



## **SAR EVALUATION REPORT**

**FCC 47 CFR § 2.1093  
IEEE Std. 1528-2013**

**For  
Tablet**

**FCC ID: 2AAGE-TAB07RK68HL  
Model: VT-TAB07-RK68H**

**Report Number: 4789722180-5-SAR**

**Issue Date: December 04, 2020**

Prepared for  
**Chengdu Vantron Technology, Ltd.  
No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, P.R. China**

Prepared by  
**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch  
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech  
Development Zone Dongguan, People's Republic of China**

**Tel: +86 769 22038881  
Fax: +86 769 33244054  
Website: www.ul.com**

**Revision History**

Rev.	Date	Revisions	Revised By
V1.0	December 04, 2020	Initial Issue	\

## Note:

1. The Measurement result for the sample received is<Pass> according to < IEEE Std. 1528-2013> when <Accuracy Method> decision rule is applied.
2. This report is only published to and used by the applicant, and it is not for evidence purpose in China.

**Table of Contents**

**1. Attestation of Test Results ..... 4**

**2. Test Specification, Methods and Procedures..... 5**

**3. Facilities and Accreditation ..... 6**

**4. SAR Measurement System & Test Equipment ..... 7**

    4.1. SAR Measurement System..... 7

    4.2. SAR Scan Procedures ..... 8

    4.3. Test Equipment..... 10

**5. Measurement Uncertainty..... 11**

**6. Device Under Test (DUT) Information ..... 12**

    6.1. DUT Description ..... 12

    6.2. Wireless Technology..... 12

**7. Conducted Output Power Measurement and tune-up tolerance..... 13**

    7.1. Power measurement result of 2.4GHz Wi-Fi ..... 13

    7.2. Power measurement result of 5GHz Wi-Fi (U-NII-1). ..... 13

    7.3. Power measurement result of 5GHz Wi-Fi (U-NII-3). ..... 14

    7.6. Power measurement result BT..... 15

**8. RF Exposure Conditions..... 15**

**9. Dielectric Property Measurements & System Check ..... 19**

    9.1. Dielectric Property Measurements ..... 19

    9.2. System Check..... 21

**10. Measured and Reported (Scaled) SAR Results..... 23**

    10.1. SAR Test Results of 2.4GHz Wi-Fi ..... 25

    10.2. SAR Test Results of 5GHz Wi-Fi ..... 26

**11. Simultaneous Transmission SAR Analysis ..... 28**

**Appendixes ..... 29**

    4789722180-5-SAR\_App A Photo(STC\_180days) ..... 29

    4789722180-5-SAR\_App B System Check Plots..... 29

    4789722180-5-SAR\_App C Highest Test Plots ..... 29

    4789722180-5-SAR\_App D Cal. Certificates ..... 29

### 1. Attestation of Test Results

Applicant Name	Chengdu Vantron Technology, Ltd.	
Address	No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, P.R. China	
Manufacturer	Chengdu Vantron Technology, Ltd.	
Address	No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, P.R. China	
EUT Name	Tablet	
Model	VT-TAB07-RK68H	
Sample Status	Normal	
Sample Received Date	November 20, 2020	
Date of Tested	November 20~ 29, 2020	
Applicable Standards	FCC 47 CFR § 2.1093 IEEE Std. 1528-2013 KDB publication	
<b>SAR Limits (W/Kg)</b>		
Exposure Category	Peak spatial-average (1g of tissue)	Extremities (hands, wrists, ankles, etc.) (10g of tissue)
General population / Uncontrolled exposure	1.6	4
<b>The Highest Reported SAR (W/kg)</b>		
RF Exposure Conditions	<b>Equipment Class</b>	
	<b>DTS</b>	<b>U-NII</b>
Body (1-g)	0.693	1.189
Simultaneous Transmission (1-g)	/	
Test Results	Pass	
Prepared By: <i>Jacky Jiang</i> Jacky Jiang Engineer Project Associate	Reviewed By: <i>Shawn Wen</i> Shawn Wen Laboratory Leader	Approved By: <i>Stephen Guo</i> Stephen Guo Laboratory Manager

## 2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with IEEE Std.1528-2013, the following FCC Published RF exposure KDB procedures:

- 248227 D01 802.11 Wi-Fi SAR
- 447498 D01 General RF Exposure Guidance
- 690783 D01 SAR Listings on Grants
- 865664 D01 SAR measurement 100 MHz to 6 GHz
- 865664 D02 RF Exposure Reporting
- 616217 D04 SAR for laptop and tablets


### 3. Facilities and Accreditation

Test Location	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
Address	Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Recognized No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>IC(Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been registered and fully described in a report filed with Industry Canada. The Company Number is 21320.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
Description	All measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

## 4. SAR Measurement System & Test Equipment

### 4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

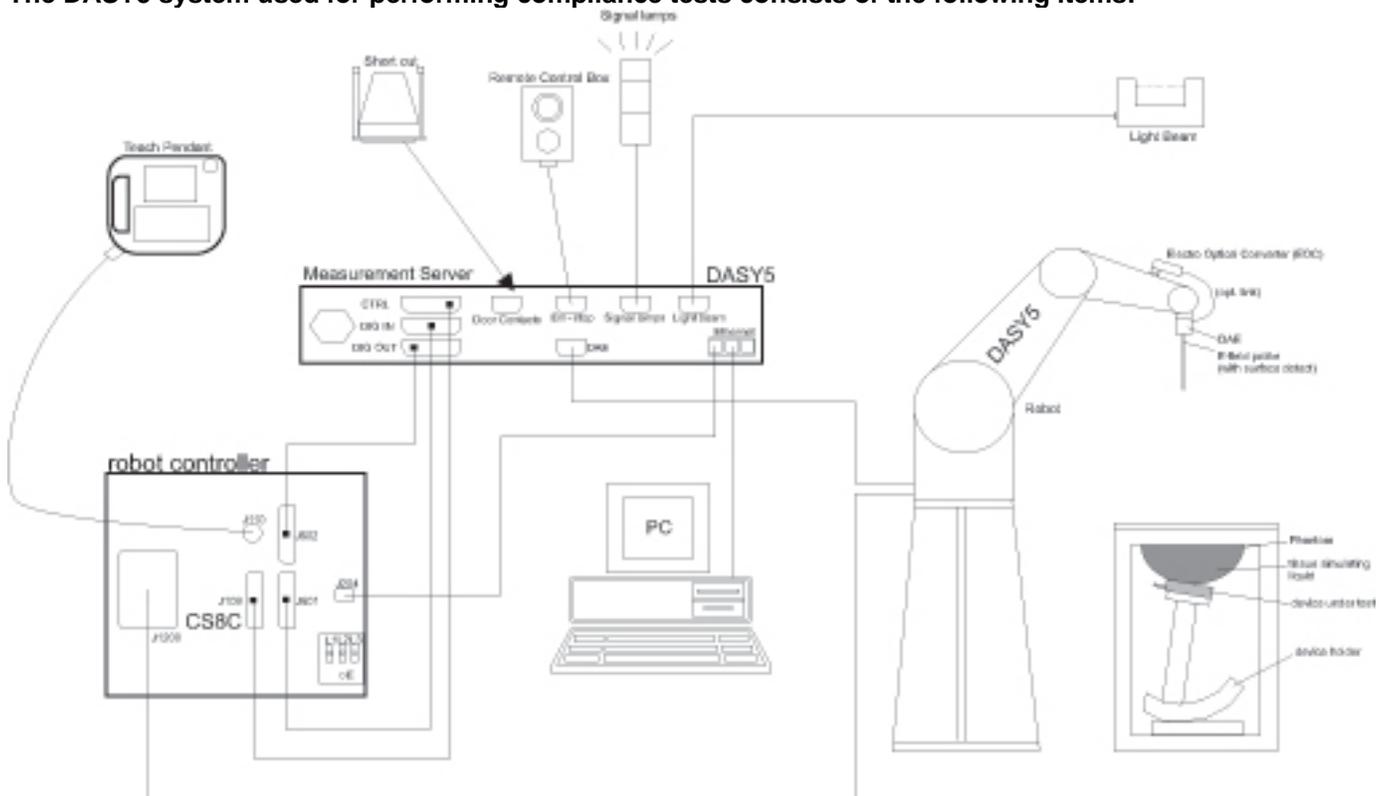

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 4.2. SAR Scan Procedures

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in Db) is specified in the standards for compliance testing. For example, a 2 Db range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 Db is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**Step 3: Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

		$\leq 3$ GHz	$> 3$ GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm *	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**Step 4: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in Db from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

**Step 5: Z-Scan (FCC only)**

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be greater than the step size in Z-direction.

### 4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Name of equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
ENA Network Analyzer	Keysight	E5080A	MY55100583	2020.12.05
Dielectric Probe kit	SPEAG	SM DAK 040 SA	1155	NCR
DC power supply	Keysight	E36103A	MY55350020	2020.12.04
Signal Generator	Rohde & Schwarz	SME06	837633\001	2020.12.04
BI-Directional Coupler	WERLATONE	C8060-102	3423	2020.12.04
Peak and Average Power Sensor	Keysight	E9323A	MY55440013	2020.12.05
Peak and Average Power Sensor	Keysight	E9323A	MY55420006	2020.12.05
Dual Channel PK Power Meter	Keysight	N1912A	MY55416024	2020.12.05
Amplifier	CORAD TECHNOLOGY LTD	AMF-4D-00400600-50-30P	1983561	NCR
Dosimetric E-Field Probe	SPEAG	EX3DV4	3748	2021.07.28
Data Acquisition Electronic	SPEAG	DAE3	427	2021.3.30
Dipole Kit 2450 MHz	SPEAG	D2450V2	977	2021.12.04
Dipole Kit 5 GHz	SPEAG	D5GHzV2	1231	2021.12.07
Software	SPEAG	DASY52	N/A	NCR
Twin Phantom	SPEAG	SAM V5.0	1805	NCR
ELI Phantom	SPEAG	ELI V5.0	1235	NCR
Thermometer	/	GX-138	150709653	2020.12.09
Thermometer	VICTOR	ITHX-SD-5	18470005	2020.12.10

**Note:**

1) Per KDB865664D01 v01r04 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
- d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

## 5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and 10-g SAR within a frequency band is < 3.75 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std. 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

## 6. Device Under Test (DUT) Information

### 6.1. DUT Description

The DUT is a Tablet with IEEE 802.11a/b/g/n/ac radio and bluetooth

Dimension	Overall (Length x Width x Height): 203 mm x 114 mm x 19 mm
-----------	--

### 6.2. Wireless Technology

Wireless technology	Frequency band
Wi-Fi	2.4 GHz
Wi-Fi	5 GHz U-NII-1 and U-NII-3 Band
Bluetooth	2.4GHz

## 7. Conducted Output Power Measurement and tune-up tolerance

### 7.1. Power measurement result of 2.4GHz Wi-Fi.

Mode	Channel	Frequency (MHz)	Data Rate	Average Power (dBm)	Tune-up Limit (dBm)	SAR Test	Duty Cycle %
802.11b	1	2412	1Mbps	12.12	13.1	Required	99.53
	6	2437		12.73	13.1		
	11	2462		13.05	13.1		
802.11g	1	2412	6Mbps	Not Required	12.5	Excluded	\
	6	2437			12.5		
	11	2462			12.5		
802.11n-HT20	1	2412	MCS0	Not Required	13.0	Excluded	\
	6	2437			13.0		
	11	2462			13.0		

### 7.2. Power measurement result of 5GHz Wi-Fi (U-NII-1).

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-up Limit	SAR Test	Duty Cycle %
802.11a-20	36	5180	6Mbps	Not Required	12.5	Excluded	\
	40	5200			12.5		
	48	5240			12.5		
802.11n-HT20	36	5180	MCS0	Not Required	12.0	Excluded	\
	40	5200			12.0		
	48	5240			12.0		
802.11n-HT40	38	5190	MCS0	12.59	13.0	Required	94.20
	46	5230		12.96	13.0		
802.11ac-VHT20	36	5180	MCS0	Not Required	12.5	Excluded	\
	40	5200			12.5		
	48	5240			12.5		
802.11ac-VHT40	38	5190	MCS0	Not Required	13.0	Excluded	\
	46	5230			13.0		
802.11ac-VHT80	42	5210	MCS0	Not Required	12.5	Excluded	\

**7.4. Power measurement result of 5GHz Wi-Fi (U-NII-3).**

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-up Limit	SAR Test	Duty Cycle %
802.11a-20	149	5745	6Mbps	Not Required	14.5	Excluded	\
	153	5765			14.5		
	157	5785			14.5		
	161	5805			14.5		
	165	5825			14.5		
802.11n-HT20	149	5745	MCS0	Not Required	14.0	Excluded	\
	153	5765			14.0		
	157	5785			14.0		
	161	5805			14.0		
	165	5825			14.0		
802.11n-HT40	151	5755	MCS0	14.44	14.5	Required	94.20
	159	5795		13.34	14.5		
802.11ac-VHT20	149	5745	MCS0	Not Required	14.5	Excluded	\
	153	5765			14.5		
	157	5785			14.5		
	161	5805			14.5		
	165	5825			14.5		
802.11ac-VHT40	151	5755	MCS0	Not Required	14.5	Excluded	\
	159	5795			14.5		
802.11ac-VHT80	155	5775	MCS0	Not Required	13.5	Excluded	\

**Note:**

- 1) As per KDB 447498 sec.4.1.d) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.
- 2) Per KDB 248227 D01 When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected.

### 7.6. Power measurement result BT

Band	Mode	Average Conducted Power (dBm)			Tune-up
		0CH	39CH	78CH	
2.4G BT	GFSK	5.52	7.23	7.76	8.0
	π/4-DQPSK	NMR	NMR	NMR	7.0
	8DPSK	NMR	NMR	NMR	7.0


Band	Mode	Average Conducted Power (dBm)			Tune-up
		0CH	19CH	39CH	
2.4G BLE	GFSK 1Mbps	NMR	NMR	NMR	4.0
	GFSK 2Mbps	NMR	NMR	NMR	

Note:

- 1) NMR is short for “No measurement requirement”.

### 8. RF Exposure Conditions

Refer to the diagram of the device below for the specific details of the antenna to edges distances.

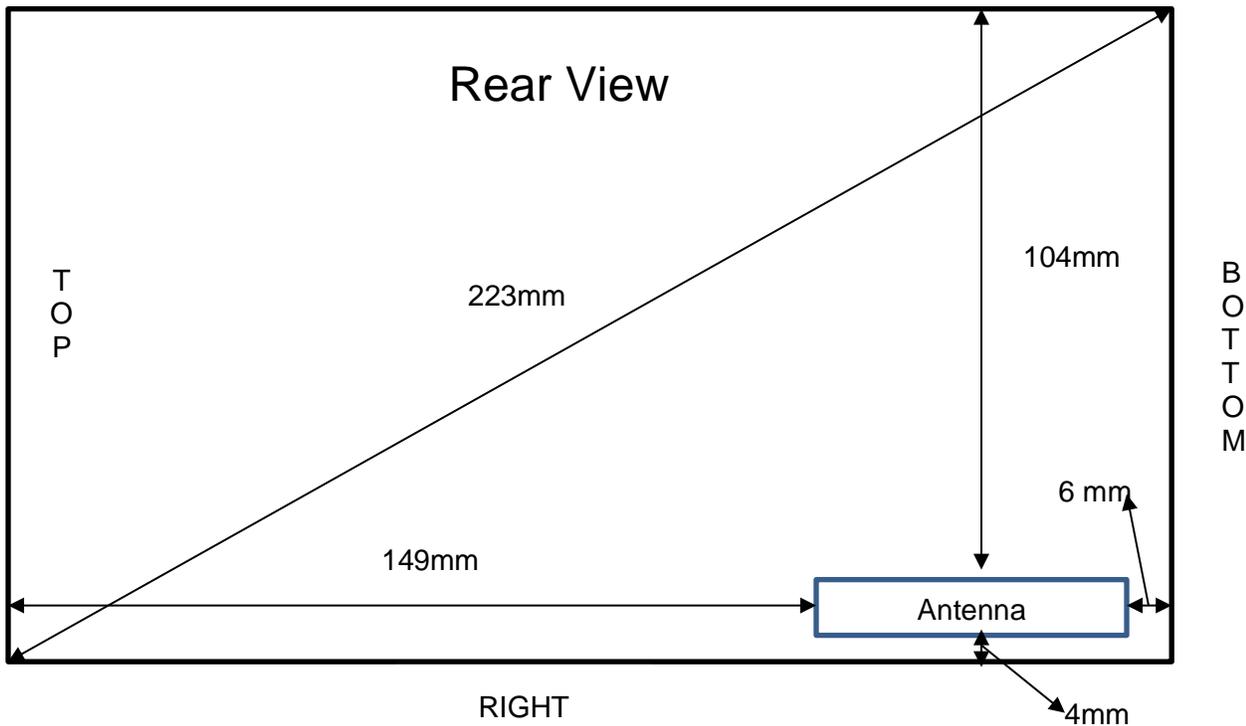

Per FCC KDB 616217 D04

The overall diagonal dimension of the display section of a tablet is > 20cm, the bottom surface and edges of the tablet should be selected for SAR evaluation at a 0mm separation distance, Exposures from antennas through the front surface of the display section of a full-size tablet, away from the edges, are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary, except for tablets that are designed to require continuous operations with the hand(s) next to the antenna(s)

Per FCC KDB 447498D01:

1. The 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for product specific 10-g SAR, where:

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

2. The SAR exclusion threshold for distances  $> 50$ mm is defined by the following equation, as illustrated in KDB 447498 D01 Appendix B:

a) at 100 MHz to 1500 MHz

$[\text{Power allowed at numeric threshold for 50 mm in step 1}] + (\text{test separation distance} - 50 \text{ mm}) \cdot (f(\text{MHz})/150)$  mW

b) at  $> 1500$  MHz and  $\leq 6$  GHz

$[\text{Power allowed at numeric Threshold at 50 mm in step 1}] + (\text{test separation distance} - 50 \text{ mm}) \cdot 10$  mW

3. The test separation distances required for a device to demonstrate SAR or MPE compliance must be sufficiently conservative to support the operational separation distances required by the device and its antennas and radiating structures. For devices such as tablets and transmitters embedded in keyboard sections of laptop computers that are typically used in close proximity to users, the test separation distance is determined by the smallest distance between the outer surface of the device and the user. For larger devices, as the antenna operational separation distance increases to where the SAR characteristics of the device and its antennas are not directly influenced by the user, such as antennas along the top and upper side edges of laptop computer displays or opposite and adjacent edges of tablets, the test separation distance is normally determined by the closest separation between the antenna and the user.

For Bluetooth 1-g SAR (antenna to edges separation distance less than 50mm)

Position	Frequency	Power (dBm)	Power (mW)	Separation Distance (mm)	Calculated Result	Threshold	SAR Test
Top edge	2480	8.0	6.31	149	\	\	\
Bottom edge	2480	8.0	6.31	6	1.7	3.0	Excluded
Left edge	2480	8.0	6.31	104	\	\	\
Right edge	2480	8.0	6.31	5	2.0	3.0	Excluded
Rear surface	2480	8.0	6.31	5	2.0	3.0	Excluded

Note: For BLE and Bluetooth mode, we selected the higher tune up power of Bluetooth to do exclusion calculation.

## For Bluetooth 1-g SAR (antenna to edges separation distance greater than 50mm)

Position	Frequency (MHz)	Power (dBm)	Power (mW)	Power allowed at 50mm (mW)	Separation Distance (mm)	Calculation Result (mW)	SAR Test
Top edge	2480	8.0	6.31	95.25	149	1085.25	Excluded
Bottom edge	2480	8.0	6.31	\	\	\	\
Left edge	2480	8.0	6.31	95.25	104	630.25	Excluded
Right edge	2480	8.0	6.31	\	\	\	\
Rear surface	2480	8.0	6.31	\	\	\	\

Note: Because the power in mW is less than the calculation result, so SAR evaluation for corresponding position is not required.

## For 2.4GHz Wi-Fi 1-g SAR (antenna to edges separation distance less than 50mm)

Position	Frequency	Power (dBm)	Power (mW)	Separation Distance (mm)	Calculated Result	Threshold	SAR Test
Top edge	2462	13.1	20.42	149	\	\	\
Bottom edge	2462	13.1	20.42	6	5.3	3.0	Required
Left edge	2462	13.1	20.42	104	\	\	\
Right edge	2462	13.1	20.42	5	6.4	3.0	Required
Rear surface	2462	13.1	20.42	5	6.4	3.0	Required

Note: Because the calculated result is greater than the threshold, so SAR evaluation for corresponding position is required.

## For 2.4GHz Wi-Fi 1-g SAR (antenna to edges separation distance greater than 50mm)

Position	Frequency (MHz)	Power (dBm)	Power (mW)	Power allowed at 50mm (mW)	Separation Distance (mm)	Calculation Result (mW)	SAR Test
Top edge	2462	13.1	20.42	95.60	149	1085.60	Excluded
Bottom edge	2462	13.1	20.42	\	\	\	\
Left edge	2462	13.1	20.42	95.60	104	635.60	Excluded
Right edge	2462	13.1	20.42	\	\	\	\
Rear surface	2462	13.1	20.42	\	\	\	\

Note: Because the power in mW is less than the calculation result, so SAR evaluation for corresponding position is not required.

## For 5GHz Wi-Fi (U-NII-1) 1-g SAR (antenna to edges separation distance less than 50mm)

Position	Frequency	Power (dBm)	Power (mW)	Separation Distance (mm)	Calculated Result	Threshold	SAR Test
Top edge	5240	13	19.95	149	\	\	\
Bottom edge	5240	13	19.95	6	7.6	3.0	Required
Left edge	5240	13	19.95	104	\	\	\
Right edge	5240	13	19.95	5	9.1	3.0	Required
Rear surface	5240	13	19.95	5	9.1	3.0	Required

Note: Because the calculated result is greater than the threshold, so SAR evaluation for corresponding position is required.

## For 5GHz Wi-Fi (U-NII-1) 1-g SAR (antenna to edges separation distance greater than 50mm)

Position	Frequency (MHz)	Power (dBm)	Power (mW)	Power allowed at 50mm	Separation Distance (mm)	Calculation Result (mW)	SAR Test
Top edge	5240	13	19.95	65.53	149	1055.53	Excluded
Bottom edge	5240	13	19.95	\	\	\	\
Left edge	5240	13	19.95	65.53	104	605.53	Excluded
Right edge	5240	13	19.95	\	\	\	\
Rear surface	5240	13	19.95	\	\	\	\

Note: Because the power in mW is less than the calculation result, so SAR evaluation for corresponding position is not required.

## For 5GHz Wi-Fi (U-NII-3) 1-g SAR (antenna to edges separation distance less than 50mm)

Position	Frequency	Power (dBm)	Power (mW)	Separation Distance (mm)	Calculated Result	Threshold	SAR Test
Top edge	5825	14.5	28.18	149	\	\	\
Bottom edge	5825	14.5	28.18	6	11.3	3.0	Required
Left edge	5825	14.5	28.18	104	\	\	\
Right edge	5825	14.5	28.18	5	13.6	3.0	Required
Rear surface	5825	14.5	28.18	5	13.6	3.0	Required

Note: Because the calculated result is greater than the threshold, so SAR evaluation for corresponding position is required.

## For 5GHz Wi-Fi (U-NII-3) 1-g SAR (antenna to edges separation distance greater than 50mm)

Position	Frequency (MHz)	Power (dBm)	Power (mW)	Power allowed at 50mm	Separation Distance (mm)	Calculation Result (mW)	SAR Test
Top edge	5825	14.5	28.18	62.15	149	1052.13	Excluded
Bottom edge	5825	14.5	28.18	\	\	\	\
Left edge	5825	14.5	28.18	62.15	104	602.13	Excluded
Right edge	5825	14.5	28.18	\	\	\	\
Rear surface	5825	14.5	28.18	\	\	\	\

Note: Because the power in mW is less than the calculation result, so SAR evaluation for corresponding position is not required.

## 9. Dielectric Property Measurements & System Check

### 9.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

#### Tissue Dielectric Parameters

FCC KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

**Dielectric Property Measurements Results:**

Liquid	Freq.	Liquid Parameters				Delta(%)		Limit (%)	Temp. (°C)	Test Date
		Measured		Target						
		$\epsilon_r$	$\sigma$	$\epsilon_r$	$\sigma$	$\epsilon_r$	$\sigma$			
Head 2450	2450	39.90	1.80	39.20	1.80	1.79	-0.06	±5	21.9	2020.12.01
Head 5250	5250	34.72	4.59	35.93	4.71	-3.37	-2.55	±5	21.8	2020.11.27
Head 5750	5750	34.08	5.35	35.36	5.22	-3.62	2.55	±5	22.7	2020.11.22

## 9.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness:  $2.0 \pm 0.2$  mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be  $\geq 15.0$  cm for SAR measurements  $\leq 3$  GHz and  $\geq 10.0$  cm for measurements  $> 3$  GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm (above 1GHz) and 15mm (below 1GHz) from dipole center to the simulating liquid surface.
- For area scan, standard grid spacing for head measurements is 15 mm in x- and y- dimension ( $\leq 2$ GHz), 12 mm in x- and y-dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz).
- For zoom scan,  $\Delta x_{\text{zoom}}$ ,  $\Delta y_{\text{zoom}} \leq 2$ GHz -  $\leq 8$ mm, 2-4GHz -  $\leq 5$  mm and 4-6 GHz- $\leq 4$ mm;  $\Delta z_{\text{zoom}} \leq 3$ GHz -  $\leq 5$  mm, 3-4 GHz-  $\leq 4$ mm and 4-6GHz- $\leq 2$ mm.
- Distance between probe sensors and phantom surface was set to 3 mm except for 5 GHz band. For 5GHz band, Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was set to 100 mW or 250 mW depend on the certificate of the dipoles.
- The results are normalized to 1 W input power.

**System Check Results**

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

T.S. Liquid		Measured Results		Target (Ref. value)	Delta (%)	Limit (%)	Temp. (°C)	Test Date
		Zoom Scan (W/Kg)	Normalize to 1W (W/Kg)					
Head 2450	1-g	13.360	53.44	53.70	-0.48	±10	21.9	2020.12.01
	10-g	6.150	24.60	25.00	-1.60	±10		
Head 5250	1-g	7.990	79.90	78.60	1.65	±10	21.8	2020.11.27
	10-g	2.320	23.20	22.50	3.11	±10		
Head 5750	1-g	8.300	83.00	80.00	3.75	±10	21.8	2020.11.22
	10-g	2.410	24.10	22.80	5.70	±10		

## 10. Measured and Reported (Scaled) SAR Results

As per KDB 447498 sec.4.1.e), When SAR or MPE is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported.

### Scaled SAR calculation formula:

Scaled SAR = Tune-up in mW / Conducted power in mW \* Duty cycle (if available) \* SAR value

### SAR Test Reduction criteria are as follows:

#### KDB 447498 D01 General RF Exposure Guidance:

A) Per KDB447498 D01 v06, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.

B) Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8$  W/kg or  $2.0$  W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz.
- $\leq 0.6$  W/kg or  $1.5$  W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
- $\leq 0.4$  W/kg or  $1.0$  W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz.

#### Per KDB865664 D01 v01r04:

For each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/Kg; if the deviation among the repeated measurement is  $\leq 20\%$ , and the measured SAR  $< 1.45$ W/Kg, only one repeated measurement is required.

#### Per KDB 248227 D01 v02r02:

For Wi-Fi SAR testing, a communication link is set up with the testing software for Wi-Fi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test procedures in KDB 248227 D01 v02r02 are applied. (Refer to KDB 248227D01 v02r02 for more details)

#### Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$ W/kg, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8$ W/kg or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions /configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.

**Initial Test Configuration Procedure**

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB 248227D01 v02r02). SAR test reduction of subsequent highest output test channels is based on the reported SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration. When the reported SAR of the initial test configuration is  $> 0.8$  W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.

**Sub Test Configuration Procedure**

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for that subsequent test configuration.

**Note:**

The same procedure is applied to extremity SAR evaluation, and the corresponding limitation is 2.5 times of 1-g SAR.

**10.1. SAR Test Results of 2.4GHz Wi-Fi.**

Test Position (Body 0mm)	Test Mode	Channel/ Frequency	Power (dBm)		SAR Value	Power Drift	Duty Factor (%)	Scaled (W/Kg)
			Tune-up	Meas.	1-g			
Right Edge	802.11 b	11/2462	13.1	13.05	0.682	0.14	99.53	<b>0.693</b>
Rear Surface	802.11 b	11/2462	13.1	13.05	0.370	0.08	99.53	0.376
Bottom Edge	802.11 b	11/2462	13.1	13.05	0.096	0.17	99.53	0.098

Note: When the reported SAR of the initial test configuration is  $>0.8\text{W/kg}$ , SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is  $\leq 1.2\text{ W/kg}$  or all required channels are tested.

## OFDM mode SAR evaluation exclusion analysis

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11b	13.1	20.42	0.693	\	\
802.11g	12.5	17.78	\	0.604	Excluded
802.11n (20M)	13	19.95	\	0.677	Excluded

Note:

- 1) The highest reported SAR for DSSS adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2\text{ W/kg}$ , so SAR evaluation for 802.11g/n is not required.

**10.2. SAR Test Results of 5GHz Wi-Fi.**

Test Position (Body 0mm)	Test Mode	Channel/ Frequency	Power (dBm)		SAR Value	Power Drift	Duty Factor (%)	Scaled (W/Kg)
			Tune-up	Meas.	1-g			
UNII-1								
Right Edge	802.11 n 40M	46/5230	13.0	12.96	1.110	0.04	94.20	<b>1.189</b>
Right Edge	802.11 n 40M	38/5190	13.0	12.59	1.017	0.01	94.20	1.187
Rear Surface	802.11 n 40M	46/5230	13.0	12.76	0.297	-0.08	94.20	0.333
Bottom Edge	802.11 n 40M	46/5230	13.0	12.76	0.188	0.17	94.20	0.211
UNII-3								
Right Edge	802.11 n 40M	151/5755	14.5	14.44	0.702	0	94.20	<b>0.756</b>
Bottom Edge	802.11 n 40M	151/5755	14.5	14.44	0.067	0.13	94.20	0.072
Rear Surface	802.11 n 40M	151/5755	14.5	14.44	0.264	0.09	94.20	0.284
Repeated test at worst measured SAR configuration above								
Right Edge	802.11 n 40M	46/5230	13.0	12.96	1.090	0.07	94.20	1.168

Subsequent test configuration SAR evaluation exclusion analysis for U-NII-1 band

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11n 40M	13.0	19.95	1.189	\	\
802.11a-20	12.5	17.78	\	1.060	Excluded
802.11n 20M	12.0	15.85	\	0.944	Excluded
802.11ac 20M	12.5	17.78	\	1.060	Excluded
802.11ac 40M	13.0	19.95	\	1.189	Excluded
802.11ac 80M	12.5	17.78	\	1.060	Excluded

Note:

- 1) The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

## Subsequent test configuration SAR evaluation exclusion analysis for U-NII-3 band

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR (W/Kg)	Adjusted SAR (W/Kg)	SAR Test
802.11n 40M	14.5	28.18	0.756	\	\
802.11a-20	14.5	28.18	\	0.756	Excluded
802.11n 20M	14.0	25.12	\	0.674	Excluded
802.11ac 20M	14.5	28.18	\	0.756	Excluded
802.11ac 40M	14.5	28.18	\	0.756	Excluded
802.11ac 80M	13.5	22.39	\	0.601	Excluded

## Note:

- 1) The 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

## 11. Simultaneous Transmission SAR Analysis

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. The main ANT supports 2.4GHz Wi-Fi, 5GHz Wi-Fi and BT sharing the same antenna, but they can't transmit in simultaneous.

## **Appendixes**

**Refer to separated files for the following appendixes.**

**4789722180-5-SAR\_App A Photo(STC\_180days)**

**4789722180-5-SAR\_App B System Check Plots**

**4789722180-5-SAR\_App C Highest Test Plots**

**4789722180-5-SAR\_App D Cal. Certificates**

-----End of Report-----