

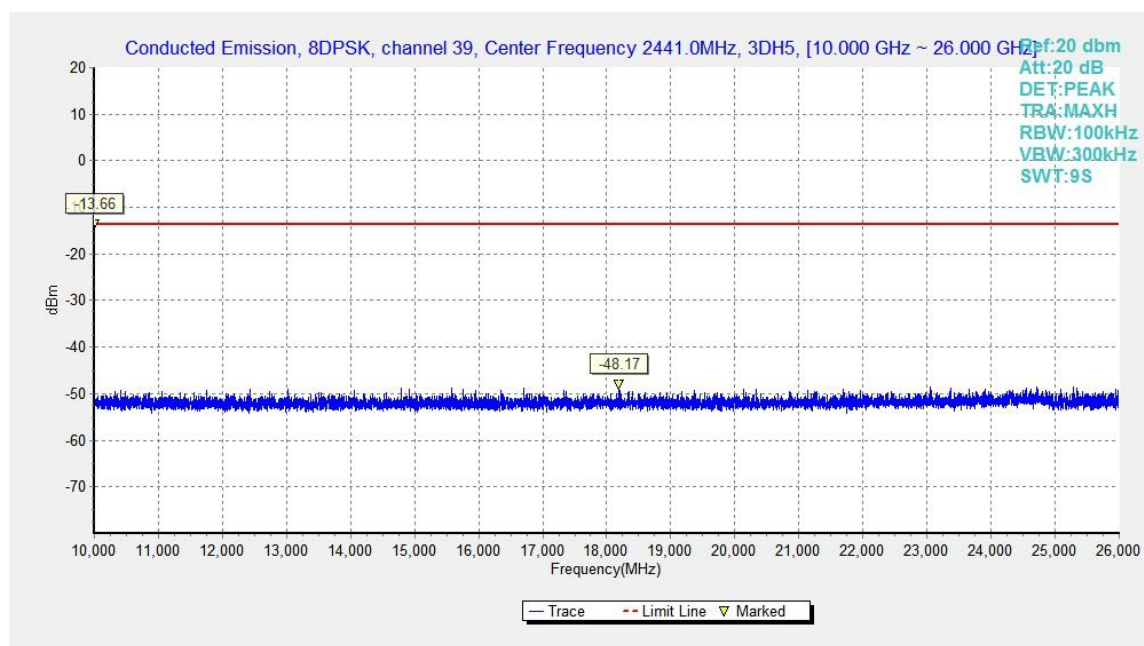


Fig.58. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

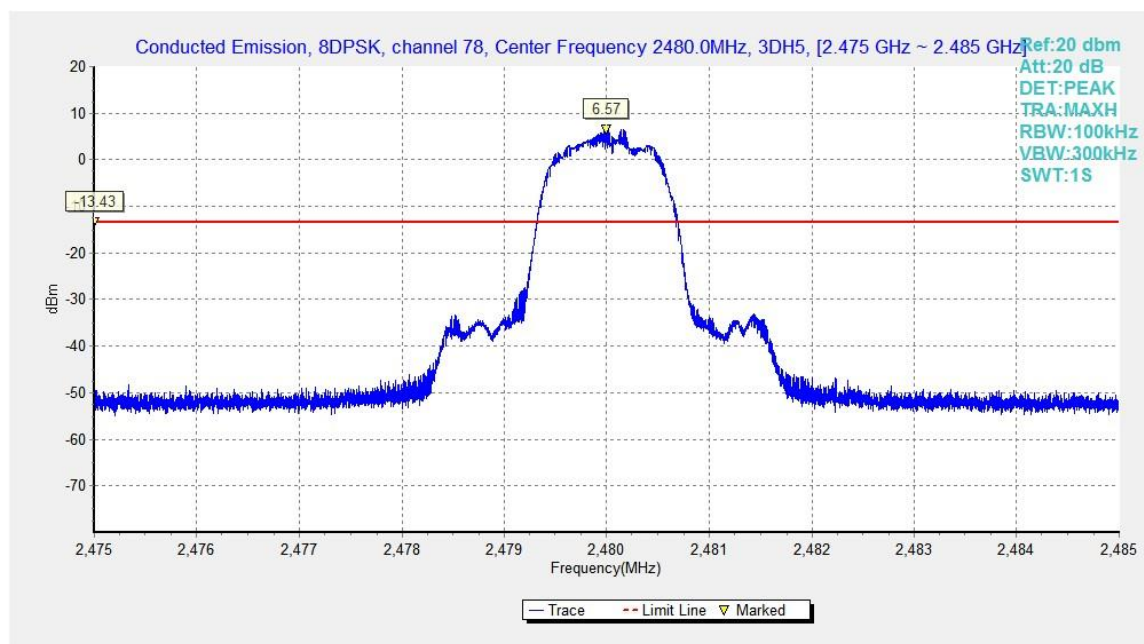


Fig.59. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

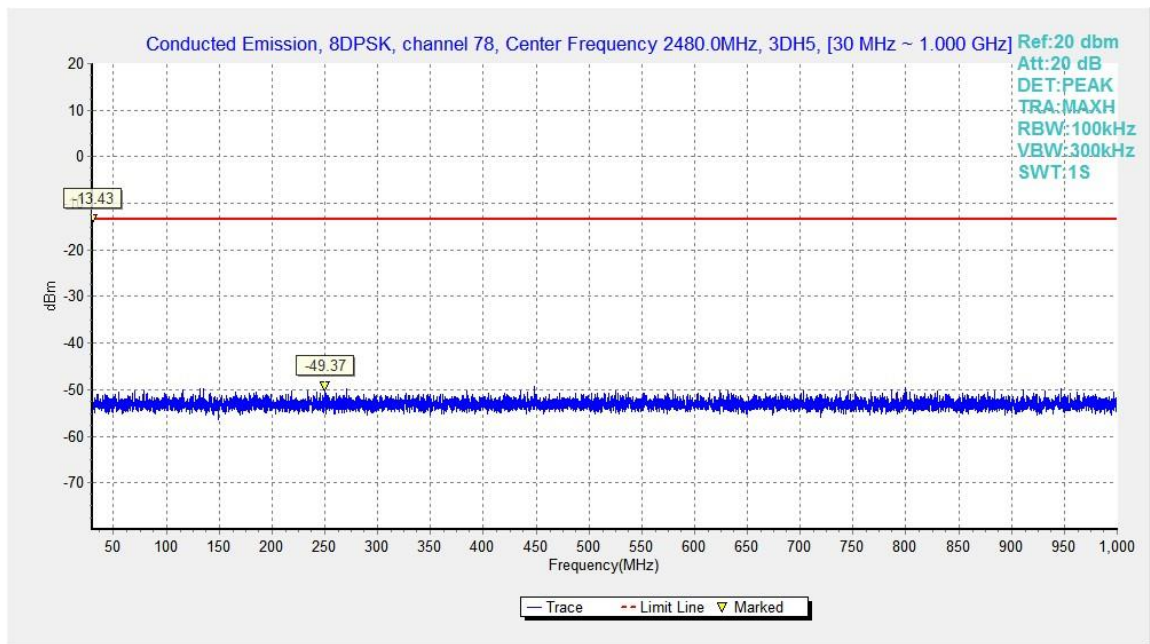


Fig.60. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

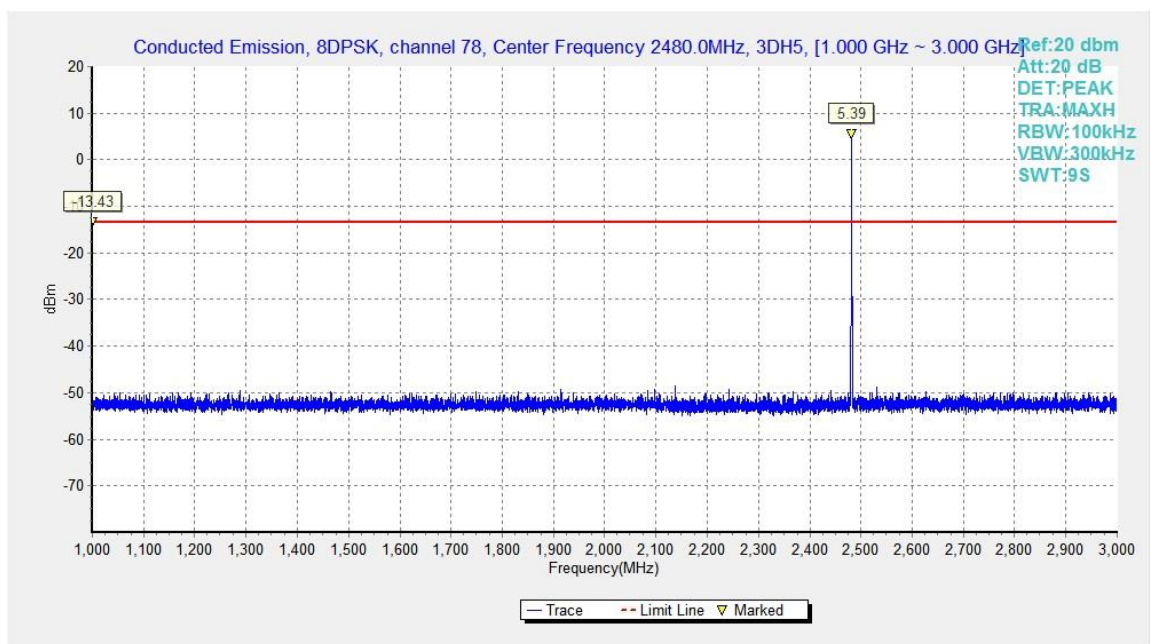


Fig.61. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

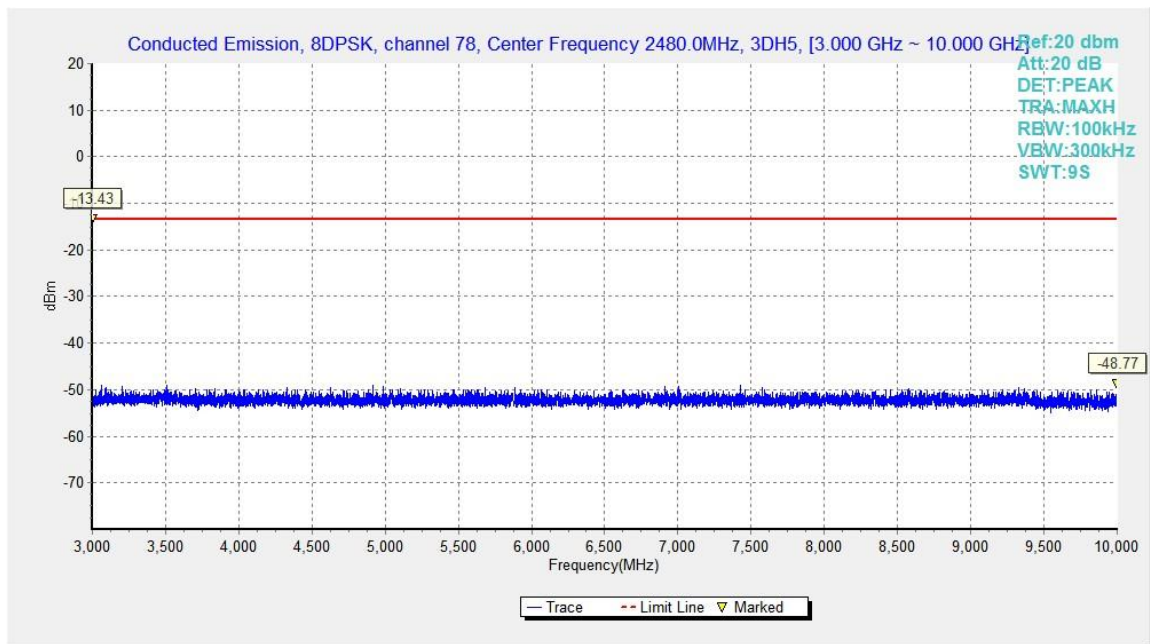


Fig.62. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

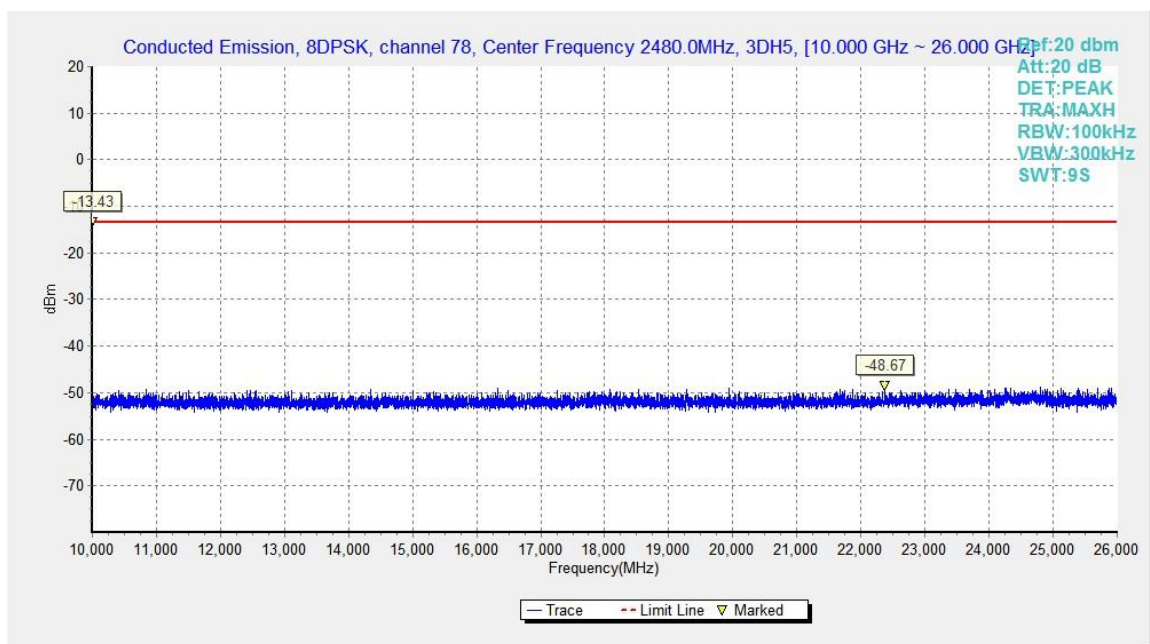


Fig.63. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

## B.6. Transmitter Spurious Emission - Radiated

**Method of Measurement:** See ANSI C63.10-clause 6.4 & 6.5 & 6.6

**Measurement Limit:**

| Standard                               | Limit                        |
|----------------------------------------|------------------------------|
| FCC 47 CFR Part 15.247, 15.205, 15.209 | 20dB below peak output power |

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Limit in restricted band:**

| Frequency (MHz) | Field strength(μV/m) | Measurement distance(m) |
|-----------------|----------------------|-------------------------|
| 0.009 - 0.490   | 2400/F(kHz)          | 300                     |
| 0.490 - 1.705   | 24000/F(kHz)         | 30                      |
| 1.705 – 30.0    | 30                   | 30                      |

| Frequency of emission (MHz) | Field strength (uV/m) | Field strength (dBuV/m) | Measurement distance (m) |
|-----------------------------|-----------------------|-------------------------|--------------------------|
| 30-88                       | 100                   | 40                      | 3                        |
| 88-216                      | 150                   | 43.5                    | 3                        |
| 216-960                     | 200                   | 46                      | 3                        |
| Above 960                   | 500                   | 54                      | 3                        |

**Set up:**

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The EUT and transmitting antenna shall be centered on the turntable.

**Note:**

1. A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

2. The range of evaluated frequency is from 9 kHz to 26GHz. Measurement value showed here only up to 6 maximum emissions noted.

### Peak Measurement results

#### GFSK Ch 0

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17357.000       | 51.45                       | -28.60          | 43.40                 | 36.65                   | 74.00          | 22.55       | V                  |
| 13605.000       | 48.89                       | -31.30          | 40.80                 | 39.39                   | 74.00          | 25.11       | V                  |
| 12687.500       | 46.86                       | -31.90          | 39.50                 | 39.26                   | 74.00          | 27.14       | H                  |
| 9621.000        | 45.64                       | -34.30          | 37.60                 | 42.34                   | 74.00          | 28.36       | H                  |
| 7214.500        | 44.68                       | -35.40          | 36.20                 | 43.88                   | 74.00          | 29.32       | V                  |
| 2367.000        | 55.16                       | -19.60          | 28.20                 | 46.56                   | 74.00          | 18.84       | V                  |

#### GFSK Ch 39

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17545.000       | 51.79                       | -29.20          | 44.90                 | 36.09                   | 74.00          | 22.21       | V                  |
| 13677.500       | 48.97                       | -31.00          | 41.00                 | 38.97                   | 74.00          | 25.03       | V                  |
| 11831.500       | 46.86                       | -32.00          | 39.20                 | 39.66                   | 74.00          | 27.14       | V                  |
| 8327.500        | 45.90                       | -35.00          | 37.20                 | 43.70                   | 74.00          | 28.10       | V                  |
| 7544.000        | 44.60                       | -35.50          | 36.30                 | 43.80                   | 74.00          | 29.40       | H                  |
| 4796.000        | 40.13                       | -37.50          | 33.10                 | 44.53                   | 74.00          | 33.87       | V                  |

#### GFSK Ch 78

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17353.000       | 52.45                       | -28.60          | 43.40                 | 37.65                   | 74.00          | 21.55       | H                  |
| 13714.000       | 49.38                       | -31.00          | 41.10                 | 39.28                   | 74.00          | 24.62       | H                  |
| 11293.500       | 47.18                       | -32.80          | 38.70                 | 41.28                   | 74.00          | 26.82       | V                  |
| 9405.000        | 46.27                       | -34.10          | 37.90                 | 42.47                   | 74.00          | 27.73       | H                  |
| 7617.000        | 45.95                       | -35.60          | 36.30                 | 45.25                   | 74.00          | 28.05       | V                  |
| 2496.300        | 55.68                       | -19.70          | 28.20                 | 47.18                   | 74.00          | 18.32       | V                  |

#### $\pi/4$ DQPSK Ch 0

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17978.000       | 51.60                       | -29.40          | 46.00                 | 35.00                   | 74.00          | 22.40       | H                  |
| 13779.000       | 48.86                       | -30.90          | 41.20                 | 38.56                   | 74.00          | 25.14       | V                  |
| 12909.000       | 46.69                       | -31.50          | 40.00                 | 38.19                   | 74.00          | 27.31       | H                  |
| 8875.500        | 45.68                       | -34.80          | 37.80                 | 42.68                   | 74.00          | 28.32       | V                  |
| 7339.000        | 45.61                       | -35.90          | 36.60                 | 44.91                   | 74.00          | 28.39       | V                  |
| 2389.700        | 55.75                       | -19.80          | 28.20                 | 47.35                   | 74.00          | 18.25       | H                  |

#### $\pi/4$ DQPSK Ch 39

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17916.500       | 51.24                       | -29.40          | 46.00                 | 34.64                   | 74.00          | 22.76       | V                  |
| 13747.500       | 48.73                       | -31.00          | 41.10                 | 38.63                   | 74.00          | 25.27       | H                  |
| 12746.500       | 47.01                       | -31.80          | 39.60                 | 39.11                   | 74.00          | 26.99       | H                  |
| 9404.000        | 45.38                       | -34.10          | 37.90                 | 41.58                   | 74.00          | 28.62       | V                  |
| 7442.500        | 45.10                       | -35.50          | 36.50                 | 44.10                   | 74.00          | 28.90       | V                  |
| 4998.000        | 40.31                       | -37.40          | 33.60                 | 44.11                   | 74.00          | 33.69       | V                  |

#### $\pi/4$ DQPSK Ch 78

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17384.500       | 51.41                       | -29.50          | 43.80                 | 37.11                   | 74.00          | 22.59       | H                  |
| 13598.500       | 49.28                       | -31.30          | 40.80                 | 39.78                   | 74.00          | 24.72       | V                  |
| 12920.500       | 46.78                       | -31.50          | 40.00                 | 38.28                   | 74.00          | 27.22       | H                  |
| 7540.000        | 45.22                       | -35.50          | 36.30                 | 44.42                   | 74.00          | 28.78       | H                  |
| 8714.500        | 45.00                       | -34.80          | 37.90                 | 41.90                   | 74.00          | 29.00       | H                  |
| 2496.500        | 55.62                       | -19.70          | 28.20                 | 47.12                   | 74.00          | 18.38       | V                  |



### 8DPSK Ch 0

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17873.500       | 51.49                       | -29.40          | 46.00                 | 34.89                   | 74.00          | 22.51       | H                  |
| 13676.000       | 49.62                       | -31.00          | 41.00                 | 39.62                   | 74.00          | 24.38       | V                  |
| 12802.500       | 47.21                       | -31.50          | 39.80                 | 38.91                   | 74.00          | 26.79       | V                  |
| 9544.500        | 45.40                       | -33.80          | 37.60                 | 41.60                   | 74.00          | 28.60       | V                  |
| 7440.500        | 44.72                       | -35.50          | 36.50                 | 43.72                   | 74.00          | 29.28       | H                  |
| 2332.300        | 55.34                       | -19.60          | 28.20                 | 46.74                   | 74.00          | 18.66       | V                  |

### 8DPSK Ch 39

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17962.500       | 52.08                       | -29.40          | 46.00                 | 35.48                   | 74.00          | 21.92       | V                  |
| 13801.500       | 49.28                       | -30.90          | 41.20                 | 38.98                   | 74.00          | 24.72       | V                  |
| 12411.500       | 48.13                       | -31.90          | 38.90                 | 41.13                   | 74.00          | 25.87       | H                  |
| 7163.500        | 45.24                       | -35.60          | 35.90                 | 44.94                   | 74.00          | 28.76       | V                  |
| 9958.000        | 44.89                       | -34.10          | 38.00                 | 41.09                   | 74.00          | 29.11       | V                  |
| 4963.500        | 41.03                       | -37.40          | 33.60                 | 44.83                   | 74.00          | 32.97       | H                  |

### 8DPSK Ch 78

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17565.000       | 52.92                       | -29.20          | 44.90                 | 37.22                   | 74.00          | 21.08       | H                  |
| 13801.000       | 49.43                       | -30.90          | 41.20                 | 39.13                   | 74.00          | 24.57       | V                  |
| 10868.000       | 46.76                       | -33.30          | 38.50                 | 41.56                   | 74.00          | 27.24       | V                  |
| 9530.500        | 45.64                       | -33.80          | 37.60                 | 41.84                   | 74.00          | 28.36       | H                  |
| 7227.000        | 45.41                       | -35.40          | 36.20                 | 44.61                   | 74.00          | 28.59       | V                  |
| 2498.700        | 56.17                       | -19.70          | 28.20                 | 47.67                   | 74.00          | 17.83       | V                  |

### Average Measurement results

#### GFSK Ch 0

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17451.000       | 42.13                       | -28.50          | 44.20                 | 26.43                   | 54.00          | 11.87       | V                  |
| 13598.500       | 39.54                       | -31.30          | 40.80                 | 30.04                   | 54.00          | 14.46       | V                  |
| 12856.500       | 37.49                       | -31.90          | 39.90                 | 29.49                   | 54.00          | 16.51       | V                  |
| 8995.500        | 35.50                       | -34.70          | 37.70                 | 32.50                   | 54.00          | 18.50       | V                  |
| 7218.500        | 35.31                       | -35.40          | 36.20                 | 34.51                   | 54.00          | 18.69       | V                  |
| 2371.900        | 43.59                       | -19.60          | 28.20                 | 34.99                   | 54.00          | 10.41       | V                  |

#### GFSK Ch 39

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17450.000       | 41.91                       | -28.50          | 44.20                 | 26.21                   | 54.00          | 12.09       | V                  |
| 14104.000       | 40.03                       | -30.20          | 41.70                 | 28.53                   | 54.00          | 13.97       | V                  |
| 12766.500       | 37.04                       | -31.80          | 39.60                 | 29.14                   | 54.00          | 16.96       | H                  |
| 9945.000        | 35.63                       | -33.80          | 37.90                 | 31.53                   | 54.00          | 18.37       | H                  |
| 7240.000        | 35.54                       | -35.60          | 36.40                 | 34.74                   | 54.00          | 18.46       | V                  |
| 4779.500        | 30.82                       | -37.50          | 33.10                 | 35.22                   | 54.00          | 23.18       | V                  |

#### GFSK Ch 78

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17609.000       | 42.07                       | -29.60          | 45.10                 | 26.47                   | 54.00          | 11.93       | V                  |
| 13759.500       | 39.98                       | -31.00          | 41.10                 | 29.88                   | 54.00          | 14.02       | H                  |
| 11902.500       | 37.49                       | -32.40          | 39.10                 | 30.79                   | 54.00          | 16.51       | H                  |
| 9432.500        | 36.47                       | -33.60          | 37.90                 | 32.17                   | 54.00          | 17.53       | H                  |
| 7137.500        | 35.80                       | -35.60          | 35.90                 | 35.50                   | 54.00          | 18.20       | H                  |
| 2485.300        | 43.84                       | -19.70          | 28.20                 | 35.34                   | 54.00          | 10.16       | H                  |



#### $\pi/4$ DQPSK Ch 0

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17595.500       | 42.06                       | -29.60          | 45.10                 | 26.46                   | 54.00          | 11.94       | V                  |
| 13716.000       | 39.90                       | -31.00          | 41.10                 | 29.80                   | 54.00          | 14.10       | V                  |
| 12846.500       | 37.11                       | -31.90          | 39.90                 | 29.11                   | 54.00          | 16.89       | V                  |
| 9513.500        | 35.82                       | -33.80          | 37.60                 | 32.02                   | 54.00          | 18.18       | V                  |
| 7322.000        | 35.57                       | -35.40          | 36.60                 | 34.37                   | 54.00          | 18.43       | V                  |
| 2367.900        | 43.59                       | -19.60          | 28.20                 | 34.99                   | 54.00          | 10.41       | H                  |

#### $\pi/4$ DQPSK Ch 39

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17453.500       | 42.05                       | -28.50          | 44.20                 | 26.35                   | 54.00          | 11.95       | H                  |
| 14206.500       | 39.38                       | -30.20          | 41.70                 | 27.88                   | 54.00          | 14.62       | H                  |
| 12991.000       | 36.92                       | -31.90          | 40.10                 | 28.72                   | 54.00          | 17.08       | V                  |
| 8708.500        | 36.12                       | -34.40          | 37.70                 | 32.82                   | 54.00          | 17.88       | V                  |
| 7536.000        | 35.18                       | -35.50          | 36.30                 | 34.38                   | 54.00          | 18.82       | H                  |
| 4692.500        | 30.68                       | -37.50          | 32.80                 | 35.38                   | 54.00          | 23.32       | V                  |

#### $\pi/4$ DQPSK Ch 78

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17875.500       | 42.35                       | -29.40          | 46.00                 | 25.75                   | 54.00          | 11.65       | V                  |
| 13693.500       | 39.70                       | -31.00          | 41.00                 | 29.70                   | 54.00          | 14.30       | V                  |
| 11882.000       | 37.23                       | -32.40          | 39.10                 | 30.53                   | 54.00          | 16.77       | V                  |
| 7224.000        | 35.76                       | -35.40          | 36.20                 | 34.96                   | 54.00          | 18.24       | V                  |
| 9432.500        | 35.55                       | -33.60          | 37.90                 | 31.25                   | 54.00          | 18.45       | H                  |
| 2492.000        | 44.07                       | -19.70          | 28.20                 | 35.57                   | 54.00          | 9.93        | V                  |

**8DPSK Ch 0**

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17149.500       | 41.86                       | -29.30          | 41.70                 | 29.46                   | 54.00          | 12.14       | V                  |
| 13738.000       | 39.46                       | -31.00          | 41.10                 | 29.36                   | 54.00          | 14.54       | V                  |
| 12785.500       | 37.18                       | -31.50          | 39.80                 | 28.88                   | 54.00          | 16.82       | V                  |
| 9896.500        | 35.84                       | -33.90          | 37.90                 | 31.84                   | 54.00          | 18.16       | H                  |
| 7536.000        | 35.40                       | -35.50          | 36.30                 | 34.60                   | 54.00          | 18.60       | H                  |
| 2360.300        | 43.59                       | -19.60          | 28.20                 | 34.99                   | 54.00          | 10.41       | V                  |

**8DPSK Ch 39**

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17376.000       | 41.91                       | -28.60          | 43.40                 | 27.11                   | 54.00          | 12.09       | V                  |
| 13687.000       | 39.44                       | -31.00          | 41.00                 | 29.44                   | 54.00          | 14.56       | H                  |
| 12697.000       | 37.53                       | -31.90          | 39.50                 | 29.93                   | 54.00          | 16.47       | V                  |
| 7310.500        | 35.48                       | -35.40          | 36.60                 | 34.28                   | 54.00          | 18.52       | V                  |
| 9114.500        | 35.48                       | -34.30          | 37.70                 | 32.08                   | 54.00          | 18.52       | V                  |
| 4941.000        | 31.15                       | -37.60          | 33.30                 | 35.45                   | 54.00          | 22.85       | V                  |

**8DPSK Ch 78**

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17352.500       | 42.50                       | -28.60          | 43.40                 | 27.70                   | 54.00          | 11.50       | H                  |
| 13799.000       | 39.42                       | -30.90          | 41.20                 | 29.12                   | 54.00          | 14.58       | V                  |
| 11879.500       | 36.99                       | -32.80          | 39.10                 | 30.59                   | 54.00          | 17.01       | V                  |
| 9012.000        | 36.07                       | -34.30          | 37.80                 | 32.57                   | 54.00          | 17.93       | V                  |
| 7342.000        | 35.56                       | -35.90          | 36.60                 | 34.86                   | 54.00          | 18.44       | V                  |
| 2491.600        | 44.08                       | -19.70          | 28.20                 | 35.58                   | 54.00          | 9.92        | V                  |

**Conclusion: Pass**

## B.7. Time of Occupancy (Dwell Time)

**Method of Measurement:** See ANSI C63.10-clause 7.8.4

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW  $\geq$  RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

### Measurement Limit:

| Standard                           | Limit (ms) |
|------------------------------------|------------|
| FCC 47 CFR Part 15.247(a) (1)(iii) | < 400      |

### Measurement Result:

#### For GFSK

| Channel | Packet | Pulse time (ms) |      | Number of Transmissions |     | Dwell Time (ms) | Conclusion |
|---------|--------|-----------------|------|-------------------------|-----|-----------------|------------|
| 39      | DH1    | Fig.64          | 0.38 | Fig.65                  | 317 | 120.46          | P          |
|         | DH3    | Fig.66          | 1.64 | Fig.67                  | 98  | 160.72          | P          |
|         | DH5    | Fig.68          | 2.88 | Fig.69                  | 64  | 184.32          | P          |

#### For $\pi/4$ DQPSK

| Channel | Packet | Pulse time (ms) |      | Number of Transmissions |     | Dwell Time (ms) | Conclusion |
|---------|--------|-----------------|------|-------------------------|-----|-----------------|------------|
| 39      | 2DH1   | Fig.70          | 0.39 | Fig.71                  | 317 | 123.63          | P          |
|         | 2DH3   | Fig.72          | 1.64 | Fig.73                  | 107 | 175.48          | P          |
|         | 2DH5   | Fig.74          | 2.89 | Fig.75                  | 62  | 179.18          | P          |

**For 8DPSK**

| Channel | Packet | Pulse time (ms) |      | Number of Transmissions |     | Dwell Time (ms) | Conclusion |
|---------|--------|-----------------|------|-------------------------|-----|-----------------|------------|
| 39      | 3DH1   | Fig.76          | 0.39 | Fig.77                  | 318 | 124.02          | P          |
|         | 3DH3   | Fig.78          | 1.64 | Fig.79                  | 104 | 170.56          | P          |
|         | 3DH5   | Fig.80          | 2.89 | Fig.81                  | 64  | 184.96          | P          |

**Conclusion: PASS**

**Test graphs as below:**

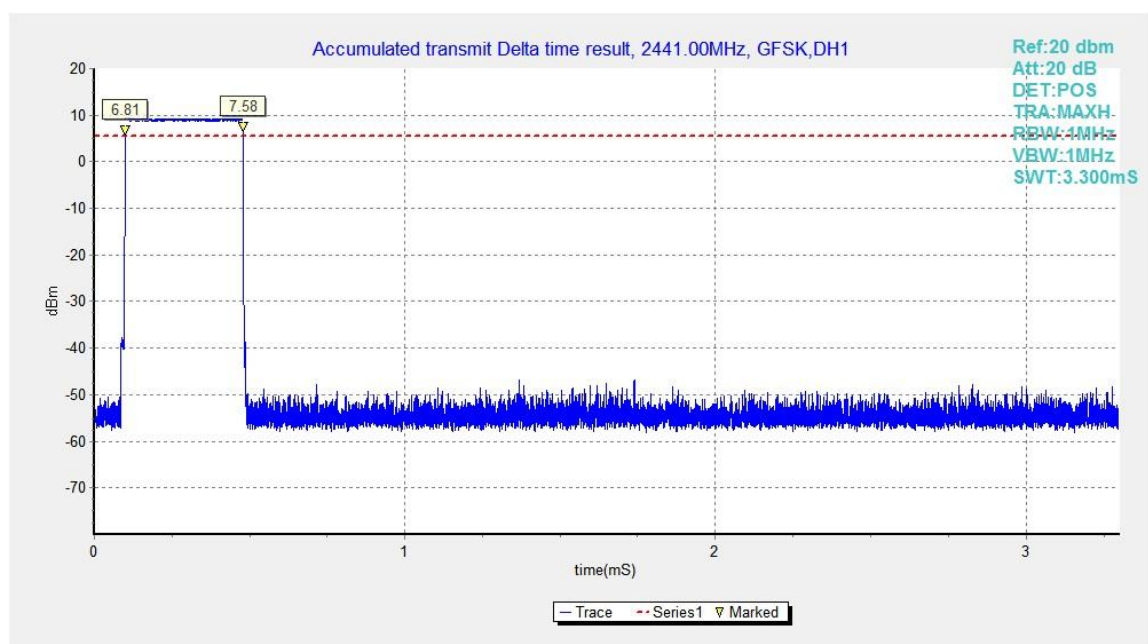


Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1

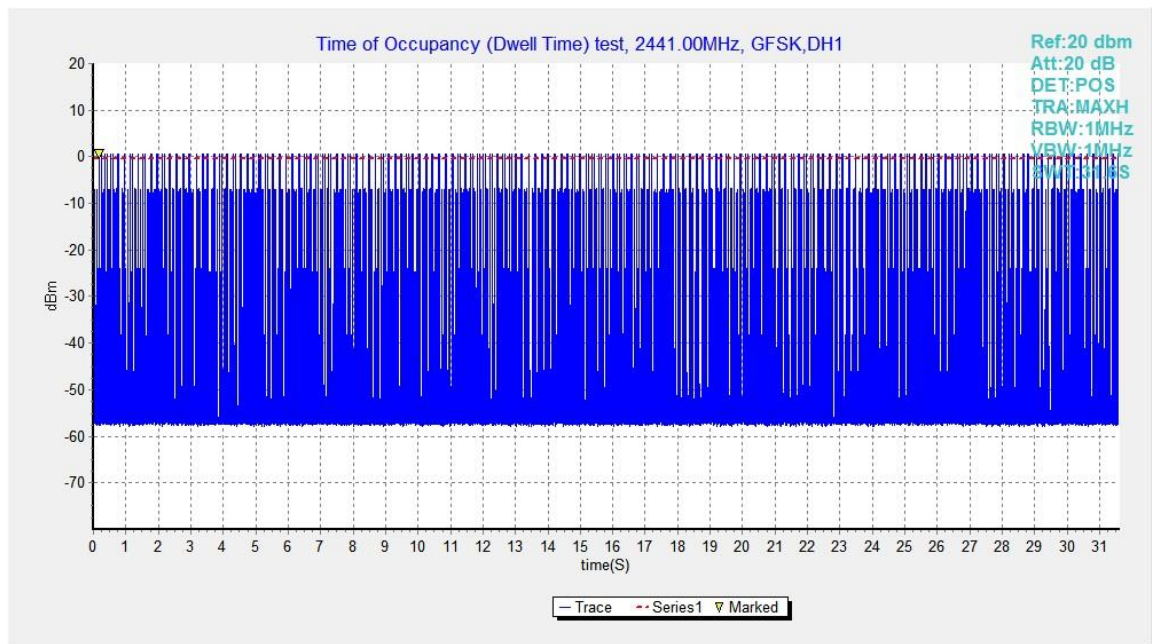


Fig.65. Number of Transmissions Measurement: Channel 39, Packet DH1

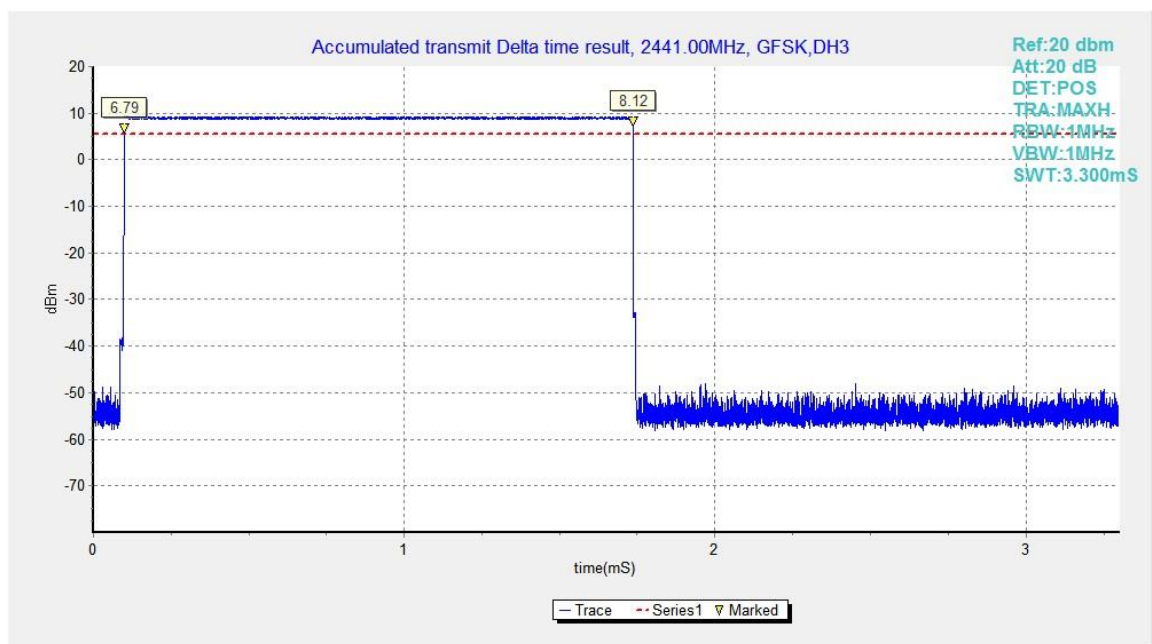


Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3

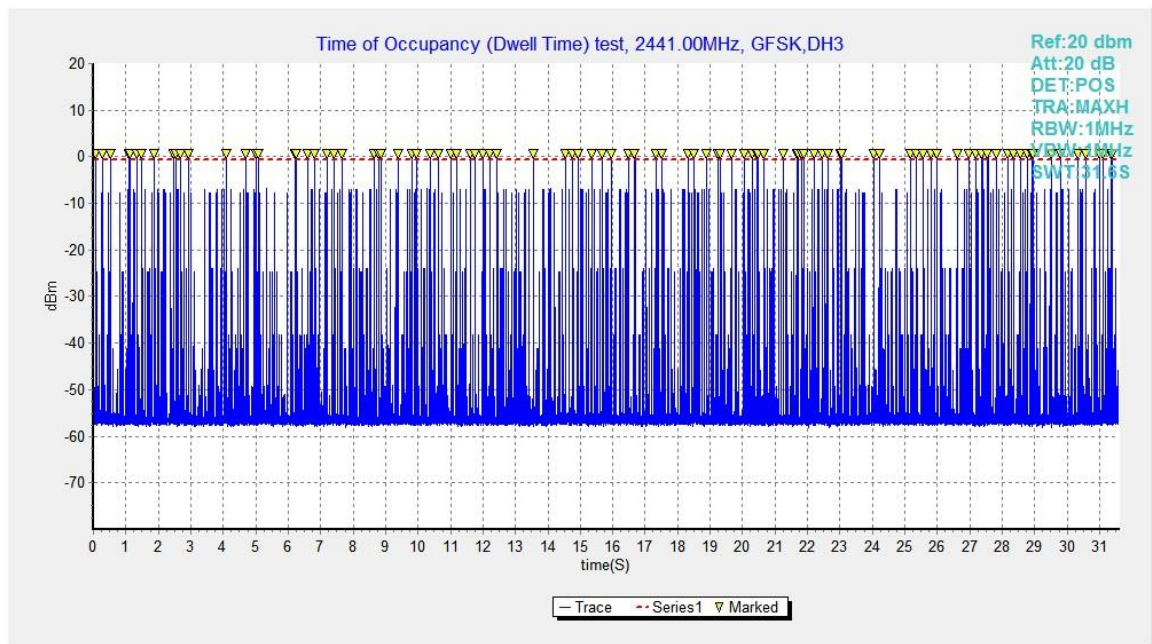


Fig.67. Number of Transmissions Measurement: Channel 39,Packet DH3

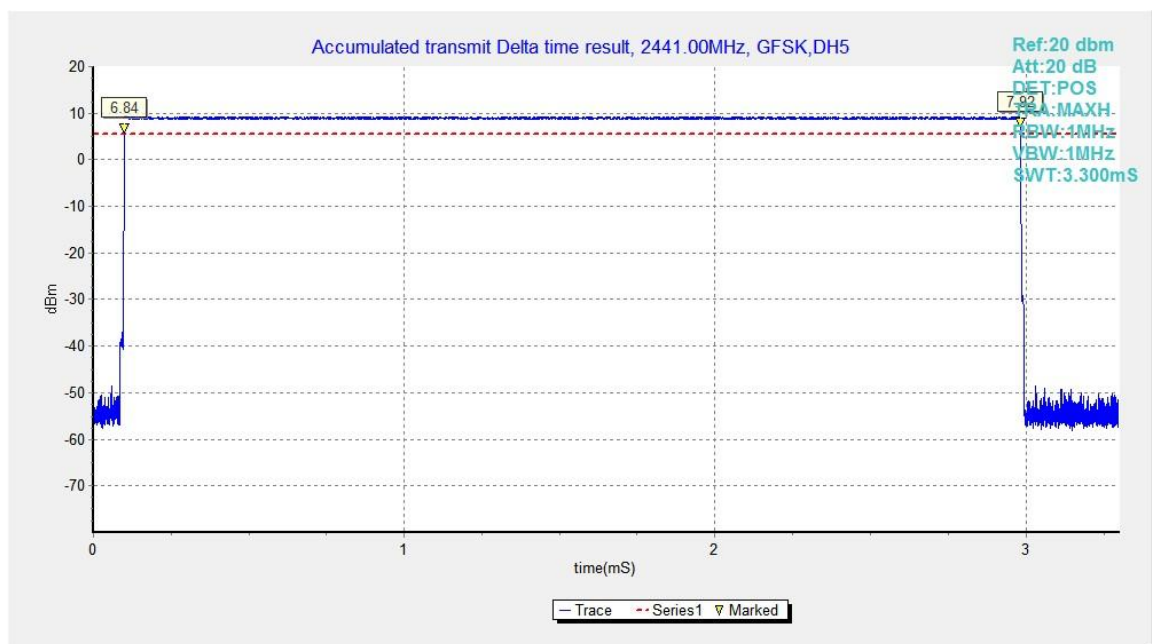


Fig.68. Time of occupancy (Dwell Time): Channel 39, Packet DH5



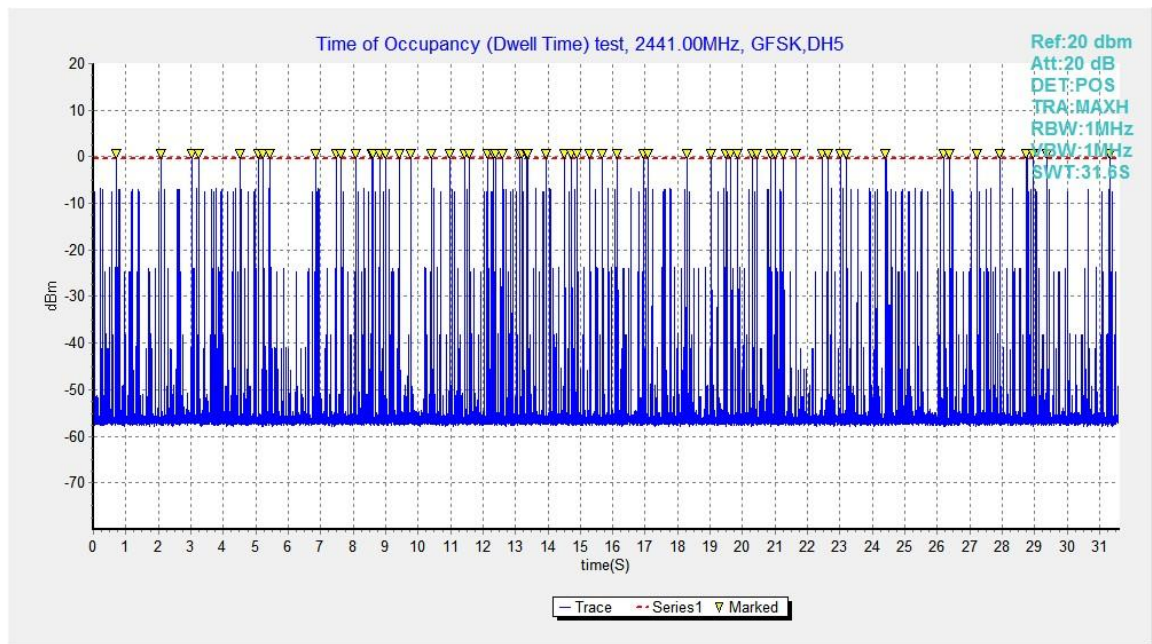


Fig.69. Number of Transmissions Measurement: Channel 39,Packet DH5

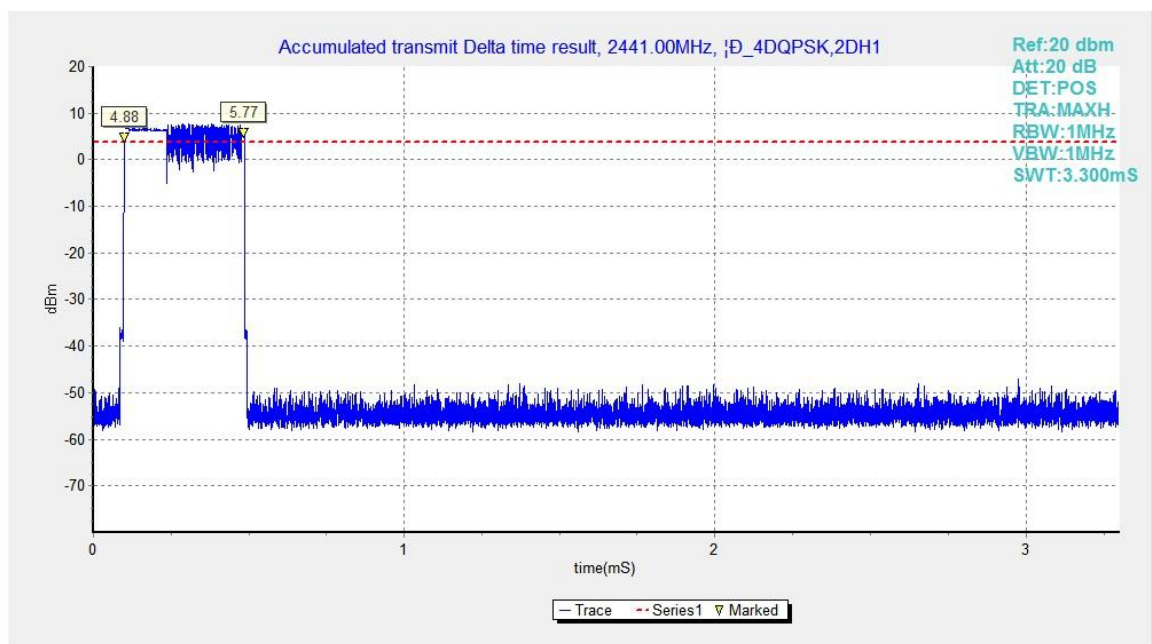


Fig.70. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

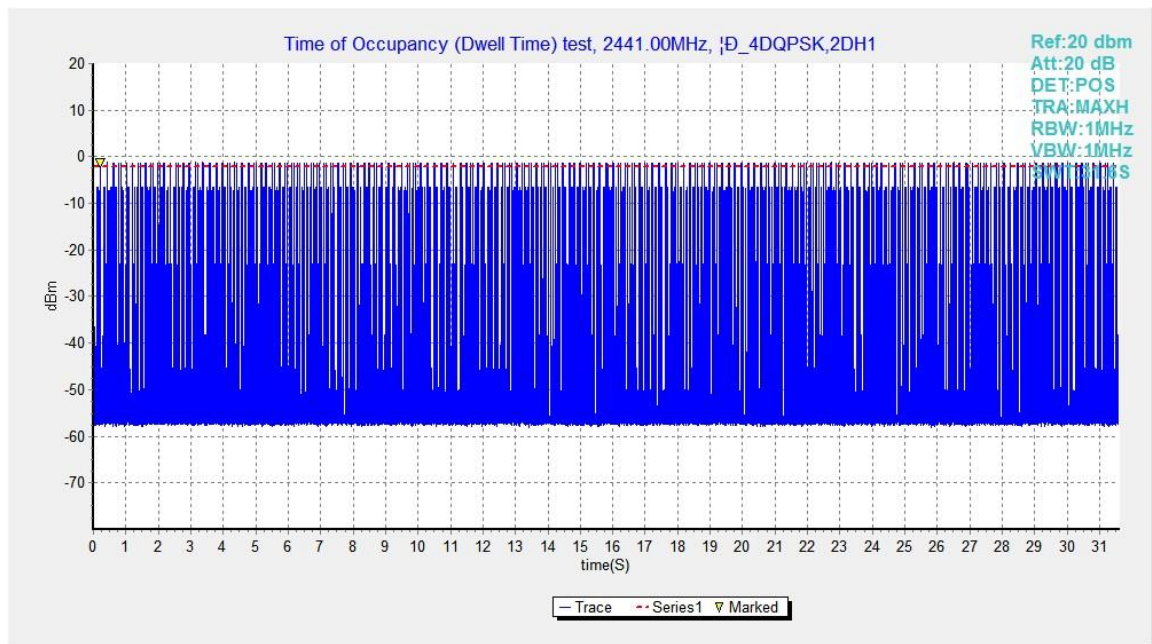


Fig.71. Number of Transmissions Measurement: Channel 39,Packet 2-DH1

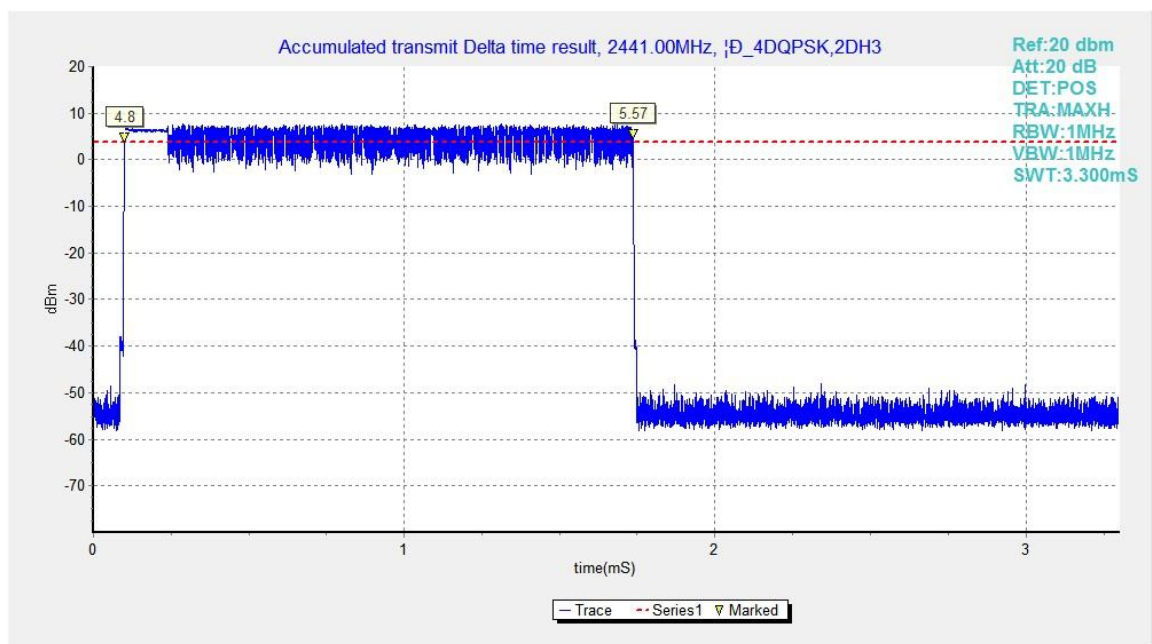


Fig.72. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

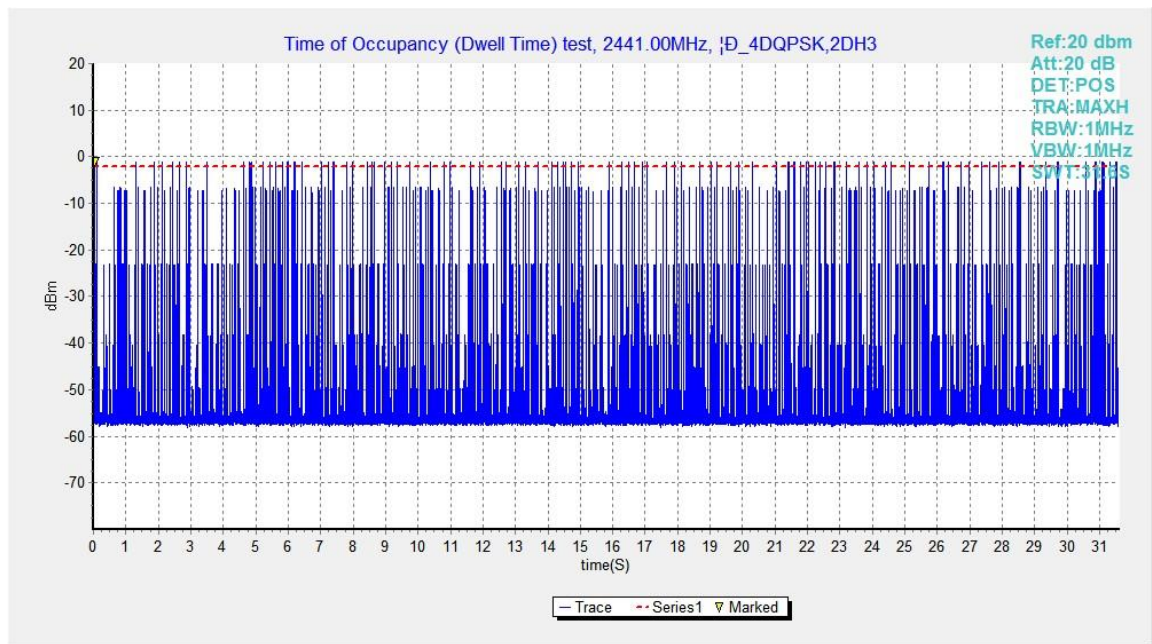


Fig.73. Number of Transmissions Measurement: Channel 39,Packet 2-DH3

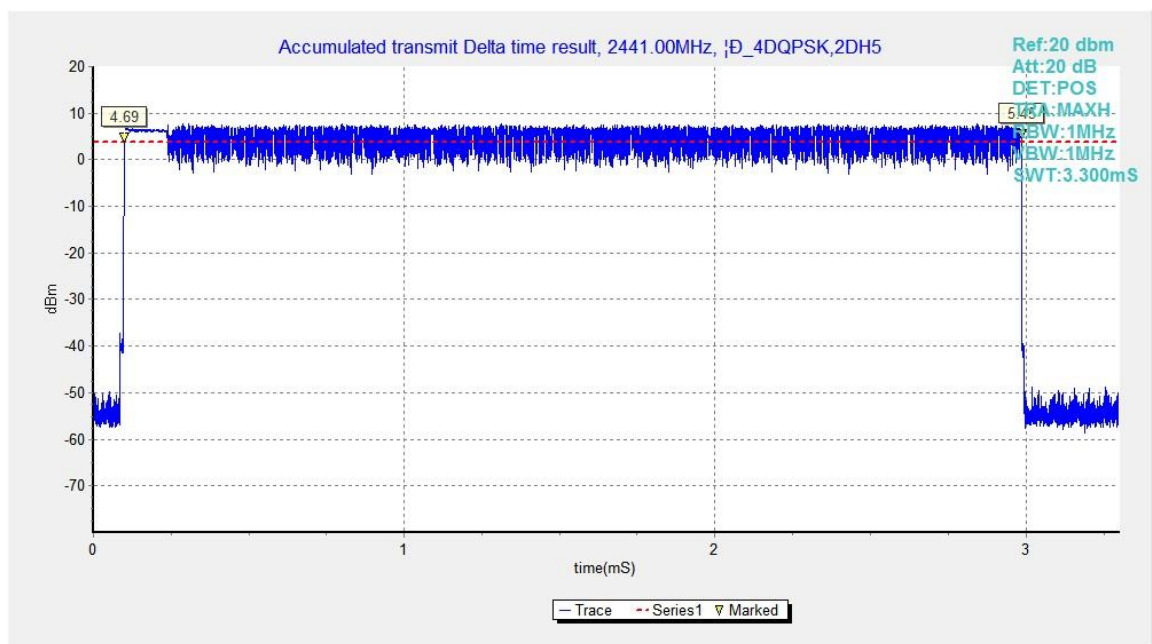


Fig.74. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

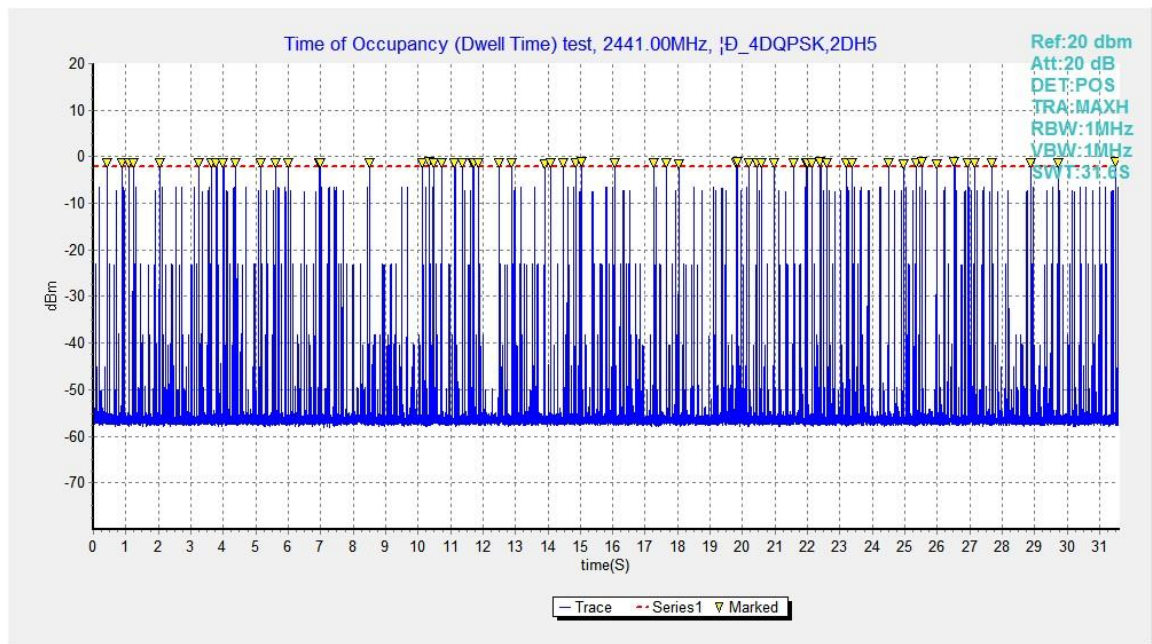


Fig.75. Number of Transmissions Measurement: Channel 39, Packet 2-DH5

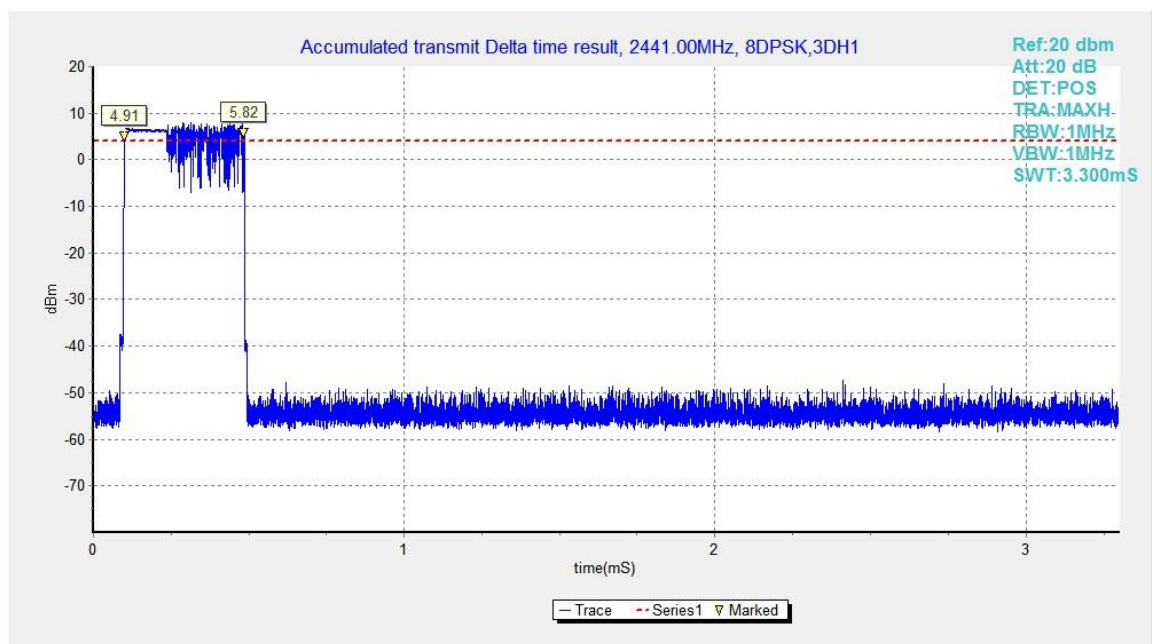


Fig.76. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1



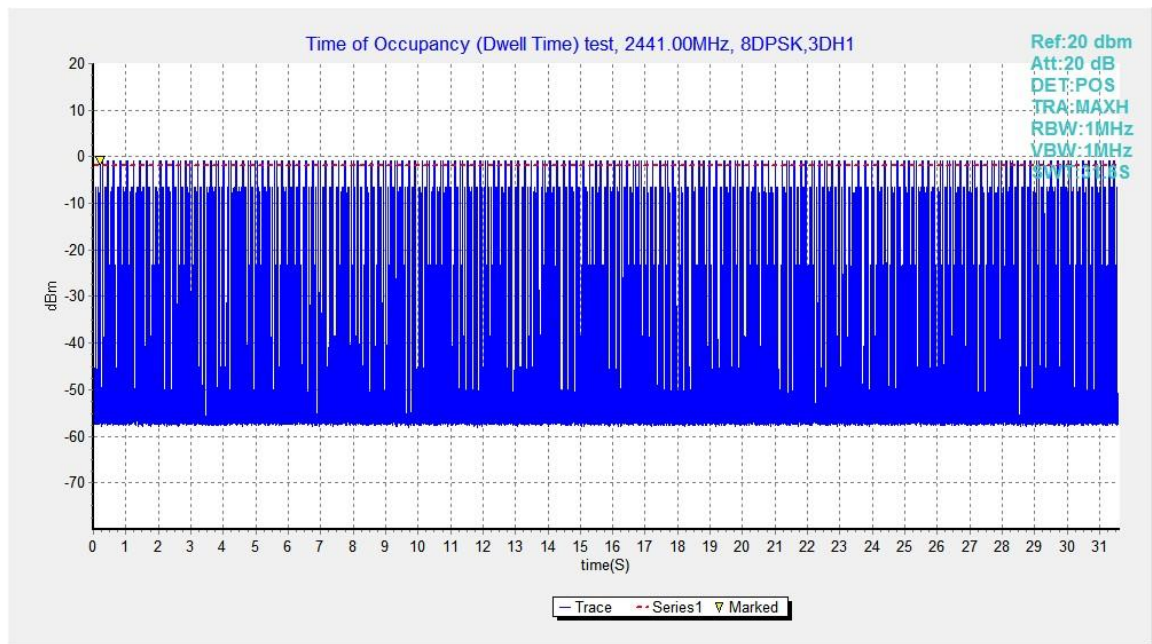


Fig.77. Number of Transmissions Measurement: Channel 39,Packet 3-DH1

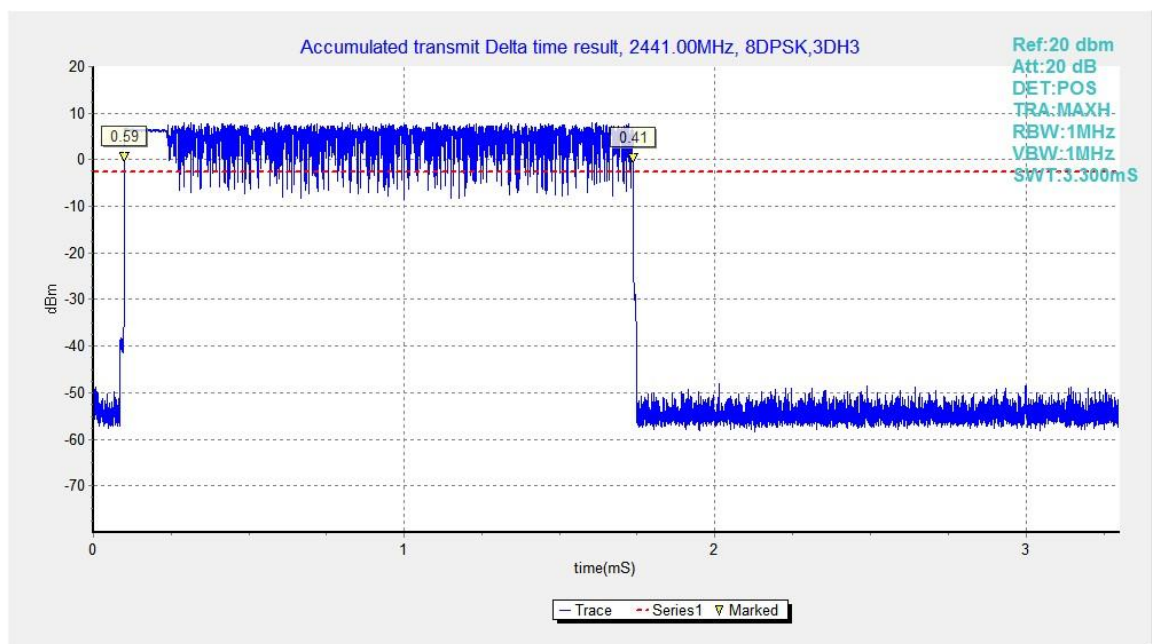


Fig.78. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

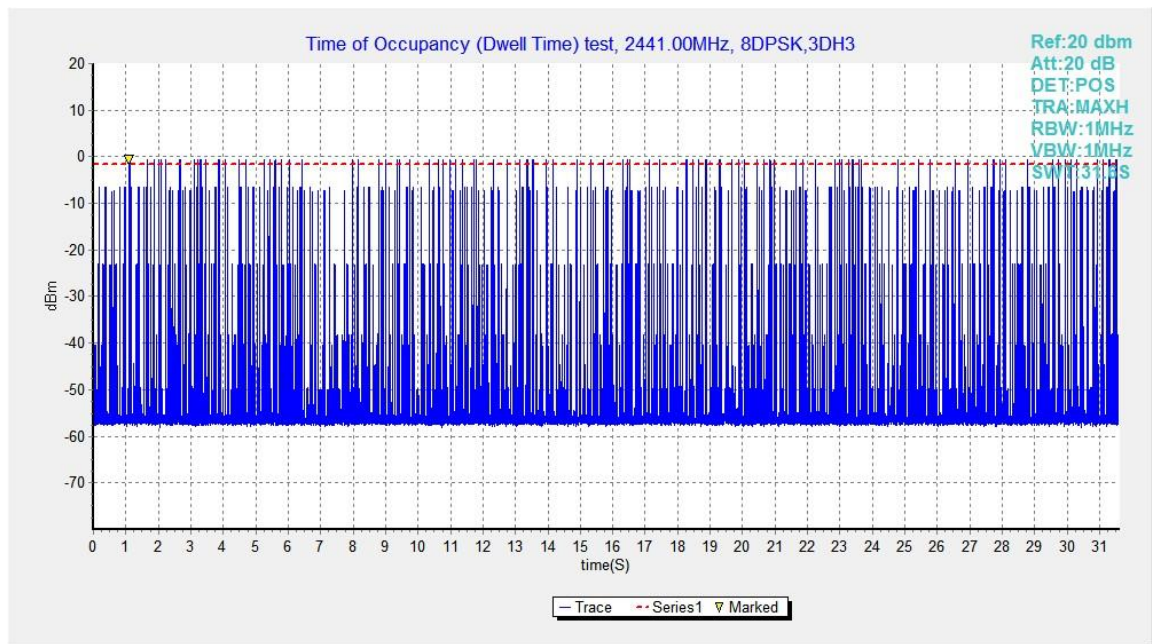


Fig.79. Number of Transmissions Measurement: Channel 39,Packet 3-DH3

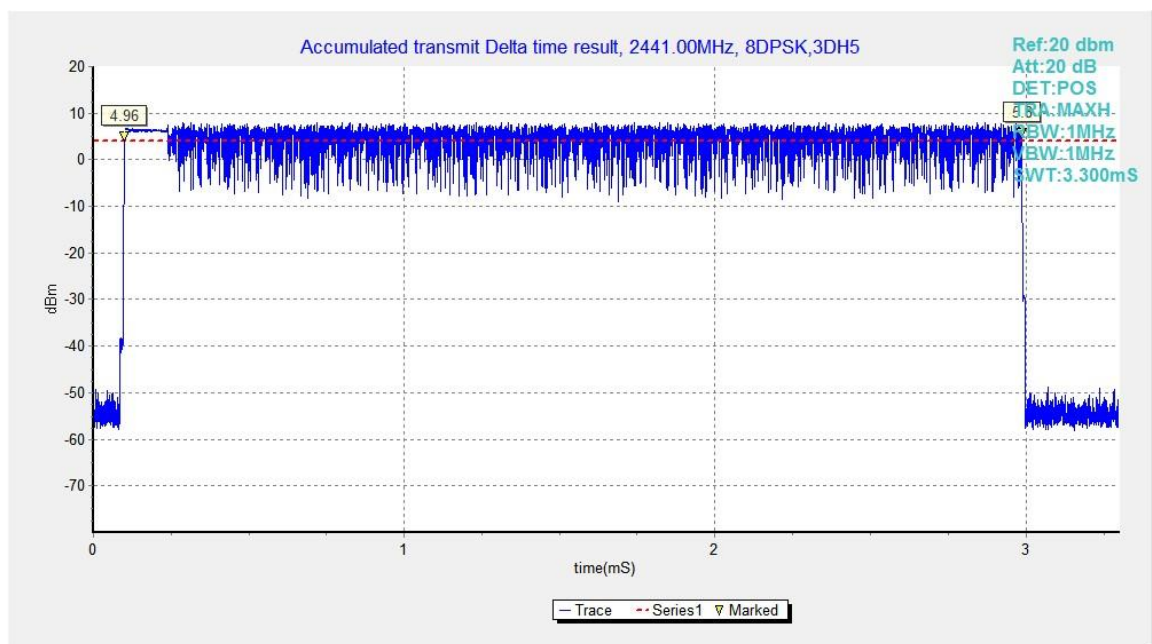


Fig.80. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5



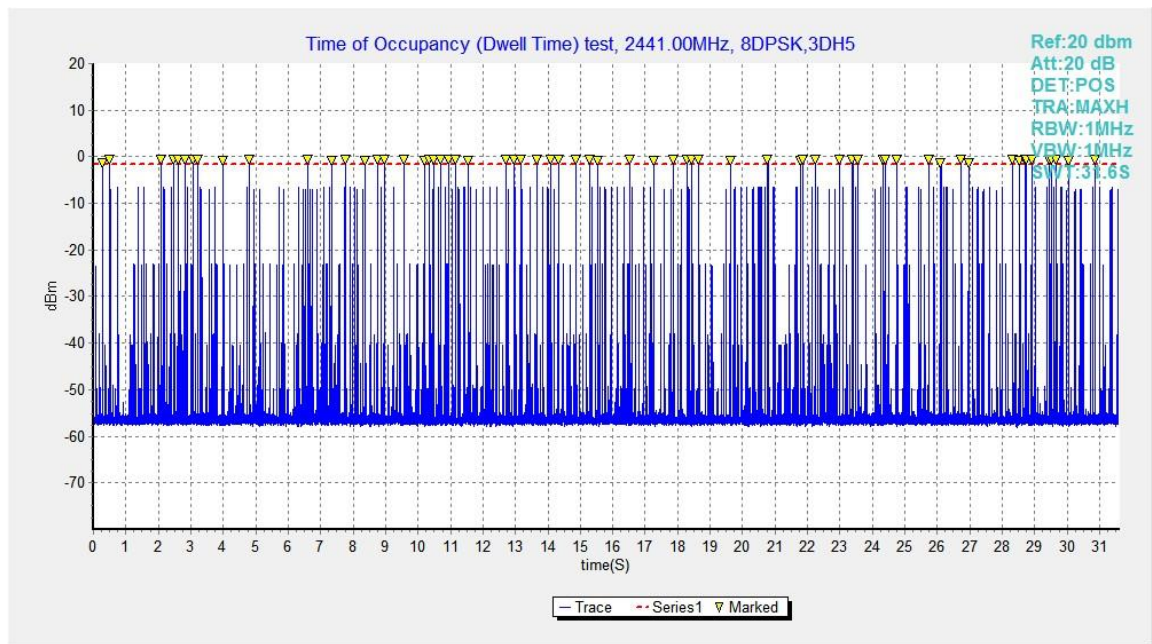


Fig.81. Number of Transmissions Measurement: Channel 39,Packet 3-DH5

## B.8. 20dB Bandwidth

**Method of Measurement:** See ANSI C63.10-clause 6.9.2

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

**Measurement Limit:**

| Standard                     | Limit |
|------------------------------|-------|
| FCC 47 CFR Part 15.247(a)(1) | NA *  |

Use NdB Down function of the SA to measure the 20dB Bandwidth

\* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

**Measurement Results:**

**For GFSK**

| Channel | 20dB Bandwidth (kHz) |        | Conclusion |
|---------|----------------------|--------|------------|
| 0       | Fig.82               | 919.50 | NA         |
| 39      | Fig.83               | 926.25 | NA         |
| 78      | Fig.84               | 923.25 | NA         |

**For  $\pi/4$  DQPSK**

| Channel | 20dB Bandwidth (kHz) |         | Conclusion |
|---------|----------------------|---------|------------|
| 0       | Fig.85               | 1290.00 | NA         |
| 39      | Fig.86               | 1278.00 | NA         |
| 78      | Fig.87               | 1278.00 | NA         |

**For 8DPSK**

| Channel | 20dB Bandwidth (kHz) |         | Conclusion |
|---------|----------------------|---------|------------|
| 0       | Fig.88               | 1297.50 | NA         |
| 39      | Fig.89               | 1299.00 | NA         |
| 78      | Fig.90               | 1296.75 | NA         |

**Conclusion: NA**

**Test graphs as below:**

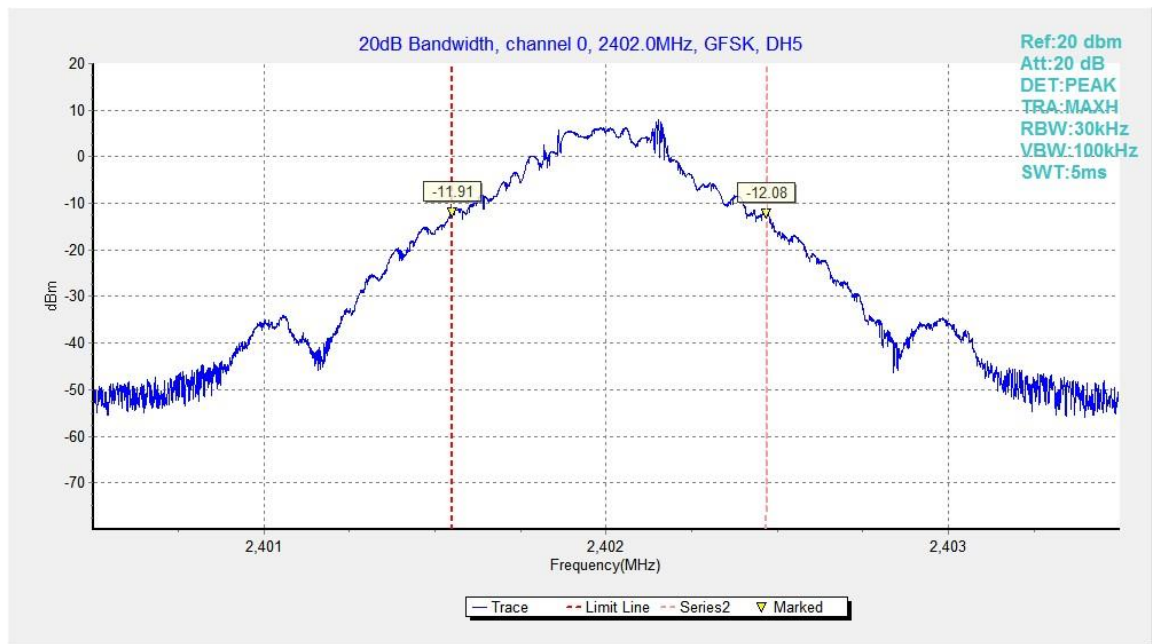


Fig.82. 20dB Bandwidth: GFSK, Channel 0

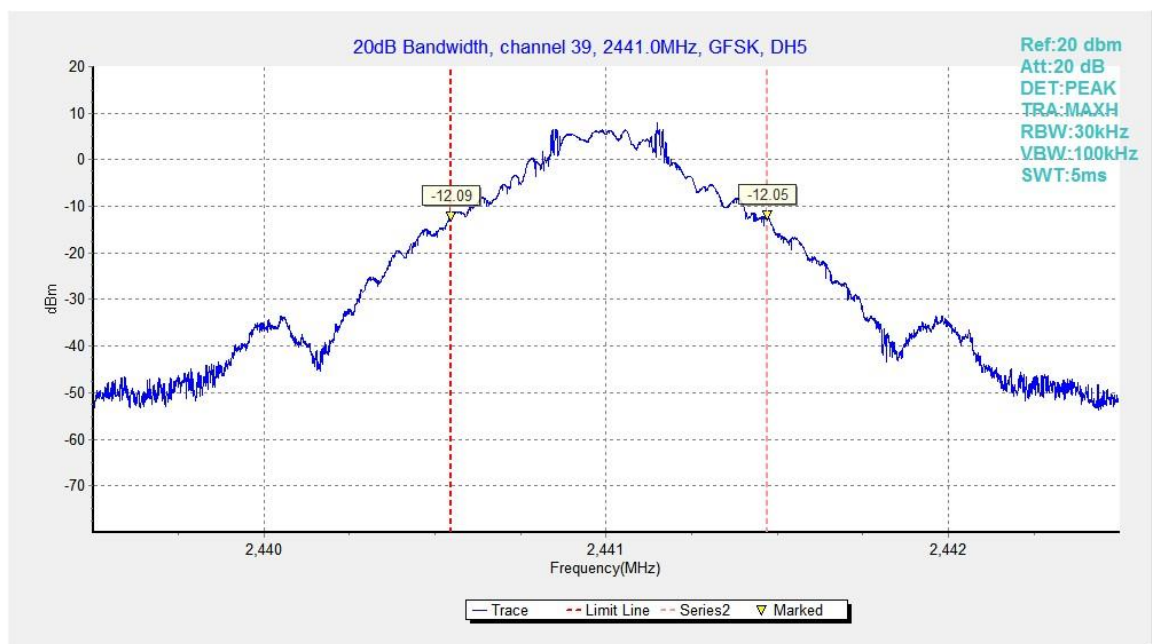


Fig.83. 20dB Bandwidth: GFSK, Channel 39

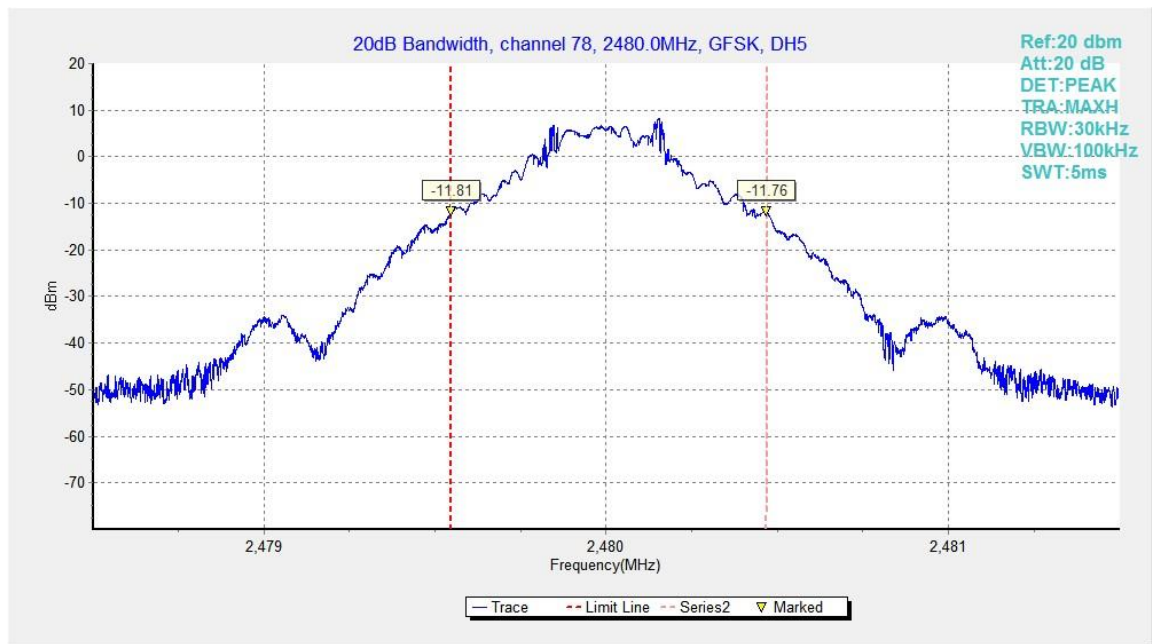


Fig.84. 20dB Bandwidth: GFSK, Channel 78

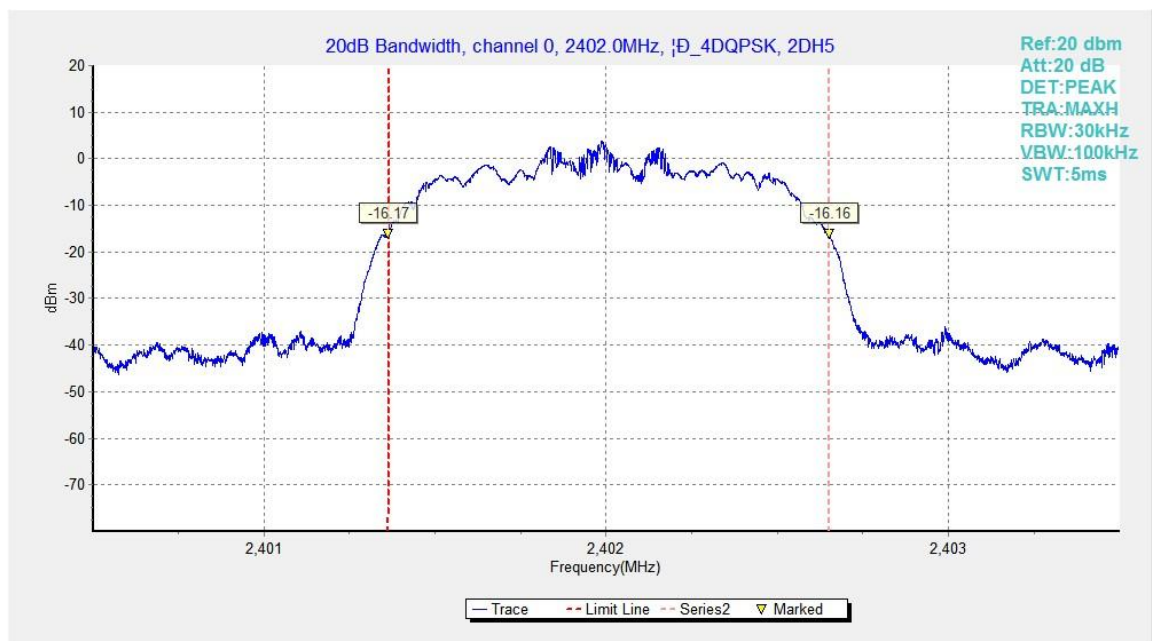


Fig.85. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 0

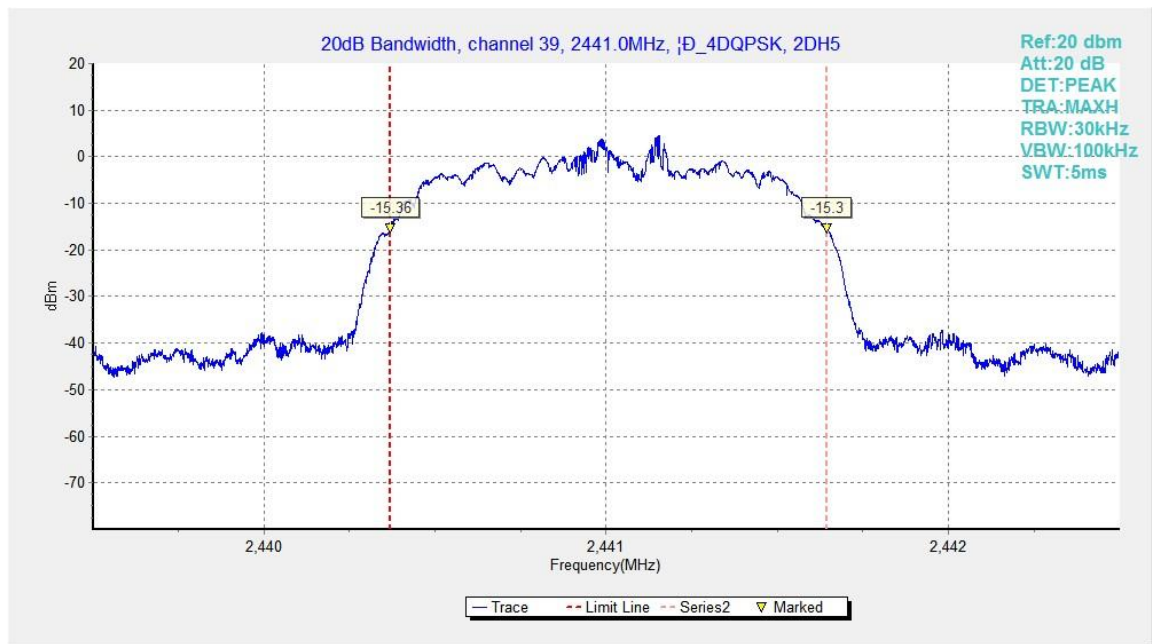


Fig.86. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 39

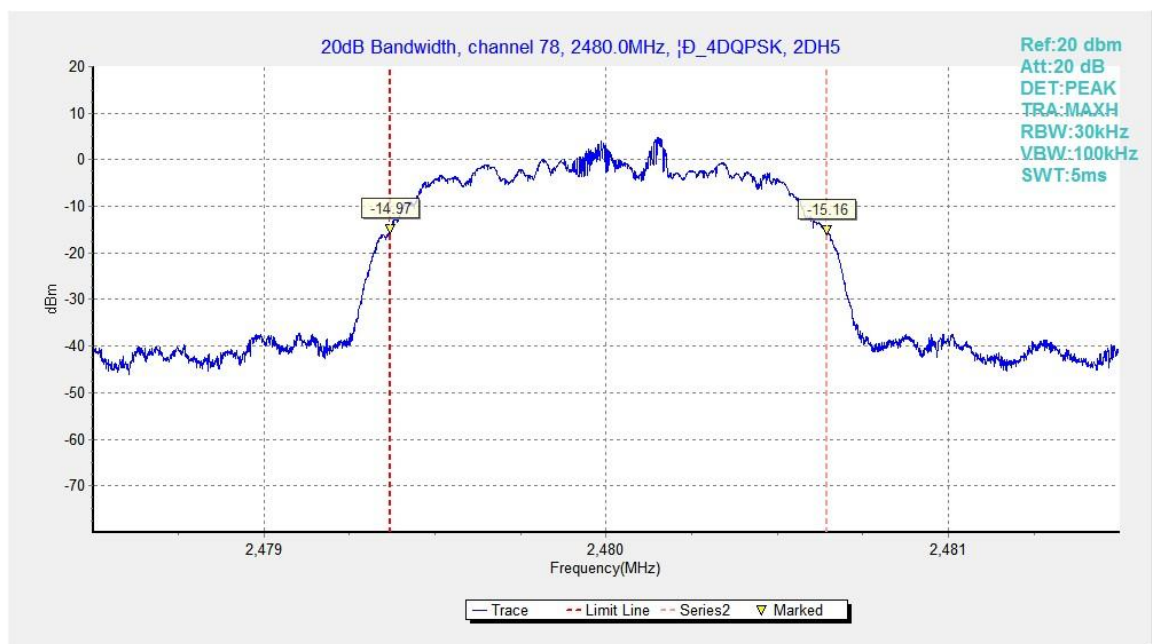


Fig.87. 20dB Bandwidth:  $\pi/4$  DQPSK, Channel 78



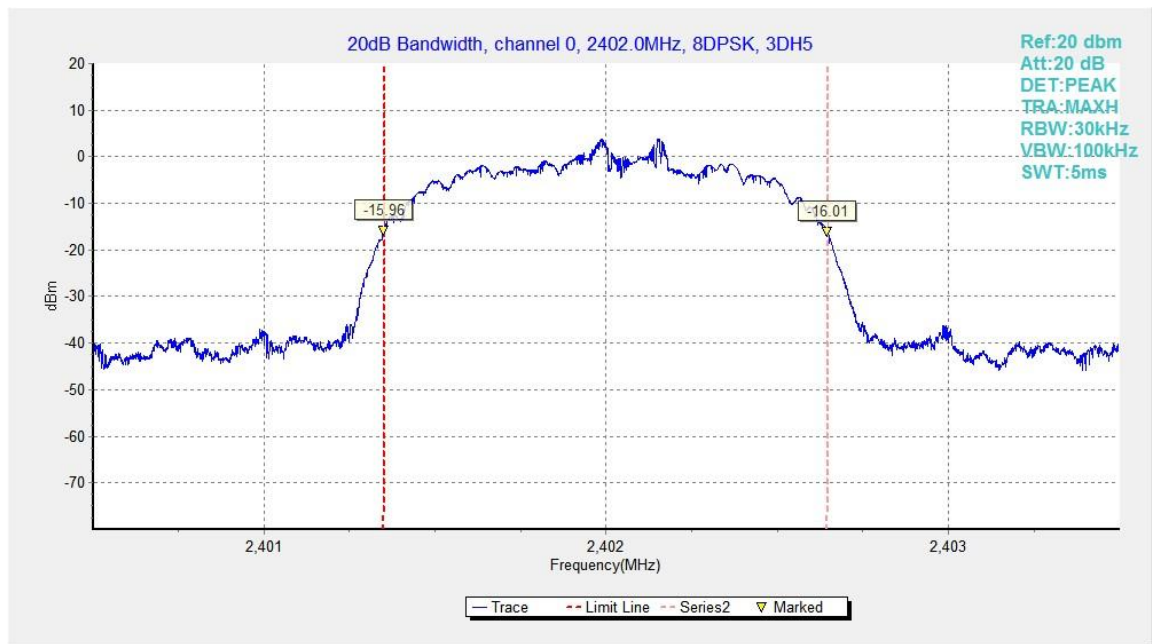


Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

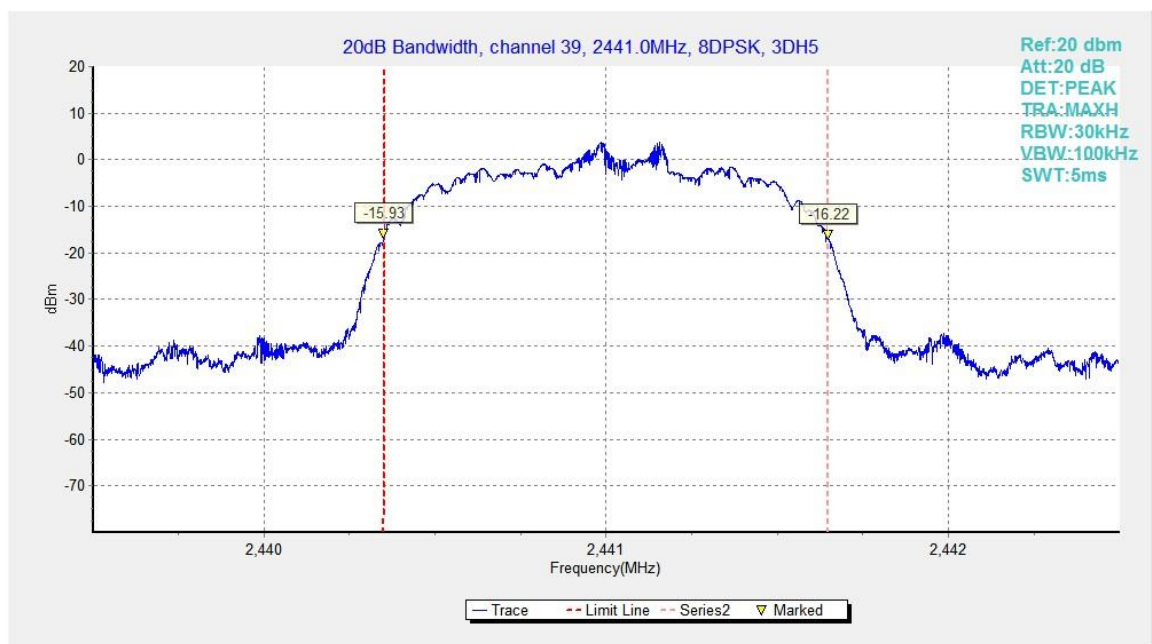


Fig.89. 20dB Bandwidth: 8DPSK, Channel 39

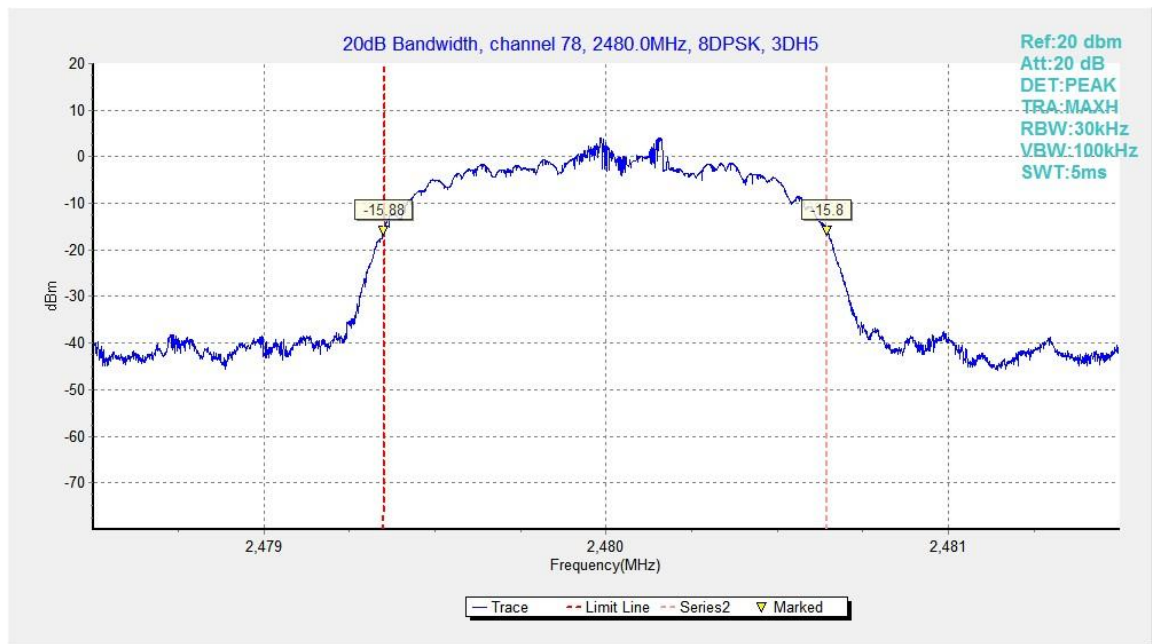


Fig.90. 20dB Bandwidth: 8DPSK, Channel 78

## B.9. Carrier Frequency Separation

**Method of Measurement:** See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

\* Comment: This limit should be over 25 kHz or  $(2/3) * 20\text{dB}$  bandwidth, whichever is greater.

### Measurement Limit:

| Standard                     | Limit(kHz)                                     |
|------------------------------|------------------------------------------------|
| FCC 47 CFR Part 15.247(a)(1) | over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth |

### Measurement Result:

#### For GFSK

| Channel | Carrier frequency separation (kHz) |        | Conclusion |
|---------|------------------------------------|--------|------------|
| 39      | Fig.91                             | 838.50 | P          |

#### For $\pi/4$ DQPSK

| Channel | Carrier frequency separation (kHz) |         | Conclusion |
|---------|------------------------------------|---------|------------|
| 39      | Fig.92                             | 1001.25 | P          |

#### For 8DPSK

| Channel | Carrier frequency separation (kHz) |         | Conclusion |
|---------|------------------------------------|---------|------------|
| 39      | Fig.93                             | 1016.25 | P          |

**Conclusion: PASS**

**Test graphs as below:**

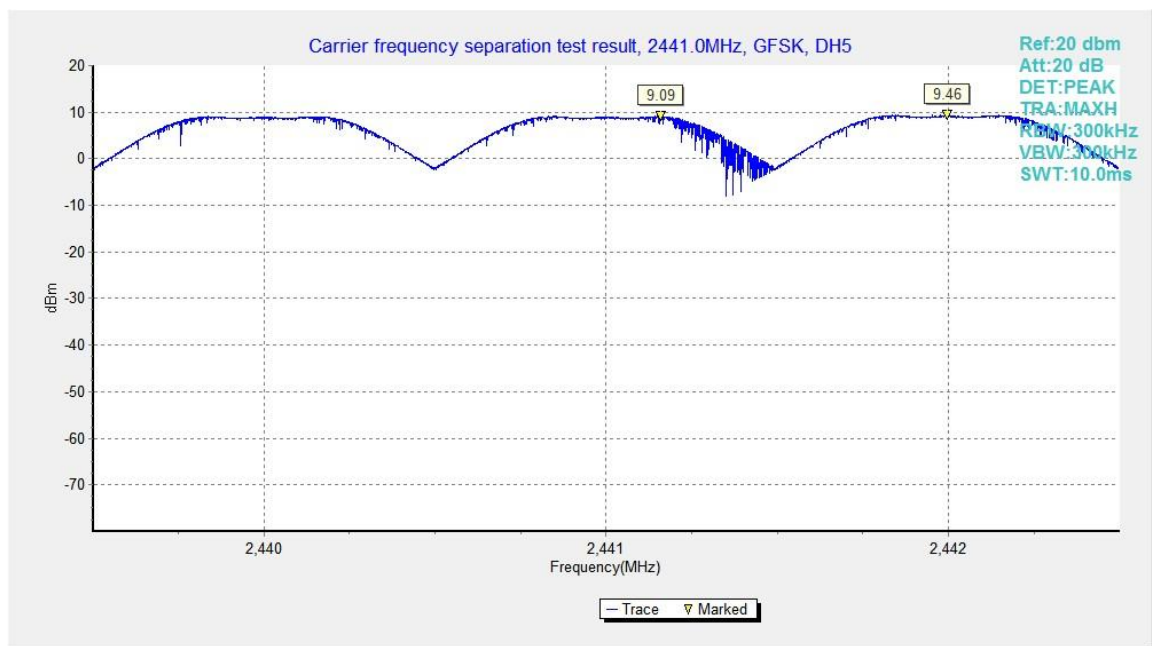


Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

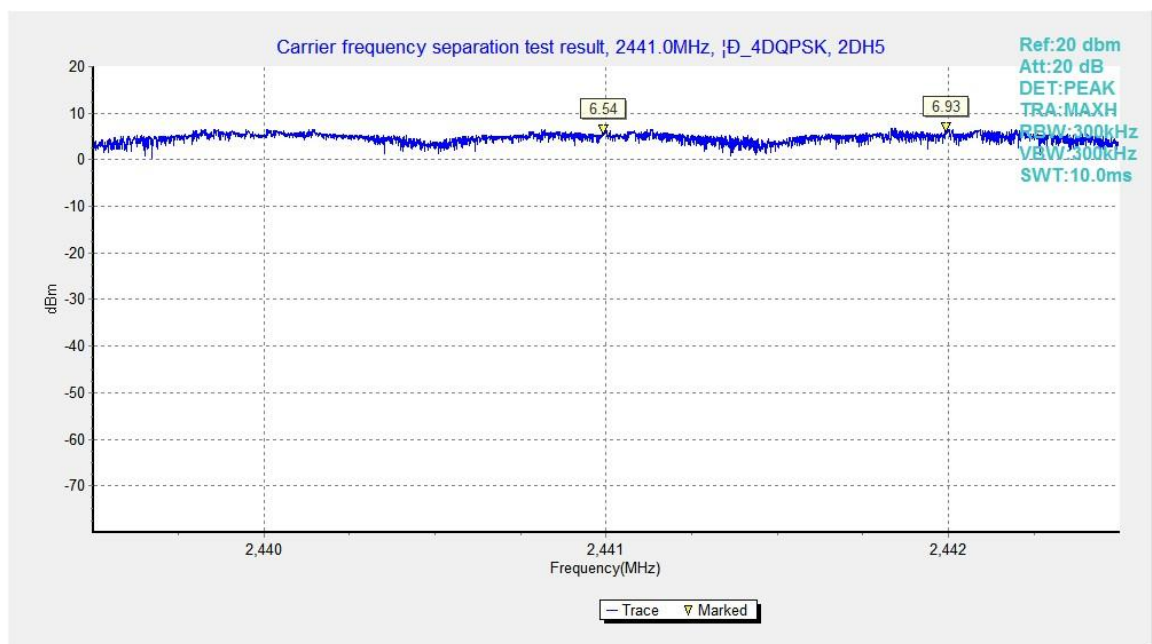


Fig.92. Carrier frequency separation measurement:  $\pi/4$  DQPSK, Channel 39

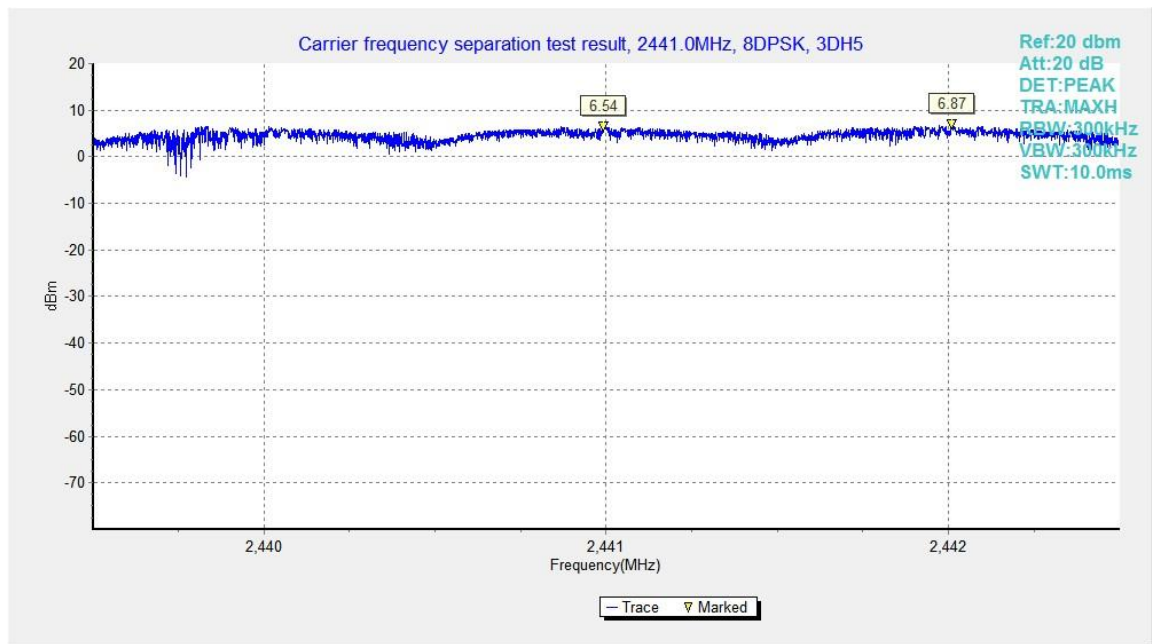


Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39



## B.10. Number of Hopping Channels

**Method of Measurement:** See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

### Measurement Limit:

| Standard                           | Limit                                |
|------------------------------------|--------------------------------------|
| FCC 47 CFR Part 15.247(a) (1)(iii) | At least 15 non-overlapping channels |

### Measurement Result:

#### For GFSK

| Channel | Number of hopping channels |    | Conclusion |
|---------|----------------------------|----|------------|
| 0~39    | Fig.94                     | 79 | P          |
| 40~78   | Fig.95                     |    |            |

#### For $\pi/4$ DQPSK

| Channel | Number of hopping channels |    | Conclusion |
|---------|----------------------------|----|------------|
| 0~39    | Fig.96                     | 79 | P          |
| 40~78   | Fig.97                     |    |            |

#### For 8DPSK

| Channel | Number of hopping channels |    | Conclusion |
|---------|----------------------------|----|------------|
| 0~39    | Fig.98                     | 79 | P          |
| 40~78   | Fig.99                     |    |            |

**Conclusion: PASS**

**Test graphs as below:**

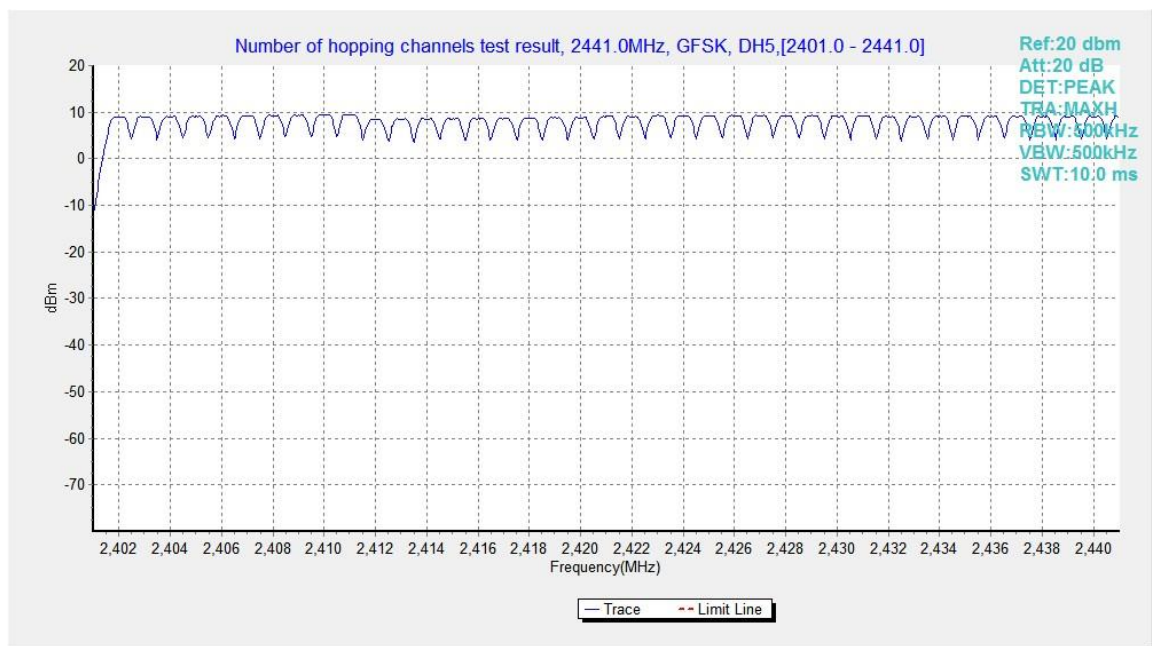


Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

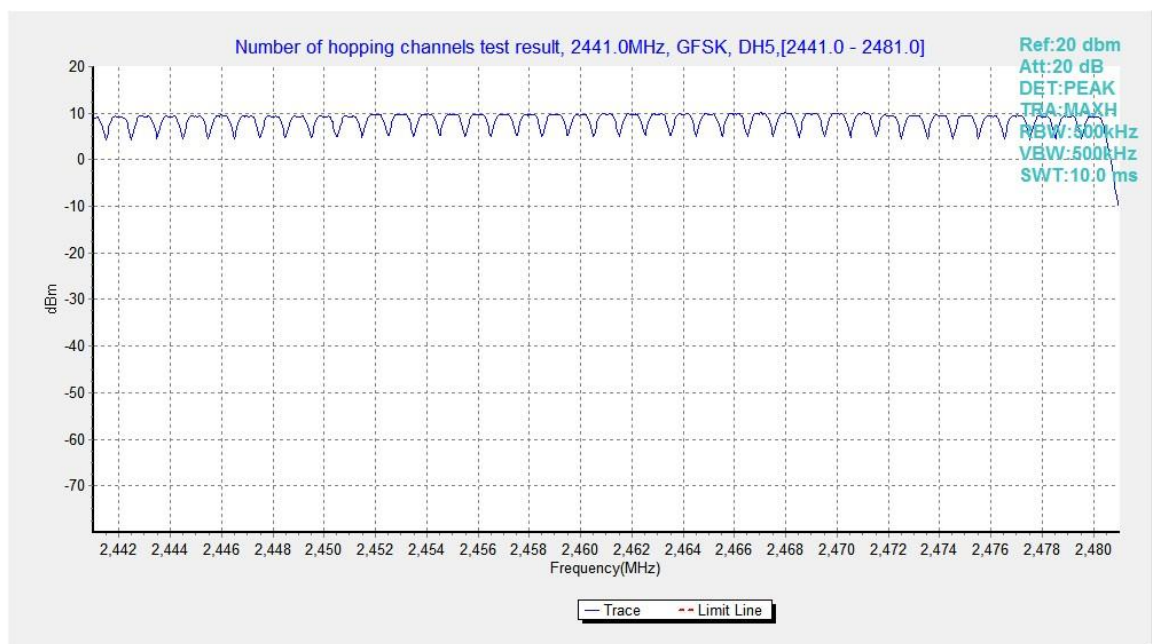
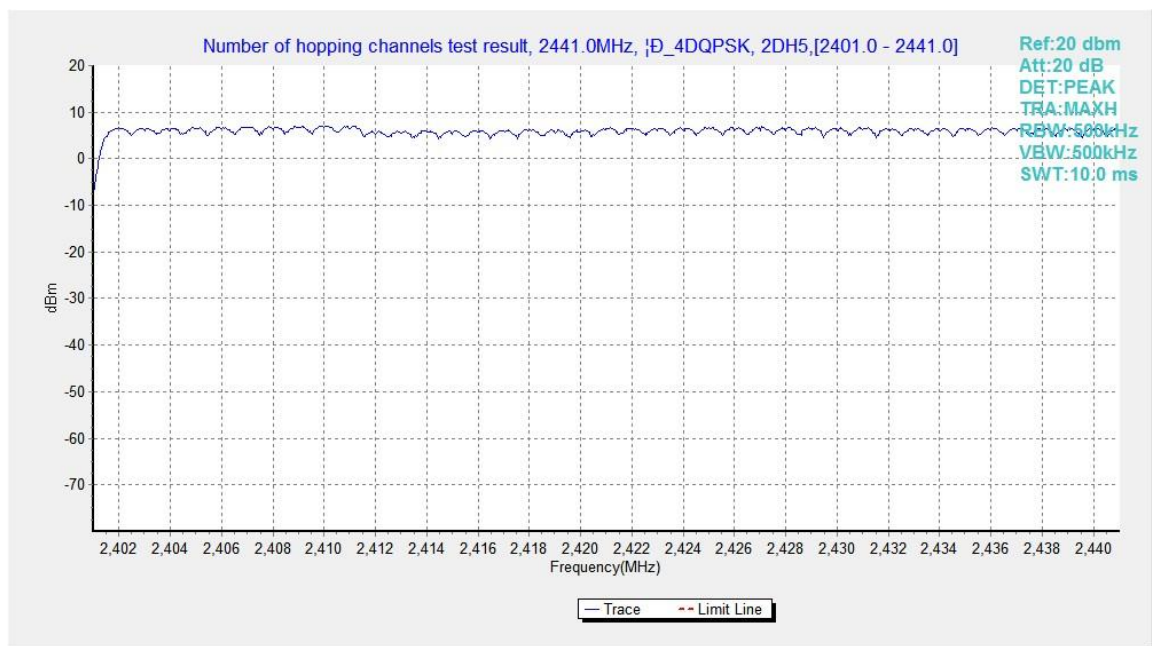
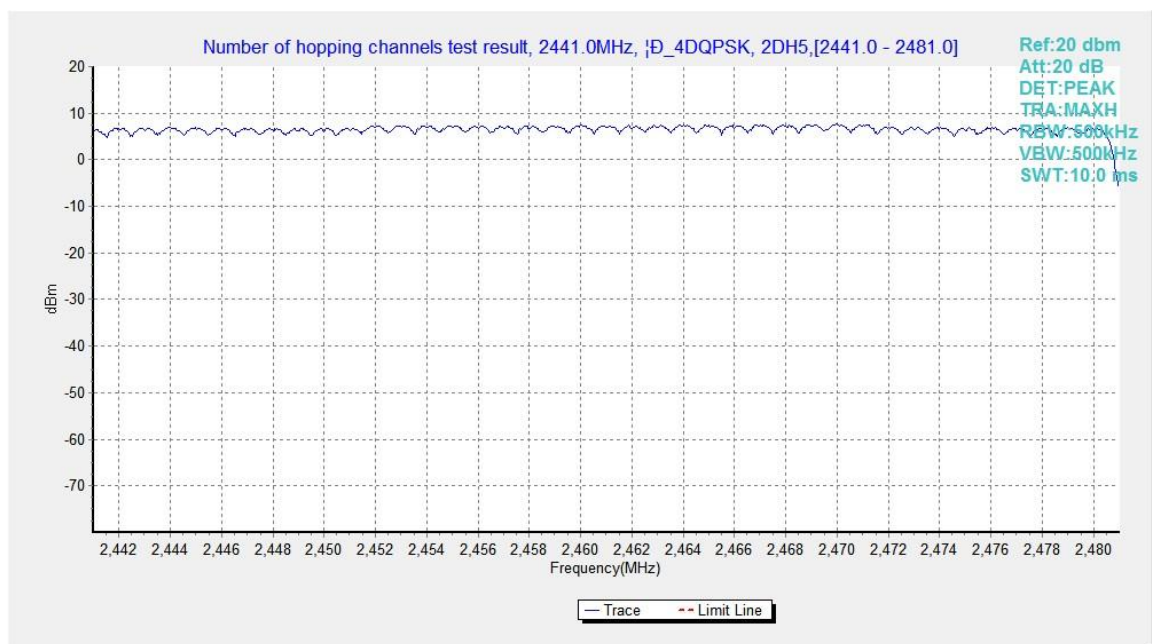


Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78


Fig.96. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 0 - 39

Fig.97. Number of hopping frequencies:  $\pi/4$  DQPSK, Channel 40 - 78

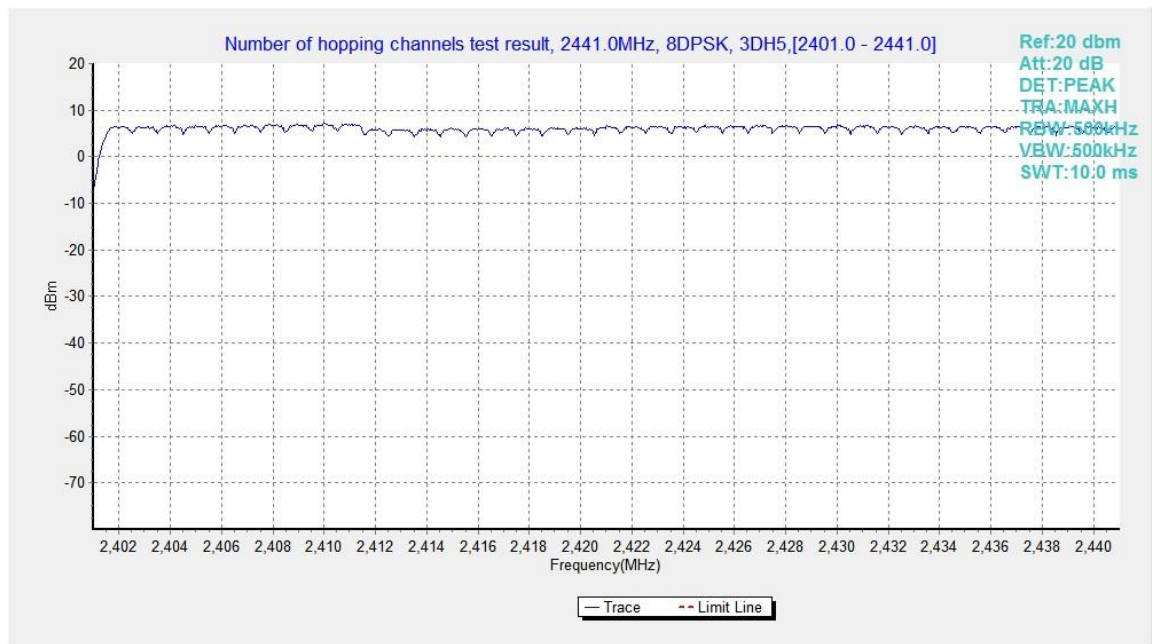


Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

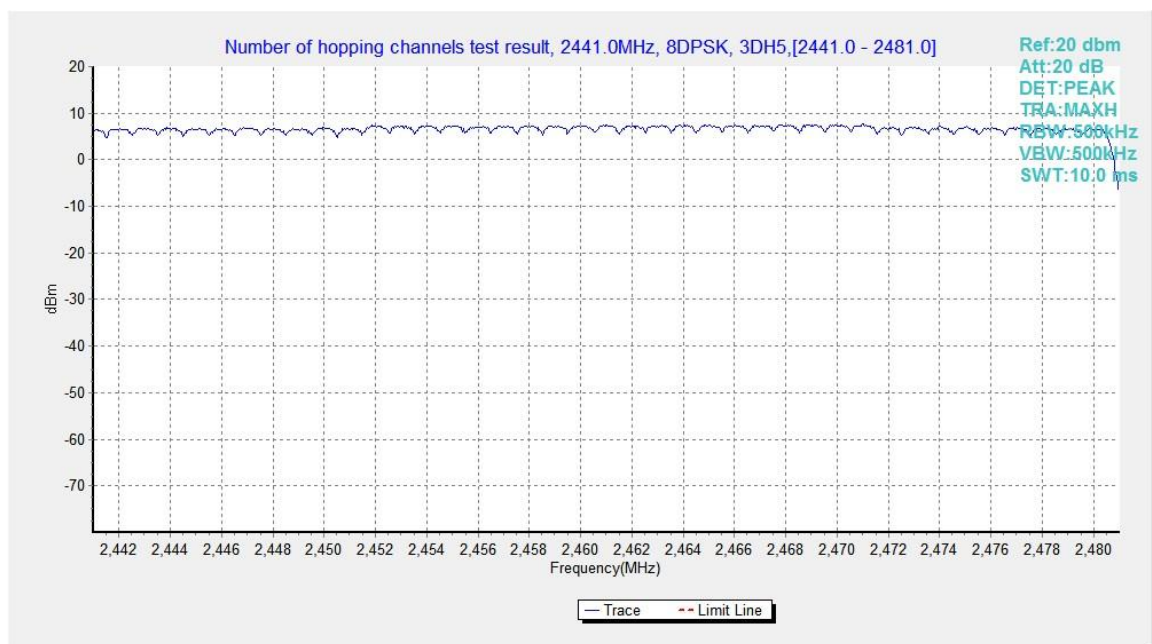


Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78

## B.11. AC Powerline Conducted Emission

## Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

**Method of Measurement:**

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver:  
Quasi-Peak / Average Detector.


The measurement bandwidth is:

|                             |                  |
|-----------------------------|------------------|
| Frequency of Emission (MHz) | RBW/IF bandwidth |
| 0.15-30                     | 9kHz             |

**Test Condition:**

|             |                |
|-------------|----------------|
| Voltage (V) | Frequency (Hz) |
| 120         | 60             |

## Measurement Setup

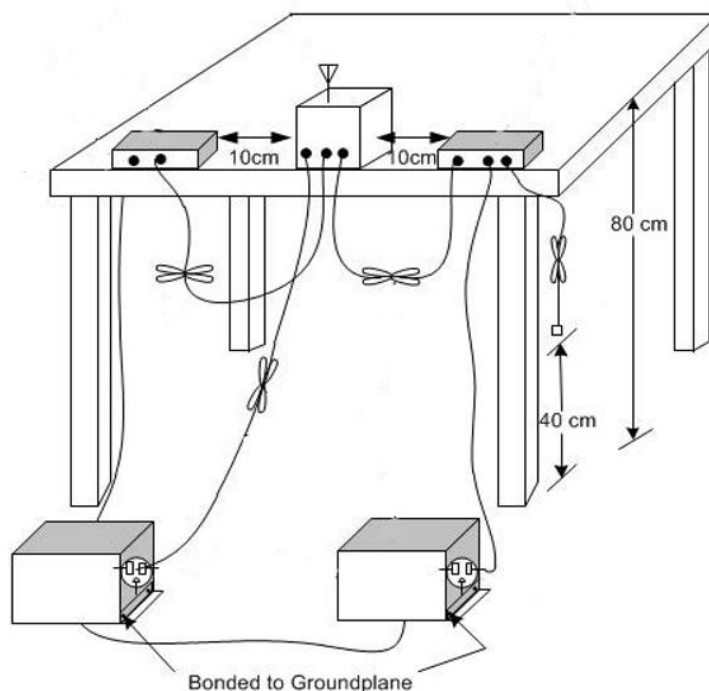

**Measurement Result and limit:**
**EUT ID: UT01a**

Bluetooth (Quasi-peak Limit)


| Frequency range<br>(MHz)                                                                                 | Quasi-peak<br>Limit (dBμV) | Result (dBμV) |            | Conclusion |
|----------------------------------------------------------------------------------------------------------|----------------------------|---------------|------------|------------|
|                                                                                                          |                            | With charger  |            |            |
|                                                                                                          |                            | bluetooth     | Idle       |            |
| 0.15 to 0.5                                                                                              | 66 to 56                   | Fig.B.11.1    | Fig.B.11.2 | P          |
| 0.5 to 5                                                                                                 | 56                         |               |            |            |
| 5 to 30                                                                                                  | 60                         |               |            |            |
| NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz. |                            |               |            |            |

Bluetooth (Average Limit)

| Bluetooth (Average Limit)                                                                                |                            | Result (dB $\mu$ V) |            | Conclusion |
|----------------------------------------------------------------------------------------------------------|----------------------------|---------------------|------------|------------|
| Frequency range (MHz)                                                                                    | Average Limit (dB $\mu$ V) | With charger        |            |            |
|                                                                                                          |                            | bluetooth           | Idle       |            |
| 0.15 to 0.5                                                                                              | 56 to 46                   | Fig.B.11.1          | Fig.B.11.2 | <b>P</b>   |
| 0.5 to 5                                                                                                 | 46                         |                     |            |            |
| 5 to 30                                                                                                  | 50                         |                     |            |            |
| NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz. |                            |                     |            |            |

**Conclusion: Pass**
**Test graphs as below:**



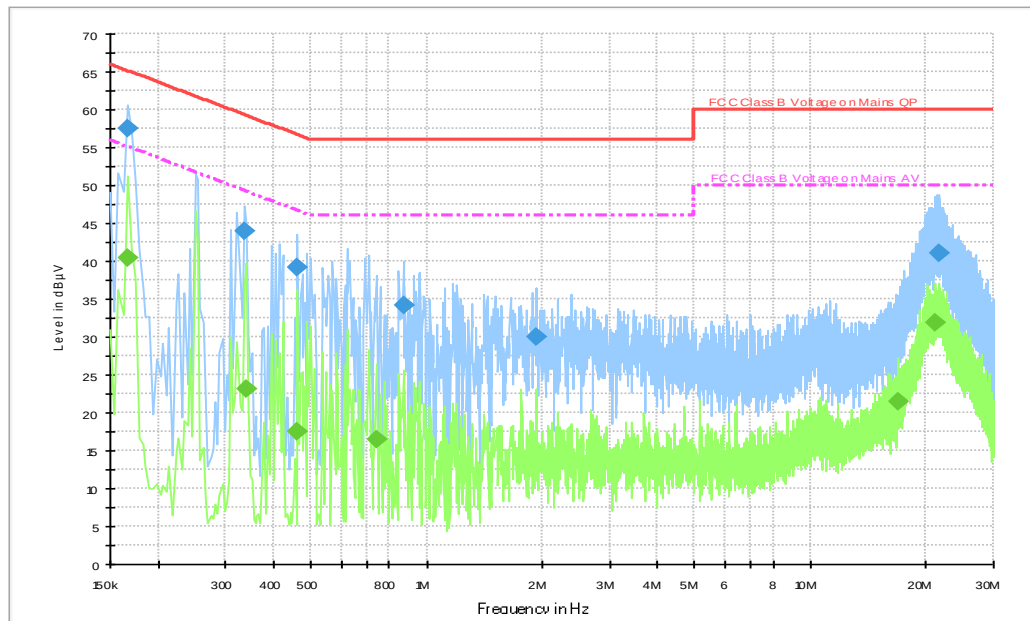

**Fig.B.11.1 AC Powerline Conducted Emission- bluetooth**


Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

### Final Result 1

| Frequency (MHz) | QuasiPeak (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------|--------------|
| 0.166000        | 57.5             | 2000.0          | 9.000           | On     | L1   | 19.8       | 7.6         | 65.2         |
| 0.334000        | 43.9             | 2000.0          | 9.000           | On     | L1   | 19.7       | 15.4        | 59.4         |
| 0.462000        | 39.1             | 2000.0          | 9.000           | On     | N    | 19.7       | 17.5        | 56.7         |
| 0.870000        | 34.1             | 2000.0          | 9.000           | On     | L1   | 19.6       | 21.9        | 56.0         |
| 1.926000        | 30.0             | 2000.0          | 9.000           | On     | L1   | 19.6       | 26.0        | 56.0         |
| 21.754000       | 41.1             | 2000.0          | 9.000           | On     | L1   | 19.7       | 18.9        | 60.0         |

### Final Result 2

| Frequency (MHz) | Average (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------|--------------|
| 0.166000        | 40.5           | 2000.0          | 9.000           | On     | L1   | 19.8       | 14.7        | 55.2         |
| 0.338000        | 23.1           | 2000.0          | 9.000           | On     | N    | 19.7       | 26.1        | 49.3         |
| 0.462000        | 17.5           | 2000.0          | 9.000           | On     | N    | 19.7       | 29.2        | 46.7         |
| 0.738000        | 16.4           | 2000.0          | 9.000           | On     | N    | 19.7       | 29.6        | 46.0         |
| 17.026000       | 21.5           | 2000.0          | 9.000           | On     | L1   | 19.7       | 28.5        | 50.0         |
| 21.074000       | 31.8           | 2000.0          | 9.000           | On     | L1   | 19.7       | 18.2        | 50.0         |

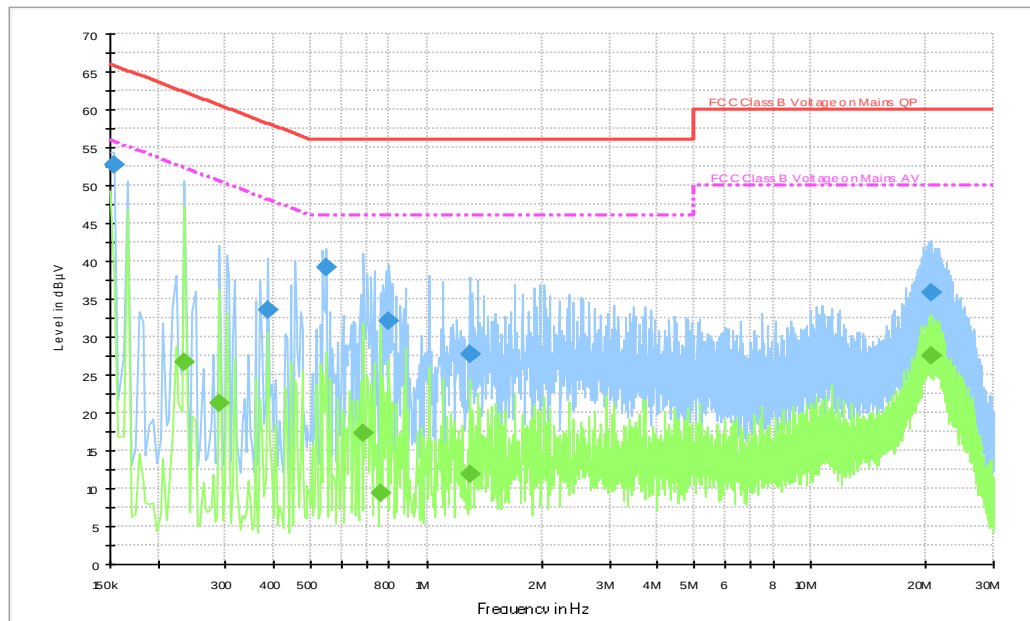

**Fig.B.11.2 AC Powerline Conducted Emission-Idle**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

### Final Result 1

| Frequency (MHz) | QuasiPeak (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------|--------------|
| 0.154000        | 52.7             | 2000.0          | 9.000           | On     | N    | 19.9       | 13.1        | 65.8         |
| 0.386000        | 33.6             | 2000.0          | 9.000           | On     | L1   | 19.7       | 24.5        | 58.1         |
| 0.550000        | 39.2             | 2000.0          | 9.000           | On     | L1   | 19.7       | 16.8        | 56.0         |
| 0.798000        | 32.1             | 2000.0          | 9.000           | On     | L1   | 19.7       | 23.9        | 56.0         |
| 1.294000        | 27.8             | 2000.0          | 9.000           | On     | L1   | 19.7       | 28.2        | 56.0         |
| 20.678000       | 35.8             | 2000.0          | 9.000           | On     | L1   | 19.7       | 24.2        | 60.0         |

### Final Result 2

| Frequency (MHz) | Average (dBµV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|-----------------|-----------------|--------|------|------------|-------------|--------------|
| 0.234000        | 26.7           | 2000.0          | 9.000           | On     | L1   | 19.7       | 25.6        | 52.3         |
| 0.290000        | 21.2           | 2000.0          | 9.000           | On     | N    | 19.7       | 29.3        | 50.5         |
| 0.686000        | 17.3           | 2000.0          | 9.000           | On     | L1   | 19.7       | 28.7        | 46.0         |
| 0.758000        | 9.3            | 2000.0          | 9.000           | On     | L1   | 19.7       | 36.7        | 46.0         |
| 1.294000        | 11.9           | 2000.0          | 9.000           | On     | L1   | 19.7       | 34.1        | 46.0         |
| 20.678000       | 27.5           | 2000.0          | 9.000           | On     | L1   | 19.7       | 22.5        | 50.0         |



## **B.12. Antenna Requirement**

The antenna of the device is permanently attached. There are no provisions for connection to an external antenna.

The unit complies with the requirement of FCC Part 15.203.

## **ANNEX C: Accreditation Certificate**



### **Accredited Laboratory**

A2LA has accredited

## **TELECOMMUNICATION TECHNOLOGY LABS, CAICT**

*Beijing, People's Republic of China*


for technical competence in the field of

### **Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 26<sup>th</sup> day of June 2023.



Mr. Trace McInturff, Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 7049.01  
Valid to July 31, 2024

*For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*

**\*\*\*END OF REPORT\*\*\***