




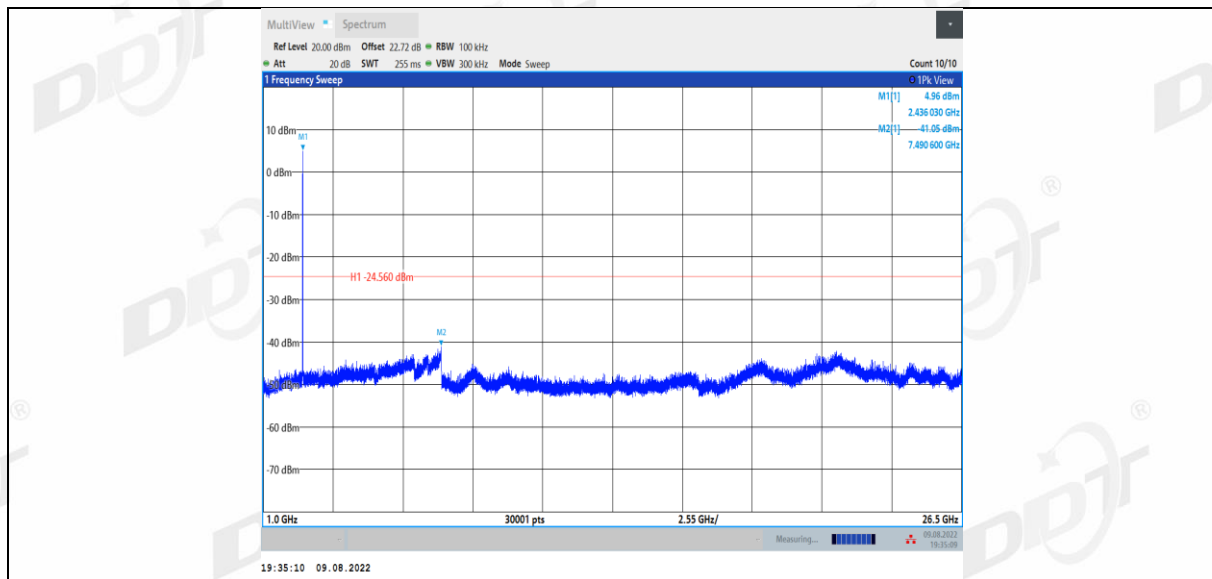


11B_Ant1_2462_0~Reference

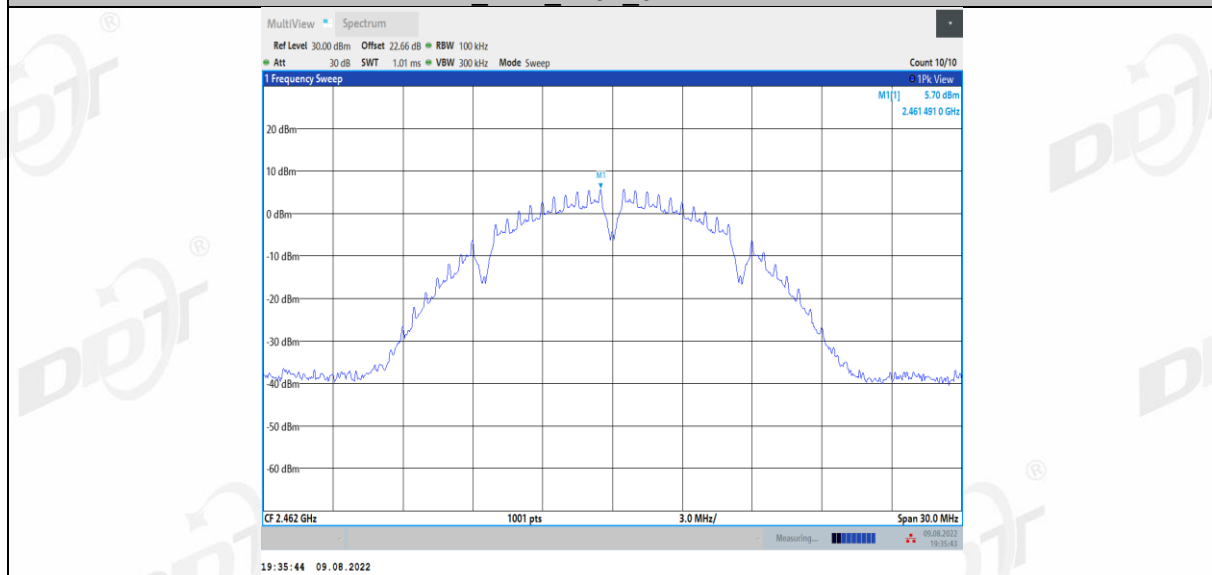


11B_Ant1_2462_30~1000

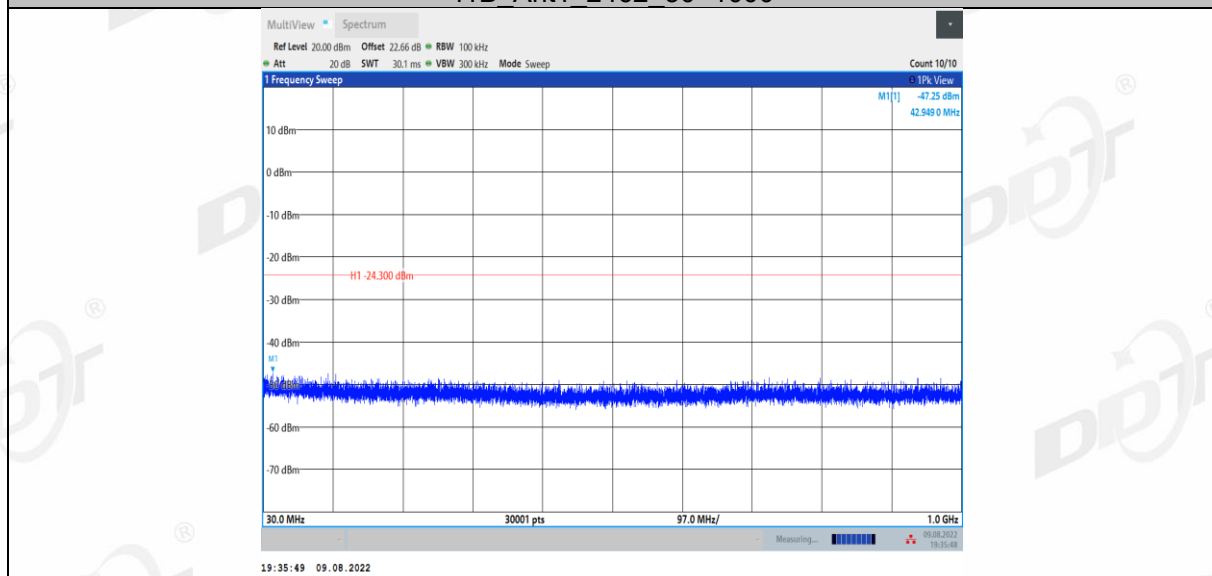


11B_Ant1_2462_1000~26500

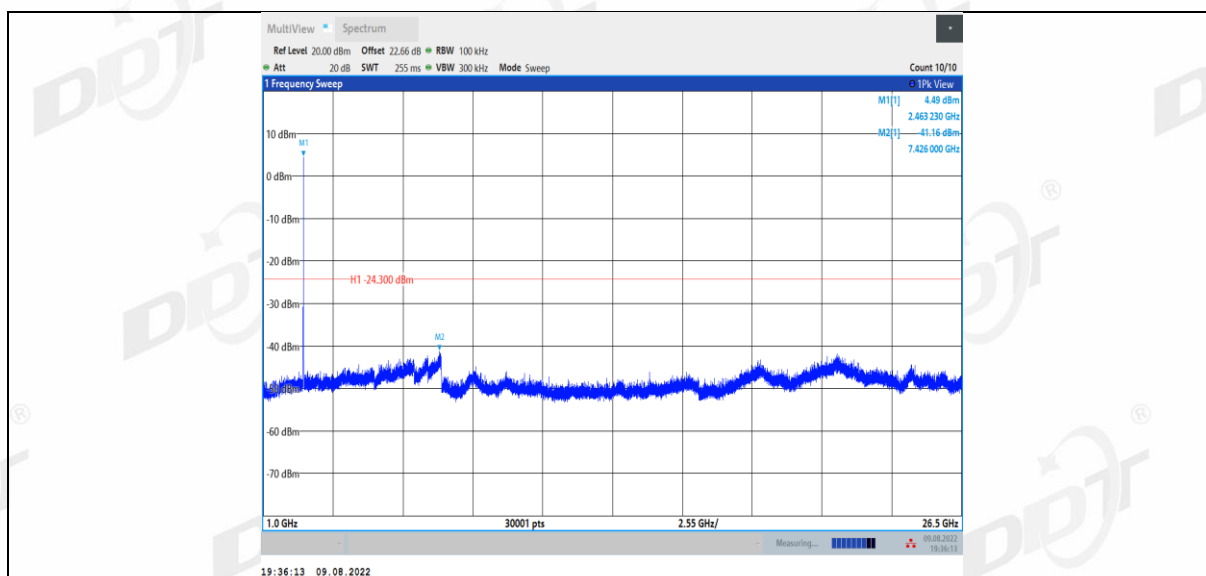


11G_Ant1_2412_0~Reference

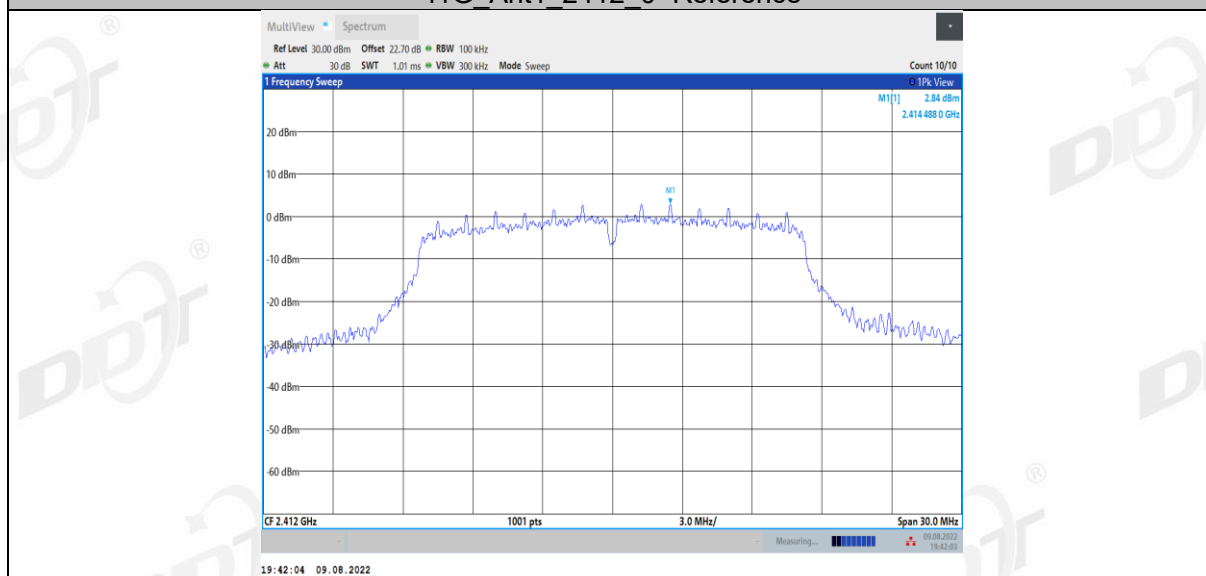


11G_Ant1_2412_30~1000

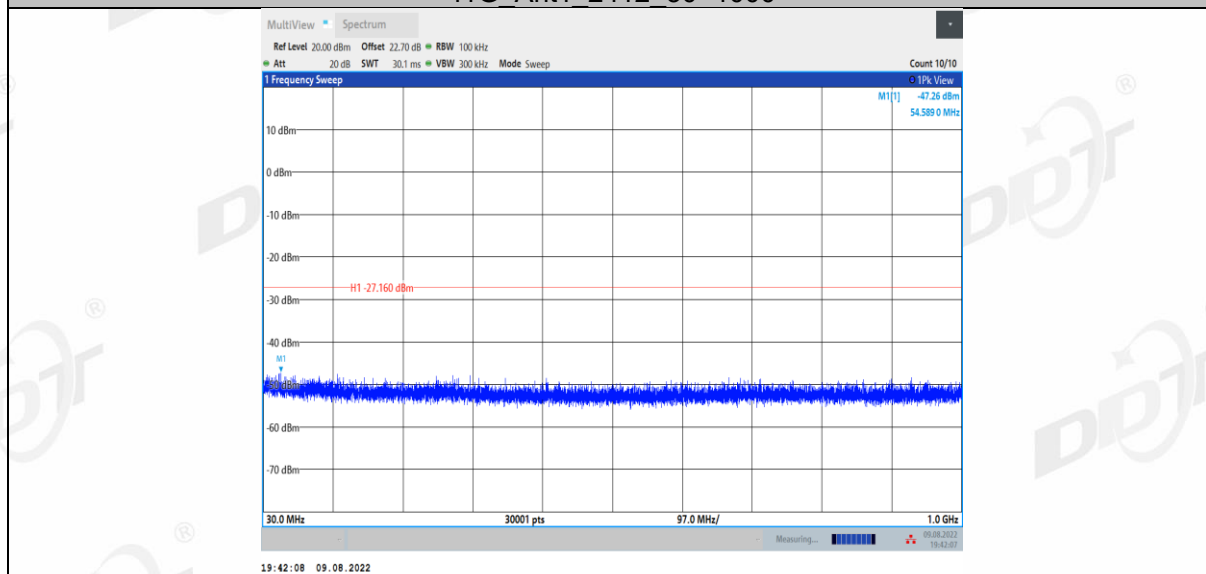


11G_Ant1_2412_1000~26500

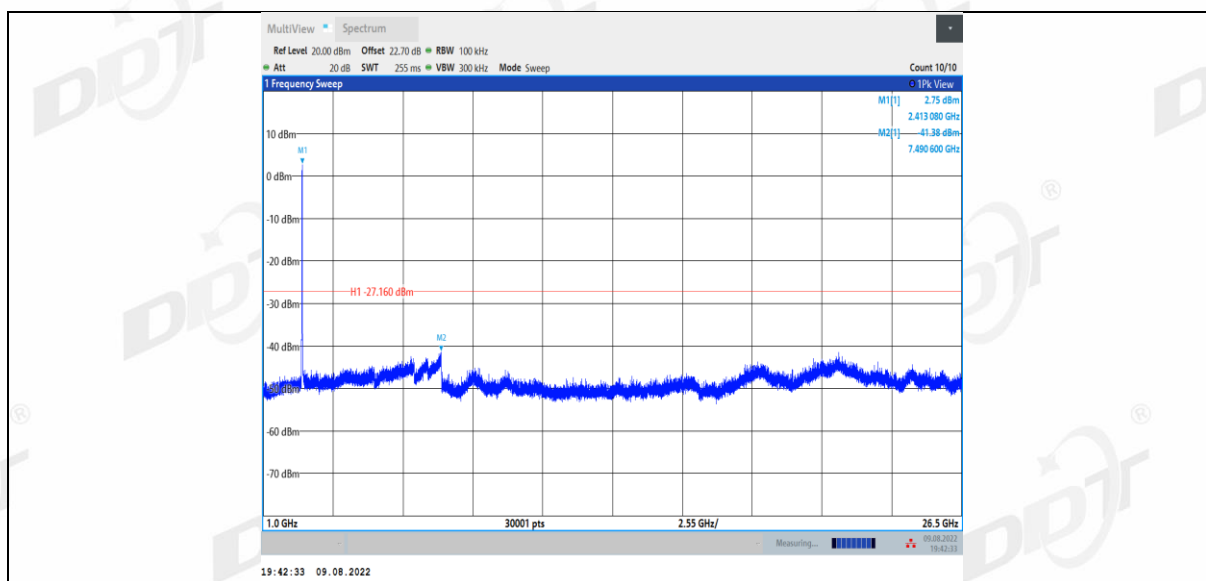


11G_Ant1_2437_0~Reference

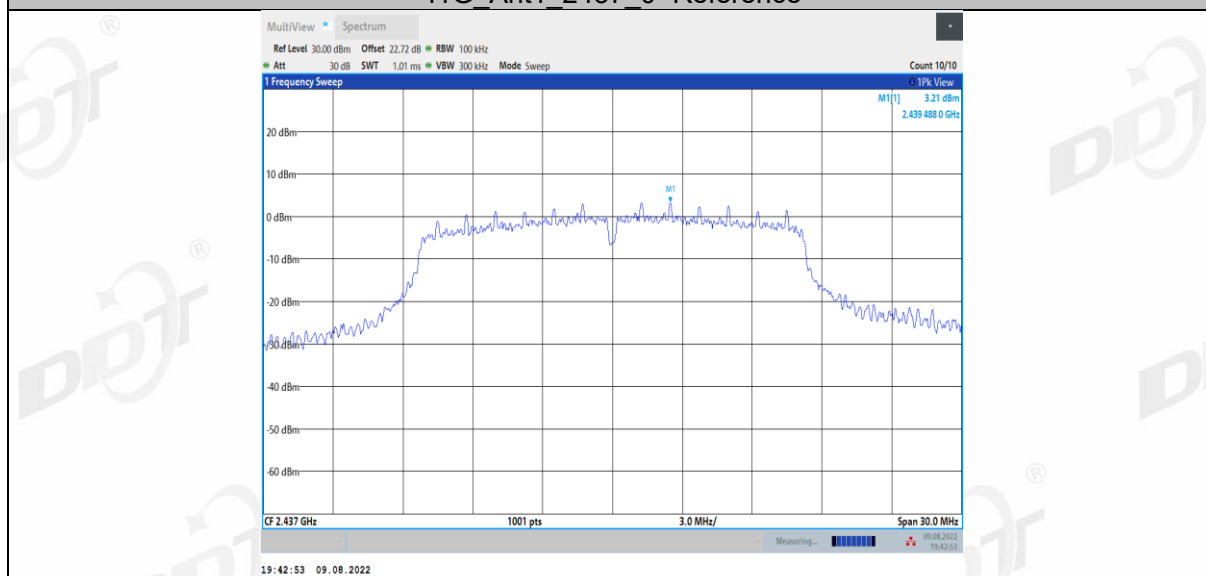


11G_Ant1_2437_30~1000

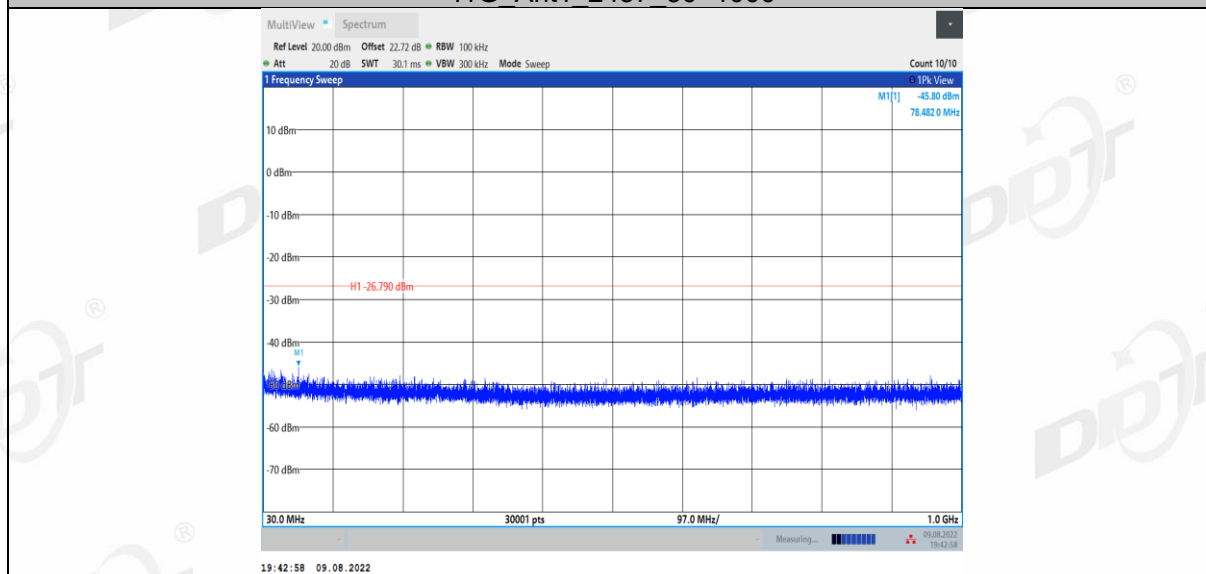


11G_Ant1_2437_1000~26500

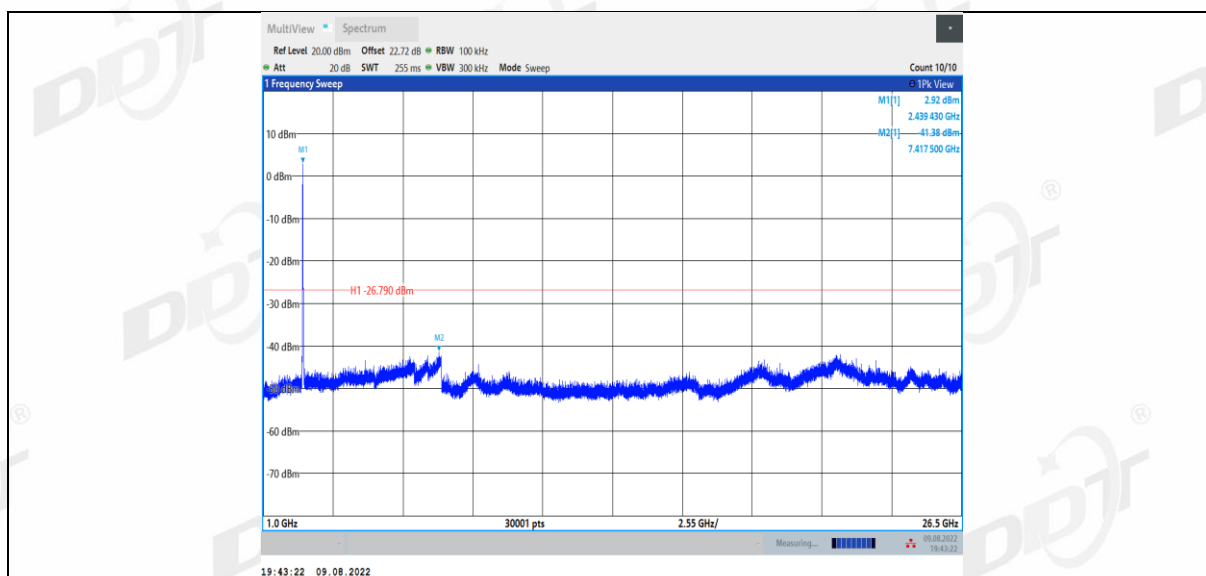


11G_Ant1_2462_0~Reference

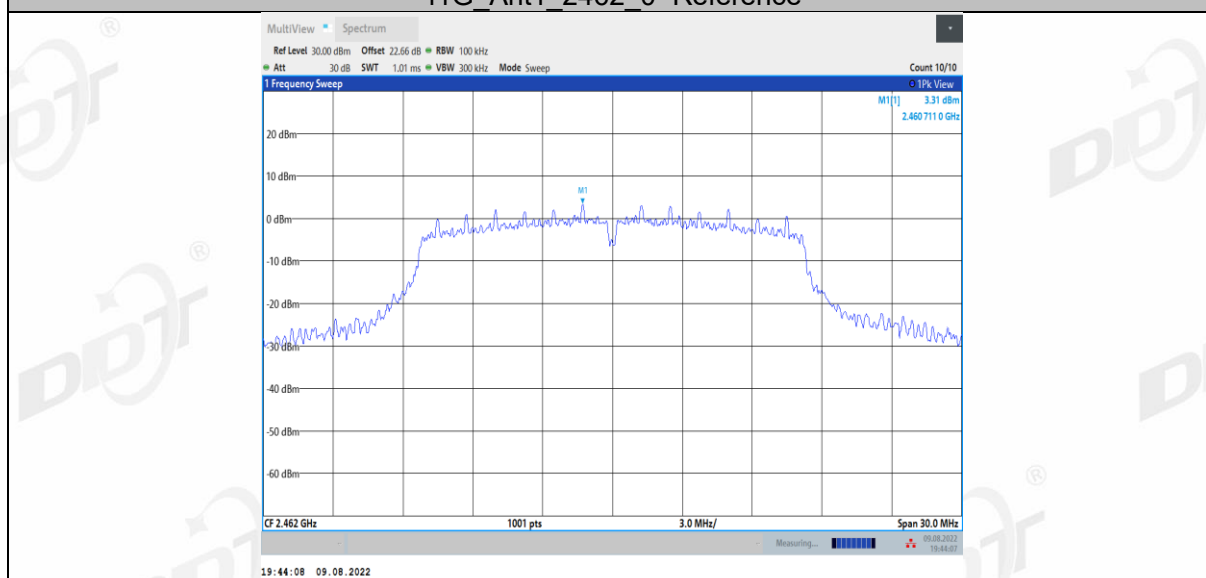


11G_Ant1_2462_30~1000

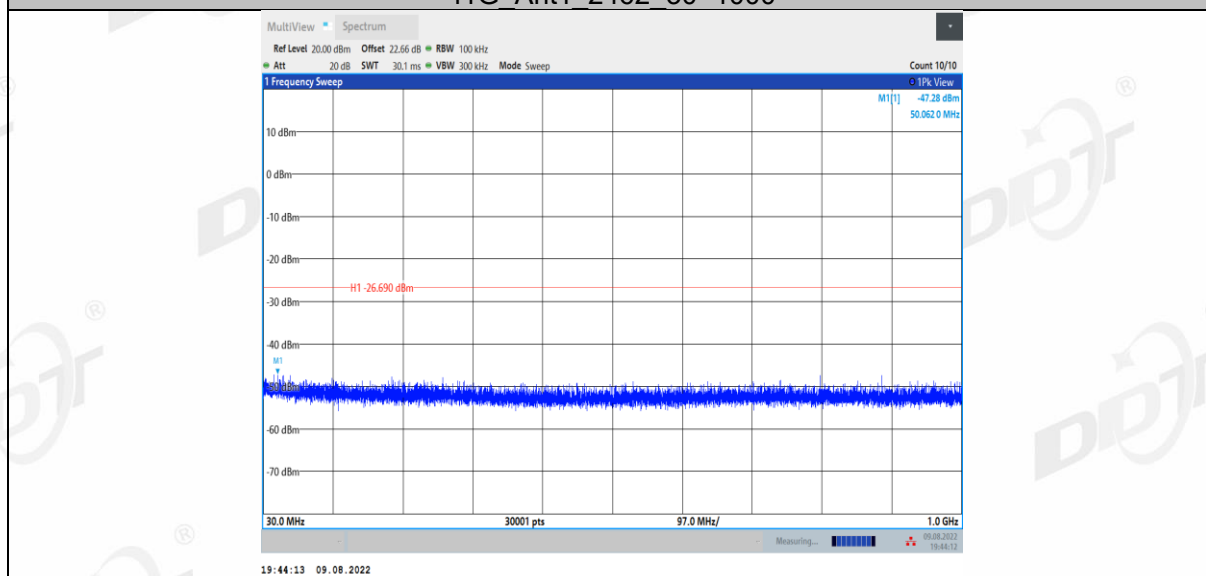


11G_Ant1_2462_1000~26500

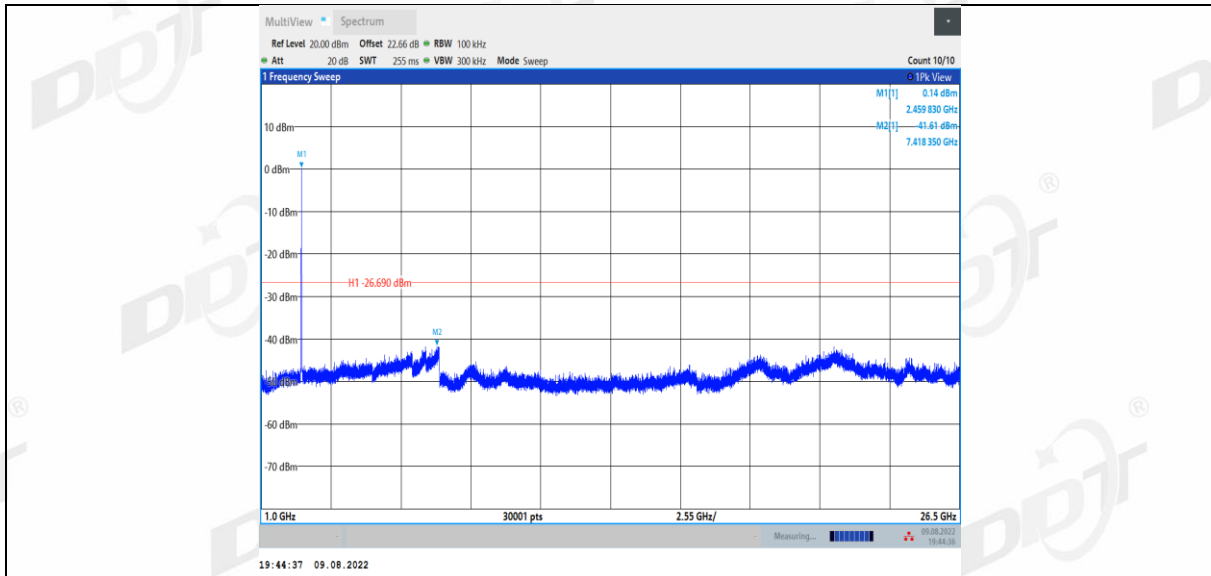


11N20SISO_Ant1_2412_0~Reference

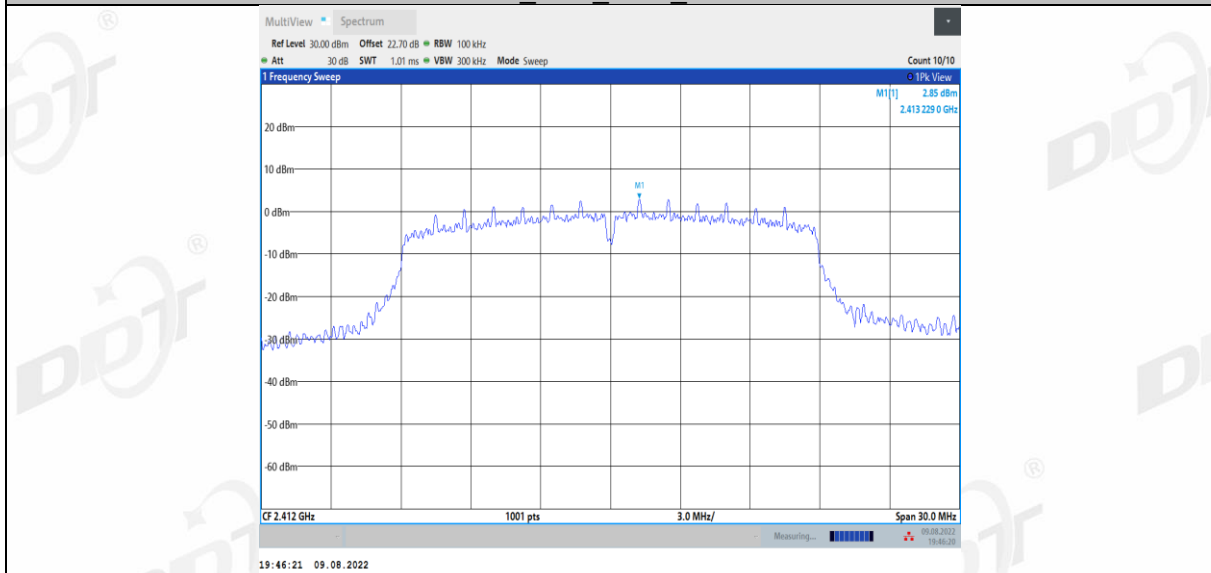


11N20SISO_Ant1_2412_30~1000

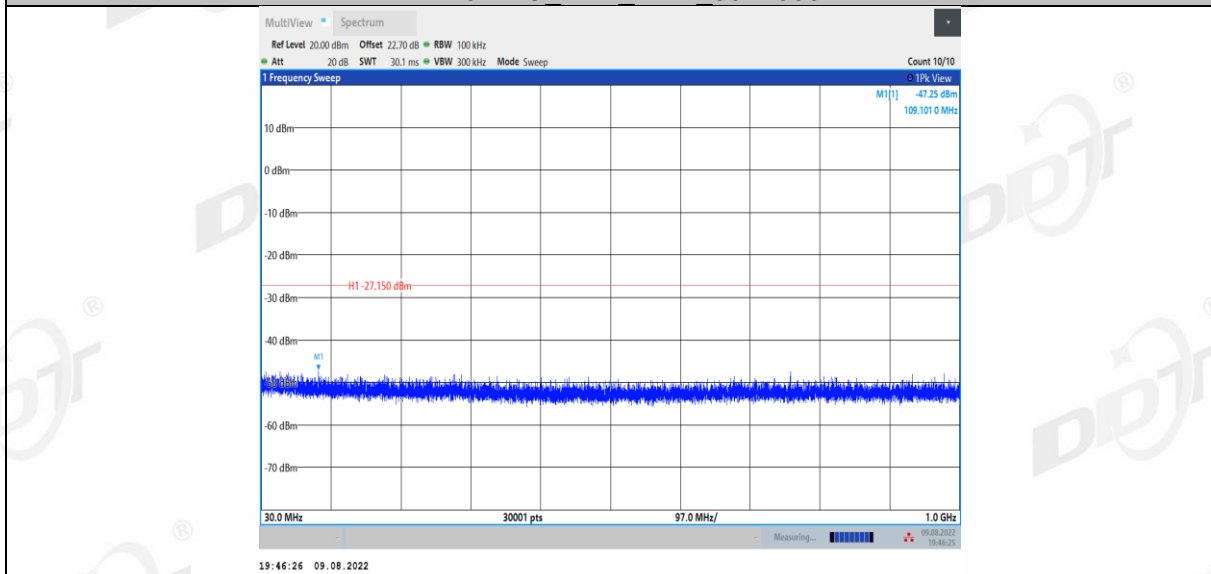


11N20SISO_Ant1_2412_1000~26500

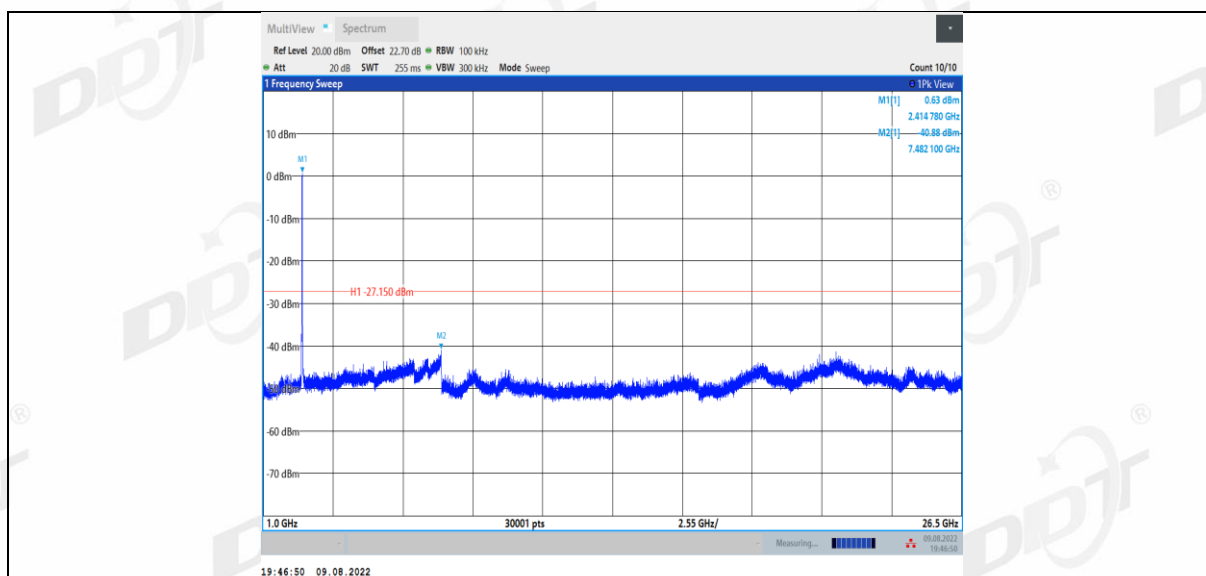


11N20SISO_Ant1_2437_0~Reference

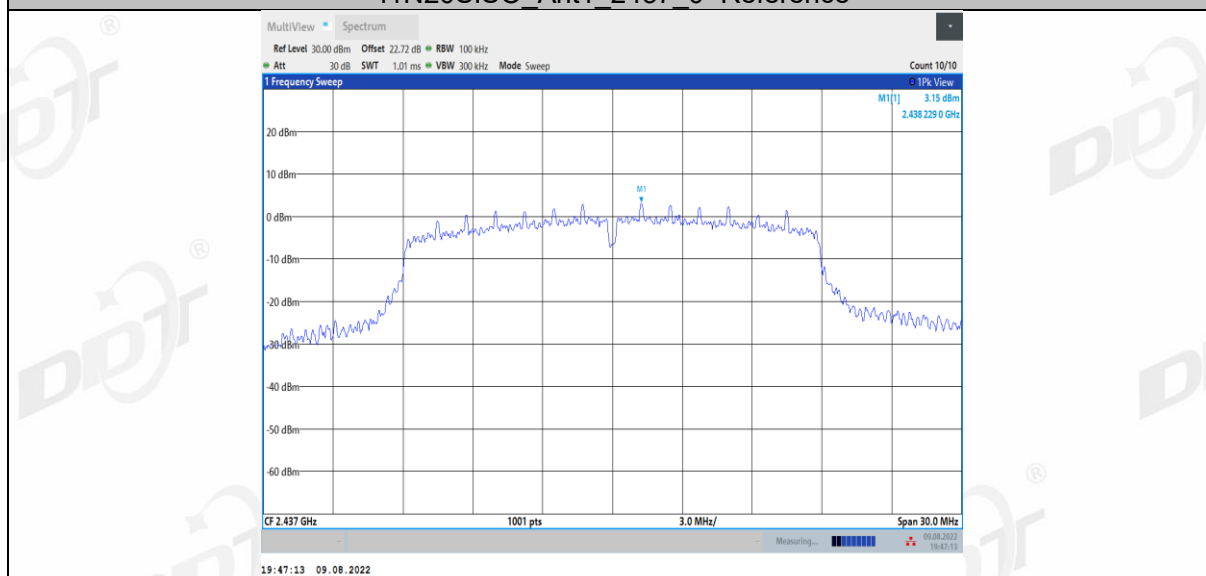


11N20SISO_Ant1_2437_30~1000

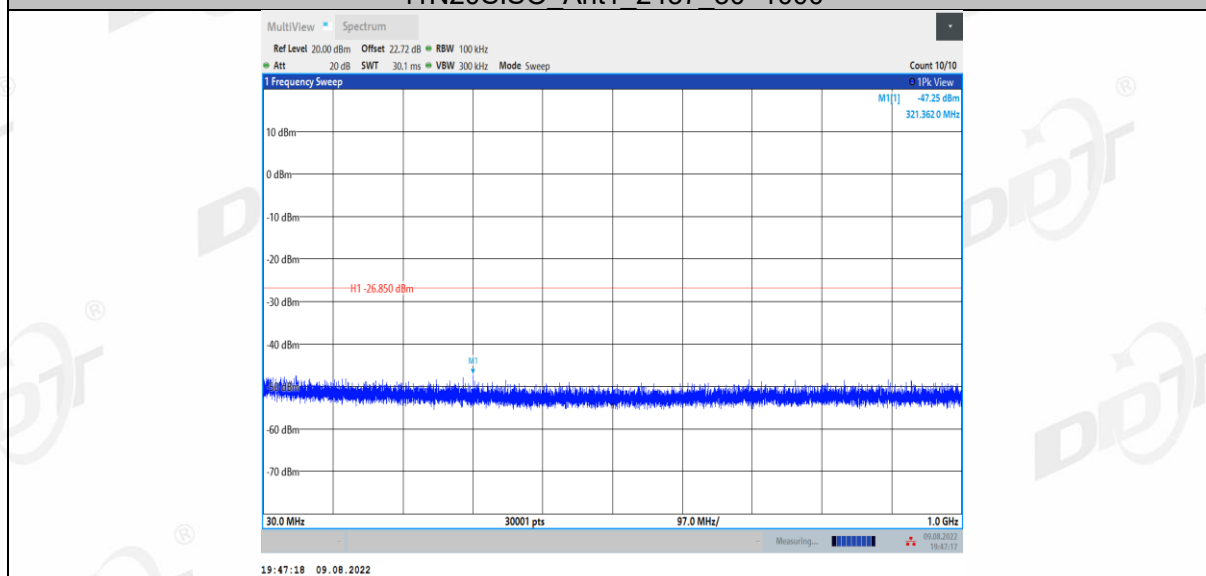


11N20SISO_Ant1_2437_1000~26500

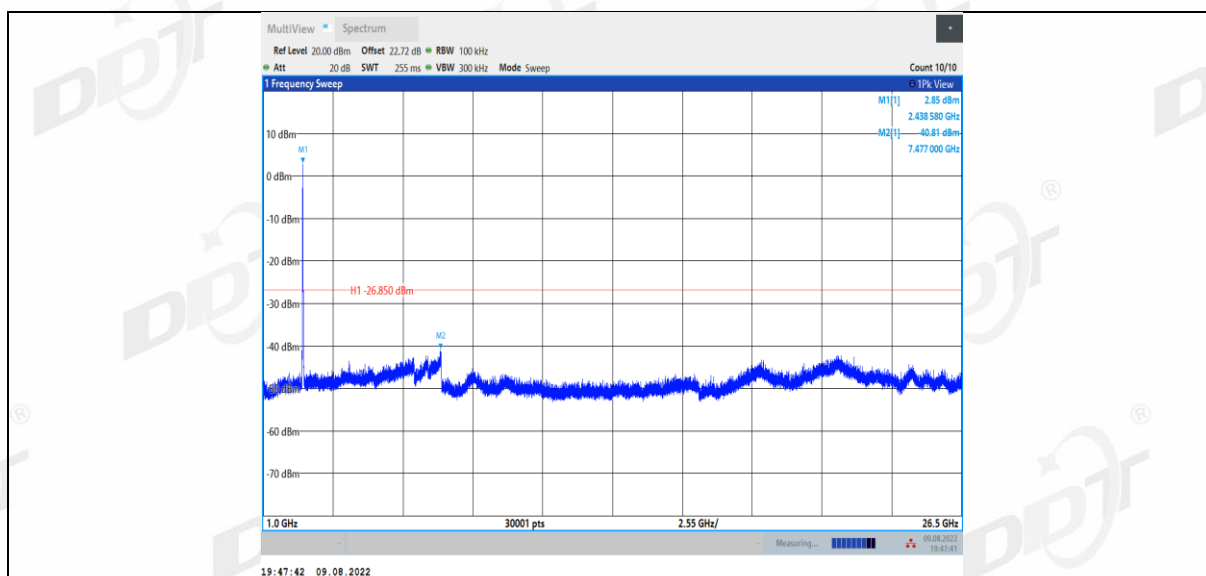


11N20SISO_Ant1_2462_0~Reference

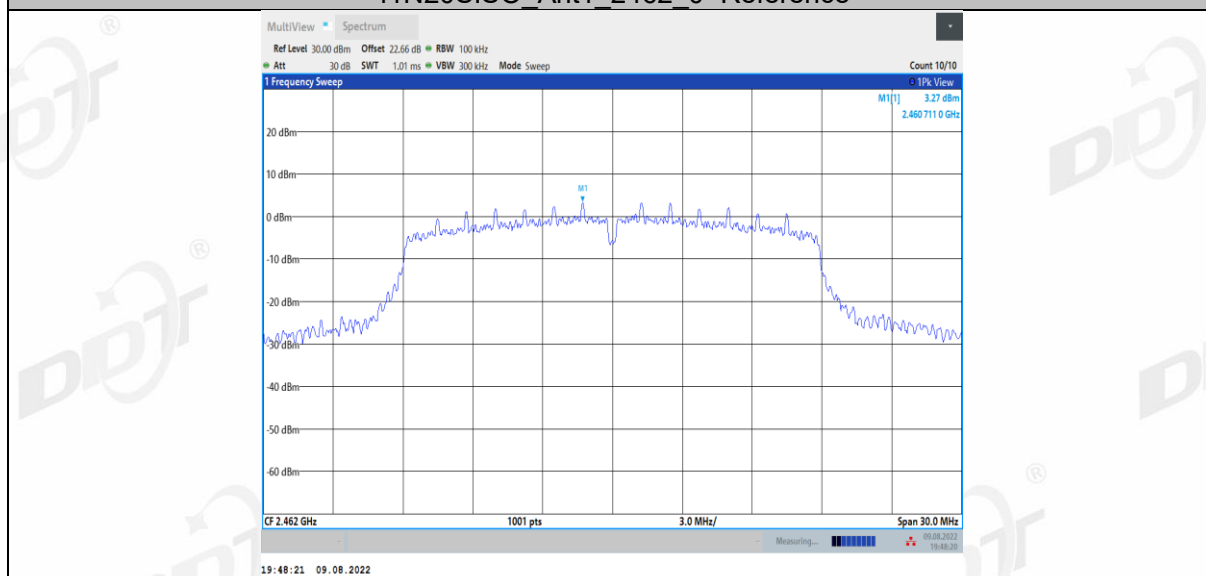


11N20SISO_Ant1_2462_30~1000

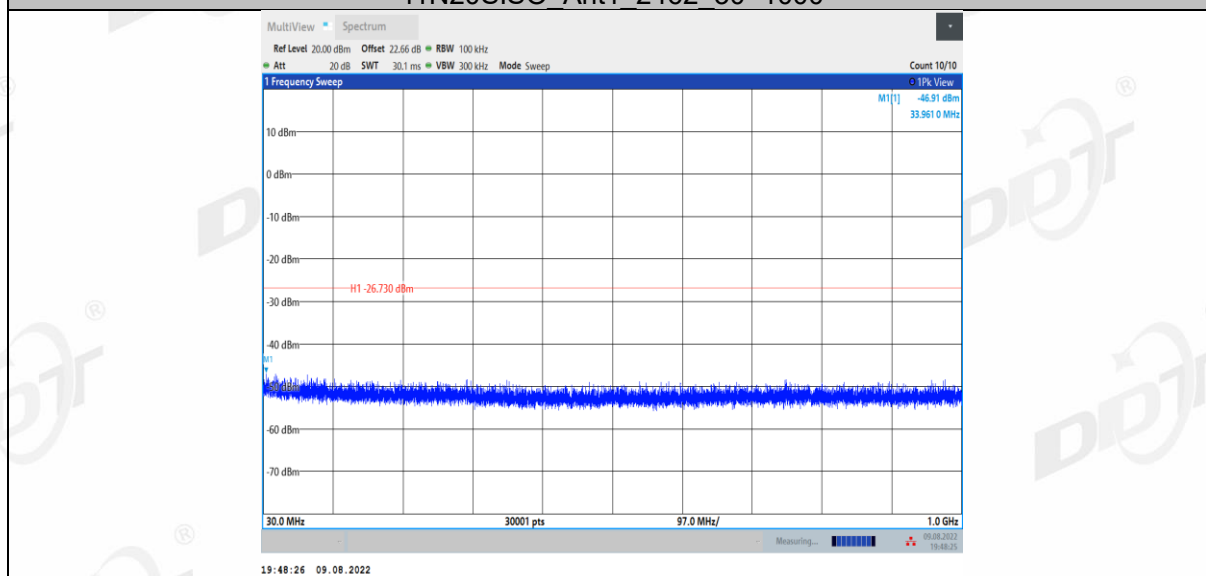


11N20SISO_Ant1_2462_1000~26500

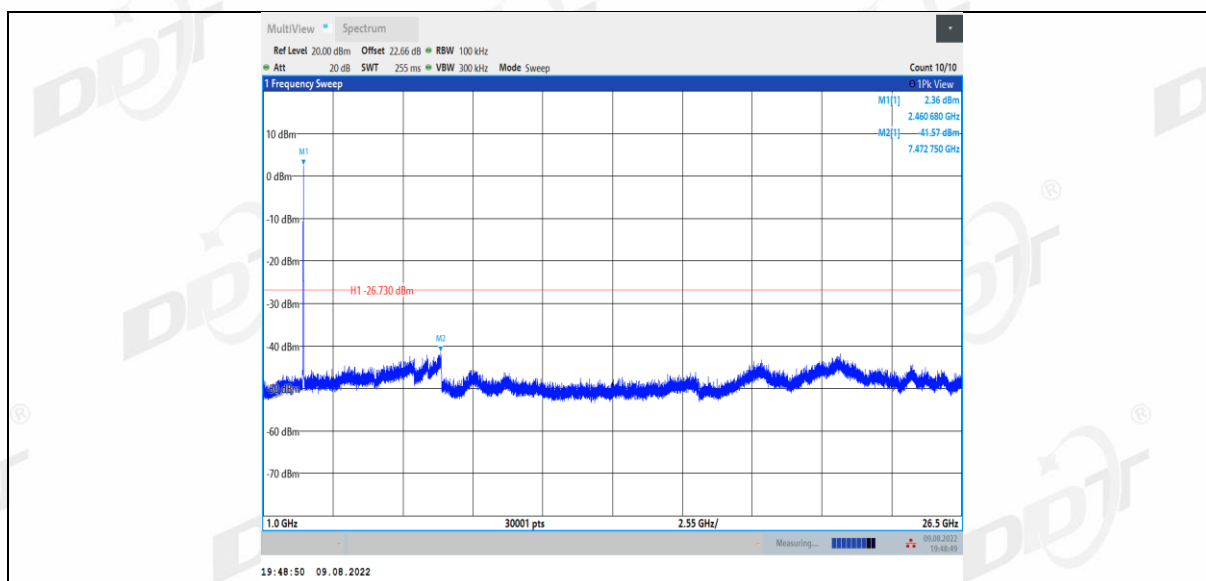


11N40SISO_Ant1_2422_0~Reference

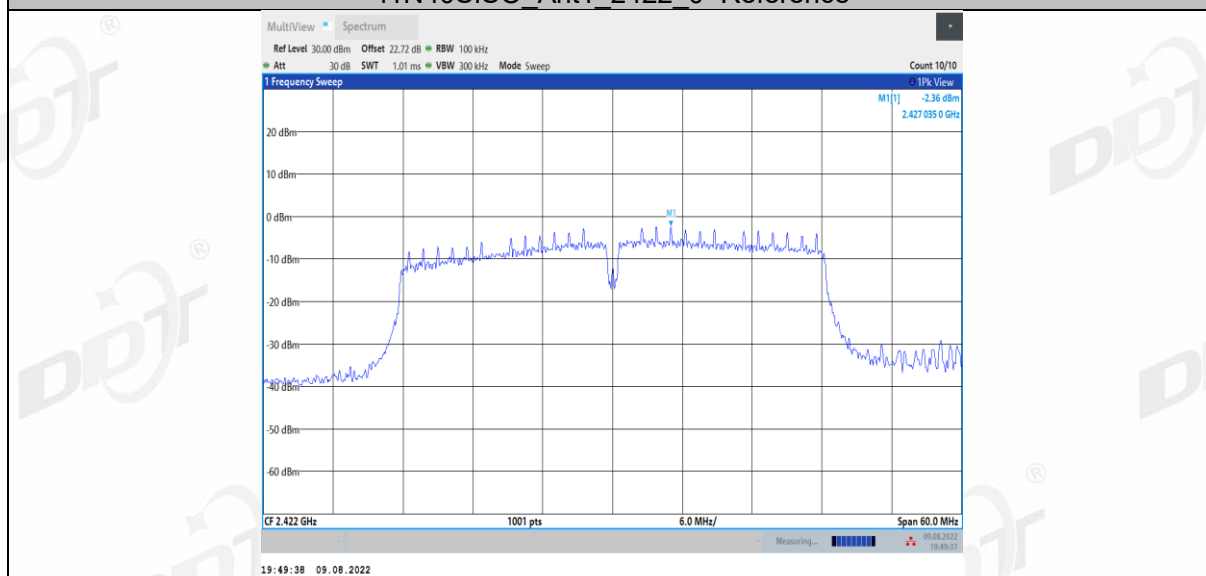


11N40SISO_Ant1_2422_30~1000

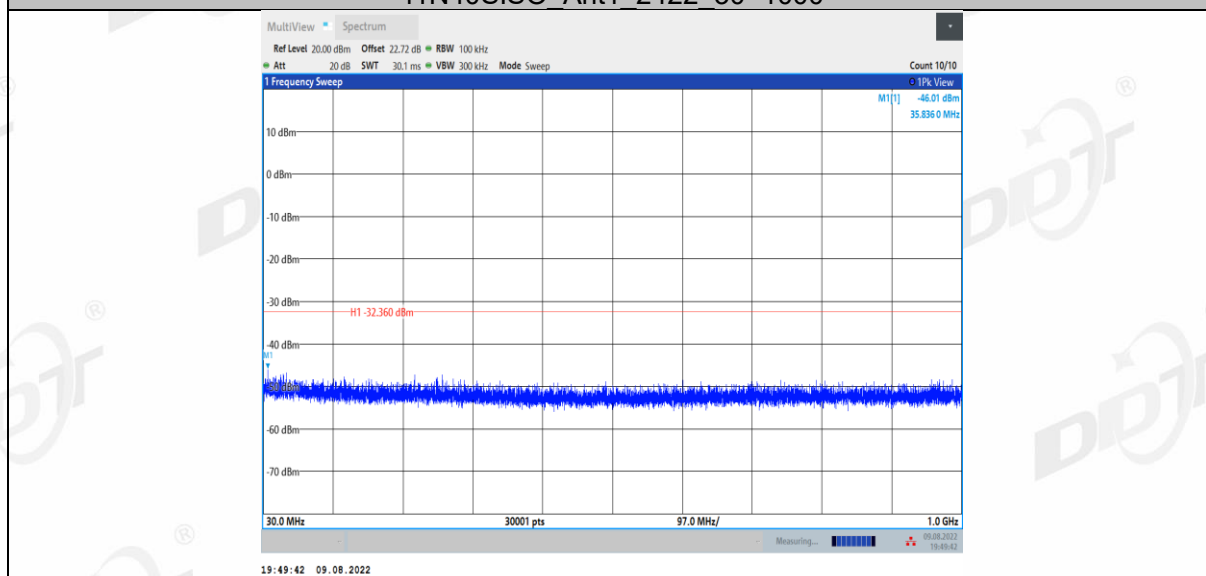


11N40SISO_Ant1_2422_1000~26500

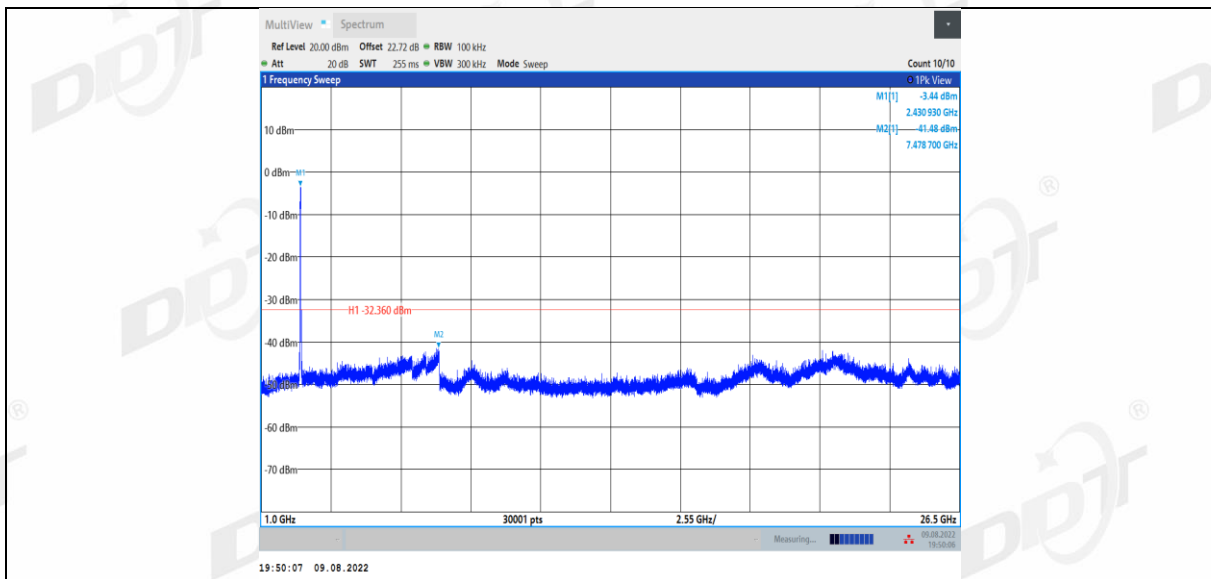


11N40SISO_Ant1_2437_0~Reference

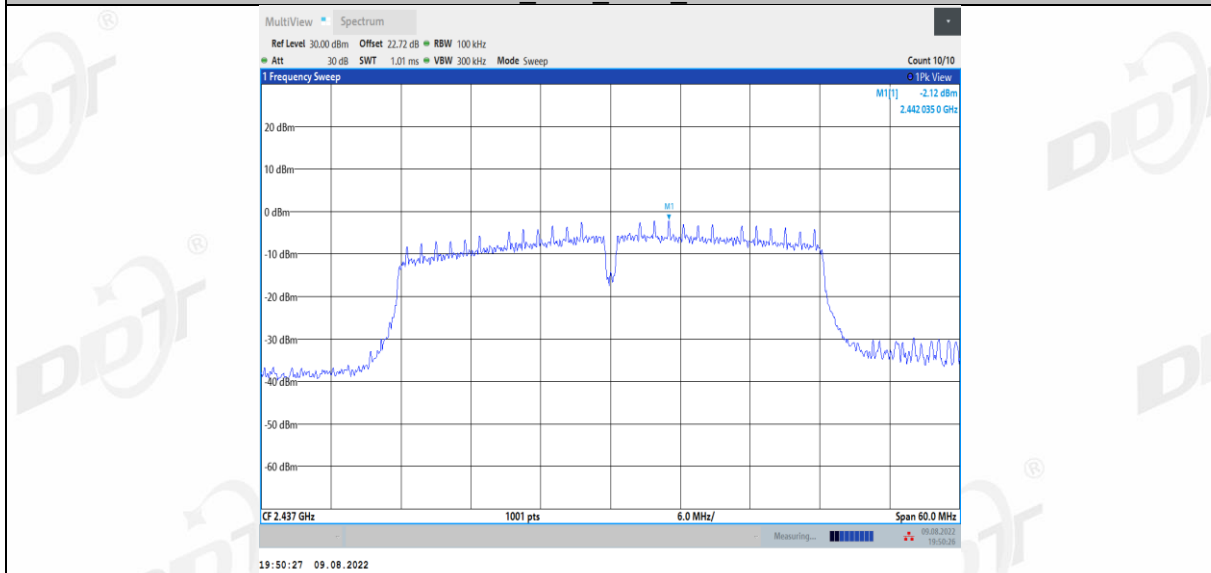


11N40SISO_Ant1_2437_30~1000

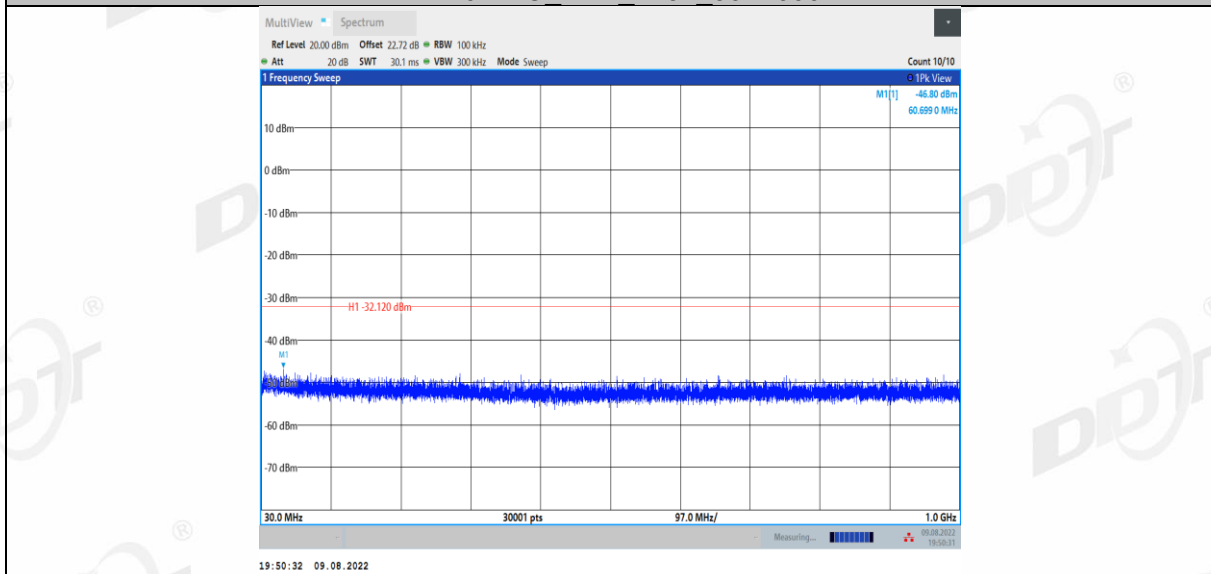


11N40SISO_Ant1_2437_1000~26500

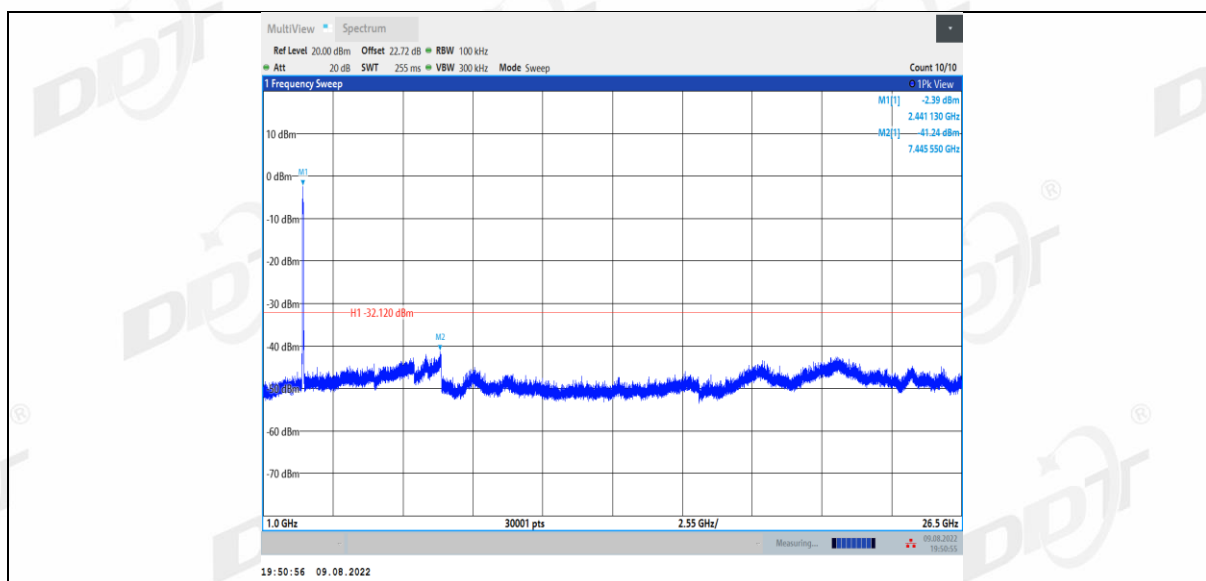


11N40SISO_Ant1_2452_0~Reference

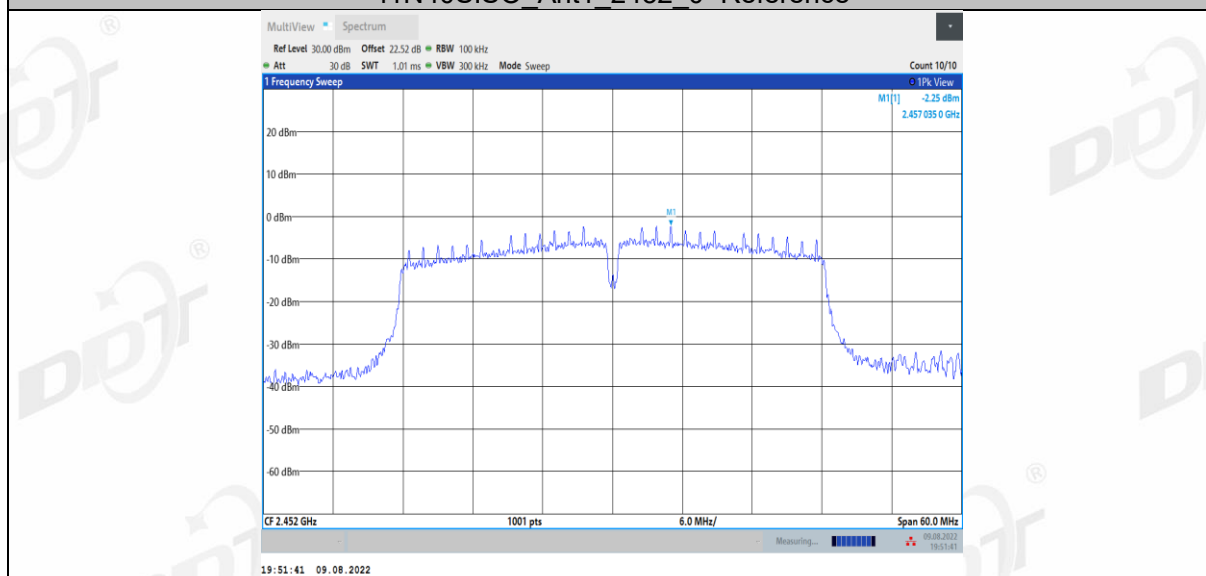

11N40SISO_Ant1_2452_30~1000

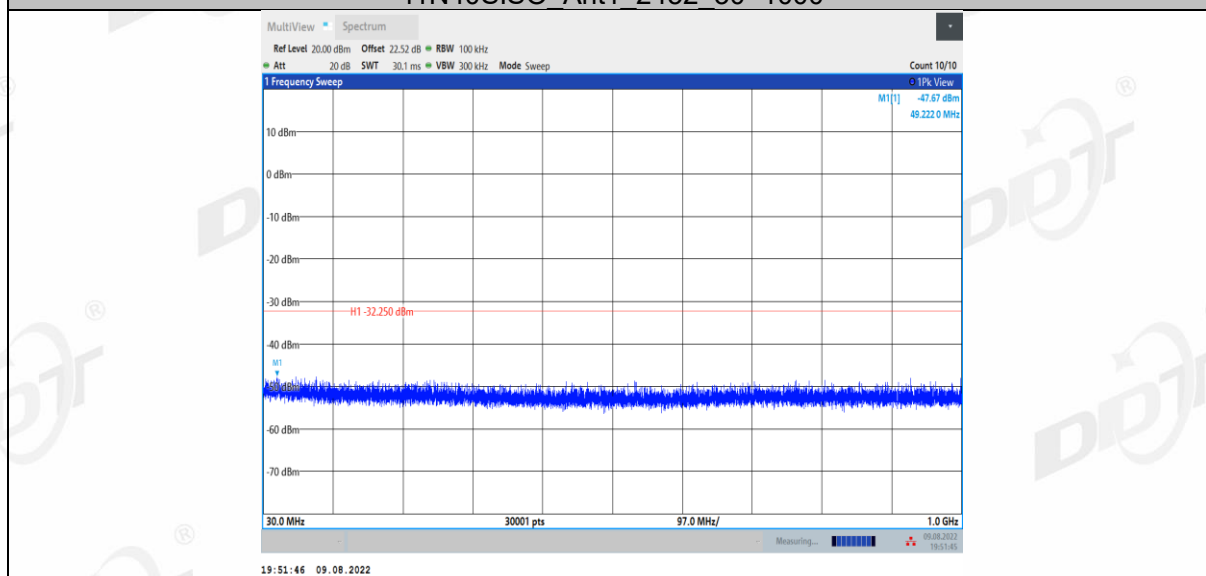


11N40SISO_Ant1_2452_1000~26500

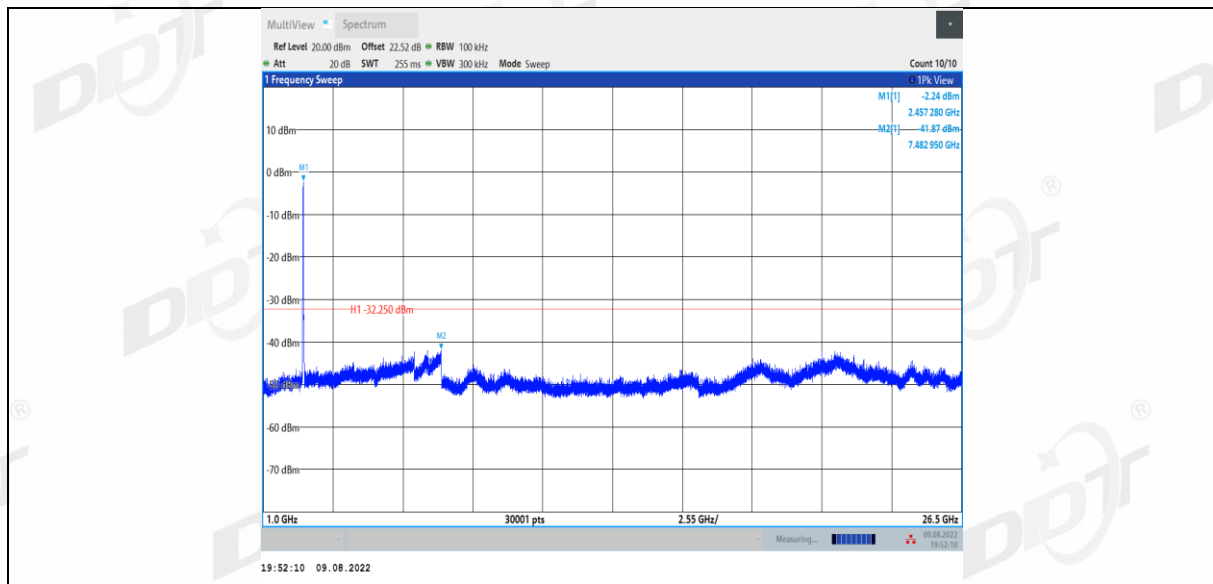

10. Radiated Band Edge Compliance

10.1. Block diagram of test setup

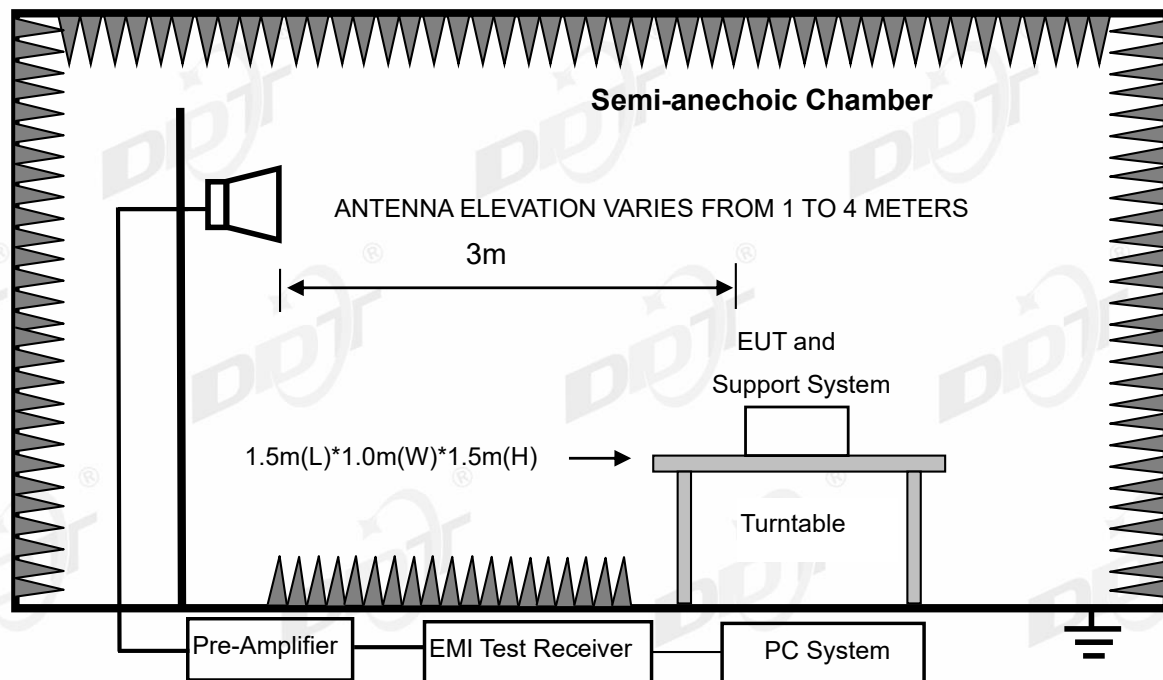

10.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400 MHz to 2483.5 MHz shall be at least 20dB below the fundamental emissions or comply with FCC 15.209 limits.

10.3. Test procedure

Same with clause 8.3 except change investigated frequency range from 2310 MHz to 2422 MHz and 2450 MHz to 2500 MHz, 2310 MHz to 2440 MHz and 2430 MHz to 2500MHz.

Remark: All restriction band have been tested, and shown in report.

10.4. Test result

Pass. (See below detailed test result)

Note: All mode was tested and the worst case was recorded this report.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-08-08

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : BATTERY

Test Mode : Tx Mode

Condition : Temp:23.2°C,Humi:53%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11B 2412

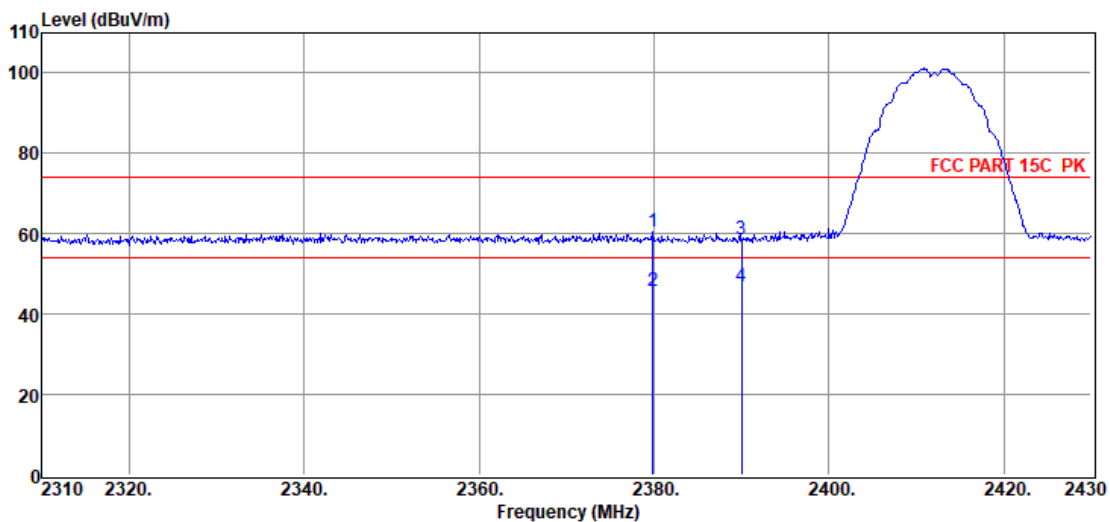

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2379.84	50.37	27.38	39.59	1.71	0.72	60.59	74.00	-13.41	Peak	HORIZONTAL
2	2379.84	35.46	27.38	39.59	1.71	0.72	45.68	54.00	-8.32	Average	HORIZONTAL
3	2390.00	48.50	27.40	39.60	1.71	0.72	58.73	74.00	-15.27	Peak	HORIZONTAL
4	2390.00	36.66	27.40	39.60	1.71	0.72	46.89	54.00	-7.11	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-08-05

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : BATTERY

Test Mode : Tx Mode

Condition : Temp:23.2°C,Humi:53%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11B 2412

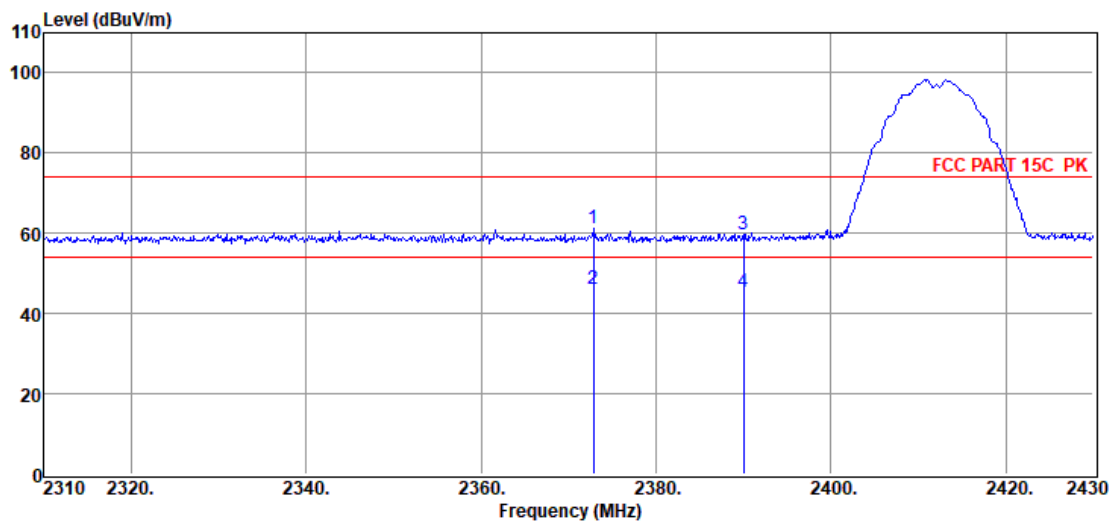

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2372.88	51.15	27.37	39.59	1.70	0.72	61.35	74.00	-12.65	Peak	VERTICAL
2	2372.88	35.97	27.37	39.59	1.70	0.72	46.17	54.00	-7.83	Average	VERTICAL
3	2390.00	49.37	27.40	39.60	1.71	0.72	59.60	74.00	-14.40	Peak	VERTICAL
4	2390.00	35.28	27.40	39.60	1.71	0.72	45.51	54.00	-8.49	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-08-08

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : BATTERY

Test Mode : Tx Mode

Condition : Temp:23.2°C,Humi:53%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11B 2462

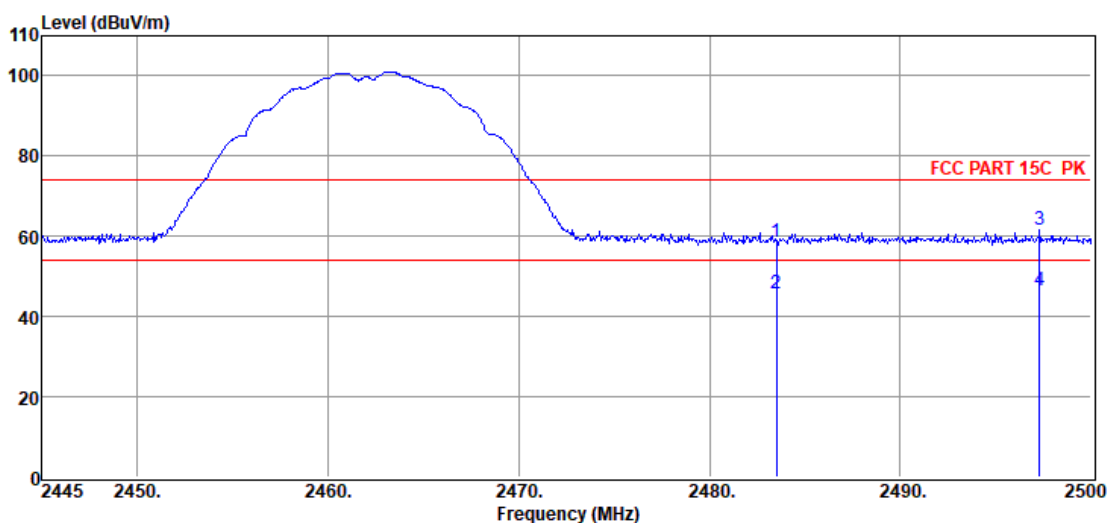

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	48.38	27.57	39.64	1.74	0.73	58.78	74.00	-15.22	Peak	HORIZONTAL
2	2483.50	35.22	27.57	39.64	1.74	0.73	45.62	54.00	-8.38	Average	HORIZONTAL
3	2497.31	51.08	27.60	39.65	1.74	0.73	61.50	74.00	-12.50	Peak	HORIZONTAL
4	2497.31	36.17	27.60	39.65	1.74	0.73	46.59	54.00	-7.41	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-08-08

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : BATTERY

Test Mode : Tx Mode

Condition : Temp:23.2°C,Humi:53%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11B 2462

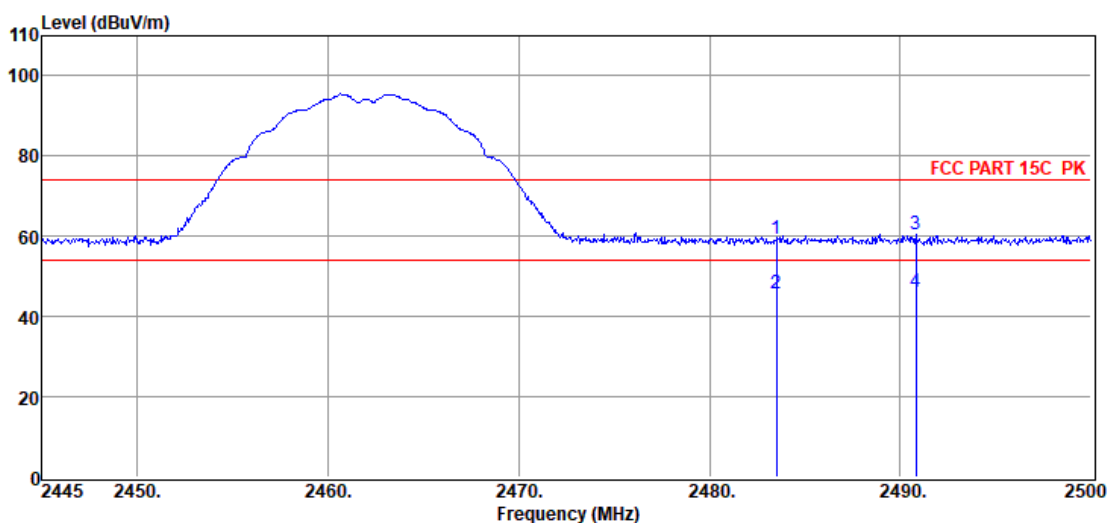

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	48.87	27.57	39.64	1.74	0.73	59.27	74.00	-14.73	Peak	VERTICAL
2	2483.50	35.41	27.57	39.64	1.74	0.73	45.81	54.00	-8.19	Average	VERTICAL
3	2490.82	50.05	27.58	39.65	1.74	0.73	60.45	74.00	-13.55	Peak	VERTICAL
4	2490.82	35.69	27.58	39.65	1.74	0.73	46.09	54.00	-7.91	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-08-09

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : BATTERY

Test Mode : Tx Mode

Condition : Temp:23.2°C,Humi:53%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11G 2412

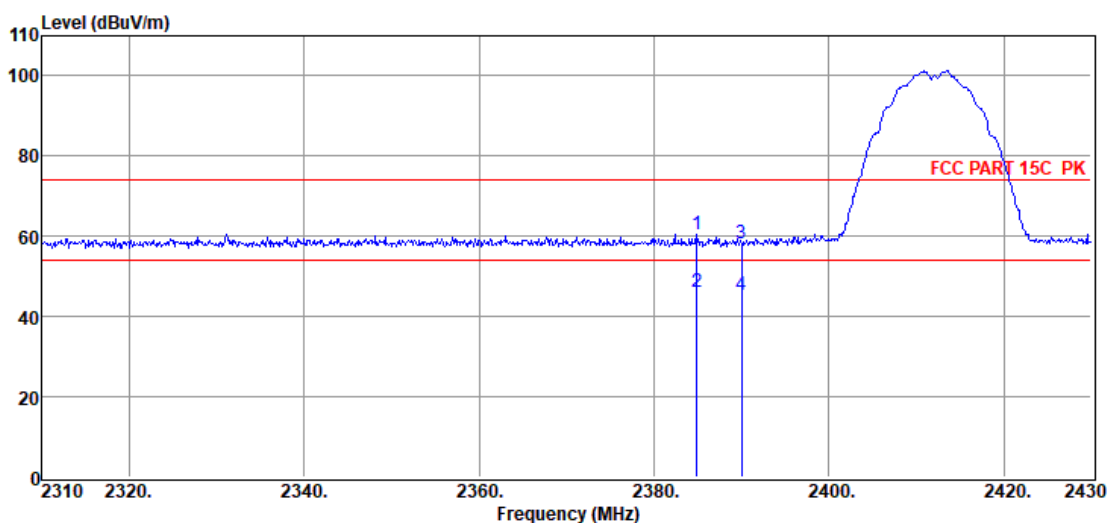

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2384.88	50.39	27.39	39.59	1.71	0.72	60.62	74.00	-13.38	Peak	HORIZONTAL
2	2384.88	35.79	27.39	39.59	1.71	0.72	46.02	54.00	-7.98	Average	HORIZONTAL
3	2390.00	47.85	27.40	39.60	1.71	0.72	58.08	74.00	-15.92	Peak	HORIZONTAL
4	2390.00	35.04	27.40	39.60	1.71	0.72	45.27	54.00	-8.73	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-08-09

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : BATTERY

Test Mode : Tx Mode

Condition : Temp:23.2°C,Humi:53%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11G 2412

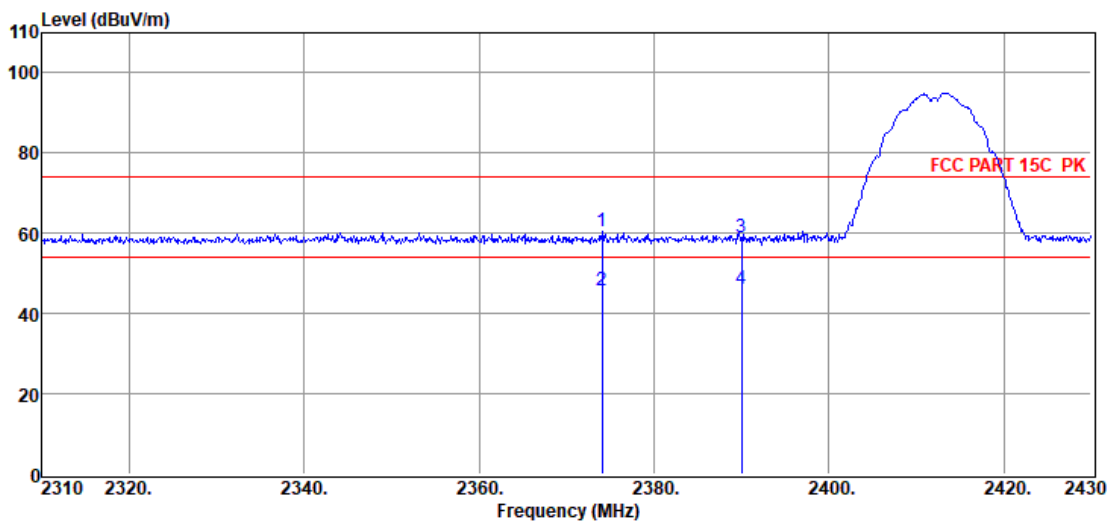

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2374.08	50.19	27.37	39.59	1.70	0.72	60.39	74.00	-13.61	Peak	VERTICAL
2	2374.08	35.45	27.37	39.59	1.70	0.72	45.65	54.00	-8.35	Average	VERTICAL
3	2390.00	48.88	27.40	39.60	1.71	0.72	59.11	74.00	-14.89	Peak	VERTICAL
4	2390.00	35.72	27.40	39.60	1.71	0.72	45.95	54.00	-8.05	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-08-09

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : BATTERY

Test Mode : Tx Mode

Condition : Temp:23.2°C,Humi:53%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11G 2462

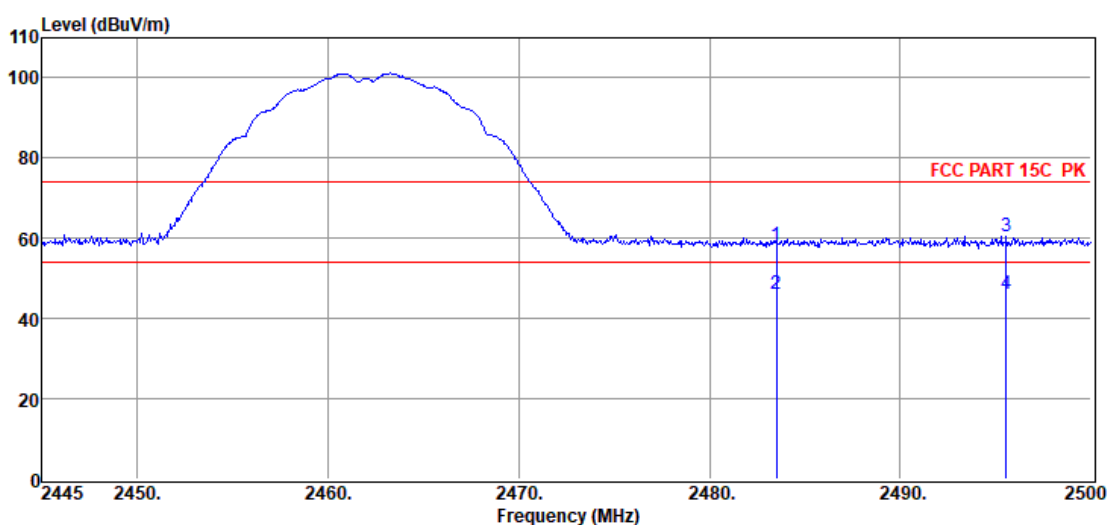

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	47.93	27.57	39.64	1.74	0.73	58.33	74.00	-15.67	Peak	HORIZONTAL
2	2483.50	35.81	27.57	39.64	1.74	0.73	46.21	54.00	-7.79	Average	HORIZONTAL
3	2495.55	50.01	27.59	39.65	1.74	0.73	60.42	74.00	-13.58	Peak	HORIZONTAL
4	2495.55	35.69	27.59	39.65	1.74	0.73	46.10	54.00	-7.90	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-08-09

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : BATTERY

Test Mode : Tx Mode

Condition : Temp:23.2°C,Humi:53%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11G 2462

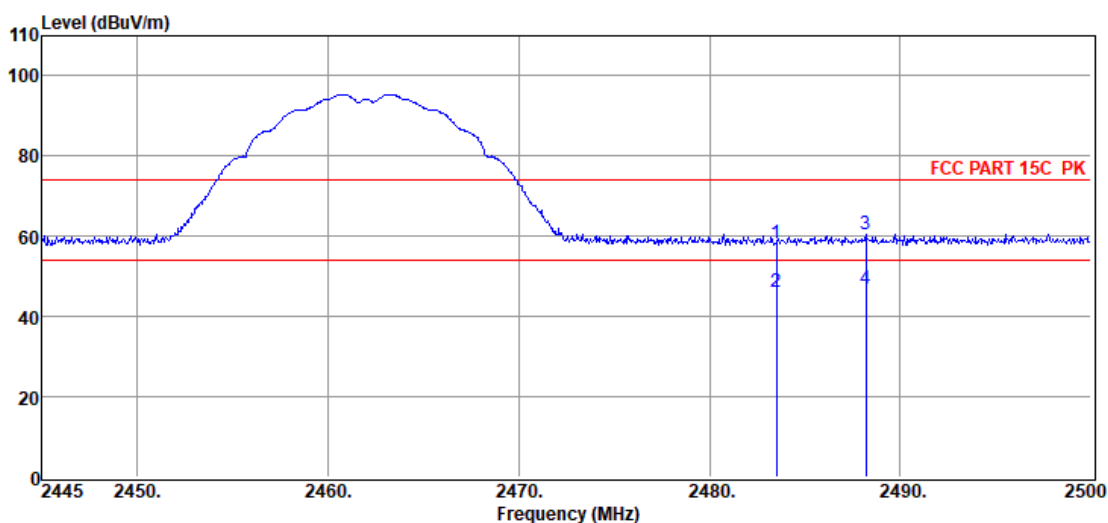

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	47.98	27.57	39.64	1.74	0.73	58.38	74.00	-15.62	Peak	VERTICAL
2	2483.50	35.66	27.57	39.64	1.74	0.73	46.06	54.00	-7.94	Average	VERTICAL
3	2488.18	50.23	27.58	39.64	1.74	0.73	60.64	74.00	-13.36	Peak	VERTICAL
4	2488.18	36.59	27.58	39.64	1.74	0.73	47.00	54.00	-7.00	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-08-09

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : BATTERY

Test Mode : Tx Mode

Condition : Temp:23.2°C,Humi:53%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11N20 2412

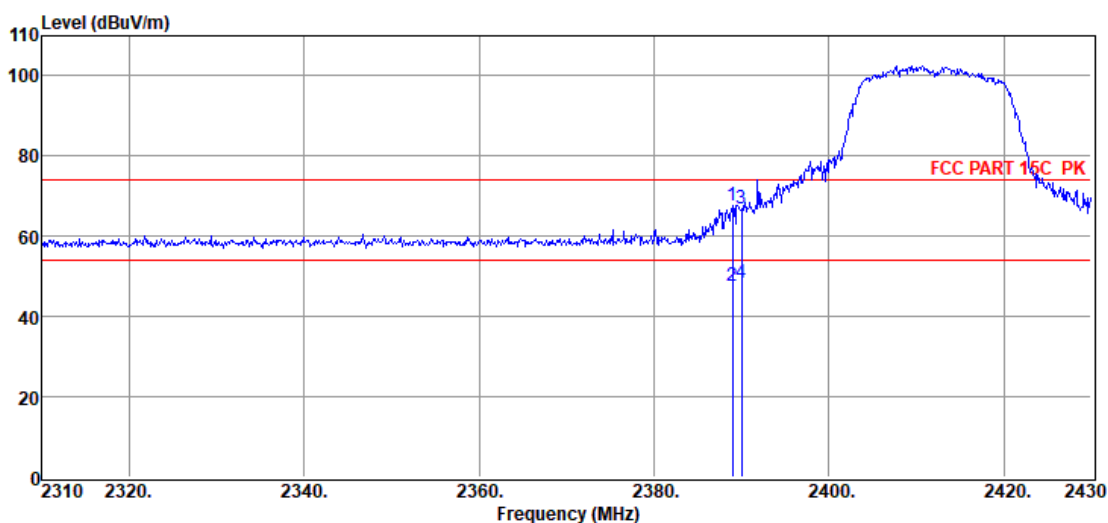

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2388.96	57.35	27.40	39.59	1.71	0.72	67.59	74.00	-6.41	Peak	HORIZONTAL
2	2388.96	37.51	27.40	39.59	1.71	0.72	47.75	54.00	-6.25	Average	HORIZONTAL
3	2390.00	56.73	27.40	39.60	1.71	0.72	66.96	74.00	-7.04	Peak	HORIZONTAL
4	2390.00	38.31	27.40	39.60	1.71	0.72	48.54	54.00	-5.46	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-08-09

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : BATTERY

Test Mode : Tx Mode

Condition : Temp:23.2°C,Humi:53%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11N20 2412

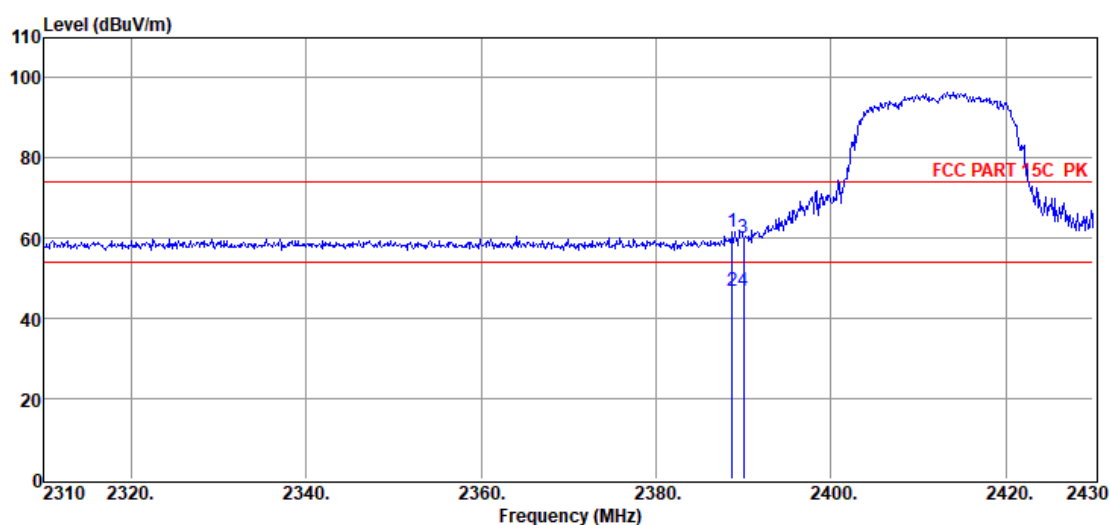

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2388.72	51.48	27.40	39.59	1.71	0.72	61.72	74.00	-12.28	Peak	VERTICAL
2	2388.72	36.72	27.40	39.59	1.71	0.72	46.96	54.00	-7.04	Average	VERTICAL
3	2390.00	49.81	27.40	39.60	1.71	0.72	60.04	74.00	-13.96	Peak	VERTICAL
4	2390.00	36.52	27.40	39.60	1.71	0.72	46.75	54.00	-7.25	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-08-09

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : BATTERY

Test Mode : Tx Mode

Condition : Temp:23.2°C,Humi:53%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11N20 2462

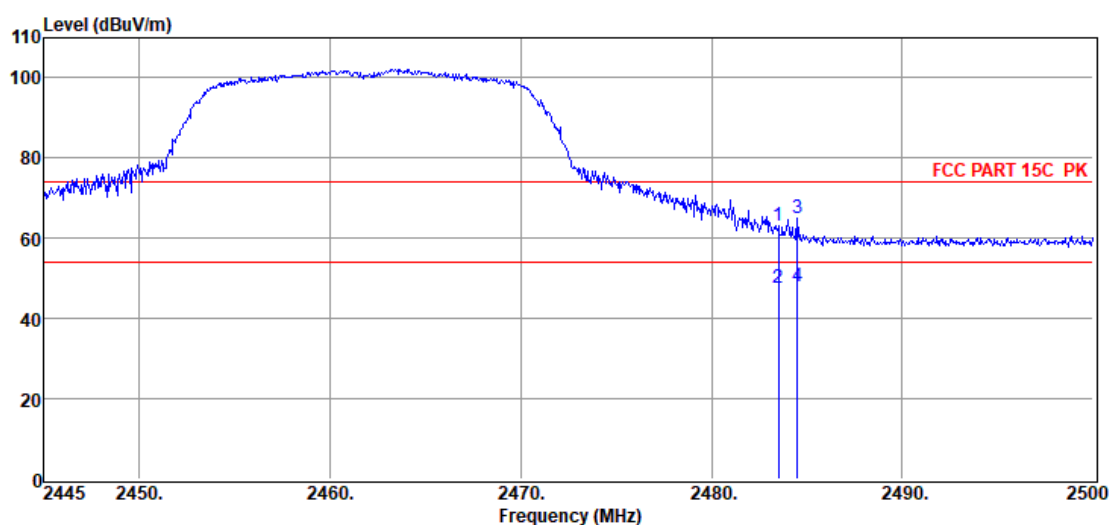

Item (Mark)	Freq. (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	52.54	27.57	39.64	1.74	0.73	62.94	74.00	-11.06	Peak	HORIZONTAL
2	2483.50	37.37	27.57	39.64	1.74	0.73	47.77	54.00	-6.23	Average	HORIZONTAL
3	2484.49	54.72	27.57	39.64	1.74	0.73	65.12	74.00	-8.88	Peak	HORIZONTAL
4	2484.49	37.50	27.57	39.64	1.74	0.73	47.90	54.00	-6.10	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-08-09

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : BATTERY

Test Mode : Tx Mode

Condition : Temp:23.2°C,Humi:53%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11N20 2462

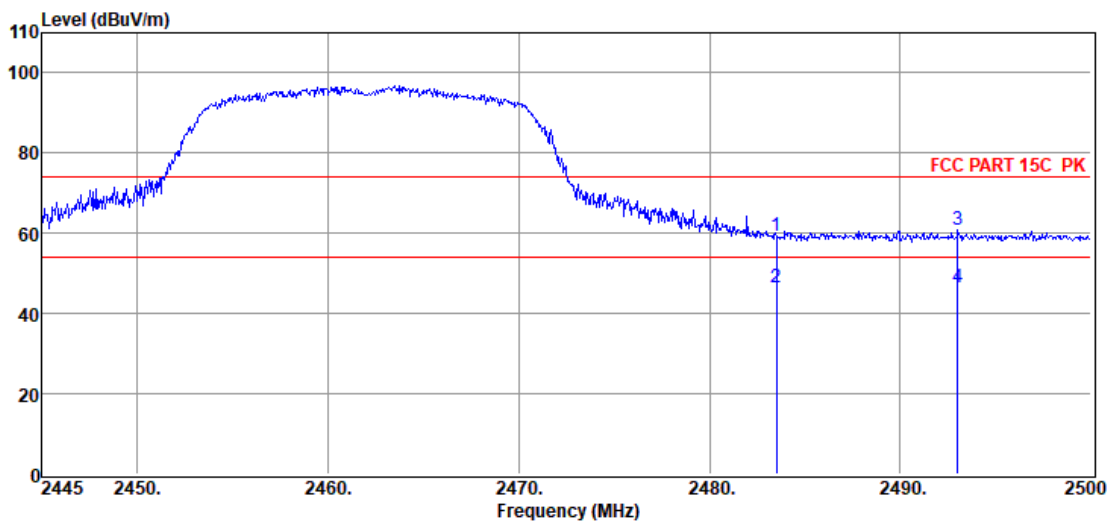


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	48.83	27.57	39.64	1.74	0.73	59.23	74.00	-14.77	Peak	VERTICAL
2	2483.50	35.92	27.57	39.64	1.74	0.73	46.32	54.00	-7.68	Average	VERTICAL
3	2493.02	50.56	27.59	39.65	1.74	0.73	60.97	74.00	-13.03	Peak	VERTICAL
4	2493.02	36.16	27.59	39.65	1.74	0.73	46.57	54.00	-7.43	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

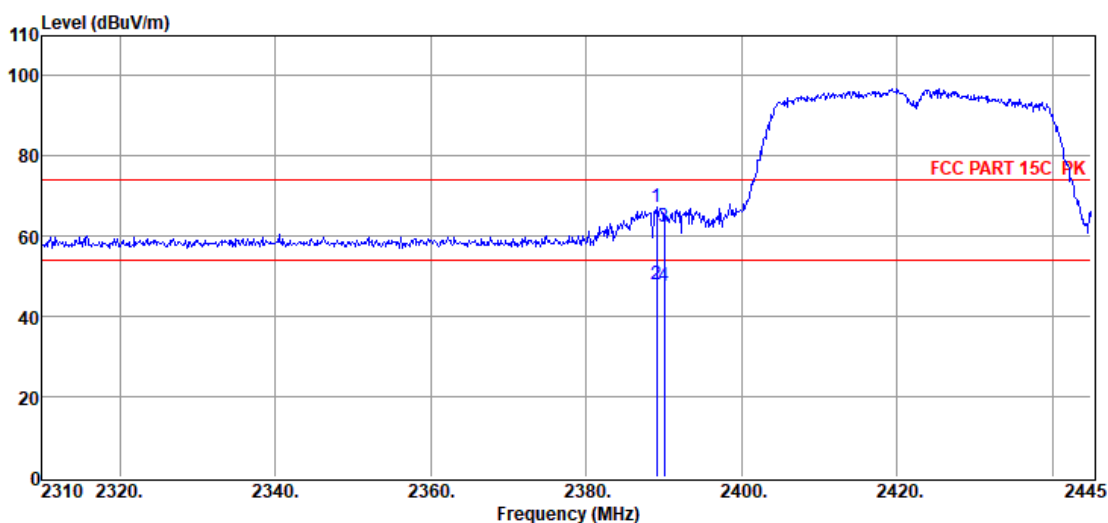Test Site : DDT 3m Chamber 3#D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC
ABOVE 1G 2.4G.EM6**Test Date** : 2022-08-09**Tested By** : James Gan**EUT** : OCR Multi-Player**Model Number** : T90ET**Power Supply** : BATTERY**Test Mode** : Tx Mode**Condition** : Temp:23.2°C,Humi:53%,Press:100.1kPa**Antenna/Distance** : 2021 BBHA 9120D
3#/3m/HORIZONTAL**Memo** : 11N40 2422

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2389.11	56.99	27.40	39.59	1.71	0.72	67.23	74.00	-6.77	Peak	HORIZONTAL
2	2389.11	37.81	27.40	39.59	1.71	0.72	48.05	54.00	-5.95	Average	HORIZONTAL
3	2390.00	52.29	27.40	39.60	1.71	0.72	62.52	74.00	-11.48	Peak	HORIZONTAL
4	2390.00	37.39	27.40	39.60	1.71	0.72	47.62	54.00	-6.38	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-08-09

Tested By : James Gan

EUT : OCR Multi-Player

Model Number : T90ET


Power Supply : BATTERY

Test Mode : Tx Mode

Condition : Temp:23.2°C,Humi:53%,Press:100.1kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11N40 2422

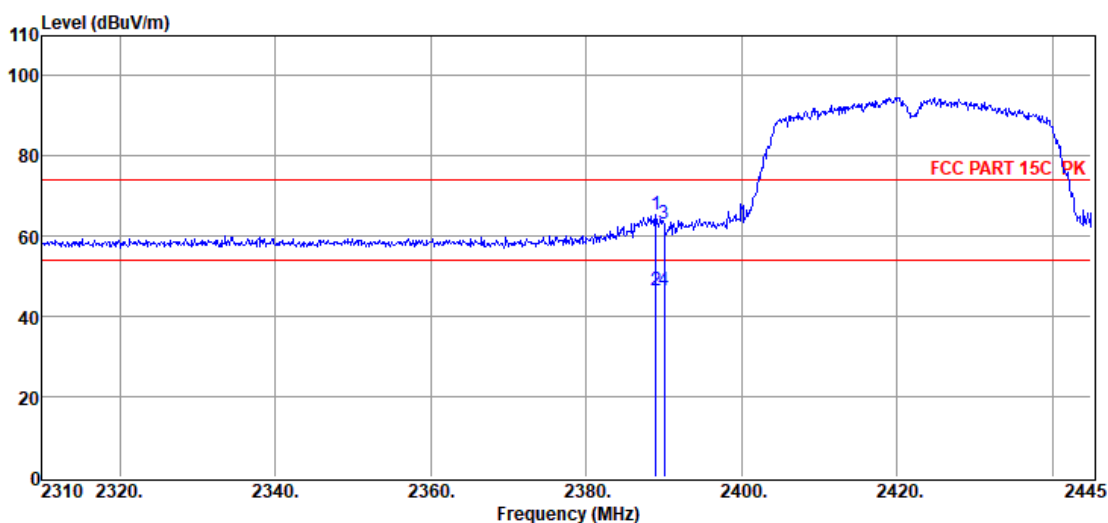


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2388.98	54.97	27.40	39.59	1.71	0.72	65.21	74.00	-8.79	Peak	VERTICAL
2	2388.98	36.34	27.40	39.59	1.71	0.72	46.58	54.00	-7.42	Average	VERTICAL
3	2390.00	53.07	27.40	39.60	1.71	0.72	63.30	74.00	-10.70	Peak	VERTICAL
4	2390.00	36.08	27.40	39.60	1.71	0.72	46.31	54.00	-7.69	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

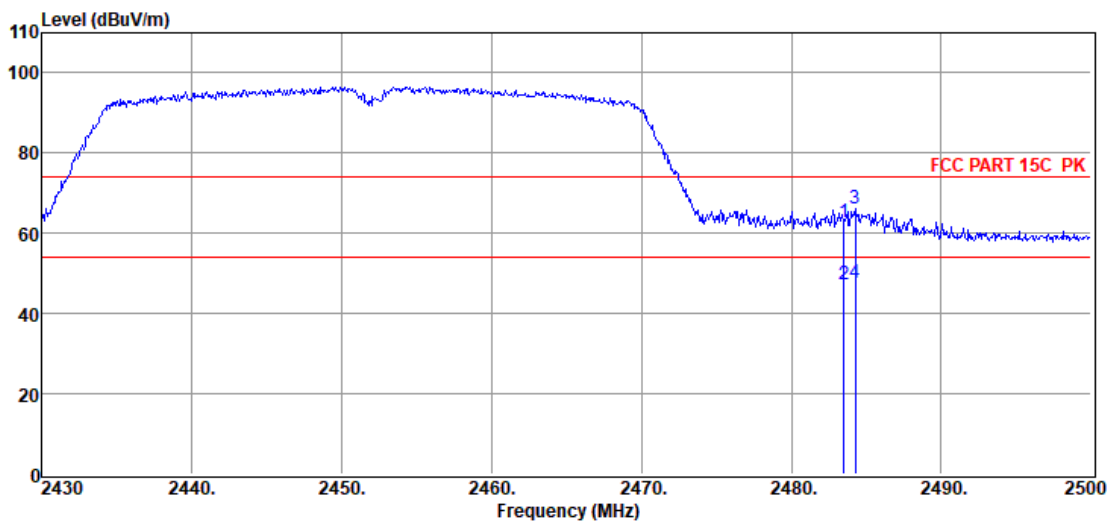Test Site : DDT 3m Chamber 3#D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC
ABOVE 1G 2.4G.EM6**Test Date** : 2022-08-09**Tested By** : James Gan**EUT** : OCR Multi-Player**Model Number** : T90ET**Power Supply** : BATTERY**Test Mode** : Tx Mode**Condition** : Temp:23.2°C,Humi:53%,Press:100.1kPa**Antenna/Distance** : 2021 BBHA 9120D
3#/3m/HORIZONTAL**Memo** : 11N40 2452

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	52.50	27.57	39.64	1.74	0.73	62.90	74.00	-11.10	Peak	HORIZONTAL
2	2483.50	36.89	27.57	39.64	1.74	0.73	47.29	54.00	-6.71	Average	HORIZONTAL
3	2484.25	55.69	27.57	39.64	1.74	0.73	66.09	74.00	-7.91	Peak	HORIZONTAL
4	2484.25	37.41	27.57	39.64	1.74	0.73	47.81	54.00	-6.19	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051321-2E T90ET\FCC ABOVE 1G 2.4G.EM6

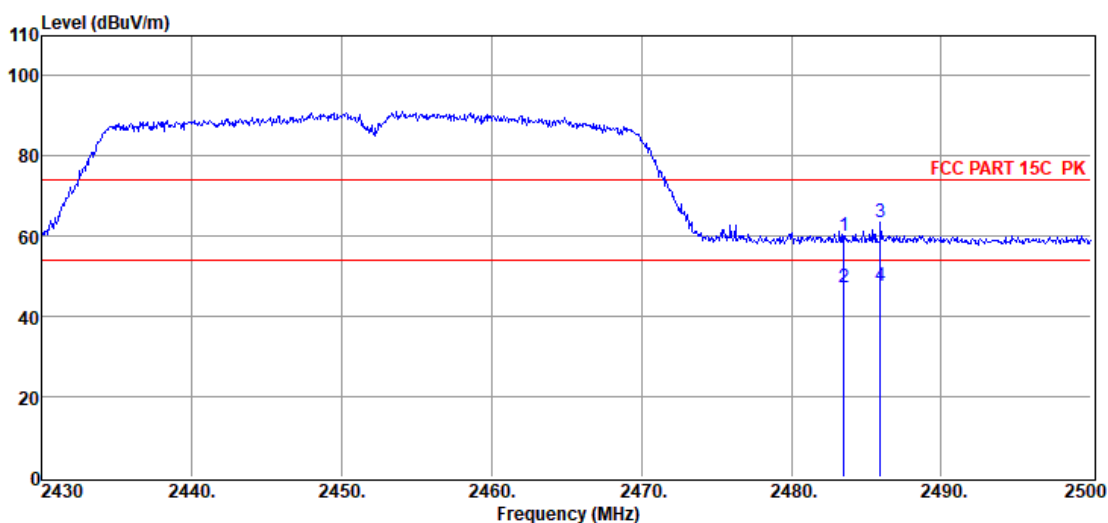Test Date : 2022-08-09**Tested By** : James Gan**EUT** : OCR Multi-Player**Model Number** : T90ET**Power Supply** : BATTERY**Test Mode** : Tx Mode**Condition** : Temp:23.2°C,Humi:53%,Press:100.1kPa**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL**Memo** : 11N40 2452

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	49.61	27.57	39.64	1.74	0.73	60.01	74.00	-13.99	Peak	VERTICAL
2	2483.50	36.72	27.57	39.64	1.74	0.73	47.12	54.00	-6.88	Average	VERTICAL
3	2485.93	53.04	27.57	39.64	1.74	0.73	63.44	74.00	-10.56	Peak	VERTICAL
4	2485.93	37.09	27.57	39.64	1.74	0.73	47.49	54.00	-6.51	Average	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

11. Power Line Conducted Emission

11.1. Block diagram of test setup

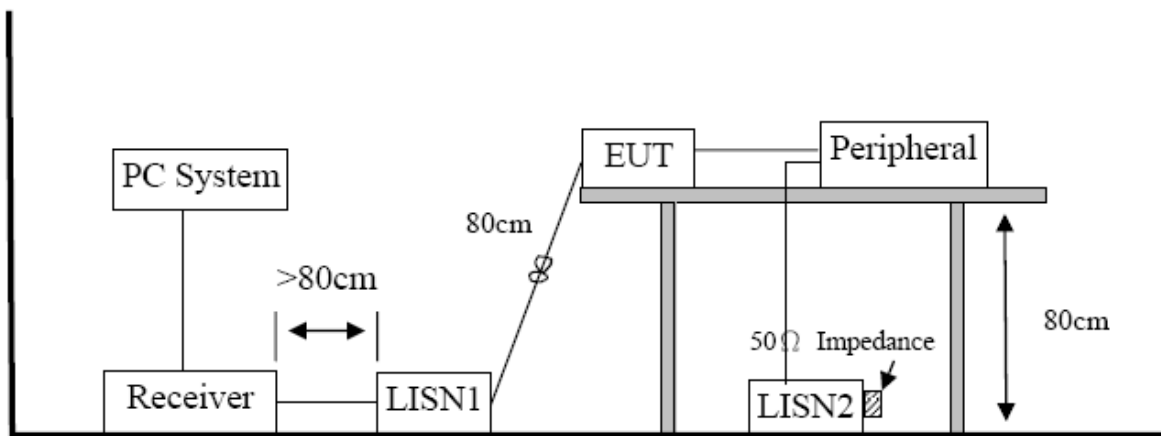

11.2. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

11.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

11.4. Test result

Pass. (See below detailed test result)


Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2022 CE report date\Q22051321-2E\FCC.EM6**
Test Date : 2022-08-17 **Tested By** : James Gan
EUT : OCR Multi-Player **Model Number** : T90ET
Power Supply : AC 120V/60Hz **Test Mode** : TX MODE
Condition : TEMP:23.8°C, RH:62.0%, BP:101.2kPa **LISN** : 2021 1# ENV216/NEUTRAL
Memo :

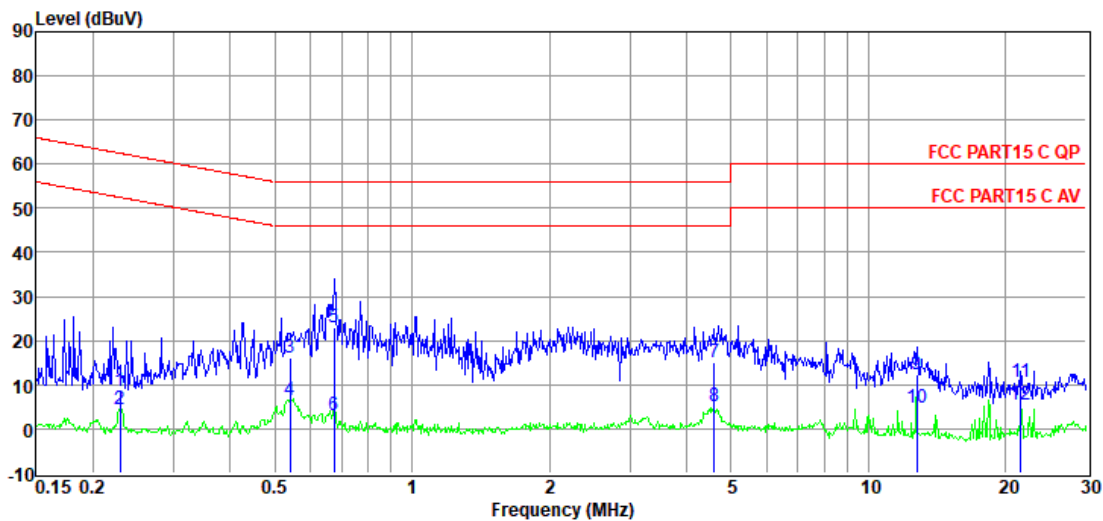


Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.23	-11.29	9.76	0.02	9.92	8.41	62.48	-54.07	QP	NEUTRAL
2	0.23	-15.32	9.76	0.02	9.92	4.38	52.48	-48.10	Average	NEUTRAL
3	0.54	-3.53	9.57	0.02	9.91	15.97	56.00	-40.03	QP	NEUTRAL
4	0.54	-13.17	9.57	0.02	9.91	6.33	46.00	-39.67	Average	NEUTRAL
5	0.68	3.42	9.77	0.02	9.91	23.12	56.00	-32.88	QP	NEUTRAL
6	0.68	-16.68	9.77	0.02	9.91	3.02	46.00	-42.98	Average	NEUTRAL
7	4.60	-4.77	9.75	0.06	9.92	14.96	56.00	-41.04	QP	NEUTRAL
8	4.60	-14.48	9.75	0.06	9.92	5.25	46.00	-40.75	Average	NEUTRAL
9	12.78	-7.31	9.68	0.13	9.93	12.43	60.00	-47.57	QP	NEUTRAL
10	12.78	-14.91	9.68	0.13	9.93	4.83	50.00	-45.17	Average	NEUTRAL
11	21.60	-9.25	9.82	0.18	9.97	10.72	60.00	-49.28	QP	NEUTRAL
12	21.60	-14.42	9.82	0.18	9.97	5.55	50.00	-44.45	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2022 CE report date\Q22051321-2E\FCC.EM6**
Test Date : 2022-08-17 **Tested By** : James Gan
EUT : OCR Multi-Player **Model Number** : T90ET
Power Supply : AC 120V/60Hz **Test Mode** : TX MODE
Condition : TEMP:23.8°C, RH:62.0%, BP:101.2kPa **LISN** : 2021 1# ENV216/LINE
Memo :

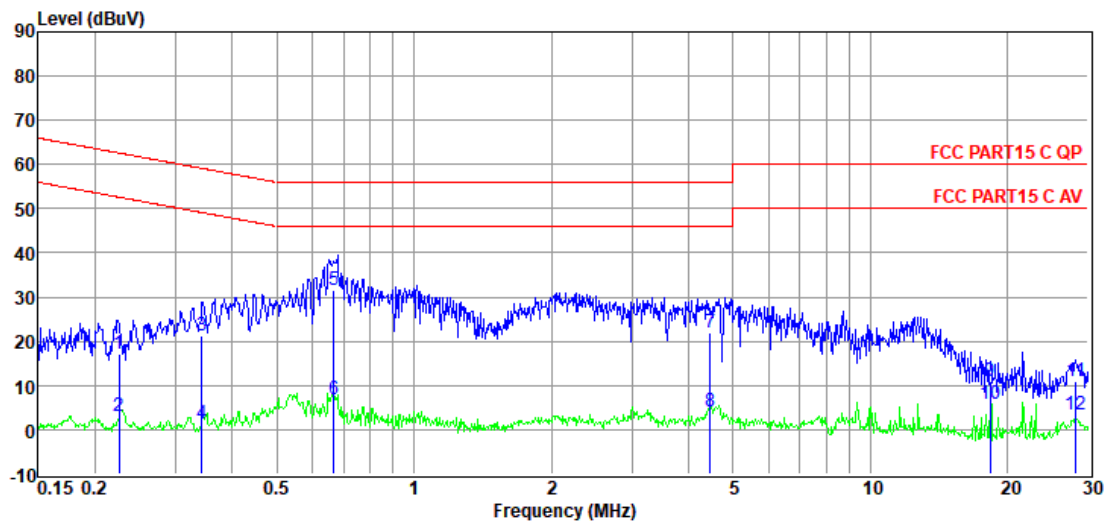

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.23	-2.44	9.77	0.02	9.92	17.27	62.61	-45.34	QP	LINE
2	0.23	-16.76	9.77	0.02	9.92	2.95	52.61	-49.66	Average	LINE
3	0.34	1.69	9.68	0.02	9.91	21.30	59.13	-37.83	QP	LINE
4	0.34	-18.10	9.68	0.02	9.91	1.51	49.13	-47.62	Average	LINE
5	0.67	12.15	9.51	0.02	9.91	31.59	56.00	-24.41	QP	LINE
6	0.67	-12.76	9.51	0.02	9.91	6.68	46.00	-39.32	Average	LINE
7	4.45	2.57	9.58	0.06	9.92	22.13	56.00	-33.87	QP	LINE
8	4.45	-15.36	9.58	0.06	9.92	4.20	46.00	-41.80	Average	LINE
9	18.33	-8.68	9.66	0.16	9.95	11.09	60.00	-48.91	QP	LINE
10	18.33	-13.87	9.66	0.16	9.95	5.90	50.00	-44.10	Average	LINE
11	28.15	-9.06	9.68	0.20	9.99	10.81	60.00	-49.19	QP	LINE
12	28.15	-16.42	9.68	0.20	9.99	3.45	50.00	-46.55	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

12. Antenna Requirements

12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2. Result

The antenna used for this product and no antenna other than that furnished by the responsible party shall be used with the device, maximum antenna gain is 1.58 dBi.

14. Photos of the EUT

Please refer to appendix I

END OF REPORT