



Test Report No.:
FCC2023-0056-RF

TEST REPORT

FCC ID : 2AWMK-BTP-A1T2
Applicant : Guangzhou Pinzhong Electronic Technology CO., Ltd.
Product Name : BEITONG ASURA2 PRO GAMEPAD-WIRELESS
Model No. : BTP-A1T2,BTP-A1T2S

CVC Testing Technology Co., Ltd.





Applicant		Name: Guangzhou Pinzhong Electronic Technology CO., Ltd.	
		Address: Room 611-612, Greenland Center of Financial City, No. 662, Huangpu Avenue Middle Road, Tianhe District, Guangzhou City, Guangdong Province, China	
Manufacturer		Name: Guangzhou Pinzhong Electronic Technology CO., Ltd.	
		Address: Room 611-612, Greenland Center of Financial City, No. 662, Huangpu Avenue Middle Road, Tianhe District, Guangzhou City, Guangdong Province, China	
Equipment Under Test		Product Name : BEITONG ASURA2 PRO GAMEPAD-WIRELESS Model No. : BTP-A1T2 Trade mark :  Serial no. : D12I17009001 Sampling : 1-1	
Date of Receipt.	2023.9.5	Date of Testing	2023.9.15
Test Specification		Test Result	
FCC CFR47 Part 15C Radio Frequency Devices ANSI C63.10-2020 KDB 558074 D01 15.247 Meas Guidance v05r02		PASS	
Evaluation of Test Result		The equipment under test was found to comply with the requirements of the standards applied. <div style="text-align: right;"> Seal of CVC Issue Date: 2023.10.11 </div>	
Approved by: Chen HuaWen 		Reviewed by: Xu Zhenfei 	
		Tested by: Lu Weiji 	
Other Aspects: NONE.			
Abbreviations:OK, Pass= passed Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested			
This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC .			

TABLE OF CONTENTS

1. GENERAL PRODUCT INFORMATION	4
1.1 GENERAL INFORMATION	4
2. TEST SITES	5
2.1 TEST FACILITIES	5
2.2 DESCRIPTION OF NON-STANDARD METHOD AND DEVIATIONS	5
2.3 LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
3. TEST CONFIGURATION	6
3.1 TEST MODE	6
3.2 DUTY CYCLE	7
4. SUMMARY OF MEASUREMENT RESULTS	8
5. MEASUREMENT PROCEDURE	9
5.1 CONDUCTED EMISSION	9
5.2 RADIATED EMISSION	13
5.3 MAXIMUM CONDUCTED OUTPUT POWER	27
5.4 MINIMUM 6 DB BANDWIDTH	29
5.5 OCCUPIED CHANNEL BANDWIDTH	31
5.6 BAND EDGE MEASUREMENT	33
5.7 MAXIMUM POWER SPECTRAL DENSITY	35
5.8 SPURIOUS RF CONDUCTED EMISSIONS	37
6. APPENDIX X	39

1. General Product Information

1.1 General information

Product Name	BEITONG ASURA2 PRO GAMEPAD-WIRELESS
Model No.	BTP-A1T2
Additional model	BTP-A1T2S
Power Supply	DC 5V
Serial Number(SN)	D12I17009001
Antenna Type	Internal Antenna
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)
Antenna Gain	0.5dBi (provided by client)
Beamforming gain	Unsupported (provided by client)
Frequency Range	2402~2480MHz
Channel Number	79 Channels
Type of Modulation	GFSK
Max. Conducted Power	-1.33 dBm

Note:

1. The information of the EUT is declared by the manufacturer.
2. The laboratory is not responsible for the product technical specification provided by the client.
3. The product models of this application are: BTP-A1T2 and BTP-A1T2S. The difference between the products are shown in the table below:

No	Model	Difference	Remarks
1	BTP-A1T2	The Circuit, PCB Layout and Electrical Parts are the same, except Tact Switch of Dpad, Mechanical Switch of ABXY, structure of Button-bracket and appearance.	Inspection model
2	BTP-A1T2S		Coverage model

All the tests carried out on model BTP-A1T2, and replenish Maximum conducted output power and Radiated Emission on model BTP-A1T2S.

Factory: Guangzhou Pinzhong Electronic Technology CO., Ltd.

Address: Room 611-612, Greenland Center of Financial City, No. 662, Huangpu Avenue Middle Road, Tianhe District, Guangzhou City, Guangdong Province, China

2. Test Sites

2.1 Test Facilities

The tests and measurements refer to this report were performed by RF testing Lab. of CVC Testing Technology Co., Ltd.

Add.: No.3, Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou,Guangdong,510663, People's Republic of China

Telephone : +86-20-32293888

Fax : +86-20-32293889

FCC(Test firm designation number: CN1282)

IC(Test firm CAB identifier number: CN0103)

2.2 Description of Non-standard Method and Deviations

The testing and measurement methods used in this report are applied by all standard methods. Not any non-standard method or deviation from the used standards was used.

2.3 List of Test and Measurement Instruments

Refer to **Appendix X**.

3. Test Configuration

3.1 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Test Mode	Antenna Delivery	Test Channel
2.4G Customization	1TX / 1RX	2402,2440,2480

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate and different channels. Preliminary tests have been done on all the configurations for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates and channels are shown as following table.

Test Mode	Data Rate		
	Antenna 1	Antenna 2	MIMO
2.4G Customization	1Mbps	/	/

Test Items	Test Antennas	Test Modes	Test Channels
Radiated Emissions	Antenna 1	2.4G Customization	0,78
Radiated Emissions (Band Edge)	Antenna 1	2.4G Customization	0,78
Maximum conducted output power	Antenna 1	2.4G Customization	0,38,78

3.2 Duty cycle

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
2.4G Customization	Ant1	2402	50.00	50.00	100.00	---	---
		2440	50.00	50.00	100.00	---	---
		2480	50.00	50.00	100.00	---	---

4. Summary of measurement results

Summary of measurements of results	Clause in FCC rules	Verdict	Note
Conducted Emissions	15.207	PASS	/
Radiated Emissions	15.247(d), 15.205, 15.209	PASS	/
Maximum conducted output power	15.247(b)(3)	PASS	/
Minimum 6 dB bandwidth	15.247(a)(2)	PASS	Appendix A of 2.4G Customization_diagram
Occupied Channel Bandwidth	15.247(a)(2)	PASS	Appendix B of 2.4G Customization_diagram
Band Edge Measurement	15.247(d)	PASS	Appendix E of 2.4G Customization_diagram
Maximum Power spectral density	15.247(e)	PASS	Appendix D of 2.4G Customization_diagram
Spurious RF Conducted Emissions	15.247(d)	PASS	Appendix F of 2.4G Customization_diagram
Antenna Requirement	15.203	PASS	See note 1

Note1: According to 15.203, it is considered sufficient to comply with the provisions of this section.

5. Measurement procedure

5.1 Conducted Emission

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.3kPa

Method of Measurement:

The EUT was setup according to ANSI C63.10, 2013 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.


Limits:

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Test Setup:

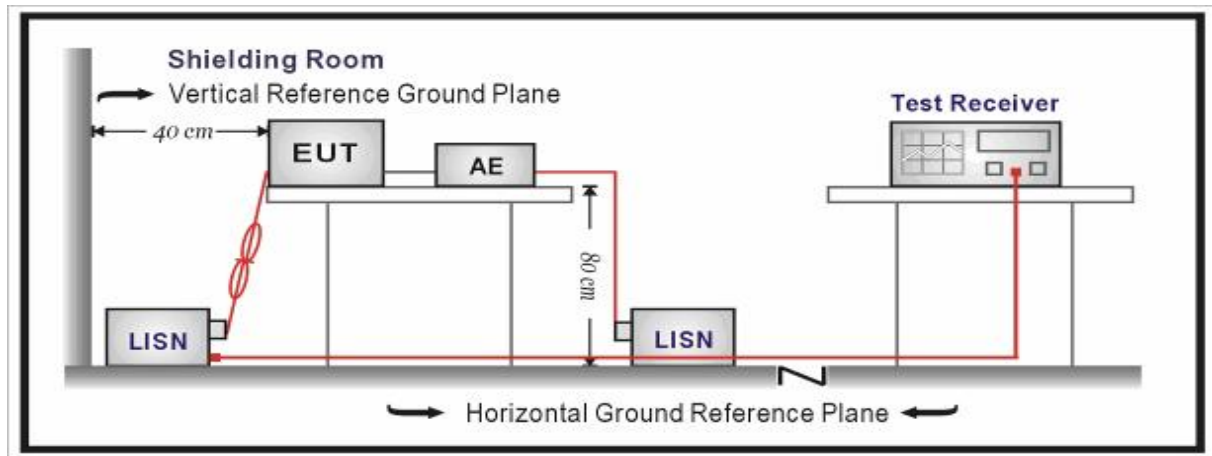

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Level = Reading + Factor.

Measurement Uncertainty:


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 3.12$ dB.

Test Results:

During the test, the Conducted Emission from 150kHz to 30MHz was performed in all channels of BTP-A1T2 and BTP-A1T2S. BTP-A1T2S, Channel 0 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


Power Line	L
Test channel	Worst-Case

Suspected List							
Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Pass/Fail
0.1613	10.29	15.98	26.27	65.40	39.13	QP	PASS
0.4335	10.30	15.20	25.50	57.19	31.69	QP	PASS
13.2045	10.62	25.38	36.00	60.00	24.00	QP	PASS
0.4335	10.30	10.34	20.64	47.19	26.55	AV	PASS
3.8715	10.40	8.71	19.11	46.00	26.89	AV	PASS
3.8715	10.40	8.71	19.11	46.00	26.89	AV	PASS

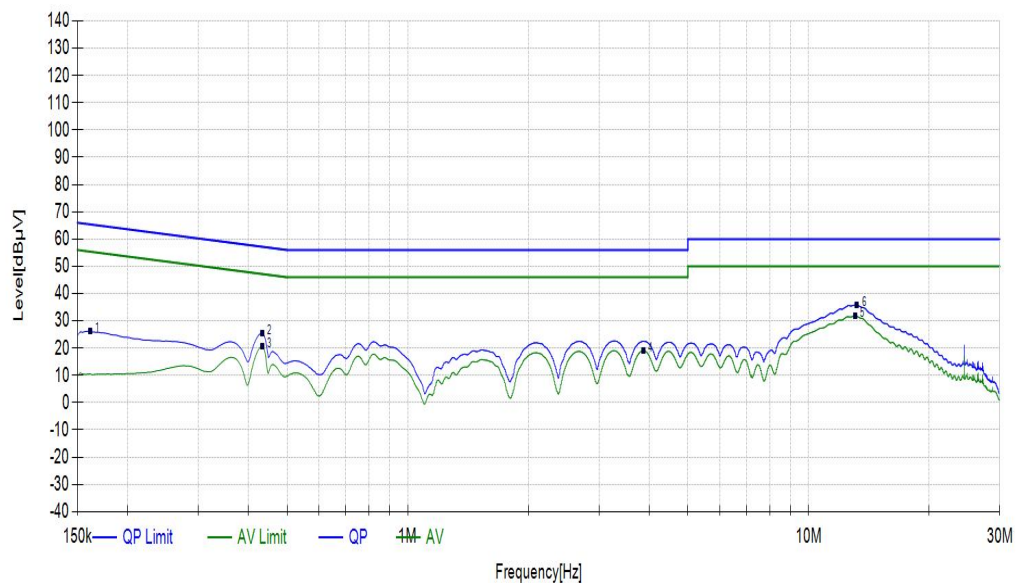

Power Line	N
Test channel	Worst-Case

Suspected List							
Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Pass/Fail
0.1613	10.28	15.64	25.92	65.40	39.48	QP	PASS
4.4790	10.42	16.27	26.69	56.00	29.31	QP	PASS
12.6150	10.63	24.34	34.97	60.00	25.03	QP	PASS
0.7643	10.32	3.23	13.55	46.00	32.45	AV	PASS
5.0325	10.43	13.37	23.80	50.00	26.20	AV	PASS
13.0470	10.64	20.11	30.75	50.00	19.25	AV	PASS

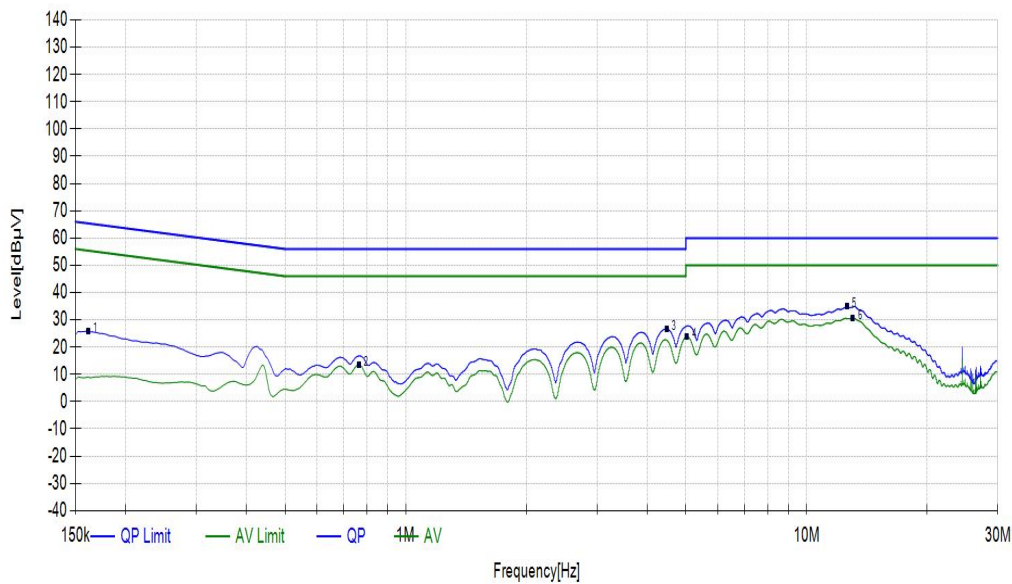

5.2 Radiated Emission

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.3kPa

Method of Measurement:

The EUT was setup and tested according to ANSI C63.10, 2013.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from Antenna to the EUT was 3 meters.

The Antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the Antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn Antenna will be bended down a little (as horn Antenna has the narrow beamwidth) in order to keeping the Antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 10~60 degrees for H-plane and 10~90 degrees for E-plane.

Limits:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Frequency	Limit ($\mu\text{V/m}$)	Limit ($\text{dB}\mu\text{V/m @3m}$)	Remark
0.009MHz-0.490MHz	2400/F(kHz)@300m	20lg(240000/F(kHz))	Quasi-peak Level
0.490MHz~1.705MHz	24000/F(kHz)@30m	20lg(240000/F(kHz))	Quasi-peak Level
1.705MHz~30.0MHz	30@30m	49.54	Quasi-peak Level
30MHz-88MHz	100@3m	40.0	Quasi-peak Level
88MHz-216MHz	150@3m	43.5	Quasi-peak Level
216MHz-960MHz	200@3m	46.0	Quasi-peak Level
960MHz-1GHz	500@3m	54.0	Quasi-peak Level
Above 1GHz	500@3m	54.0	Average Level


	5000@3m	74.0	Peak Level
--	---------	------	------------

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.
12.57675-12.57725	322-335.4	3600-4400	/
13.36-13.41	/	/	/

Test Setup:


Below 30MHz Test Setup:

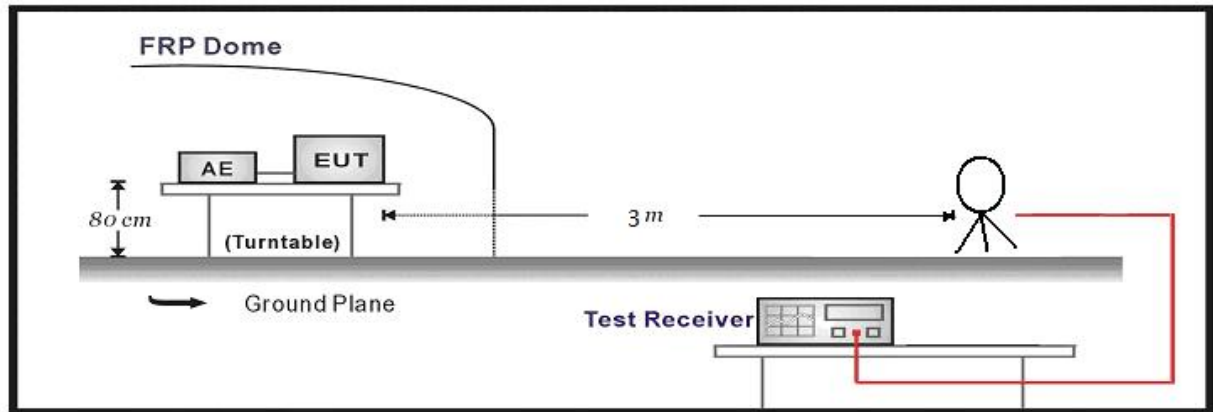

Below 1GHz Test Setup:

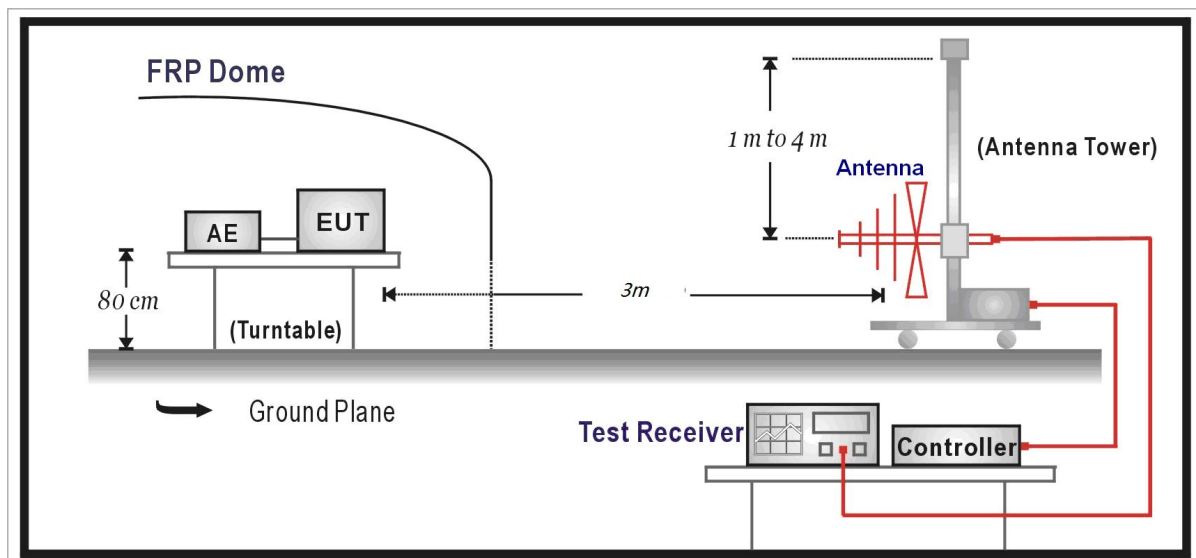

Above 1GHz Test Setup:

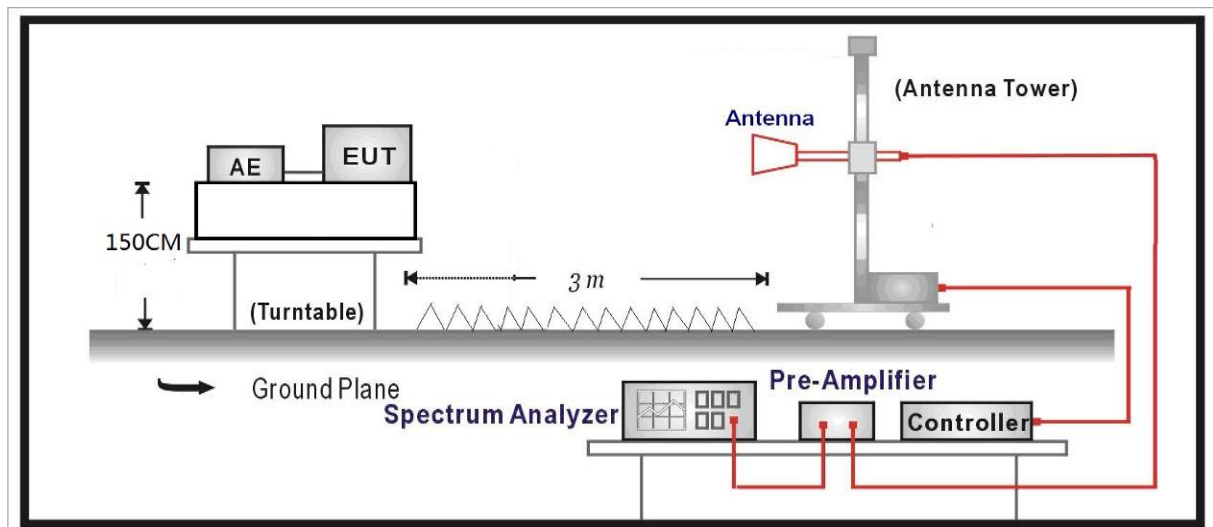

Measurement Data:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Level = Reading - Factor

Factor = Preamplifier Factor – Antenna Factor–Cable Loss

Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB


Test Results:

SPURIOUS EMISSIONS:

During the test, the Radiates Emission from 9kHz to 30MHz was performed in all channels of BTP-A1T2 and BTP-A1T2S. BTP-A1T2, the lowest and highest channels, X axis are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


Radiated Emission	9kHz-30MHz
Polarity	X axis
Test channel	2402MHz

Final Data List								
Frequency [MHz]	Polarity	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pass/Fail
0.1713	X axis	20.40	39.78	62.85	23.07	100	150	PASS
0.2225	X axis	20.37	37.61	60.57	22.96	100	90	PASS
0.4485	X axis	20.41	34.47	54.47	20.00	100	250	PASS
0.8750	X axis	20.59	31.21	48.68	17.47	100	320	PASS
1.6854	X axis	20.73	29.14	43.00	13.86	100	40	PASS
3.4425	X axis	20.99	27.26	49.50	22.24	100	0	PASS

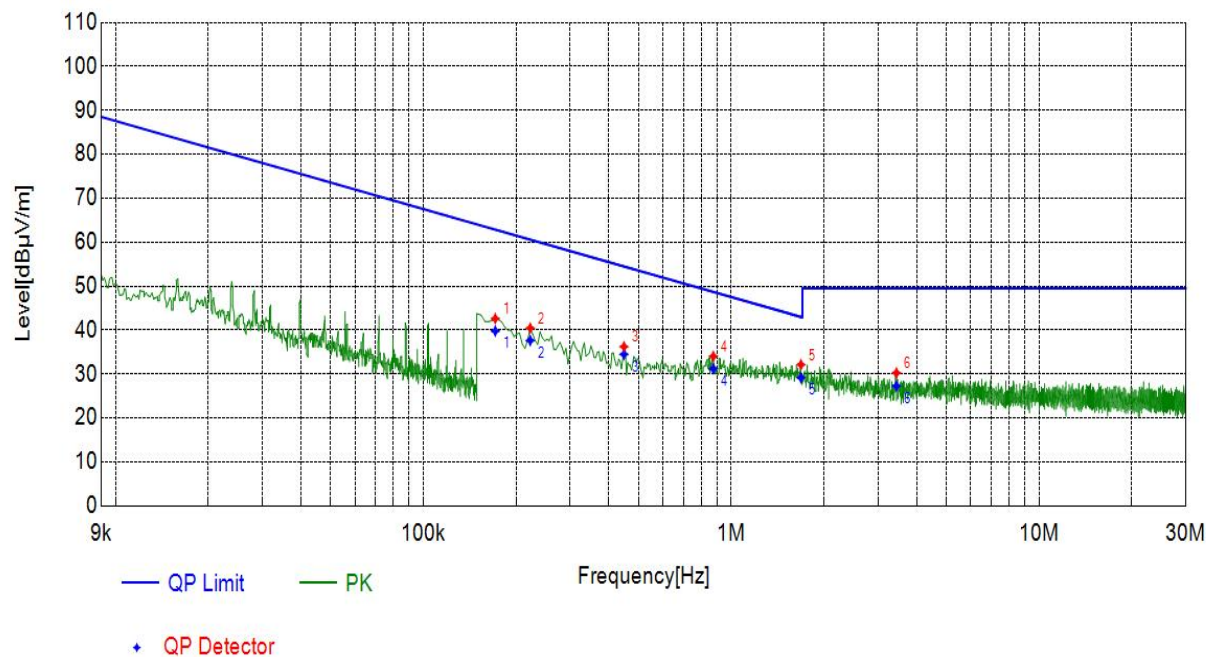

Radiated Emission	9kHz-30MHz
Polarity	X axis
Test channel	2480MHz


Final Data List								
Frequency [MHz]	Polarity	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pass/Fail
0.1628	X axis	20.41	49.61	63.29	13.68	100	270	PASS
0.4187	X axis	20.32	36.75	55.07	18.32	100	300	PASS
0.4955	X axis	20.56	35.47	53.60	18.13	100	320	PASS
0.9347	X axis	20.56	33.49	48.11	14.62	100	90	PASS
4.9480	X axis	21.13	28.87	49.50	20.63	100	270	PASS
10.2578	X axis	20.95	26.98	49.50	22.52	100	230	PASS

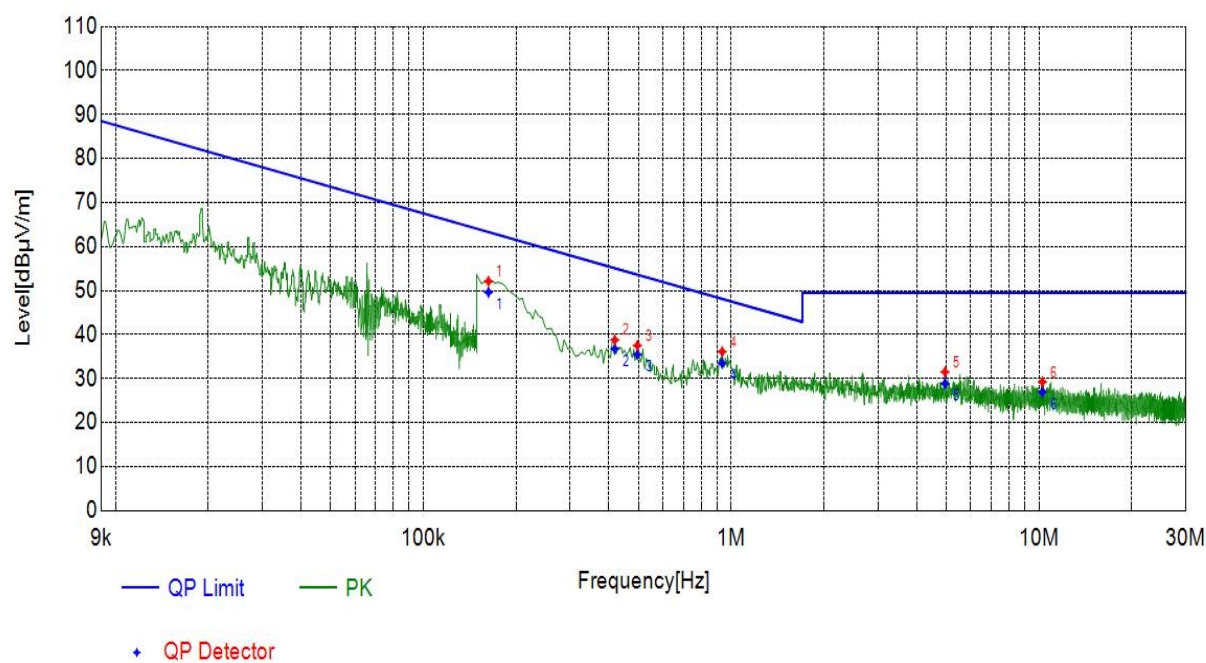

During the test, the Radiates Emission from 30MHz to 40GHz was performed in all channels of BTP-A1T2 and BTP-A1T2S. BTP-A1T2, the lowest and highest channels, Horizontal Polarity are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


Radiates Emission		30MHz~1GHz							
Polarity		Horizontal							
Test Channel		2402MHz							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Dete ctor	Height [cm]	Angle deg	Pass/ Fail
37.4181	13.39	6.55	19.94	40.00	20.06	PK	100	20	PASS
44.4938	14.21	6.02	20.23	40.00	19.77	PK	100	20	PASS
105.9498	12.43	4.64	17.07	43.52	26.45	PK	100	40	PASS
236.4510	14.28	6.26	20.54	46.02	25.48	PK	100	30	PASS
312.1154	15.54	7.92	23.46	46.02	22.56	PK	100	40	PASS
660.9365	21.78	10.67	32.45	46.02	13.57	PK	100	20	PASS

Final Data List							
Frequency [MHz]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pass/Fail
37.4181	13.39	17.30	40.00	22.70	130	20	PASS
44.4938	14.21	17.59	40.00	22.41	170	20	PASS
105.9498	12.43	14.43	43.52	29.09	190	40	PASS
236.4510	14.28	18.26	46.02	27.76	220	30	PASS
312.1154	15.54	21.02	46.02	25.00	240	40	PASS
660.9365	21.78	30.01	46.02	16.01	320	20	PASS

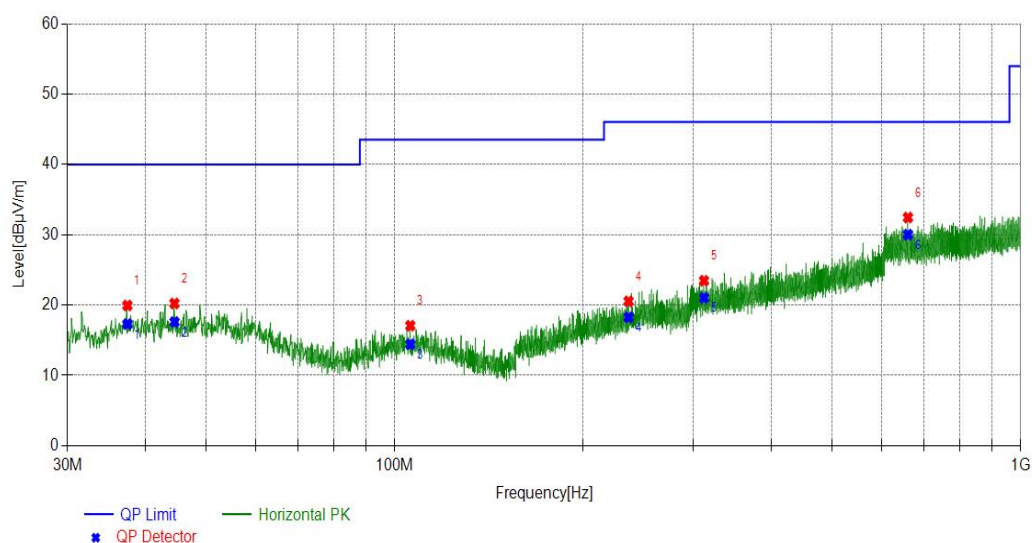


Radiates Emission		30MHz~1GHz							
Polarity		Horizontal							
Test Channel		2480MHz							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Dete ctor	Height [cm]	Angle deg	Pass/ Fail
37.2469	13.35	5.56	18.91	40.00	21.09	PK	100	30	PASS
43.4096	14.15	6.73	20.88	40.00	19.12	PK	100	30	PASS
50.8848	14.42	5.49	19.91	40.00	20.09	PK	100	30	PASS
100.4718	12.42	5.75	18.17	43.52	25.35	PK	100	20	PASS
216.7645	13.33	7.61	20.94	46.02	25.08	PK	100	30	PASS
516.7975	19.48	7.96	27.44	46.02	18.58	PK	100	30	PASS

Final Data List							
Frequency [MHz]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pass/Fail
37.2469	13.35	16.82	40.00	23.18	114	30	PASS
43.4096	14.15	18.79	40.00	21.21	156	30	PASS
50.8848	14.42	17.82	40.00	22.18	190	30	PASS
100.4718	12.42	16.08	43.52	27.44	222	20	PASS
216.7645	13.33	18.85	46.02	27.17	260	30	PASS
516.7975	19.48	24.71	46.02	21.31	338	30	PASS

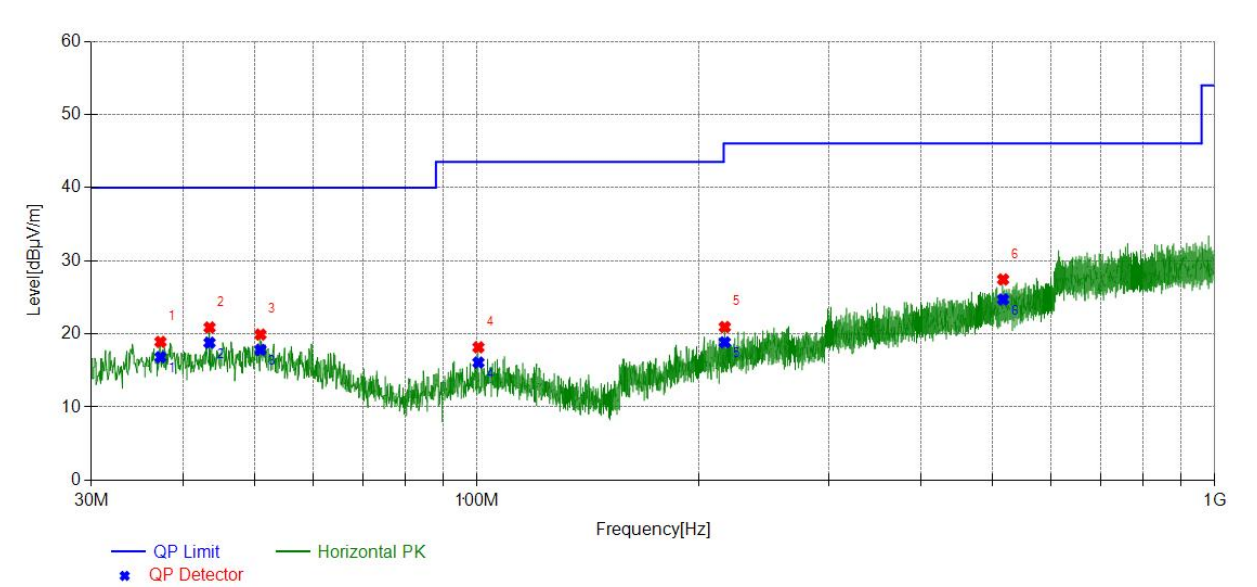


Radiates Emission		1G~18GHz							
polarization		Horizontal							
Test Channel		2402MHz							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
1746.3746	-5.91	41.43	35.52	74.00	38.48	PK	150	185	PASS
1746.3746	-5.91	27.43	21.52	54.00	32.48	AV	150	0	PASS
4804.9805	2.99	47.23	50.22	54.00	3.78	AV	150	330	PASS
4804.9805	2.99	64.24	67.23	74.00	6.77	PK	150	97	PASS
7209.0209	9.82	33.73	43.55	54.00	10.45	AV	150	350	PASS
7209.0209	9.82	45.33	55.15	74.00	18.85	PK	150	24	PASS
9609.6610	14.24	38.08	52.32	74.00	21.68	PK	150	94	PASS
9609.6610	14.24	19.20	33.44	54.00	20.56	AV	150	350	PASS
12013.7014	13.54	37.84	51.38	74.00	22.62	PK	150	327	PASS
12013.7014	13.54	25.70	39.24	54.00	14.76	AV	150	307	PASS
14336.1336	19.49	33.41	52.90	74.00	21.10	PK	150	221	PASS
14336.1336	19.49	19.72	39.21	54.00	14.79	AV	150	27	PASS
17986.3986	29.55	13.16	42.71	54.00	11.29	AV	150	343	PASS
17986.3986	29.55	26.09	55.64	74.00	18.36	PK	150	62	PASS

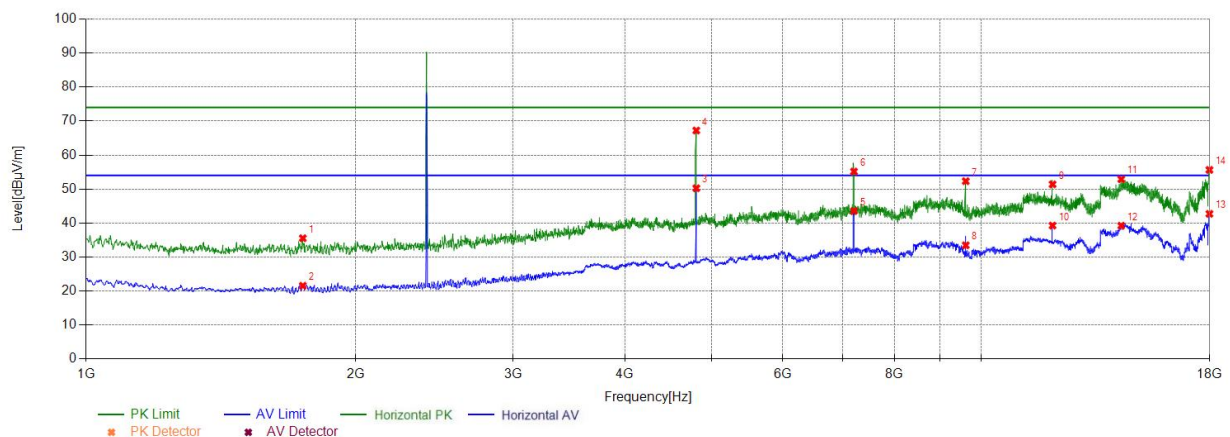


Note: The signal beyond the limit is carrier

Radiates Emission		1G~3G							
polarization		Horizontal							
Test Channel		2480MHz							
Suspected List									
Frequency[MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
1768.4768	-6.73	43.77	37.04	74.00	36.96	PK	150	317	PASS
1768.4768	-6.73	27.17	20.44	54.00	33.56	AV	150	317	PASS
2601.5602	-3.99	25.86	21.87	54.00	32.13	AV	150	346	PASS
2601.5602	-3.99	44.69	40.70	74.00	33.30	PK	150	12	PASS
4959.6960	3.00	50.37	53.37	74.00	20.63	PK	150	283	PASS
4959.6960	3.00	32.62	35.62	54.00	18.38	AV	150	266	PASS
7440.2440	9.30	30.87	40.17	54.00	13.83	AV	150	51	PASS
7440.2440	9.30	44.83	54.13	74.00	19.87	PK	150	150	PASS
12397.9398	13.28	21.85	35.13	54.00	18.87	AV	150	346	PASS
12397.9398	13.28	40.05	53.33	74.00	20.67	PK	150	346	PASS
14337.8338	18.18	31.16	49.34	74.00	24.66	PK	150	307	PASS
14337.8338	18.18	19.74	37.92	54.00	16.08	AV	150	343	PASS
17984.6985	28.10	24.20	52.30	74.00	21.70	PK	150	118	PASS
17984.6985	28.10	12.27	40.37	54.00	13.63	AV	150	346	PASS

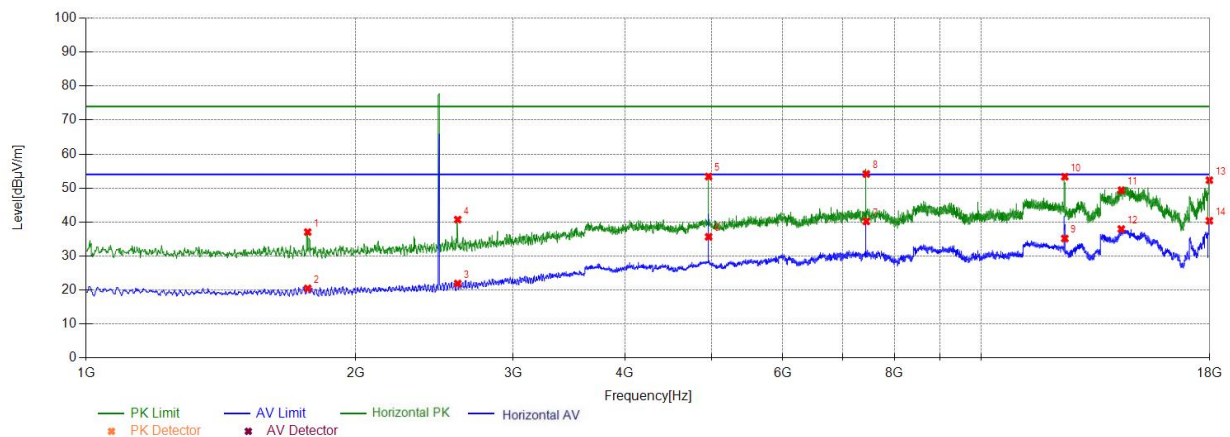


Note: The signal beyond the limit is carrier

Radiates Emission		18G~40G							
polarization		Horizontal							
Test Channel		2402MHz							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
19139.7140	1.34	43.55	44.89	74.00	29.11	PK	150	90	PASS
26288.2288	4.62	41.54	46.16	74.00	27.84	PK	150	50	PASS
39537.9538	10.78	41.97	52.75	74.00	21.25	PK	150	30	PASS
29782.1782	6.55	40.66	47.21	74.00	26.79	PK	150	20	PASS
33768.9769	6.53	42.52	49.05	74.00	24.95	PK	150	20	PASS
22464.2464	2.36	41.49	43.85	74.00	30.15	PK	150	90	PASS
26255.2255	4.60	32.30	36.90	54.00	17.10	AV	150	10	PASS
19335.5336	1.33	33.55	34.88	54.00	19.12	AV	150	10	PASS
22184.8185	2.08	33.39	35.47	54.00	18.53	AV	150	10	PASS
29694.1694	6.49	31.01	37.50	54.00	16.50	AV	150	10	PASS
33773.3773	6.53	32.07	38.60	54.00	15.40	AV	150	10	PASS
39753.5754	10.79	33.22	44.01	54.00	9.99	AV	150	10	PASS

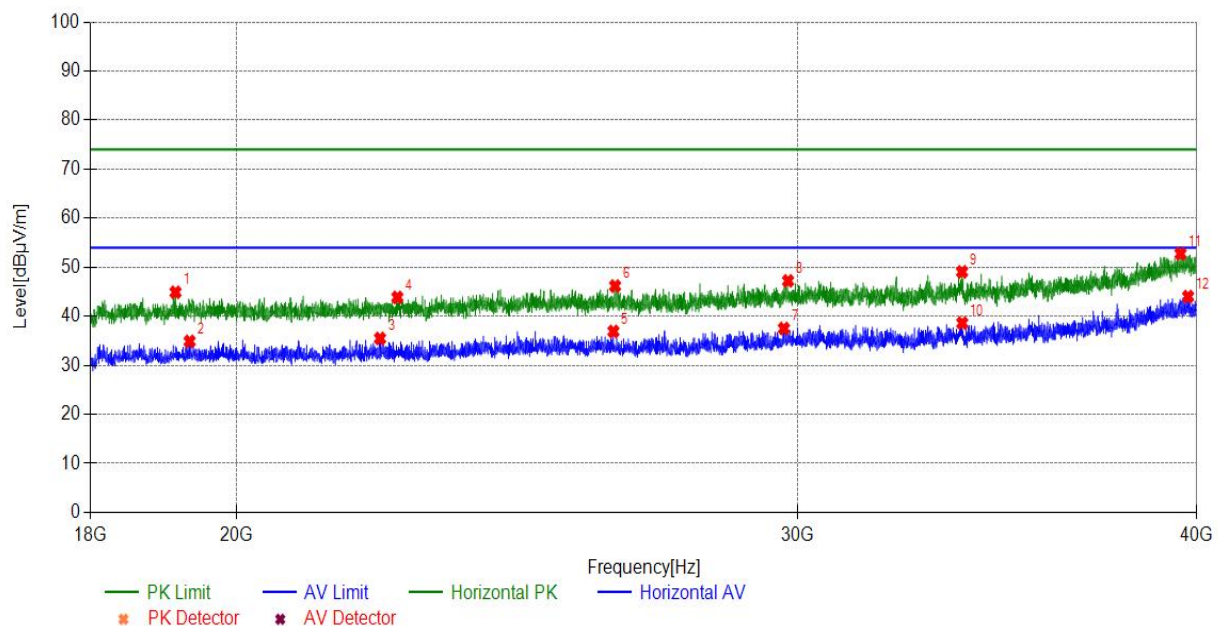


Radiates Emission		18G~40G							
polarization		Horizontal							
Test Channel		2480MHz							
Suspected List									
Frequency[MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
27221.1221	5.01	41.86	46.87	74.00	27.13	PK	150	270	PASS
32495.0495	6.10	41.75	47.85	74.00	26.15	PK	150	320	PASS
39540.1540	10.78	42.75	53.53	74.00	20.47	PK	150	320	PASS
23907.5908	3.63	42.42	46.05	74.00	27.95	PK	150	60	PASS
36008.8009	7.16	43.06	50.22	74.00	23.78	PK	150	220	PASS
21797.5798	1.85	42.63	44.48	74.00	29.52	PK	150	90	PASS
32308.0308	6.02	31.79	37.81	54.00	16.19	AV	150	10	PASS
27256.3256	5.03	31.40	36.43	54.00	17.57	AV	150	10	PASS
23837.1837	3.57	32.31	35.88	54.00	18.12	AV	150	10	PASS
39751.3751	10.79	33.00	43.79	54.00	10.21	AV	150	10	PASS
36112.2112	7.23	32.28	39.51	54.00	14.49	AV	150	10	PASS
21727.1727	1.83	33.70	35.53	54.00	18.47	AV	150	10	PASS

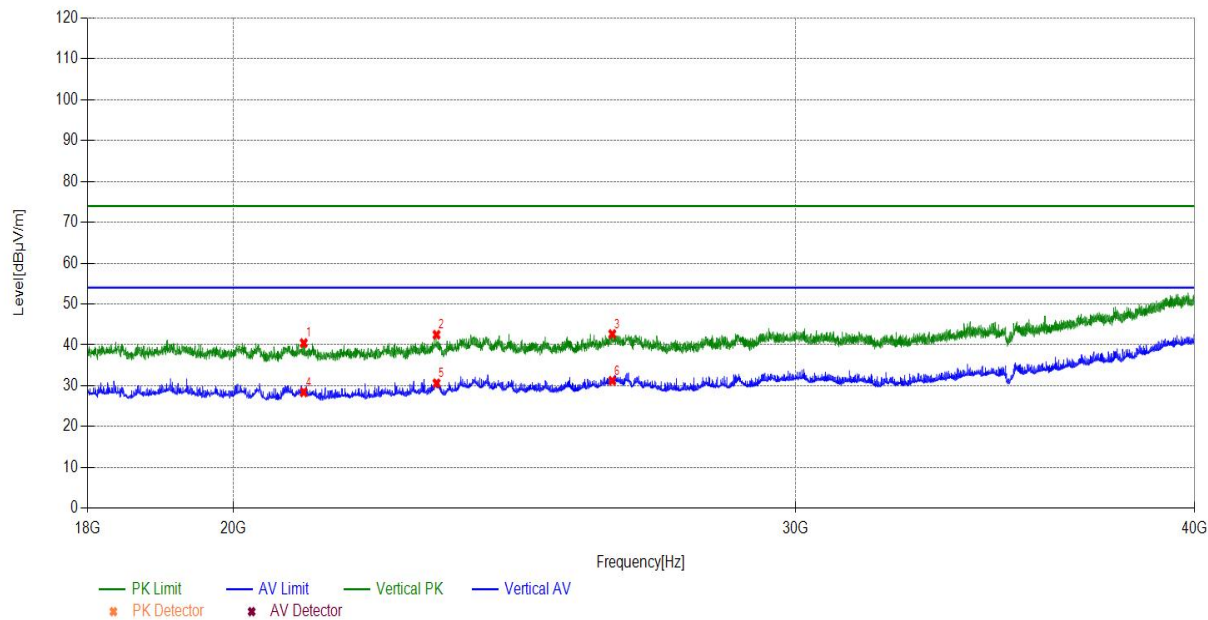


Band Edge:

During the test, the Band Edge was performed in all channels of BTP-A1T2 and BTP-A1T2S. BTP-A1T2, Horizontal Polarity are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Test channel			Lowest channel						
polarization			Horizontal						
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Height [cm]	Angle deg	Pass/ Fail
2358.5359	35.54	1.12	36.66	54.00	17.34	AV	150	296	PASS
2358.5359	35.54	12.13	47.67	74.00	26.33	PK	150	140	PASS
2373.1373	35.66	13.25	48.91	74.00	25.09	PK	150	38	PASS
2373.1373	35.66	0.95	36.61	54.00	17.39	AV	150	230	PASS
2390.1390	35.79	1.02	36.81	54.00	17.19	AV	150	247	PASS
2390.1390	35.79	12.30	48.09	74.00	25.91	PK	150	85	PASS

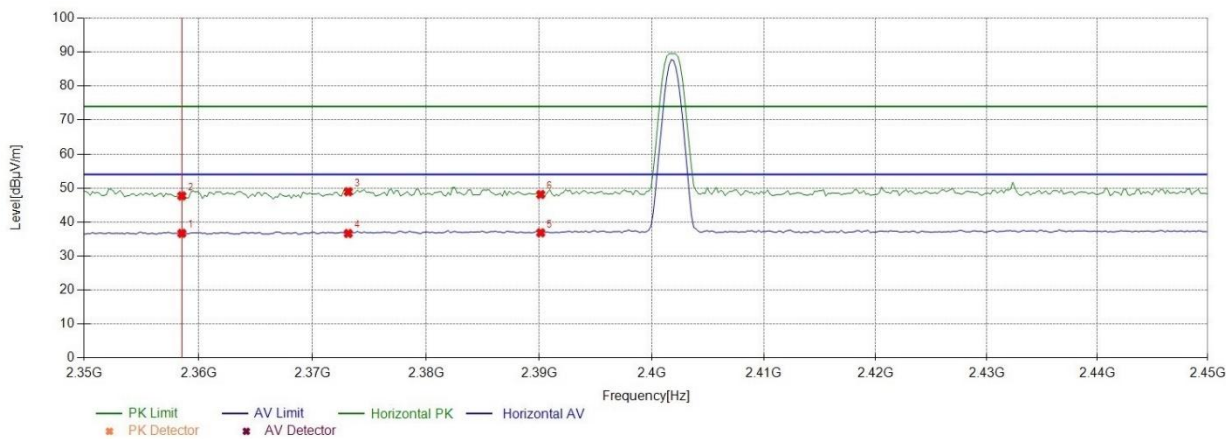

Test channel			Lowest channel						
polarization			Vertical						
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Height [cm]	Angle deg	Pass/ Fail
2483.5484	36.20	1.20	37.40	54.00	16.60	AV	150	124	PASS
2483.5484	36.20	13.37	49.57	74.00	24.43	PK	150	244	PASS
2493.9494	36.25	12.24	48.49	74.00	25.51	PK	150	44	PASS
2493.9494	36.25	1.22	37.47	54.00	16.53	AV	150	159	PASS
2524.5525	36.37	1.49	37.86	54.00	16.14	AV	150	183	PASS
2524.5525	36.37	13.49	49.86	74.00	24.14	PK	150	81	PASS

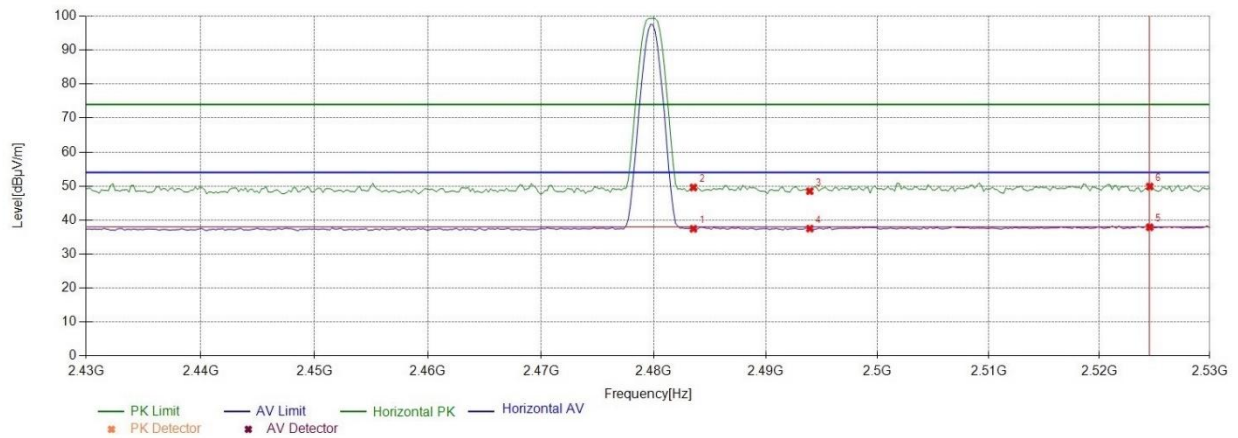

5.3 Maximum conducted output power

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.3kPa

Method of Measurement:

The EUT was tested according to DTS test procedure of ANSI C63.10 for compliance to FCC 47CFR 15.247 requirements. The maximum conducted output power using ANSI C63.10 section 11.9.2.3 AVGPM Average power meter method.

1. Power meter and sensor's minimum video bandwidth is 50MHz, larger than 802.11n(40MHz) bandwidth;
2. Fast responding diode sensors respond immediately to changes in power level to reduce total test time.
3. Use average detector to test.

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Maximum Average Conducted Output Power Level Method AVGSA-2 in KDB 558074 D01 /KDB662911 D01 for this test.

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.


Limits:

Average Output Power	$\leq 1\text{W (30dBm)}$
----------------------	--------------------------

Note: the conducted output power limit specified above is based on the use the antennas with directional gains that do not exceed 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated Levels above, as appropriate, by the amount in dB that the directional gain of antenna exceeds 6 dBi.

Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Test Setup:

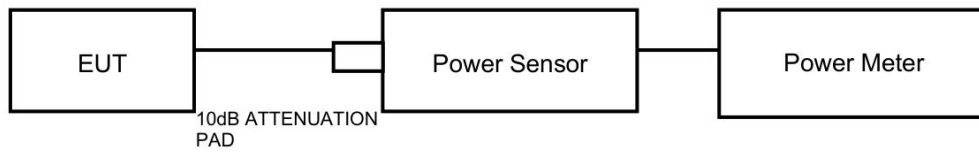

Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

Test Results:

Test Model	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BTP-A1T2	Ant1	2402	-1.33	≤ 30	PASS
	Ant1	2440	-1.49	≤ 30	PASS
	Ant1	2480	-1.81	≤ 30	PASS
BTP-A1T2S	Ant1	2402	-1.45	≤ 30	PASS
	Ant1	2440	-1.57	≤ 30	PASS
	Ant1	2480	-1.88	≤ 30	PASS

5.4 Minimum 6 dB Bandwidth

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.3kPa

Method of Measurement:

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.


Detector=Peak, Trace mode=Max hold.

Limits:

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

Minimum 6dB Bandwidth	≥ 500 kHz
-----------------------	----------------

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
2.4G Customization	Ant1	2402	0.67	2401.69	2402.36	≥0.5	PASS
		2440	0.67	2439.69	2440.36	≥0.5	PASS
		2480	0.68	2479.69	2480.36	≥0.5	PASS

5.5 Occupied Channel Bandwidth

Ambient condition:


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.3kPa

Method of Measurement:

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 50 kHz; VBW is set to 200 kHz on spectrum analyzer.

Detector=Peak, Trace mode=Max hold.

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
2.4G Customization	Ant1	2402	1.023	2401.512	2402.535	---	---
		2440	1.023	2439.512	2440.535	---	---
		2480	1.027	2479.508	2480.535	---	---

5.6 Band Edge Measurement

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.3kPa


Method of Measurement:

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer.

Limits:

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 936 \text{ Hz}$, $2 \text{ GHz}-3 \text{ GHz} = 1.407 \text{ dB}$.

Test Results:

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
2.4G Customization	Ant1	Low	2402	-1.74	-48.24	≤-21.74	PASS
		High	2480	-2.07	-45.87	≤-22.07	PASS

5.7 Maximum Power Spectral Density

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.3kPa

Method of Measurement:

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Method AVGPSD-2 in KDB 558074 D01 for this test.


The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

Limits:

Rule Part 15.247(e) specifies that" For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Maximum Power Spectral Density	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------------------------------	------------------------------------

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

Test Results:

TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
2.4G Customization	Ant1	2402	-10.06	≤ 8	PASS
		2440	-10.85	≤ 8	PASS
		2480	-11.25	≤ 8	PASS

5.8 Spurious RF Conducted Emissions

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.3kPa

Method of Measurement:

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100kHz and VBW to 300 kHz, Sweep is set to AUTO. The test is in transmitting mode.

Limits:

Rule Part 15.247(d) specifies that "In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power."

Test Setup:



Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

Test Results:

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
2.4G Customization	Ant1	2402	Reference	-1.67	-1.67	---	PASS
			30~1000	-1.67	-59.15	≤ -21.67	PASS
			1000~26500	-1.67	-46.09	≤ -21.67	PASS
		2440	Reference	-1.80	-1.80	---	PASS
			30~1000	-1.80	-57.96	≤ -21.8	PASS
			1000~26500	-1.80	-36.03	≤ -21.8	PASS
		2480	Reference	-2.15	-2.15	---	PASS
			30~1000	-2.15	-58.85	≤ -22.15	PASS
			1000~26500	-2.15	-44.33	≤ -22.15	PASS

6. Appendix X

Test Equipment	Type/Mode	SERIAL NO.	Equipment No.	Manufacturer	Cal. Due
Conducted Test: Maximum Peak Conducted Output Power, Minimum 6dB Bandwidth, Occupied Channel Bandwidth, Band Edge Measurement, Maximum Power Spectral Density, Conducted Spurious Emissions					
Communication Shielded Room 2	4m*3m*3m	CRTDSWKS44301	VGDS-0700	CRT	2024/04/24
Spectrum Analyzer	FSV40	101580	DZ-000238-3	R&S	2024/04/22
Comprehensive Test Instrument	CMW270	100304	DZ-000240-1	R&S	2023/12/06
RF Radio Frequency Switch	JS0806-2	19H9080187	DZ-000241	Tonscend	2024/05/29
Programmable DC Power Supply	E3644A	MY58036222	DZ-000178	KEYSIGHT	2024/04/12
Analog Signal Generator	N5173B	MY53270588	EM-000487-2	KEYSIGHT	2023/12/06
Vector Signal Generator	N5172B	MY53051933	EM-000487-1	KEYSIGHT	2023/12/06
Temperature and humidity meter	MHO-C201	/	DZ-000249-3	Seconds test	2024/05/29
Radiated Test: Radiated Emission, Band Edge Measurement					
3m Semi-Anechoic Chamber	FACT-4	ST08035	WKNA-0024	ETS	2024/12/12
Spectrum Analyzer	N9010B	MY57470323	DZ-000174	KEYSIGHT	2024/02/22
EMI Test Receiver	N9038A-508	MY532290079	EM-000397	Agilent	2024/02/22
Broadband Antenna	VULB 9163	9163-530	EM-000342	SCHWARZBECK	2024/06/10
Broadband Antenna	VULB 9168	01537	EM-000736-1	SCHWARZBECK	2024/04/24
Waveguide Horn Antenna	HF906	360306/008	WKNA-0024-8	R&S	2024/02/24
Waveguide Horn Antenna	BBHA9170	00949	EM-000383	SCHWARZBECK	2024/08/25
EMI Test Receiver	ESR7	102235	VG DY-0956	R&S	2024/02/22
Loop Antenna	HLA 6121	540046	EM-000546	TESEQ	2024/06/05
Semi-Anechoic Chamber(5m)	SAC-5	SAC-5-2.0	EM-000557	COMTEST	2024/11/02
Bandstop Filters	SW-BSF-240 0-100-7-A1	/	EM-000495	/	2024/08/25
5G Bandstop Filters	WRCJV12-49 00-5100-590 0-6100-50EE	1	DZ-000186	WI	2023/12/06
Preamplifier	BBV 9721	9721-050	DZ-000209-1	SCHWARZBECK	2024/06/04
EMI Test Receiver	ESR3	102394	VG DY-0705	R&S	2024/04/22
Plus Limiter (#2)	VTSD 9561	9561-F017	VG DY-0152	SCHWARZBECK	2024/09/03
Shielding Room(#2)	GP1A	001	WKNF-0006	LEINING	2024/08/07
LISN	NSLK 8127	8127644	VG DY-0150	SCHWARZBECK	2024/08/25

Detection software

Conducted Test: Maximum Peak Conducted Output Power, Minimum 6dB Bandwidth, Occupied Channel Bandwidth, Band Edge Measurement, Maximum Power Spectral Density, Conducted Spurious Emissions		
Dynacomm	Software Release	Software Developer
TS1120-3 Test System	2.6.88.0342	Tonscend
Radiated Test: Radiated Emission, Band Edge Measurement		
Dynacomm	Software Release	Software Developer
JS36-RSE Radiation stray test system	2.5.1.2	Tonscend

The End

Important

1. The test report is invalid without the official stamp of CVC;
2. Any part photocopies of the test report are forbidden without the written permission from CVC;
3. The test report is invalid without the signatures of Approval and Reviewer;
4. The test report is invalid if altered;
5. Objections to the test report must be submitted to CVC within 15 days;
6. Generally, commission test is responsible for the tested samples only;
7. As for the test result, “—”or “N” means “not applicable”, “ / ”means “not test”“P” means “pass” and “F” means “fail”.

The test data and test results given in this test report should only be used for purposes of scientific research, teaching and internal quality control when the CMA symbol is not presented.

Lab address: No.3, Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou, Guangdong, P.R. China

Post Code: 510663

Tel: 020 32293888

Fax: 020 32293889

E-mail: office@cvc.org.cn

<http://www.cvc.org.cn>