

FCC Radio Test Report

FCC ID: TE7C4000V3

This report concerns: Original Grant

Project No. : 1902C049
Equipment : AC4000 MU-MIMO Tri-Band Wi-Fi Router
Test Model : Archer C4000
Series Model : N/A
Applicant : TP-Link Technologies Co., Ltd.
Address : Building 24(floors1,3,4,5) and 28(floors1-4) Central
Science and Technology Park, Shennan Rd,
Nanshan, Shenzhen, China

Date of Receipt : Feb. 20, 2019
Date of Test : Feb. 20, 2019 ~ Apr. 12, 2019
Issued Date : May 13, 2019
Tested by : BTL Inc.

Testing Engineer

: Welly Zhou
(Welly Zhou)

Technical Manager

: Steven Lu
(Steven Lu)

Authorized Signatory

: Ethan Ma
(Ethan Ma)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Certificate #5123.02

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and is not use in determining the Pass/Fail results.

Table of Contents

Page

REPORT ISSUED HISTORY	6
1 . GENERAL SUMMARY	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 PARAMETERS OF TEST SOFTWARE	14
3.4 DUTY CYCLE	15
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	17
3.6 SUPPORT UNITS	17
4 . AC POWER LINE CONDUCTED EMISSIONS TEST	18
4.1 LIMIT	18
4.2 TEST PROCEDURE	18
4.3 DEVIATION FROM TEST STANDARD	18
4.4 TEST SETUP	19
4.5 EUT OPERATION CONDITIONS	19
4.6 EUT TEST CONDITIONS	19
4.7 TEST RESULTS	19
5 . RADIATED EMISSIONS TEST	20
5.1 LIMIT	20
5.2 TEST PROCEDURE	21
5.3 DEVIATION FROM TEST STANDARD	21
5.4 TEST SETUP	22
5.5 EUT OPERATION CONDITIONS	23
5.6 EUT TEST CONDITIONS	23
5.7 TEST RESULTS - 9 KHZ TO 30 MHZ	23
5.8 TEST RESULTS - 30 MHZ TO 1000 MHZ	23
5.9 TEST RESULTS - ABOVE 1000 MHZ	23
6 . BANDWIDTH TEST	24
6.1 LIMIT	24
6.2 TEST PROCEDURE	24

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	24
6.4 TEST SETUP	24
6.5 EUT OPERATION CONDITIONS	24
6.6 EUT TEST CONDITIONS	24
6.7 TEST RESULTS	24
7 . MAXIMUM AVERAGE OUTPUT POWER TEST	25
7.1 LIMIT	25
7.2 TEST PROCEDURE	25
7.3 DEVIATION FROM STANDARD	25
7.4 TEST SETUP	25
7.5 EUT OPERATION CONDITIONS	25
7.6 EUT TEST CONDITIONS	25
7.7 TEST RESULTS	25
8 . CONDUCTED SPURIOUS EMISSIONS	26
8.1 LIMIT	26
8.2 TEST PROCEDURE	26
8.3 DEVIATION FROM STANDARD	26
8.4 TEST SETUP	26
8.5 EUT OPERATION CONDITIONS	26
8.6 EUT TEST CONDITIONS	26
8.7 TEST RESULTS	26
9 . POWER SPECTRAL DENSITY TEST	27
9.1 LIMIT	27
9.2 TEST PROCEDURE	27
9.3 DEVIATION FROM STANDARD	27
9.4 TEST SETUP	27
9.5 EUT OPERATION CONDITIONS	27
9.6 EUT TEST CONDITIONS	27
9.7 TEST RESULTS	27
10 . MEASUREMENT INSTRUMENTS LIST	28
11 . EUT TEST PHOTO	30
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	34
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	37

Table of Contents**Page**

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	42
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	45
APPENDIX E - BANDWIDTH	246
APPENDIX F - MAXIMUM AVERAGE OUTPUT POWER	257
APPENDIX G - CONDUCTED SPURIOUS EMISSIONS	268
APPENDIX H - POWER SPECTRAL DENSITY	299

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Apr. 23, 2019
R01	Modified the comments of TCB.	May 13, 2019

1. GENERAL SUMMARY

Equipment : AC4000 MU-MIMO Tri-Band Wi-Fi Router
Brand Name : tp-link
Test Model : Archer C4000
Series Model : N/A
Applicant : TP-Link Technologies Co., Ltd.
Manufacturer : TP-Link Technologies Co., Ltd.
Address : Building 24(floors1,3,4,5) and 28(floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China
Date of Test : Feb. 20, 2019 ~ Apr. 12, 2019
Test Sample : Engineering Sample No.: D190201479
Standard(s) : FCC Part15, Subpart C (15.247)
ANSI C63.10-2013
FCC KDB 558074 D01 DTS Meas Guidance v05r02
FCC KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1902C049) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of A2LA according to the ISO/IEC 17025 quality assessment standard and technical standard(s).

Test results included in this report are only for the WLAN 2.4 GHz part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15, Subpart C (15.247)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Average Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 kHz ~ 30 MHz	2.32

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9 KHz~30 MHz	V	3.79
		9 KHz~30 MHz	H	3.57
		30 MHz~200 MHz	V	3.82
		30 MHz~200 MHz	H	3.78
		200 MHz~1,000 MHz	V	4.10
		200 MHz~1,000 MHz	H	4.06
		1 GHz~18 GHz	V	3.12
		1 GHz~18 GHz	H	3.68
		18 GHz~40 GHz	V	4.15
		18 GHz~40 GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	AC4000 MU-MIMO Tri-Band Wi-Fi Router
Brand Name	tp-link
Test Model	Archer C4000
Series Model	N/A
Model Difference(s)	N/A
Power Source	DC voltage supplied from AC/DC adapter. Model: S050FU1200400
Power Rating	I/P: 100-240V~ 50/60Hz 1.5A Max O/P: 12.0V $\overline{=}$ 4000mA
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM IEEE vht: QAM1024
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 450 Mbps IEEE vht: up to 750 Mbps
Maximum Average Output Power_Non-Beamforming	IEEE 802.11b: 28.47 dBm (0.7031 W) IEEE 802.11g: 28.56 dBm (0.7178 W) IEEE 802.11n (HT20): 28.56 dBm (0.7178 W) IEEE 802.11n (HT40): 22.41 dBm (0.1742 W) IEEE vht20: 28.84 dBm (0.7656 W) IEEE vht40: 23.58 dBm (0.2280 W)
Maximum Average Output Power_With Beamforming	IEEE 802.11n (HT20): 28.81 dBm (0.7603 W) IEEE 802.11n (HT40): 24.42 dBm (0.2767 W) IEEE vht20: 28.80 dBm (0.7586 W) IEEE vht40: 24.76 dBm (0.2992 W)




Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 - CH11 for 802.11b, 802.11g, 802.11n(20 MHz), vht(20 MHz)							
CH03 - CH09 for 802.11n(40 MHz), vht(40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1		N/A	Dipole	N/A	1.8
2		N/A	Dipole	N/A	1.8
3		N/A	Dipole	N/A	1.8

Note: This EUT supports CDD, and all antennas have the same gain,
Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows:

(1) Non-Beamforming function,

For power spectral density measurements, $N_{ANT} = 3$, $N_{SS} = 1$.

So Directional gain = $G_{ANT} + \text{Array Gain} = 10 \log (N_{ANT} / N_{SS}) \text{ dB}$
 $= 1.8 + 10 \log (3/1) \text{ dBi} = 6.57$.

Then, the power density limit is $8 - (6.57 - 6) = 7.43$.

For power measurements, Array Gain = 0 dB ($N_{ANT} \leq 4$), so the Directional gain = 1.8.

(2) Beamforming function, Beamforming Gain: 4.77 dB.

So Directional gain = $4.77 + 1.8 = 6.57$. Then, the average output power limit is
 $30 - (6.57 - 6) = 29.43$. The power density limit is $8 - (6.57 - 6) = 7.43$.

4. Table for Antenna Configuration:

Operating Mode	TX Mode	3TX
IEEE 802.11b		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11g		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11n (HT20)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11n (HT40)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE vht20		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE vht40		V (Ant. 1 + Ant. 2 + Ant. 3)

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09
Mode 5	TX vht-20 MHz Mode Channel 01/06/11
Mode 6	TX vht-40 MHz Mode Channel 03/06/09
Mode 7	TX vht-20 MHz Mode Channel 06
Mode 8	TX B Mode Channel 01/02/06/10/11
Mode 9	TX G Mode Channel 01/02/06/10/11
Mode 10	TX N-20 MHz Mode Channel 01/02/06/10/11
Mode 11	TX N-40 MHz Mode Channel 03/04/06/08/09
Mode 12	TX vht-20 MHz Mode Channel 01/02/06/10/11
Mode 13	TX vht-40 MHz Mode Channel 03/04/06/08/09

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode:	Description
Mode 7	TX vht-20 MHz Mode Channel 06

Radiated emissions test – Below 1G	
Final Test Mode:	Description
Mode 7	TX vht-20 MHz Mode Channel 06

Radiated emissions test – Above 1G	
Final Test Mode:	Description
Mode 8	TX B Mode Channel 01/02/06/10/11
Mode 9	TX G Mode Channel 01/02/06/10/11
Mode 10	TX N-20 MHz Mode Channel 01/02/06/10/11
Mode 11	TX N-40 MHz Mode Channel 03/04/06/08/09
Mode 12	TX vht-20 MHz Mode Channel 01/02/06/10/11
Mode 13	TX vht-40 MHz Mode Channel 03/04/06/08/09

Band edge test	
Final Test Mode:	Description
Mode 8	TX B Mode Channel 01/02/06/10/11
Mode 9	TX G Mode Channel 01/02/06/10/11
Mode 10	TX N-20 MHz Mode Channel 01/02/06/10/11
Mode 11	TX N-40 MHz Mode Channel 03/04/06/08/09
Mode 12	TX vht-20 MHz Mode Channel 01/02/06/10/11
Mode 13	TX vht-40 MHz Mode Channel 03/04/06/08/09

Conducted test	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09
Mode 5	TX vht-20 MHz Mode Channel 01/06/11
Mode 6	TX vht-40 MHz Mode Channel 03/06/09

NOTE:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1 Mbps)
 802.11g mode: OFDM (6 Mbps)
 802.11n HT20 mode : BPSK (19.5 Mbps)
 802.11n HT40 mode : BPSK (40.5 Mbps)
 vht20 mode : BPSK (19.5 Mbps)
 vht40 mode : BPSK (40.5 Mbps)
 For radiated emission tests, the highest output powers were set for final test.
- (3) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (4) For radiated emission below 1 GHz test, the IEEE vht20 channel 06 is found to be the worst case and recorded.
- (5) For radiated emission above 1 GHz test, 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.

3.3 PARAMETERS OF TEST SOFTWARE

Non-Beamforming

Test Software	accessMTool_REL_3_0_0_1		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	90	94	94
IEEE 802.11g	71	90	74
IEEE 802.11n (HT20)	71	92	72
IEEE vht20	71	91	72
Frequency (MHz)	2422	2437	2452
IEEE 802.11n (HT40)	58	67	55
IEEE vht40	53	66	54


With Beamforming

Test Software	accessMTool_REL_3_0_0_1		
Frequency (MHz)	2412	2437	2462
IEEE 802.11n (HT20)	76	92	78
IEEE vht20	76	91	79
Frequency (MHz)	2422	2437	2452
IEEE 802.11n (HT40)	65	72	65
IEEE vht40	63	72	65

3.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
If duty cycle is $< 98\%$, duty factor shall be considered.
The output power = measured power + duty factor.


IEEE 802.11b

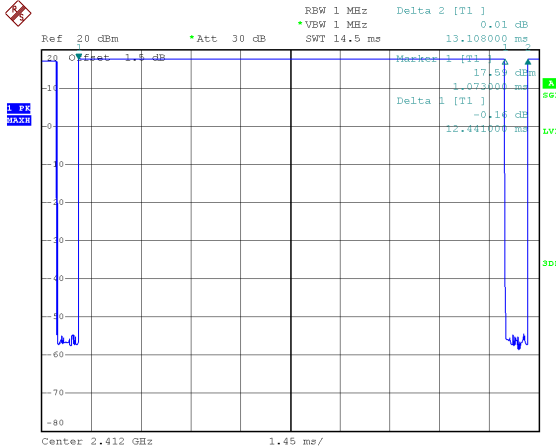

Date: 2.MAR.2019 16:52:10

Duty cycle = $12.441 \text{ ms} / 13.108 \text{ ms} = 94.91\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.23$


IEEE 802.11n (HT20)

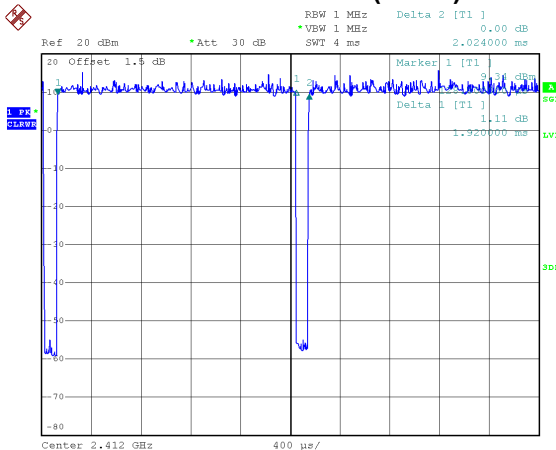

Date: 2.MAR.2019 16:53:18

Duty cycle = $1.920 \text{ ms} / 2.024 \text{ ms} = 94.86\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.23$


IEEE 802.11g

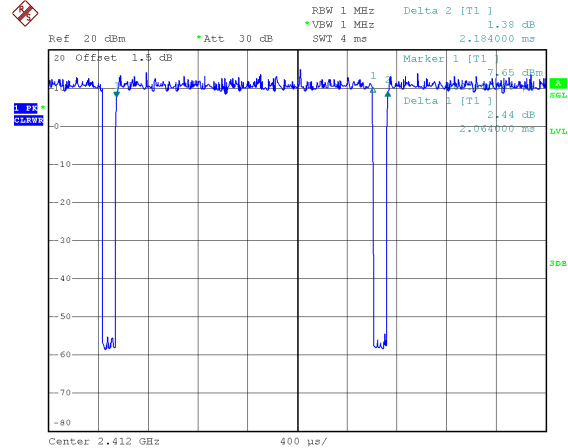

Date: 2.MAR.2019 16:52:43


Duty cycle = $2.064 \text{ ms} / 2.184 \text{ ms} = 94.51\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.25$

IEEE 802.11n (HT40)

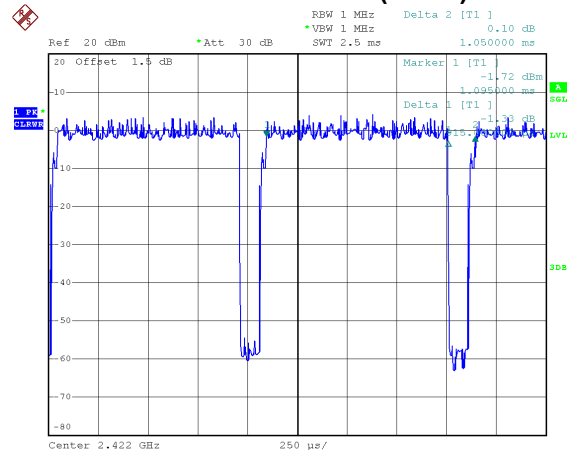


Date: 2.MAR.2019 16:53:54

Duty cycle = $0.915 \text{ ms} / 1.050 \text{ ms} = 87.14\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.60$

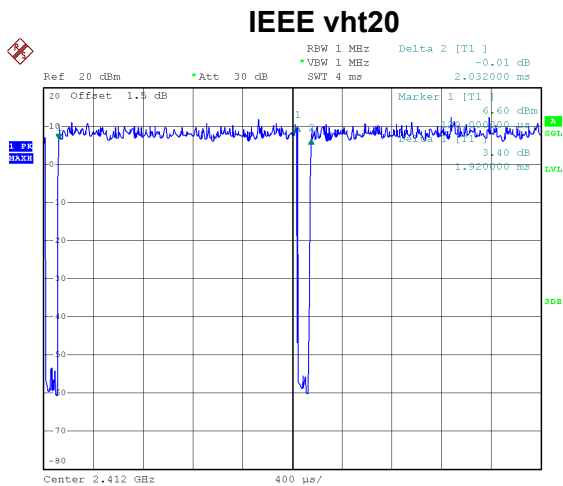

Date: 18.MAR.2019 10:46:26

Duty cycle = 1.920 ms / 2.032 ms = 94.49%
Duty Factor = 10 log(1/Duty cycle) = 0.25

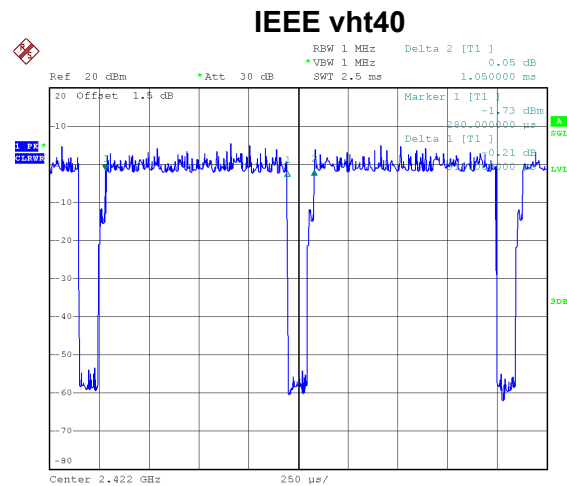

Date: 18.MAR.2019 10:46:50

Duty cycle = 0.915 ms / 1.050 ms = 87.14%
Duty Factor = 10 log(1/Duty cycle) = 0.60

NOTE:


For IEEE 802.11g, IEEE 802.11n (HT20), IEEE vht20:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

For IEEE 802.11n (HT40), IEEE vht40:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

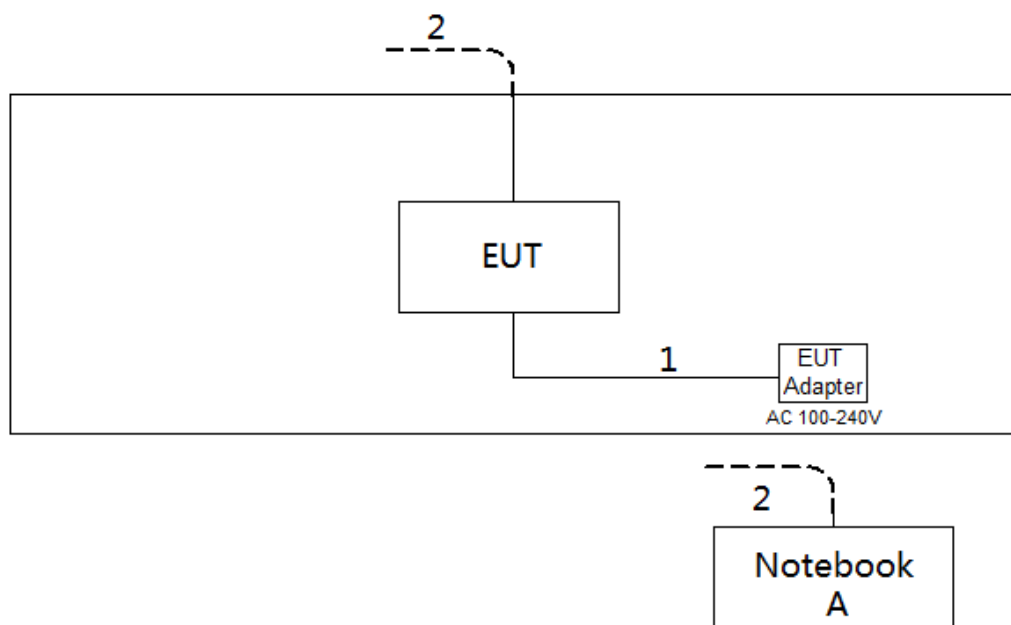

3.6 SUPPORT UNITS

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	DC Cable
2	NO	NO	10m	RJ45 Cable

4. AC POWER LINE CONDUCTED EMISSIONS TEST

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

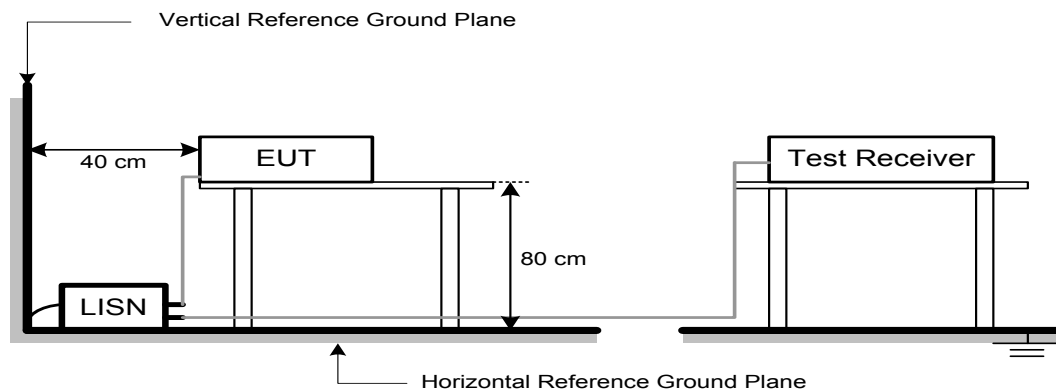

4.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

4.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 53% Test Voltage: AC 120V/60Hz

4.7 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS TEST

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

5.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item -EUT Test Photos.

5.3 DEVIATION FROM TEST STANDARD


No deviation

5.4 TEST SETUP


9 kHz-30 MHz

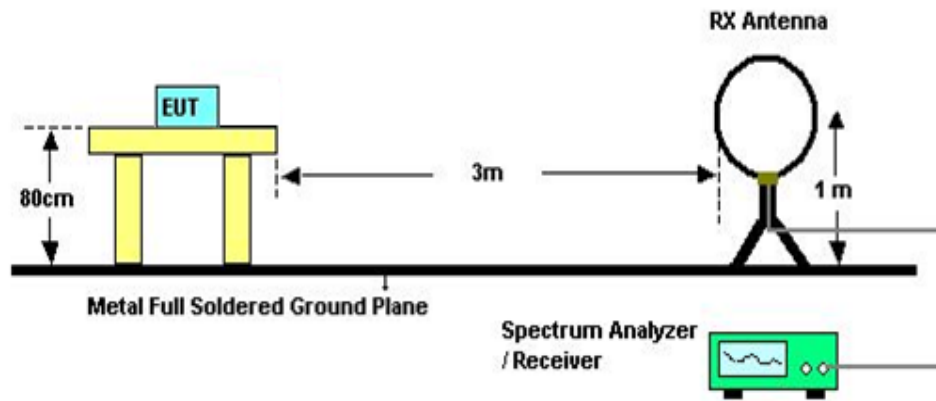

30 MHz to 1 GHz

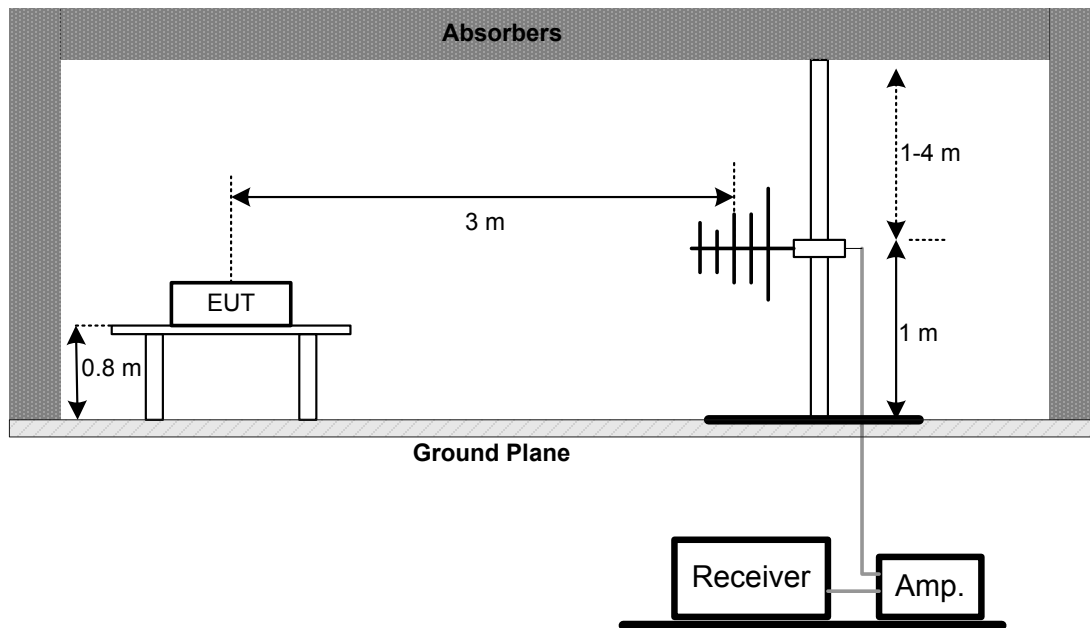

Above 1 GHz

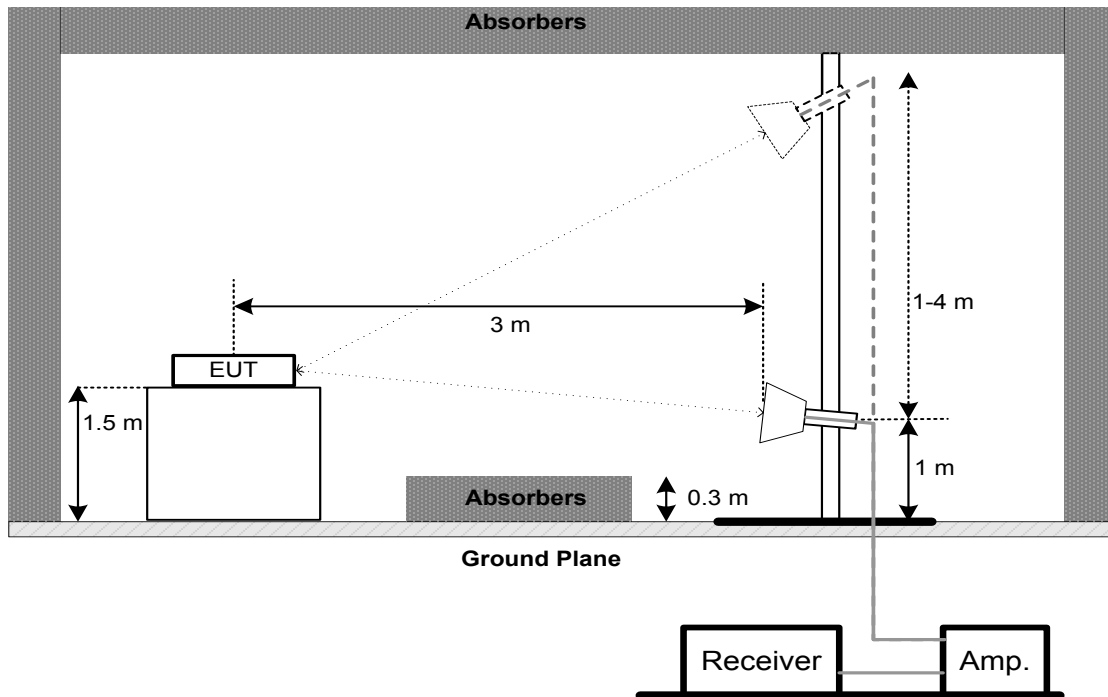

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 68% Test Voltage: AC 120V/60Hz

5.7 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.8 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.9 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH TEST

6.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-


6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- For 6dB Bandwidth Spectrum setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.
For 99% OBW Spectrum Setting: For B,G,N20,vht20 mode: RBW= 300KHz, VBW=1MHz,For N40,vht40 mode: RBW= 1MHz, VBW=3MHz, Sweep time = 2.5 ms.
- The bandwidth was performed in accordance with method 11.8 of ANSI C63.10-2013.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

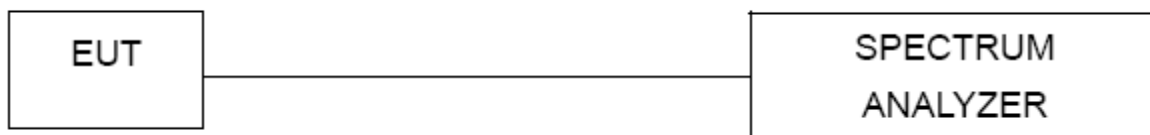

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 EUT TEST CONDITIONS

Temperature: 23°C Relative Humidity: 68% Test Voltage: AC 120V/60Hz

6.7 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM AVERAGE OUTPUT POWER TEST

7.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(b)(3)	Maximum Average Output Power	1 Watt or 30dBm

7.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.2.3 of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 EUT TEST CONDITIONS

Temperature: 23°C Relative Humidity: 68% Test Voltage: AC 120V/60Hz

7.7 TEST RESULTS

Please refer to the APPENDIX F.

8. CONDUCTED SPURIOUS EMISSIONS

8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 EUT TEST CONDITIONS

Temperature: 23°C Relative Humidity: 68% Test Voltage: AC 120V/60Hz

8.7 TEST RESULTS

Please refer to the APPENDIX G.

9. POWER SPECTRAL DENSITY TEST

9.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)


9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=3 kHz, VBW=10 kHz, Sweep time = Auto.
- The Power Spectral Density was performed in accordance with method 11.10.2 of ANSI C63.10-2013.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

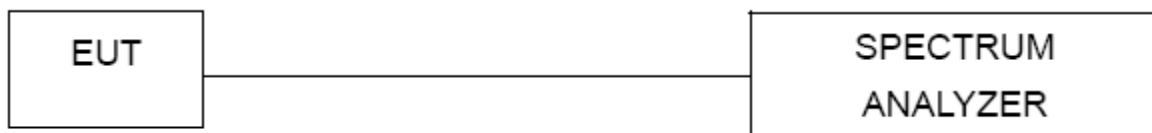

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 EUT TEST CONDITIONS

Temperature: 23°C Relative Humidity: 68% Test Voltage: AC 120V/60Hz

9.7 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 10, 2020
2	LISN	EMCO	3816/2	52765	Mar. 10, 2020
3	50ohm Terminator	SHX	TF5-3	15041305	Mar. 10, 2020
4	Artificial-Mains Network	SCHWARZBECK	NSLK 8127	8127685	Mar. 10, 2020
5	TRANSIENT LIMITER	EM	EM-7600	772	Mar. 10, 2020
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	Cable	N/A	RG223	12m	Mar. 12, 2020

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Jan. 15, 2020
2	Cable	N/A	RG 213/U	C-102	Jun. 01, 2019
3	EMI Test Receiver	R&S	ESCI	100895	Mar. 10, 2020
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 09, 2020
2	Amplifier	HP	8447D	2944A09673	Aug. 11, 2019
3	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
4	Cable	emci	LMR-400(30MHz-1GHz)(8m+5m)	N/A	May 25, 2019
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 09, 2020
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 30, 2019
3	Amplifier	Agilent	8449B	3008A02333	Mar. 10, 2020
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 10, 2020
5	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	mitron	B10-01-01-12M	18072744	Jul. 30, 2019
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Maximum Average Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	P-series power meter	Agilent	N1911A	MY45100473	Aug. 11, 2019
2	wideband power sensor	Agilent	N1921A	MY51100041	Aug. 11, 2019

Antenna Conducted Spurious Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 11, 2019

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

11. EUT TEST PHOTO

AC Power Line Conducted Emissions Test Photos





Radiated Emissions Test Photos

9 kHz to 30 MHz




Radiated Emissions Test Photos

30 MHz to 1 GHz

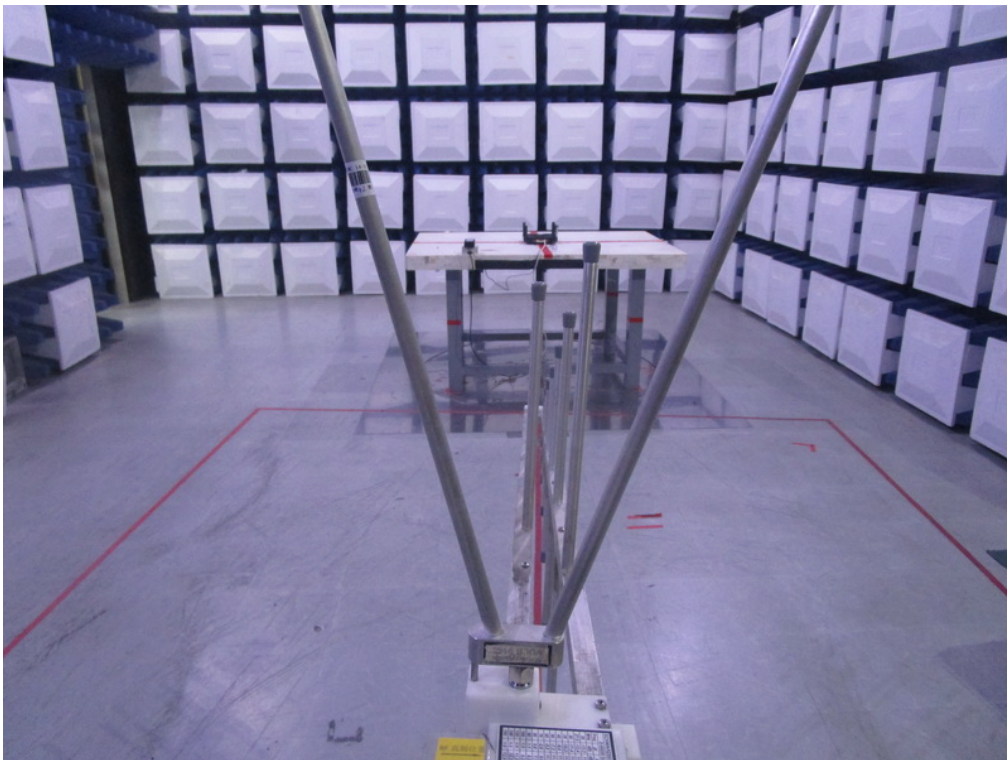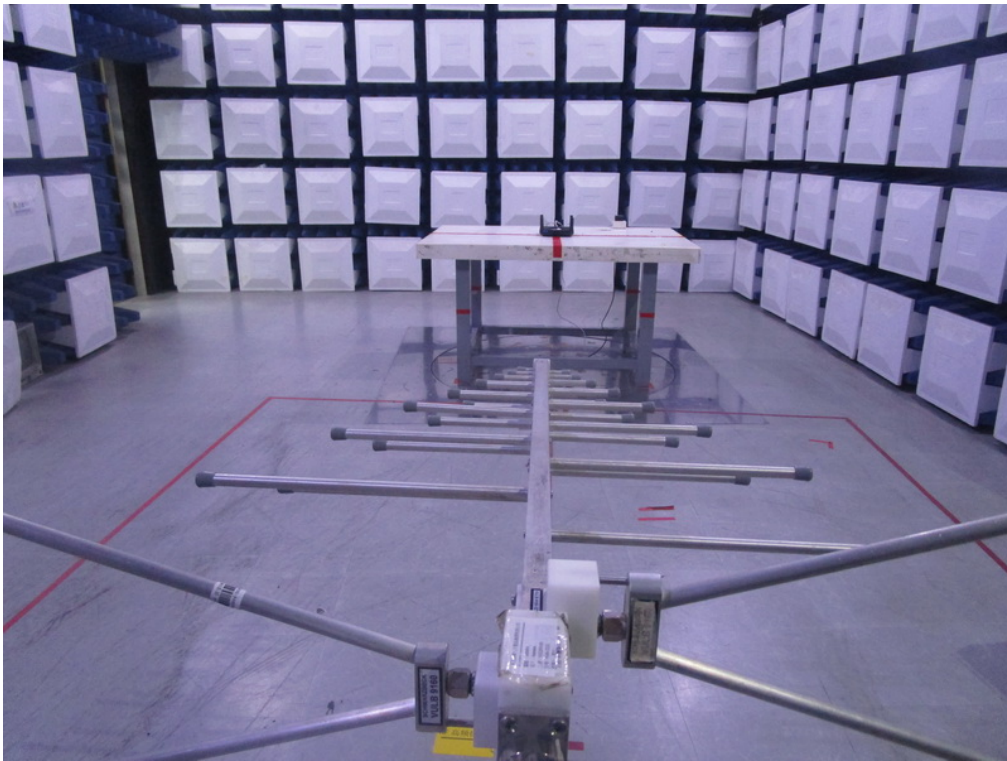

Radiated Emissions Test Photos


Above 1 GHz

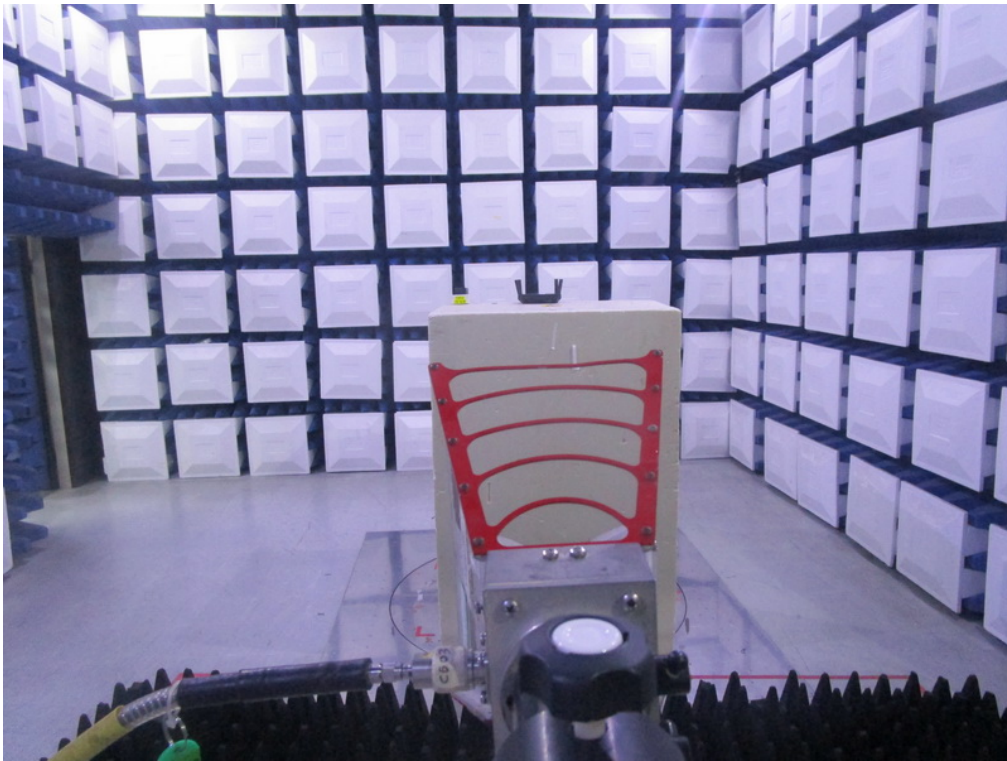

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode: TX vht-20M MODE CHANNEL 06

Line

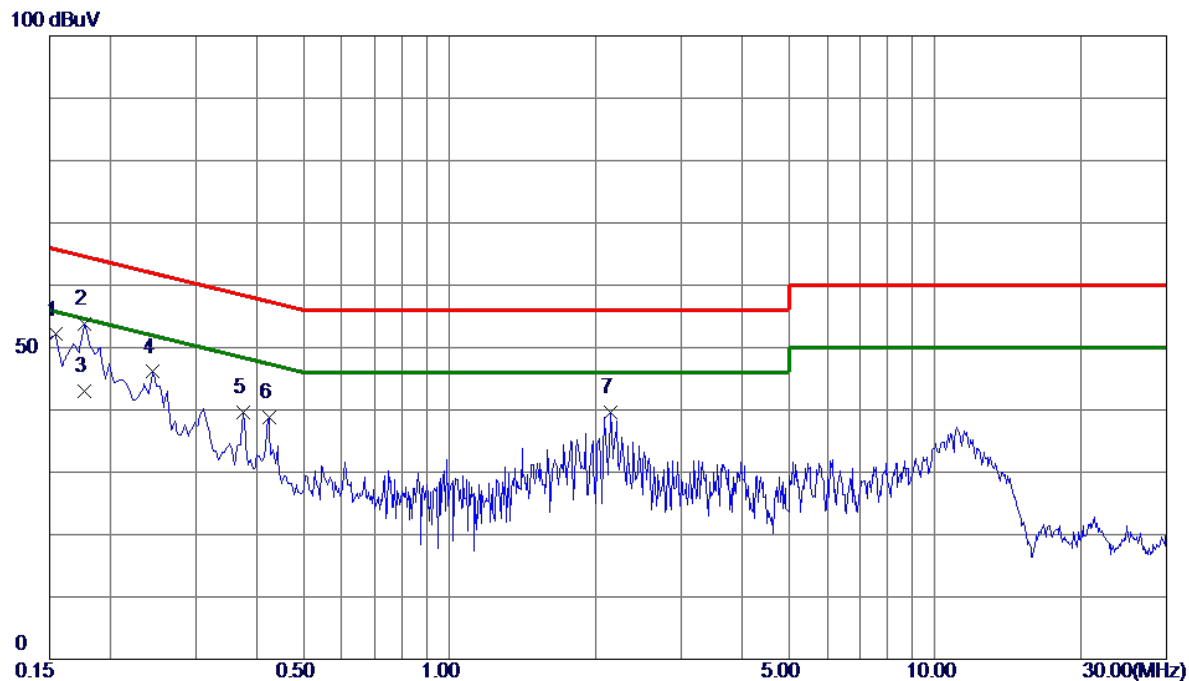

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1545	42.28	9.82	52.10	65.75	-13.65	Peak	
2 *	0.1770	43.91	9.82	53.73	64.63	-10.90	Peak	
3	0.1770	33.13	9.82	42.95	54.63	-11.68	AVG	
4	0.2445	36.28	9.82	46.10	61.94	-15.84	Peak	
5	0.3750	29.86	9.81	39.67	58.39	-18.72	Peak	
6	0.4245	29.02	9.80	38.82	57.36	-18.54	Peak	
7	2.1480	29.65	10.01	39.66	56.00	-16.34	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M MODE CHANNEL 06

Neutral

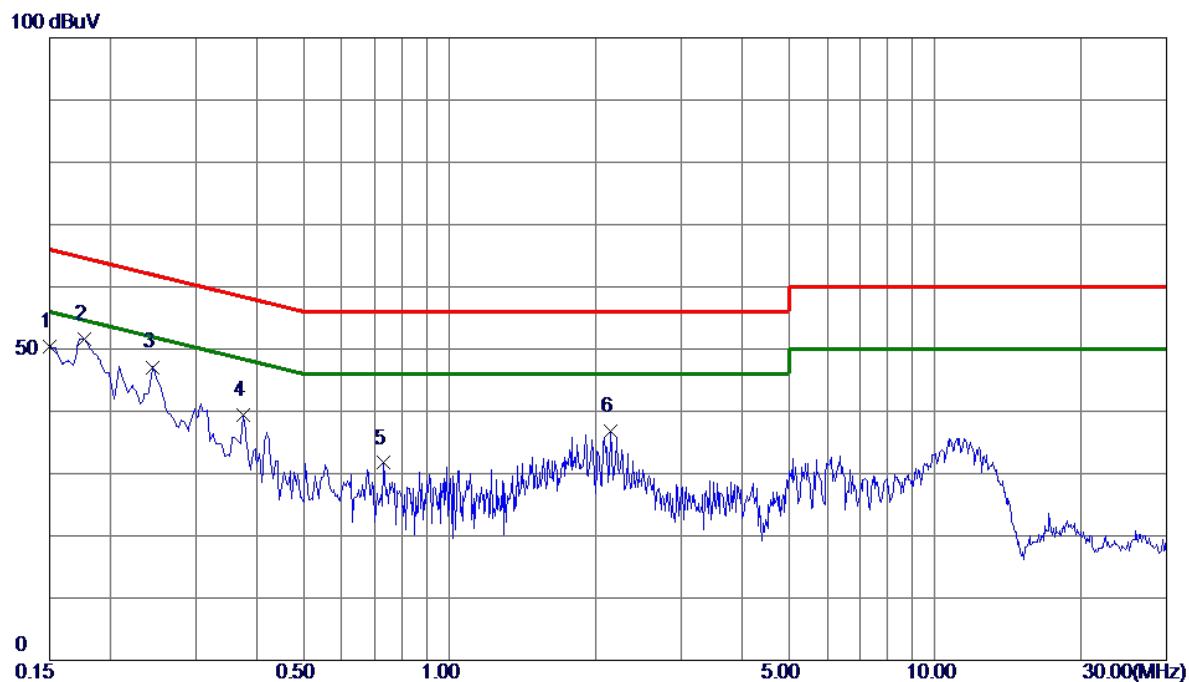

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1500	40.48	9.91	50.39	66.00	-15.61	Peak	
2 *	0.1770	41.72	9.91	51.63	64.63	-13.00	Peak	
3	0.2445	37.18	9.92	47.10	61.94	-14.84	Peak	
4	0.3750	29.50	9.95	39.45	58.39	-18.94	Peak	
5	0.7304	21.64	10.06	31.70	56.00	-24.30	Peak	
6	2.1480	26.63	10.20	36.83	56.00	-19.17	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode: TX vht-20M MODE CHANNEL 06

Ant 0°

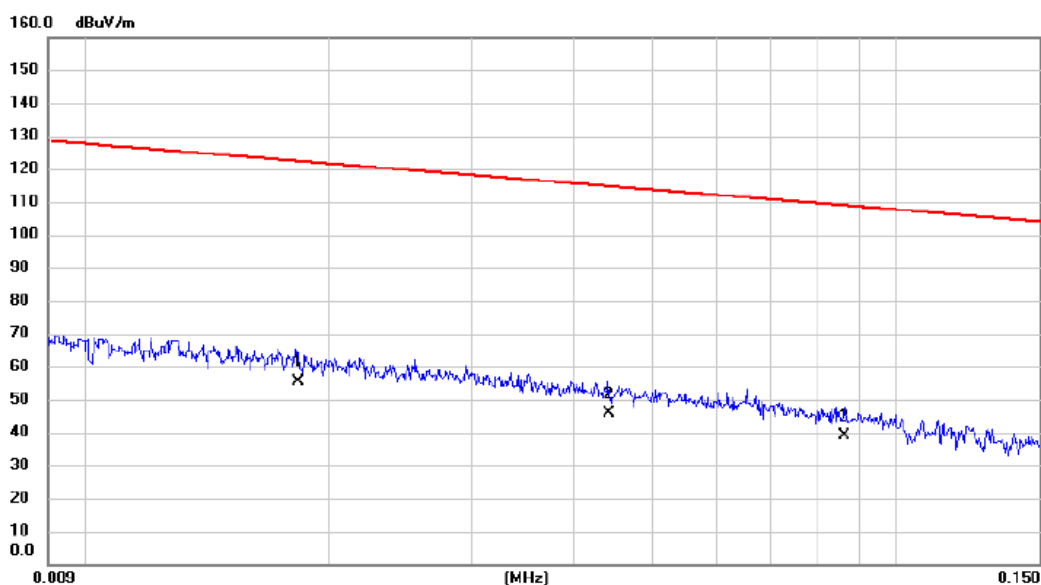


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0183	35.10	20.26	55.36	122.36	-67.00	AVG	
2		0.0442	26.20	19.63	45.83	114.70	-68.87	AVG	
3		0.0863	20.40	18.77	39.17	108.88	-69.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M MODE CHANNEL 06

Ant 0°

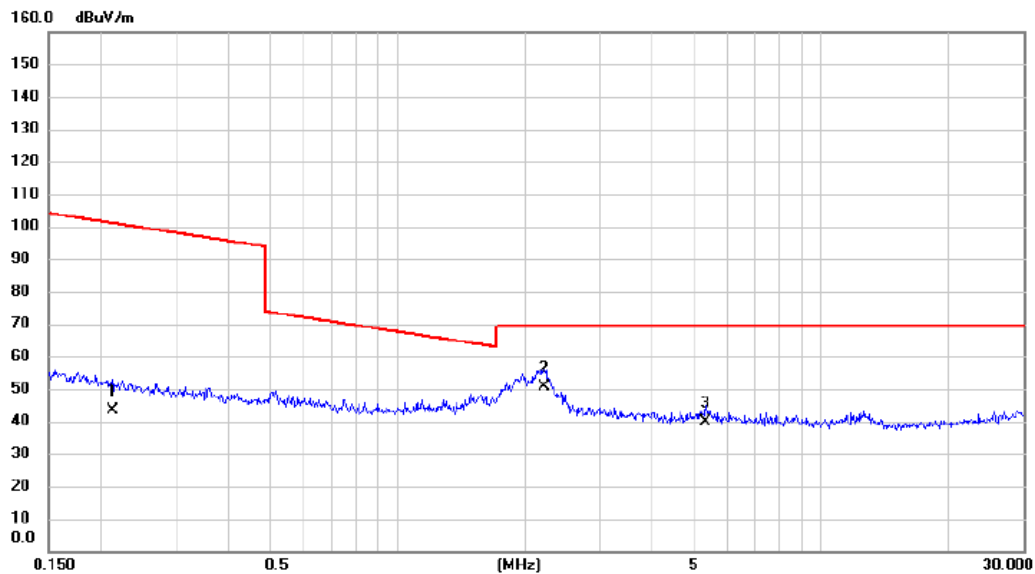

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2134	26.10	17.13	43.23	101.02	-57.79	AVG	
2	*	2.2250	33.81	16.98	50.79	69.54	-18.75	QP	
3		5.3332	24.90	15.10	40.00	69.54	-29.54	QP	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M MODE CHANNEL 06

Ant 90°

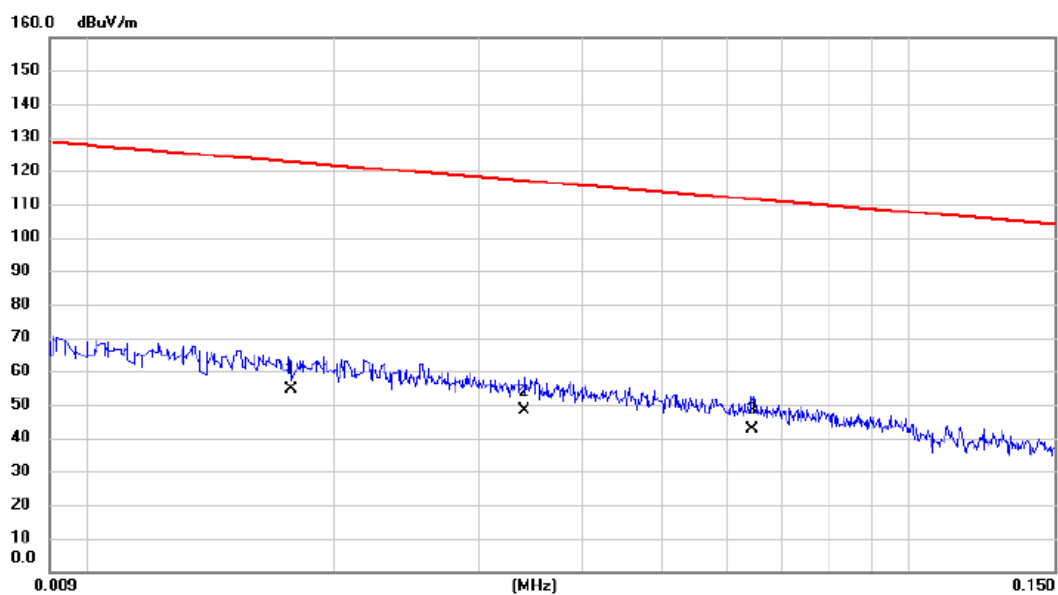

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0177	34.10	20.34	54.44	122.65	-68.21	AVG	
2		0.0340	28.50	19.80	48.30	116.98	-68.68	AVG	
3		0.0643	23.40	19.24	42.64	111.44	-68.80	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M MODE CHANNEL 06

Ant 90°

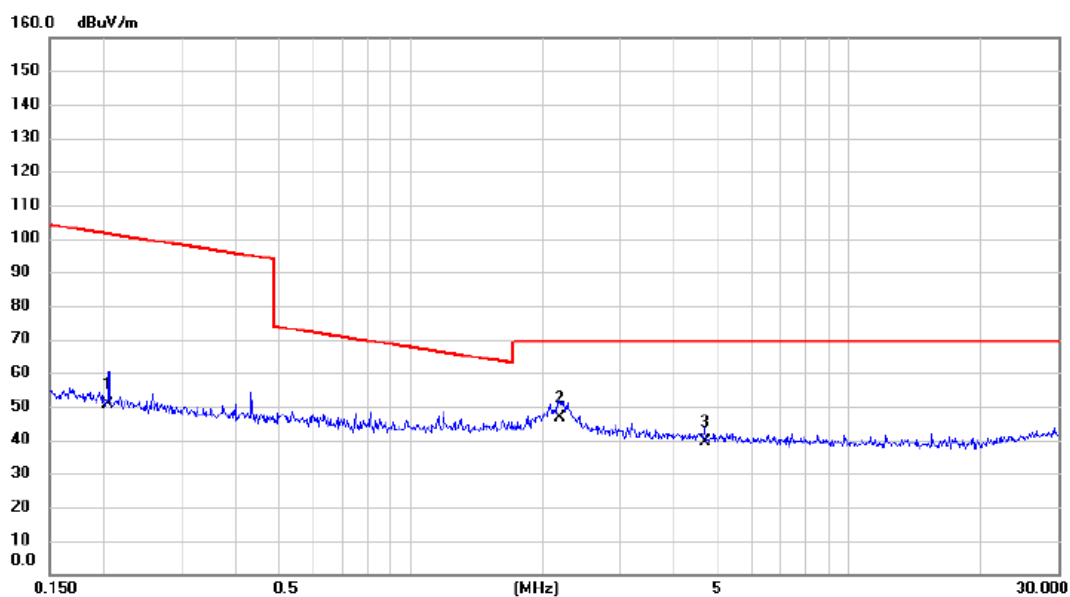

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2045	33.60	17.15	50.75	101.39	-50.64	AVG	
2	*	2.1956	29.70	17.00	46.70	69.54	-22.84	QP	
3		4.6964	24.10	15.34	39.44	69.54	-30.10	QP	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode: TX vht-20M MODE CHANNEL 06

Vertical

80 dBuV/m

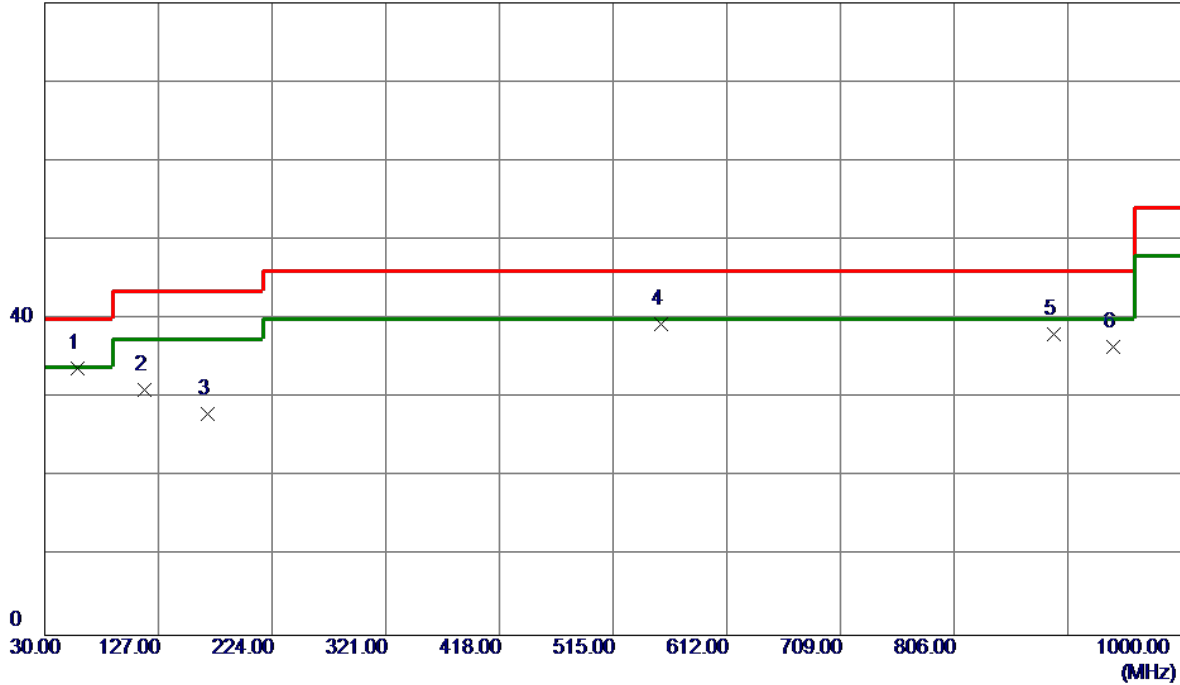

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	58.1300	49.23	-15.42	33.81	40.00	-6.19	Peak	
2	115.3600	46.50	-15.43	31.07	43.50	-12.43	Peak	
3	168.7100	39.07	-11.12	27.95	43.50	-15.55	Peak	
4	555.7400	44.94	-5.56	39.38	46.00	-6.62	Peak	
5	891.3600	38.86	-0.81	38.05	46.00	-7.95	Peak	
6	941.8000	35.33	1.08	36.41	46.00	-9.59	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX vht-20M MODE CHANNEL 06

Horizontal

80 dBuV/m

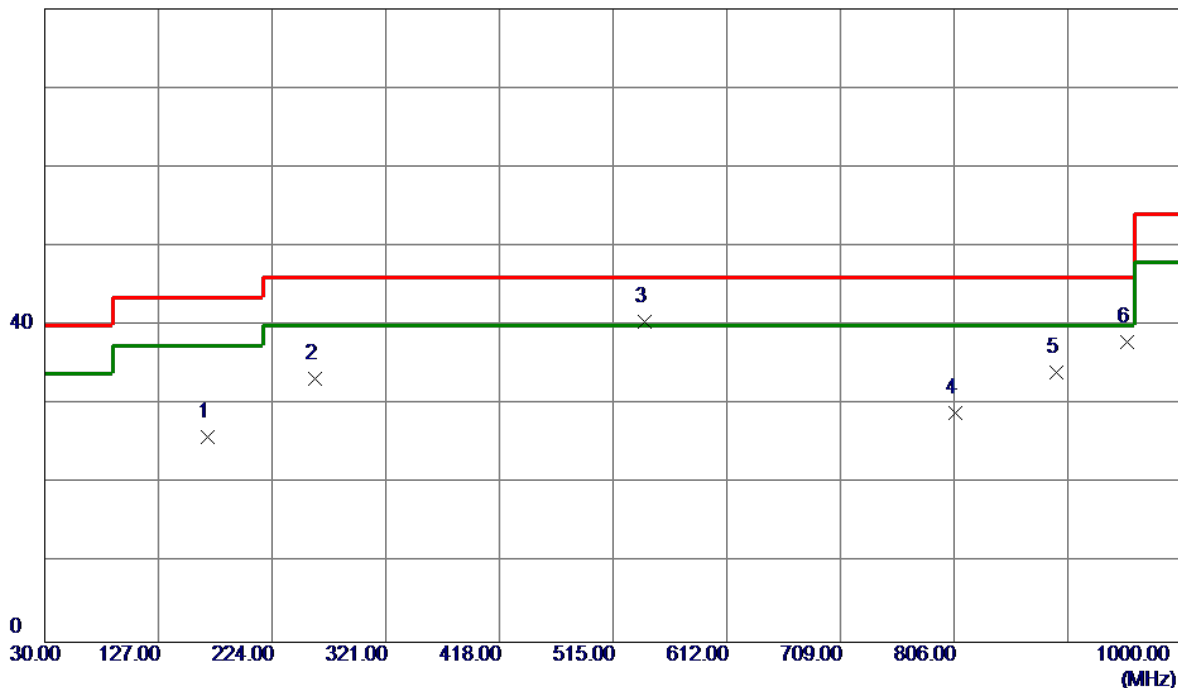

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	168.7100	37.04	-11.12	25.92	43.50	-17.58	Peak	
2	260.8599	46.73	-13.42	33.31	46.00	-12.69	Peak	
3 *	542.1599	46.44	-5.94	40.50	46.00	-5.50	Peak	
4	806.9699	30.04	-1.15	28.89	46.00	-17.11	Peak	
5	893.3000	34.78	-0.76	34.02	46.00	-11.98	Peak	
6	953.4400	36.62	1.33	37.95	46.00	-8.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.


APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Non-Beamforming

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical

130 dBuV/m

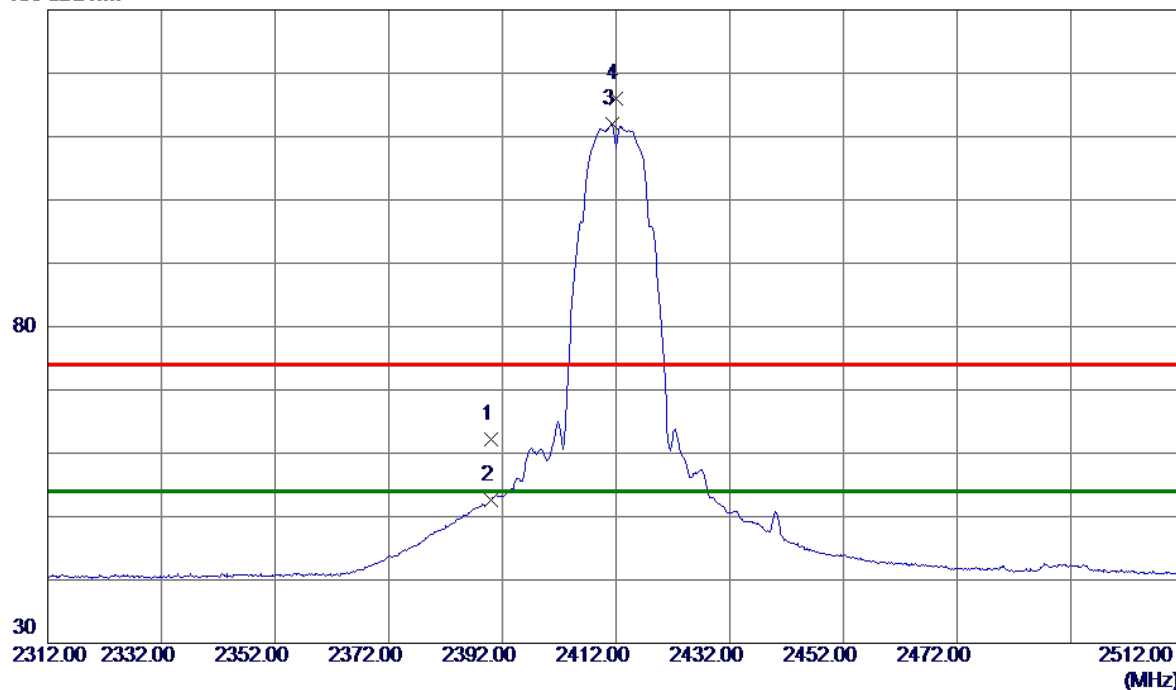

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	53.01	9.11	62.12	74.00	-11.88	Peak	
2	2390.0000	43.57	9.11	52.68	54.00	-1.32	AVG	
3 *	2411.3000	102.86	9.16	112.02	54.00	58.02	AVG	No Limit
4	2412.0000	106.86	9.16	116.02	74.00	42.02	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical

80 dBuV/m

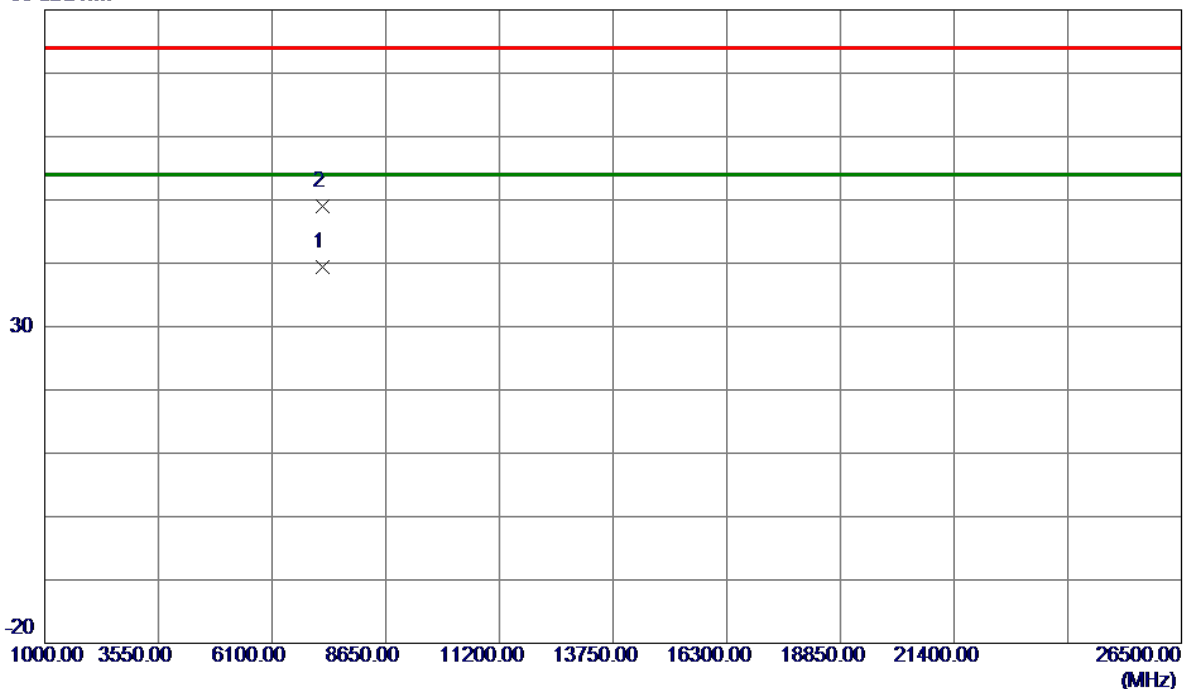


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7237.0000	30.16	9.22	39.38	54.00	-14.62	AVG	
2	7237.1100	39.83	9.22	49.05	74.00	-24.95	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal

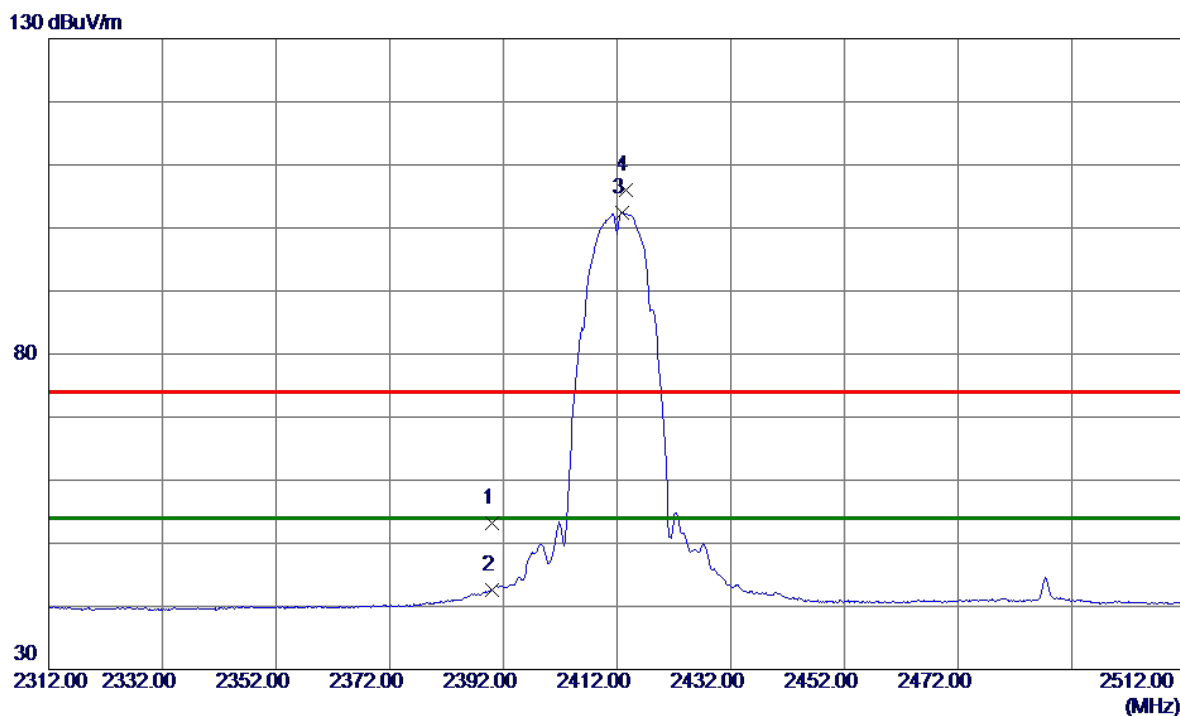

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	44.11	9.11	53.22	74.00	-20.78	Peak	
2	2390.0000	33.46	9.11	42.57	54.00	-11.43	AVG	
3 *	2412.8000	93.27	9.17	102.44	54.00	48.44	AVG	No Limit
4	2413.5000	96.82	9.17	105.99	74.00	31.99	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal

80 dBuV/m

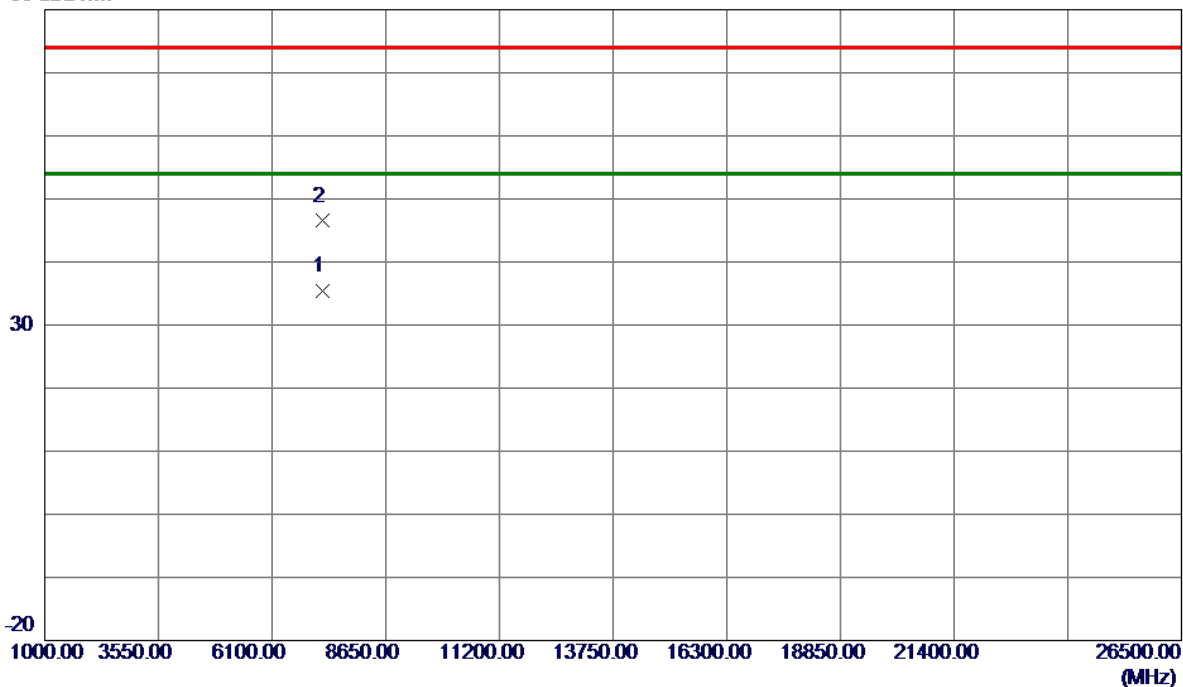

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7237.4200	26.11	9.22	35.33	54.00	-18.67	AVG	
2	7245.9600	37.26	9.24	46.50	74.00	-27.50	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2417 MHz

Vertical

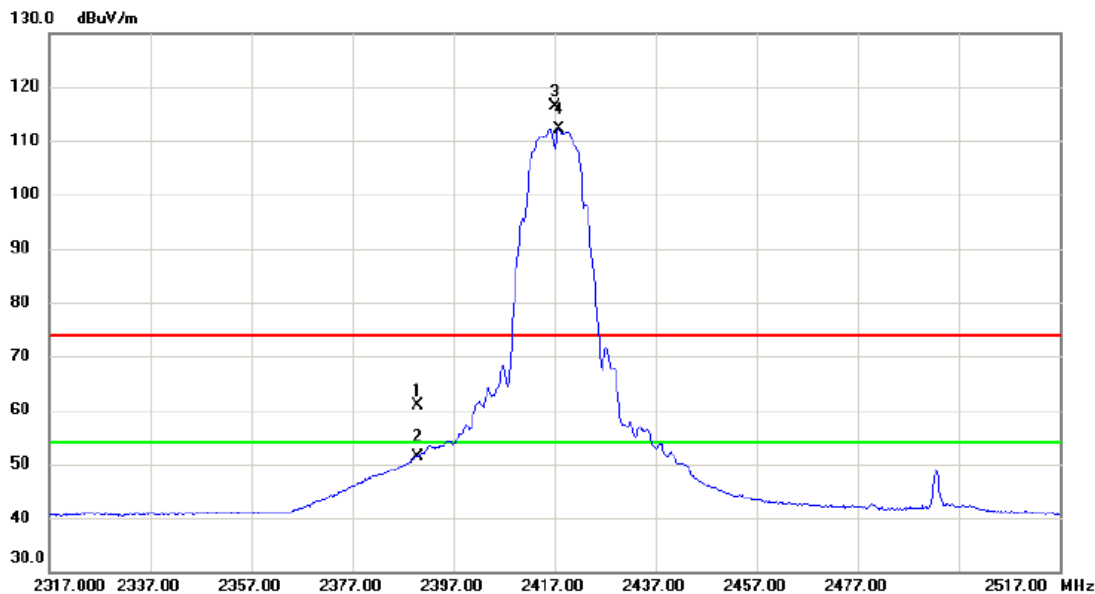


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	51.70	9.11	60.81	74.00	-13.19	peak	
2		2390.000	42.38	9.11	51.49	54.00	-2.51	AVG	
3	X	2417.000	107.10	9.18	116.28	74.00	42.28	peak	No Limit
4	*	2417.800	102.98	9.18	112.16	54.00	58.16	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2417 MHz

Vertical

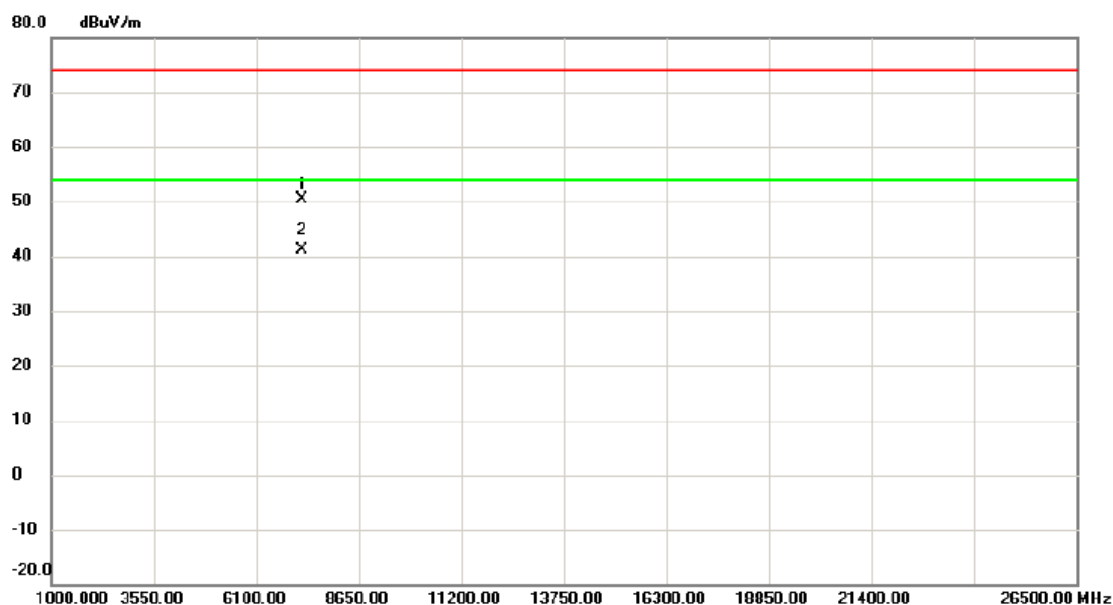


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7249.790	41.13	9.25	50.38	74.00	-23.62	peak	
2	*	7250.330	31.83	9.24	41.07	54.00	-12.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2417 MHz

Horizontal

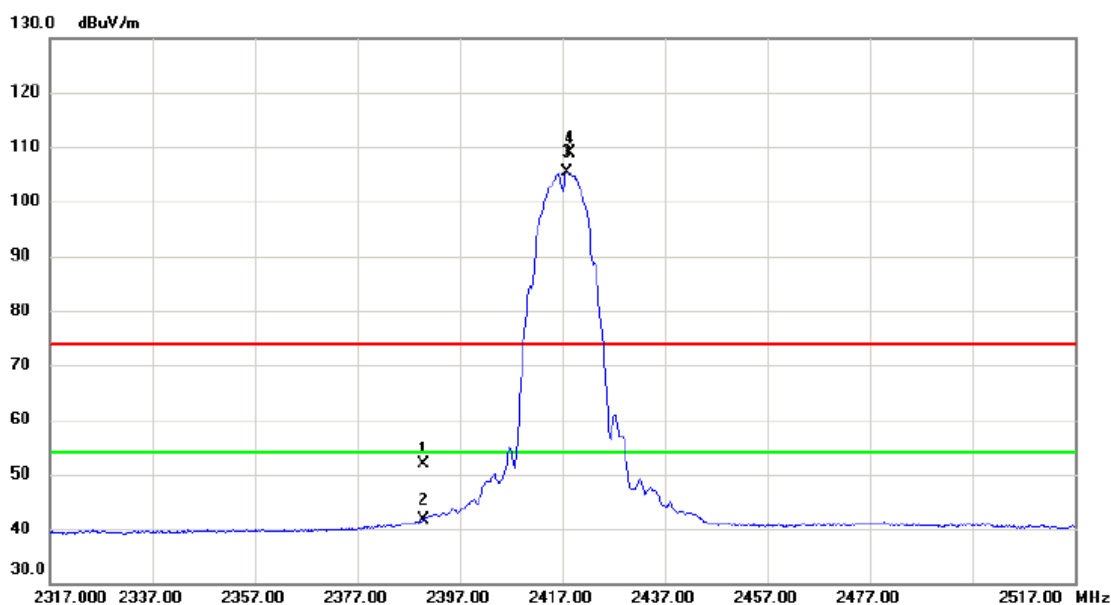


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	42.82	9.11	51.93	74.00	-22.07	peak	
2		2390.000	32.62	9.11	41.73	54.00	-12.27	AVG	
3	*	2417.800	96.22	9.18	105.40	54.00	51.40	AVG	No Limit
4	X	2418.400	99.75	9.18	108.93	74.00	34.93	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2417 MHz

Horizontal

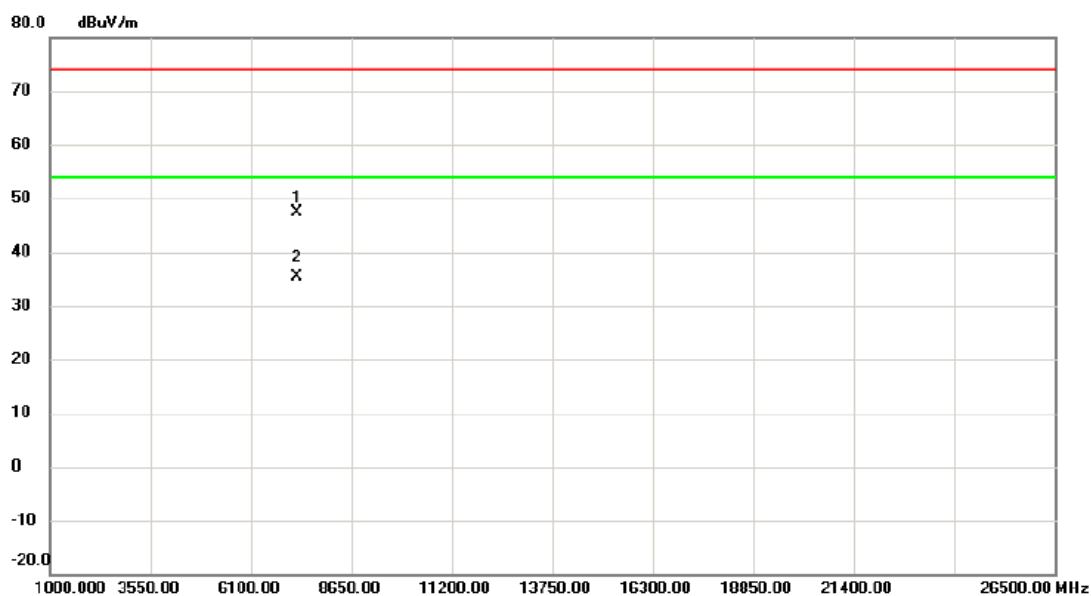

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7258.100	38.03	9.25	47.28	74.00	-26.72	peak	
2	*	7259.110	26.14	9.25	35.39	54.00	-18.61	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical

130 dBuV/m

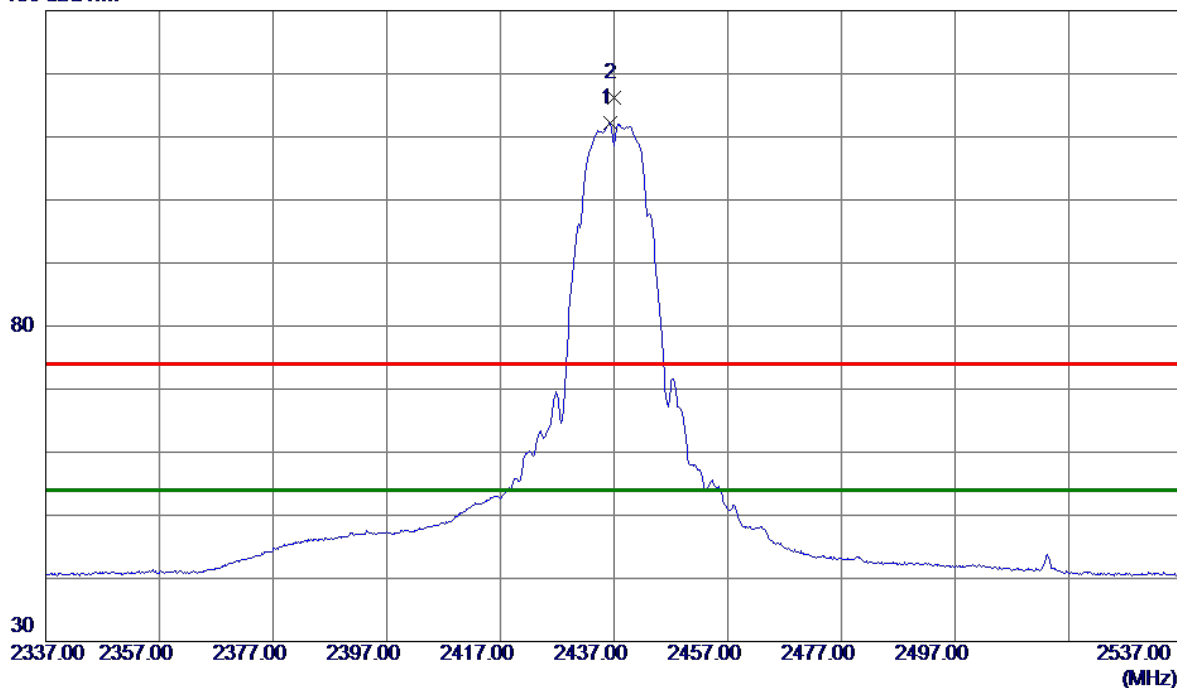

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2436.3000	102.98	9.23	112.21	54.00	58.21	AVG	No Limit
2	2437.0000	107.03	9.23	116.26	74.00	42.26	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical

80 dBuV/m

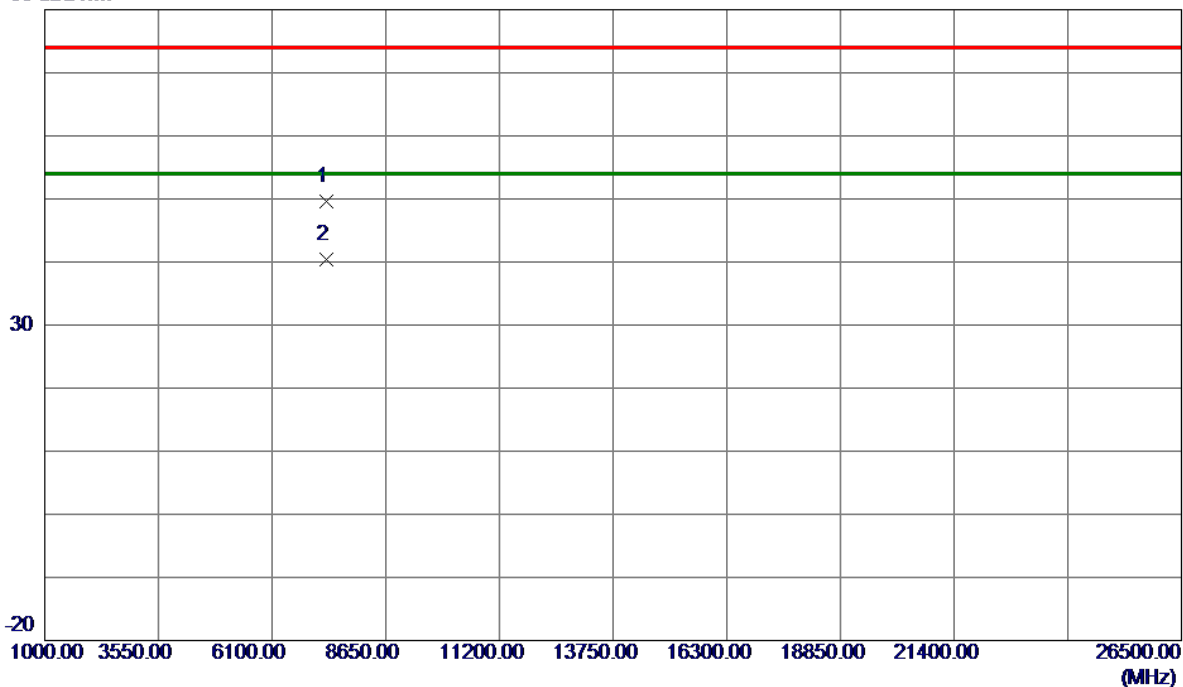


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7310.1200	40.27	9.36	49.63	74.00	-24.37	Peak	
2 *	7310.2700	31.07	9.36	40.43	54.00	-13.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal

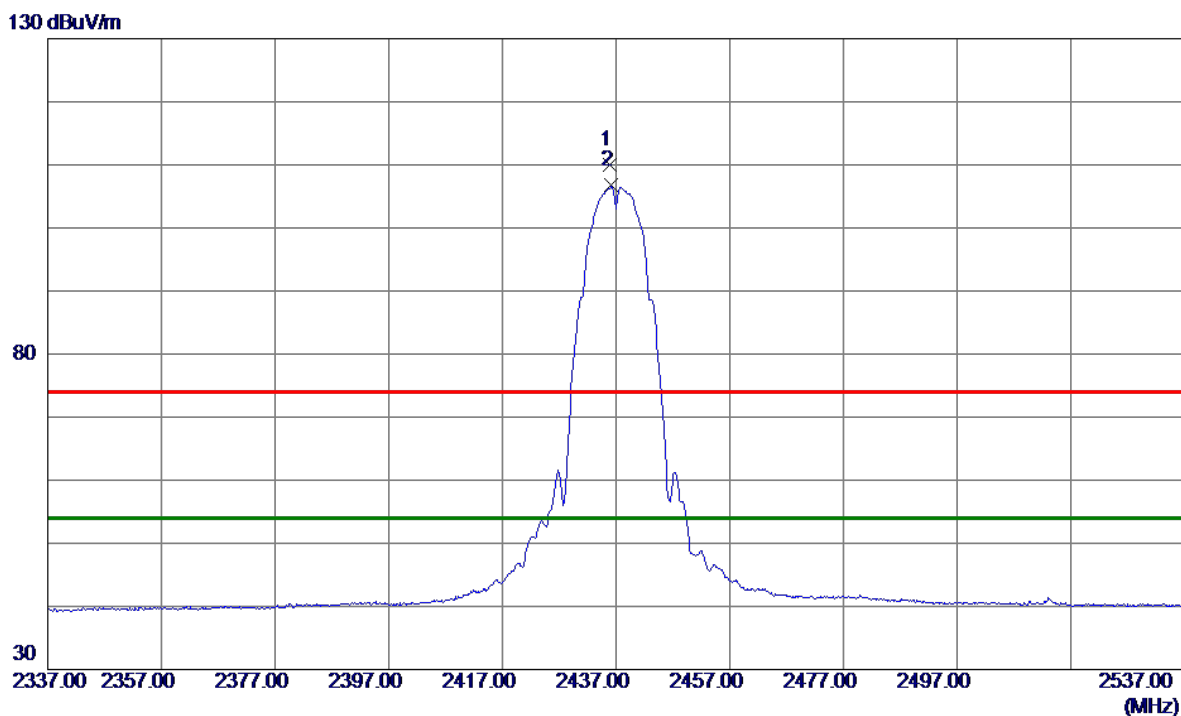

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2435.9000	100.74	9.23	109.97	74.00	35.97	Peak	No Limit
2 *	2436.2000	97.52	9.23	106.75	54.00	52.75	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal

80 dBuV/m

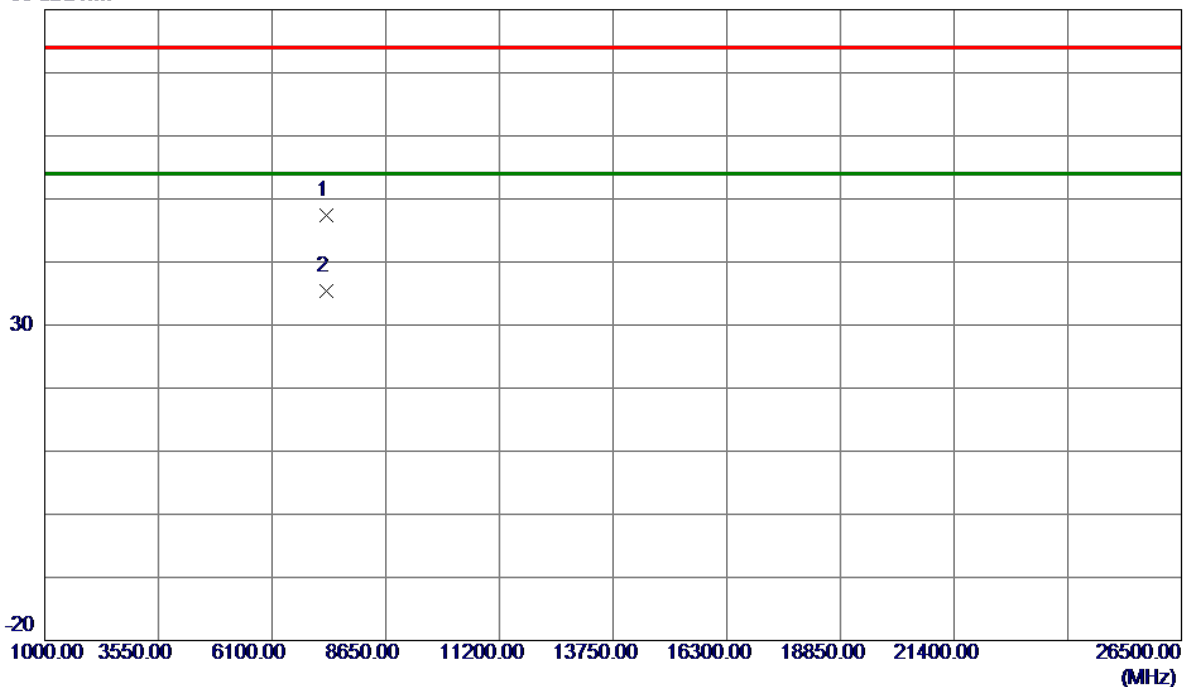

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7305.3500	37.99	9.35	47.34	74.00	-26.66	Peak	
2 *	7311.7000	26.09	9.36	35.45	54.00	-18.55	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2457 MHz

Vertical

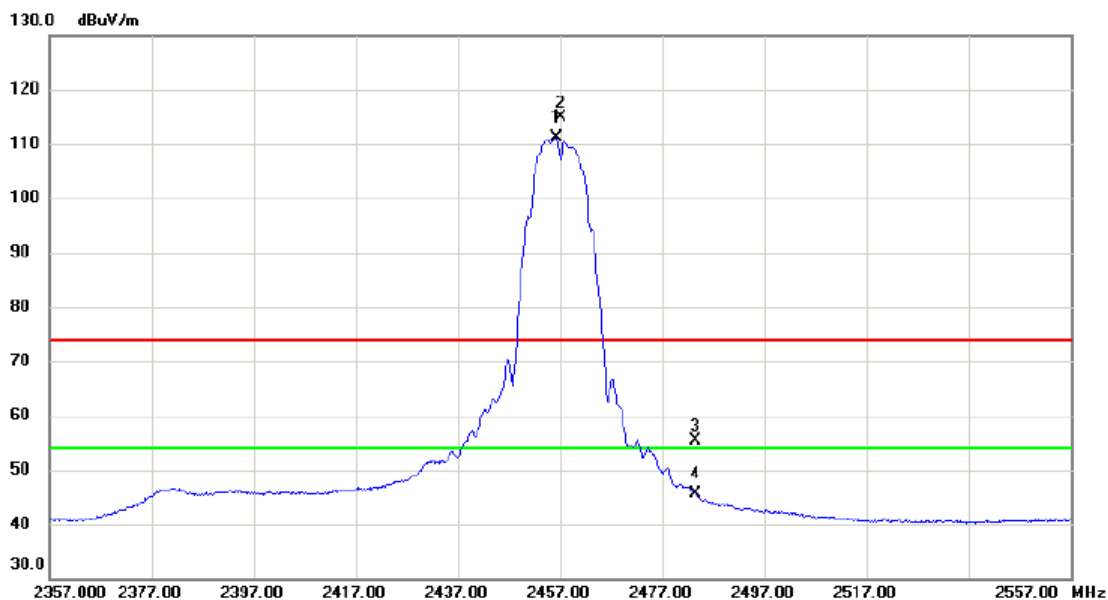


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2456.300	101.75	9.28	111.03	54.00	57.03	AVG	No Limit
2	X	2457.000	105.69	9.28	114.97	74.00	40.97	peak	No Limit
3		2483.500	45.99	9.35	55.34	74.00	-18.66	peak	
4		2483.500	36.31	9.35	45.66	54.00	-8.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2457 MHz

Vertical

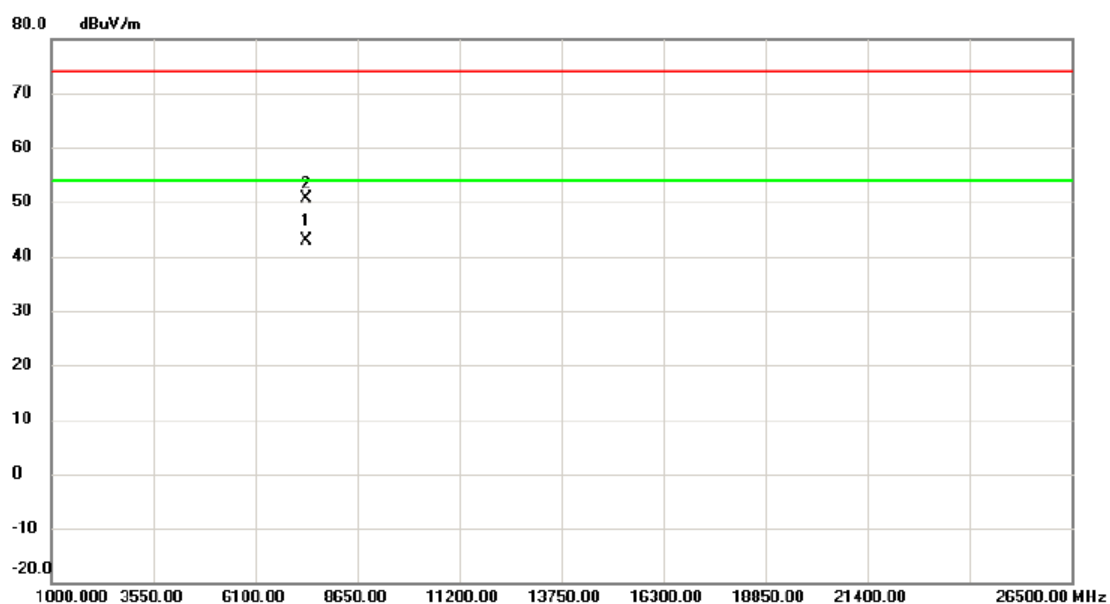


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7370.370	33.35	9.47	42.82	54.00	-11.18	AVG	
2		7372.530	41.04	9.47	50.51	74.00	-23.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2457 MHz

Horizontal

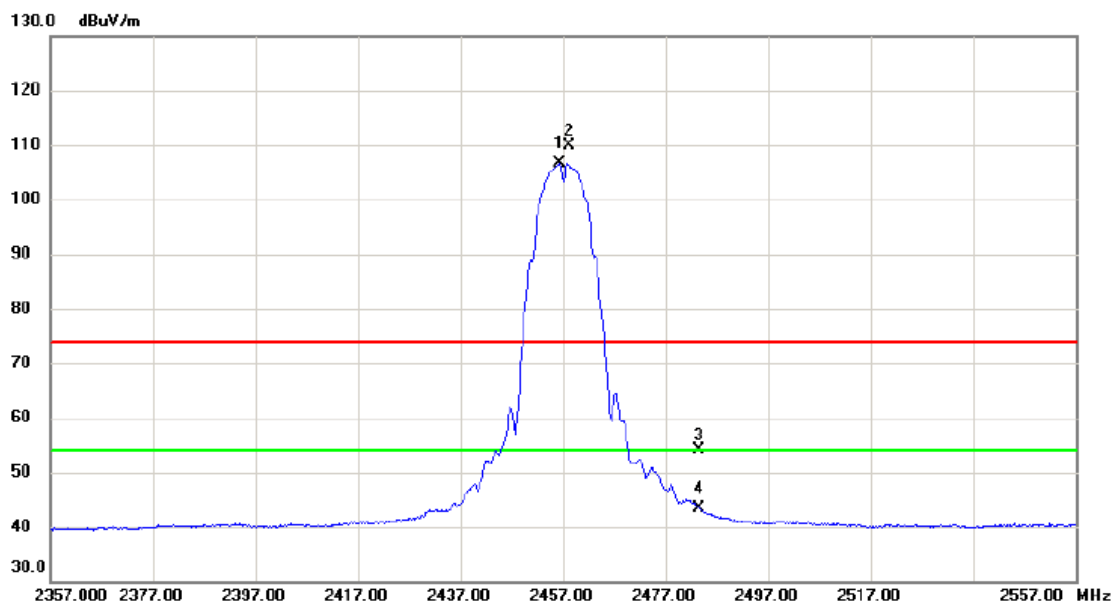

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2456.300	97.31	9.28	106.59	54.00	52.59	AVG	No Limit
2	X	2458.200	100.69	9.28	109.97	74.00	35.97	peak	No Limit
3		2483.500	44.69	9.35	54.04	74.00	-19.96	peak	
4		2483.500	34.12	9.35	43.47	54.00	-10.53	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2457 MHz

Horizontal

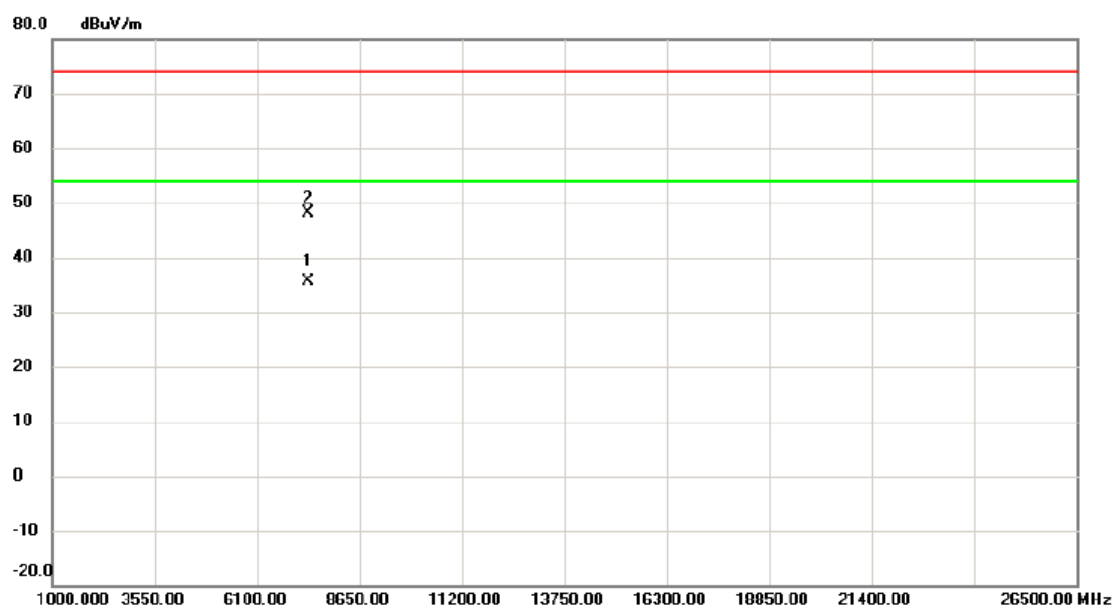

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7371.140	26.07	9.47	35.54	54.00	-18.46	AVG	
2		7371.180	38.73	9.47	48.20	74.00	-25.80	peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical

130 dBuV/m

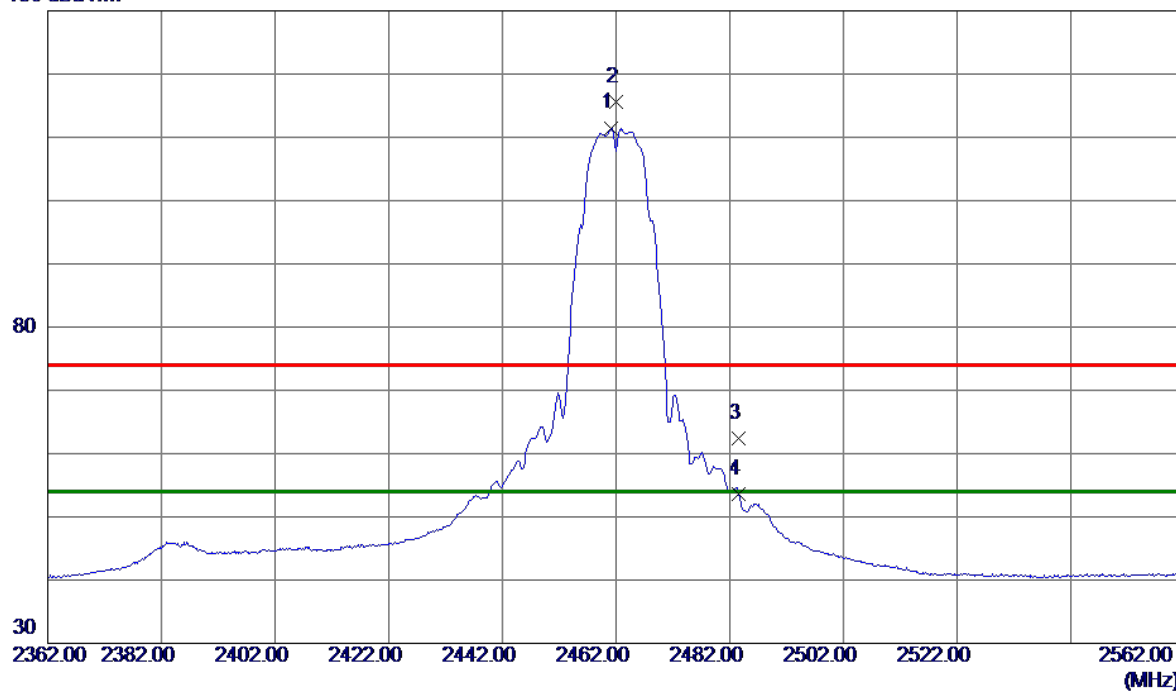

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2461.2000	102.21	9.29	111.50	54.00	57.50	AVG	No Limit
2	2461.9000	106.25	9.29	115.54	74.00	41.54	Peak	No Limit
3	2483.5000	52.96	9.35	62.31	74.00	-11.69	Peak	
4	2483.5000	44.30	9.35	53.65	54.00	-0.35	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical

80 dBuV/m

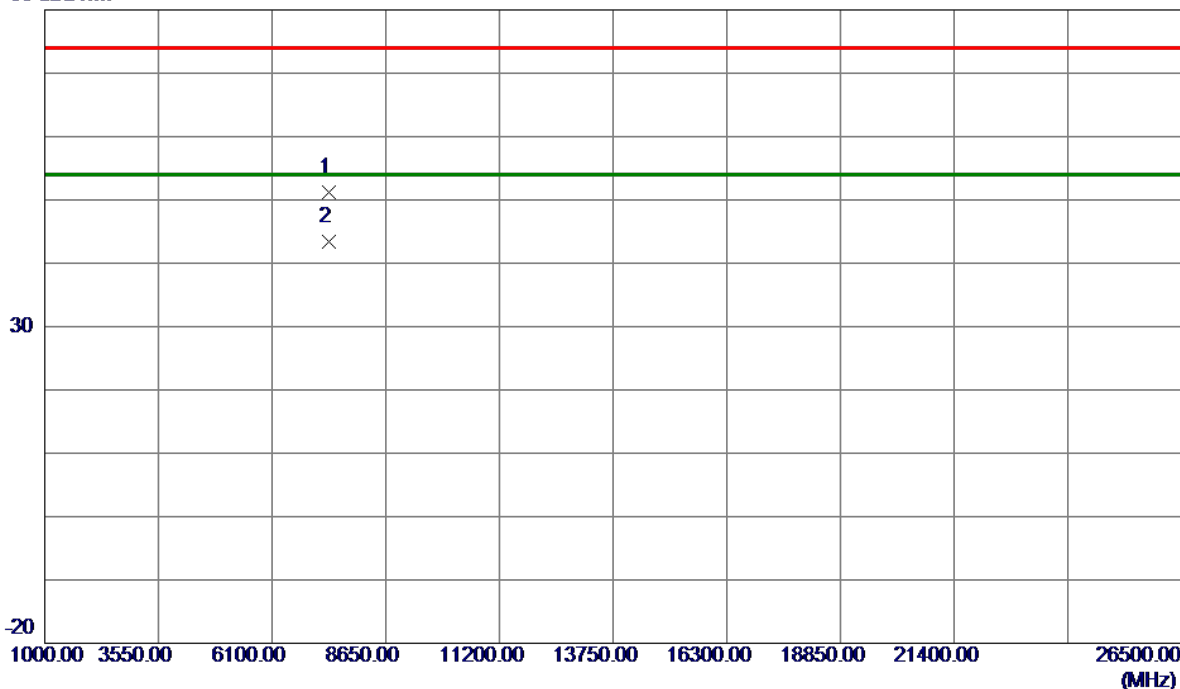


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7384.9600	41.65	9.50	51.15	74.00	-22.85	Peak	
2 *	7385.2400	33.97	9.50	43.47	54.00	-10.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

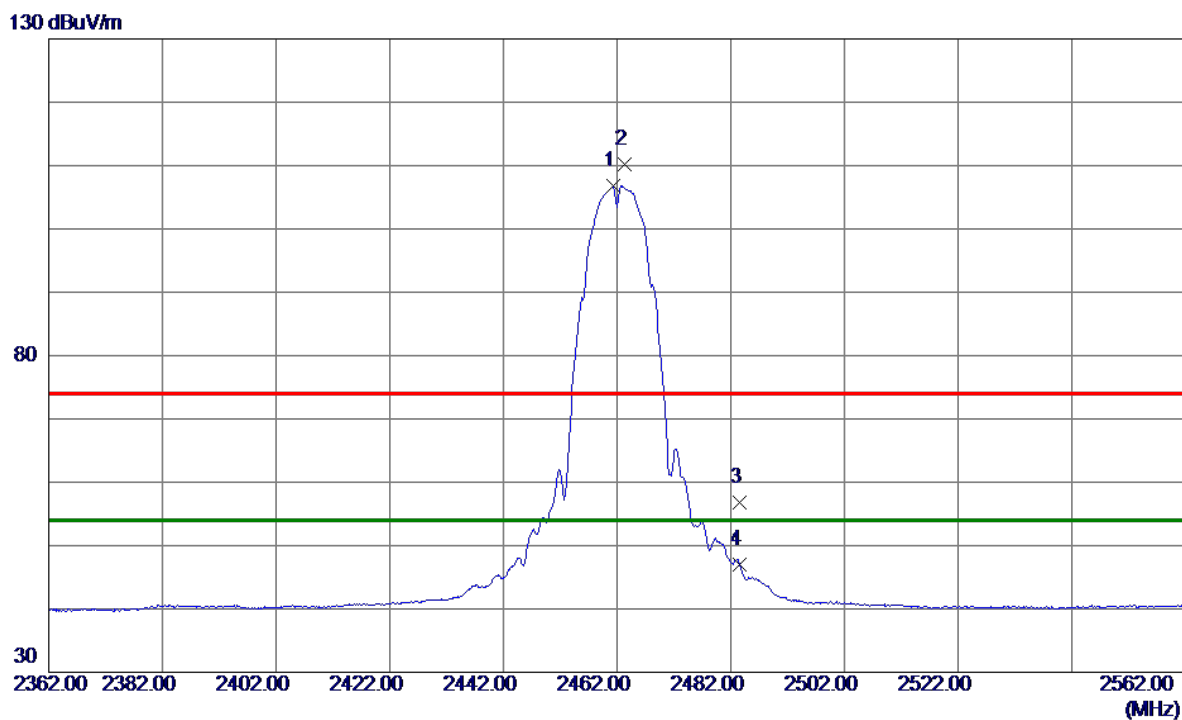

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2461.3000	97.53	9.29	106.82	54.00	52.82	AVG	No Limit
2	2463.4000	100.97	9.30	110.27	74.00	36.27	Peak	No Limit
3	2483.5000	47.38	9.35	56.73	74.00	-17.27	Peak	
4	2483.5000	37.72	9.35	47.07	54.00	-6.93	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

80 dBuV/m

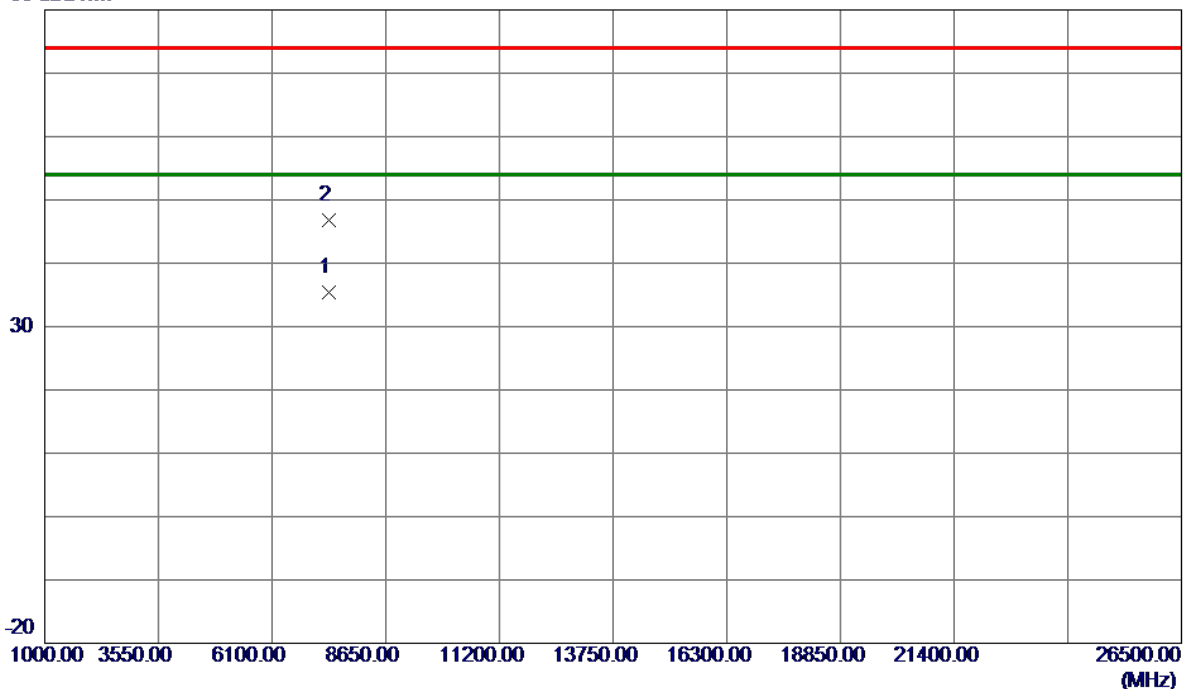

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7386.0500	25.99	9.50	35.49	54.00	-18.51	AVG	
2	7387.6100	37.28	9.50	46.78	74.00	-27.22	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical

130 dBuV/m

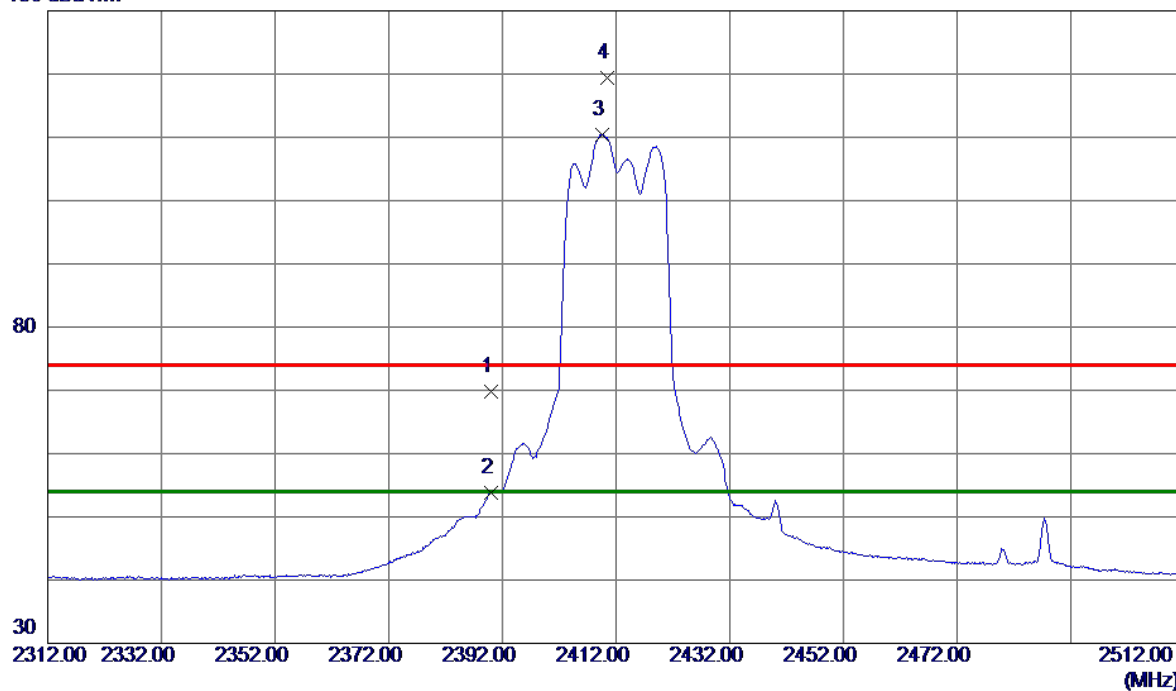

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	60.60	9.11	69.71	74.00	-4.29	Peak	
2	2390.0000	44.67	9.11	53.78	54.00	-0.22	AVG	
3 *	2409.5000	101.28	9.16	110.44	54.00	56.44	AVG	No Limit
4	2410.4000	110.26	9.16	119.42	74.00	45.42	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical

80 dBuV/m

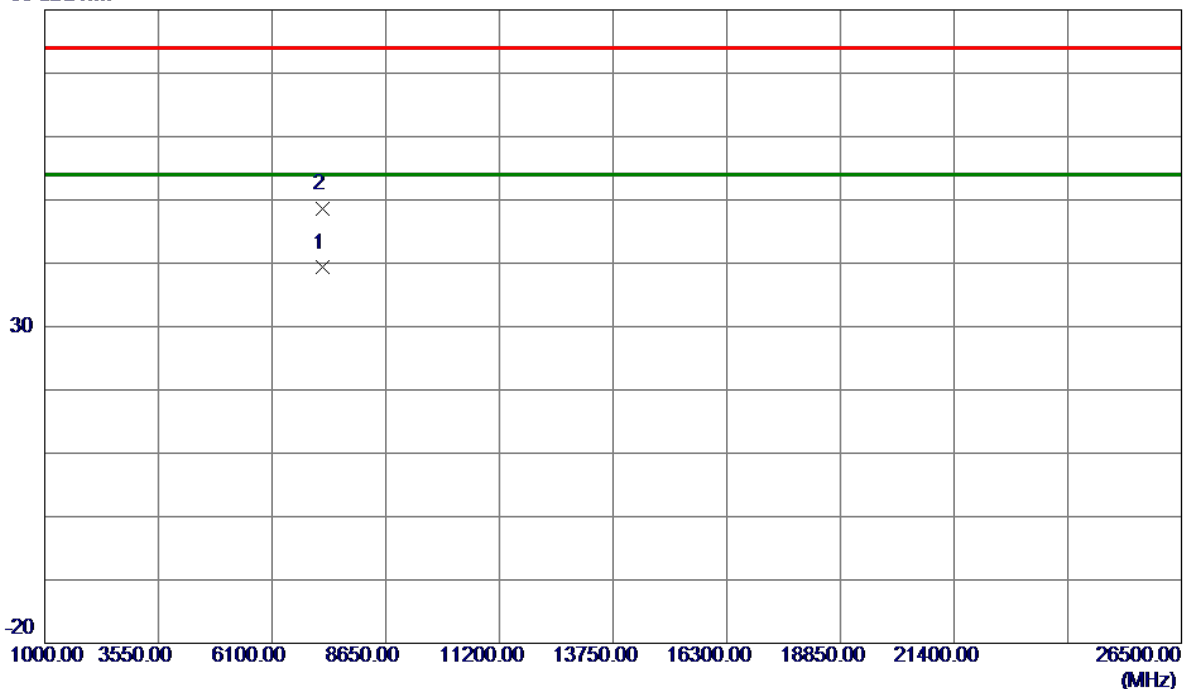

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7236.0500	30.08	9.22	39.30	54.00	-14.70	AVG	
2	7236.0900	39.36	9.22	48.58	74.00	-25.42	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal

130 dBuV/m

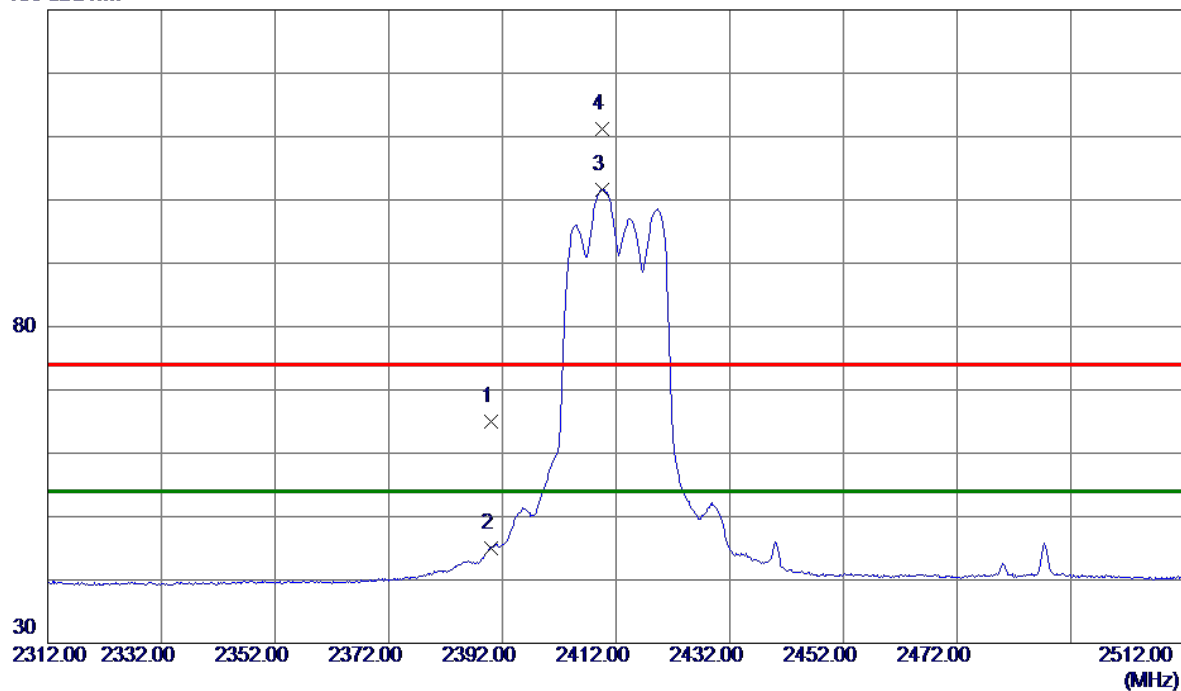

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	55.86	9.11	64.97	74.00	-9.03	Peak	
2	2390.0000	35.89	9.11	45.00	54.00	-9.00	AVG	
3 *	2409.5000	92.45	9.16	101.61	54.00	47.61	AVG	No Limit
4	2409.6000	102.01	9.16	111.17	74.00	37.17	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal

80 dBuV/m

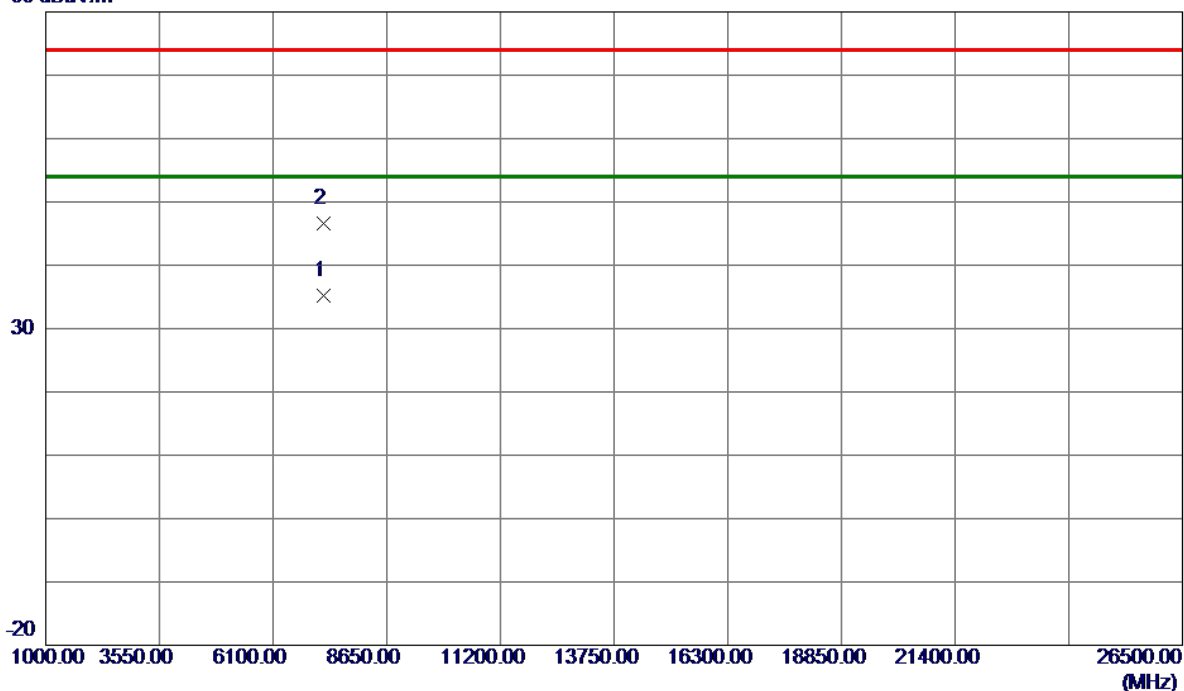

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7233.0400	25.94	9.21	35.15	54.00	-18.85	AVG	
2	7245.3500	37.39	9.24	46.63	74.00	-27.37	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2417 MHz

Vertical

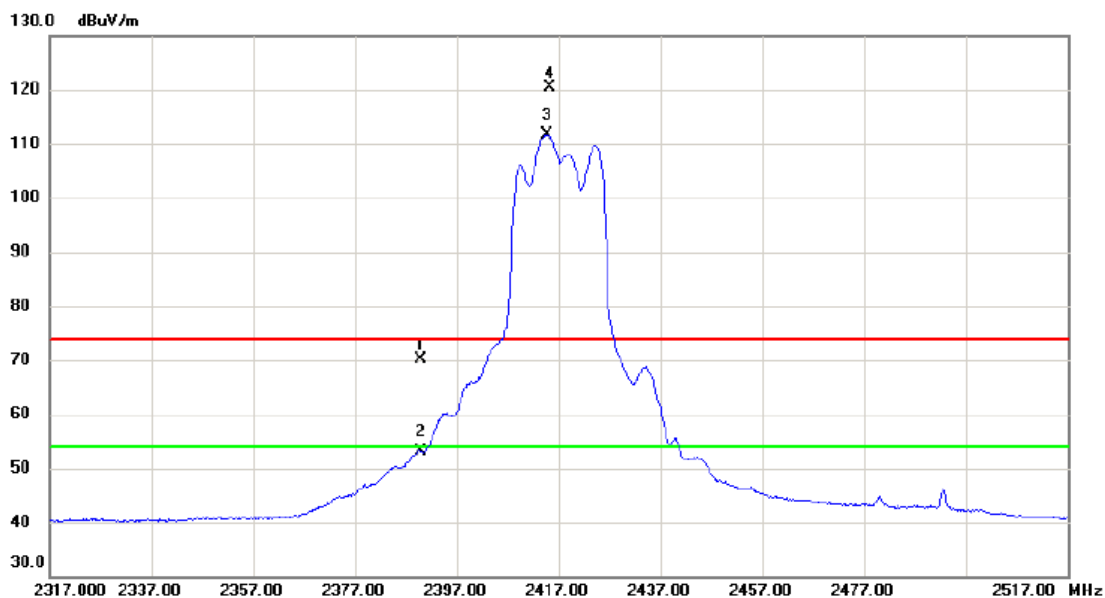


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	61.14	9.11	70.25	74.00	-3.75	peak	
2		2390.000	43.94	9.11	53.05	54.00	-0.95	AVG	
3	*	2414.800	102.47	9.18	111.65	54.00	57.65	AVG	No Limit
4	X	2415.300	111.31	9.18	120.49	74.00	46.49	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2417 MHz

Vertical

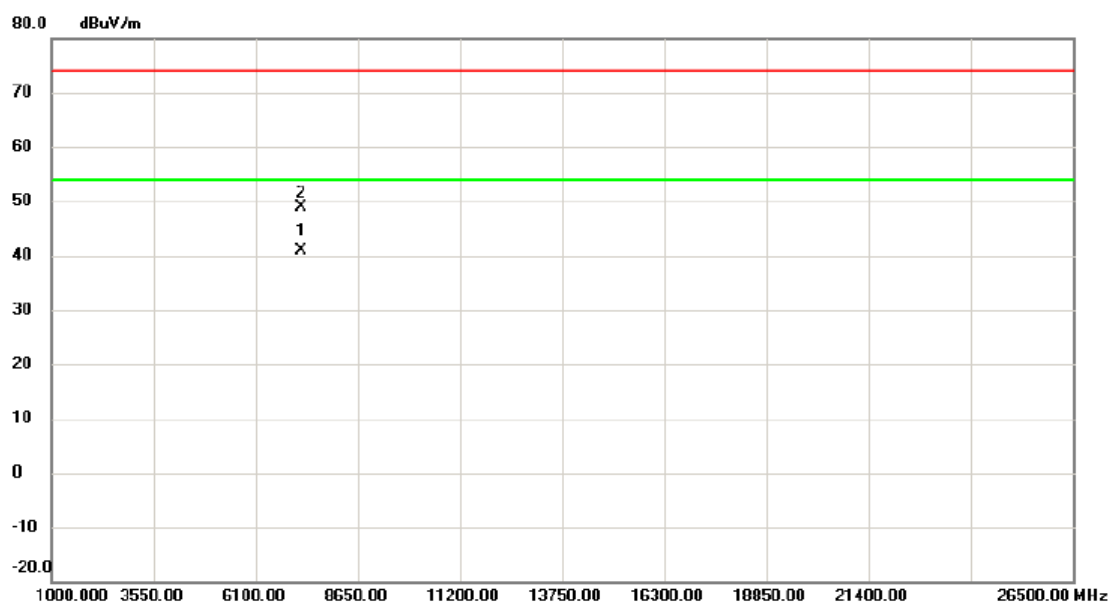


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7251.130	31.60	9.24	40.84	54.00	-13.16	AVG	
2		7251.350	39.70	9.24	48.94	74.00	-25.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2417 MHz

Horizontal

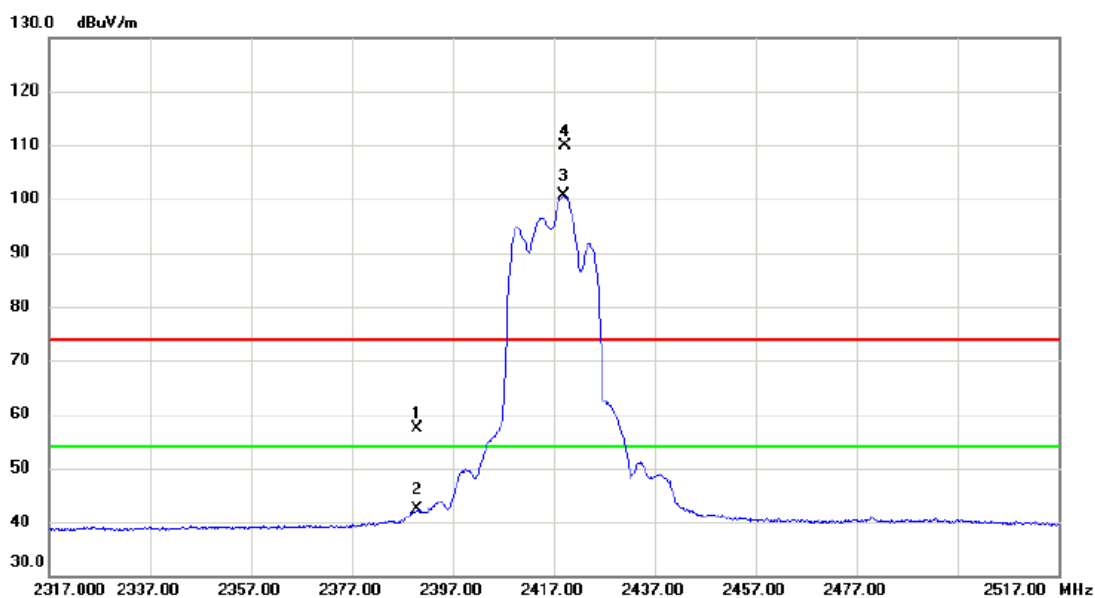


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	48.18	9.11	57.29	74.00	-16.71	peak	
2		2390.000	33.21	9.11	42.32	54.00	-11.68	AVG	
3	*	2419.100	91.40	9.18	100.58	54.00	46.58	AVG	No Limit
4	X	2419.200	100.67	9.18	109.85	74.00	35.85	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2417 MHz

Horizontal

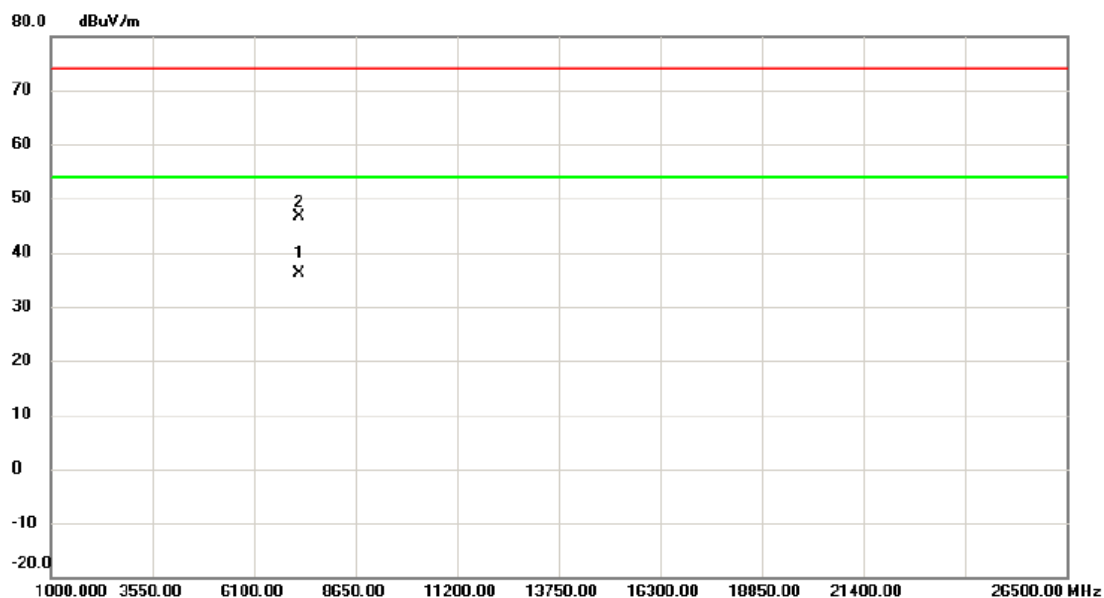

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7251.130	26.96	9.24	36.20	54.00	-17.80	AVG	
2		7253.700	37.38	9.25	46.63	74.00	-27.37	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical

130 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	62.63	9.11	71.74	74.00	-2.26	Peak	
2	2390.0000	44.63	9.11	53.74	54.00	-0.26	AVG	
3	2434.6000	112.07	9.22	121.29	74.00	47.29	Peak	No Limit
4 *	2434.8000	103.62	9.22	112.84	54.00	58.84	AVG	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical

80 dBuV/m

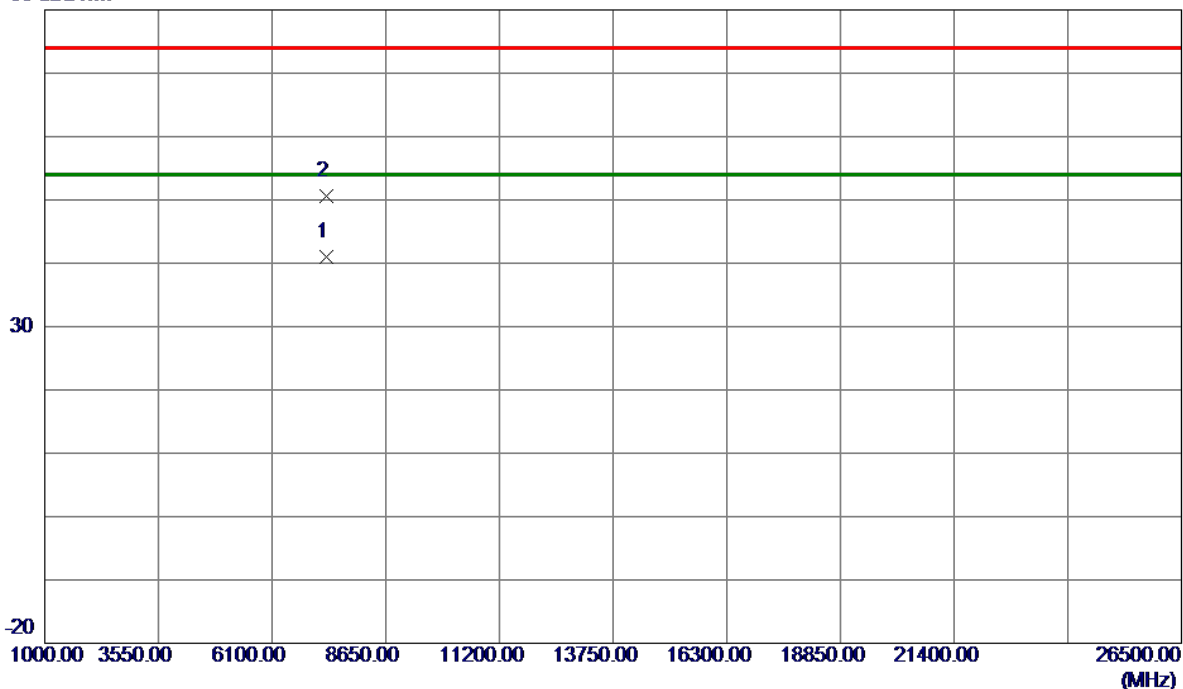

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7311.0400	31.56	9.36	40.92	54.00	-13.08	AVG	
2	7311.2600	41.29	9.36	50.65	74.00	-23.35	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal

130 dBuV/m

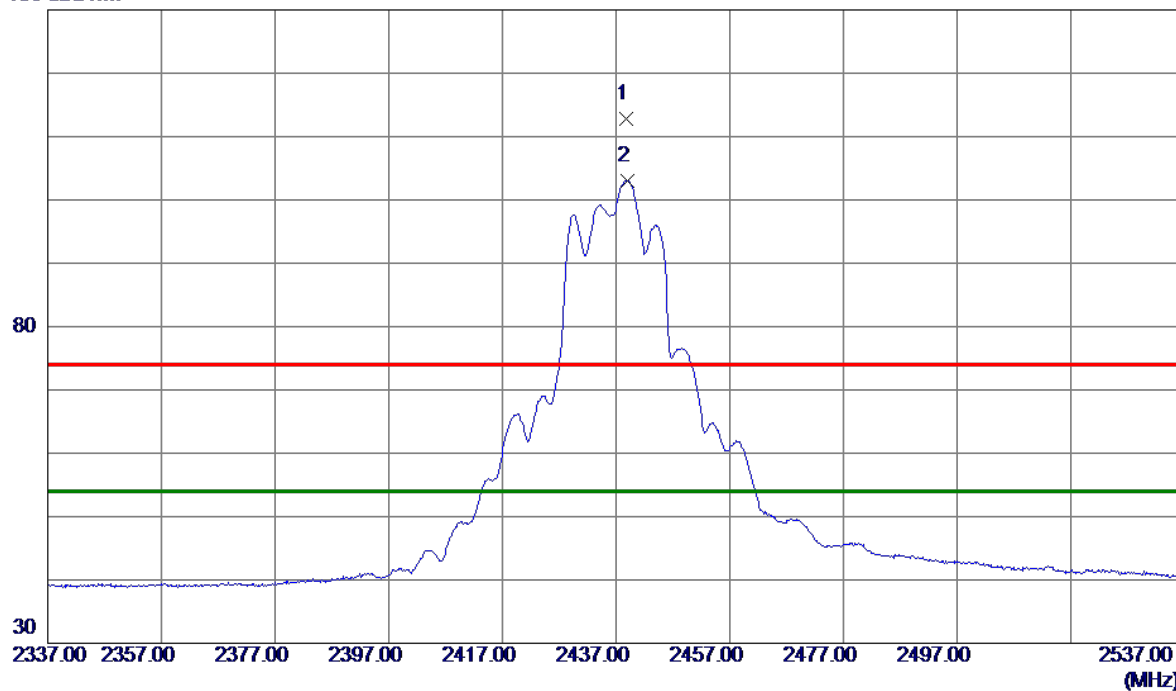

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2438.7000	103.64	9.23	112.87	74.00	38.87	Peak	No Limit
2 *	2438.9000	93.80	9.23	103.03	54.00	49.03	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal

80 dBuV/m

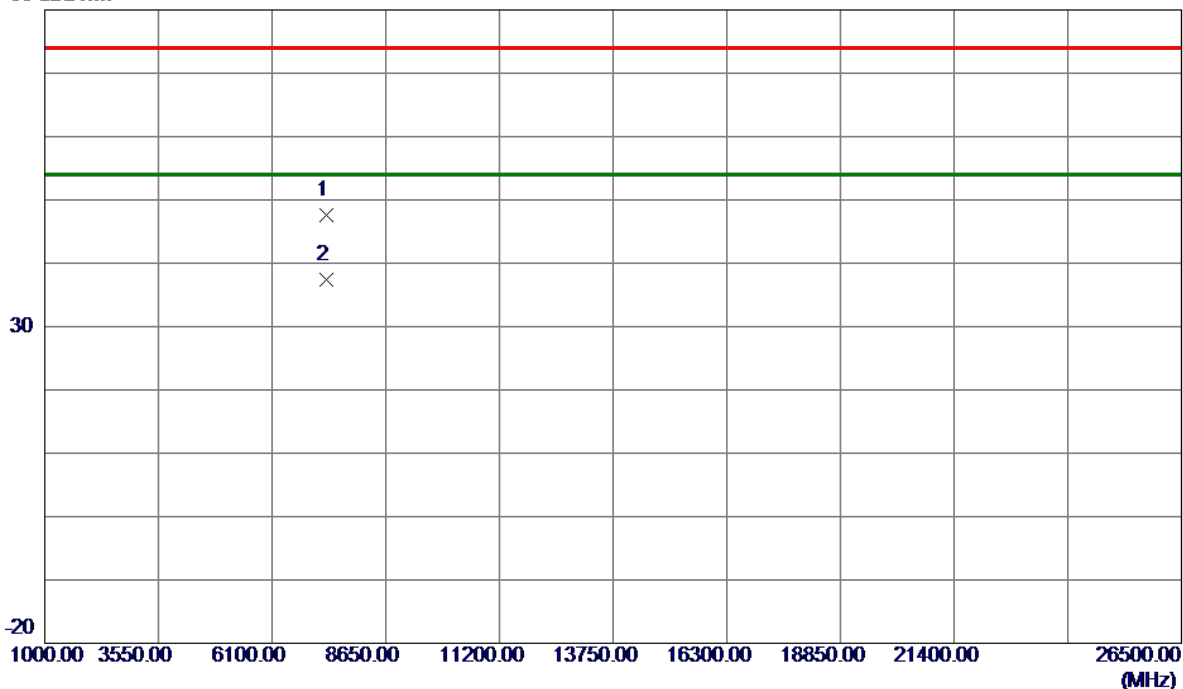

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7307.1200	38.18	9.35	47.53	74.00	-26.47	Peak	
2 *	7310.9300	28.00	9.36	37.36	54.00	-16.64	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2457 MHz

Vertical

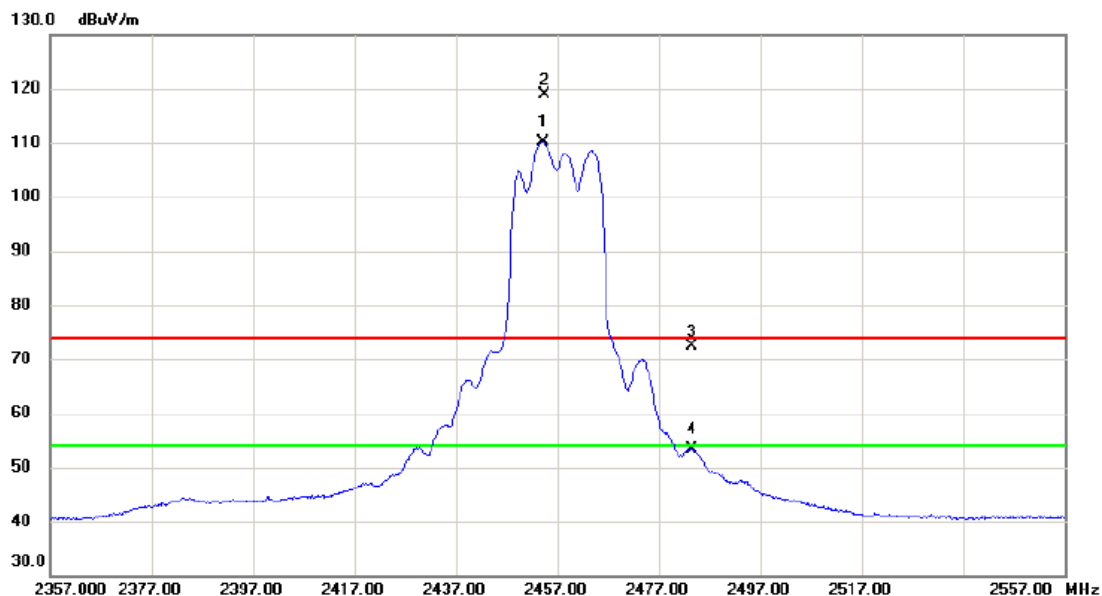


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.100	100.89	9.28	110.17	54.00	56.17	AVG	No Limit
2	X	2454.500	109.68	9.28	118.96	74.00	44.96	peak	No Limit
3		2483.500	63.10	9.35	72.45	74.00	-1.55	peak	
4		2483.500	44.02	9.35	53.37	54.00	-0.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2457 MHz

Vertical

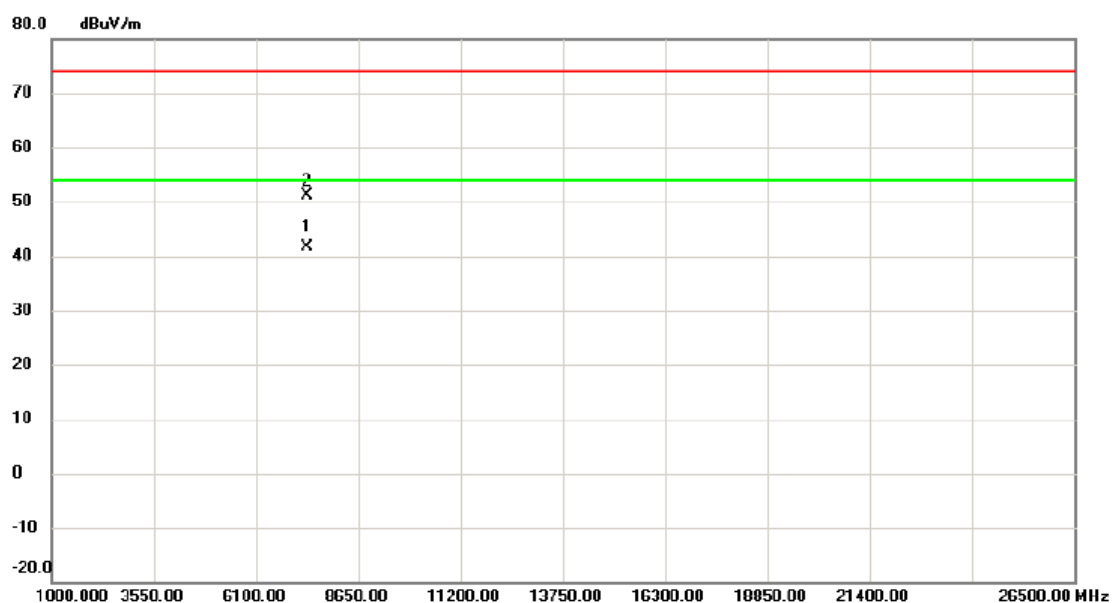


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7370.930	32.06	9.47	41.53	54.00	-12.47	AVG	
2		7372.340	41.57	9.47	51.04	74.00	-22.96	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2457 MHz

Horizontal

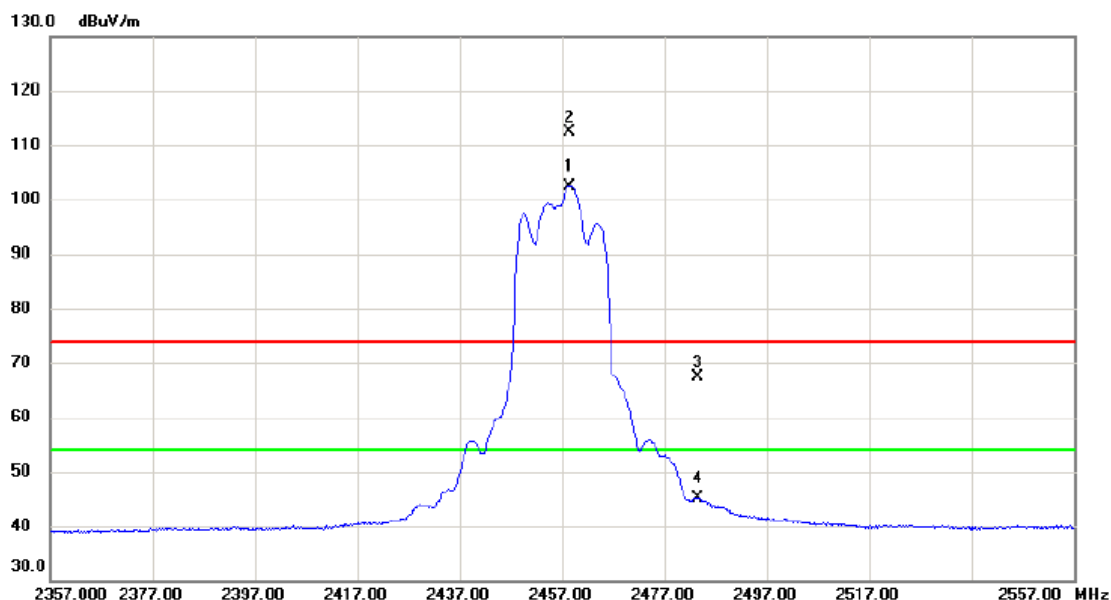


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2458.500	93.16	9.29	102.45	54.00	48.45	AVG	No Limit
2	X	2458.600	103.01	9.29	112.30	74.00	38.30	peak	No Limit
3		2483.500	58.09	9.35	67.44	74.00	-6.56	peak	
4		2483.500	35.88	9.35	45.23	54.00	-8.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2457 MHz

Horizontal

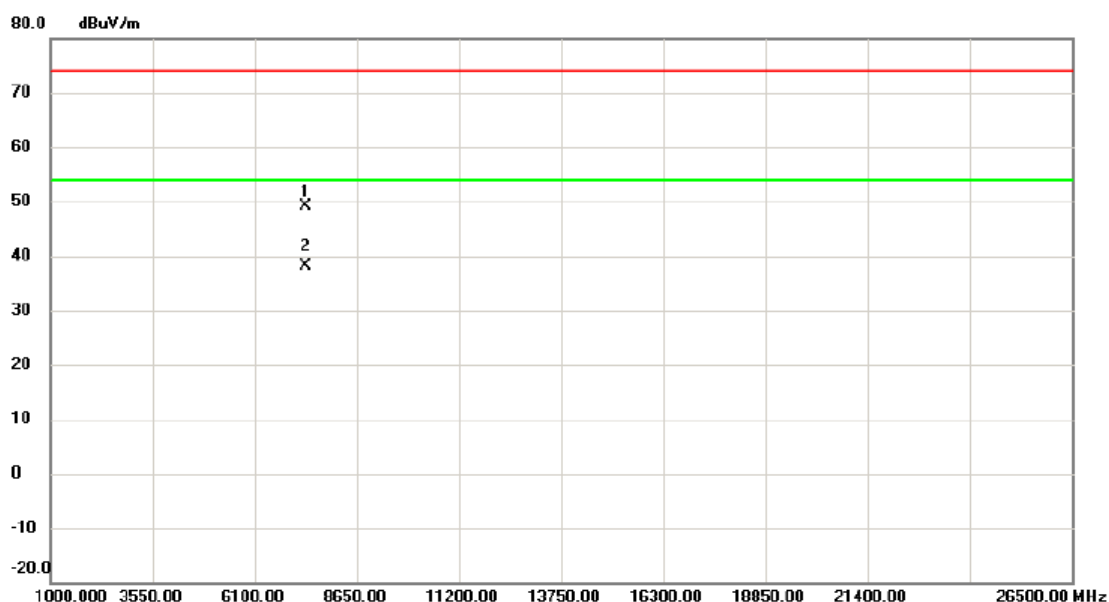

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7369.170	39.68	9.47	49.15	74.00	-24.85	peak	
2	*	7371.150	28.55	9.47	38.02	54.00	-15.98	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical

130 dBuV/m

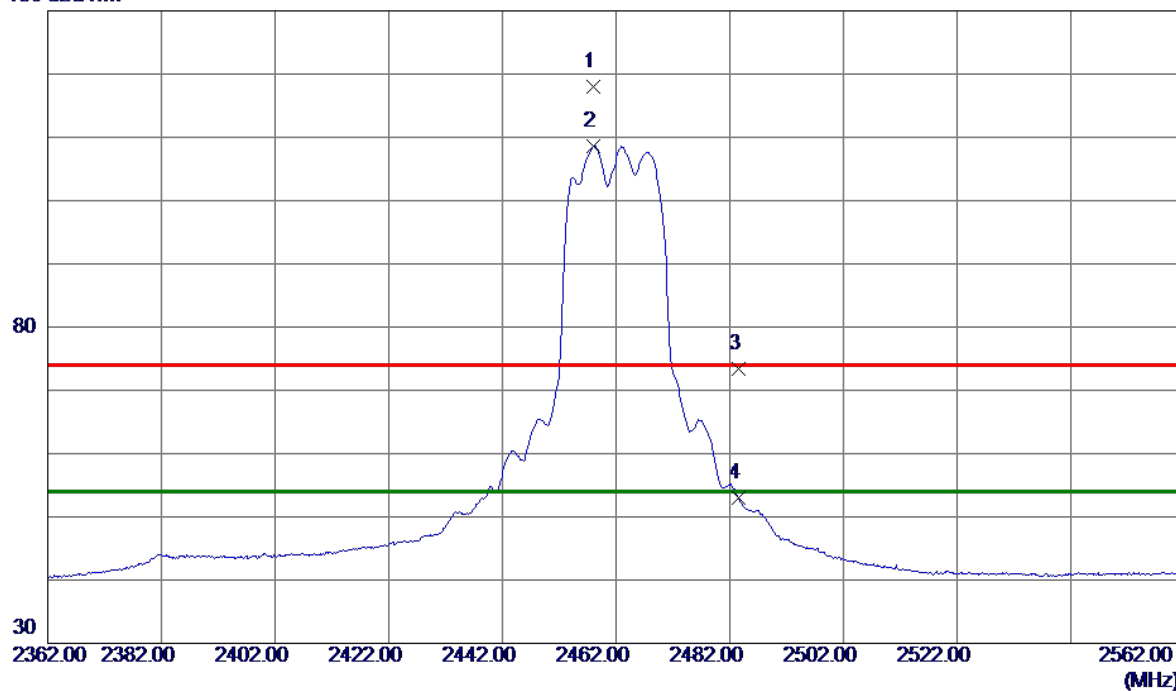

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2457.9000	108.68	9.28	117.96	74.00	43.96	Peak	No Limit
2 *	2458.0000	99.41	9.28	108.69	54.00	54.69	AVG	No Limit
3	2483.5000	63.99	9.35	73.34	74.00	-0.66	Peak	
4	2483.5000	43.69	9.35	53.04	54.00	-0.96	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical

80 dBuV/m

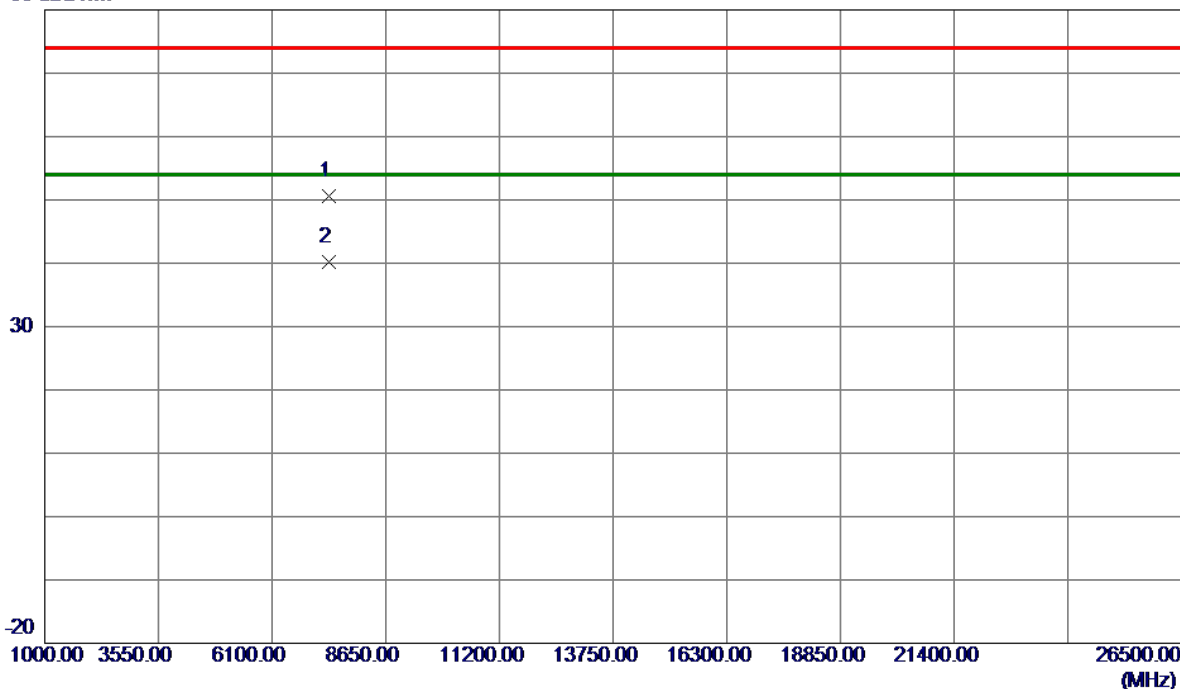


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7385.9700	41.05	9.50	50.55	74.00	-23.45	Peak	
2 *	7386.0300	30.67	9.50	40.17	54.00	-13.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

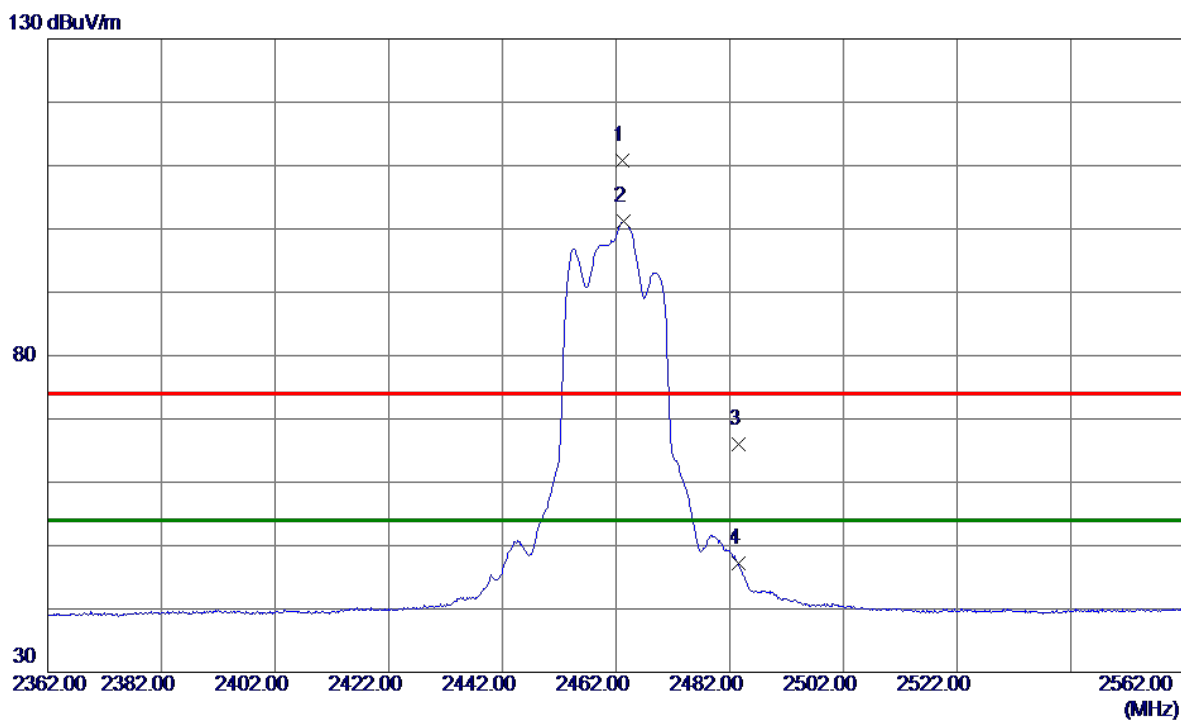

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2463.2000	101.53	9.30	110.83	74.00	36.83	Peak	No Limit
2 *	2463.3000	91.83	9.30	101.13	54.00	47.13	AVG	No Limit
3	2483.5000	56.58	9.35	65.93	74.00	-8.07	Peak	
4	2483.5000	37.76	9.35	47.11	54.00	-6.89	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

80 dBuV/m

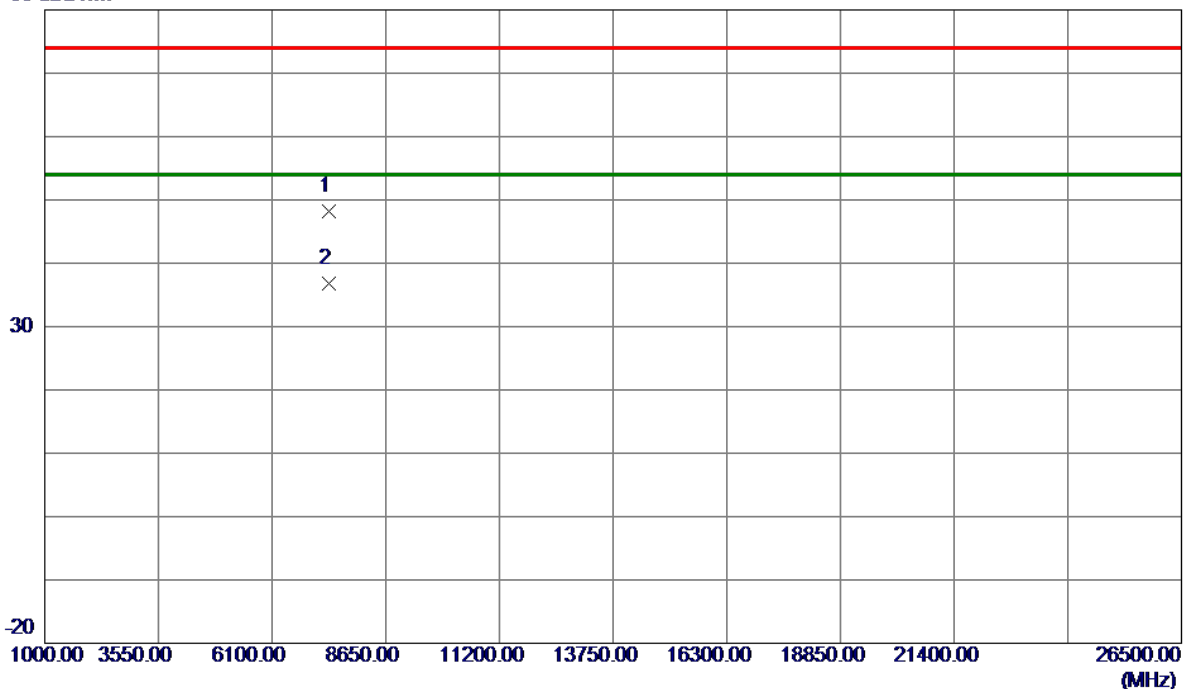

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7385.9500	38.66	9.50	48.16	74.00	-25.84	Peak	
2 *	7386.0600	27.37	9.50	36.87	54.00	-17.13	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical

130 dBuV/m

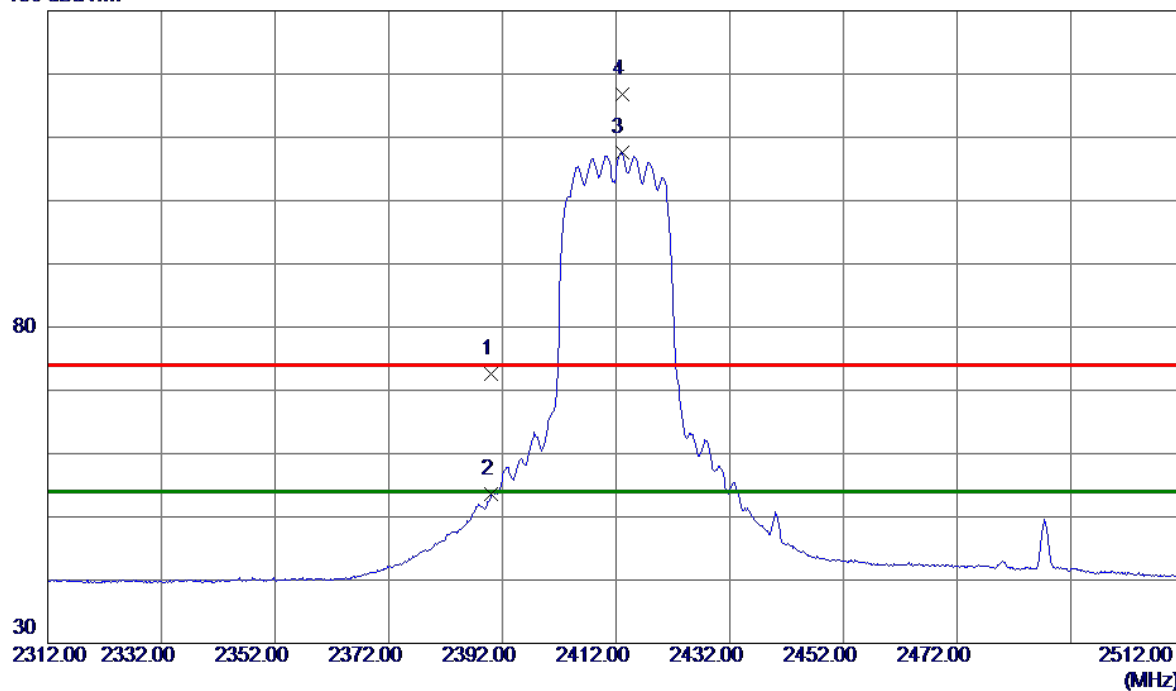

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	63.58	9.11	72.69	74.00	-1.31	Peak	
2	2390.0000	44.42	9.11	53.53	54.00	-0.47	AVG	
3 *	2413.0000	98.36	9.17	107.53	54.00	53.53	AVG	No Limit
4	2413.2000	107.67	9.17	116.84	74.00	42.84	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical

80 dBuV/m

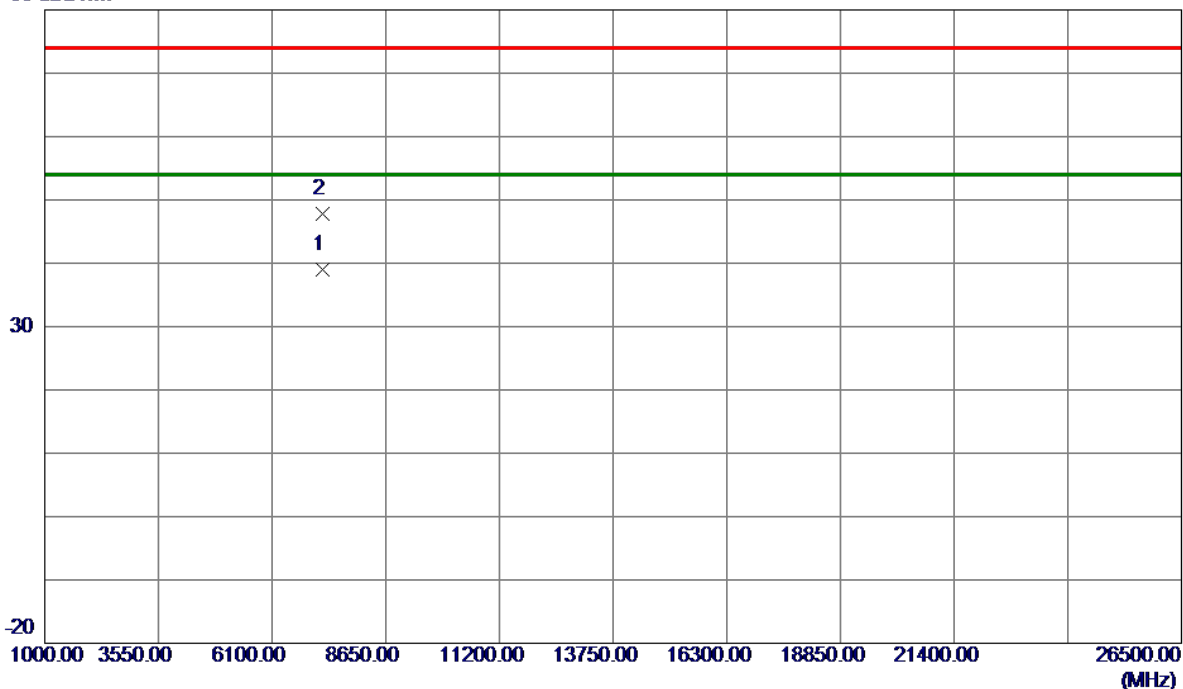

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7235.9100	29.83	9.22	39.05	54.00	-14.95	AVG	
2	7235.9300	38.65	9.22	47.87	74.00	-26.13	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

130 dBuV/m

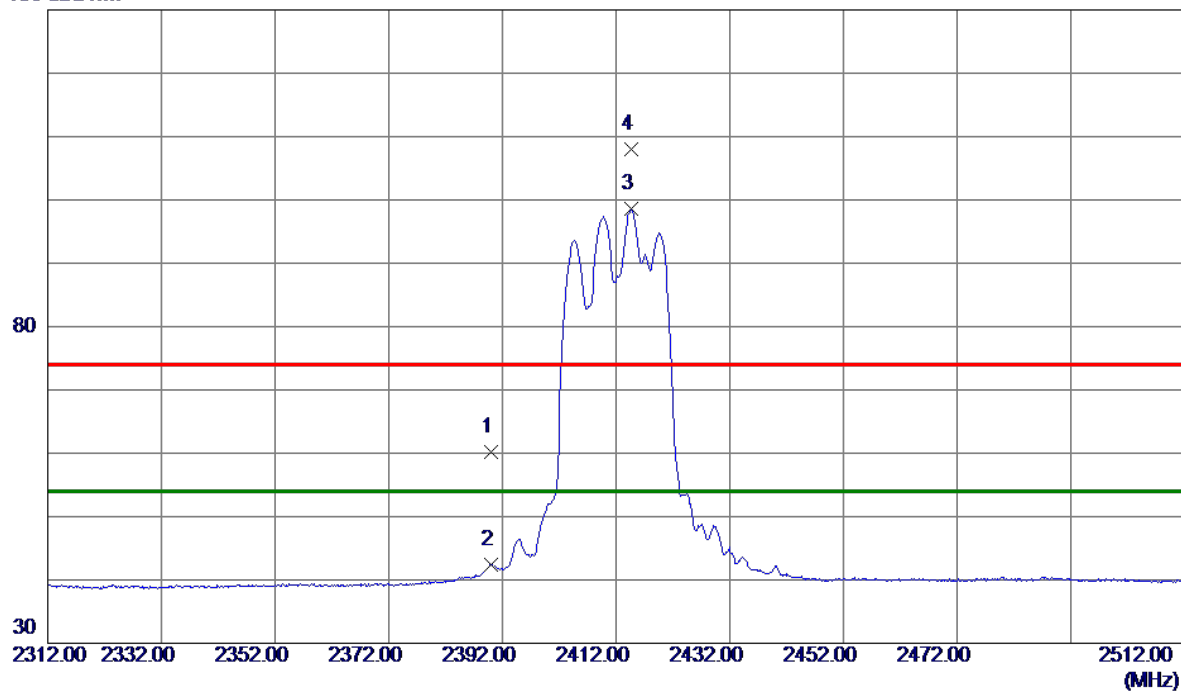

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	51.05	9.11	60.16	74.00	-13.84	Peak	
2	2390.0000	33.21	9.11	42.32	54.00	-11.68	AVG	
3 *	2414.6000	89.34	9.17	98.51	54.00	44.51	AVG	No Limit
4	2414.7000	98.85	9.17	108.02	74.00	34.02	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

80 dBuV/m

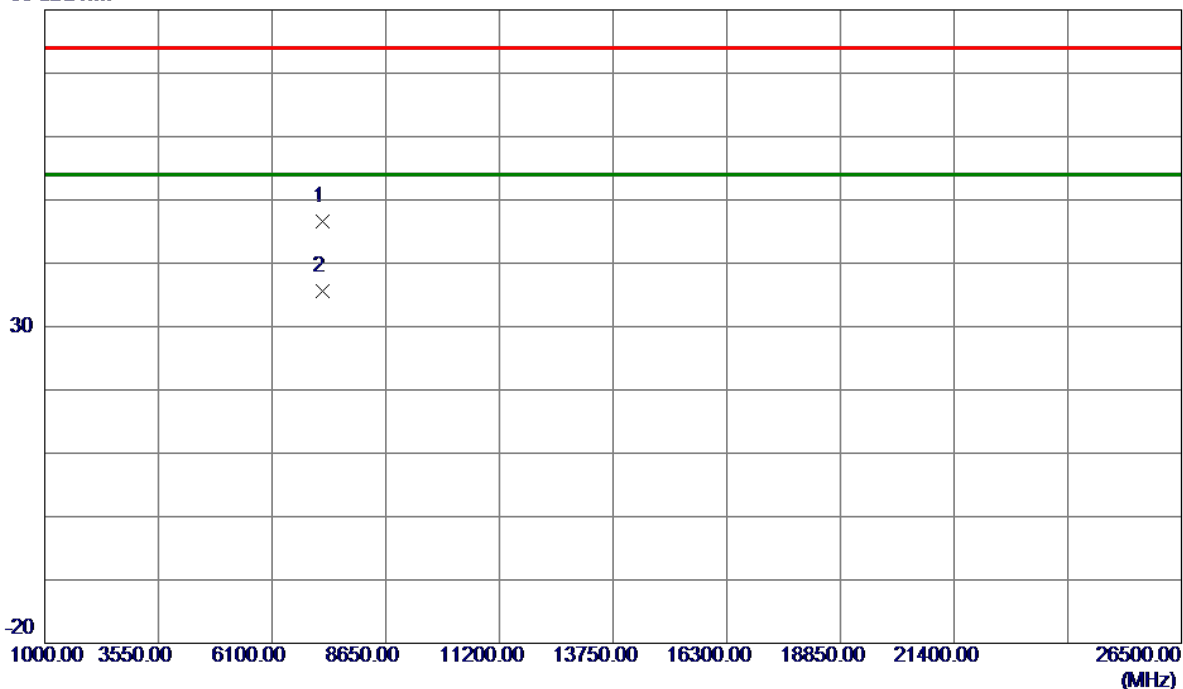


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7235.4600	37.32	9.22	46.54	74.00	-27.46	Peak	
2 *	7236.1600	26.39	9.22	35.61	54.00	-18.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2417 MHz

Vertical

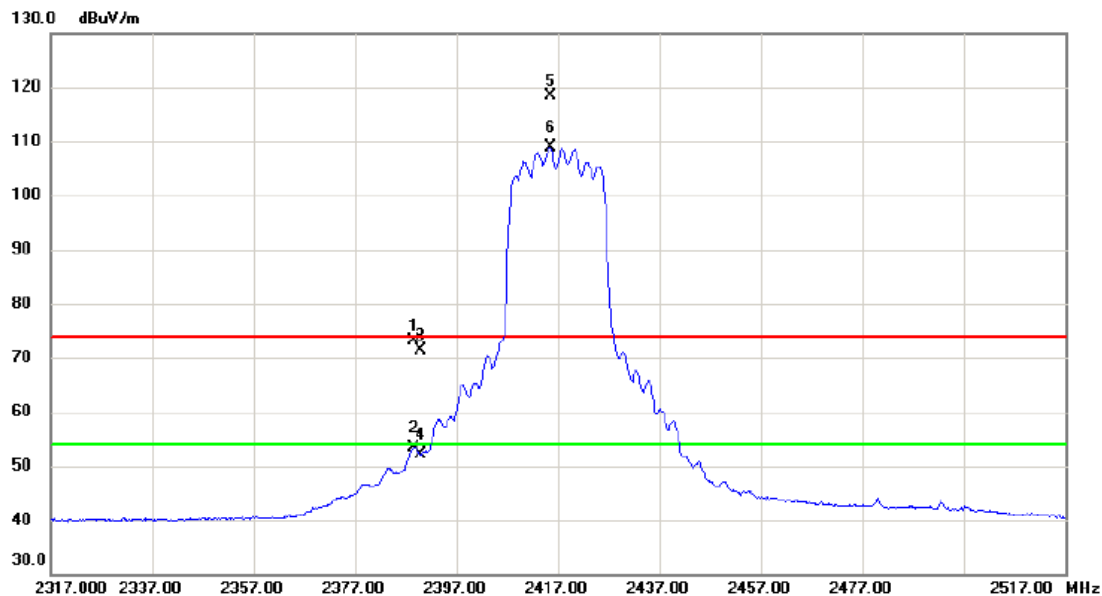


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.500	63.93	9.11	73.04	74.00	-0.96	peak	
2		2388.500	44.31	9.11	53.42	54.00	-0.58	AVG	
3		2390.000	62.35	9.11	71.46	74.00	-2.54	peak	
4		2390.000	43.11	9.11	52.22	54.00	-1.78	AVG	
5	X	2415.400	109.08	9.18	118.26	74.00	44.26	peak	No Limit
6	*	2415.400	99.71	9.18	108.89	54.00	54.89	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2417 MHz

Vertical

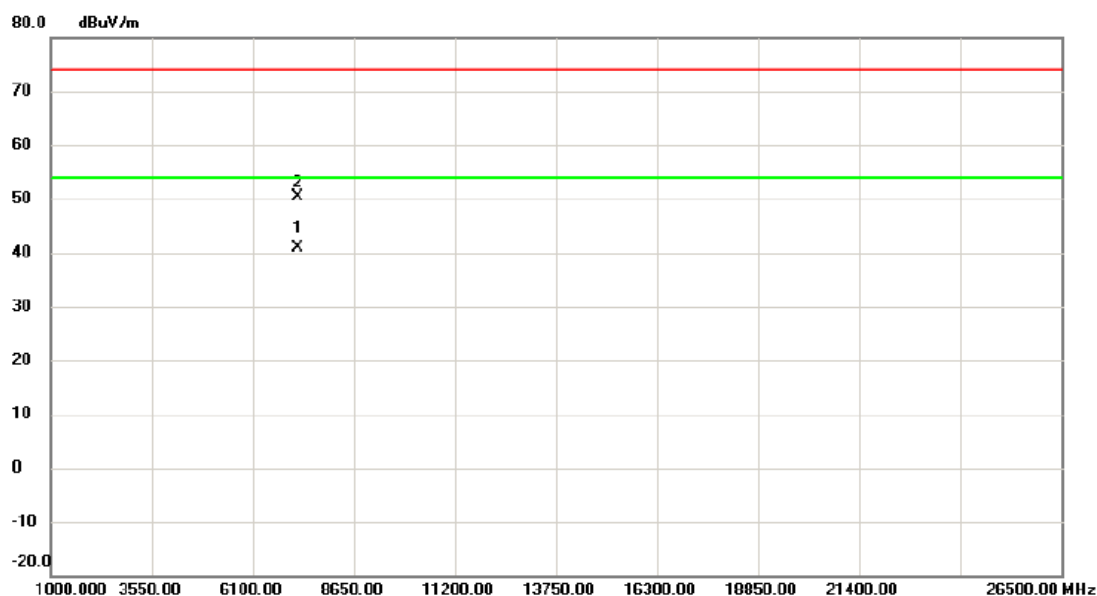


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7251.040	31.58	9.24	40.82	54.00	-13.18	AVG	
2		7251.220	41.22	9.24	50.46	74.00	-23.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2417 MHz

Horizontal

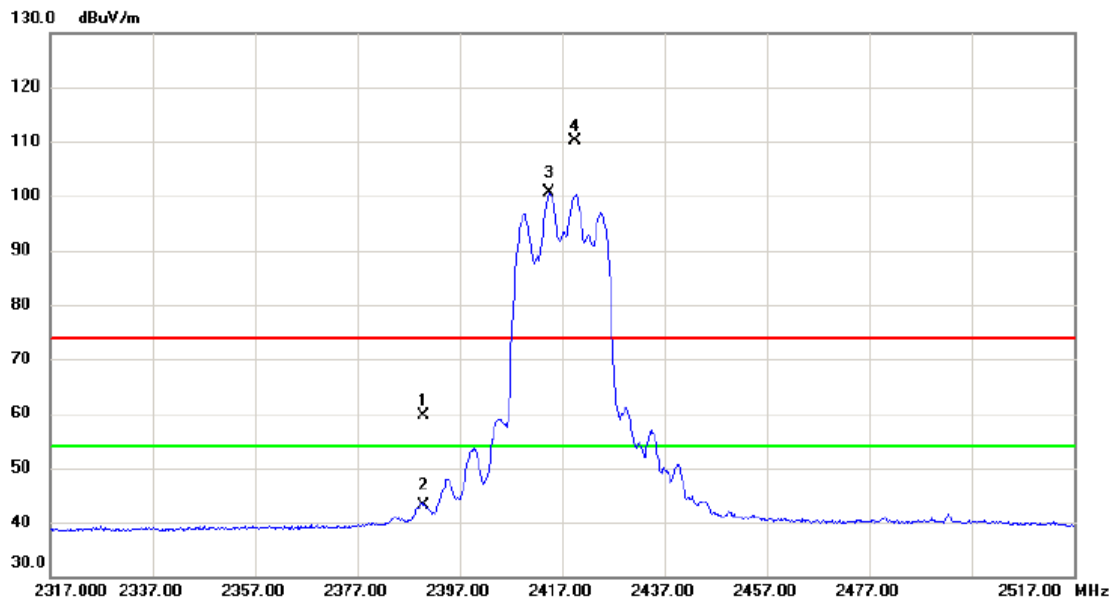

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	50.59	9.11	59.70	74.00	-14.30	peak	
2		2390.000	34.12	9.11	43.23	54.00	-10.77	AVG	
3	*	2414.600	91.51	9.18	100.69	54.00	46.69	AVG	No Limit
4	X	2419.400	100.98	9.18	110.16	74.00	36.16	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2417 MHz

Horizontal

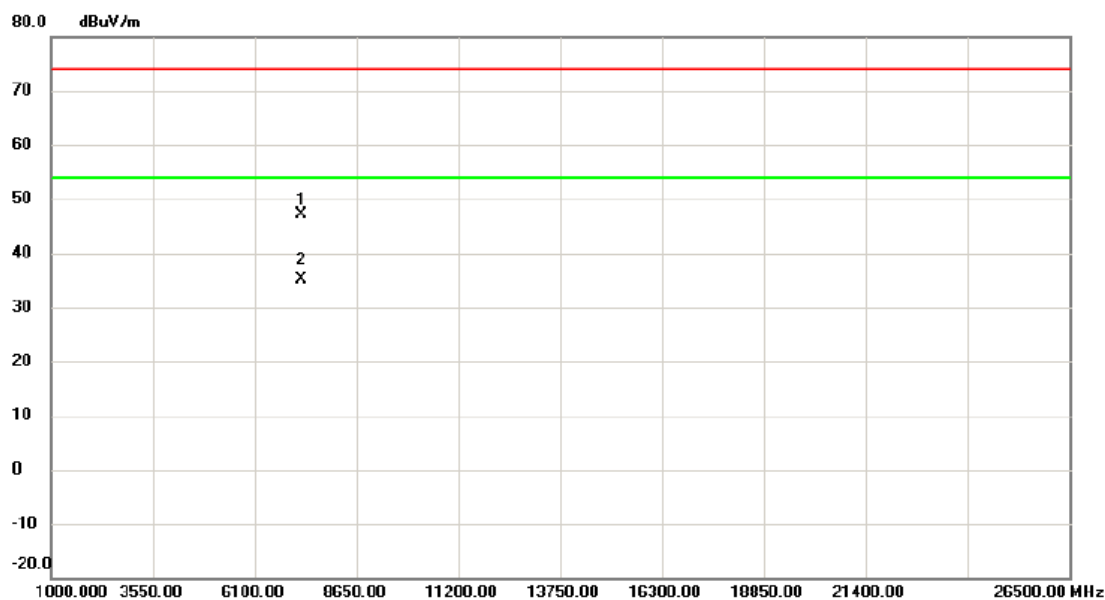

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7256.150	37.85	9.25	47.10	74.00	-26.90	peak	
2	*	7257.110	25.99	9.25	35.24	54.00	-18.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical

130 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2388.2000	60.83	9.10	69.93	74.00	-4.07	Peak	
2	2388.2000	41.83	9.10	50.93	54.00	-3.07	AVG	
3	2390.0000	60.66	9.11	69.77	74.00	-4.23	Peak	
4	2390.0000	41.71	9.11	50.82	54.00	-3.18	AVG	
5 *	2437.9000	101.08	9.23	110.31	54.00	56.31	AVG	No Limit
6	2438.2000	110.48	9.23	119.71	74.00	45.71	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical

80 dBuV/m

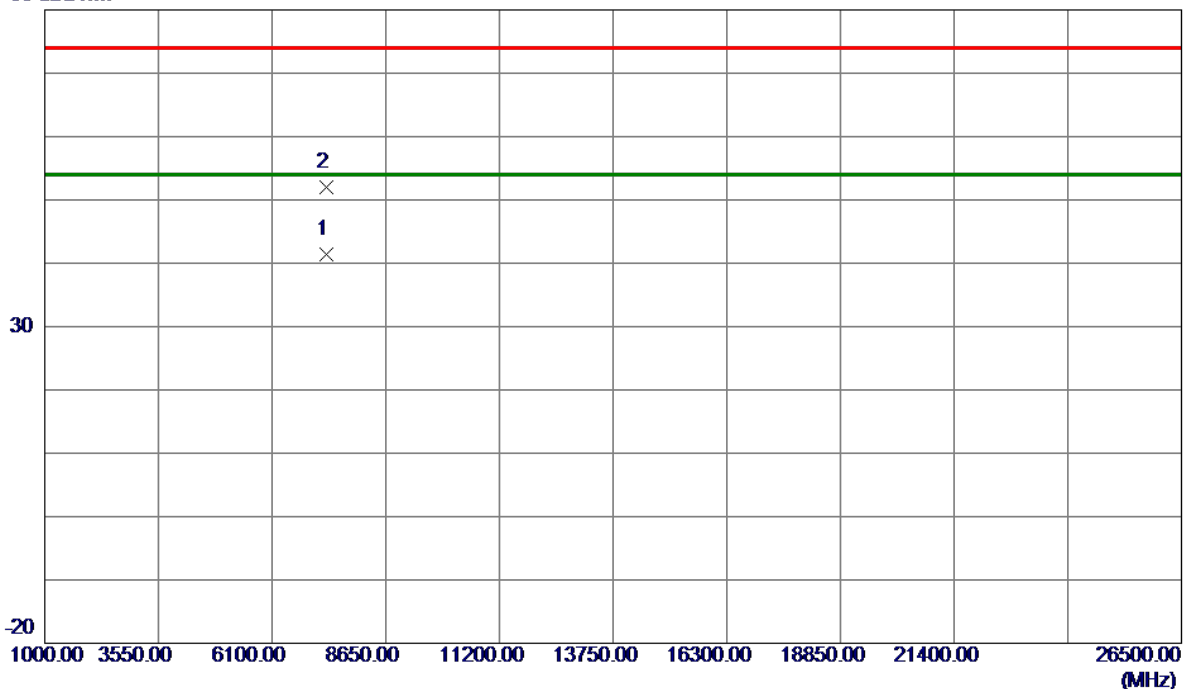


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7311.0300	32.04	9.36	41.40	54.00	-12.60	AVG	
2	7311.2800	42.64	9.36	52.00	74.00	-22.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

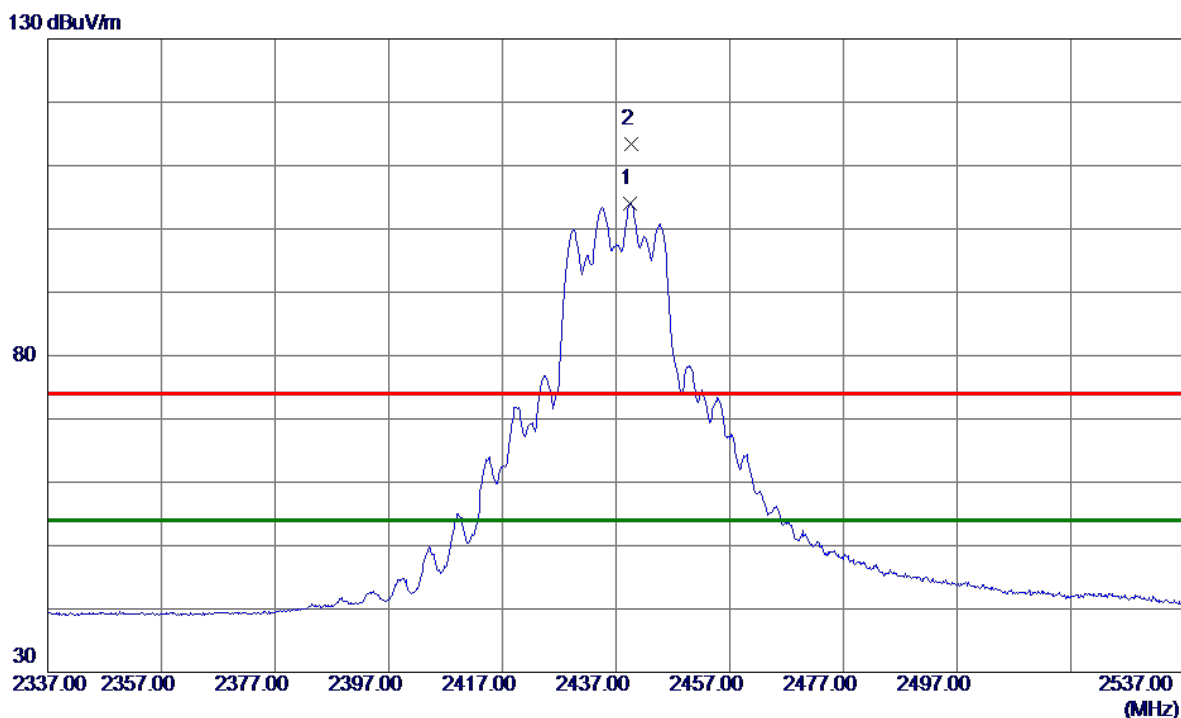

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2439.5000	94.67	9.24	103.91	54.00	49.91	AVG	No Limit
2	2439.6000	104.16	9.24	113.40	74.00	39.40	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

80 dBuV/m

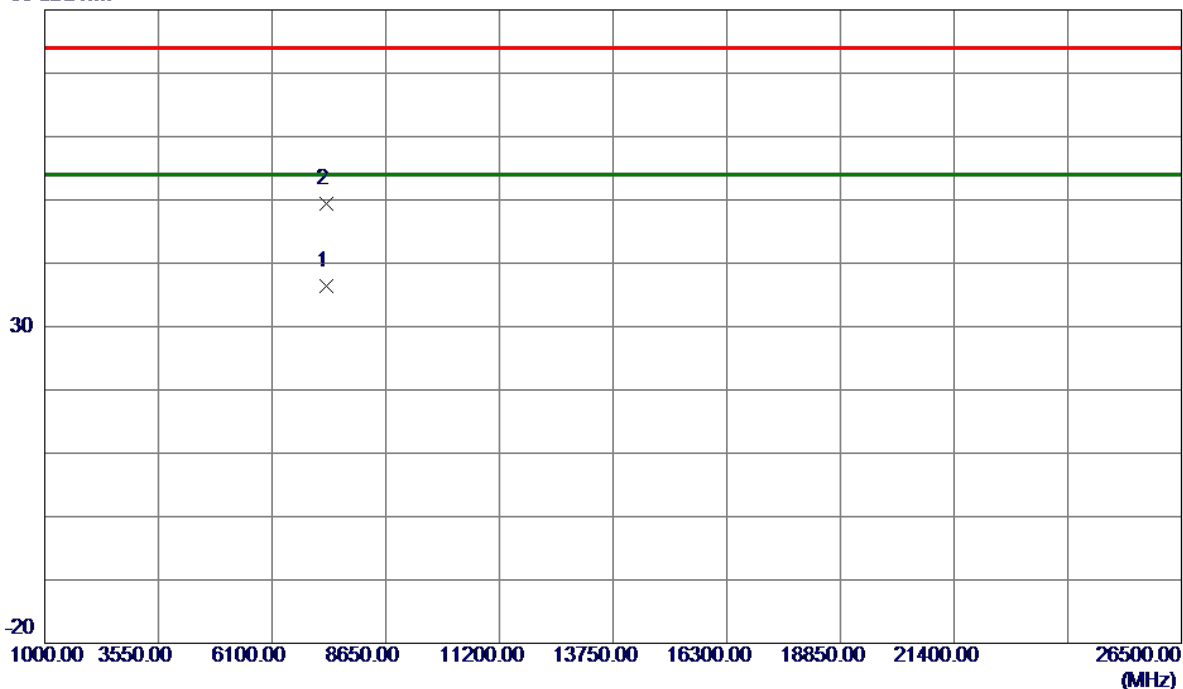


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7310.9100	27.10	9.36	36.46	54.00	-17.54	AVG	
2	7311.4100	39.96	9.36	49.32	74.00	-24.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2457 MHz

Vertical

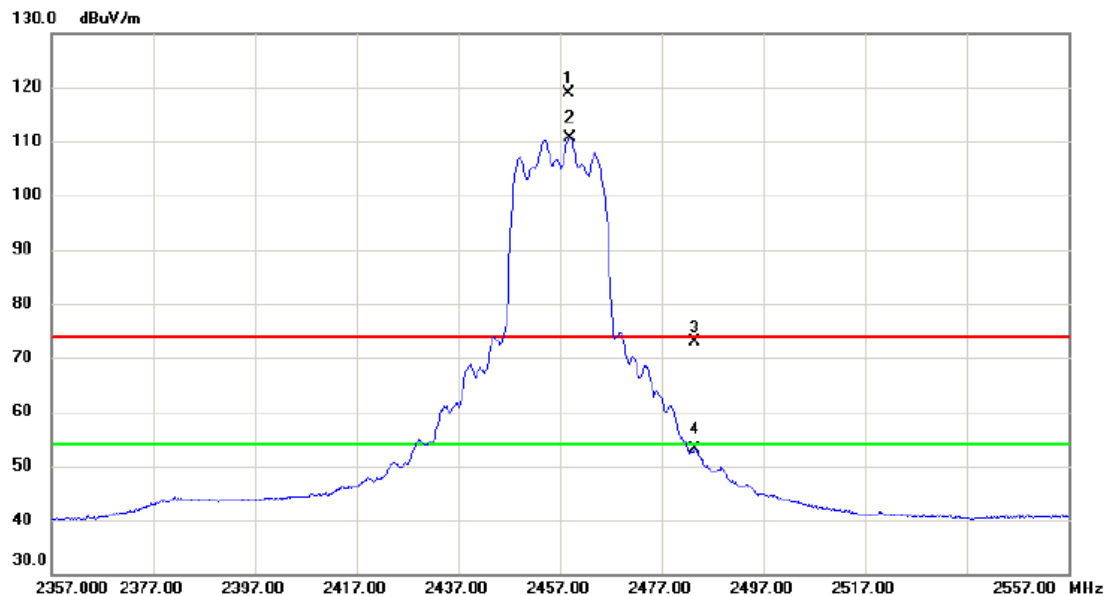


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2458.800	109.67	9.29	118.96	74.00	44.96	peak	No Limit
2	*	2459.000	101.40	9.29	110.69	54.00	56.69	AVG	No Limit
3		2483.500	63.55	9.35	72.90	74.00	-1.10	peak	
4		2483.500	43.67	9.35	53.02	54.00	-0.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2457 MHz

Vertical

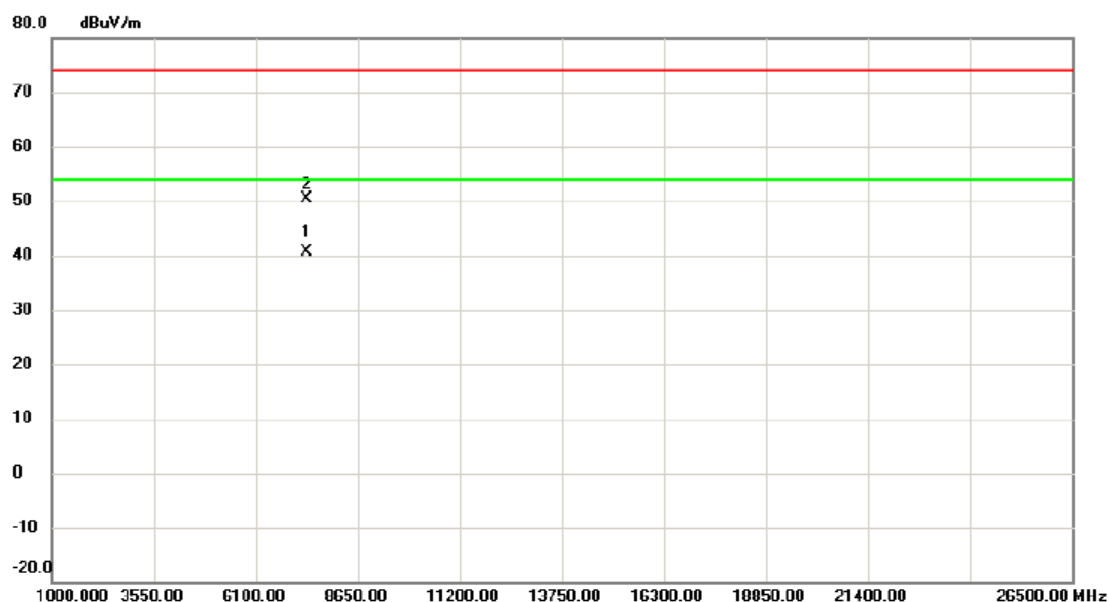

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7370.910	31.26	9.47	40.73	54.00	-13.27	AVG	
2		7371.170	41.00	9.47	50.47	74.00	-23.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2457 MHz

Horizontal




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.500	93.41	9.28	102.69	54.00	48.69	AVG	No Limit
2	X	2454.600	102.77	9.28	112.05	74.00	38.05	peak	No Limit
3		2483.500	54.79	9.35	64.14	74.00	-9.86	peak	
4		2483.500	35.92	9.35	45.27	54.00	-8.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2457 MHz

Horizontal

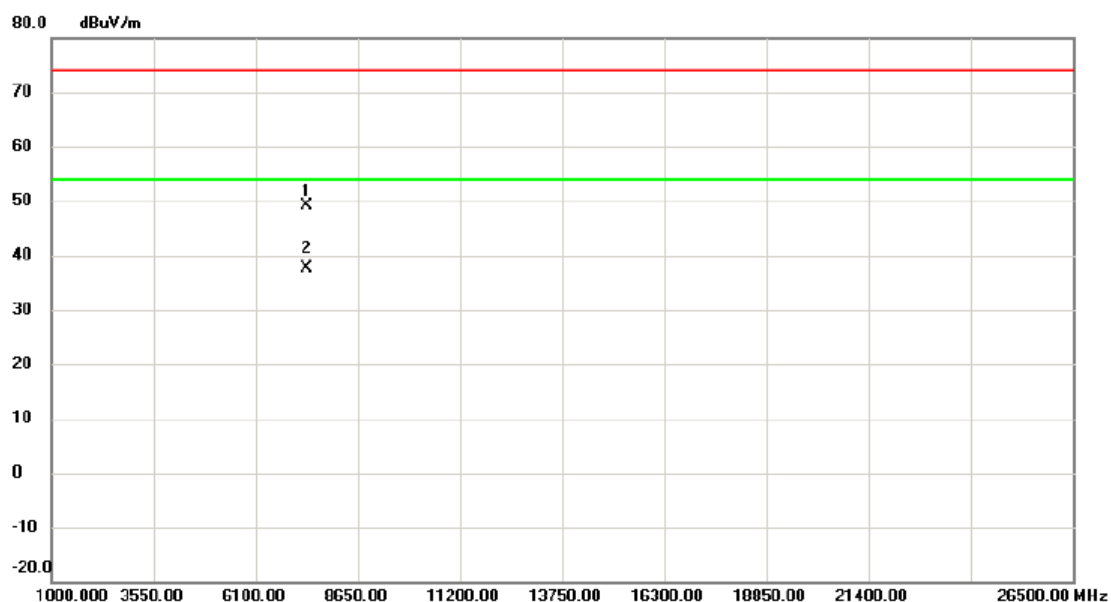

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7370.770	39.76	9.47	49.23	74.00	-24.77	peak	
2	*	7371.250	28.20	9.47	37.67	54.00	-16.33	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical

130 dBuV/m

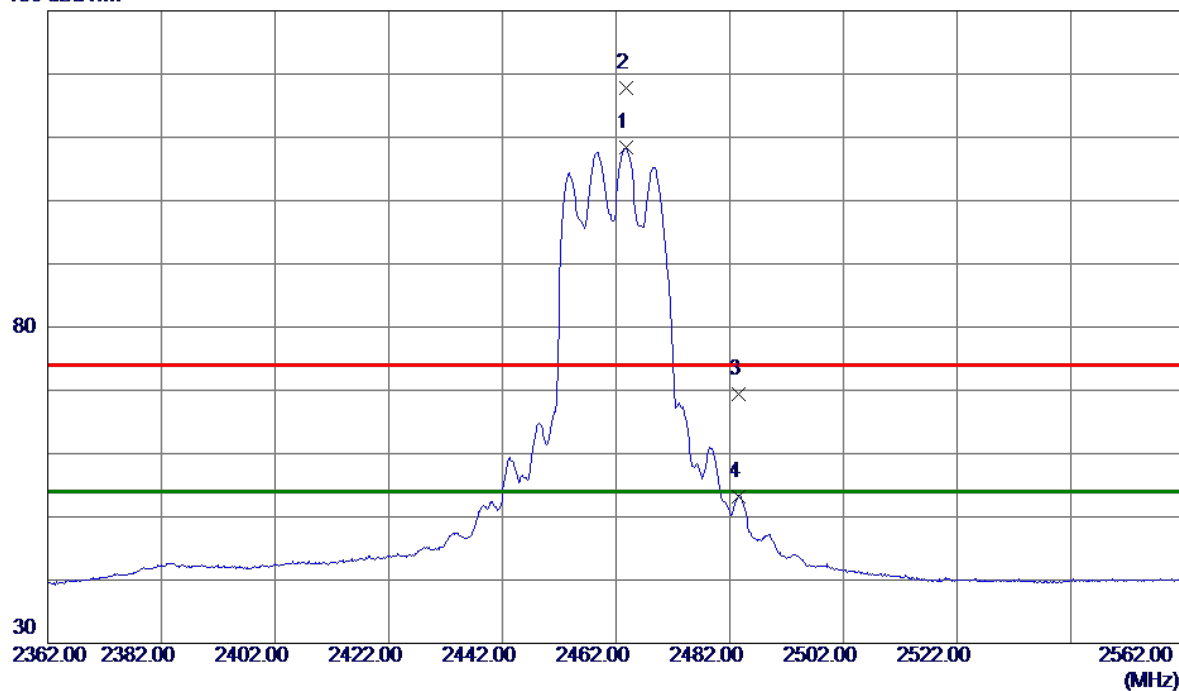

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2463.7000	99.16	9.30	108.46	54.00	54.46	AVG	No Limit
2	2463.8000	108.41	9.30	117.71	74.00	43.71	Peak	No Limit
3	2483.5000	60.13	9.35	69.48	74.00	-4.52	Peak	
4	2483.5000	43.93	9.35	53.28	54.00	-0.72	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical

80 dBuV/m

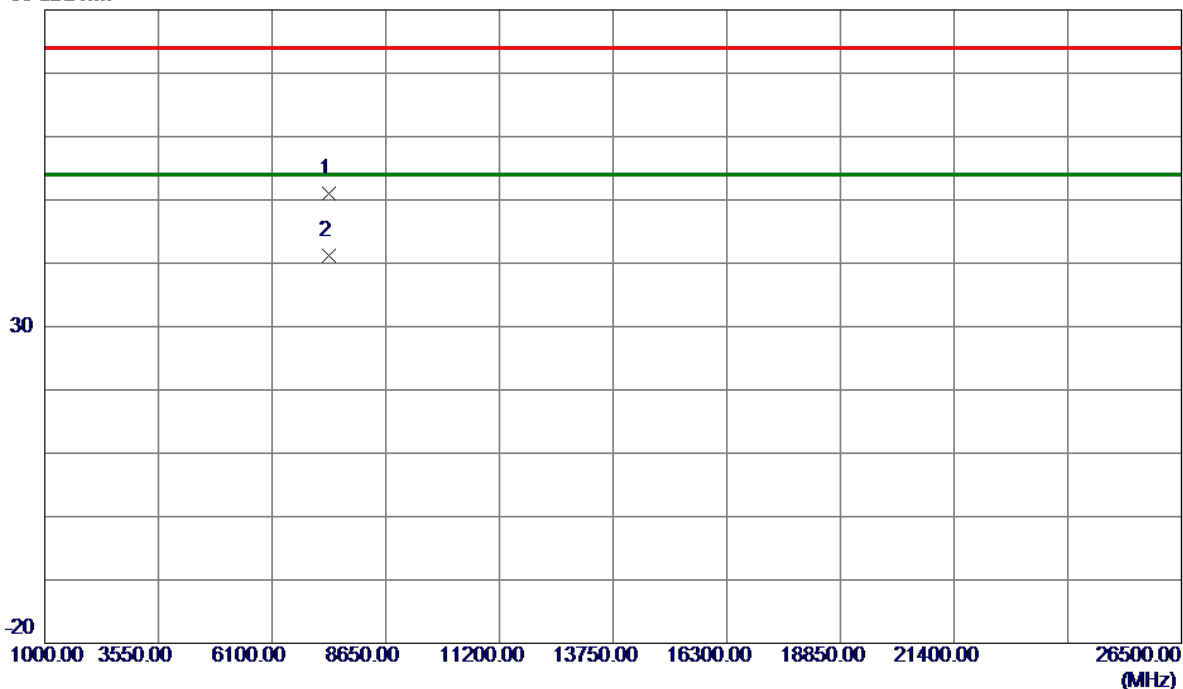


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7386.0000	41.44	9.50	50.94	74.00	-23.06	Peak	
2 *	7386.1400	31.65	9.50	41.15	54.00	-12.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

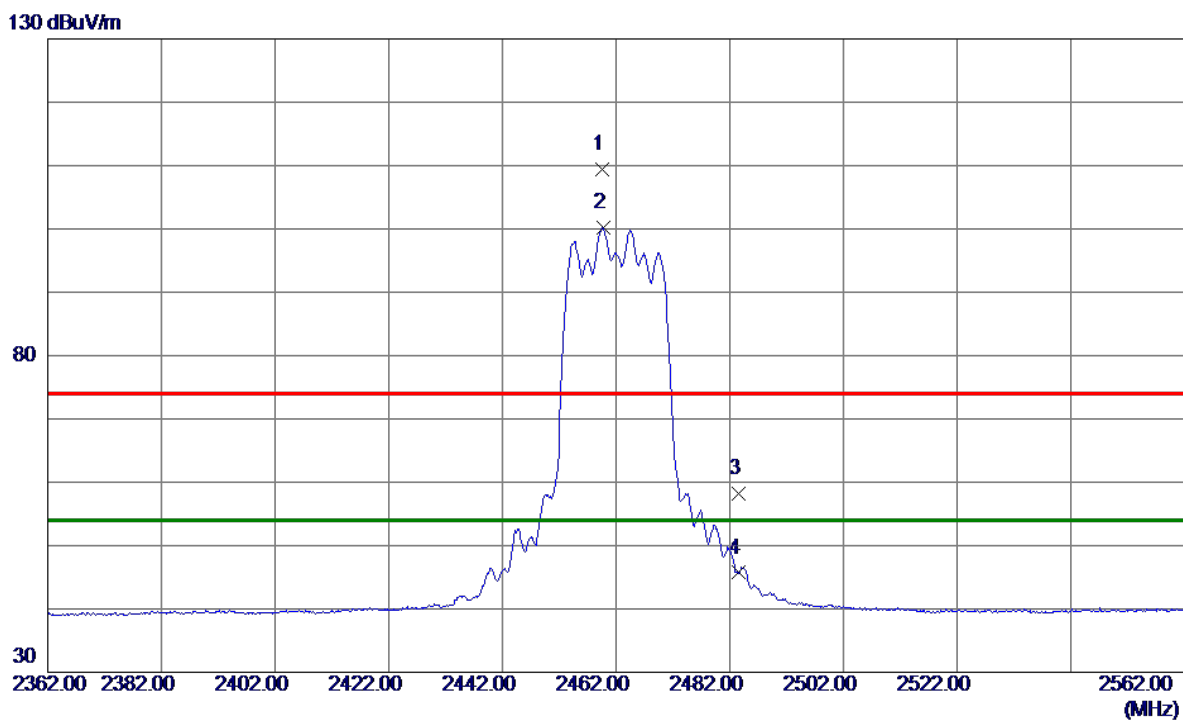

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2459.5000	100.17	9.29	109.46	74.00	35.46	Peak	No Limit
2 *	2459.7000	91.00	9.29	100.29	54.00	46.29	AVG	No Limit
3	2483.5000	48.78	9.35	58.13	74.00	-15.87	Peak	
4	2483.5000	36.35	9.35	45.70	54.00	-8.30	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

80 dBuV/m

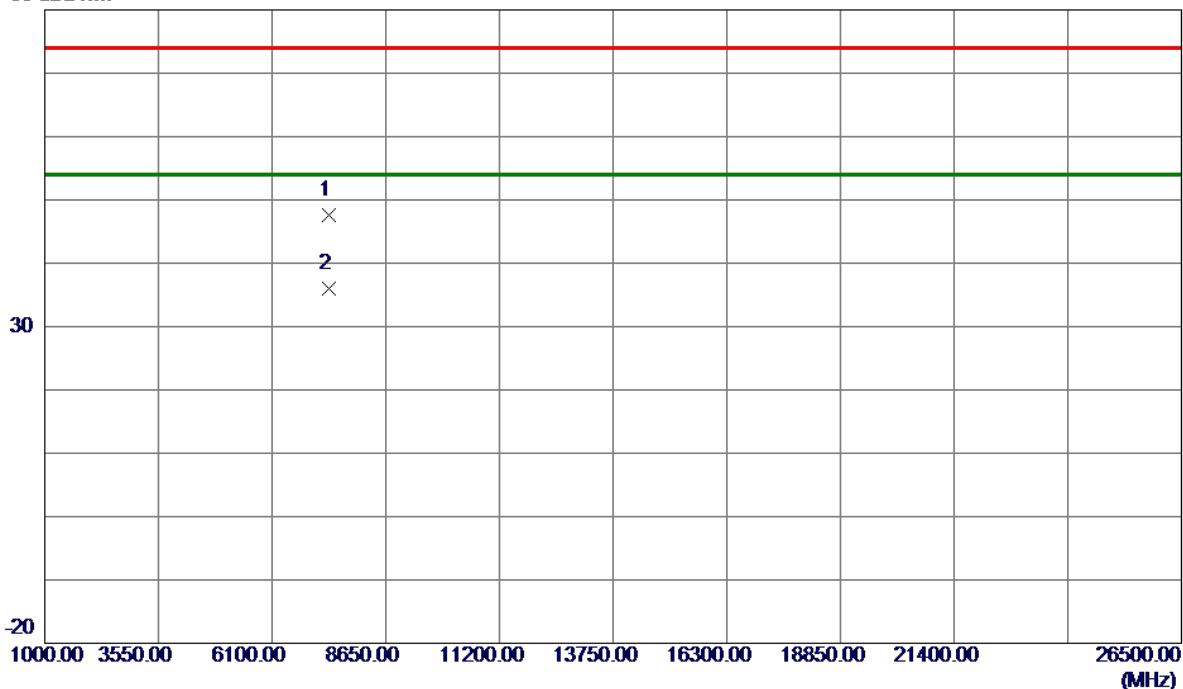

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7380.0500	38.12	9.49	47.61	74.00	-26.39	Peak	
2 *	7386.1400	26.58	9.50	36.08	54.00	-17.92	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422 MHz

Vertical

130 dBuV/m

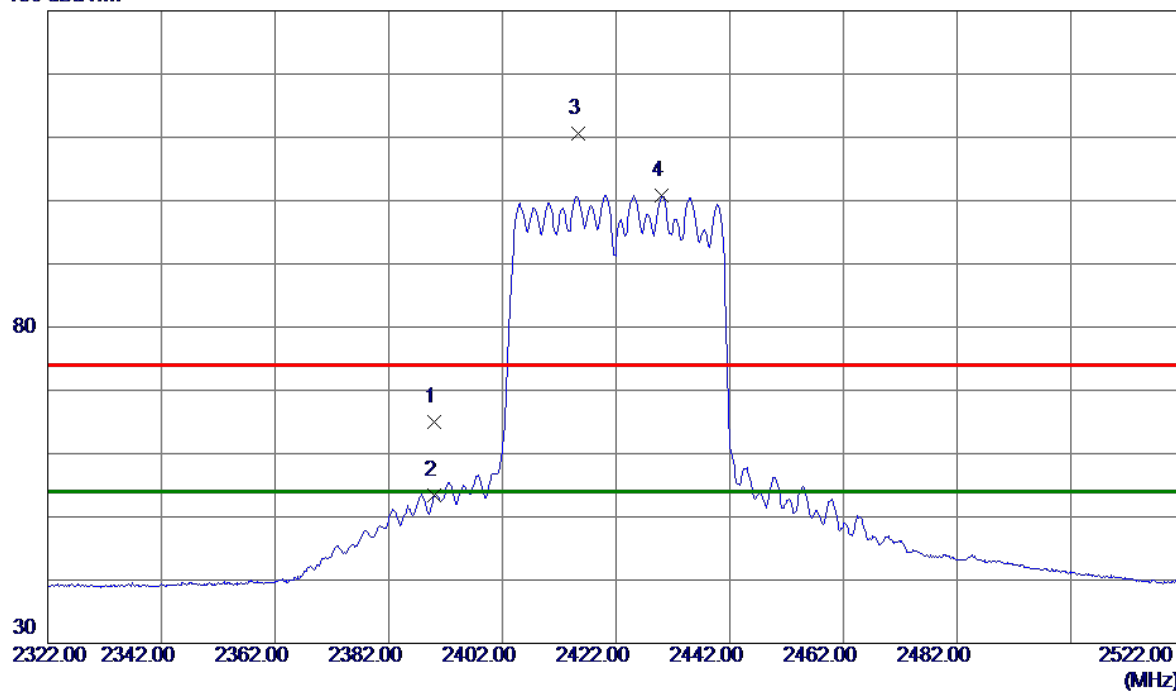

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	55.90	9.11	65.01	74.00	-8.99	Peak	
2	2390.0000	44.29	9.11	53.40	54.00	-0.60	AVG	
3	2415.3000	101.52	9.17	110.69	74.00	36.69	Peak	No Limit
4 *	2430.0000	91.63	9.21	100.84	54.00	46.84	AVG	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422 MHz

Vertical

80 dBuV/m

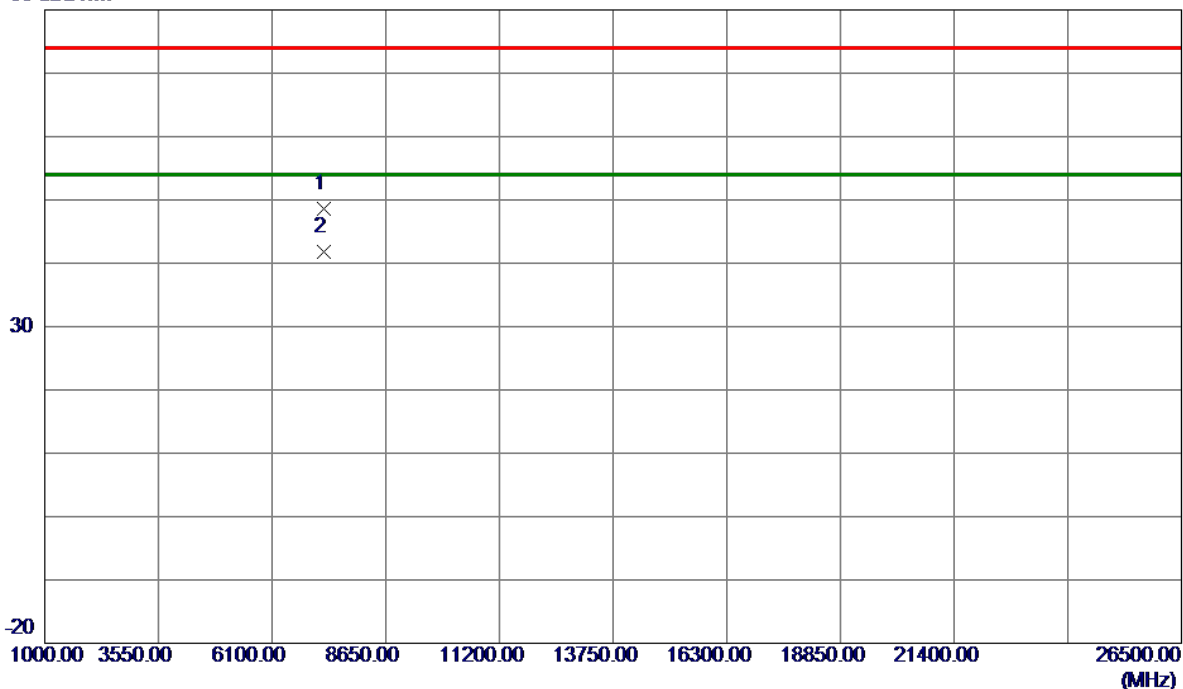


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7265.9700	39.39	9.27	48.66	74.00	-25.34	Peak	
2 *	7266.0400	32.54	9.27	41.81	54.00	-12.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422 MHz

Horizontal

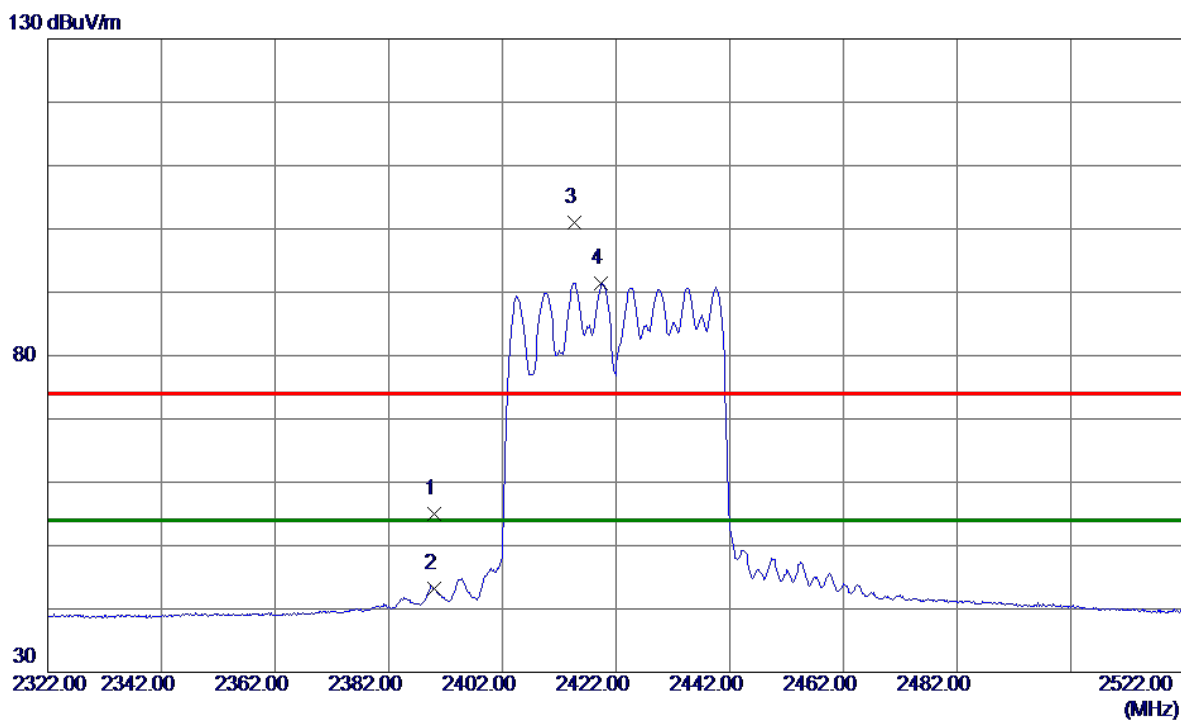

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	45.85	9.11	54.96	74.00	-19.04	Peak	
2	2390.0000	34.08	9.11	43.19	54.00	-10.81	AVG	
3	2414.7000	91.92	9.17	101.09	74.00	27.09	Peak	No Limit
4 *	2419.4000	82.25	9.18	91.43	54.00	37.43	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422 MHz

Horizontal

80 dBuV/m

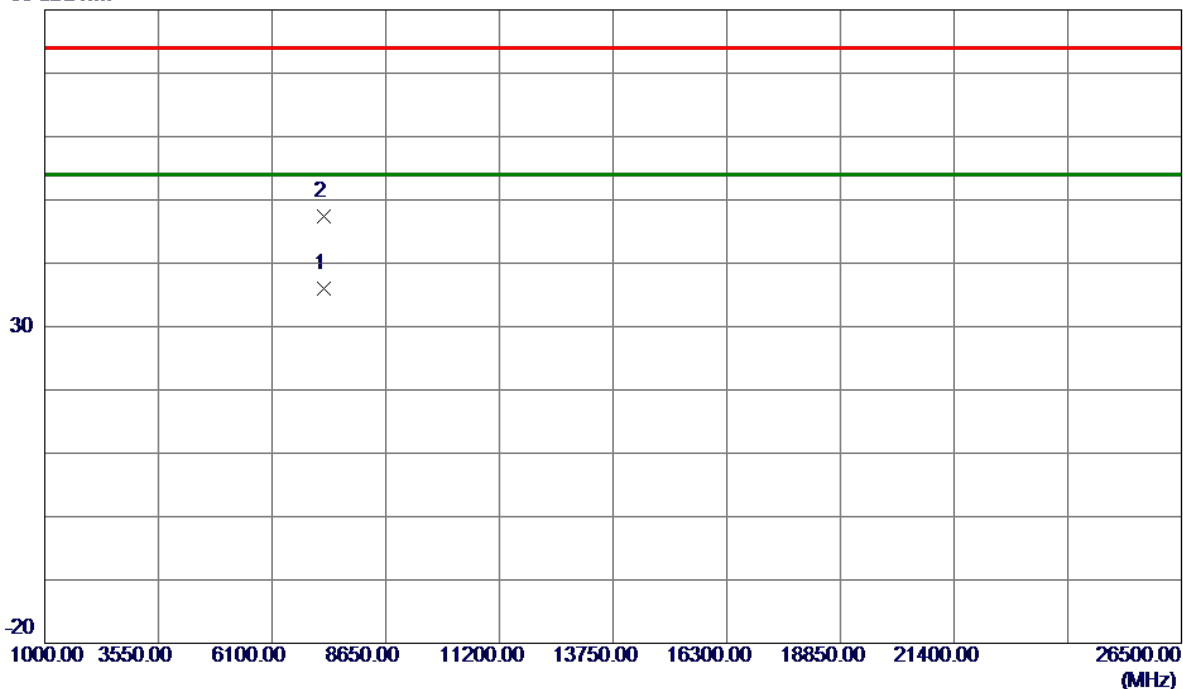


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7266.0400	26.69	9.27	35.96	54.00	-18.04	AVG	
2	7266.3000	38.03	9.28	47.31	74.00	-26.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2427 MHz

Vertical

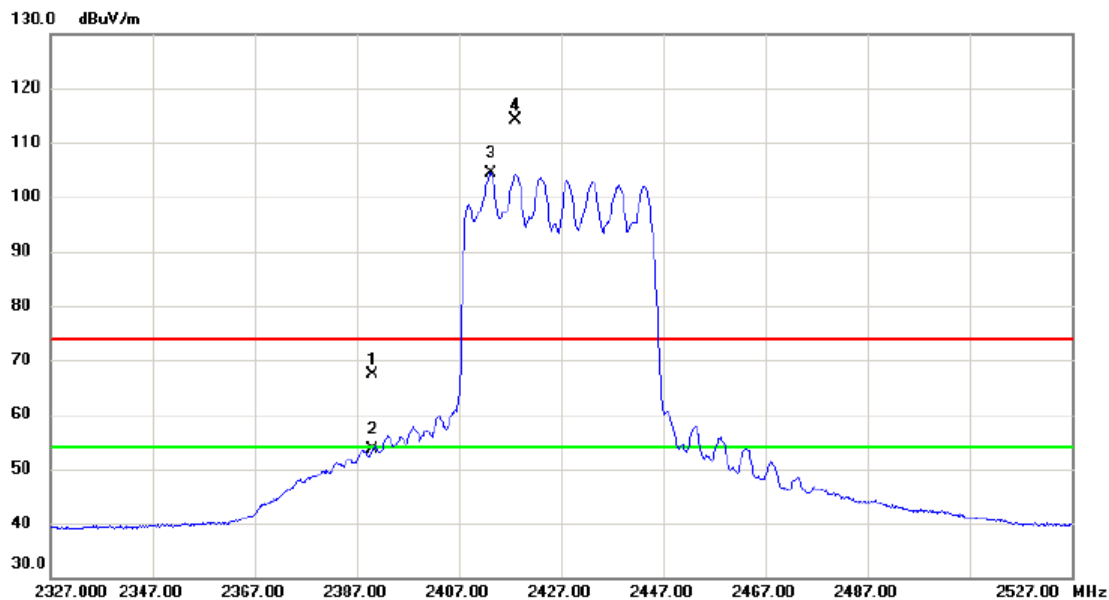


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	58.21	9.11	67.32	74.00	-6.68	peak	
2		2390.000	44.41	9.11	53.52	54.00	-0.48	AVG	
3	*	2413.200	95.10	9.16	104.26	54.00	50.26	AVG	No Limit
4	X	2418.000	104.95	9.18	114.13	74.00	40.13	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2427 MHz

Vertical

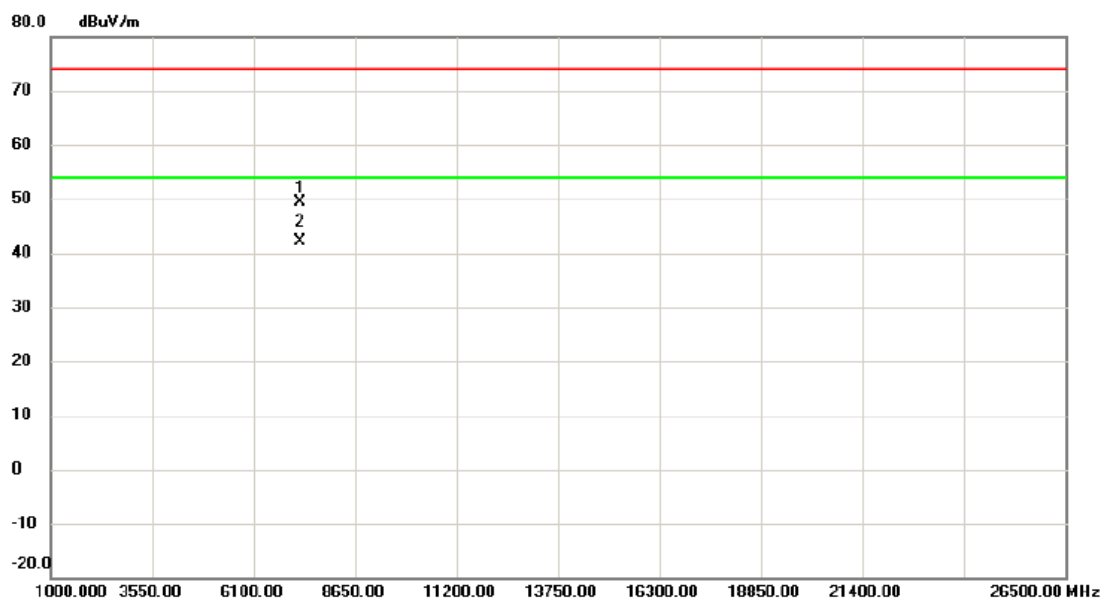


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7280.660	39.96	9.30	49.26	74.00	-24.74	peak	
2	*	7281.020	32.77	9.30	42.07	54.00	-11.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2427 MHz

Horizontal

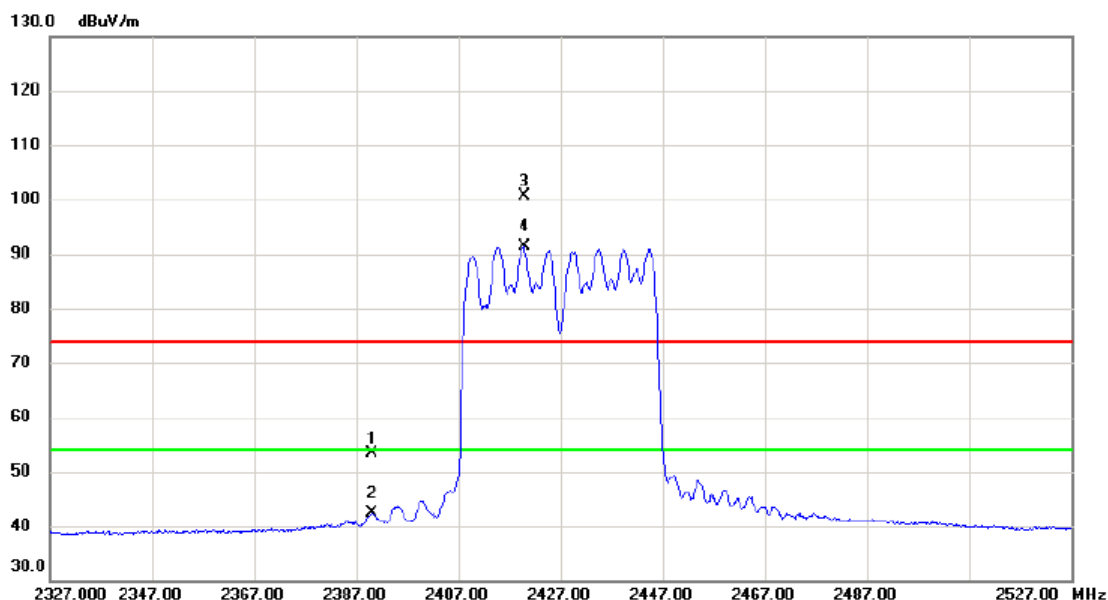


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	44.33	9.11	53.44	74.00	-20.56	peak	
2		2390.000	33.39	9.11	42.50	54.00	-11.50	AVG	
3	X	2419.800	91.44	9.19	100.63	74.00	26.63	peak	No Limit
4	*	2419.800	82.16	9.19	91.35	54.00	37.35	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2427 MHz

Horizontal

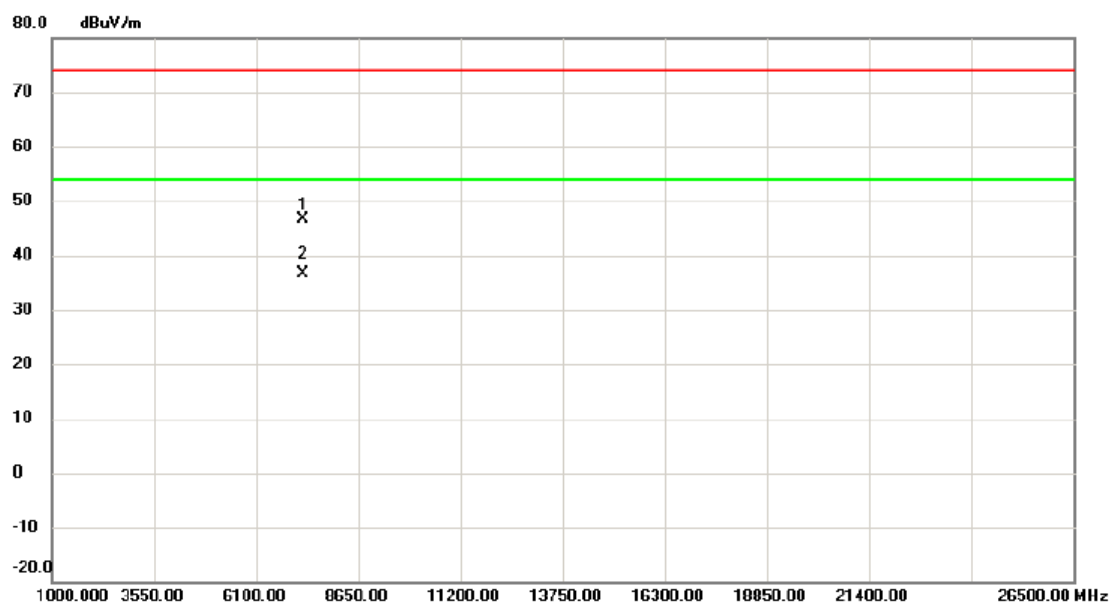

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7272.660	37.34	9.29	46.63	74.00	-27.37	peak	
2	*	7280.960	27.45	9.30	36.75	54.00	-17.25	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical

130 dBuV/m

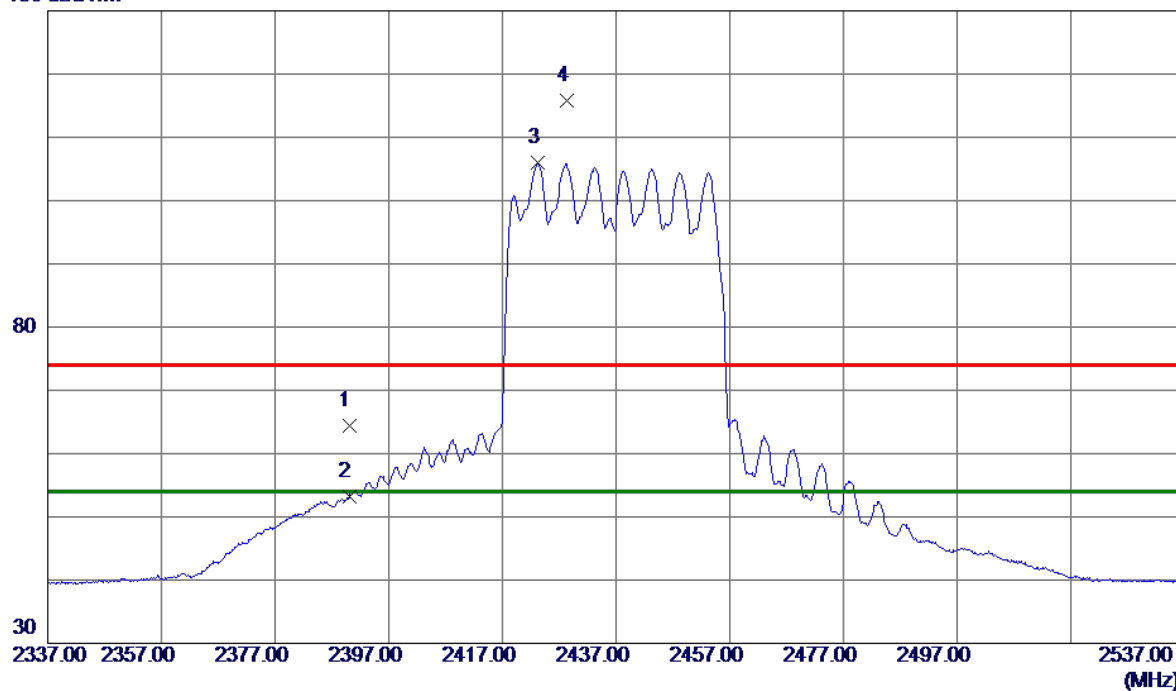

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	55.24	9.11	64.35	74.00	-9.65	Peak	
2	2390.0000	44.16	9.11	53.27	54.00	-0.73	AVG	
3 *	2423.2000	96.87	9.19	106.06	54.00	52.06	AVG	No Limit
4	2428.3000	106.56	9.21	115.77	74.00	41.77	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical

80 dBuV/m

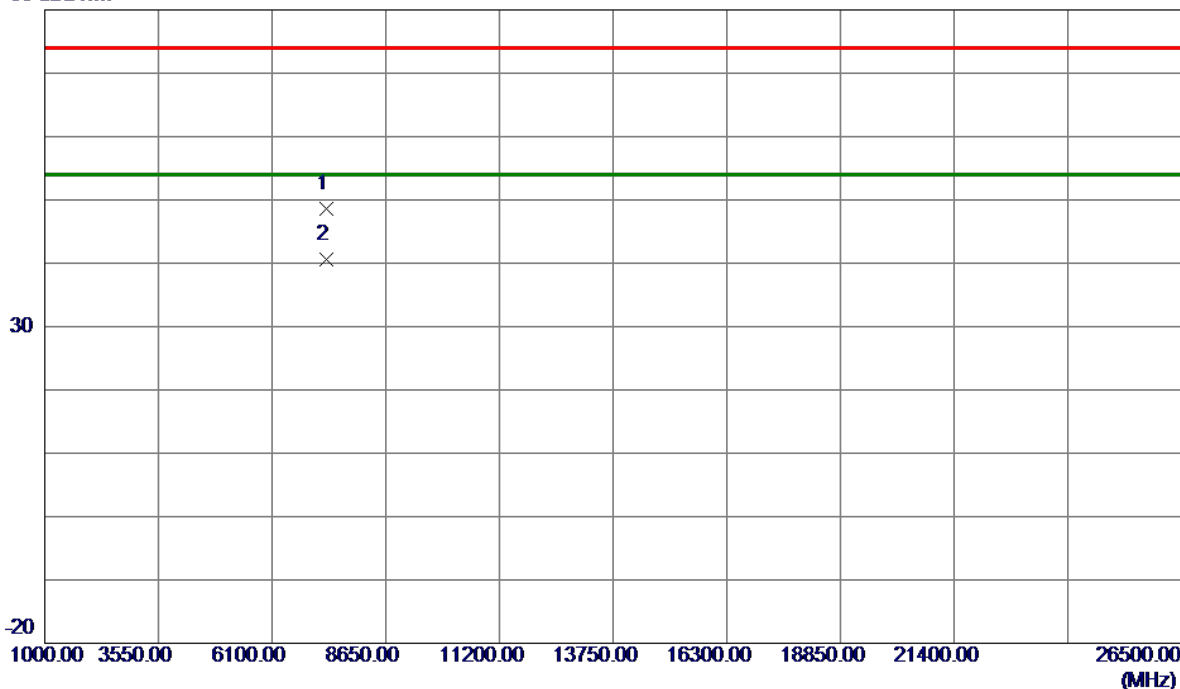


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7310.8600	39.26	9.36	48.62	74.00	-25.38	Peak	
2 *	7311.0200	31.16	9.36	40.52	54.00	-13.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal

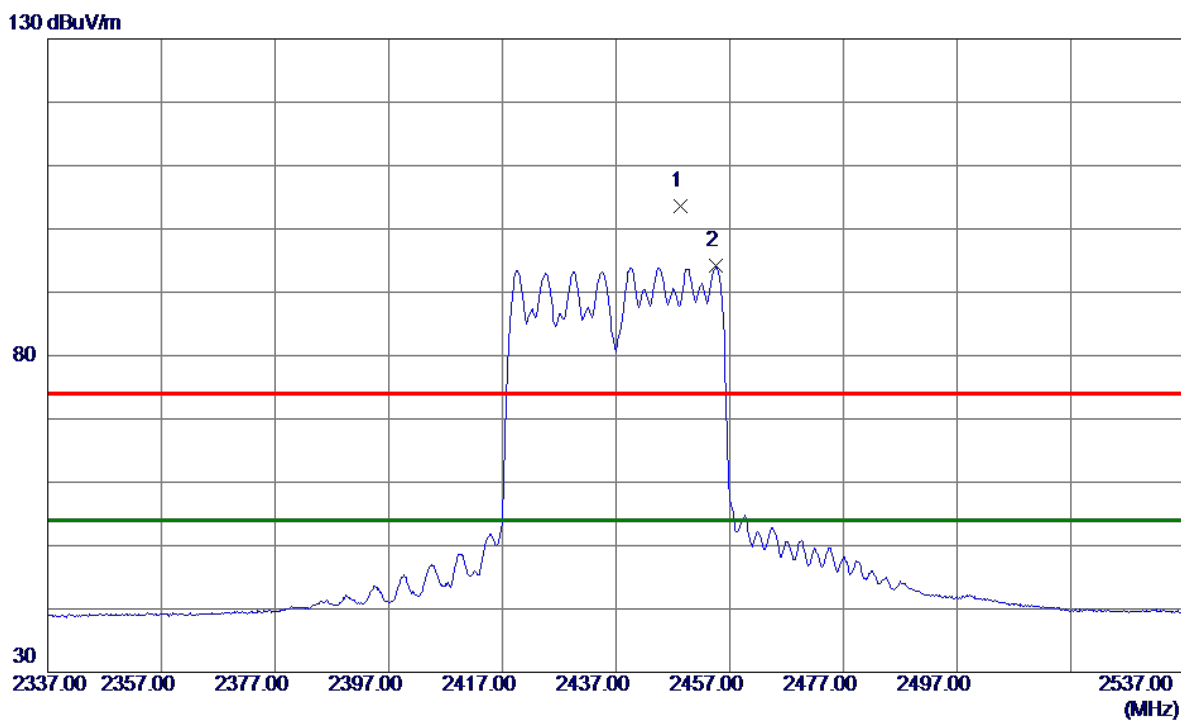

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2448.3000	94.41	9.26	103.67	74.00	29.67	Peak	No Limit
2 *	2454.6000	84.90	9.27	94.17	54.00	40.17	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal

80 dBuV/m

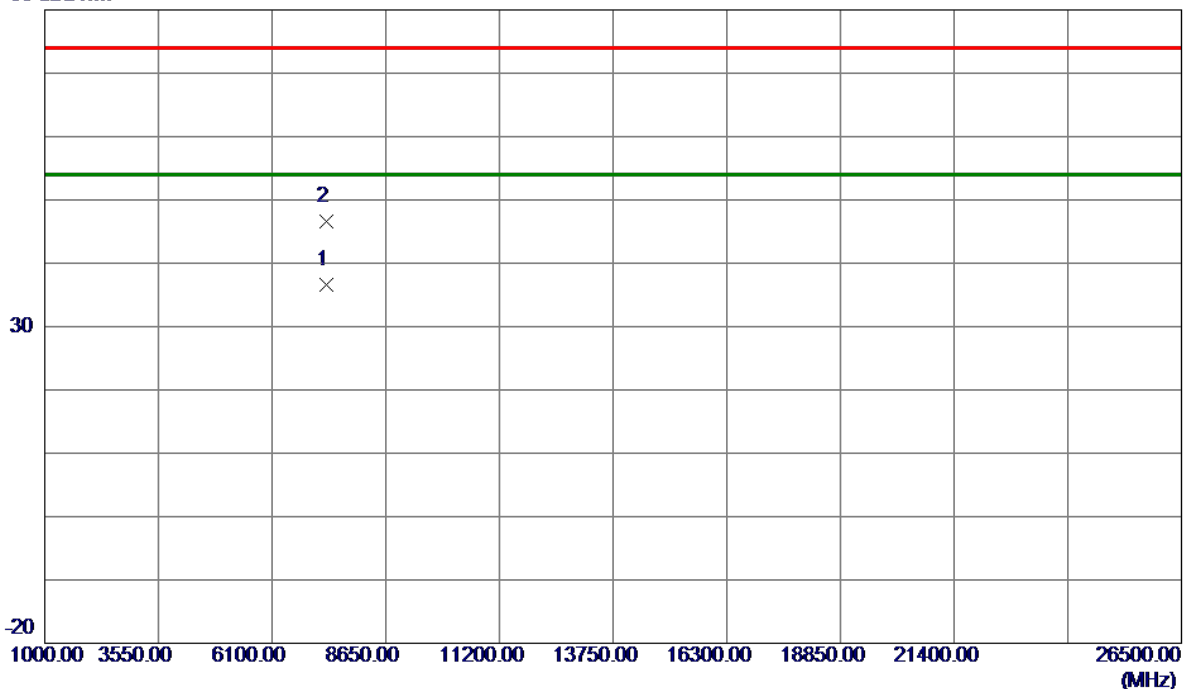


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7311.0700	27.24	9.36	36.60	54.00	-17.40	AVG	
2	7311.7100	37.19	9.36	46.55	74.00	-27.45	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2447 MHz

Vertical

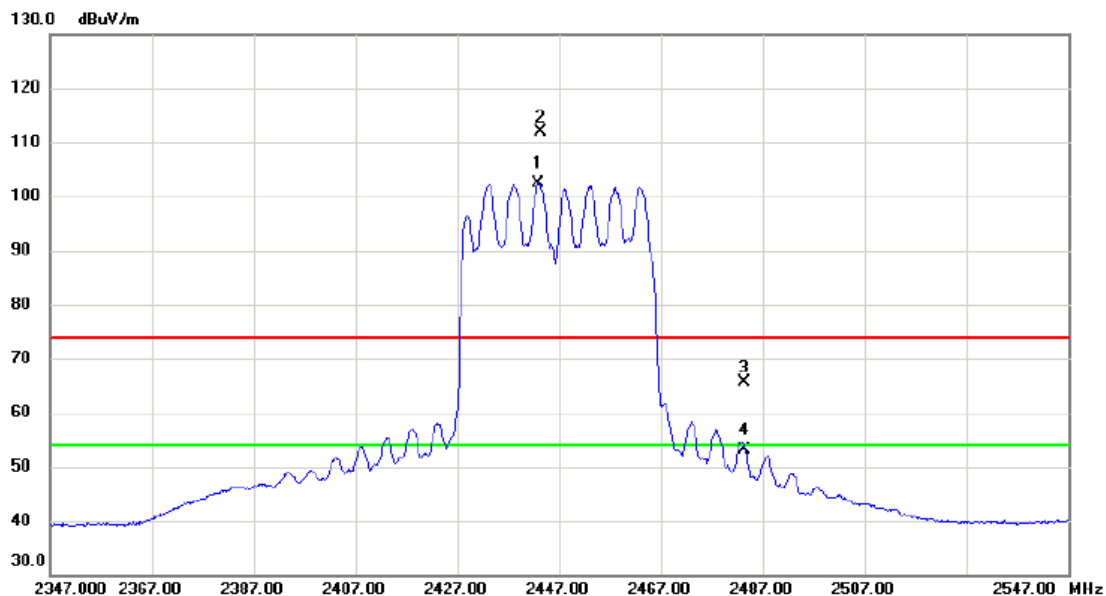

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2442.900	93.03	9.25	102.28	54.00	48.28	AVG	No Limit
2	X	2443.400	102.71	9.25	111.96	74.00	37.96	peak	No Limit
3		2483.500	56.33	9.35	65.68	74.00	-8.32	peak	
4		2483.500	43.87	9.35	53.22	54.00	-0.78	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2447 MHz

Vertical

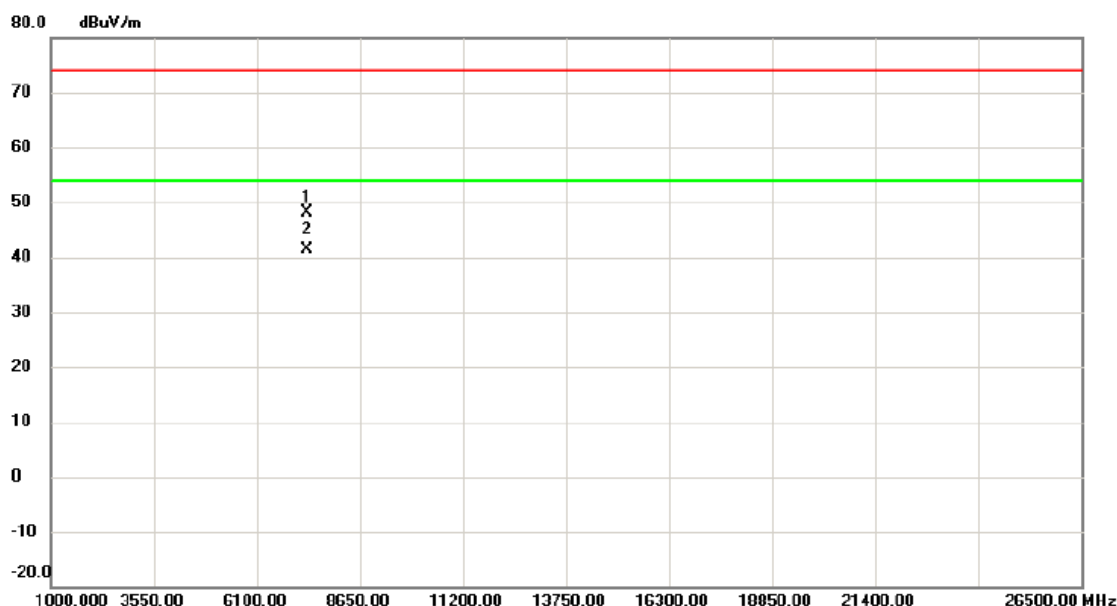


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7337.610	38.63	9.42	48.05	74.00	-25.95	peak	
2	*	7340.980	31.94	9.42	41.36	54.00	-12.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2447 MHz

Horizontal

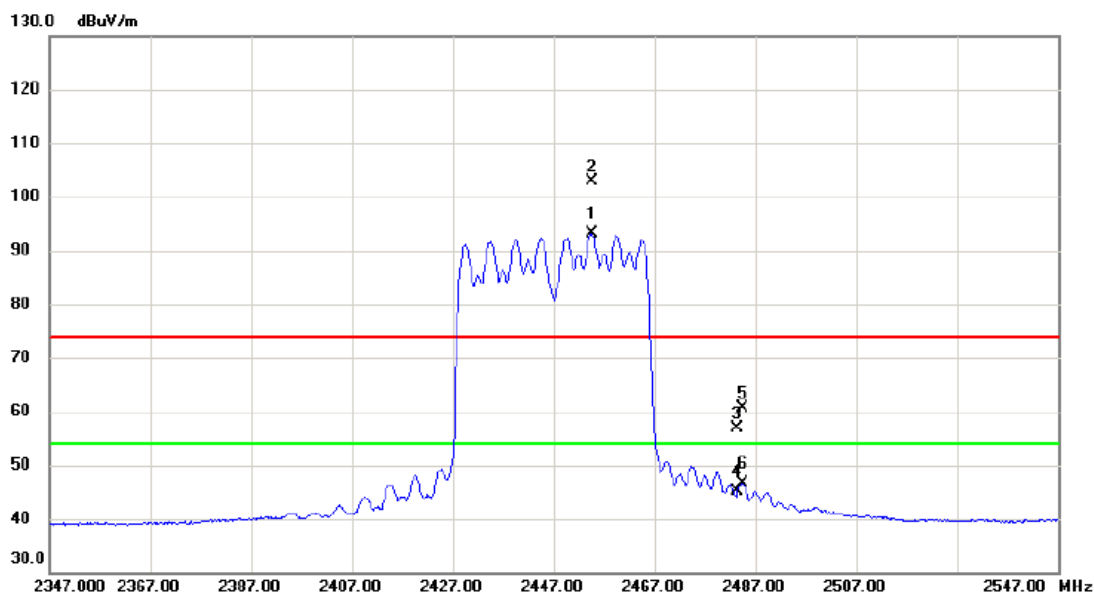

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2454.500	83.97	9.28	93.25	54.00	39.25	AVG	No Limit
2	X	2454.700	93.56	9.28	102.84	74.00	28.84	peak	No Limit
3		2483.500	47.48	9.35	56.83	74.00	-17.17	peak	
4		2483.500	35.67	9.35	45.02	54.00	-8.98	AVG	
5		2484.400	51.33	9.35	60.68	74.00	-13.32	peak	
6		2484.400	37.37	9.35	46.72	54.00	-7.28	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2447 MHz

Horizontal

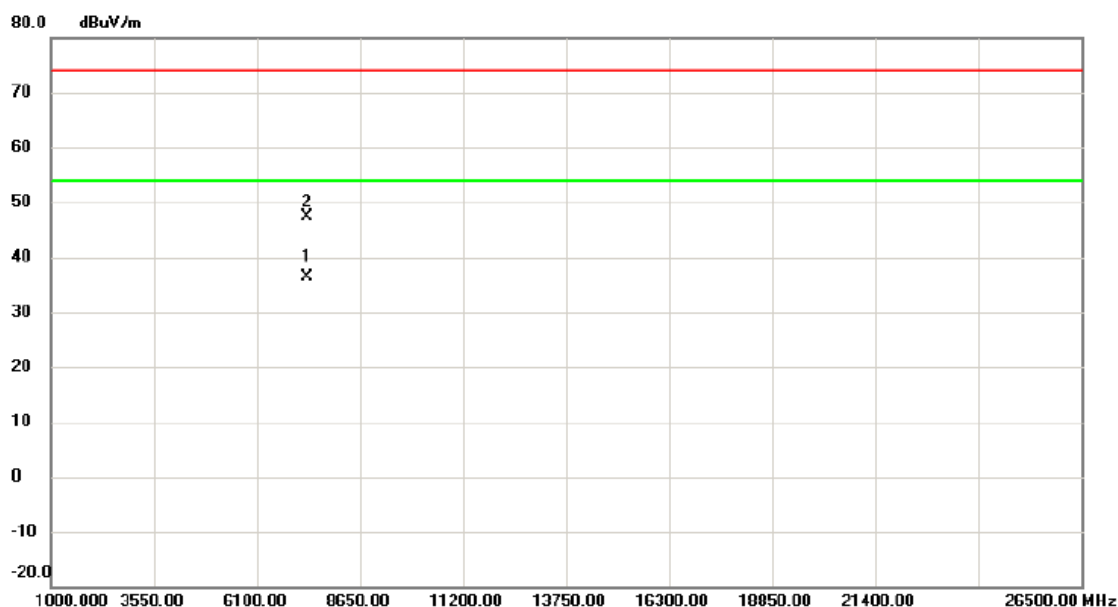

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7340.980	26.98	9.42	36.40	54.00	-17.60	AVG	
2		7341.100	38.01	9.42	47.43	74.00	-26.57	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452 MHz

Vertical

130 dBuV/m

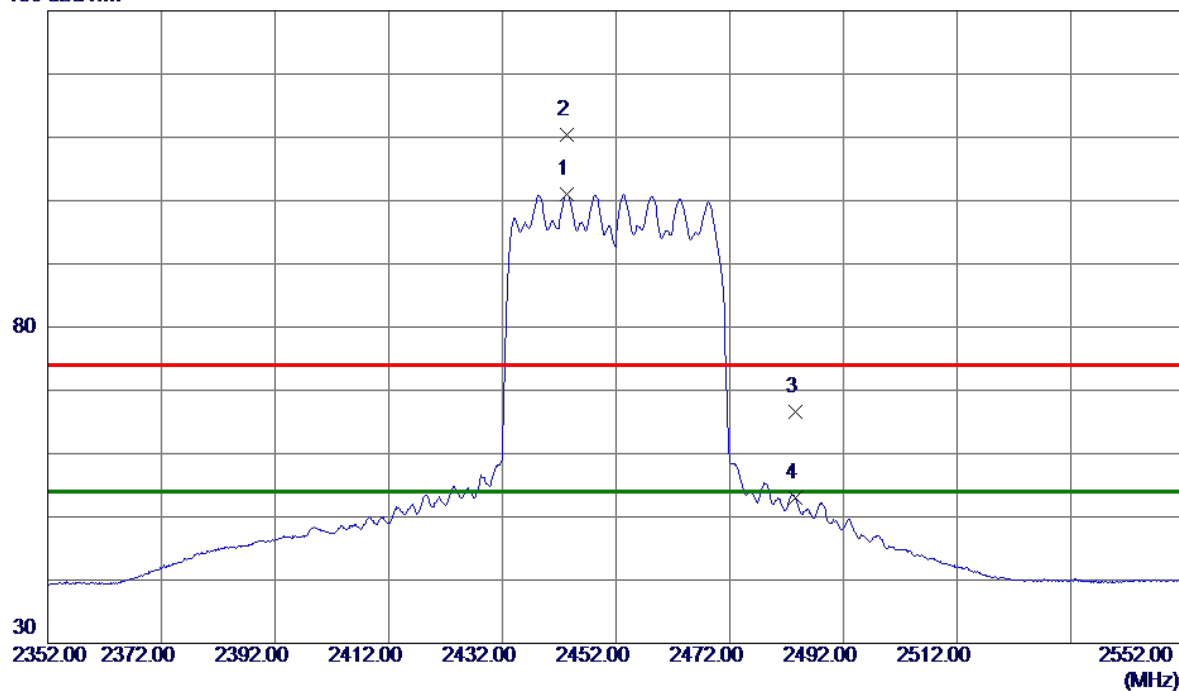

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2443.3000	91.75	9.24	100.99	54.00	46.99	AVG	No Limit
2	2443.4000	101.19	9.25	110.44	74.00	36.44	Peak	No Limit
3	2483.5000	57.29	9.35	66.64	74.00	-7.36	Peak	
4	2483.5000	43.58	9.35	52.93	54.00	-1.07	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452 MHz

Vertical

80 dBuV/m

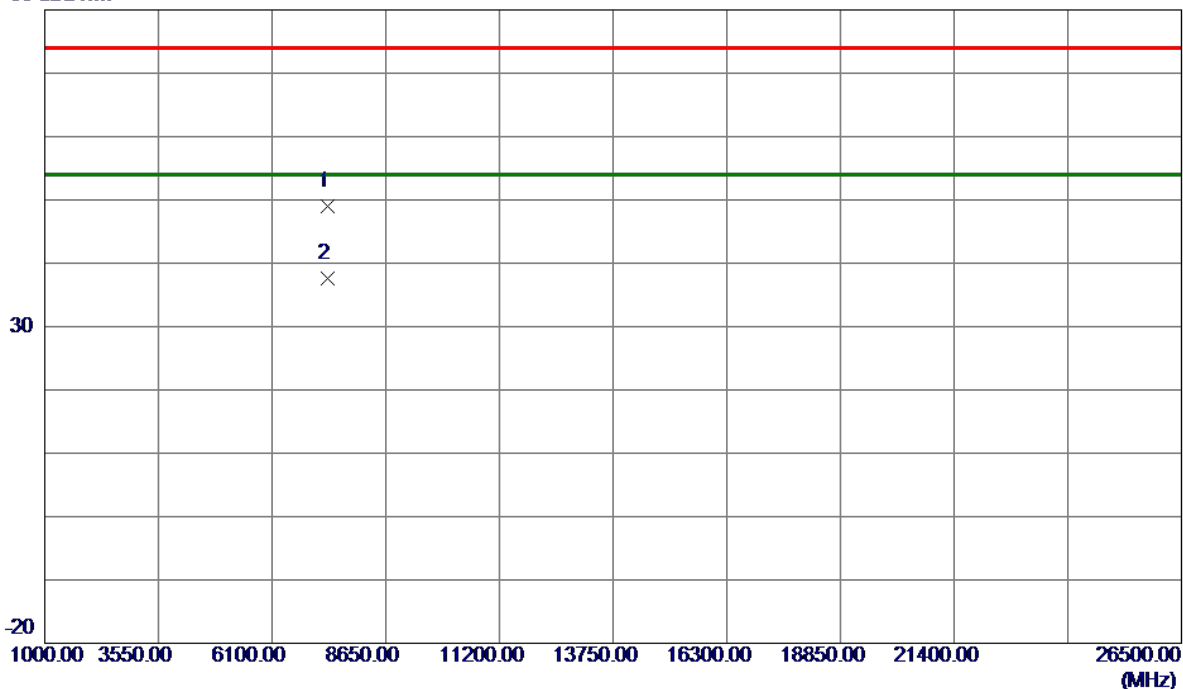


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7355.0200	39.47	9.44	48.91	74.00	-25.09	Peak	
2 *	7356.8700	28.23	9.44	37.67	54.00	-16.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452 MHz

Horizontal

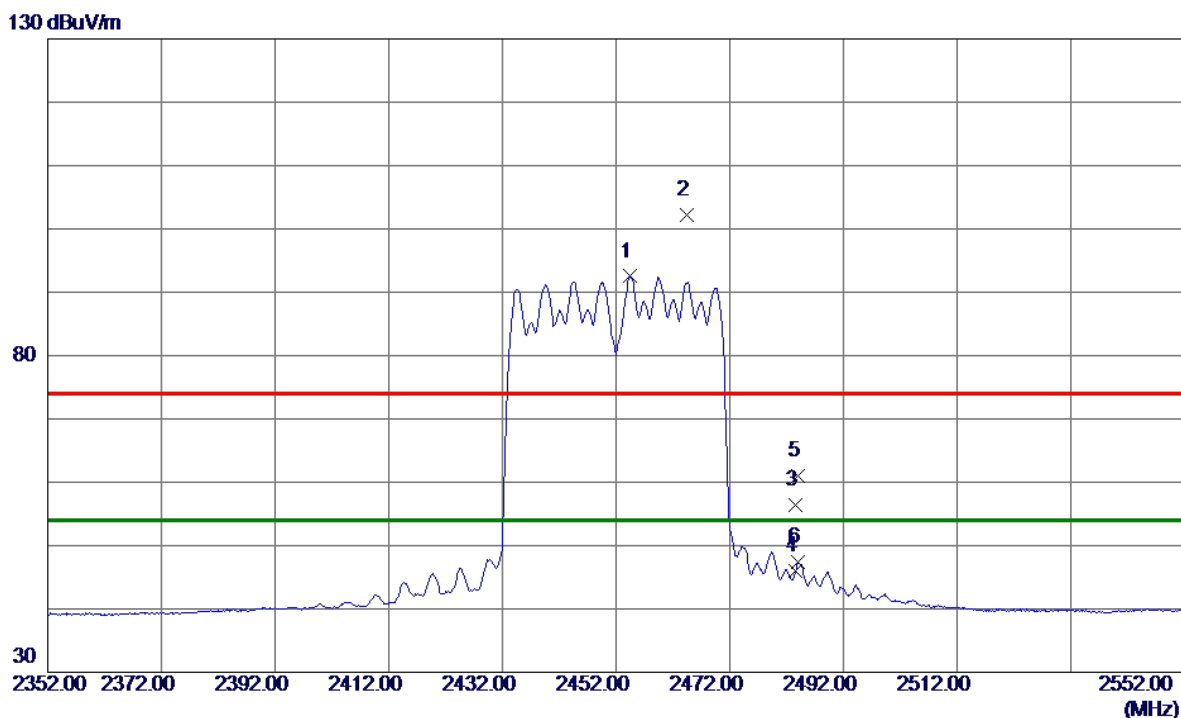

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2454.4000	83.23	9.27	92.50	54.00	38.50	AVG	No Limit
2	2464.4000	92.87	9.30	102.17	74.00	28.17	Peak	No Limit
3	2483.5000	46.99	9.35	56.34	74.00	-17.66	Peak	
4	2483.5000	36.69	9.35	46.04	54.00	-7.96	AVG	
5	2484.1000	51.63	9.35	60.98	74.00	-13.02	Peak	
6	2484.1000	38.00	9.35	47.35	54.00	-6.65	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452 MHz

Horizontal

80 dBuV/m

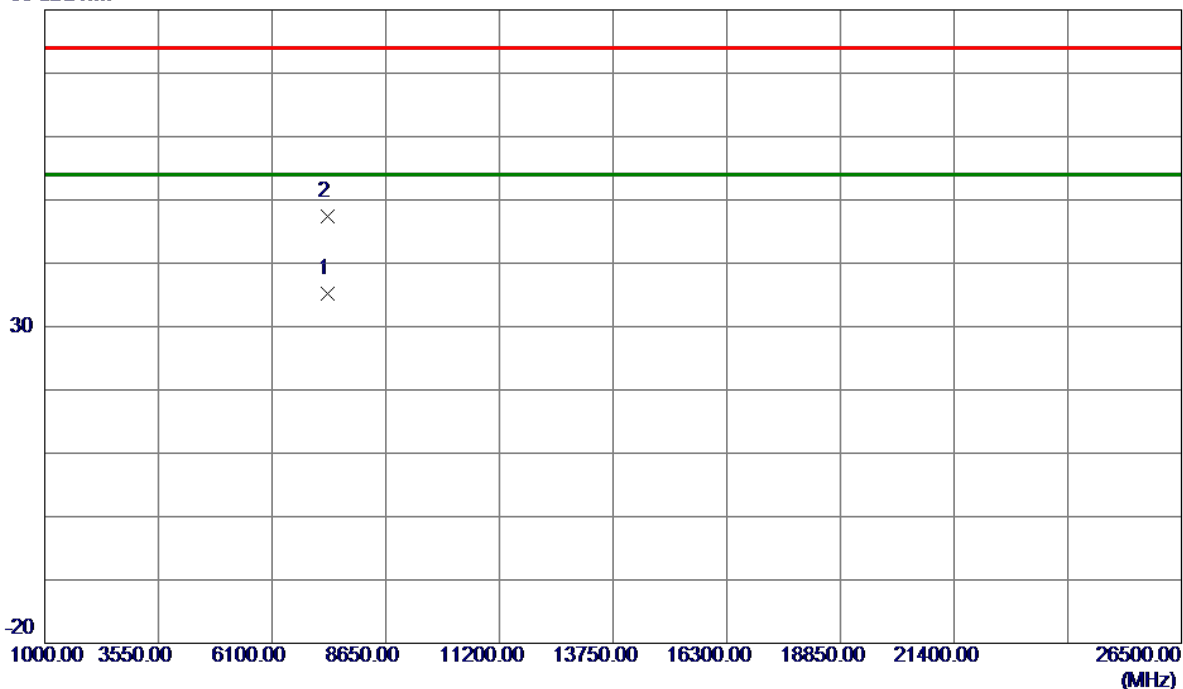


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7354.3100	25.76	9.44	35.20	54.00	-18.80	AVG	
2	7355.0900	37.89	9.44	47.33	74.00	-26.67	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2412 MHz

Vertical

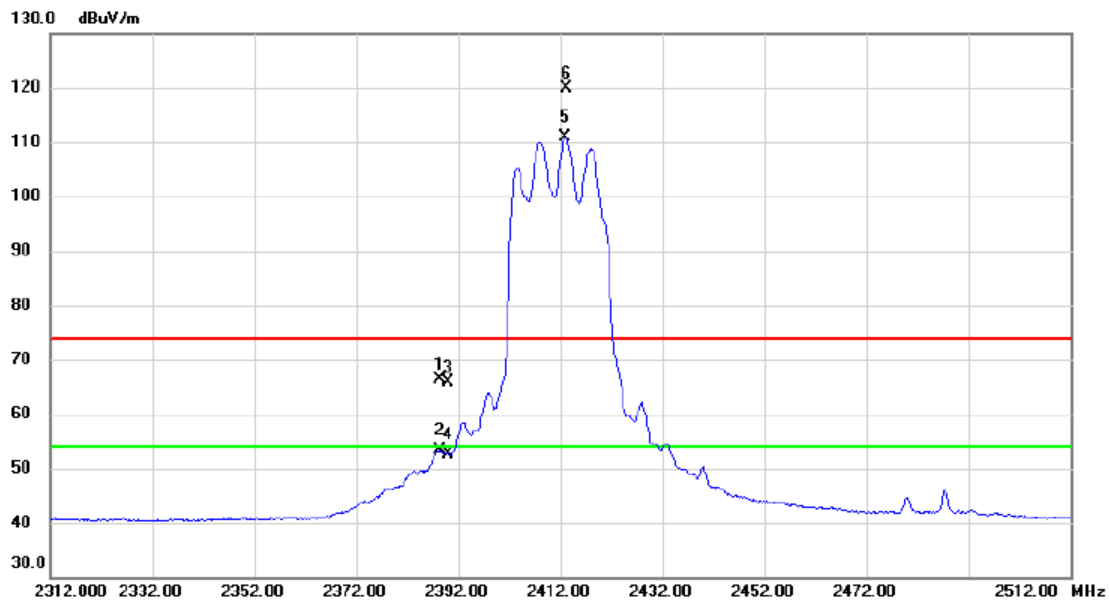


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.300	57.16	9.11	66.27	74.00	-7.73	peak	
2		2388.300	44.15	9.11	53.26	54.00	-0.74	AVG	
3		2390.000	56.87	9.11	65.98	74.00	-8.02	peak	
4		2390.000	43.64	9.11	52.75	54.00	-1.25	AVG	
5	*	2413.000	101.80	9.16	110.96	54.00	56.96	AVG	No Limit
6	X	2413.200	110.62	9.16	119.78	74.00	45.78	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2412 MHz

Vertical

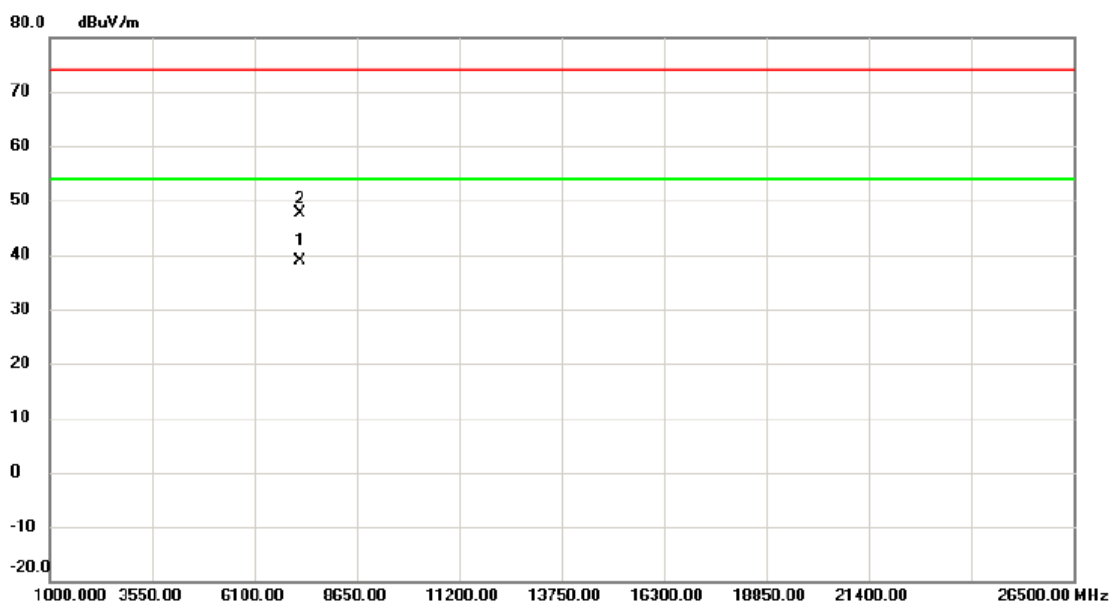

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7236.080	29.57	9.22	38.79	54.00	-15.21	AVG	
2		7236.140	38.53	9.22	47.75	74.00	-26.25	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2412 MHz

Horizontal

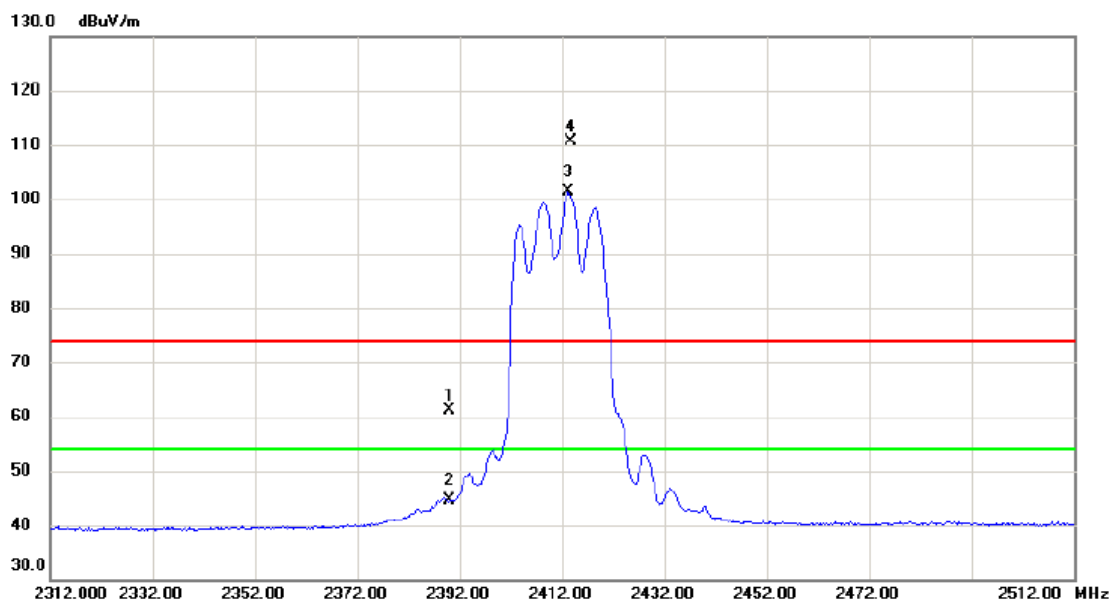


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	52.00	9.11	61.11	74.00	-12.89	peak	
2		2390.000	35.55	9.11	44.66	54.00	-9.34	AVG	
3	*	2413.200	92.13	9.16	101.29	54.00	47.29	AVG	No Limit
4	X	2413.700	101.41	9.16	110.57	74.00	36.57	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2412 MHz

Horizontal

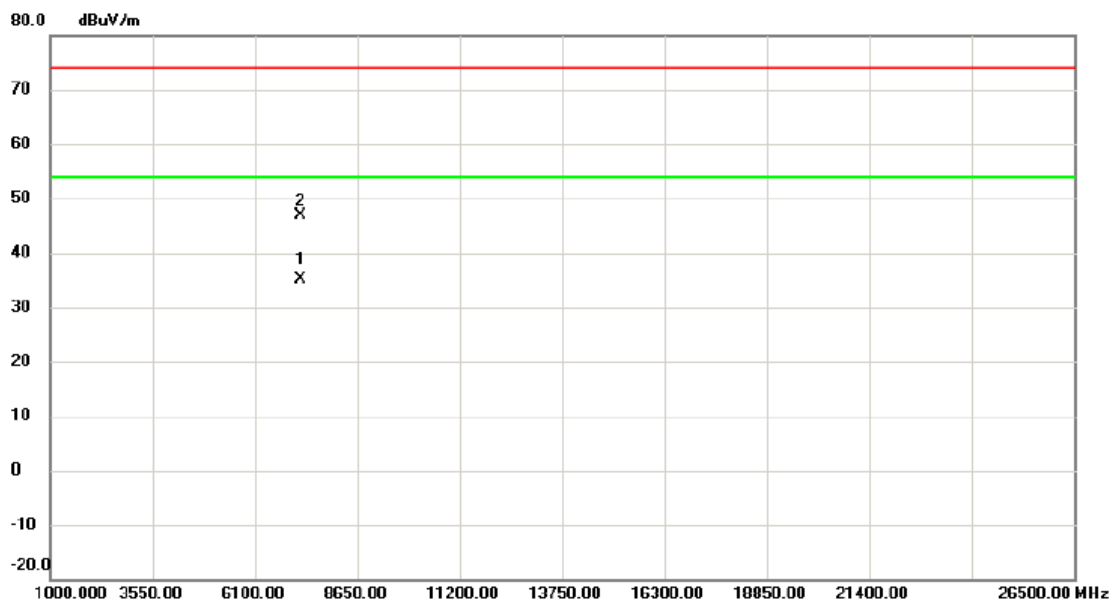

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7236.090	25.89	9.22	35.11	54.00	-18.89	AVG	
2		7236.860	37.72	9.22	46.94	74.00	-27.06	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2417 MHz

Vertical

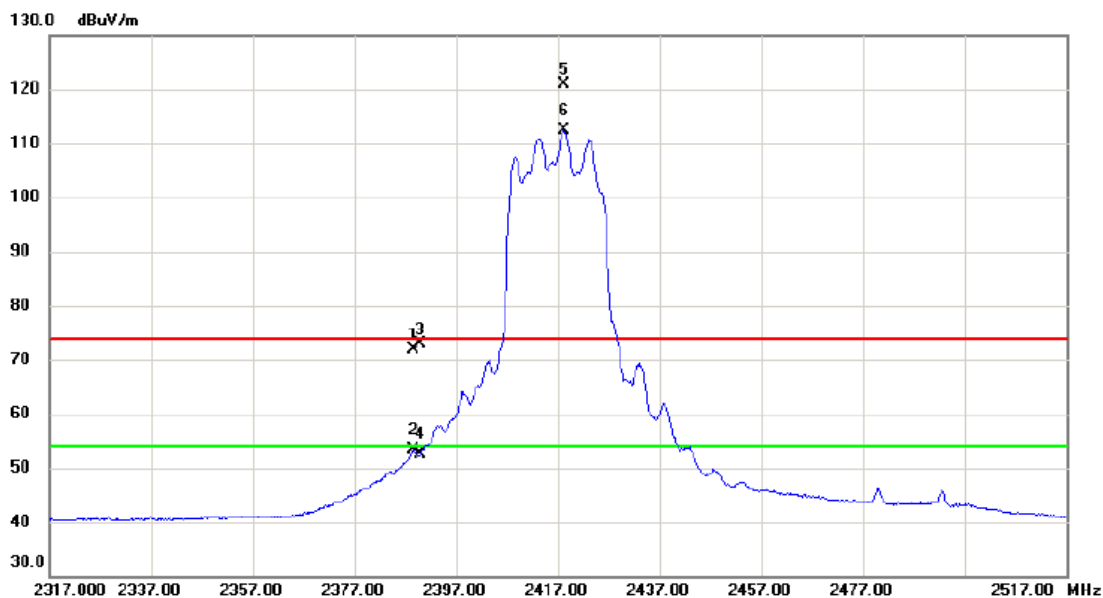


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.600	62.74	9.11	71.85	74.00	-2.15	peak	
2		2388.600	44.21	9.11	53.32	54.00	-0.68	AVG	
3		2390.000	63.87	9.11	72.98	74.00	-1.02	peak	
4		2390.000	43.46	9.11	52.57	54.00	-1.43	AVG	
5	X	2418.300	111.58	9.18	120.76	74.00	46.76	peak	No Limit
6	*	2418.300	103.22	9.18	112.40	54.00	58.40	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2417 MHz

Vertical

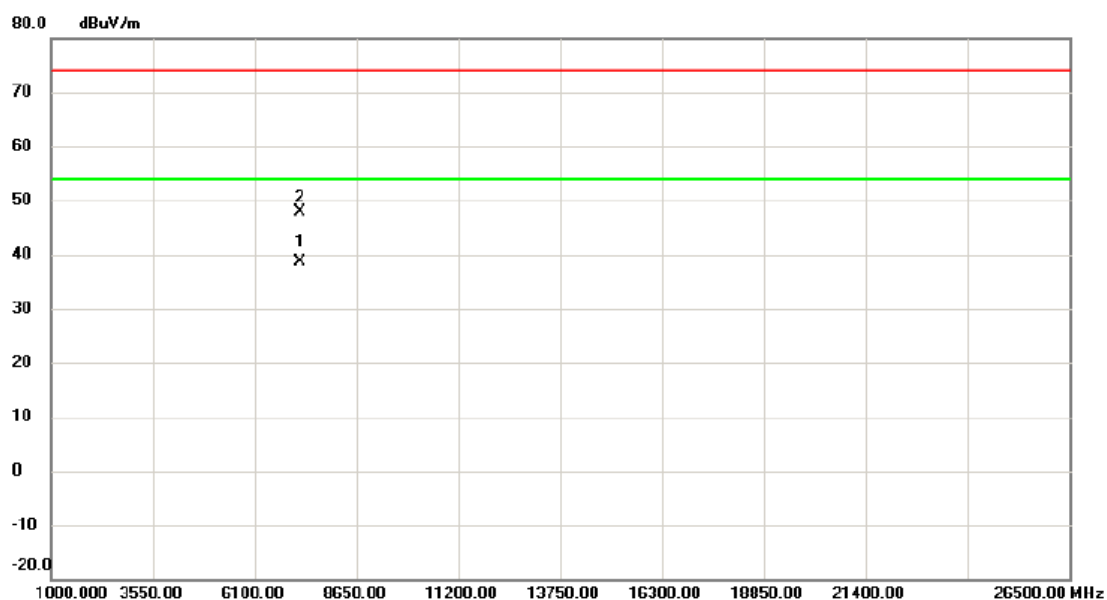


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7251.040	29.43	9.24	38.67	54.00	-15.33	AVG	
2		7251.160	38.53	9.24	47.77	74.00	-26.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2417 MHz

Horizontal

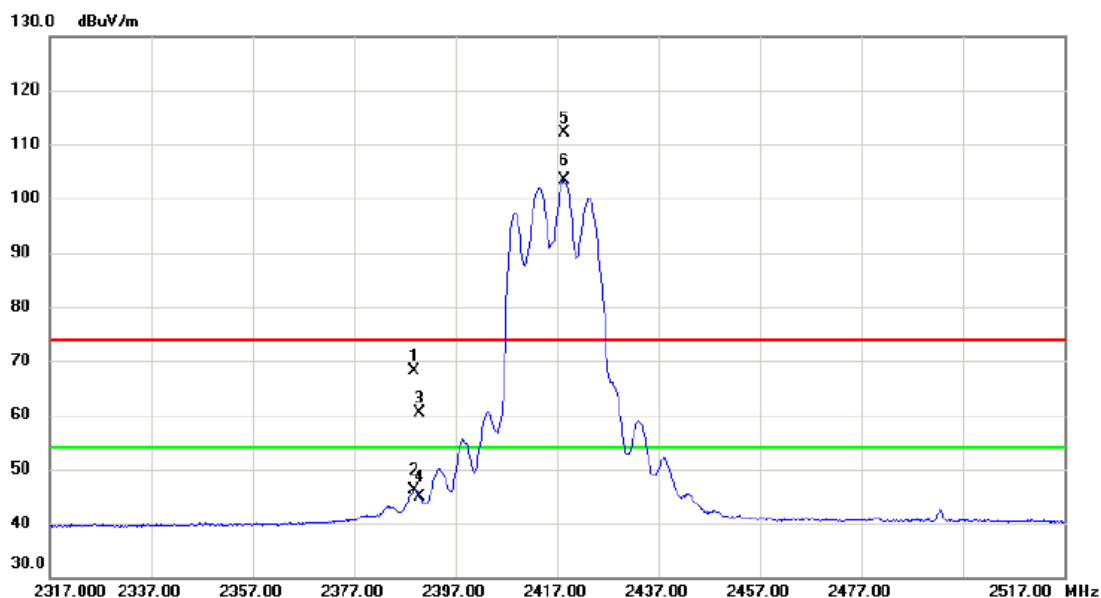


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.800	58.93	9.11	68.04	74.00	-5.96	peak	
2		2388.800	37.10	9.11	46.21	54.00	-7.79	AVG	
3		2390.000	51.26	9.11	60.37	74.00	-13.63	peak	
4		2390.000	35.87	9.11	44.98	54.00	-9.02	AVG	
5	X	2418.400	103.06	9.18	112.24	74.00	38.24	peak	No Limit
6	*	2418.400	94.27	9.18	103.45	54.00	49.45	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2417 MHz

Horizontal

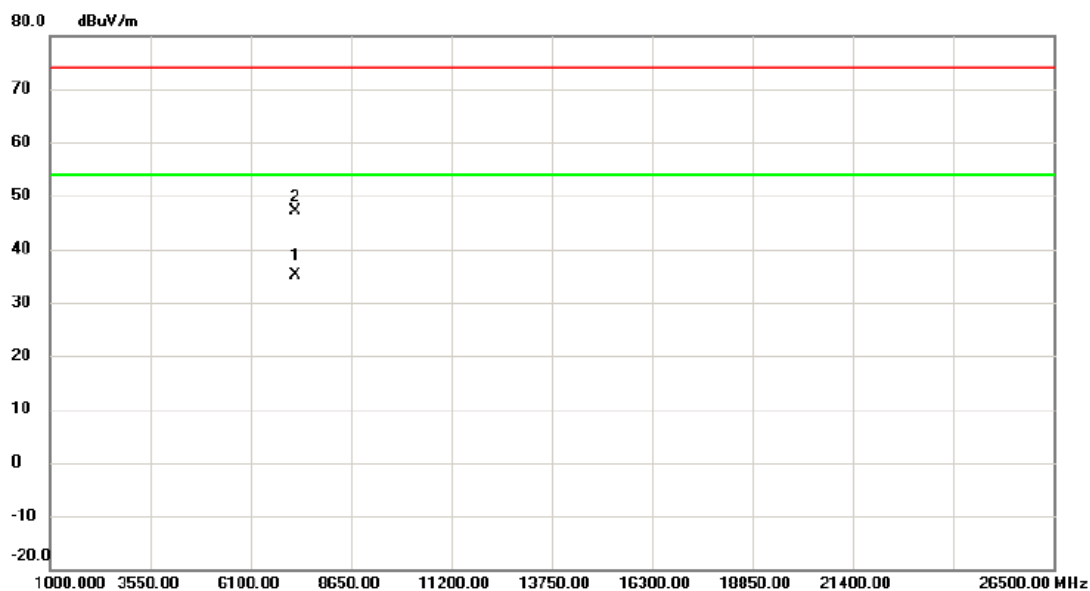


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7250.630	25.97	9.24	35.21	54.00	-18.79	AVG	
2		7253.890	37.94	9.25	47.19	74.00	-26.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2437 MHz

Vertical

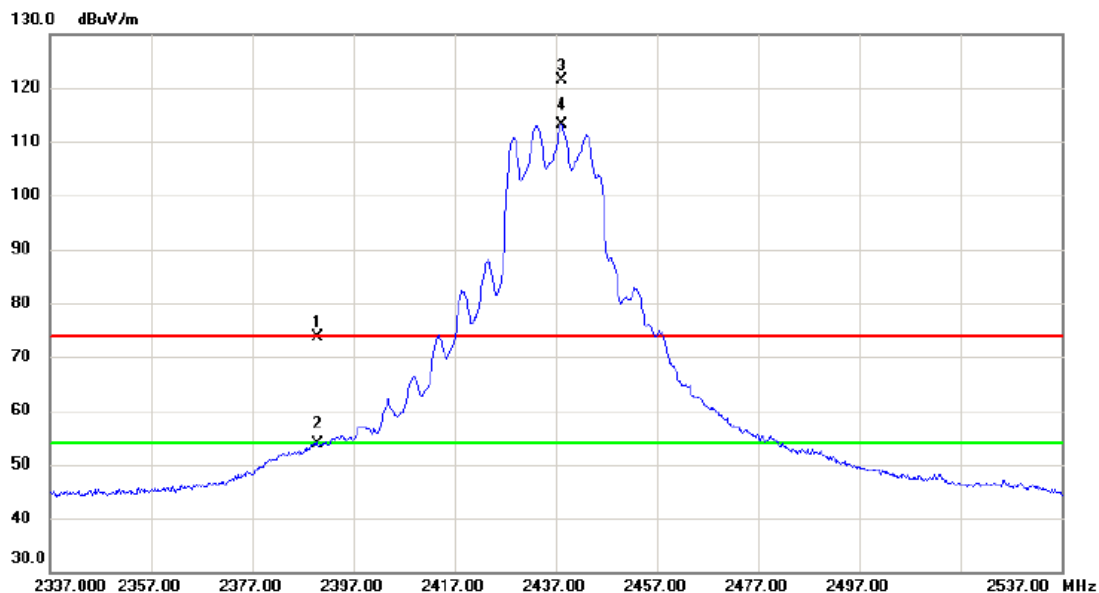

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	64.45	9.11	73.56	74.00	-0.44	peak	
2		2390.000	44.72	9.11	53.83	54.00	-0.17	AVG	
3	X	2438.100	112.17	9.23	121.40	74.00	47.40	peak	No Limit
4	*	2438.200	103.83	9.23	113.06	54.00	59.06	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2437 MHz

Vertical

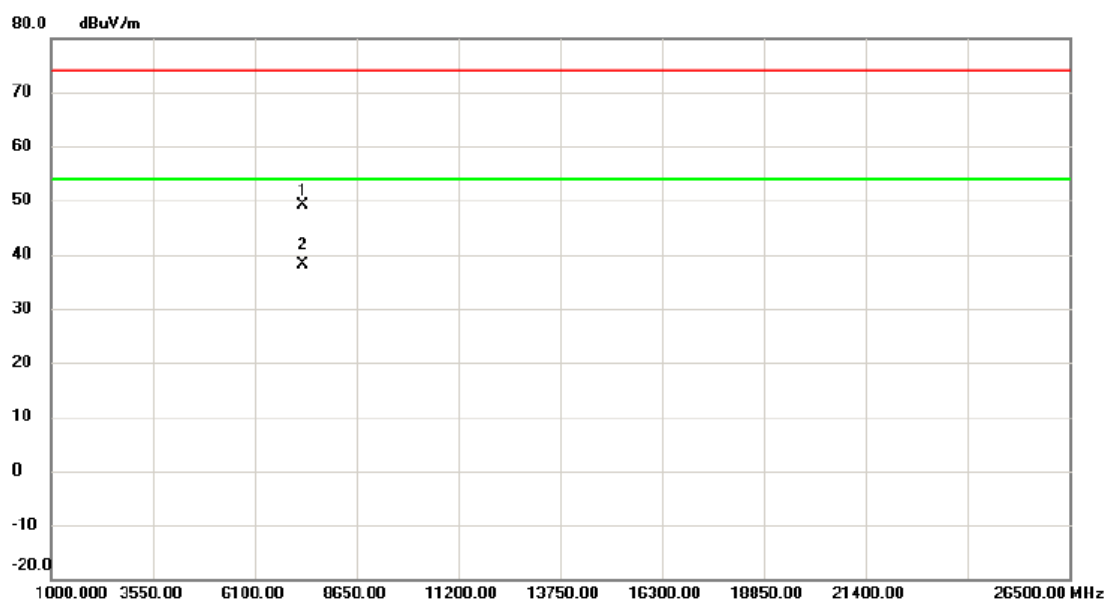

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7308.550	39.74	9.35	49.09	74.00	-24.91	peak	
2	*	7313.000	28.84	9.37	38.21	54.00	-15.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2437 MHz

Horizontal




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2438.300	95.90	9.23	105.13	54.00	51.13	AVG	No Limit
2	X	2438.400	105.78	9.23	115.01	74.00	41.01	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2437 MHz

Horizontal

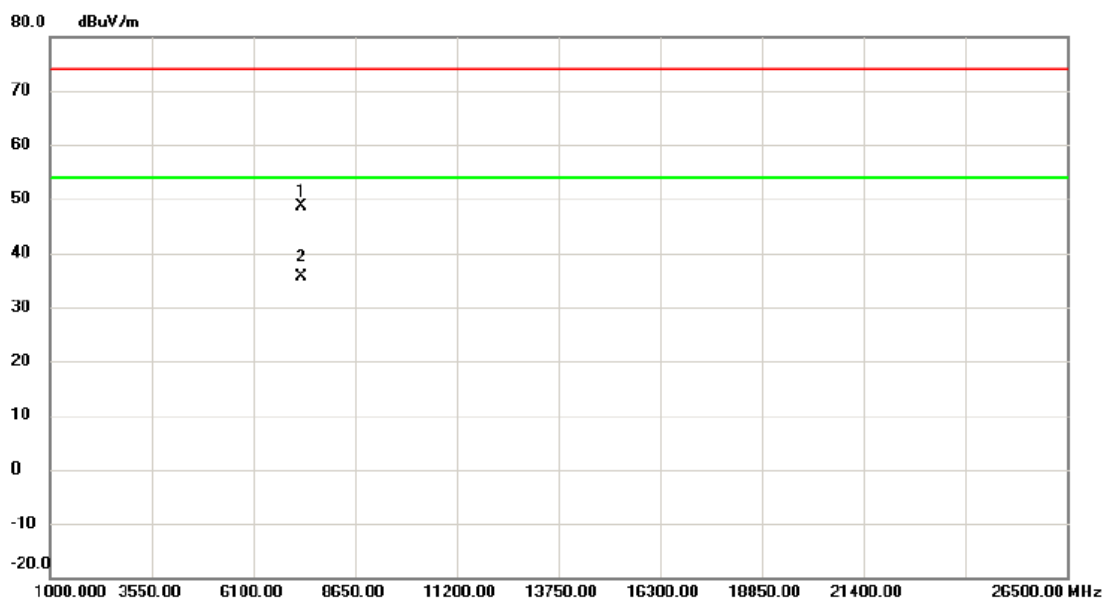


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7309.900	39.17	9.35	48.52	74.00	-25.48	peak	
2	*	7310.110	26.39	9.35	35.74	54.00	-18.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2457 MHz

Vertical

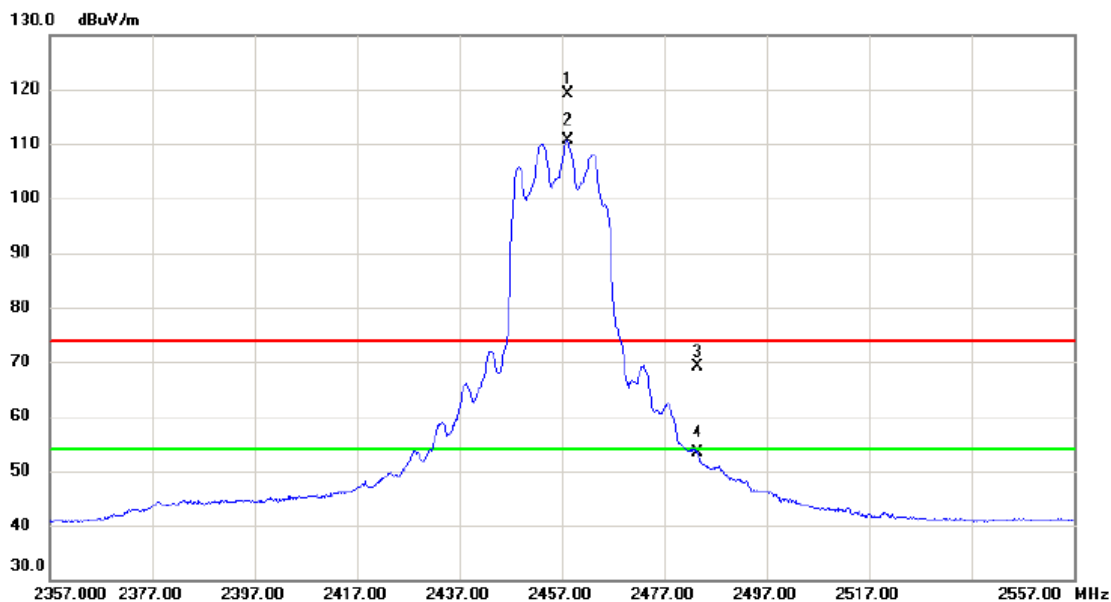


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2458.100	109.94	9.28	119.22	74.00	45.22	peak	No Limit
2	*	2458.200	101.39	9.28	110.67	54.00	56.67	AVG	No Limit
3		2483.500	59.68	9.35	69.03	74.00	-4.97	peak	
4		2483.500	43.99	9.35	53.34	54.00	-0.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2457 MHz

Vertical

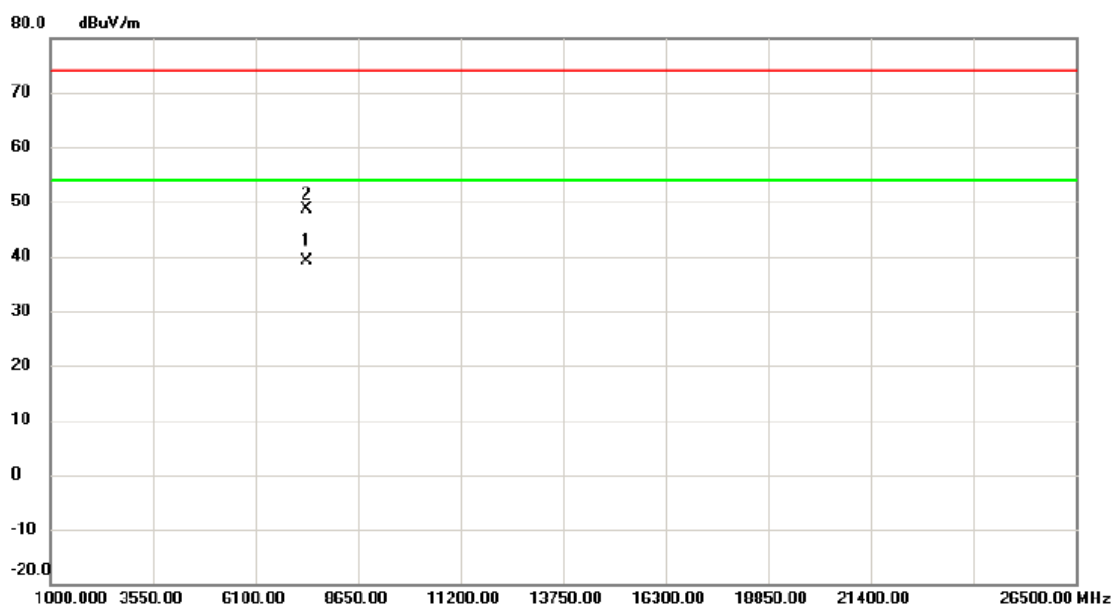


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7371.110	29.72	9.47	39.19	54.00	-14.81	AVG	
2		7371.190	39.17	9.47	48.64	74.00	-25.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2457 MHz

Horizontal

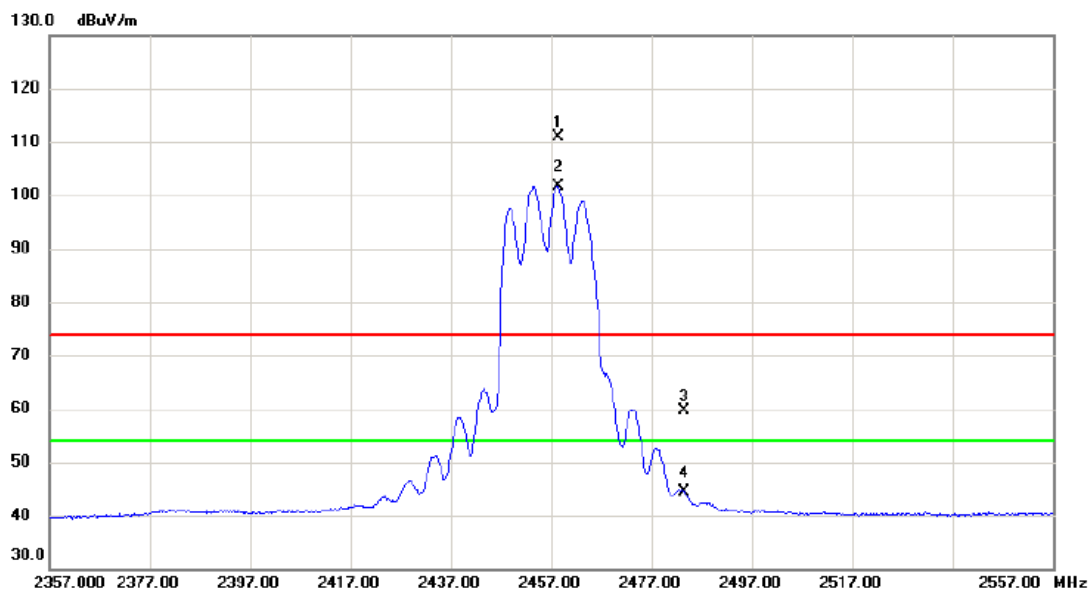


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2458.400	101.60	9.29	110.89	74.00	36.89	peak	No Limit
2	*	2458.400	92.45	9.29	101.74	54.00	47.74	AVG	No Limit
3		2483.500	50.21	9.35	59.56	74.00	-14.44	peak	
4		2483.500	35.07	9.35	44.42	54.00	-9.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2457 MHz

Horizontal

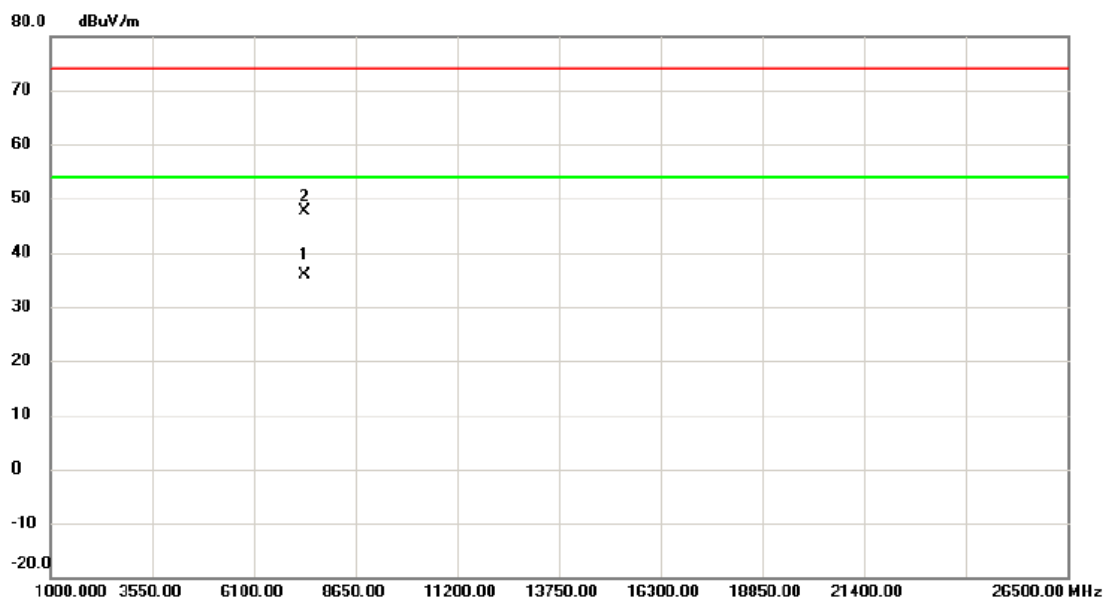


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7371.440	26.35	9.47	35.82	54.00	-18.18	AVG	
2		7378.060	38.19	9.48	47.67	74.00	-26.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2462 MHz

Vertical

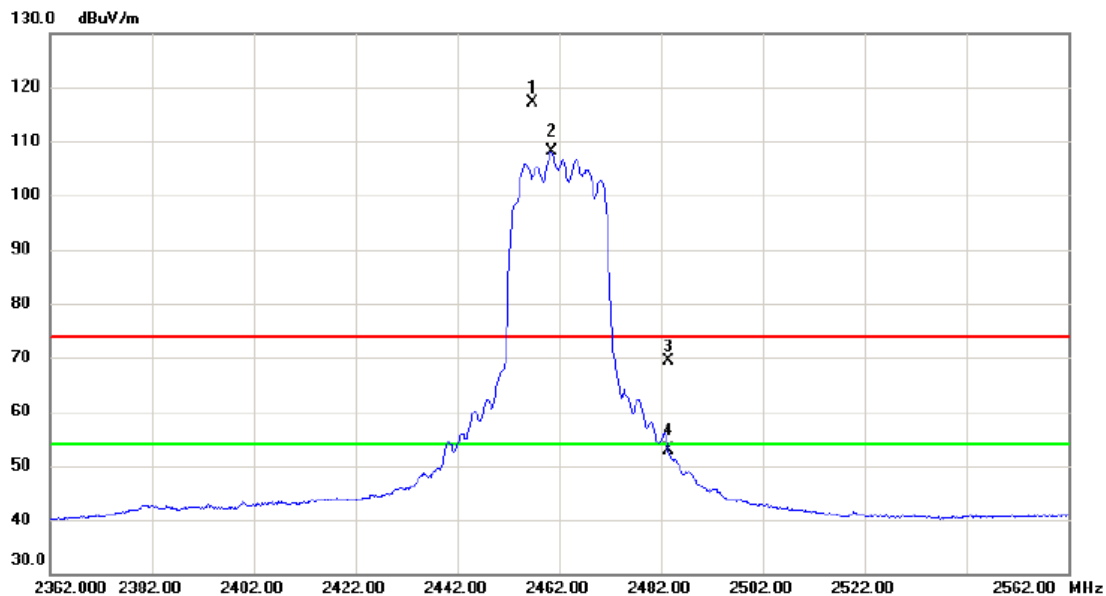


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.700	107.86	9.28	117.14	74.00	43.14	peak	No Limit
2	*	2460.400	98.84	9.29	108.13	54.00	54.13	AVG	No Limit
3		2483.500	60.02	9.35	69.37	74.00	-4.63	peak	
4		2483.500	43.63	9.35	52.98	54.00	-1.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2462 MHz

Vertical

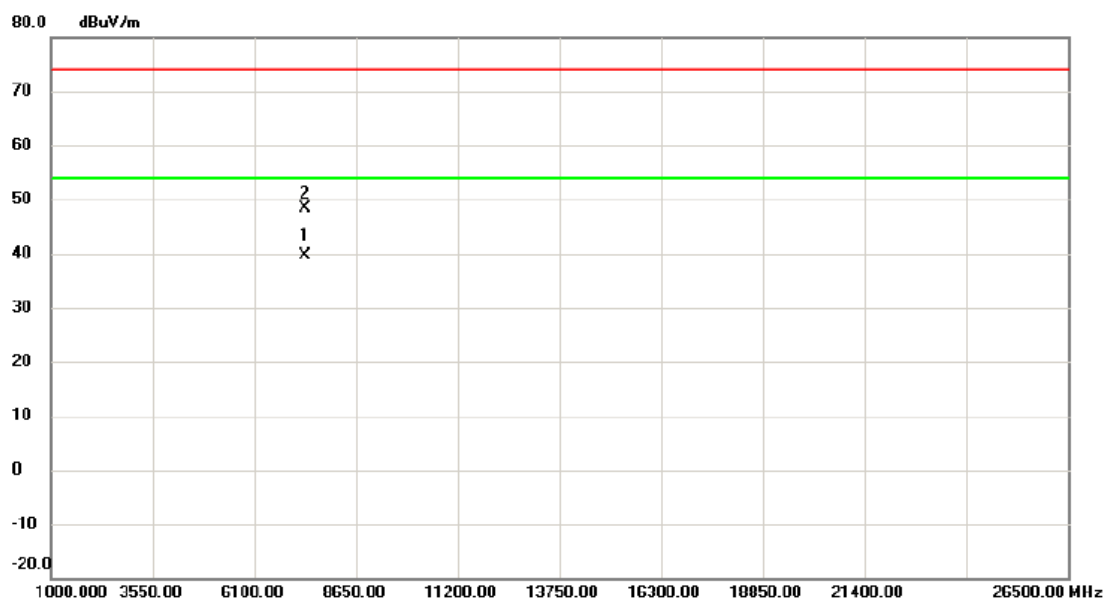

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7386.080	30.23	9.49	39.72	54.00	-14.28	AVG	
2		7387.360	38.86	9.49	48.35	74.00	-25.65	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2462 MHz

Horizontal

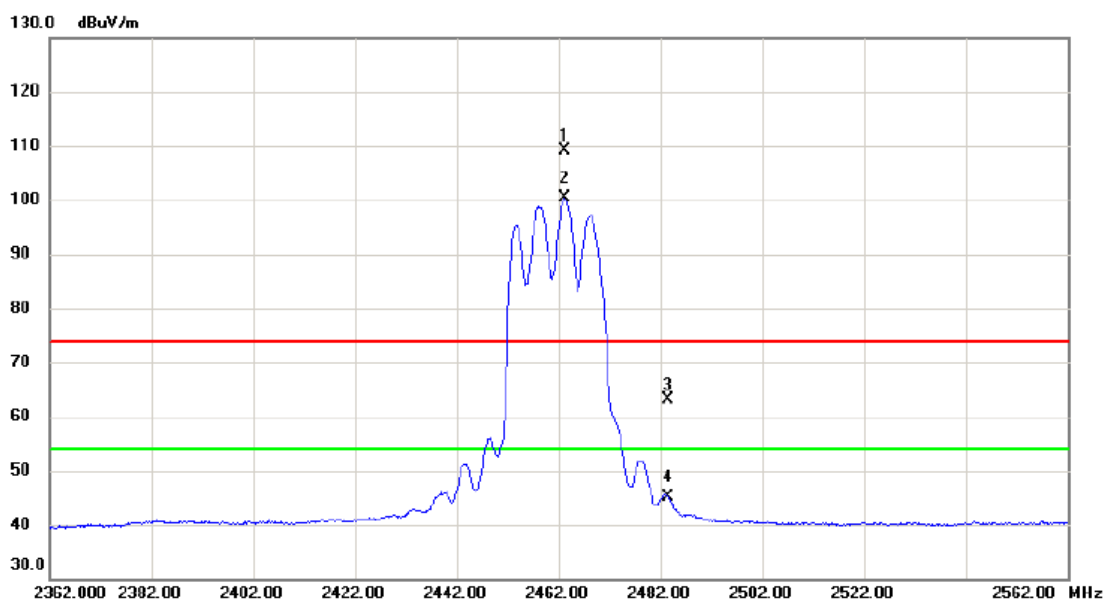


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2463.200	99.80	9.29	109.09	74.00	35.09	peak	No Limit
2	*	2463.300	91.00	9.29	100.29	54.00	46.29	AVG	No Limit
3		2483.500	53.78	9.35	63.13	74.00	-10.87	peak	
4		2483.500	35.68	9.35	45.03	54.00	-8.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-20M Mode 2462 MHz

Horizontal

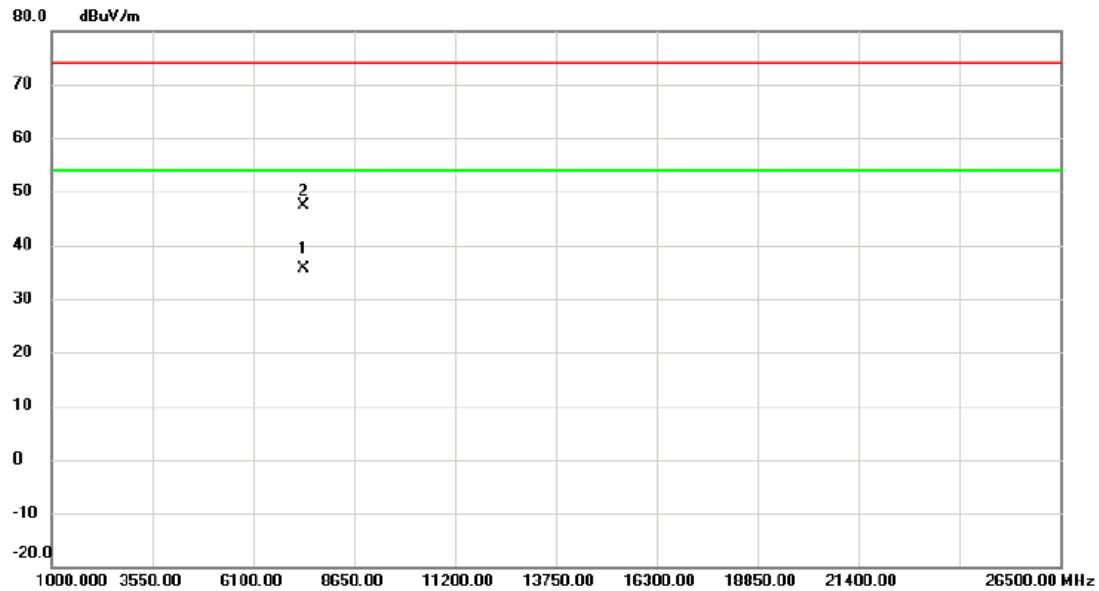


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7386.120	26.21	9.49	35.70	54.00	-18.30	AVG	
2		7386.350	37.78	9.49	47.27	74.00	-26.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2422 MHz

Vertical

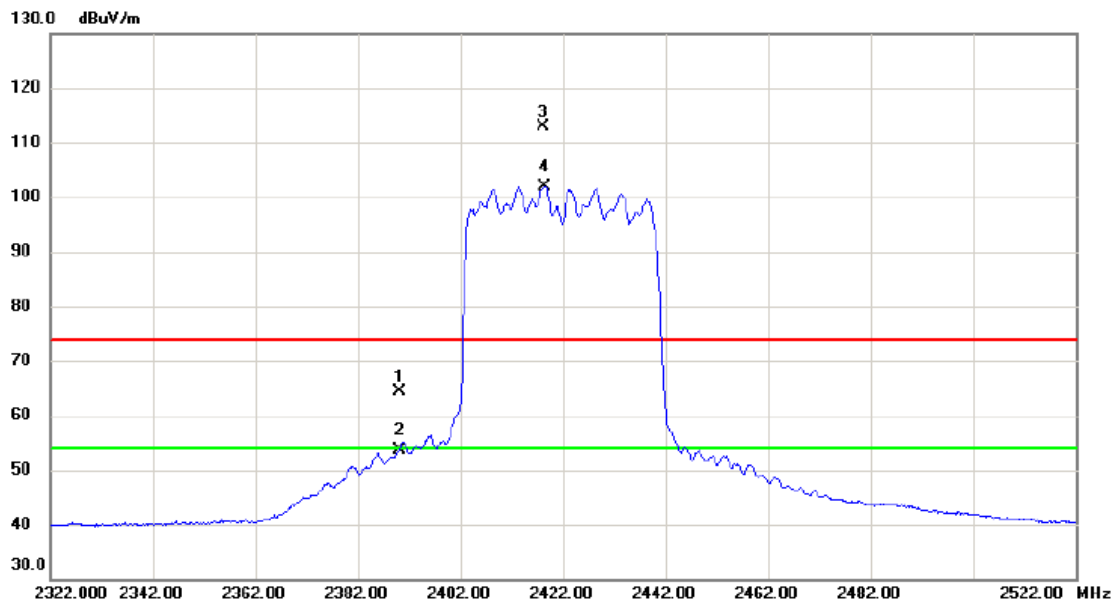


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	55.30	9.11	64.41	74.00	-9.59	peak	
2		2390.000	44.63	9.11	53.74	54.00	-0.26	AVG	
3	X	2418.200	103.81	9.18	112.99	74.00	38.99	peak	No Limit
4	*	2418.300	92.73	9.18	101.91	54.00	47.91	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2422 MHz

Vertical

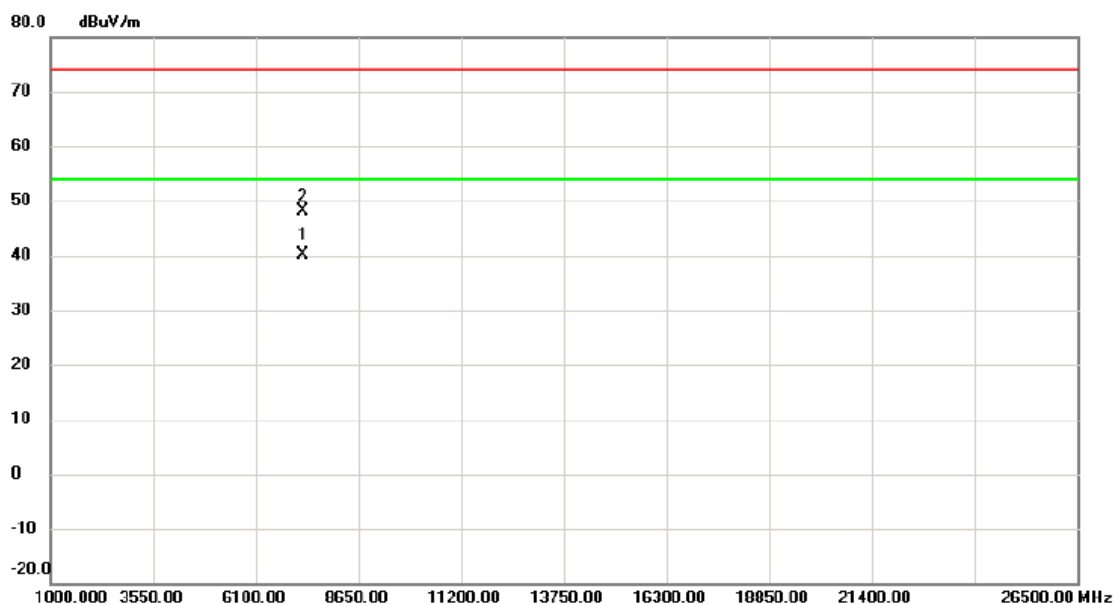


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7266.050	30.90	9.28	40.18	54.00	-13.82	AVG	
2		7266.340	38.92	9.28	48.20	74.00	-25.80	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2422 MHz

Horizontal

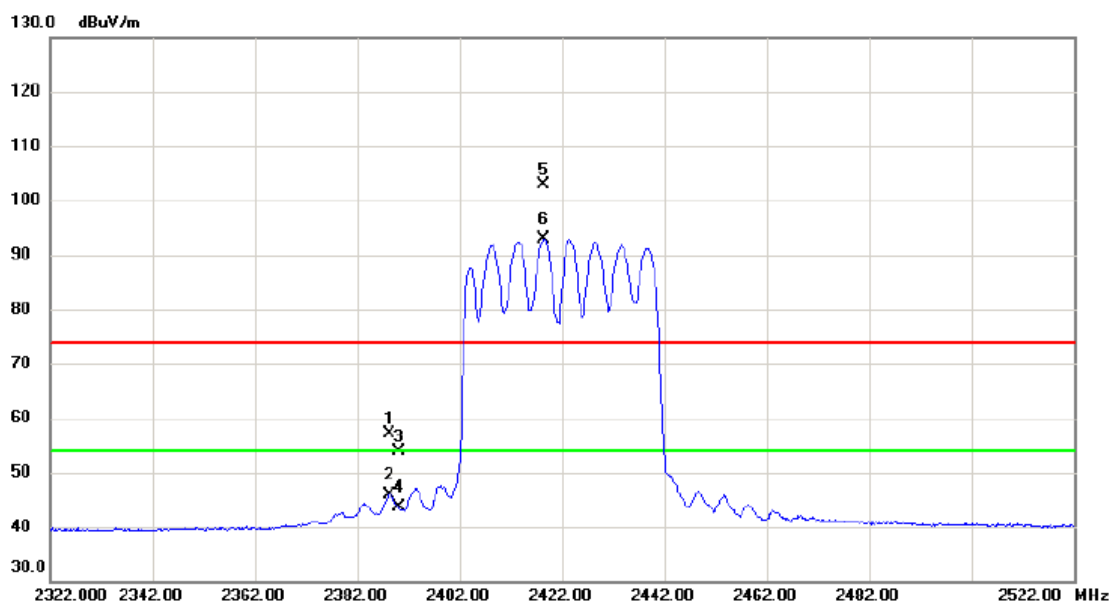


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.300	48.08	9.11	57.19	74.00	-16.81	peak	
2		2388.300	36.89	9.11	46.00	54.00	-8.00	AVG	
3		2390.000	44.68	9.11	53.79	74.00	-20.21	peak	
4		2390.000	34.62	9.11	43.73	54.00	-10.27	AVG	
5	X	2418.400	93.68	9.18	102.86	74.00	28.86	peak	No Limit
6	*	2418.500	83.75	9.18	92.93	54.00	38.93	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2422 MHz

Horizontal

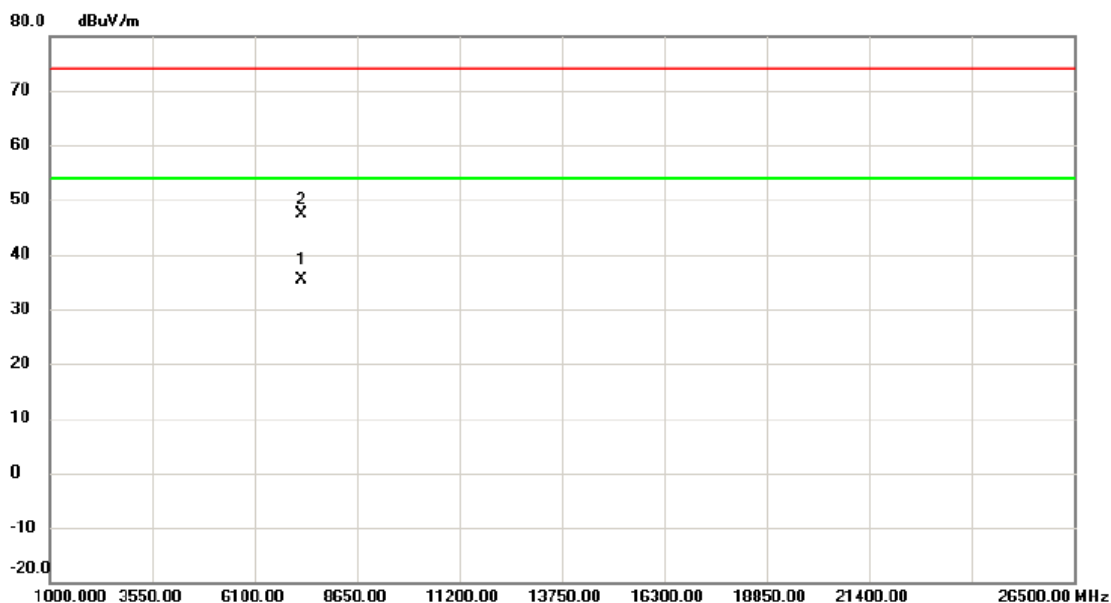

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7265.940	26.05	9.27	35.32	54.00	-18.68	AVG	
2		7275.710	37.99	9.29	47.28	74.00	-26.72	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2427 MHz

Vertical

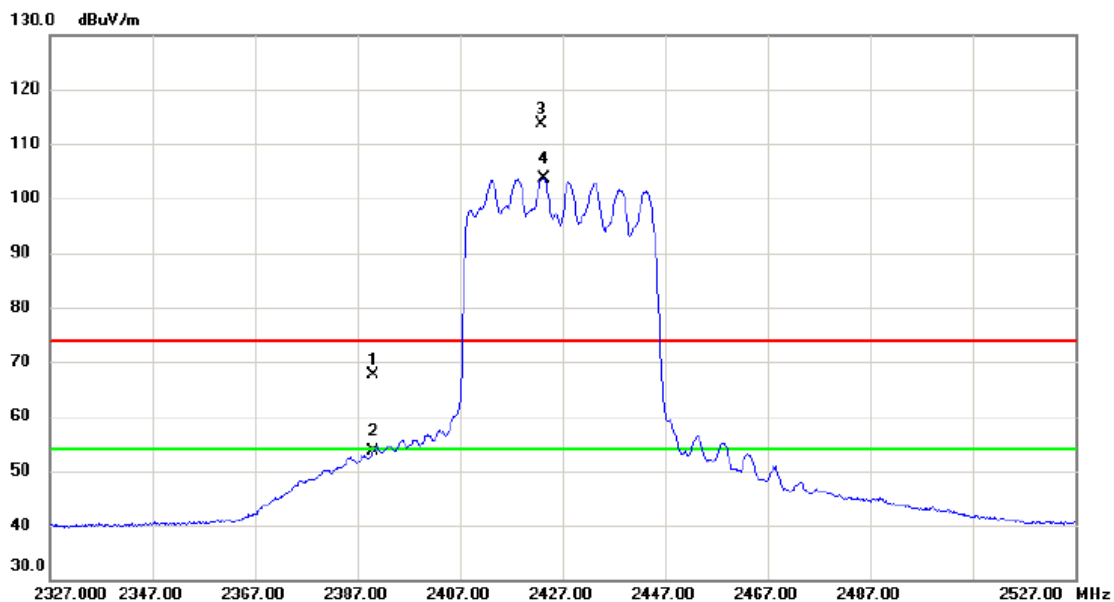

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	58.61	9.11	67.72	74.00	-6.28	peak	
2		2390.000	44.44	9.11	53.55	54.00	-0.45	AVG	
3	X	2422.800	104.32	9.19	113.51	74.00	39.51	peak	No Limit
4	*	2423.500	94.48	9.19	103.67	54.00	49.67	AVG	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2427 MHz

Vertical

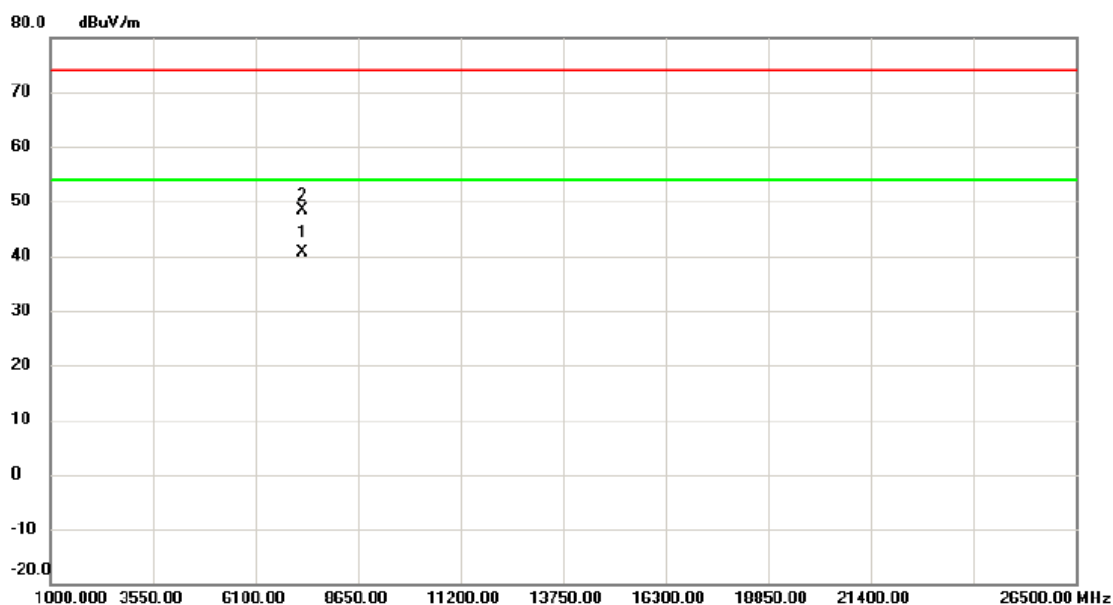


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7281.130	31.23	9.30	40.53	54.00	-13.47	AVG	
2		7281.210	38.99	9.30	48.29	74.00	-25.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2427 MHz

Horizontal

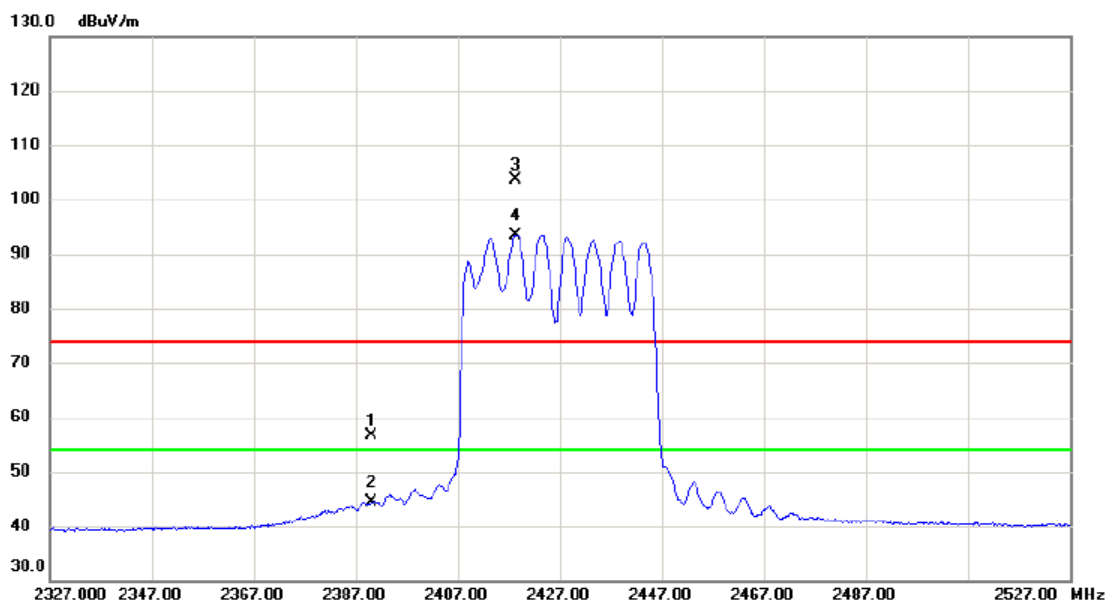


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	47.42	9.11	56.53	74.00	-17.47	peak	
2		2390.000	35.18	9.11	44.29	54.00	-9.71	AVG	
3	X	2418.400	94.47	9.18	103.65	74.00	29.65	peak	No Limit
4	*	2418.400	84.30	9.18	93.48	54.00	39.48	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2427 MHz

Horizontal

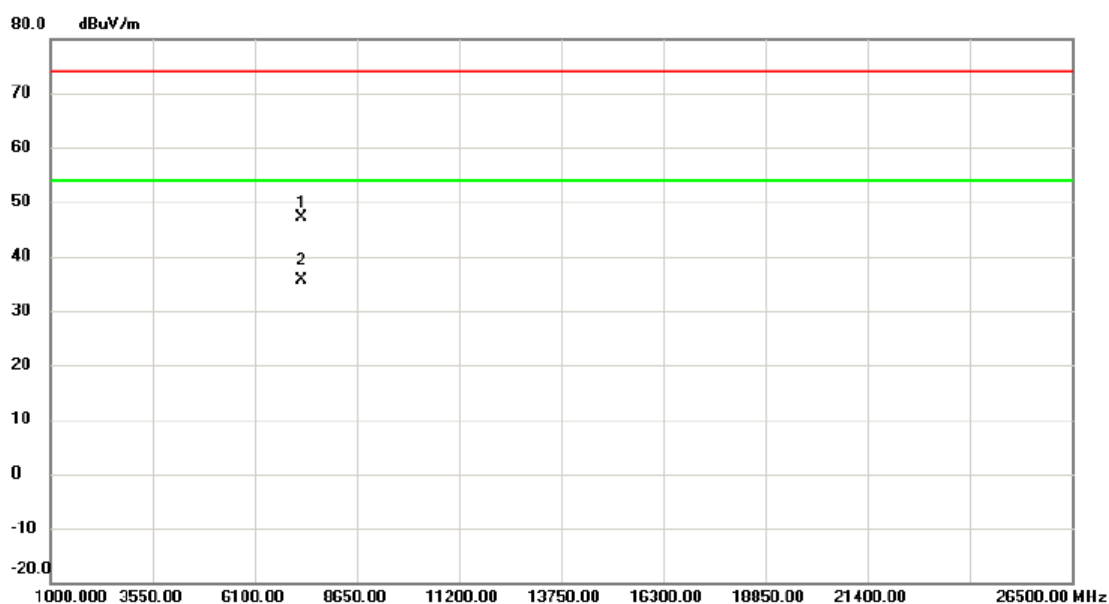


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7276.330	37.81	9.29	47.10	74.00	-26.90	peak	
2	*	7281.110	26.23	9.30	35.53	54.00	-18.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2437 MHz

Vertical

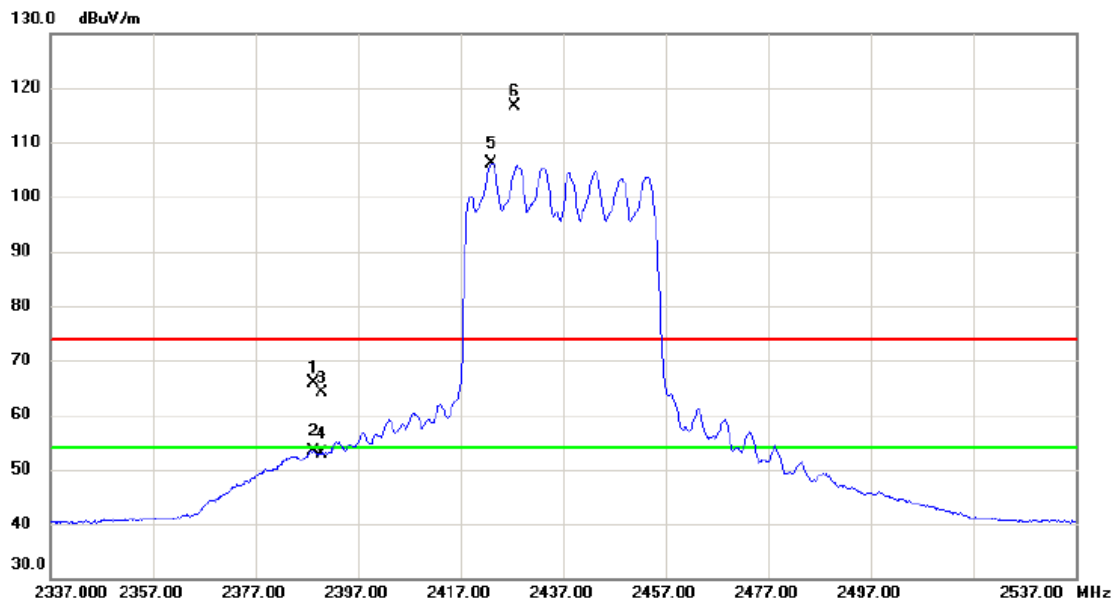


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2388.300	56.71	9.11	65.82	74.00	-8.18	peak	
2		2388.300	44.24	9.11	53.35	54.00	-0.65	AVG	
3		2390.000	55.04	9.11	64.15	74.00	-9.85	peak	
4		2390.000	43.75	9.11	52.86	54.00	-1.14	AVG	
5	*	2422.900	96.94	9.19	106.13	54.00	52.13	AVG	No Limit
6	X	2427.600	107.47	9.20	116.67	74.00	42.67	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2437 MHz

Vertical

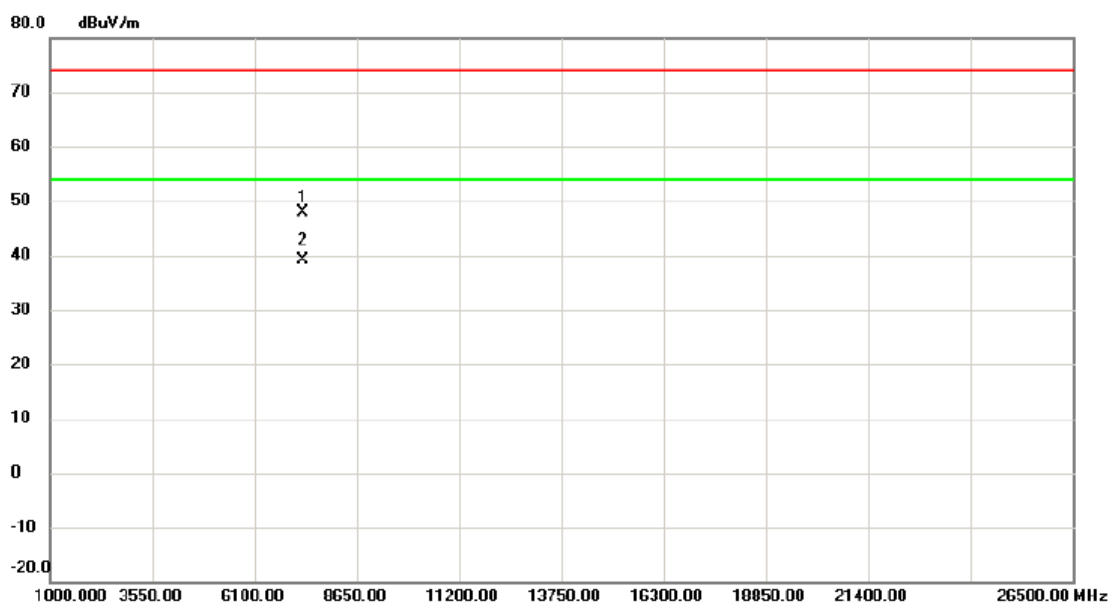

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7310.980	38.63	9.36	47.99	74.00	-26.01	peak	
2	*	7311.110	29.69	9.36	39.05	54.00	-14.95	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2437 MHz

Horizontal

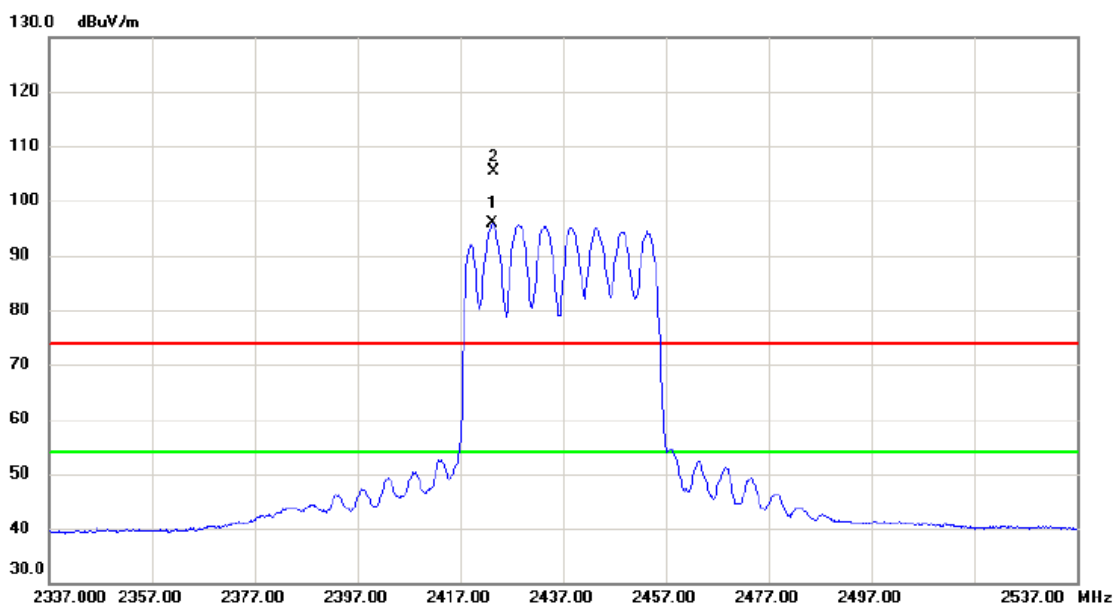


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2423.300	86.73	9.19	95.92	54.00	41.92	AVG	No Limit
2	X	2423.400	96.18	9.19	105.37	74.00	31.37	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2437 MHz

Horizontal

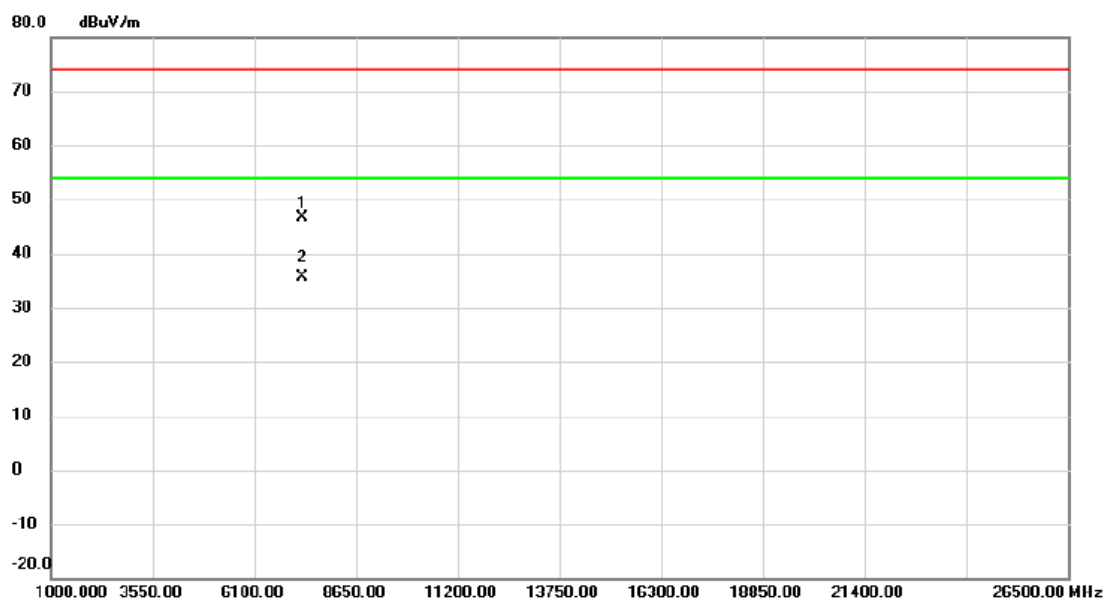


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7301.050	37.19	9.34	46.53	74.00	-27.47	peak	
2 *		7310.870	26.25	9.35	35.60	54.00	-18.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2447 MHz

Vertical

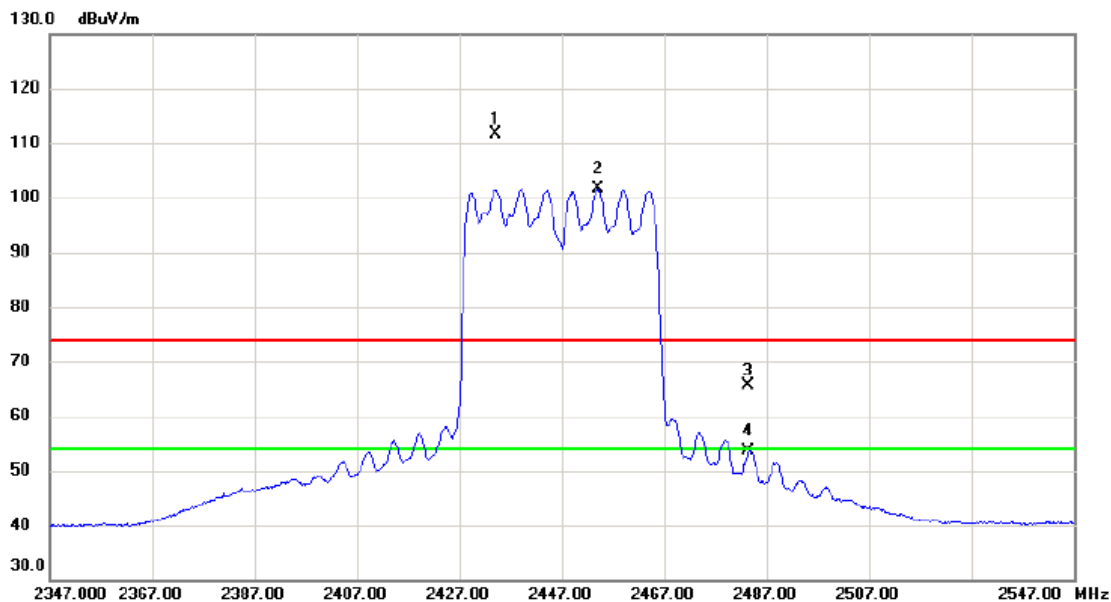

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2434.100	102.36	9.22	111.58	74.00	37.58	peak	No Limit
2	*	2454.000	92.31	9.28	101.59	54.00	47.59	AVG	No Limit
3		2483.500	56.16	9.35	65.51	74.00	-8.49	peak	
4		2483.500	44.18	9.35	53.53	54.00	-0.47	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2447 MHz

Vertical

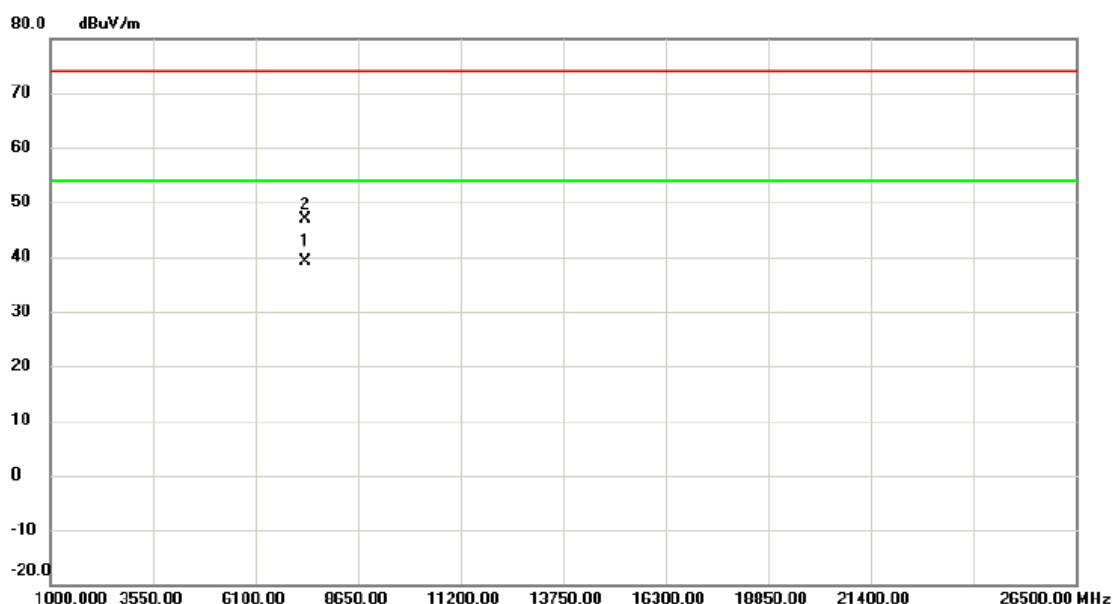


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7341.100	29.75	9.42	39.17	54.00	-14.83	AVG	
2		7345.090	37.54	9.43	46.97	74.00	-27.03	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2447 MHz

Horizontal

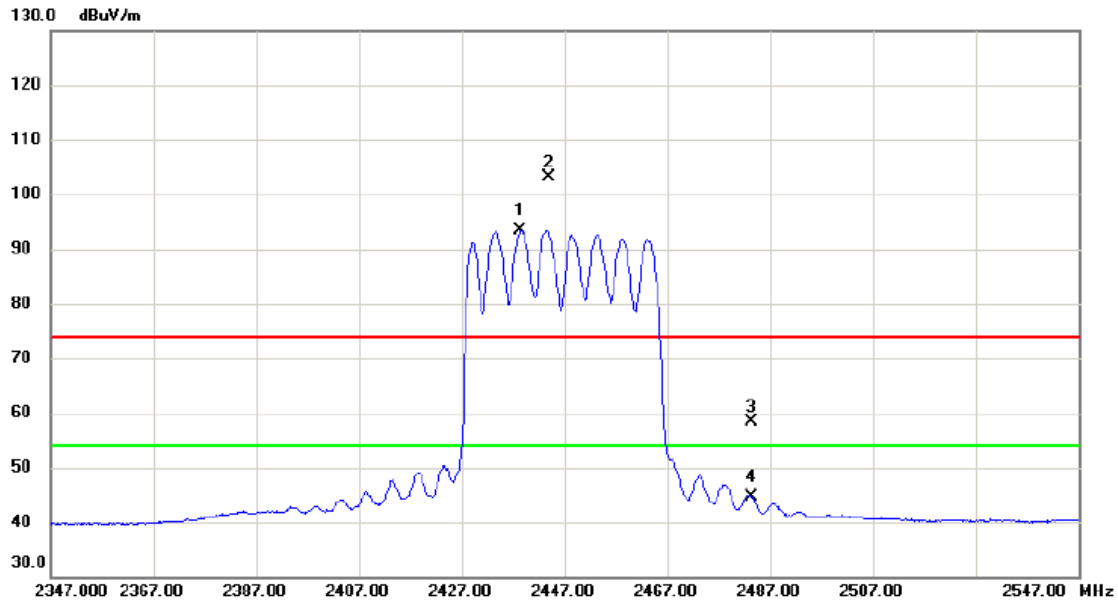


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2438.400	84.17	9.23	93.40	54.00	39.40	AVG	No Limit
2	X	2443.800	93.85	9.25	103.10	74.00	29.10	peak	No Limit
3		2483.500	48.96	9.35	58.31	74.00	-15.69	peak	
4		2483.500	35.28	9.35	44.63	54.00	-9.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2447 MHz

Horizontal

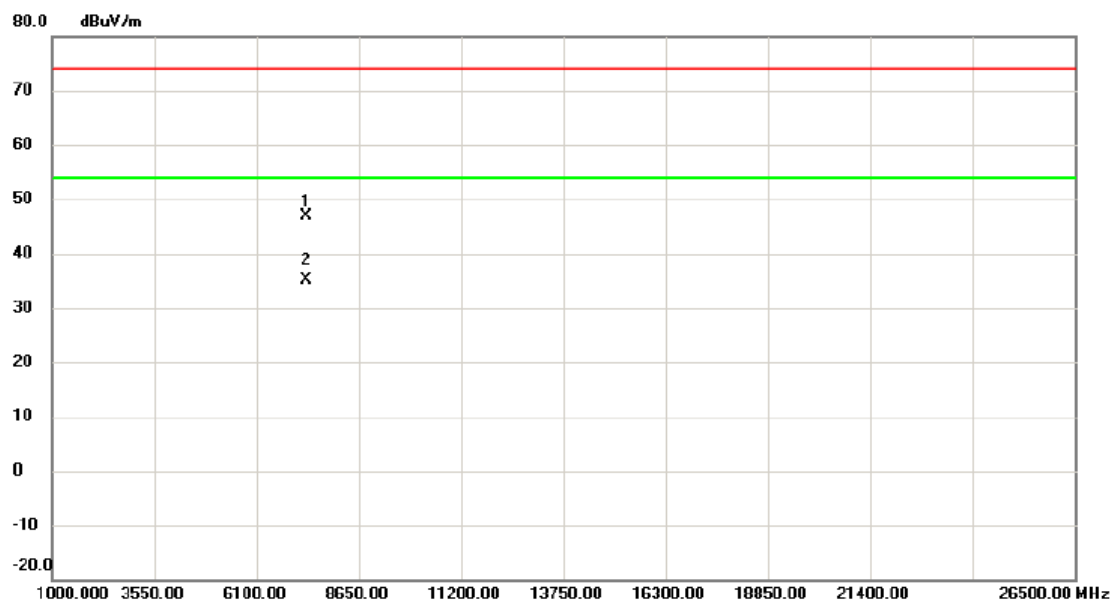


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7333.690	37.43	9.40	46.83	74.00	-27.17	peak	
2	*	7341.330	25.83	9.42	35.25	54.00	-18.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2452 MHz

Vertical

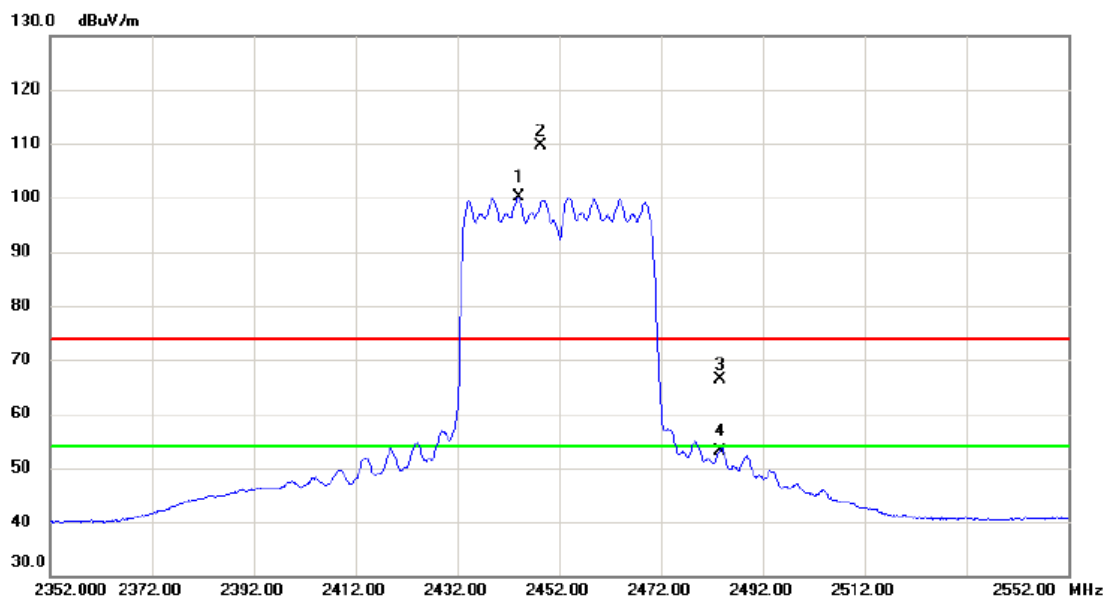


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2444.000	90.81	9.25	100.06	54.00	46.06	AVG	No Limit
2	X	2448.300	100.48	9.26	109.74	74.00	35.74	peak	No Limit
3		2483.500	57.08	9.35	66.43	74.00	-7.57	peak	
4		2483.500	43.70	9.35	53.05	54.00	-0.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2452 MHz

Vertical

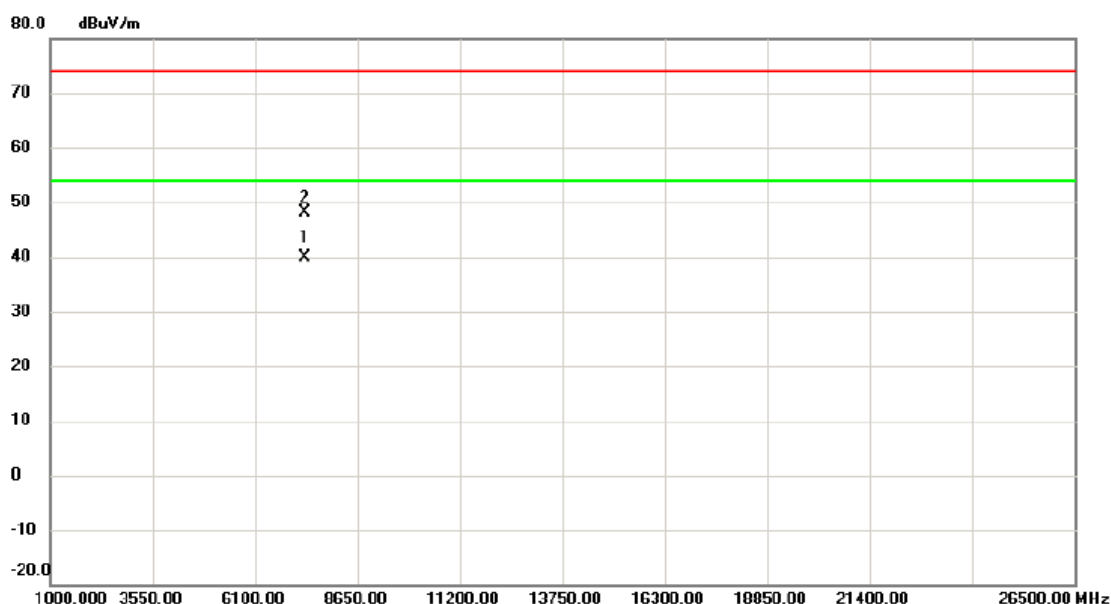

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7356.030	30.53	9.44	39.97	54.00	-14.03	AVG	
2		7357.160	38.69	9.44	48.13	74.00	-25.87	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2452 MHz

Horizontal

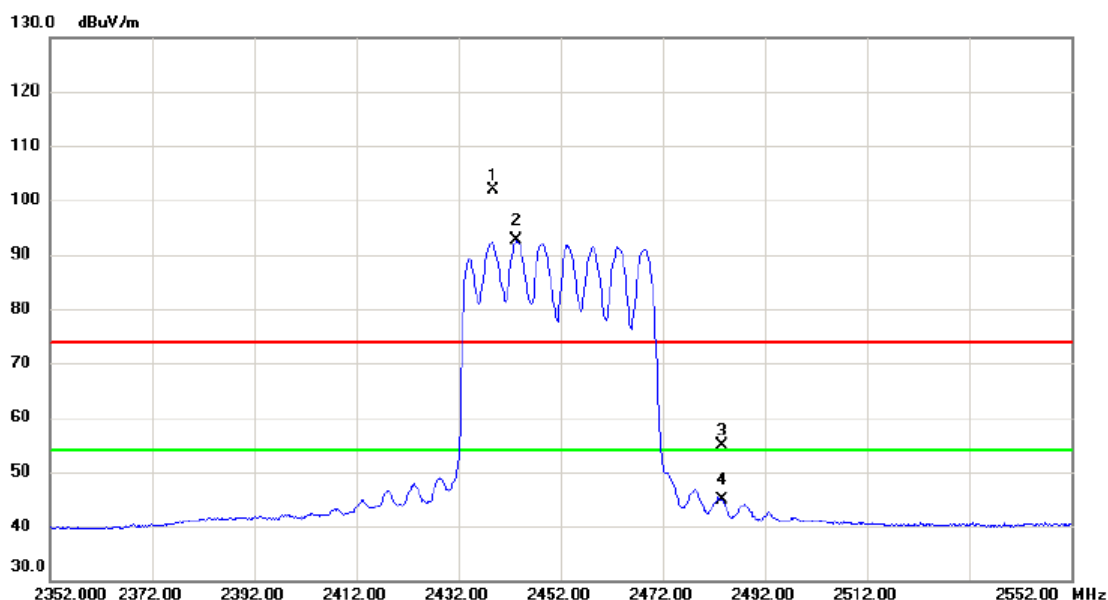


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2438.700	92.77	9.23	102.00	74.00	28.00	peak	No Limit
2	*	2443.400	83.30	9.25	92.55	54.00	38.55	AVG	No Limit
3		2483.500	45.64	9.35	54.99	74.00	-19.01	peak	
4		2483.500	35.43	9.35	44.78	54.00	-9.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX vht-40M Mode 2452 MHz

Horizontal

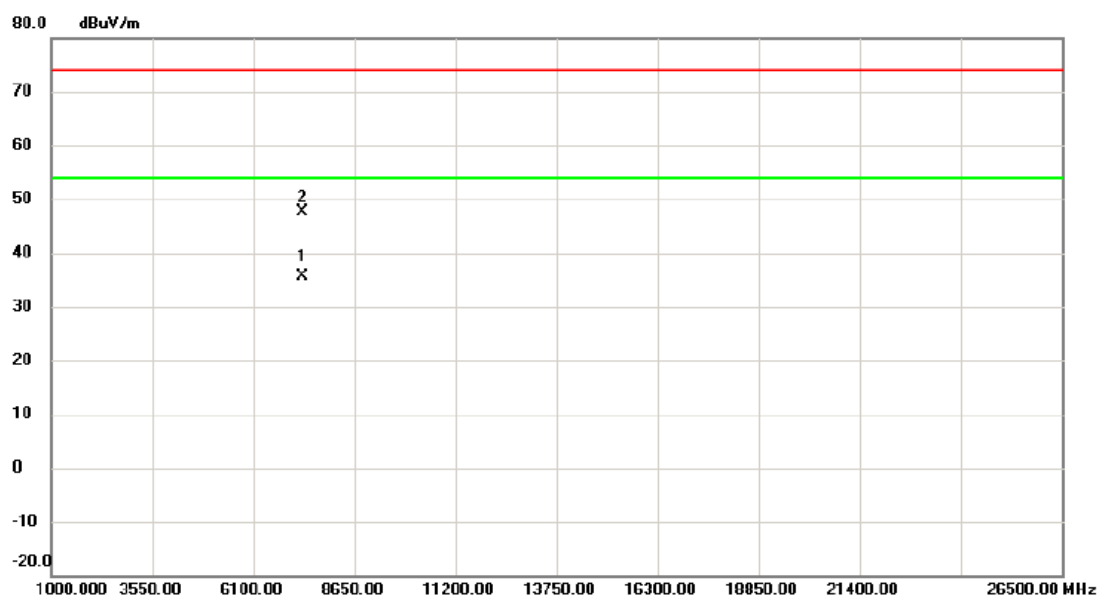

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7355.150	26.32	9.43	35.75	54.00	-18.25	AVG	
2		7355.940	38.11	9.44	47.55	74.00	-26.45	peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

With Beamforming

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical

130 dBuV/m

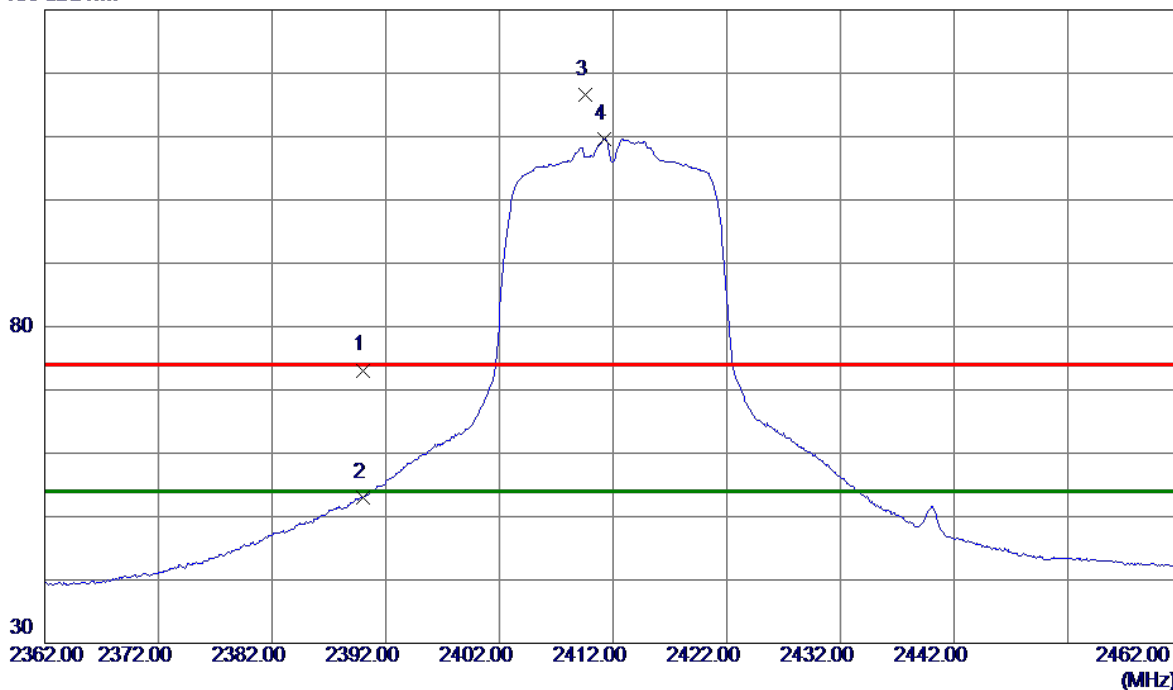

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	64.75	8.35	73.10	74.00	-0.90	Peak	
2	2390.0000	44.70	8.35	53.05	54.00	-0.95	AVG	
3	2409.5500	108.12	8.40	116.52	74.00	42.52	Peak	No Limit
4 *	2411.2500	101.20	8.41	109.61	54.00	55.61	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical

80 dBuV/m

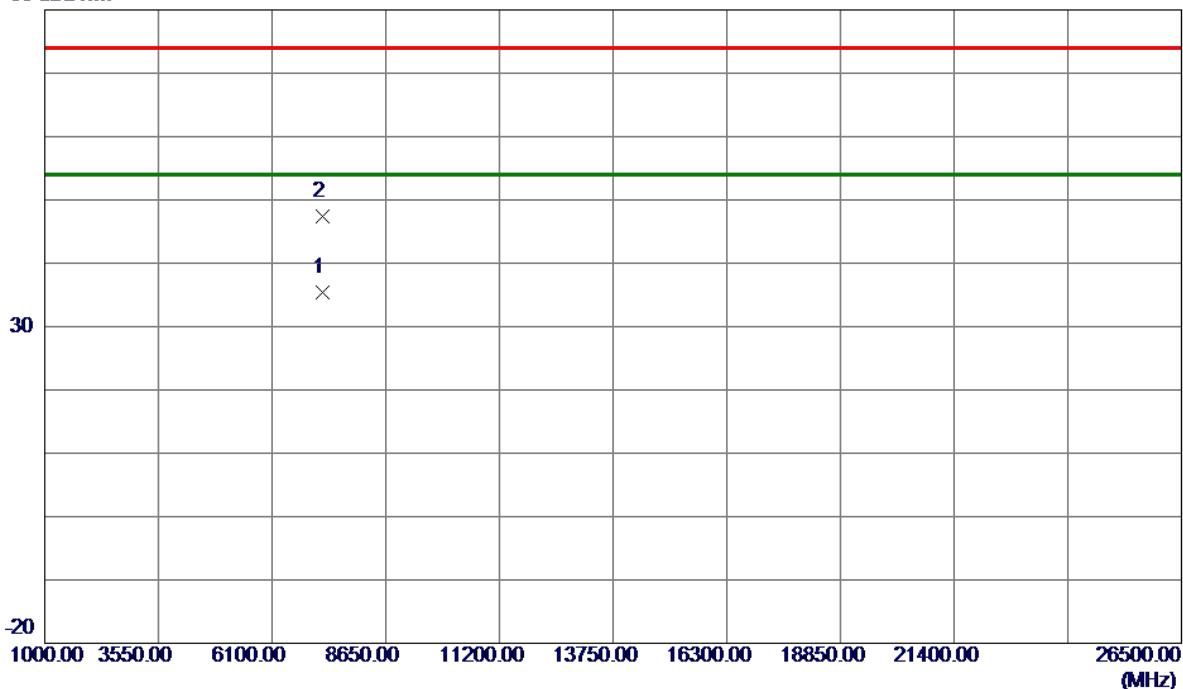


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7235.8800	27.57	7.91	35.48	54.00	-18.52	AVG	
2	7236.0970	39.40	7.91	47.31	74.00	-26.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

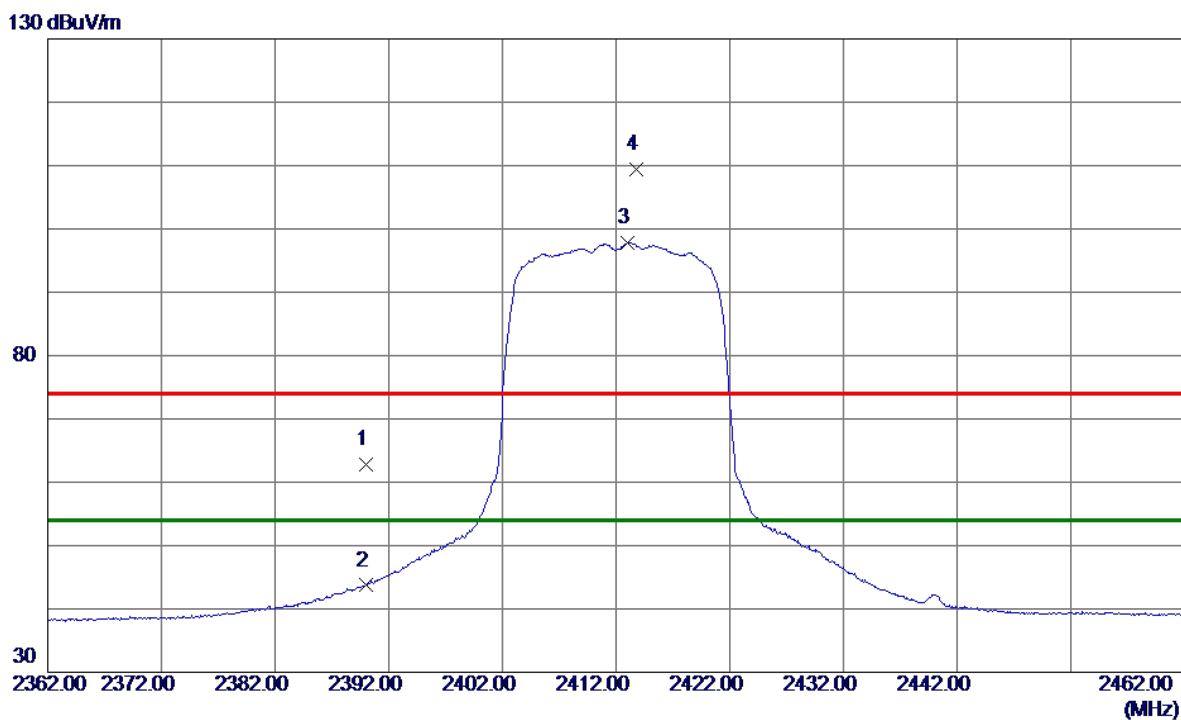

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	54.44	8.35	62.79	74.00	-11.21	Peak	
2	2390.0000	35.35	8.35	43.70	54.00	-10.30	AVG	
3 *	2413.0000	89.48	8.41	97.89	54.00	43.89	AVG	No Limit
4	2413.7500	100.92	8.41	109.33	74.00	35.33	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

80 dBuV/m

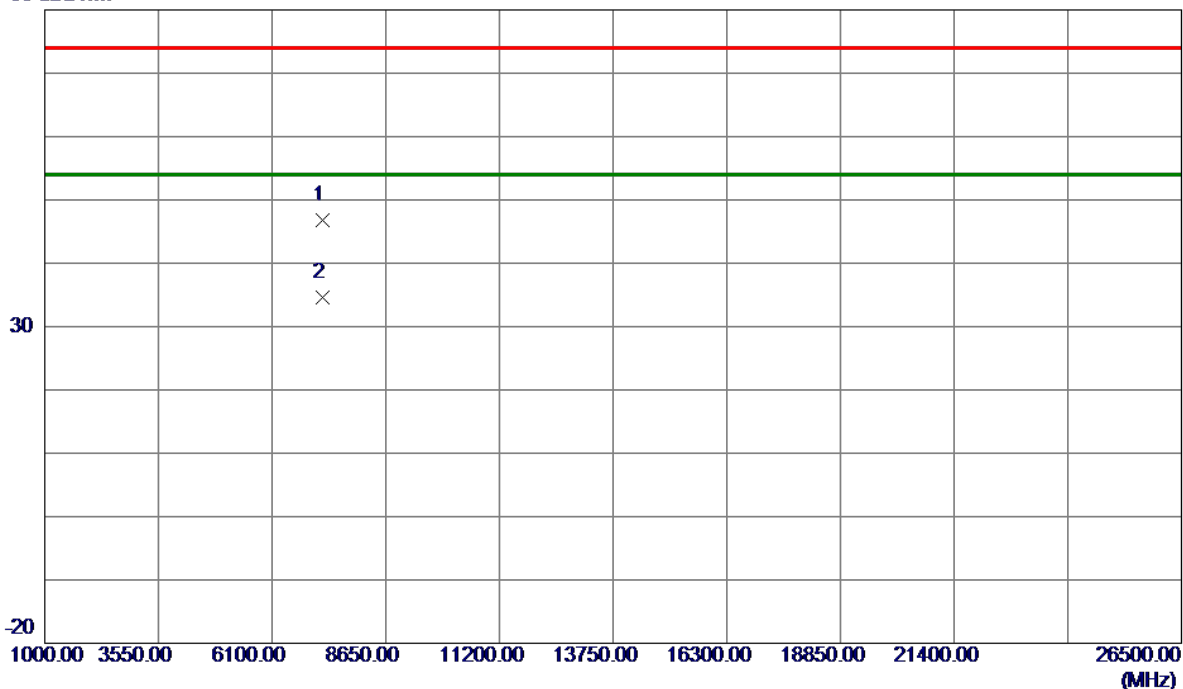


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7235.2780	38.92	7.91	46.83	74.00	-27.17	Peak	
2 *	7236.0350	26.65	7.91	34.56	54.00	-19.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2417 MHz

Vertical

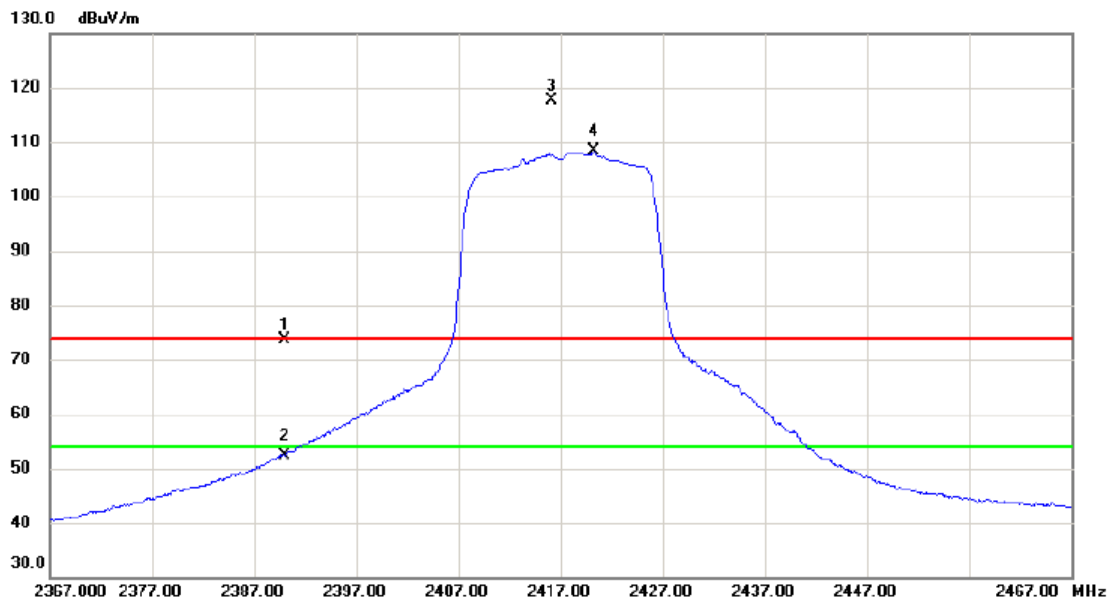


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	65.28	8.35	73.63	74.00	-0.37	peak	
2		2390.000	44.08	8.35	52.43	54.00	-1.57	AVG	
3	X	2416.150	109.20	8.42	117.62	74.00	43.62	peak	No Limit
4	*	2420.250	99.88	8.43	108.31	54.00	54.31	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2417 MHz

Vertical

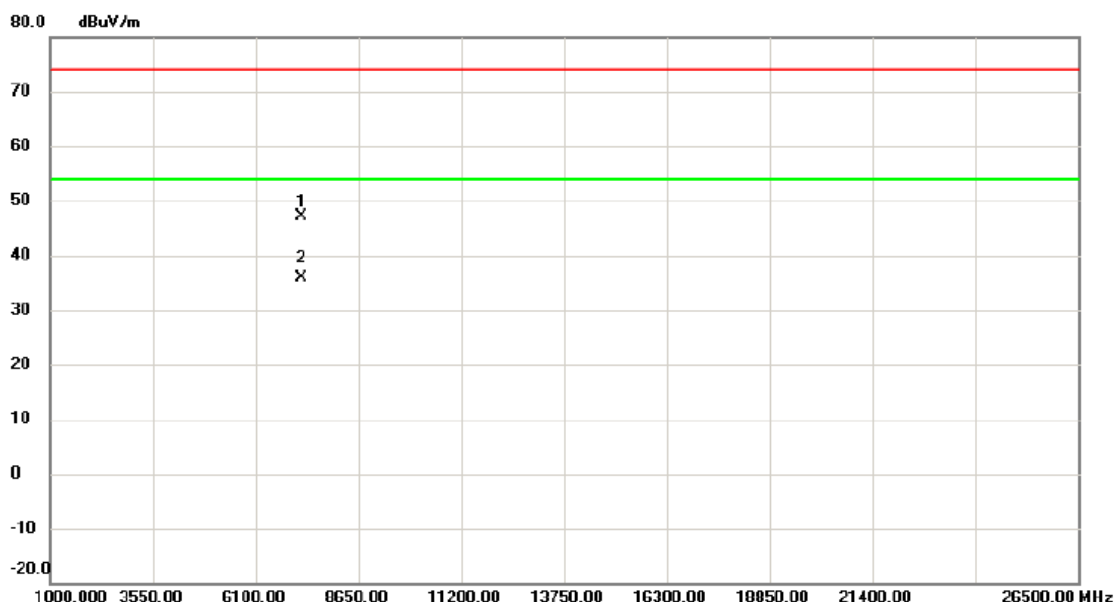


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7250.615	39.21	7.92	47.13	74.00	-26.87	peak	
2	*	7251.000	27.91	7.92	35.83	54.00	-18.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2417 MHz

Horizontal

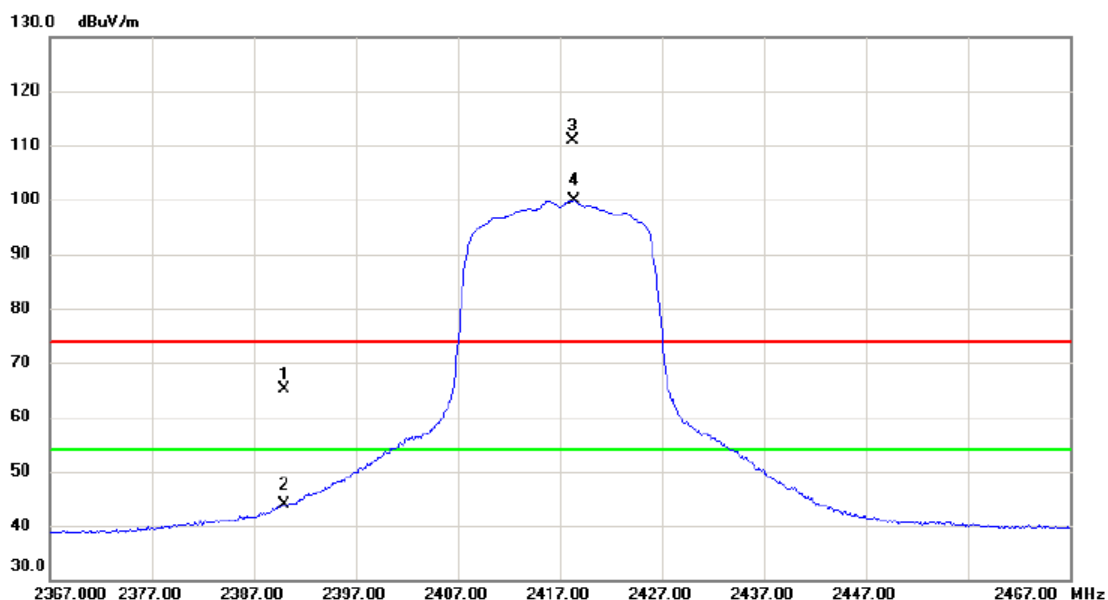


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	56.67	8.35	65.02	74.00	-8.98	peak	
2		2390.000	35.55	8.35	43.90	54.00	-10.10	AVG	
3	X	2418.300	102.57	8.42	110.99	74.00	36.99	peak	No Limit
4	*	2418.400	91.37	8.42	99.79	54.00	45.79	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2417 MHz

Horizontal

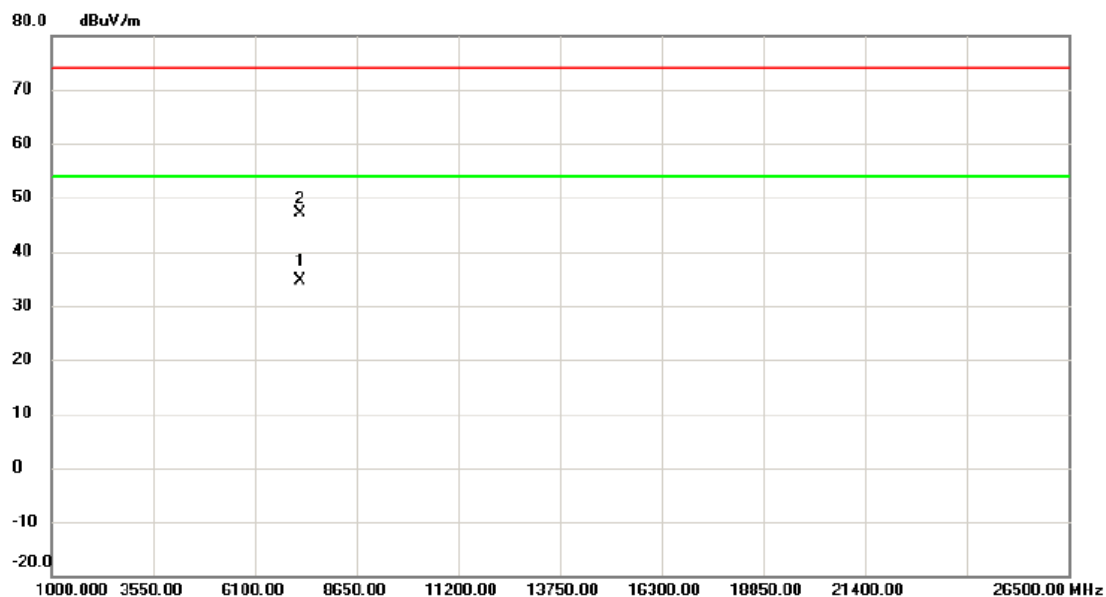

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	7250.813	26.72	7.92	34.64	54.00	-19.36	AVG	
2		7251.033	39.09	7.92	47.01	74.00	-26.99	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical

130 dBuV/m

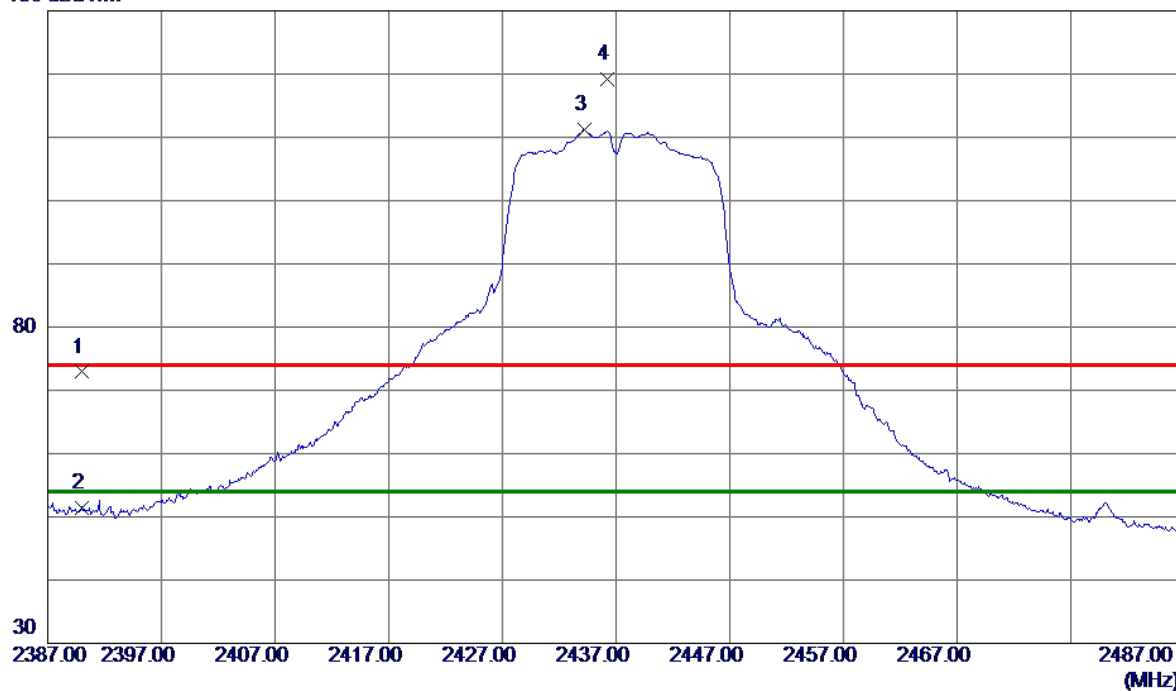

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	64.55	8.35	72.90	74.00	-1.10	Peak	
2	2390.0000	43.01	8.35	51.36	54.00	-2.64	AVG	
3 *	2434.2000	102.73	8.46	111.19	54.00	57.19	AVG	No Limit
4	2436.2000	110.65	8.47	119.12	74.00	45.12	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical

80 dBuV/m

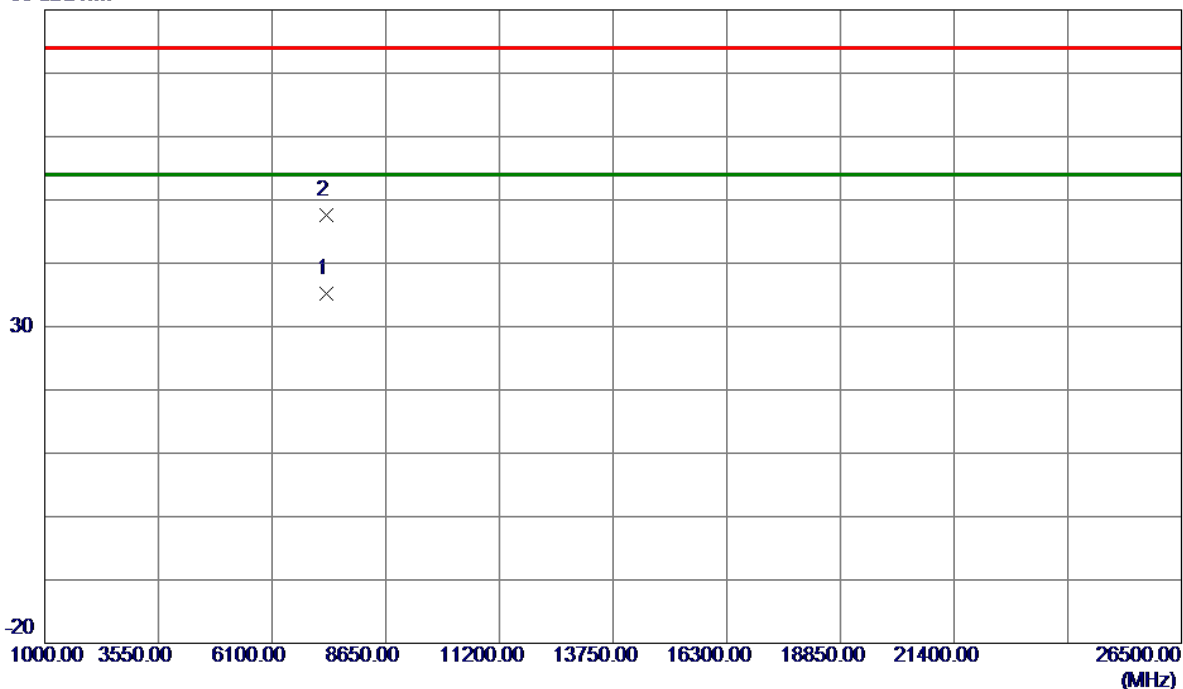


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7310.7780	27.29	7.98	35.27	54.00	-18.73	AVG	
2	7311.3820	39.58	7.98	47.56	74.00	-26.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

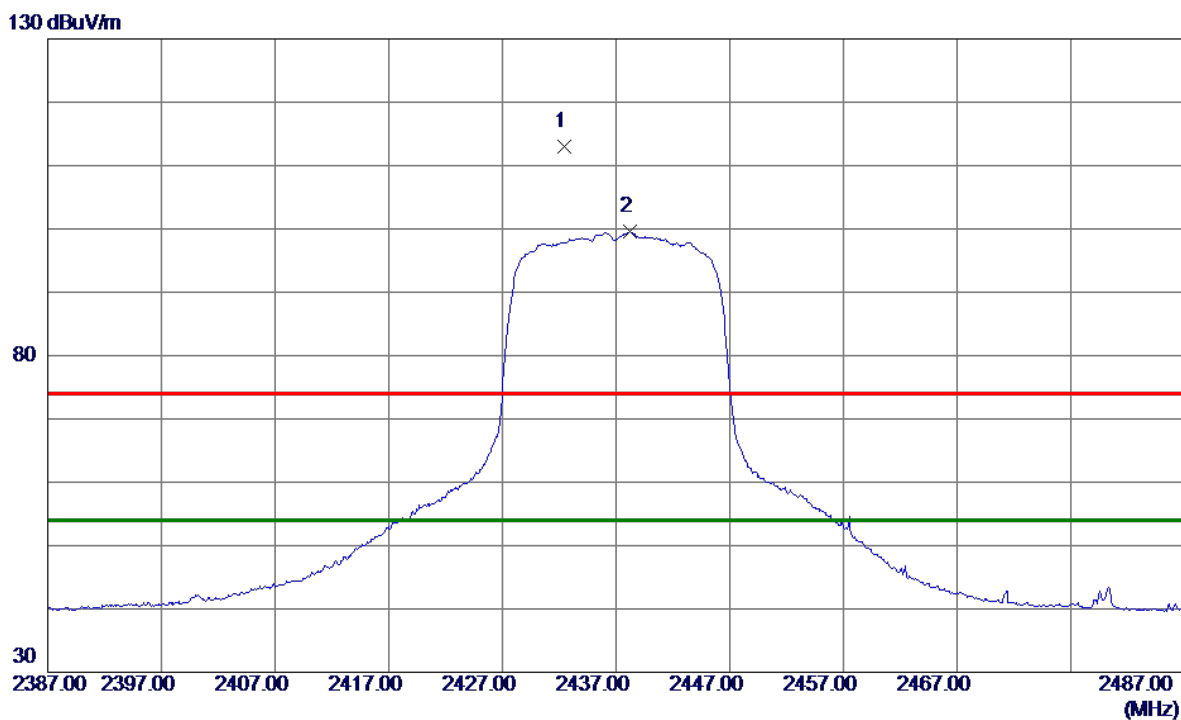

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2432.4500	104.59	8.46	113.05	74.00	39.05	Peak	No Limit
2 *	2438.2500	91.14	8.47	99.61	54.00	45.61	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

80 dBuV/m

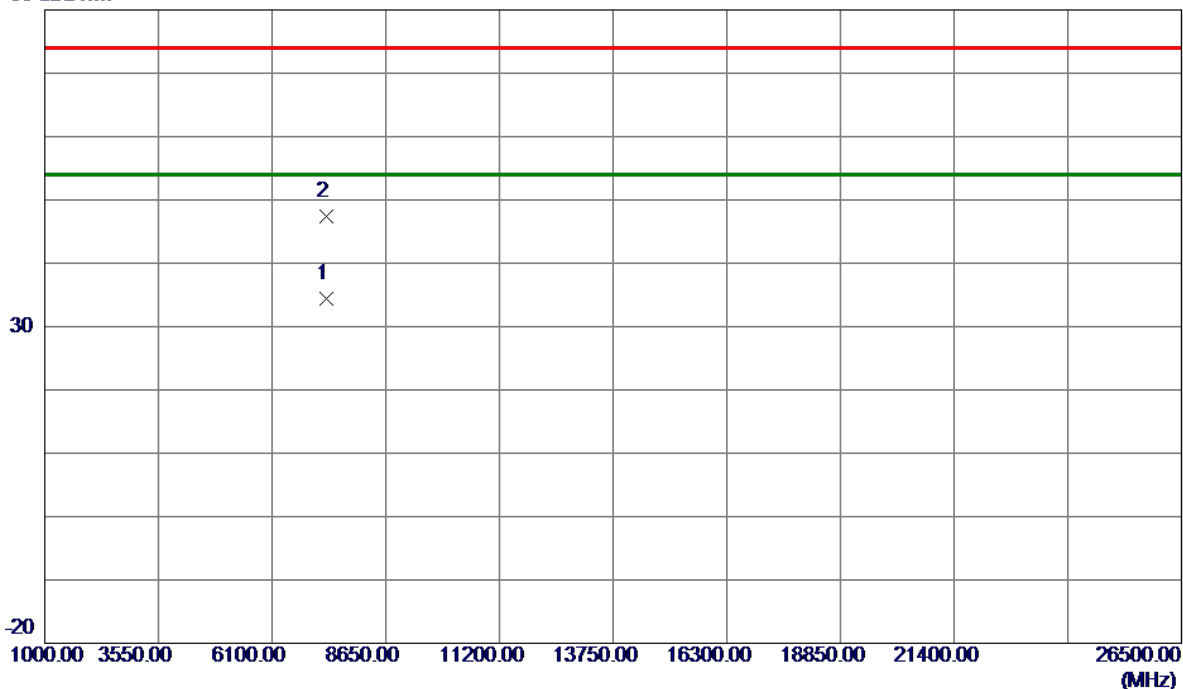


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7310.8870	26.41	7.98	34.39	54.00	-19.61	AVG	
2	7310.9380	39.36	7.98	47.34	74.00	-26.66	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2457 MHz

Vertical

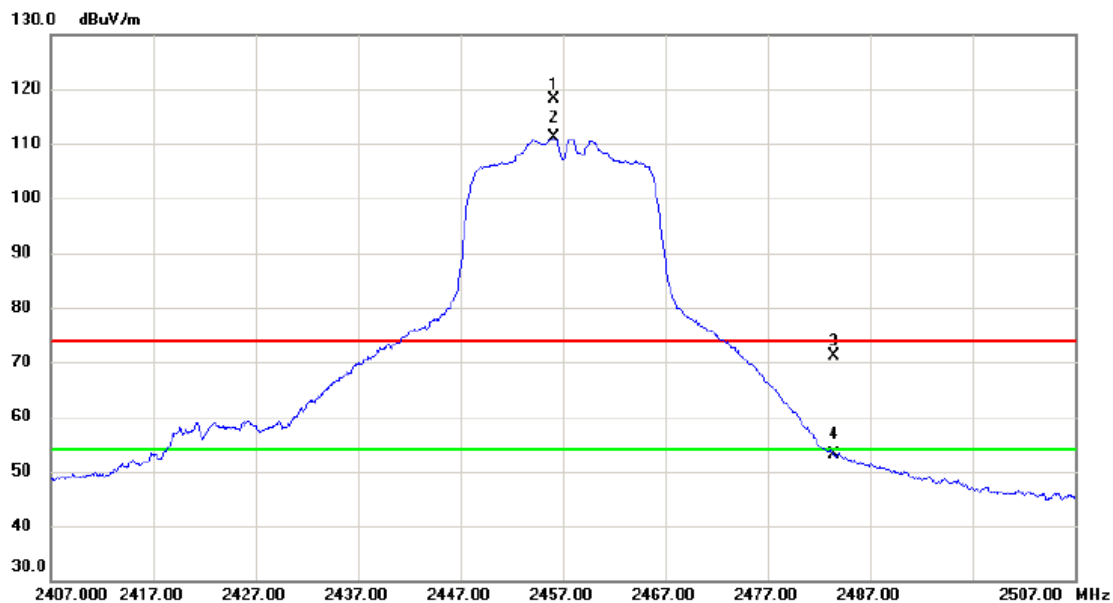


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2456.100	109.67	8.52	118.19	74.00	44.19	peak	No Limit
2	*	2456.200	102.54	8.52	111.06	54.00	57.06	AVG	No Limit
3		2483.500	62.66	8.59	71.25	74.00	-2.75	peak	
4		2483.500	44.56	8.59	53.15	54.00	-0.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2457 MHz

Vertical

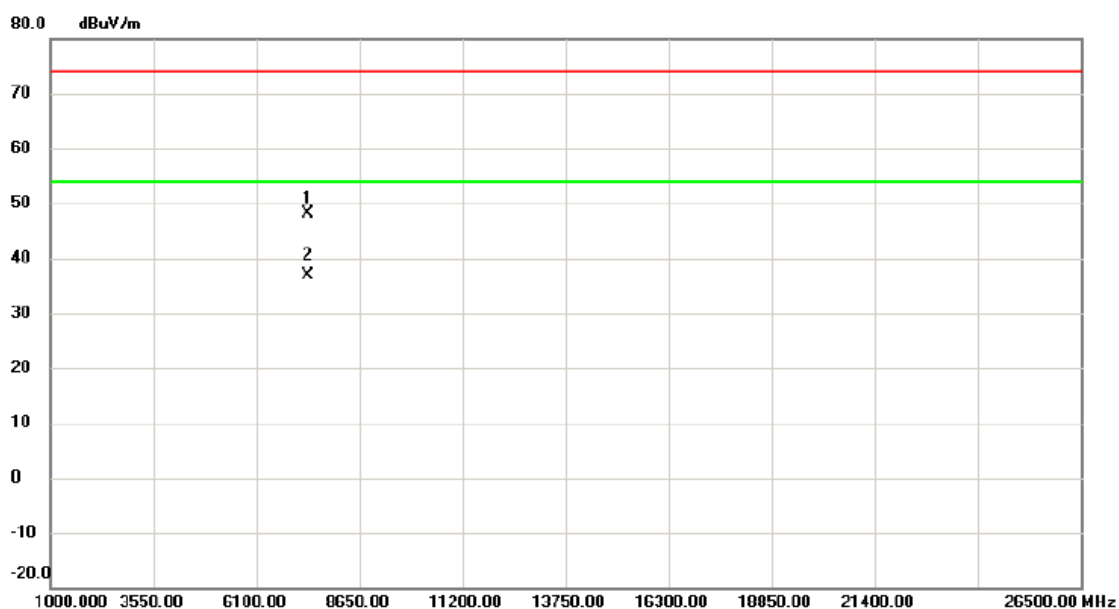


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7370.797	40.02	8.03	48.05	74.00	-25.95	peak	
2	*	7371.050	28.78	8.03	36.81	54.00	-17.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2457 MHz

Horizontal

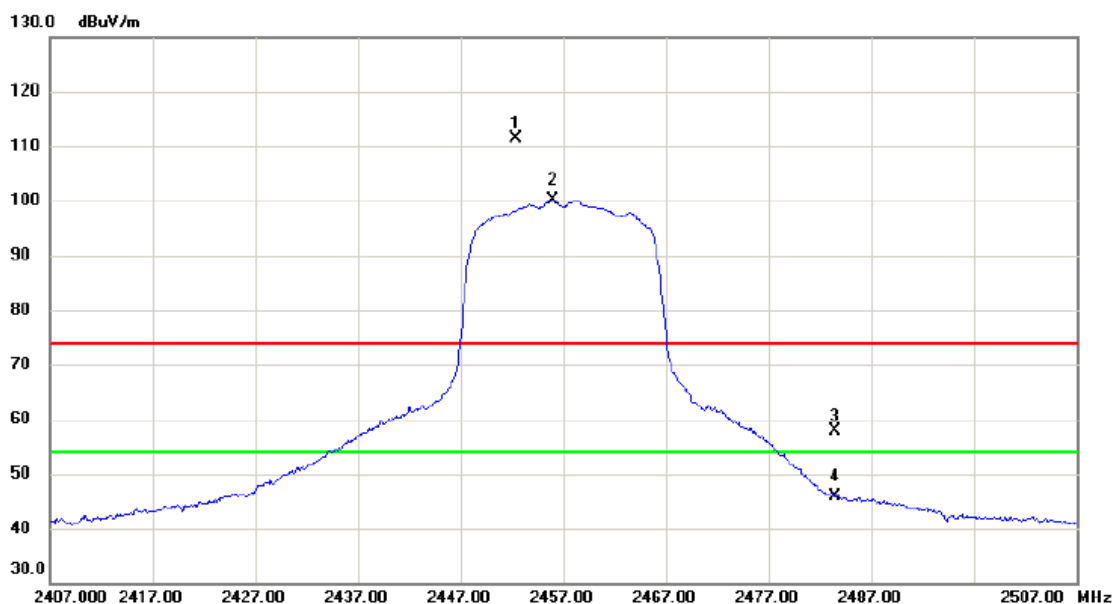


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2452.400	102.76	8.51	111.27	74.00	37.27	peak	No Limit
2	*	2456.050	91.58	8.52	100.10	54.00	46.10	AVG	No Limit
3		2483.500	49.25	8.59	57.84	74.00	-16.16	peak	
4		2483.500	37.35	8.59	45.94	54.00	-8.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2457 MHz

Horizontal

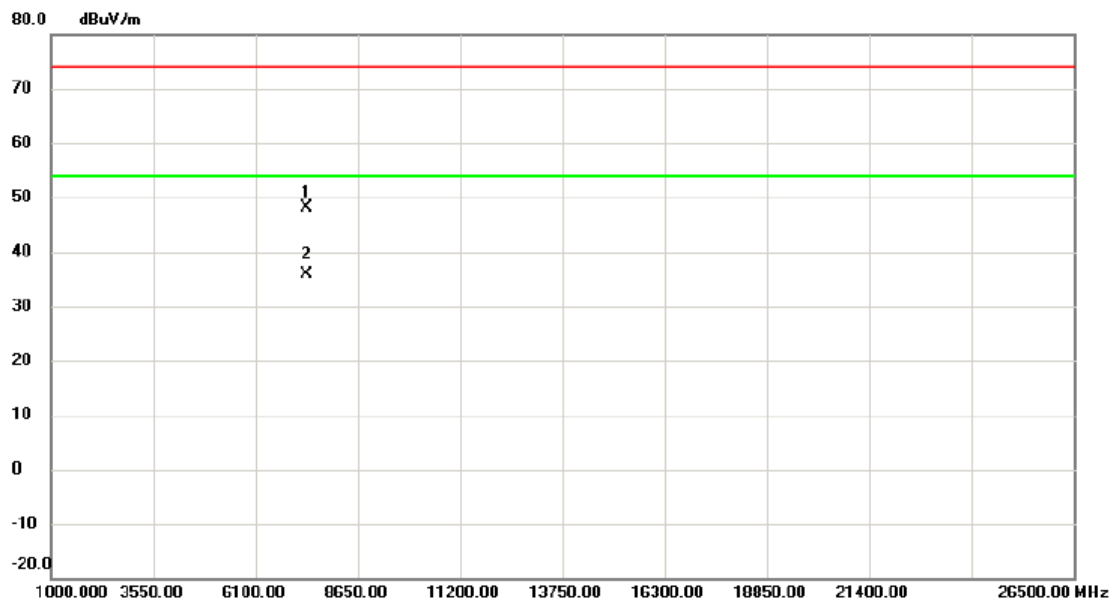

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7370.910	40.03	8.03	48.06	74.00	-25.94	peak	
2	*	7371.083	27.90	8.03	35.93	54.00	-18.07	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical

130 dBuV/m

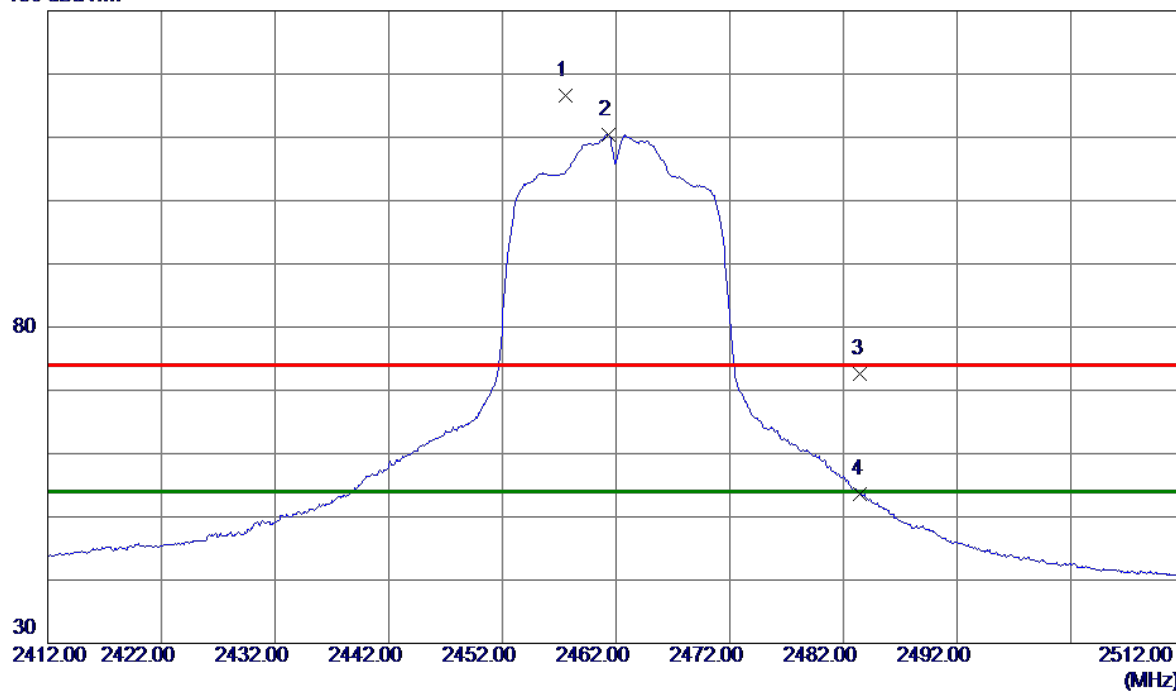

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2457.5500	108.14	8.52	116.66	74.00	42.66	Peak	No Limit
2 *	2461.3500	101.80	8.53	110.33	54.00	56.33	AVG	No Limit
3	2483.5000	64.03	8.59	72.62	74.00	-1.38	Peak	
4	2483.5000	45.05	8.59	53.64	54.00	-0.36	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical

80 dBuV/m

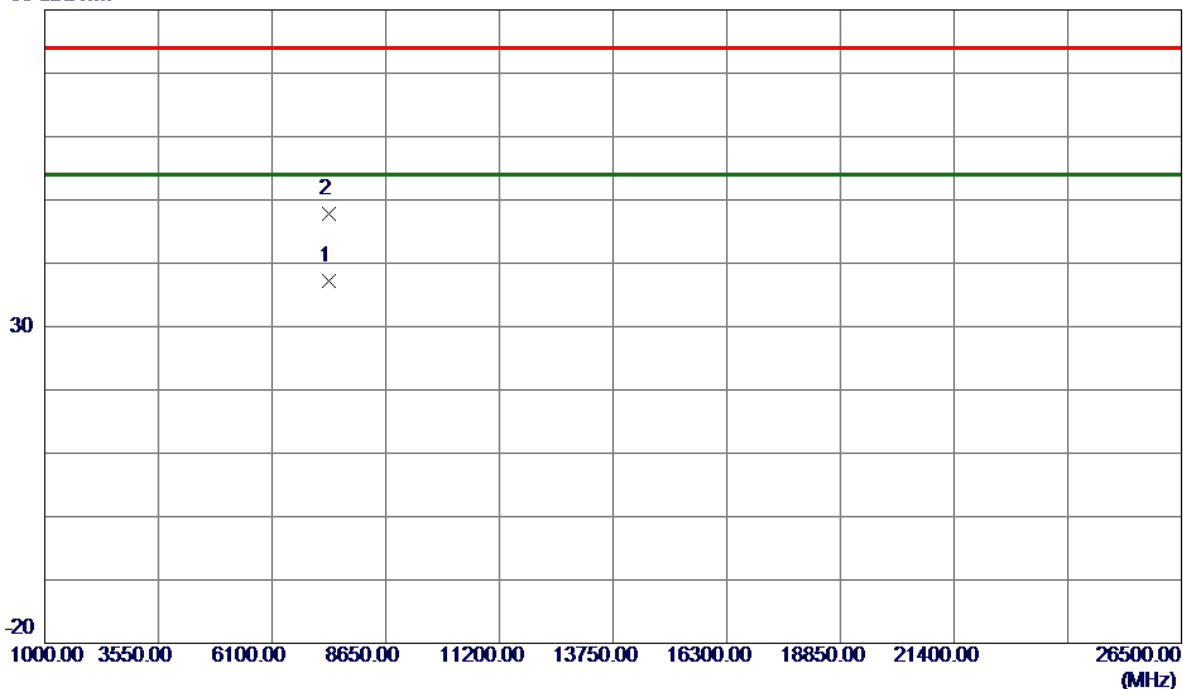

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7385.9380	29.19	8.04	37.23	54.00	-16.77	AVG	
2	7386.0300	39.81	8.04	47.85	74.00	-26.15	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

130 dBuV/m

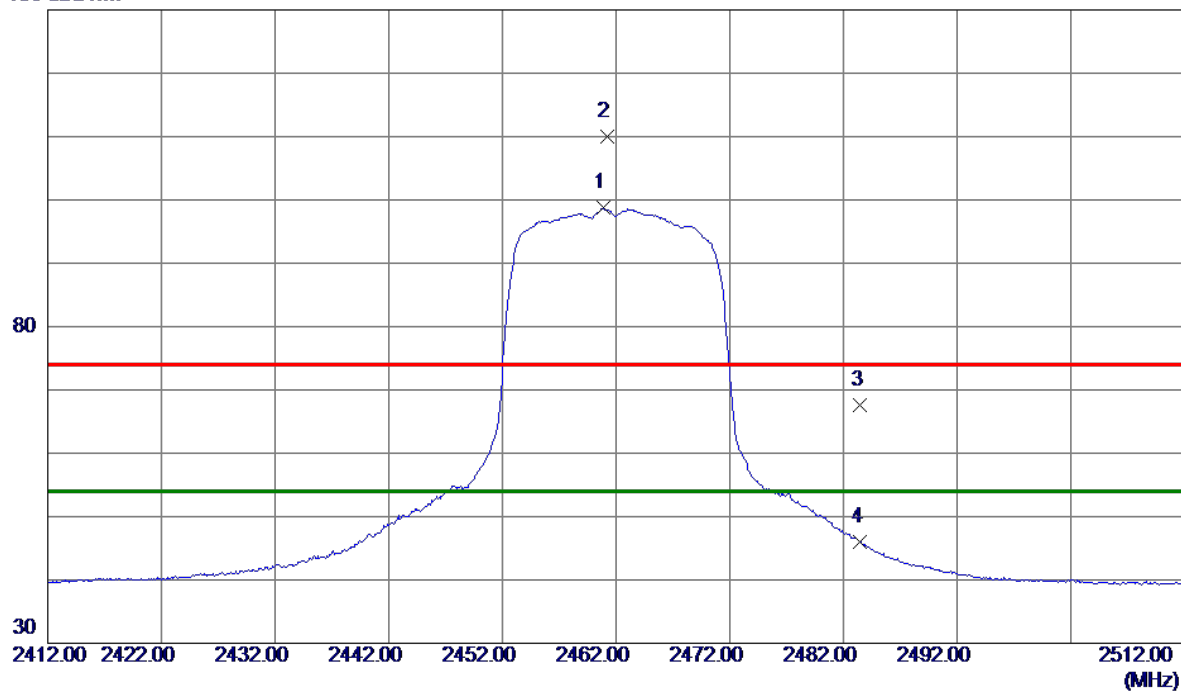

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2460.8500	90.25	8.53	98.78	54.00	44.78	AVG	No Limit
2	2461.2500	101.42	8.53	109.95	74.00	35.95	Peak	No Limit
3	2483.5000	59.03	8.59	67.62	74.00	-6.38	Peak	
4	2483.5000	37.44	8.59	46.03	54.00	-7.97	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

80 dBuV/m

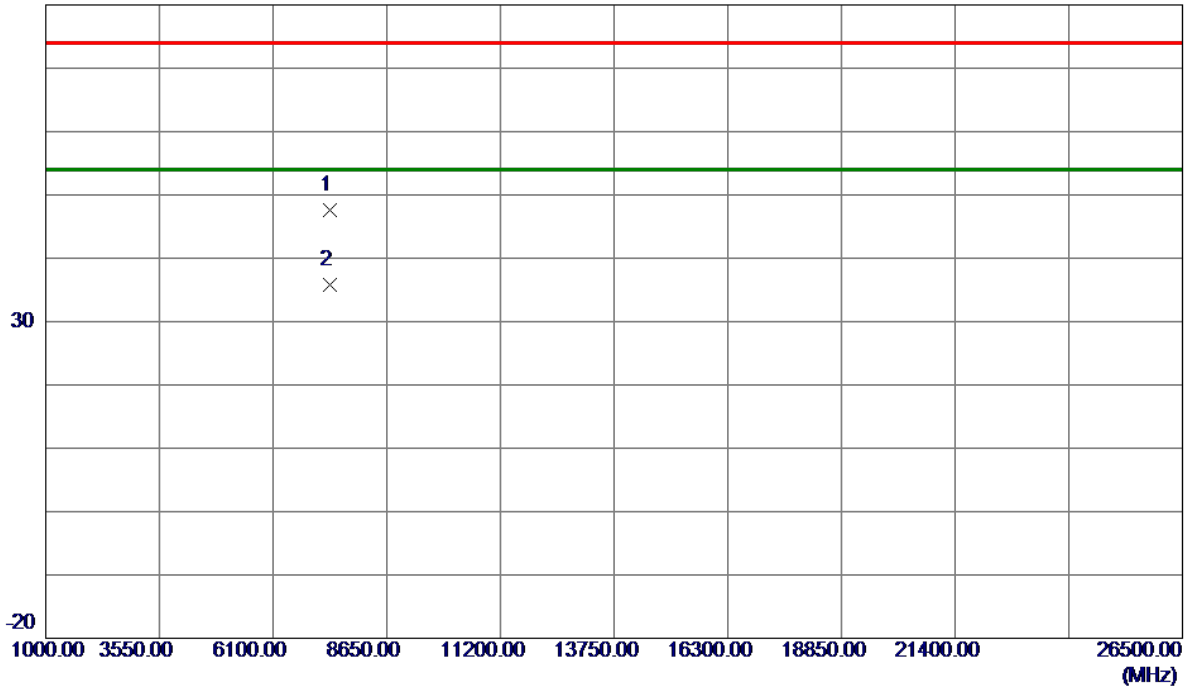

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7386.0900	39.56	8.04	47.60	74.00	-26.40	Peak	
2 *	7386.1300	27.68	8.04	35.72	54.00	-18.28	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422 MHz

Vertical

130 dBuV/m

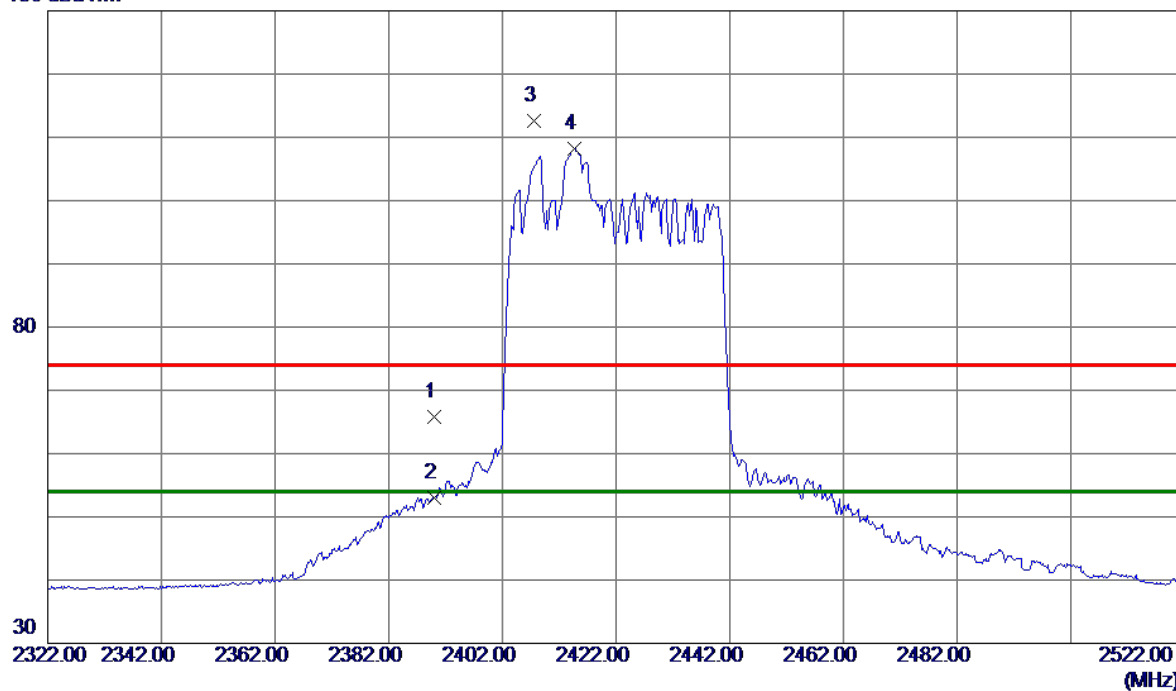

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	57.48	8.35	65.83	74.00	-8.17	Peak	
2	2390.0000	44.70	8.35	53.05	54.00	-0.95	AVG	
3	2407.6000	104.23	8.40	112.63	74.00	38.63	Peak	No Limit
4 *	2414.7000	99.73	8.42	108.15	54.00	54.15	AVG	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422 MHz

Vertical

80 dBuV/m

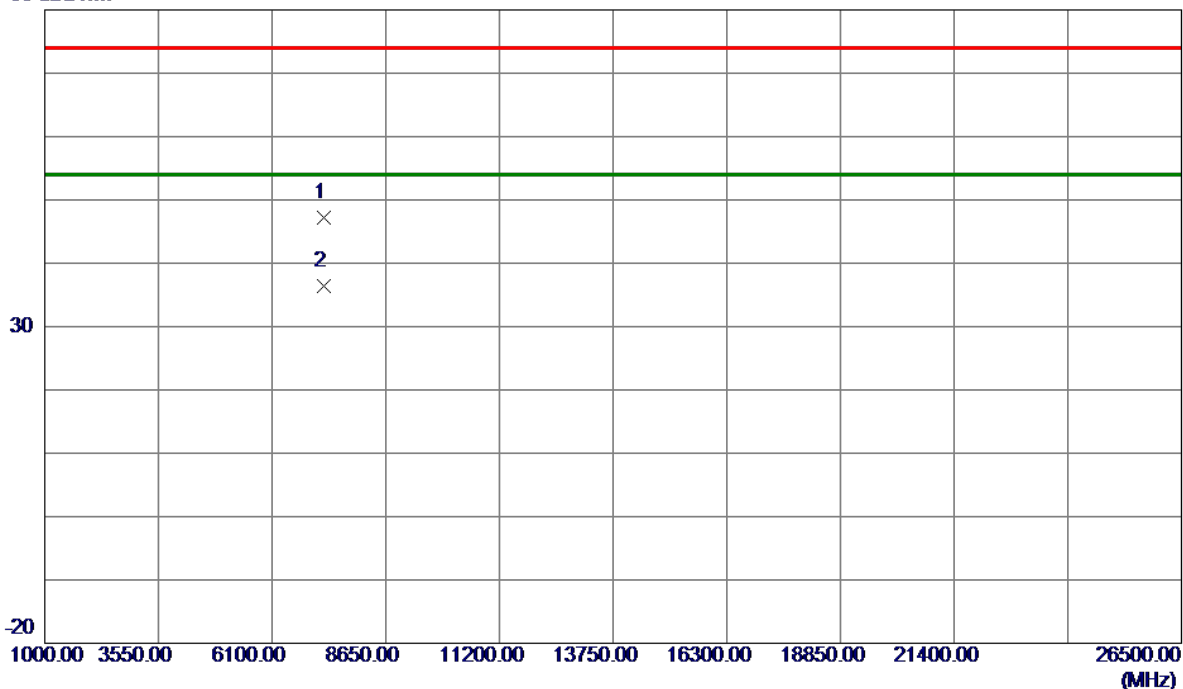


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7264.5800	39.32	7.94	47.26	74.00	-26.74	Peak	
2 *	7266.1130	28.41	7.94	36.35	54.00	-17.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422 MHz

Horizontal

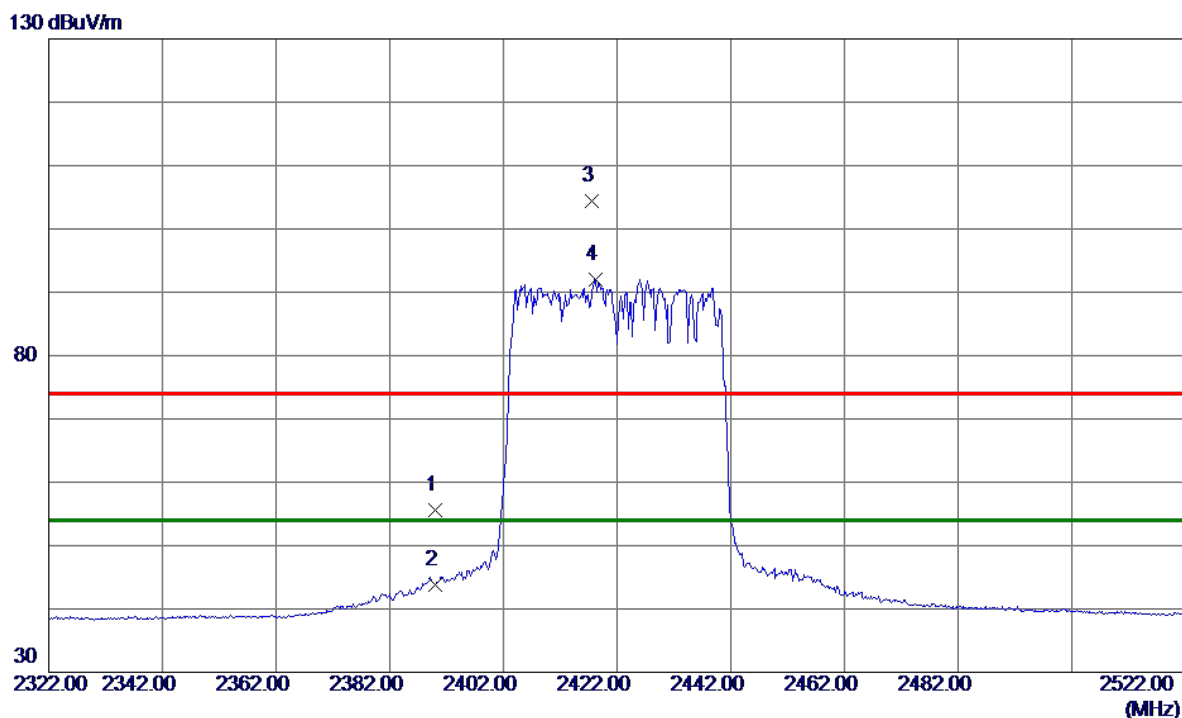

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	47.16	8.35	55.51	74.00	-18.49	Peak	
2	2390.0000	35.52	8.35	43.87	54.00	-10.13	AVG	
3	2417.5000	95.98	8.42	104.40	74.00	30.40	Peak	No Limit
4 *	2418.2000	83.68	8.42	92.10	54.00	38.10	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422 MHz

Horizontal

80 dBuV/m

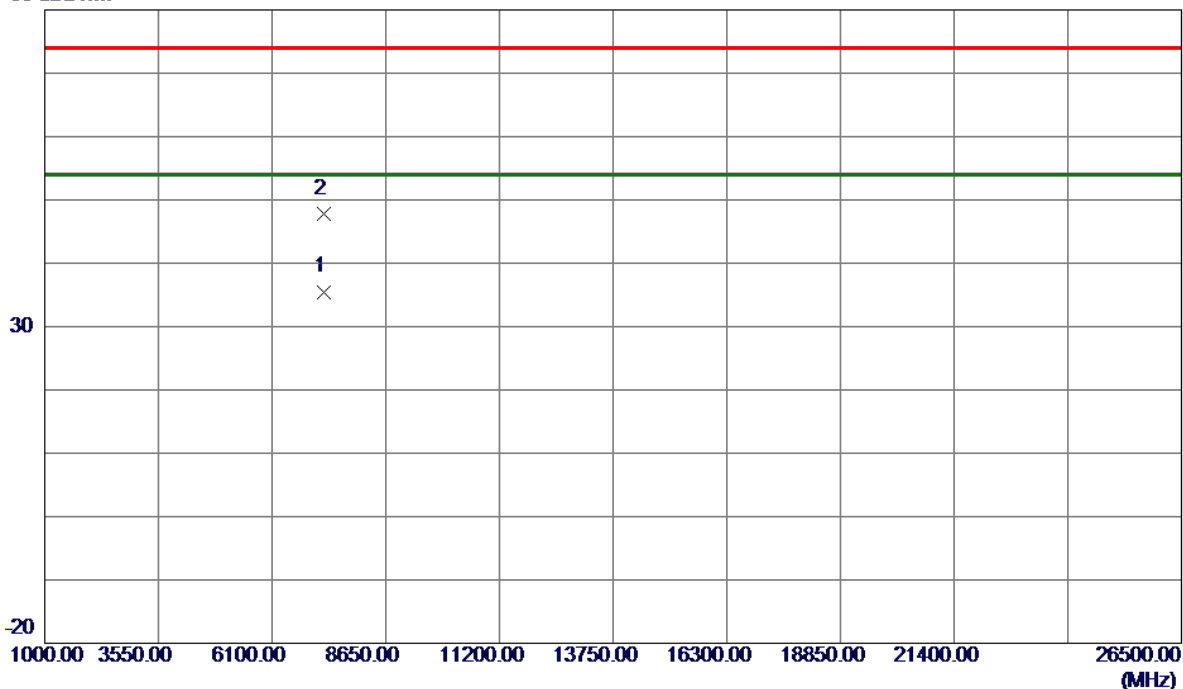


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7266.0230	27.56	7.94	35.50	54.00	-18.50	AVG	
2	7266.4350	39.78	7.94	47.72	74.00	-26.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2427 MHz

Vertical

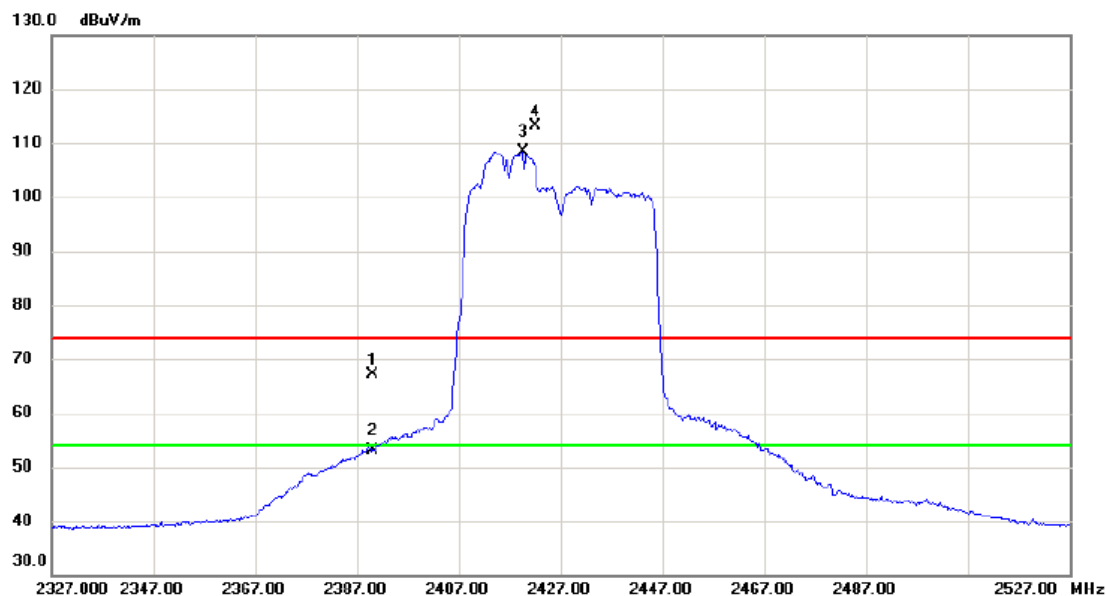


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	58.70	8.35	67.05	74.00	-6.95	peak	
2		2390.000	44.75	8.35	53.10	54.00	-0.90	AVG	
3	*	2419.600	99.90	8.43	108.33	54.00	54.33	AVG	No Limit
4	X	2422.200	104.76	8.43	113.19	74.00	39.19	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2427 MHz

Vertical

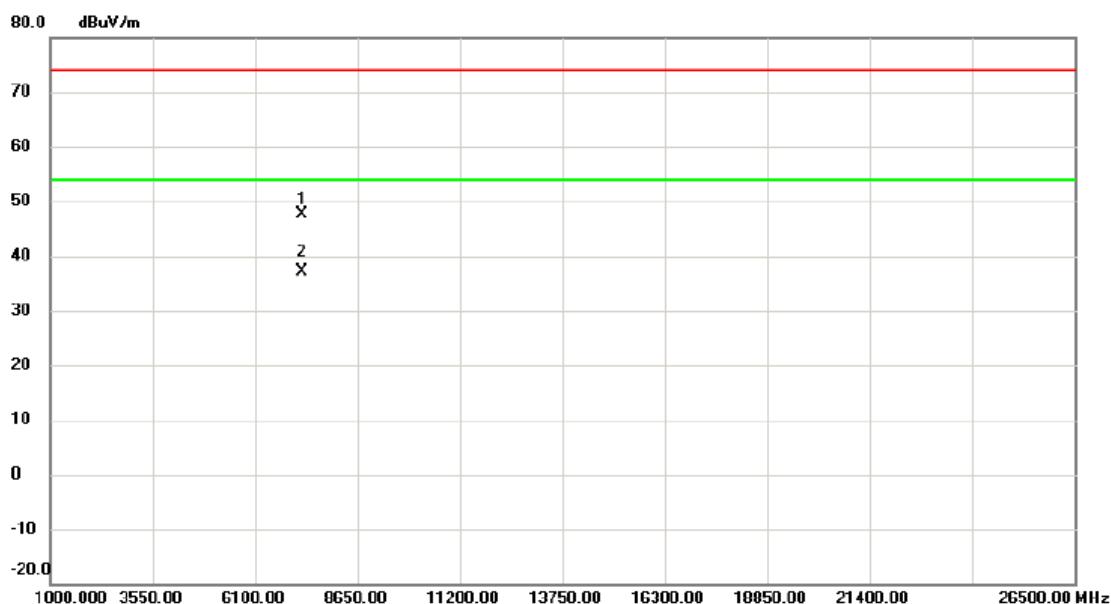

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7281.087	39.68	7.95	47.63	74.00	-26.37	peak	
2 *		7281.193	29.21	7.95	37.16	54.00	-16.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.