



802.11ax-HE80 26dB Bandwidth & 99% Bandwidth


Channel 42 (5210MHz)

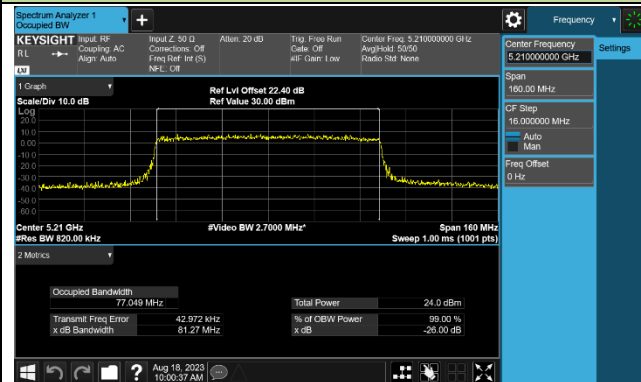


Channel 58 (5290MHz)

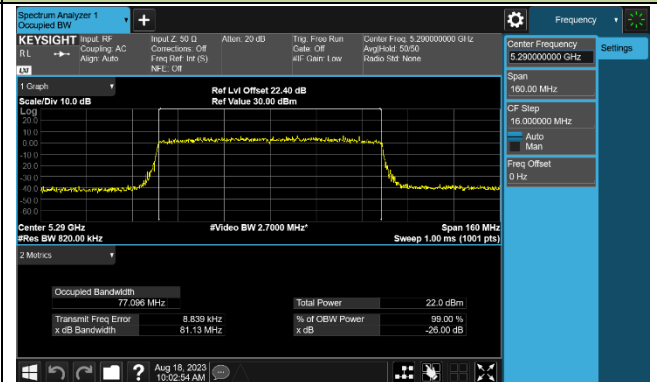


Channel 106 (5530MHz)

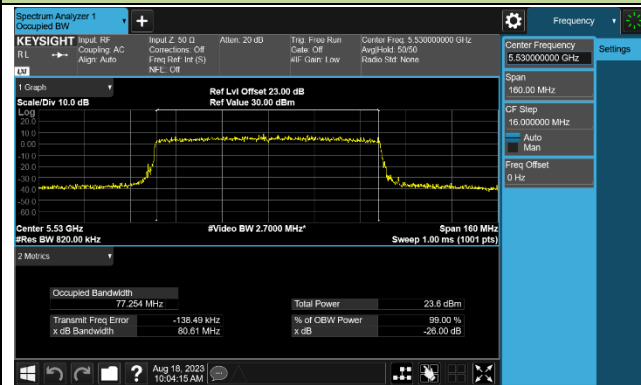


Channel 122 (5610MHz)

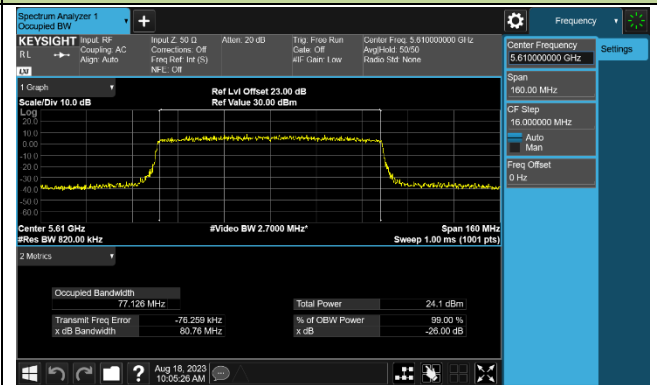

Channel 138 (5690MHz)

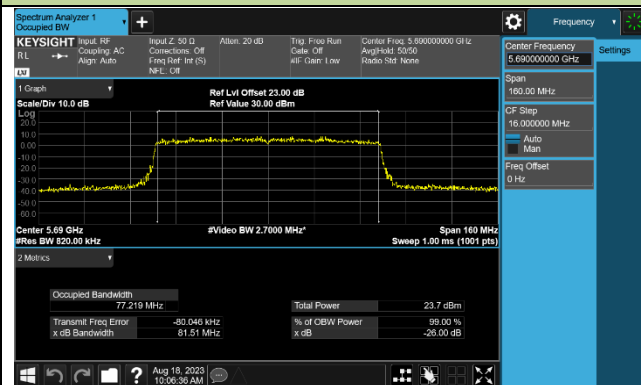


Channel 155 (5775MHz)

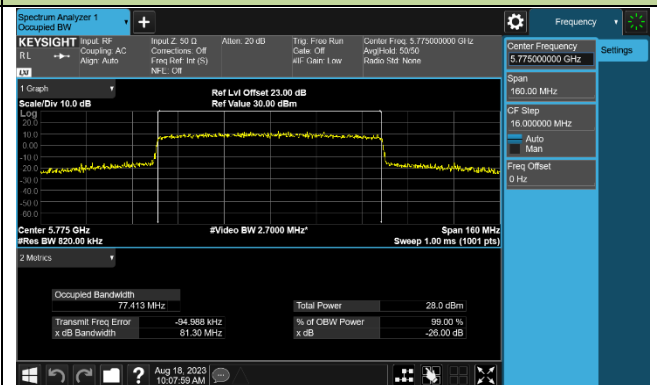


802.11ax-HE160 26dB Bandwidth & 99% Bandwidth

Channel 50 (5250MHz)

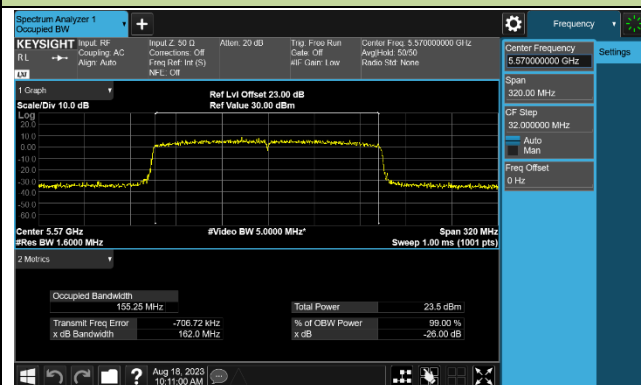

Channel 114 (5570MHz)

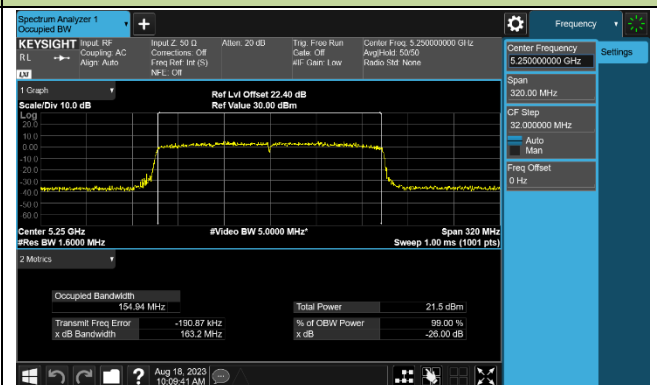

7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

KDB 789033 D02v02r01- Section C.2

7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

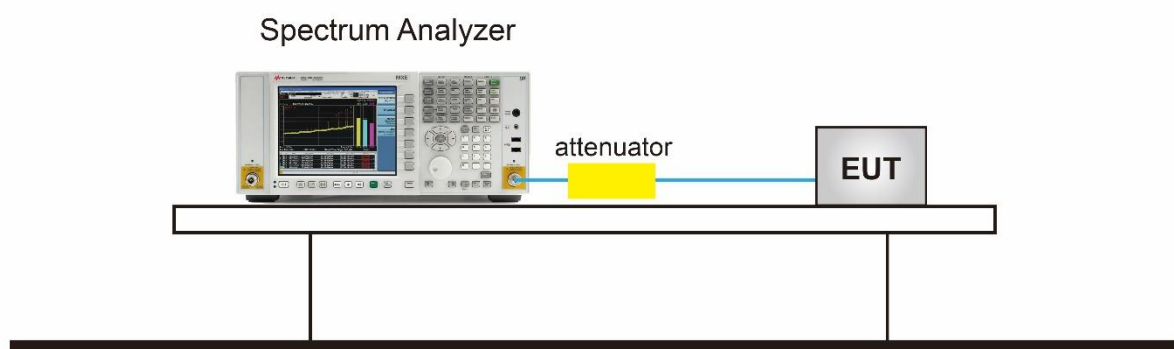

7.3.5.TestResult

Product	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Test Engineer	Xuan Yu
Test Site	SR5	Test Date	2023/08/18


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 1						
802.11a	6Mbps	149	5745	16.400	≥ 0.5	Pass
802.11a	6Mbps	157	5785	16.420	≥ 0.5	Pass
802.11a	6Mbps	165	5825	16.420	≥ 0.5	Pass
802.11ac-VHT20	MCS0	149	5745	17.810	≥ 0.5	Pass
802.11ac-VHT20	MCS0	157	5785	17.620	≥ 0.5	Pass
802.11ac-VHT20	MCS0	165	5825	17.610	≥ 0.5	Pass
802.11ac-VHT40	MCS0	151	5755	36.370	≥ 0.5	Pass
802.11ac-VHT40	MCS0	159	5795	36.050	≥ 0.5	Pass
802.11ac-VHT80	MCS0	155	5775	75.790	≥ 0.5	Pass
802.11ax-HE20	MCS0	149	5745	19.140	≥ 0.5	Pass
802.11ax-HE20	MCS0	157	5785	19.060	≥ 0.5	Pass
802.11ax-HE20	MCS0	165	5825	18.970	≥ 0.5	Pass
802.11ax-HE40	MCS0	151	5755	36.270	≥ 0.5	Pass
802.11ax-HE40	MCS0	159	5795	36.070	≥ 0.5	Pass
802.11ax-HE80	MCS0	155	5775	76.880	≥ 0.5	Pass

802.11a 6dB Bandwidth


Channel 149 (5745MHz)



Channel 157 (5785MHz)

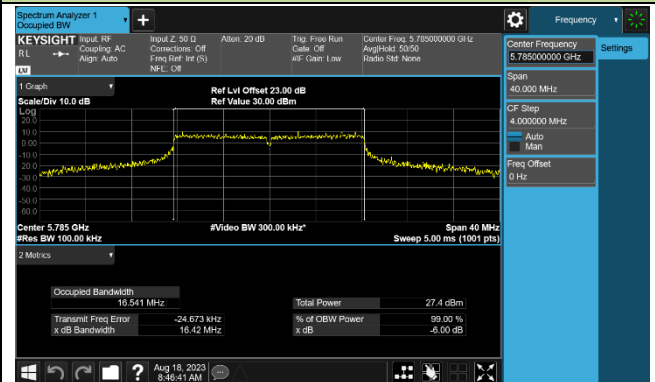


Channel 165 (5825MHz)

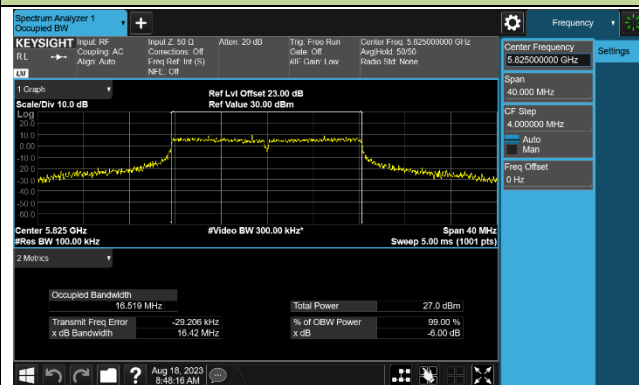


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

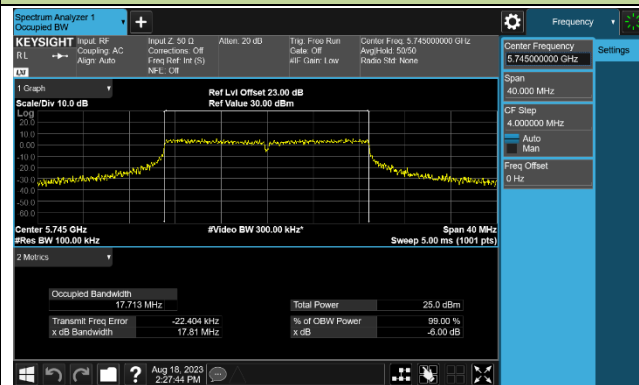

Channel 157 (5785MHz)

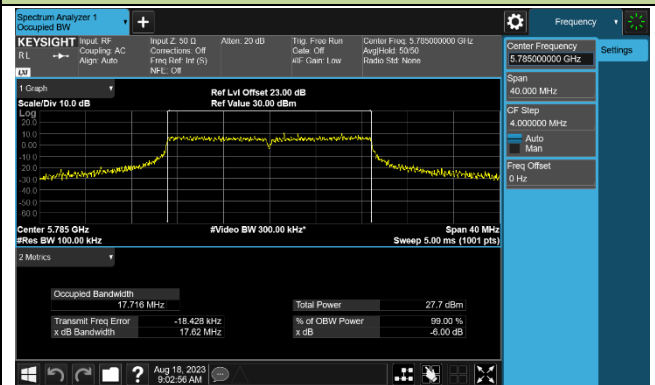


Channel 165 (5825MHz)

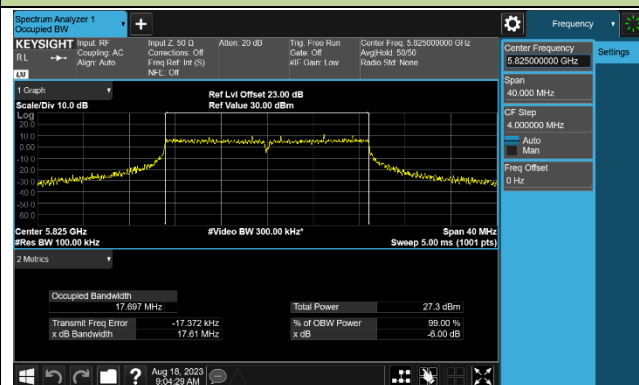


802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

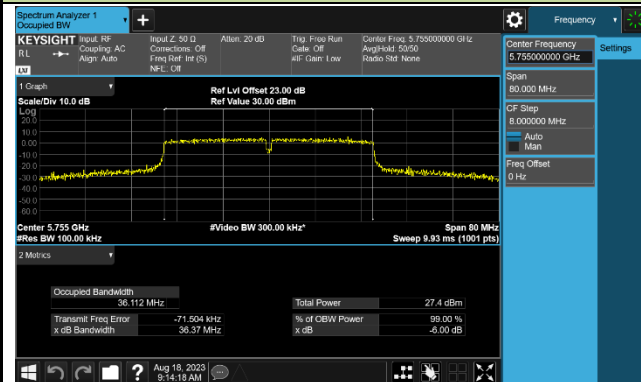


Channel 159 (5795MHz)

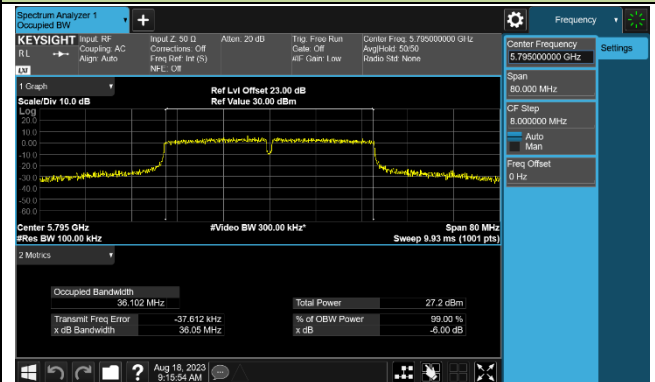


802.11ac-VHT80 6dB Bandwidth

Channel 155 (5775MHz)

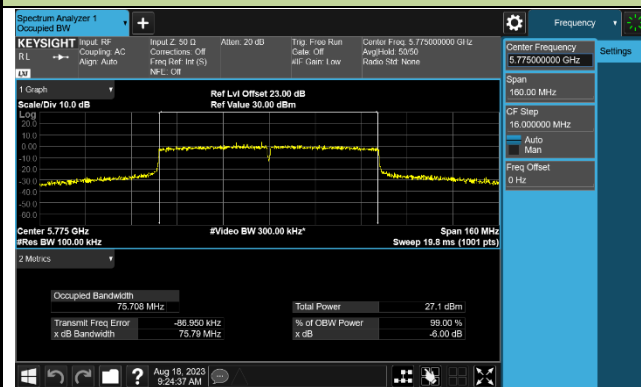


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

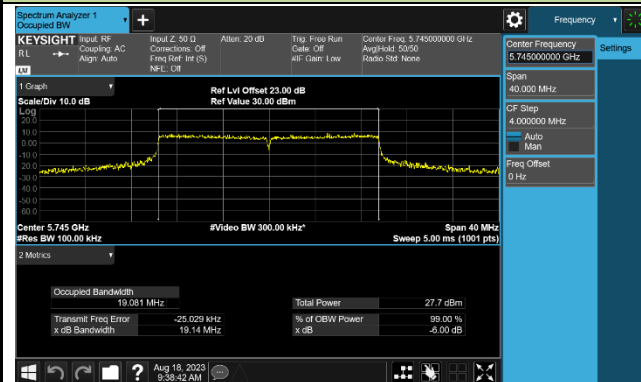

Channel 157 (5785MHz)

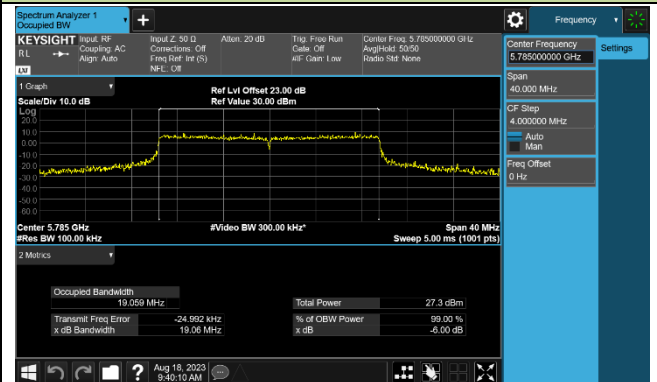


Channel 165 (5825MHz)

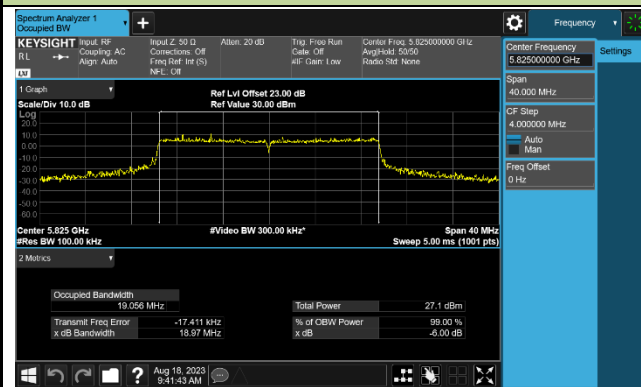


802.11ax-HE40 6dB Bandwidth

Channel 151 (5755MHz)

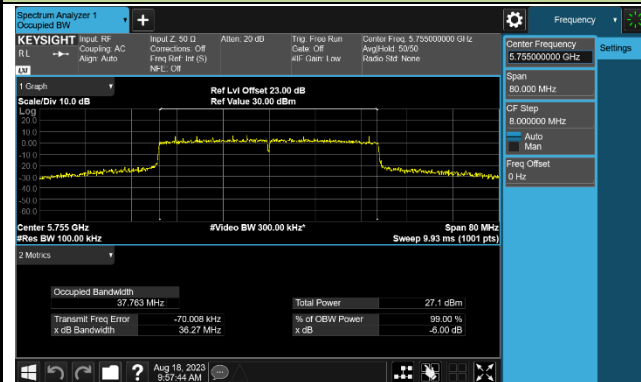


Channel 159 (5795MHz)

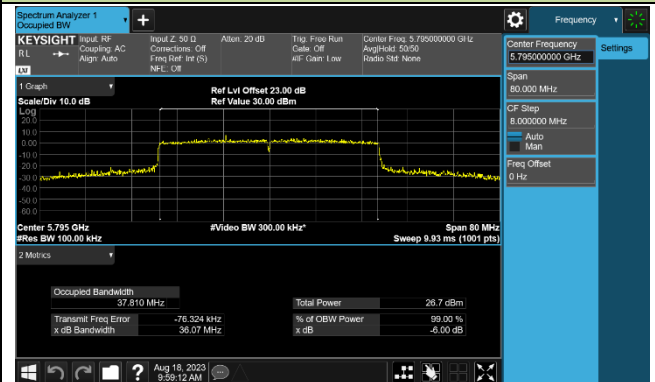

802.11ax-HE80 6dB Bandwidth

Channel 155 (5775MHz)

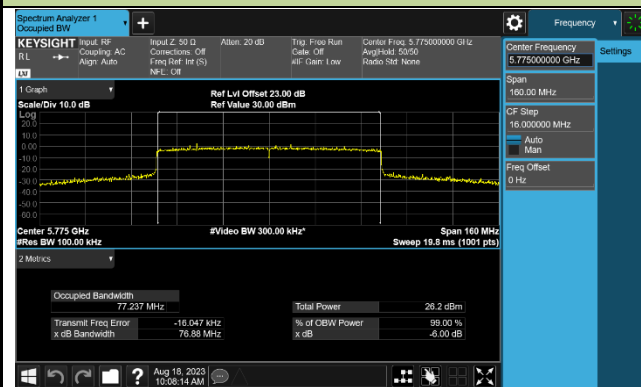

7.4. Output Power Measurement

7.4.1. Test Limit

For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.4.2. Test Procedure Used

KDB 789033D02v02r01- Section E)3)b) Method PM-G

7.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

7.4.4. Test Setup

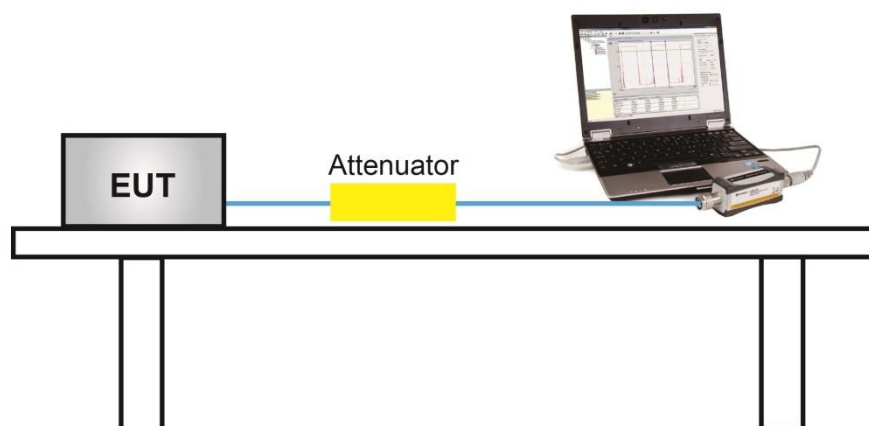

7.4.5. Test Result

Product	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Test Engineer	Xuan Yu
Test Site	SR5	Test Date	2023/08/15
Test Mode	CDD Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Power Limit (dBm)	Result
11a	6Mbps	36	5180	20.58	21.35	20.21	20.83	26.78	≤ 30.00	Pass
11a	6Mbps	44	5220	21.10	21.71	20.67	21.41	27.26	≤ 30.00	Pass
11a	6Mbps	48	5240	20.84	21.39	20.38	21.13	26.97	≤ 30.00	Pass
11a	6Mbps	52	5260	14.42	15.11	13.87	14.52	20.52	≤ 23.98	Pass
11a	6Mbps	60	5300	14.03	14.65	13.90	14.20	20.22	≤ 23.98	Pass
11a	6Mbps	64	5320	14.25	15.26	13.92	14.45	20.52	≤ 23.98	Pass
11a	6Mbps	100	5500	14.12	16.62	13.89	14.60	20.97	≤ 23.98	Pass
11a	6Mbps	116	5580	14.38	17.75	14.13	15.32	21.67	≤ 23.98	Pass
11a	6Mbps	140	5700	13.92	16.03	13.02	14.28	20.48	≤ 23.98	Pass
11a	6Mbps	144	5720	14.33	16.50	13.75	14.92	21.02	≤ 22.75	Pass
11a	6Mbps	149	5745	21.42	23.95	21.01	22.23	28.33	≤ 30.00	Pass
11a	6Mbps	157	5785	21.91	23.73	21.31	22.40	28.45	≤ 30.00	Pass
11a	6Mbps	165	5825	21.69	23.24	21.51	22.28	28.25	≤ 30.00	Pass
11ac-VHT20	MCS0	36	5180	20.76	20.93	20.35	20.28	26.61	≤ 30.00	Pass
11ac-VHT20	MCS0	44	5220	21.30	21.65	20.60	20.86	27.14	≤ 30.00	Pass
11ac-VHT20	MCS0	48	5240	21.01	21.31	20.34	20.56	26.84	≤ 30.00	Pass
11ac-VHT20	MCS0	52	5260	14.82	15.23	14.13	14.30	20.66	≤ 23.98	Pass
11ac-VHT20	MCS0	60	5300	14.67	14.67	13.75	14.07	20.33	≤ 23.98	Pass
11ac-VHT20	MCS0	64	5320	14.62	15.07	13.90	14.34	20.52	≤ 23.98	Pass
11ac-VHT20	MCS0	100	5500	14.18	16.87	13.74	14.29	20.98	≤ 23.98	Pass
11ac-VHT20	MCS0	116	5580	14.32	18.14	14.18	15.05	21.77	≤ 23.98	Pass
11ac-VHT20	MCS0	140	5700	14.39	17.10	13.61	14.73	21.19	≤ 23.98	Pass
11ac-VHT20	MCS0	144	5720	14.34	16.57	13.72	14.72	21.00	≤ 22.82	Pass
11ac-VHT20	MCS0	149	5745	21.64	24.25	20.66	22.11	28.39	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	21.96	23.60	21.54	22.70	28.54	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	21.60	23.35	21.03	22.66	28.27	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Power Limit (dBm)	Result
11ac-VHT40	MCS0	38	5190	19.80	19.99	19.31	19.32	25.64	≤ 30.00	Pass
11ac-VHT40	MCS0	46	5230	22.34	22.90	22.10	22.40	28.47	≤ 30.00	Pass
11ac-VHT40	MCS0	54	5270	17.40	17.94	16.95	17.16	23.40	≤ 23.98	Pass
11ac-VHT40	MCS0	62	5310	17.27	17.96	17.13	17.37	23.46	≤ 23.98	Pass
11ac-VHT40	MCS0	102	5510	17.10	18.51	17.00	18.05	23.73	≤ 23.98	Pass
11ac-VHT40	MCS0	110	5550	16.98	18.69	16.88	17.32	23.55	≤ 23.98	Pass
11ac-VHT40	MCS0	134	5670	17.01	17.73	16.76	17.91	23.40	≤ 23.98	Pass
11ac-VHT40	MCS0	142	5710	17.27	18.16	17.04	17.90	23.64	≤ 23.98	Pass
11ac-VHT40	MCS0	151	5755	20.77	23.79	20.31	23.20	28.29	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	21.38	23.66	20.20	23.23	28.36	≤ 30.00	Pass
11ac-VHT80	MCS0	42	5210	19.31	20.00	18.50	18.81	25.21	≤ 30.00	Pass
11ac-VHT80	MCS0	58	5290	17.49	17.67	17.33	17.14	23.43	≤ 23.98	Pass
11ac-VHT80	MCS0	106	5530	16.38	18.92	16.51	17.03	23.36	≤ 23.98	Pass
11ac-VHT80	MCS0	122	5610	16.60	19.24	16.50	16.38	23.38	≤ 23.98	Pass
11ac-VHT80	MCS0	138	5690	17.29	19.51	16.85	16.94	23.82	≤ 23.98	Pass
11ac-VHT80	MCS0	155	5775	20.81	24.13	21.47	22.01	28.32	≤ 30.00	Pass
11ac-VHT160	MCS0	50	5250	16.03	16.85	15.93	15.31	22.09	≤ 23.98	Pass
11ac-VHT160	MCS0	114	5570	16.64	19.41	16.13	16.28	23.36	≤ 23.98	Pass
11ax-HE20	MCS0	36	5180	20.50	20.88	19.89	19.96	26.35	≤ 30.00	Pass
11ax-HE20	MCS0	40	5220	20.70	21.42	20.22	20.68	26.80	≤ 30.00	Pass
11ax-HE20	MCS0	48	5240	20.92	21.48	20.61	20.54	26.92	≤ 30.00	Pass
11ax-HE20	MCS0	52	5260	14.51	15.20	14.28	14.26	20.60	≤ 23.98	Pass
11ax-HE20	MCS0	60	5300	14.05	14.74	13.88	13.81	20.16	≤ 23.98	Pass
11ax-HE20	MCS0	64	5320	14.37	15.19	14.20	14.13	20.51	≤ 23.98	Pass
11ax-HE20	MCS0	100	5500	14.02	16.97	13.72	14.70	21.07	≤ 23.98	Pass
11ax-HE20	MCS0	116	5580	14.54	17.82	14.16	15.10	21.68	≤ 23.98	Pass
11ax-HE20	MCS0	140	5700	14.00	16.27	13.43	14.46	20.70	≤ 23.98	Pass
11ax-HE20	MCS0	144	5720	14.11	16.48	13.78	15.08	21.01	≤ 22.87	Pass
11ax-HE20	MCS0	149	5745	21.72	24.15	20.44	22.08	28.33	≤ 30.00	Pass
11ax-HE20	MCS0	157	5785	21.56	24.40	20.40	22.65	28.53	≤ 30.00	Pass
11ax-HE20	MCS0	165	5825	21.83	23.67	20.82	23.40	28.60	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Power Limit (dBm)	Result
11ax-HE40	MCS0	38	5190	19.39	19.62	18.96	18.69	25.20	≤ 30.00	Pass
11ax-HE40	MCS0	46	5230	22.10	22.88	22.15	22.47	28.43	≤ 30.00	Pass
11ax-HE40	MCS0	54	5270	17.67	18.04	17.05	17.05	23.49	≤ 23.98	Pass
11ax-HE40	MCS0	62	5310	17.43	17.94	17.02	17.22	23.44	≤ 23.98	Pass
11ax-HE40	MCS0	102	5510	16.58	18.76	16.40	17.04	23.32	≤ 23.98	Pass
11ax-HE40	MCS0	110	5550	17.07	19.42	16.56	17.18	23.73	≤ 23.98	Pass
11ax-HE40	MCS0	134	5670	16.37	19.18	16.10	17.19	23.41	≤ 23.98	Pass
11ax-HE40	MCS0	142	5710	17.32	19.21	16.34	17.37	23.71	≤ 23.98	Pass
11ax-HE40	MCS0	151	5755	21.39	24.01	20.98	23.18	28.59	≤ 30.00	Pass
11ax-HE40	MCS0	159	5795	21.83	23.75	21.44	22.05	28.38	≤ 30.00	Pass
11ax-HE80	MCS0	42	5210	19.53	19.81	19.02	19.45	25.48	≤ 30.00	Pass
11ax-HE80	MCS0	58	5290	17.36	17.89	17.19	17.41	23.49	≤ 23.98	Pass
11ax-HE80	MCS0	106	5530	17.55	19.10	16.61	17.43	23.79	≤ 23.98	Pass
11ax-HE80	MCS0	122	5610	16.93	19.51	16.64	17.70	23.87	≤ 23.98	Pass
11ax-HE80	MCS0	138	5690	16.91	19.14	16.27	17.53	23.62	≤ 23.98	Pass
11ax-HE80	MCS0	155	5775	21.62	23.72	21.23	22.13	28.30	≤ 30.00	Pass
11ax-HE160	MCS0	50	5250	16.90	17.49	16.72	16.60	22.96	≤ 23.98	Pass
11ax-HE160	MCS0	114	5570	17.01	19.41	16.23	16.45	23.50	≤ 23.98	Pass

Note 1:

The Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

Note 2:

For 5250- 5350MHz and 5470 - 5725MHz Band: Average Power Limit (dBm) = 23.98 dBm.

For 5150 - 5250MHz and 5725 - 5850MHz Bands: Average Power Limit (dBm) = 30 dBm.

For 802.11a Ch144 (5720MHz), Average Power Limit (dBm) = $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2) = 22.75$ dBm.

For 802.11ac Ch144 (5720MHz), Average Power Limit (dBm) = $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2) = 22.82$ dBm.

For 802.11ax Ch144 (5720MHz), Average Power Limit (dBm) = $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2) = 22.87$ dBm.

Product	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Test Engineer	Xuan Yu
Test Site	SR5	Test Date	2023/08/15
Test Mode	Beamforming Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Power Limit (dBm)	Result
11ac-VHT20	MCS0	36	5180	20.76	20.93	20.35	20.28	26.61	≤ 27.98	Pass
11ac-VHT20	MCS0	40	5220	21.30	21.65	20.60	20.86	27.14	≤ 27.98	Pass
11ac-VHT20	MCS0	48	5240	21.01	21.31	20.34	20.56	26.84	≤ 27.98	Pass
11ac-VHT20	MCS0	52	5260	14.82	15.23	14.13	14.30	20.66	≤ 21.96	Pass
11ac-VHT20	MCS0	60	5300	14.67	14.67	13.75	14.07	20.33	≤ 21.96	Pass
11ac-VHT20	MCS0	64	5320	14.62	15.07	13.90	14.34	20.52	≤ 21.96	Pass
11ac-VHT20	MCS0	100	5500	14.18	16.87	13.74	14.29	20.98	≤ 21.96	Pass
11ac-VHT20	MCS0	116	5580	14.32	18.14	14.18	15.05	21.77	≤ 21.96	Pass
11ac-VHT20	MCS0	140	5700	14.39	17.10	13.61	14.73	21.19	≤ 21.96	Pass
11ac-VHT20	MCS0	144	5720	13.78	16.29	13.22	14.25	20.57	≤ 20.80	Pass
11ac-VHT20	MCS0	149	5745	20.89	23.76	20.59	20.66	27.72	≤ 27.98	Pass
11ac-VHT20	MCS0	157	5785	20.77	23.03	20.35	20.59	27.35	≤ 27.98	Pass
11ac-VHT20	MCS0	165	5825	21.50	22.82	21.10	21.51	27.80	≤ 27.98	Pass
11ac-VHT40	MCS0	38	5190	19.80	19.99	19.31	19.32	25.64	≤ 27.98	Pass
11ac-VHT40	MCS0	46	5230	21.24	22.00	21.22	21.92	27.63	≤ 27.98	Pass
11ac-VHT40	MCS0	54	5270	15.63	16.05	14.86	14.68	21.36	≤ 21.96	Pass
11ac-VHT40	MCS0	62	5310	15.48	15.88	15.10	15.49	21.52	≤ 21.96	Pass
11ac-VHT40	MCS0	102	5510	14.49	17.60	14.81	14.44	21.58	≤ 21.96	Pass
11ac-VHT40	MCS0	110	5550	14.66	18.05	15.25	14.42	21.88	≤ 21.96	Pass
11ac-VHT40	MCS0	134	5670	14.60	17.71	14.34	14.86	21.63	≤ 21.96	Pass
11ac-VHT40	MCS0	142	5710	15.10	17.28	14.67	15.13	21.69	≤ 21.96	Pass
11ac-VHT40	MCS0	151	5755	20.59	23.10	20.78	21.82	27.71	≤ 27.98	Pass
11ac-VHT40	MCS0	159	5795	20.84	22.53	20.46	21.56	27.44	≤ 27.98	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Power Limit (dBm)	Result
11ac-VHT80	MCS0	42	5210	19.31	20.00	18.50	18.81	25.21	≤ 27.98	Pass
11ac-VHT80	MCS0	58	5290	15.13	15.70	15.05	14.75	21.19	≤ 21.96	Pass
11ac-VHT80	MCS0	106	5530	14.84	17.53	14.44	14.14	21.49	≤ 21.96	Pass
11ac-VHT80	MCS0	122	5610	14.56	17.49	14.23	14.34	21.41	≤ 21.96	Pass
11ac-VHT80	MCS0	138	5690	14.91	17.55	14.20	14.80	21.59	≤ 21.96	Pass
11ac-VHT80	MCS0	155	5775	20.33	22.91	20.48	21.93	27.57	≤ 27.98	Pass
11ac-VHT160	MCS0	50	5250	15.65	16.14	15.05	15.30	21.58	≤ 21.96	Pass
11ac-VHT160	MCS0	114	5570	14.80	17.82	14.77	14.23	21.68	≤ 21.96	Pass
11ax-HE20	MCS0	36	5180	20.50	20.88	19.89	19.96	26.35	≤ 27.98	Pass
11ax-HE20	MCS0	40	5220	20.70	21.42	20.22	20.68	26.80	≤ 27.98	Pass
11ax-HE20	MCS0	48	5240	20.92	21.48	20.61	20.54	26.92	≤ 27.98	Pass
11ax-HE20	MCS0	52	5260	14.51	15.20	14.28	14.26	20.60	≤ 21.96	Pass
11ax-HE20	MCS0	60	5300	14.05	14.74	13.88	13.81	20.16	≤ 21.96	Pass
11ax-HE20	MCS0	64	5320	14.37	15.19	14.20	14.13	20.51	≤ 21.96	Pass
11ax-HE20	MCS0	100	5500	14.02	16.97	13.72	14.70	21.07	≤ 21.96	Pass
11ax-HE20	MCS0	116	5580	14.54	17.82	14.16	15.10	21.68	≤ 21.96	Pass
11ax-HE20	MCS0	140	5700	14.00	16.27	13.43	14.46	20.70	≤ 21.96	Pass
11ax-HE20	MCS0	144	5720	13.85	15.79	12.82	14.01	20.27	≤ 20.85	Pass
11ax-HE20	MCS0	149	5745	20.49	23.42	20.22	21.28	27.57	≤ 27.98	Pass
11ax-HE20	MCS0	157	5785	20.77	23.02	20.58	22.00	27.73	≤ 27.98	Pass
11ax-HE20	MCS0	165	5825	20.85	22.16	20.23	21.81	27.35	≤ 27.98	Pass
11ax-HE40	MCS0	38	5190	19.39	19.62	18.96	18.69	25.20	≤ 27.98	Pass
11ax-HE40	MCS0	46	5230	21.58	22.01	21.24	21.68	27.66	≤ 27.98	Pass
11ax-HE40	MCS0	54	5270	15.62	16.20	14.70	14.75	21.38	≤ 21.96	Pass
11ax-HE40	MCS0	62	5310	15.78	17.00	15.35	14.63	21.80	≤ 21.96	Pass
11ax-HE40	MCS0	102	5510	14.72	17.33	14.22	14.89	21.49	≤ 21.96	Pass
11ax-HE40	MCS0	110	5550	14.70	17.66	14.65	14.70	21.66	≤ 21.96	Pass
11ax-HE40	MCS0	134	5670	14.20	17.25	13.90	14.60	21.23	≤ 21.96	Pass
11ax-HE40	MCS0	142	5710	14.75	17.50	14.66	15.42	21.77	≤ 21.96	Pass
11ax-HE40	MCS0	151	5755	20.55	23.15	20.62	21.40	27.58	≤ 27.98	Pass
11ax-HE40	MCS0	159	5795	20.95	22.78	20.73	22.02	27.72	≤ 27.98	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Power Limit (dBm)	Result
11ax-HE80	MCS0	42	5210	19.53	19.81	19.02	19.45	25.48	≤ 27.98	Pass
11ax-HE80	MCS0	58	5290	15.52	16.00	14.66	14.83	21.31	≤ 21.96	Pass
11ax-HE80	MCS0	106	5530	14.88	17.30	14.22	14.39	21.41	≤ 21.96	Pass
11ax-HE80	MCS0	122	5610	14.52	17.56	13.84	14.16	21.32	≤ 21.96	Pass
11ax-HE80	MCS0	138	5690	14.47	17.41	14.31	15.09	21.53	≤ 21.96	Pass
11ax-HE80	MCS0	155	5775	20.66	23.21	20.55	21.80	27.71	≤ 27.98	Pass
11ax-HE160	MCS0	50	5250	15.72	16.31	15.40	15.62	21.80	≤ 21.96	Pass
11ax-HE160	MCS0	114	5570	14.19	17.54	14.23	14.60	21.41	≤ 21.96	Pass

Note 1:

The Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

Note 2:

For 5125 - 5250MHz Band: Average Power Limit (dBm) = 30 - (8.02- 6) = 27.98dBm

For 5250 - 5350MHz and 5470 - 5725MHz Band: Average Power Limit (dBm) = 23.98 - (8.02- 6) = 21.96dBm.

For 5725 - 5850MHz Band: Average Power Limit (dBm) = 30- (8.02- 6) = 27.98dBm.

For ac_ch144 (5720MHz), Average Power Limit (dBm) = $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2) - (8.02- 6) = 20.80\text{dBm}$.

For ax_ch144 (5720MHz), Average Power Limit (dBm) = $11 + 10 \cdot \log(5\text{MHz} + \text{BW}_{26\text{dBc}}/2) - (8.02- 6) = 20.85\text{dBm}$.

7.5. Transmit Power Control

7.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


7.5.2. Test Procedure Used

KDB 789033 D02v02r01- Section E)3)b) Method PM-G

7.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.5.4. Test Setup

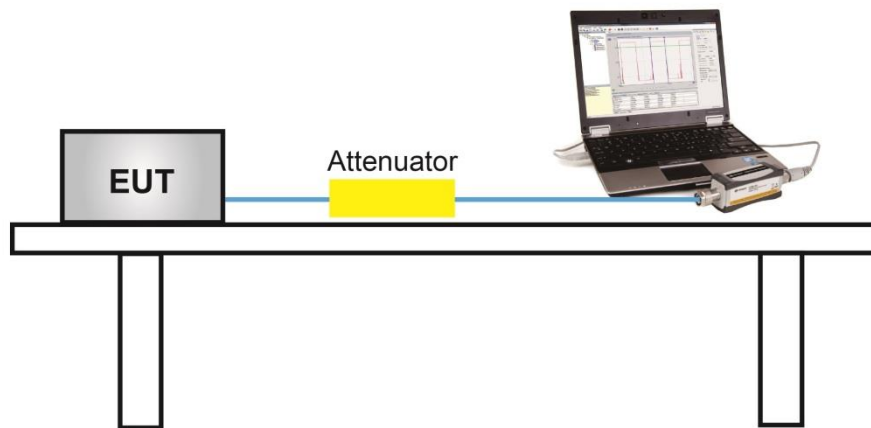

7.5.5. Test Result

Device supports TPC mechanism, details refer to the operational description.

7.6. Power Spectral Density Measurement

7.6.1. Test Limit

For the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.6.2. Test Procedure Used

KDB 789033 D02v02r01-Section F

7.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,
RBW = 510 kHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

7.6.4. Test Setup

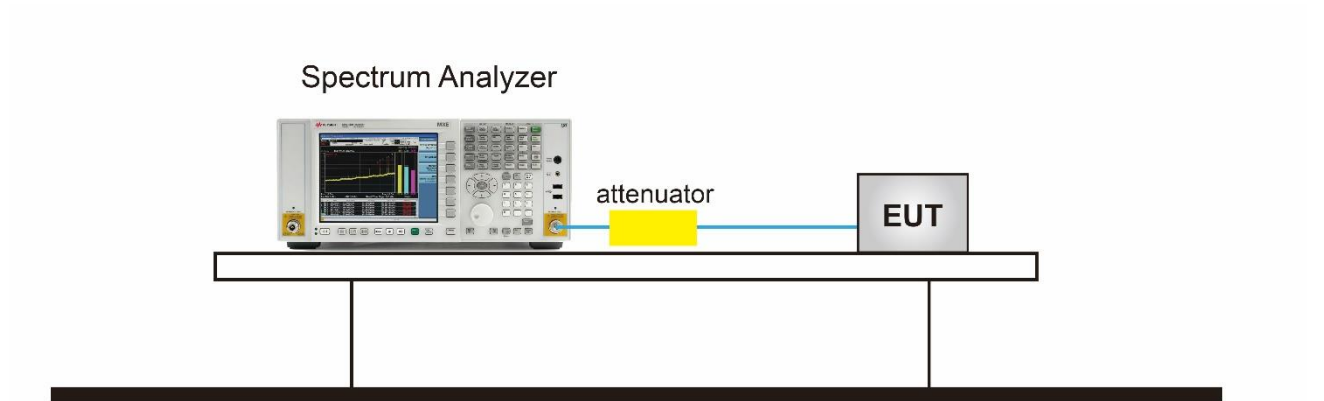

7.6.5.Test Result

Product	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Test Engineer	Xuan Yu
Test Site	SR5	Test Date	2023/08/15
Mode	Power Spectral Density (U-NII- 1/-2a / -2c) CDD Mode		

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	Ant 0 PSD (dBm/MHz)	Ant 1 PSD (dBm/MHz)	Ant 2 PSD (dBm/MHz)	Ant 3 PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11a	6Mbps	36	5180	8.049	8.645	8.127	8.587	96.87%	14.519	≤ 14.98	Pass
11a	6Mbps	44	5220	8.772	8.783	8.281	8.788	96.87%	14.820	≤ 14.98	Pass
11a	6Mbps	48	5240	8.244	8.461	8.075	8.373	96.87%	14.449	≤ 14.98	Pass
11a	6Mbps	52	5260	2.655	2.530	2.253	2.594	96.87%	8.669	≤ 8.98	Pass
11a	6Mbps	60	5300	2.538	2.555	2.030	2.463	96.87%	8.560	≤ 8.98	Pass
11a	6Mbps	64	5320	2.941	2.472	2.298	3.087	96.87%	8.870	≤ 8.98	Pass
11a	6Mbps	100	5500	2.634	2.727	2.128	2.574	96.87%	8.680	≤ 8.98	Pass
11a	6Mbps	116	5580	2.535	2.921	2.003	2.839	96.87%	8.748	≤ 8.98	Pass
11a	6Mbps	140	5700	2.765	2.819	2.061	2.801	96.87%	8.782	≤ 8.98	Pass
11a	6Mbps	144	5720	2.575	2.636	2.250	2.788	96.87%	8.725	≤ 8.98	Pass
11ac-VHT20	MCS0	36	5180	7.706	8.284	7.950	8.059	85.76%	14.692	≤ 14.98	Pass
11ac-VHT20	MCS0	44	5220	8.041	8.299	8.079	8.042	85.76%	14.804	≤ 14.98	Pass
11ac-VHT20	MCS0	48	5240	7.944	8.028	8.132	8.381	85.76%	14.812	≤ 14.98	Pass
11ac-VHT20	MCS0	52	5260	2.263	2.133	1.428	1.945	85.76%	8.641	≤ 8.98	Pass
11ac-VHT20	MCS0	60	5300	2.535	2.319	1.940	1.848	85.76%	8.857	≤ 8.98	Pass
11ac-VHT20	MCS0	64	5320	2.254	2.598	1.696	1.874	85.76%	8.807	≤ 8.98	Pass
11ac-VHT20	MCS0	100	5500	1.713	3.329	1.282	2.081	85.76%	8.859	≤ 8.98	Pass
11ac-VHT20	MCS0	116	5580	2.056	2.658	1.806	2.233	85.76%	8.887	≤ 8.98	Pass
11ac-VHT20	MCS0	140	5700	1.828	2.533	1.465	2.467	85.76%	8.784	≤ 8.98	Pass
11ac-VHT20	MCS0	144	5720	2.041	2.482	1.198	1.835	85.76%	8.601	≤ 8.98	Pass

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	Ant 0 PSD (dBm/MHz)	Ant 1 PSD (dBm/MHz)	Ant 2 PSD (dBm/MHz)	Ant 3 PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11ac-VHT40	MCS0	38	5190	4.332	4.795	4.140	4.014	85.28%	11.043	≤ 14.98	Pass
11ac-VHT40	MCS0	46	5230	6.001	6.517	6.001	6.199	85.28%	12.897	≤ 14.98	Pass
11ac-VHT40	MCS0	54	5270	1.116	1.947	1.432	0.965	85.28%	8.094	≤ 8.98	Pass
11ac-VHT40	MCS0	62	5310	1.742	2.229	1.028	2.187	85.28%	8.535	≤ 8.98	Pass
11ac-VHT40	MCS0	102	5510	1.159	3.953	0.490	1.794	85.28%	8.768	≤ 8.98	Pass
11ac-VHT40	MCS0	110	5550	1.060	3.241	0.199	0.803	85.28%	8.201	≤ 8.98	Pass
11ac-VHT40	MCS0	134	5670	0.958	3.647	0.285	1.921	85.28%	8.606	≤ 8.98	Pass
11ac-VHT40	MCS0	142	5710	1.846	3.766	0.306	2.027	85.28%	8.872	≤ 8.98	Pass
11ac-VHT80	MCS0	42	5210	0.298	1.125	0.159	0.475	84.83%	7.265	≤ 14.98	Pass
11ac-VHT80	MCS0	58	5290	-1.478	-0.892	-1.674	-1.803	84.83%	5.288	≤ 8.98	Pass
11ac-VHT80	MCS0	106	5530	-2.188	0.894	-2.983	-2.063	84.83%	5.424	≤ 8.98	Pass
11ac-VHT80	MCS0	122	5610	-2.587	1.133	-2.313	-1.680	84.83%	5.650	≤ 8.98	Pass
11ac-VHT80	MCS0	138	5690	-1.605	1.572	-2.274	-1.080	84.83%	6.154	≤ 8.98	Pass
11ac-VHT160	MCS0	50	5250	-5.243	-3.808	-5.130	-4.991	91.25%	1.665	≤ 8.98	Pass
11ac-VHT160	MCS0	114	5570	-4.598	-1.166	-5.328	-4.680	91.25%	2.816	≤ 8.98	Pass
11ax-HE20	MCS0	36	5180	7.724	8.587	7.094	8.064	85.81%	14.586	≤ 14.98	Pass
11ax-HE20	MCS0	44	5220	8.420	8.331	7.460	8.238	85.81%	14.814	≤ 14.98	Pass
11ax-HE20	MCS0	48	5240	8.035	8.285	7.175	8.281	85.81%	14.652	≤ 14.98	Pass
11ax-HE20	MCS0	52	5260	1.916	2.549	1.745	1.728	85.81%	8.683	≤ 8.98	Pass
11ax-HE20	MCS0	60	5300	2.134	2.305	1.381	1.590	85.81%	8.554	≤ 8.98	Pass
11ax-HE20	MCS0	64	5320	2.037	2.786	2.002	1.982	85.81%	8.900	≤ 8.98	Pass
11ax-HE20	MCS0	100	5500	1.621	2.250	1.349	2.114	85.81%	8.534	≤ 8.98	Pass
11ax-HE20	MCS0	116	5580	1.727	2.336	0.930	1.918	85.81%	8.442	≤ 8.98	Pass
11ax-HE20	MCS0	140	5700	1.199	2.618	0.676	1.902	85.81%	8.346	≤ 8.98	Pass
11ax-HE20	MCS0	144	5720	1.998	2.499	0.646	2.206	85.81%	8.578	≤ 8.98	Pass

Test Mode	Data Rate/MCS	Ch. No.	Freq. (MHz)	Ant 0 PSD (dBm/MHz)	Ant 1 PSD (dBm/MHz)	Ant 2 PSD (dBm/MHz)	Ant 3 PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11ax-HE40	MCS0	38	5190	3.488	4.412	3.736	3.297	85.60%	10.450	≤ 14.98	Pass
11ax-HE40	MCS0	46	5230	6.305	7.830	6.511	7.064	85.60%	13.664	≤ 14.98	Pass
11ax-HE40	MCS0	54	5270	1.975	2.738	1.535	1.273	85.60%	8.612	≤ 8.98	Pass
11ax-HE40	MCS0	62	5310	2.052	2.867	1.853	1.819	85.60%	8.865	≤ 8.98	Pass
11ax-HE40	MCS0	102	5510	1.061	4.126	-0.081	0.842	85.60%	8.499	≤ 8.98	Pass
11ax-HE40	MCS0	110	5550	1.340	4.320	0.638	1.510	85.60%	8.897	≤ 8.98	Pass
11ax-HE40	MCS0	134	5670	0.971	3.763	0.407	1.329	85.60%	8.518	≤ 8.98	Pass
11ax-HE40	MCS0	142	5710	1.419	3.773	0.540	2.393	85.60%	8.896	≤ 8.98	Pass
11ax-HE80	MCS0	42	5210	0.682	1.623	0.289	1.123	86.04%	7.631	≤ 14.98	Pass
11ax-HE80	MCS0	58	5290	-0.979	-0.738	-1.226	-0.664	86.04%	5.777	≤ 8.98	Pass
11ax-HE80	MCS0	106	5530	-1.749	0.821	-2.141	-1.314	86.04%	5.740	≤ 8.98	Pass
11ax-HE80	MCS0	122	5610	-1.774	1.394	-1.989	-1.569	86.04%	5.932	≤ 8.98	Pass
11ax-HE80	MCS0	122	5690	-1.545	0.921	-1.977	-1.235	86.04%	5.869	≤ 8.98	Pass
11ax-HE160	MCS0	50	5250	-4.132	-2.951	-4.176	-4.068	85.65%	2.893	≤ 8.98	Pass
11ax-HE160	MCS0	114	5570	-4.173	-1.200	-5.493	-4.171	85.65%	3.240	≤ 8.98	Pass

Note 1: When EUT duty cycle ≥ 98%,

the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\}$ (dBm/MHz).

When EUT duty cycle < 98%,

the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\} + 10 \cdot \log (1/\text{Duty Cycle})$ (dBm/MHz).

Note 2:

For 5150 - 5250MHz Band: PSD Limit (dBm/MHz) = 17 - (8.02 - 6) = 14.98dBm/MHz.

For 5250 - 5350MHz and 5470 - 5725MHz Band: PSD Limit (dBm/MHz) = 11 - (8.02 - 6) = 8.98dBm/MHz.

Product	AX5400 Ceiling Mount Wi-Fi 6 Access Point	Test Engineer	Xuan Yu
Test Site	SR5	Test Date	2023/08/15
Test Item	Power Spectral Density (U-NII-3) CDD Mode		

Test Mode	Data Rate/MCS	Ch. No.	Freq. (MHz)	Ant 0 PSD (dBm/510KHz)	Ant 1 PSD (dBm/510KHz)	Ant 2 PSD (dBm/510KHz)	Ant 3 PSD (dBm/510KHz)	Duty Cycle (%)	Total PSD (dBm/510kHz)	Limit (dBm/500kHz)	Result
11a	6Mbps	149	5745	7.045	9.156	6.519	8.726	96.87%	14.159	≤ 27.98	Pass
11a	6Mbps	157	5785	7.422	8.900	6.548	8.622	96.87%	14.132	≤ 27.98	Pass
11a	6Mbps	165	5825	7.685	8.916	6.407	9.304	96.87%	14.379	≤ 27.98	Pass
11ac-VHT20	MCS0	149	5745	5.910	8.843	5.158	7.491	85.76%	13.774	≤ 27.98	Pass
11ac-VHT20	MCS0	157	5785	6.175	8.711	5.496	7.897	85.76%	13.948	≤ 27.98	Pass
11ac-VHT20	MCS0	165	5825	6.635	8.205	5.493	7.545	85.76%	13.773	≤ 27.98	Pass
11ac-VHT40	MCS0	151	5755	2.400	6.237	2.146	4.469	85.28%	10.853	≤ 27.98	Pass
11ac-VHT40	MCS0	159	5795	3.132	5.150	2.574	4.570	85.28%	10.693	≤ 27.98	Pass
11ac-VHT80	MCS0	155	5775	-0.014	2.863	-0.041	1.398	84.83%	7.958	≤ 27.98	Pass
11ax-HE20	MCS0	149	5745	5.365	8.963	5.326	7.020	85.81%	13.622	≤ 27.98	Pass
11ax-HE20	MCS0	157	5785	5.935	8.866	5.688	7.770	85.81%	13.951	≤ 27.98	Pass
11ax-HE20	MCS0	165	5825	6.534	8.409	5.481	7.475	85.81%	13.795	≤ 27.98	Pass
11ax-HE40	MCS0	151	5755	2.849	5.626	2.503	4.860	85.60%	10.854	≤ 27.98	Pass
11ax-HE40	MCS0	159	5795	3.399	5.379	2.977	4.884	85.60%	10.970	≤ 27.98	Pass
11ax-HE80	MCS0	155	5775	-0.214	2.537	-0.137	1.942	86.04%	7.878	≤ 27.98	Pass

Note 1: When EUT duty cycle ≥ 98%,


the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\}$ (dBm/510kHz).

When EUT duty cycle < 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\}$ (dBm/510kHz) + $10 \cdot \log (1/\text{Duty Cycle})$.


Note 2: PSD Limit (dBm/500kHz) = 30 - (8.02 - 6) = 27.98 (dBm/500kHz).

802.11a Power Spectral Density - Ant 0


Channel 36 (5180MHz)

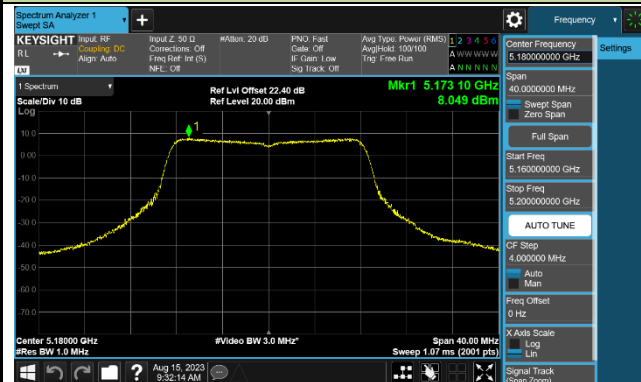


Channel 44 (5220MHz)

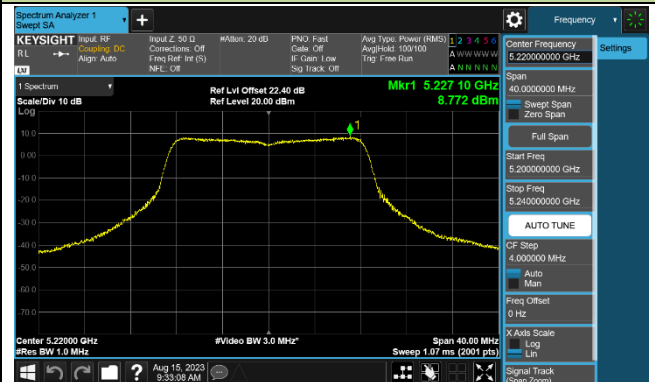


Channel 48 (5240MHz)

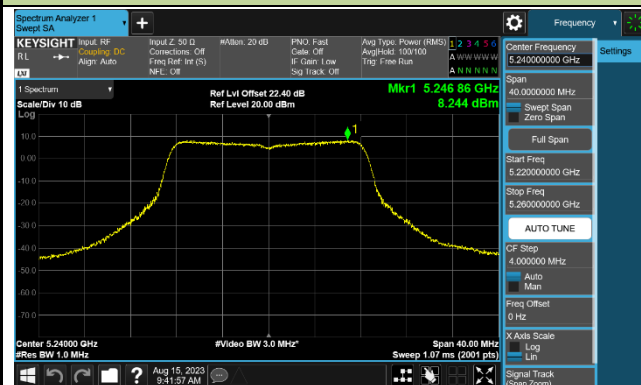


Channel 52 (5260MHz)

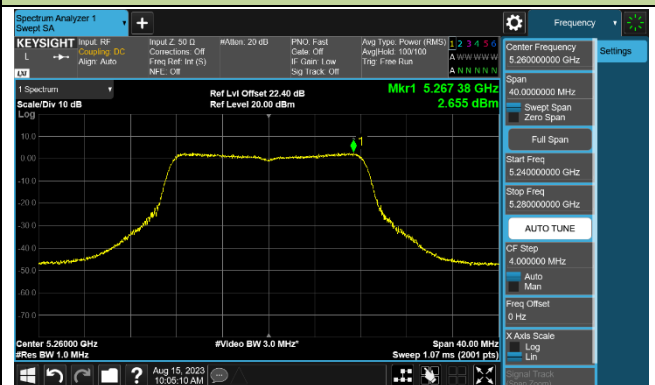


Channel 60 (5300MHz)

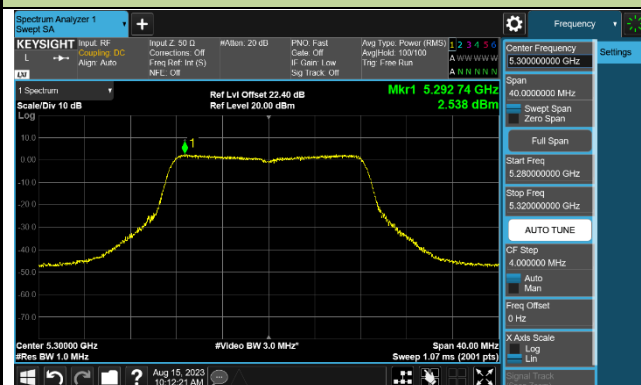


Channel 64 (5320MHz)

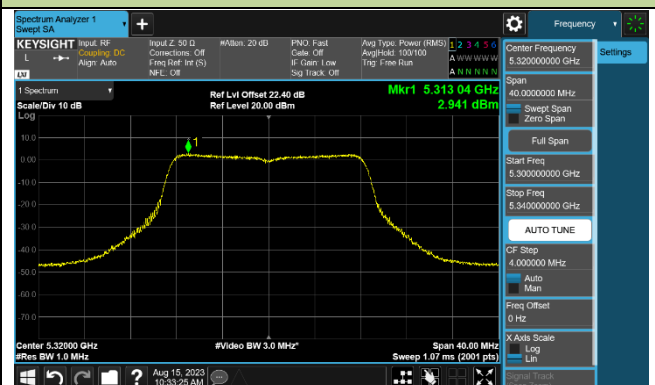


Channel 100 (5500MHz)

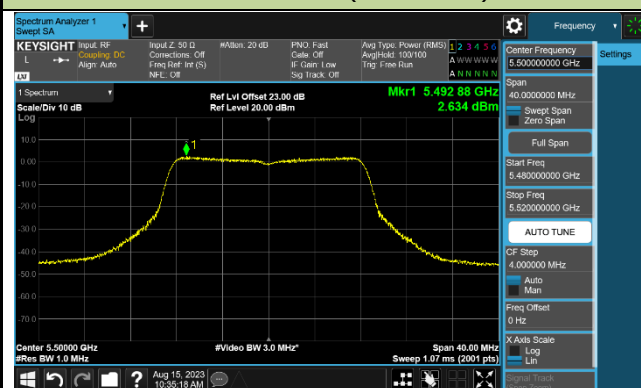


Channel 116 (5580MHz)

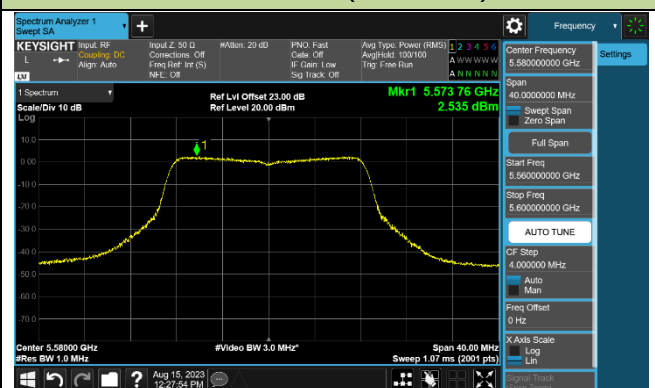

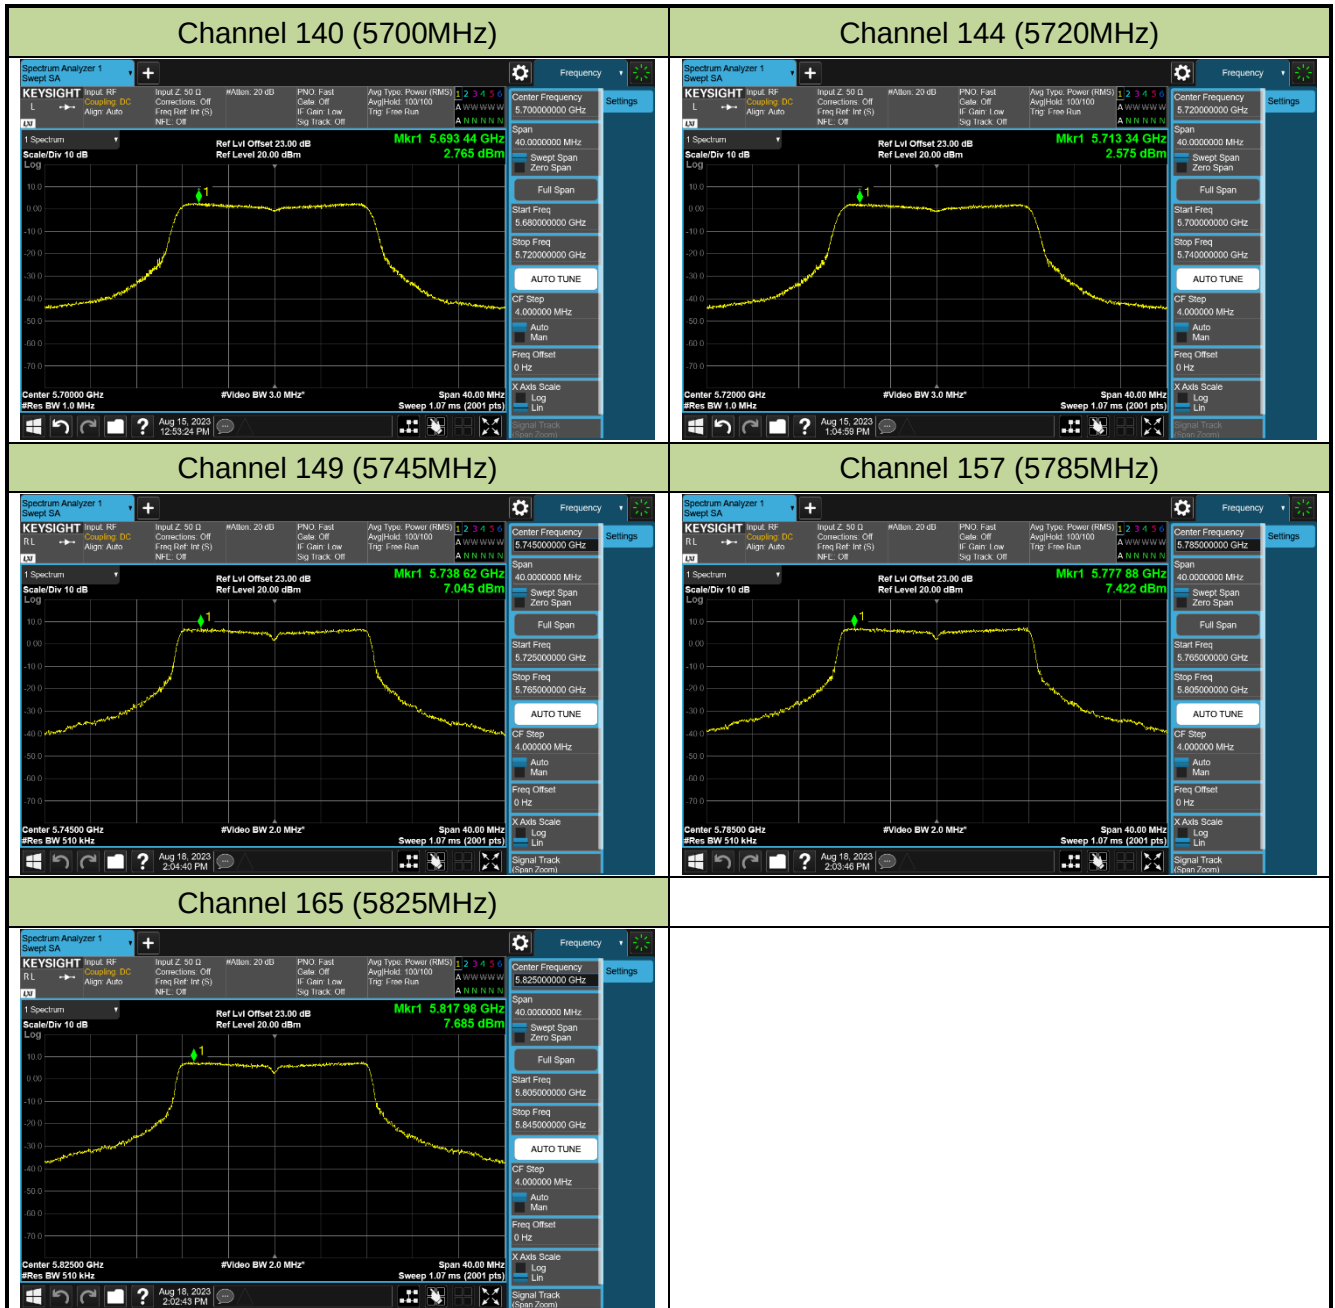


802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

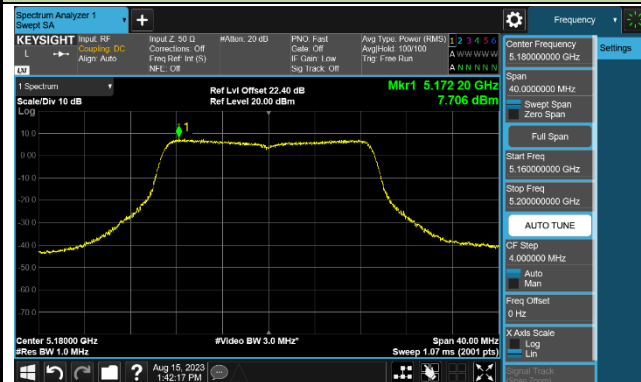


Channel 44 (5220MHz)

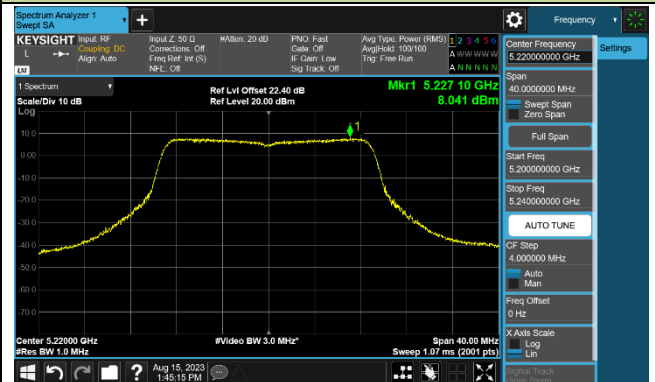


Channel 48 (5240MHz)

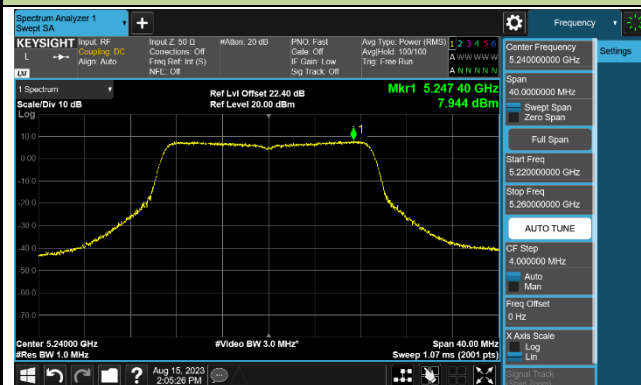


Channel 52 (5260MHz)

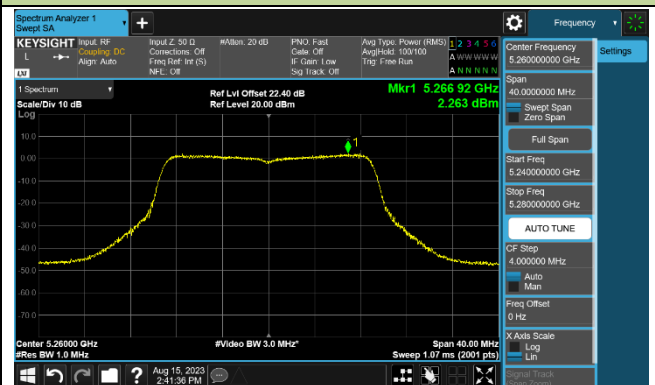


Channel 60 (5300MHz)

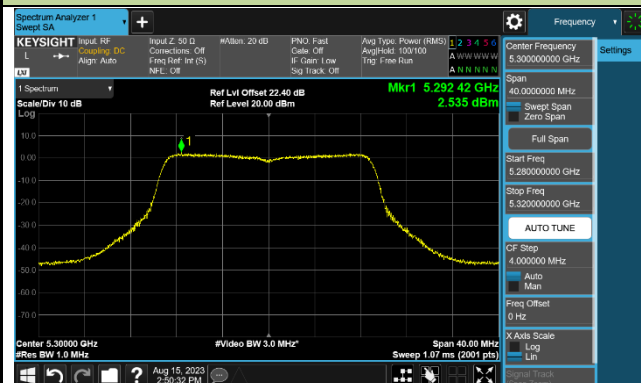


Channel 64 (5320MHz)

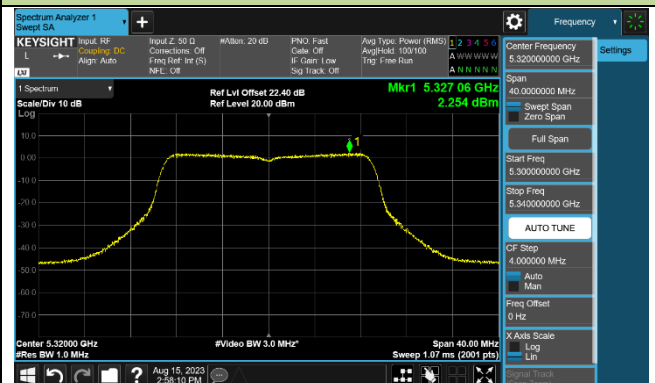


Channel 100 (5500MHz)

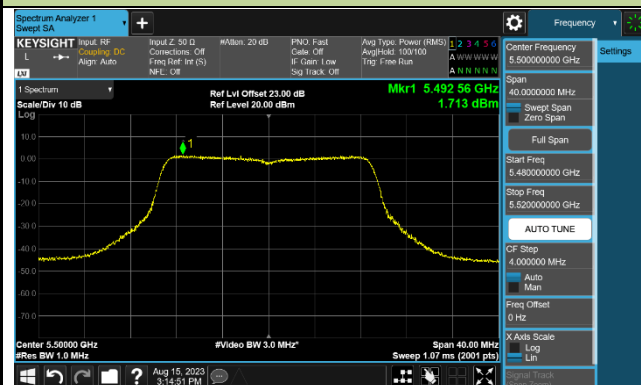


Channel 116 (5580MHz)

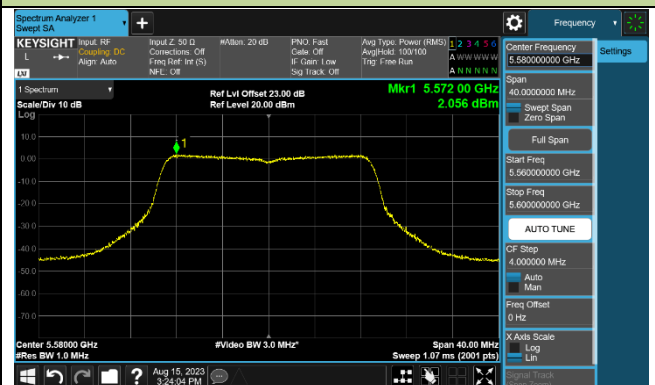

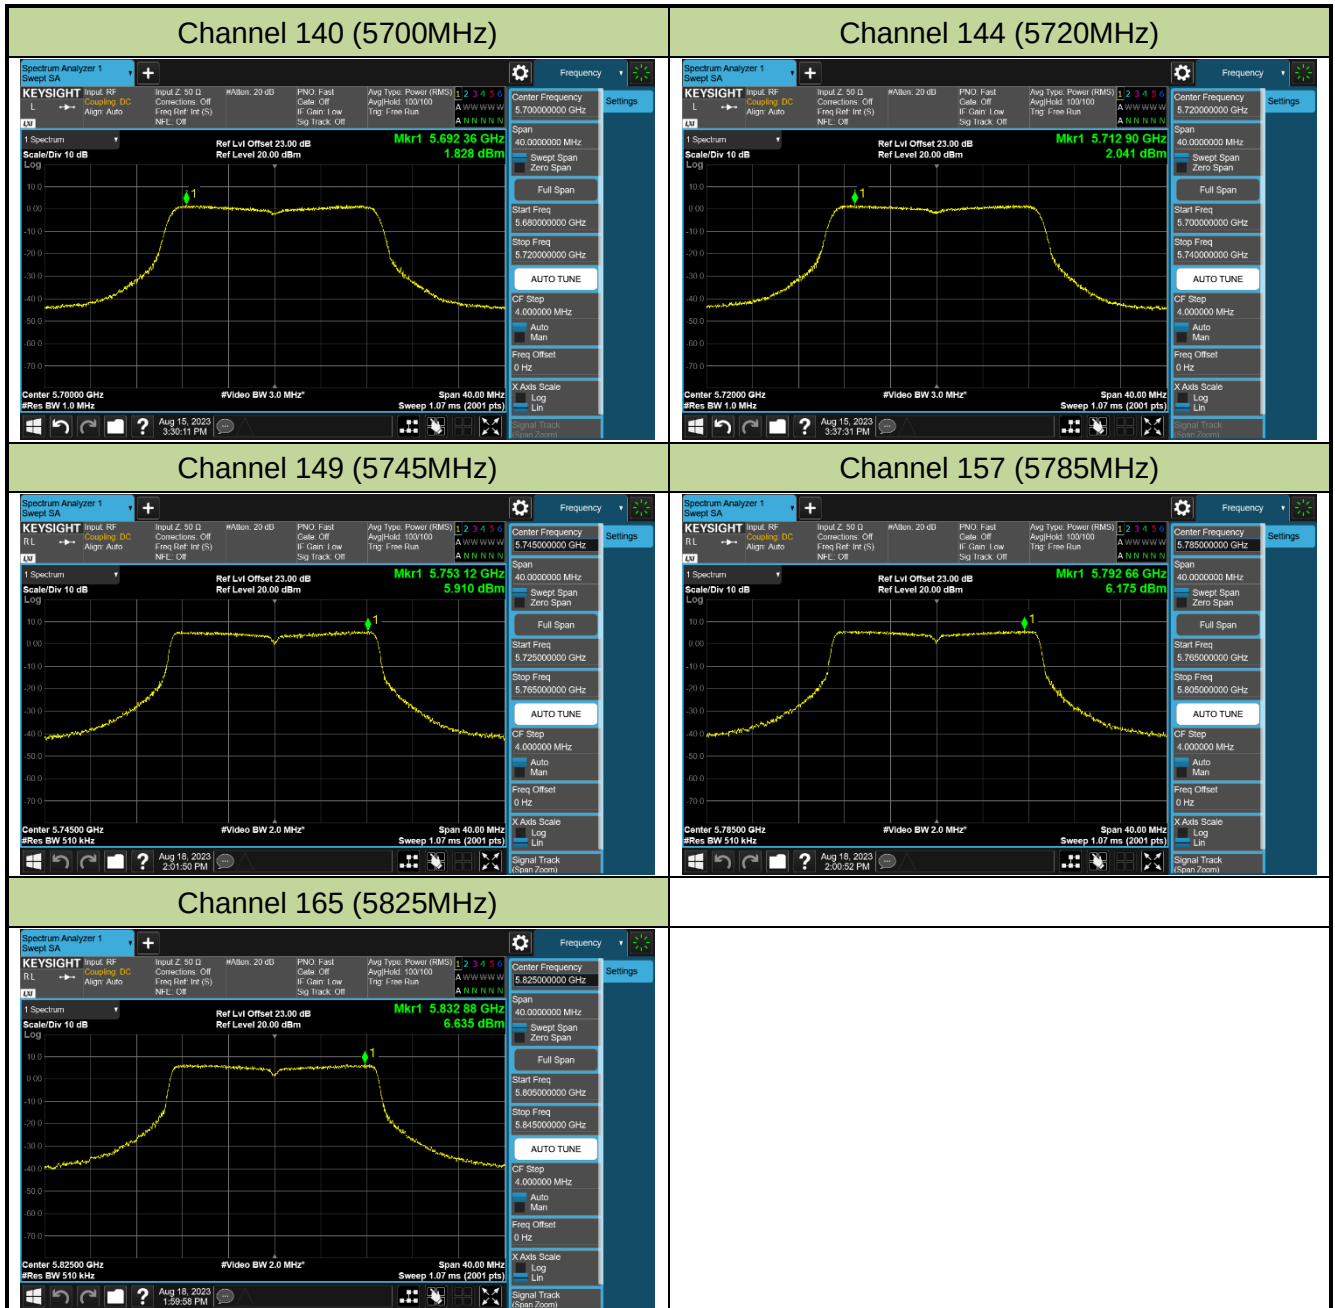


802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 38 (5190MHz)

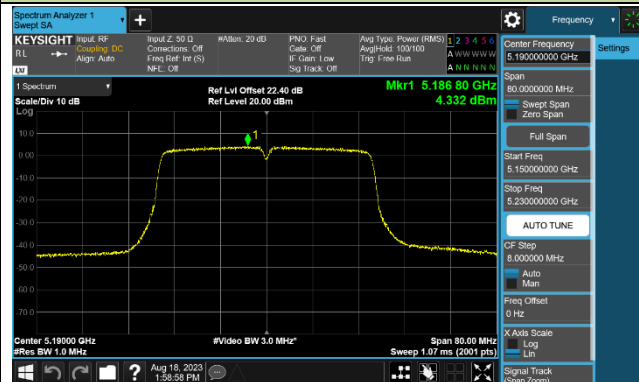


Channel 46 (5230MHz)

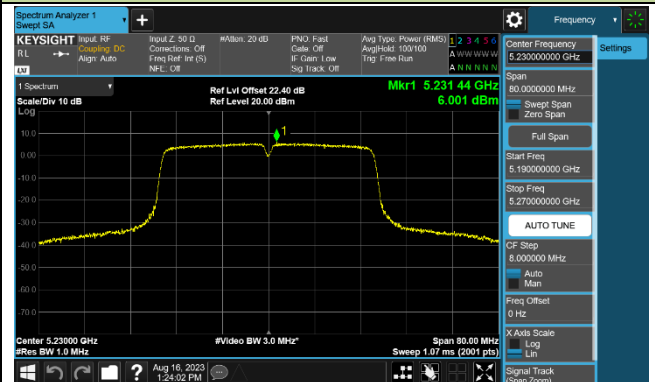


Channel 54 (5270MHz)

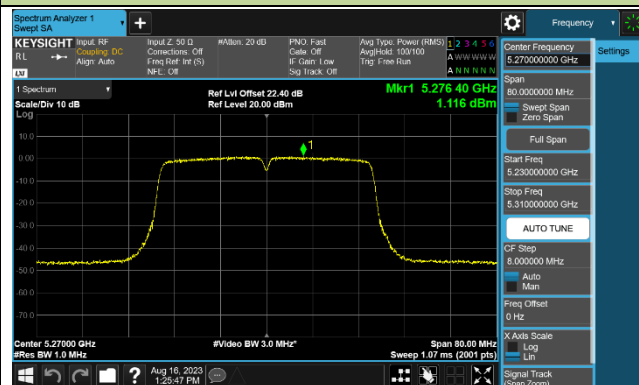


Channel 62 (5310MHz)

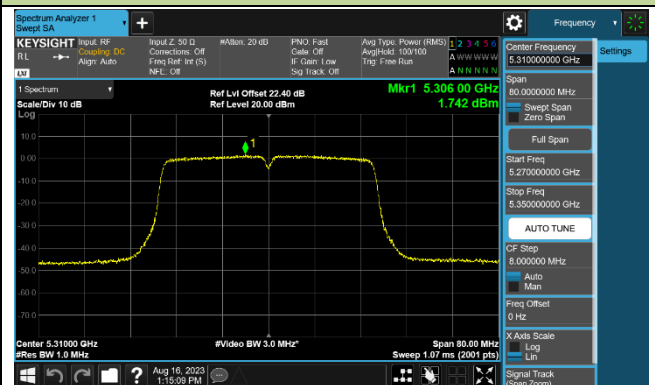


Channel 102 (5510MHz)

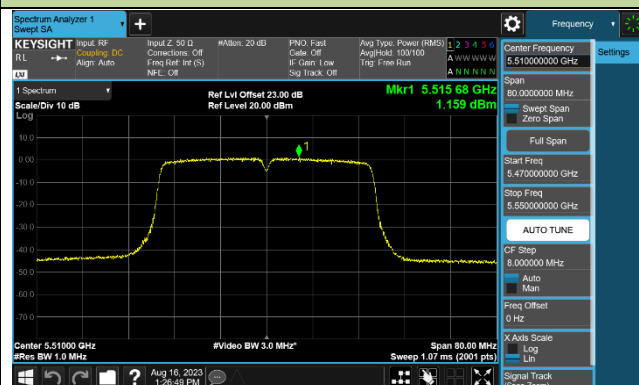


Channel 110 (5550MHz)

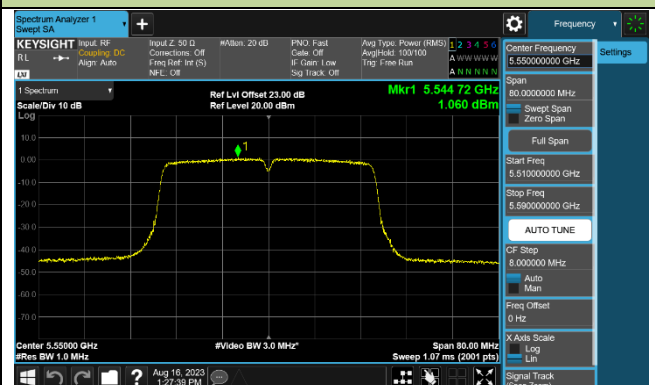


Channel 134 (5670MHz)

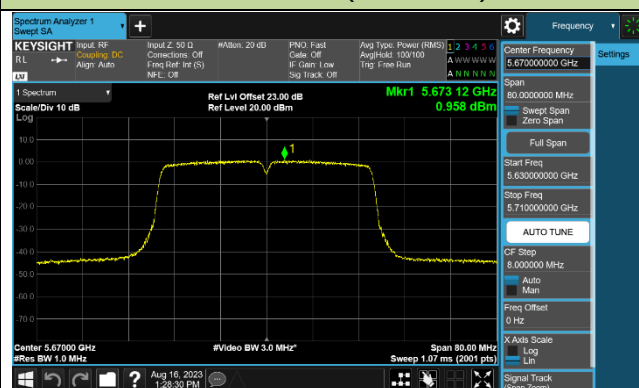


Channel 142 (5710MHz)

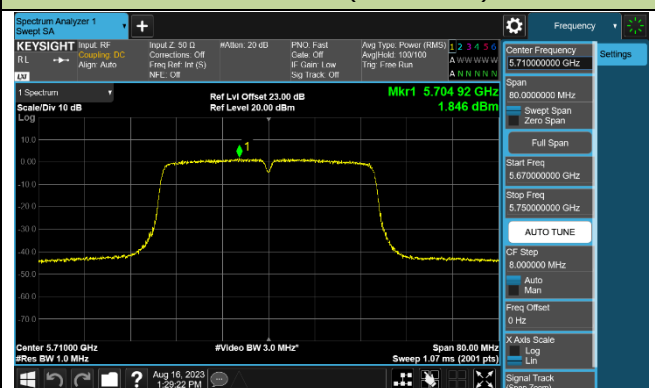

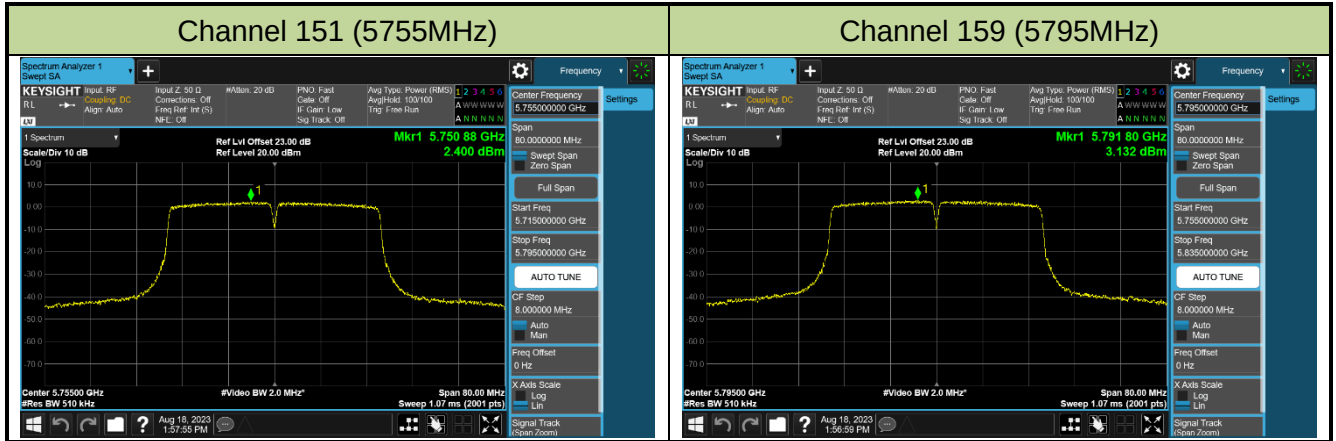


802.11ac-VHT80 Power Spectral Density - Ant 0


Channel 42 (5210MHz)

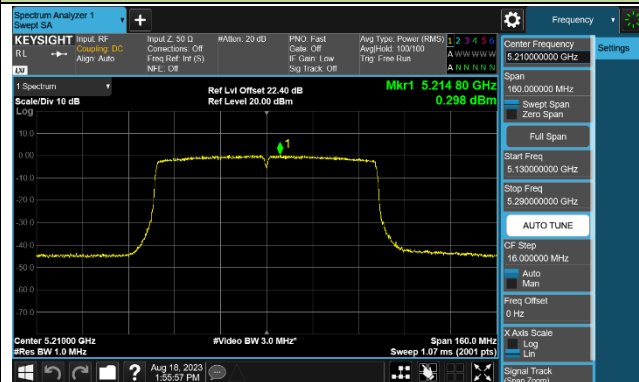


Channel 58 (5290MHz)

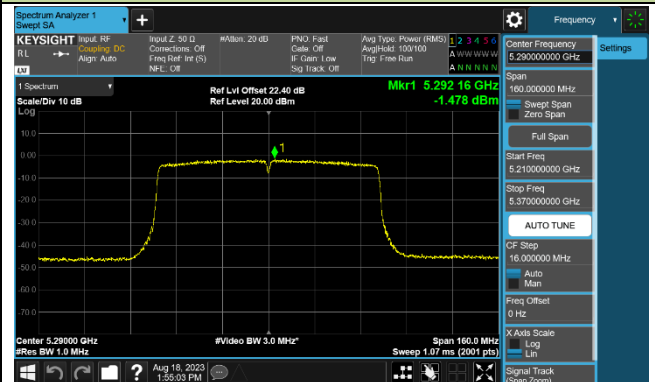


Channel 106 (5530MHz)

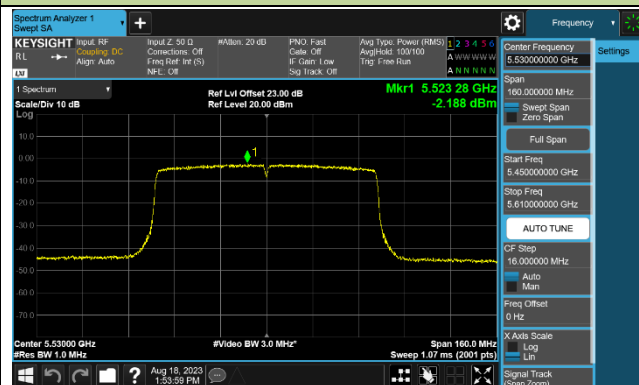


Channel 122 (5610MHz)

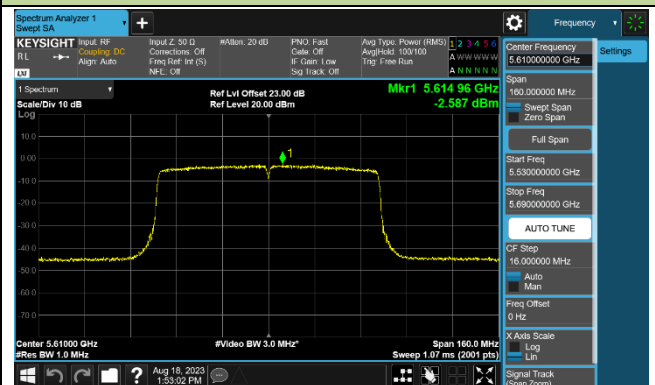

Channel 138 (5690MHz)

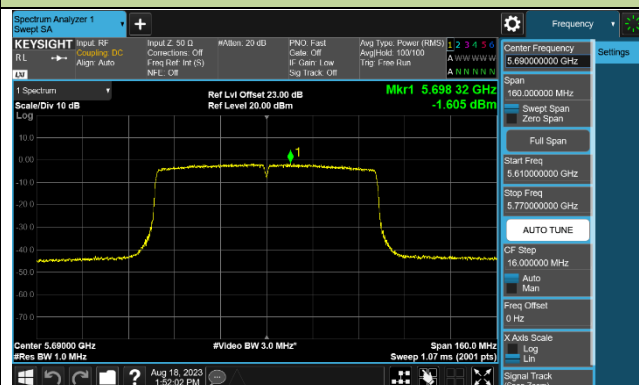


Channel 155 (5775MHz)

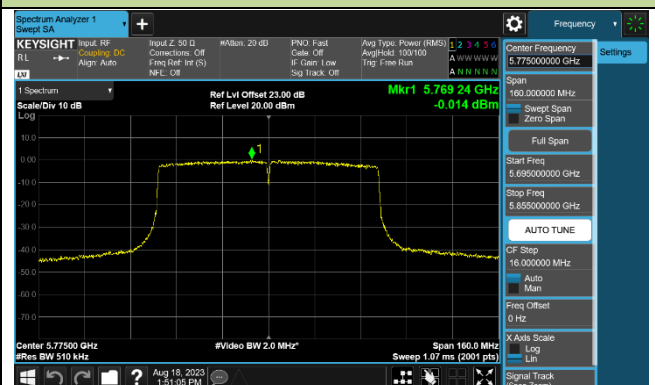


802.11ac-VHT160 Power Spectral Density - Ant 0

Channel 50 (5250MHz)

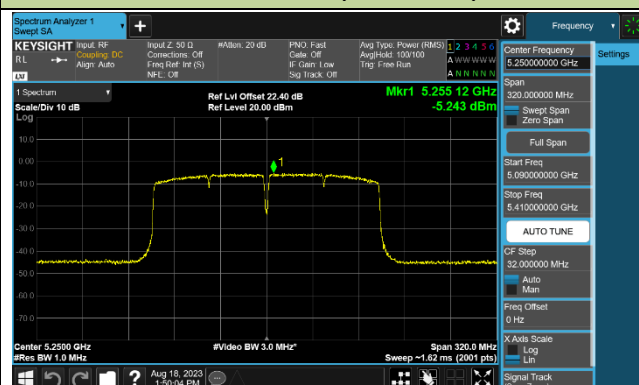


Channel 114 (5570MHz)

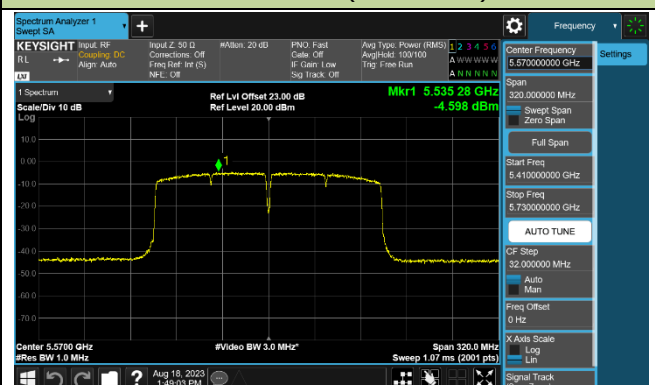


802.11ax-HE20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

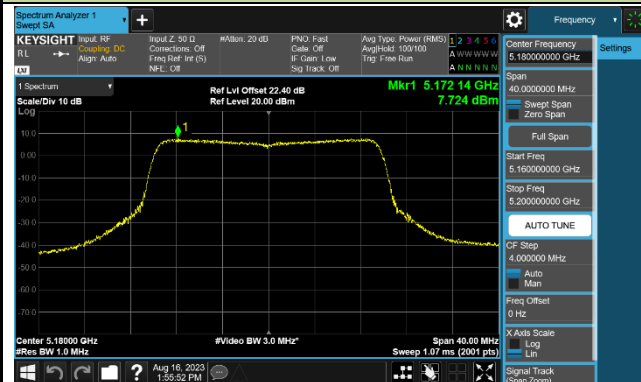


Channel 44 (5220MHz)

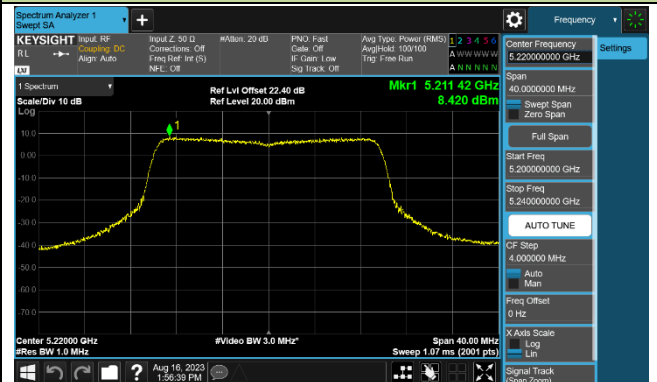


Channel 48 (5240MHz)

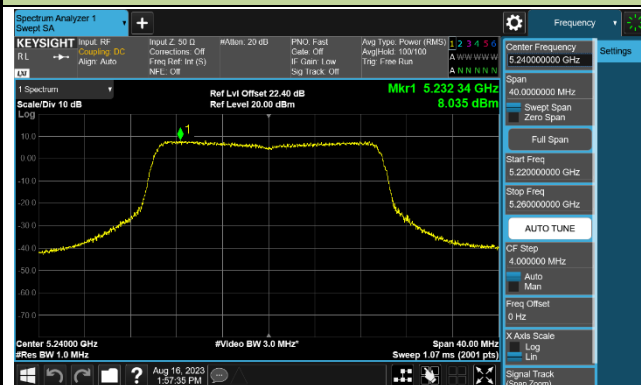


Channel 52 (5260MHz)

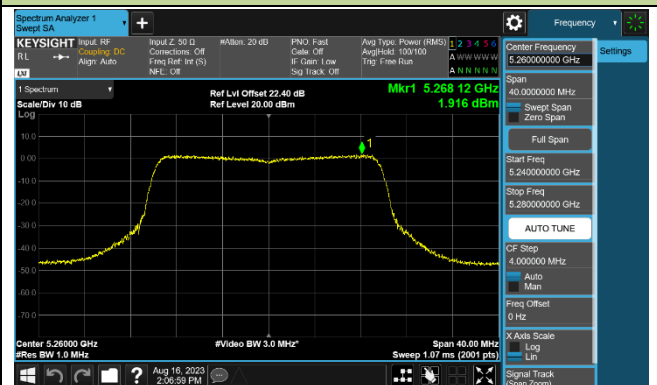


Channel 60 (5300MHz)

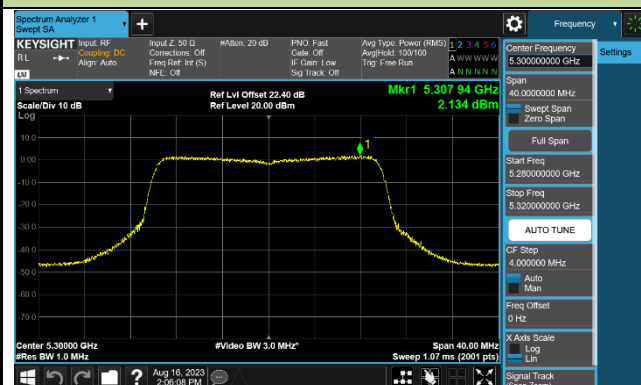

Channel 64 (5320MHz)

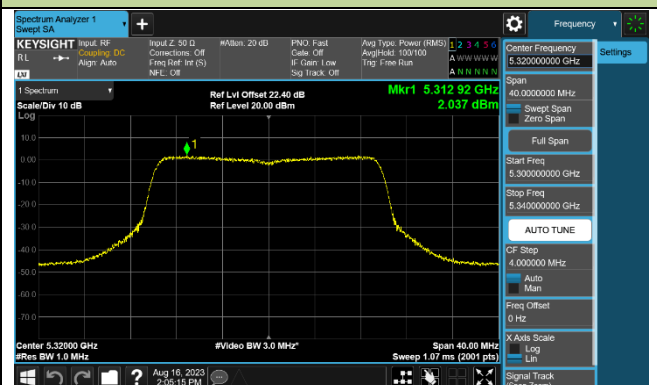

Channel 100 (5500MHz)

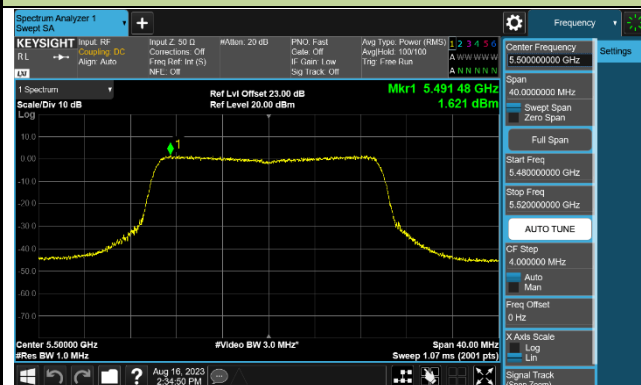

Channel 116 (5580MHz)

