


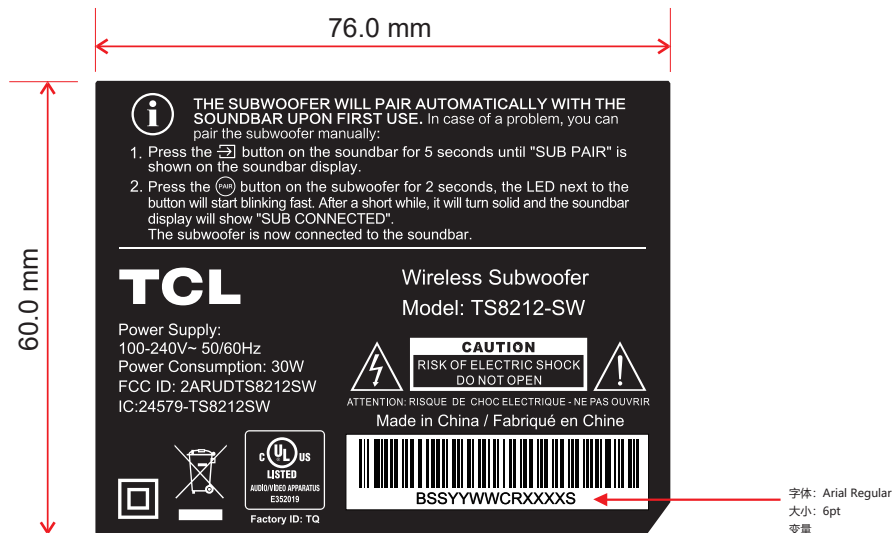

变量，直接打印

编码规则:

BSSYYWWCRXXXXS

共14位

条码类型: CODE 128

B = Brand code, 品牌码 (T=TCL, O=Onkyo)

SS = Supplier Code, 供应商代码 (CM=CMT MI=Minami VT=Vtrek RS=RSR
SK=Sky dragon TL=Tonly)

YY = Calendar Year, 生产年代码 (21 = 2021, 22 = 2022...etc.)

WW = Calendar Week, 生产周代码 (1 = 1周, 2 = 2周...etc)

C=Version change code, 版本变更代码, 由0开始, 当流水码超过9999, 依次变为1,2,3...

R = Reserve code, 走向代码

R = 1, 对于北美NA区, 此代码固定为1
R = 2, 对于欧洲EU区, 此代码固定为2
R = 3, 对于澳洲AU区, 此代码固定为3
R = 4, 对于巴西BR区, 此代码固定为4
R = 5, 对于全球版GL, 此代码固定为5

XXXX = Running number, 流水码 (由 0001 - 9999)。

流水码每周归零一次。同一生产商针对相同区域走向但不同型号的产品, 同一周内流水码

按 0001 - 9999顺序依次生成, 例:

若同一周内生产3000张TS6110贴纸和1000张TS7010贴纸, 则TS6110流水码由0001到3000跳变,
TS7010流水码由3001到4000跳变。

S为定量, 代表低音箱

贴纸粘贴位置示意



THE SUBWOOFER WILL PAIR AUTOMATICALLY WITH THE SOUNDBAR UPON FIRST USE. In case of a problem, you can pair the subwoofer manually:

1. Press the button on the soundbar for 5 seconds until "SUB PAIR" is shown on the soundbar display.
2. Press the button on the subwoofer for 2 seconds, the LED next to the button will start blinking fast. After a short while, it will turn solid and the soundbar display will show "SUB CONNECTED". The subwoofer is now connected to the soundbar.

TCL Wireless Subwoofer
Model: TS8212-SW

Power Supply:
100-240V~50/60Hz
Power Consumption: 30W
FCC ID: 2ARUDTS8212SW
IC:24579-TS8212SW

CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN

ATTENTION: RISQUE DE CHOC ELECTRIQUE - NE PAS OUVRIR
Made in China / Fabriqué en Chine

Factory ID: TQ

BSSYYWCRXXXXS

左右居中

