

FCC Test Report

(PART 27)

Report No.: RF180904C01-4

FCC ID: L6AIRC100-1

Test Model: ITC100-1

Series Model: ITC100-2

Received Date: Sep. 04, 2018

Test Date: Sep. 15, 2018 ~ Sep. 23, 2018

Issued Date: Oct. 16, 2018

Applicant: BlackBerry Limited

Address: 2200 University Avenue East Waterloo, Ontario N2K 0A7 Canada

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan (R.O.C)

FCC Registration /
Designation Number: 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	7
2.2 Test Site and Instruments	8
3 General Information	9
3.1 General Description of EUT	9
3.2 Configuration of System under Test	11
3.2.1 Description of Support Units	11
3.3 Test Mode Applicability and Tested Channel Detail	12
3.4 EUT Operating Conditions	15
3.5 General Description of Applied Standards	15
4 Test Types and Results	16
4.1 Output Power Measurement	16
4.1.1 Limits of Output Power Measurement	16
4.1.2 Test Procedures	16
4.1.3 Test Setup	17
4.1.4 Test Results	18
4.2 Modulation Characteristics Measurement	26
4.2.1 Limits of Modulation Characteristics	26
4.2.2 Test Setup	26
4.2.3 Test Procedure	26
4.2.4 Test Results	27
4.3 Frequency Stability Measurement	28
4.3.1 Limits of Frequency Stability Measurement	28
4.3.2 Test Procedure	28
4.3.3 Test Setup	28
4.3.4 Test Results	29
4.4 Occupied Bandwidth Measurement	39
4.4.1 Limits of Occupied Bandwidth Measurement	39
4.4.2 Test Procedure	39
4.4.3 Test Setup	39
4.4.4 Test Result	40
4.5 Band Edge Measurement	45
4.5.1 Limits of Band Edge Measurement	45
4.5.2 Test Setup	45
4.5.3 Test Procedures	45
4.5.4 Test Results	46
4.6 Peak to Average Ratio	56
4.6.1 Limits of Peak to Average Ratio Measurement	56
4.6.2 Test Setup	56
4.6.3 Test Procedures	56
4.6.4 Test Results	57
4.7 Conducted Spurious Emissions	62
4.7.1 Limits of Conducted Spurious Emissions Measurement	62
4.7.2 Test Setup	62
4.7.3 Test Procedure	62
4.7.4 Test Results	63
4.8 Radiated Emission Measurement	85
4.8.1 Limits of Radiated Emission Measurement	85
4.8.2 Test Procedure	85
4.8.3 Deviation from Test Standard	85
4.8.4 Test Setup	86

4.8.5 Test Results	87
5 Pictures of Test Arrangements	123
Appendix – Information on the Testing Laboratories	124

Release Control Record

Issue No.	Description	Date Issued
RF180904C01-4	Original Release	Oct. 16, 2018

1 Certificate of Conformity

Product: Asset Tracker

Brand: BlackBerry

Test Model: ITC100-1

Series Model: ITC100-2

Sample Status: Identical Prototype

Applicant: BlackBerry Limited

Test Date: Sep. 15, 2018 ~ Sep. 23, 2018

Standards: FCC Part 27, Subpart C, H, L

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :



Date: Oct. 16, 2018

Rona Chen / Specialist

Approved by :



Date: Oct. 16, 2018

Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2 (LTE 4)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -26.21 dB at 5235.00 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 12)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(c)(10)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(g)	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(g)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -30.32 dB at 1422.00 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 16, 2018	Mar. 15, 2019
Spectrum Analyzer Agilent	N9010A	MY52220314	Nov. 24, 2017	Nov. 23, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Dec. 12, 2017	Dec. 11, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 06, 2017	Dec. 05, 2018
Horn Antenna SCHWARZBECK	BBHA 9170	148	Dec. 13, 2017	Dec. 12, 2018
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019
MXG Vector signal generator Agilent	N5182B	MY53050430	Oct. 24, 2017	Oct. 23, 2018
Preamplifier EMCI	EMC 012645	980115	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 330H	980112	Oct. 13, 2017	Oct. 12, 2018
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 20, 2017	Oct. 19, 2018
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
DC Power Supply Topward	33010D	807748	Oct. 25, 2016	Oct. 24, 2018

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.
3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
4. The IC Site Registration No. is IC7450F-10.

3 General Information

3.1 General Description of EUT

Product	Asset Tracker	
Brand	BlackBerry	
Test Model	ITC100-1	
Series Model	ITC100-2	
Status of EUT	Identical Prototype	
Power Supply Rating	7.2 Vdc (Battery)	
Modulation Type	LTE	QPSK, 16QAM
Frequency Range	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1710.7 ~ 1754.3 MHz
	LTE Band 4 (Channel Bandwidth: 3 MHz)	1711.5 ~ 1753.5 MHz
	LTE Band 4 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1752.5 MHz
	LTE Band 4 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1750.0 MHz
	LTE Band 4 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1747.5 MHz
	LTE Band 4 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1745.0 MHz
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	699.7 ~ 715.3 MHz
	LTE Band 12 (Channel Bandwidth: 3 MHz)	700.5 ~ 714.5 MHz
	LTE Band 12 (Channel Bandwidth: 5 MHz)	701.5 ~ 713.5 MHz
	LTE Band 12 (Channel Bandwidth: 10 MHz)	704.0 ~ 711.0 MHz
Emission Designator	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 4 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 4 (Channel Bandwidth: 5 MHz)	4M49W7D
	LTE Band 4 (Channel Bandwidth: 10 MHz)	8M98W7D
	LTE Band 4 (Channel Bandwidth: 15 MHz)	13M49G7D
	LTE Band 4 (Channel Bandwidth: 20 MHz)	18M01W7D
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 12 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 12 (Channel Bandwidth: 5 MHz)	4M49W7D
	LTE Band 12 (Channel Bandwidth: 10 MHz)	8M99G7D
Max. ERP Power	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	30.06 mW
	LTE Band 12 (Channel Bandwidth: 3 MHz)	31.99 mW
	LTE Band 12 (Channel Bandwidth: 5 MHz)	34.67 mW
	LTE Band 12 (Channel Bandwidth: 10 MHz)	36.64 mW
Max. EIRP Power	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	94.41 mW
	LTE Band 4 (Channel Bandwidth: 3 MHz)	100.23 mW
	LTE Band 4 (Channel Bandwidth: 5 MHz)	105.93 mW
	LTE Band 4 (Channel Bandwidth: 10 MHz)	111.43 mW
	LTE Band 4 (Channel Bandwidth: 15 MHz)	119.40 mW
	LTE Band 4 (Channel Bandwidth: 20 MHz)	126.18 mW
Antenna Type	Monopole Antenna	
Antenna Gain	LTE Band 4	-3.2 dBi
	LTE Band 12	-6.3 dBi
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. All models are listed as below.


Brand	Model	Difference
BlackBerry	ITC100-1	Supports SRD function
	ITC100-2	Disable SRD function via software

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Battery 1	BlackBerry	BAT-63320-001	7.2 Vdc, 38 Ah, Non-rechargeable Manufacturer: EVE Energy Co., Ltd.
Battery 2	BlackBerry	BAT-63318-001	7.2 Vdc, 19 Ah, Non-rechargeable Manufacturer: EVE Energy Co., Ltd.

- Above batteries had been pre-tested, and the worst case was found when EUT with Battery 1. Therefore, only this configuration was as a representative for final test.
3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

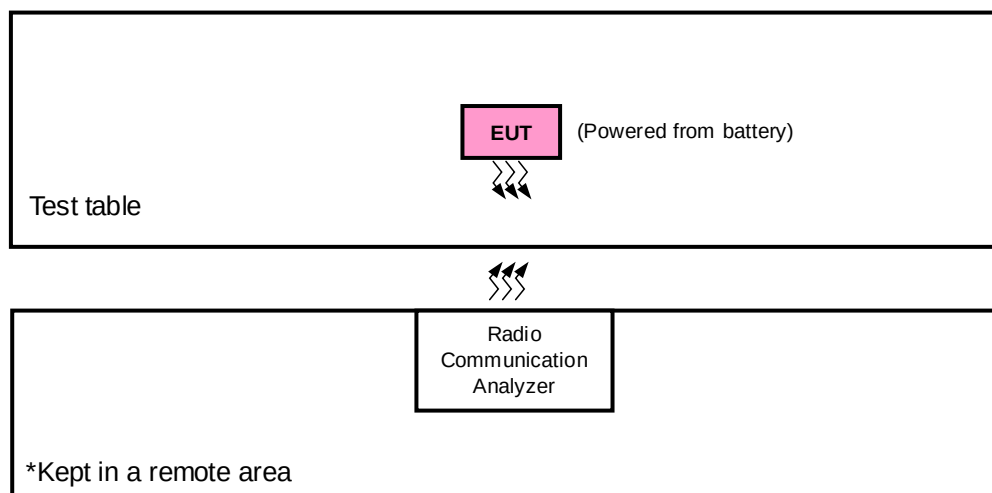

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP / EIRP	Radiated Emission
LTE Band 4	Y-plane	Z-axis
LTE Band 12	X-plane	X-axis

LTE Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	1 RB / 5 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	1 RB / 14 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	1 RB / 49 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	1 RB / 74 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	1 RB / 99 RB Offset
-	Modulation Characteristics	20050 to 20300	20050	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Frequency Stability	19957 to 20393	19957, 20393	1.4 MHz	QPSK	1 RB / 5 RB Offset
		19965 to 20385	19965, 20385	3 MHz	QPSK	1 RB / 14 RB Offset
		19975 to 20375	19975, 20375	5 MHz	QPSK	1 RB / 24 RB Offset
		20000 to 20350	20000, 20350	10 MHz	QPSK	1 RB / 49 RB Offset
		20025 to 20325	20025, 20325	15 MHz	QPSK	1 RB / 74 RB Offset
		20050 to 20300	20050, 20300	20 MHz	QPSK	1 RB / 99 RB Offset
-	Occupied Bandwidth	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	1 RB / 2 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	12 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	36 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	50 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Band Edge	19957 to 20393	19957	1.4 MHz	QPSK	1 RB / 0 RB Offset
			20393	1.4 MHz	QPSK	6 RB / 0 RB Offset
		19965 to 20385	19965	3 MHz	QPSK	1 RB / 5 RB Offset
			20385	3 MHz	QPSK	6 RB / 0 RB Offset
		19975 to 20375	19975	5 MHz	QPSK	1 RB / 0 RB Offset
			20375	5 MHz	QPSK	15 RB / 0 RB Offset
		20000 to 20350	20000	10 MHz	QPSK	1 RB / 14 RB Offset
			20350	10 MHz	QPSK	15 RB / 0 RB Offset
		20025 to 20325	20025	15 MHz	QPSK	1 RB / 0 RB Offset
			20325	15 MHz	QPSK	25 RB / 0 RB Offset
		20050 to 20300	20050	20 MHz	QPSK	1 RB / 24 RB Offset
			20300	20 MHz	QPSK	25 RB / 0 RB Offset
		19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
			19965, 20175, 20385	3 MHz	QPSK	50 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK	1 RB / 49 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	50 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK	75 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 74 RB Offset
-	Conducted Emission	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	75 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	100 RB / 0 RB Offset
-	Radiated Emission	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 2 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK	12 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	36 RB / 0 RB Offset
-	Radiated Emission	20000 to 20350	20000, 20175, 20350	10 MHz	QPSK	50 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK	50 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	50 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 12

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	1 RB / 2 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
-	Modulation Characteristics	23060 to 23130	23060	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Frequency Stability	23017 to 23173	23017, 23173	1.4 MHz	QPSK	1 RB / 2 RB Offset
		23025 to 23165	23025, 23165	3 MHz	QPSK	1 RB / 7 RB Offset
		23035 to 23155	23035, 23155	5 MHz	QPSK	1 RB / 12 RB Offset
		23060 to 23130	23060, 23130	10 MHz	QPSK	1 RB / 24 RB Offset
-	Occupied Bandwidth	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Peak to Average Ratio	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Band Edge	23017 to 23173	23017	1.4 MHz	QPSK	1 RB / 0 RB Offset
			23173	1.4 MHz	QPSK	6 RB / 0 RB Offset
		23025 to 23165	23025	3 MHz	QPSK	1 RB / 5 RB Offset
			23165	3 MHz	QPSK	15 RB / 0 RB Offset
		23035 to 23155	23035	5 MHz	QPSK	1 RB / 14 RB Offset
			23155	5 MHz	QPSK	15 RB / 0 RB Offset
		23060 to 23130	23035	5 MHz	QPSK	1 RB / 0 RB Offset
			23155	5 MHz	QPSK	25 RB / 0 RB Offset
		23060 to 23130	23060	10 MHz	QPSK	1 RB / 24 RB Offset
			23130	10 MHz	QPSK	25 RB / 0 RB Offset
		23060 to 23130	23060	10 MHz	QPSK	1 RB / 0 RB Offset
			23130	10 MHz	QPSK	50 RB / 0 RB Offset
-	Conducted Emission	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 49 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK	50 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP / EIRP	25 deg. C, 65 % RH	7.2 Vdc	Jisyong Wang
Modulation Characteristics	25 deg. C, 65 % RH	7.2 Vdc	Wayne Lin
Frequency Stability	25 deg. C, 65 % RH	7.2 Vdc	Wayne Lin
Occupied Bandwidth	25 deg. C, 65 % RH	7.2 Vdc	Wayne Lin
Band Edge	25 deg. C, 65 % RH	7.2 Vdc	Wayne Lin
Peak to Average Ratio	25 deg. C, 65 % RH	7.2 Vdc	Wayne Lin
Conducted Emission	25 deg. C, 65 % RH	7.2 Vdc	Wayne Lin
Radiated Emission	25 deg. C, 65 % RH	7.2 Vdc	Jisyong Wang

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

Portable stations (hand-held devices) operating in the 698-746 MHz band are limited to 3 watts ERP

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

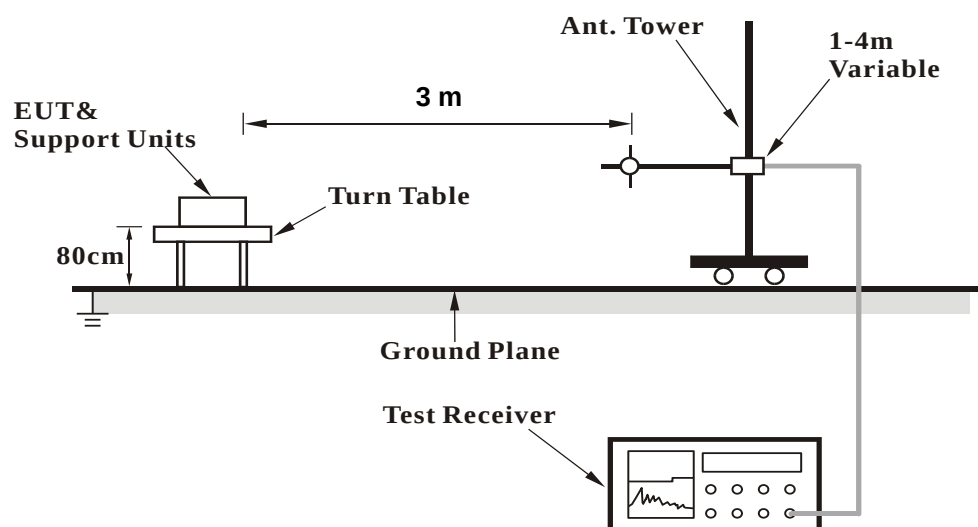


<Radiated Emission above 1 GHz>

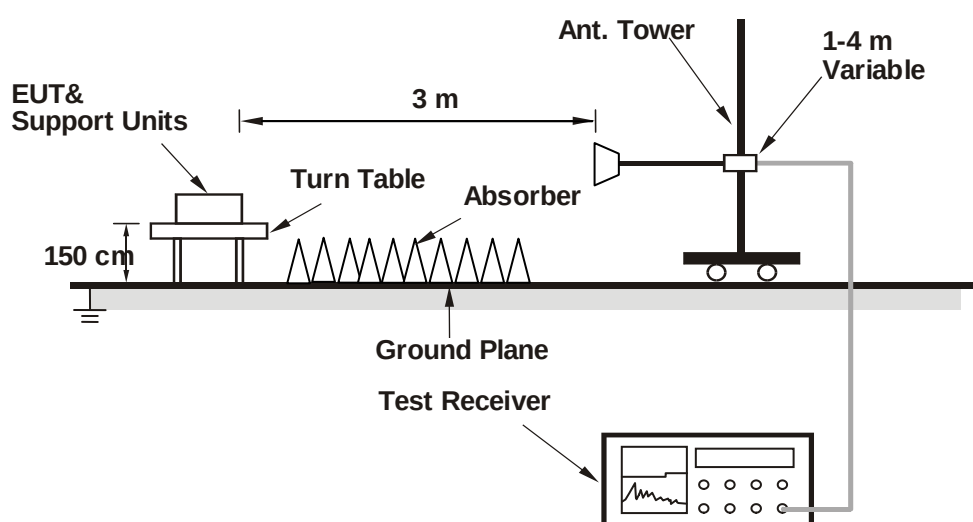

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 19957	Mid Ch 20175	High Ch 20393		Low Ch 19957	Mid Ch 20175	High Ch 20393	
			1710.7 MHz	1732.5 MHz	1754.3 MHz		1710.7 MHz	1732.5 MHz	1754.3 MHz	
4 / 1.4M	1	0	21.52	21.60	21.55	0	20.51	20.55	20.50	1
	1	2	21.35	21.47	21.33	0	20.38	20.45	20.46	1
	1	5	21.24	21.34	21.32	0	20.21	20.08	20.13	1
	3	0	21.26	21.35	21.33	0	20.19	20.12	20.18	1
	3	1	21.29	21.33	21.31	0	20.19	20.18	20.09	1
	3	3	21.35	21.31	21.28	0	20.11	20.17	20.15	1
	6	0	20.25	20.52	20.33	1	19.20	19.39	19.35	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 19965	Mid Ch 20175	High Ch 20385		Low Ch 19965	Mid Ch 20175	High Ch 20385	
			1711.5 MHz	1732.5 MHz	1753.5 MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz	
4 / 3M	1	0	21.63	21.62	21.56	0	20.26	20.33	20.21	1
	1	7	21.52	21.52	21.46	0	20.48	20.49	20.38	1
	1	14	21.40	21.24	21.25	0	20.29	20.22	20.10	1
	8	0	20.48	20.55	20.47	1	19.29	19.51	19.35	2
	8	3	20.33	20.36	20.25	1	19.15	19.44	19.26	2
	8	7	20.14	20.25	20.12	1	19.19	19.15	19.03	2
	15	0	20.41	20.53	20.38	1	19.36	19.54	19.43	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 19975	Mid Ch 20175	High Ch 20375		Low Ch 19975	Mid Ch 20175	High Ch 20375	
			1712.5 MHz	1732.5 MHz	1752.5 MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz	
4 / 5M	1	0	21.62	21.68	21.59	0	20.33	20.46	20.33	1
	1	12	21.51	21.53	21.52	0	20.44	20.51	20.43	1
	1	24	21.29	21.41	21.21	0	20.40	20.31	20.32	1
	12	0	20.54	20.54	20.46	1	19.28	19.34	19.38	2
	12	6	20.30	20.44	20.33	1	19.31	19.30	19.32	2
	12	13	20.30	20.41	20.10	1	19.12	19.15	19.18	2
	25	0	20.54	20.54	20.48	1	19.45	19.51	19.48	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20000	Mid Ch 20175	High Ch 20350		Low Ch 20000	Mid Ch 20175	High Ch 20350	
			1715.0 MHz	1732.5 MHz	1750.0 MHz		1715.0 MHz	1732.5 MHz	1750.0 MHz	
4 / 10M	1	0	21.71	21.79	21.65	0	20.54	20.64	20.51	1
	1	24	21.59	21.61	21.57	0	20.54	20.63	20.47	1
	1	49	21.31	21.51	21.37	0	20.27	20.49	20.31	1
	25	0	20.59	20.68	20.53	1	19.42	19.57	19.49	2
	25	12	20.35	20.50	20.36	1	19.32	19.39	19.34	2
	25	25	20.31	20.36	20.28	1	19.25	19.29	19.24	2
	50	0	20.44	20.68	20.55	1	19.57	19.51	19.52	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20025	Mid Ch 20175	High Ch 20325		Low Ch 20025	Mid Ch 20175	High Ch 20325	
			1717.5 MHz	1732.5 MHz	1747.5 MHz		1717.5 MHz	1732.5 MHz	1747.5 MHz	
4 / 15M	1	0	21.72	21.81	21.70	0	20.63	20.73	20.57	1
	1	37	21.64	21.70	21.57	0	20.63	20.63	20.52	1
	1	74	21.45	21.47	21.44	0	20.49	20.46	20.38	1
	36	0	20.64	20.65	20.62	1	19.50	19.59	19.48	2
	36	19	20.45	20.48	20.46	1	19.36	19.38	19.42	2
	36	39	20.34	20.32	20.35	1	19.30	19.32	19.20	2
	75	0	20.55	20.68	20.66	1	19.53	19.59	19.51	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20050	Mid Ch 20175	High Ch 20300		Low Ch 20050	Mid Ch 20175	High Ch 20300	
			1720.0 MHz	1732.5 MHz	1745.0 MHz		1720.0 MHz	1732.5 MHz	1745.0 MHz	
4 / 20M	1	0	21.80	21.87	21.78	0	20.72	20.79	20.72	1
	1	50	21.67	21.76	21.64	0	20.64	20.68	20.66	1
	1	99	21.47	21.53	21.42	0	20.35	20.47	20.49	1
	50	0	20.66	20.78	20.62	1	19.50	19.64	19.42	2
	50	25	20.47	20.59	20.40	1	19.44	19.44	19.42	2
	50	50	20.39	20.55	20.34	1	19.29	19.36	19.33	2
	100	0	20.59	20.74	20.59	1	19.57	19.63	19.55	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23017	Mid Ch 23095	High Ch 23173		Low Ch 23017	Mid Ch 23095	High Ch 23173	
			699.7 MHz	707.5 MHz	715.3 MHz		699.7 MHz	707.5 MHz	715.3 MHz	
12 / 1.4M	1	0	22.46	22.55	22.49	0	21.37	21.55	21.50	1
	1	2	22.33	22.41	22.46	0	21.36	21.45	21.35	1
	1	5	22.04	22.26	22.18	0	21.19	21.35	21.13	1
	3	0	22.03	22.24	22.11	0	21.17	21.33	21.09	1
	3	1	22.01	22.22	22.09	0	21.13	21.28	21.04	1
	3	3	21.93	22.18	22.01	0	21.09	21.21	21.01	1
	6	0	21.31	21.43	21.28	1	20.23	20.34	20.26	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23025	Mid Ch 23095	High Ch 23165		Low Ch 23025	Mid Ch 23095	High Ch 23165	
			700.5 MHz	707.5 MHz	714.5 MHz		700.5 MHz	707.5 MHz	714.5 MHz	
12 / 3M	1	0	22.56	22.58	22.53	0	21.27	21.31	21.17	1
	1	7	22.38	22.49	22.37	0	21.32	21.48	21.34	1
	1	14	22.14	22.27	22.24	0	21.11	21.25	21.25	1
	8	0	21.40	21.47	21.43	1	20.17	20.35	20.20	2
	8	3	21.16	21.25	21.21	1	20.11	20.24	20.15	2
	8	7	21.08	21.24	21.06	1	20.08	20.17	20.09	2
	15	0	21.41	21.46	21.41	1	20.24	20.44	20.36	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23035	Mid Ch 23095	High Ch 23155		Low Ch 23035	Mid Ch 23095	High Ch 23155	
			701.5 MHz	707.5 MHz	713.5 MHz		701.5 MHz	707.5 MHz	713.5 MHz	
12 / 5M	1	0	22.56	22.63	22.58	0	21.44	21.34	21.29	1
	1	12	22.41	22.58	22.52	0	21.38	21.49	21.50	1
	1	24	22.23	22.36	22.36	0	21.32	21.38	21.27	1
	12	0	21.48	21.53	21.44	1	20.40	20.54	20.38	2
	12	6	21.25	21.33	21.31	1	20.26	20.27	20.17	2
	12	13	21.16	21.27	21.17	1	20.20	20.15	20.08	2
	25	0	21.42	21.44	21.45	1	20.26	20.47	20.43	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23060	Mid Ch 23095	High Ch 23130		Low Ch 23060	Mid Ch 23095	High Ch 23130	
			704.0 MHz	707.5 MHz	711.0 MHz		704.0 MHz	707.5 MHz	711.0 MHz	
12 / 10M	1	0	22.60	22.71	22.69	0	21.48	21.57	21.51	1
	1	24	22.47	22.57	22.61	0	21.42	21.45	21.48	1
	1	49	22.41	22.39	22.48	0	21.27	21.35	21.38	1
	25	0	21.54	21.59	21.50	1	20.26	20.49	20.46	2
	25	12	21.35	21.40	21.33	1	20.30	20.38	20.24	2
	25	25	21.32	21.29	21.15	1	20.24	20.33	20.19	2
	50	0	21.51	21.60	21.50	1	20.40	20.49	20.50	2

ERP Power (dBm)

LTE Band 12							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23017	699.7	-13.68	30.36	14.53	28.38	H
	23095	707.5	-13.24	30.17	14.78	30.06	
	23173	715.3	-13.27	30.17	14.75	29.87	
	23017	699.7	-24.94	32.03	4.94	3.12	V
	23095	707.5	-24.66	31.98	5.17	3.29	
	23173	715.3	-25.03	32.06	4.88	3.08	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	23017	699.7	-14.79	30.36	13.42	21.98	H
	23095	707.5	-14.15	30.17	13.87	24.38	
	23173	715.3	-14.34	30.17	13.68	23.33	
	23017	699.7	-26.01	32.03	3.87	2.44	V
	23095	707.5	-25.74	31.98	4.09	2.56	
	23173	715.3	-26.13	32.06	3.78	2.39	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23025	700.5	-13.18	30.17	14.84	30.48	H
	23095	707.5	-12.97	30.17	15.05	31.99	
	23165	714.5	-13.01	30.18	15.02	31.77	
	23025	700.5	-24.59	31.96	5.22	3.33	V
	23095	707.5	-24.39	31.98	5.44	3.50	
	23165	714.5	-24.74	32.03	5.14	3.27	
Channel Bandwidth: 3 MHz / 16QAM							
X	23025	700.5	-14.27	30.17	13.75	23.71	H
	23095	707.5	-13.85	30.17	14.17	26.12	
	23165	714.5	-14.14	30.18	13.89	24.49	
	23025	700.5	-25.61	31.96	4.20	2.63	V
	23095	707.5	-25.41	31.98	4.42	2.77	
	23165	714.5	-25.77	32.03	4.11	2.58	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23035	701.5	-12.84	30.17	15.18	32.96	H
	23095	707.5	-12.62	30.17	15.40	34.67	
	23155	713.5	-12.74	30.18	15.29	33.81	
	23035	701.5	-24.26	31.96	5.55	3.59	V
	23095	707.5	-24.06	31.98	5.77	3.78	
	23155	713.5	-24.47	32.03	5.41	3.48	
Channel Bandwidth: 5 MHz / 16QAM							
X	23035	701.5	-13.96	30.17	14.06	25.47	H
	23095	707.5	-13.58	30.17	14.44	27.80	
	23155	713.5	-13.83	30.18	14.20	26.30	
	23035	701.5	-25.39	31.96	4.42	2.77	V
	23095	707.5	-25.18	31.98	4.65	2.92	
	23155	713.5	-25.47	32.03	4.41	2.76	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23060	704.0	-12.51	30.17	15.51	35.56	H
	23095	707.5	-12.38	30.17	15.64	36.64	
	23130	711.0	-12.45	30.18	15.58	36.14	
	23060	704.0	-23.92	31.96	5.89	3.88	V
	23095	707.5	-23.82	31.98	6.01	3.99	
	23130	711.0	-24.14	32.03	5.74	3.75	
Channel Bandwidth: 10 MHz / 16QAM							
X	23060	704.0	-13.76	30.17	14.26	26.67	H
	23095	707.5	-13.35	30.17	14.67	29.31	
	23130	711.0	-13.59	30.18	14.44	27.80	
	23060	704.0	-25.12	31.96	4.69	2.94	V
	23095	707.5	-24.92	31.98	4.91	3.10	
	23130	711.0	-25.18	32.03	4.70	2.95	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

EIRP Power (dBm)

LTE Band 4							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	19957	1710.7	-21.16	36.45	15.29	33.81	H
	20175	1732.5	-21.25	36.80	15.55	35.89	
	20393	1754.3	-21.50	36.94	15.44	34.99	
	19957	1710.7	-17.91	37.28	19.37	86.50	V
	20175	1732.5	-17.88	37.63	19.75	94.41	
	20393	1754.3	-18.14	37.64	19.50	89.13	
Channel Bandwidth: 1.4 MHz / 16QAM							
Y	19957	1710.7	-22.17	36.45	14.28	26.79	H
	20175	1732.5	-22.12	36.80	14.68	29.38	
	20393	1754.3	-22.56	36.94	14.38	27.42	
	19957	1710.7	-18.76	37.28	18.52	71.12	V
	20175	1732.5	-18.76	37.63	18.87	77.09	
	20393	1754.3	-18.97	37.64	18.67	73.62	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	19965	1711.5	-20.83	36.45	15.62	36.48	H
	20175	1732.5	-21.01	36.80	15.79	37.93	
	20385	1753.5	-21.24	36.94	15.70	37.15	
	19965	1711.5	-17.65	37.28	19.63	91.83	V
	20175	1732.5	-17.62	37.63	20.01	100.23	
	20385	1753.5	-17.93	37.64	19.71	93.54	
Channel Bandwidth: 3 MHz / 16QAM							
Y	19965	1711.5	-22.27	36.45	14.18	26.18	H
	20175	1732.5	-21.79	36.80	15.01	31.70	
	20385	1753.5	-22.30	36.94	14.64	29.11	
	19965	1711.5	-18.47	37.28	18.81	76.03	V
	20175	1732.5	-18.55	37.63	19.08	80.91	
	20385	1753.5	-18.74	37.64	18.90	77.62	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	19975	1712.5	-20.60	36.45	15.85	38.46	H
	20175	1732.5	-20.80	36.80	16.00	39.81	
	20375	1752.5	-20.96	36.94	15.98	39.63	
	19975	1712.5	-17.35	37.28	19.93	98.40	V
	20175	1732.5	-17.38	37.63	20.25	105.93	
	20375	1752.5	-17.63	37.64	20.01	100.23	
Channel Bandwidth: 5 MHz / 16QAM							
Y	19975	1712.5	-21.75	36.45	14.70	29.51	H
	20175	1732.5	-21.56	36.80	15.24	33.42	
	20375	1752.5	-22.02	36.94	14.92	31.05	
	19975	1712.5	-18.19	37.28	19.09	81.10	V
	20175	1732.5	-18.25	37.63	19.38	86.70	
	20375	1752.5	-18.43	37.64	19.21	83.37	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20000	1715.0	-20.45	36.64	16.19	41.59	H
	20175	1732.5	-20.47	36.80	16.33	42.95	
	20350	1750.0	-20.51	36.80	16.29	42.56	
	20000	1715.0	-17.26	37.44	20.18	104.23	V
	20175	1732.5	-17.16	37.63	20.47	111.43	
	20350	1750.0	-17.36	37.64	20.28	106.66	
Channel Bandwidth: 10 MHz / 16QAM							
Y	20000	1715.0	-21.64	36.64	15.00	31.62	H
	20175	1732.5	-21.23	36.80	15.57	36.06	
	20350	1750.0	-21.65	36.80	15.15	32.73	
	20000	1715.0	-18.12	37.44	19.32	85.51	V
	20175	1732.5	-18.02	37.63	19.61	91.41	
	20350	1750.0	-18.23	37.64	19.41	87.30	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20025	1717.5	-19.97	36.45	16.48	44.46	H
	20175	1732.5	-20.17	36.80	16.63	46.03	
	20325	1747.5	-20.35	36.94	16.59	45.60	
	20025	1717.5	-16.76	37.28	20.52	112.72	V
	20175	1732.5	-16.86	37.63	20.77	119.40	
	20325	1747.5	-17.02	37.64	20.62	115.35	
Channel Bandwidth: 15 MHz / 16QAM							
Y	20025	1717.5	-21.17	36.45	15.28	33.73	H
	20175	1732.5	-21.03	36.80	15.77	37.76	
	20325	1747.5	-21.46	36.94	15.48	35.32	
	20025	1717.5	-17.69	37.28	19.59	90.99	V
	20175	1732.5	-17.81	37.63	19.82	95.94	
	20325	1747.5	-17.97	37.64	19.67	92.68	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20050	1720.0	-19.68	36.45	16.77	47.53	H
	20175	1732.5	-19.84	36.80	16.96	49.66	
	20300	1745.0	-20.14	36.94	16.80	47.86	
	20050	1720.0	-16.43	37.28	20.85	121.62	V
	20175	1732.5	-16.62	37.63	21.01	126.18	
	20300	1745.0	-16.72	37.64	20.92	123.59	
Channel Bandwidth: 20 MHz / 16QAM							
Y	20050	1720.0	-20.86	36.45	15.59	36.22	H
	20175	1732.5	-20.76	36.80	16.04	40.18	
	20300	1745.0	-21.26	36.94	15.68	36.98	
	20050	1720.0	-17.36	37.28	19.92	98.17	V
	20175	1732.5	-17.59	37.63	20.04	100.93	
	20300	1745.0	-17.71	37.64	19.93	98.40	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A



4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

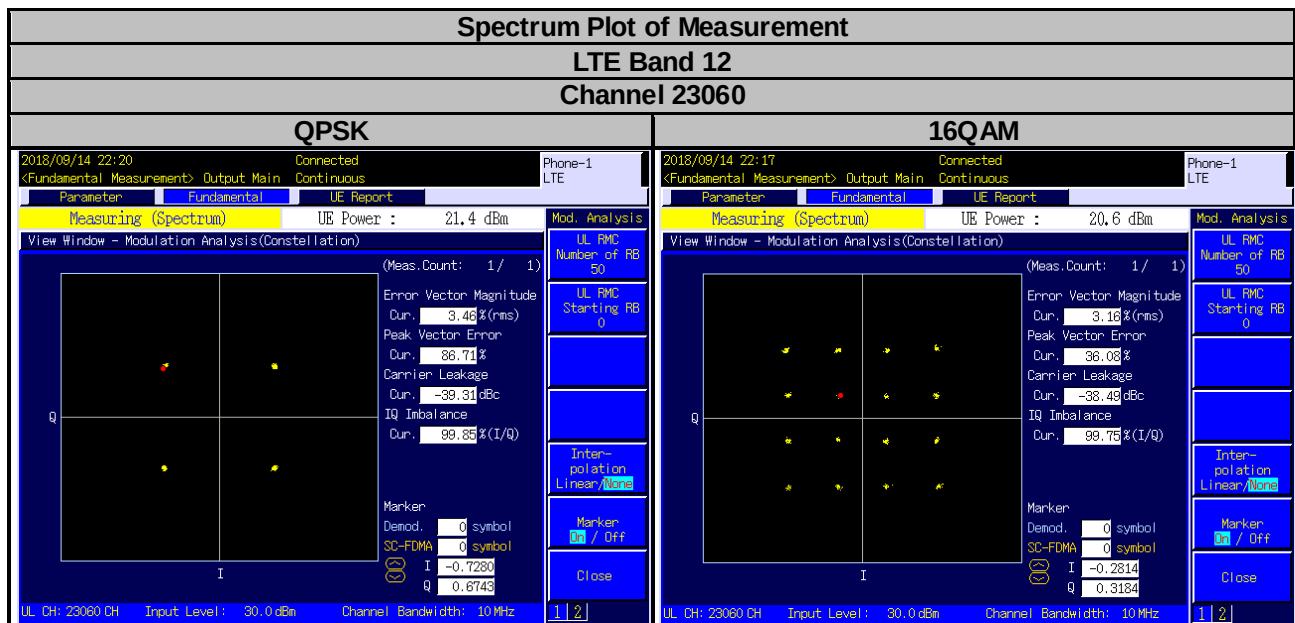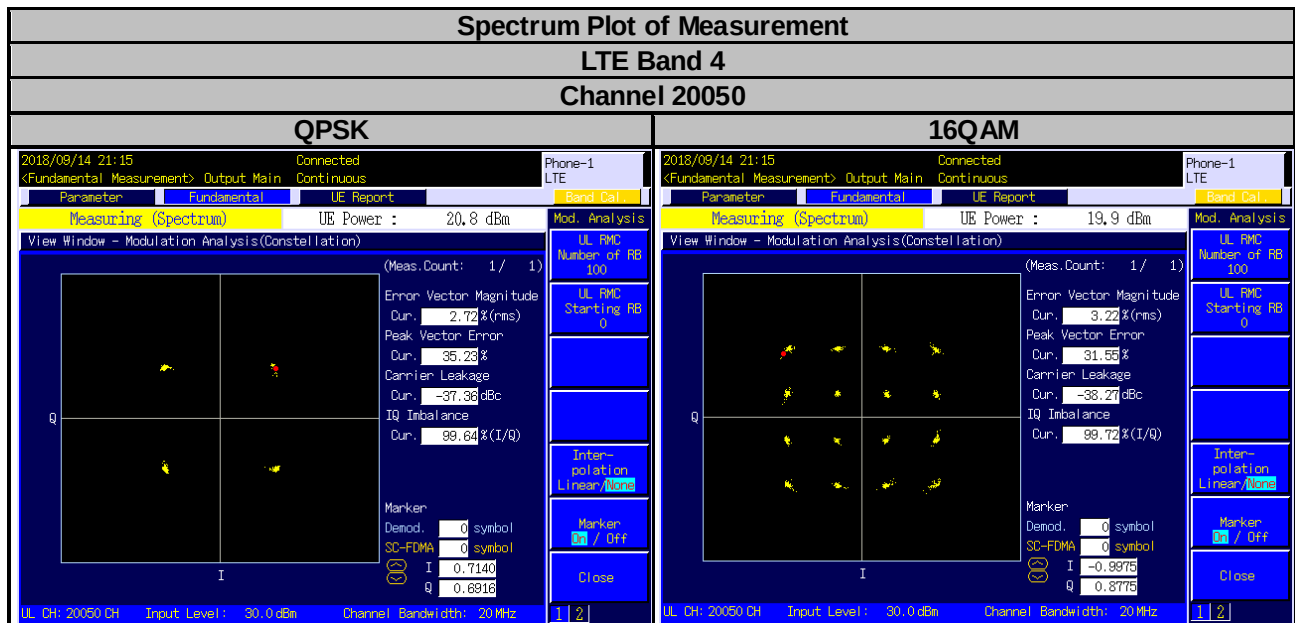

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

Note: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

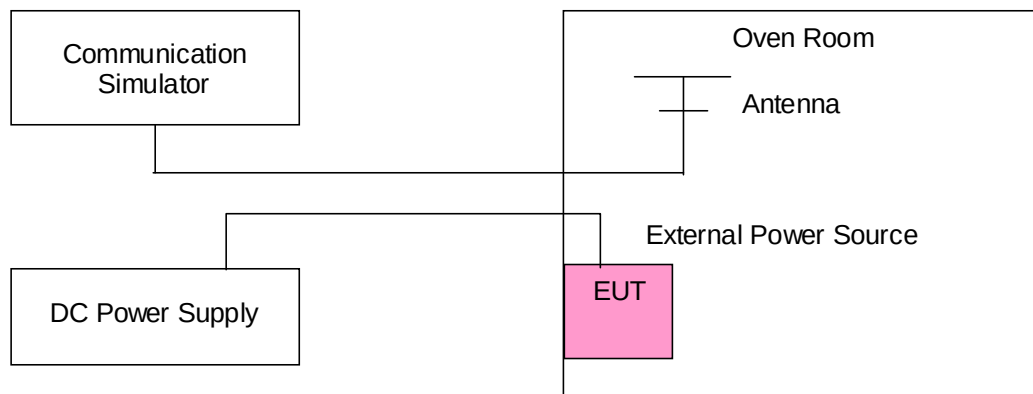

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.2	1710.700004	0.002	1754.300000	0.002	2.5
6.12	1710.700003	0.002	1754.300000	0.001	2.5
8.28	1710.700002	0.001	1754.300000	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1710.700004	0.002	1754.300000	0.002	2.5
-20	1710.700002	0.001	1754.300000	0.002	2.5
-10	1710.700003	0.002	1754.300000	0.002	2.5
0	1710.700004	0.002	1754.300000	0.001	2.5
10	1710.700001	0.001	1754.300000	0.001	2.5
20	1710.699996	-0.002	1754.300000	-0.001	2.5
30	1710.699999	-0.001	1754.300000	-0.001	2.5
40	1710.699998	-0.001	1754.300000	-0.002	2.5
50	1710.699997	-0.002	1754.300000	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.2	1711.500001	0.001	1753.500000	0.002	2.5
6.12	1711.500002	0.001	1753.500000	0.002	2.5
8.28	1711.500004	0.002	1753.500000	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1711.500004	0.002	1753.500000	0.001	2.5
-20	1711.500003	0.002	1753.500000	0.002	2.5
-10	1711.500002	0.001	1753.500000	0.001	2.5
0	1711.500004	0.002	1753.500000	0.002	2.5
10	1711.500003	0.002	1753.500000	0.002	2.5
20	1711.499999	-0.001	1753.500000	-0.001	2.5
30	1711.499999	-0.001	1753.500000	-0.002	2.5
40	1711.499997	-0.002	1753.500000	-0.002	2.5
50	1711.499999	-0.001	1753.500000	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.2	1712.500003	0.002	1752.500000	0.002	2.5
6.12	1712.500003	0.002	1752.500000	0.001	2.5
8.28	1712.500004	0.002	1752.500000	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1712.500003	0.002	1752.500000	0.001	2.5
-20	1712.500003	0.002	1752.500000	0.002	2.5
-10	1712.500003	0.002	1752.500000	0.001	2.5
0	1712.500003	0.002	1752.500000	0.002	2.5
10	1712.500004	0.002	1752.500000	0.002	2.5
20	1712.499996	-0.002	1752.500000	-0.002	2.5
30	1712.499996	-0.002	1752.500000	-0.002	2.5
40	1712.499997	-0.002	1752.500000	-0.001	2.5
50	1712.499998	-0.001	1752.500000	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.2	1715.000001	0.001	1750.000000	0.002	2.5
6.12	1715.000004	0.002	1750.000000	0.001	2.5
8.28	1715.000002	0.001	1750.000000	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1715.000004	0.002	1750.000000	0.001	2.5
-20	1715.000001	0.001	1750.000000	0.002	2.5
-10	1715.000003	0.002	1750.000000	0.002	2.5
0	1715.000002	0.001	1750.000000	0.001	2.5
10	1715.000004	0.002	1750.000000	0.002	2.5
20	1714.999997	-0.002	1750.000000	-0.001	2.5
30	1714.999999	-0.001	1750.000000	-0.002	2.5
40	1714.999998	-0.001	1750.000000	-0.001	2.5
50	1714.999997	-0.002	1750.000000	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.2	1717.500001	0.001	1747.500000	0.001	2.5
6.12	1717.500002	0.001	1747.500000	0.001	2.5
8.28	1717.500004	0.002	1747.500000	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1717.500002	0.001	1747.500000	0.001	2.5
-20	1717.500003	0.002	1747.500000	0.001	2.5
-10	1717.500003	0.002	1747.500000	0.002	2.5
0	1717.500003	0.002	1747.500000	0.002	2.5
10	1717.500002	0.001	1747.500000	0.001	2.5
20	1717.499997	-0.002	1747.500000	-0.001	2.5
30	1717.499998	-0.001	1747.500000	-0.001	2.5
40	1717.499999	-0.001	1747.500000	-0.001	2.5
50	1717.499997	-0.002	1747.500000	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.2	1720.000002	0.001	1745.000000	0.002	2.5
6.12	1720.000004	0.002	1745.000000	0.001	2.5
8.28	1720.000004	0.002	1745.000000	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1720.000001	0.001	1745.000000	0.002	2.5
-20	1720.000001	0.001	1745.000000	0.001	2.5
-10	1720.000003	0.002	1745.000000	0.002	2.5
0	1720.000004	0.002	1745.000000	0.002	2.5
10	1720.000003	0.001	1745.000000	0.001	2.5
20	1719.999997	-0.002	1745.000000	-0.002	2.5
30	1719.999996	-0.002	1745.000000	-0.002	2.5
40	1719.999999	-0.001	1745.000000	-0.002	2.5
50	1719.999998	-0.001	1745.000000	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.2	699.700003	0.004	715.300000	0.003	2.5
6.12	699.700004	0.005	715.300000	0.003	2.5
8.28	699.700004	0.005	715.300000	0.005	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	699.700004	0.005	715.300000	0.006	2.5
-20	699.700002	0.002	715.300000	0.004	2.5
-10	699.700002	0.003	715.300000	0.003	2.5
0	699.700001	0.002	715.300000	0.005	2.5
10	699.700003	0.005	715.300000	0.004	2.5
20	699.699998	-0.002	715.300000	-0.002	2.5
30	699.699997	-0.004	715.300000	-0.005	2.5
40	699.699997	-0.004	715.300000	-0.002	2.5
50	699.699997	-0.005	715.300000	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.2	700.500004	0.006	714.500000	0.005	2.5
6.12	700.500003	0.004	714.500000	0.004	2.5
8.28	700.500002	0.002	714.500000	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	700.500002	0.002	714.500000	0.006	2.5
-20	700.500004	0.005	714.500000	0.004	2.5
-10	700.500003	0.005	714.500000	0.005	2.5
0	700.500002	0.003	714.500000	0.003	2.5
10	700.500004	0.005	714.500000	0.003	2.5
20	700.499998	-0.002	714.500000	-0.002	2.5
30	700.499997	-0.005	714.500000	-0.002	2.5
40	700.499998	-0.002	714.500000	-0.003	2.5
50	700.499999	-0.002	714.500000	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.2	701.500002	0.003	713.500000	0.002	2.5
6.12	701.500003	0.004	713.500000	0.002	2.5
8.28	701.500004	0.005	713.500000	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	701.500002	0.003	713.500000	0.004	2.5
-20	701.500003	0.005	713.500000	0.004	2.5
-10	701.500003	0.004	713.500000	0.002	2.5
0	701.500003	0.004	713.500000	0.004	2.5
10	701.500002	0.002	713.500000	0.002	2.5
20	701.499997	-0.004	713.500000	-0.004	2.5
30	701.499999	-0.002	713.500000	-0.005	2.5
40	701.499999	-0.002	713.500000	-0.001	2.5
50	701.499998	-0.002	713.500000	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
7.2	704.000003	0.004	711.000000	0.002	2.5
6.12	704.000002	0.003	711.000000	0.003	2.5
8.28	704.000004	0.005	711.000000	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 6.12 Vdc to 8.28 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	704.000002	0.003	711.000000	0.003	2.5
-20	704.000001	0.002	711.000000	0.003	2.5
-10	704.000003	0.005	711.000000	0.004	2.5
0	704.000004	0.005	711.000000	0.002	2.5
10	704.000002	0.003	711.000000	0.005	2.5
20	703.999999	-0.002	711.000000	-0.005	2.5
30	703.999997	-0.005	711.000000	-0.002	2.5
40	703.999998	-0.002	711.000000	-0.003	2.5
50	703.999996	-0.005	711.000000	-0.002	2.5

4.4 Occupied Bandwidth Measurement


4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure


- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.3 Test Setup

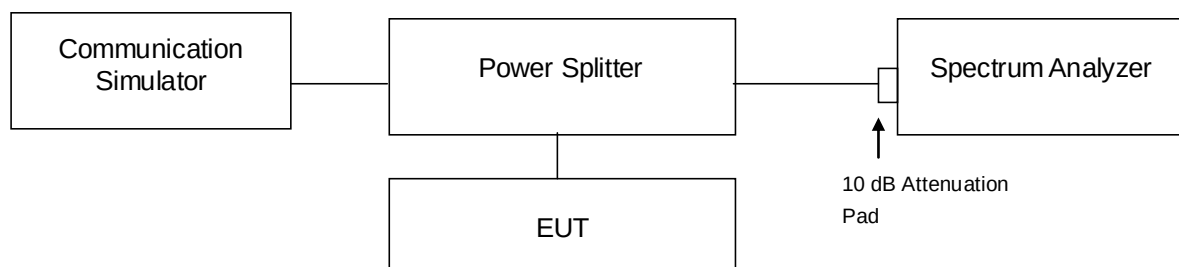


4.4.4 Test Result

LTE Band 4							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	1.09	1.09	19965	1711.5	2.70	2.70
20175	1732.5	1.09	1.09	20175	1732.5	2.70	2.70
20393	1754.3	1.09	1.09	20385	1753.5	2.70	2.70

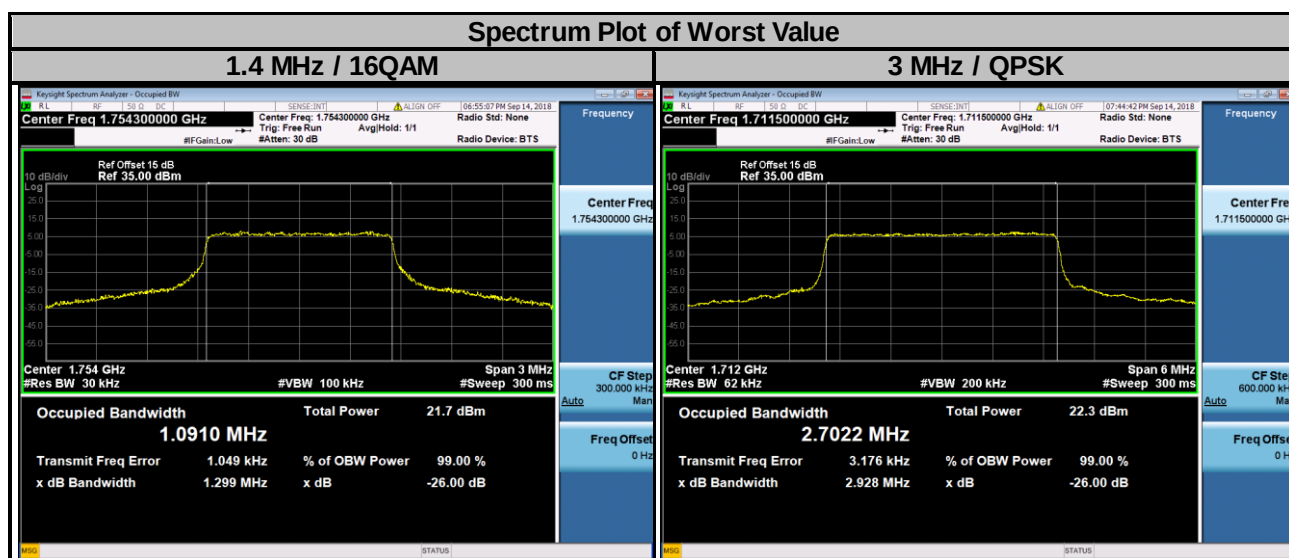


LTE Band 4							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.48	4.49	20000	1715.0	8.97	8.97
20175	1732.5	4.48	4.49	20175	1732.5	8.96	8.97
20375	1752.5	4.49	4.49	20350	1750.0	8.97	8.98

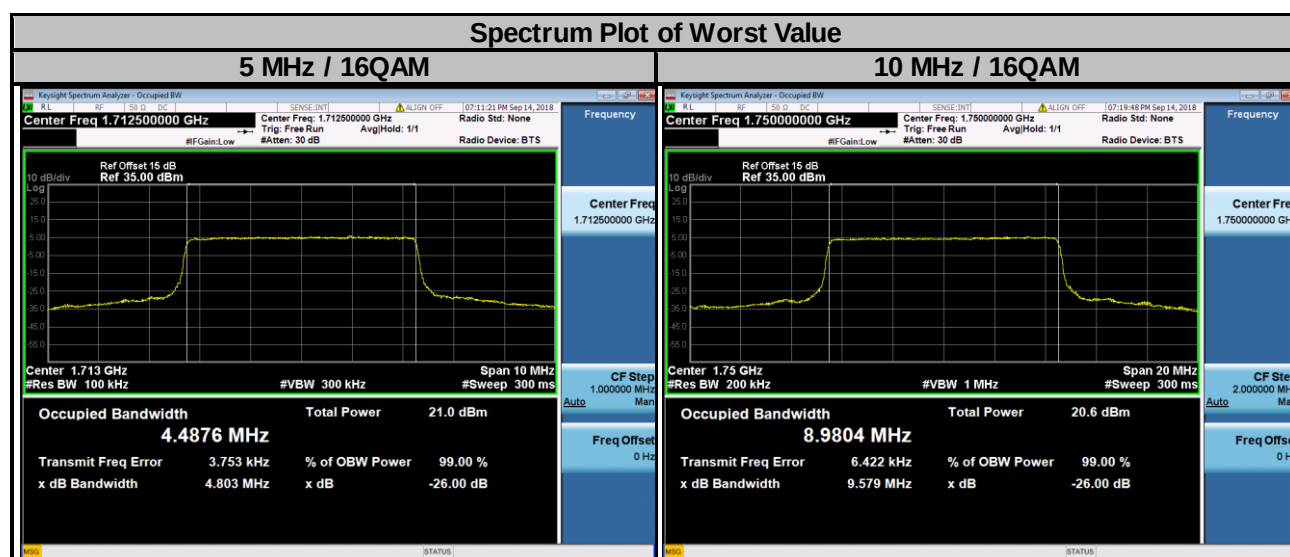


LTE Band 4

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	13.46	13.45	20050	1720.0	17.92	17.94
20175	1732.5	13.45	13.44	20175	1732.5	17.91	17.93
20325	1747.5	13.49	13.47	20300	1745.0	17.99	18.01


Spectrum Plot of Worst Value

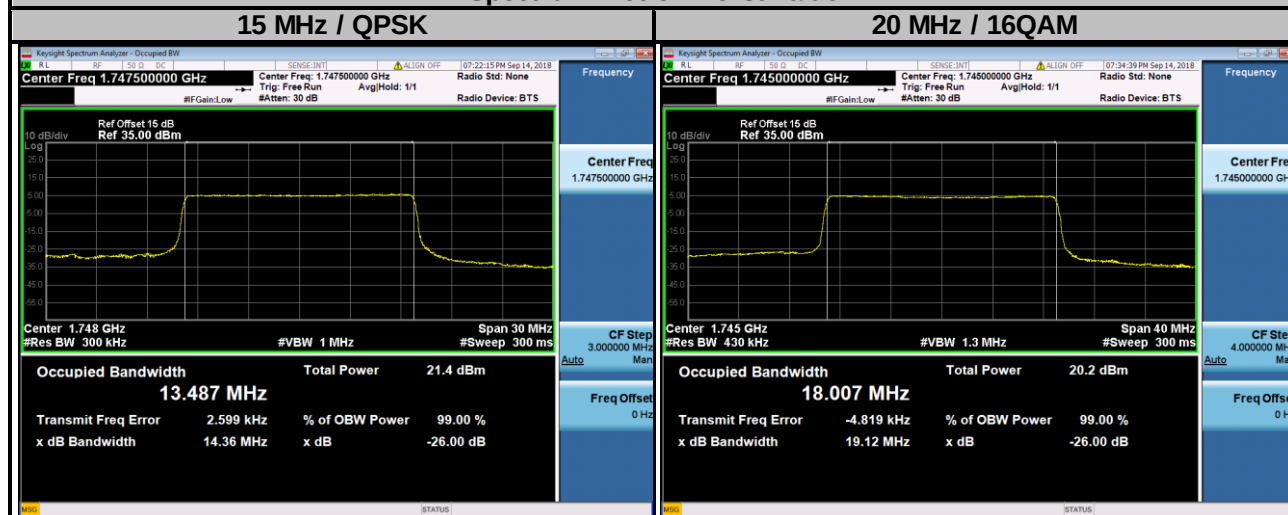

LTE Band 12							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	1.09	1.09	23025	700.5	2.70	2.70
23095	707.5	1.09	1.09	23095	707.5	2.70	2.70
23173	715.3	1.09	1.09	23165	714.5	2.70	2.70

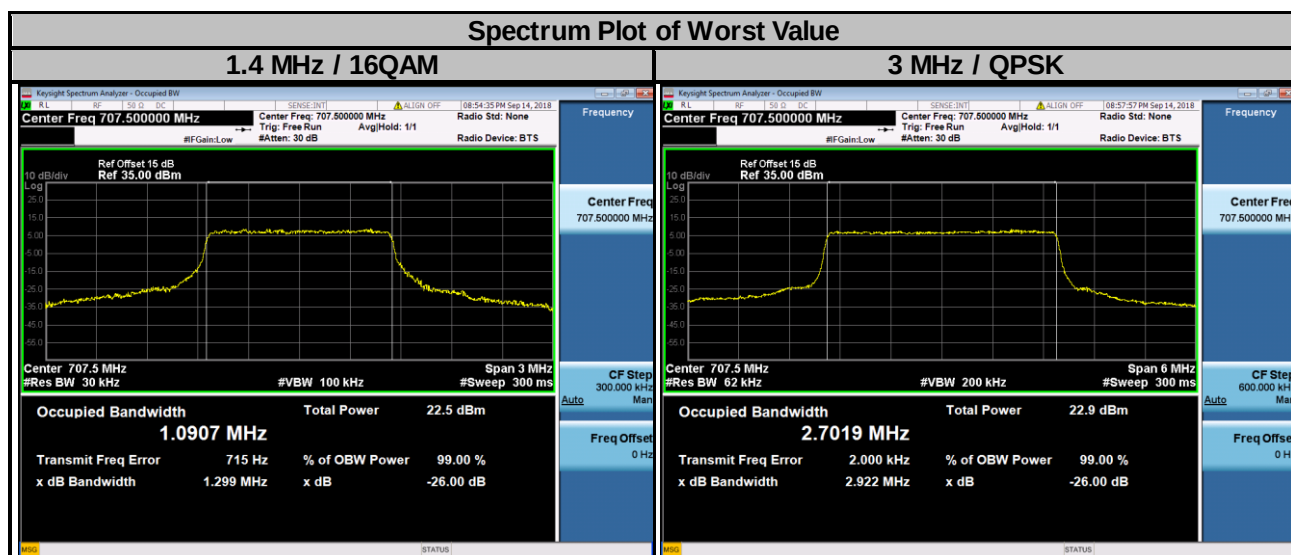

LTE Band 12							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	4.49	4.49	23060	704.0	8.99	8.99
23095	707.5	4.48	4.48	23095	707.5	8.95	8.95
23155	713.5	4.49	4.49	23130	711.0	8.98	8.98

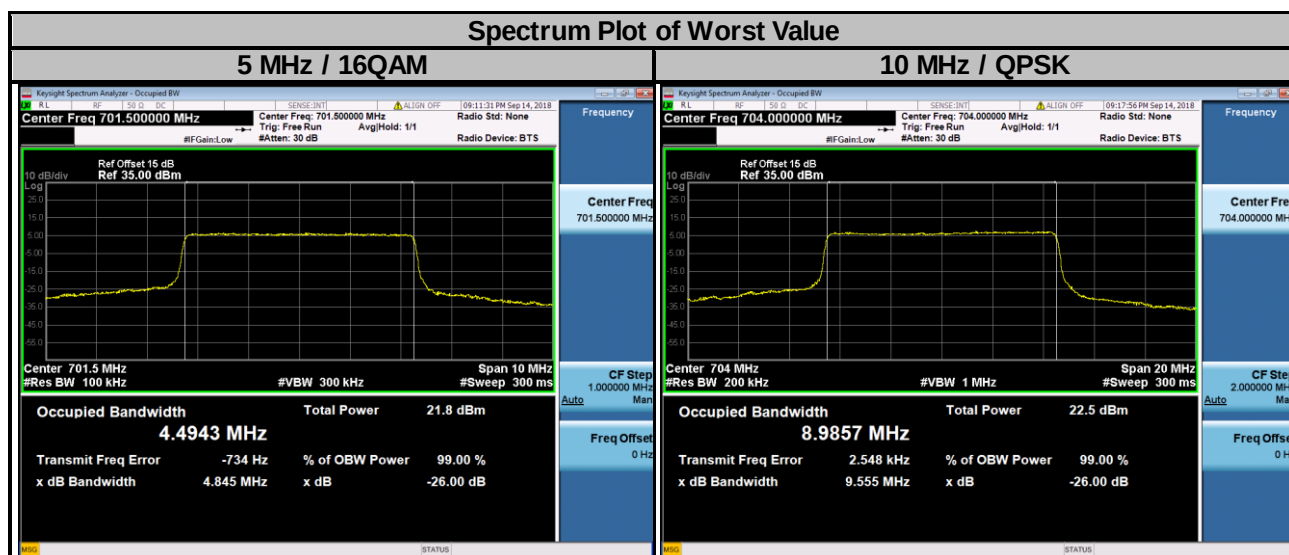

4.5 Band Edge Measurement


4.5.1 Limits of Band Edge Measurement

For operations in the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

For operations in the 1710–1755 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.


4.5.2 Test Setup

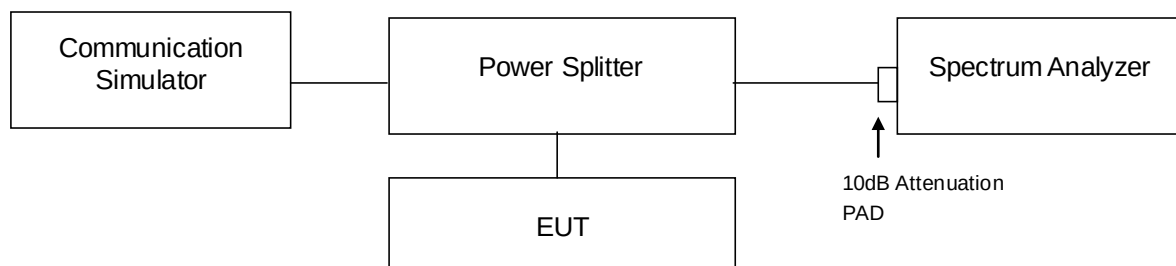


4.5.3 Test Procedures

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 62 kHz and VB of the spectrum is 200 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150 kHz and VB of the spectrum is 470 kHz (LTE Bandwidth 15 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 20 MHz).
- Record the max. trace plot into the test report.


4.5.4 Test Results

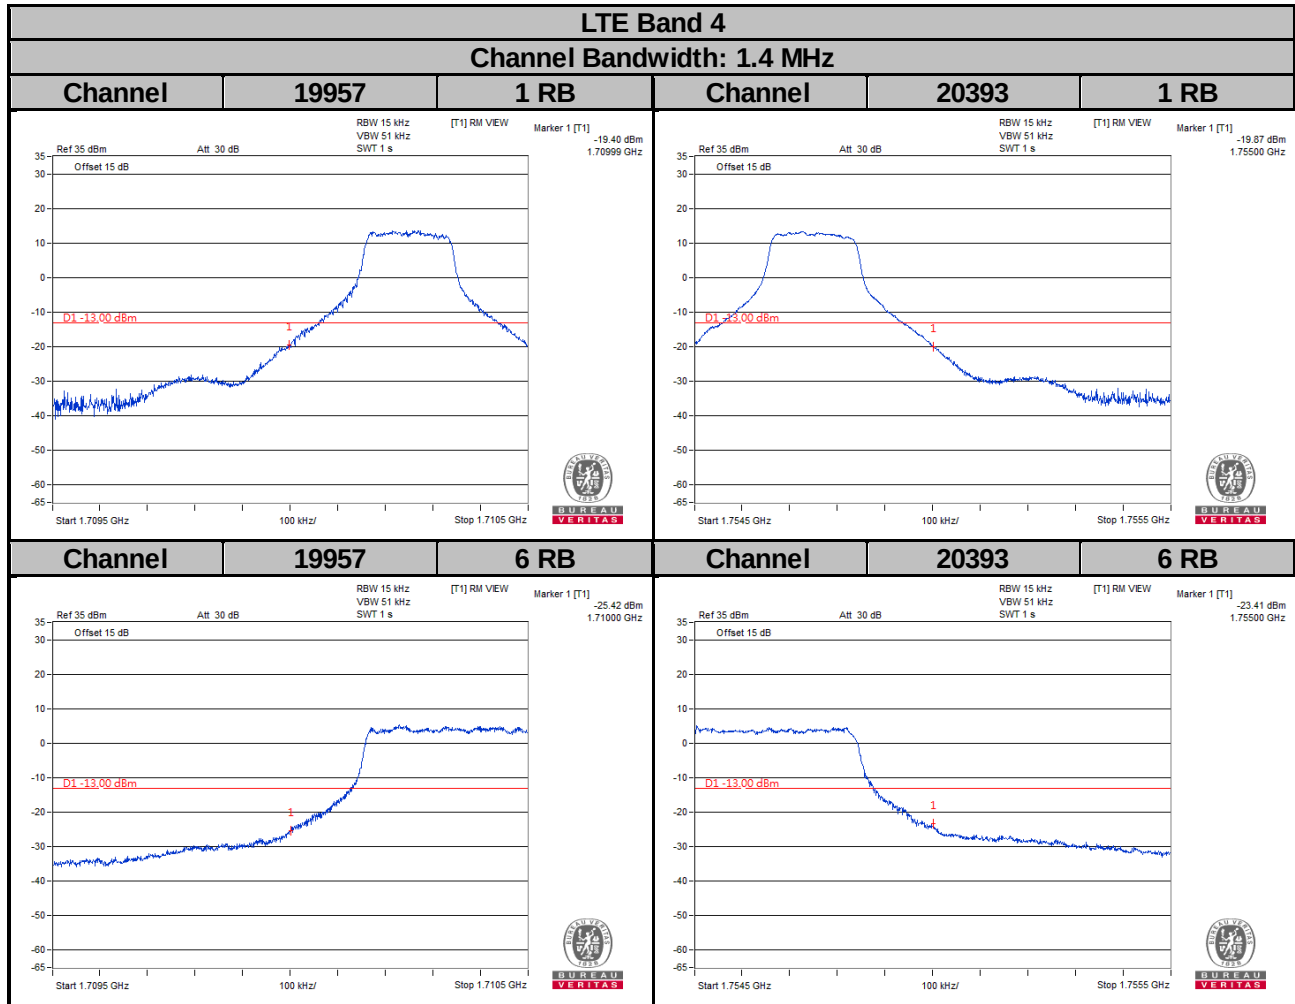


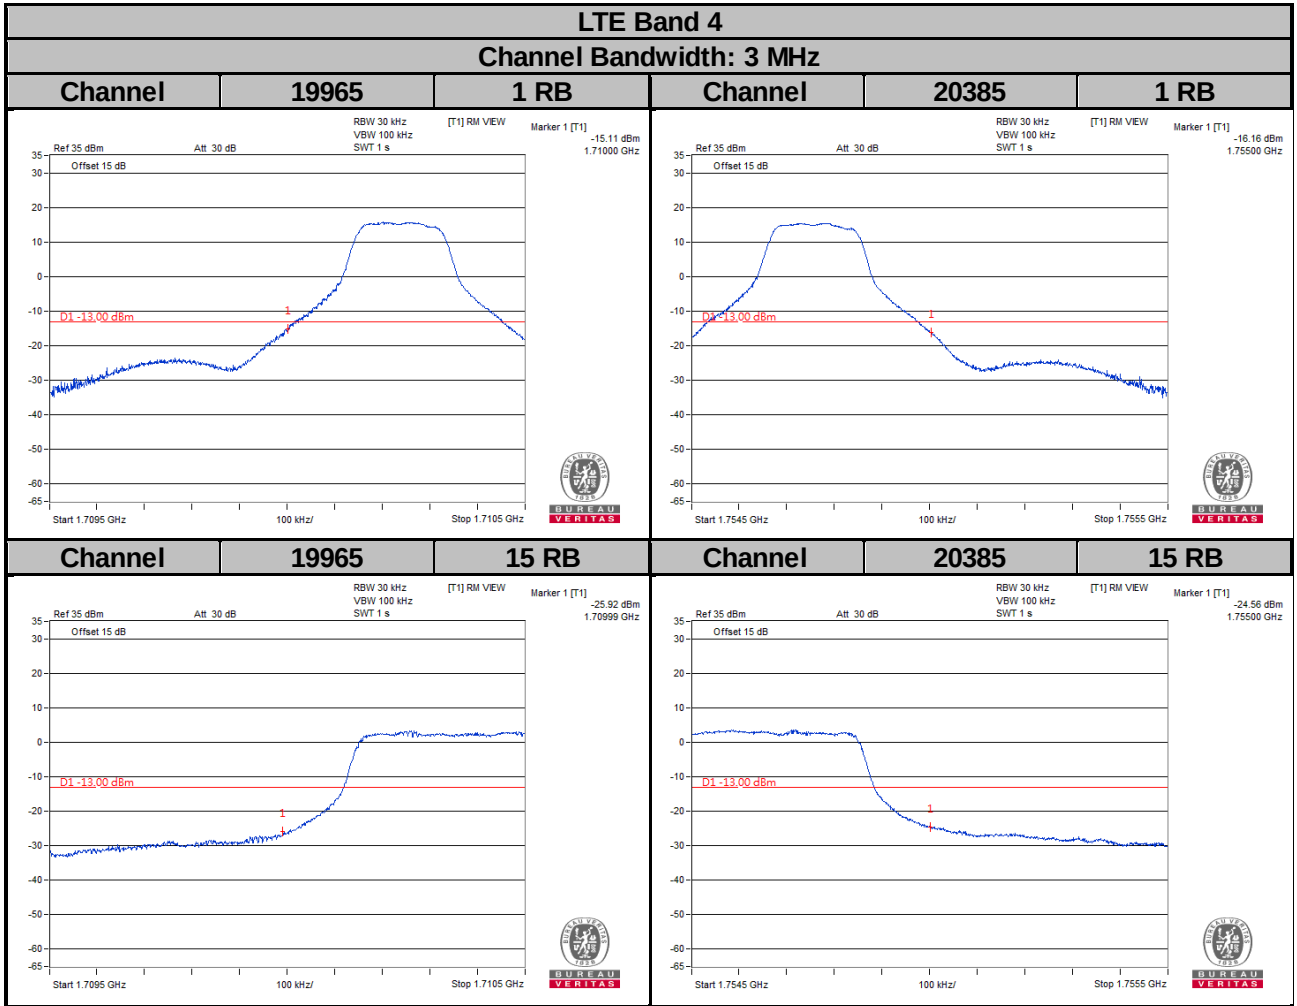



LTE Band 4

Channel Bandwidth: 5 MHz

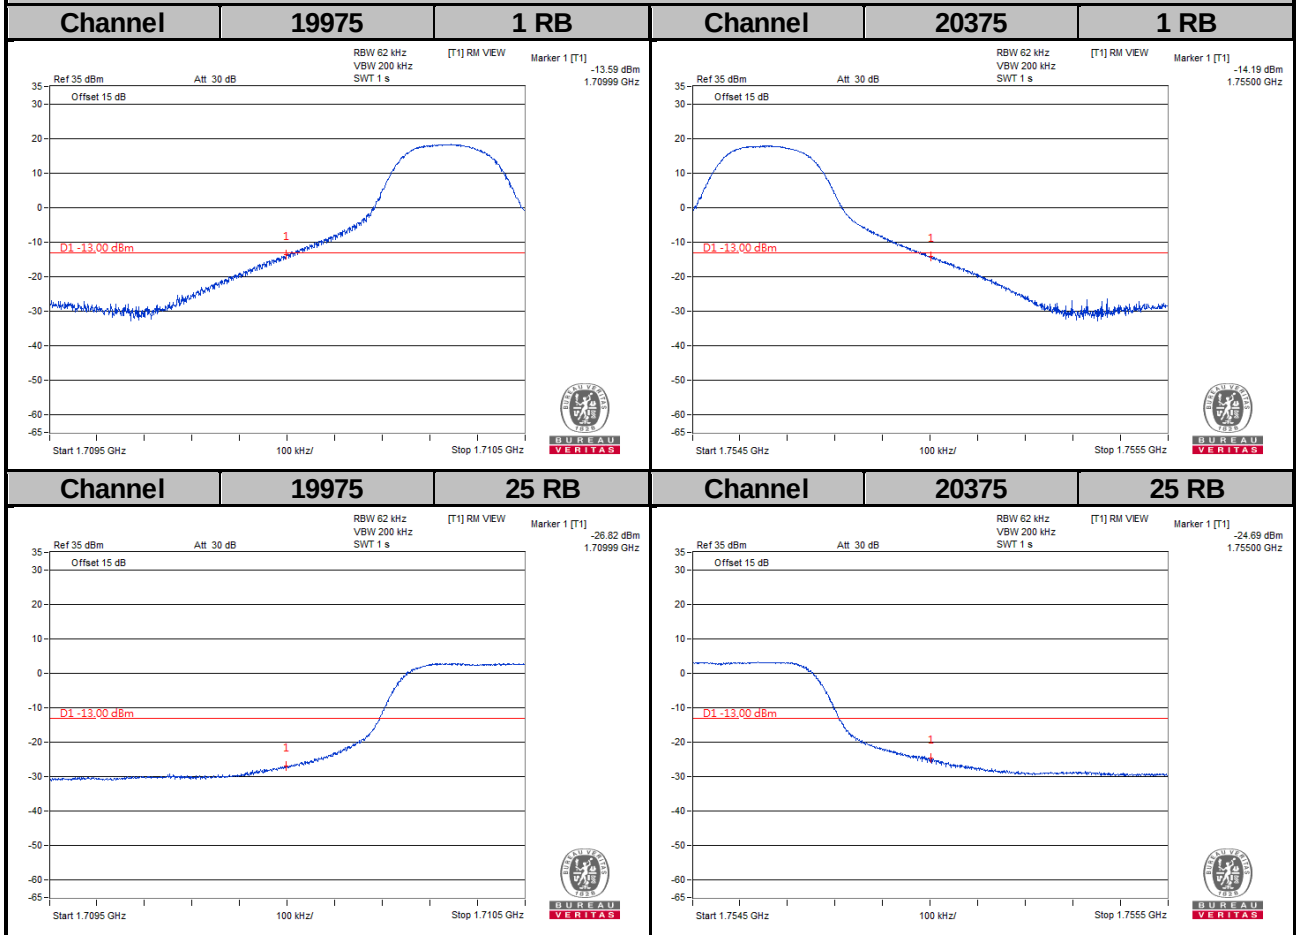

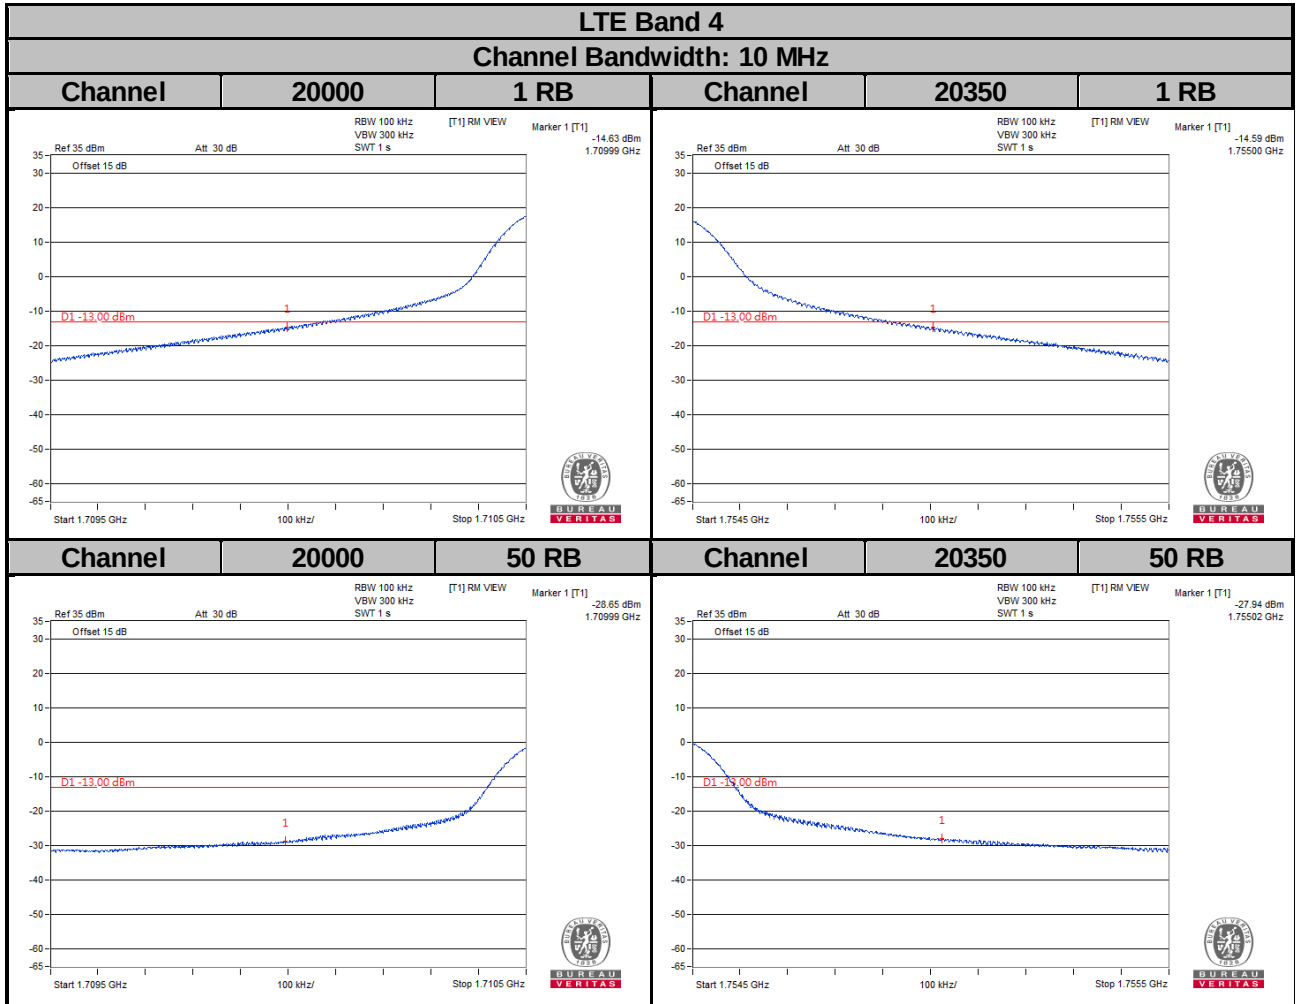


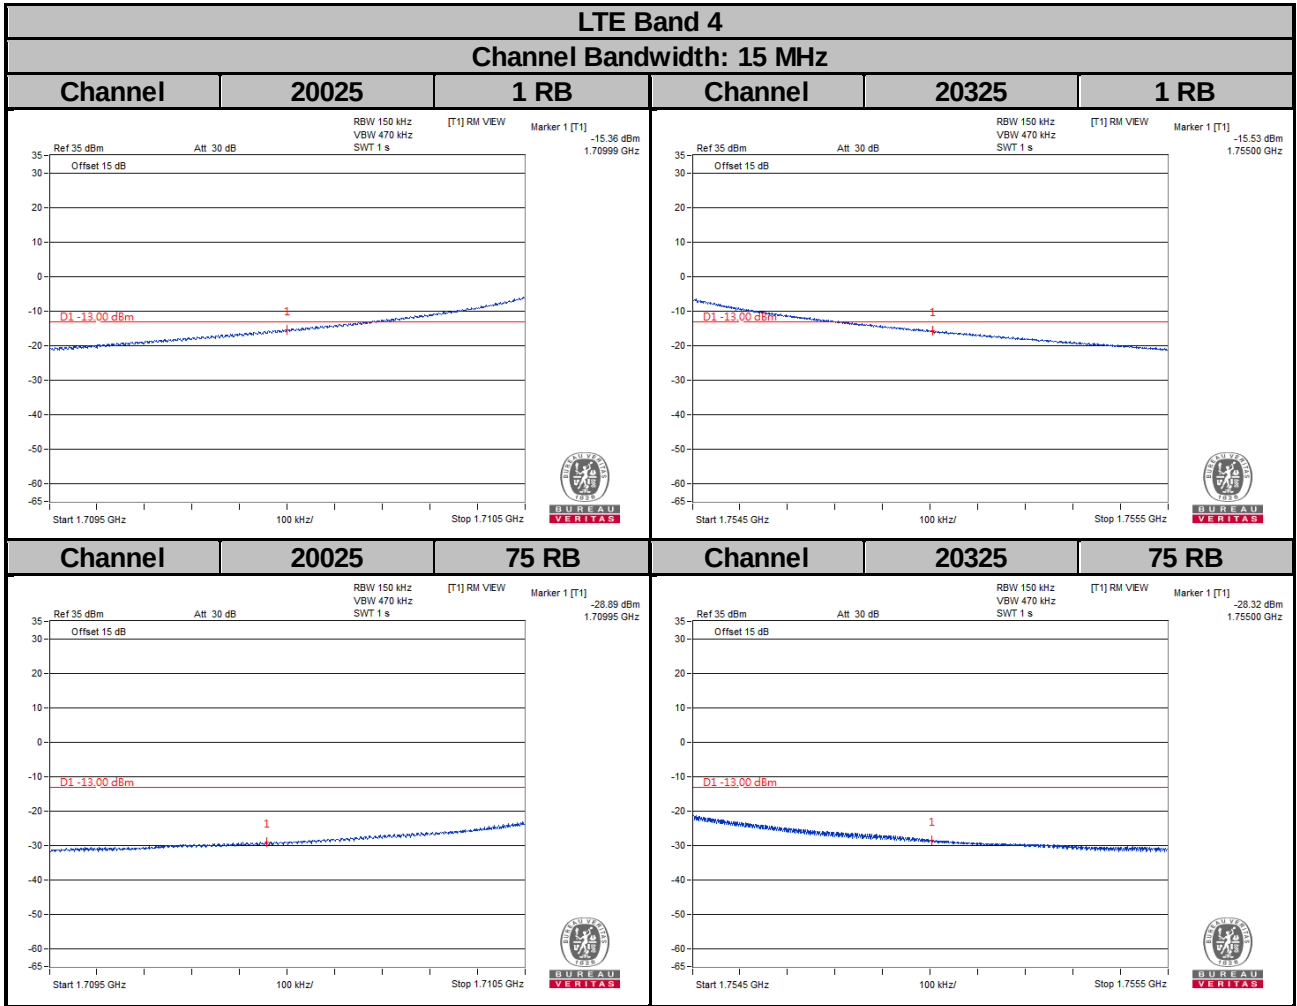

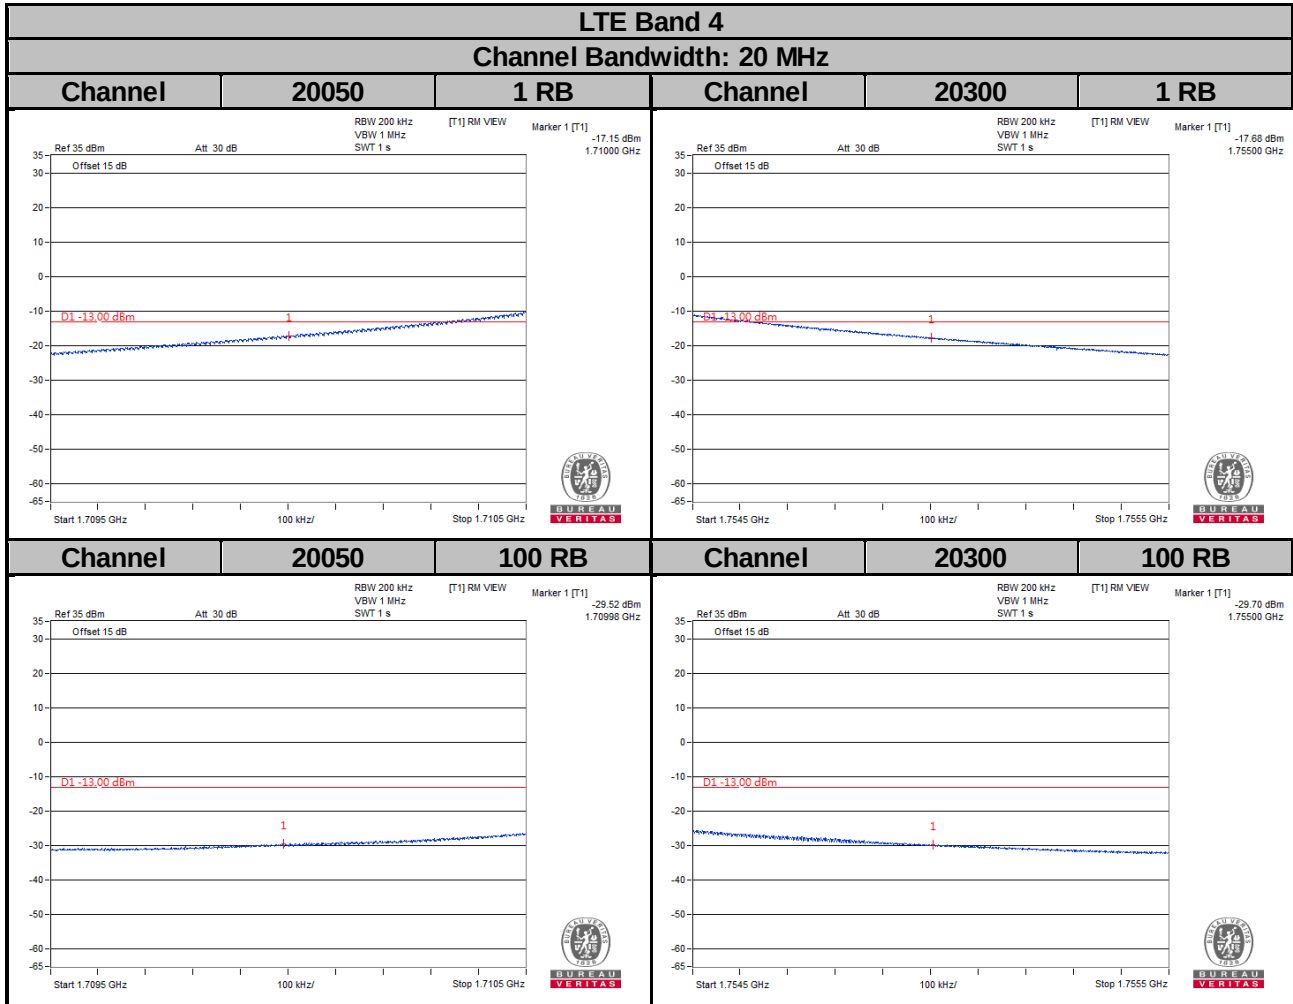


LTE Band 12

Channel Bandwidth: 1.4 MHz

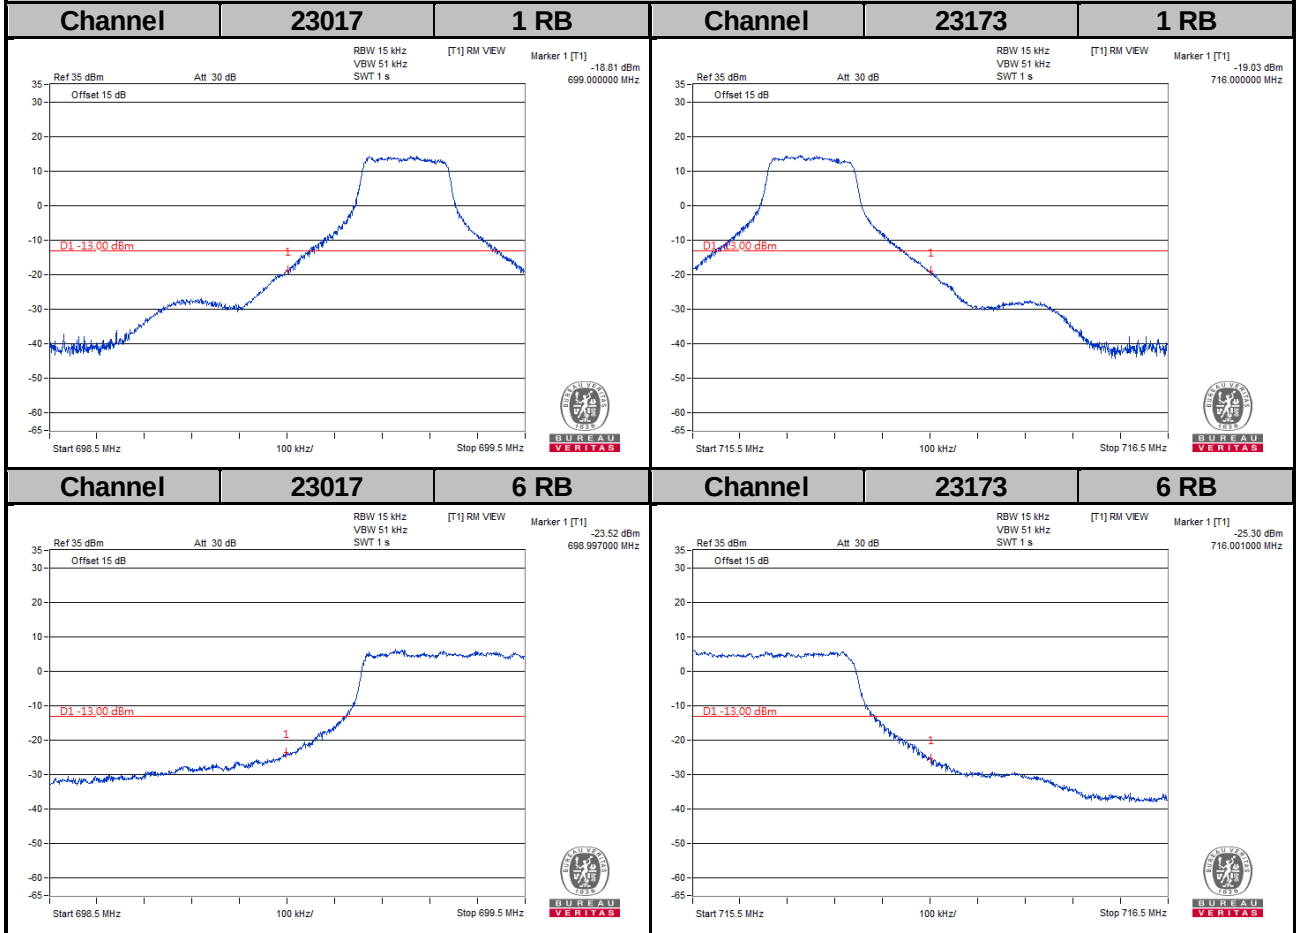


LTE Band 12


Channel Bandwidth: 3 MHz

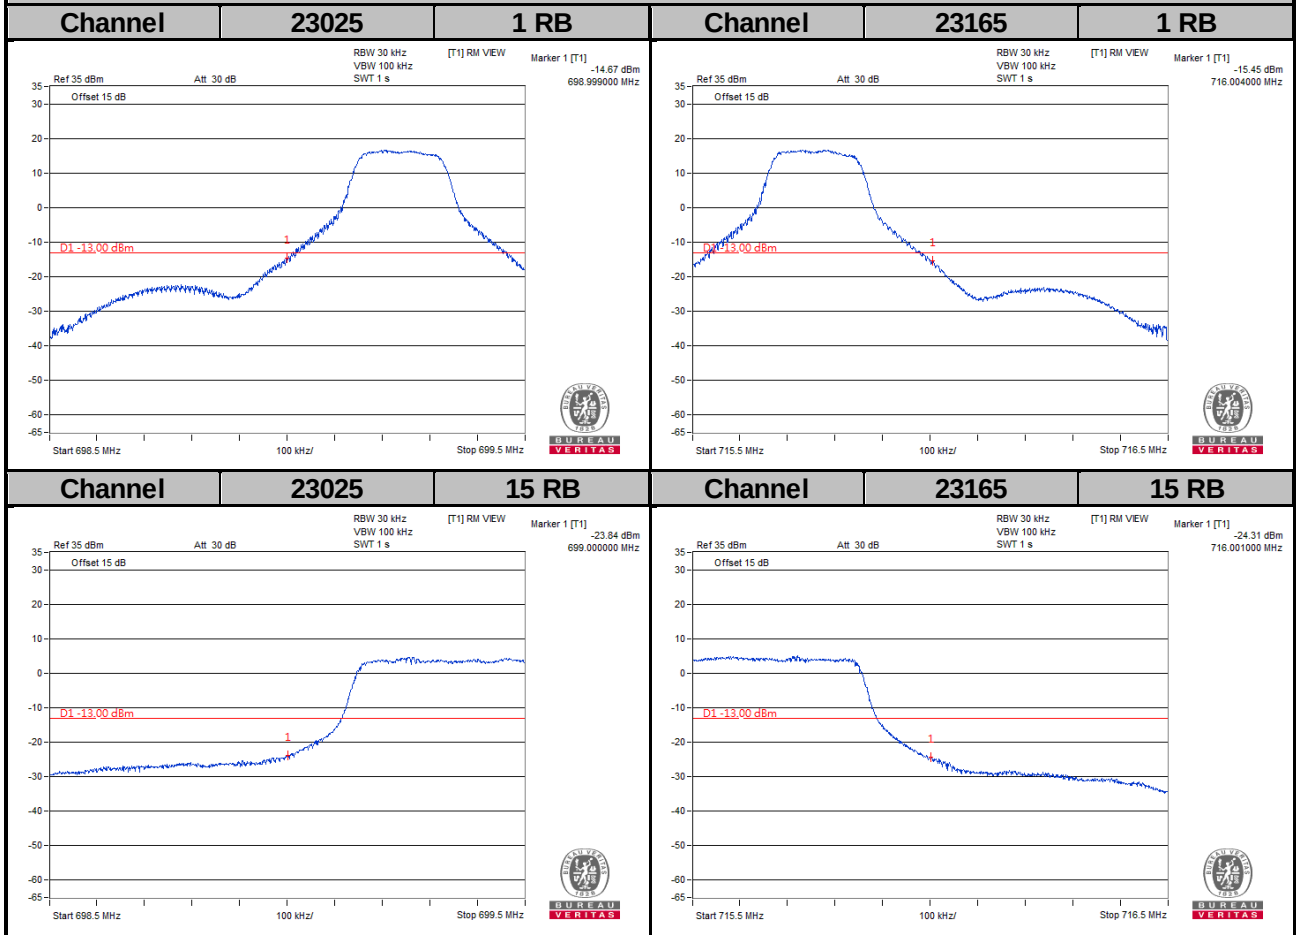

LTE Band 12

Channel Bandwidth: 5 MHz

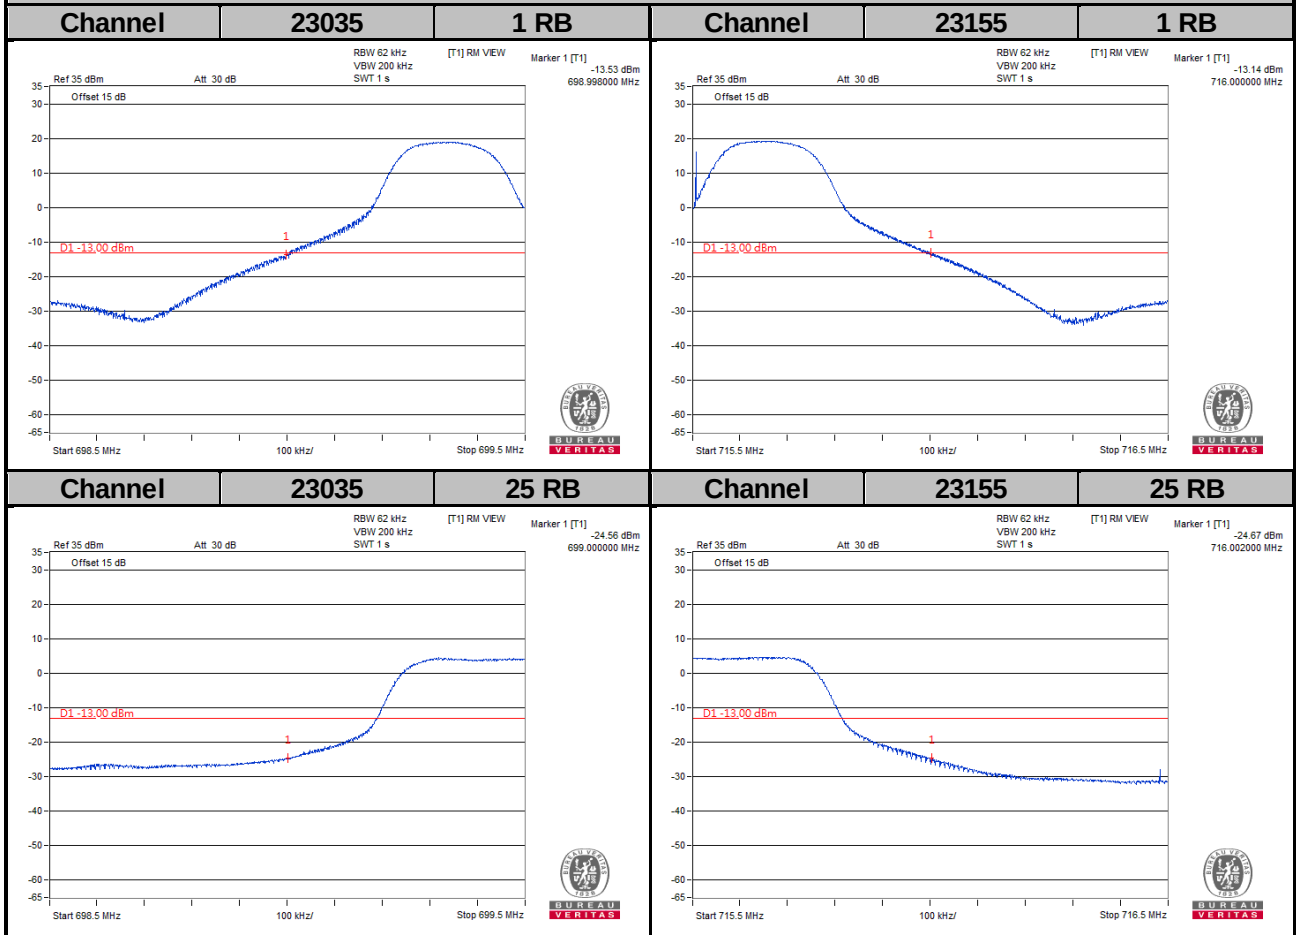

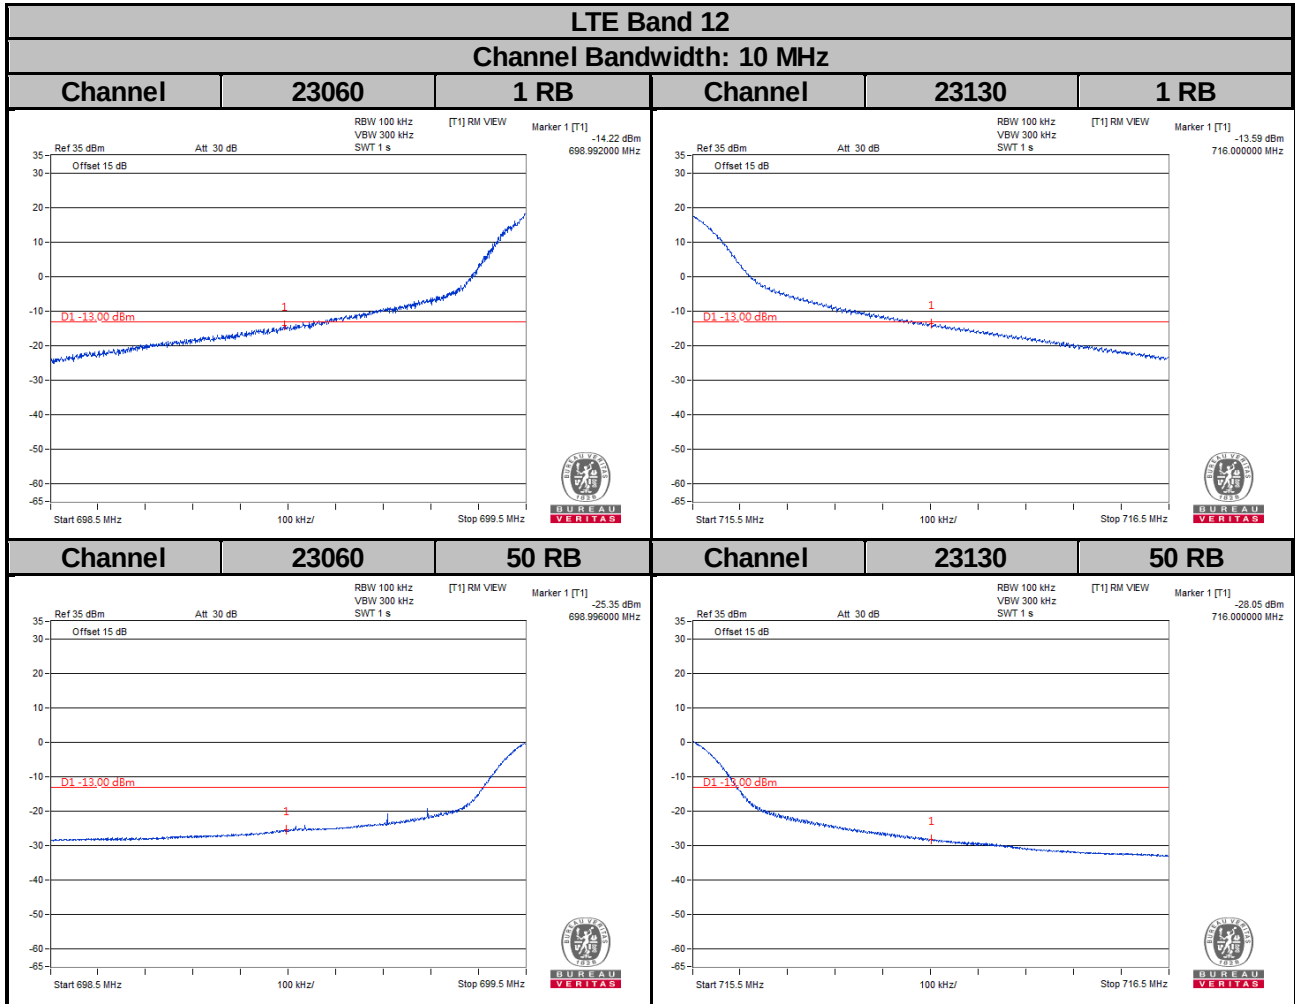


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

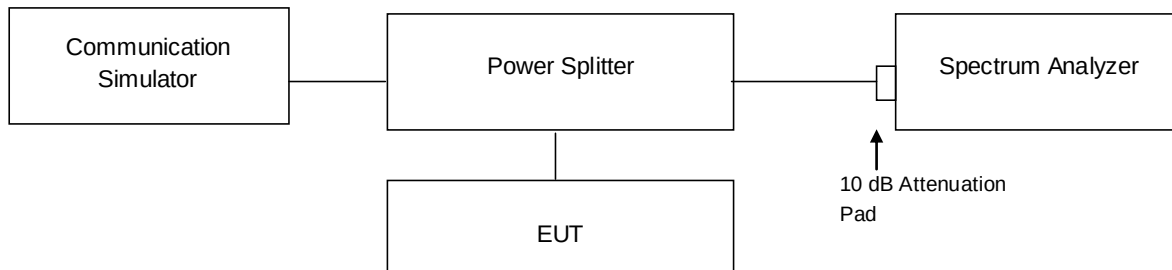


4.6.3 Test Procedures


1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results

LTE Band 4							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	5.06	6.01	19965	1711.5	4.86	5.76
20175	1732.5	4.84	5.72	20175	1732.5	4.70	5.50
20393	1754.3	4.72	5.51	20385	1753.5	4.80	5.50

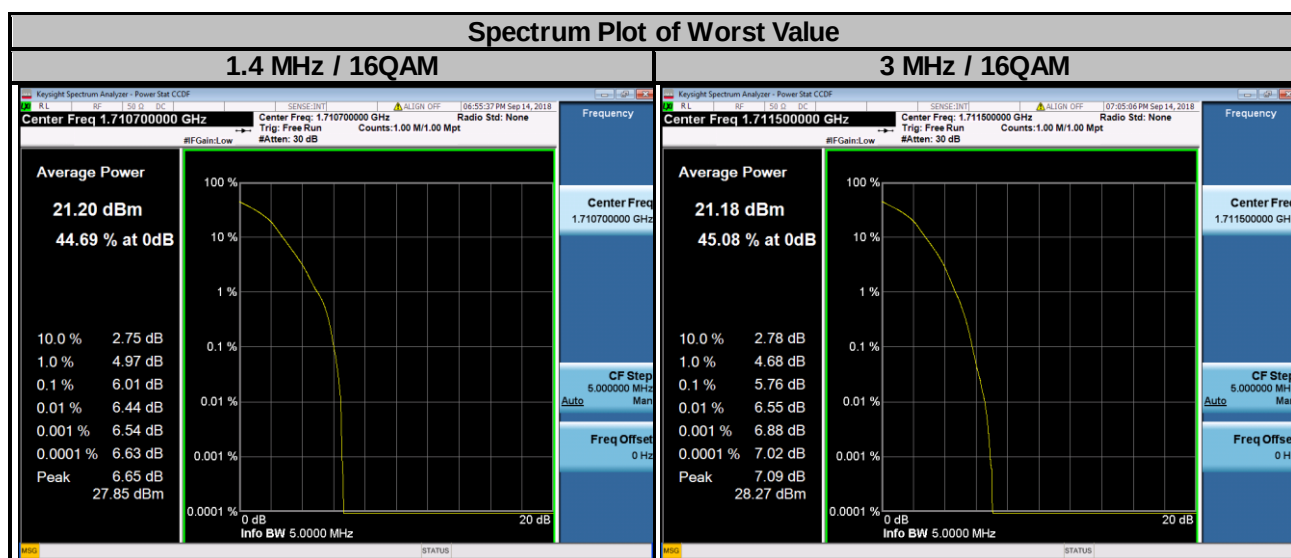


LTE Band 4							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	5.06	5.95	20000	1715.0	5.00	5.78
20175	1732.5	4.69	5.53	20175	1732.5	4.51	5.29
20375	1752.5	5.04	5.87	20350	1750.0	5.27	6.07

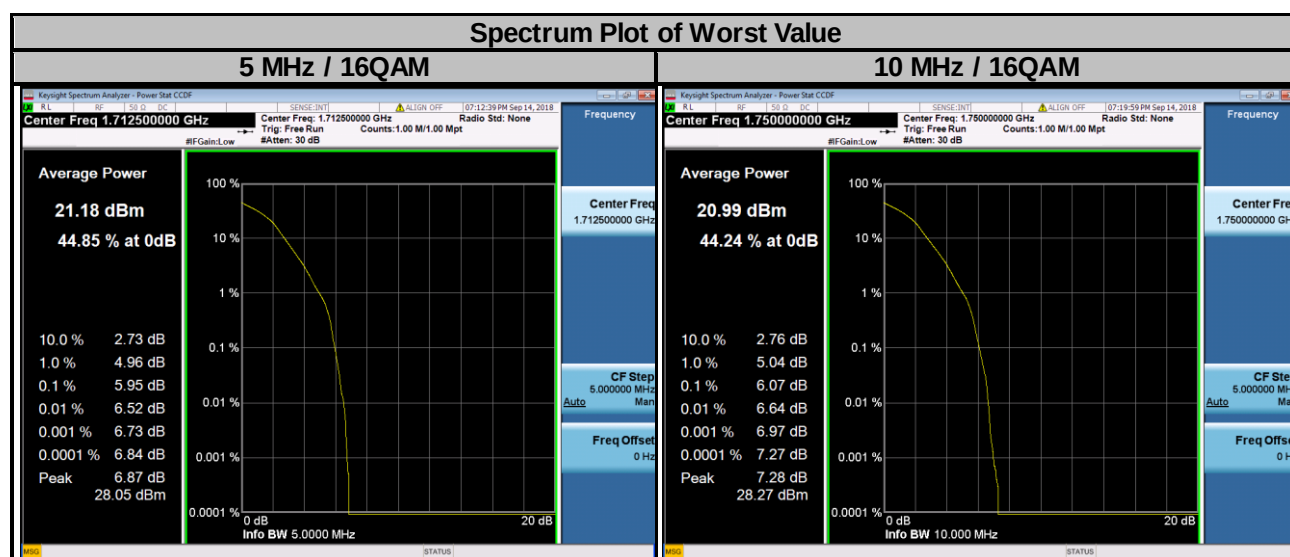


LTE Band 4

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	4.91	5.90	20050	1720.0	4.91	5.81
20175	1732.5	4.35	5.19	20175	1732.5	4.36	5.12
20325	1747.5	5.19	6.39	20300	1745.0	5.02	5.82


Spectrum Plot of Worst Value

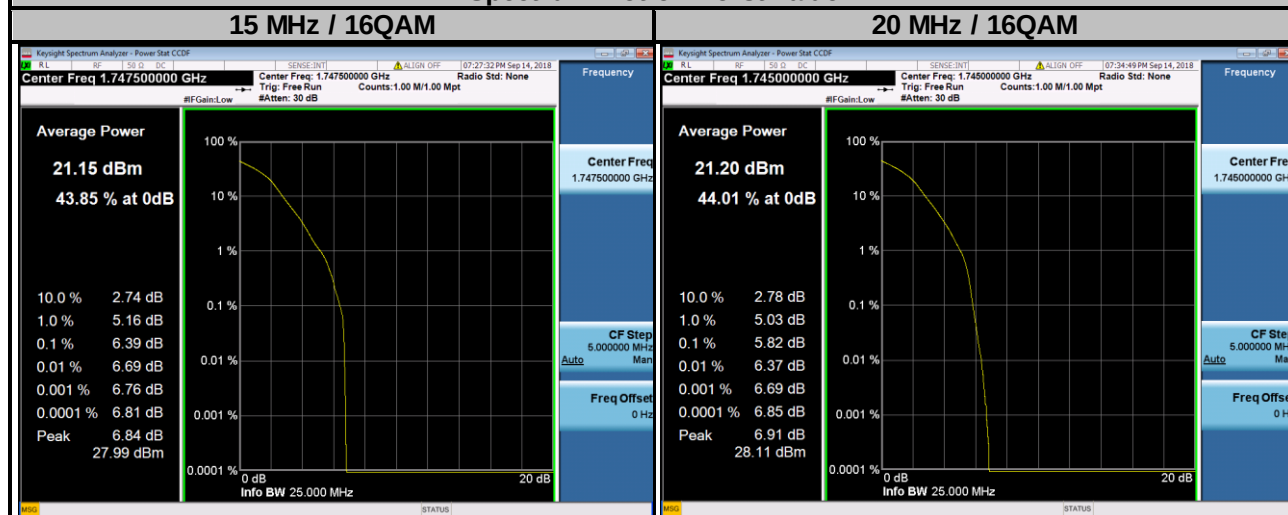

LTE Band 12							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	6.12	7.01	23025	700.5	5.72	6.58
23095	707.5	5.88	6.85	23095	707.5	5.60	6.46
23173	715.3	5.71	6.66	23165	714.5	5.42	6.20

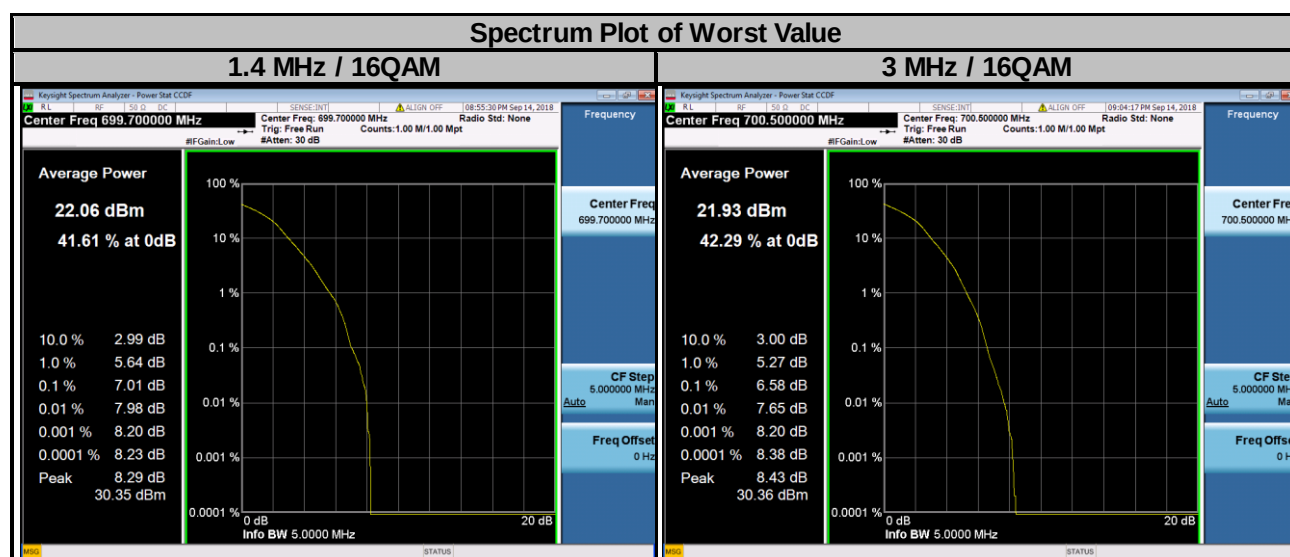

LTE Band 12							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	6.78	6.99	23060	704.0	5.94	6.87
23095	707.5	5.65	6.56	23095	707.5	5.75	6.84
23155	713.5	5.73	6.67	23130	711.0	5.70	6.66

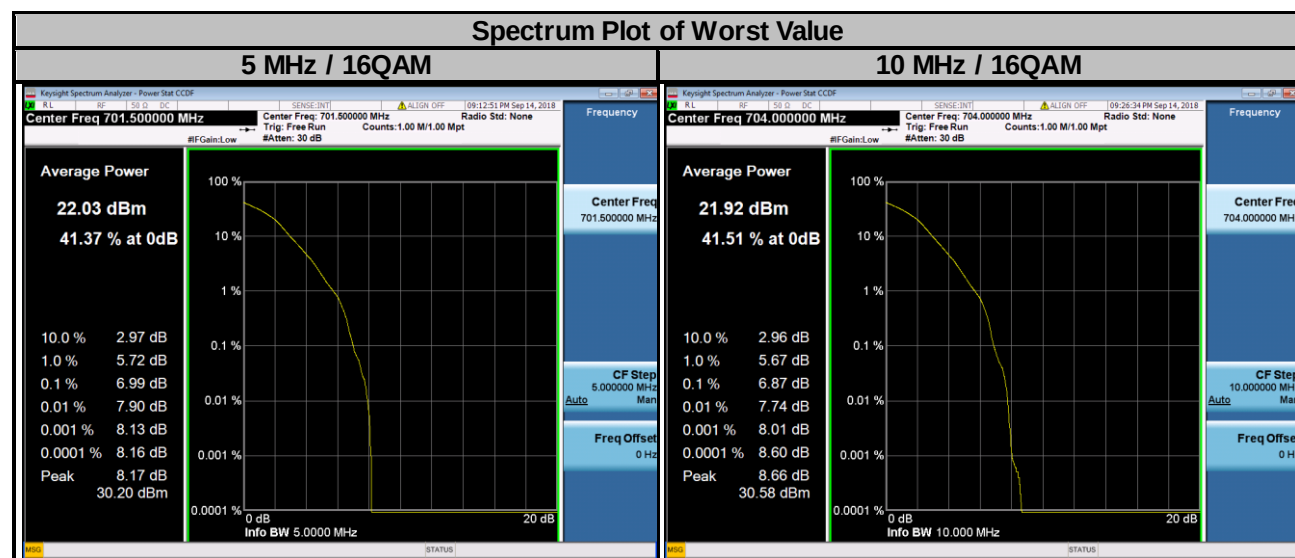


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission is equal to -13 dBm.


4.7.2 Test Setup

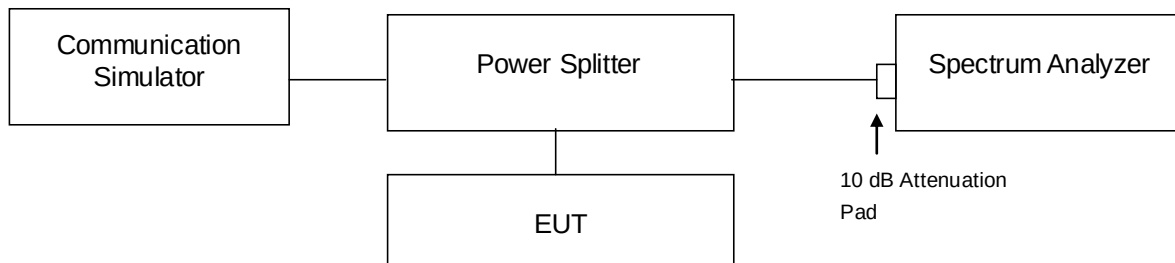


4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- For LTE B4, measuring frequency range is from 9 kHz to 27 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz for 9 kHz to 1 GHz and RBW = 1 MHz and VBW = 3 MHz for 1 GHz to 27 GHz is used for conducted emission measurement.
- For LTE B12, measuring frequency range is from 9 kHz to 10 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz for 9 kHz to 1 GHz and RBW = 1 MHz and VBW = 3 MHz for 1 GHz to 10 GHz is used for conducted emission measurement.

4.7.4 Test Results

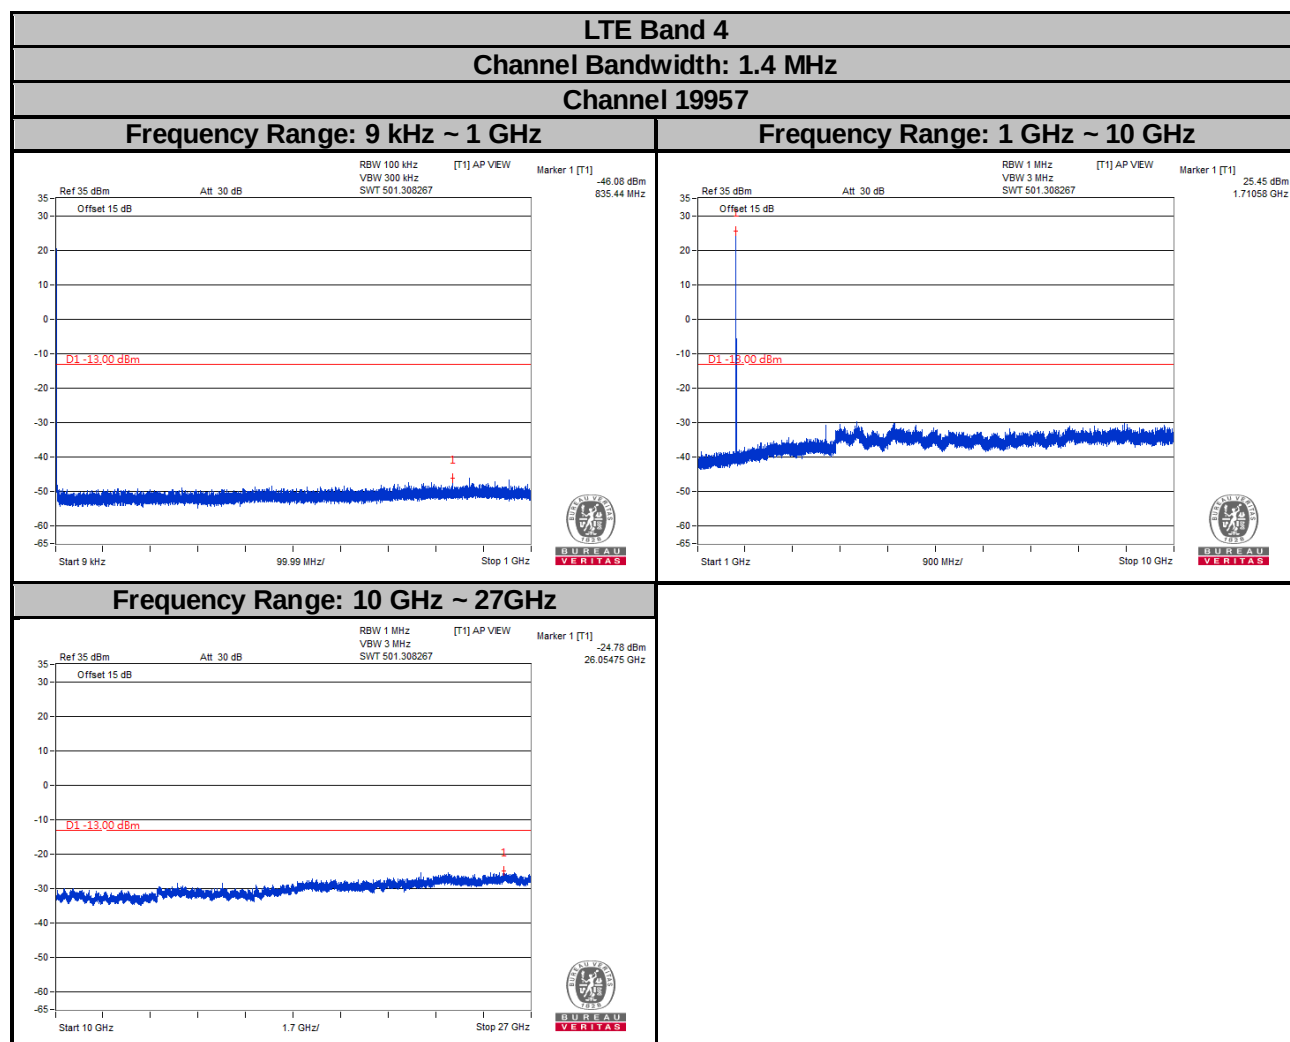

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

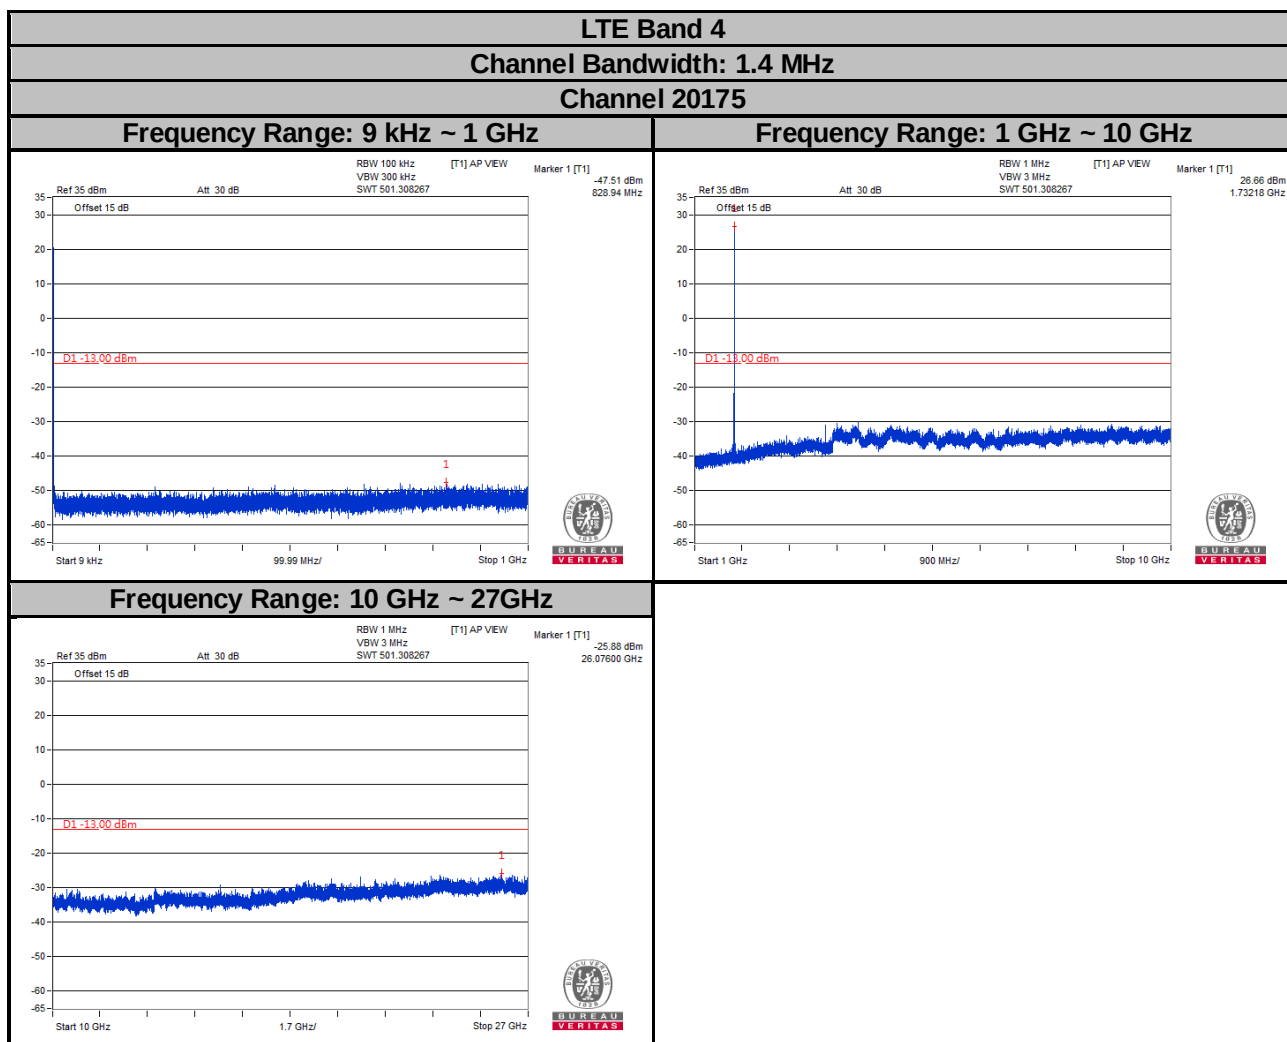


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 4


Channel Bandwidth: 1.4 MHz

Channel 20393


Frequency Range: 9 kHz ~ 1 GHz

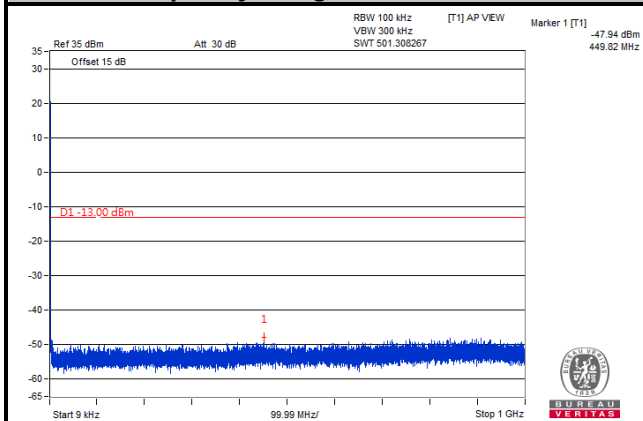


Frequency Range: 1 GHz ~ 10 GHz

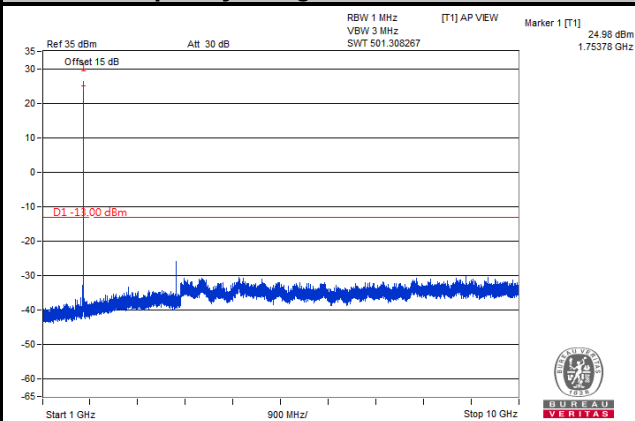


Frequency Range: 10 GHz ~ 27GHz

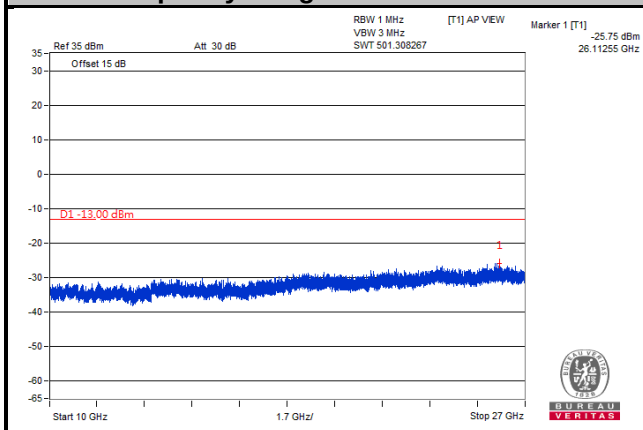


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

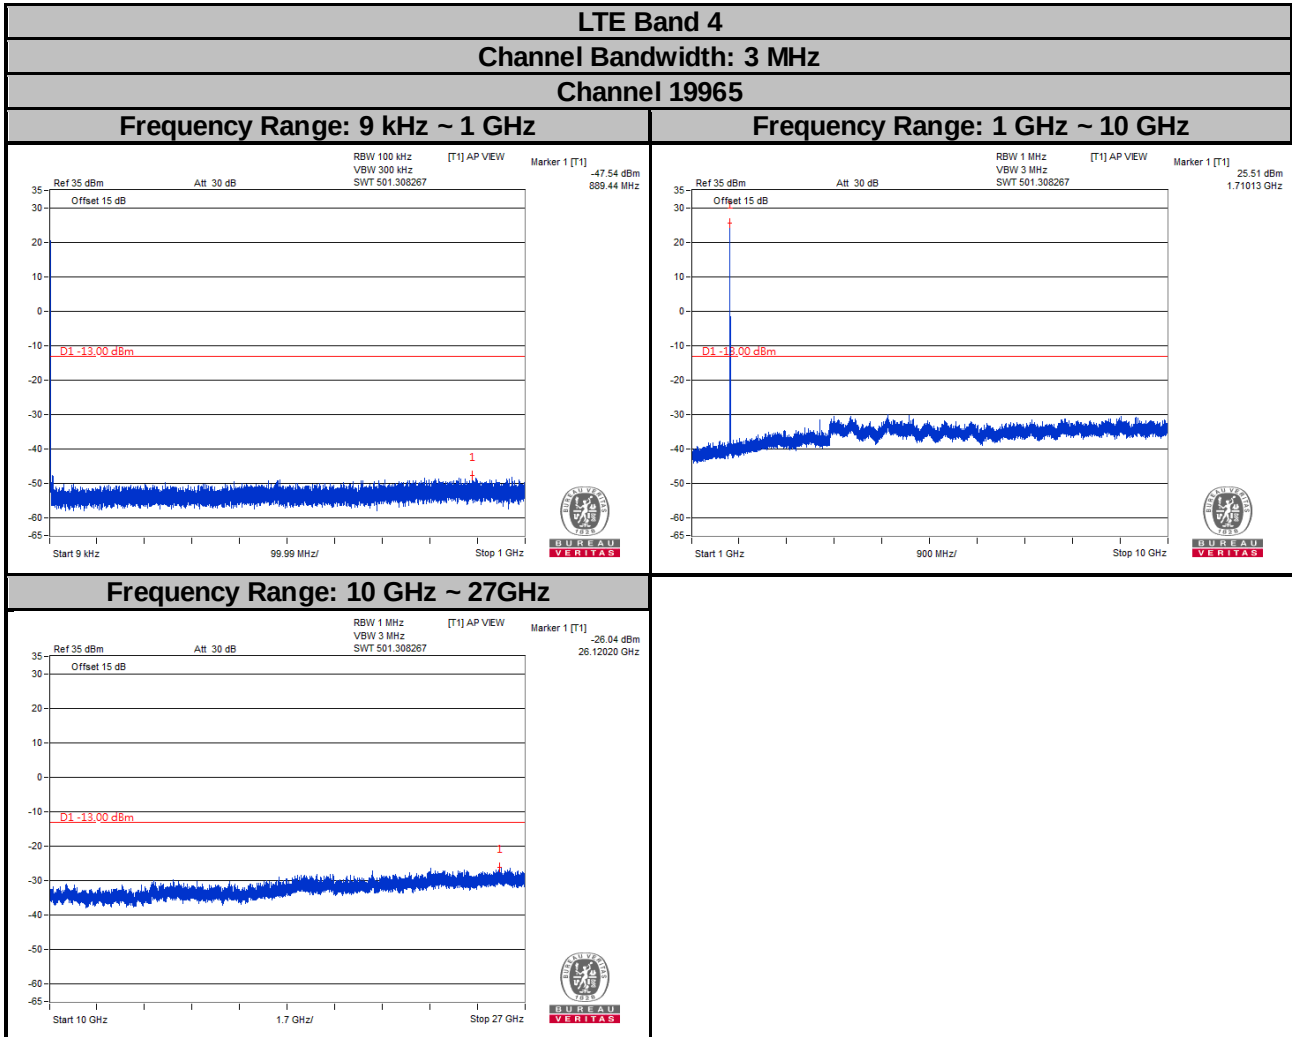


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

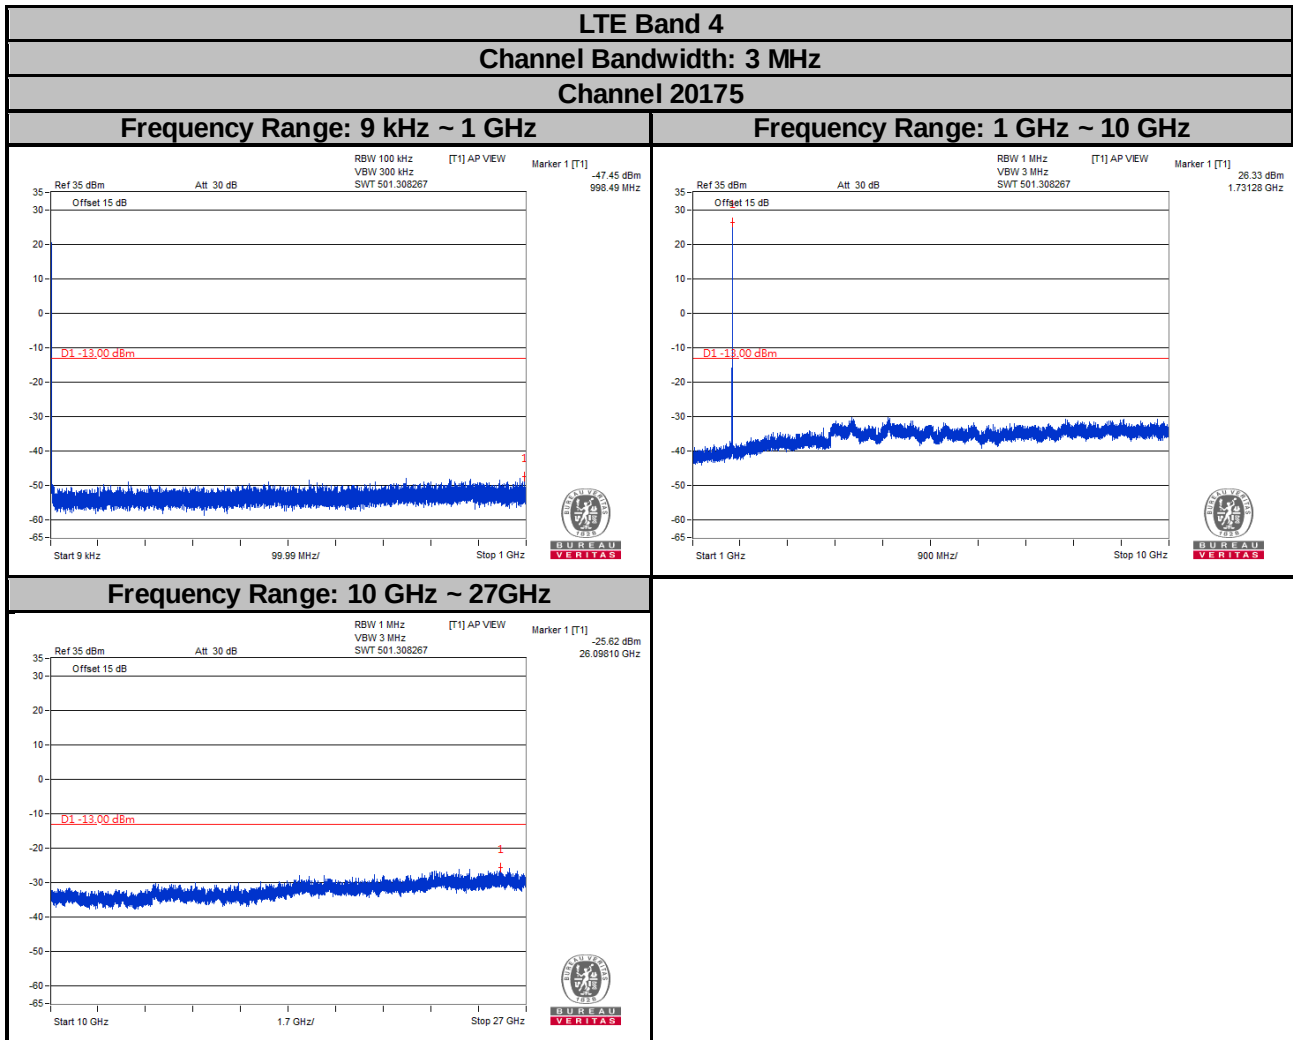


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

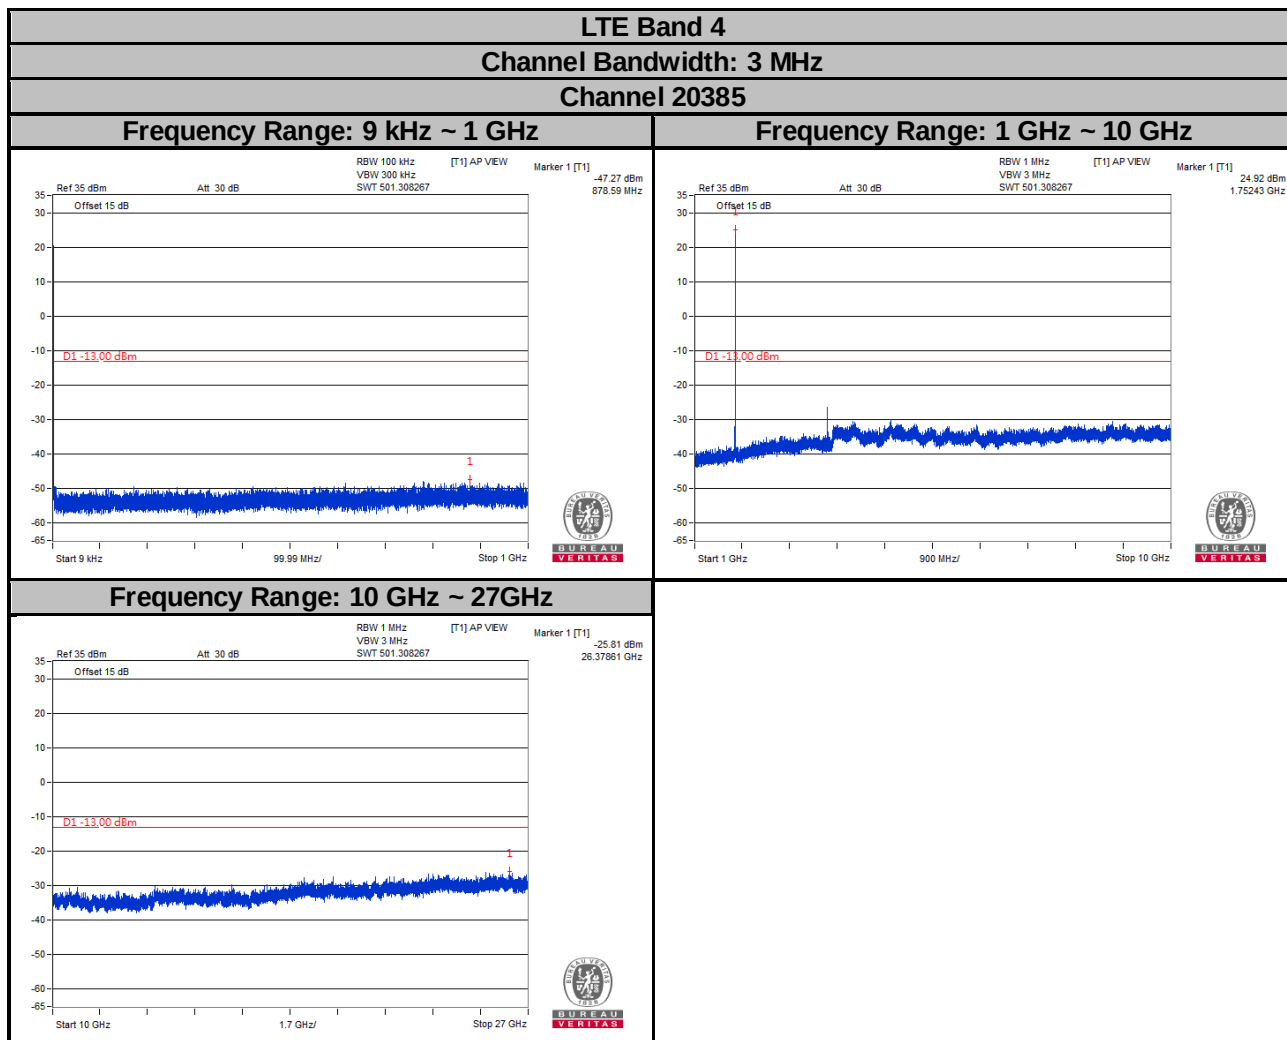


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

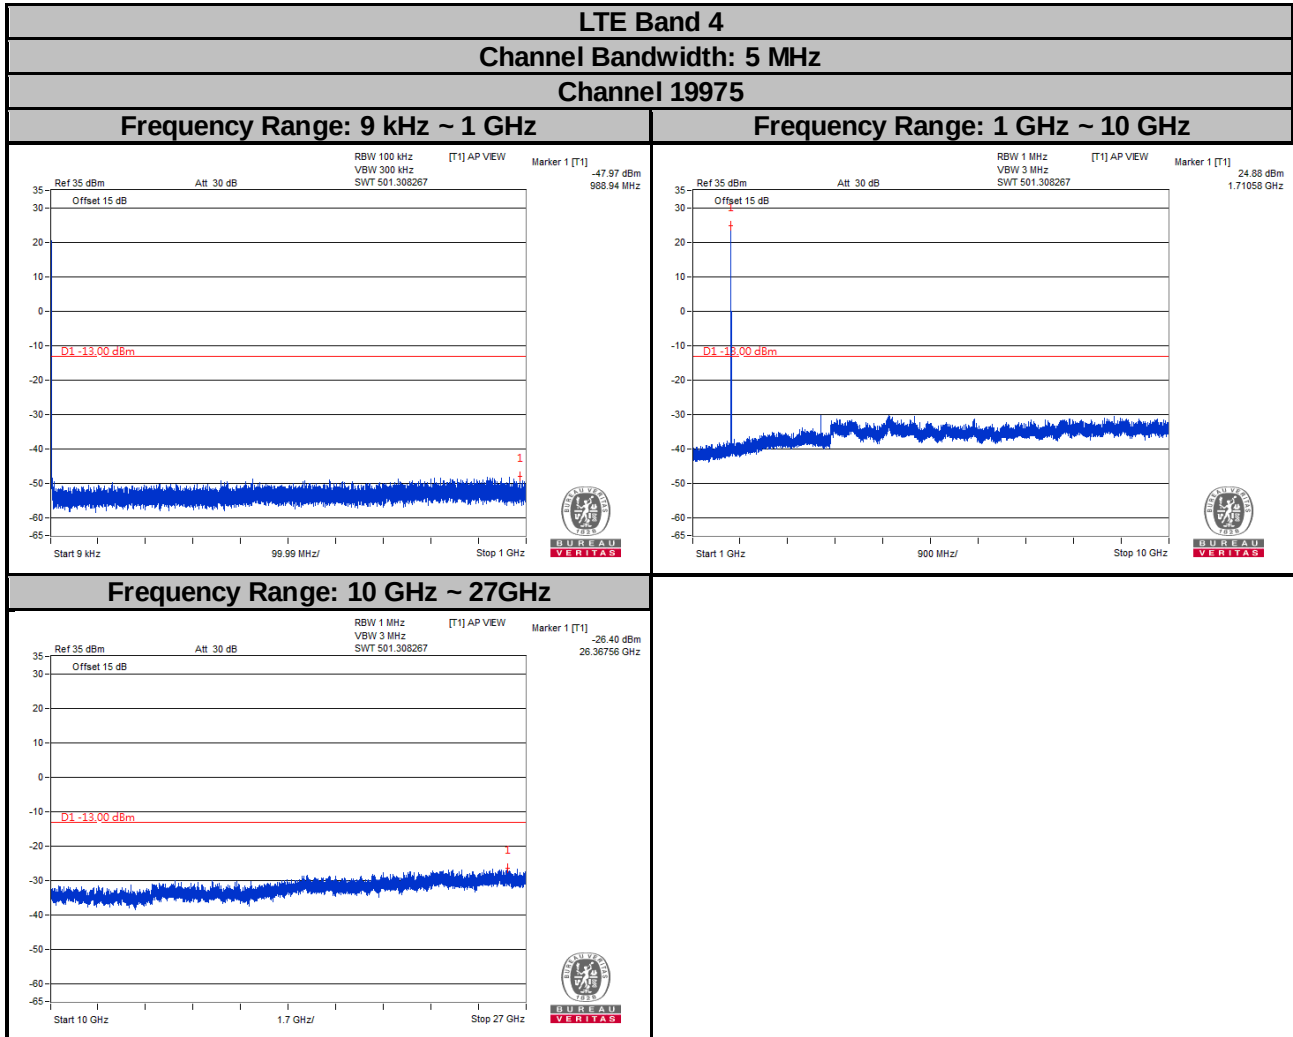


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

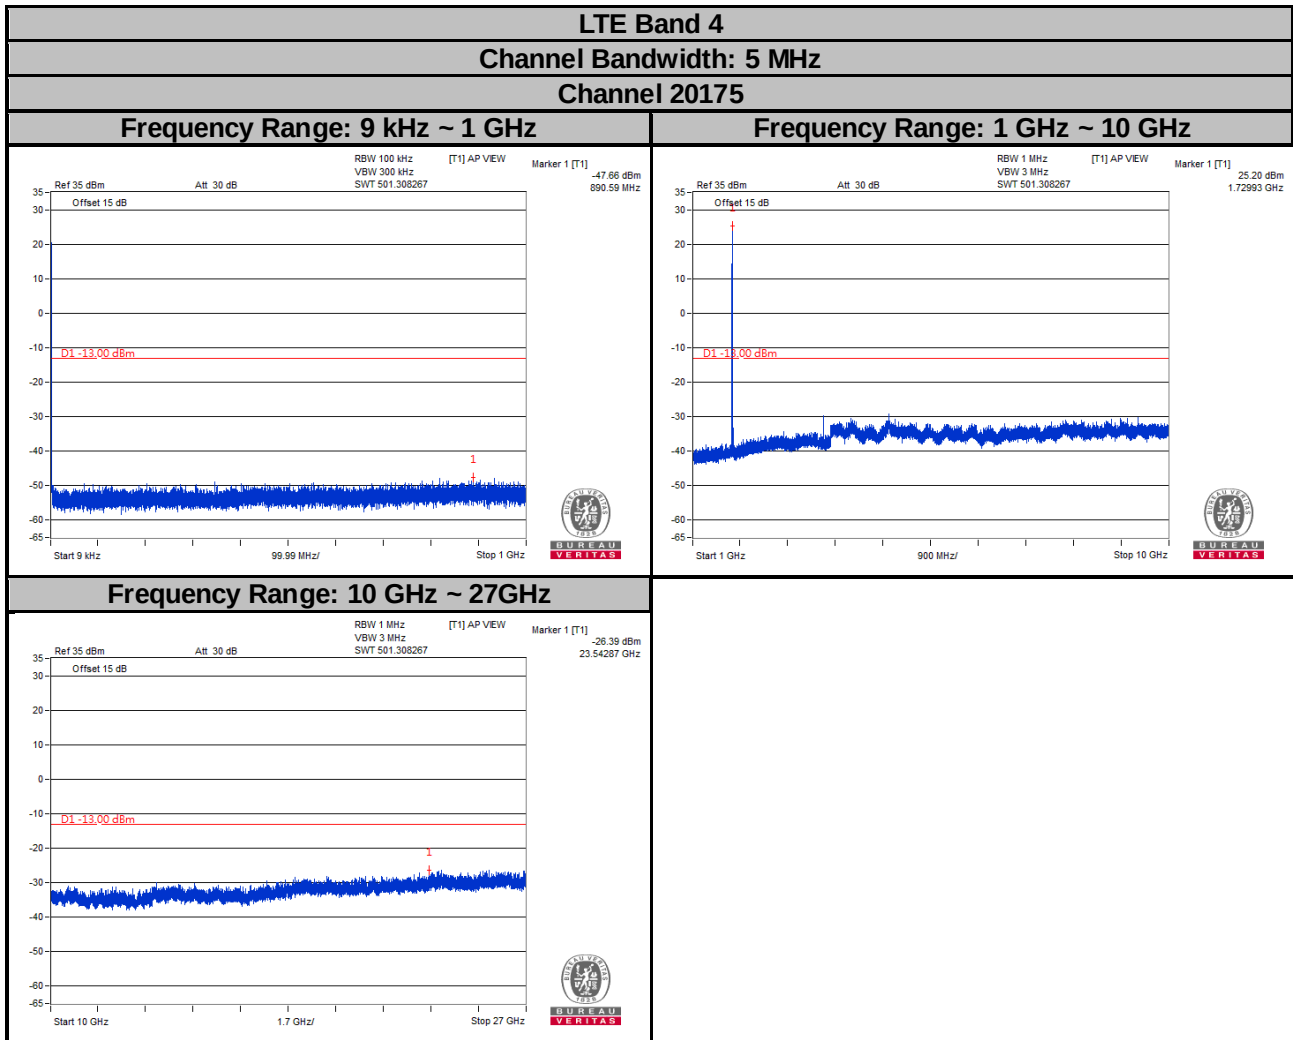


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

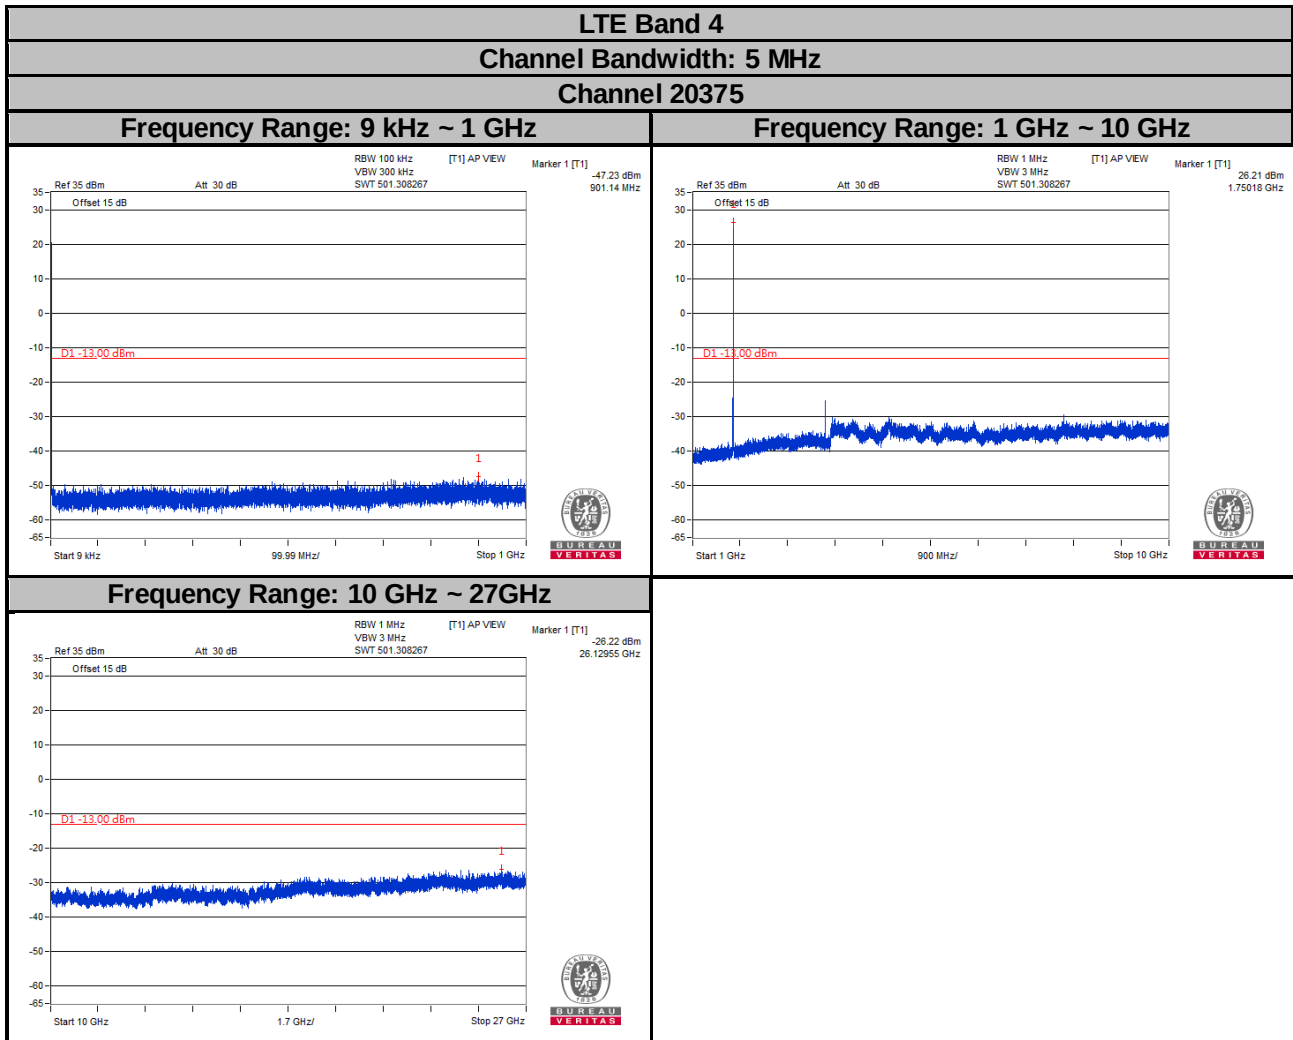


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

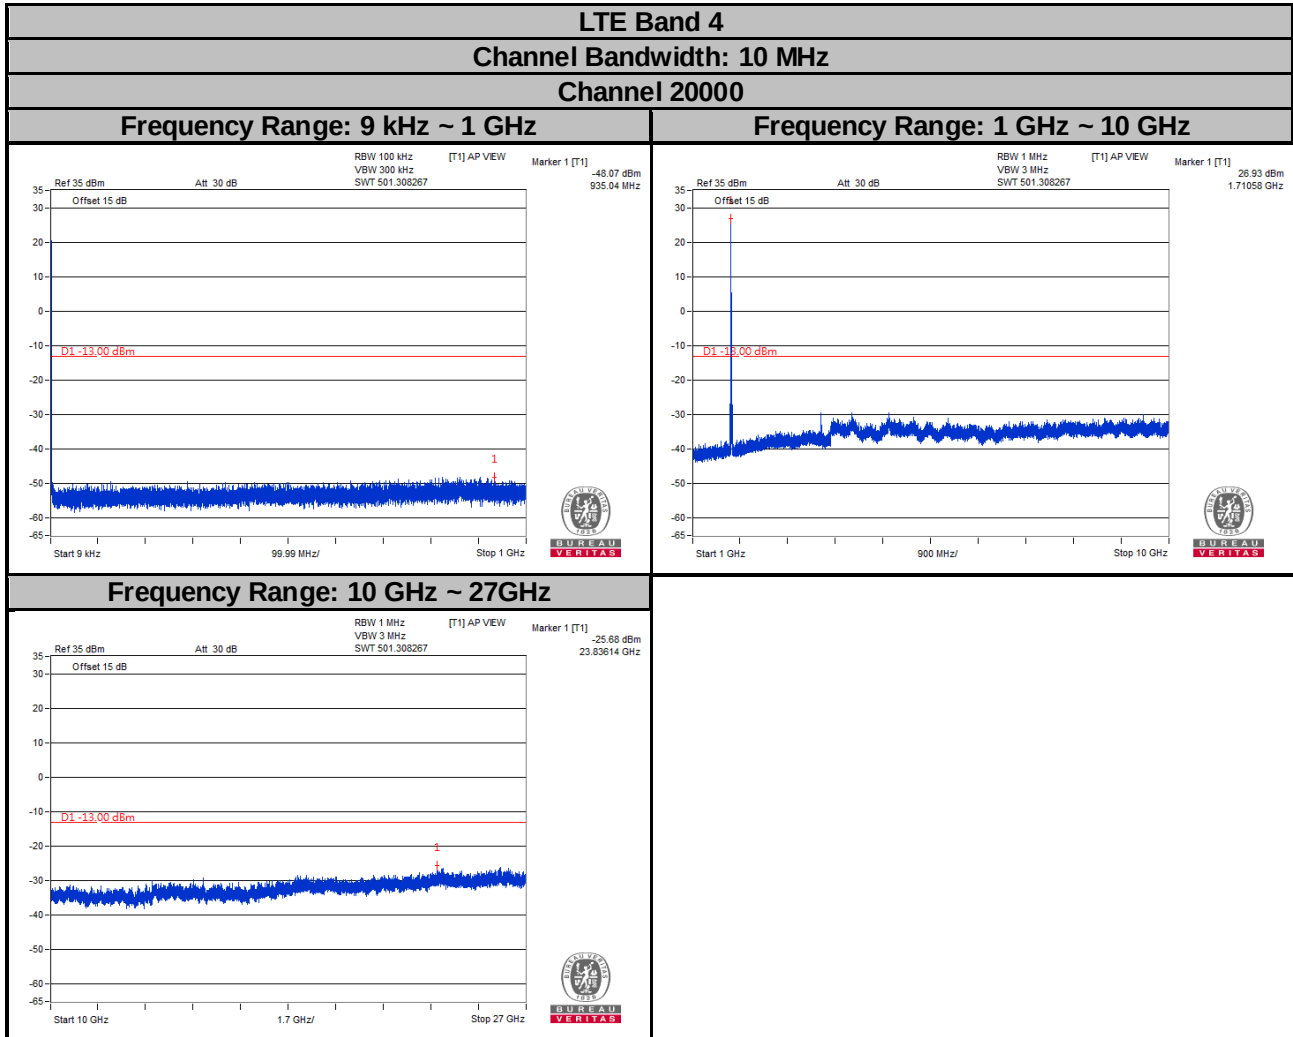


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

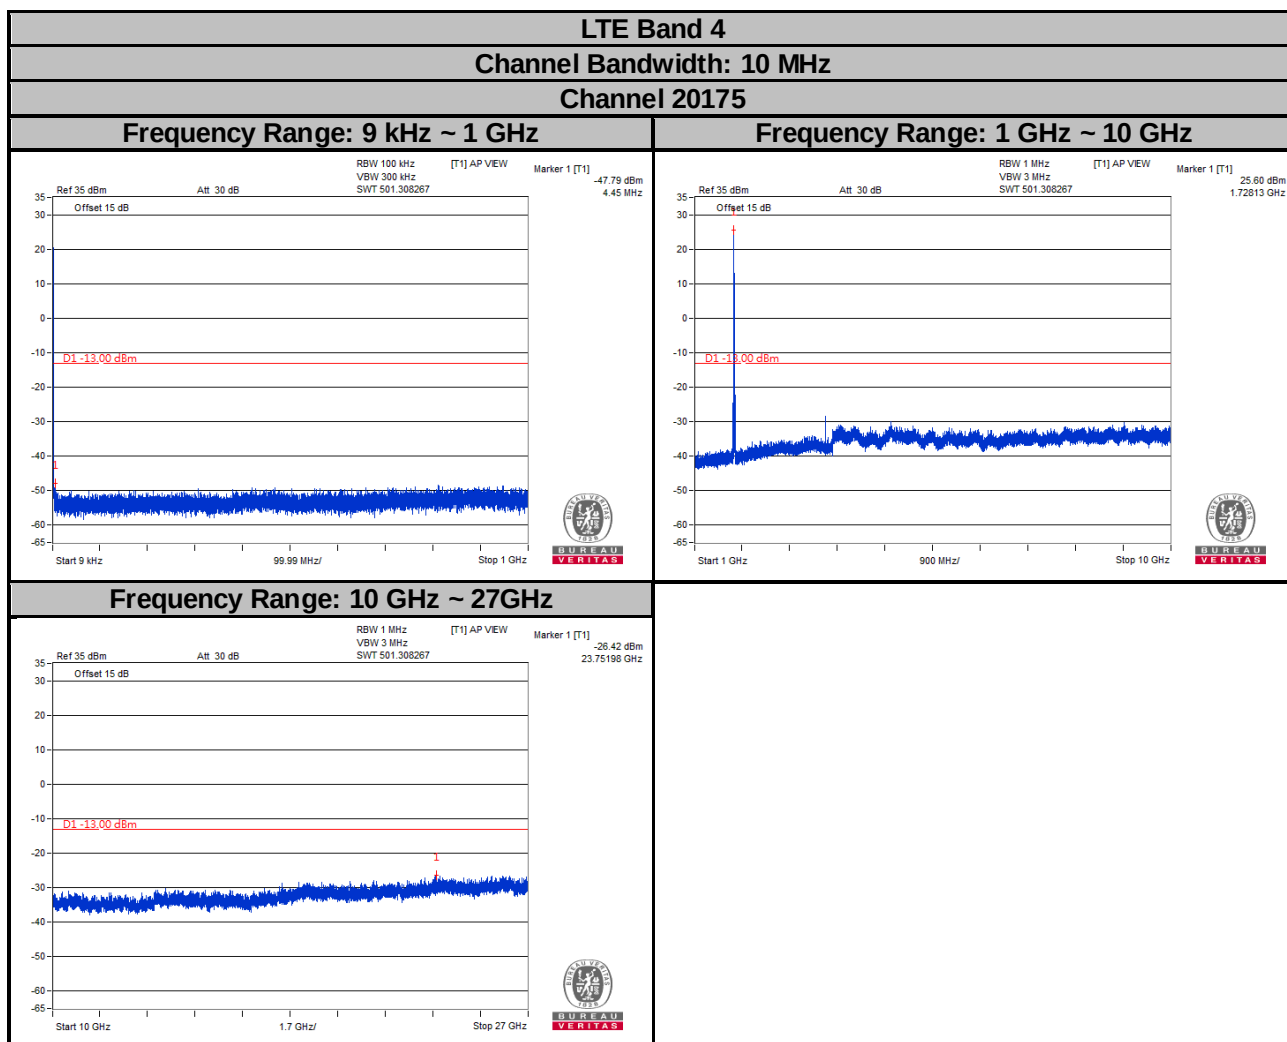


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

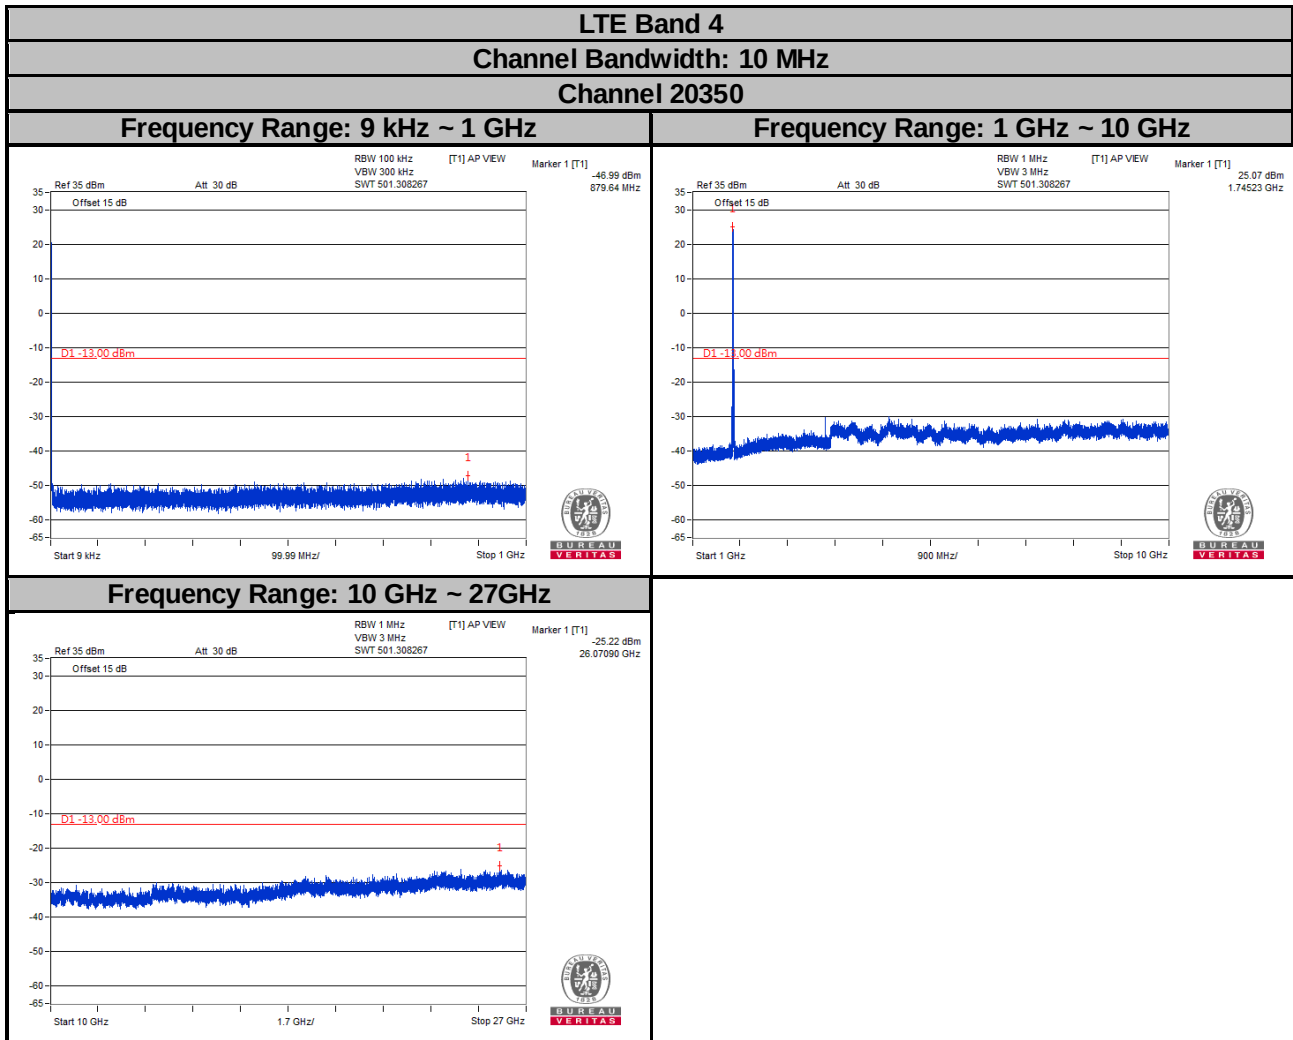


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

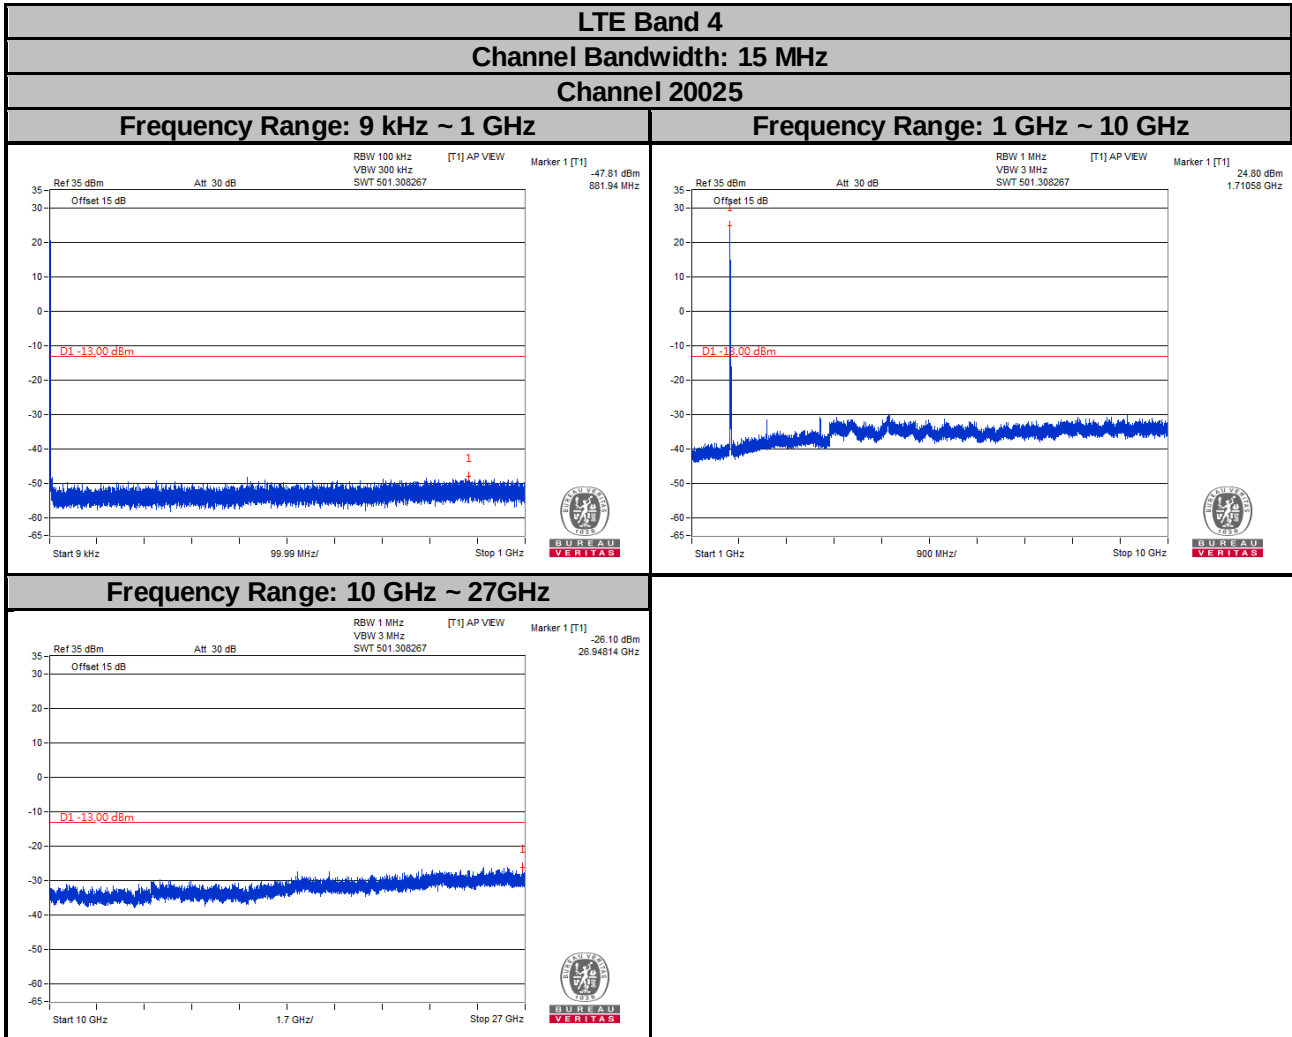


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

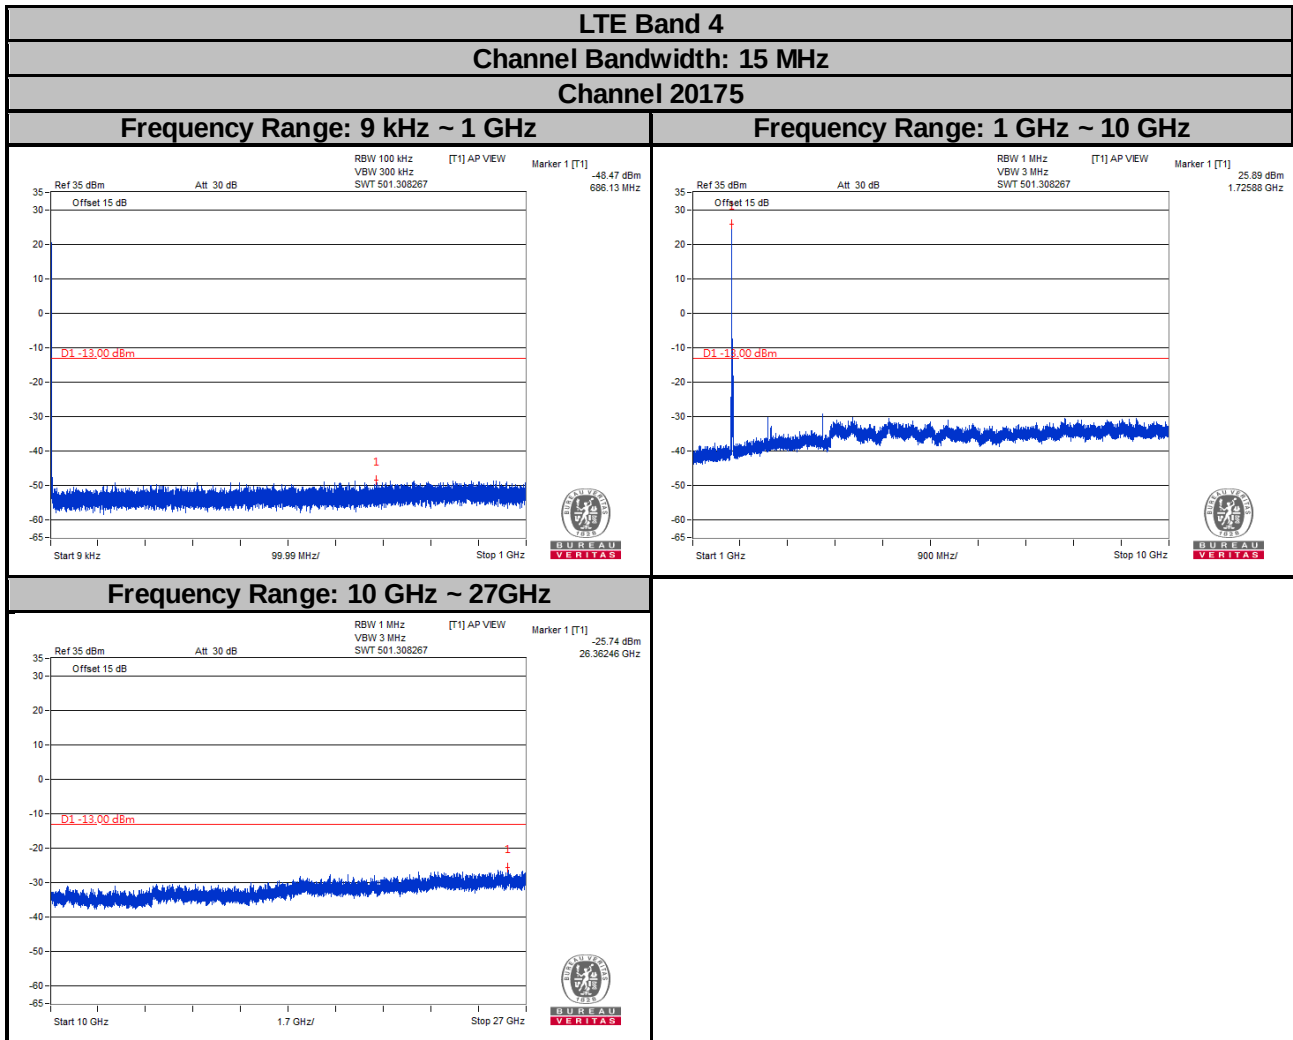

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

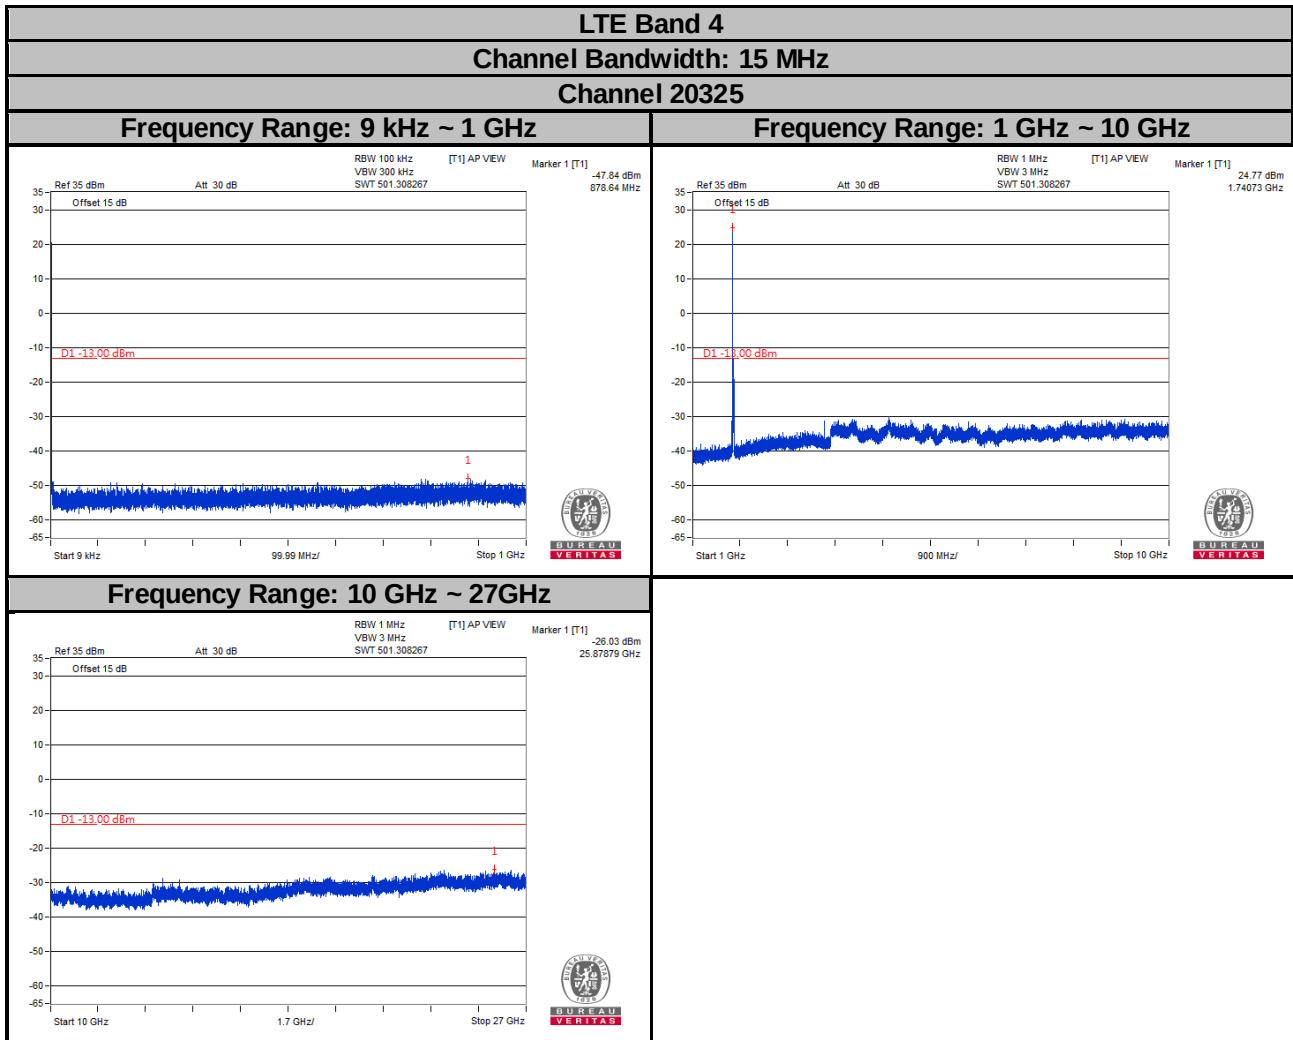

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

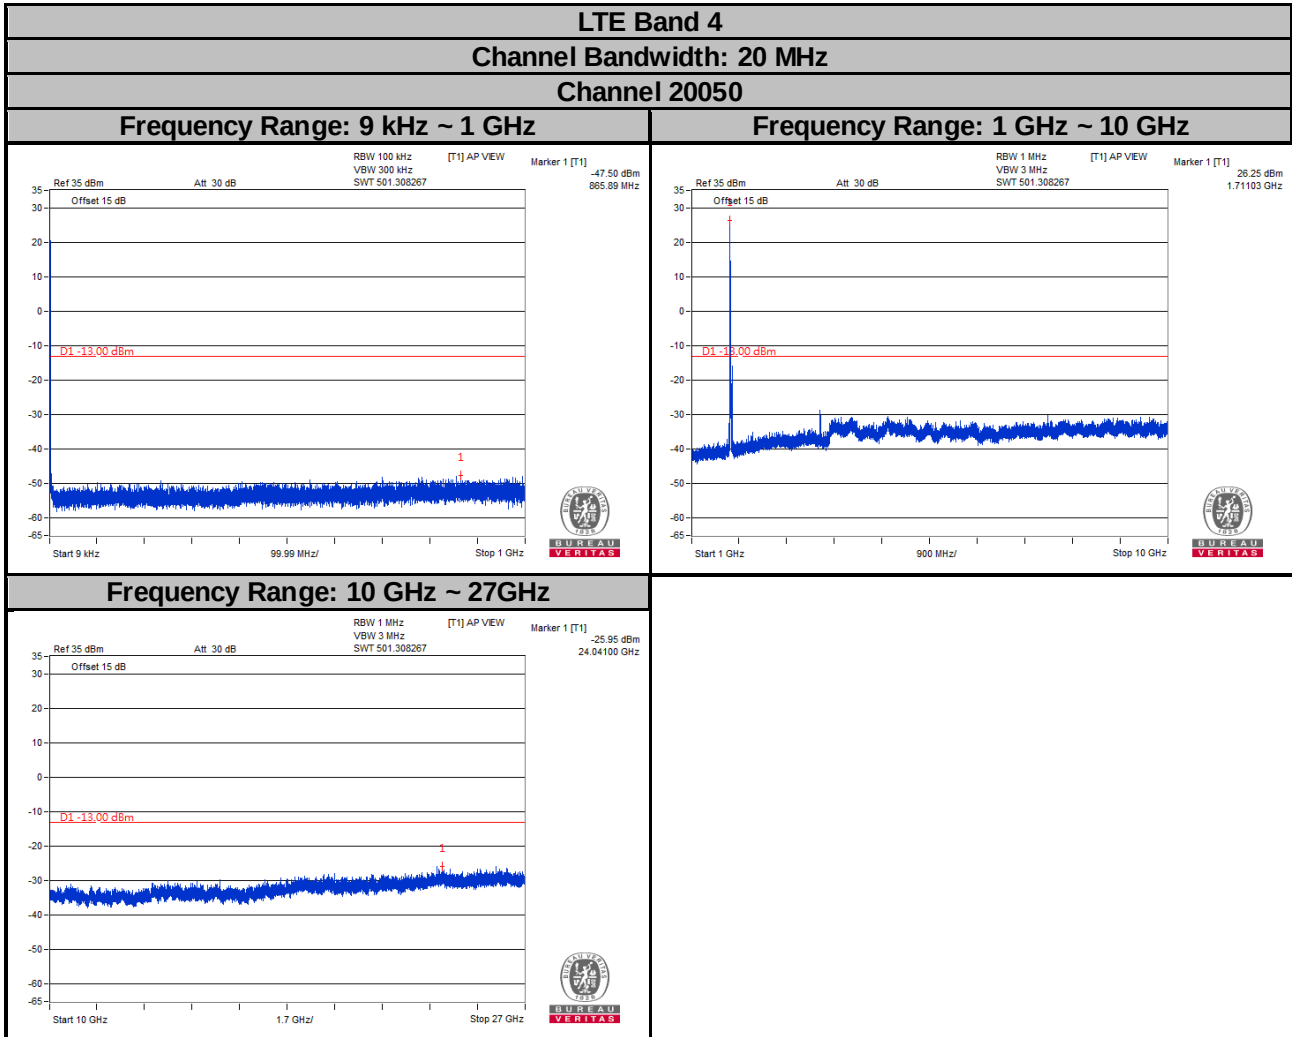


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 4


Channel Bandwidth: 20 MHz

Channel 20175


Frequency Range: 9 kHz ~ 1 GHz

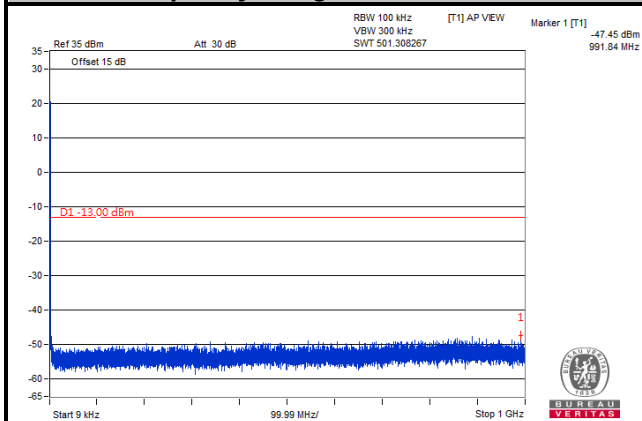


Frequency Range: 1 GHz ~ 10 GHz

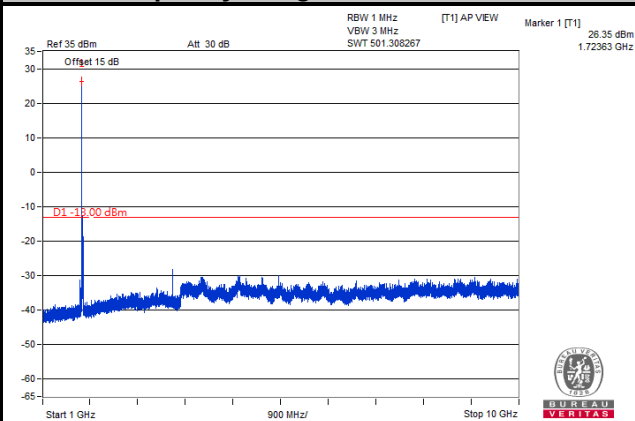

Frequency Range: 10 GHz ~ 27GHz

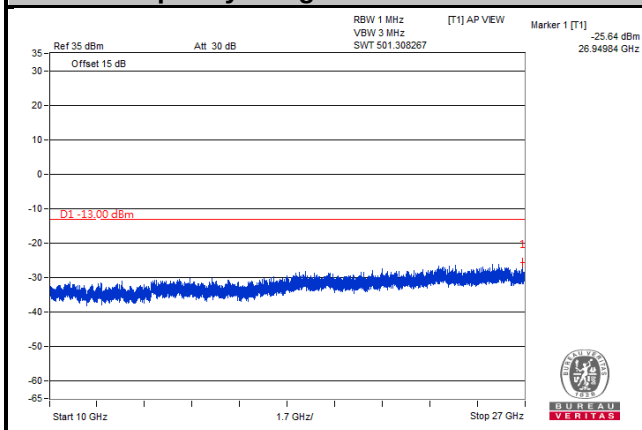

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

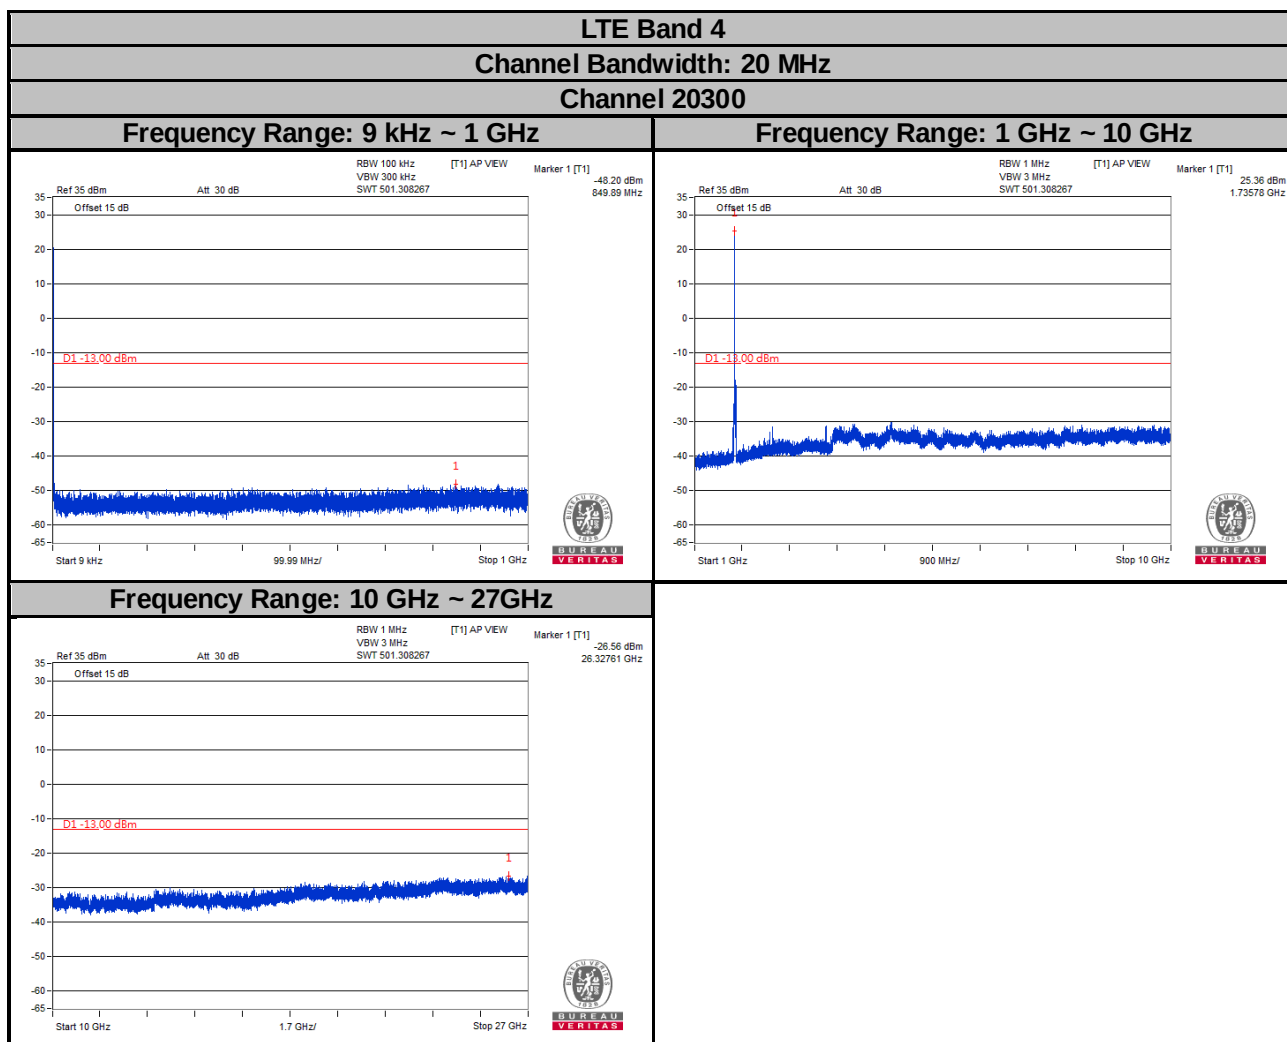


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 12


Channel Bandwidth: 1.4 MHz

Channel 23017

Frequency Range: 9 kHz ~ 1 GHz

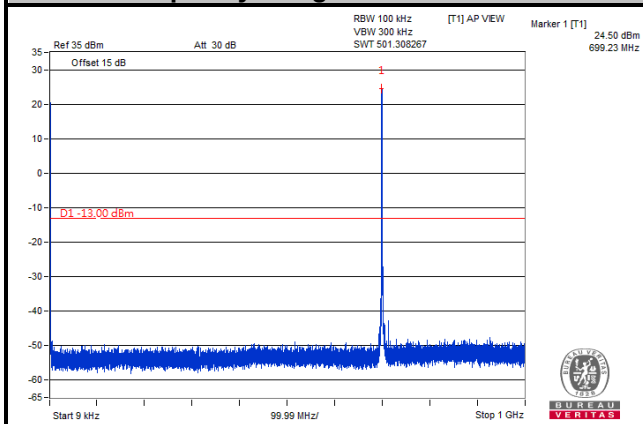


Frequency Range: 1 GHz ~ 10 GHz

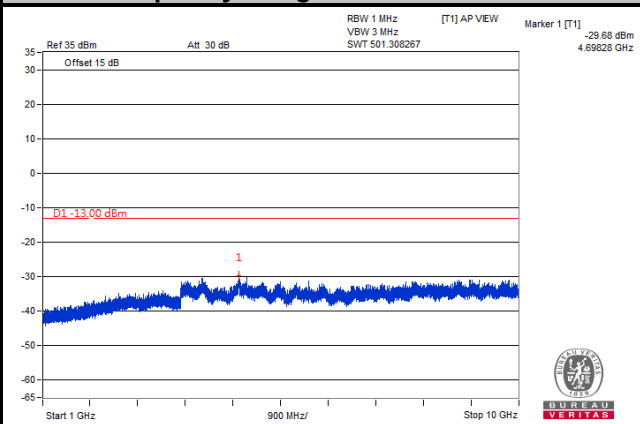


Channel 23095

Frequency Range: 9 kHz ~ 1 GHz

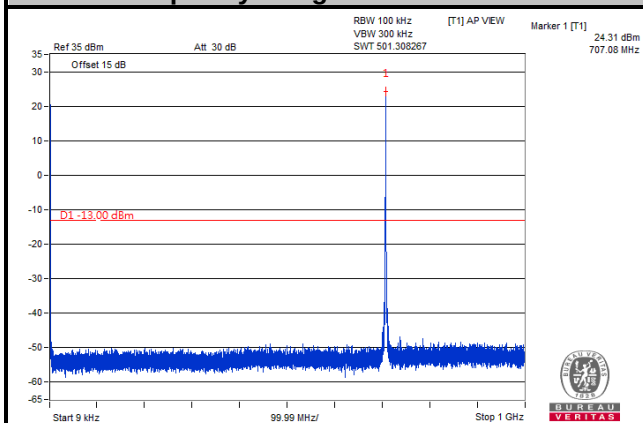


Frequency Range: 1 GHz ~ 10 GHz

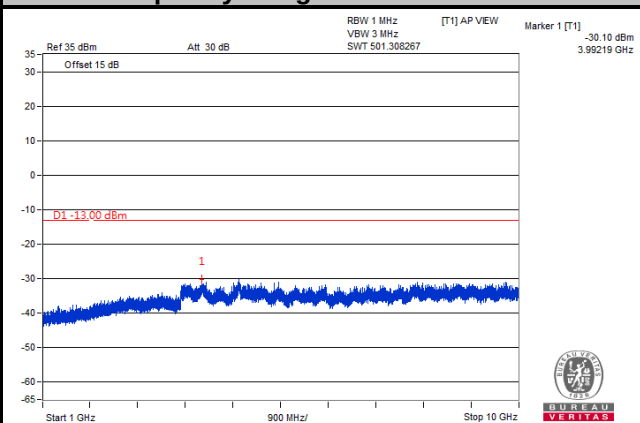


Channel 23173

Frequency Range: 9 kHz ~ 1 GHz

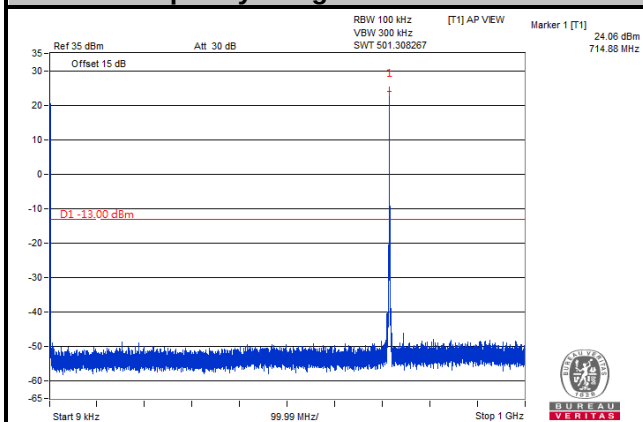

Frequency Range: 1 GHz ~ 10 GHz

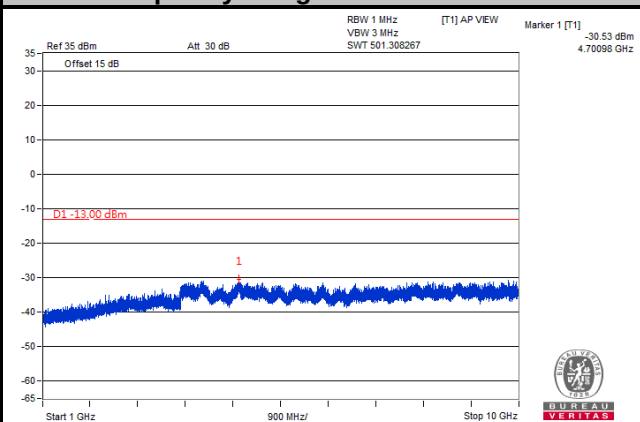


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 12


Channel Bandwidth: 3 MHz

Channel 23025

Frequency Range: 9 kHz ~ 1 GHz

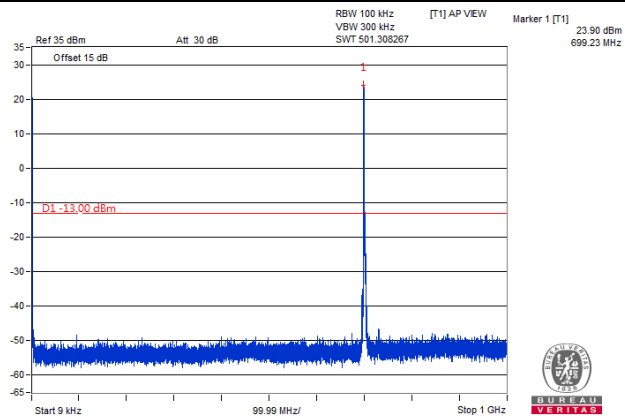


Frequency Range: 1 GHz ~ 10 GHz

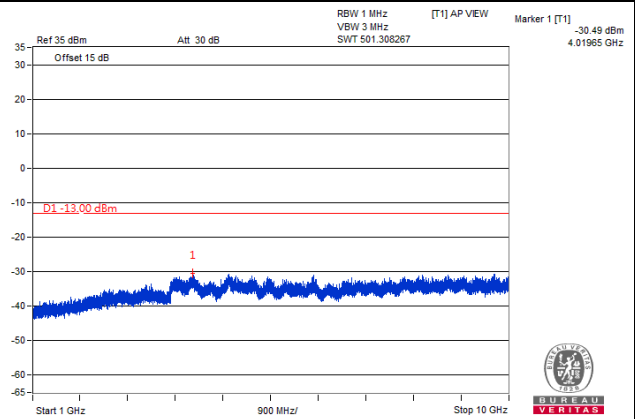


Channel 23095

Frequency Range: 9 kHz ~ 1 GHz

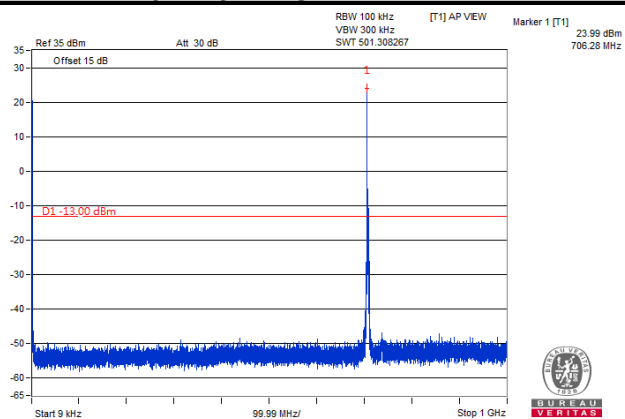


Frequency Range: 1 GHz ~ 10 GHz

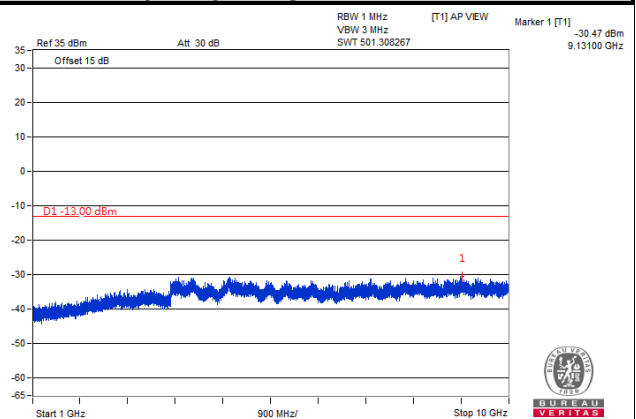


Channel 23165

Frequency Range: 9 kHz ~ 1 GHz

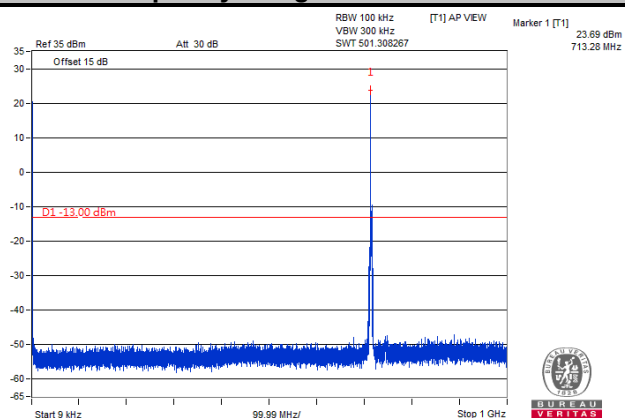

Frequency Range: 1 GHz ~ 10 GHz

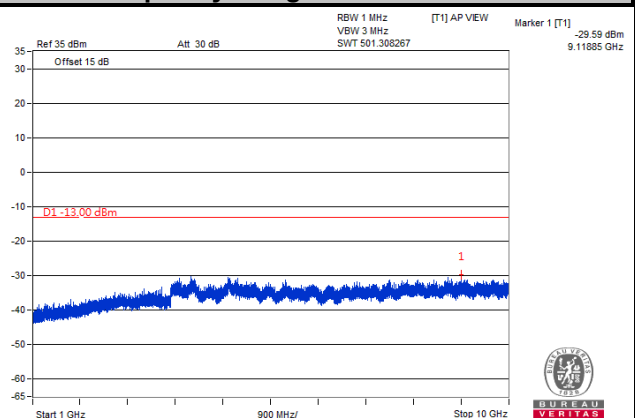


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 12


Channel Bandwidth: 5 MHz

Channel 23035

Frequency Range: 9 kHz ~ 1 GHz

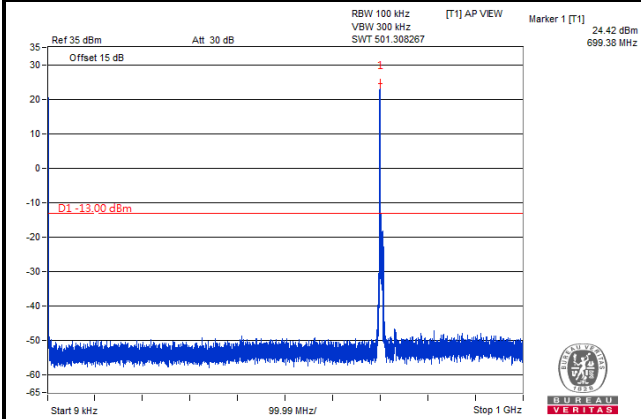


Frequency Range: 1 GHz ~ 10 GHz

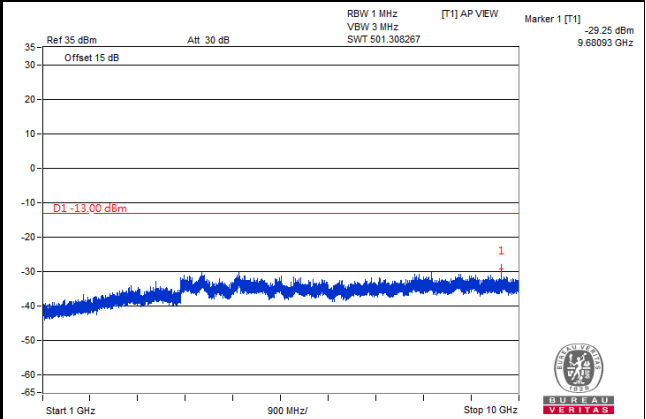


Channel 23095

Frequency Range: 9 kHz ~ 1 GHz

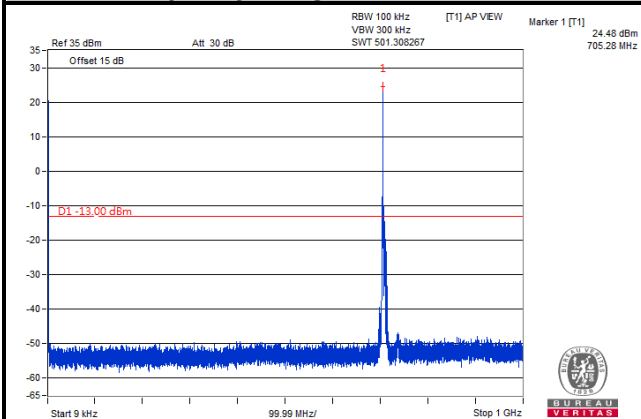


Frequency Range: 1 GHz ~ 10 GHz

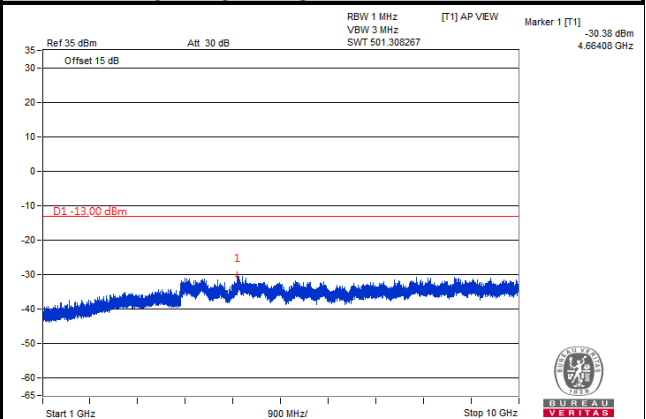


Channel 23155


Frequency Range: 9 kHz ~ 1 GHz

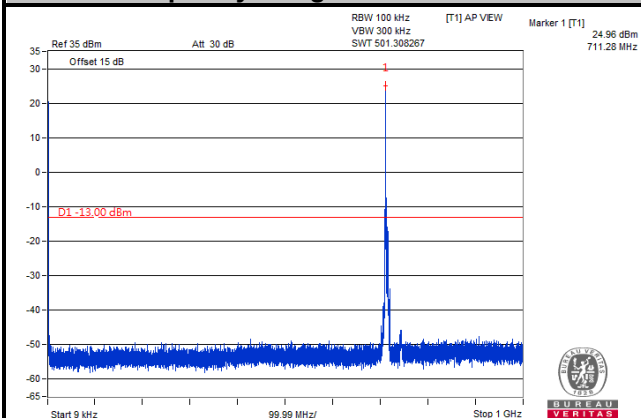

Frequency Range: 1 GHz ~ 10 GHz

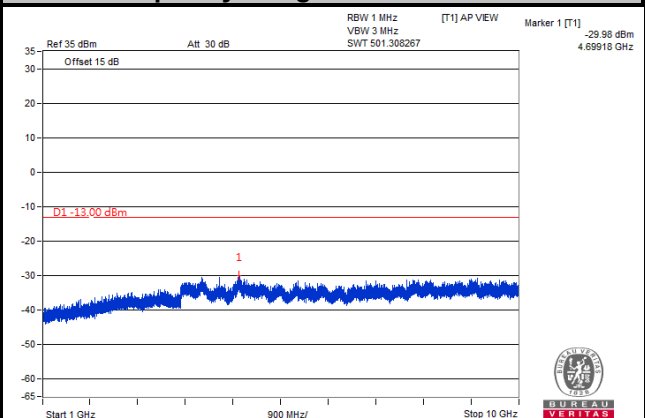

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

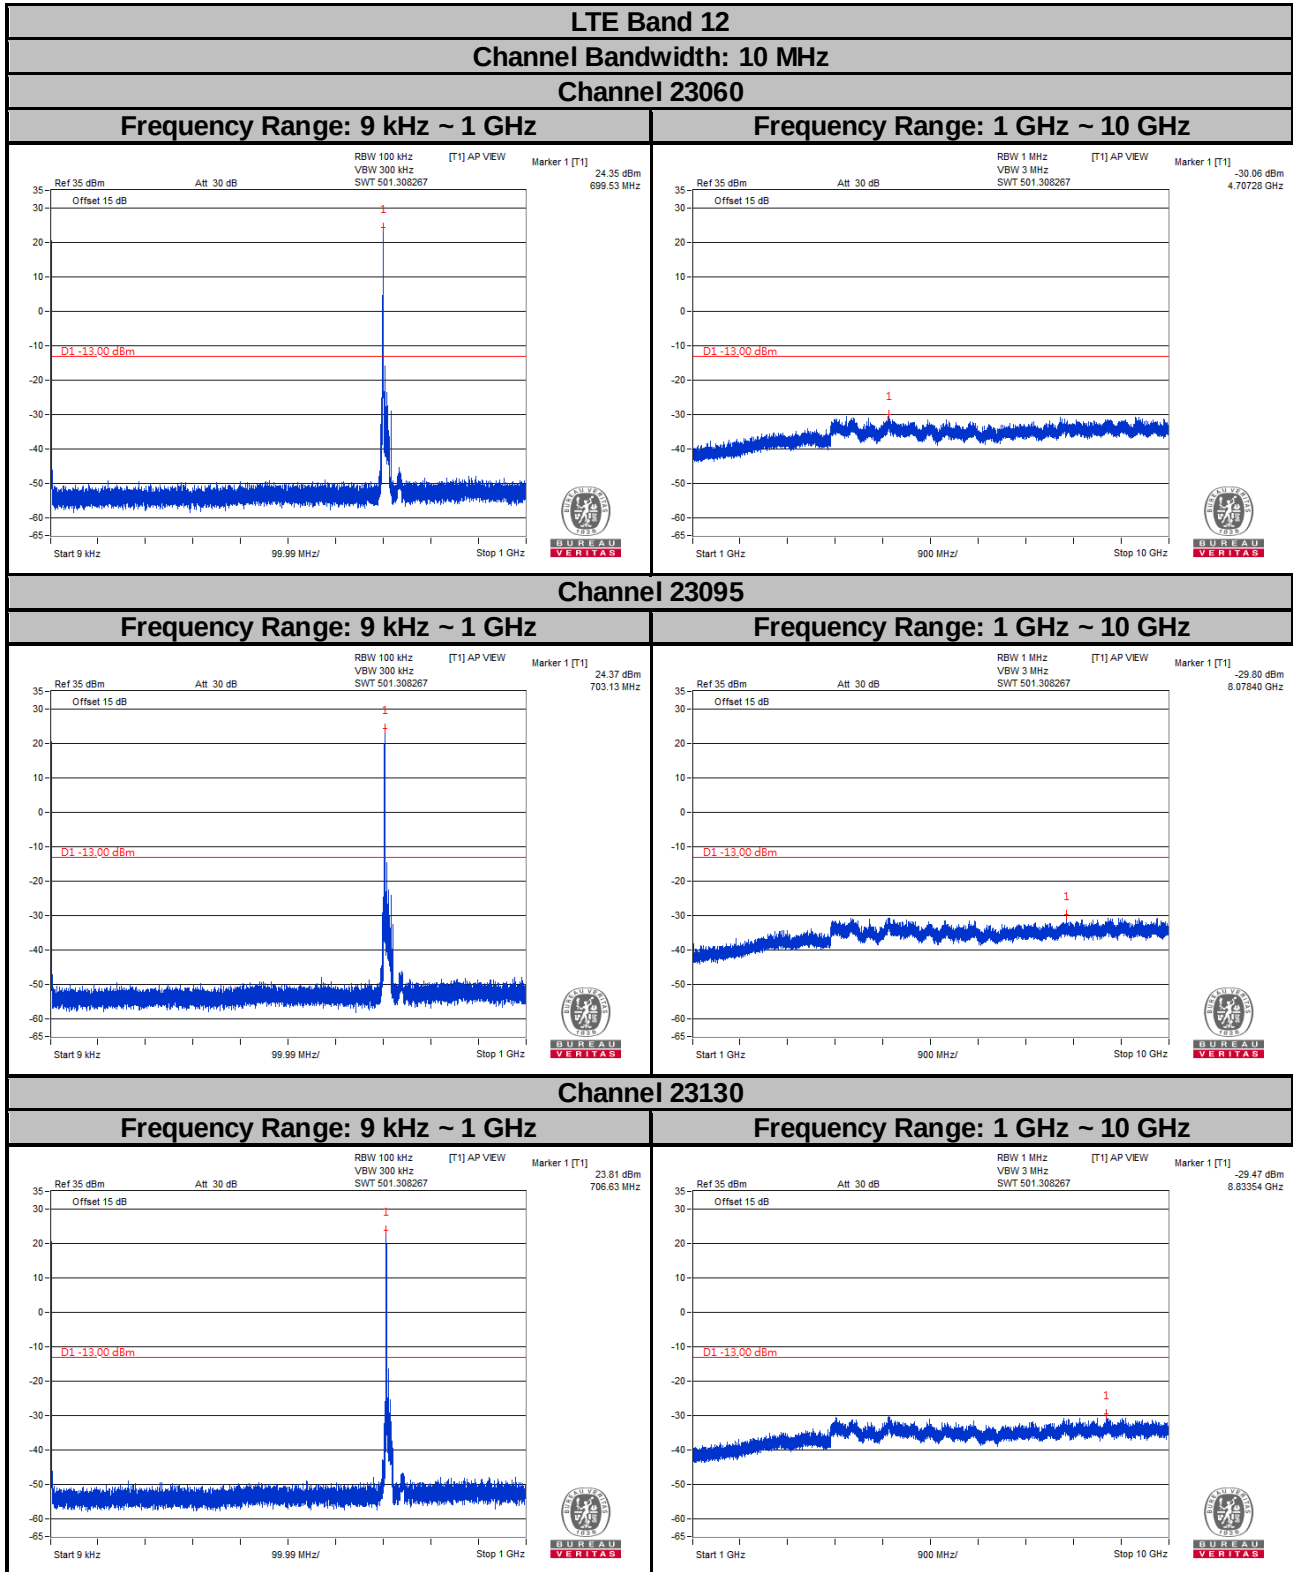

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

- a. The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission is equal to -13 dBm.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Note: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

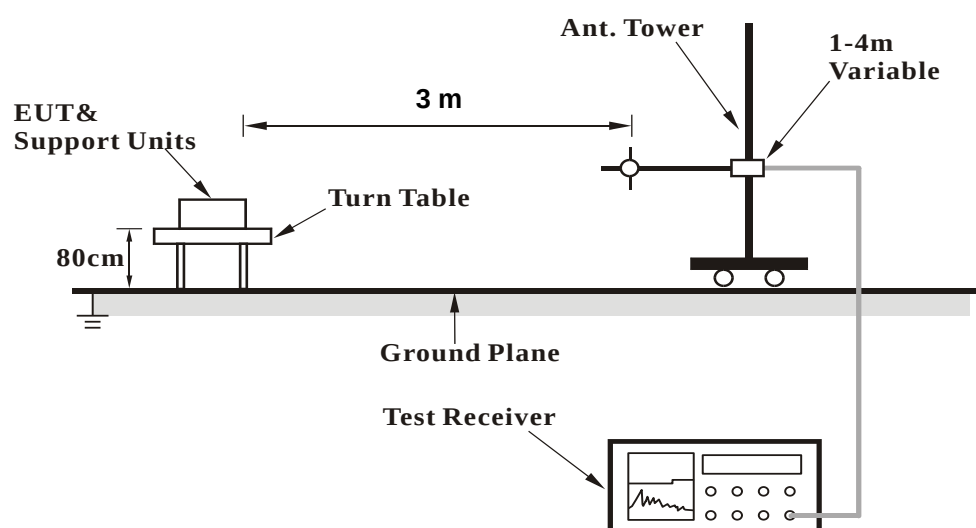

<Radiated Emission above 1 GHz>

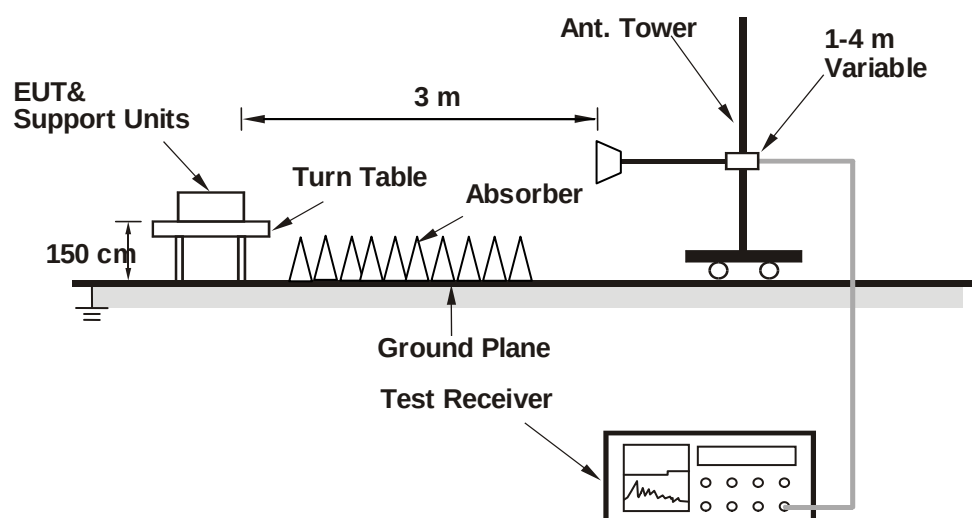

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

LTE Band 4

Channel Bandwidth: 1.4 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

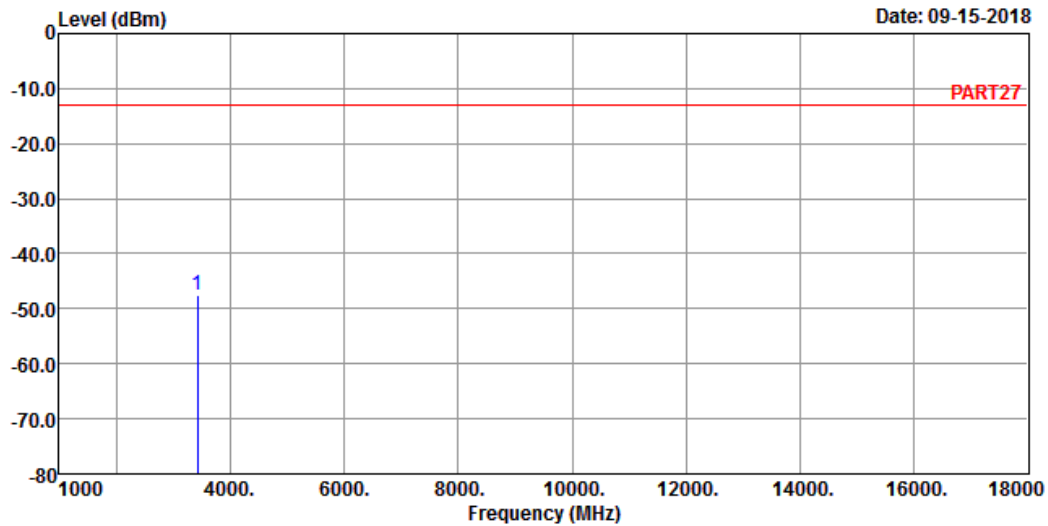

Site : 966 Chamber 5
 Condition: PART27 HORIZONTAL
 Remak : LTE Band 4 QPSK_1.4M Link_L-CH
 Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 3421.40 -47.48 -39.14 -13.00 -34.48 -8.34 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 09-15-2018

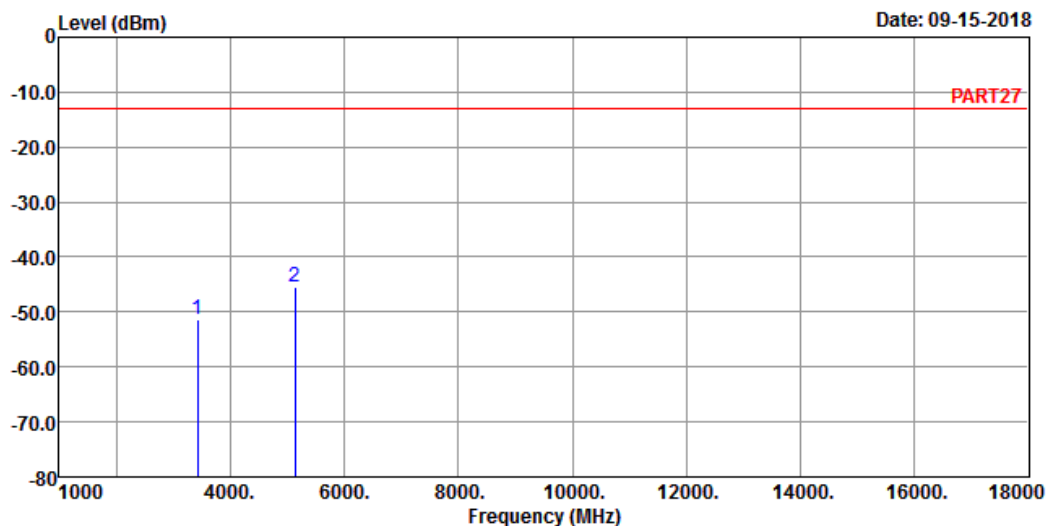

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 4 QPSK_1.4M Link_L-CH

Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3421.40	-51.23	-42.89	-13.00	-38.23	-8.34	Peak
2 pp	5132.10	-45.38	-43.64	-13.00	-32.38	-1.74	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 1

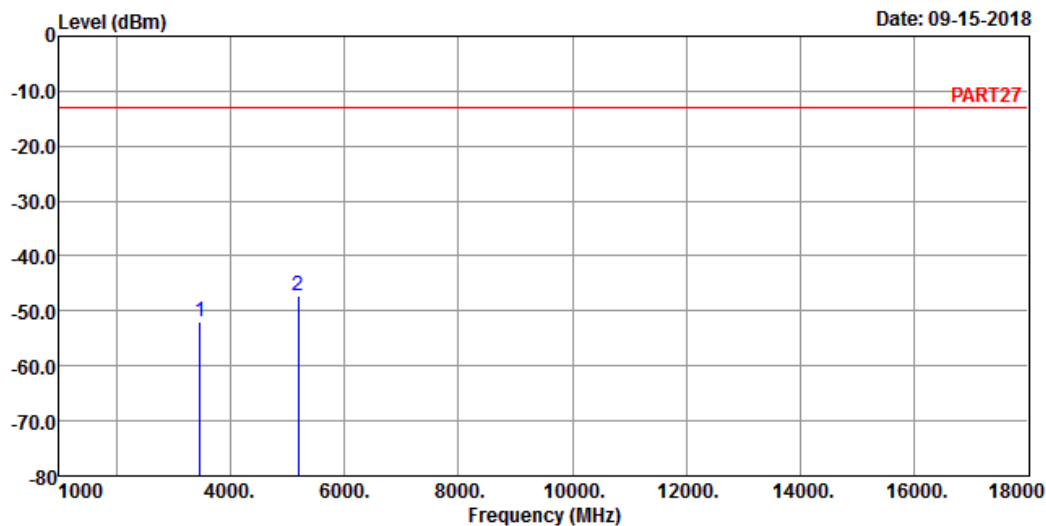

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 4 QPSK_1.4M Link_M-CH
Tested by: Thomas Wei


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3465.00	-51.84	-43.96	-13.00	-38.84	-7.88	Peak
2 pp	5197.50	-47.09	-45.02	-13.00	-34.09	-2.07	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

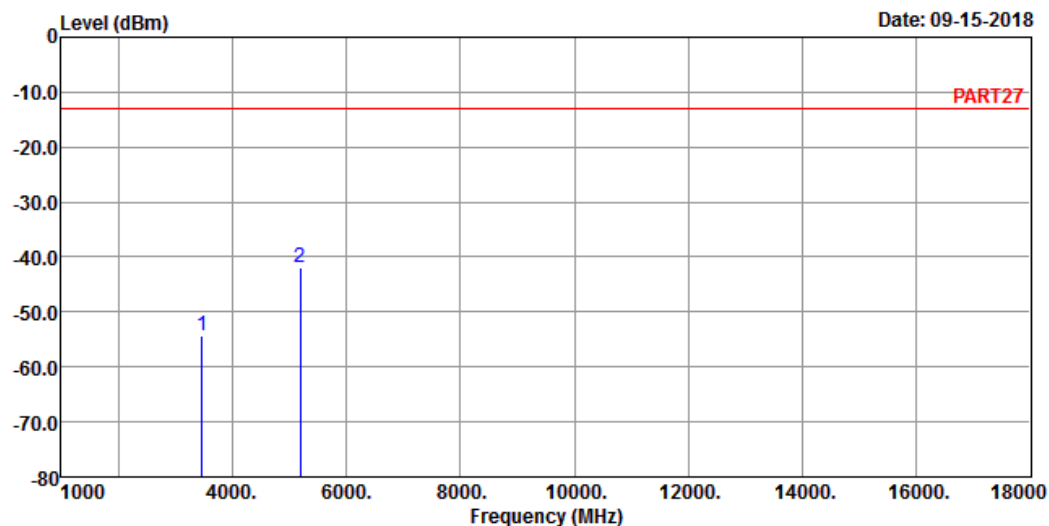

Site : 966 Chamber 5
Condition: PART27 VERTICAL
Remak : LTE Band 4 QPSK_1.4M Link_M-CH
Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3465.00	-54.41	-46.53	-13.00	-41.41	-7.88	Peak
2 pp	5197.50	-42.04	-39.97	-13.00	-29.04	-2.07	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

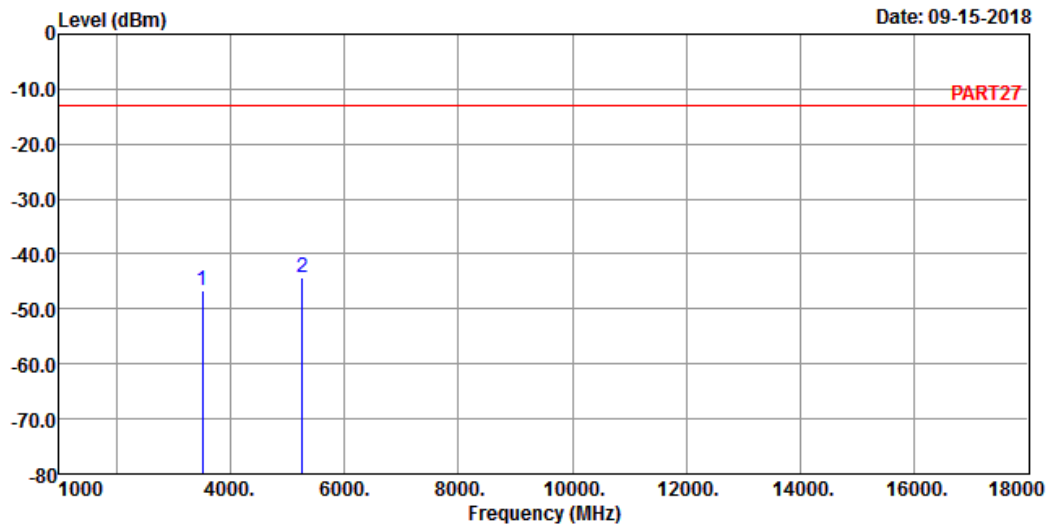

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 4 QPSK_1.4M Link_H-CH
Tested by: Thomas Wei


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3508.60	-46.75	-39.30	-13.00	-33.75	-7.45	Peak
2 pp	5262.90	-44.14	-41.62	-13.00	-31.14	-2.52	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

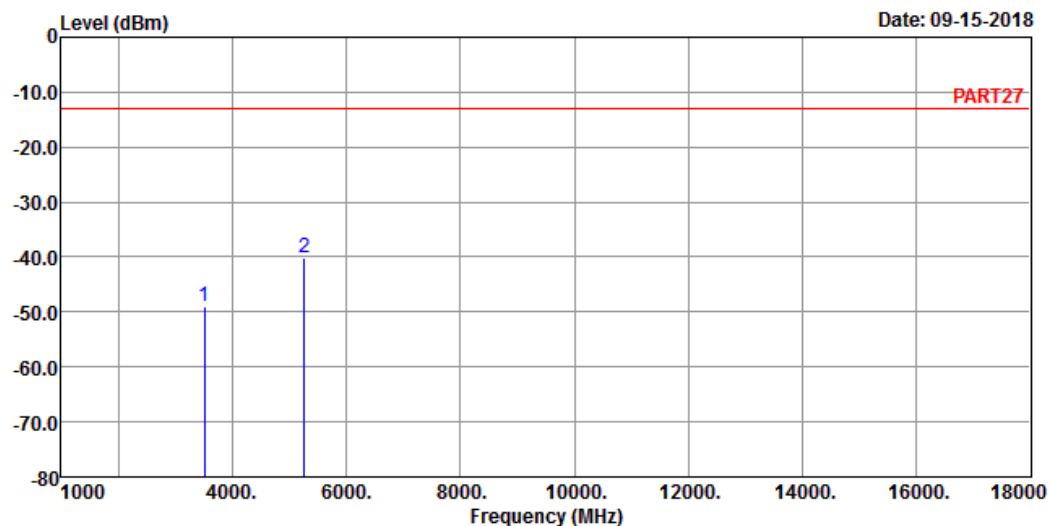

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : LTE Band 4 QPSK_1.4M Link_H-CH
 Tested by: Thomas Wei

			Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1	3508.60	-48.98	-41.53	-13.00	-35.98	-7.45	Peak
2 pp	5262.90	-40.17	-37.65	-13.00	-27.17	-2.52	Peak

Channel Bandwidth: 5 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

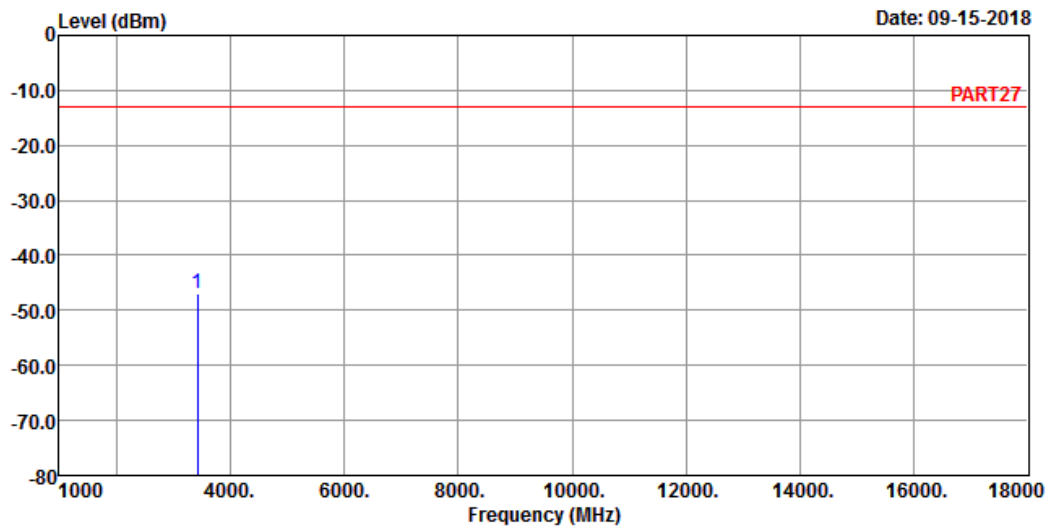

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 4 QPSK_5M Link_L-CH

Tested by: Thomas Wei


Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3425.00	-46.98	-38.64	-13.00	-33.98	-8.34	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

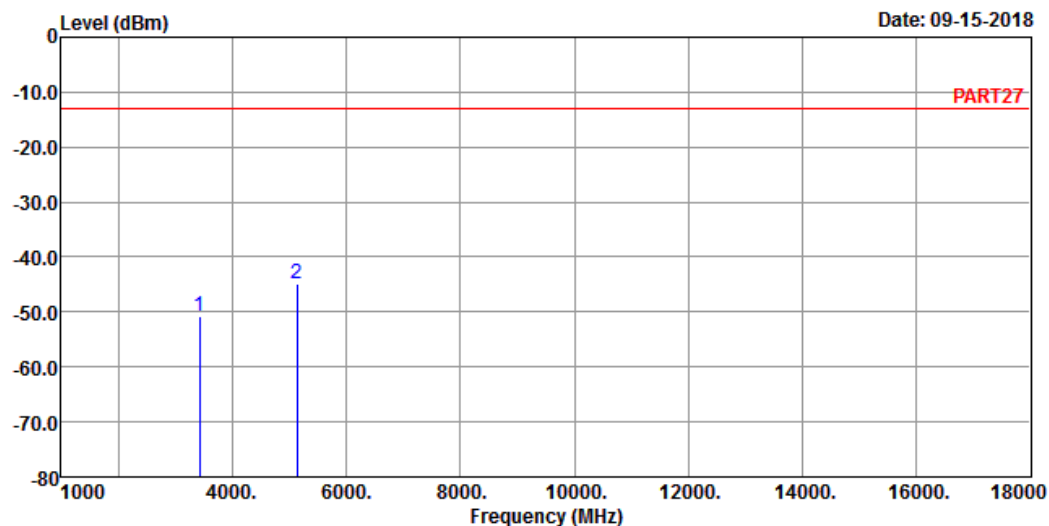

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 4 QPSK_5M Link_L-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3425.00	-50.83	-42.49	-13.00	-37.83	-8.34	Peak
2 pp	5137.50	-44.98	-43.24	-13.00	-31.98	-1.74	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

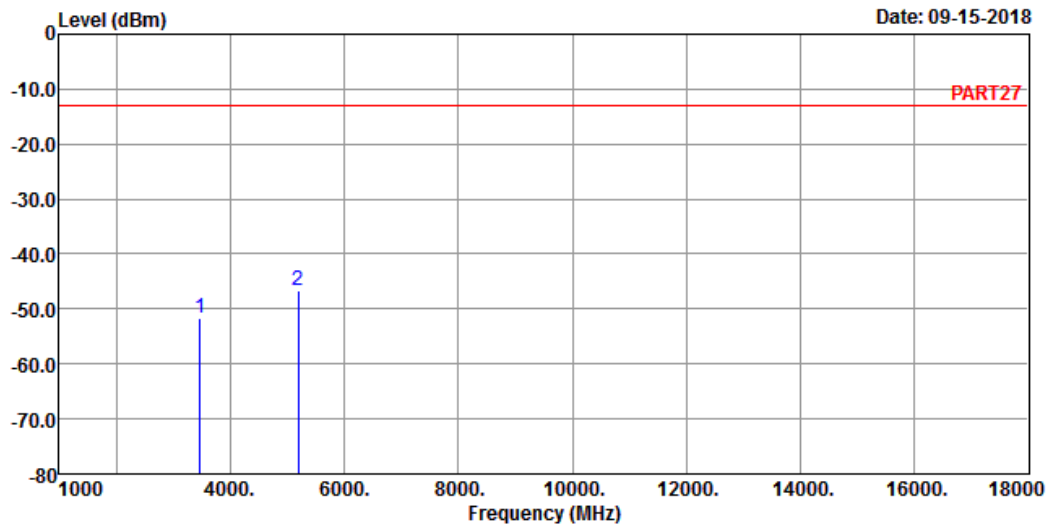

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : LTE Band 4 QPSK_5M Link_M-CH

Tested by: Thomas Wei


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3465.00	-51.65	-43.77	-13.00	-38.65	-7.88	Peak
2 pp	5197.50	-46.71	-44.64	-13.00	-33.71	-2.07	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

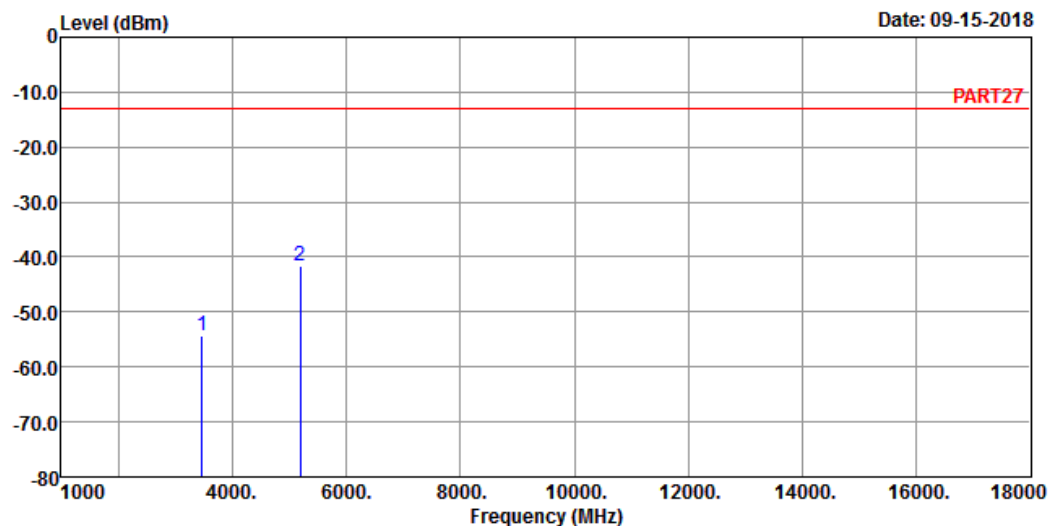

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 4 QPSK_5M Link_M-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3465.00	-54.41	-46.53	-13.00	-41.41	-7.88	Peak
2 pp	5197.50	-41.57	-39.50	-13.00	-28.57	-2.07	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

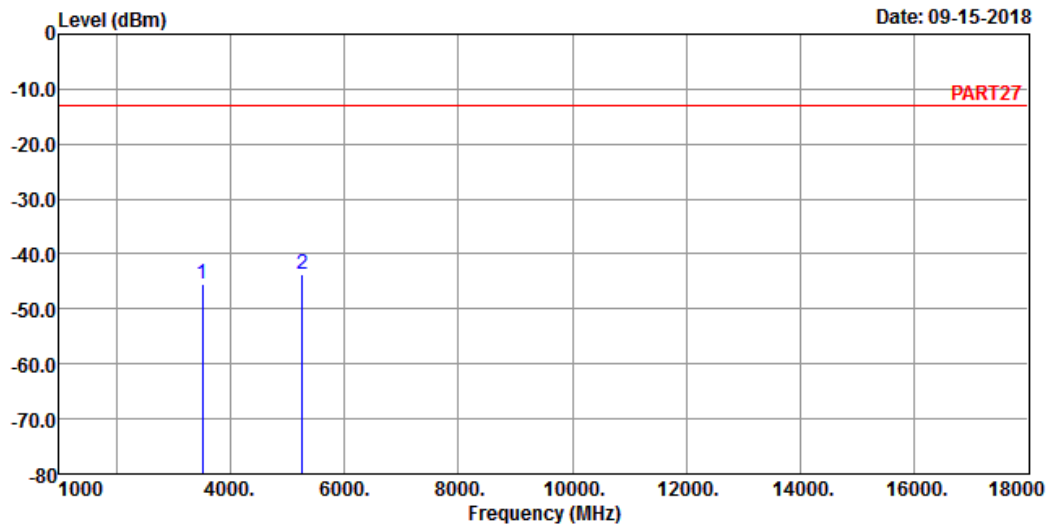

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 4 QPSK_5M Link_H-CH
Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3505.00	-45.59	-38.14	-13.00	-32.59	-7.45	Peak
2 pp	5257.50	-43.79	-41.27	-13.00	-30.79	-2.52	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

Date: 09-15-2018

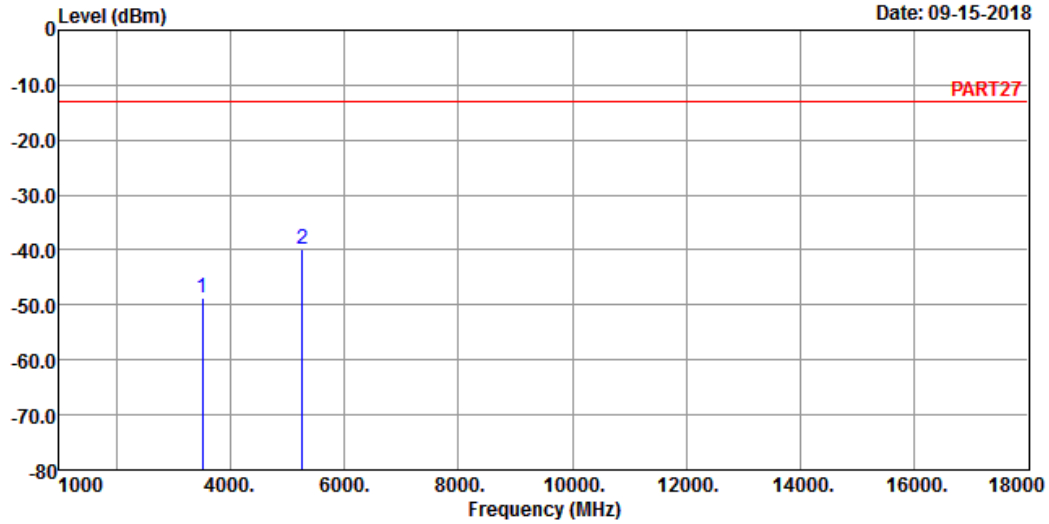

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 4 QPSK_5M Link_H-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3505.00	-48.56	-41.11	-13.00	-35.56	-7.45	Peak
2 pp	5257.50	-39.87	-37.35	-13.00	-26.87	-2.52	Peak


Channel Bandwidth: 20 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

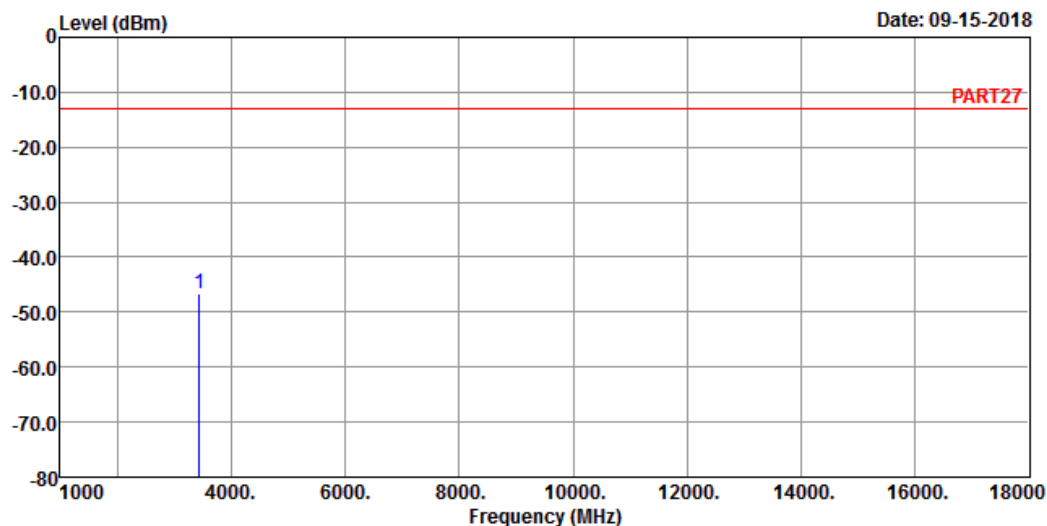

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 4 QPSK_20M Link_L-CH
Tested by: Thomas Wei


Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3440.00	-46.57	-38.35	-13.00	-33.57	-8.22	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

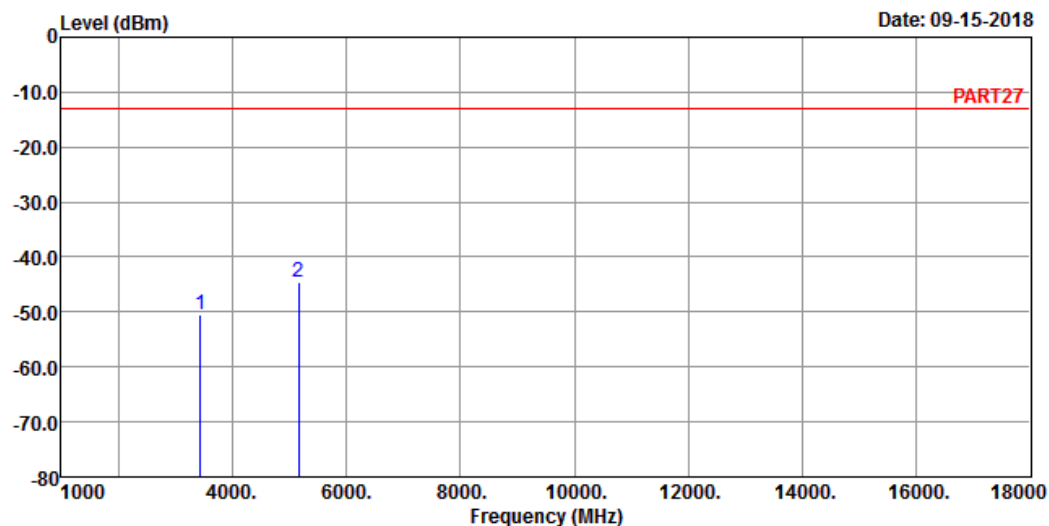

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : LTE Band 4 QPSK_20M Link_L-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3440.00	-50.44	-42.22	-13.00	-37.44	-8.22	Peak
2 pp	5160.00	-44.59	-42.68	-13.00	-31.59	-1.91	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

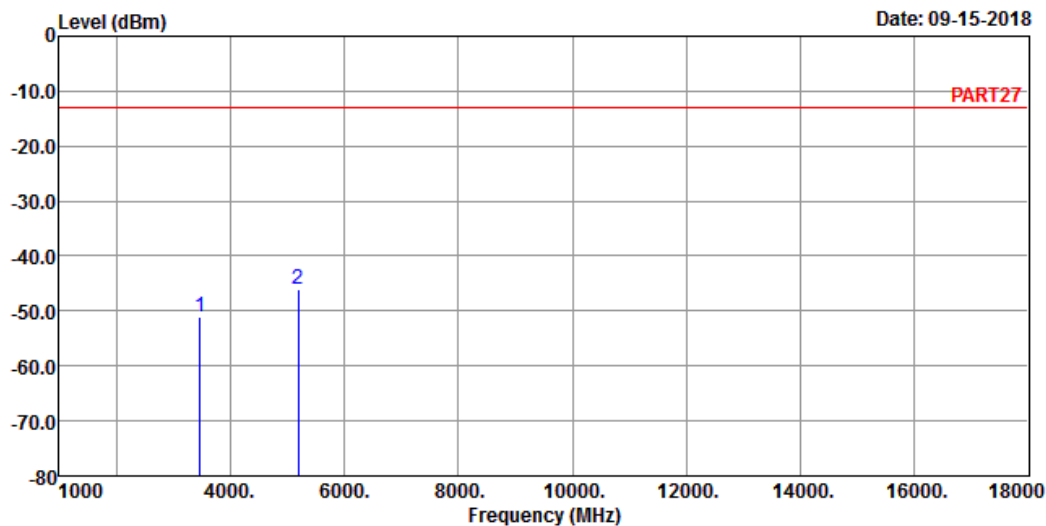

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 4 QPSK_20M Link_M-CH
Tested by: Thomas Wei


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3465.00	-51.15	-43.27	-13.00	-38.15	-7.88	Peak
2 pp	5197.50	-46.07	-44.00	-13.00	-33.07	-2.07	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

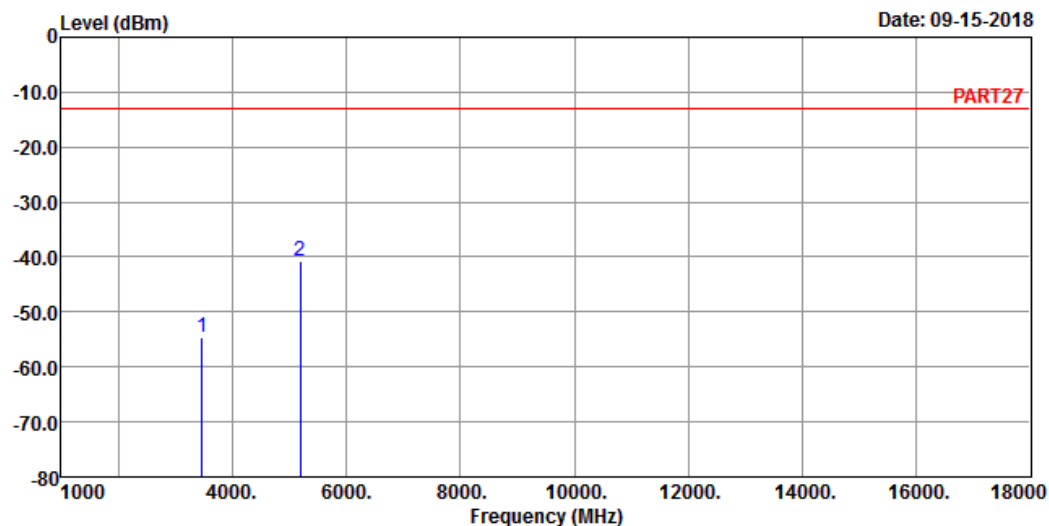

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : LTE Band 4 QPSK_20M Link_M-CH
 Tested by: Thomas Wei

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3465.00	-54.52	-46.64	-13.00	-41.52	-7.88	Peak
2 pp	5197.50	-40.86	-38.79	-13.00	-27.86	-2.07	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 7

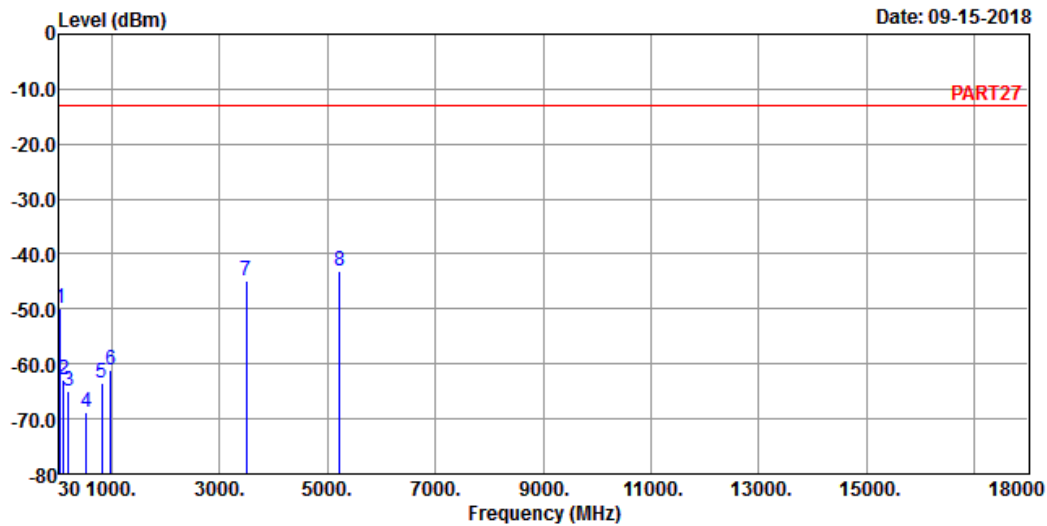

Site : 966 Chamber 5
 Condition: PART27 HORIZONTAL
 Remak : LTE Band 4 QPSK_20M Link_H-CH
 Tested by: Thomas Wei


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	43.58	-49.75	-48.28	-13.00	-36.75	-1.47	Peak
2	113.42	-62.95	-52.80	-13.00	-49.95	-10.15	Peak
3	201.69	-64.86	-56.92	-13.00	-51.86	-7.94	Peak
4	529.55	-68.68	-65.11	-13.00	-55.68	-3.57	Peak
5	821.52	-63.59	-64.13	-13.00	-50.59	0.54	Peak
6	980.60	-61.14	-64.03	-13.00	-48.14	2.89	Peak
7	3490.00	-44.82	-37.17	-13.00	-31.82	-7.65	Peak
8 pp	5235.00	-43.12	-40.71	-13.00	-30.12	-2.41	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 8

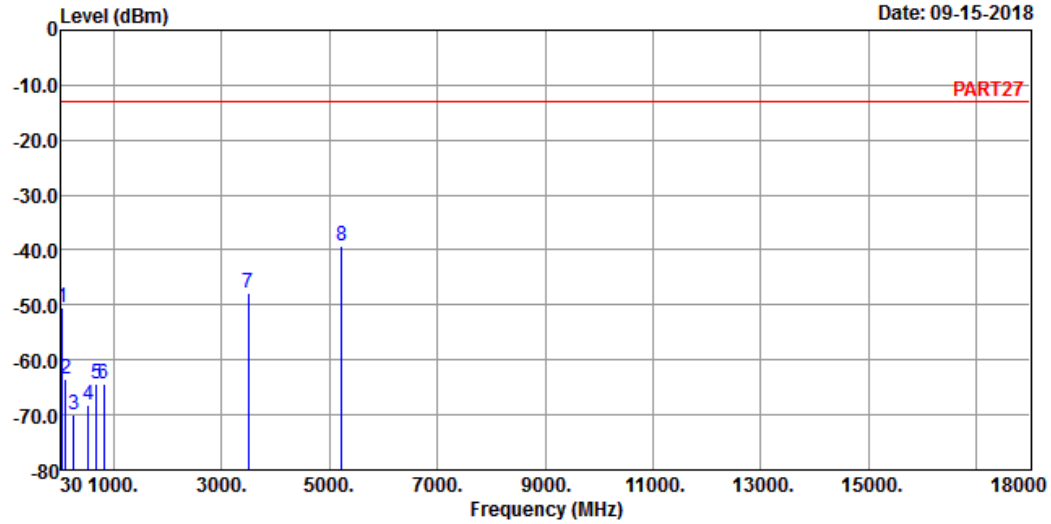

Site : 966 Chamber 5
Condition: PART27 VERTICAL
Remak : LTE Band 4 QPSK_20M Link_H-CH
Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	44.55	-50.61	-48.62	-13.00	-37.61	-1.99	Peak
2	111.48	-63.46	-53.22	-13.00	-50.46	-10.24	Peak
3	260.86	-69.99	-63.78	-13.00	-56.99	-6.21	Peak
4	528.58	-68.15	-64.54	-13.00	-55.15	-3.61	Peak
5	687.66	-64.45	-64.15	-13.00	-51.45	-0.30	Peak
6	823.46	-64.27	-64.80	-13.00	-51.27	0.53	Peak
7	3490.00	-47.96	-40.31	-13.00	-34.96	-7.65	Peak
8 pp	5235.00	-39.21	-36.80	-13.00	-26.21	-2.41	Peak


LTE Band 12
Channel Bandwidth: 1.4 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

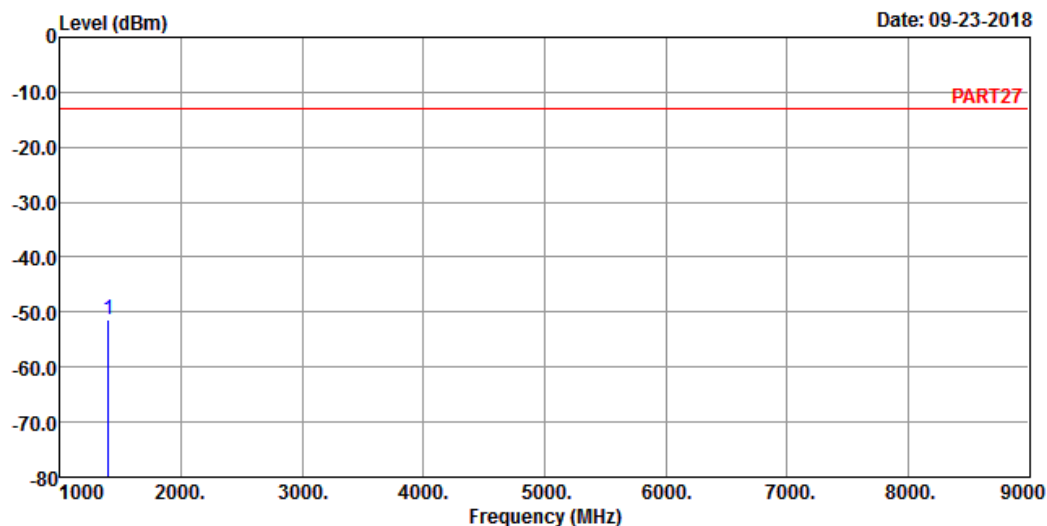

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 12 QPSK_1.4M Link_L-CH
Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1399.40 -51.23 -39.38 -13.00 -38.23 -11.85 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

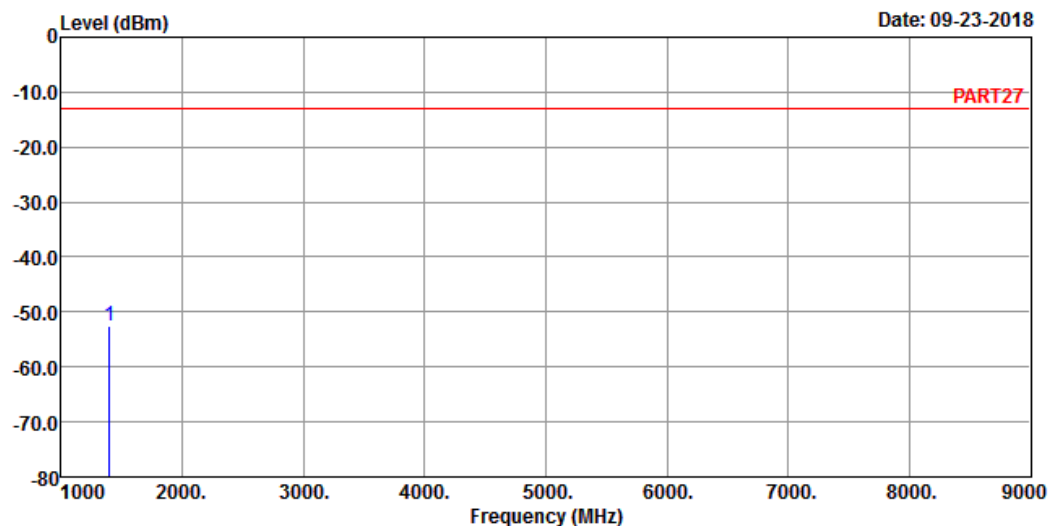

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 12 QPSK_1.4M Link_L-CH

Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1399.40	-52.65	-40.80	-13.00	-39.65	-11.85	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

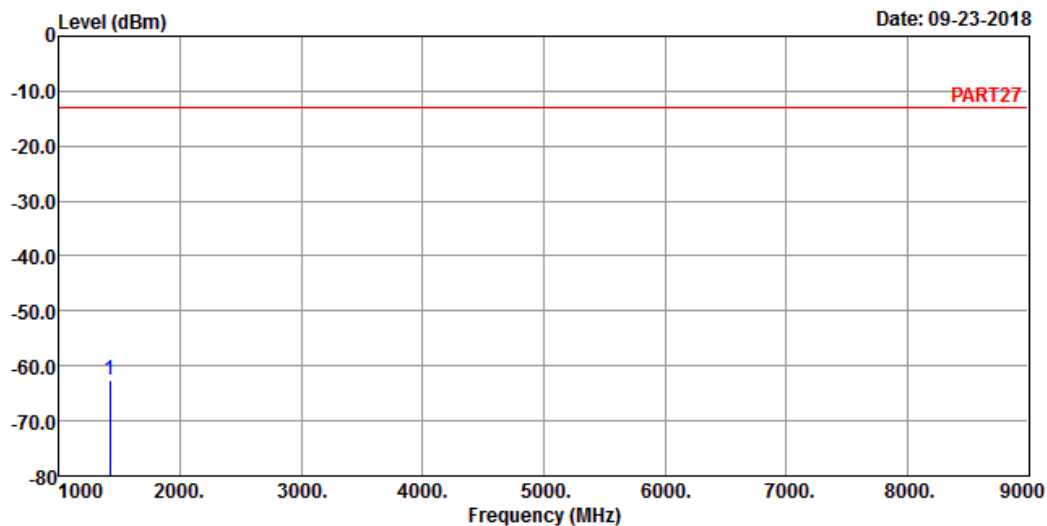

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 12 QPSK_1.4M Link_M-CH
Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1415.00 -62.52 -50.44 -13.00 -49.52 -12.08 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

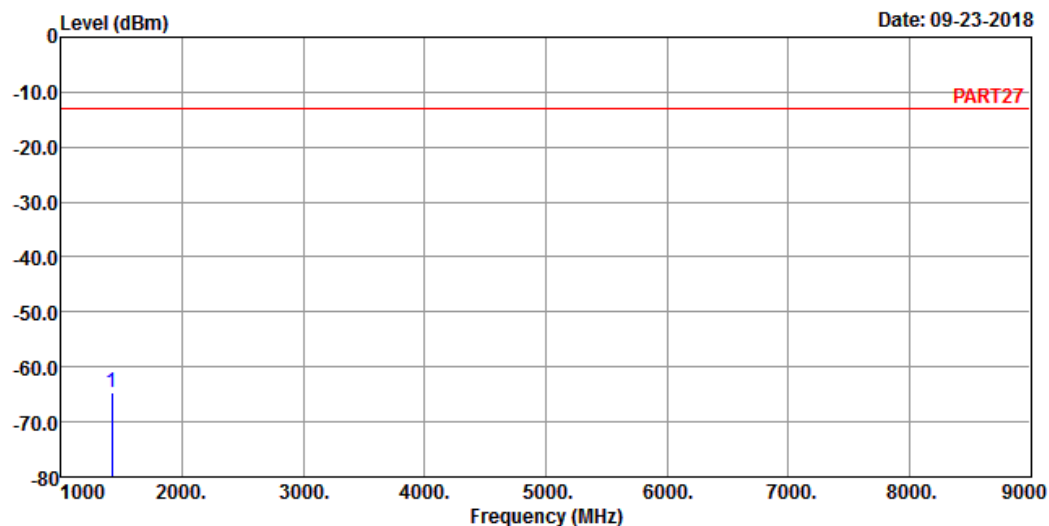

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : LTE Band 12 QPSK_1.4M Link_M-CH
 Tested by: Jisyong Wang

Freq	Level	Read	Limit	Over	Factor	Remark
		Level	Line	Limit		
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1415.00	-64.69	-52.61	-13.00	-51.69	-12.08	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

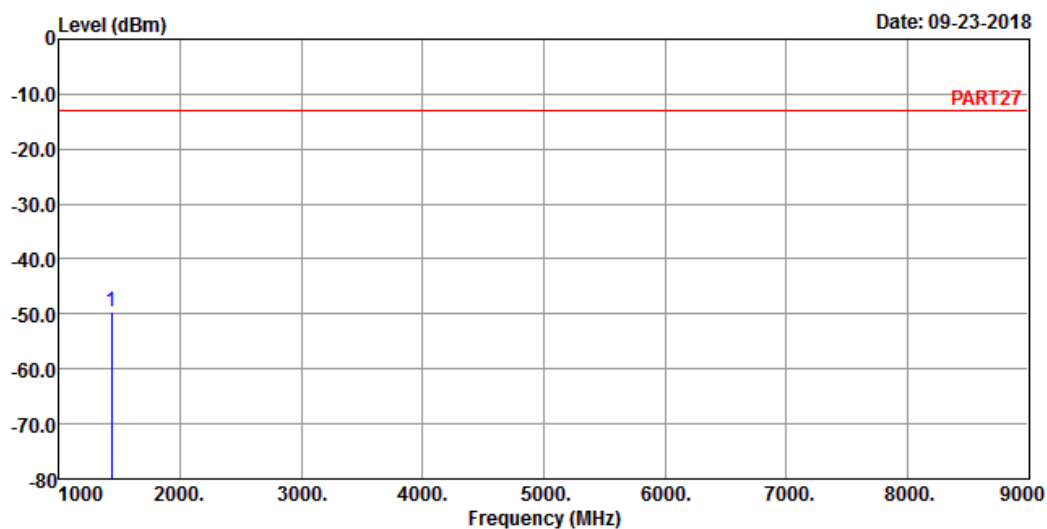

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 12 QPSK_1.4M Link_H-CH
Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1430.60 -49.52 -37.21 -13.00 -36.52 -12.31 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

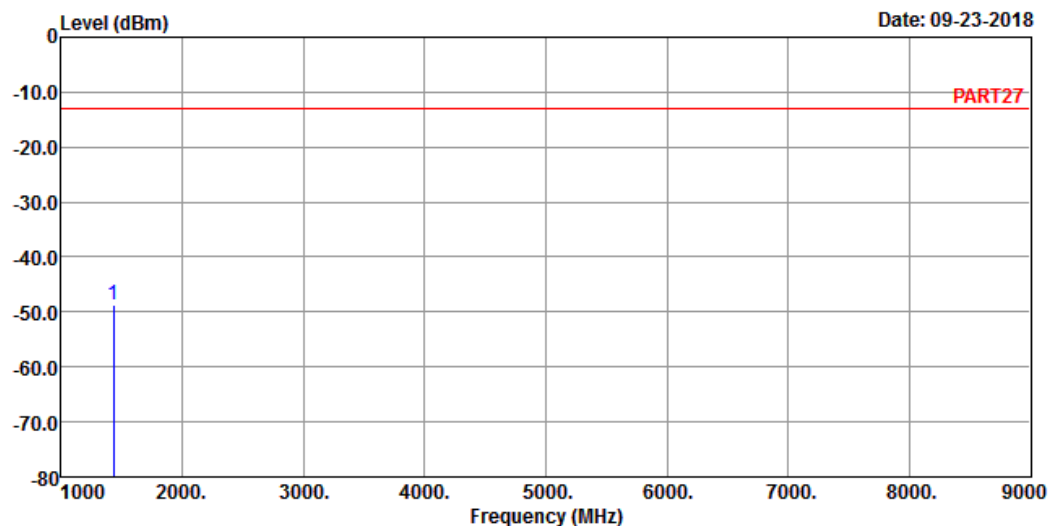

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 12 QPSK_1.4M Link_H-CH

Tested by: Jisyong Wang

Freq	Level	Read	Limit	Over	Factor	Remark
		Level	Line	Limit		
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1430.60	-48.65	-36.34	-13.00	-35.65	-12.31	Peak


Channel Bandwidth: 5 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

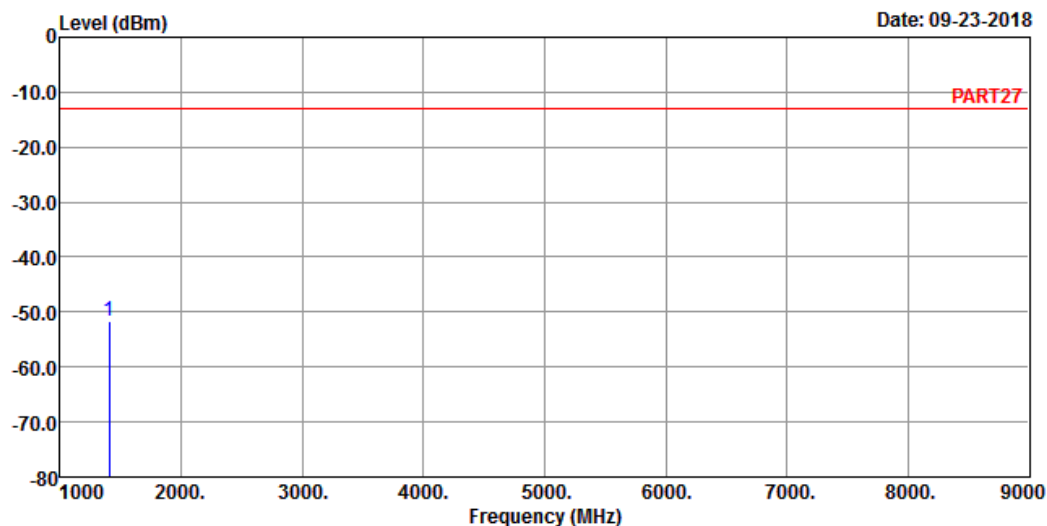

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 12 QPSK_5M Link_L-CH
Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1403.00 -51.52 -39.61 -13.00 -38.52 -11.91 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

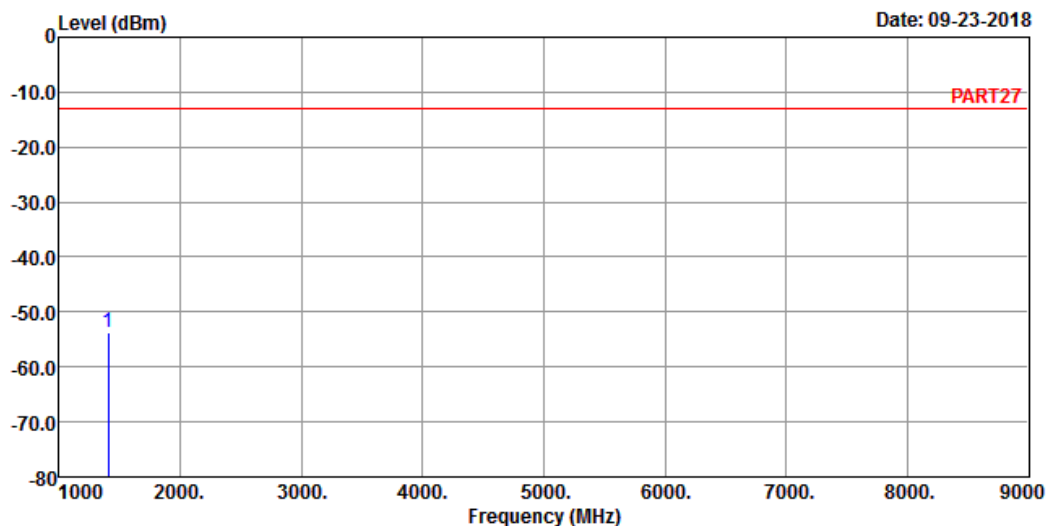

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : LTE Band 12 QPSK_5M Link_L-CH
 Tested by: Jisyong Wang

Freq	Level	Read	Limit	Over	Factor	Remark
		Level	Line	Limit		
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1403.00	-53.62	-41.71	-13.00	-40.62	-11.91	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

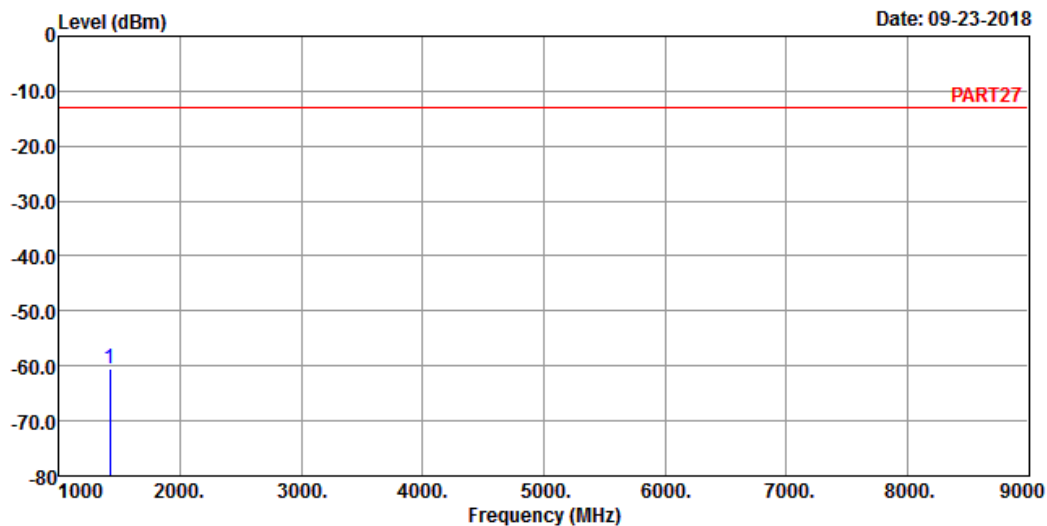

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 12 QPSK_5M Link_M-CH
Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1415.00 -60.52 -48.44 -13.00 -47.52 -12.08 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

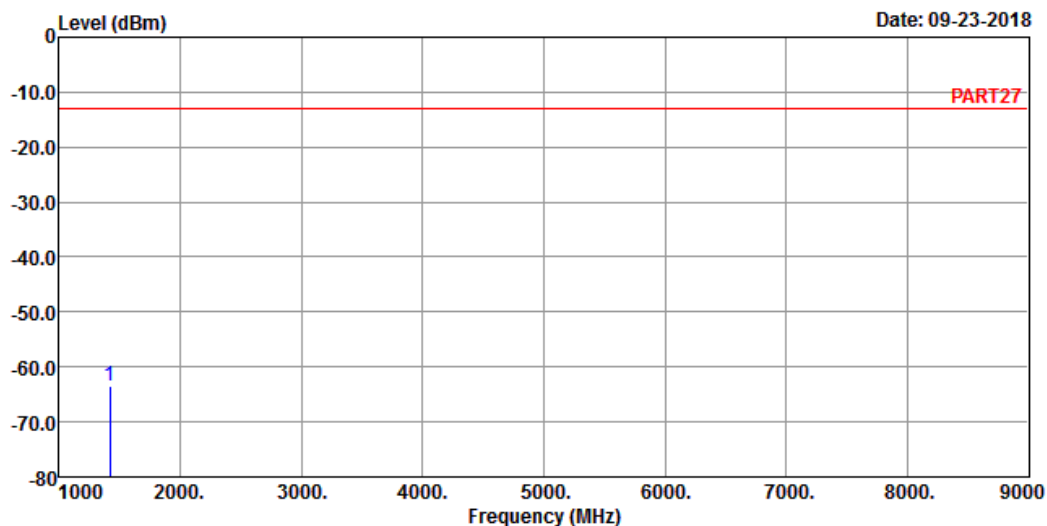

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : LTE Band 12 QPSK_5M Link_M-CH
 Tested by: Jisyong Wang

Freq	Level	Read	Limit	Over	Factor	Remark
		Level	Line	Limit		
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1415.00	-63.58	-51.50	-13.00	-50.58	-12.08	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

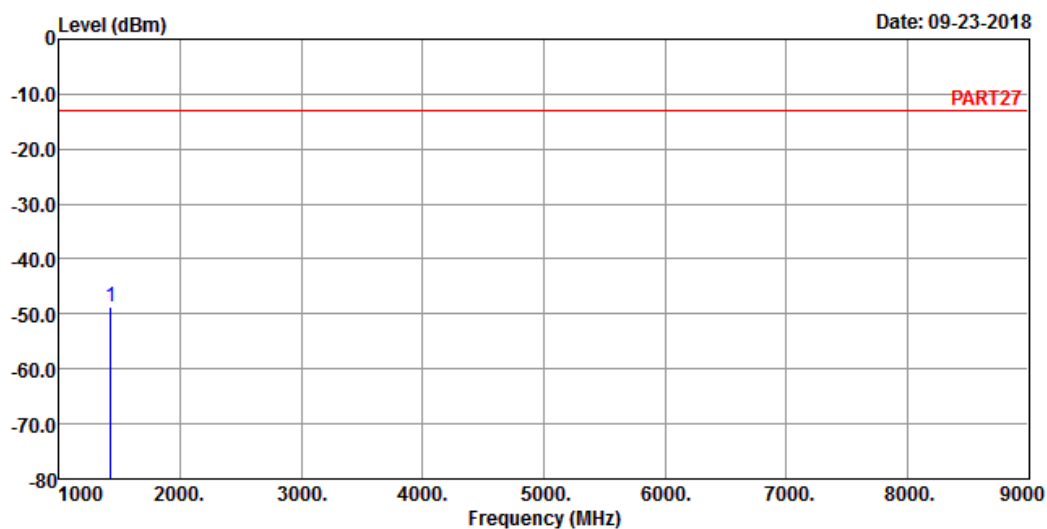

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 12 QPSK_5M Link_H-CH
Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1427.00 -48.65 -36.40 -13.00 -35.65 -12.25 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

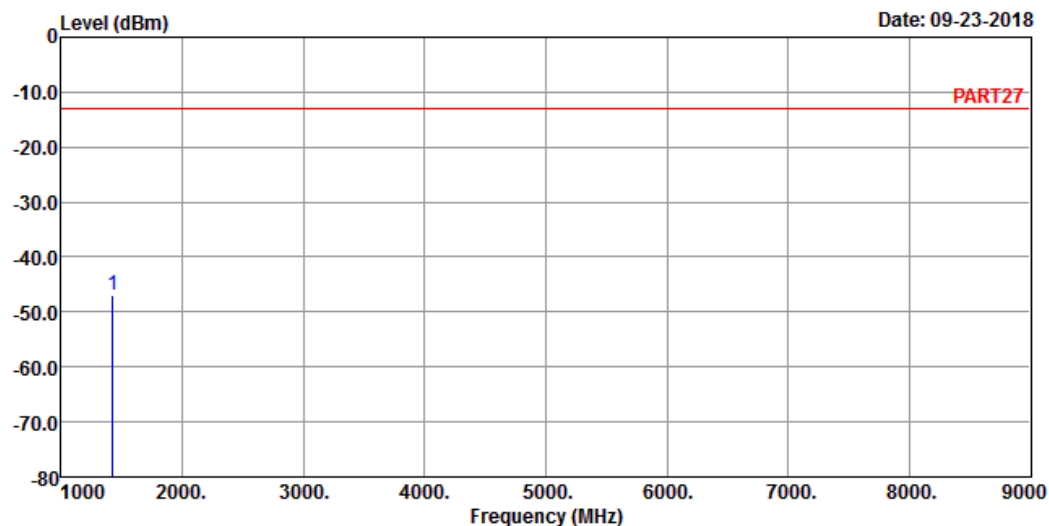

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 12 QPSK_5M Link_H-CH

Tested by: Jisyong Wang

Freq	Level	Read	Limit	Over	Factor	Remark
		Level	Line	Limit		
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1427.00	-46.98	-34.73	-13.00	-33.98	-12.25	Peak


Channel Bandwidth: 10 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

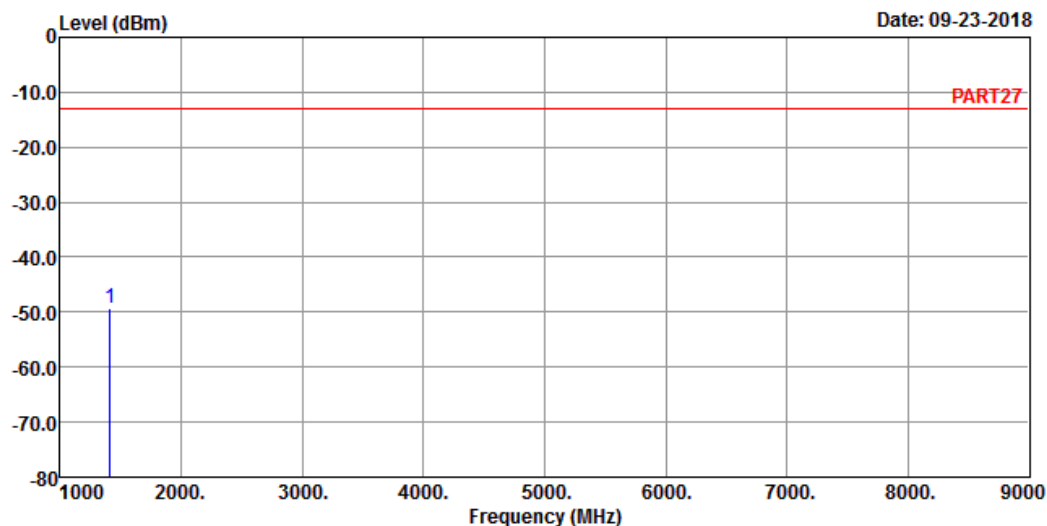

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 12 QPSK_10M Link_L-CH
Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1408.00 -49.20 -37.24 -13.00 -36.20 -11.96 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

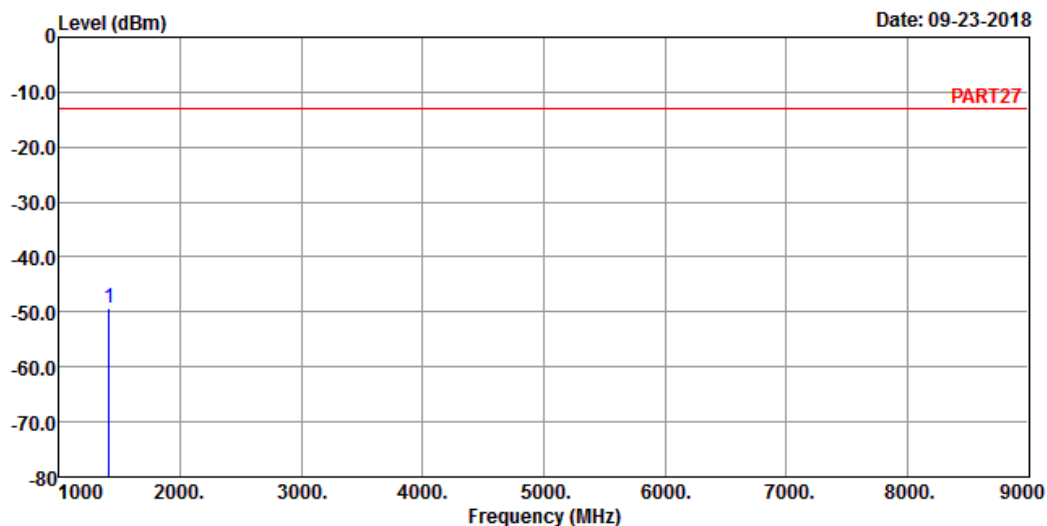

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 12 QPSK_10M Link_L-CH

Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1408.00 -49.33 -37.37 -13.00 -36.33 -11.96 Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

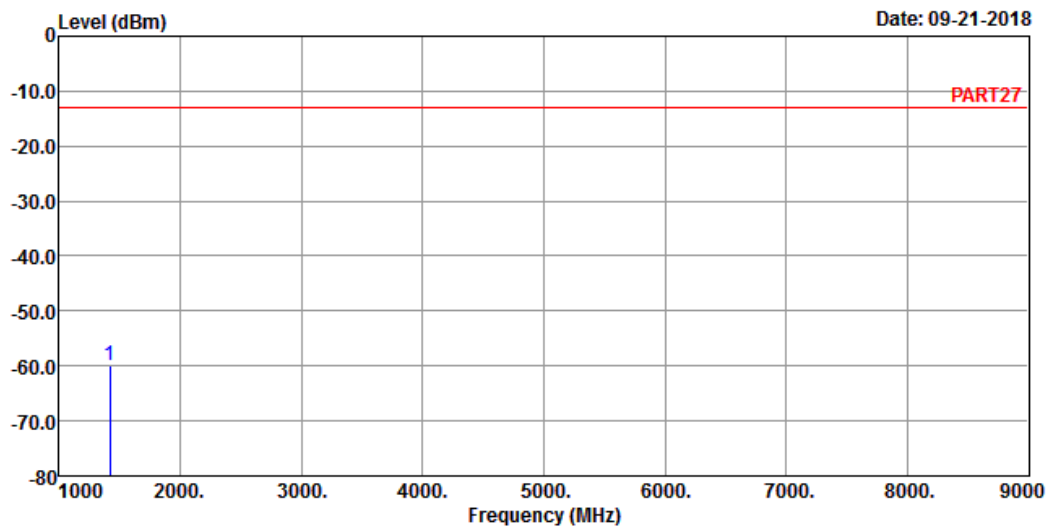

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 12 QPSK_10M Link_M-CH
Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1415.00 -60.00 -47.92 -13.00 -47.00 -12.08 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

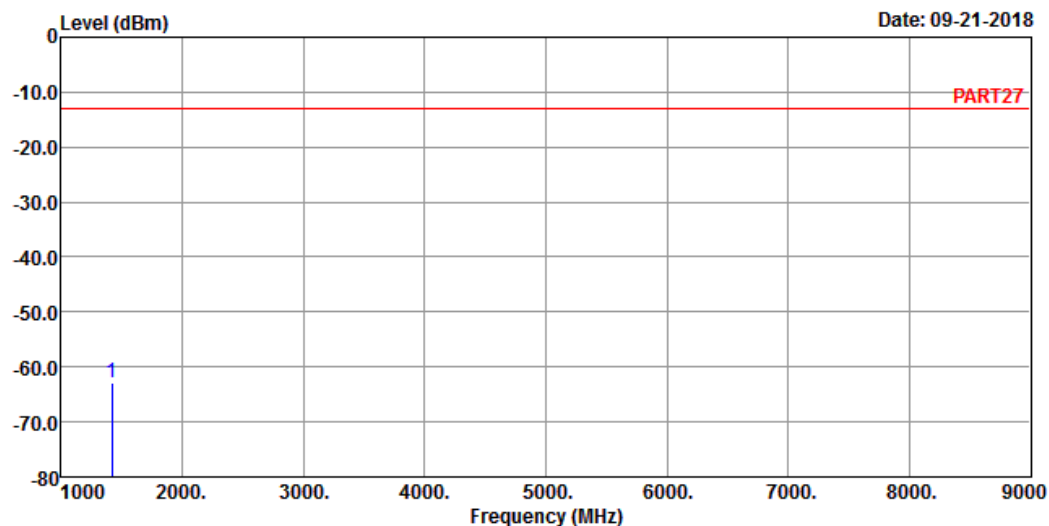

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : LTE Band 12 QPSK_10M Link_M-CH
 Tested by: Jisyong Wang

Freq	Level	Read	Limit	Over	Factor	Remark
		Level	Line	Limit		
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1415.00	-62.80	-50.72	-13.00	-49.80	-12.08	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 7

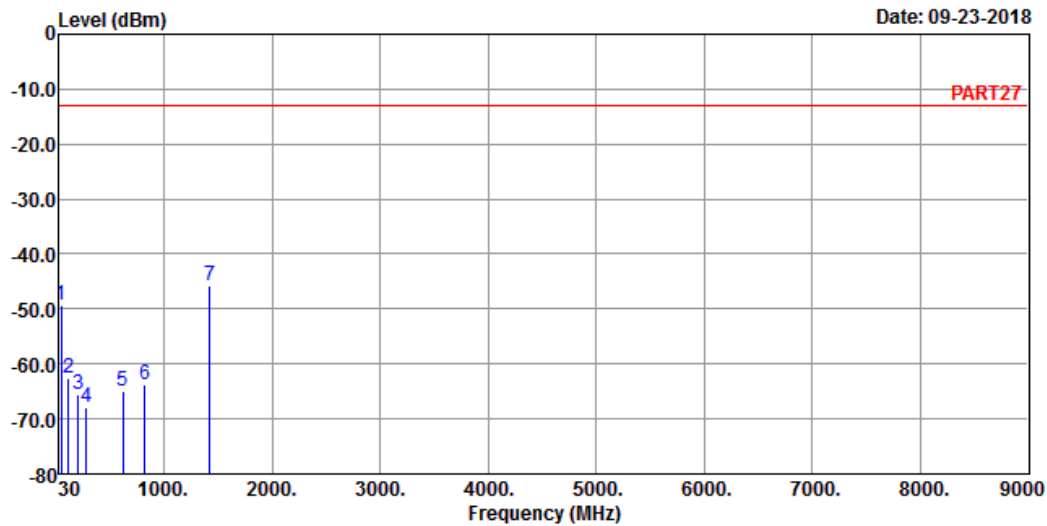

Site : 966 Chamber 5
 Condition: PART27 HORIZONTAL
 Remak : LTE Band 12 QPSK_10M Link_H-CH
 Tested by: Jisyoung Wang


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	43.58	-49.42	-47.95	-13.00	-36.42	-1.47	Peak
2	115.36	-62.48	-52.41	-13.00	-49.48	-10.07	Peak
3	202.66	-65.46	-57.56	-13.00	-52.46	-7.90	Peak
4	280.26	-67.97	-61.36	-13.00	-54.97	-6.61	Peak
5	615.88	-64.86	-64.07	-13.00	-51.86	-0.79	Peak
6	818.61	-63.77	-64.34	-13.00	-50.77	0.57	Peak
7 pp	1422.00	-45.62	-33.43	-13.00	-32.62	-12.19	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 8

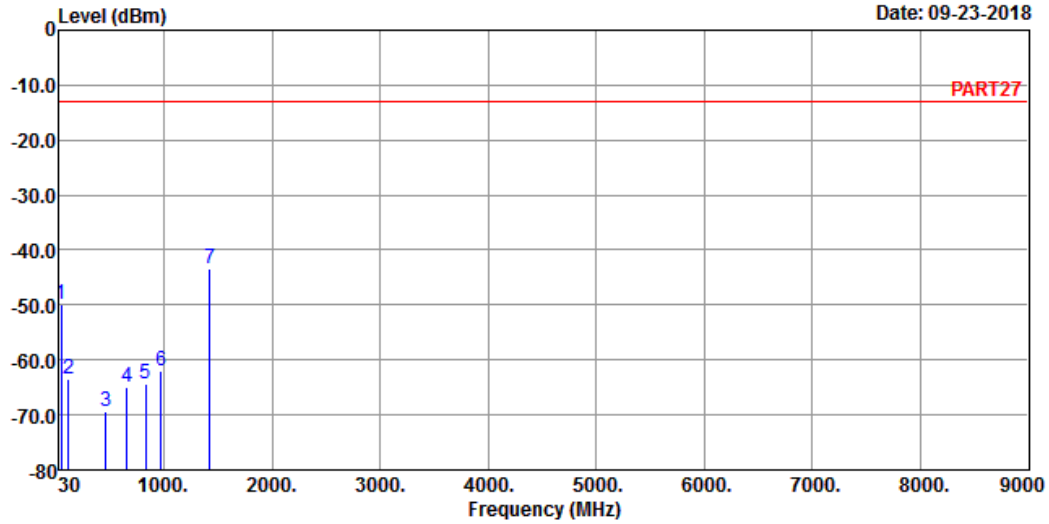

Site : 966 Chamber 5
Condition: PART27 VERTICAL
Remak : LTE Band 12 QPSK_10M Link_H-CH
Tested by: Jisyong Wang

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	43.58	-49.81	-48.34	-13.00	-36.81	-1.47	Peak
2	112.45	-63.53	-53.33	-13.00	-50.53	-10.20	Peak
3	461.65	-69.32	-63.99	-13.00	-56.32	-5.33	Peak
4	656.62	-64.93	-64.15	-13.00	-51.93	-0.78	Peak
5	825.40	-64.22	-64.73	-13.00	-51.22	0.51	Peak
6	968.96	-62.09	-64.57	-13.00	-49.09	2.48	Peak
7 pp	1422.00	-43.32	-31.13	-13.00	-30.32	-12.19	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---