

PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



HEARING AID COMPATIBILITY

Applicant Name:

LG Electronics MobileComm U.S.A. Inc. 1000 Sylvan Avenue Englewood Cliffs, NJ 07632 United States Date of Testing: 03/26/2018 - 04/02/2018 Test Site/Location: PCTEST Lab, Columbia, MD, USA

Test Report Serial No.: 1M1803050033-11.ZNF

FCC ID: ZNFQ710TS

APPLICANT: LG ELECTRONICS MOBILECOMM U.S.A. INC.

Scope of Test: Audio Band Magnetic Testing (T-Coil)

Application Type: Certification
FCC Rule Part(s): CFR §20.19(b)
HAC Standard: ANSI C63.19-2011

285076 D01 HAC Guidance v05

285076 D02 T-Coil testing for CMRS IP v03

DUT Type: Portable Handset **Model:** LM-Q710TS

Additional Model(s): LMQ710TS, Q710TS, LM-Q710MS, LMQ710MS, Q710MS

Test Device Serial No.: Pre-Production Sample [S/N: 05783]

C63.19-2011 HAC Category: T3 (SIGNAL TO NOISE CATEGORY)

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.







FCC ID: ZNFQ710TS	HAC (T-COIL) TEST REPORT		LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 1 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 10176

TABLE OF CONTENTS

1.	INTRODUCTION	3
2.	DUT DESCRIPTION	4
3.	ANSI C63.19-2011 PERFORMANCE CATEGORIES	6
4.	METHOD OF MEASUREMENT	8
5.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	18
6.	VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION	21
7.	OTT VOIP TEST SYSTEM AND DUT CONFIGURATION	24
8.	FCC 3G MEASUREMENTS	27
9.	T-COIL TEST SUMMARY	28
10.	MEASUREMENT UNCERTAINTY	39
11.	EQUIPMENT LIST	40
12.	TEST DATA	41
13.	CALIBRATION CERTIFICATES	64
14.	CONCLUSION	71
15.	REFERENCES	. 72
16.	TEST SETUP PHOTOGRAPHS	74

FCC ID: ZNFQ710TS	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 2 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 2 01 70

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-86581 to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: ZNFQ710TS	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 3 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 3 01 70

© 2018 PCTEST Engineering Laboratory, Inc.

REV 3.2.M

2. DUT DESCRIPTION



FCC ID: ZNFQ710TS

Applicant: LG Electronics MobileComm U.S.A. Inc.

1000 Sylvan Avenue

Englewood Cliffs, NJ 07632

United States

Model: LM-Q710TS

Additional Model(s): LMQ710TS, Q710TS, LM-Q710MS, LMQ710MS, Q710MS

Serial Number: 05783 HW Version: Rev.B

SW Version: Q710TS09a_pre2
Antenna: Internal Antenna
DUT Type: Portable Handset

I. LTE Band Selection

This device supports the following pair of LTE bands with similar frequencies: LTE B4 & B66. This pair of LTE bands has the same target power and shares the same transmission path. Since the supported frequency span for the smaller LTE band is completely covered by the larger LTE band, only the larger LTE band (LTE B66) was evaluated for hearing-aid compliance.

FCC ID: ZNFQ710TS	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 4 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 4 01 70

Table 2-1 **ZNFQ710TS HAC Air Interfaces**

Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service
	850	VO	Yes	Yes: WIFI or BT	CMRS Voice*
GSM	1900	VO	res	res. Wiri Oi Bi	CIVIRS VOICE
	GPRS/EDGE	VD	Yes	Yes: WIFI or BT	Google Duo**
	850				
UMTS	1700	VD	Yes	Yes: WIFI or BT	CMRS Voice*
UIVITS	1900				
	HSPA	VD	Yes	Yes: WIFI or BT	Google Duo**
	680 (B71)		Yes ¹		
	700 (B12)		Yes	Yes: WIFI or BT	VoLTE*, Google Duo**
	780 (B13)				
LTE (FDD)	850 (B5)	VD			
	1700 (B4)				
	1700 (B66)				
	1900 (B2)				
LTE (TDD)	2600 (B41)	VD	Yes	Yes: WIFI or BT	VoLTE*, Google Duo**
	2450				
	5200 (U-NII 1)				
WIFI	5300 (U-NII 2A)	VD	Yes	Yes: GSM, UMTS, or LTE	VoWIFI**, Google Duo**
	5500 (U-NII 2C)				
	5800 (U-NII 3)				
BT	2450	DT	DT No Yes: GSM, UMTS, or LTE N/A		
Type Transport		Notes:			
VO = Voice Only		* Reference level in accordance with 7.4.2.1 of ANSI C63.19-2011 and July 2012 C63 VoLTE			
DT = Digital Data - Not intended for CMRS Service		Interpretation.			

VD = CMRS and IP Voice over Data Transport

** Reference level is -20dBm0 in accordance with FCC KDB 285076 D02

1. LTE Band 71 is outside of the scope of ANSI 63.19-2011, it was additionally tested according to existing test procedures.

FCC ID: ZNFQ710TS	HAC (T-COIL) TEST REPORT		LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 5 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 5 01 76

3. ANSI C63.19-2011 PERFORMANCE CATEGORIES

I. MAGNETIC COUPLING

Axial and Radial Field Intensity

All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be \geq -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz – 3000 Hz per §8.3.2.

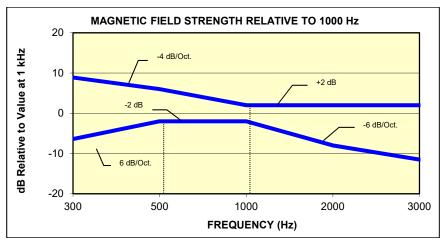


Figure 3-1
Magnetic field frequency response for Wireless Devices with an axial field ≤-15 dB(A/m) at 1 kHz

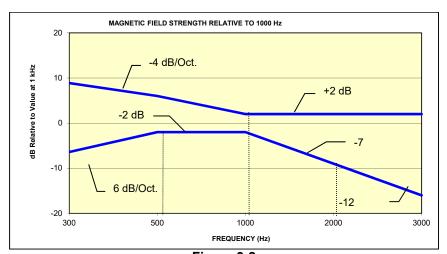


Figure 3-2
Magnetic Field frequency response for wireless devices with an axial field that exceeds
-15 dB(A/m) at 1 kHz

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 6 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		rage 6 01 76

© 2018 PCTEST Engineering Laboratory, Inc.

REV 3.2.M 01/11/2018

Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Category	Telephone RF Parameters			
	Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB]			
T1	0 to 10 dB			
T2	10 to 20 dB			
Т3	20 to 30 dB			
T4	> 30 dB			
Table 3-1 Magnetic Coupling Parameters				

FCC ID: ZNFQ710TS	PCTEST	HAC (1-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 7 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage / 01/0

4. METHOD OF MEASUREMENT

I. Test Setup

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:

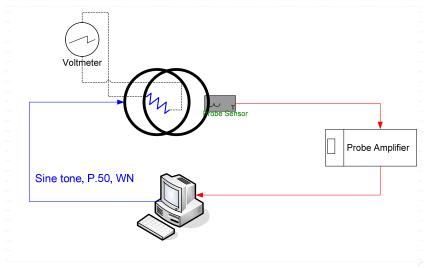


Figure 4-1
Validation Setup with Helmholtz Coil

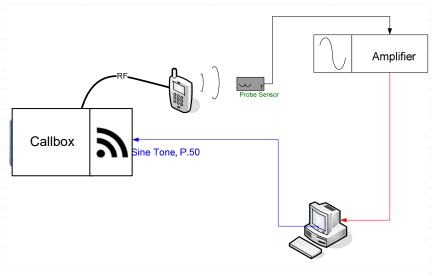


Figure 4-2 T-Coil Test Setup

FCC ID: ZNFQ710TS	HAC (T-COIL) TEST REPORT		LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 8 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 6 01 76

II. Scanning Mechanism

Manufacturer: TEM

Accuracy: ± 0.83 cm/meter

Minimum Step Size: 0.1 mm

Maximum speed 6.1 cm/sec
Line Voltage: 115 VAC
Line Frequency: 60 Hz

Material Composite: Delrin (Acetal)

Data Control: Parallel Port

Dynamic Range (X-Y-Z): 45 x 31.75 x 47 cm

Dimensions: 36" x 25" x 38" Operating Area: 36" x 49" x 55"

Reflections: < -20 dB (in anechoic chamber)




Figure 4-3 RF Near-Field Scanner

III. ITU-T P.50 Artificial Voice

Manufacturer: ITU-T

Active Frequency 100 Hz – 8 kHz

Range:

Stimulus Type: Male and Female, no spaces

Single Sample 20.96 seconds

Duration: 20.90 Activity Level: 100%

Figure 4-4 Spectral Characteristic of full P.50




Figure 4-5
Temporal Characteristic of full P.50

FCC ID: ZNFQ710TS	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 9 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		rage 9 01 70

ABM1 Measurement Block Diagram:



ABM2 Measurement Block Diagram:



Figure 4-6 Magnetic Measurement Processing Steps

IV. **Test Procedure**

- 1. Ambient Noise Check per C63.19 §7.3.1
 - Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
 - "A-weighting" and Half-Band Integration was applied to the measurements.
 - c. Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:

- 2. Measurement System Validation(See Figure 4-1)
 - The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
 - **ABM1 Validation**

The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_c = \frac{NI}{r\sqrt{1.25^3}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^3}}$$

Where H_c = magnetic field strength in amperes per meter N = number of turns per coil

For the Helmholtz Coil, N=20; r=0.08m; R=10.2Ω and using V=18mV:

Coil, N=20; f=0.08m, R=10.20 and using V=18mV:
$$H_c = \frac{20 \cdot (\frac{0.018}{10.2})}{0.08 \cdot \sqrt{1.25^3}} = 0.316A/m \approx -10dB(A/m)$$

Therefore a pure tone of 1kHz was applied into the coils such that 18mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of -10 dB(A/m) in the center of the Helmholtz coil which was used to validate the probe measurement at -10dB(A/m). This was verified to be within ± 0.5 dB of the -10dB(A/m) value (see Page 37).

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 10 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 10 01 76

© 2018 PCTEST Engineering Laboratory, Inc.

Frequency Response Validation
 The frequency response through the Helmholtz Coil was verified to be within 0.5 dB relative to 1kHz, between 300 – 3000 Hz using the P.50 signal as shown below:



Figure 4-7 Frequency Response Validation

d. ABM2 Measurement Validation

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz – 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

Table 4-1
ABM2 Frequency Response Validation

	HBI, A -	HBI, A -	
f (Hz)	Measured	Theoretical	dB Var.
	(dB re 1kHz)	(dB re 1kHz)	
100	-16.180	-16.170	-0.010
125	-13.257	-13.250	-0.007
160	-10.347	-10.340	-0.007
200	-8.017	-8.010	-0.007
250	-5.925	-5.920	-0.005
315	-4.045	-4.040	-0.005
400	-2.405	-2.400	-0.005
500	-1.212	-1.210	-0.002
630	-0.349	-0.350	0.001
800	0.071	0.070	0.001
1000	0.000	0.000	0.000
1250	-0.503	-0.500	-0.003
1600	-1.513	-1.510	-0.003
2000	-2.778	-2.780	0.002
2500	-4.316	-4.320	0.004
3150	-6.166	-6.170	0.004
4000	-8.322	-8.330	0.008
5000	-10.573	-10.590	0.017
6300	-13.178	-13.200	0.022
8000	-16.241	-16.270	0.029
10000	-19.495	-19.520	0.025

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 11 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 110176




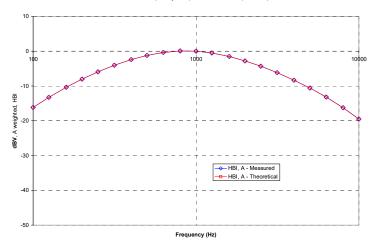


Figure 4-8 **ABM2 Frequency Response Validation**

The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and Aweighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-9). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:

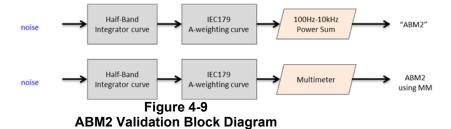

The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

Table 4-2 **ABM2 Power Sum Validation**

WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)
-60	-60.36	-60.2	0.16
-50	-50.19	-50.13	0.06
-40	-40.14	-40.03	0.11
-30	-30.13	-30.01	0.12
-20	-20.12	-20	0.12
-10	-10.14	-10	0.14

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 12 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 12 01 70

© 2018 PCTEST Engineering Laboratory, Inc.

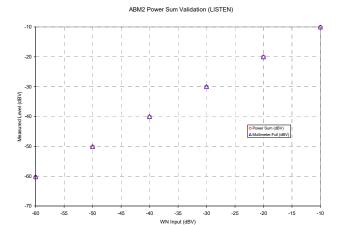


Figure 4-10
ABM2 Power Sum Validation

- 3. Measurement Test Setup
 - a. Fine scan above the WD (TEM)
 - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-12, the grid is not to scale but merely a graphical representation of the coordinate system in use):

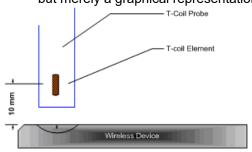


Figure 4-11 Measurement Distance




Figure 4-12 Measurement Grid

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure 4-15 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
 - i. C63.19 Table 7-1 states audio reference input levels for various technologies:

Standard	Technology	Input Level (dBm0)
TIA/EIA/IS-2000	CDMA	-18
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16
iDEN TM	TDMA (22 and 11 Hz)	-18

FCC ID: ZNFQ710TS	PCTEST:	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 13 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 13 01 76

© 2018 PCTEST Engineering Laboratory, Inc.

- ii. See Section 5 and 6 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE), and Voice Over WIFI (VoWIFI) testing.
- iii. See Section 7 for more information regarding audio level settings for Over-The-Top (OTT) Voice Over IP (VoIP) Testing.

c. Real-Time Analyzer (RTA)

i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.

d. WD Radio Configuration Selection

i. The device was chosen to be tested in the worst-case ABM2 condition (see below for GSM, see Section 8 for more information regarding worst-case configurations for UMTS. LTE configuration information can be found in Section 5. WIFI configuration information can be found in Section 6 and 7.):

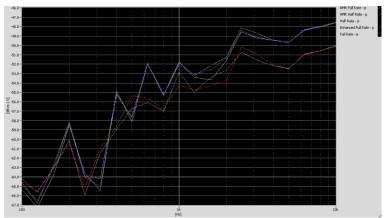


Figure 4-13 **Vocoder Analysis for ABM Noise for GSM**

4. Signal Quality Data Analysis

- a. Narrow-band Magnetic Intensity
 - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.

b. Frequency Response

- i. The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 - 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
- ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-7. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
- iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 14 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 14 01 76

c. Signal Quality Index

- i. Ensuring the WD was at maximum RF power, maximum volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz -10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
- ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
- This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

V. **Test Setup**

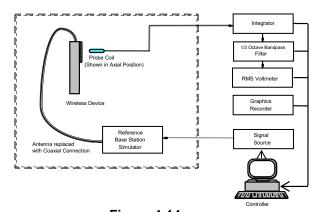


Figure 4-14 **Audio Magnetic Field Test Setup**

Deviation from C63.19 Test Procedure VI.

Non-conducted RF connection due to inaccessible RF ports.

VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications were tested for T-coil. See Table 2-1 for more details regarding which modes were tested.

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 15 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 13 01 70

VIII. Wireless Device Channels and Frequencies

1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Low, middle and high channels were tested in each band for FCC compliance evaluation to ensure the maximum emission is captured across the entire band. Only middle channels were evaluated for data modes since circuit-switched voice modes were worst-case.

> Table 4-3 **Center Channels and Frequencies**

Test frequencies & associated channels				
Channel	Frequency (MHz)			
Cellular 850				
190 (GSM)	836.60			
4183 (UMTS)	836.60			
AWS 1750				
1412 (UMTS)	1730.40			
PCS 1900				
661 (GSM)	1880			
9400 (UMTS)	1880			

2. 4G (LTE) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. Low-mid and mid-high channels are additionally tested for LTE TDD. The middle channel and supported bandwidths from the worst-case band was additionally evaluated with OTT VoIP for each probe orientation. See Tables 9-4 to 9-10 and 9-17 to 9-18 for LTE bandwidths and channels.

3. WIFI

The middle channel for each 802.11 standard was tested for each probe orientation. The 2.4GHz 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels. The 5GHz 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested on higher U-NII bands as well as applicable low and high channels. See Tables 9-11 to 9-14 and 9-19 to 9-22 for WIFI standards and channels.

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 16 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 10 01 70

IX. **Test Flow**

The flow diagram below was followed (From C63.19):

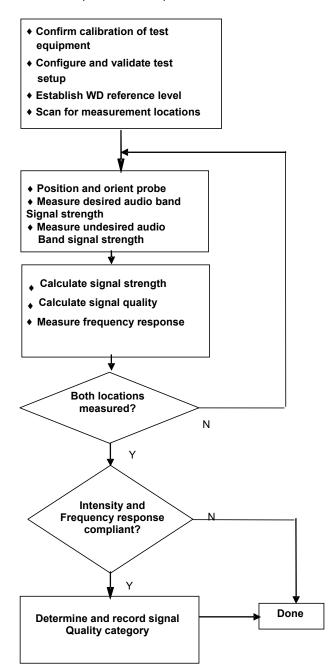


Figure 4-15 C63.19 T-Coil Signal Test Process

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 17 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 17 01 76

© 2018 PCTEST Engineering Laboratory, Inc.

REV 3.2.M

VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION 5.

I. Test System Setup for VoLTE over IMS T-coil Testing

Equipment Setup

The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

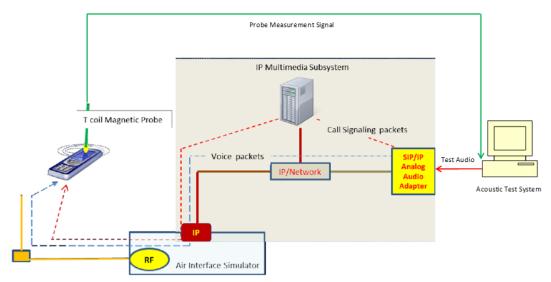


Figure 5-1 Test Setup for VoLTE over IMS T-Coil Measurements

2. Audio Level Settings

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level*. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

* http://c63.org/documents/misc/posting/new_interpretations.htm

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 18 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 10 01 70

© 2018 PCTEST Engineering Laboratory, Inc.

REV 3.2.M

II. **DUT Configuration for VoLTE over IMS T-coil Testing**

1. Radio Configuration

An investigation was performed to determine the modulation and RB configuration to be used for testing. 16QAM, 1RB, 0RB offset was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different radio configurations:

> Table 5-1 Vol.TE over IMS SNNR by Radio Configuration

	• • •		IIVIO OIVI	11 t Dy 1	i tualo t	Jonnigare	111011	
Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
1880.0	18900	20	QPSK	1	0	-2.06	-39.38	37.32
1880.0	18900	20	QPSK	1	50	-1.95	-39.11	37.16
1880.0	18900	20	QPSK	1	99	-1.81	-37.56	35.75
1880.0	18900	20	QPSK	50	0	-1.84	-38.52	36.68
1880.0	18900	20	QPSK	50	25	-1.77	-38.90	37.13
1880.0	18900	20	QPSK	50	50	-1.60	-38.70	37.10
1880.0	18900	20	QPSK	100	0	-1.49	-40.43	38.94
1880.0	18900	20	16QAM	1	0	-1.76	-34.71	32.95
1880.0	18900	20	16QAM	1	50	-1.74	-35.66	33.92
1880.0	18900	20	16QAM	1	99	-1.54	-35.45	33.91
1880.0	18900	20	16QAM	50	0	-1.82	-40.17	38.35
1880.0	18900	20	16QAM	50	25	-2.01	-40.64	38.63
1880.0	18900	20	16QAM	50	50	-1.76	-39.94	38.18
1880.0	18900	20	16QAM	100	0	-1.94	-39.51	37.57
1880.0	18900	20	64QAM	1	0	-1.45	-34.91	33.46
1880.0	18900	20	64QAM	1	50	-1.64	-35.60	33.96
1880.0	18900	20	64QAM	1	99	-1.63	-35.50	33.87
1880.0	18900	20	64QAM	50	0	-2.17	-39.43	37.26
1880.0	18900	20	64QAM	50	25	-1.50	-39.48	37.98
1880.0	18900	20	64QAM	50	50	-1.82	-39.84	38.02
1880.0	18900	20	64QAM	100	0	-1.72	-39.48	37.76

2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

> Table 5-2 AMR Codec Investigation - VolTE over IMS

Awit Codec investigation - Volit Over Into										
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel			
ABM1 (dBA/m)	-0.37	-1.83	5.33	5.78		LTE Band 2 20MHz	18900			
ABM2 (dBA/m)	-35.44	-35.36	-35.38	-35.32	Axial					
Frequency Response	Pass	Pass	Pass	Pass	Axiai					
S+N/N (dB)	35.07	33.53	40.71	41.10						

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = "Max Power"




Figure 5-2 **Audio Band Magnetic Curve Measurement Block Diagram**

FCC ID: ZNFQ710TS	POTEST:	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 19 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 19 01 70

3. LTE TDD Uplink-Downlink Configuration Investigation for VoLTE over IMS

An investigation was performed to determine the worst-case Uplink-Downlink configuration for VoLTE over IMS T-Coil testing.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length $T_f = 307200 \cdot T_s$ = 10 ms, where T_s is a number of time units equal to 1/(15000 x 2048) seconds. Additionally, each radio frame consists of 10 subframes, each of length 30720 · T_s = 1 ms, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is 2192 · Ts which occurs in the normal cyclic prefix and special subframe configuration 4.

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

> Table 5-3 **Uplink-Downlink Configurations for Type 2 Frame Structures**

	I DOMINIC COM				- 7 12							
Uplink-downlink	Downlink-to-Uplink		Subframe number									Calculated
configuration	Switch-point periodicity									Transmission		
Comparation	Switch-point periodicity	0	1	2	3	4	5	6	7	8	9	Duty Cycle (%)
0	5 ms	D	S	U	U	U	D	S	J	J	U	61.4%
1	5 ms	D	S	U	U	D	D	S	J	J	D	41.4%
2	5 ms	D	S	U	D	D	D	S	J	D	D	21.4%
3	10 ms	D	S	U	U	U	D	D	D	D	D	30.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	20.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	10.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	51.4%

Uplink-Downlink Configuration Investigation

LTE TDD was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 0RB Offset. All configurations (0-6) are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 0 was used as the worst-case configuration for LTE TDD VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

> Table 5-4 LTE TDD VolTE over IMS SNNR by UL-DL Configuration

						.,			
Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	0	0	-1.20	-24.75	23.55
2593.0	40620	20	16QAM	1	0	1	-1.67	-24.60	22.93
2593.0	40620	20	16QAM	1	0	2	-1.78	-24.46	22.68
2593.0	40620	20	16QAM	1	0	3	-1.34	-27.19	25.85
2593.0	40620	20	16QAM	1	0	4	-1.74	-27.22	25.48
2593.0	40620	20	16QAM	1	0	5	-1.34	-26.86	25.52
2593.0	40620	20	16QAM	1	0	6	-1.36	-24.75	23.39

b. Conclusion

Per the investigations above, UL-DL Configuration 2 was used to evaluate LTE TDD VoLTE over IMS.

FCC ID: ZNFQ710TS	PCTEST VINITURE LANDANDER, INC.	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 20 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 20 01 70

VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION 6.

I. Test System Setup for VoWIFI over IMS T-coil Testing

Equipment Setup

The general test setup used for VoWIFI over IMS, or CMRS WIFI Calling, is shown below. The callbox used when performing VoWIFI over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

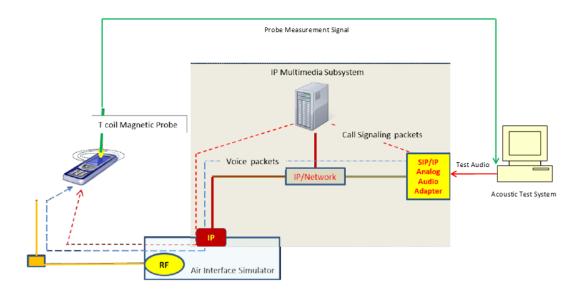


Figure 6-1 Test Setup for VoWIFI over IMS T-Coil Measurements

2. Audio Level Settings

According to KDB 285076 D02 released by the FCC OET regarding the appropriate audio levels to be used for VoWIFI over IMS T-Coil testing, -20dBm0 shall be used for the normal speech input level2. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the VoWIFI over IMS connection.

² FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

FCC ID: ZNFQ710TS	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 21 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Faye 210170

© 2018 PCTEST Engineering Laboratory, Inc.

REV 3.2.M

DUT Configuration for VoWIFI over IMS T-coil Testing II.

1. Radio Configuration

An investigation was performed on all applicable data rates and modulations to determine the radio configuration to be used for testing. See tables below for SNNR comparison between radio configurations in each 802.11 standard:

> Table 6-1 802.11b SNNR by Radio Configuration

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
802.11b	6	DSSS	1	-6.45	-34.42	27.97
802.11b	6	DSSS	2	-6.46	-34.71	28.25
802.11b	6	CCK	5.5	-6.11	-35.04	28.93
802.11b	6	CCK	11	-6.56	-35.97	29.41

Table 6-2 802.11g/a SNNR by Radio Configuration

Mode	Channel	Modulation	Data Rate	ABM1 [dB(A/m)]	ABM2	SNNR
			[Mbps]	[ub(A/III)]	[dB(A/m)]	[dB]
802.11g	6	BPSK	6	-6.46	-37.46	31.00
802.11g	6	BPSK	9	-6.05	-36.15	30.10
802.11g	6	QPSK	12	-6.07	-34.50	28.43
802.11g	6	QPSK	18	-6.07	-38.24	32.17
802.11g	6	16-QAM	24	-5.98	-39.16	33.18
802.11g	6	16-QAM	36	-6.56	-35.37	28.81
802.11g	6	64-QAM	48	-6.00	-37.13	31.13
802.11g	6	64-QAM	54	-5.87	-39.23	33.36

Table 6-3 802 11n/ac 20MHz RW SNNR by Radio Configuration

802.1111/ac 20MHZ BW SNNR by Radio Configuration										
Mode	Bandwidth [MHz]	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]			
802.11n	20	40	BPSK	6.5	-5.74	-4 1.00	35.26			
802.11n	20	40	QPSK	13	-6.03	-41.70	35.67			
802.11n	20	40	QPSK	19.5	-5.68	-41.59	35.91			
802.11n	20	40	16-QAM	26	-6.27	-41.54	35.27			
802.11n	20	40	16-QAM	39	-5.59	-42.17	36.58			
802.11n	20	40	64-QAM	52	-5.84	-41.87	36.03			
802.11n	20	40	64-QAM	58.5	-5.79	-41.18	35.39			
802.11n	20	40	64-QAM	65	-5.95	-41.75	35.80			
802.11ac	20	40	256-QAM	78	-6.14	-42.79	36.65			

FCC ID: ZNFQ710TS	POTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 22 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 22 01 70

Table 6-4 802.11n/ac 40MHz BW SNNR by Radio Configuration

602.1 III/ac 40Mile BW SMMX by Radio Configuration								
Mode	Bandwidth [MHz]	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]	
802.11n	40	38	BPSK	13.5	-5.78	-41.58	35.80	
802.11n	40	38	QPSK	27	-5.93	-41.24	35.31	
802.11n	40	38	QPSK	40.5	-6.27	-41.81	35.54	
802.11n	40	38	16-QAM	54	-5.69	-42.09	36.40	
802.11n	40	38	16-QAM	81	-5.78	-41.92	36.14	
802.11n	40	38	64-QAM	108	-5.90	-41.19	35.29	
802.11n	40	38	64-QAM	121.5	-6.19	-41.95	35.76	
802.11n	40	38	64-QAM	135	-5.94	-41.53	35.59	
802.11ac	40	38	256-QAM	162	-5.76	-42.06	36.30	
802.11ac	40	38	256-QAM	180	-5.89	-42.86	36.97	

2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoWIFI over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

> Table 6-5 AMR Codec Investigation - VoWIFI over IMS

AWIN Codec III vestigation - vovil i over IIVis											
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band	Standard	Channel			
ABM1 (dBA/m)	-4.62	-6.40	-2.72	-2.78							
ABM2 (dBA/m)	-34.71	-34.65	-33.79	-34.98	Axial	2.4GHz	802.11b				
Frequency Response	Pass	Pass	Pass	Pass	Axiai	2.4GHZ	802.110	6			
S+N/N (dB)	30.09	28.25	31.07	32.20							

Mute on; Backlight off; Max Volume; Max Contrast




Figure 6-2 **Audio Band Magnetic Curve Measurement Block Diagram**

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 23 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 23 01 76

OTT VOIP TEST SYSTEM AND DUT CONFIGURATION 7.

I. Test System Setup for OTT VolP T-Coil Testing

1. OTT VoIP Application

Google Duo is a pre-installed application on the DUT which allows for VoIP calls in a held-to-ear scenario. Duo uses the OPUS audio codec and supports a bitrate range of 6kb/s to 64kb/s. All air interfaces capable of a data connection were evaluated with Google Duo.

2. Equipment Setup

A CMW500 callbox was used to perform OTT VoIP T-coil measurements. The Data Application Unit (DAU) of the CMW500 was connected to the internet and allowed for an IP data connection on the DUT. An auxiliary VoIP unit was used to initiate an OTT VoIP call to the DUT. The auxiliary VoIP unit allowed for the configuration and monitoring of the OTT VoIP codec bitrate during a call. Both high and low bitrate settings were evaluated in to determine the worst-case configuration.

Audio Level Settings

According to KDB 285076 D02, the average speech level of -20dBm0 shall be used for protocols not specifically listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation3. The auxiliary VoIP unit allowed for monitoring the signal input level to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the OTT VoIP call.

II. **DUT Configuration for OTT VolP T-Coil Testing**

1. Codec Configuration

An investigation was performed for each applicable data mode to determine the audio codec configuration to be used for testing. The 6kbps codec setting was used for the audio codec on the auxiliary VoIP unit for OTT VoIP T-Coil testing. See below tables for comparisons between codec data rates on all applicable data modes:

> Table 7-1 Codec Investigation - OTT VoIP (EDGE)

Codec Setting:	64kbps	6kbps	Orientation	Channel
ABM1 (dBA/m)	9.09	7.83		
ABM2 (dBA/m)	-21.23	-20.80	Axial	661
Frequency Response	Pass	Pass	AAlai	
S+N/N (dB)	30.32	28.63		

³ FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 24 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 24 01 70

Table 7-2
Codec Investigation – OTT VoIP (HSPA)

Codec investigation – OTT voil (Not A)							
Codec Setting:	64kbps	6kbps	Orientation	Channel			
ABM1 (dBA/m)	9.31	8.82					
ABM2 (dBA/m)	-36.73	-37.04	Axial	9400			
Frequency Response	Pass	Pass	AAlai	9400			
S+N/N (dB)	46.04	45.86					


Table 7-3
Codec Investigation – OTT VoIP (LTF)

0	(-				
Codec Setting:	64kbps	6kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	9.37	9.19			
ABM2 (dBA/m)	-36.25	-36.32	Axial	LTE Band 2	18900
Frequency Response	Pass	Pass	Axidi	20MHz	
S+N/N (dB)	45.62	45.51			

Table 7-4
Codec Investigation – OTT VoIP (WIFI)

Codec investigation – OTT voil (vvii i)									
Codec Setting:	64kbps	6kbps	Orientation	Band	Standard	Channel			
ABM1 (dBA/m)	9.38	9.22							
ABM2 (dBA/m)	-35.14	-34.80	Axial	2 4GHz	802.11b	6			
Frequency Response	Pass	Pass	Axiai	2.4GHz	602.11b	Ü			
S+N/N (dB)	44.52	44.02							

- Mute on; Backlight off; Max Volume; Max Contrast
- · Radio Configurations can be found in Section 9.II.G



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 25 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 25 01 76

2. LTE FDD Band Investigation

An investigation was performed to determine the worst-case LTE FDD band for OTT VoIP T-Coil testing. LTE Band 12 was evaluated for OTT VoIP over LTE T-Coil testing. See table below for the SNNR comparison between each LTE FDD band.

Table 7-5
OTT VoIP (LTE) SNNR by LTE FDD Band

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2	1880.0	18900	20	16QAM	1	0	9.11	-36.03	45.14
5	836.5	20525	10	16QAM	1	0	9.34	-36.26	45.60
12	707.5	23095	10	16QAM	1	0	8.95	-34.50	43.45
13	782.0	23230	10	16QAM	1	0	9.24	-36.33	45.57
66	1745.0	132322	20	16QAM	1	0	9.10	-37.35	46.45
71	680.5	133297	20	16QAM	1	0	9.04	-34.59	43.63

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 26 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 20 01 70

FCC 3G MEASUREMENTS 8.

I. **UMTS Test Configurations**

AMR at 12.2kbps, 13.6kbps SRB was used for the testing as the worst-case configuration for the handset. See below plot for ABM noise comparison between vocoder rates:

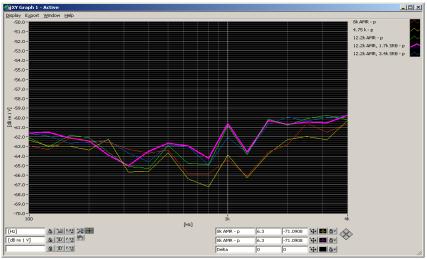


Figure 8-1 **UMTS Audio Band Magnetic Noise**

Table 8-1 **Codec Investigation - UMTS**

Codec Setting:	AMR 12.2kbps	AMR 7.95kbps	AMR 4.75kbps	Orientation	Channel		
ABM1 (dBA/m)	-7.55	-6.40	-6.56				
ABM2 (dBA/m)	-45.26	-45.21	-45.88	Axial	1412		
Frequency Response	Pass	Pass	Pass	Axiai			
S+N/N (dB)	37.71	38.81	39.32				

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC="All 1s"




Figure 8-2 Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 27 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 27 01 76

© 2018 PCTEST Engineering Laboratory, Inc.

REV 3.2.M

9. T-COIL TEST SUMMARY

Table 9-1 Consolidated Tabled Results

_									
		7	esponse rgin	- 3	netic / Verdict		SNNR dict	FCC Margin	C63.19-2011
C62 10	9 Section	8.3	3.2	8.3	3.1	8.3	3.4	(dB)	Rating
C03. 18	3 Section	Axial	Radial	Axial	Radial	Axial	Radial		
GSM	Cellular	PASS	NA	PASS	PASS	PASS	PASS	2.27	Т3
GSW	PCS	PASS	NA	PASS	PASS	PASS	PASS	-2.27	13
EDGE	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-4.66	Т3
(OTT VoIP)	PCS	PASS	NA	PASS	PASS	PASS	PASS	-4.00	13
	Cellular	PASS	NA	PASS	PASS	PASS	PASS		
UMTS	AWS	PASS	NA	PASS	PASS	PASS	PASS	-16.81	T4
	PCS	PASS	NA	PASS	PASS	PASS	PASS		
	Cellular	PASS	NA	PASS	PASS	PASS	PASS		
HSPA (OTT VoIP)	AWS	PASS	NA	PASS	PASS	PASS	PASS	-24.58	T4
,	PCS	PASS	NA	PASS	PASS	PASS	PASS		
	B71	PASS	NA	PASS	PASS	PASS	PASS		
	B12	PASS	NA	PASS	PASS	PASS	PASS		
LTE FDD	B13	PASS	NA	PASS	PASS	PASS	PASS	11 11	T4
LIEFDD	B5	PASS	NA	PASS	PASS	PASS	PASS	-11.41	14
	B66	PASS	NA	PASS	PASS	PASS	PASS		
	B2	PASS	NA	PASS	PASS	PASS	PASS		
LTE FDD (OTT VoIP)	B12	PASS	NA	PASS	PASS	PASS	PASS	-23.12	Т4
LTE TDD	B41	PASS	NA	PASS	PASS	PASS	PASS	-1.94	Т3
LTE TDD (OTT VoIP)	B41	PASS	NA	PASS	PASS	PASS	PASS	-11.32	Т4
	802.11b	PASS	NA	PASS	PASS	PASS	PASS		
WLAN	802.11g	PASS	NA	PASS	PASS	PASS	PASS	-5.00	Т3
	802.11n	PASS	NA	PASS	PASS	PASS	PASS	1	
	802.11b	PASS	NA	PASS	PASS	PASS	PASS		
WLAN (OTT VoIP)	802.11g	PASS	NA	PASS	PASS	PASS	PASS	-22.18	T4
(211 2011)	802.11n	PASS	NA	PASS	PASS	PASS	PASS		
	802.11a	PASS	NA	PASS	PASS	PASS	PASS		
U-NII	802.11n	PASS	NA	PASS	PASS	PASS	PASS		T4
	802.11ac	PASS	NA	PASS	PASS	PASS	PASS		
	802.11a	PASS	NA	PASS	PASS	PASS	PASS		
U-NII (OTT VoIP)	802.11n	PASS	NA	PASS	PASS	PASS	PASS	-24.32	T4
(211 2011)	802.11ac	PASS	NA	PASS	PASS	PASS	PASS		

FCC ID: ZNFQ710TS	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 28 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 20 01 70

© 2018 PCTEST Engineering Laboratory, Inc.

REV 3.2.M

I. Raw Handset Data

Table 9-2
Raw Data Results for GSM

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)	C63.19-2011 Rating	Test Coordinates					
		128	8.88	-13.91		2.00	22.79	20.00	-2.79	Т3						
	Axial	190	8.93	-14.13	-59.96	2.00	23.06	20.00	-3.06	Т3	1.4, 3.6					
GSM850		251	8.89	-13.38		2.00	22.27	20.00	-2.27	Т3						
GSIVIOSU		128	0.22	-26.24			26.46	20.00	-6.46	Т3						
	Radial	190	0.21	-25.62	-62.26	N/A	25.83	20.00	-5.83	Т3	2.0, 4.2					
		251	0.22	-25.04			25.26	20.00	-5.26	Т3						
		512	9.30	-19.02		2.00	28.32	20.00	-8.32	Т3						
	Axial	661	9.02	-19.52	-59.96	2.00	28.54	20.00	-8.54	Т3	1.4, 3.6					
GSM1900		810	8.87	-18.29		2.00	27.16	20.00	-7.16	Т3						
G31V11900		512	0.23	-29.53			29.76	20.00	-9.76	T3						
	Radial	661	0.26	-29.59	-62.26	-62.26	-62.26	-62.26	-62.26	-62.26	N/A	29.85	20.00	-9.85	T3	2.0, 4.2
		810	0.27	-29.92			30.19	20.00	-10.19	T4						

Table 9-3
Raw Data Results for UMTS

Naw Data Results for OWITS												
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)	C63.19-2011 Rating	Test Coordinates	
		4132	-7.72	-45.94		2.00	38.22	20.00	-18.22	T4		
	Axial	4183	-7.41	-45.94	-59.96	2.00	38.53	20.00	-18.53	T4	1.4, 3.6	
UMTS V		4233	-7.61	-44.53		2.00	36.92	20.00	-16.92	T4		
UNITSV		4132	-16.65	-53.77			37.12	20.00	-17.12	T4		
	Radial	4183	-16.85	-54.51	-62.26	N/A	37.66	20.00	-17.66	T4	2.0, 4.2	
		4233	-16.73	-53.98			37.25	20.00	-17.25	T4		
		1312	-7.55	-45.68	-59.96	2.00	38.13	20.00	-18.13	T4		
	Axial	1412	-7.67	-45.76		2.00	38.09	20.00	-18.09	T4	1.4, 3.6	
UMTS IV		1513	-7.80	-46.09		2.00	38.29	20.00	-18.29	T4		
OWISTV		1312	-16.82	-54.29			37.47	20.00	-17.47	T4		
	Radial	1412	-16.88	-54.51	-62.26	N/A	37.63	20.00	-17.63	T4	2.0, 4.2	
		1513	-16.78	-54.73			37.95	20.00	-17.95	T4		
		9262	-7.80	-45.16		2.00	37.36	20.00	-17.36	T4		
	Axial	9400	-7.83	-44.90	-59.96	2.00	37.07	20.00	-17.07	T4	1.4, 3.6	
UMTS II		9538	-7.66	-45.42		2.00	37.76	20.00	-17.76	T4		
OWISI		9262	-16.78	-53.59			36.81	20.00	-16.81	T4		
	Radial	9400	-16.99	-54.45	-62.26	-62.26 N	N/A	37.46	20.00	-17.46	T4	2.0, 4.2
		9538	-16.85	-54.14			37.29	20.00	-17.29	T4		

Table 9-4 Raw Data Results for LTE B71

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	133297	-1.88	-33.99		1.54	32.11	20.00	-12.11	T4	
	Axial	15MHz	133297	-1.88	-33.58	-59.96	1.68	31.70	20.00	-11.70	T4	1.4, 3.6
	Axiai	10MHz	133297	-1.87	-34.80	-59.90	1.60	32.93	20.00	-12.93	T4	1.4, 3.0
LTE Band		5MHz	133297	-1.91	-36.24		1.55	34.33	20.00	-14.33	T4	
71		20MHz	133297	-10.03	-44.21			34.18	20.00	-14.18	T4	
	Radial	15MHz	133297	-9.87	-45.19	-62.26	N/A	35.32	20.00	-15.32	T4	20.42
	radiai	10MHz	133297	-10.01	-46.59	-02.20	IWA	36.58	20.00	-16.58	T4	2.0, 4.2
		5MHz	133297	-9.91	-48.10			38.19	20.00	-18.19	T4	

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 29 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 29 01 70

Table 9-5 Raw Data Results for LTE B12

	1/411 5414 1/55416 10: 212 512												
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)	C63.19-2011 Rating	Test Coordinates	
		10MHz	23095	-1.73	-33.88		1.76	32.15	20.00	-12.15	T4		
		5MHz	23155	-1.47	-35.31		1.56	33.84	20.00	-13.84	T4		
	Axial	5MHz	23095	-1.83	-33.24	-59.96	1.66	31.41	20.00	-11.41	T4	1.4, 3.6	
Axiai	5MHz	23035	-1.83	-35.12	-59.90	1.56	33.29	20.00	-13.29	T4	1.4, 3.0		
		3MHz	23095	-1.69	-33.30		1.69	31.61	20.00	-11.61	T4		
LTE Band		1.4MHz	23095	-1.74	-34.81		1.77	33.07	20.00	-13.07	T4		
12		10MHz	23095	-10.18	-44.06			33.88	20.00	-13.88	T4		
		5MHz	23155	-10.23	-45.77			35.54	20.00	-15.54	T4		
	Radial	5MHz	23095	-10.21	-43.84	-62.26	N/A	33.63	20.00	-13.63	T4	2.0, 4.2	
	Radiai	5MHz	23035	-10.42	-47.74	-02.20	IN/A	37.32	20.00	-17.32	T4	2.0, 4.2	
		3MHz	23095	-10.50	-44.27			33.77	20.00	-13.77	T4		
		1.4MHz	23095	-10.12	-45.78			35.66	20.00	-15.66	T4		

Table 9-6 Raw Data Results for LTE B13

	Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)		Test Coordinates
Ī		Axial	10MHz	23230	-1.83	-36.43	-59.96	1.63	34.60	20.00	-14.60	T4	1.4, 3.6
	LTE Band	Axiai	5MHz	23230	-1.66	-35.61	-39.90	1.78	33.95	20.00	-13.95	T4	1.4, 5.0
	13	Radial	10MHz	23230	-10.24	-46.72	-62.26	N/A	36.48	20.00	-16.48	T4	2.0, 4.2
		Radiai	5MHz	23230	-10.16	-47.41	-02.20	N/A	37.25	20.00	-17.25	T4	2.0, 4.2

Table 9-7 Raw Data Results for LTE B5

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)		Test Coordinates
		10MHz	20525	-1.91	-36.34		1.68	34.43	20.00	-14.43	T4	
	Axial	5MHz	20525	-1.67	-36.25	-59.96	1.73	34.58	20.00	-14.58	T4	1.4. 3.6
	Axiai	3MHz	20525	-1.67	-35.39	-59.90	1.57	33.72	20.00	-13.72	T4	1.4, 5.0
 E Band 5		1.4MHz	20525	-1.66	-35.90		1.69	34.24	20.00	-14.24	T4	
 E Ballu 5		10MHz	20525	-10.49	-46.51			36.02	20.00	-16.02	T4	
	Radial	5MHz	20525	-10.37	-46.87	-62.26	N/A	36.50	20.00	-16.50	T4	2.0, 4.2
	radiai	3MHz	20525	-10.39	-46.27	-02.20	IN/A	35.88	20.00	-15.88	T4	2.0, 4.2
		1.4MHz	20525	-10.19	-46.30			36.11	20.00	-16.11	T4	

Table 9-8 Raw Data Results for LTE B66

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)		Test Coordinates
		20MHz	132322	-1.75	-36.41		1.63	34.66	20.00	-14.66	T4	
		15MHz	132322	-1.79	-35.44		1.60	33.65	20.00	-13.65	T4	
	Axial	10MHz	132322	-1.76	-37.01	-59.96	1.62	35.25	20.00	-15.25	T4	1.4, 3.6
	Axiai	5MHz	132322	-1.71	-35.11	-59.90	1.69	33.40	20.00	-13.40	T4	1.4, 3.0
	3MHz	132322	-1.94	-35.24		1.63	33.30	20.00	-13.30	T4		
LTE Band		1.4MHz	132322	-2.08	-35.42		1.58	33.34	20.00	-13.34	T4	
66		20MHz	132322	-10.33	-47.69			37.36	20.00	-17.36	T4	
		15MHz	132322	-10.16	-47.06			36.90	20.00	-16.90	T4	
	Radial	10MHz	132322	-10.06	-47.10	-62.26	N/A	37.04	20.00	-17.04	T4	2.0, 4.2
	radiai	5MHz	132322	-10.49	-46.13	-02.20	IN/A	35.64	20.00	-15.64	T4	2.0, 4.2
		3MHz	132322	-10.25	-45.94			35.69	20.00	-15.69	T4	
		1.4MHz	132322	-10.51	-47.07			36.56	20.00	-16.56	T4	

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 30 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 30 01 76

Table 9-9 Raw Data Results for LTE B2

						Courto IC						
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	18900	-1.80	-34.61		1.56	32.81	20.00	-12.81	T4	
		15MHz	18900	-1.79	-33.84		1.60	32.05	20.00	-12.05	T4	
	Axial	10MHz	18900	-1.75	-33.60	-59.96	1.58	31.85	20.00	-11.85	T4	1.4, 3.6
	Axiai	5MHz	18900	-1.85	-34.81	-59.90	1.49	32.96	20.00	-12.96	T4	1.4, 3.0
		3MHz	18900	-1.89	-34.78		1.65	32.89	20.00	-12.89	T4	
LTE Band 2		1.4MHz	18900	-1.72	-35.01		1.62	33.29	20.00	-13.29	T4	
LIE Ballu 2		20MHz	18900	-10.23	-45.26	6 0 9 -62.26 N/A		35.03	20.00	-15.03	T4	
		15MHz	18900	-10.13	-45.80			35.67	20.00	-15.67	T4	
	Radial	10MHz	18900	-10.19	-46.29		NI/A	36.10	20.00	-16.10	T4	2.0, 4.2
	Naulai	5MHz	18900	-10.24	-46.39		-62.26 N/A	36.15	20.00	-16.15	T4	2.0, 4.2
		3MHz	18900	-10.45	-46.34			35.89	20.00	-15.89	T4	
		1.4MHz	18900	-10.17	-46.08			35.91	20.00	-15.91	T4	

Table 9-10 Raw Data Results for LTE B41

					- ata : t	couito io	<u> </u>	• •				
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)		Test Coordinates
		20MHz	40620	-1.78	-24.49		1.70	22.71	20.00	-2.71	T3	
		15MHz	40620	-1.43	-23.92		1.72	22.49	20.00	-2.49	T3	
		10MHz	40620	-1.51	-24.22		1.73	22.71	20.00	-2.71	T3	
	Axial	5MHz	41490	-1.74	-24.57	-59.96	1.64	22.83	20.00	-2.83	Т3	1.4, 3.6
	Axiai	5MHz	41055	-1.48	-24.03	-59.90	1.53	22.55	20.00	-2.55	Т3	1.4, 5.0
		5MHz	40620	-1.71	-24.02		1.61	22.31	20.00	-2.31	Т3	
		5MHz	40185	-1.32	-24.85		1.67	23.53	20.00	-3.53	Т3	
LTE Band		5MHz	39750	-1.69	-23.63		1.77	21.94	20.00	-1.94	T3	
41		20MHz	40620	-10.45	-37.47			27.02	20.00	-7.02	Т3	
		15MHz	40620	-10.07	-36.63			26.56	20.00	-6.56	Т3	
		10MHz	41490	-10.40	-35.91			25.51	20.00	-5.51	Т3	
	Radial	10MHz	41055	-10.04	-36.23	62.26	N/A	26.19	20.00	-6.19	T3	2.0, 4.2
	radiai	10MHz	40620	-10.18	-36.67	-62.26 3 6	IN/A	26.49	20.00	-6.49	T3	2.0, 4.2
		10MHz	40185	-10.41	-37.83			27.42	20.00	-7.42	T3	
		10MHz	39750	-10.23	-36.16			25.93	20.00	-5.93	T3	
		5MHz	40620	-10.44	-37.21			26.77	20.00	-6.77	T3	

Table 9-11 Raw Data Results for 2.4GHz WIFI

	Naw Data Results for 2.49HZ WIFT												
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)	C63.19-2011 Rating	Test Coordinates		
WLAN	Axial	6	-6.12	-35.27	-59.96	1.75	29.15	20.00	-9.15	T3	1.4, 3.6		
802.11b	Radial	6	-14.81	-49.54	-62.26	N/A	34.73	20.00	-14.73	T4	2.0, 4.2		
	Axial	6	-6.55	-35.07	-59.96	1.68	28.52	20.00	-8.52	Т3	1.4, 3.6		
WLAN		1	-14.92	-50.11	-62.26		35.19	20.00	-15.19	T4			
802.11g	Radial	6	-14.85	-49.50		N/A	34.65	20.00	-14.65	T4	2.0, 4.2		
		11	-14.82	-49.71			34.89	20.00	-14.89	T4			
		1	-5.90	-32.16		1.73	26.26	20.00	-6.26	Т3			
WLAN	Axial	6	-5.74	-33.14		1.66	27.40	20.00	-7.40	Т3	1.4, 3.6		
802.11n		11	-6.59	-31.59		1.76	25.00	20.00	-5.00	Т3			
	Radial	6	-14.54	-49.37	-62.26	N/A	34.83	20.00	-14.83	T4	2.0, 4.2		

FCC ID: ZNFQ710TS	PETEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 31 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 31 01 76

Table 9-12 Raw Data Results for 5GHz WIFI 802.11a

							71 00112						
Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	1	36	-5.83	-38.84		1.68	33.01	20.00	-13.01	T4	
		20MHz	1	40	-6.23	-40.17		1.90	33.94	20.00	-13.94	T4	
	Axial	20MHz	1	48	-5.79	-41.15	-59.96	1.80	35.36	20.00	-15.36	T4	1.4, 3.6
	Axiai	20MHz	2A	56	-5.75	-40.73	-59.90	1.63	34.98	20.00	-14.98	T4	
		20MHz	2C	120	-5.83	-40.17		1.84	34.34	20.00	-14.34	T4	
		20MHz	3	157	-6.28	-40.33		1.89	34.05	20.00	-14.05	T4	
802.11a													
		20MHz	1	36	-14.43	-50.97			36.54	20.00	-16.54	T4	
		20MHz	1	40	-14.89	-49.76			34.87	20.00	-14.87	T4	
	Radial	20MHz	1	48	-14.69	-50.84	62.26	N/A	36.15	20.00	-16.15	T4	2.0, 4.2
	Itadiai	20MHz	2A	56	-14.47	-51.29	-62.26	IN/A	36.82	20.00	-16.82	T4	2.0, 4.2
		20MHz	2C	120	-14.44	-51.06			36.62	20.00	-16.62	T4	
		20MHz	3	157	-14.91	-50.27			35.36	20.00	-15.36	T4	

Table 9-13 Raw Data Results for 5GHz WIFI 802.11n

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)		Test Coordinates
	Avial	40MHz	1	38	-5.94	-40.79	-59.96	1.75	34.85	20.00	-14.85	T4	1.4, 3.6
Axial	20MHz	1	40	-5.68	-41.40	-55.50	1.74	35.72	20.00	-15.72	T4	1.4, 5.0	
802.11n													
	Radial	40MHz	1	38	-15.03	-52.66	62.26	NI/A	37.63	20.00	-17.63	T4	2.0, 4.2
L	i vadiai	20MHz	1	40	-14.85	-50.51	-62.26	2.26 N/A	35.66	20.00	-15.66	T4	2.0, 4.2

Table 9-14 Raw Data Results for 5GHz WIFI 802.11ac

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)	C63.19-2011 Rating	Test Coordinates
	Avial	40MHz	1	38	-5.67	-41.42	-59.96	1.69	35.75	20.00	-15.75	T4	1.4, 3.6
Axial	Axidi	20MHz	1	40	-5.77	-40.92	-59.90	1.71	35.15	20.00	-15.15	T4	1.4, 5.0
802.11ac													
	Radial	40MHz	1	38	-14.48	-50.24	-62.26	N/Δ	35.76	20.00	-15.76	T4	2.0, 4.2
	Naulai	20MHz	1	40	-14.66	-50.70	-62.26	62.26 N/A	36.04	20.00	-16.04	T4	2.0, 4.2

Table 9-15 Raw Data Results for EDGE (OTT VoIP)

That Data Hooding is 12-2 (CT For)											
Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)	C63.19-2011 Rating	Test Coordinates	
Axial	190	8.01	-16.65	-59.96	1.88	24.66	20.00	-4.66	Т3	1.4, 3.6	
Radial	190	0.53	-27.54	-62.26	N/A	28.07	20.00	-8.07	Т3	2.0, 4.2	
Axial	661	8.62	-20.71	-59.96	1.73	29.33	20.00	-9.33	Т3	1.4, 3.6	
Radial	661	0.19	-32.06	-62.26	N/A	32.25	20.00	-12.25	T4	2.0, 4.2	
	Axial Radial Axial	Axial 190 Radial 190 Axial 661	Orientation Channel ABM1 [dB(A/m)] Axial 190 8.01 Radial 190 0.53 Axial 661 8.62	Orientation Channel [dB(A/m)] [dB(A/m)] Axial 190 8.01 -16.65 Radial 190 0.53 -27.54 Axial Axial 661 8.62 -20.71	Orientation Channel [dB(A/m)] [dB(A/m)] <t< td=""><td>Orientation Channel ABM1 [dB(A/m)] ABM2 [dB(A/m)] Ambient Noise [dB(A/m)] Response Margin (dB) Axial 190 8.01 -16.65 -59.96 1.88 Radial 190 0.53 -27.54 -62.26 N/A Axial 661 8.62 -20.71 -59.96 1.73</td><td>Orientation Channel ABM1 [dB(A/m)] ABM2 [dB(A/m)] Ambient Noise [dB(A/m)] Frequency Response Margin (dB) S+N/N (dB) Axial 190 8.01 -16.65 -59.96 1.88 24.66 Radial 190 0.53 -27.54 -62.26 N/A 28.07 Axial 661 8.62 -20.71 -59.96 1.73 29.33</td><td>Orientation Channel ABM1 [dB(A/m)] ABM2 [dB(A/m)] Ambient Noise [dB(A/m)] Frequency Response Margin (dB) S+N/N (dB) FCC Limit (dB) Axial 190 8.01 -16.65 -59.96 1.88 24.66 20.00 Radial 190 0.53 -27.54 -62.26 N/A 28.07 20.00 Axial 661 8.62 -20.71 -59.96 1.73 29.33 20.00</td><td>Orientation Channel ABM1 [dB(A/m)] ABM2 [dB(A/m)] Ambient Noise [dB(A/m)] Frequency Response Margin (dB) S+N/N (dB) FCC Limit (dB) FCC Margin (dB) Axial 190 8.01 -16.65 -59.96 1.88 24.66 20.00 -4.66 Radial 190 0.53 -27.54 -62.26 N/A 28.07 20.00 -8.07 Axial 661 8.62 -20.71 -59.96 1.73 29.33 20.00 -9.33</td><td>Orientation Channel ABM1 [dB(A/m)] ABM2 [dB(A/m)] Ambient Noise [dB(A/m)] Frequency Response (dB) S+N/N (dB) FCC Limit (dB) FCC Margin (dB) C63.19-2011 (dB) Axial 190 8.01 -16.65 -59.96 1.88 24.66 20.00 -4.66 T3 Radial 190 0.53 -27.54 -62.26 N/A 28.07 20.00 -8.07 T3 Axial 661 8.62 -20.71 -59.96 1.73 29.33 20.00 -9.33 T3</td></t<>	Orientation Channel ABM1 [dB(A/m)] ABM2 [dB(A/m)] Ambient Noise [dB(A/m)] Response Margin (dB) Axial 190 8.01 -16.65 -59.96 1.88 Radial 190 0.53 -27.54 -62.26 N/A Axial 661 8.62 -20.71 -59.96 1.73	Orientation Channel ABM1 [dB(A/m)] ABM2 [dB(A/m)] Ambient Noise [dB(A/m)] Frequency Response Margin (dB) S+N/N (dB) Axial 190 8.01 -16.65 -59.96 1.88 24.66 Radial 190 0.53 -27.54 -62.26 N/A 28.07 Axial 661 8.62 -20.71 -59.96 1.73 29.33	Orientation Channel ABM1 [dB(A/m)] ABM2 [dB(A/m)] Ambient Noise [dB(A/m)] Frequency Response Margin (dB) S+N/N (dB) FCC Limit (dB) Axial 190 8.01 -16.65 -59.96 1.88 24.66 20.00 Radial 190 0.53 -27.54 -62.26 N/A 28.07 20.00 Axial 661 8.62 -20.71 -59.96 1.73 29.33 20.00	Orientation Channel ABM1 [dB(A/m)] ABM2 [dB(A/m)] Ambient Noise [dB(A/m)] Frequency Response Margin (dB) S+N/N (dB) FCC Limit (dB) FCC Margin (dB) Axial 190 8.01 -16.65 -59.96 1.88 24.66 20.00 -4.66 Radial 190 0.53 -27.54 -62.26 N/A 28.07 20.00 -8.07 Axial 661 8.62 -20.71 -59.96 1.73 29.33 20.00 -9.33	Orientation Channel ABM1 [dB(A/m)] ABM2 [dB(A/m)] Ambient Noise [dB(A/m)] Frequency Response (dB) S+N/N (dB) FCC Limit (dB) FCC Margin (dB) C63.19-2011 (dB) Axial 190 8.01 -16.65 -59.96 1.88 24.66 20.00 -4.66 T3 Radial 190 0.53 -27.54 -62.26 N/A 28.07 20.00 -8.07 T3 Axial 661 8.62 -20.71 -59.96 1.73 29.33 20.00 -9.33 T3	

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 32 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 32 01 76

Table 9-16 Raw Data Results for HSPA (OTT VoIP)

					counto ioi		• • • • • • •				
Mod	e Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)	C63.19-2011 Rating	Test Coordinates
HSP/	Axial	4183	9.14	-36.36	-59.96	1.63	45.50	20.00	-25.50	T4	1.4, 3.6
погл	Radial	4183	0.67	-51.38	-62.26	N/A	52.05	20.00	-32.05	T4	2.0, 4.2
HSPA	Axial	1412	8.98	-35.60	-59.96	1.71	44.58	20.00	-24.58	T4	1.4, 3.6
погл	Radial	1412	0.34	-51.30	-62.26	N/A	51.64	20.00	-31.64	T4	2.0, 4.2
HSP	Axial	9400	9.08	-35.79	-59.96	1.75	44.87	20.00	-24.87	T4	1.4, 3.6
1137/	Radial	9400	0.35	-51.64	-62.26	N/A	51.99	20.00	-31.99	T4	2.0, 4.2

Table 9-17 Raw Data Results for LTE B12 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)		Test Coordinates	
		10MHz	23095	8.81	-35.10		1.78	43.91	20.00	-23.91	T4		
		5MHz	23155	8.85	-36.55		1.74	45.40	20.00	-25.40	T4		
	Axial	5MHz	23095	8.84	-34.28	-59.96	1.88	43.12	20.00	-23.12	T4	1.4, 3.6	
	Axiai	5MHz	23035	8.77	-37.98	-59.90	1.83	46.75	20.00	-26.75	T4	1.4, 3.0	
	-	3MHz	23095	8.92	-35.17		1.73	44.09	20.00	-24.09	T4		
LTE Band		1.4MHz	23095	9.09	-35.93		1.70	45.02	20.00	-25.02	T4		
12		10MHz	23095	0.72	-43.19	-62.26		43.91	20.00	-23.91	T4		
		5MHz	23155	0.20	-46.11			46.31	20.00	-26.31	T4		
	Radial	5MHz	23095	0.43	-43.15		3.15 7.14 -62.26 N/A	NI/A	43.58	20.00	-23.58	T4	2.0, 4.2
	Radiai	5MHz	23035	0.44	-47.14			-62.26 N/A	47.58	20.00	-27.58	T4	2.0, 4.2
		3MHz	23095	0.45	-44.25				44.70	20.00	-24.70	T4	
		1.4MHz	23095	0.20	-44.93			45.13	20.00	-25.13	T4		

Table 9-18 Raw Data Results for LTE B41 (OTT VoIP)

Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)	C63.19-2011 Rating	Test Coordinates
	20MHz	40620	9.01	-24.37		1.75	33.38	20.00	-13.38	T4	
	15MHz	40620	8.93	-24.37		1.71	33.30	20.00	-13.30	T4	
	10MHz	41490	8.73	-22.59		1.69	31.32	20.00	-11.32	T4	
Axial	10MHz	41055	8.71	-23.11	-59.96	1.72	31.82	20.00	-11.82	T4	1.4, 3.6
Axiai	10MHz	40620	8.92	-24.15	-59.90	1.89	33.07	20.00	-13.07	T4	1.4, 5.0
	10MHz	40185	9.00	-24.85		1.77	33.85	20.00	-13.85	T4	
	10MHz	39750	8.75	-23.12		1.75	31.87	20.00	-11.87	T4	
	5MHz	40620	8.97	-24.36		1.82	33.33	20.00	-13.33	T4	
	20MHz	40620	0.44	-36.74			37.18	20.00	-17.18	T4	
	15MHz	40620	0.39	-36.72			37.11	20.00	-17.11	T4	
	10MHz	41490	0.40	-35.19			35.59	20.00	-15.59	T4	
Radial	10MHz	41055	0.18	-35.72	-62.26	N/A	35.90	20.00	-15.90	T4	2.0, 4.2
Raulai	10MHz	40620	0.30	-36.31	-02.20	IN/A	36.61	20.00	-16.61	T4	2.0, 4.2
	10MHz	40185	0.22	-37.36	i		37.58	20.00	-17.58	T4	
	10MHz	39750	0.16	-35.26			35.42	20.00	-15.42	T4	
	5MHz	40620	0.40	-36.61			37.01	20.00	-17.01	T4	

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 33 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 33 01 76

Table 9-19 Raw Data Results for 2.4GHz WIFI (OTT VoIP)

				 		TOTIZ VVII	1 (011 4	• /			
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)	C63.19-2011 Rating	Test Coordinates
		1	9.11	-34.38		1.62	43.49	20.00	-23.49	T4	
	Axial	6	8.93	-34.43	-59.96	1.69	43.36	20.00	-23.36	T4	1.4, 3.6
WLAN		11	8.98	-33.20		1.62	42.18	20.00	-22.18	T4	
802.11b		1	0.23	-46.59			46.82	20.00	-26.82	T4	
	Radial	6	0.35	-44.38	-62.26	N/A	44.73	20.00	-24.73	T4	2.0, 4.2
		11	0.09	-46.21			46.30	20.00	-26.30	T4	
WLAN	Axial	6	9.18	-37.30	-59.96	1.95	46.48	20.00	-26.48	T4	1.4, 3.6
802.11g	Radial	6	0.14	-46.80	-62.26	N/A	46.94	20.00	-26.94	T4	2.0, 4.2
WLAN	Axial	6	8.97	-34.98	-59.96	1.78	43.95	20.00	-23.95	T4	1.4, 3.6
802.11n	Radial	6	0.39	-47.10	-62.26	N/A	47.49	20.00	-27.49	T4	2.0, 4.2

Table 9-20 Raw Data Results for 5GHz WIFI 802.11a (OTT VoIP)

							-	-	, •	,			
Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	1	40	9.00	-37.39		1.69	46.39	20.00	-26.39	T4	
		20MHz	2A	56	8.83	-36.88		1.56	45.71	20.00	-25.71	T4	
	Axial	20MHz	2C	100	9.06	-35.26	-59.96	1.71	44.32	20.00	-24.32	T4	1.4, 3.6
	Axidi	20MHz	2C	120	9.00	-36.35	-59.96	1.73	45.35	20.00	-25.35	T4	1.4, 5.0
		20MHz	2C	140	9.17	-35.66		1.81	44.83	20.00	-24.83	T4	
		20MHz	3	157	9.05	-36.81		1.83	45.86	20.00	-25.86	T4	
802.11a													
		20MHz	1	40	0.44	-48.71			49.15	20.00	-29.15	T4	
		20MHz	2A	56	0.30	-47.58			47.88	20.00	-27.88	T4	
	Radial	20MHz	2C	100	0.52	-47.54	-62.26	N/A	48.06	20.00	-28.06	T4	2.0, 4.2
	Naulai	20MHz	2C	120	0.66	-47.16	-02.20	47.82	47.82	20.00	-27.82	T4	2.0, 4.2
		20MHz	2C	140	0.43	-46.85			47.28	20.00	-27.28	T4	
		20MHz	3	157	0.66	-48.03			48.69	20.00	-28.69	T4	

Table 9-21 Raw Data Results for 5GHz WIFI 802.11n (OTT VoIP)

	Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)		Test Coordinates
	Axial	Avial	40MHz	1	38	9.31	-38.29	-59.96	1.91	47.60	20.00	-27.60	T4	1.4, 3.6
		Axidi	20MHz	1	40	9.04	-37.57	-59.90	1.68	46.61	20.00	-26.61	T4	
	802.11n													
		Radial	40MHz	1	38	0.35	-49.48	62.26	N/A	49.83	20.00	-29.83	T4	2.0, 4.2
	Radial	20MHz	1	40	0.86	-48.62	-62.26	N/A	49.48	20.00	-29.48	T4	2.0, 4.2	

Table 9-22 Raw Data Results for 5GHz WIFI 802.11ac (OTT VoIP)

				Data it	ounto i	0. 00		02 0	(0	~ <i>,</i>			
Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	FCC Margin (dB)		Test Coordinates
	Axial	40MHz	1	38	8.93	-38.10	-59.96	1.60	47.03	20.00	-27.03	T4	1.4. 3.6
	Axidi	20MHz	1	40	9.04	-38.42		1.74	47.46	20.00	-27.46	T4	1.4, 5.0
802.11ac													
	Radial	40MHz	1	38	0.49	-50.41	-62.26	N/A	50.90	20.00	-30.90	T4	2.0, 4.2
	Nadiai	20MHz	1	40	0.23	-51.80	-02.20	02.20 N/A	52.03	20.00	-32.03	T4	2.0, 4.2

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 34 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Faye 54 01 70

II. **Test Notes**

A. General

- 1. Phone Condition: Mute on; Backlight off; Max Volume; Max Contrast
- 2. 'Radial' orientation refers to radial transverse.
- 3. Hearing Aid mode (Phone→Call Settings→More→Hearing aids) as well as Noise Suppression mode (Phone→Call Settings→More→Noise suppression) was set to ON for Frequency Response compliance
- 4. Speech Signal: ITU-T P.50 Artificial Voice
- 5. Bluetooth and WIFI were disabled for 2G/3G/4G modes while testing.
- 6. Licensed data modes and Bluetooth were disabled for WIFI modes while testing.

B. GSM

- 1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0;
- 2. Vocoder Configuration: EFR (GSM);

C. UMTS

- 1. Power Configuration: TPC= "All 1s";
- 2. Vocoder Configuration: AMR 12.2 kbps (UMTS);

D. LTE FDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Vocoder Configuration: WB AMR 6.60kbps
- 4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 12 at 5MHz is the worst-case for both Axial and Radial probe orientations.

E. LTE TDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Uplink-Downlink configuration: 2
- 4. Vocoder Configuration: WB AMR 6.60kbps
- 5. The worst-case bandwidth for each probe orientation is additionally tested on the low, low-mid, mid-high and high channels. LTE Band 41 at 5MHz is the worst-case for the Axial probe orientation. LTE Band 41 at 10MHz is the worst-case for the Radial probe orientation.

FCC ID: ZNFQ710TS	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 35 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 33 01 70

F. WIFI


- 1. Radio Configuration
 - a. 802.11b: DSSS, 1Mbps
 - b. 802.11g/a: QPSK, 12Mbps
 - c. 802.11n/ac 20MHz: BPSK, 6.5Mbps
 - d. 802.11n/ac 40MHz: 64QAM, 108Mbps
- 2. Vocoder Configuration: WB AMR 6.60kbps
- 3. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. 802.11n is the worst-case for the Axial probe orientation. 802.11g is the worst-case for the Radial probe orientation.
- 4. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. 802.11a (U-NII 1) is the worst-case for both Axial and Radial probe orientations.

G. OTT VolP


- 1. Vocoder Configuration: 6kbps
- 2. EDGE Configuration
 - a. MCS Index: 7
 - b. Number of TX slots: 2
- 3. HSPA Configuration:
 - a. Release: 6
 - b. 3GPP 34.121 Subtest 1
- 4. LTE FDD Configuration:
 - a. Power Configuration: TPC = "Max Power"
 - b. Radio Configuration: 16QAM, 1RB, 0RB offset
 - c. LTE Band 12 was the worst-case band from Table 7-5 and was used for testing both Axial and Radial probe orientations.
 - The worst-case bandwidth for each probe orientation is additionally tested on the low and high channels. LTE Band 12 at 5MHz is the worst-case for both Axial and Radial probe orientations.
- 5. LTE TDD Configuration:
 - a. Power Configuration: TPC = "Max Power"
 - Radio Configuration: 16QAM, 1RB, 0RB offset
 - Uplink-Downlink configuration: 2
 - d. The worst-case bandwidth for each probe orientation is additionally tested on the low, low-mid, mid-high and high channels. LTE Band 41 at 10MHz is the worst-case for both Axial and Radial probe orientations.
- 6. WIFI Configuration:
 - a. Radio Configuration
 - i. 802.11b: DSSS, 1Mbps
 - ii. 802.11g/a: QPSK, 12Mbps
 - iii. 802.11n/ac 20MHz: BPSK, 6.5Mbps
 - iv. 802.11n/ac 40MHz: 64QAM, 108Mbps
 - b. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. 802.11b is the worst-case for both Axial and Radial probe orientations.
 - The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. 802.11a (U-NII 2C) is the worst-case for both Axial and Radial probe orientations.

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 36 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 30 01 70

1 kHz Vocoder Application Check III.

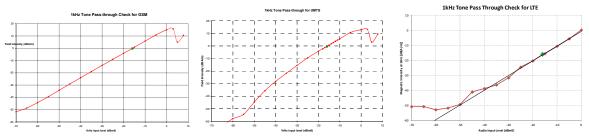

This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM, UMTS, and VoLTE over IMS. This measurement was taken in the axial configuration above the maximum location.

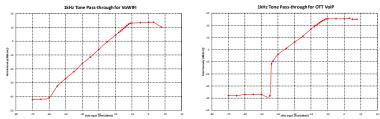

This model was verified to be within the linear region for ABM1 measurements at -20 dBm0 for VoWIFI over IMS and OTT VoIP. This measurement was taken in the axial configuration above the maximum location.

IV. **T-Coil Validation Test Results**

Table 9-23 Helmholtz Coil Validation Table of Results

Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.165	PASS
Environmental Noise	< -58 dBA/m	-59.96	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.262	PASS
Environmental Noise	< -58 dBA/m	-62.26	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS

FCC ID: ZNFQ710TS	PCTEST	HAC (1-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 37 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 37 Ol 76

ABM1 Magnetic Field Distribution Scan Overlays ٧.

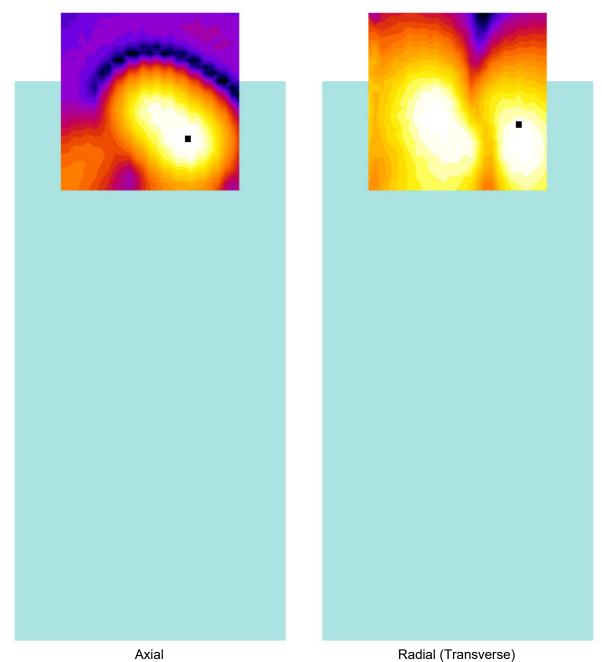


Figure 9-1 T-Coil Scan Overlay Magnetic Field Distributions

Notes:

- 1. Final measurement locations are indicated by a cursor on the contour plots.
- 2. See Test Setup Photographs for actual WD overlay.

FCC ID: ZNFQ710TS	POTEST:	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 38 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 30 01 70

© 2018 PCTEST Engineering Laboratory, Inc.

REV 3.2.M

10. MEASUREMENT UNCERTAINTY

Table 10-1
Uncertainty Estimation Table

Contribution	Data +/- %	Data +/- dB	Data Type	Probability distribution	Divisor	Standard uncertainty	Standard Uncertainty (dB)
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%	
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%	
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%	
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular 1.73		7.0%	
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%	
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%	
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%	
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%	
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%	
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%	
Combined standard uncertainty, uc (k=1)							0.71
Expanded uncertainty (k=2),	Expanded uncertainty (k=2), 95% confidence level						

Notes:

- 1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.
- All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: ZNFQ710TS	PCTEST	TAC (1-COIL) IEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 39 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 39 01 70

11. EQUIPMENT LIST

Table 11-1 Equipment List

	Equipment List							
Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number		
Dell	Latitude E6540	SoundCheck Acoustic Analyzer Laptop	4/11/2017	Annual	4/11/2018	7BFNM32		
Listen	SoundConnect	Microphone Power Supply	N/A		N/A	0899-PS150		
Listen	SoundConnect	Microphone Power Supply	12/2/2016	Biennial	12/2/2018	PS2612		
RME	Fireface UC	Soundcheck Acoustic Analyzer External Audio Interface	4/11/2017	Annual	4/11/2018	23528889		
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	1/19/2018	Annual	1/19/2019	162125		
Rohde & Schwarz	CMW500	Radio Communication Tester	7/14/2017	Annual	7/14/2018	140144		
Seekonk	NC-100	Torque Wrench (8" lb)	9/1/2016	Biennial	9/1/2018	21053		
TEM	C63.19	Helmholtz Coil	12/7/2016	Biennial	12/7/2018	925		
TEM	Radial T-Coil Probe	Radial T-Coil Probe	12/7/2016	Biennial	12/7/2018	TEM-1130		
TEM	Axial T-Coil Probe	Axial T-Coil Probe	12/7/2016	Biennial	12/7/2018	TEM-1124		
TEM		HAC System Controller with Software	N/A		N/A	N/A		
TEM		HAC Positioner	N/A		N/A	N/A		

FCC ID: ZNFQ710TS	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 40 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 40 of 76

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	€ LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 41 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Faye 410170



DUT: HH Coil - SN: 925

Type: HH Coil Serial: 925


Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 12/07/2016

Helmholtz Coil – SN: 925; Calibrated: 12/07/2016

Noise Spectrum

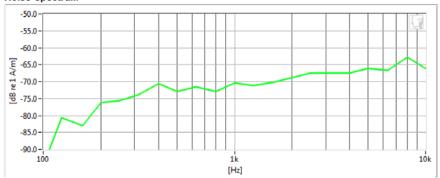

Frequency Response

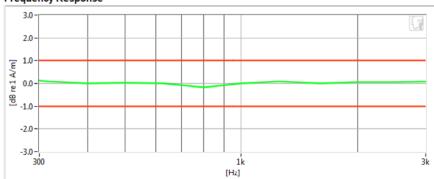

Results

Verification 1kHz Intensity	-10.165 dB	•	Max/Min	-9.5/-10.5
Verification ABM2	-59.96 dB	•	Maximum	-58.0
Frequency Response Margin	800m dB	•	Tolerance curves	Aligned Data

FCC ID: ZNFQ710TS	PCTEST	HAC (1-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 42 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 42 01 70



DUT: HH Coil - SN: 925


Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1130; Calibrated: 12/07/2016
- Helmholtz Coil SN: 925; Calibrated: 12/07/2016

Noise Spectrum

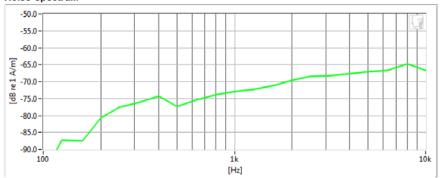

Frequency Response

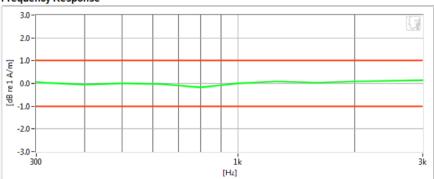

Results

Verification 1kHz Intensity	-10.262 dB	\checkmark	Max/Min	-9.5/-10.5
Verification ABM2	-62.26 dB	\checkmark	Maximum	-58.0
Frequency Response Margin	800m dB	•	Tolerance curves	Aligned Data

FCC ID: ZNFQ710TS	PCTEST	HAC (1-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 43 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 43 01 76



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 12/07/2016

Test Configuration:

Mode: GSM850Channel: 251

• Speech Signal: ITU-T P.50 Artificial Voice

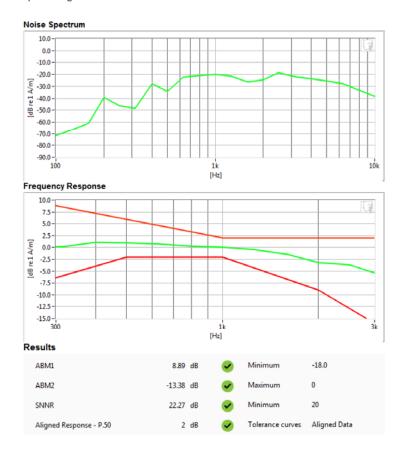

FCC ID: ZNFQ710TS	POTEST:	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 44 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 44 01 70



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 12/07/2016

Test Configuration:

Mode: GSM1900Channel: 810

• Speech Signal: ITU-T P.50 Artificial Voice

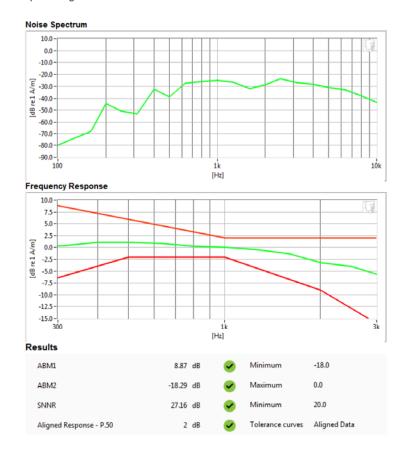

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 45 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 43 01 70



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 12/07/2016

Test Configuration:

Mode: UMTS VChannel: 4233

• Speech Signal: ITU-T P.50 Artificial Voice

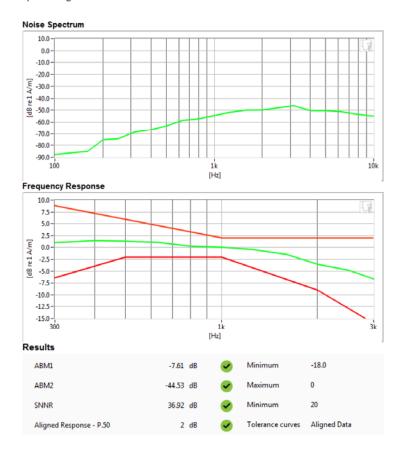

FCC ID: ZNFQ710TS	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 46 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 40 01 70



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 12/07/2016

Test Configuration:

Mode: UMTS IVChannel: 1412

• Speech Signal: ITU-T P.50 Artificial Voice

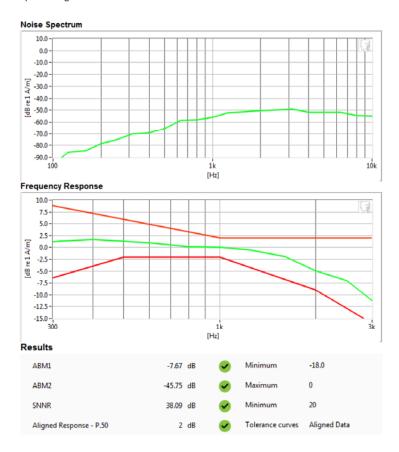

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 47 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 47 Oi 76



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 12/07/2016

Test Configuration:

Mode: UMTS IIChannel: 9400

• Speech Signal: ITU-T P.50 Artificial Voice

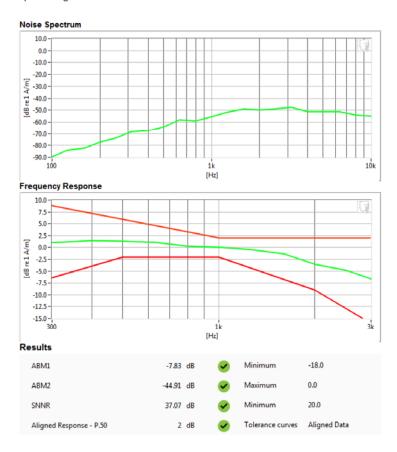

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 48 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 40 01 70



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 12/07/2016


Test Configuration:

Mode: LTE FDD Band 12

Bandwidth: 5MHz

Channel: 23095

Speech Signal: ITU-T P.50 Artificial Voice

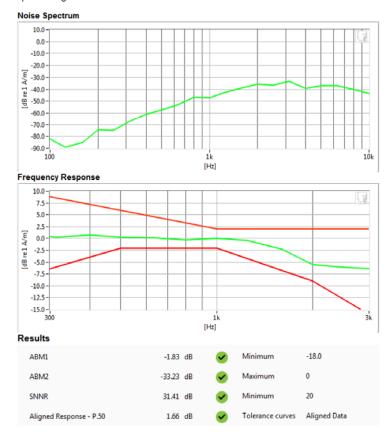

FCC ID: ZNFQ710TS	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 49 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Faye 49 01 70



Type: Portable Handset Serial: 05783


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 12/07/2016

Test Configuration:

- Mode: LTE TDD Band 41 (PC3)
- Bandwidth: 5MHz
- Channel: 39750
- Speech Signal: ITU-T P.50 Artificial Voice

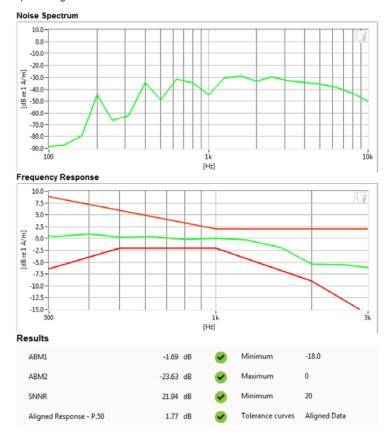

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 50 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 50 01 76



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 12/07/2016

Test Configuration:

Mode: 2.4GHz WIFIStandard: IEEE 802.11n

Channel: 11

• Speech Signal: ITU-T P.50 Artificial Voice

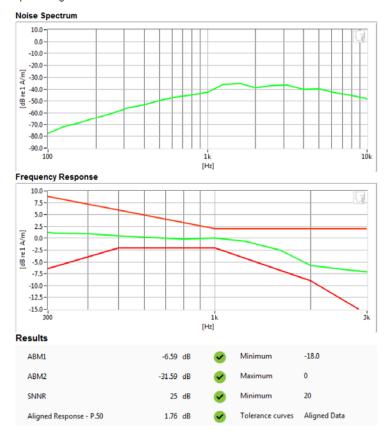

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 51 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 51 01 76



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 12/07/2016

Test Configuration:


Mode: 5GHz WIFI (U-NII 1)Standard: IEEE 802.11a

Bandwidth: 20MHz

Channel: 36

• Speech Signal: ITU-T P.50 Artificial Voice



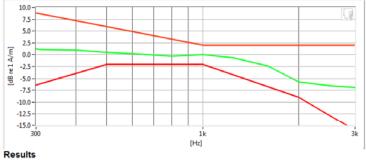

ABM1	-5.83	dB	✓	Minimum	-18.0
ABM2	-38.83	dB	\checkmark	Maximum	0
SNNR	33.01	dB	•	Minimum	20
Aligned Response - P.50	1.68	dB	•	Tolerance curves	Aligned Data

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 52 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 32 01 70



Type: Portable Handset Serial: 05783


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 12/07/2016

Test Configuration:

- VolP Application: Google Duo
- Mode: EDGE850
- Channel: 190
- Speech Signal: ITU-T P.50 Artificial Voice

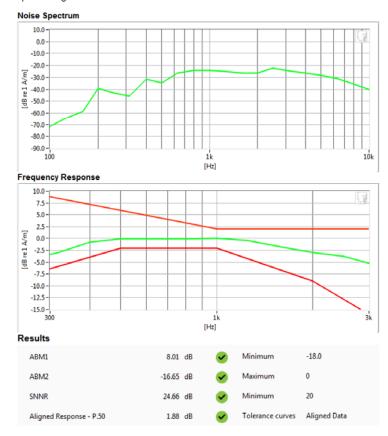

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 53 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 55 01 76



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011

Equipment:

SNNR

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 12/07/2016

Test Configuration:

Mode: GSM850Channel: 251



25.26 dB

20.0

Minimum

FCC ID: ZNFQ710TS	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 54 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 34 01 70



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011


Equipment:

SNNR

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 12/07/2016

Test Configuration:

Mode: GSM1900Channel: 512

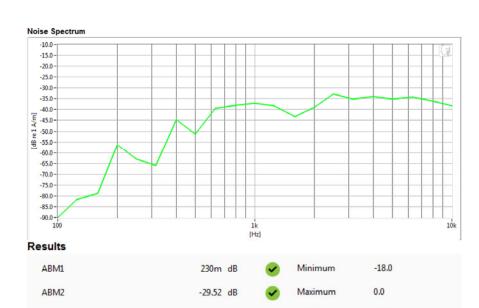

29.76 dB

20.0

Minimum

FCC ID: ZNFQ710TS	PCTEST	HAC (1-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 55 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 33 01 70



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 12/07/2016

Test Configuration:

Mode: UMTS VChannel: 4132



FCC ID: ZNFQ710TS	HAC (T-COIL) TEST REPORT		(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 56 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 30 01 70



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011

Equipment:

SNNR

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 12/07/2016

Test Configuration:

Mode: UMTS IVChannel: 1312



37.47 dB

20.0

Minimum

FCC ID: ZNFQ710TS	PCTEST*	HAC (I-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 57 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 37 0170



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011

Equipment:

SNNR

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 12/07/2016

Test Configuration:

Mode: UMTS IIChannel: 9262



36.81 dB

20.0

Minimum

FCC ID: ZNFQ710TS	HAC (T-COIL) TEST REPORT		① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 58 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 30 01 70



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 12/07/2016

Test Configuration:

Mode: LTE FDD Band 12
Bandwidth: 5MHz
Channel: 23095

Noise Spectrum



FCC ID: ZNFQ710TS	HAC (T-COIL) TEST REPORT		(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 59 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 59 01 76



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 12/07/2016

Test Configuration:

Mode: LTE TDD Band 41 (PC3)

Bandwidth: 10MHzChannel: 41490

Noise Spectrum



FCC ID: ZNFQ710TS	HAC (T-COIL) TEST REPORT		LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 60 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 60 01 76



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 12/07/2016

Test Configuration:

Mode: 2.4GHz WIFIStandard: IEEE 802.11g

Channel: 6

Noise Spectrum



FCC ID: ZNFQ710TS	HAC (T-COIL) TEST REPORT		① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 61 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 010170



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 12/07/2016

Test Configuration:

Mode: 5GHz WIFI (U-NII 1)
Standard: IEEE 802.11a
Bandwidth: 20MHz
Channel: 40

Noise Spectrum



FCC ID: ZNFQ710TS	PCTEST*	HAC (1-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 62 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 02 01 70



Type: Portable Handset Serial: 05783

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 12/07/2016

Test Configuration:

VolP Application: Google Duo

Mode: EDGE850 Channel: 190

Noise Spectrum

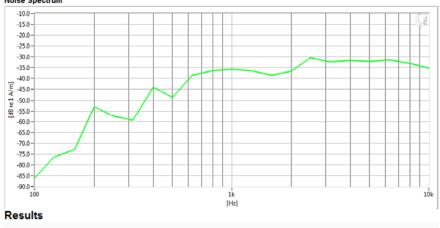


ABM1	530m dB	\checkmark	Minimum	-18.0
ABM2	-27.55 dB	\checkmark	Maximum	0.0
SNNR	28.07 dB	•	Minimum	20.0

FCC ID: ZNFQ710TS	HAC (T-COIL) TEST REPORT		LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 63 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 63 01 76

13. CALIBRATION CERTIFICATES

FCC ID: ZNFQ710TS	HAC (T-COIL) TEST REPORT		(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 64 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 64 01 76

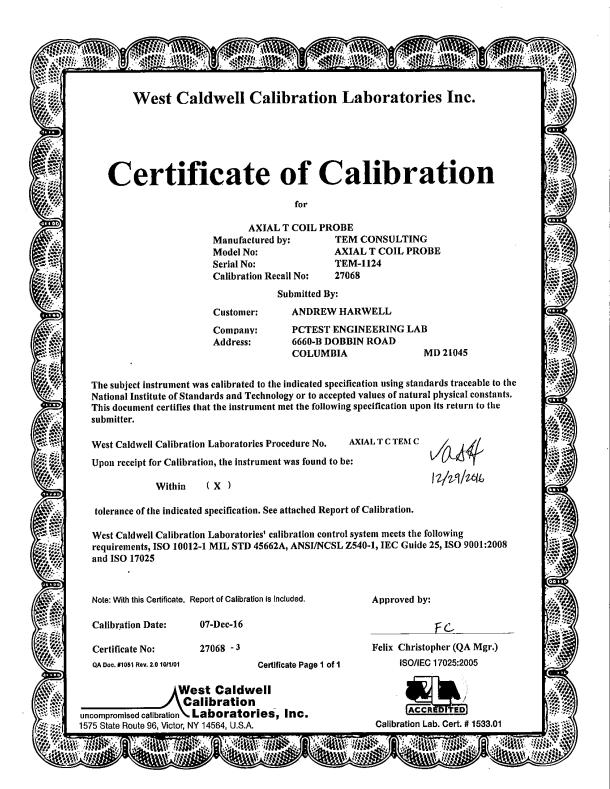

FCC ID: ZNFQ710TS	INCINENTAL LABORATORS, INC.	HAC (1-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 65 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		rage 65 of 76

© 2018 PCTEST Engineering Laboratory, Inc.

REV 3.2.M

HCATEMC TEM 1124 Dec-07-2016



ISO/IEC 17025: 2005

1575 State Route 96, Victor NY 14564

Calibration Lab. Cert. # 1533.01

REPORT OF CALIBRATION

TEM Consulting LP Axial T Coil Probe Model No.: Axial T Coil Probe Serial No.: TEM 1124

Company: PCTEST Engineering Lab. I. D. No: 80578

Probe Sensitivity measured wit	h Heimholt	z Call			
Helmholtz Coil;			Before & afte	r data same	.: X
the number of turns on each coil;	10	No.			
the radius of each coil, in meters;	0.204	m	Laboratory Environ	ment:	
the current in the coils, in amperes.;	0.09	Α	Ambient Temperature:	20.2	°C
Helmholtz Coil Constant;	7.09	A/m/V	Ambient Humidity:	31.4	% RH
Helmholtz Coil magnetic field;	5.98	A/m	Ambient Pressure:	99.1	кP«
			Calibration Date:	7-D••-16	
Probe Sensitivity at	1000	H₂.			
was	-60.23	a BV/A/m	Report Number:	27068	-3
	0.974	m V/A/m	Control Number:	27068	
Probe resistance	904	On m .			
he above listed instrument meets or e	xceeds tl	ie tested manufact	urer's specifications.		
is Calibration is traceable through NIST tast number:	:	683/284413-14	_		

Graph represents Probes Frequency Response.

Axial Probe Response Measured Probe Resp. 15 10 Magnitude (dB) 5 0 -10 -15 -20 100 Freq. (Hz) 10000

The above listed instrument was checked using calibration procedure documented in West Caldwell Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC Calibration Laboratories Inc. procedure :

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2008, ISO 17025

Cal. Date: 7-Dec-2016 Felix Christopher Calibrated on WCCL system type 9700 Ray. 7.0 Jan. 24, 2014 Day. # 1038 HCATEMC

Page 1 of 2

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 66 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 00 01 70

© 2018 PCTEST Engineering Laboratory, Inc.

HCATEMC_TEM 1124_Dec-07-2016

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Axial T Coil Probe

Model No.: Axial T Coil Probe

Serial No.: TEM 1124

Company: PCTEST Engineering Lab.

Test	Function	Tolera	nce	Me	easured valu	ies
				Before	Out	Remarks
1.0	Probe Sensitivity at	1000 Hz.	d BV/A/m	-60.23		
			аΒ			
2.0	Probe Level Linearity		6	6.03		
		R∗r. (0 a B)	0	0.00		
ĺ			-6	-6.03		
			-12	-12.05		
			Hz			
3.0	Probe Frequency Response		100	-19.8		
			126	-18.0		
			158	-16.0		
			200	-13.9		
			251	-12.0		
			316	-9.9		
			398	-8.0		
			501	-6.0		
			631	-4.0		
			794	-2.0		
		Ror. (0 a B)	1000	0.0		
			1259	2.0		
			1585	4.0		
			1995	6.0		
			2512	7.9		
			3162	9.9		
			3981	11.9		
			5012	13.9		
			6310	15.9		
			7943	18.0		
			10000	20.2		

Instruments used for celibr	etion:		Date of Cal.	Traceability No.	Dua Data
HP	34401A	S/N 36064102	1-Oct-2016	,287708	1-Oot-2017
HP	34401A	S/N 35102471	1-Oct-2016	,287708	1-Oct-2017
HP	33120A	S/N 36043716	1-Oct-2016	.287708	1-Oct-2017
B&K	2133	S/N 1583254	1-Oct-2016	683/284413-14	1-Oot-2017

Cal. Date: 7-Dec-2016 Calibrated on WCCL system type 9700

Tested by: Felix Christopher

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Laber Inc.


Rev. 7.0 Jan. 24, 2014 Dec. # 1038 HCATEMC

Page 2 of 2

FCC ID: ZNFQ710TS	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 67 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page 07 01 70

© 2018 PCTEST Engineering Laboratory, Inc.

REV 3.2.M

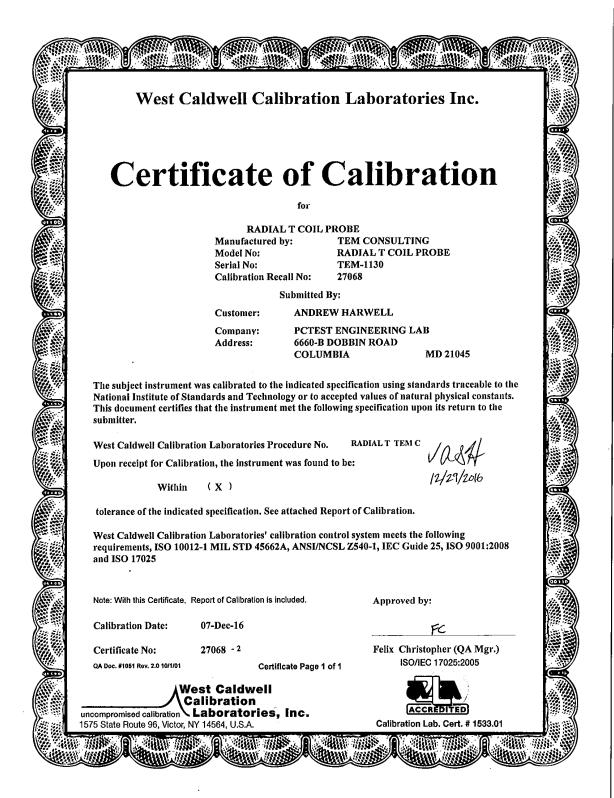

FCC ID: ZNFQ710TS	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 68 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		rage 00 01 70

© 2018 PCTEST Engineering Laboratory, Inc.

REV 3.2.M

HCRTEMC TEM-1130 Dec-07-2016



ISO/IEC 17025: 2005

1575 State Route 96, Victor NY 14564

Calibration Lab. Cert. # 1533.01


REPORT OF CALIBRATION

TEM Consulting LP Radial T Coil Probe Model No.: Radial T Coil Probe Serial No.: TEM-1130

I. D. No: 80579 Company: PCTEST Engineering Lab.

Probe Sensitivity measured wit	h Heimholt	z Call			
Helmholtz Coil;			Before & afte	r data same	.: X
the number of turns on each coil;	10	No.			
the radius of each coil, in meters;	0.204	m	Laboratory Environ	ment:	
the current in the coils, in amperes.;	0.09	Α	Ambient Temperature:	20.2	°C
Helmholtz Coil Constant;	7.09	A/m/V	Ambient Humidity:	31.4	% RH
Helmholtz Coil magnetic field;	5.98	A/m	Ambiens Pressure:	99.1	κP«
			Calibration Date:	7-D••-16	
Probe Sensitivity at	1000	Hz.			
was	-60.27	a BV/A/m	Report Number:	27068	-2
	0.969	m V/A/m	Control Number:	27068	
Probe resistance	902	On m .			
he above listed instrument meets or e	xceeds tl	ne tested manufact	urer's specifications.		
nis Calibration is traceable through NIST tast number:	:	683/284413-14			

Graph represents Probes Frequency Response.

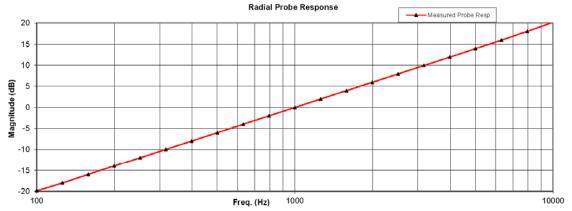

The above listed instrument was checked using calibration procedure documented in West Caldwell Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC Calibration Laboratories Inc. procedure :

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2008, ISO 17025

Cal. Date: 7-Dec-2016

Felix Christopher Calibrated on WCCL system type 9700 Ray. 7.0 Jan. 24, 2014 Day. # 1038 HCRTEMC

Page 1 of 2

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 69 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 69 01 76

© 2018 PCTEST Engineering Laboratory, Inc.

HCRTEMC_TEM-1130_Dec-07-2016

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Radial T Coil Probe

Model No.: Radial T Coil Probe

Serial No.: TEM-1130

Company: PCTEST Engineering Lab.

Test	Function	Tolera	nce	Measured values		
				Before	Out	Remarks
1.0	Probe Sensitivity at	1000 Hz.	a BV/A/m	-60.27		
2.0	Probe Level Linearity	R•r. (0 dB)	⊌B 6 0 -6 -12	6.03 0.00 -6.03 -12.06		
3.0	Probe Frequency Response	Ror. (0 d B)	H _z 100 126 158 200 251 316 398 501 631 794 1000 1259 1585 1995 2512 3162 3981 5012 6310 7943 10000	-19.9 -18.0 -16.0 -13.9 -12.0 -10.0 -8.0 -6.0 -4.0 -2.0 0.0 2.0 4.0 6.0 7.9 9.9 11.9 13.9 15.9 18.0 20.2		

Instruments used for celibration	on:		Date of Cal.	Traceability No.	Dua Data
HP	34401A	S/N 36064102	1-Oct-2016	,287708	1-Oct-2017
HP	34401A	S/N 36102471	1-Oct-2016	,287708	1-Oct-2017
HP	33120A	S/N 36043716	1-Oct-2016	.287708	1-Oct-2017
B&K	2133	S/N 1583254	1-Oct-2016	683/284413-14	1-Oot-2017

Cal. Date: 7-Dec-2016 Calibrated on WCCL system type 9700

Tested by: Felix Christopher

Rev. 7.0 Jan. 24, 2014 Dec. # 1038 HCRTEMC

Page 2 of 2

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 70 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Fage 70 01 70

© 2018 PCTEST Engineering Laboratory, Inc.

REV 3.2.M

14. CONCLUSION

The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 71 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		Page / For / 6

15. REFERENCES

- ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- 2. FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13,
- FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, " IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- 11. Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells, "U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- 12. Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1013, July 1981.
- 13. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- 14. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- 15. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- 16. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.

FCC ID: ZNFQ710TS	PETEST:	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 72 of 76
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		

- Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- 19. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 21. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
- 23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S.
 Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- 25. Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- 28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: ZNFQ710TS	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 73 of 76	
1M1803050033-11.ZNF	03/26/2018 - 04/02/2018	Portable Handset		rage 73 of 70	