

S

T

S

L

A

B



FCC SAR TEST REPORT

Report No.: STS2201037H01

Issued for

RM Acquisition LLC.

8770 West Bryn Mawr Avenue, Chicago, IL 60631


Product Name:	GPS Device
Brand Name:	RAND McNALLY
Model Name:	TND T1050
Series Model:	N/A
FCC ID:	A4C-10016A
Test Standard:	ANSI/IEEE Std. C95.1
	FCC 47 CFR Part 2 (2.1093)
	IEEE 1528: 2013
Max. Report SAR (1g):	Body: 1.357 W/kg

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com





Test Report Certification

Applicant's name : RM Acquisition LLC.

Address..... : 8770 West Bryn Mawr Avenue, Chicago, IL 60631

Manufacture's Name : SHEN ZHEN APICAL TECHNOLOGY CO., LTD

Address..... : 9/F,B Building, Tinghua Unis Infoport, Langshan RD, North district, Hi-tech Industrial Park, Nanshan, Shenzhen

Product description

Product name..... : GPS Device

Brand name : RAND McNALLY

Model name : TND T1050

Series Model..... : N/A

Standards : ANSI/IEEE Std. C95.1-1992
FCC 47 CFR Part 2 (2.1093)
IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of Test

Date (s) of performance of tests..... : 12 Jan. 2022 ~ 14 Jan. 2022

Date of Issue : 17 Jan. 2022

Test Result..... : **Pass**

Testing Engineer : _____

(Shifan. Long)

Technical Manager : _____

(Sean she)

Authorized Signatory : _____

(Vita Li)





Table of Contents

1. General Information	5
1.1 EUT Description	5
1.2 Test Environment	6
1.3 Test Factory	6
2. Test Standards and Limits	7
3. SAR Measurement System	8
3.1 Definition of Specific Absorption Rate (SAR)	8
3.2 SAR System	8
4. Tissue Simulating Liquids	11
4.1 Simulating Liquids Parameter Check	11
5. SAR System Validation	13
5.1 Validation System	13
5.2 Validation Result	13
6. SAR Evaluation Procedures	14
7. EUT Antenna Location Sketch	15
7.1 SAR test exclusion consider table	16
8. EUT Test Position	18
8.1 Body-worn Position Conditions	18
8.2 Hotspot mode exposure position condition	18
9. Measurement Uncertainty	19
10. Conducted Power Measurement	20
10.1 Test Result	20
11. EUT And Test Setup Photo	23
11.1 EUT Photo	23
11.2 Setup Photo	26
12. SAR Result Summary	29
12.1 Body-worn and hotspot SAR	29
12.2 repeated SAR measurement	31
13. Equipment List	32
Appendix A. System Validation Plots	33
Appendix B. SAR Test Plots	43
Appendix C. Probe Calibration And Dipole Calibration Report	48

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	17 Jan. 2022	STS2201037H01	ALL	Initial Issue





1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	GPS Device		
Brand Name	RAND McNALLY		
Model Name	TND T1050		
Series Model	N/A		
Model Difference	N/A		
Battery	Rated Voltage: 3.7V Charge Limit Voltage: 4.2V Capacity: 8000mAh		
Device Category	Portable		
Product stage	Production unit		
RF Exposure Environment	General Population / Uncontrolled		
Hardware Version	TND T1050-MT8176-MAIN-01B		
Software Version	O11019. TND 1050 -P1-220110-110		
Frequency Range	WLAN802.11b/g/n(HT20)/n(HT40): 2412~2462MHz 2.4G WLAN 802.11b/g/n20/n40: 2412 to 2462 MHz 5.2G WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5150 to 5250 MHz 5.3G WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5250 ~ 5350 MHz 5.6G WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5470 to 5725 MHz 5.8G WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5725 to 5875 MHz Bluetooth: 2402 to 2480 MHz		
Max. Reported SAR(1g): (Limit:1.6W/kg)	Band	Mode	Body worn and hotspot (W/kg)
	DTS	2.4GHz WLAN	0.786
	NII	5.2GHz WLAN	1.080
	NII	5.3GHz WLAN	1.291
	NII	5.6GHz WLAN	0.913
	NII	5.8GHz WLAN	1.357
FCC Equipment Class	Part 15 Spread Spectrum Transmitter (DSS) Unlicensed National Information Infrastructure TX (NII) Digital Transmission System (DTS)		
Operating Mode	WLAN: 802.11 a/b/g/n20/n40/ac20/ ac80 Bluetooth: GFSK		
Antenna Specification	PIFA Antenna		
Hotspot Mode	Support		
DTM Mode	Not Support		
Note:			
1. Estimated exemption for Bluetooth.			
2. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power			
3. The Bluetooth and WLAN can't simultaneous transmission at the same time.			



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration No.: 625569

IC Registration No.: 12108A

A2LA Certificate No.: 4338.01





2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
8	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
9	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE

GENERAL POPULATION/UNCONTROLLED EXPOSURE

PARTIAL BODY LIMIT

1.6 W/kg

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
 ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:

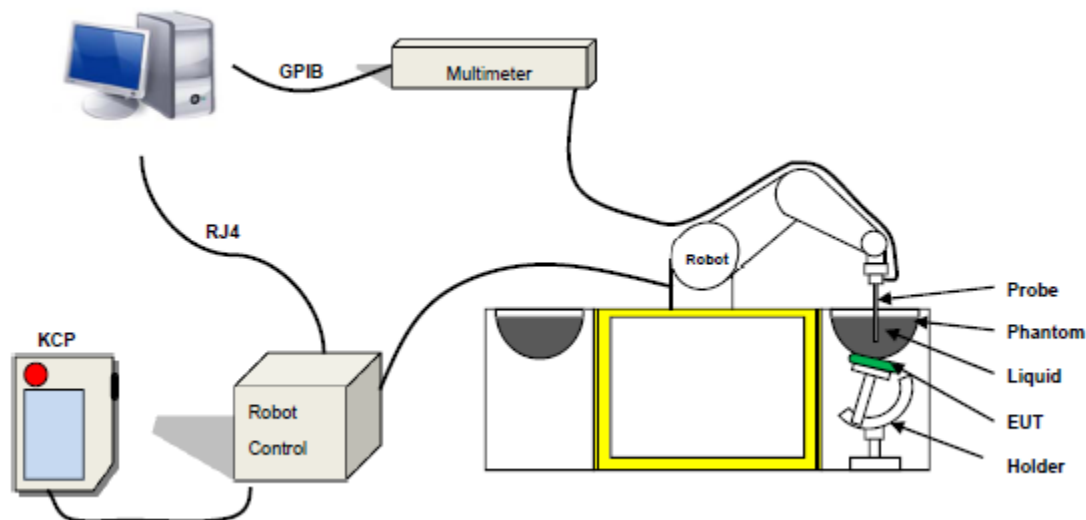

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The Open SAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 07/21 EPG0352 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 150 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Dipole

3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

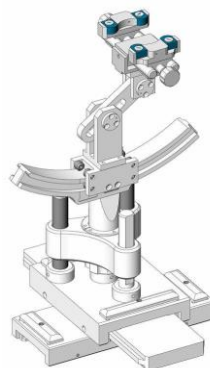


Figure-SN 32/14 SAM115



Figure-SN 32/14 SAM116

3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Head Tissue

Frequency (MHz)	cellulose %	DGBE %	HEC %	NaCl %	Preventol %	Sugar %	X100 %	Water %	Conductivity σ	Permittivity ϵ_r
750	0.2	/	/	1.4	0.2	57.0	/	41.1	0.89	41.9
835	0.2	/	/	1.4	0.2	57.9	/	40.3	0.90	41.5
900	0.2	/	/	1.4	0.2	57.9	/	40.3	0.97	41.5
1800	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
1900	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
2000	/	44.5	/	0.3	/	/	/	55.2	1.4	40.0
2450	/	44.9	/	0.1	/	/	/	55.0	1.80	39.2
2600	/	45.0	/	0.1	/	/	/	54.9	1.96	39.0

Body Tissue


Frequency (MHz)	cellulose %	DGBE %	HEC %	NaCl %	Preventol %	Sugar %	X100 %	Water %	Conductivity σ	Permittivity ϵ_r
750	0.2	/	/	0.9	0.1	47.2	/	51.7	0.96	55.5
835	0.2	/	/	0.9	0.1	48.2	/	50.8	0.97	55.2
900	0.2	/	/	0.9	0.1	48.2	/	50.8	1.05	55.0
1800	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
1900	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
2000	/	29.4	/	0.4	/	/	/	70.2	1.52	53.3
2450	/	31.3	/	0.1	/	/	/	68.6	1.95	52.7
2600	/	31.7	/	0.1	/	/	/	68.2	2.16	52.3

Tissue dielectric parameters for head and body phantoms				
Frequency	ϵ_r		σ S/m	
	Head	Body	Head	Body
300	45.3	58.2	0.87	0.92
450	43.5	56.7	0.87	0.94
900	41.5	55.0	0.97	1.05
1450	40.5	54.0	1.20	1.30
1800	40.0	53.3	1.40	1.52
2450	39.2	52.7	1.80	1.95
3000	38.5	52.0	2.40	2.73
5800	35.3	48.2	5.27	6.00

**LIQUID MEASUREMENT RESULTS**

Date	Ambient		Simulating Liquid		Parameters	Target	Measured	Deviation %	Limited %
	Temp. [°C]	Humidity %	Frequency	Temp. [°C]					
2022-01-12	20.8	49	2450 MHz	20.6	Permittivity	39.20	38.81	-0.99	±5
					Conductivity	1.80	1.82	1.27	±5
2022-01-12	22.7	42	2472 MHz	22.4	Permittivity	39.17	39.54	0.95	±5
					Conductivity	1.82	1.80	-1.05	±5
2022-01-12	20.2	44	5180 MHz	19.8	Permittivity	36.02	35.90	-0.32	±5
					Conductivity	4.64	4.62	-0.45	±5
2022-01-12	23.3	51	5200 MHz	23.0	Permittivity	36.00	35.77	-0.65	±5
					Conductivity	4.66	4.77	2.39	±5
2022-01-12	20.1	42	5240 MHz	19.8	Permittivity	35.96	36.09	0.35	±5
					Conductivity	4.70	4.76	1.28	±5
2022-01-12	22.7	43	5260 MHz	22.4	Permittivity	35.94	36.33	1.09	±5
					Conductivity	4.72	4.83	2.34	±5
2022-01-12	22.5	60	5280 MHz	22.2	Permittivity	35.92	35.26	-1.84	±5
					Conductivity	4.74	4.73	-0.13	±5
2022-01-12	22.0	41	5300 MHz	21.8	Permittivity	35.90	37.20	3.61	±5
					Conductivity	4.76	4.87	2.28	±5
2022-01-12	20.6	58	5320 MHz	20.3	Permittivity	35.88	36.18	0.84	±5
					Conductivity	4.78	4.62	-3.25	±5
2022-01-14	24.0	49	5500 MHz	23.8	Permittivity	35.68	35.53	-0.41	±5
					Conductivity	4.96	4.91	-1.12	±5
2022-01-14	21.7	60	5580 MHz	21.4	Permittivity	35.58	36.10	1.48	±5
					Conductivity	5.04	5.07	0.49	±5
2022-01-14	24.0	50	5600 MHz	23.7	Permittivity	35.50	35.02	-1.36	±5
					Conductivity	5.07	5.28	4.20	±5
2022-01-14	21.2	50	5700 MHz	20.9	Permittivity	35.43	35.78	0.99	±5
					Conductivity	5.17	5.08	-1.75	±5
2022-01-14	22.4	41	5745 MHz	22.2	Permittivity	35.37	36.47	3.10	±5
					Conductivity	5.21	5.24	0.51	±5
2022-01-14	22.0	55	5785 MHz	21.7	Permittivity	35.32	35.06	-0.74	±5
					Conductivity	5.25	5.23	-0.38	±5
2022-01-14	22.8	50	5800 MHz	22.5	Permittivity	35.30	35.36	0.16	±5
					Conductivity	5.27	5.26	-0.16	±5
2022-01-14	20.3	52	5825 MHz	20.0	Permittivity	35.30	35.29	-0.02	±5
					Conductivity	5.28	5.42	2.66	±5

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

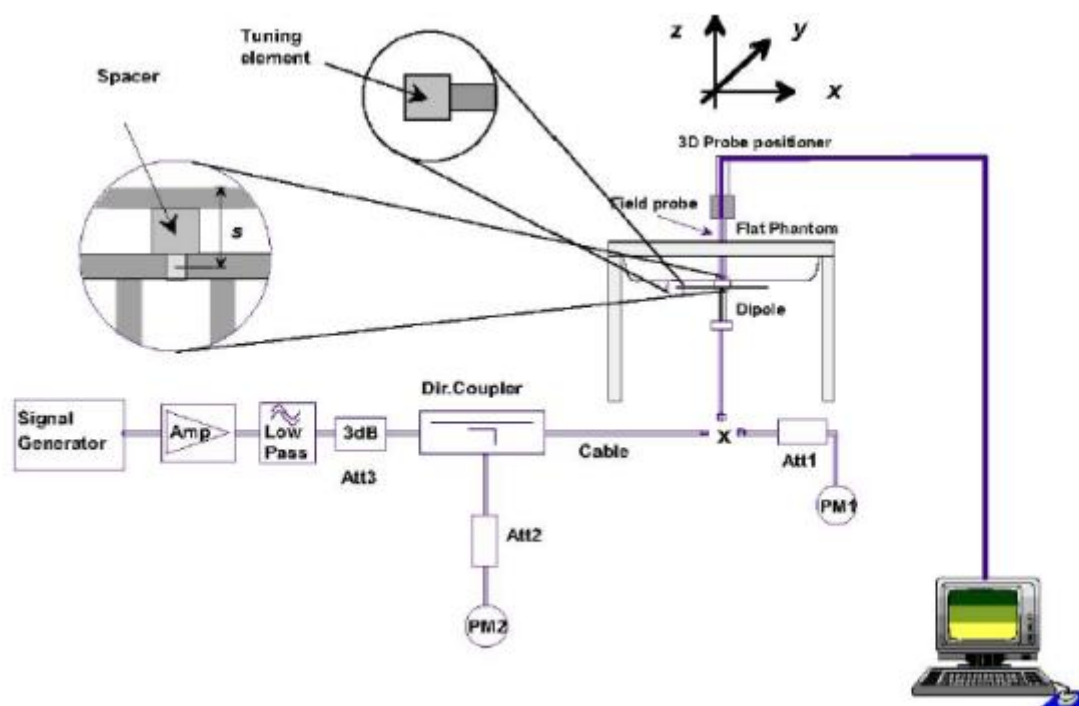

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %.

Date	Freq.	Power	Tested Value	Normalized SAR	Target SAR	Tolerance	Limit
	(MHz)	(mW)	(W/Kg)	(W/kg)	1g(W/kg)	(%)	(%)
2022/1/12	2450	100	5.230	52.30	52.40	-0.19	10
2022/1/12	5200	100	16.109	161.09	159.00	1.31	10
2022/1/12	5300	100	16.854	168.54	166.40	1.29	10
2022/1/14	5600	100	16.678	166.78	173.80	-4.04	10
2022/1/14	5800	100	17.821	178.21	181.20	-1.65	10

1. The tolerance limit of System validation $\pm 10\%$.
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:


The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

Area Scan& Zoom Scan:


First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR -distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

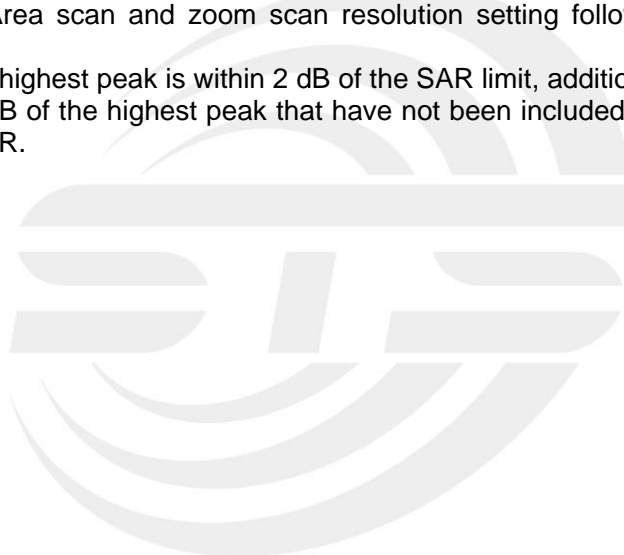

7. EUT Antenna Location Sketch

It is a GPS Device, support BT/WLAN mode.

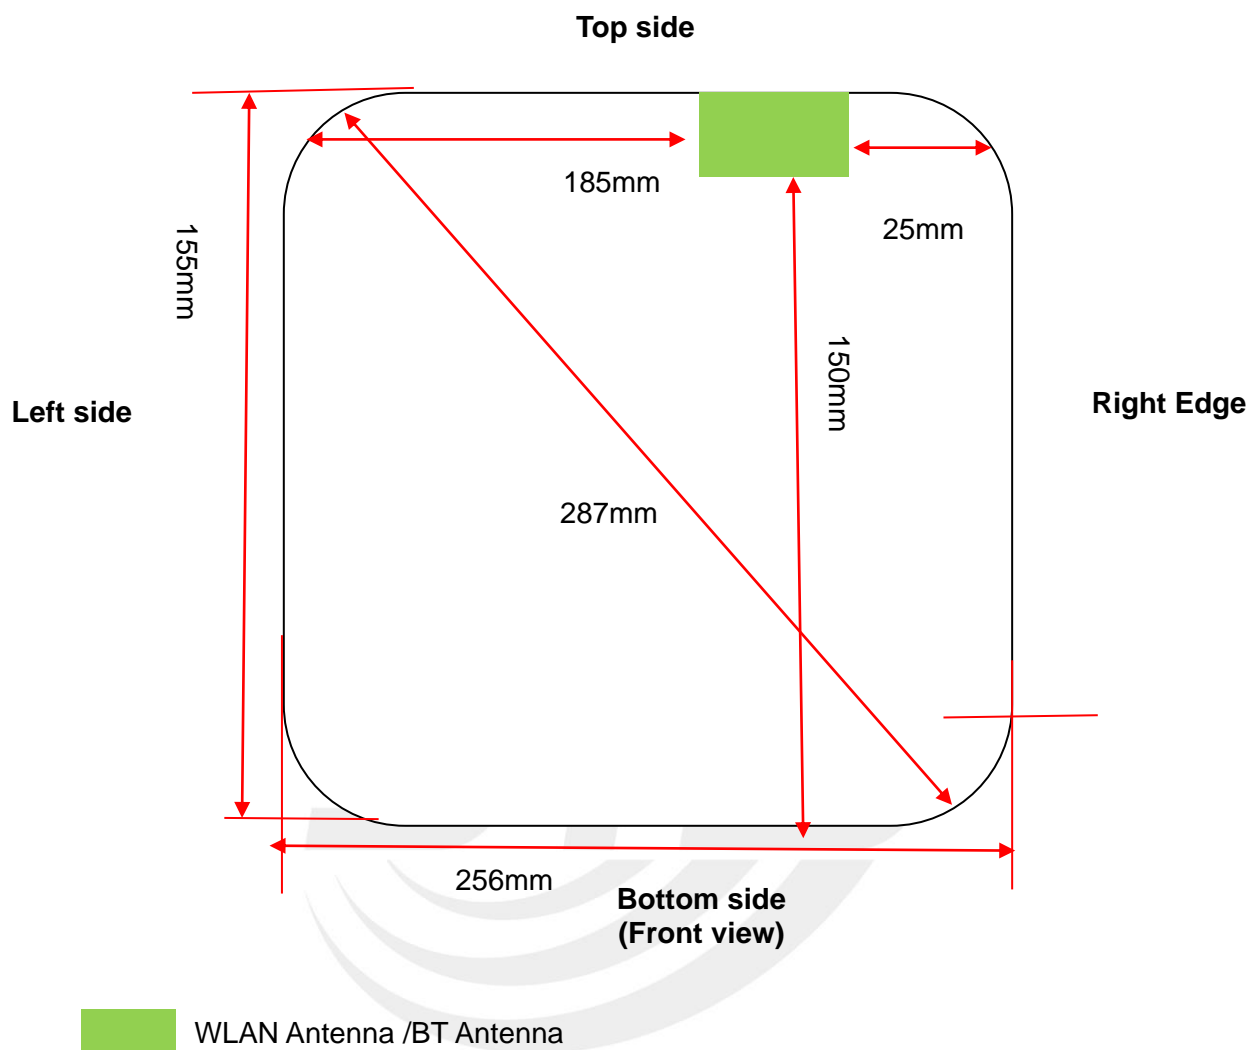

Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



7.1 SAR test exclusion consider table

The WLAN/BT SAR evaluation of Maximum power (dBm) summing tolerance.

Exposure Position	Wireless Interface	BT	2.4G WLAN	5.2G WLAN	5.3G WLAN	5.6G WLAN	5.8G WLAN
	Calculated Frequency	2480	2472	5180	5280	5500	5745
	Maximum Turn-up power (dBm)	6	16.2	14.5	14.5	15	15
	Maximum rated power(mW)	3.98	41.69	28.18	28.18	31.62	31.62
Back Side	Separation distance (mm)	≤5	≤5	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	9.53	9.54	6.59	6.53	6.40	6.26
	Testing required?	NO	YES	YES	YES	YES	YES
Left Edge	Separation distance (mm)	185	185	185	185	185	185
	exclusion threshold(mW)	1445.25	1445.40	1415.91	1415.28	1413.96	1412.58
	Testing required?	NO	NO	NO	NO	NO	NO
Right Edge	Separation distance (mm)	25	25	25	25	25	25
	exclusion threshold(mW)	47.63	47.70	32.95	32.64	31.98	31.29
	Testing required?	NO	NO	NO	NO	NO	YES
Top Edge	Separation distance (mm)	≤5	≤5	≤5	≤5	≤5	≤5
	exclusion threshold(mW)	9.53	9.54	6.59	6.53	6.40	6.26
	Testing required?	NO	YES	YES	YES	YES	YES
Bottom Edge	Separation distance (mm)	150	150	150	150	150	150
	exclusion threshold(mW)	1095.25	1095.40	1065.91	1065.28	1063.96	1062.58
	Testing required?	NO	NO	NO	NO	NO	NO

Note:

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.



2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <25mm, 25mm is user to determine SAR exclusion threshold
4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance $\leq 50\text{mm}$ are determined by:
$$[(\text{max.power of channel, including tune-up tolerance, Mw})/(\text{min. test separation distance, mm})] * \sqrt{f(\text{GHz})} \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
$$f(\text{GHz}) \text{ is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation. The result is rounded to one decimal place for comparison}$$


For <50mm distance, we just calculate mW of the exclusion threshold value(3.0) to do compare
5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR test exclusion threshold is determined according to the following
 - a) [threshold at 50mm in step 1] + (test separation distance - 50mm) * (f (MHz)/150) mW, at 100 MHz to 1500 MHz
 - b) [threshold at 50mm in step 1] + (test separation distance - 50mm) * 10 mW at > 1500MHz and $\leq 6\text{GHz}$
6. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8. for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode, thus the SAR can be excluded.
7. Per KDB 616217 D04, SAR evaluation for the front surface of tablet display screens are generally not necessary.

8. EUT Test Position

This EUT was tested in Front Face and Rear Face.

8.1 Body-worn Position Conditions


Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported SAR* for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest *reported SAR* configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

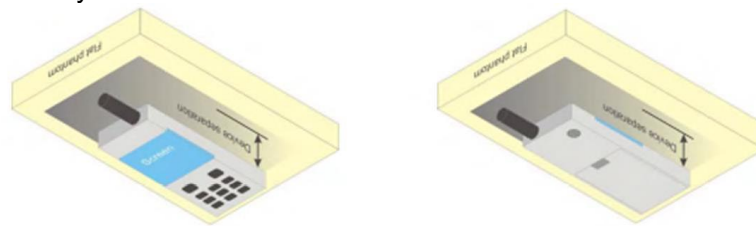

8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge.

When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration(surface).

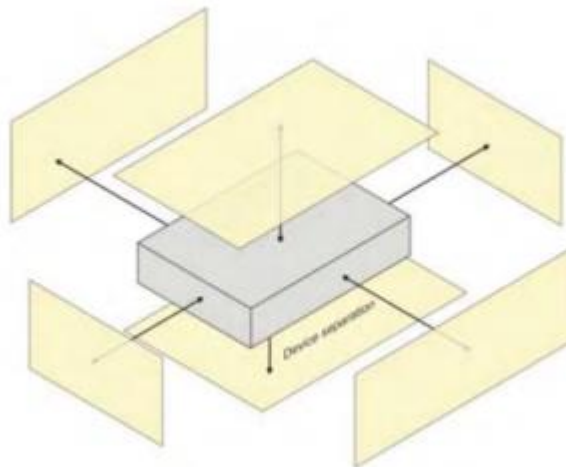



9. Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Uncertainty Component	Tol (+/- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+/-%)	10g Ui (+/-%)	v_i
Measurement System								
Probe calibration	5.86	N	1	1	1	5.86	5.86	∞
Axial Isotropy	0.16	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.07	0.07	∞
Hemispherical Isotropy	1.06	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.43	0.43	∞
Boundary effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	1.27	R	$\sqrt{3}$	1	1	0.73	0.73	∞
System detection limits	1.23	R	$\sqrt{3}$	1	1	0.71	0.71	∞
Modulation response	3.6	R	$\sqrt{3}$	1	1	3.60	3.60	∞
Readout Electronics	0.28	N	1	1	1	0.28	0.28	∞
Response Time	0.19	R	$\sqrt{3}$	1	1	0.11	0.11	∞
Integration Time	1.47	R	$\sqrt{3}$	1	1	0.85	0.85	∞
RF ambient conditions-Noise	3.5	R	$\sqrt{3}$	1	1	2.02	2.02	∞
RF ambient conditions-reflections	3.2	R	$\sqrt{3}$	1	1	1.85	1.85	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related								
Test sample positioning	3.1	N	1	1	1	3.10	3.10	∞
Device holder uncertainty	3.8	N	1	1	1	3.80	3.80	∞
SAR drift measurement	4.8	R	$\sqrt{3}$	1	1	2.77	2.77	∞
SAR scaling	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and tissue parameters								
Phantom uncertainty (shape and thickness uncertainty)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.95	1.78	∞
Liquid conductivity (measured)	4	N	1	0.78	0.71	0.92	1.04	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	1.95	1.78	∞
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				10.60	10.51	
Expanded Uncertainty (95% Confidence interval)		K=2				21.21	21.03	



10. Conducted Power Measurement

10.1 Test Result

2.4G WLAN

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
802.11b	1	2412	16.11	40.83
	6	2437	16.16	41.30
	13	2472	16.18	41.50
802.11g	1	2412	12.40	17.38
	7	2437	13.97	24.95
	11	2472	14.27	26.73
802.11 n-HT20	1	2412	12.26	16.83
	7	2437	13.89	24.49
	11	2472	14.06	25.47
802.11 n-HT40	3	2422	13.39	21.83
	6	2437	13.27	21.23
	11	2462	13.08	20.32

BT

BT				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	4.47	2.80
	39	2441	5.64	3.66
	78	2480	5.76	3.77

**5G WLAN**

5.2G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11a20	36	5180	14.14	25.94
	40	5200	14.22	26.42
	48	5240	14.05	25.41
802.11 n-HT20	36	5180	14.06	25.47
	40	5200	14.21	26.36
	48	5240	14.42	27.67
802.11 n-HT40	38	5190	14.06	25.47
	46	5230	14.06	25.47
802.11ac-VHT20	36	5180	12.56	18.03
	40	5200	12.64	18.37
	48	5240	12.53	17.91
802.11ac-VHT40	38	5190	11.52	14.19
	46	5230	10.64	11.59
802.11ac-VHT80	42	5210	9.69	9.31

5.3G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11a20	52	5260	14.12	25.82
	56	5280	14.05	25.41
	64	5320	14.16	26.06
802.11 n-HT20	52	5260	13.42	21.98
	56	5280	14.05	25.41
	64	5320	14.13	25.88
802.11 n-HT40	54	5270	13.52	22.49
	62	5310	14.05	25.41
802.11ac-VHT20	52	5260	14.13	25.88
	56	5280	14.06	25.47
	64	5320	13.85	24.27
802.11ac-VHT40	54	5270	12.65	18.41
	62	5310	11.25	13.34
802.11ac-VHT80	58	5290	10.06	10.14




5.6G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11a20	100	5500	14.84	30.48
	120	5580	14.26	26.67
	140	5700	14.03	25.29
802.11 n-HT20	100	5500	14.13	25.88
	120	5580	14.10	25.70
	140	5700	14.06	25.47
802.11 n-HT40	102	5510	13.52	22.49
	110	5550	14.03	25.29
	134	5670	14.15	26.00
802.11ac-VHT20	100	5500	13.56	22.70
	120	5580	13.34	21.58
	140	5700	13.62	23.01
802.11ac-VHT40	102	5510	13.52	22.49
	110	5550	12.89	19.45
	134	5670	11.86	15.35
802.11ac-VHT80	106	5530	11.87	15.38
	122	5610	10.52	11.27

5.8G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11a20	149	5745	14.52	28.31
	157	5785	14.62	28.97
	165	5825	14.25	26.61
802.11 n-HT20	149	5745	14.13	25.88
	157	5785	14.25	26.61
	165	5825	14.05	25.41
802.11 n-HT40	151	5755	13.99	25.06
	159	5795	13.84	24.21
802.11ac-VHT20	149	5745	12.95	19.72
	157	5785	13.06	20.23
	165	5825	12.76	18.88
802.11ac-VHT40	151	5755	11.98	15.78
	159	5795	11.56	14.32
802.11ac-VHT80	155	5775	10.49	11.19


11. EUT And Test Setup Photo

11.1 EUT Photo


Front side

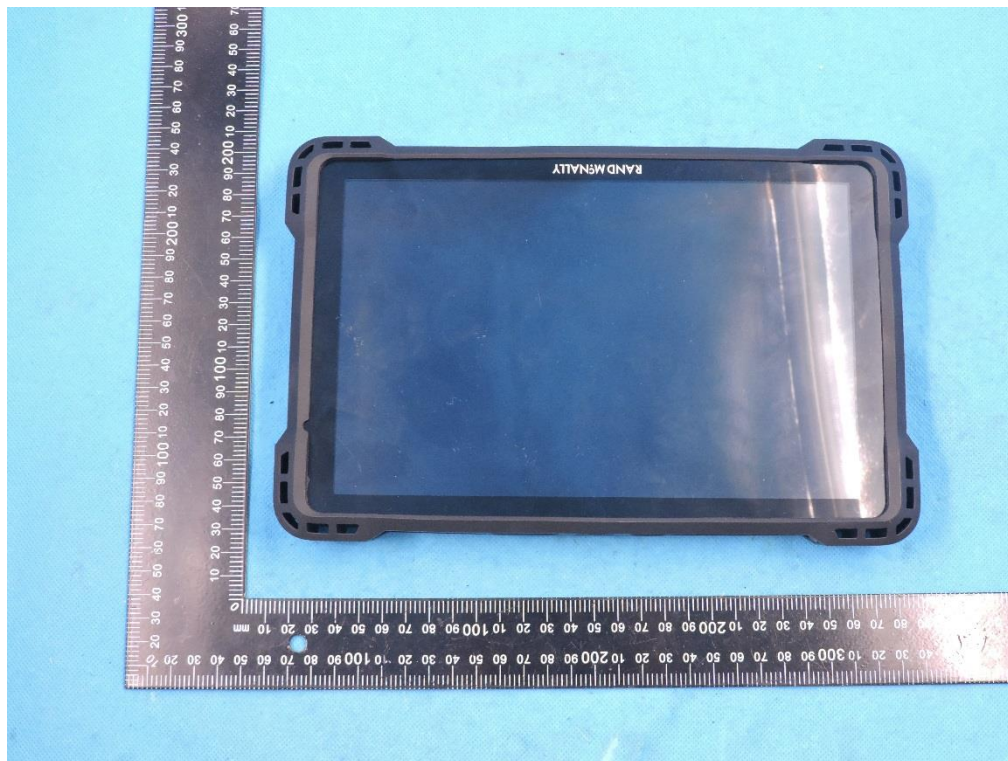


Back side

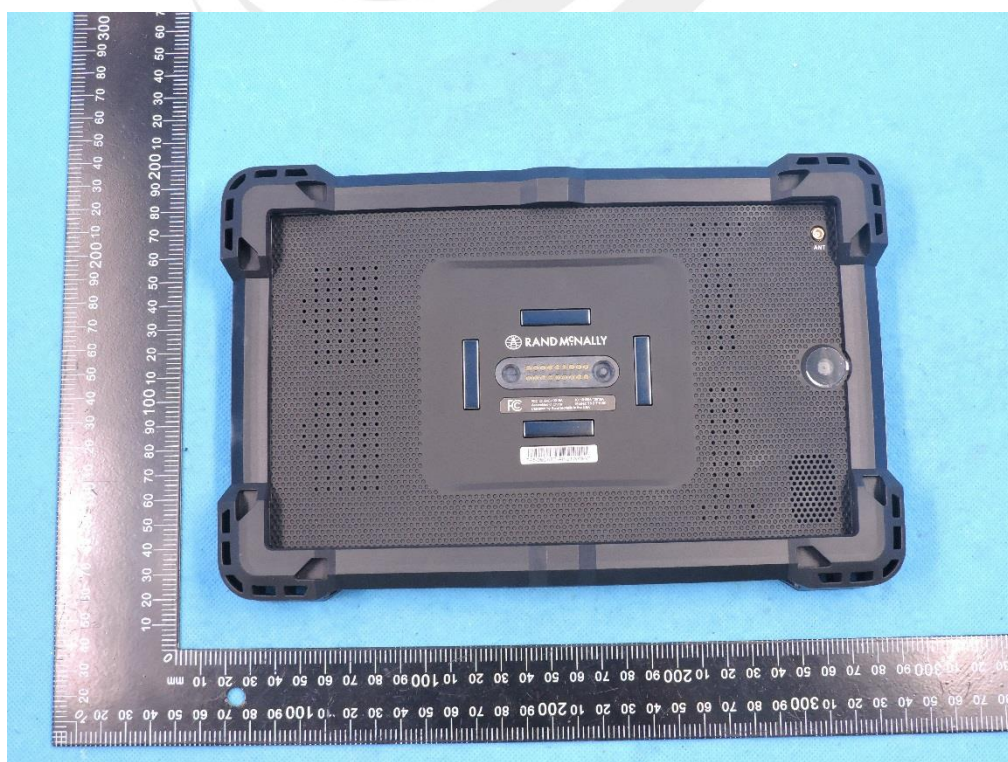


Top side

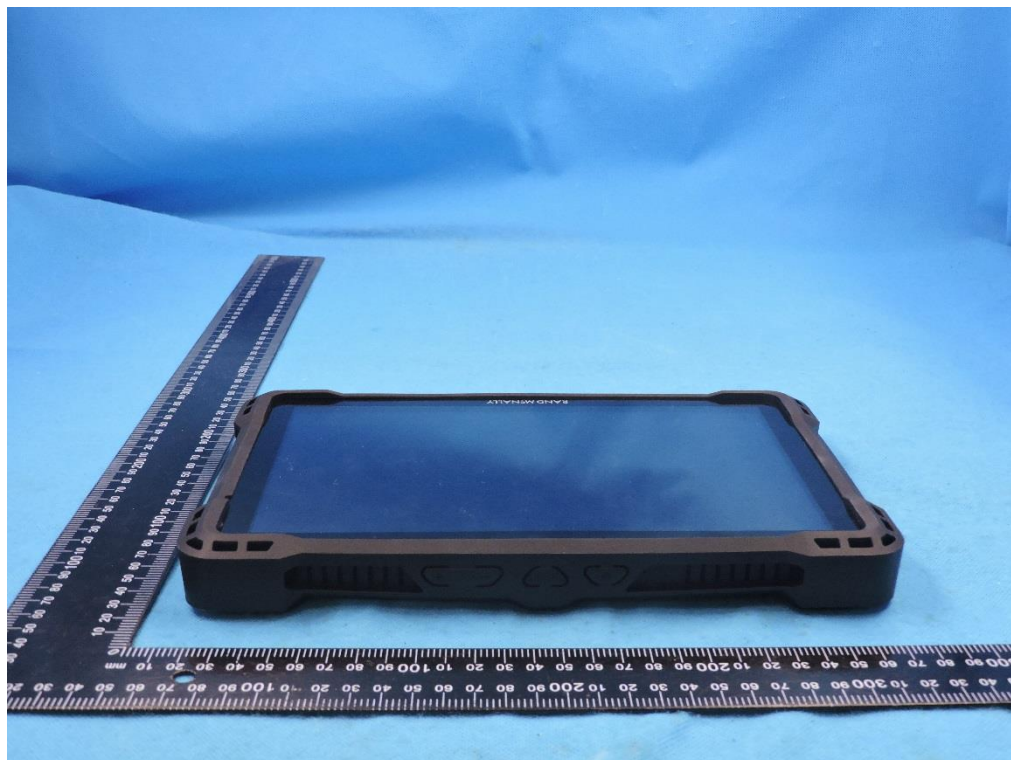


Bottom side

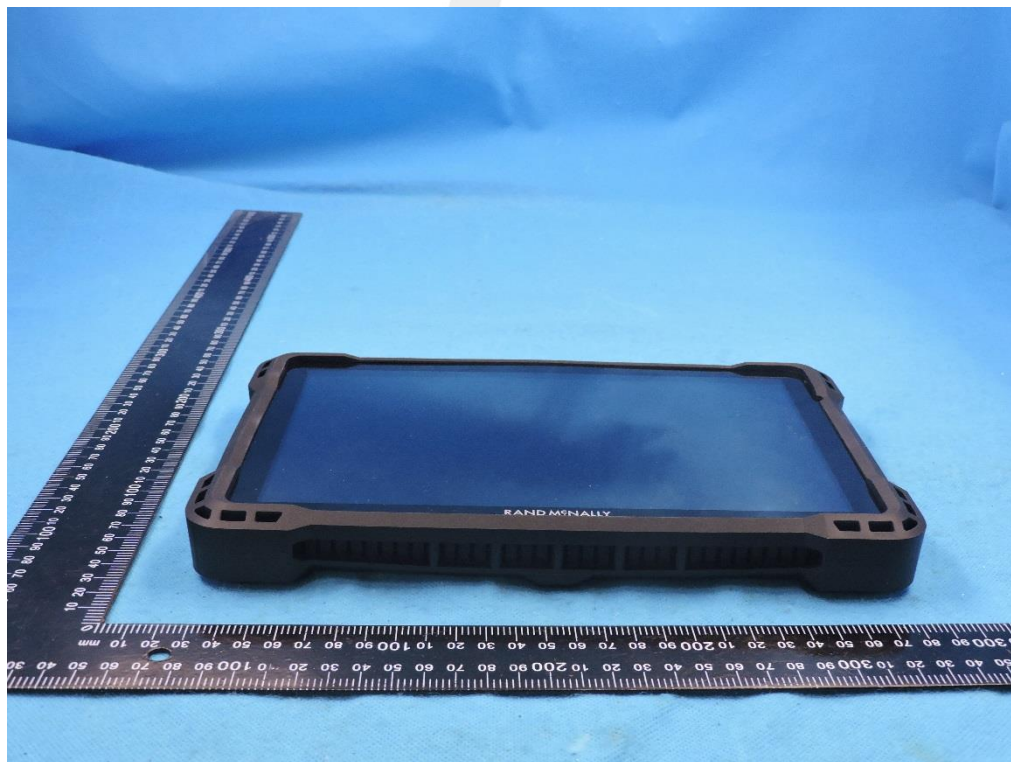

Left side

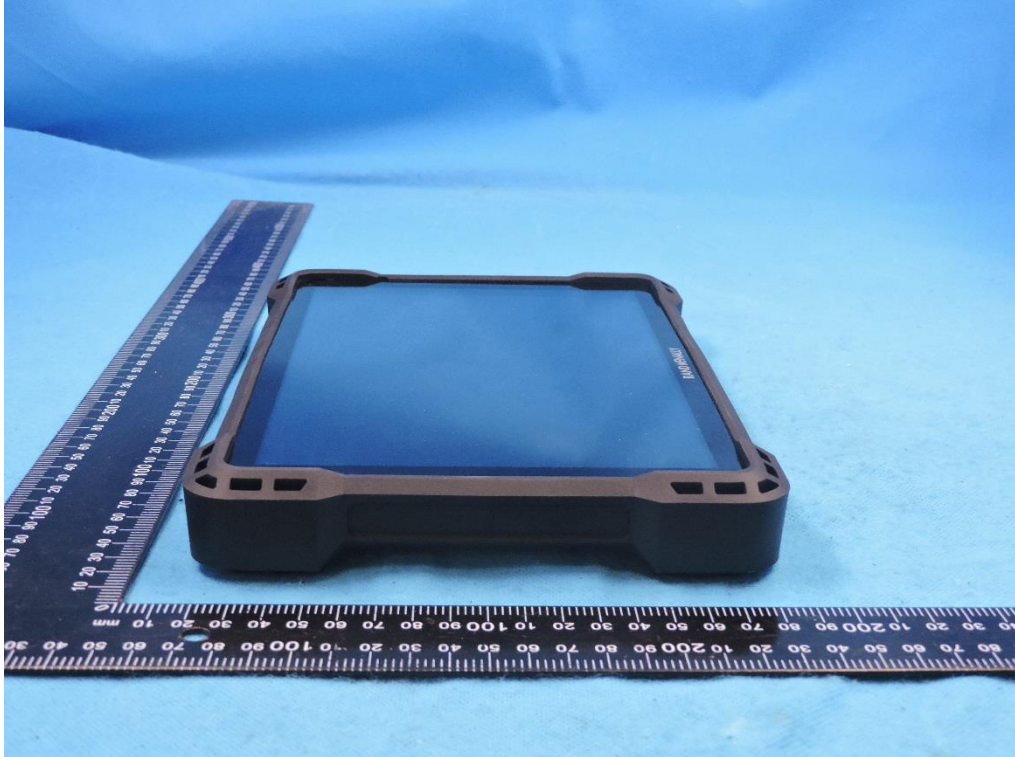

Right side

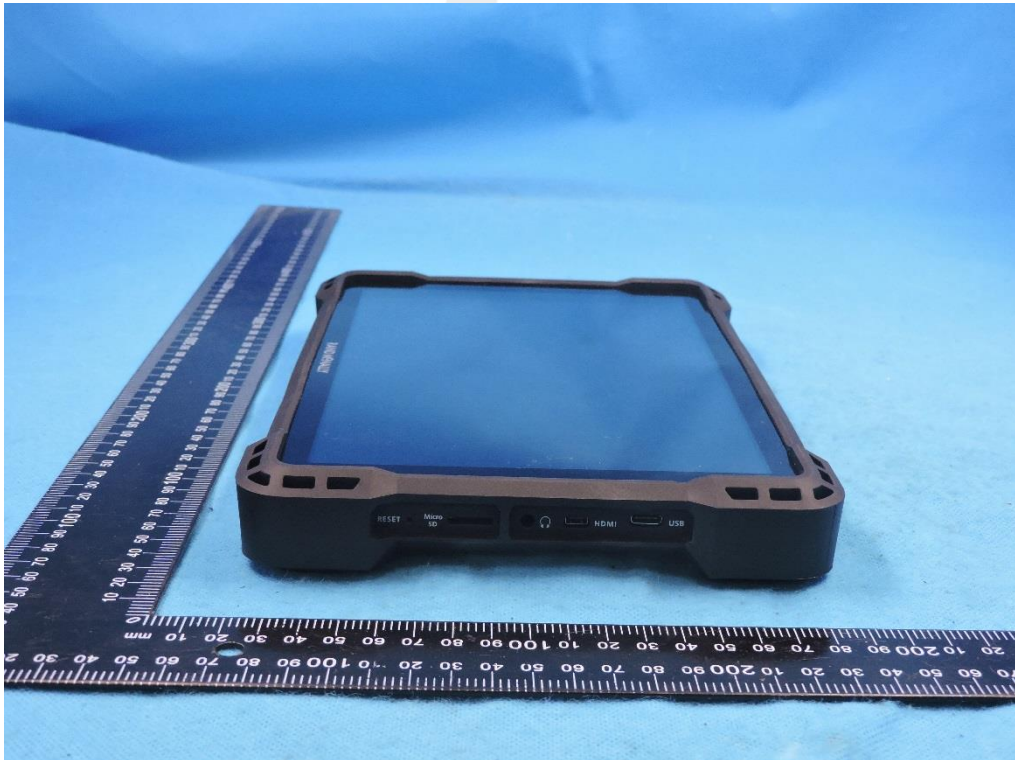


11.2 Setup Photo

Body Back side(separation distance is 0mm)



Body Right side(separation distance is 0mm)

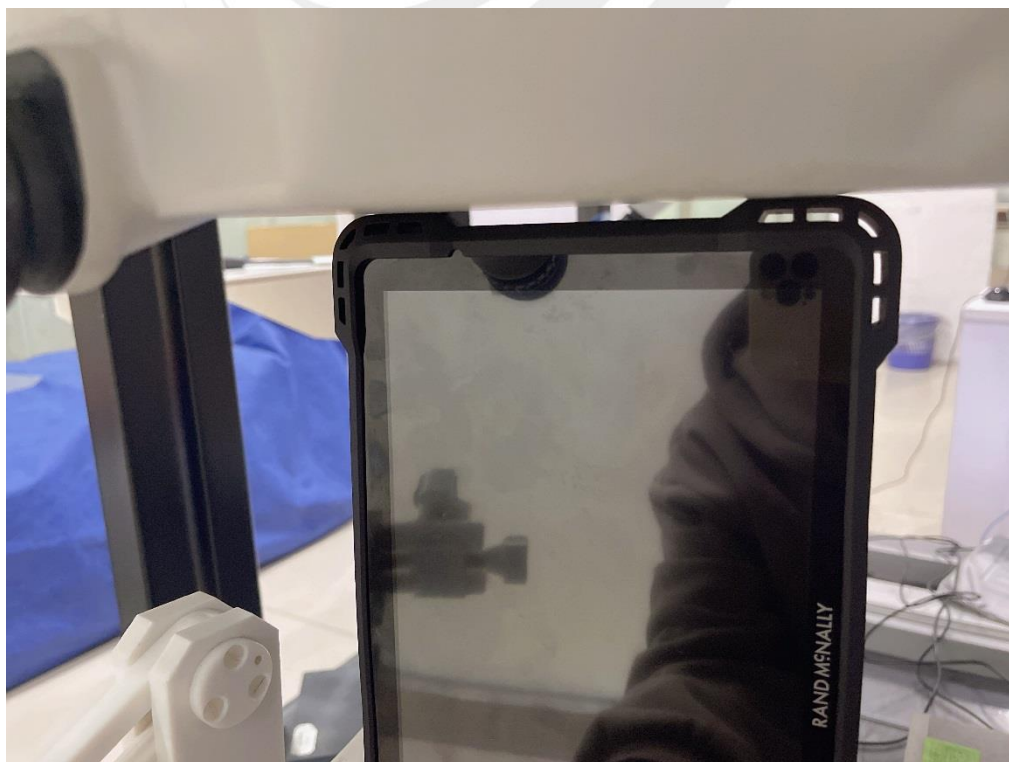

Body Top Edge (separation distance is 0mm)



Liquid depth (15 cm)





12. SAR Result Summary

12.1 Body-worn and hotspot SAR

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas.No.
2.4GHz WLAN	802.11b	Back Side	2472	0.782	1.95	16.20	16.18	0.786	1
		Top Edge	2472	0.715	1.04	16.50	16.18	0.770	/
5.2GHz WLAN	802.11a	Back Side	5180	0.980	0.81	14.50	14.14	1.065	/
		Back Side	5200	1.013	0.94	14.50	14.22	1.080	2
		Back Side	5240	0.971	-3.97	14.50	14.05	1.077	/
		Top Edge	5180	0.821	-0.87	14.50	14.14	0.892	/
		Top Edge	5200	0.956	-1.07	14.50	14.22	1.020	/
		Top Edge	5240	0.897	-0.57	14.50	14.05	0.995	/
5.3GHz WLAN	802.11a	Back Side	5260	1.012	-2.85	14.50	14.12	1.105	/
		Back Side	5280	1.105	1.47	14.50	14.05	1.226	/
		Back Side	5320	1.194	-0.78	14.50	14.16	1.291	3
		Top Edge	5260	0.951	-1.05	14.50	14.12	1.038	/
		Top Edge	5280	0.973	-1.07	14.50	14.05	1.079	/
		Top Edge	5320	0.982	-0.93	14.50	14.16	1.062	/
5.6GHz WLAN	802.11a	Back Side	5500	0.880	-3.62	15.00	14.84	0.913	4
		Back Side	5580	0.752	-0.61	15.00	14.26	0.892	/
		Back Side	5700	0.725	2.95	15.00	14.03	0.906	/
		Top Edge	5500	0.768	-3.32	15.00	14.84	0.797	/
5.8GHz WLAN	802.11a	Back Side	5745	1.122	-0.57	15.00	14.52	1.253	/
		Back Side	5785	1.243	-3.24	15.00	14.62	1.357	5
		Back Side	5825	1.132	1.98	15.00	14.25	1.345	/
		Right Edge	5745	0.685	1.74	15.00	14.62	0.748	/
		Top Edge	5745	0.934	0.32	15.00	14.52	1.043	/
		Top Edge	5785	0.971	0.35	15.00	14.62	1.060	/
		Top Edge	5825	0.902	0.95	15.00	14.25	1.072	/

Note:

- The test separation of all above table is 0mm.
- The Bluetooth and WLAN can't simultaneous transmission at the same time.
- Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For WWAN: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.543** W/kg for Body)



5. When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

Repeated SAR

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR(W/Kg)	Meas. No.
5.2GHz WLAN	802.11a	Back Side	5180	0.958	3.81	14.50	14.14	1.041	-
		Back Side	5200	0.996	-1.18	14.50	14.22	1.062	-
		Back Side	5240	0.932	1.17	14.50	14.05	1.034	-
		Top Edge	5180	0.784	0.37	14.50	14.14	0.852	-
		Top Edge	5200	0.948	0.89	14.50	14.22	1.011	-
		Top Edge	5240	0.878	-1.27	14.50	14.05	0.974	-
5.3GHz WLAN	802.11a	Back Side	5260	0.962	-3.99	14.50	14.12	1.050	-
		Back Side	5280	1.100	1.53	14.50	14.05	1.220	-
		Back Side	5320	1.155	2.21	14.50	14.16	1.249	-
		Back Side	5280	1.005	1.27	14.50	14.05	1.115	-
		Back Side	5320	1.056	1.24	14.50	14.16	1.142	-
		Top Edge	5260	0.908	-1.35	14.50	14.12	0.991	-
		Top Edge	5280	0.953	0.57	14.50	14.05	1.057	-
		Top Edge	5320	0.945	1.18	14.50	14.16	1.022	-
5.3GHz WLAN	802.11a	Back Side	5500	0.843	0.46	15.00	14.84	0.875	-
		Back Side	5580	0.740	0.58	15.00	14.26	0.877	-
		Back Side	5700	0.711	3.78	15.00	14.03	0.889	-
5.8GHz WLAN	802.11a	Back Side	5745	1.112	2.12	15.00	14.52	1.242	-
		Back Side	5785	1.237	-2.50	15.00	14.62	1.350	-
		Back Side	5825	1.083	3.08	15.00	14.25	1.287	-
		Back Side	5745	1.057	0.15	15.00	14.52	1.181	-
		Back Side	5785	1.157	-1.27	15.00	14.62	1.263	-
		Back Side	5825	1.051	0.96	15.00	14.25	1.249	-
		Top Edge	5745	0.899	-0.75	15.00	14.52	1.004	-
		Top Edge	5785	0.971	-0.17	15.00	14.62	1.060	-
		Top Edge	5825	0.873	1.27	15.00	14.25	1.038	-



12.2 repeated SAR measurement

Band	Mode	Test Position	Ch.	Original Measured SAR 1g(W/kg)	1 st Repeated SAR 1g	Ratio	Original Measured SAR 1g(W/kg)	2nd Repeated SAR 1g	Ratio
5.2GHz WLAN	802.11a	Back Side	5180	0.980	0.958	1.023	-	-	-
		Back Side	5200	1.013	0.996	1.017	-	-	-
		Back Side	5240	0.971	0.932	1.042	-	-	-
		Top Edge	5180	0.821	0.784	1.047	-	-	-
		Top Edge	5200	0.956	0.948	1.008	-	-	-
		Top Edge	5240	0.897	0.878	1.022	-	-	-
5.3GHz WLAN	802.11a	Back Side	5260	1.012	0.962	1.052	-	-	-
		Back Side	5280	1.105	1.100	1.005	1.105	1.005	1.100
		Back Side	5320	1.194	1.155	1.034	1.194	1.056	1.131
		Top Edge	5260	0.951	0.908	1.047	-	-	-
		Top Edge	5280	0.973	0.953	1.021	-	-	-
		Top Edge	5320	0.982	0.945	1.039	-	-	-
5.6GHz WLAN	802.11a	Back Side	5500	0.880	0.843	1.044	-	-	-
		Back Side	5580	0.752	0.740	1.016	-	-	-
		Back Side	5700	0.725	0.711	1.020	-	-	-
5.8GHz WLAN	802.11a	Back Side	5745	1.122	1.112	1.009	1.122	1.057	1.061
		Back Side	5785	1.243	1.237	1.005	1.243	1.157	1.074
		Back Side	5825	1.132	1.083	1.045	1.132	1.051	1.077
		Top Edge	5745	0.934	0.899	1.039	-	-	-
		Top Edge	5785	0.971	0.971	1.000	-	-	-
		Top Edge	5825	0.902	0.873	1.033	-	-	-

Note:

1. Per KDB 865664 D01,for each frequency band ,repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/Kg}$.
2. Per KDB 865664 D01,if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/Kg}$, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45\text{W/Kg}$
4. The ratio is the difference in percentage between original and repeated measured SAR.



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
2450MHzDipole	MVG	SID2450	SN 30/14 DIP2G450-335	2020.07.14	2023.07.13
Waveguide	SATIMO	SWG5500	SN 13/14 WGA32	2020.07.14	2023.07.13
E-Field Probe	MVG	SSE2	SN 07/21 EPG0352	2021.03.01	2022.02.28
Dielectric Probe Kit	MVG	SCLMP	SN 32/14 OCPG67	2021.11.23	2022.11.22
Antenna	MVG	ANTA3	SN 07/13 ZNTA52	N/A	N/A
Phantom1	MVG	SAM	SN 32/14 SAM115	N/A	N/A
Phantom2	MVG	SAM	SN 32/14 SAM116	N/A	N/A
Phone holder	MVG	N/A	SN 32/14 MSH97	N/A	N/A
Laptop holder	MVG	N/A	SN 32/14 LSH29	N/A	N/A
Attenuator	Agilent	99899	DC-18GHz	N/A	N/A
Directional coupler	Narda	4226-20	3305	N/A	N/A
Network Analyzer	Agilent	8753ES	US38432810	2021.09.29	2022.09.28
Multi Meter	Keithley	Multi Meter 2000	4050073	2021.10.08	2022.10.07
Signal Generator	Agilent	N5182A	MY50140530	2021.09.30	2022.09.29
Wireless Communication Test Set	Agilent	8960-E5515C	MY48360751	2021.09.30	2022.09.29
Wireless Communication Test Set	R&S	CMW500	117239	2021.09.30	2022.09.29
Power Amplifier	DESAY	ZHL-42W	9638	2021.10.09	2022.10.08
Power Meter	R&S	NRP	100510	2021.09.29	2022.09.28
Power Sensor	R&S	NRP-Z11	101919	2021.09.29	2022.09.28
Temperature hygrometer	SuWei	SW-108	N/A	2021.10.09	2022.10.08
Thermograph	Elitech	RC-4	S/N EF7176501537	2021.10.09	2022.10.08

Note:

Per KDB 865664 D01, Dipole SAR Validation Verification, STS LAB has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole
 2. System validation with specific dipole is within 10% of calibrated value
- Return-loss in within 20% of calibrated measurement



Appendix A. System Validation Plots

System Performance Check Data (2450MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2022-01-12

Experimental conditions.




Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity	38.81
Conductivity (S/m)	1.82
Probe	SN 07/21 EPGO352
ConvF	1.75
Crest factor	1:1

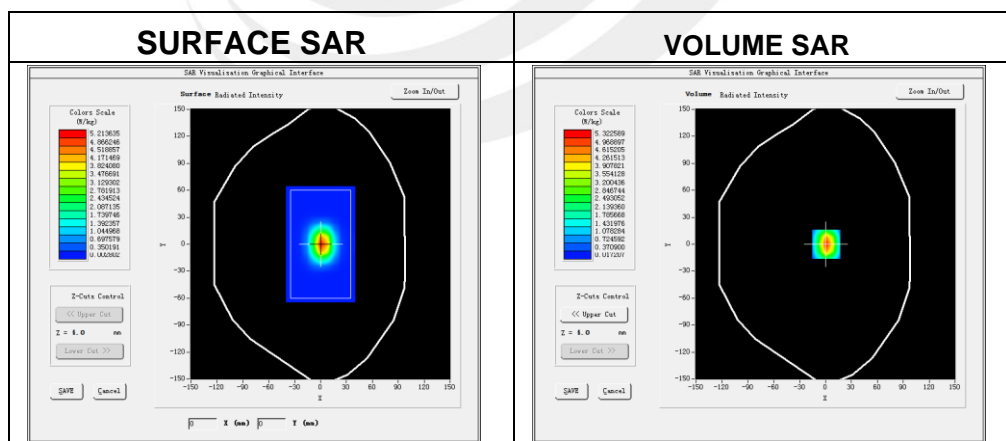

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	2.372717
SAR 1g (W/Kg)	5.230429

Z Axis Scan

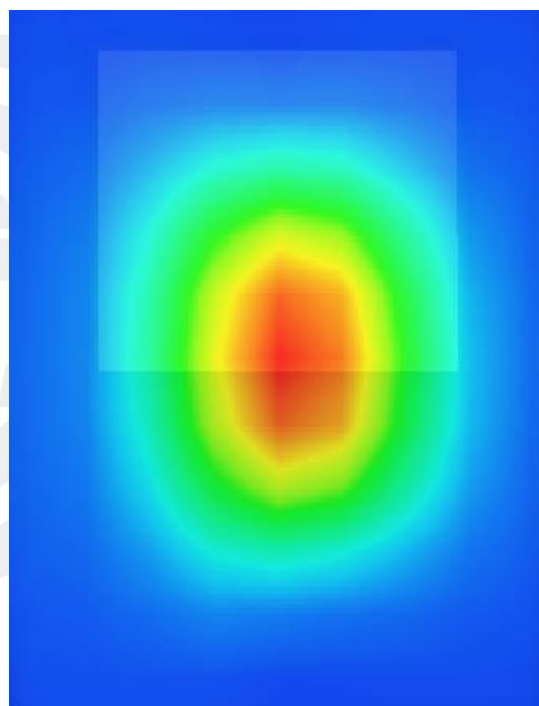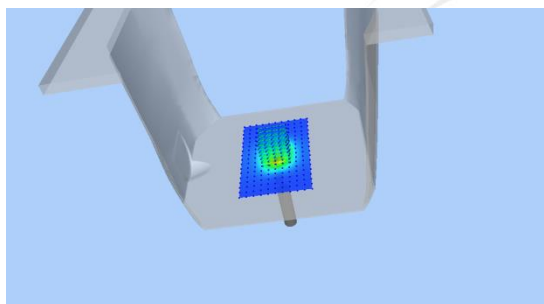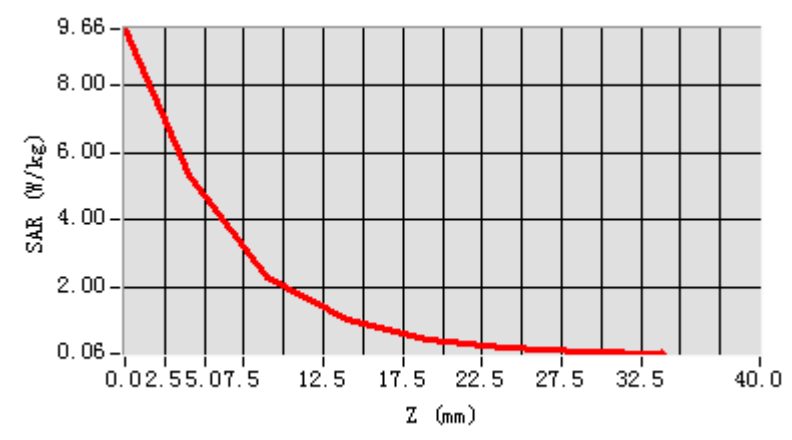



System Performance Check Data(5200MHz)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2022-01-12

Experimental conditions.


Device Position	Validation plane
Band	5200 MHz
Channels	-
Signal	CW
Frequency (MHz)	5200
Relative permittivity	35.77
Conductivity (S/m)	4.77
Probe	SN 07/21 EPGO352
ConvF	1.47
Crest factor:	1:1

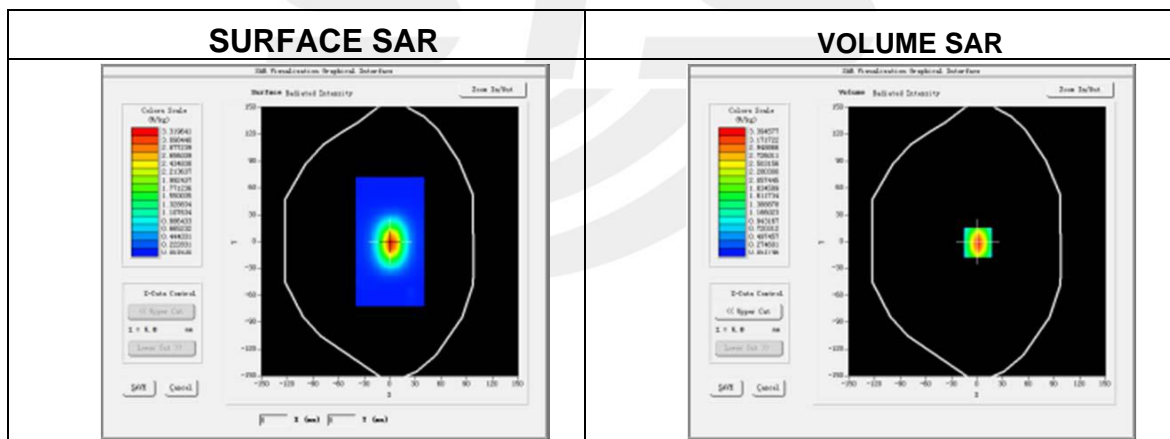

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	5.588217
SAR 1g (W/Kg)	16.109293

Z Axis Scan

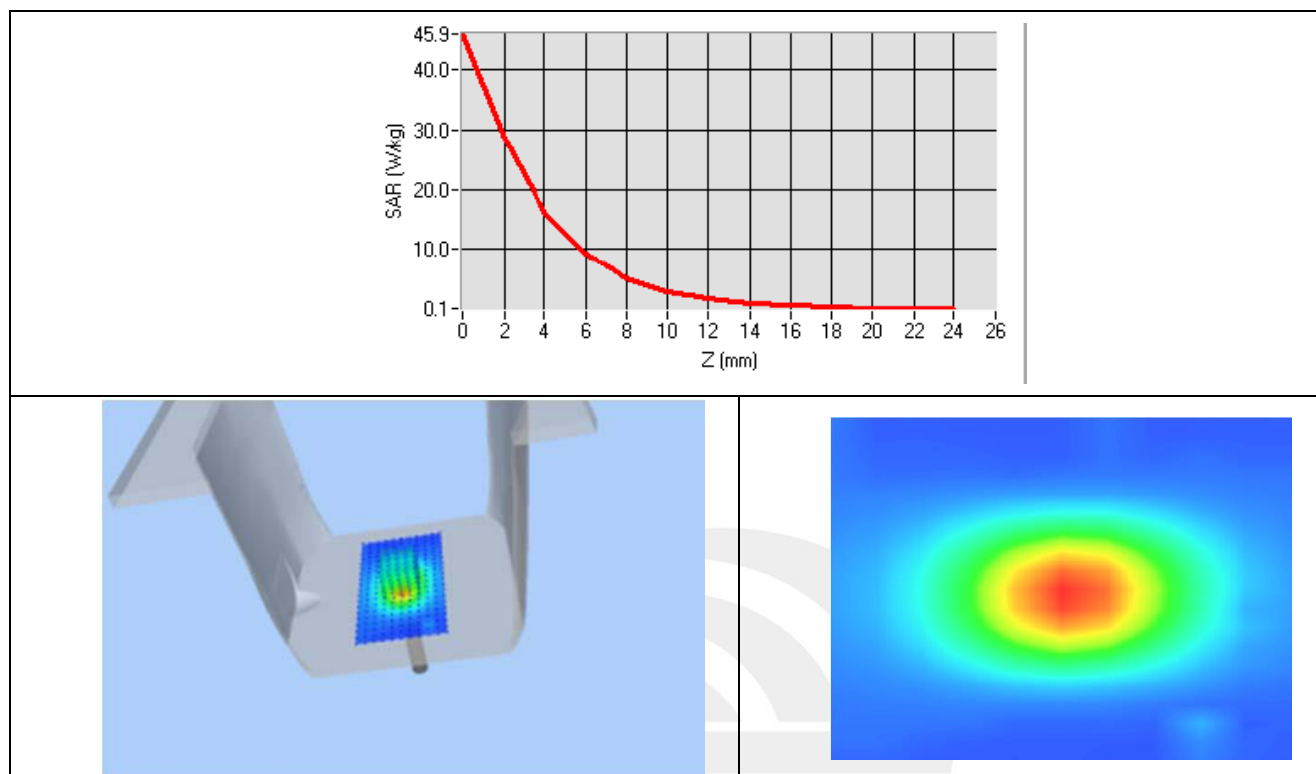



System Performance Check Data(5300MHz)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2022-01-12

Experimental conditions.


Device Position	Validation plane
Band	5300 MHz
Channels	-
Signal	CW
Frequency (MHz)	5300
Relative permittivity	37.20
Conductivity (S/m)	4.87
Probe	SN 07/21 EPGO352
ConvF	1.47
Crest factor:	1:1

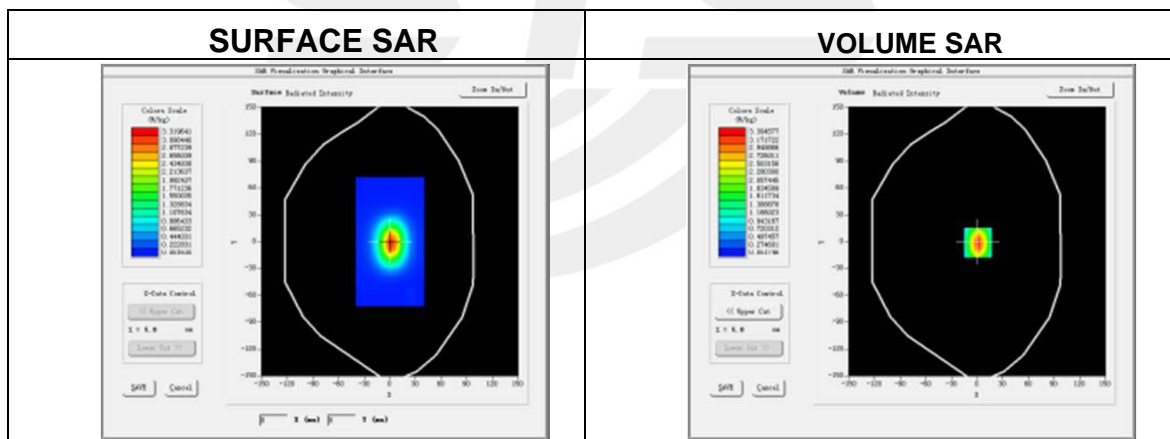

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	5.585484
SAR 1g (W/Kg)	16.853868

Z Axis Scan

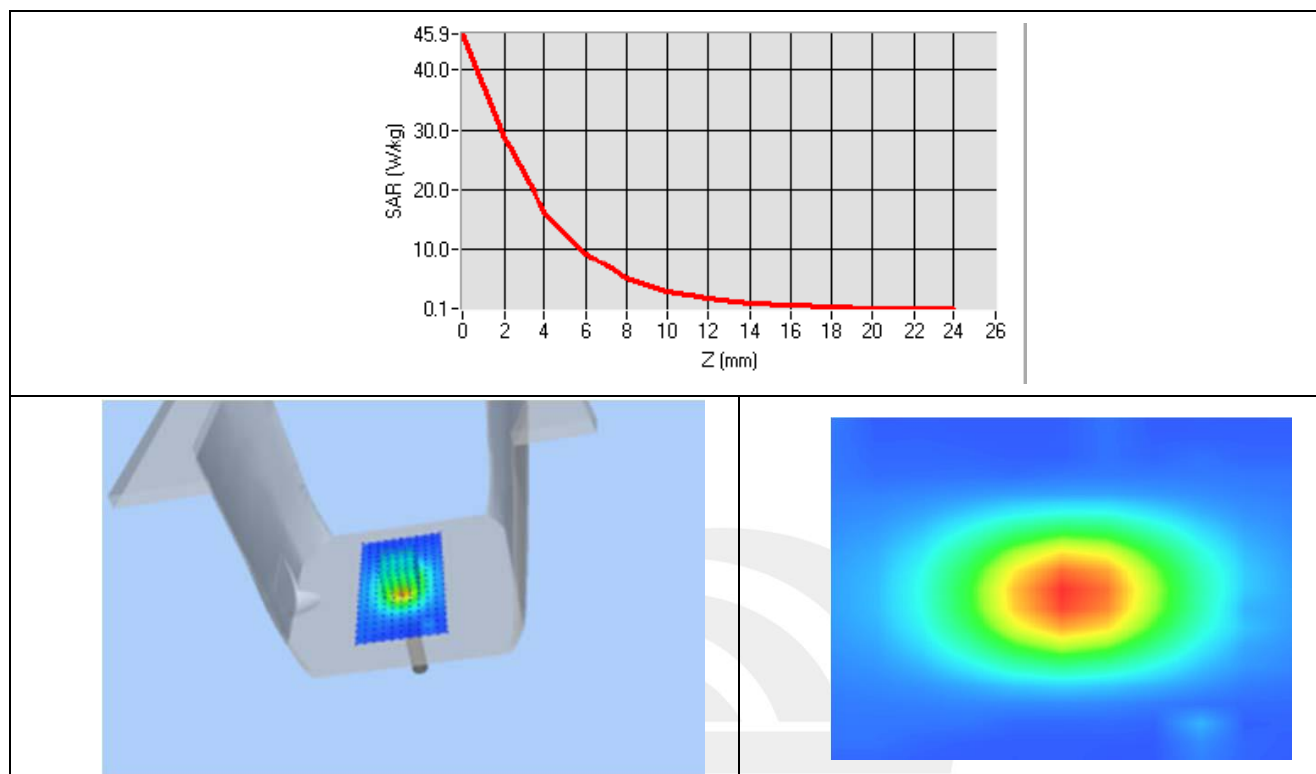



System Performance Check Data(5600MHz)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2022-01-14

Experimental conditions.


Device Position	Validation plane
Band	5600 MHz
Channels	-
Signal	CW
Frequency (MHz)	5600
Relative permittivity	35.02
Conductivity (S/m)	5.28
Probe	SN 07/21 EPGO352
ConvF	1.47
Crest factor:	1:1

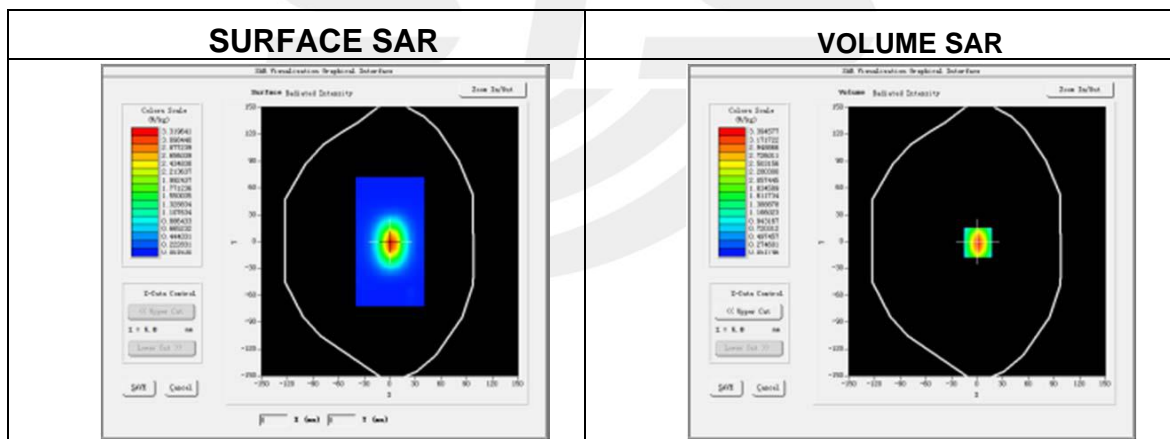

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	5.587831
SAR 1g (W/Kg)	16.67763

Z Axis Scan

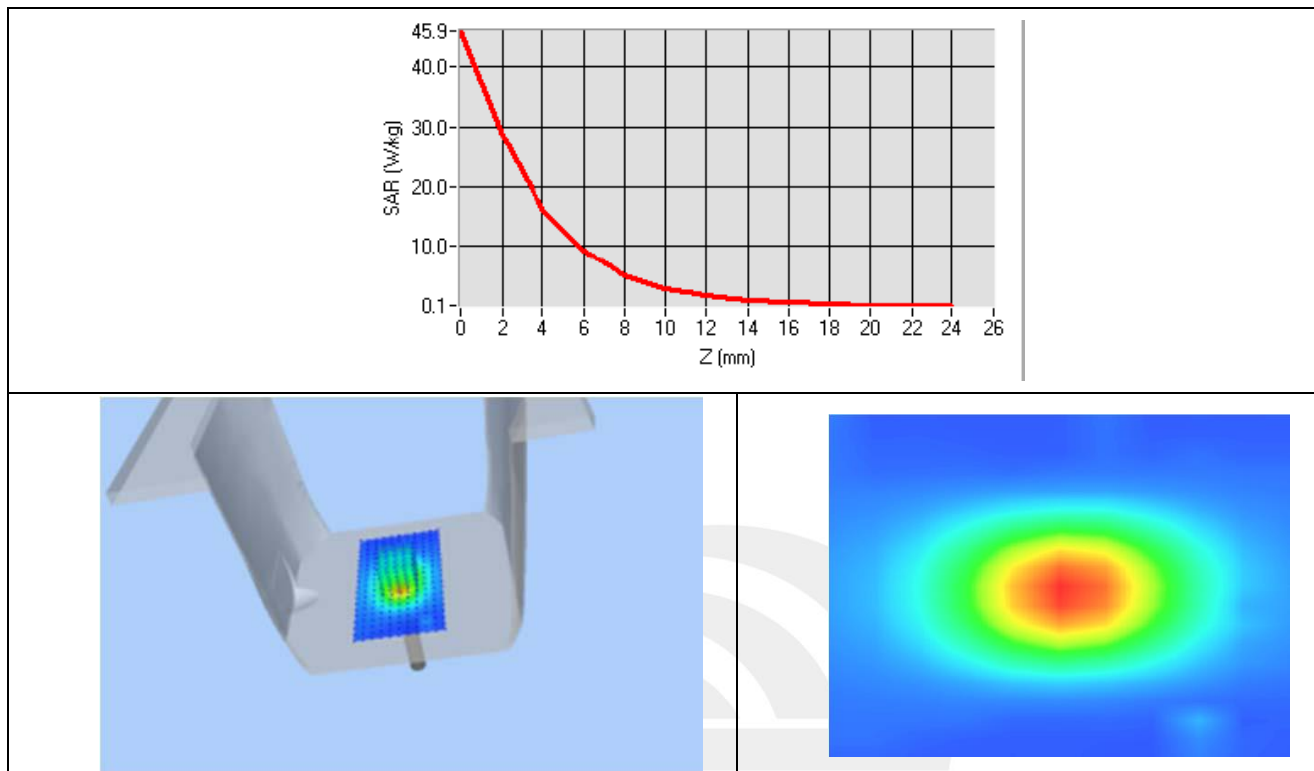

**System Performance Check Data(5800MHz)**

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2022-01-14


Experimental conditions.

Device Position	Validation plane
Band	5800 MHz
Channels	-
Signal	CW
Frequency (MHz)	5800
Relative permittivity	35.36
Conductivity (S/m)	5.26
Probe	SN 07/21 EPGO352
ConvF	1.64
Crest factor:	1:1

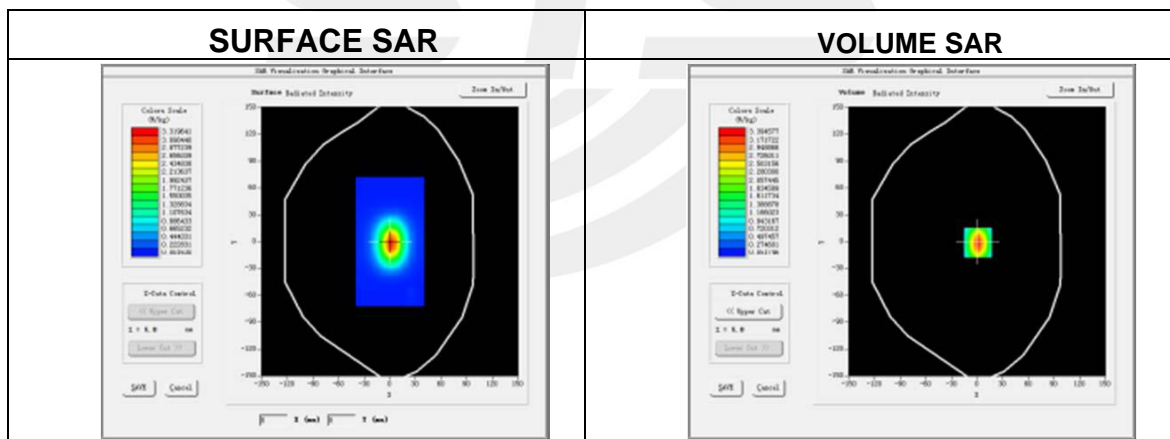**Maximum location: X=7.00, Y=2.00**


SAR 10g (W/Kg)	6.183710
SAR 1g (W/Kg)	17.820605

Z Axis Scan

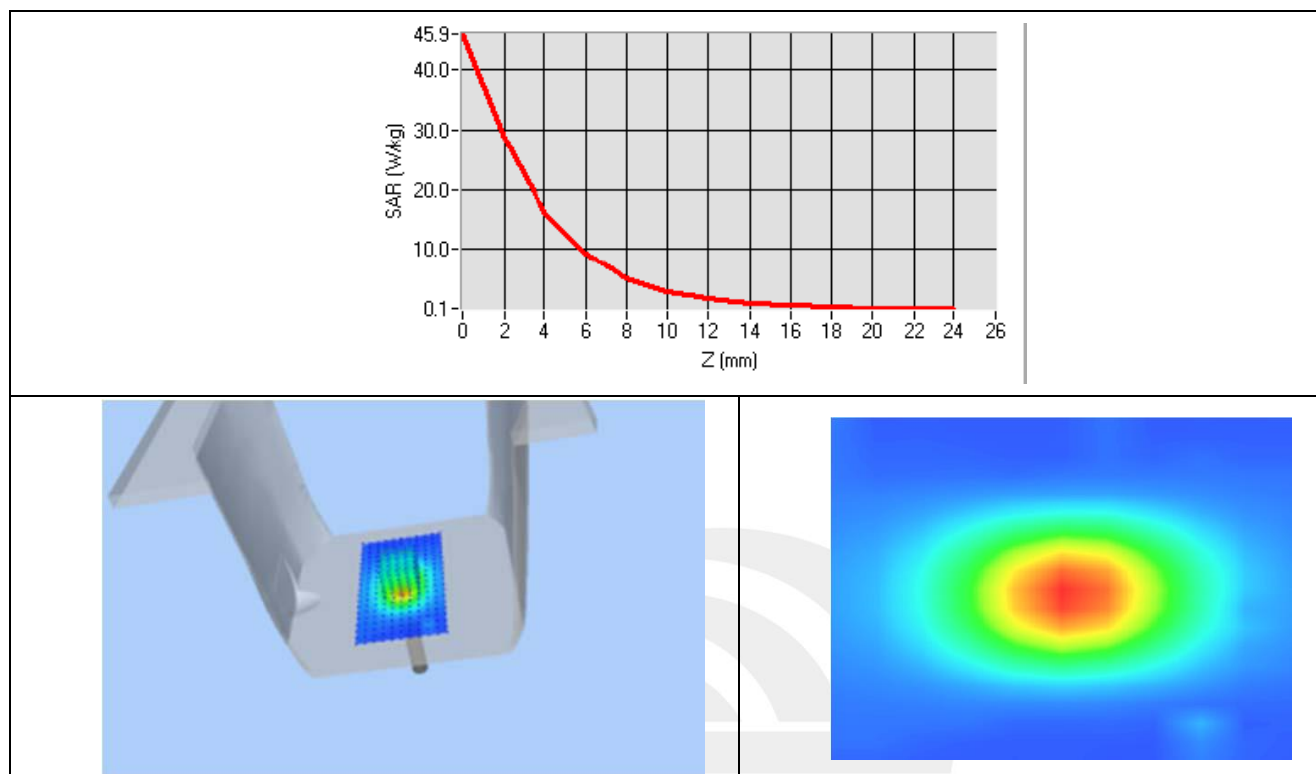

**Appendix B. SAR Test Plots****Plot 1: DUT: GPS Device; EUT Model: TND T1050**

Test Date	2022-01-12
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b
Channels	13
Signal	IEEE802.11b (Crest factor: 1.0)
Frequency (MHz)	2472
Relative permittivity (real part)	39.54
Conductivity (S/m)	1.80
Maximum location: X=1.00, Y=-31.00 SAR Peak: 1.74 W/kg	
SAR 10g (W/Kg)	0.270213
SAR 1g (W/Kg)	0.782245

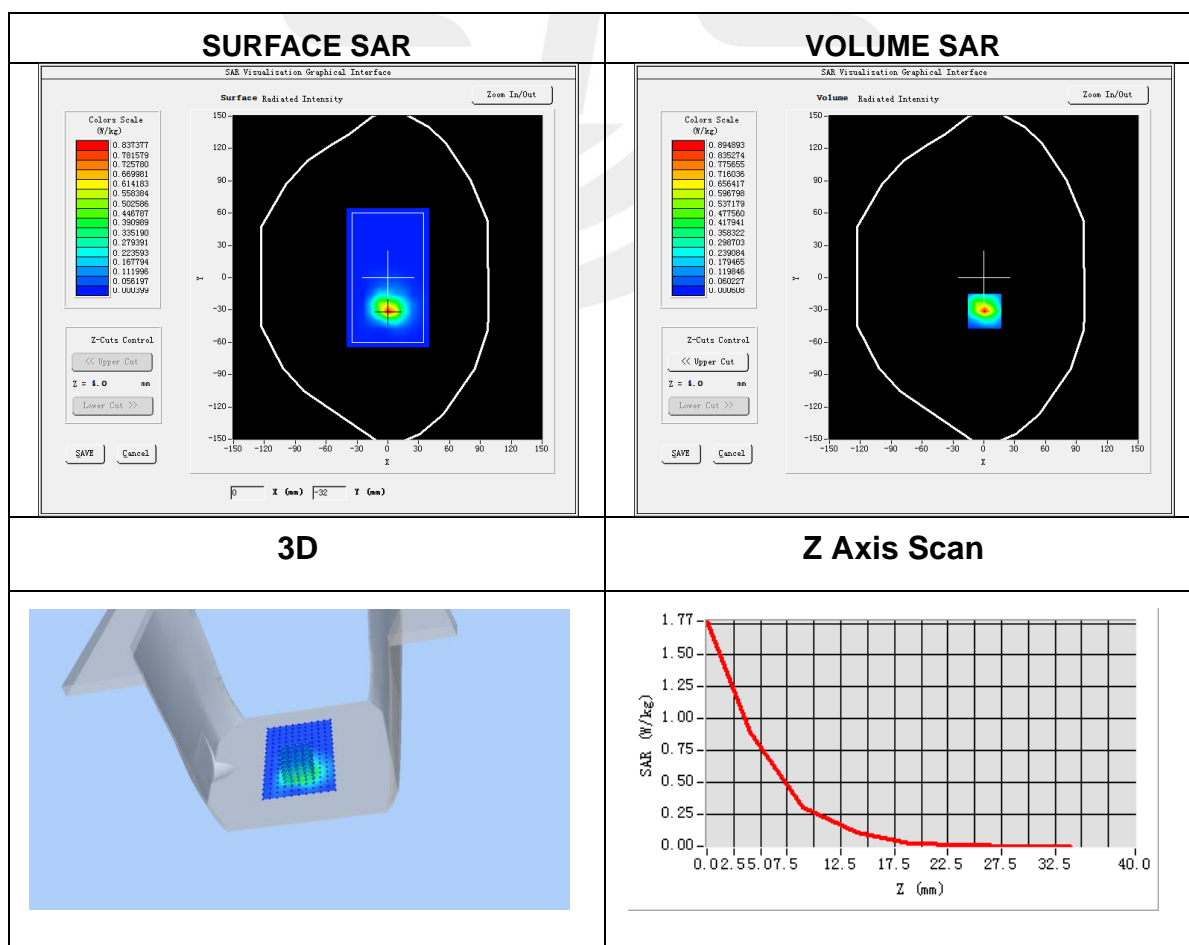


Plot 2: DUT: GPS Device; EUT Model: TND T1050

Test Date	2022-01-12
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a
Channels	40
Signal	IEEE802.11a (Crest factor: 1.0)
Frequency (MHz)	5200
Relative permittivity (real part)	35.77
Conductivity (S/m)	4.77

Maximum location: X=-9.00, Y=-43.00

SAR Peak: 3.72 W/kg

SAR 10g (W/Kg)	0.292660
SAR 1g (W/Kg)	1.013214

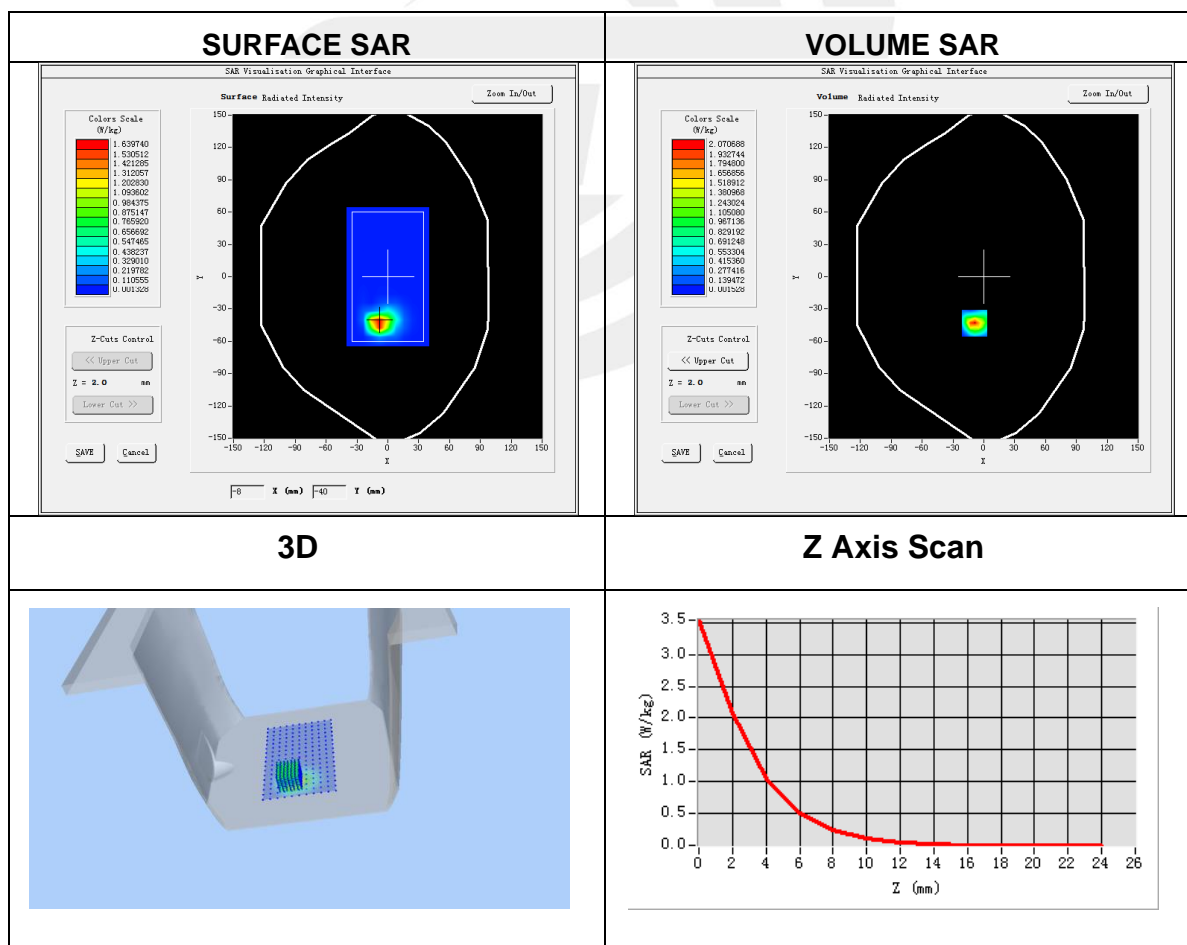


Plot 3: DUT: GPS Device; EUT Model: TND T1050

Test Date	2022-01-12
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a
Channels	64
Signal	IEEE802.11a (Crest factor: 1.0)
Frequency (MHz)	5320
Relative permittivity (real part)	0.255929
Conductivity (S/m)	1.194166

Maximum location: X=-17.00, Y=-25.00

SAR Peak: 4.82 W/kg

SAR 10g (W/Kg)	0.292660
SAR 1g (W/Kg)	1.013214

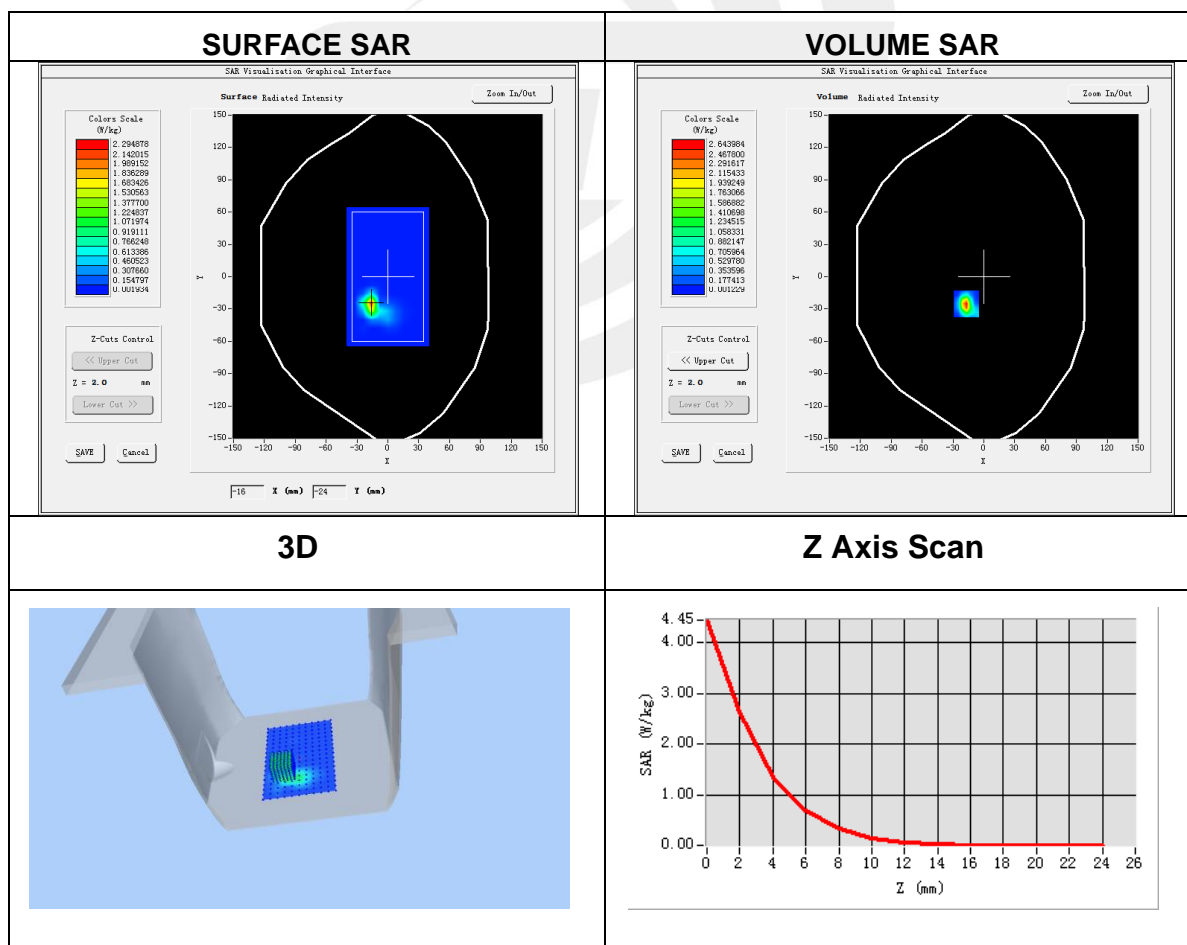


Plot 4: DUT: GPS Device; EUT Model: TND T1050

Test Date	2022-01-14
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a
Channels	100
Signal	IEEE802.11a (Crest factor: 1.0)
Frequency (MHz)	5500
Relative permittivity (real part)	35.53
Conductivity (S/m)	4.91

Maximum location: X=0.00, Y=-16.00

SAR Peak: 3.62 W/kg

SAR 10g (W/Kg)	0.264280
SAR 1g (W/Kg)	0.880442

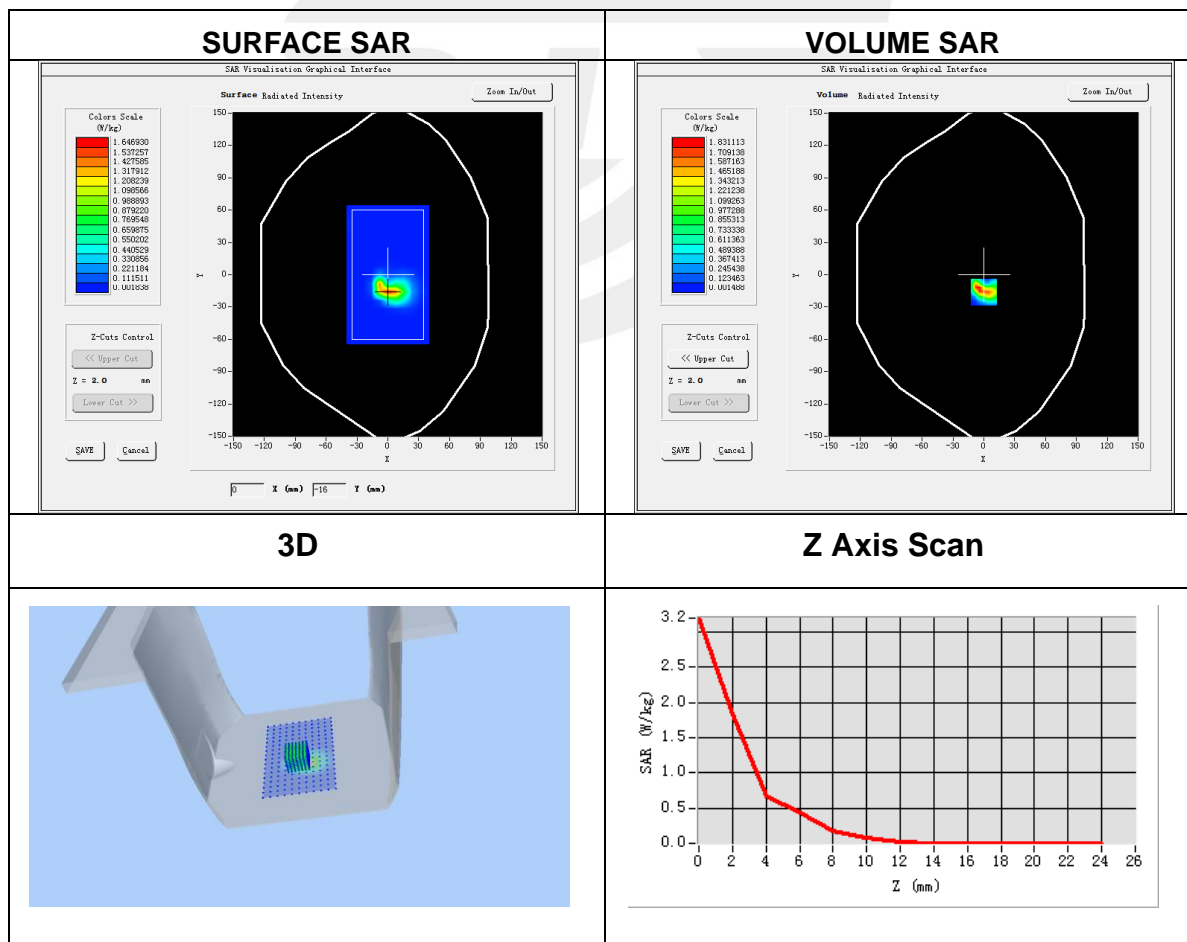




Plot 5: DUT: GPS Device; EUT Model: TND T1050

Test Date	2022-01-14
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a
Channels	157
Signal	IEEE802.11a (Crest factor: 1.0)
Frequency (MHz)	5785
Relative permittivity (real part)	35.06
Conductivity (S/m)	5.23

Maximum location: X=-18.00, Y=-16.00

SAR Peak: 5.14 W/kg

SAR 10g (W/Kg)	0.286748
SAR 1g (W/Kg)	1.243040

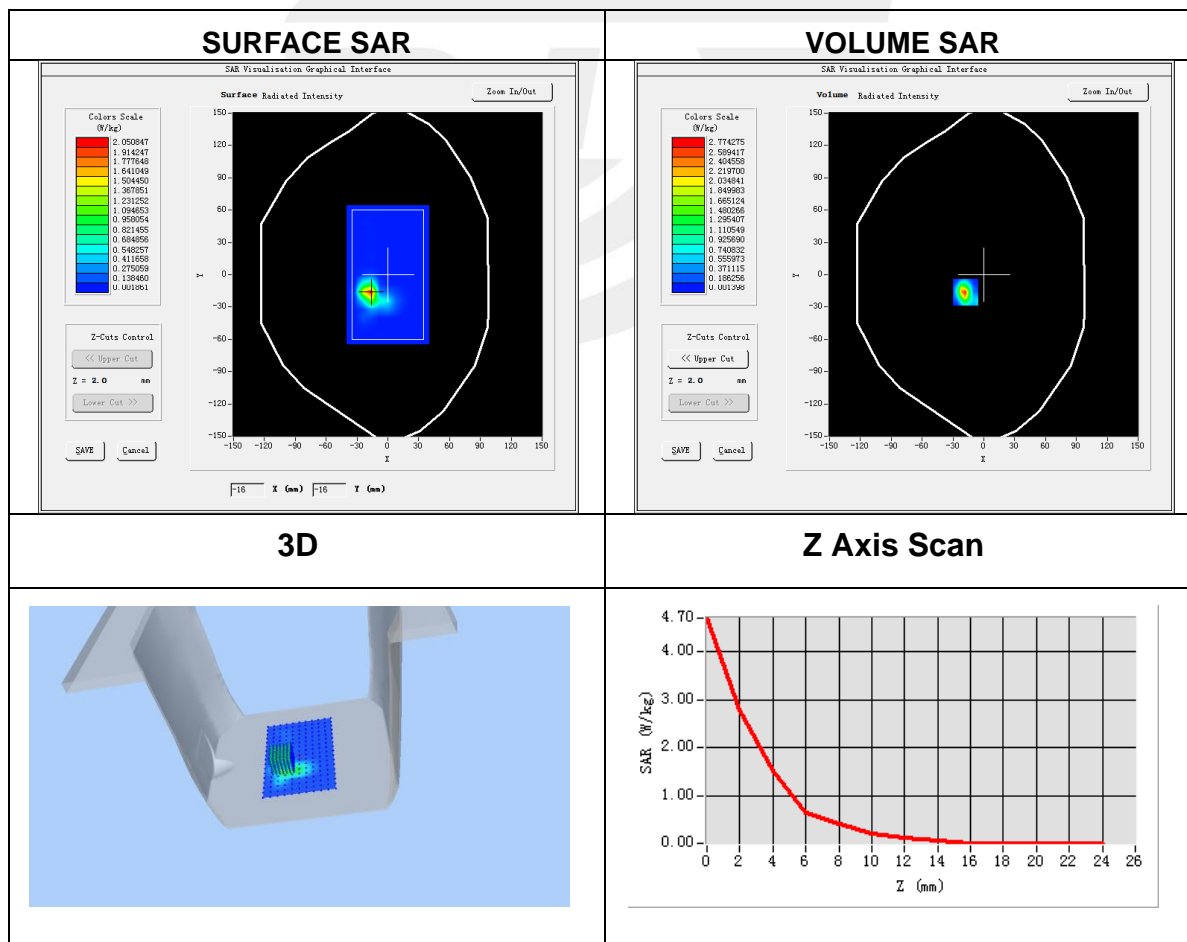



Appendix C. Probe Calibration And Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※

