

TEST RESULT SUMMARY

FCC PART 15 SUBPART C

Section 15.247

FCC PART 15 SUBPART C

Section 15.207 Conducted Emission Requirements

MANUFACTURER'S NAME	Digi International
NAME OF EQUIPMENT	Digi Connect Wi-EM 802.11b radio to 2 serial ports converter module
TYPE OF EQUIPMENT	802.11B 11 Mbit 2.4 GHz radio transceiver to dual TTL serial port module
MODEL NUMBER	50000879-xx Rev 1P
MANUFACTURER'S ADDRESS	11001 Bren Road East Minnetonka, MN 55343
TEST REPORT NUMBER	WC402191
TEST DATE	07 May 2004 29 June 2004

According to testing performed at TÜV Product Service Inc, the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in FCC Part 15 Subpart C Sections 15.207 and 15.247.

It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications necessary for compliance made during testing on the above mentioned date(s) must be implemented in all production units for compliance to be maintained.

TÜV Product Service Inc, as an independent testing laboratory, declares that the equipment tested as specified above conforms to the requirements of FCC Part 15 Subpart C Sections 15.207 and 15.247.

Date: 23 July 2004



Location: Taylors Falls MN
USA

J. C. Sausen
Tested By

T. K. Swanson
Reviewed By

Not Transferable

EMC EMISSION - TEST REPORT

Test Report File No. : **WC402191** Date of issue: 23 July 2004

Model No. : **50000879-xx Rev 1P**

Product Name : **Digi Connect Wi-EM 802.11b radio to 2 serial ports
converter module**

Product Type : **802.11B 11 Mbit 2.4 GHz radio transceiver to dual TTL serial
port module**

Applicant : **Digi International**

Manufacturer : **Digi International**

License holder : **Digi International**

Address : **11001 Bren Road East**
: **Minnetonka, MN 55343**

Test Result : ☒ **Positive** ☐ **Negative**

Test Project Number :
Reference(s) : **WC402191**

Total pages including
Appendices : **57**

TÜV Product Service Inc is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO/IEC Guide 25 and EN 45001.

TÜV Product Service Inc reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. TÜV Product Service Inc shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service Inc issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.

TÜV Product Service Inc and its professional staff hold government and professional organization certifications and are members of AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, and VCCI


D I R E C T O R Y - E M I S S I O N S

A) Documentation	Page(s)
Test report	<u>1 - 10</u>
Directory	<u>2</u>
Test Regulations	<u>3</u>
Deviations from standard / Summary	<u>11</u>
Test-setups (Photos)	<u>12 - 14</u>
Test-setup (drawing)	<u>Appendix A</u>
B) Test data	
6 dB Bandwidth [15.247 (a)(2)]	<u>9</u>
Peak Power Out [15.247 (b)]	<u>9</u>
Antenna Directional Gain [15.247 (b)(3)(i)]	<u>9</u>
Peak Power Spectral Density [15.247 (d)]	<u>9</u>
FCC 15.207 - Conducted emissions	150 kHz – 30 MHz <u>5, 10</u>
Spurious radiated emissions (electric field) (restricted bands)	30 MHz – 25.0 GHz <u>5, 6, 10</u>
Spurious conducted emissions	30 MHz – 25.0 GHz <u>10</u>
C) Appendix A	
Test Data Sheets and Test Setup Drawing(s)	<u>A1 – A36</u>
D) Appendix B	
Constructional Data Form(s) and/or Product Information Form(s)	<u>B1 – B5</u>
E) Appendix C	
Measurement Protocol	<u>C1 - C2</u>

EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

- ☐ - EN 50081-1 / 1991
☐ - EN 55011 / 1998
 w/Amendment A1:1999
☐ - EN 55013 / 1990
☐ - EN 55014 / 1987
- ☐ - EN 55014 / A2:1990
☐ - EN 55014 / 1993
- ☐ - EN 55015 / 1987
☐ - EN 55015 / A1:1990
☐ - EN 55015 / 1993
☐ - EN 55022 / 1987
☒ - FCC Part 15 Subpart C Section 15.247
☒ - FCC Part 15 Subpart C Section 15.207 Conducted Emission Requirements
- ☐ - Group 1
☐ - Class A
- ☐ - Group 2
☐ - Class B
- ☐ - Household appliances and similar
☐ - Portable tools
☐ - Semiconductor devices
- ☐ - Household appliances and similar
☐ - Portable tools
☐ - Semiconductor devices
- ☐ - Class A
☐ - Class B

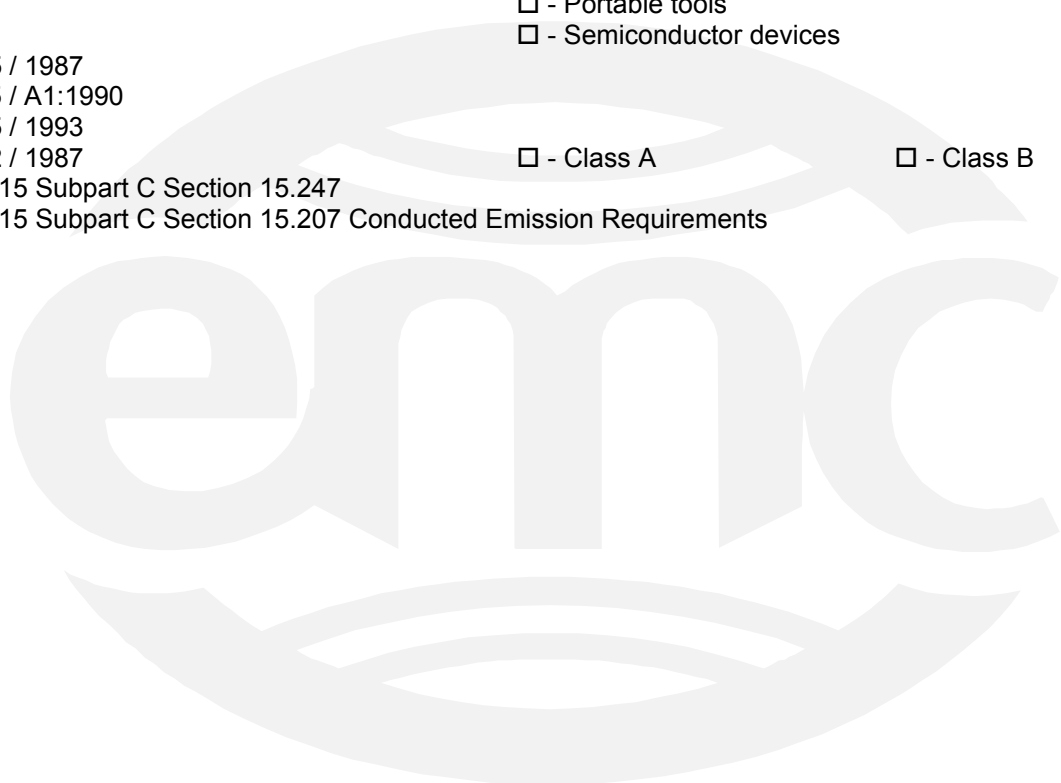

Environmental conditions in the lab:

	<u>Actual</u>
Temperature	: 16 - 23 °C
Relative Humidity	: 28 - 44 %
Atmospheric pressure	: 99.0 - 100.0 kPa
Power supply system	: 60 Hz – 115 VAC – 1 Phase

Sign Explanations:

- ☐ - not applicable
☒ - applicable



Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)

The **CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)** measurements were performed at the following test location:

☐ - Test not applicable

- ☒ - Wild River Lab Large Test Site (Open Area Test Site)
- ☐ - Wild River Lab Small Test Site (Open Area Test Site)
- ☐ - Oakwood Lab (Open Area Test Site)
- ☐ - Wild River Lab Screen Room
- ☐ - New Brighton Lab Shielded Room

Test equipment used:

	TUV ID	Model Number	Manufacturer	Description	Serial Number	Cal Due
■ -	2416	3825/2	Electro-Mechanics (EMCO)	50 Ω LISN	8812-1437	Code B
■ -	2534	ESHS-20	Rhode & Schwarz	EMI Receiver	837055/003	1-14-05

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually.

Emissions Test Conditions: CONDUCTED EMISSIONS (30 MHz – 25 GHz)

The **CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)** measurements were performed at the following test location:

☐ - Test not applicable

- ☒ - Wild River Lab Large Test Site (Open Area Test Site)
- ☐ - Wild River Lab Small Test Site (Open Area Test Site)
- ☐ - Oakwood Lab (Open Area Test Site)
- ☐ - Wild River Lab Screen Room
- ☐ - New Brighton Lab Shielded Room

Test equipment used:

	TUV ID	Model Number	Manufacturer	Description	Serial Number	Cal Due
■ -	2690	8566B	Hewlett-Packard	Spectrum Analyzer (Unit F)	2430A00930	1-28-05
■ -	2673	85662A	Hewlett-Packard	Analyzer Display (Unit A)	2152A03687	1-28-05

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually.

Emissions Test Conditions: RADIATED EMISSIONS (Magnetic Field)

The **RADIATED EMISSIONS (MAGNETIC FIELD)** measurements were performed at the following test location:

☒ - Test not applicable

- ☐ - Wild River Lab Large Test Site (Open Area Test Site)
- ☐ - Wild River Lab Small Test Site (Open Area Test Site)
- ☐ - Oakwood Lab (Open Area Test Site)

Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The *RADIATED EMISSIONS (ELECTRIC FIELD)* measurements, in the frequency range of 30 MHz-1000 MHz, were tested in a horizontal and vertical polarization at the following test location:

☐ - Test not applicable

- ☐ - Wild River Lab Large Test Site (Open Area Test Site)
- ☒ - Wild River Lab Small Test Site (Open Area Test Site) – NSA measurements made 2-03, due 2-05.
- ☐ - Oakwood Lab (Open Area Test Site)

at a test distance of :

- ☒ - 3 meters
- ☐ - 10 meters
- ☐ - 30 meters

Test equipment used:

	TUV ID	Model Number	Manufacturer	Description	Serial Number	Cal Due
■ -	3203	EM-6917B	Electro-Metrics	Biconicalog Periodic	106	3-30-05
■ -	2690	8566B	Hewlett-Packard	Spectrum Analyzer (Unit F)	2430A00930	1-28-05
■ -	2673	85662A	Hewlett-Packard	Analyzer Display (Unit A)	2152A03687	1-28-05
■	2681	85650A	Hewlett-Packard	Quasi-Peak Adapter	2430A00562	2-23-05
■ -	2671	8447D	Electro-Mechanics (EMCO)	Preamplifier	2648A04942	Code B

Cal Code B = Calibration verification performed internally.

Cal Code Y = Calibration not required when used with other calibrated equipment.

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually.

Emissions Test Conditions: INTERFERENCE POWER

The *INTERFERENCE POWER* measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHz - 300 MHz at the following test location :

☒ - Test not applicable

- ☐ - Wild River Lab Large Test Site (Open Area Test Site)
- ☐ - Wild River Lab Small Test Site (Open Area Test Site)
- ☐ - Oakwood Lab (Open Area Test Site)
- ☐ - Wild River Lab Screen Room
- ☐ - New Brighton Lab Shielded Room

Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The *EQUIVALENT RADIATED EMISSIONS* measurements in the frequency range 1 GHz – 25 GHz were performed in a horizontal and vertical polarization at the following test location:

☐ - Test not applicable

- - Wild River Lab Large Test Site (Open Area Test Site)
- ☐ - Wild River Lab Small Test Site (Open Area Test Site)
- ☐ - Oakwood Lab (Open Area Test Site)
- ☐ - Wild River Lab Screen Room

at a test distance of:

- ☐ - 1 meters
- - 3 meters
- ☐ - 10 meters

Test equipment used:

	TUV ID	Model Number	Manufacturer	Description	Serial Number	Cal Due
■ -	8052	8566B	Hewlett-Packard	Spectrum Analyzer	2115a00853	10-17-04
■ -	8051	85662A	Hewlett-Packard	Analyzer Display	2112A02220	10-17-04
■ -	3204	EM-6917B	Electro-Metrics	Biconicalog Periodic	102	10-24-04
■ -	2075	3115	Electro-Mechanics (EMCO)	Ridge Guide Ant. 1-18 GHz	9001-3275	11-19-04
■ -	2788	3116	Electro-Mechanics (EMCO)	Ridge Guide Ant 18-40 GHz	2005	7-11-04
■ -	2662	11970K	Hewlett-Packard	Harm Mixer – 18-26.5 GHz	2332A01170	7-11-04
■ -	2127	11975A	Hewlett Packard	Amplifier 2- 8 GHz	2738A01200	Code B
■ -	3957	SL18B4020	Phase One Microwave	Preamplifier 1 – 18 GHz	0001	Code B

Cal Code B = Calibration verification performed internally.

Cal Code Y = Calibration not required when used with other calibrated equipment.

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually.

Equipment Under Test (EUT) Test Operation Mode - Emission tests :

The device under test was operated under the following conditions during emissions testing:

- ☐ - Standby
- ☐ - Test program (H - Pattern)
- ☐ - Test program (color bar)
- ☐ - Test program (customer specific)
- ☐ - Practice operation
- ☐ - Normal Operating Mode
- - FCC software -- "H"s out of serial port and across radio link.

Configuration of the device under test:

- ☐ - See Constructional Data Form in Appendix B - Page B2
- - See Product Information Form in Appendix B - beginning on Page B3

The following peripheral devices and interface cables were connected during the measurement:

- | | |
|---|----------------|
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| <input type="checkbox"/> - _____ | Type : _____ |
| ■ - unshielded power cable | |
| <input type="checkbox"/> - unshielded cables | |
| ■ - shielded cables | MPS.No.: _____ |
| <input type="checkbox"/> - customer specific cables | |
| <input type="checkbox"/> - _____ | |

Emission Test Results:

6 dB Bandwidth [15.247 (a)(2)]

The requirements are

■ - MET

□ - NOT MET

The minimum 6 dB bandwidth shall be at least 500 kHz.

Remarks: See plots on pages A4 – A6. Bandwidths are shown to be 9.4 to 9.5 MHz.

Duty Cycle

Remarks: See plots on pages A7 and A8. Duty cycle correction factor is –12dB and is NOT applied

Peak Power Out [15.247 (b)]

The requirements are

■ - MET

□ - NOT MET

Maximum peak power output shall be 1 watt.

Remarks: See plots on pages A9 - A14. Max peak output power is shown to be 0.17 W (22.25 dBm when unit is on Channel 6).

Antenna Directional Gain [15.247 (b)(4)(i)]

The requirements are

■ - MET

□ - NOT MET

The antenna directional gain is less than 6 dBi. For antennas with directional gain greater than 6 dBi the maximum peak output power is reduced by 1 dB for every 3 dB that the directional gain is over 6 dBi.

Remarks: The antenna directional gain is 2 dBi.

Peak Power Spectral Density – [15.247 (d)]

The requirements are

■ - MET

□ - NOT MET

Peak power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Remarks: See plots on pages A9 – A11. Maximum peak power spectral density is –15.8 dBm/3 kHz.

Emission Test Results Continued:

FCC 15.207 - Conducted emissions 150 kHz - 30 MHz

The requirements are ☒ - MET ☐ - NOT MET

Minimum margin of compliance _____ 18 dB at _____ 150.0 kHz

Maximum margin of non-compliance _____ dB at _____ MHz

Remarks: See Data on pages A23 – A26.

Spurious radiated emissions (electric field) 30 MHz - 1000 MHz (restricted bands)

The requirements are ☒ - MET ☐ - NOT MET

Minimum margin of compliance _____ 15 dB at _____ 608.2 MHz

Maximum margin of non-compliance _____ dB at _____ MHz

Remarks: See data on pages A27 – A33.

Spurious conducted emissions 30 MHz – 25 GHz

The requirements are ☒ - MET ☐ - NOT MET

Minimum margin of compliance _____ >10 dB at _____ MHz

Maximum margin of non-compliance _____ dB at _____ MHz

Remarks: See data on pages A15 – A22. The limit is –20 dBc in any 100 kHz band outside the operating band.

Special attention is paid to ensure band edge compliance.

Equivalent Radiated emissions 1 GHz – 25 GHz (restricted bands)

The requirements are ☒ - MET ☐ - NOT MET

Minimum margin of compliance _____ 3 dB at _____ 4874.0 MHz

Maximum margin of non-compliance _____ dB at _____ MHz

Remarks: See data on pages A33 – A36.

DEVIATIONS FROM STANDARD:

None

GENERAL REMARKS:

The EUT was tested with the antenna connected directly to the rf module and with a 12" extension cable between the rf module and the antenna.

SUMMARY:

The requirements according to the technical regulations are

☒ - met

☐ - **not** met.

The device under test does


☒ - fulfill the general approval requirements mentioned on page 3.

☐ - **not** fulfill the general approval requirements mentioned on page 3.

Testing Start Date: 07 May 2004

Testing End Date: 29 June 2004

- TÜV PRODUCT SERVICE INC -



T. K. Swanson
Test Technician



Tested By:
J. C. Sausen

Test-setup photo(s):
Conducted emission 150 kHz - 30 MHz




Test-setup photo(s):
Radiated emission 30 MHz - 25000 MHz without 12" extension cable with antenna




Test-setup photo(s):

Radiated emission 30 MHz - 25000 MHz with 12" extension cable with antenna

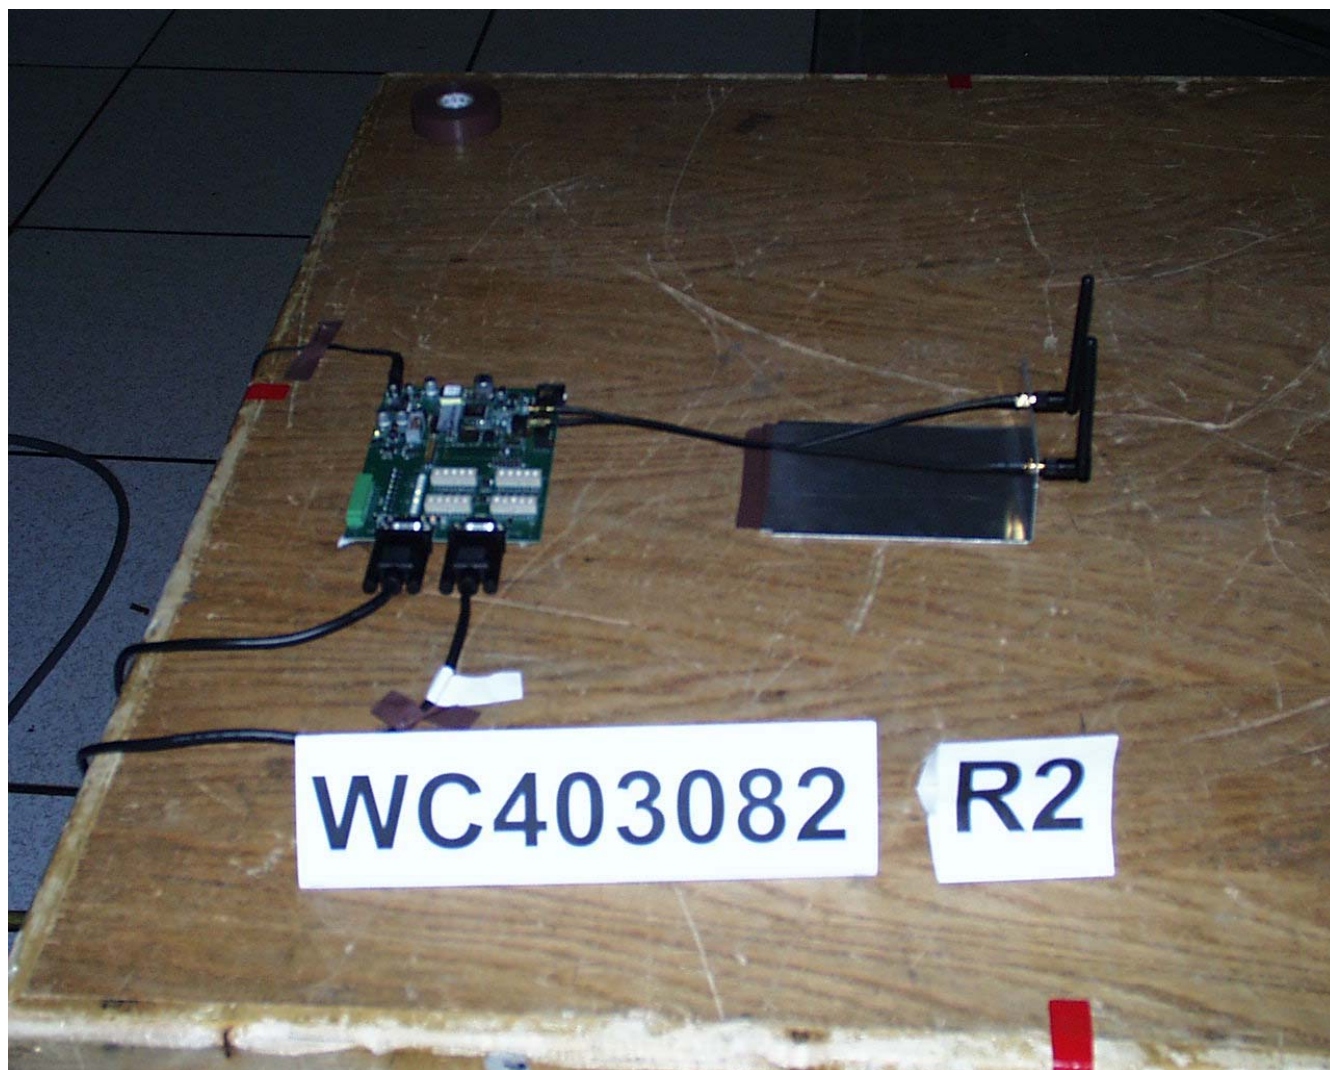

Appendix A

Test Data Sheets
and
Test Setup Drawing(s)

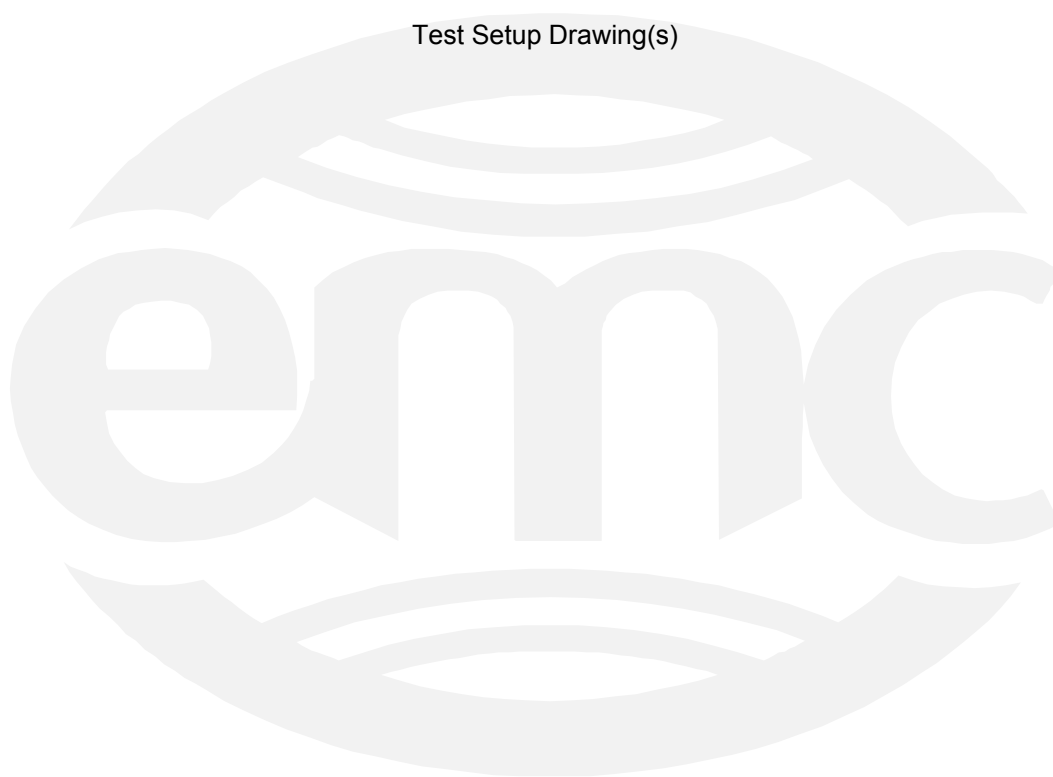


TEST SETUP FOR EMISSIONS TESTING

WILD RIVER LAB Large Test Site


Notes:

1. Items shown in dotted lines are located on the floor below the test area. It is 5 meters vertically from the ground floor to the test area.
2. 50 Hz, 60 Hz, and 400 Hz are power panels for alternating current.
3. The antenna may be positioned horizontally 3, 10 or 30 meters from the center of the turntable.
4. The circle is a 6.7 meter diameter turntable.
5. A ground plane is in the plane of this sheet.
6. The test sample is shown in the azimuthal position representing zero degrees.

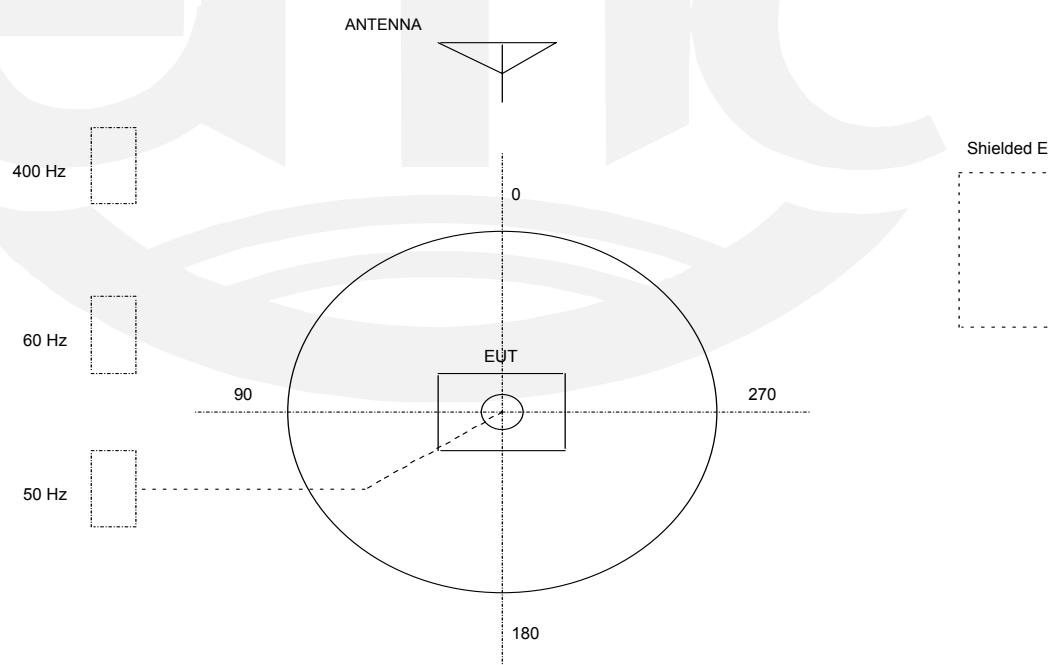


TEST SETUP FOR EMISSIONS TESTING

WILD RIVER LAB
Small Test Site (STS)

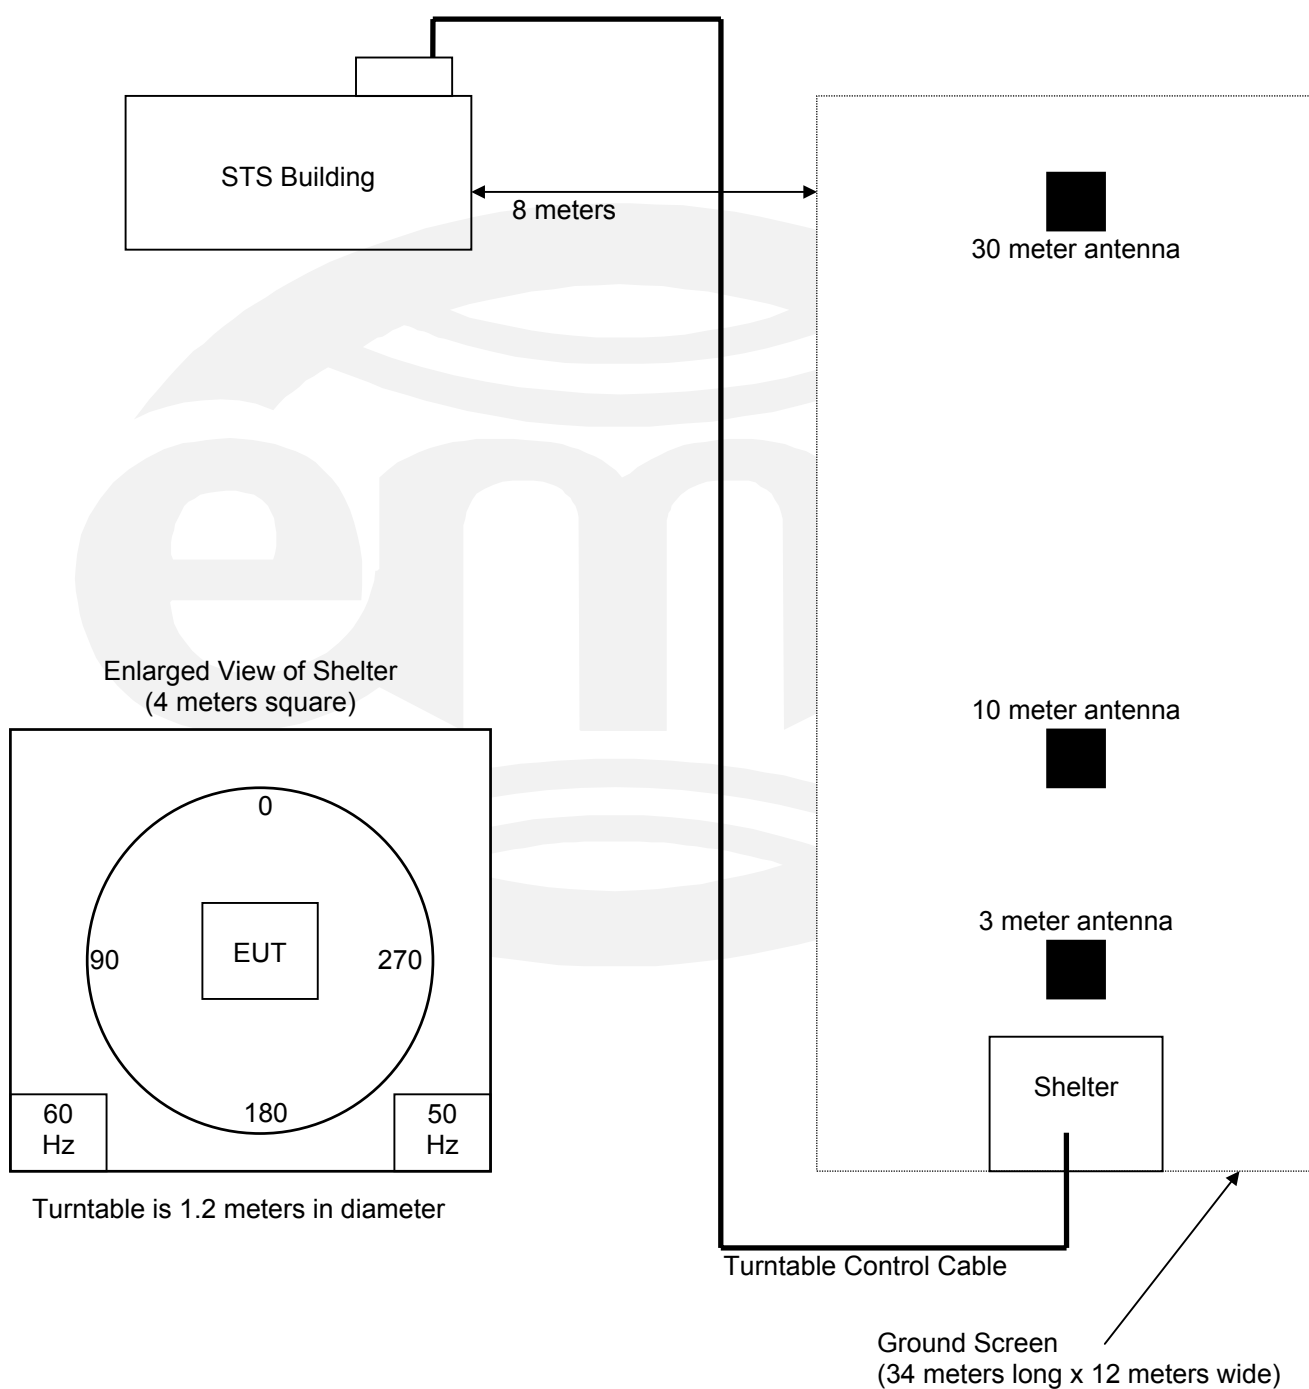

Bandwidth - 6 dBm


Agilent 04:10:05 Jun 29, 2004

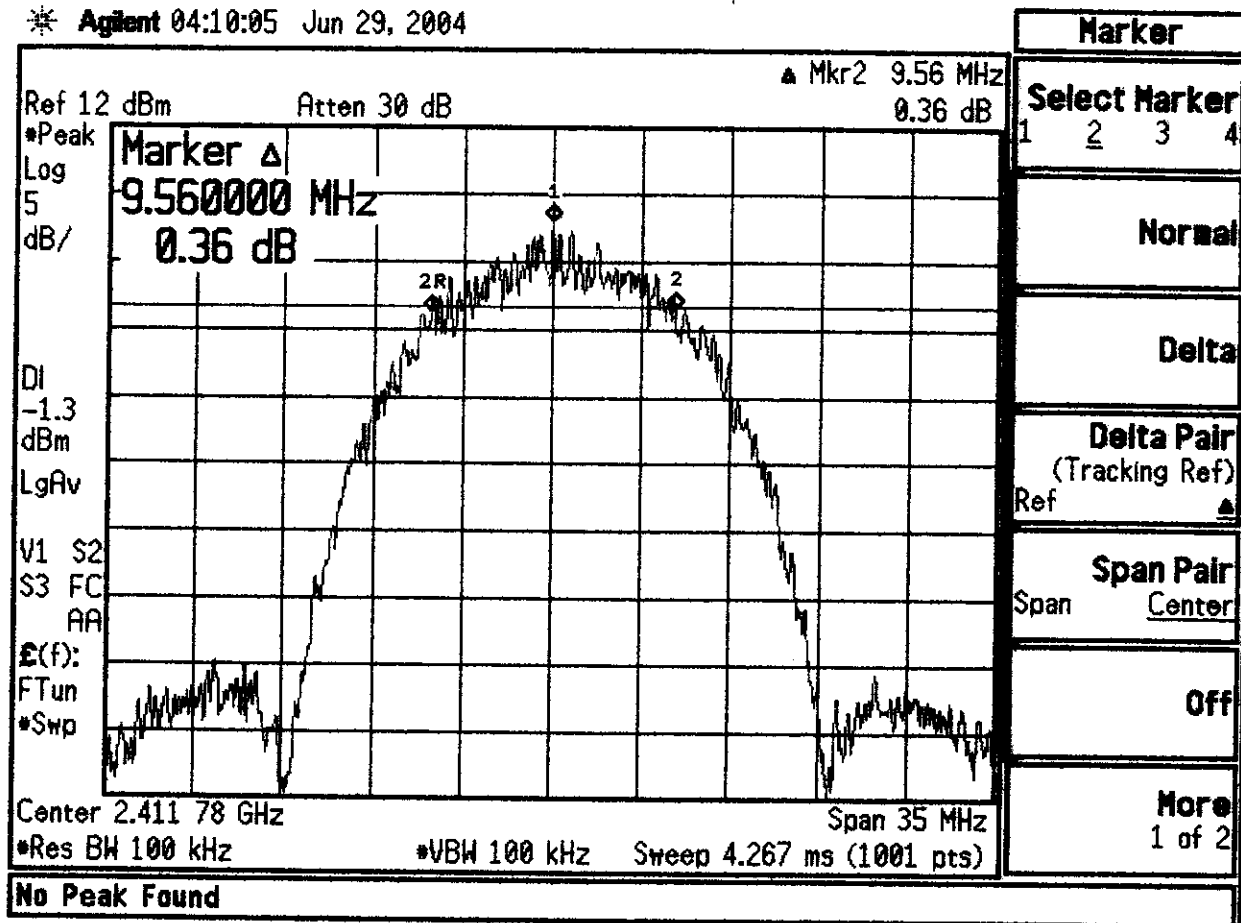

Chan #1 WiEM w/cable

bandwidth - 6 dBm


* Agilent 04:12:45 Jun 29, 2004

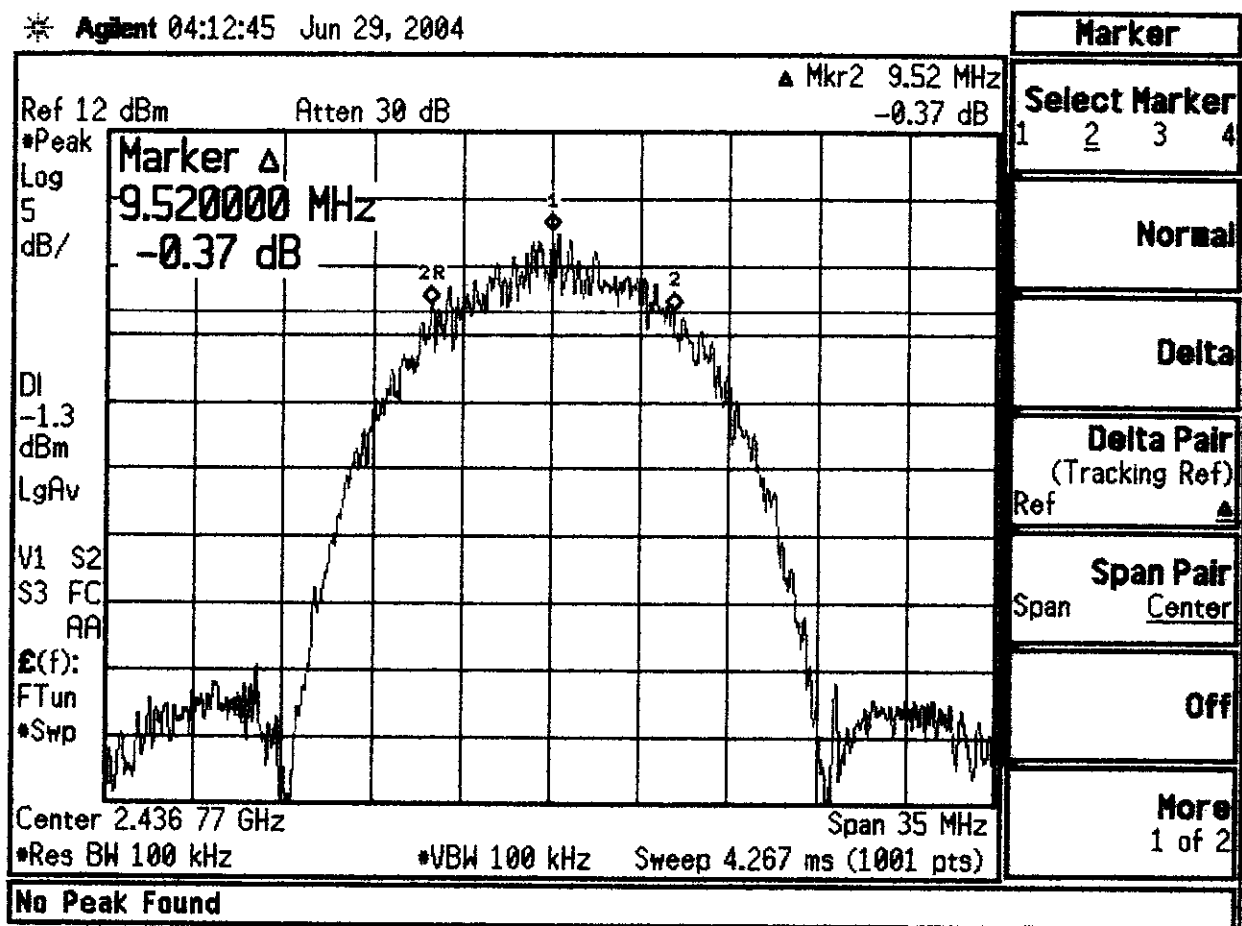

Chan # 6 WiEM w/cable

Bandwidth - b dBm

* Agilent 04:14:49 Jun 29, 2004

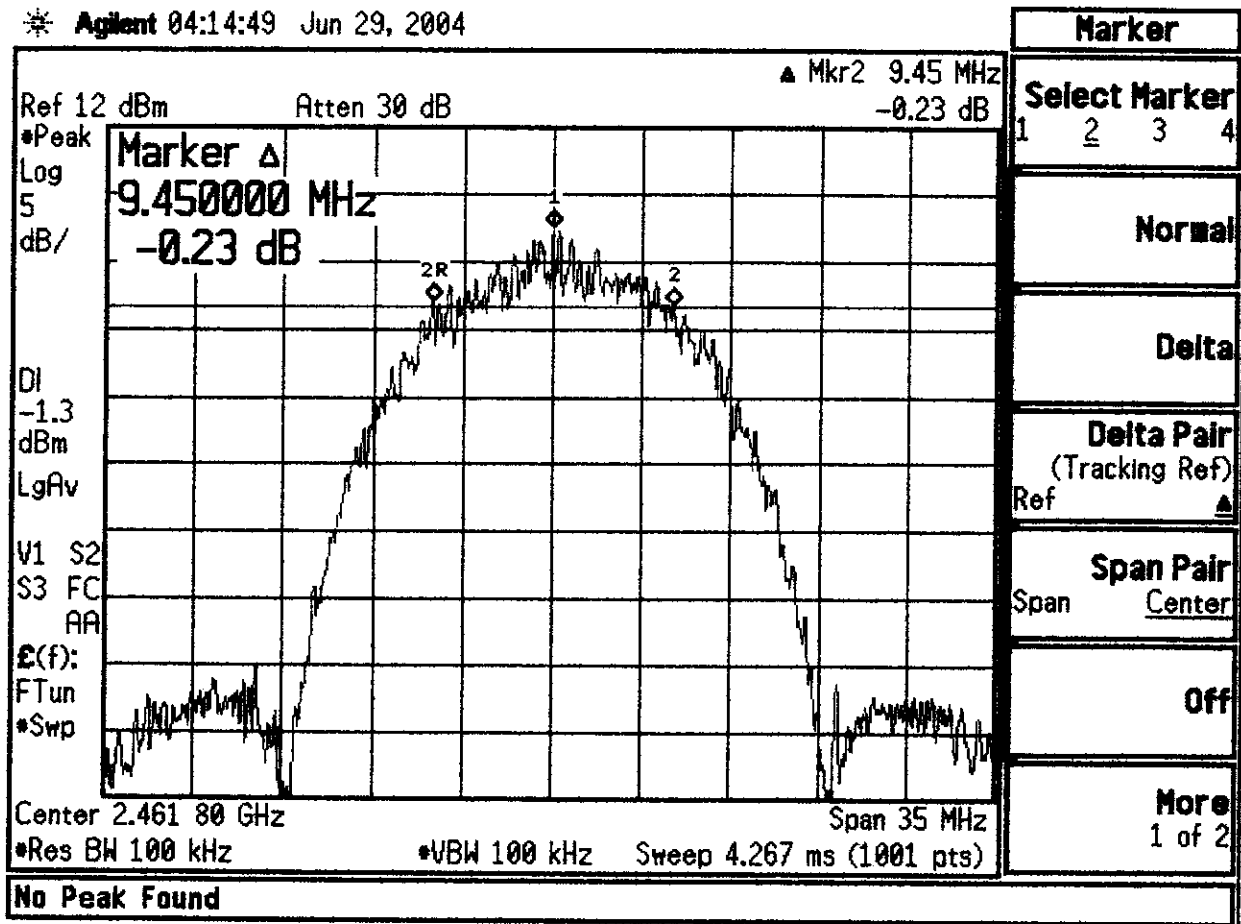

Chan #11 WiEM w/cable

same with/without 12" extension cable


MKR Δ 1.360 msec
-0.70 dB

hp REF 70.0 dB μ V ATTN 10 dB

5 dB/

POS PK

DL
36.4
dB μ V

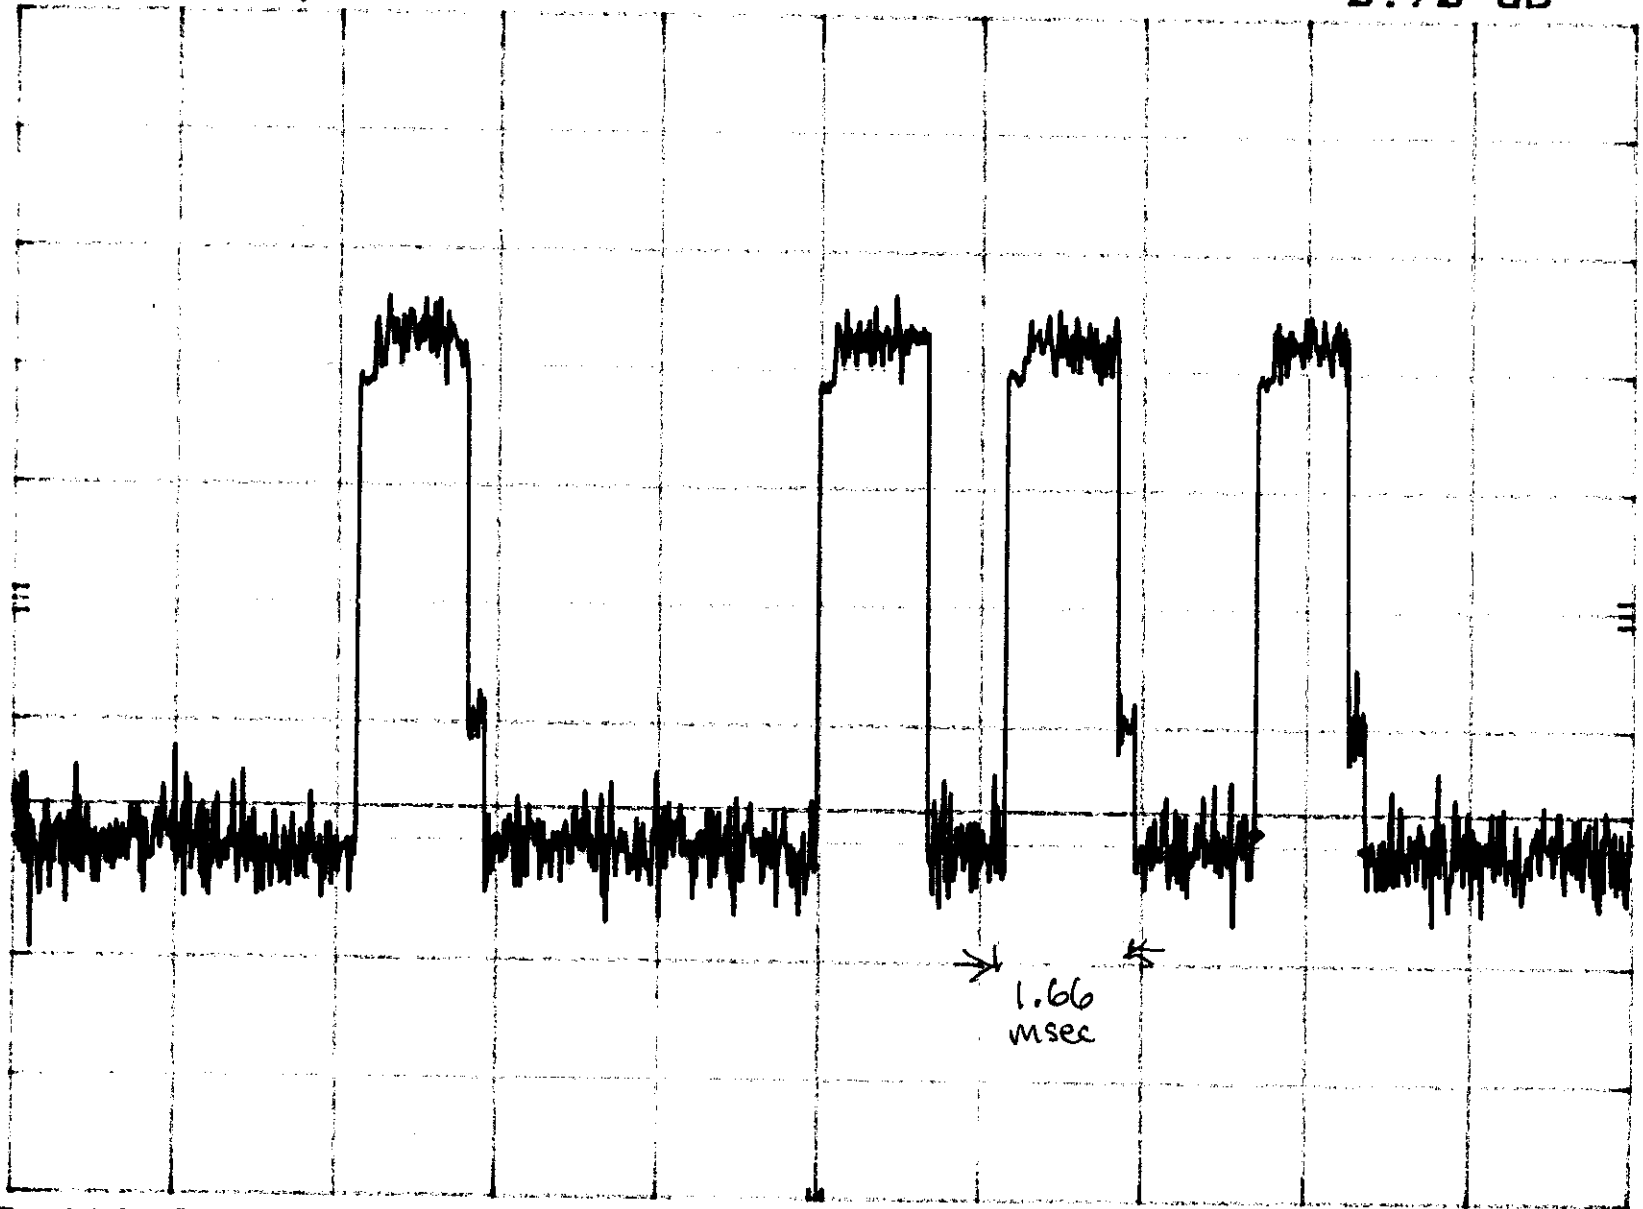

CENTER 2.411 240 000 GHz
RES BW 1 MHz

VBW 1 MHz

SPAN 0 Hz
SWP 20.0 msec

same w/ + w/o 12" extension
cable

$$13 \times 1.66 + 8 \times .34$$

$$21.58 + 2.72$$

$$= 24.3 \text{ msec on time}$$

$$20 \log 24.3/100 = -12 \text{ dB}$$

MKA 81.50 msec

REF 70.0 dB μ V


ATTEN 10 dB

duty cycle relaxation

57.40 dB μ V

5 dB/

POS PK

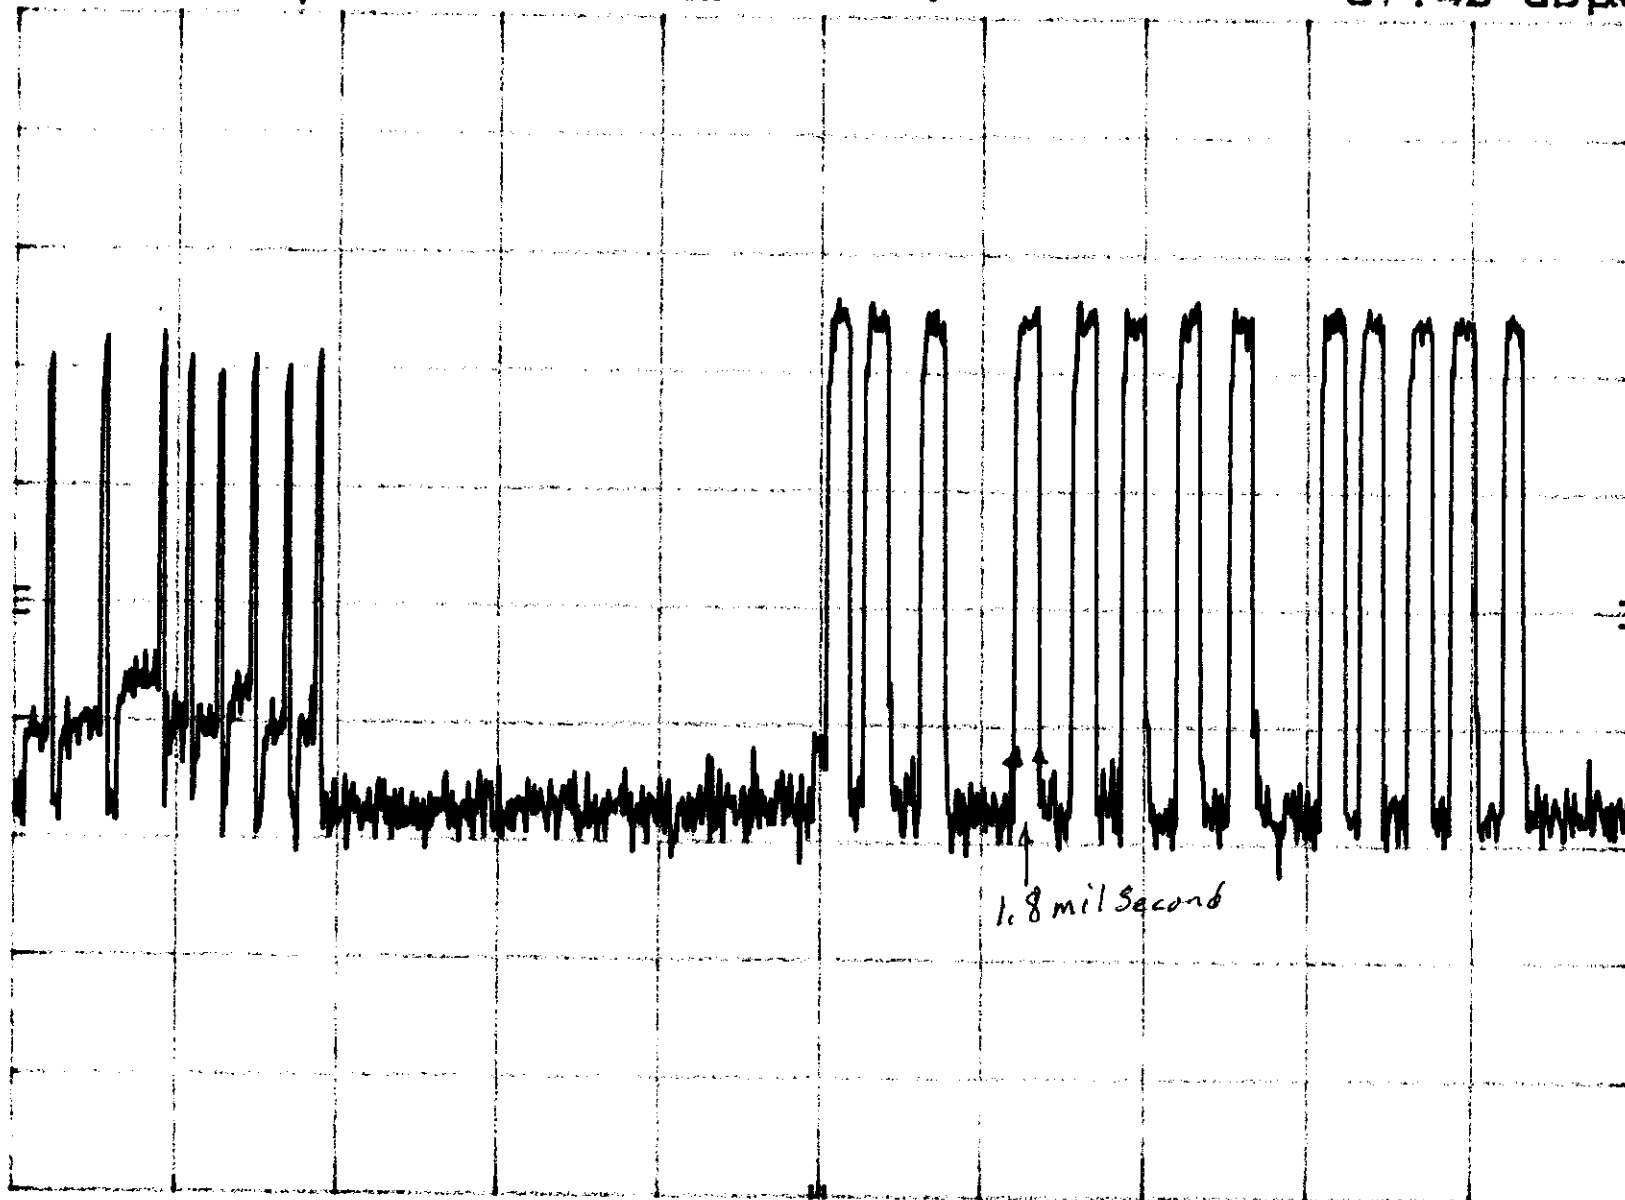


CENTER 2.411 240 000 GHz

RES BW 1 MHz

VBW 1 MHz

SPAN 0 Hz

SWP 100 msec

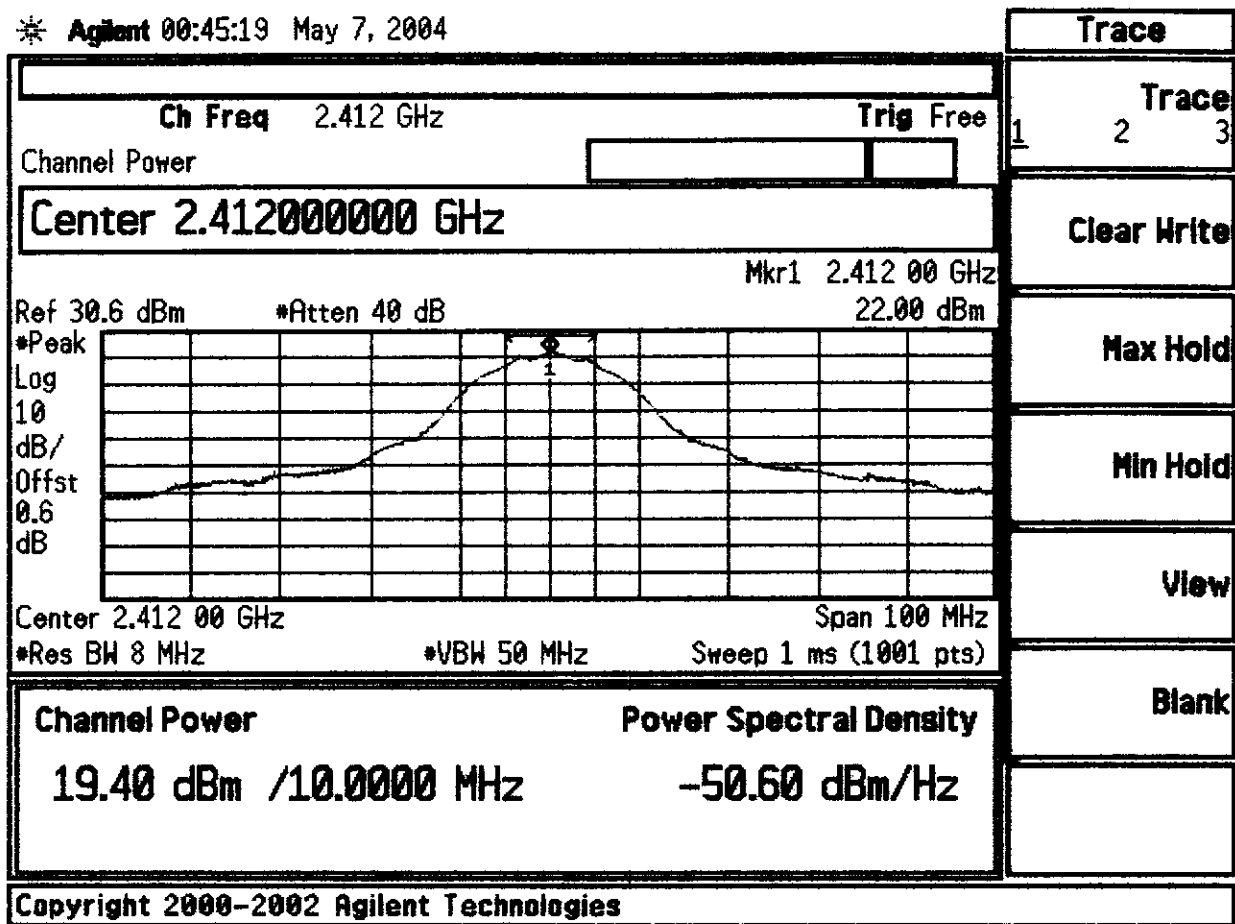


Ch. 1 - Max. Pk. Output Pow - 1W - PASS
(15.247)

Power Setting 15 (Max.)

w/o 12" Extension Cable

Peak Power Spectral Density

~~-48~~
 $-50.6 + 34.8 = -15.8 \text{ dBm/3kHz}$

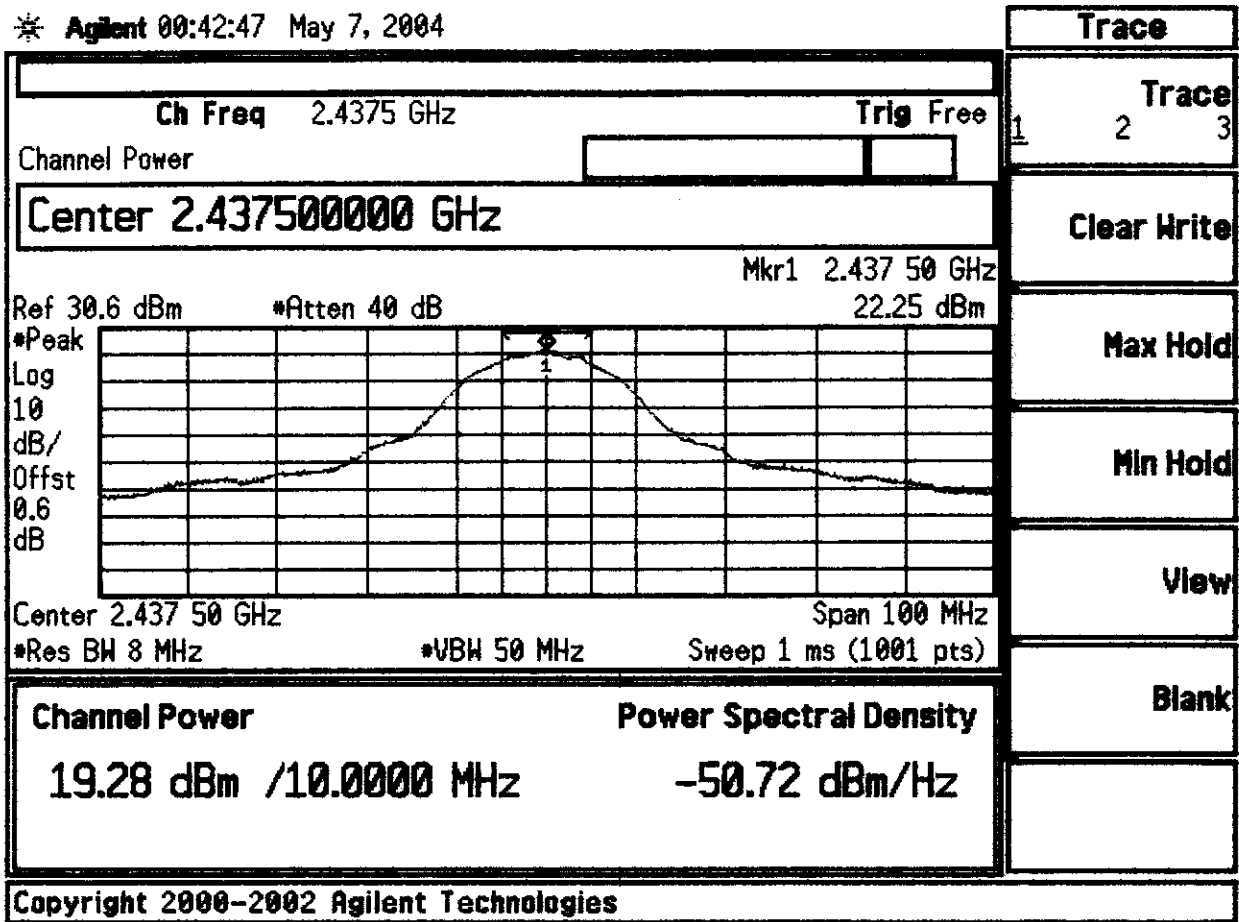


Ch. 6 - Max Peak Output Power - 1W - PASS
(15.247)

Power Setting 15 (Max.)

w/o 12" Extension Cable

Peak Power Spectral Density

$$-50.72 + 34.8 = -15.92 \text{ dBm/3KHz}$$

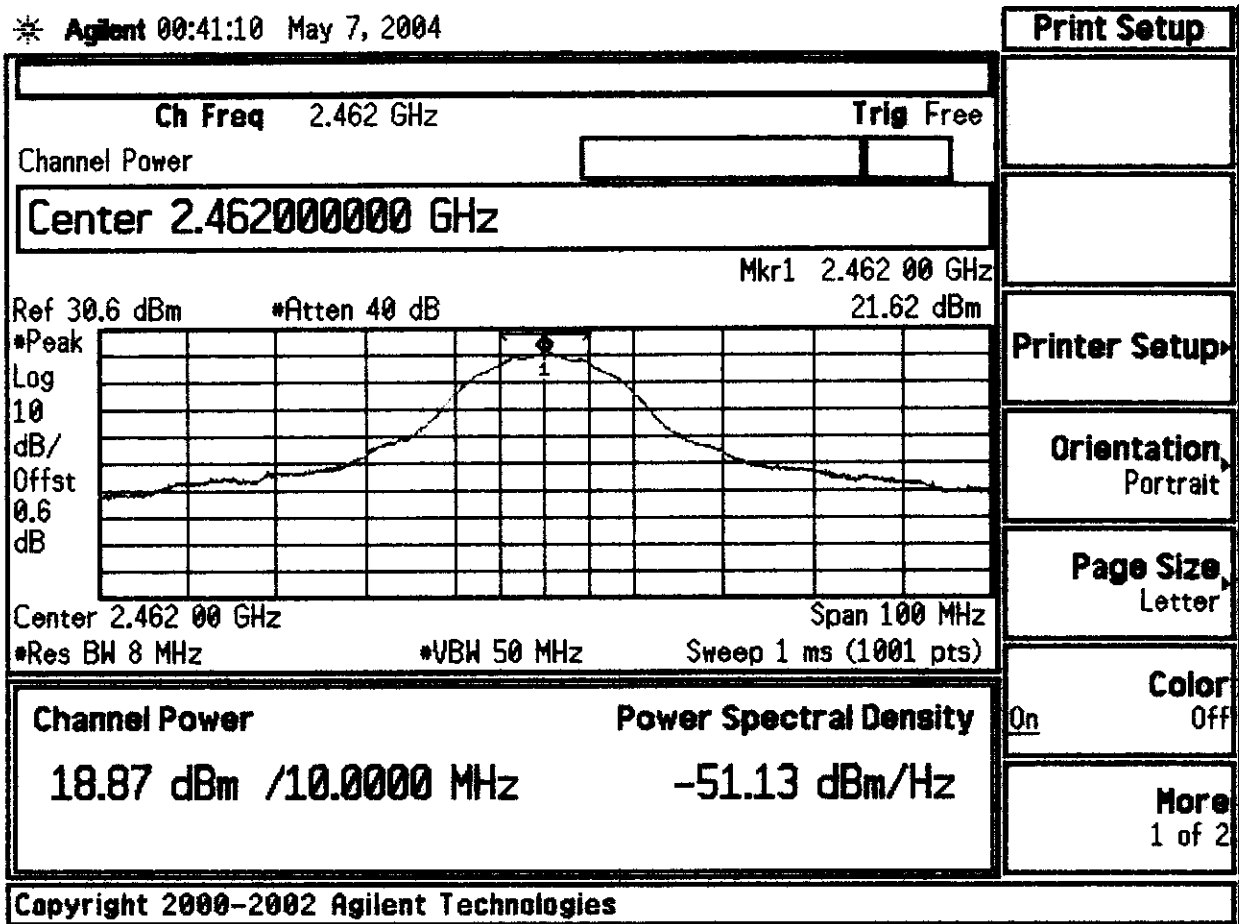

Ch. 11 - Max Pk Output Power - 1W - P_{SS}
 (15.247)
 Power Setting 15 (Full Power)

w/o 12" Extension Cable


Peak Power Spectral Density

$$-51.13 + 34.8 = -16.33 \text{ dBm / 3 kHz}$$

Power

Plot #3

* Agilent 03:41:14 Jun 29, 2004

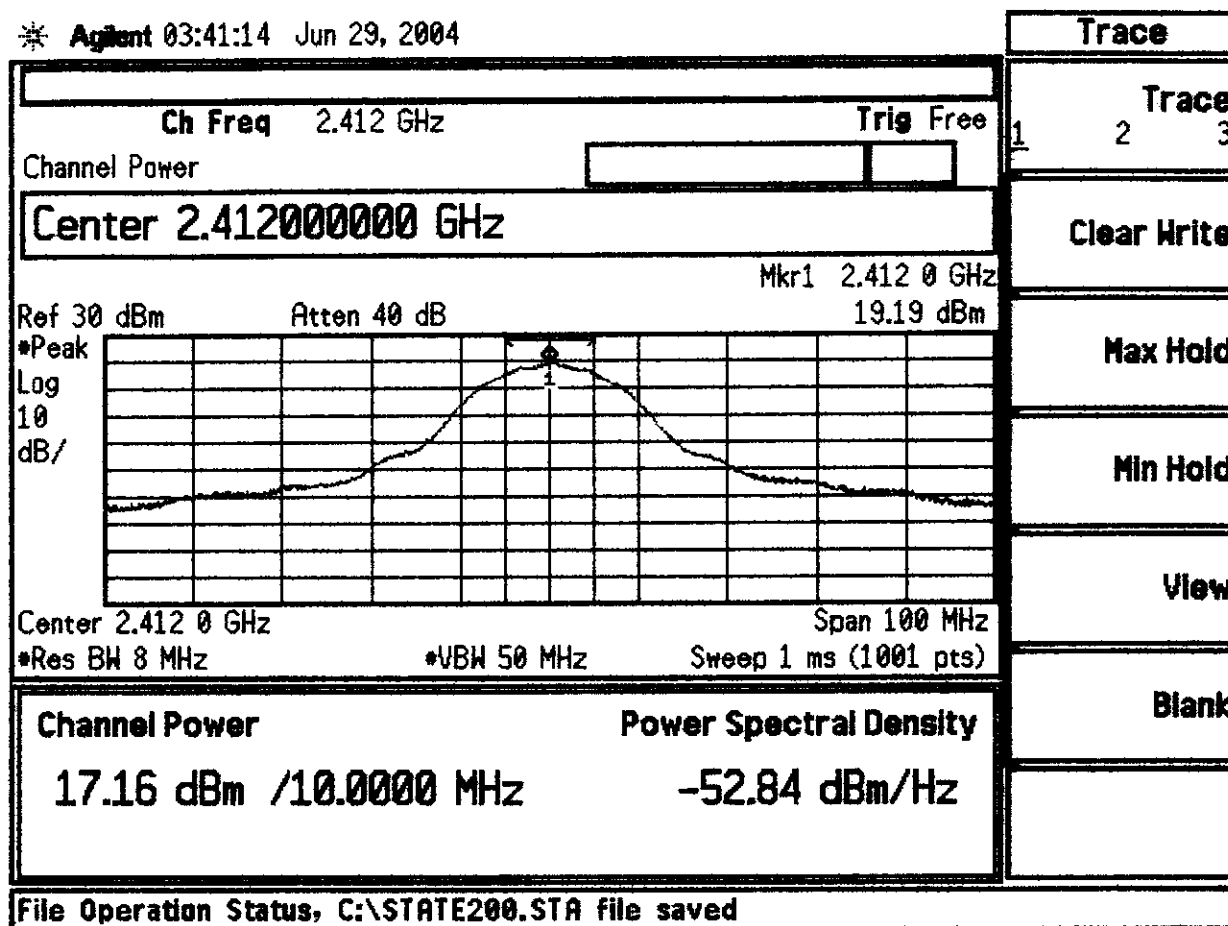

Chan #1 WiEM w/cable


Peak Power Spectral Density

$$-52.84 + 34.8 = -18.04 \text{ dBm/3 kHz}$$

Power

Plot #2

* Agilent 03:36:21 Jun 29, 2004

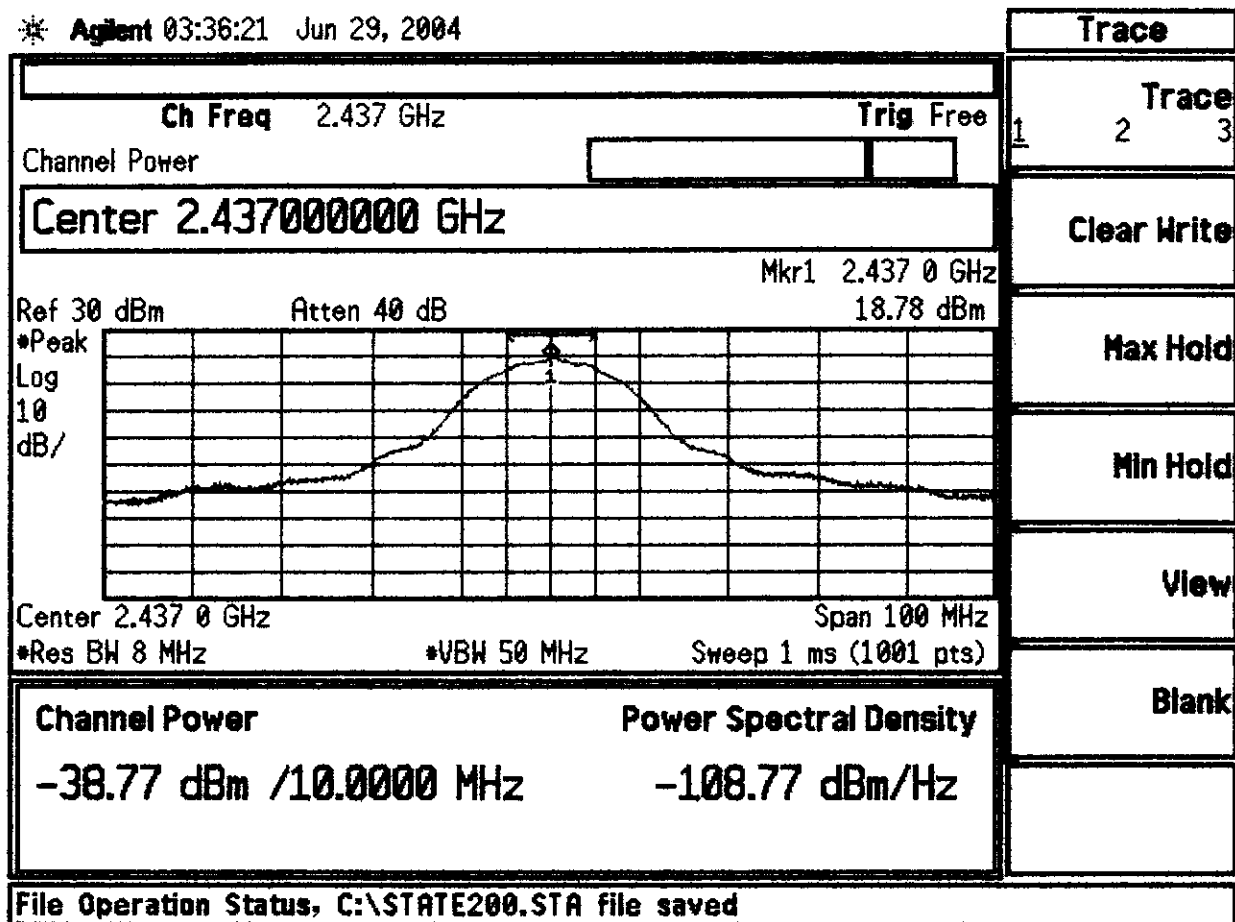

Same as Plot #1 WIEM w/cable
Channel #6


Peak Power Spectral Density

$$-108.77 + 34.8 = -73.97 \text{ dBm} / 3 \text{ kHz}$$

Power

Plot #1

* Agilent 03:35:07 Jun 29, 2004

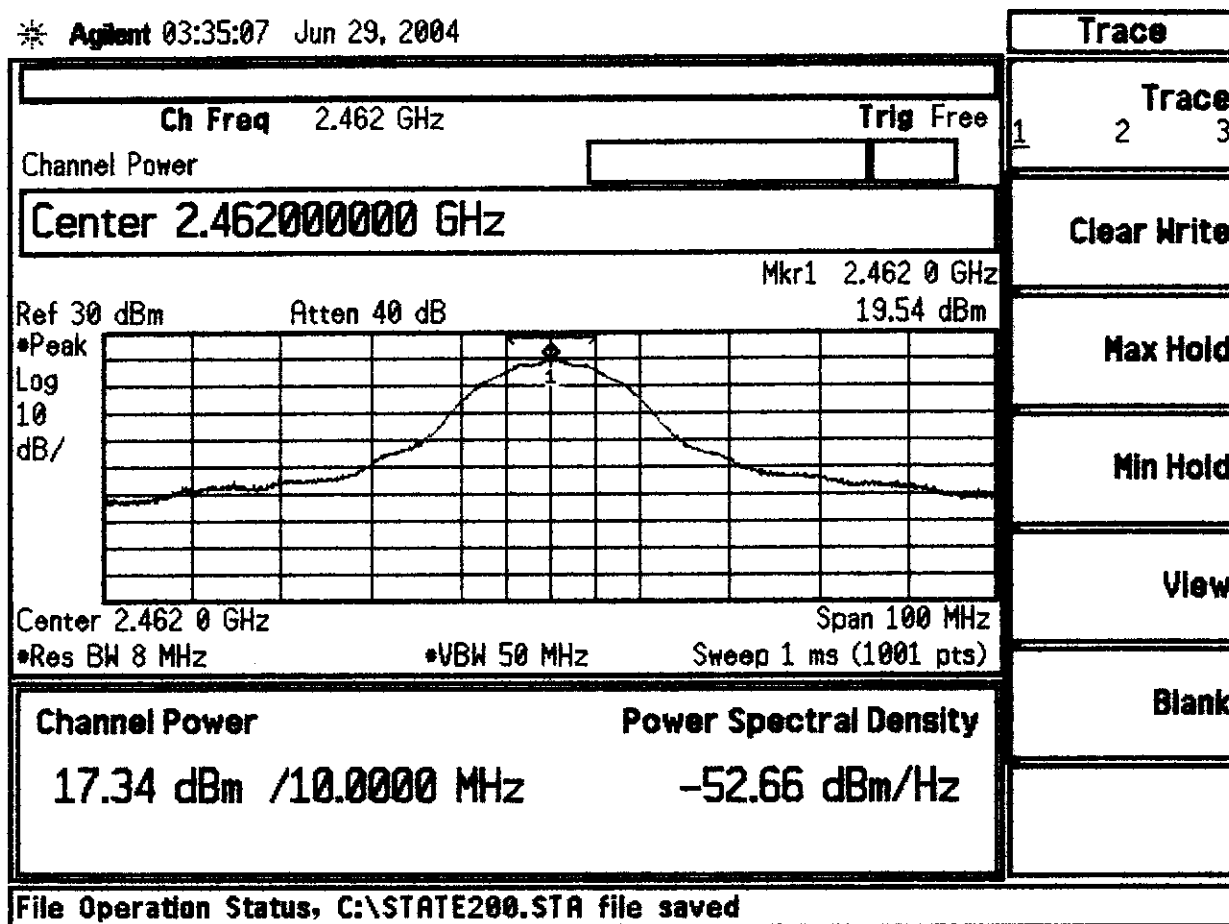

~~VEM~~ w
WIEM with Cable

Chan #11


Power 19.54 dB

PWR = 15

Peak Power Spectral Density

$-52.66 + 34.8 = -17.86 \text{ dBm} / 3 \text{ kHz}$


* Agilent 02:09:36 May 7, 2004

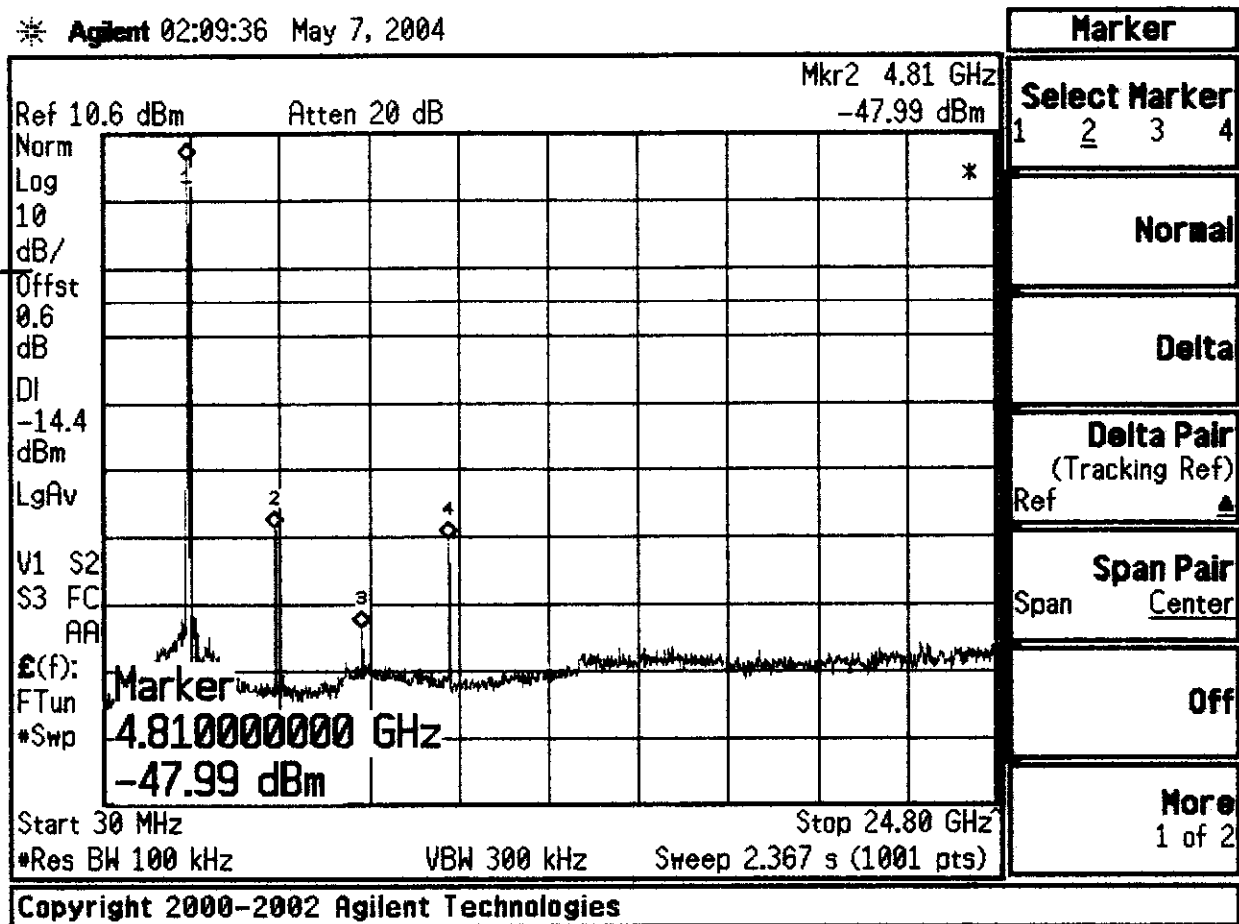

CH. 1 - CONDUCTED SPURIOUS
 -20 dBc - PASS
 (15.247)

w/o 12" Extension Cable


Agilent 02:14:01 May 7, 2004

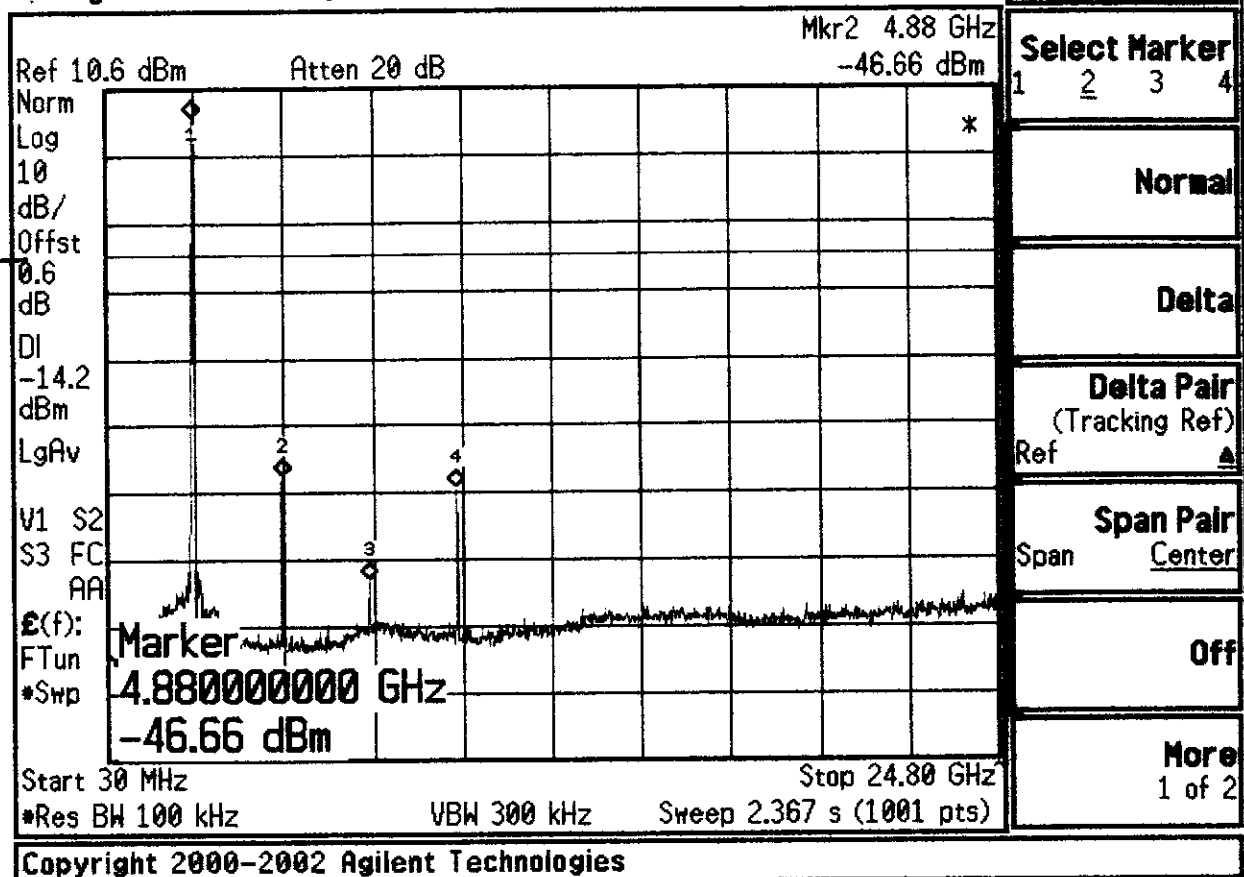

CH. 6 COND. SPURIOUS
-20 dBc - PASS
(15.247)

w/o 12" Extension Cable

* Agilent 02:03:34 May 7, 2004

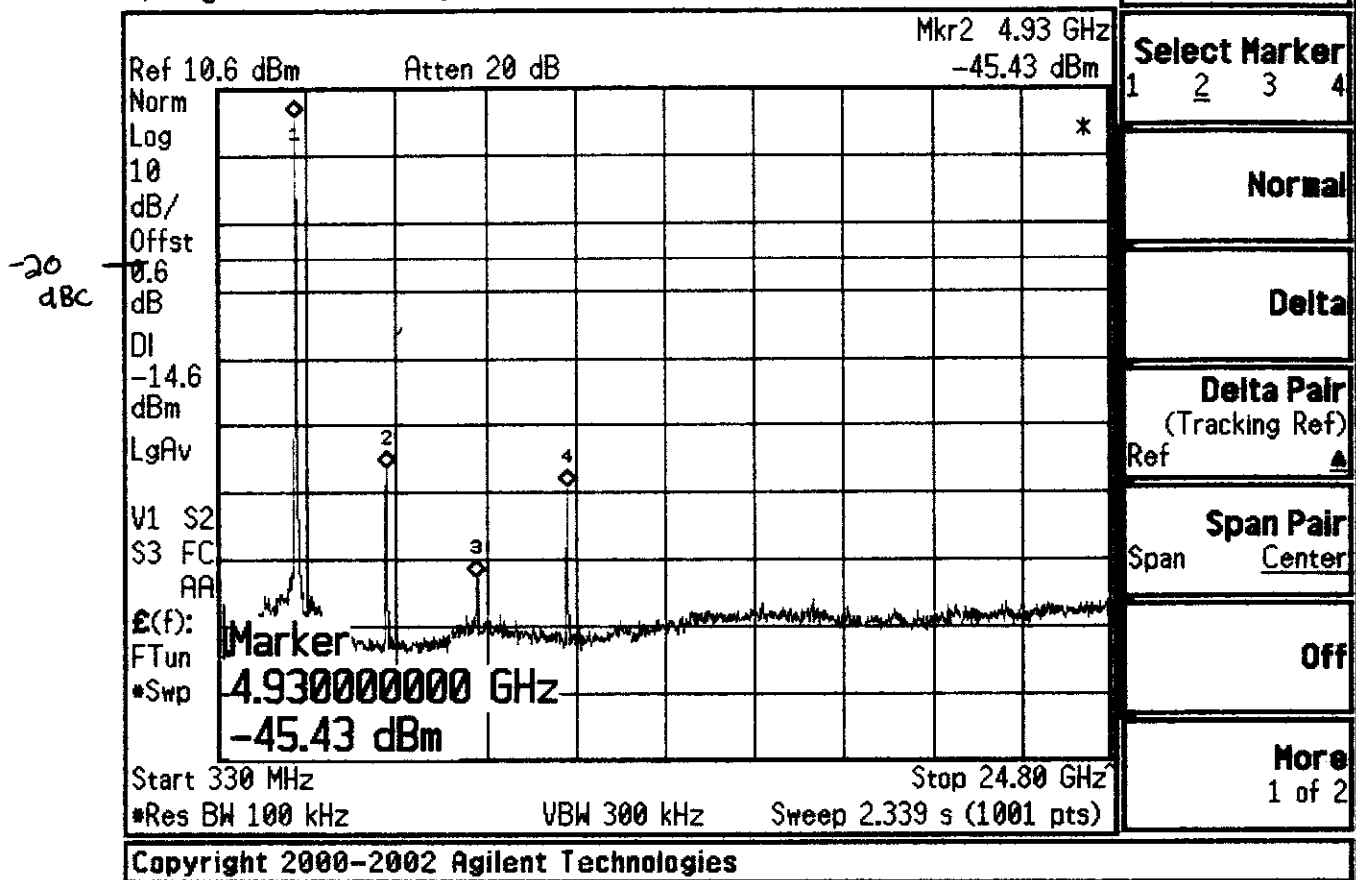


* Agilent 00:57:30 May 7, 2004

-20
dBc

Ref 10.6 dBm

Atten 20 dB

Norm
Log
10
dB/
Offst
0.6
dB
DI
-14.2
dBm
LgAv
V1 S2
S3 FC
AA
E(f):
FTun
*Swp

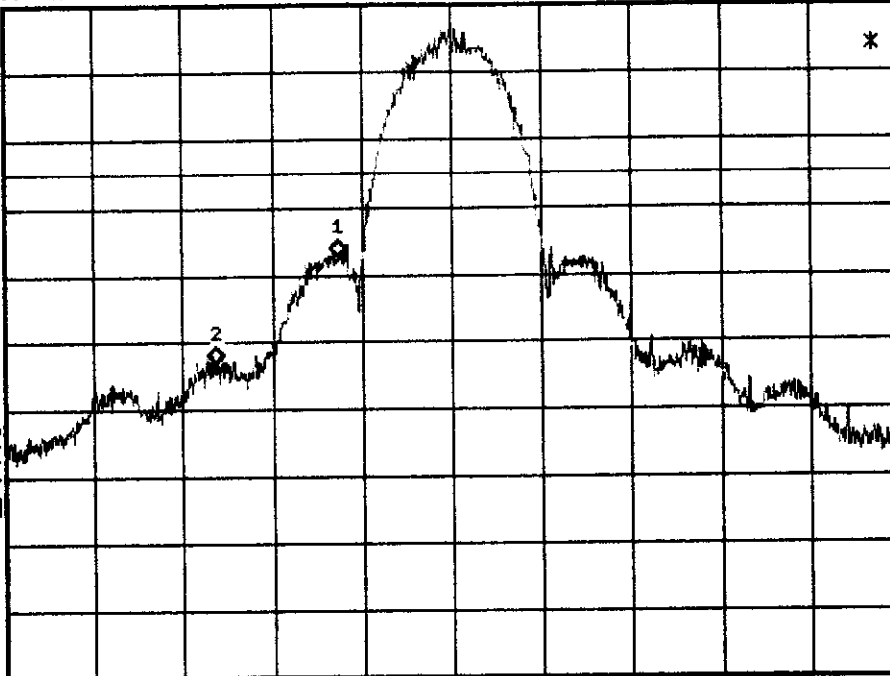

Center 2.412 0 GHz

Span 100 MHz

*Res BW 100 kHz

VBW 300 kHz

Sweep 9.6 ms (1001 pts)

Copyright 2000-2002 Agilent Technologies

Marker

Select Marker

1 2 3 4

Normal

Delta

Delta Pair

(Tracking Ref)

Ref

Span Pair

Span Center

Off

More


1 of 2

Ch. 1 - Cond. spurious band edge, -20dBc
PASS
(15.247)

w/o 12" Extension Cable

Agilent 01:54:32 May 7, 2004

Act Fctn Posn

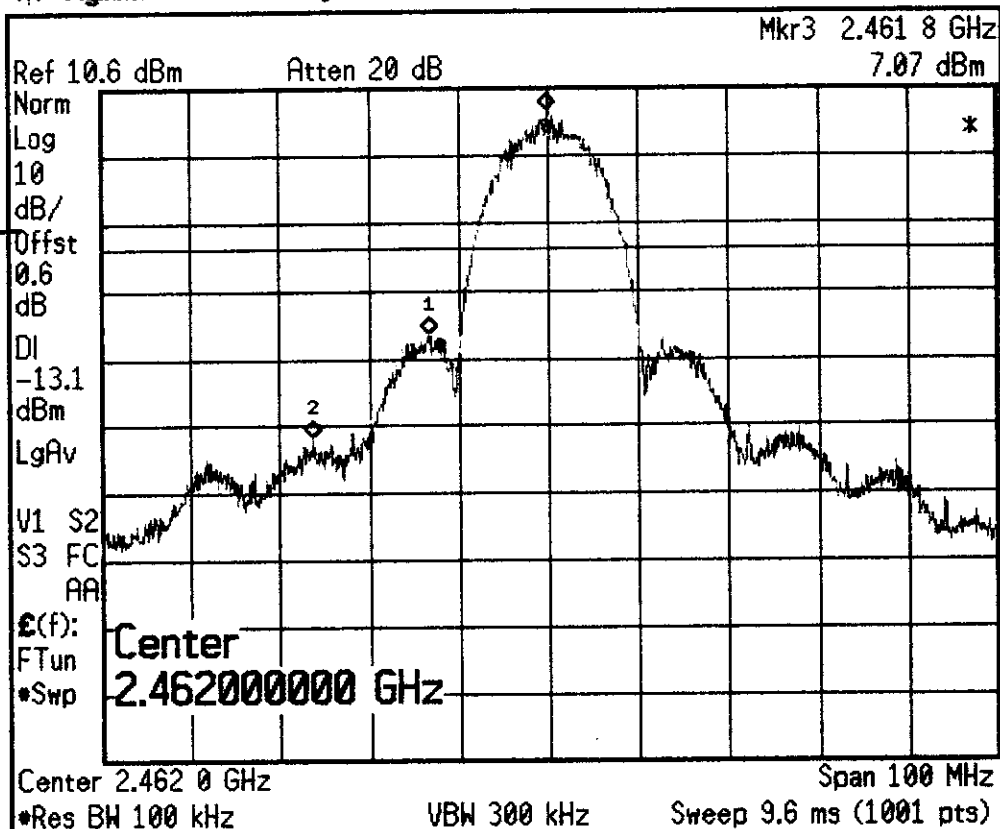


Top
Center
Bottom

CH. 11 - COND. SPURIOUS BAND EDGE
-20 dBc - PASS
(15.247)

w/o 12" Extension Cable


Spurious

Agilent 04:02:58 Jun 29, 2004

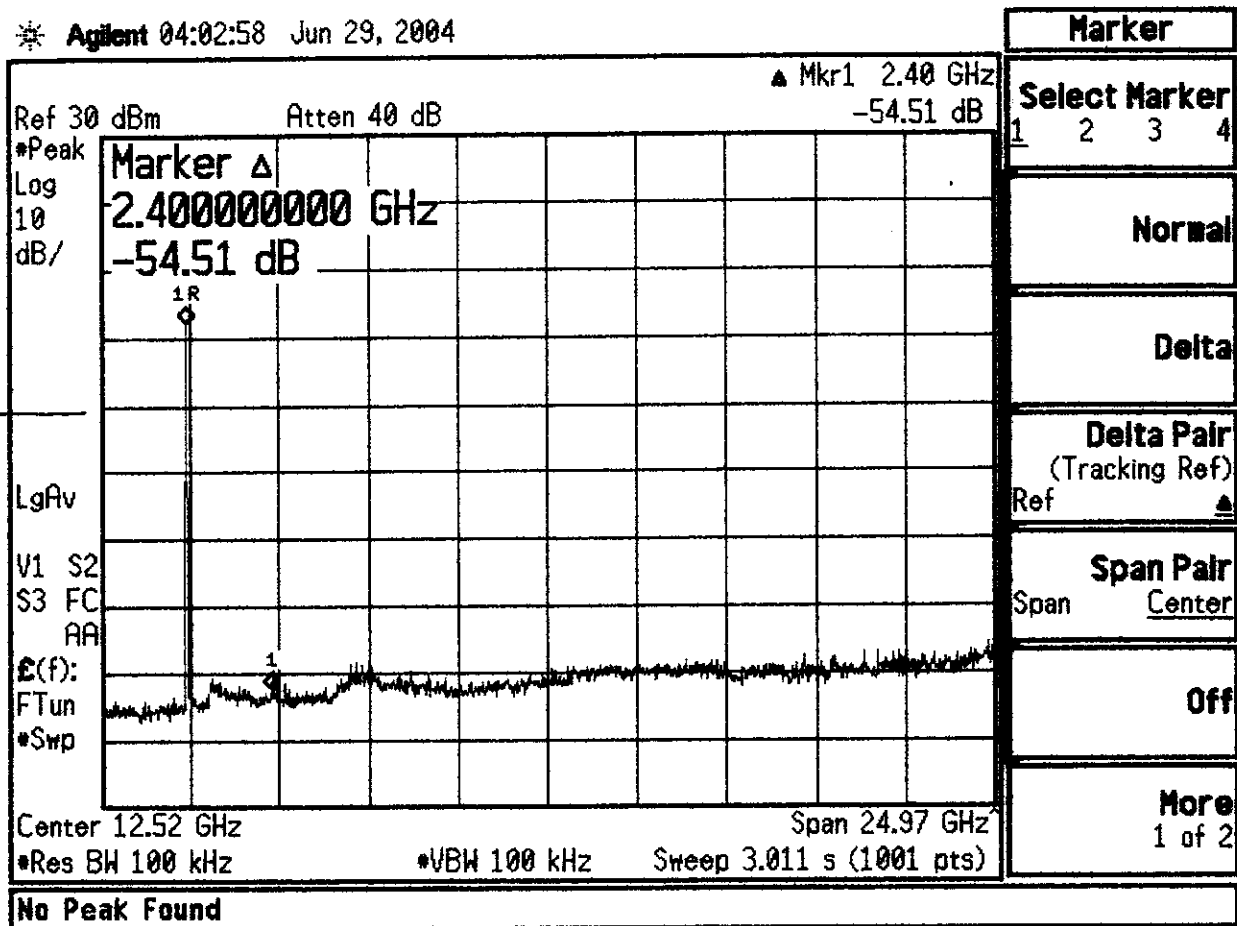


Chan#1 WiFM w/cable

Spurious

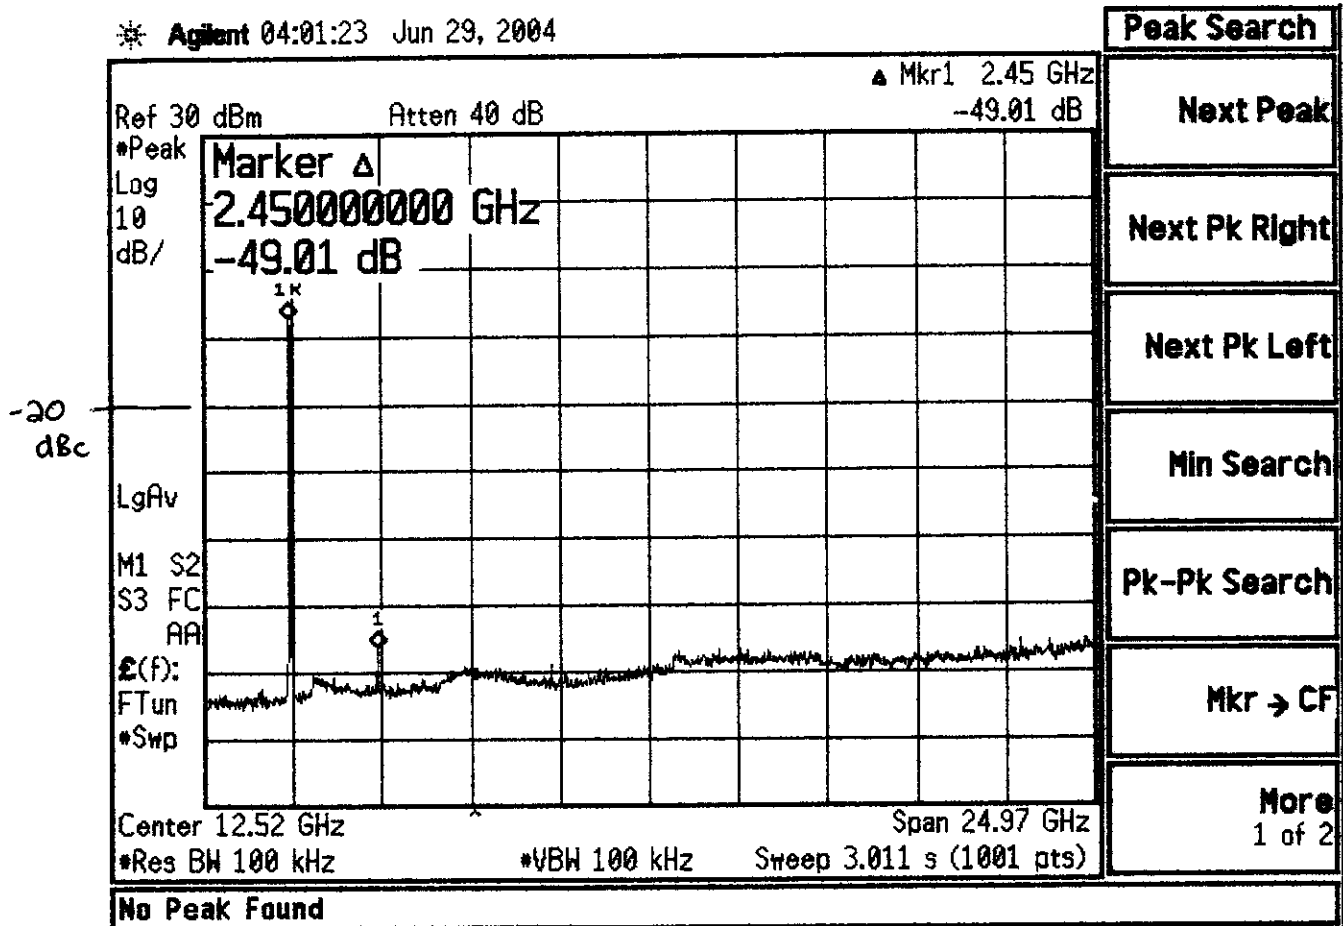

Chano #6 WiEM w/cable

Spurios

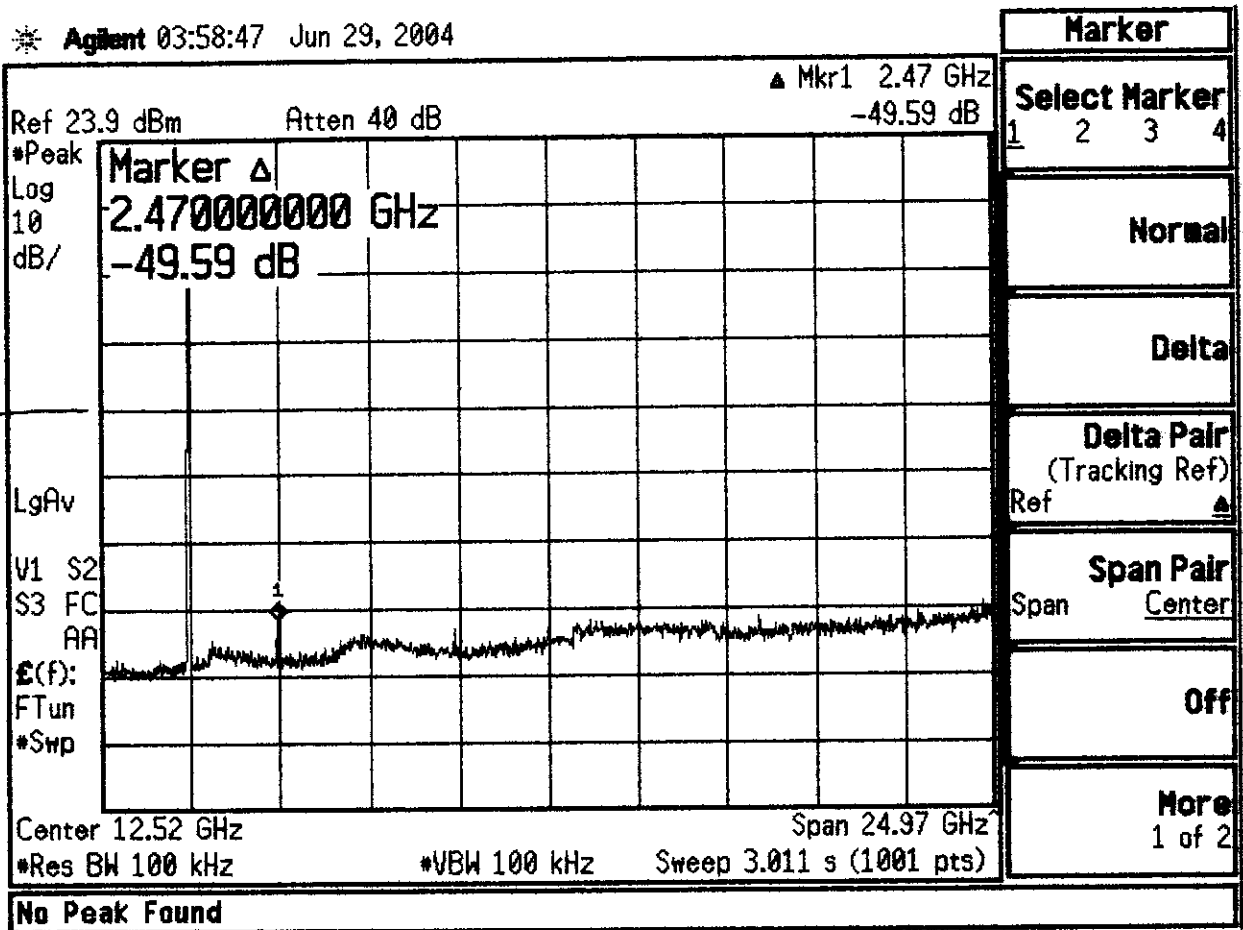

Chan #11 WiEM w/cable

CONDUCTED EMISSIONS



Test Report #: WC402191 Run 2 Test Area: STS

EUT Model #: WiEM Date: 5/7/04

EUT Serial #: _____ EUT Power: 60HZ/110VAC Temperature: 16.0 °C

Test Method: EN55022 B Air Pressure: 99.0 kPa

Customer: DIGI INT'L Rel. Humidity: 28.0 %

EUT Description: 2.4GHz S.S. XMTR (2 SERIAL TO 802.11B CONVERTER)

Notes: same levels with or without 12" extension cable

Data File Name: 2191.dat

Page: 1 of 4

List of measurements for run #: 2

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	EUT Lead	DELTA1 EN55022 B Qp	DELTA2 EN55022 B Avg
150.0 kHz	44.05 Qp	0.33 / 3.0 / 0.0 / 0.0	47.38	N	-18.62	n/a
170.0 kHz	43.21 Qp	0.35 / 2.6 / 0.0 / 0.0	46.16	N	-18.8	n/a
190.0 kHz	42.52 Qp	0.38 / 2.2 / 0.0 / 0.0	45.1	N	-18.94	n/a
215.0 kHz	41.7 Qp	0.39 / 1.93 / 0.0 / 0.0	44.02	N	-18.99	n/a
240.0 kHz	40.88 Qp	0.42 / 1.8 / 0.0 / 0.0	43.1	N	-19.0	n/a
280.0 kHz	39.79 Qp	0.45 / 1.6 / 0.0 / 0.0	41.84	N	-18.98	n/a
150.0 kHz	13.54 Av	0.33 / 3.0 / 0.0 / 0.0	16.87	N	n/a	-39.13
170.0 kHz	12.25 Av	0.35 / 2.6 / 0.0 / 0.0	15.2	N	n/a	-39.76
190.0 kHz	11.56 Av	0.38 / 2.2 / 0.0 / 0.0	14.14	N	n/a	-39.9
215.0 kHz	10.8 Av	0.39 / 1.93 / 0.0 / 0.0	13.12	N	n/a	-39.89
240.0 kHz	10.07 Av	0.42 / 1.8 / 0.0 / 0.0	12.29	N	n/a	-39.81
280.0 kHz	9.01 Av	0.45 / 1.6 / 0.0 / 0.0	11.06	N	n/a	-39.76
150.0 kHz	43.69 Qp	0.33 / 3.0 / 0.0 / 0.0	47.02	L1	-18.98	n/a
170.0 kHz	42.83 Qp	0.35 / 2.6 / 0.0 / 0.0	45.78	L1	-19.18	n/a
190.0 kHz	42.06 Qp	0.38 / 2.2 / 0.0 / 0.0	44.64	L1	-19.4	n/a
215.0 kHz	41.0 Qp	0.39 / 1.93 / 0.0 / 0.0	43.32	L1	-19.69	n/a
240.0 kHz	40.01 Qp	0.42 / 1.8 / 0.0 / 0.0	42.23	L1	-19.87	n/a
280.0 kHz	38.71 Qp	0.45 / 1.6 / 0.0 / 0.0	40.76	L1	-20.06	n/a
150.0 kHz	12.98 Av	0.33 / 3.0 / 0.0 / 0.0	16.31	L1	n/a	-39.69
170.0 kHz	12.03 Av	0.35 / 2.6 / 0.0 / 0.0	14.98	L1	n/a	-39.98
190.0 kHz	11.16 Av	0.38 / 2.2 / 0.0 / 0.0	13.74	L1	n/a	-40.3
215.0 kHz	10.29 Av	0.39 / 1.93 / 0.0 / 0.0	12.61	L1	n/a	-40.4

Tested by: RMJ

Printed

Signature

Reviewed by: TKS

Printed

Signature

CONDUCTED EMISSIONS



Test Report #: WC402191 Run 2 Test Area: STS
EUT Model #: WiEM Date: 5/7/04
EUT Serial #: _____ EUT Power: 60HZ/110VAC Temperature: 16.0 °C
Test Method: EN55022 B Air Pressure: 99.0 kPa
Customer: DIGI INT'L Rel. Humidity: 28.0 %

EUT Description: 2.4GHz S.S. XMTR (2 SERIAL TO 802.11B CONVERTER)

Notes: same levels with or without 12" extension cable

Data File Name: 2191.dat

Page: 2 of 4

List of measurements for run #: 2

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	EUT Lead	DELTA1 EN55022 B Qp	DELTA2 EN55022 B Avg
240.0 kHz	9.4 Av	0.42 / 1.8 / 0.0 / 0.0	11.62	L1	n/a	-40.48
280.0 kHz	8.19 Av	0.45 / 1.6 / 0.0 / 0.0	10.24	L1	n/a	-40.58

END OF SCAN.

Tested by: RMJ

Printed

Signature

Reviewed by: TKS

Printed

Signature

CONDUCTED EMISSIONS



Test Report #: WC402191 Run 2 Test Area: STS
EUT Model #: WiEM Date: 5/7/04
EUT Serial #: _____ EUT Power: 60HZ/110VAC Temperature: 16.0 °C
Test Method: EN55022 B Air Pressure: 99.0 kPa
Customer: DIGI INT'L Rel. Humidity: 28.0 %

EUT Description: 2.4GHz S.S. XMTR (2 SERIAL TO 802.11B CONVERTER)

Notes: same levels with or without 12" extension cable

Data File Name: 2191.dat

Page: 3 of 4

Measurement summary for limit1: EN55022 B Qp (Qp)

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	EUT Lead	DELTA1 EN55022 B Qp
150.0 kHz	44.05 Qp	0.33 / 3.0 / 0.0 / 0.0	47.38	N	-18.62
170.0 kHz	43.21 Qp	0.35 / 2.6 / 0.0 / 0.0	46.16	N	-18.8
190.0 kHz	42.52 Qp	0.38 / 2.2 / 0.0 / 0.0	45.1	N	-18.94
280.0 kHz	39.79 Qp	0.45 / 1.6 / 0.0 / 0.0	41.84	N	-18.98
215.0 kHz	41.7 Qp	0.39 / 1.93 / 0.0 / 0.0	44.02	N	-18.99
240.0 kHz	40.88 Qp	0.42 / 1.8 / 0.0 / 0.0	43.1	N	-19.0

Measurement summary for limit2: EN55022 B Avg (Av)

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	EUT Lead	DELTA2 EN55022 B Avg
150.0 kHz	13.54 Av	0.33 / 3.0 / 0.0 / 0.0	16.87	N	-39.13
170.0 kHz	12.25 Av	0.35 / 2.6 / 0.0 / 0.0	15.2	N	-39.76
280.0 kHz	9.01 Av	0.45 / 1.6 / 0.0 / 0.0	11.06	N	-39.76
240.0 kHz	10.07 Av	0.42 / 1.8 / 0.0 / 0.0	12.29	N	-39.81
215.0 kHz	10.8 Av	0.39 / 1.93 / 0.0 / 0.0	13.12	N	-39.89
190.0 kHz	11.56 Av	0.38 / 2.2 / 0.0 / 0.0	14.14	N	-39.9

Tested by: RMJ

Printed

Signature

Reviewed by: TKS

Printed

Signature

CONDUCTED EMISSIONS



Test Report #: WC402191 Run 2 Test Area: STS
EUT Model #: WiEM Date: 5/7/04
EUT Serial #: _____ EUT Power: 60HZ/110VAC Temperature: 16.0 °C
Test Method: EN55022 B Air Pressure: 99.0 kPa
Customer: DIGI INT'L Rel. Humidity: 28.0 %


EUT Description: 2.4GHz S.S. XMTR (2 SERIAL TO 802.11B CONVERTER)

Notes: same levels with or with 12" extension cable

Data File Name: 2191.dat

Page: 4 of 4

Graph:

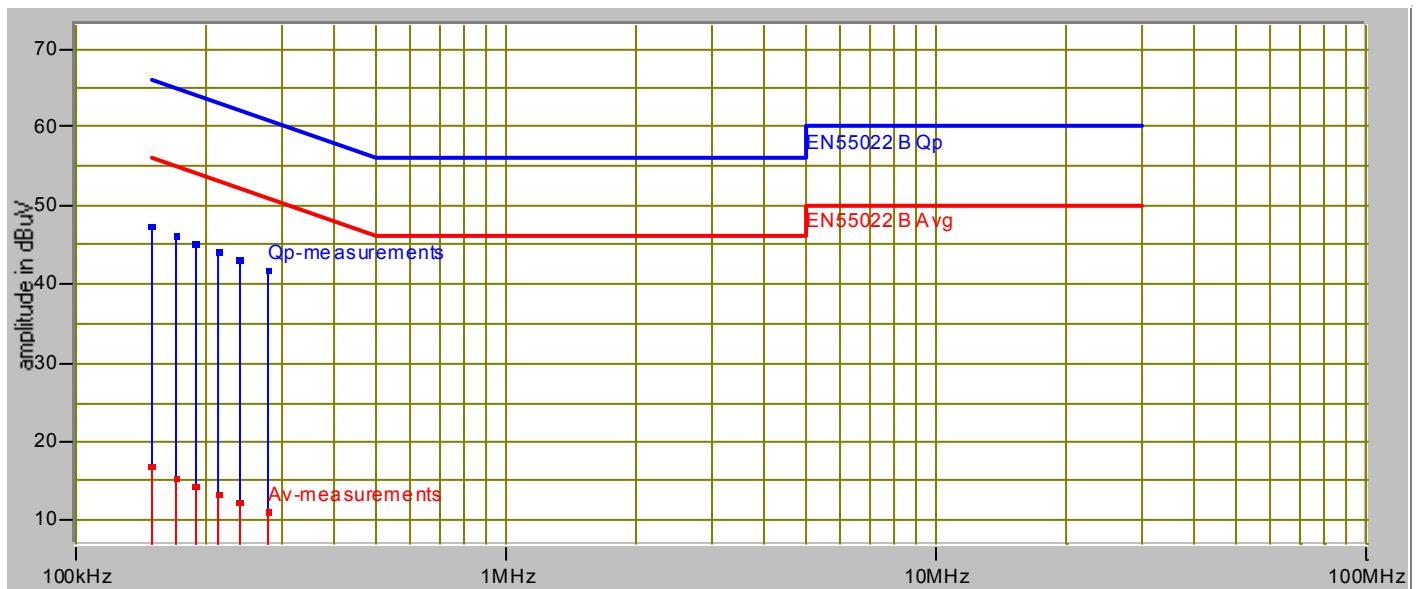

Tested by: RMJ

Printed

Signature

Reviewed by: TKS

Printed

Signature

RADIATED EMISSIONS



Test Report #: WC402191 Run 1 Test Area: STS

EUT Model #: WiEM Date: 5/7/2004

EUT Serial #: _____ EUT Power: 60HZ/110VAC Temperature: 16.0 °C

Test Method: EN55022 A Air Pressure: 99.0 kPa

Customer: DIGI INT'L Rel. Humidity: 28.0 %

EUT Description: 2.4GHz S.S. XMTR (2 SERIAL TO 802.11B CONVERTER)

Notes: w/o 12" extension cable

Data File Name: 2191.dat

Page: 1 of 7

List of measurements for run #: 1

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	POL / HGT / AZ (m)(DEG)	DELTA1 FCC-B <1GHz 3m	DELTA2 FCC B >1GHz 3m
79.005 MHz	37.5 Qp	1.3 / 7.13 / 26.7 / 0.0	19.23	V / 1.00 / 0	-20.77	n/a
110.605 MHz	33.9 Qp	1.5 / 8.86 / 26.84 / 0.0	17.42	V / 1.00 / 0	-26.08	n/a
165.88 MHz	34.15 Qp	1.85 / 8.5 / 26.83 / 0.0	17.67	V / 1.00 / 0	-25.83	n/a
169.29 MHz	31.55 Qp	1.88 / 8.58 / 26.86 / 0.0	15.15	V / 1.00 / 0	-28.35	n/a
219.315 MHz	32.45 Qp	2.15 / 10.6 / 26.93 / 0.0	18.27	V / 1.00 / 0	-27.73	n/a
219.495 MHz	30.65 Qp	2.16 / 10.6 / 26.93 / 0.0	16.47	V / 1.00 / 0	-29.53	n/a
221.185 MHz	35.3 Qp	2.17 / 10.6 / 26.94 / 0.0	21.12	V / 1.00 / 0	-24.88	n/a
248.43 MHz	29.7 Qp	2.3 / 11.2 / 26.92 / 0.0	16.27	V / 1.00 / 0	-29.73	n/a
252.685 MHz	30.8 Qp	2.3 / 11.47 / 26.97 / 0.0	17.59	V / 1.00 / 0	-28.41	n/a
262.015 MHz	33.4 Qp	2.31 / 11.99 / 27.08 / 0.0	20.62	V / 1.00 / 0	-25.38	n/a
263.715 MHz	31.65 Qp	2.32 / 12.06 / 27.1 / 0.0	18.93	V / 1.00 / 0	-27.07	n/a
328.41 MHz	30.8 Qp	2.64 / 13.46 / 27.32 / 0.0	19.58	V / 1.00 / 0	-26.42	n/a
330.08 MHz	32.95 Qp	2.64 / 13.53 / 27.32 / 0.0	21.8	V / 1.00 / 0	-24.2	n/a
331.78 MHz	38.55 Qp	2.65 / 13.6 / 27.33 / 0.0	27.48	V / 1.00 / 0	-18.52	n/a
335.18 MHz	33.5 Qp	2.67 / 13.75 / 27.34 / 0.0	22.57	V / 1.00 / 0	-23.43	n/a
346.255 MHz	33.9 Qp	2.71 / 14.46 / 27.39 / 0.0	23.68	V / 1.00 / 0	-22.32	n/a
351.995 MHz	35.05 Qp	2.74 / 14.88 / 27.42 / 0.0	25.25	V / 1.00 / 0	-20.75	n/a
110.605 MHz	35.4 Qp	1.5 / 8.86 / 26.84 / 0.0	18.92	V / 1.00 / 90	-24.58	n/a
165.88 MHz	35.75 Qp	1.85 / 8.5 / 26.83 / 0.0	19.27	V / 1.00 / 90	-24.23	n/a
169.29 MHz	31.45 Qp	1.88 / 8.58 / 26.86 / 0.0	15.05	V / 1.00 / 90	-28.45	n/a
219.495 MHz	32.55 Qp	2.16 / 10.6 / 26.93 / 0.0	18.37	V / 1.00 / 90	-27.63	n/a
221.185 MHz	36.15 Qp	2.17 / 10.6 / 26.94 / 0.0	21.97	V / 1.00 / 90	-24.03	n/a
164.195 MHz	31.45 Qp	1.84 / 8.5 / 26.81 / 0.0	14.97	V / 1.00 / 90	-28.53	n/a
167.59 MHz	30.35 Qp	1.87 / 8.5 / 26.84 / 0.0	13.88	V / 1.00 / 90	-29.62	n/a

Tested by: RMJ

Printed

Signature

Reviewed by: TKS

Printed

Signature

RADIATED EMISSIONS



Test Report #: WC402191 Run 1 Test Area: STS

EUT Model #: WiEM Date: 5/7/2004

EUT Serial #: _____ EUT Power: 60HZ/110VAC Temperature: 16.0 °C

Test Method: EN55022 A Air Pressure: 99.0 kPa

Customer: DIGI INT'L Rel. Humidity: 28.0 %

EUT Description: 2.4GHz S.S. XMTR (2 SERIAL TO 802.11B CONVERTER)

Notes: w/o 12" extension cable

Data File Name: 2191.dat

Page: 2 of 7

List of measurements for run #: 1

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	POL / HGT / AZ (m)(DEG)	DELTA1 FCC-B <1GHz 3m	DELTA2 FCC B >1GHz 3m
276.471 MHz	33.25 Qp	2.39 / 12.41 / 27.17 / 0.0	20.88	V / 1.00 / 90	-25.12	n/a
276.471 MHz	39.05 Qp	2.39 / 12.41 / 27.17 / 0.0	26.68	V / 1.00 / 270	-19.32	n/a
328.41 MHz	32.05 Qp	2.64 / 13.46 / 27.32 / 0.0	20.83	V / 1.00 / 270	-25.17	n/a
497.675 MHz	30.3 Qp	3.27 / 17.37 / 27.8 / 0.0	23.14	V / 3.00 / 270	-22.86	n/a
608.277 MHz	30.85 Qp	3.65 / 19.66 / 27.8 / 0.0	26.36	V / 3.00 / 270	-19.64	n/a
MAXIMIZED.						
221.185 MHz	38.48 Qp	2.17 / 10.6 / 26.94 / 0.0	24.3	V / 1.00 / 113	-21.7	n/a
331.78 MHz	39.05 Qp	2.65 / 13.6 / 27.33 / 0.0	27.98	V / 1.00 / 10	-18.02	n/a
MAXED ANTENNA AND ROTATED EUT 360 DEGREES.						
330.08 MHz	34.1 Qp	2.64 / 13.53 / 27.32 / 0.0	22.95	H / 3.00 / 0	-23.05	n/a
346.255 MHz	35.5 Qp	2.71 / 14.46 / 27.39 / 0.0	25.28	H / 3.00 / 0	-20.72	n/a
307.982 MHz	34.3 Qp	2.6 / 12.77 / 27.3 / 0.0	22.37	H / 3.00 / 0	-23.63	n/a
387.081 MHz	33.15 Qp	2.87 / 15.4 / 27.55 / 0.0	23.87	H / 3.00 / 0	-22.13	n/a
442.376 MHz	37.6 Qp	3.07 / 16.81 / 27.64 / 0.0	29.84	H / 3.00 / 0	-16.16	n/a
445.776 MHz	33.0 Qp	3.08 / 16.53 / 27.66 / 0.0	24.96	H / 3.00 / 0	-21.04	n/a
248.43 MHz	30.65 Qp	2.3 / 11.2 / 26.92 / 0.0	17.22	H / 3.00 / 90	-28.78	n/a
330.08 MHz	35.45 Qp	2.64 / 13.53 / 27.32 / 0.0	24.3	H / 3.00 / 270	-21.7	n/a
331.78 MHz	40.0 Qp	2.65 / 13.6 / 27.33 / 0.0	28.93	H / 3.00 / 270	-17.07	n/a

Tested by: RMJ

Printed

Signature

Reviewed by: TKS

Printed

Signature

RADIATED EMISSIONS



Test Report #: WC402191 Run 1 Test Area: STS

EUT Model #: WiEM Date: 5/7/2004

EUT Serial #: _____ EUT Power: 60HZ/110VAC Temperature: 16.0 °C

Test Method: EN55022 A Air Pressure: 99.0 kPa

Customer: DIGI INT'L Rel. Humidity: 28.0 %

EUT Description: 2.4GHz S.S. XMTR (2 SERIAL TO 802.11B CONVERTER)

Notes: w/o 12" extension cable

Data File Name: 2191.dat

Page: 3 of 7

List of measurements for run #: 1

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	POL / HGT / AZ (m)(DEG)	DELTA1 FCC-B <1GHz 3m	DELTA2 FCC B >1GHz 3m
335.18 MHz	34.45 Qp	2.67 / 13.75 / 27.34 / 0.0	23.52	H / 3.00 / 270	-22.48	n/a
346.255 MHz	36.9 Qp	2.71 / 14.46 / 27.39 / 0.0	26.68	H / 3.00 / 270	-19.32	n/a
351.995 MHz	36.25 Qp	2.74 / 14.88 / 27.42 / 0.0	26.45	H / 3.00 / 270	-19.55	n/a
497.675 MHz	32.8 Qp	3.27 / 17.37 / 27.8 / 0.0	25.64	H / 1.00 / 270	-20.36	n/a
608.277 MHz	34.65 Qp	3.65 / 19.66 / 27.8 / 0.0	30.16	H / 1.00 / 270	-15.84	n/a
663.577 MHz	31.2 Qp	3.85 / 20.4 / 27.87 / 0.0	27.58	H / 1.00 / 270	-18.42	n/a
MAXIMIZED.						
608.277 MHz	35.05 Qp	3.65 / 19.66 / 27.8 / 0.0	30.56	H / 1.00 / 272	-15.44	n/a
MAXED ANTENNA AND ROTATED EUT 360 DEGREES.						
1.161 GHz	48.05 Av	5.25 / 26.5 / 40.06 / 0.0	39.73	V / 1.00 / 0	n/a	-14.27
1.604 GHz	44.83 Av	6.21 / 27.3 / 41.84 / 0.0	36.5	V / 1.00 / 0	n/a	-17.5
4.874 GHz	46.6 Av	11.95 / 34.75 / 44.05 / 0.0	49.25	V / 1.00 / 0	n/a	-4.75
MAXIMIZED.						
4.874 GHz	47.62 Av	11.95 / 34.75 / 44.05 / 0.0	50.27	V / 1.00 / 209	n/a	-3.73
END OF SCAN 30MHz - 24GHz						

Tested by: RMJ

Printed

Signature

Reviewed by: TKS

Printed

Signature

RADIATED EMISSIONS



Test Report #: WC402191 Run 1 Test Area: STS

EUT Model #: WiEM Date: 5/7/2004

EUT Serial #: _____ EUT Power: 60HZ/110VAC Temperature: 16.0 °C

Test Method: EN55022 A Air Pressure: 99.0 kPa

Customer: DIGI INT'L Rel. Humidity: 28.0 %

EUT Description: 2.4GHz S.S. XMTR (2 SERIAL TO 802.11B CONVERTER)

Notes: w/o 12" extension cable

Data File Name: 2191.dat

Page: 4 of 7

Measurement summary for limit1: FCC-B <1GHz 3m (Qp)

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	POL / HGT / AZ (m)(DEG)	DELTA1 FCC-B <1GHz 3m
608.277 MHz	35.05 Qp	3.65 / 19.66 / 27.8 / 0.0	30.56	H / 1.00 / 272	-15.44
442.376 MHz	37.6 Qp	3.07 / 16.81 / 27.64 / 0.0	29.84	H / 3.00 / 0	-16.16
331.78 MHz	40.0 Qp	2.65 / 13.6 / 27.33 / 0.0	28.93	H / 3.00 / 270	-17.07
663.577 MHz	31.2 Qp	3.85 / 20.4 / 27.87 / 0.0	27.58	H / 1.00 / 270	-18.42
346.255 MHz	36.9 Qp	2.71 / 14.46 / 27.39 / 0.0	26.68	H / 3.00 / 270	-19.32
276.471 MHz	39.05 Qp	2.39 / 12.41 / 27.17 / 0.0	26.68	V / 1.00 / 270	-19.32
351.995 MHz	36.25 Qp	2.74 / 14.88 / 27.42 / 0.0	26.45	H / 3.00 / 270	-19.55
497.675 MHz	32.8 Qp	3.27 / 17.37 / 27.8 / 0.0	25.64	H / 1.00 / 270	-20.36
79.005 MHz	37.5 Qp	1.3 / 7.13 / 26.7 / 0.0	19.23	V / 1.00 / 0	-20.77
445.776 MHz	33.0 Qp	3.08 / 16.53 / 27.66 / 0.0	24.96	H / 3.00 / 0	-21.04
221.185 MHz	38.48 Qp	2.17 / 10.6 / 26.94 / 0.0	24.3	V / 1.00 / 113	-21.7
330.08 MHz	35.45 Qp	2.64 / 13.53 / 27.32 / 0.0	24.3	H / 3.00 / 270	-21.7
387.081 MHz	33.15 Qp	2.87 / 15.4 / 27.55 / 0.0	23.87	H / 3.00 / 0	-22.13
335.18 MHz	34.45 Qp	2.67 / 13.75 / 27.34 / 0.0	23.52	H / 3.00 / 270	-22.48
307.982 MHz	34.3 Qp	2.6 / 12.77 / 27.3 / 0.0	22.37	H / 3.00 / 0	-23.63
165.88 MHz	35.75 Qp	1.85 / 8.5 / 26.83 / 0.0	19.27	V / 1.00 / 90	-24.23
110.605 MHz	35.4 Qp	1.5 / 8.86 / 26.84 / 0.0	18.92	V / 1.00 / 90	-24.58
328.41 MHz	32.05 Qp	2.64 / 13.46 / 27.32 / 0.0	20.83	V / 1.00 / 270	-25.17
262.015 MHz	33.4 Qp	2.31 / 11.99 / 27.08 / 0.0	20.62	V / 1.00 / 0	-25.38
263.715 MHz	31.65 Qp	2.32 / 12.06 / 27.1 / 0.0	18.93	V / 1.00 / 0	-27.07
219.495 MHz	32.55 Qp	2.16 / 10.6 / 26.93 / 0.0	18.37	V / 1.00 / 90	-27.63
219.315 MHz	32.45 Qp	2.15 / 10.6 / 26.93 / 0.0	18.27	V / 1.00 / 0	-27.73
169.29 MHz	31.55 Qp	1.88 / 8.58 / 26.86 / 0.0	15.15	V / 1.00 / 0	-28.35
252.685 MHz	30.8 Qp	2.3 / 11.47 / 26.97 / 0.0	17.59	V / 1.00 / 0	-28.41

Tested by: RMJ

Printed

Signature

Reviewed by: TKS

Printed

Signature

RADIATED EMISSIONS



Test Report #: WC402191 Run 1 Test Area: STS
EUT Model #: WiEM Date: 5/7/2004
EUT Serial #: _____ EUT Power: 60HZ/110VAC Temperature: 16.0 °C
Test Method: EN55022 A Air Pressure: 99.0 kPa
Customer: DIGI INT'L Rel. Humidity: 28.0 %

EUT Description: 2.4GHz S.S. XMTR (2 SERIAL TO 802.11B CONVERTER)

Notes: w/o 12" extension cable

Data File Name: 2191.dat

Page: 5 of 7

Measurement summary for limit1: FCC-B <1GHz 3m (Qp)

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	POL / HGT / AZ (m)(DEG)	DELTA1 FCC-B <1GHz 3m
164.195 MHz	31.45 Qp	1.84 / 8.5 / 26.81 / 0.0	14.97	V / 1.00 / 90	-28.53
248.43 MHz	30.65 Qp	2.3 / 11.2 / 26.92 / 0.0	17.22	H / 3.00 / 90	-28.78
167.59 MHz	30.35 Qp	1.87 / 8.5 / 26.84 / 0.0	13.88	V / 1.00 / 90	-29.62

Tested by: RMJ

Printed

Signature

Reviewed by: TKS

Printed

Signature

RADIATED EMISSIONS



Test Report #: WC402191 Run 1 Test Area: STS
EUT Model #: WiEM Date: 5/7/2004
EUT Serial #: _____ EUT Power: 60HZ/110VAC Temperature: 16.0 °C
Test Method: EN55022 A Air Pressure: 99.0 kPa
Customer: DIGI INT'L Rel. Humidity: 28.0 %

EUT Description: 2.4GHz S.S. XMTR (2 SERIAL TO 802.11B CONVERTER)

Notes: w/o 12" extension cable

Data File Name: 2191.dat

Page: 6 of 7

Measurement summary for limit2: FCC B >1GHz 3m (Av)

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	POL / HGT / AZ (m)(DEG)	DELTA2 FCC B >1GHz 3m
4.874 GHz	47.62 Av	11.95 / 34.75 / 44.05 / 0.0	50.27	V / 1.00 / 209	-3.73
1.161 GHz	48.05 Av	5.25 / 26.5 / 40.06 / 0.0	39.73	V / 1.00 / 0	-14.27
1.604 GHz	44.83 Av	6.21 / 27.3 / 41.84 / 0.0	36.5	V / 1.00 / 0	-17.5

Tested by: RMJ

Printed

Signature

Reviewed by: TKS

Printed

Signature

RADIATED EMISSIONS



Test Report #: WC402191 Run 1 Test Area: STS
EUT Model #: WiEM Date: 5/7/2004
EUT Serial #: _____ EUT Power: 60HZ/110VAC Temperature: 16.0 °C
Test Method: EN55022 A Air Pressure: 99.0 kPa
Customer: DIGI INT'L Rel. Humidity: 28.0 %


EUT Description: 2.4GHz S.S. XMTR (2 SERIAL TO 802.11B CONVERTER)

Notes: w/o 12" extension cable

Data File Name: 2191.dat

Page: 7 of 7

Graph:

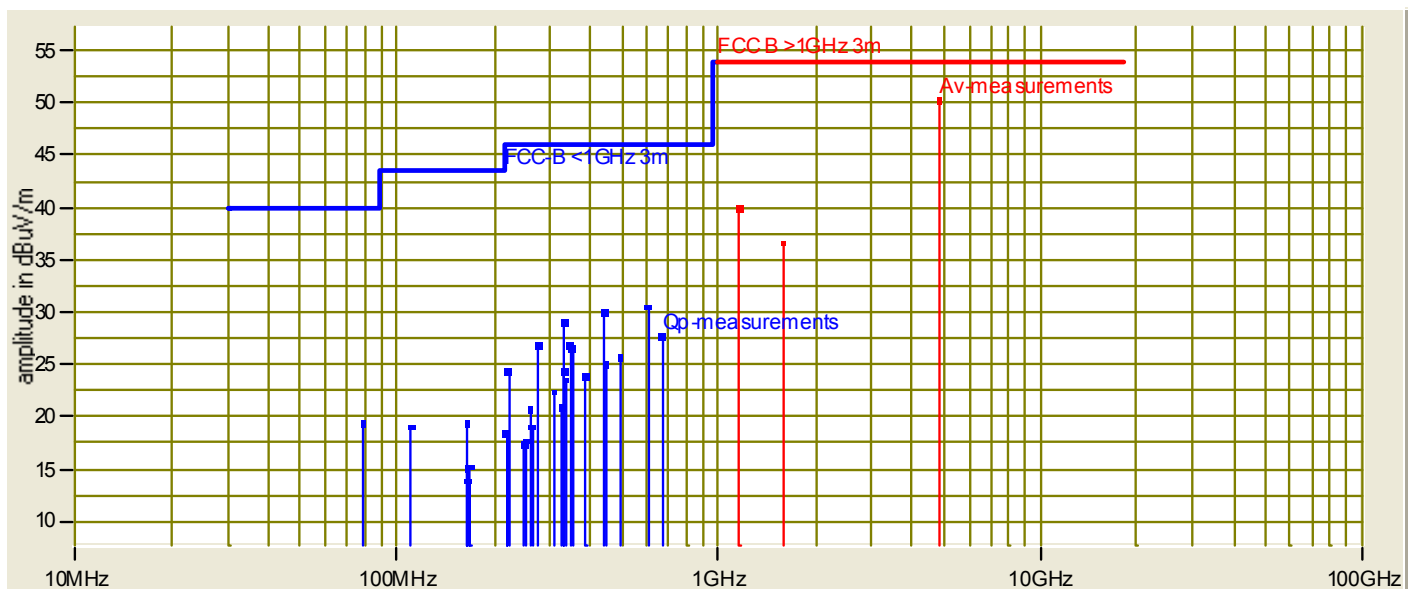

Tested by: RMJ

Printed

Signature

Reviewed by: TKS

Printed

Signature

RADIATED EMISSIONS



Test Report #: 3082 Run 2 Test Area: LTS
EUT Model #: Wi-EM 50000879-01 Date: 6/29/04
EUT Serial #: _____ EUT Power: 60 Hz / 110 VAC Temperature: 23.0 °C
Test Method: _____ Air Pressure: 100.0 kPa
Customer: Digi International Rel. Humidity: 44.0 %

EUT Description: 2 of 12 " extension cable with standard whip antenna.

Notes: 12 " cable P/N: 26000050

Data File Name: 3082.dat

Page: 1 of 3

List of measurements for run #: 2

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	POL / HGT / AZ (m)(DEG)	DELTA1 FCC B >1GHz 3m	DELTA2
4.823 GHz	38.35 Av	6.34 / 34.61 / 44.09 / 0.36	35.57	V / 1.20 / 208	-18.43	n/a
4.823 GHz	47.6 Pk	6.34 / 34.61 / 44.09 / 0.36	44.82	V / 1.20 / 208	-9.18*	n/a
7.235 GHz	34.88 Av	8.1 / 37.27 / 44.09 / 0.59	36.75	V / 1.20 / 208	-17.25	n/a
7.235 GHz	44.65 Pk	8.1 / 37.27 / 44.09 / 0.59	46.52	V / 1.20 / 208	-7.48*	n/a

No further EUT emissions detected.

* Denotes peak measurement compared to average limit.

Tested by: J. C. Sausen

Printed

Signature

Reviewed by: TKS

Printed

Signature

RADIATED EMISSIONS



Test Report #: 3082 Run 2 Test Area: LTS
EUT Model #: Wi-EM 50000879-01 Date: 6/29/04
EUT Serial #: _____ EUT Power: 60 Hz / 110 VAC Temperature: 23.0 °C
Test Method: _____ Air Pressure: 100.0 kPa
Customer: Digi International Rel. Humidity: 44.0 %

EUT Description: 2 of 12 " extension cable with standard whip antenna.

Notes: 12 " cable P/N: 26000050

Data File Name: 3082.dat

Page: 2 of 3

Measurement summary for limit1: FCC B >1GHz 3m (Av)

FREQ	LEVEL (dBuV)	CABLE / ANT / PREAMP / ATTEN (dB)	FINAL (dBuV / m)	POL / HGT / AZ (m)(DEG)	DELTA1 FCC B >1GHz 3m
7.235 GHz	34.88 Av	8.1 / 37.27 / 44.09 / 0.59	36.75	V / 1.20 / 208	-17.25
4.823 GHz	38.35 Av	6.34 / 34.61 / 44.09 / 0.36	35.57	V / 1.20 / 208	-18.43
4.823 GHz	47.6 Pk	6.34 / 34.61 / 44.09 / 0.36	44.82	V / 1.20 / 208	-9.18*
7.235 GHz	44.65 Pk	8.1 / 37.27 / 44.09 / 0.59	46.52	V / 1.20 / 208	-7.48*

* Denotes peak measurement compared to average limit.

Tested by: J. C. Sausen

Printed

Signature

Reviewed by: TKS

Printed

Signature

RADIATED EMISSIONS



Test Report #: 3082 Run 2 Test Area: LTS

EUT Model #: Wi-EM 50000879-01 Date: 6/29/04

EUT Serial #: _____ EUT Power: 60 Hz / 110 VAC Temperature: 23.0 °C

Test Method: _____ Air Pressure: 100.0 kPa


Customer: Digi International Rel. Humidity: 44.0 %

EUT Description: 2 of 12 " extension cable with standard whip antenna.

Notes: 12 " cable P/N: 26000050

Data File Name: 3082.dat Page: 3 of 3

Graph:

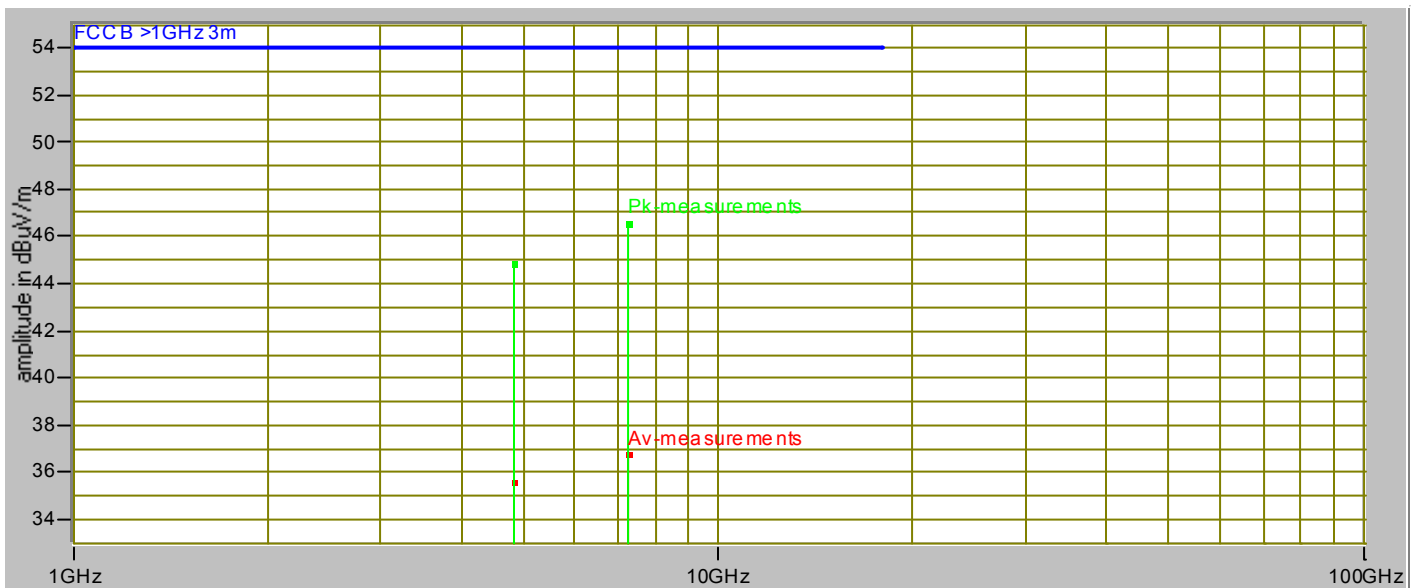

Tested by: J. C. Sausen

Printed

Signature

Reviewed by: TKS

Printed


Signature

Appendix B

Constructional Data Form(s)

and/or

Product Information Form(s)

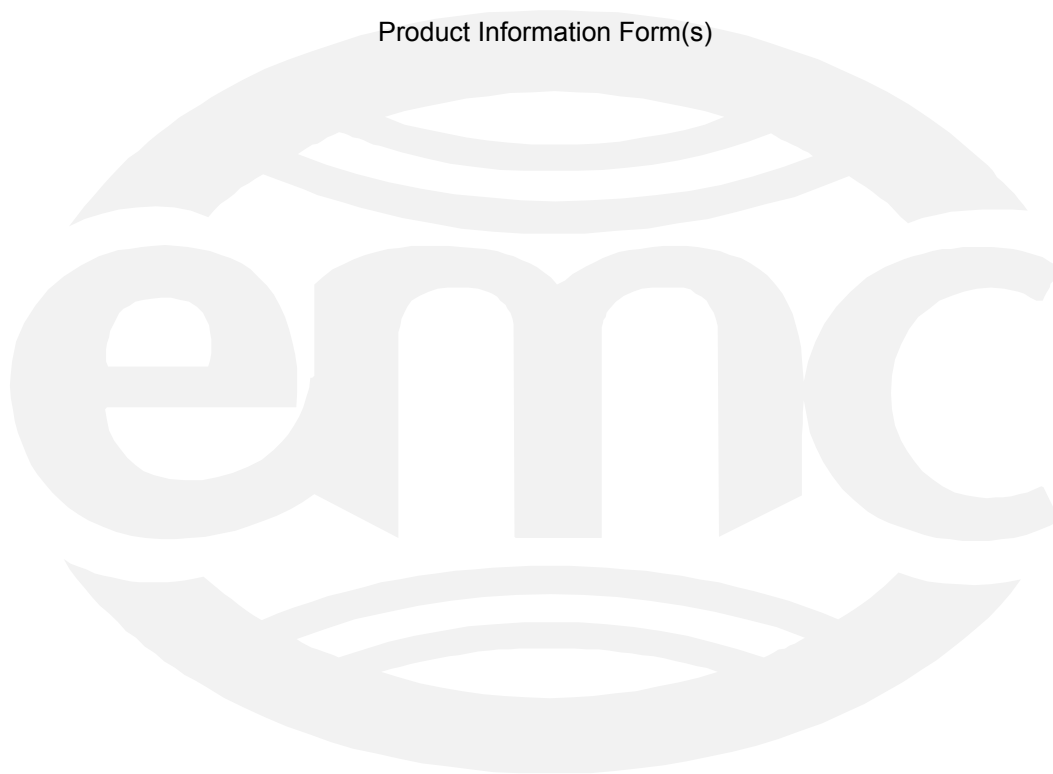



EMC TEST - PRODUCT INFORMATION FORM

Company Address: 11001 Bren Road East
Minnetonka, MN 55343

Ph: (952) 912-3444 Fax: (952) 912-4955

Digi Engineering Contact: Bill Kumpf

Phone: 952-912-3444

Digi Homologation Contact: Nick Melnick

Phone: 952-912-3511

Equipment Under Test: Digi Connect Wi-EM 802.11b radio to 2 serial ports converter module.

Model Number: 50000879-01

Rev: 1P

Serial Number: 00001

Test Laboratory: TUV Wild river

Test Date: May 1st, 7th 2004

Type of Test:

<input type="checkbox"/> Development	<input checked="" type="checkbox"/> EN55022:1998/FCC Class B Emissions
<input checked="" type="checkbox"/> Initial Design Verification	<input type="checkbox"/> EN55022:1998/FCC Class A Emissions
<input type="checkbox"/> Design Change	<input type="checkbox"/> Korea No. 1996-18 (based on CISPR 22)
<input type="checkbox"/> Production Sample (Audit Test)	<input type="checkbox"/> Taiwan CNS 13438:1997
<input type="checkbox"/> Other	<input type="checkbox"/> EN55024:1998 IT & Telecom Immunity
	<input type="checkbox"/> EN61000-3-2,3 Supply Harmonics/Flicker
	<input type="checkbox"/> ETS 301 489-3
EMC – Wireless (Intentional)	
<input checked="" type="checkbox"/> ETS 300 328 (Europe)	EMC – Wireless (Unintentional)
<input checked="" type="checkbox"/> FCC Part 15.247, 15.249 / RSS 139, 210	ETS 300 826 (Europe)
<input type="checkbox"/> ARIB T66 (RCR STD-33) - Japan	FCC Part 15, Class B / ICES 003, Class B
	<input type="checkbox"/> VCCI, Class B - Japan

Documentation Requested:

- | | |
|--|---|
| <input checked="" type="checkbox"/> EN55022:1998 Test Report (FCC Style) | <input checked="" type="checkbox"/> Austel EMC Report |
| <input type="checkbox"/> International EMC Report | <input checked="" type="checkbox"/> FCC Test Report |
| <input checked="" type="checkbox"/> VCCI Test Report | <input type="checkbox"/> EN55024: 1998 Test Report |
| <input type="checkbox"/> Taiwan CNS 13438:1997 Test Report | <input type="checkbox"/> Korea No. 1996-18 Report |
| <input type="checkbox"/> EN61000-3-2, 3:1995 | <input type="checkbox"/> Test Results Summary |
| <input checked="" type="checkbox"/> ETS 300 328 (Europe) | <input type="checkbox"/> ETS 301 489-3 Immunity |
| <input checked="" type="checkbox"/> FCC Part 15.247, 15.249/RSS 139, 210 | |

Equipment Description: 802.11B 11 Mbit 2.4 GHz radio transceiver to dual TTL serial port module

Design Changes Made (if applicable):

Oscillator Frequencies: 18.432 MHz, 44Mhz, 2.4GHz pll

Power Interface	AC Power Cable	DC Power Cable
	<input type="checkbox"/> Hardwired <input type="checkbox"/> Flexible <input type="checkbox"/> Shielded <input type="checkbox"/> Unshielded <input type="checkbox"/> Attached <input type="checkbox"/> Removable	<input type="checkbox"/> Hardwired <input type="checkbox"/> Flexible <input type="checkbox"/> Shielded <input type="checkbox"/> Unshielded <input type="checkbox"/> Attached <input type="checkbox"/> Removable
Frequency: _____ Hz Voltage: _____ V Current: _____ A # of Phases: _____	Gauge _____ AWG Length _____ Ft.	Gauge _____ AWG Length _____ Ft.

Power Line Filter: **Manufacturer:** **Model Number:**

Power Supply:

Description: N/A

Manufacturer: N/A

Model Number: N/A

Switching Frequency: N/A

If a Ferrite Bead is used on the AC line cord, give location on cable:

N/A

If a Ferrite Bead is used on the DC line cord, give location on cable:

N/A

Housing or Cabinet Type: Plastic ☐ Metallized ☐ Metal ☐ Other ☐
Host Board Only, Housed in PC ☐

Cabinet Shielding Provision : N/A


Interfacing Equipment or Simulators

Description	Model Number	Serial Number	FCC ID#
Digi development board	50001275-01	na	na
Linksys access point	WAP11	G3110304780	07JGL2411AP
IBM Think Pad PC	Type 2611	AA-DVBCD	7K85E145483 3872B567

I/O Cables

Function	Length	Quantity	Location	Type	Shield Termination
SERIAL CABLE	1M	2	ON DEV. BOARD	SHIELDED	CONNECTOR SHELL

Block Diagram:

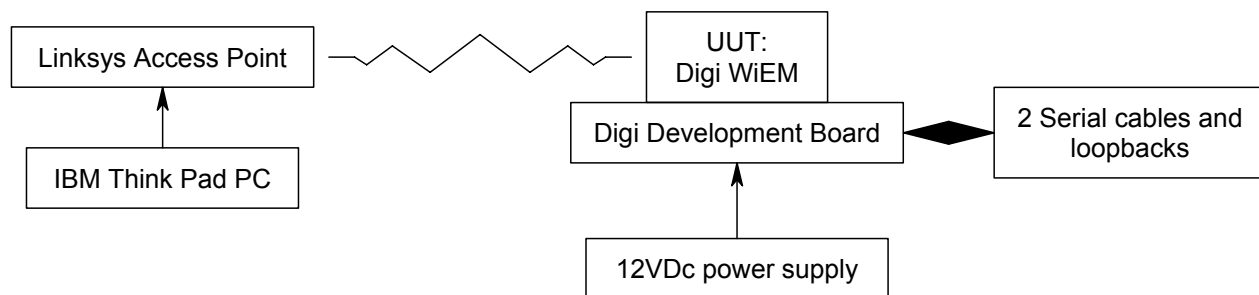

Software and/or Operating Modes: FCC software -- "H"'s out of serial port and across radio link.

Further Notes:

**Constructional Data Form
for EMC-certificate testing**

TÜV Product Service Inc
1775 Old Highway 8
New Brighton MN 55112-1891



Telephone 612 631 2487
Telefax 612 631 3515

General equipment description for EMC-certificate testing

Applicant: Digi International

Address: 11001 Bren Road East

Minnetonka MN 55343

Type of equipment 802.11B 11 Mbit 2.4 GHz radio
transceiver to dual TTL serial
port module

Rated voltage 3.3VDC

Type No./model WiME 50000879-01

Rated input power 3W Max

Protection class na

Check the appropriate:

Kind of interference:

☐ Broadband interference x Narrowband interference ☐ Click interference

Repetition frequency:

☐ <10 kHz x >10 kHz

Sources of interference

(e.g. motor, switch mode power supply, quartz oscillator)

Quartz oscillator

¹⁾ Internal frequencies 18.432 MHz, 44Mhz, 2.4GHz pll

(e.g. clock frequency, deflection frequency, switching frequency)

¹⁾ Devices used for RFI suppression (include
manufacturer and model no.)

na

na

¹⁾ Measures for electromagnetic shielding
(include type, manufacturer and model no.)

¹⁾ External interfaces and connections
(include manufacturer and model no.)

Digi development board
50000808-02

¹⁾ Description of modes or operation during test

FCC software -- "H"'s on serial
port and across radio link

¹⁾ Please include detailed information and if applicable, refer to the appropriate Product Information Form or attachment

date

TÜV Product Service Inc

date

Seal and signature of applicant

Appendix C

MEASUREMENT PROTOCOL

GENERAL INFORMATION

Test Methodology

Conducted and radiated emission testing is performed according to the procedures in International Special Committee on Radio Interference (CISPR) Publication 22 (1993), European Standard EN 55022 and Australian Standard AS 3548 (which are based on CISPR 22).

The Japanese standard, "Voluntary Control Council for Interference (VCCI) by Data Processing Equipment and Electronic Office Machines, Technical Requirements" is technically equivalent to CISPR 22 (1993). For official compliance, a conformance report must be sent to and accepted by the VCCI.

In compliance with FCC Docket 92-152, "Harmonization of Rules for Digital Devices Incorporate International Standards", testing for FCC compliance may be done following the ANSI C63.4-1992 procedures and using the CISPR 22 Limits.

Measurement Uncertainty

The test system for conducted emissions is defined as the LISN, tuned receiver or spectrum analyzer, and coaxial cable. The test system for radiated emissions is defined as the antenna, the pre-amplifier, the spectrum analyzer and the coaxial cable. These test systems have a measurement uncertainty of ± 4.5 dB. The equipment comprising the test systems are calibrated on an annual basis.

Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

CONDUCTED EMISSIONS

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the CISPR limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

RADIATED EMISSIONS

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the spectrum analyzer (Level dB μ V), adding the antenna correction factor and cable loss factor (Factor dB) to it, then subtracting the preamp gain. This result then has the CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets in Attachment A.

Example:

FREQ (MHz)	LEVEL (dB μ V)	CABLE/ANT/PREAMP (dB)	FINAL (dB μ V/m)	POL/HGT/AZ (m) (deg)	DELTA1 EN 55022 A
60.80	42.5Qp	+ 1.2 + 10.9 - 25.5 =	29.1	V 1.0 0.0	-10.9

DETAILS OF TEST PROCEDURES

General Standard Information

The test methods used comply with ANSI C63.4-1992 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

Conducted Emissions

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. In some cases, a pre-scan using a spectrum analyzer is initially performed on the units comprising the system under test to locate the highest emissions. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver or spectrum analyzer with quasi-peak and average detection and recorded on the data sheets.

Radiated Emissions

Radiated emissions from the EUT are measured in the frequency range of 30 to 25000 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection and measurements above 1000 MHz are made with a 1 MHz/6 dB bandwidth and peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3, 10 or 30 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees. The transmitter is rotated through 3 orthogonal axes in order to determine the maximum emission levels.