



Mode:	BAND2-18700
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

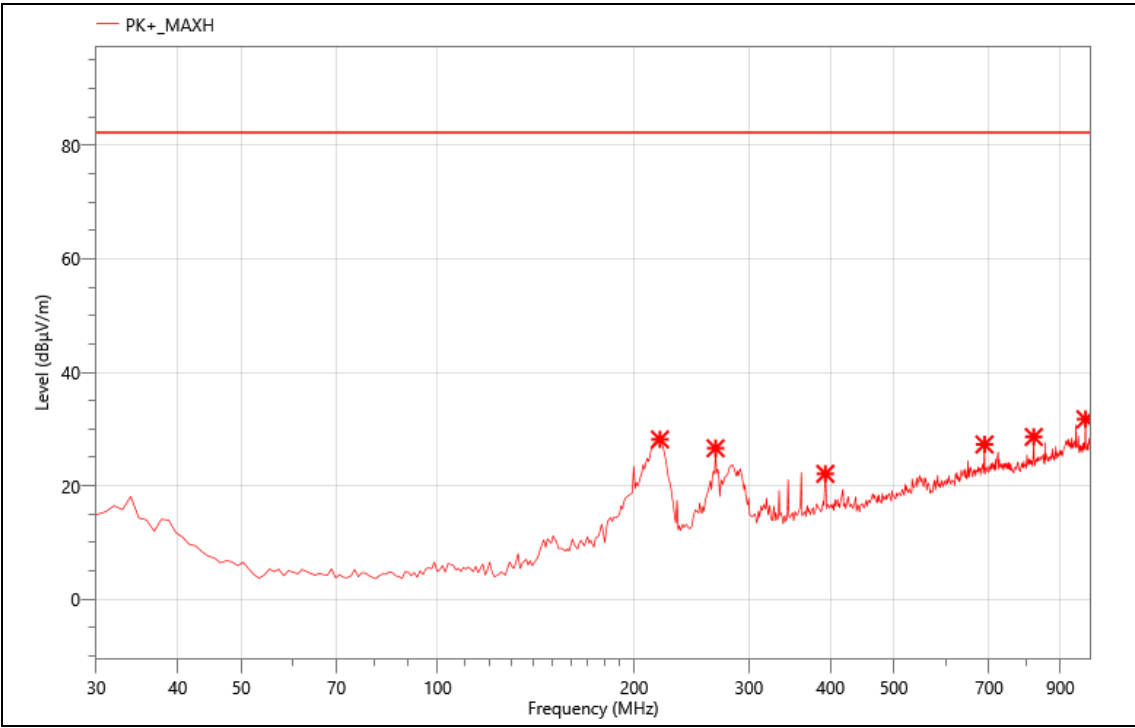

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	219.150	48.71	-20.55	28.16	82.30	54.14	PK+	H
2	266.680	44.77	-18.17	26.60	82.30	55.70	PK+	H
3	392.780	36.00	-13.9	22.10	82.30	60.20	PK+	H
4	688.630	34.48	-7.2	27.28	82.30	55.02	PK+	H
5	819.580	34.07	-5.47	28.60	82.30	53.70	PK+	H
6	983.510	34.33	-2.61	31.72	82.30	50.58	PK+	H

Mode:	BAND2-18700
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

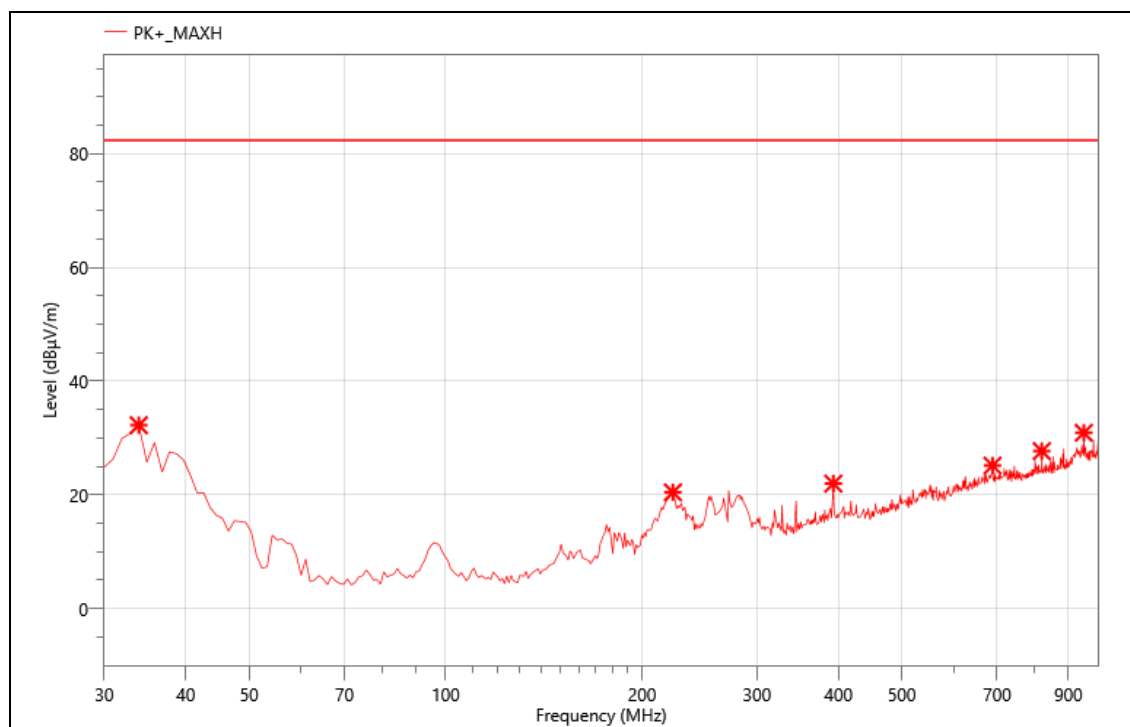


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	33.880	48.88	-16.63	32.25	82.30	50.05	PK+	V
2	223.030	40.78	-20.34	20.44	82.30	61.86	PK+	V
3	392.780	35.88	-13.9	21.98	82.30	60.32	PK+	V
4	688.630	32.35	-7.2	25.15	82.30	57.15	PK+	V
5	819.580	33.16	-5.47	27.69	82.30	54.61	PK+	V
6	950.530	33.31	-2.4	30.91	82.30	51.39	PK+	V

Note: Limit= -13dBm+95.25=82.25 dBuV/m


Mode:	BAND4-20050
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

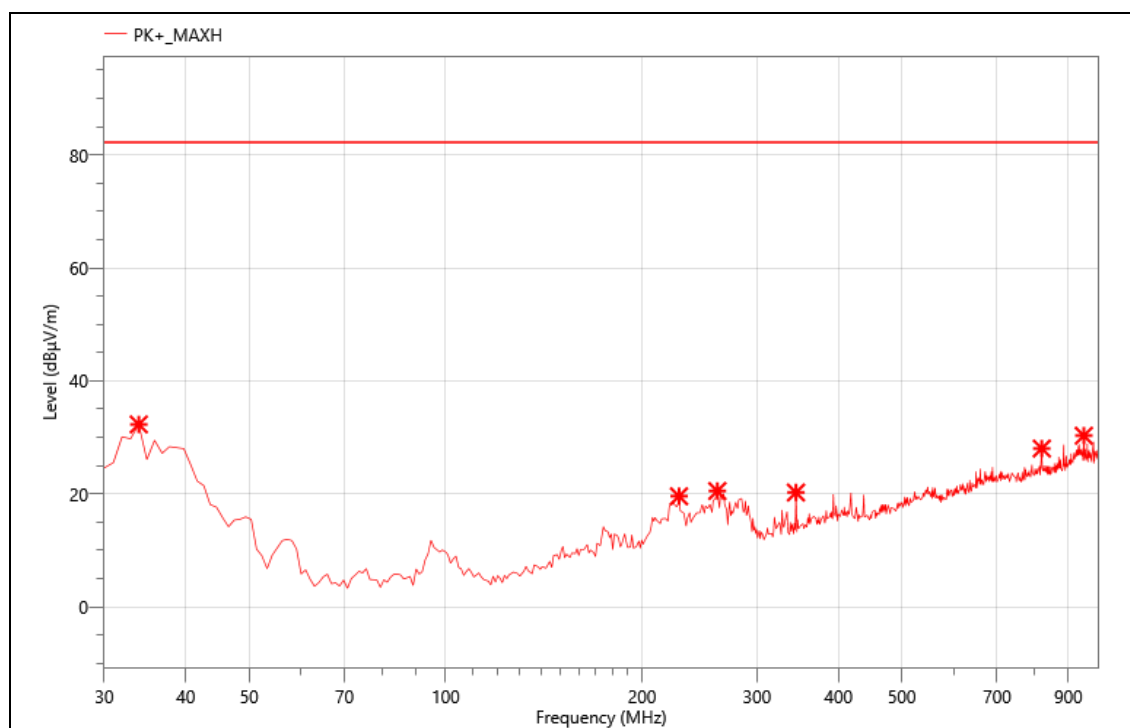

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	33.880	48.93	-16.63	32.30	82.30	50.00	PK+	V
2	227.880	39.64	-20.06	19.58	82.30	62.72	PK+	V
3	260.860	38.80	-18.29	20.51	82.30	61.79	PK+	V
4	344.280	36.73	-16.48	20.25	82.30	62.05	PK+	V
5	819.580	33.50	-5.47	28.03	82.30	54.27	PK+	V
6	950.530	32.70	-2.4	30.30	82.30	52.00	PK+	V

Mode:	BAND4-20050
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

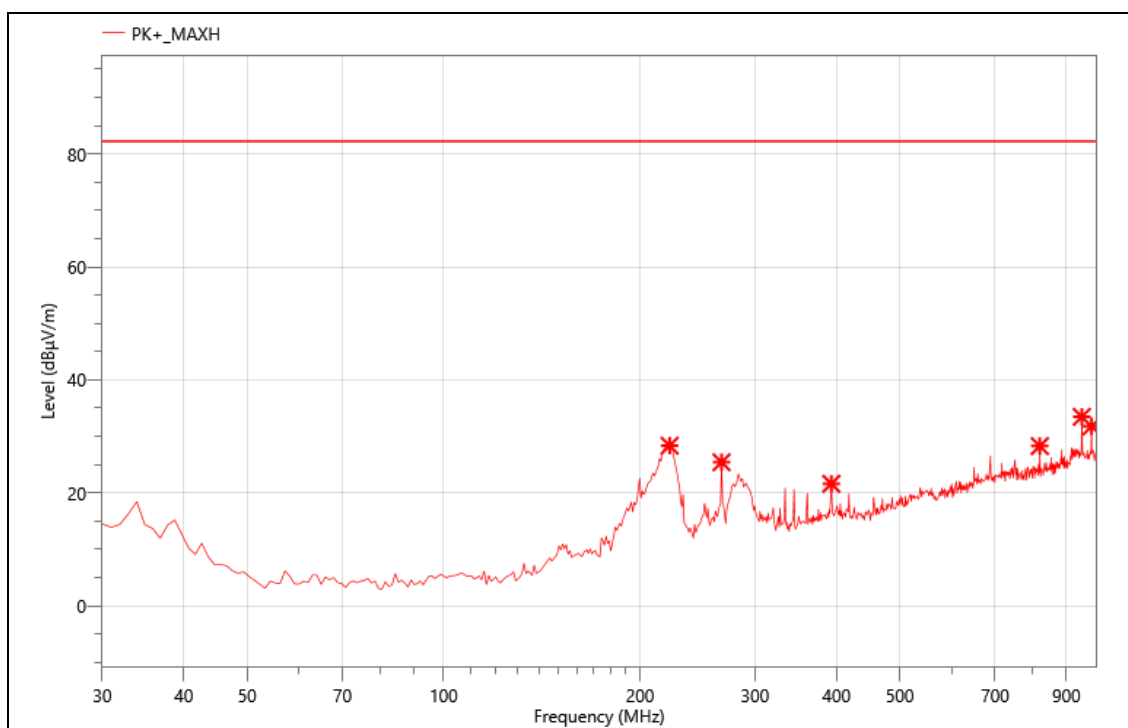


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	222.060	48.78	-20.42	28.36	82.30	53.94	PK+	H
2	266.680	43.59	-18.17	25.42	82.30	56.88	PK+	H
3	392.780	35.51	-13.9	21.61	82.30	60.69	PK+	H
4	819.580	33.76	-5.47	28.29	82.30	54.01	PK+	H
5	950.530	35.86	-2.4	33.46	82.30	48.84	PK+	H
6	983.510	34.38	-2.61	31.77	82.30	50.53	PK+	H

Note: Limit= -13dBm+95.25=82.25 dBuV/m


Mode:	BAND5-20450
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

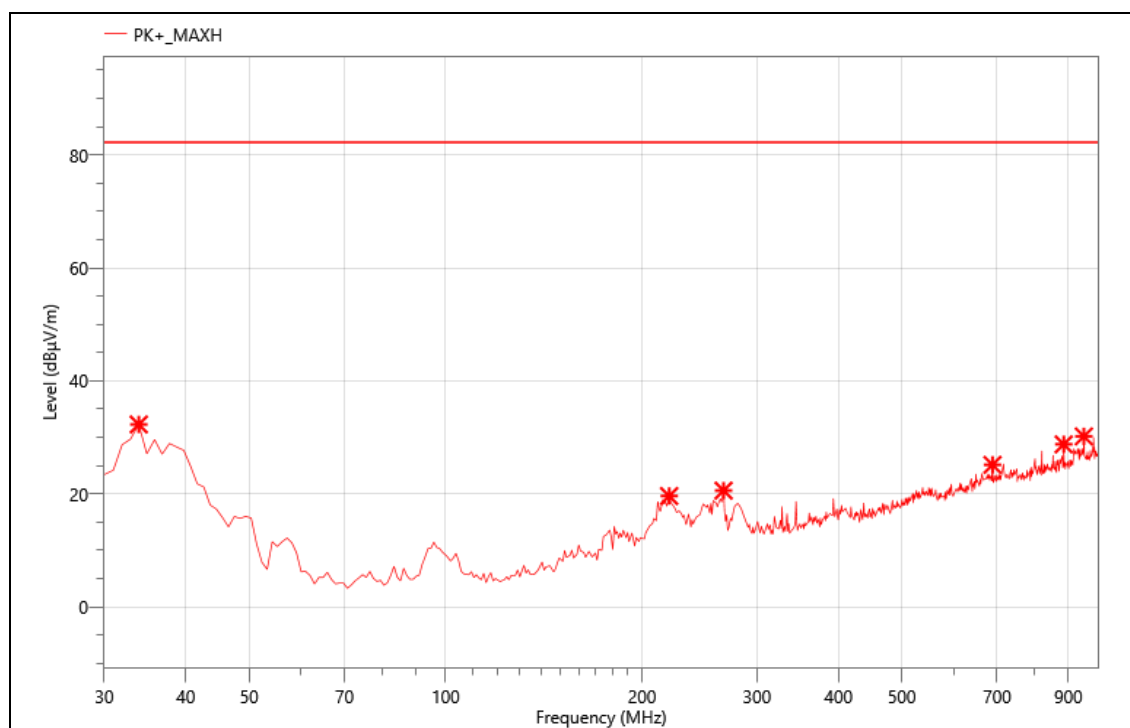

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	33.880	48.92	-16.63	32.29	82.30	50.01	PK+	V
2	220.120	40.13	-20.51	19.62	82.30	62.68	PK+	V
3	266.680	38.75	-18.17	20.58	82.30	61.72	PK+	V
4	688.630	32.34	-7.2	25.14	82.30	57.16	PK+	V
5	885.540	33.15	-4.38	28.77	82.30	53.53	PK+	V
6	950.530	32.58	-2.4	30.18	82.30	52.12	PK+	V

Mode:	BAND5-20450
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

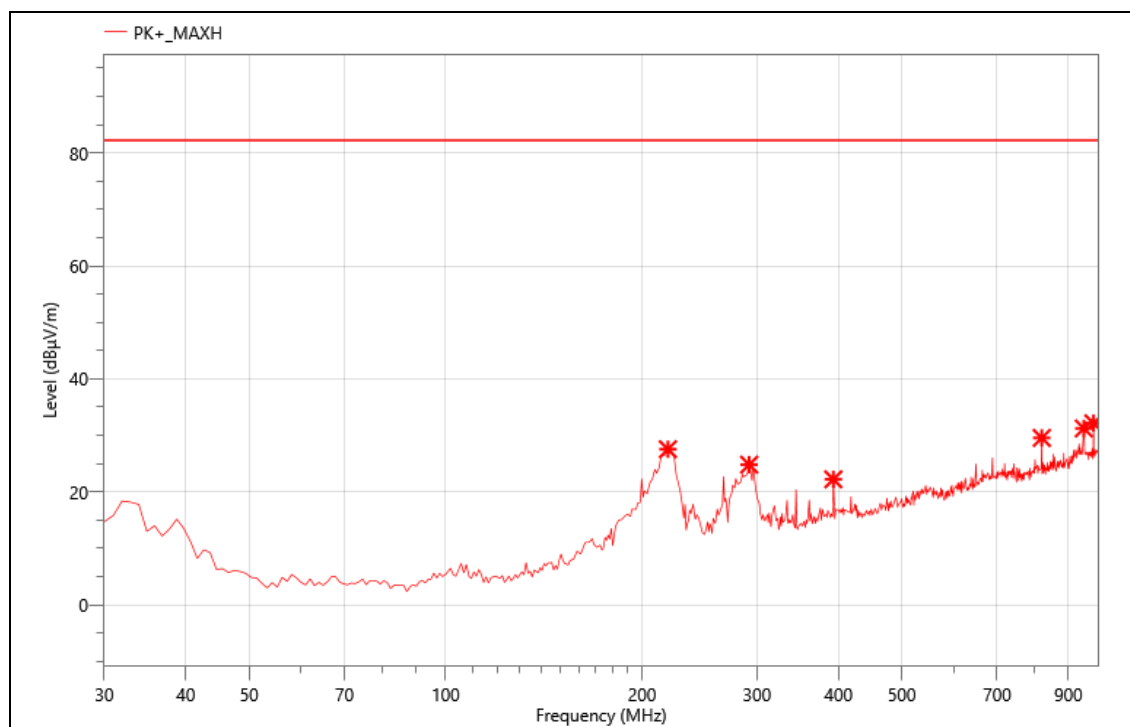


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	219.150	48.10	-20.55	27.55	82.30	54.75	PK+	H
2	291.900	44.00	-19.18	24.82	82.30	57.48	PK+	H
3	392.780	36.12	-13.9	22.22	82.30	60.08	PK+	H
4	819.580	35.02	-5.47	29.55	82.30	52.75	PK+	H
5	950.530	33.63	-2.4	31.23	82.30	51.07	PK+	H
6	983.510	34.76	-2.61	32.15	82.30	50.15	PK+	H

Note: Limit= $-13\text{dBm} + 95.25 = 82.25 \text{ dBuV/m}$


Mode:	BAND7-20850
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

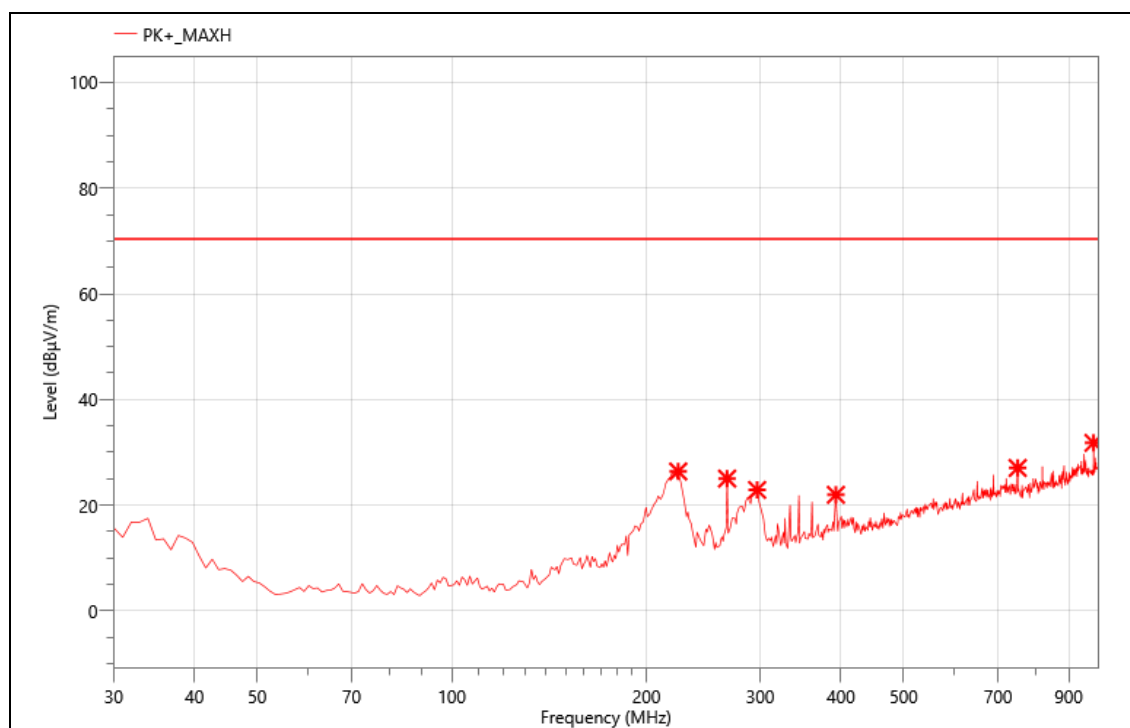

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	224.000	46.68	-20.3	26.38	70.25	43.87	PK+	H
2	266.680	43.19	-18.17	25.02	70.25	45.23	PK+	H
3	296.750	41.78	-18.9	22.88	70.25	47.37	PK+	H
4	392.780	35.86	-13.9	21.96	70.25	48.29	PK+	H
5	750.710	33.75	-6.71	27.04	70.25	43.21	PK+	H
6	983.510	34.40	-2.61	31.79	70.25	38.46	PK+	H

Mode:	BAND7-20850
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

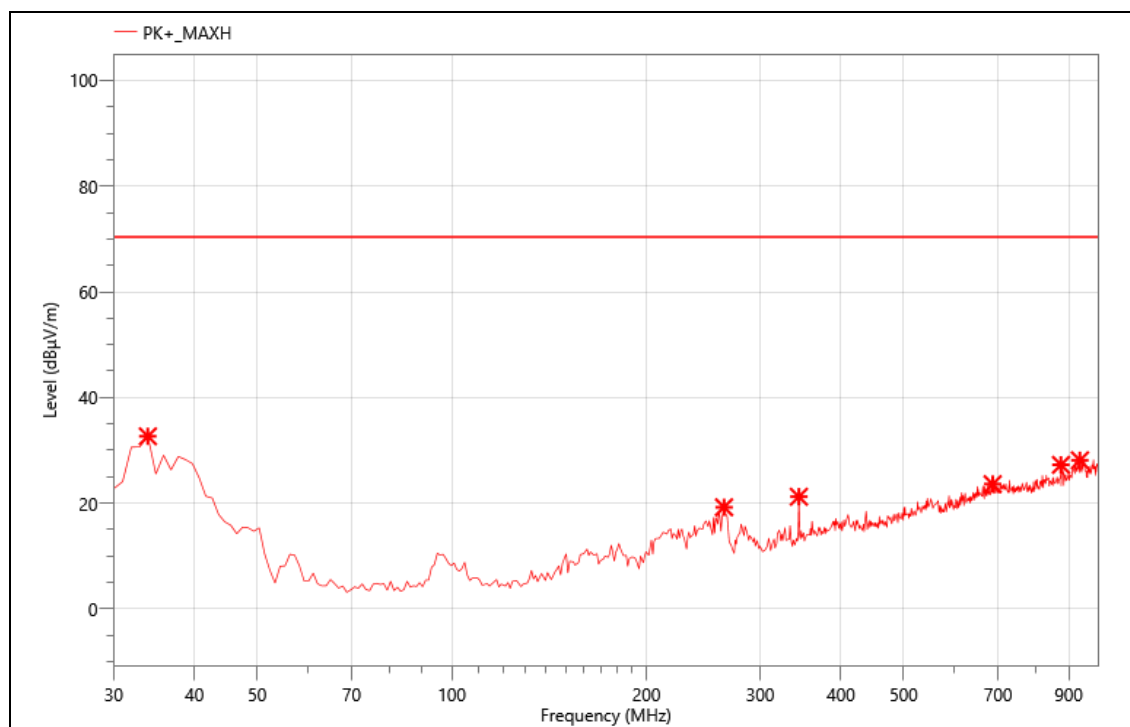


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	33.880	49.29	-16.63	32.66	70.25	37.59	PK+	V
2	263.770	37.36	-18.14	19.22	70.25	51.03	PK+	V
3	344.280	37.69	-16.48	21.21	70.25	49.04	PK+	V
4	686.690	30.80	-7.21	23.59	70.25	46.66	PK+	V
5	875.840	31.82	-4.57	27.25	70.25	43.00	PK+	V
6	936.950	30.28	-2.16	28.12	70.25	42.13	PK+	V

Note: Limit= -25dBm+95.25=70.25 dBuV/m


Mode:	BAND38-37850
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

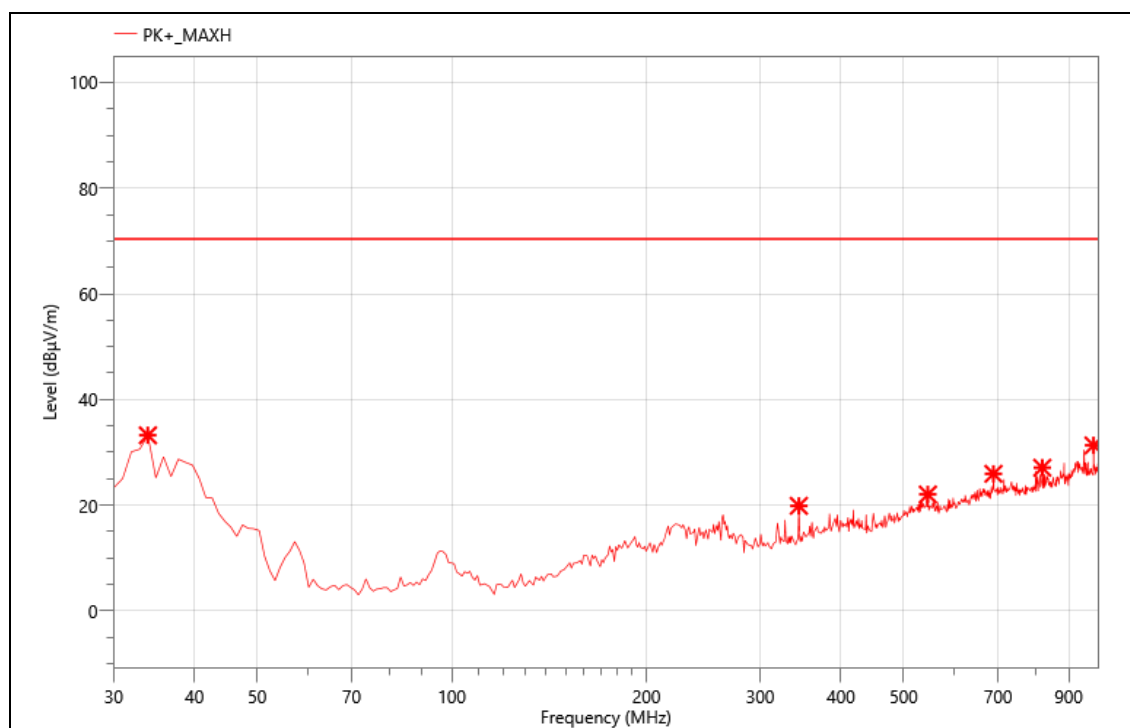

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	33.880	49.85	-16.63	33.22	70.25	37.03	PK+	V
2	344.280	36.35	-16.48	19.87	70.25	50.38	PK+	V
3	545.070	31.74	-9.72	22.02	70.25	48.23	PK+	V
4	688.630	33.13	-7.2	25.93	70.25	44.32	PK+	V
5	819.580	32.55	-5.47	27.08	70.25	43.17	PK+	V
6	983.510	33.92	-2.61	31.31	70.25	38.94	PK+	V

Mode:	BAND38-37850
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

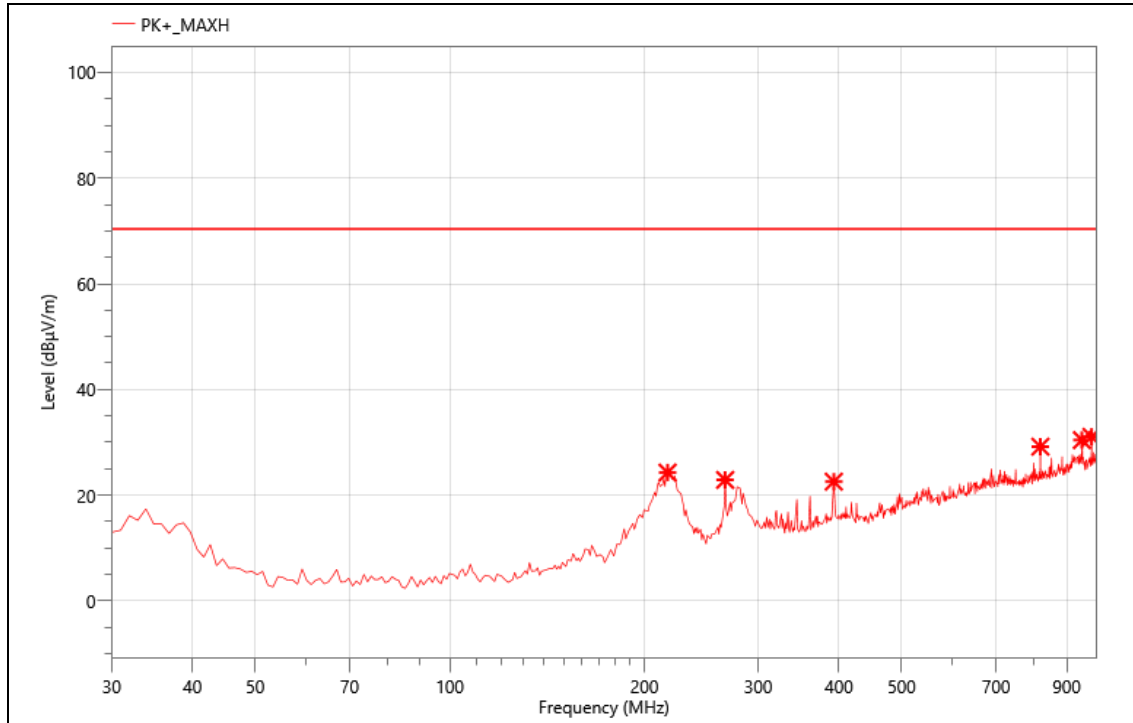


Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	217.210	44.95	-20.67	24.28	70.25	45.97	PK+	H
2	266.680	41.05	-18.17	22.88	70.25	47.37	PK+	H
3	392.780	36.46	-13.9	22.56	70.25	47.69	PK+	H
4	819.580	34.65	-5.47	29.18	70.25	41.07	PK+	H
5	950.530	32.82	-2.4	30.42	70.25	39.83	PK+	H
6	983.510	33.65	-2.61	31.04	70.25	39.21	PK+	H

Note: Limit= -25dBm+95.25=70.25 dBuV/m


Mode:	BAND41-39750
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

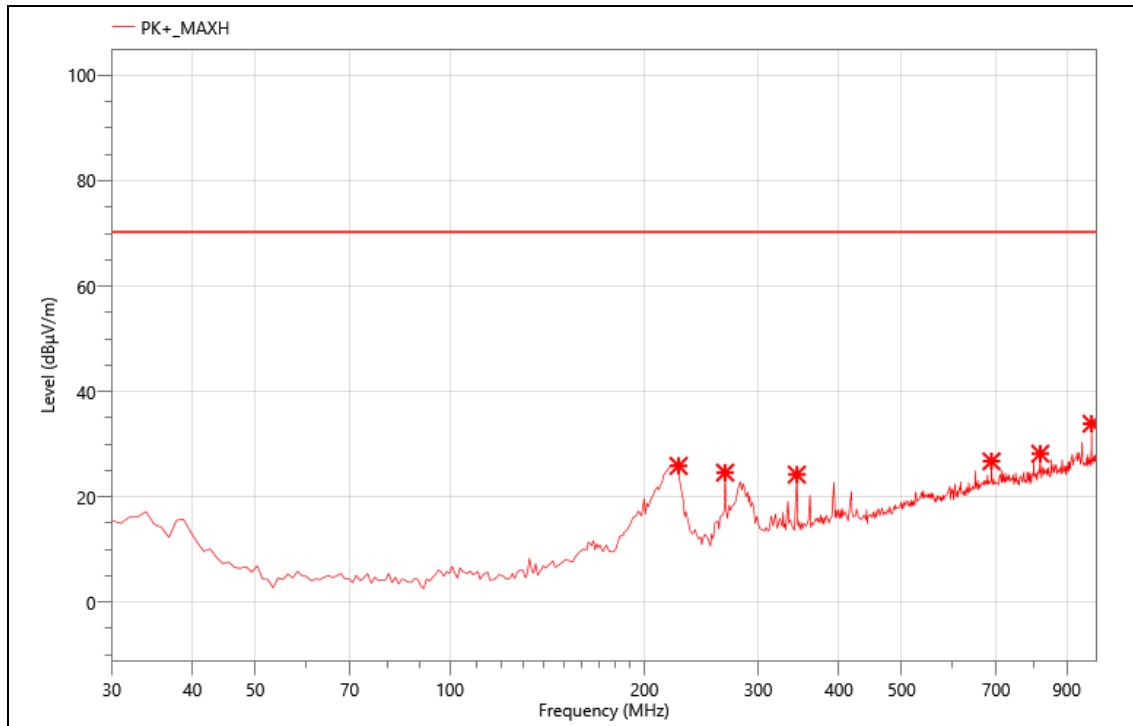

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	225.940	46.06	-20.19	25.87	70.25	44.38	PK+	H
2	266.680	42.78	-18.17	24.61	70.25	45.64	PK+	H
3	344.280	40.72	-16.48	24.24	70.25	46.01	PK+	H
4	688.630	33.95	-7.2	26.75	70.25	43.50	PK+	H
5	819.580	33.66	-5.47	28.19	70.25	42.06	PK+	H
6	983.510	36.50	-2.61	33.89	70.25	36.36	PK+	H

Mode:	BAND41-39750
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

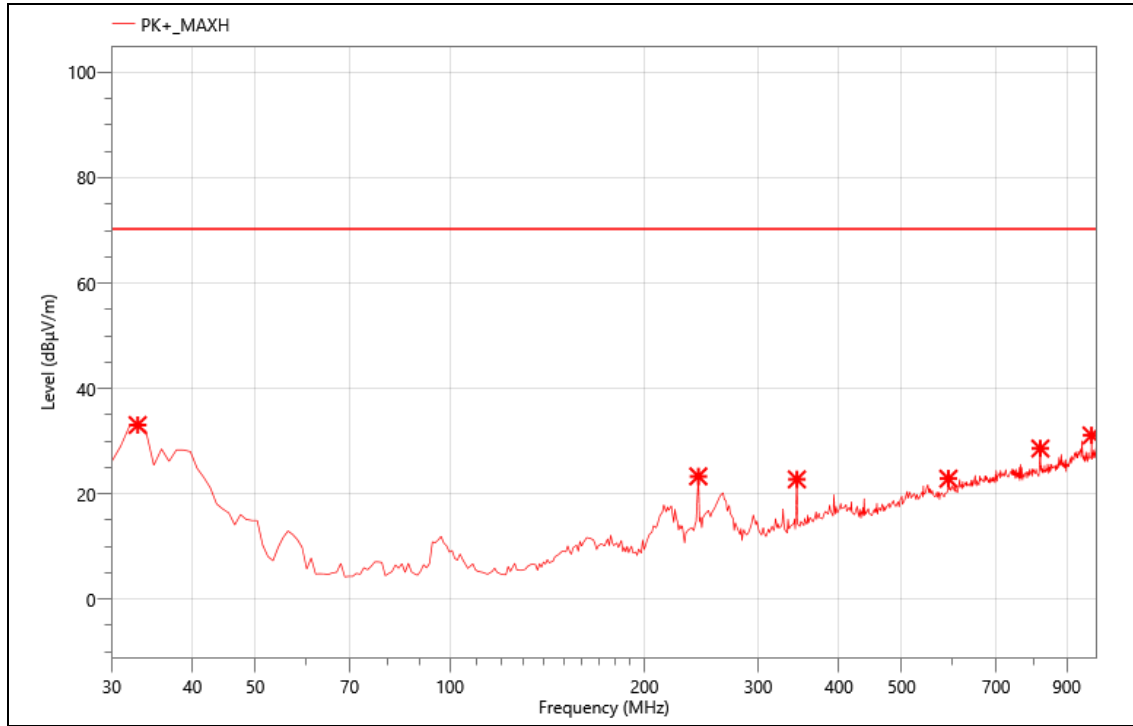


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	32.910	49.11	-16.04	33.07	70.25	37.18	PK+	V
2	242.430	42.38	-19.06	23.32	70.25	46.93	PK+	V
3	344.280	39.23	-16.48	22.75	70.25	47.50	PK+	V
4	590.660	32.62	-9.74	22.88	70.25	47.37	PK+	V
5	819.580	34.08	-5.47	28.61	70.25	41.64	PK+	V
6	983.510	33.71	-2.61	31.10	70.25	39.15	PK+	V

Note: Limit= -25dBm+95.25=70.25 dBuV/m


Mode:	BAND2-18700
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

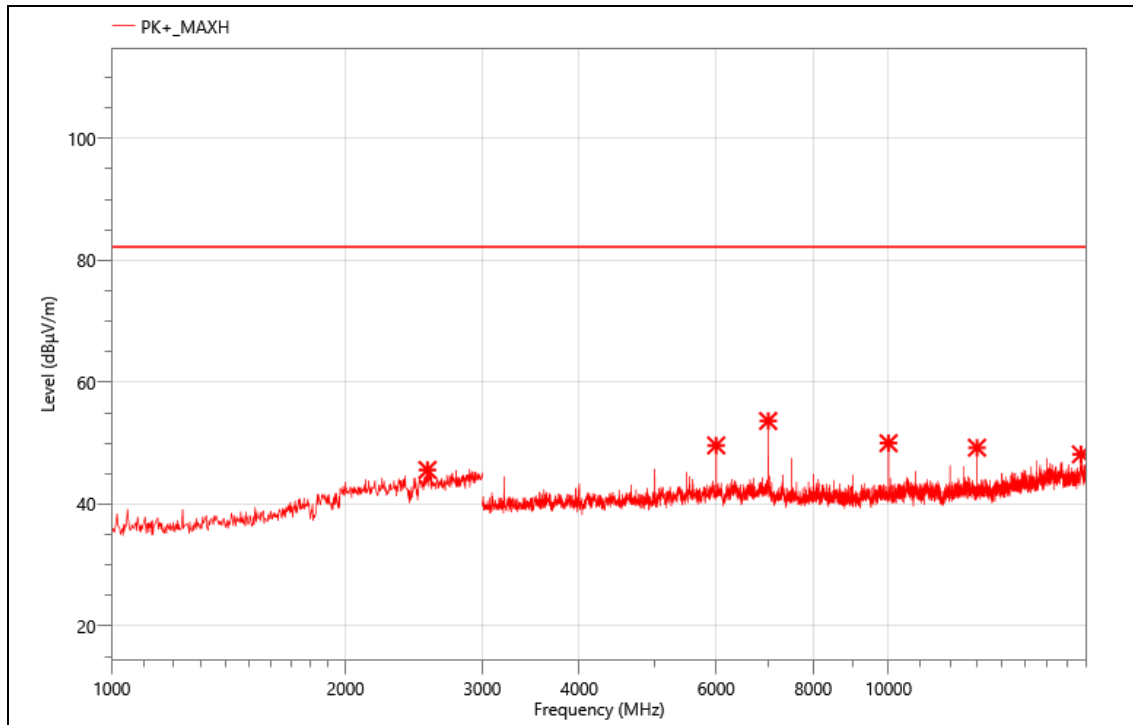

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2550.000	53.79	-8.17	45.62	82.30	36.68	PK+	H
2	6000.000	58.51	-8.87	49.64	82.30	32.66	PK+	H
3	7000.500	61.45	-7.8	53.65	82.30	28.65	PK+	H
4	10000.500	56.18	-6.17	50.01	82.30	32.29	PK+	H
5	13000.500	53.77	-4.51	49.26	82.30	33.04	PK+	H
6	17695.500	47.97	0.21	48.18	82.30	34.12	PK+	H


Mode:	BAND2-18700
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

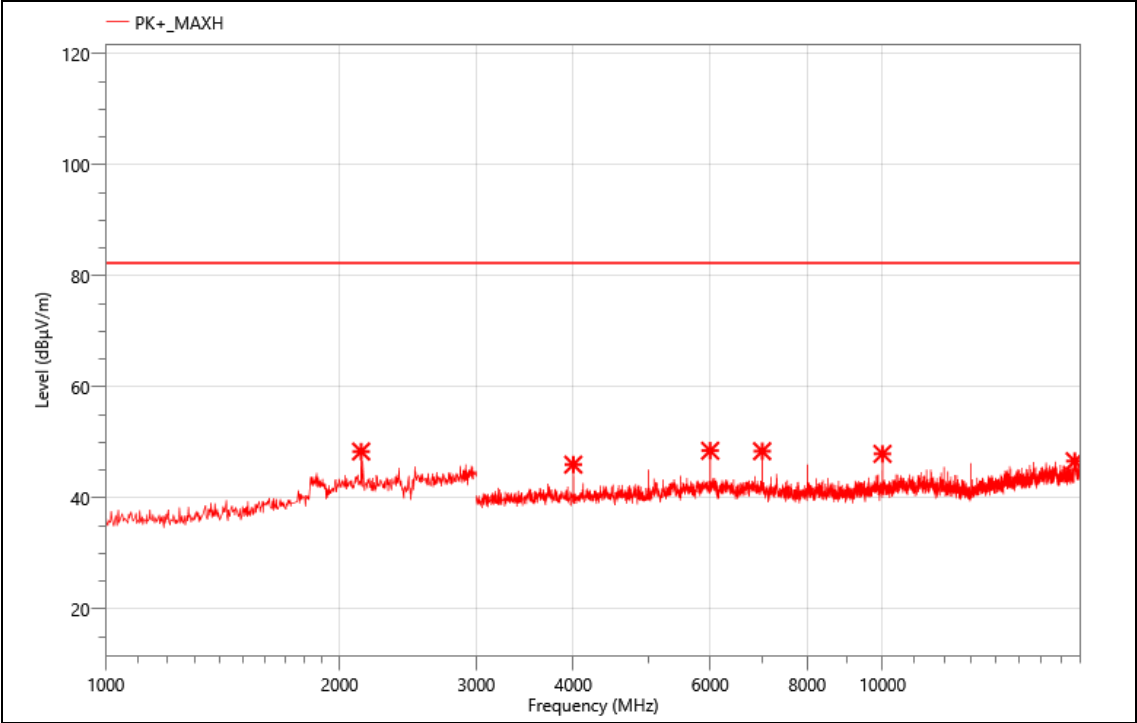

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2132.000	57.41	-9.05	48.36	82.30	33.94	PK+	V
2	3999.000	59.34	-13.34	46.00	82.30	36.30	PK+	V
3	6000.000	57.37	-8.87	48.50	82.30	33.80	PK+	V
4	7000.500	56.22	-7.8	48.42	82.30	33.88	PK+	V
5	10000.500	54.11	-6.17	47.94	82.30	34.36	PK+	V
6	17679.000	46.33	0.29	46.62	82.30	35.68	PK+	V


Mode:	BAND2-18900
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

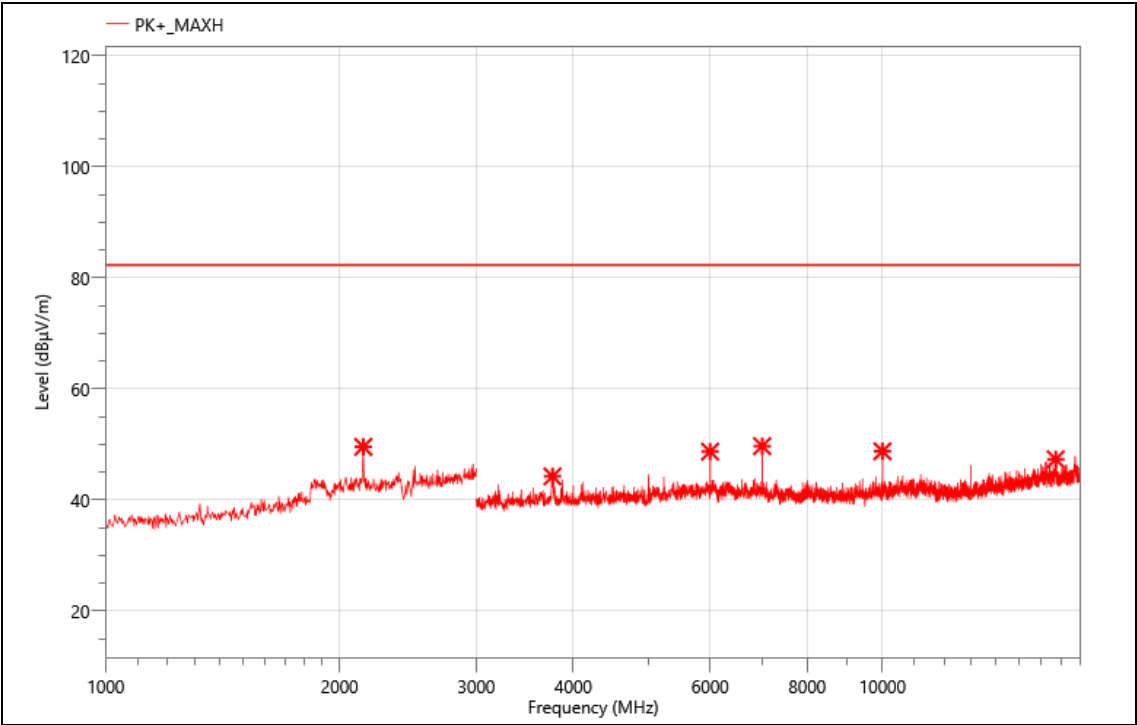

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2146.000	58.61	-9.05	49.56	82.30	32.74	PK+	V
2	3760.500	57.71	-13.46	44.25	82.30	38.05	PK+	V
3	6000.000	57.57	-8.87	48.70	82.30	33.60	PK+	V
4	7000.500	57.49	-7.8	49.69	82.30	32.61	PK+	V
5	10000.500	54.93	-6.17	48.76	82.30	33.54	PK+	V
6	16713.000	48.16	-0.84	47.32	82.30	34.98	PK+	V


Mode:	BAND2-18900
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

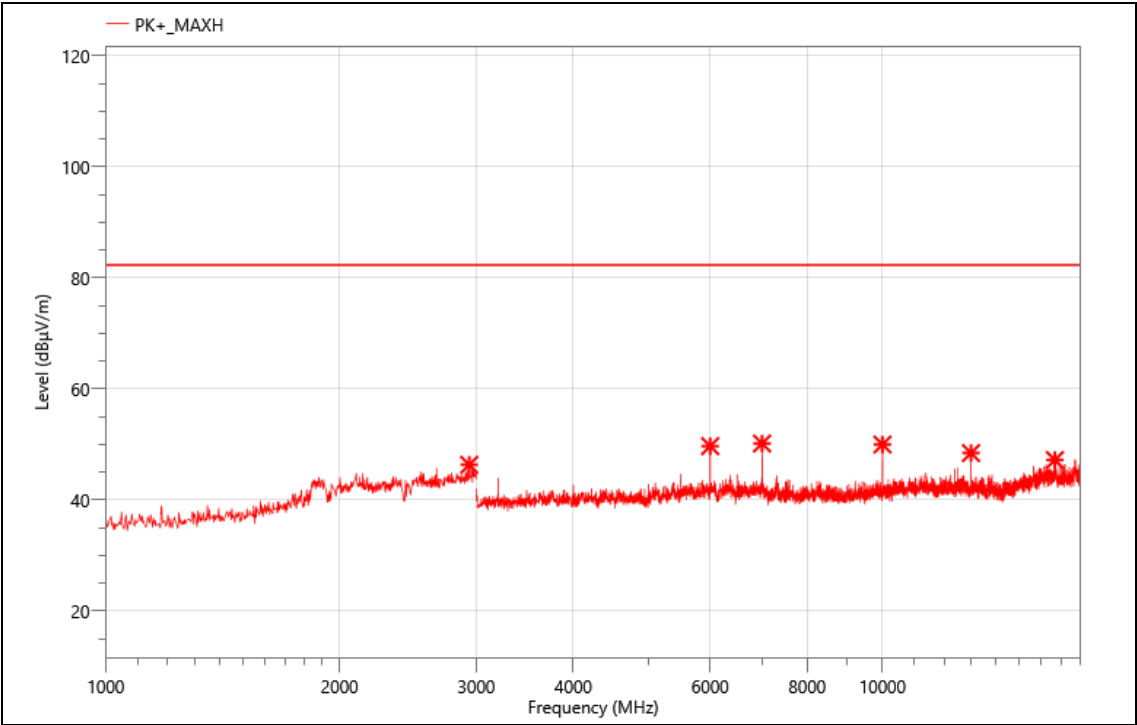

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2938.000	53.82	-7.49	46.33	82.30	35.97	PK+	H
2	6000.000	58.56	-8.87	49.69	82.30	32.61	PK+	H
3	6999.000	57.95	-7.79	50.16	82.30	32.14	PK+	H
4	10000.500	56.15	-6.17	49.98	82.30	32.32	PK+	H
5	13000.500	52.95	-4.51	48.44	82.30	33.86	PK+	H
6	16672.500	47.68	-0.5	47.18	82.30	35.12	PK+	H


Mode:	BAND2-19100
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

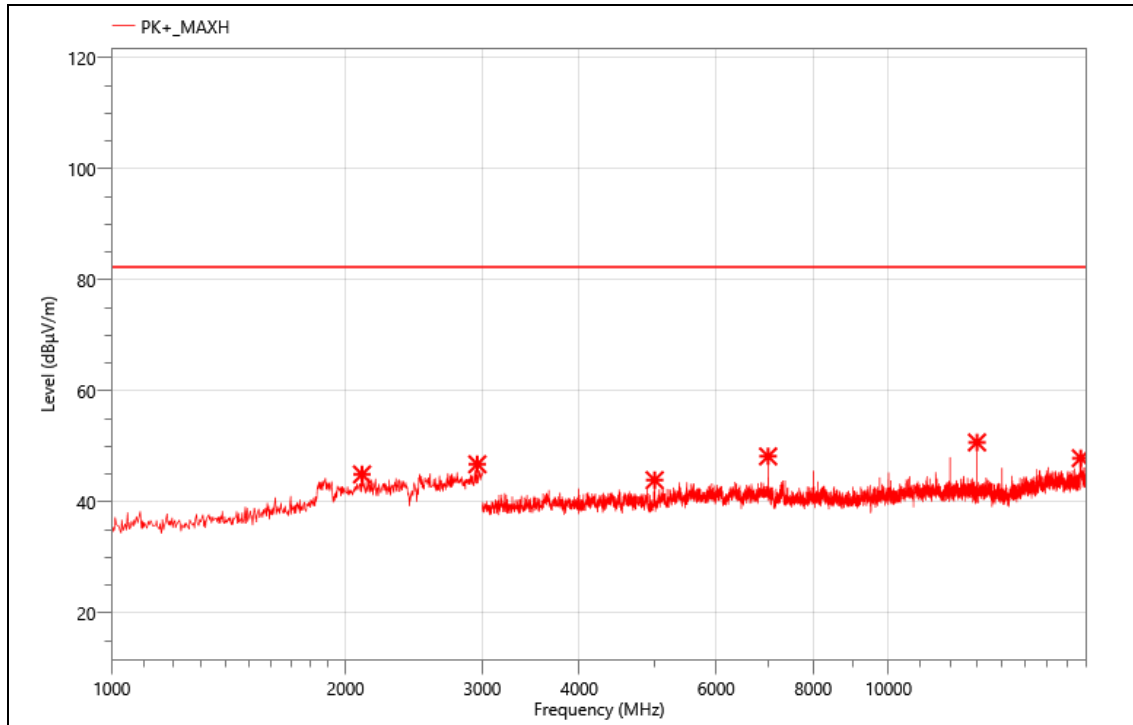

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2100.000	54.28	-9.32	44.96	82.30	37.34	PK+	H
2	2956.000	54.17	-7.39	46.78	82.30	35.52	PK+	H
3	4999.500	55.11	-11.18	43.93	82.30	38.37	PK+	H
4	6999.000	56.00	-7.79	48.21	82.30	34.09	PK+	H
5	13000.500	55.23	-4.51	50.72	82.30	31.58	PK+	H
6	17686.500	47.63	0.25	47.88	82.30	34.42	PK+	H

Mode:	BAND2-19100
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

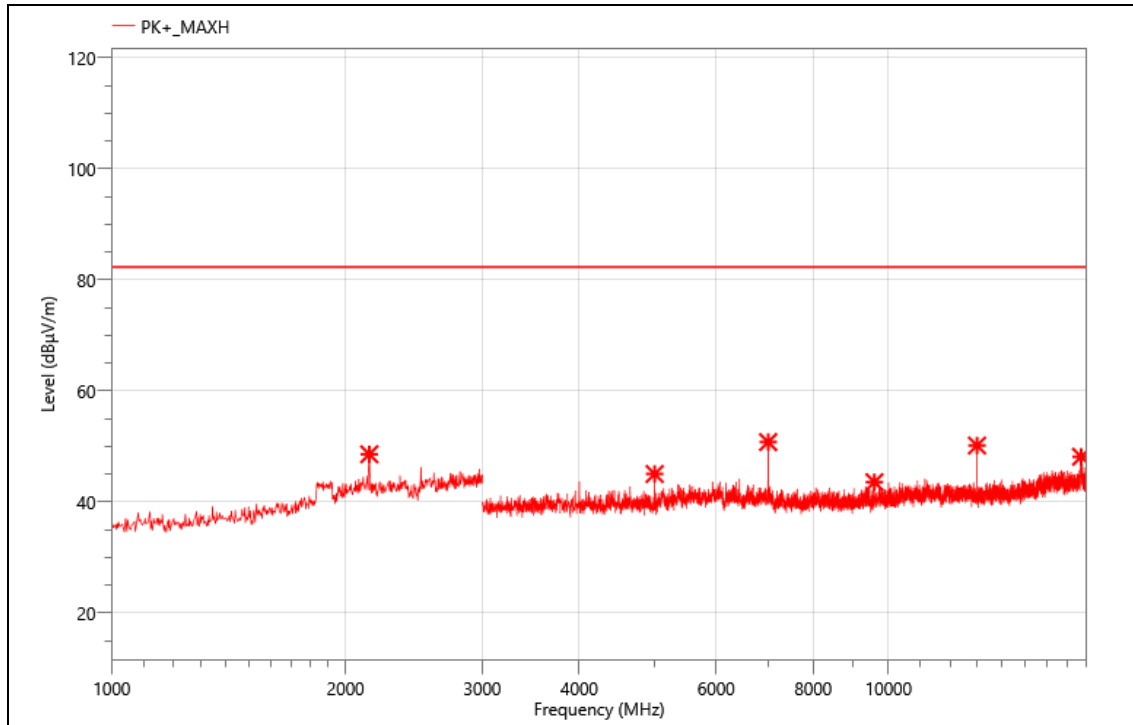


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2146.000	57.64	-9.05	48.59	82.30	33.71	PK+	V
2	4999.500	56.21	-11.18	45.03	82.30	37.27	PK+	V
3	7000.500	58.58	-7.8	50.78	82.30	31.52	PK+	V
4	9592.500	50.29	-6.73	43.56	82.30	38.74	PK+	V
5	13000.500	54.67	-4.51	50.16	82.30	32.14	PK+	V
6	17701.500	48.00	0.14	48.14	82.30	34.16	PK+	V

Note: Limit= -13dBm+95.25=82.25 dBuV/m


Mode:	BAND4-20050
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

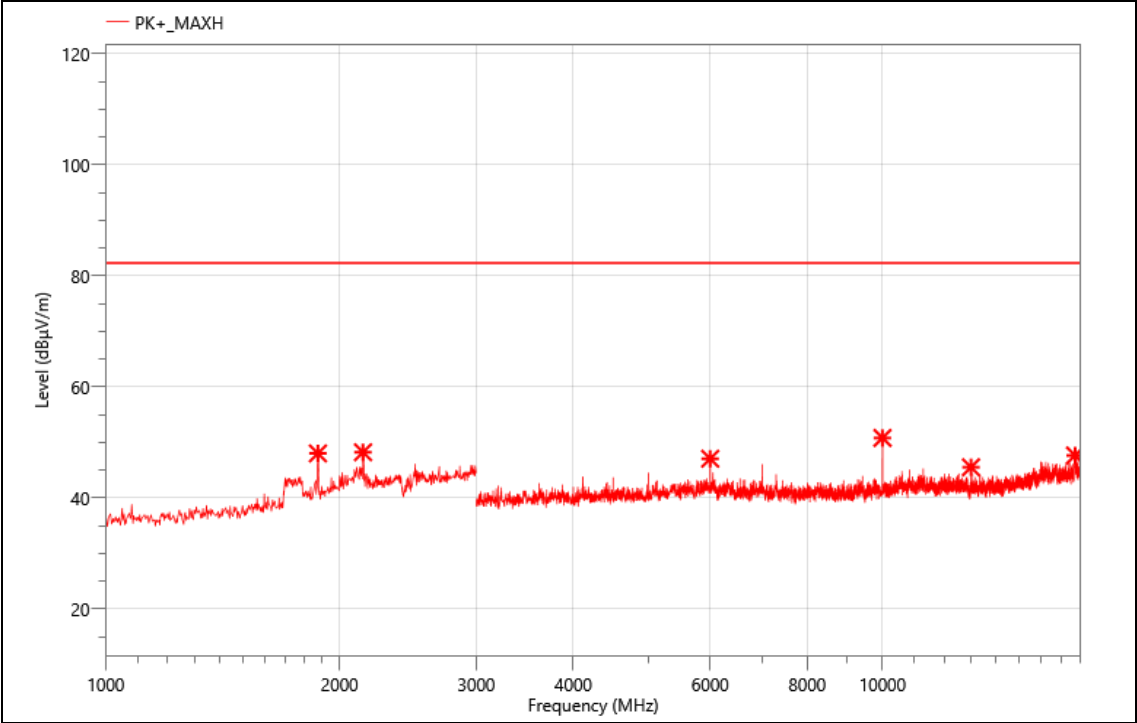

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	1876.000	58.36	-10.34	48.02	82.30	34.28	PK+	V
2	2144.000	57.28	-9.05	48.23	82.30	34.07	PK+	V
3	6000.000	55.93	-8.87	47.06	82.30	35.24	PK+	V
4	10000.500	56.97	-6.17	50.80	82.30	31.50	PK+	V
5	13000.500	50.04	-4.51	45.53	82.30	36.77	PK+	V
6	17698.500	47.46	0.19	47.65	82.30	34.65	PK+	V


Mode:	BAND4-20050
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

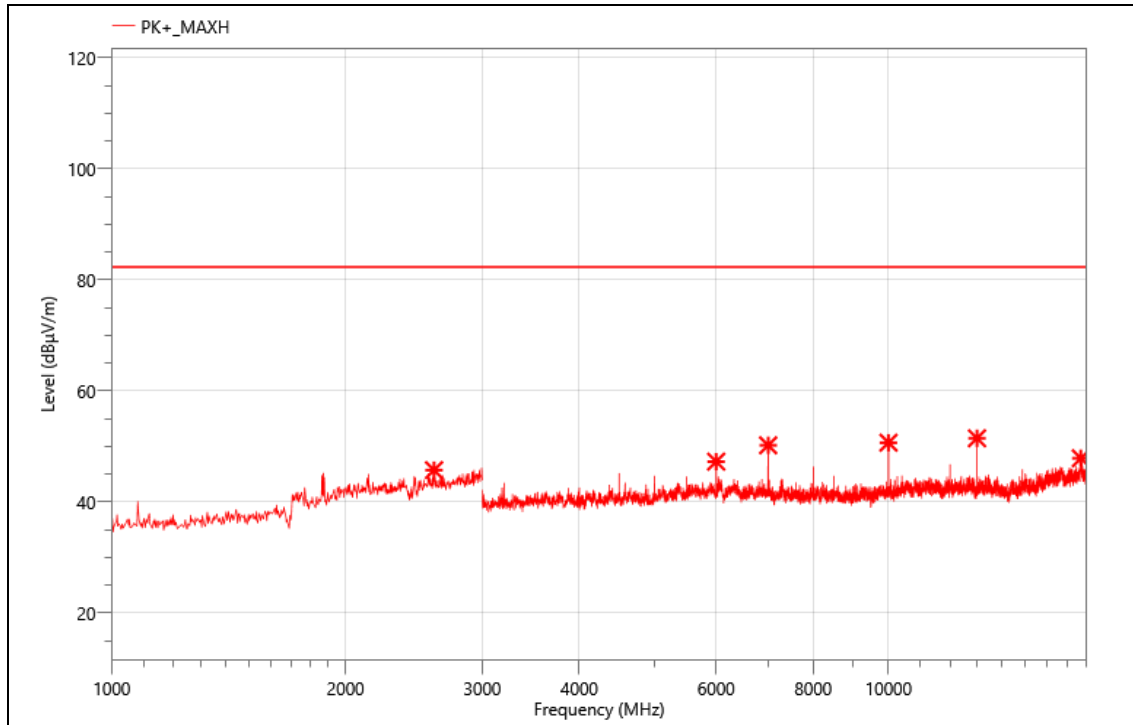

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2600.000	53.88	-8.15	45.73	82.30	36.57	PK+	H
2	6000.000	56.13	-8.87	47.26	82.30	35.04	PK+	H
3	7000.500	58.00	-7.8	50.20	82.30	32.10	PK+	H
4	10000.500	56.84	-6.17	50.67	82.30	31.63	PK+	H
5	13000.500	55.98	-4.51	51.47	82.30	30.83	PK+	H
6	17688.000	47.61	0.25	47.86	82.30	34.44	PK+	H


Mode:	BAND4-20175
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

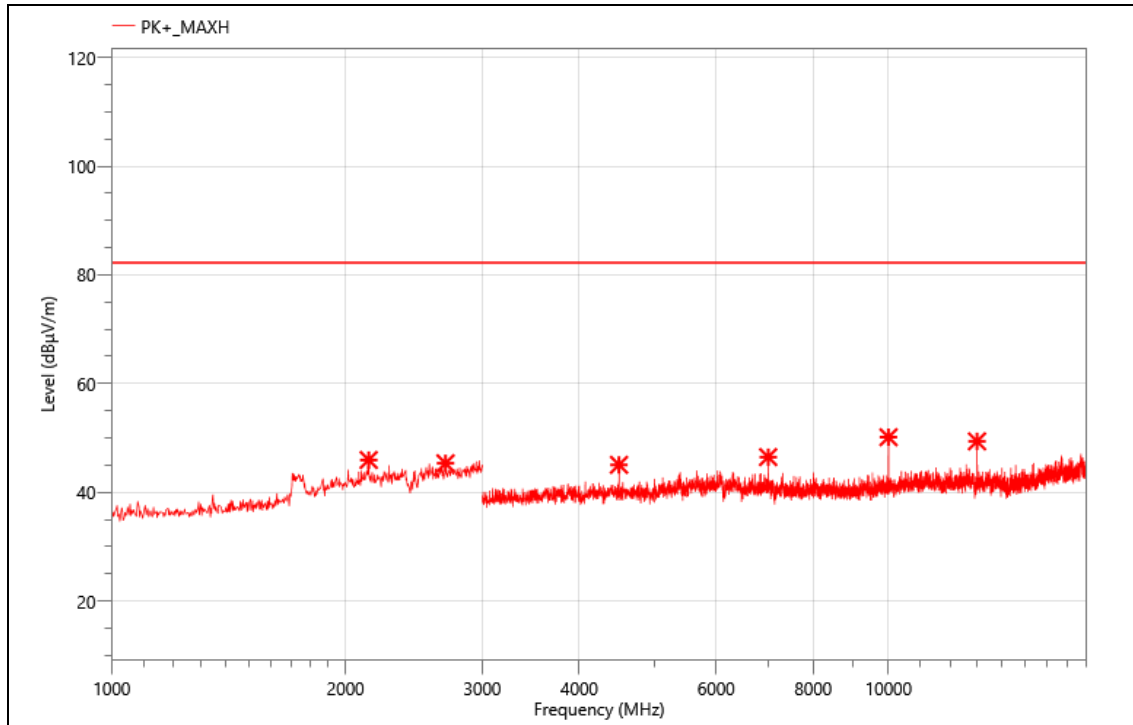

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2142.000	54.99	-9.05	45.94	82.30	36.36	PK+	H
2	2690.000	53.72	-8.38	45.34	82.30	36.96	PK+	H
3	4498.500	56.99	-11.95	45.04	82.30	37.26	PK+	H
4	7000.500	54.27	-7.8	46.47	82.30	35.83	PK+	H
5	10000.500	56.30	-6.17	50.13	82.30	32.17	PK+	H
6	13000.500	53.88	-4.51	49.37	82.30	32.93	PK+	H


Mode:	BAND4-20175
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

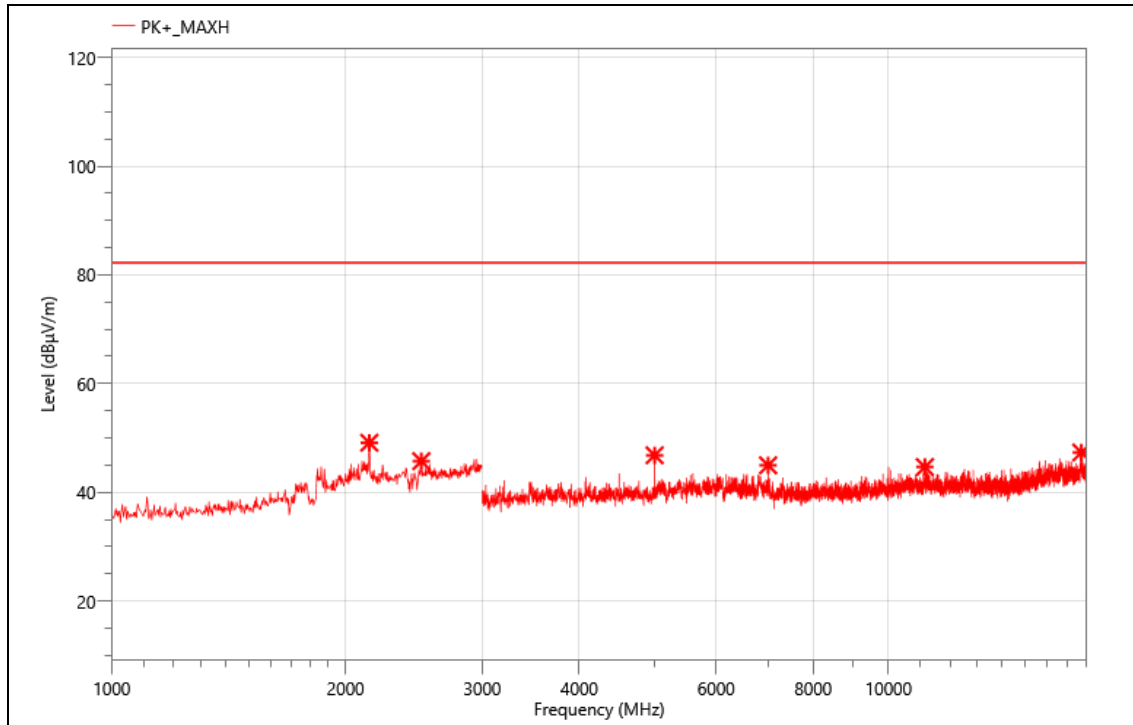

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2146.000	58.17	-9.05	49.12	82.30	33.18	PK+	V
2	2504.000	54.13	-8.41	45.72	82.30	36.58	PK+	V
3	4999.500	57.98	-11.18	46.80	82.30	35.50	PK+	V
4	6999.000	52.75	-7.79	44.96	82.30	37.34	PK+	V
5	11139.000	48.89	-4.24	44.65	82.30	37.65	PK+	V
6	17713.500	47.43	-0.11	47.32	82.30	34.98	PK+	V


Mode:	BAND4-20300
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

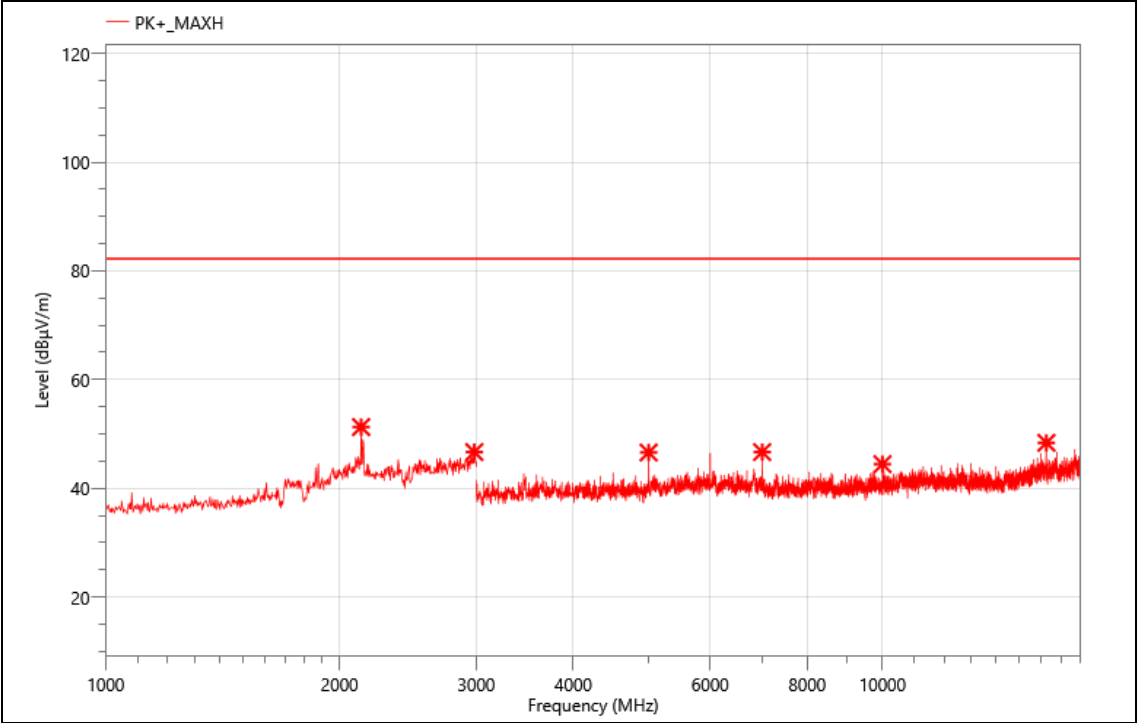

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2132.000	60.31	-9.05	51.26	82.30	31.04	PK+	V
2	2982.000	53.63	-6.96	46.67	82.30	35.63	PK+	V
3	4999.500	57.77	-11.18	46.59	82.30	35.71	PK+	V
4	7000.500	54.46	-7.8	46.66	82.30	35.64	PK+	V
5	9999.000	50.60	-6.16	44.44	82.30	37.86	PK+	V
6	16257.000	49.13	-0.77	48.36	82.30	33.94	PK+	V

Mode:	BAND4-20300
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

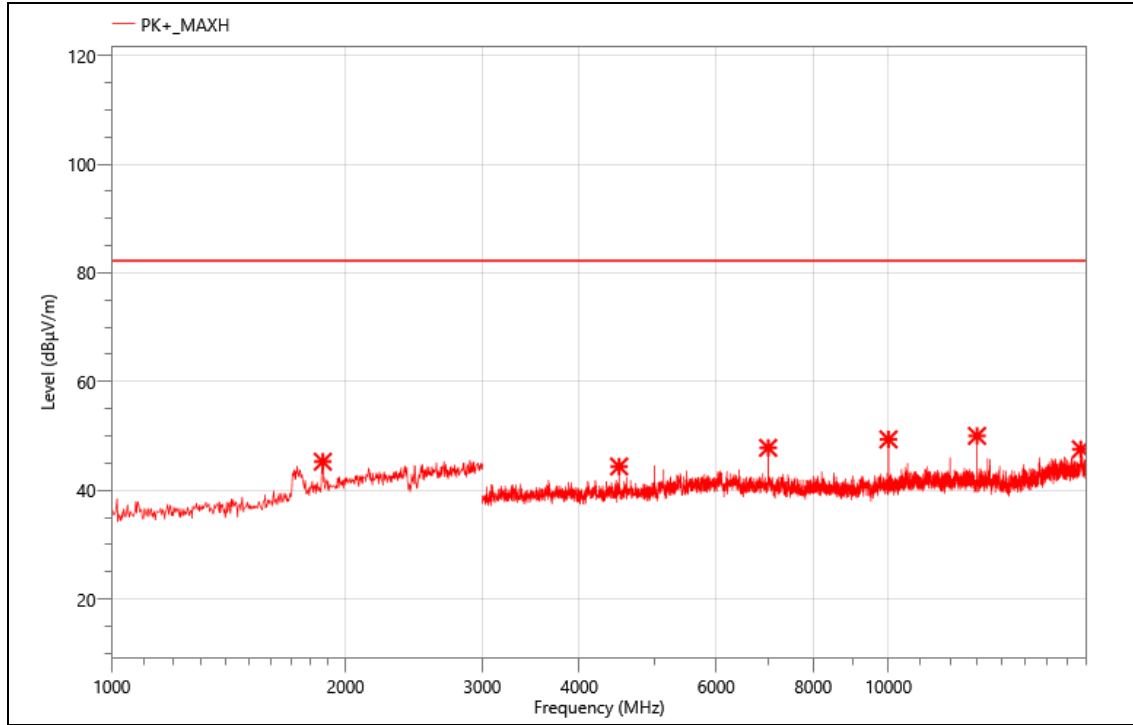


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	1870.000	55.62	-10.37	45.25	82.30	37.05	PK+	H
2	4500.000	56.33	-11.95	44.38	82.30	37.92	PK+	H
3	7000.500	55.60	-7.8	47.80	82.30	34.50	PK+	H
4	10000.500	55.53	-6.17	49.36	82.30	32.94	PK+	H
5	13000.500	54.51	-4.51	50.00	82.30	32.30	PK+	H
6	17688.000	47.29	0.25	47.54	82.30	34.76	PK+	H

Note: Limit= -13dBm+95.25=82.25 dBuV/m


Mode:	BAND5-20450
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

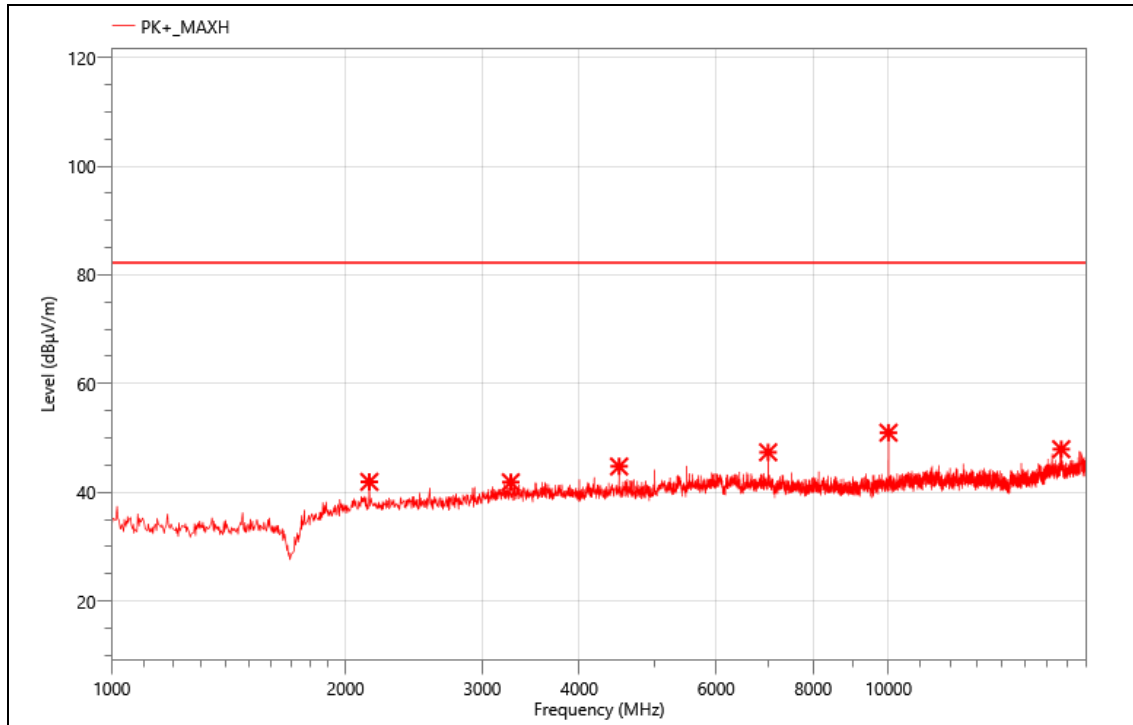

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2146.000	59.91	-17.99	41.92	82.30	40.38	PK+	H
2	3264.000	56.59	-14.75	41.84	82.30	40.46	PK+	H
3	4500.000	56.70	-11.95	44.75	82.30	37.55	PK+	H
4	6999.000	55.15	-7.79	47.36	82.30	34.94	PK+	H
5	10000.500	57.14	-6.17	50.97	82.30	31.33	PK+	H
6	16690.500	48.42	-0.49	47.93	82.30	34.37	PK+	H


Mode:	BAND5-20450
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

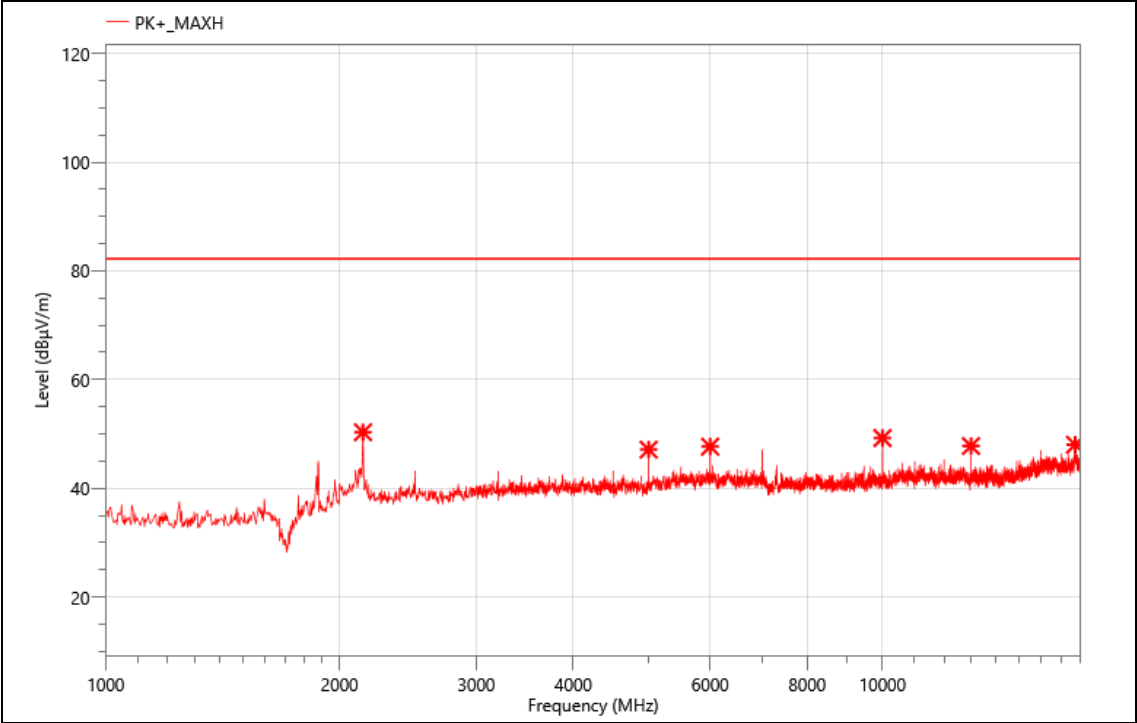

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2144.000	68.31	-18	50.31	82.30	31.99	PK+	V
2	4999.500	58.29	-11.18	47.11	82.30	35.19	PK+	V
3	6000.000	56.54	-8.87	47.67	82.30	34.63	PK+	V
4	10000.500	55.41	-6.17	49.24	82.30	33.06	PK+	V
5	13000.500	52.28	-4.51	47.77	82.30	34.53	PK+	V
6	17700.000	47.83	0.18	48.01	82.30	34.29	PK+	V


Mode:	BAND5-20525
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

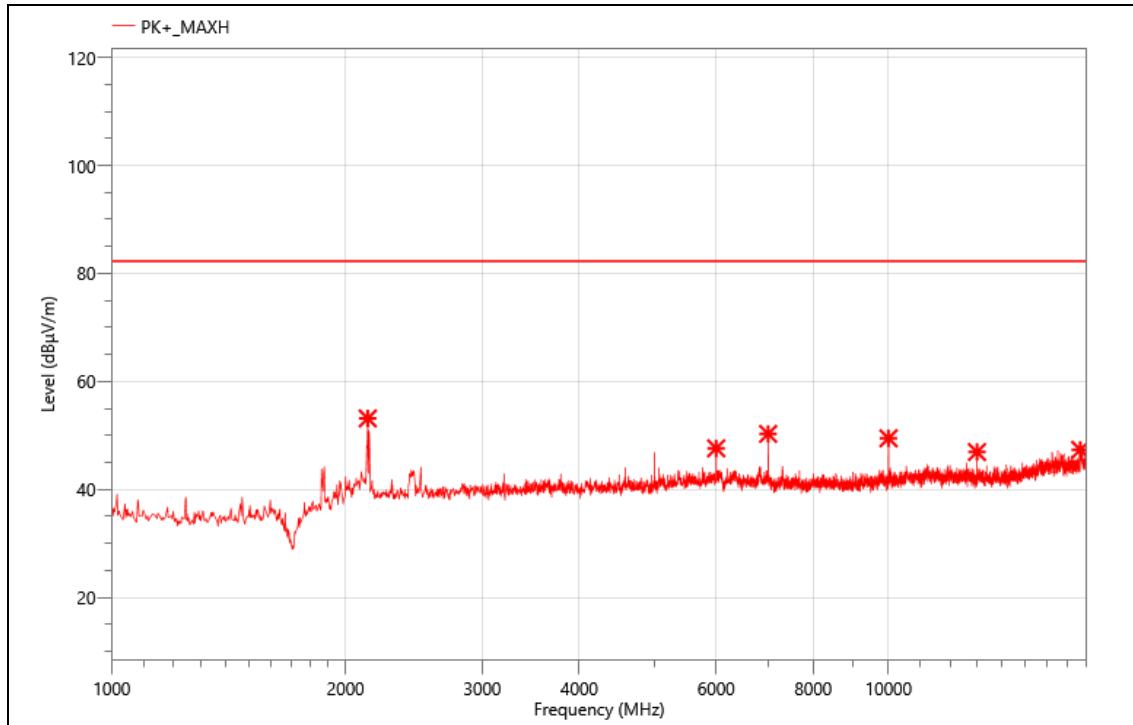

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2136.000	71.17	-18.02	53.15	82.30	29.15	PK+	V
2	6000.000	56.49	-8.87	47.62	82.30	34.68	PK+	V
3	6999.000	58.08	-7.79	50.29	82.30	32.01	PK+	V
4	10000.500	55.64	-6.17	49.47	82.30	32.83	PK+	V
5	13000.500	51.44	-4.51	46.93	82.30	35.37	PK+	V
6	17656.500	47.27	0.07	47.34	82.30	34.96	PK+	V


Mode:	BAND5-20525
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

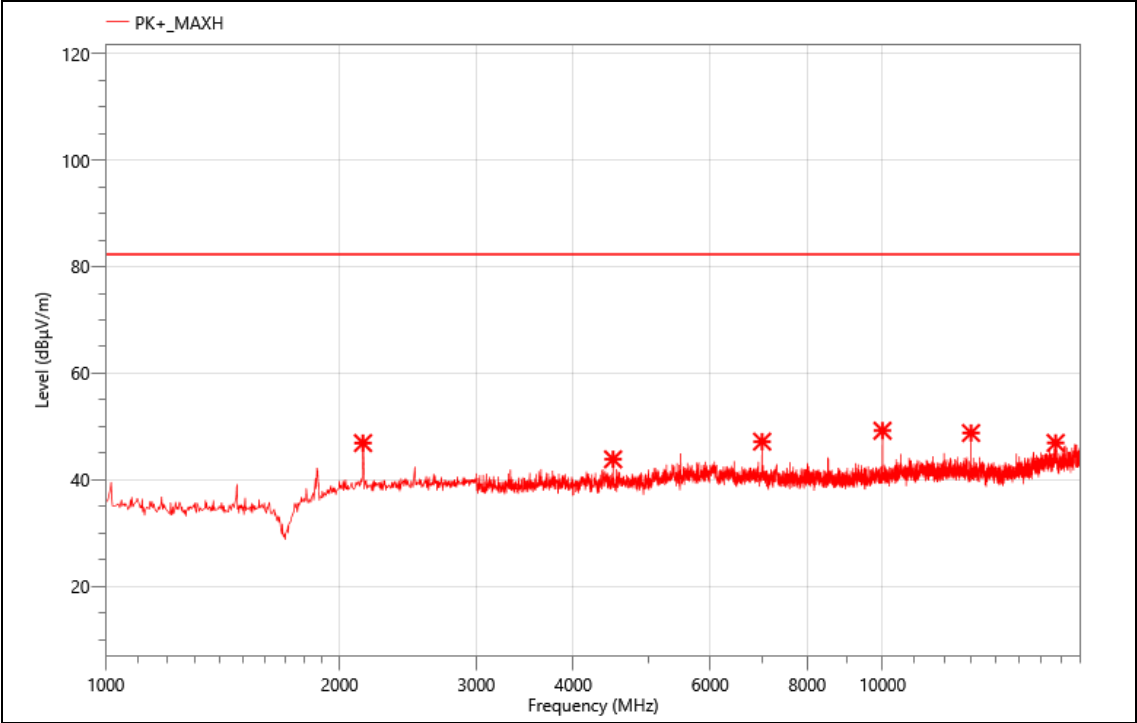

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2144.000	64.92	-18	46.92	82.30	35.38	PK+	H
2	4500.000	55.83	-11.95	43.88	82.30	38.42	PK+	H
3	6999.000	54.99	-7.79	47.20	82.30	35.10	PK+	H
4	10000.500	55.41	-6.17	49.24	82.30	33.06	PK+	H
5	13000.500	53.32	-4.51	48.81	82.30	33.49	PK+	H
6	16710.000	47.73	-0.77	46.96	82.30	35.34	PK+	H


Mode:	BAND5-20600
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

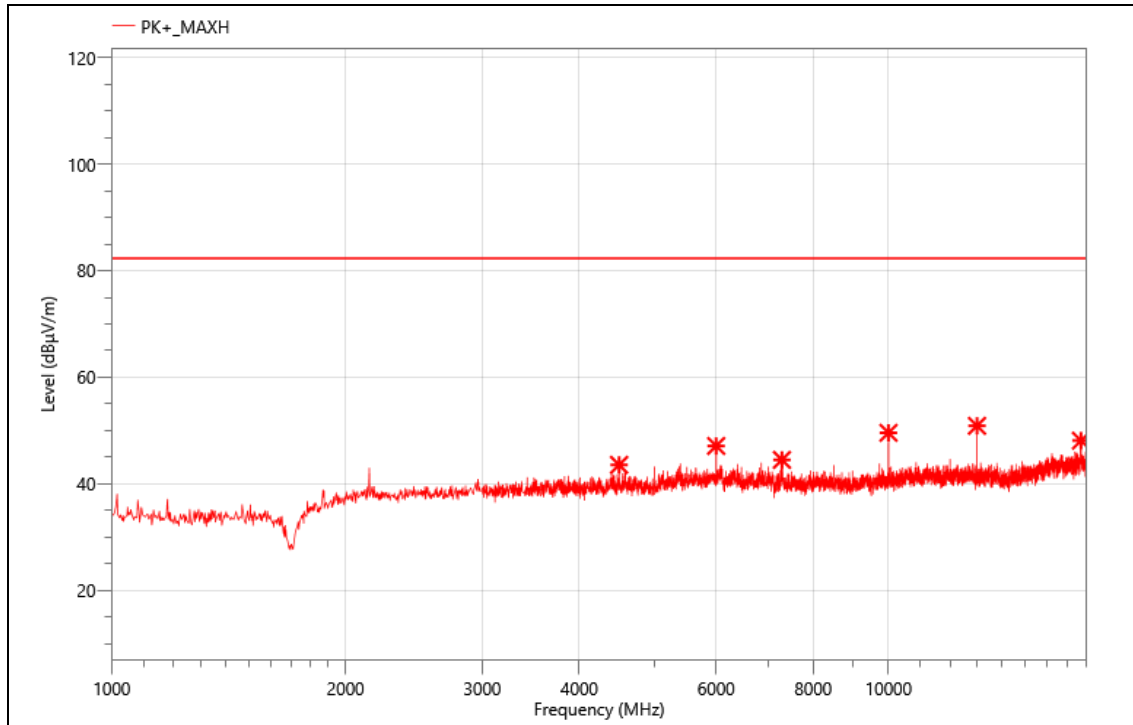

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	4500.000	55.54	-11.95	43.59	82.30	38.71	PK+	H
2	6000.000	56.01	-8.87	47.14	82.30	35.16	PK+	H
3	7291.500	52.27	-7.75	44.52	82.30	37.78	PK+	H
4	10000.500	55.77	-6.17	49.60	82.30	32.70	PK+	H
5	13000.500	55.42	-4.51	50.91	82.30	31.39	PK+	H
6	17694.000	47.92	0.21	48.13	82.30	34.17	PK+	H

Mode:	BAND5-20600
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

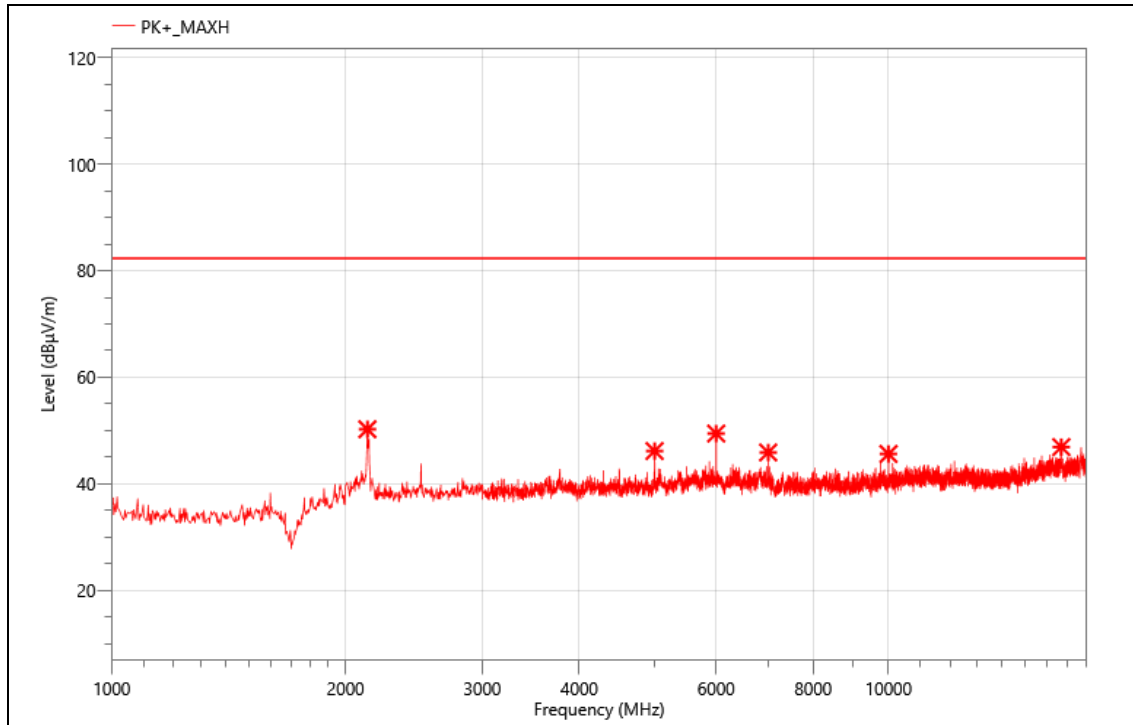


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2134.000	68.30	-18.03	50.27	82.30	32.03	PK+	V
2	4999.500	57.37	-11.18	46.19	82.30	36.11	PK+	V
3	6000.000	58.34	-8.87	49.47	82.30	32.83	PK+	V
4	7000.500	53.72	-7.8	45.92	82.30	36.38	PK+	V
5	10000.500	51.81	-6.17	45.64	82.30	36.66	PK+	V
6	16693.500	47.42	-0.49	46.93	82.30	35.37	PK+	V

Note: Limit= -13dBm+95.25=82.25 dBuV/m


Mode:	BAND7-20850
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

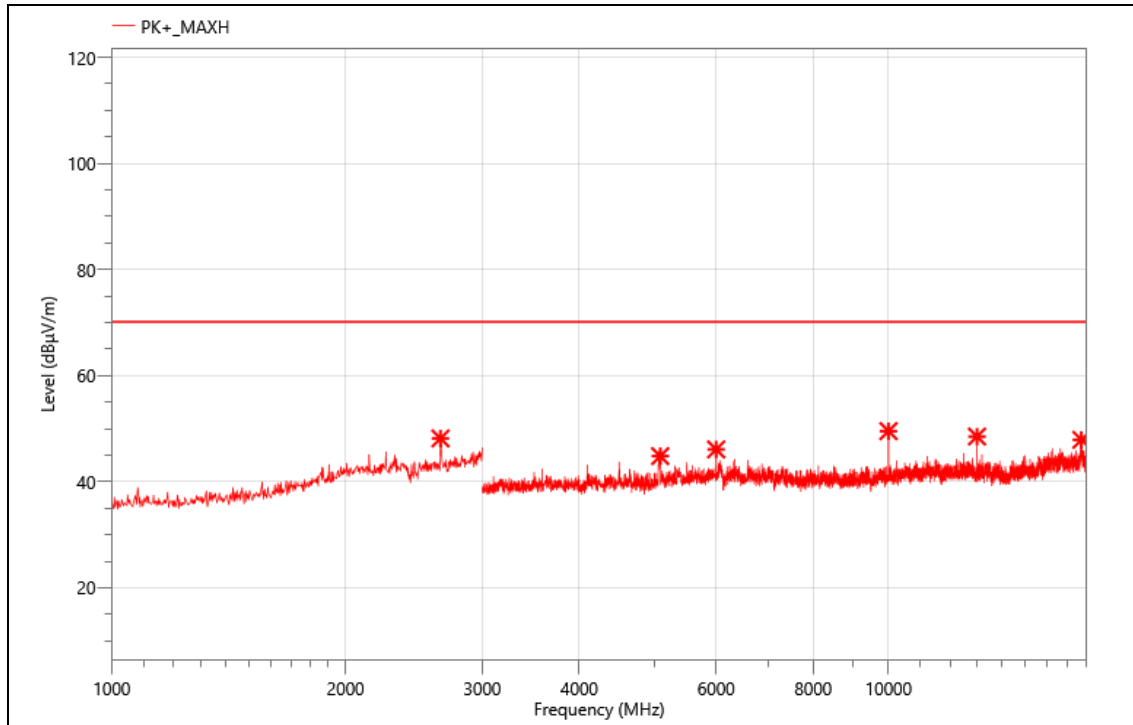

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2650.000	56.91	-8.73	48.18	70.25	22.07	PK+	H
2	5083.500	55.24	-10.39	44.85	70.25	25.40	PK+	H
3	6000.000	54.97	-8.87	46.10	70.25	24.15	PK+	H
4	10000.500	55.72	-6.17	49.55	70.25	20.70	PK+	H
5	13000.500	53.04	-4.51	48.53	70.25	21.72	PK+	H
6	17715.000	48.05	-0.14	47.91	70.25	22.34	PK+	H


Mode:	BAND7-20850
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

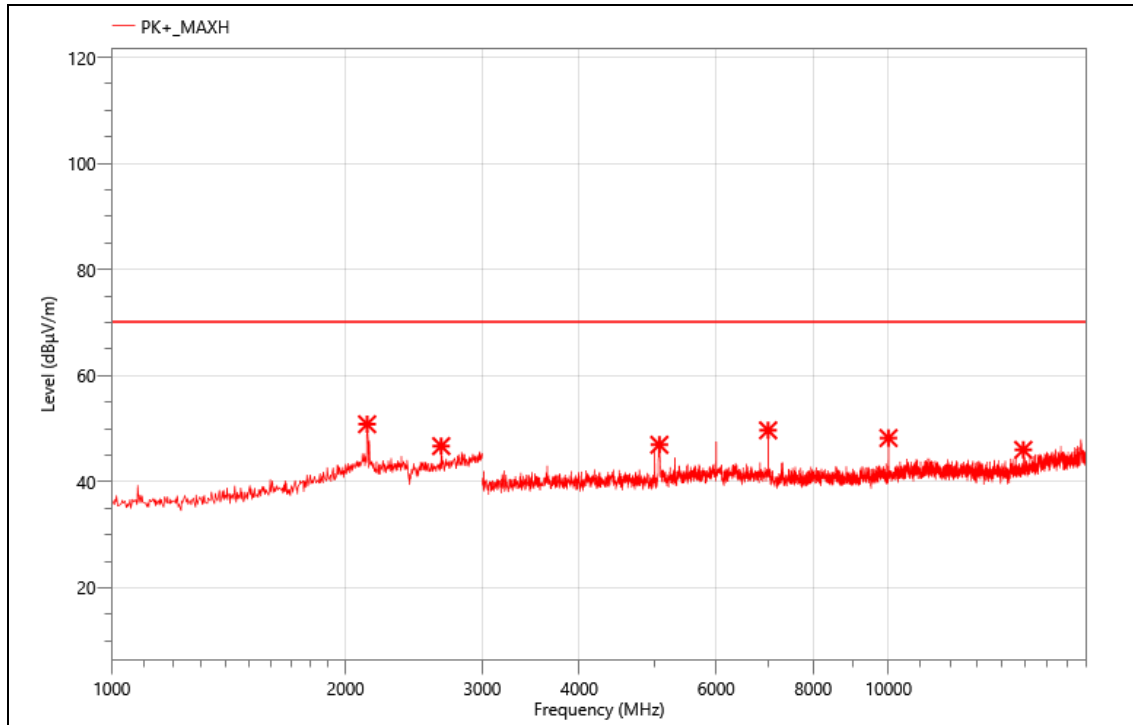

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2132.000	59.90	-9.05	50.85	70.25	19.40	PK+	V
2	2656.000	55.49	-8.76	46.73	70.25	23.52	PK+	V
3	5070.000	57.44	-10.46	46.98	70.25	23.27	PK+	V
4	6999.000	57.50	-7.79	49.71	70.25	20.54	PK+	V
5	10000.500	54.42	-6.17	48.25	70.25	22.00	PK+	V
6	14913.000	48.77	-2.75	46.02	70.25	24.23	PK+	V


Mode:	BAND7-21100
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

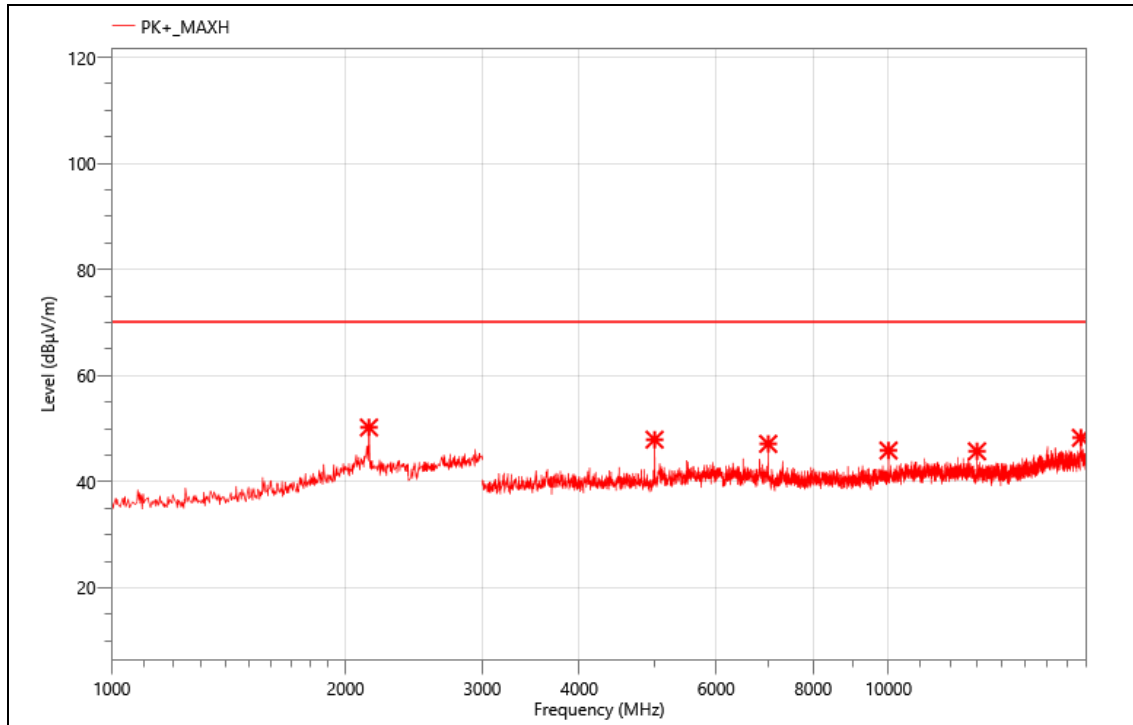

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2144.000	59.29	-9.05	50.24	70.25	20.01	PK+	V
2	4999.500	59.13	-11.18	47.95	70.25	22.30	PK+	V
3	7000.500	54.95	-7.8	47.15	70.25	23.10	PK+	V
4	10000.500	52.07	-6.17	45.90	70.25	24.35	PK+	V
5	13000.500	50.26	-4.51	45.75	70.25	24.50	PK+	V
6	17694.000	48.09	0.21	48.30	70.25	21.95	PK+	V


Mode:	BAND7-21100
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

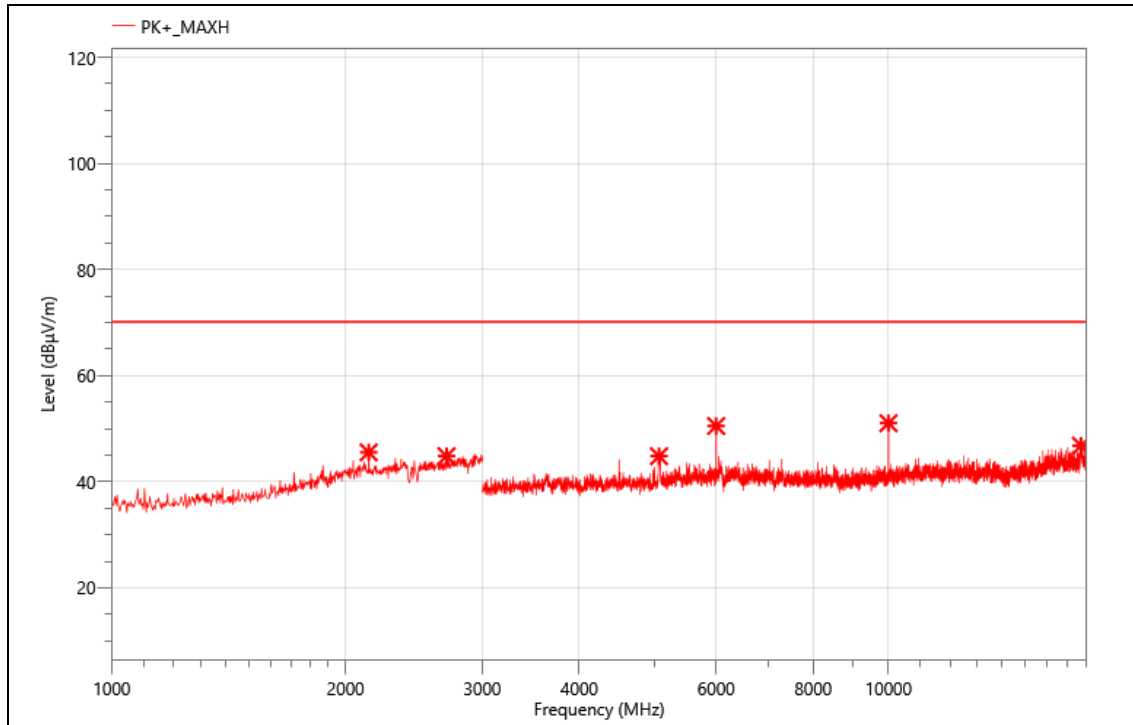

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2142.000	54.61	-9.05	45.56	70.25	24.69	PK+	H
2	2698.000	53.27	-8.42	44.85	70.25	25.40	PK+	H
3	5065.500	55.32	-10.49	44.83	70.25	25.42	PK+	H
4	6000.000	59.39	-8.87	50.52	70.25	19.73	PK+	H
5	10000.500	57.22	-6.17	51.05	70.25	19.20	PK+	H
6	17695.500	46.61	0.21	46.82	70.25	23.43	PK+	H


Mode:	BAND7-21350
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

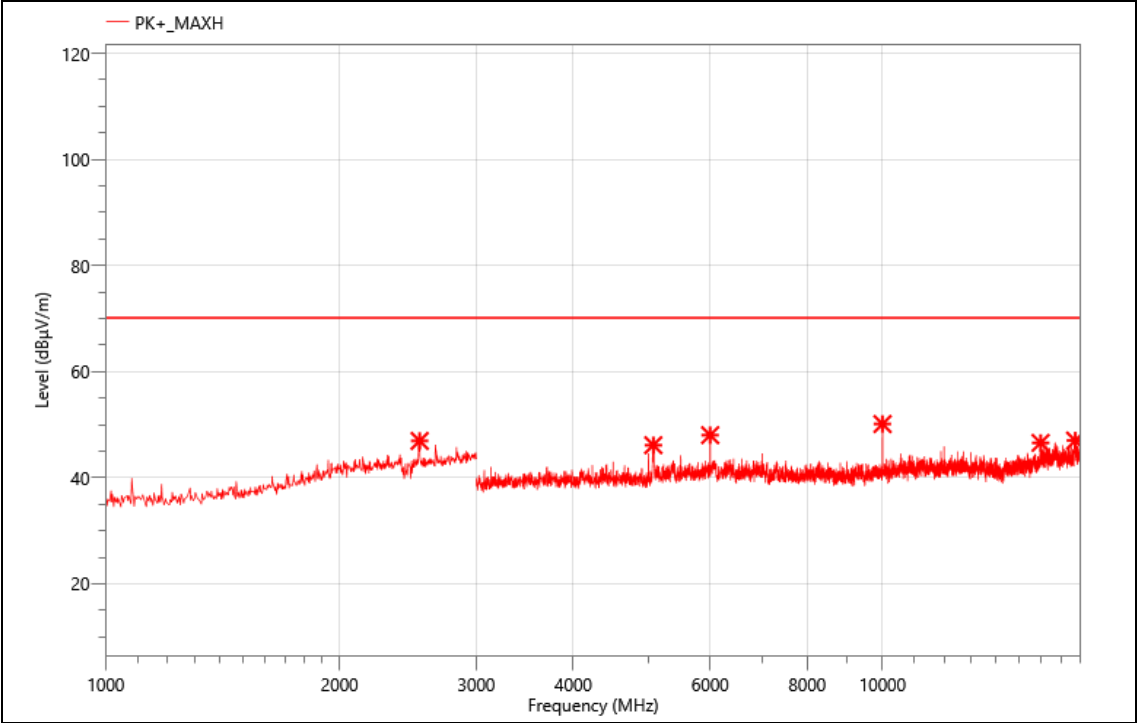

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2536.000	55.46	-8.51	46.95	70.25	23.30	PK+	H
2	5070.000	56.61	-10.46	46.15	70.25	24.10	PK+	H
3	6000.000	56.91	-8.87	48.04	70.25	22.21	PK+	H
4	10000.500	56.31	-6.17	50.14	70.25	20.11	PK+	H
5	15979.500	48.85	-2.26	46.59	70.25	23.66	PK+	H
6	17707.500	47.00	0.02	47.02	70.25	23.23	PK+	H

Mode:	BAND7-21350
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

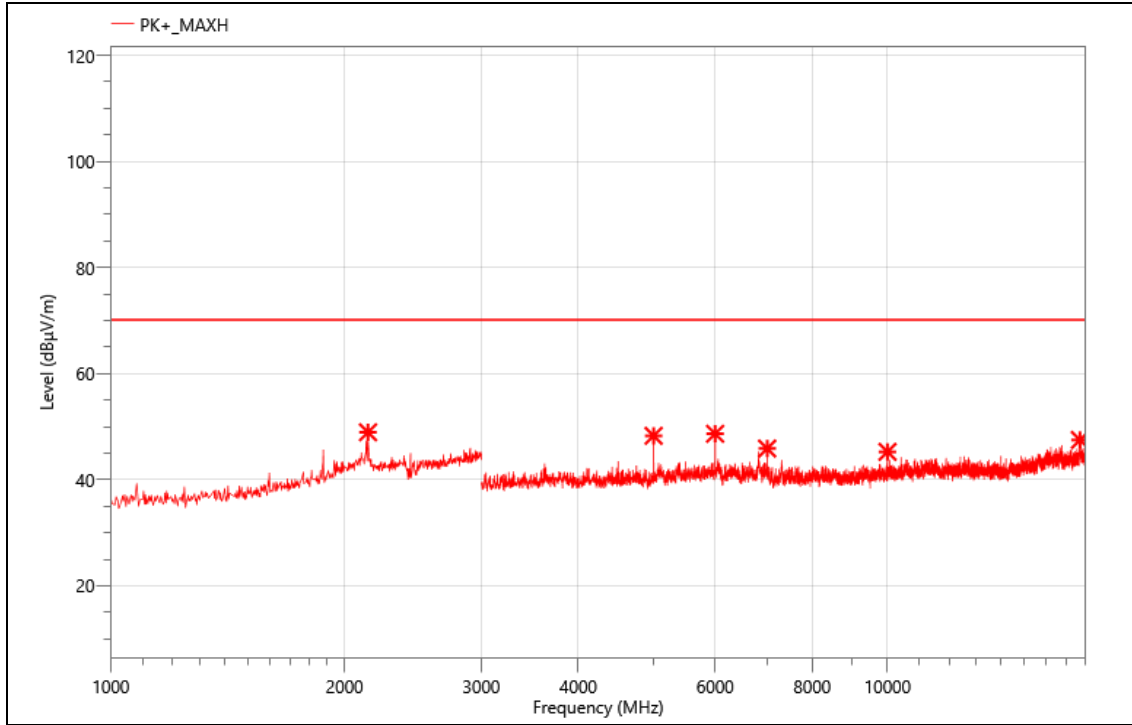


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2144.000	58.01	-9.05	48.96	70.25	21.29	PK+	V
2	4999.500	59.47	-11.18	48.29	70.25	21.96	PK+	V
3	6000.000	57.55	-8.87	48.68	70.25	21.57	PK+	V
4	7000.500	53.70	-7.8	45.90	70.25	24.35	PK+	V
5	10000.500	51.44	-6.17	45.27	70.25	24.98	PK+	V
6	17692.500	47.29	0.22	47.51	70.25	22.74	PK+	V

Note: Limit= -25dBm+95.25=70.25 dBuV/m


Mode:	BAND38-37850
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

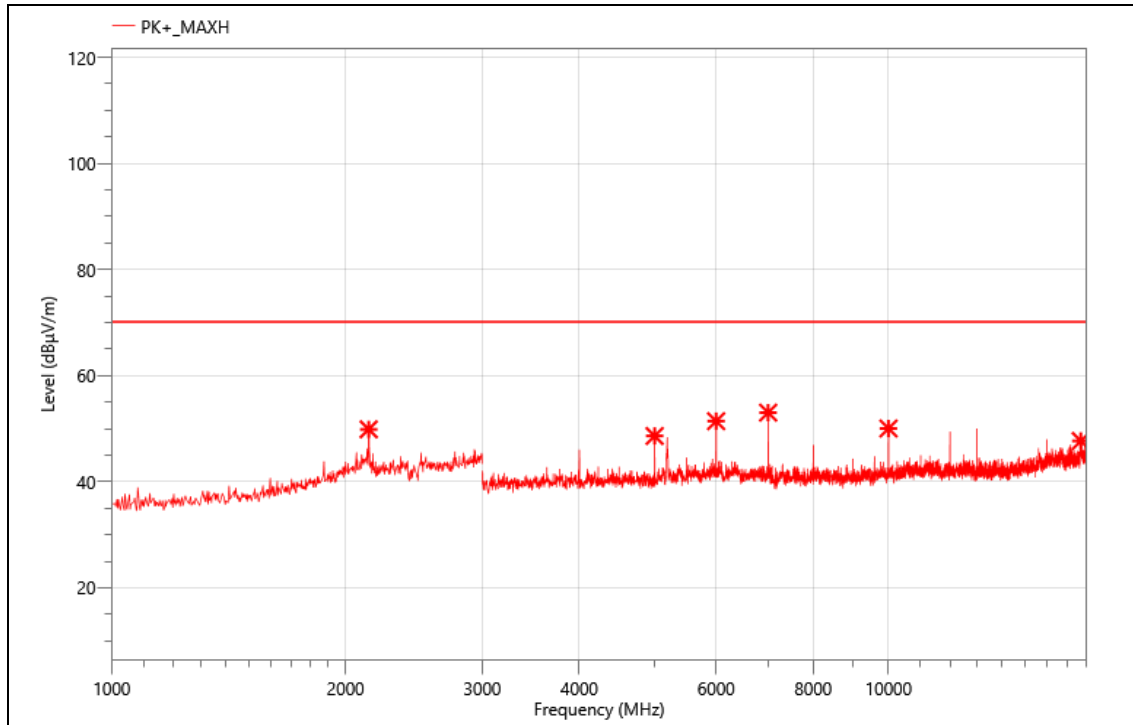

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2142.000	58.94	-9.05	49.89	70.25	20.36	PK+	V
2	4999.500	59.82	-11.18	48.64	70.25	21.61	PK+	V
3	6000.000	60.30	-8.87	51.43	70.25	18.82	PK+	V
4	6999.000	60.83	-7.79	53.04	70.25	17.21	PK+	V
5	10000.500	56.22	-6.17	50.05	70.25	20.20	PK+	V
6	17686.500	47.45	0.25	47.70	70.25	22.55	PK+	V


Mode:	BAND38-37850
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

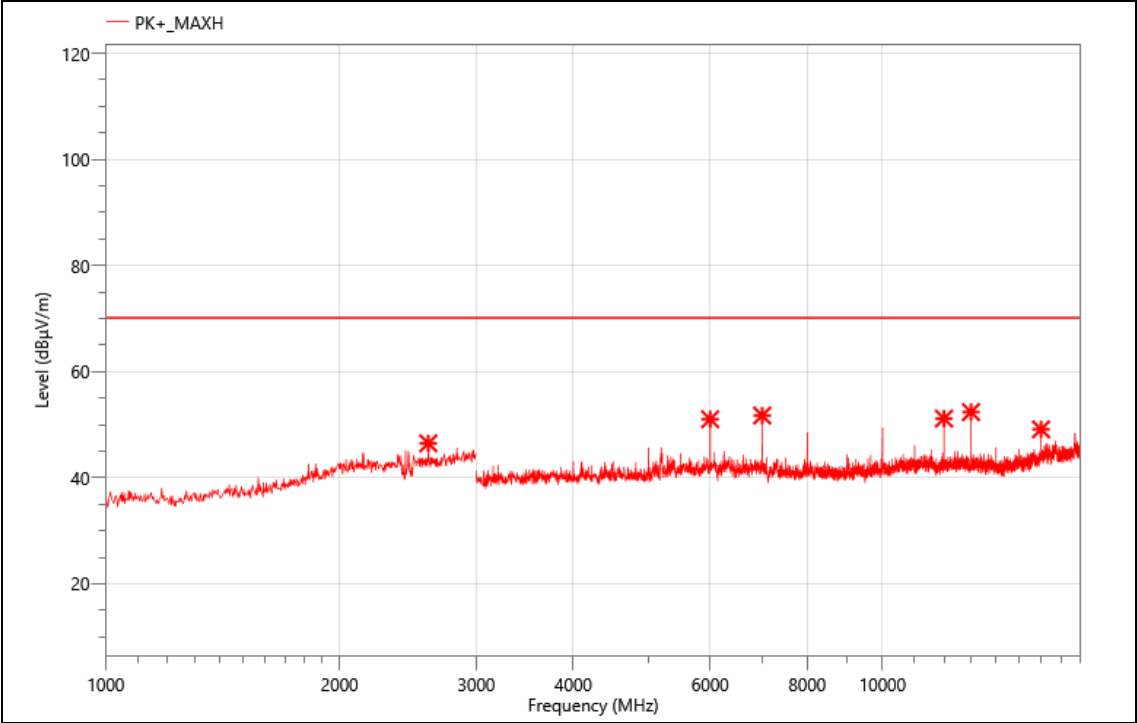

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2602.000	54.66	-8.17	46.49	70.25	23.76	PK+	H
2	6000.000	59.91	-8.87	51.04	70.25	19.21	PK+	H
3	7000.500	59.54	-7.8	51.74	70.25	18.51	PK+	H
4	12000.000	55.53	-4.36	51.17	70.25	19.08	PK+	H
5	13000.500	56.90	-4.51	52.39	70.25	17.86	PK+	H
6	16000.500	51.21	-2.08	49.13	70.25	21.12	PK+	H


Mode:	BAND38-38000
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

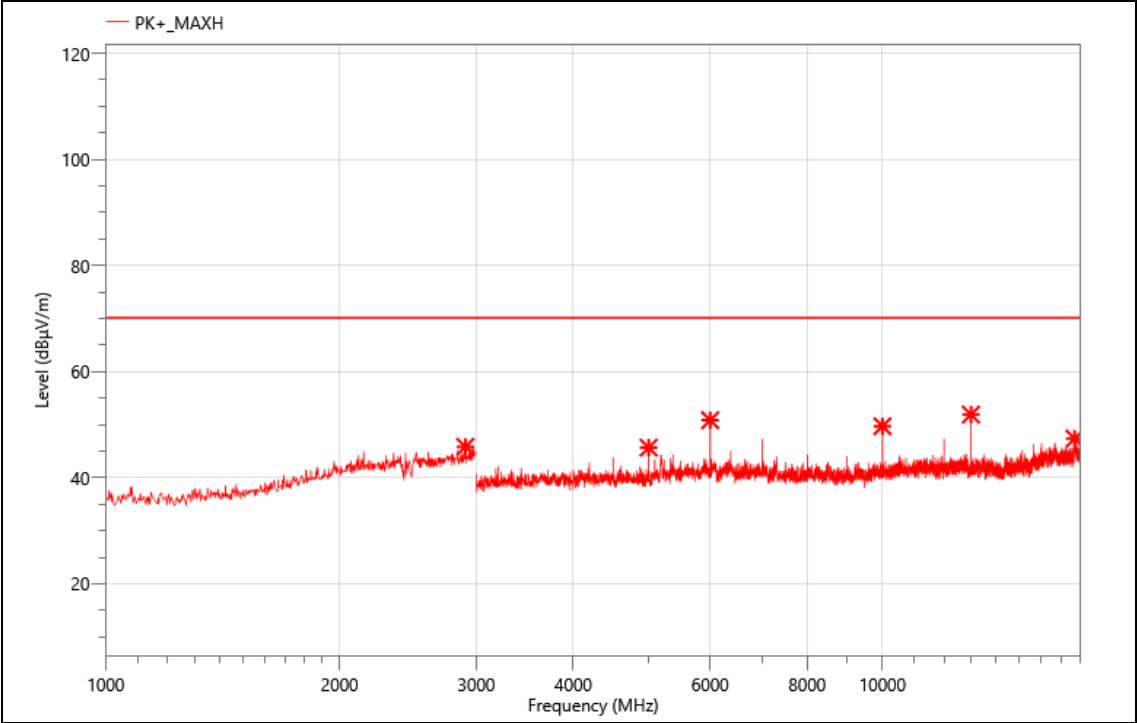

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2904.000	53.61	-7.77	45.84	70.25	24.41	PK+	H
2	4999.500	56.87	-11.18	45.69	70.25	24.56	PK+	H
3	6000.000	59.73	-8.87	50.86	70.25	19.39	PK+	H
4	10000.500	55.89	-6.17	49.72	70.25	20.53	PK+	H
5	13000.500	56.43	-4.51	51.92	70.25	18.33	PK+	H
6	17676.000	47.09	0.31	47.40	70.25	22.85	PK+	H


Mode:	BAND38-38000
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

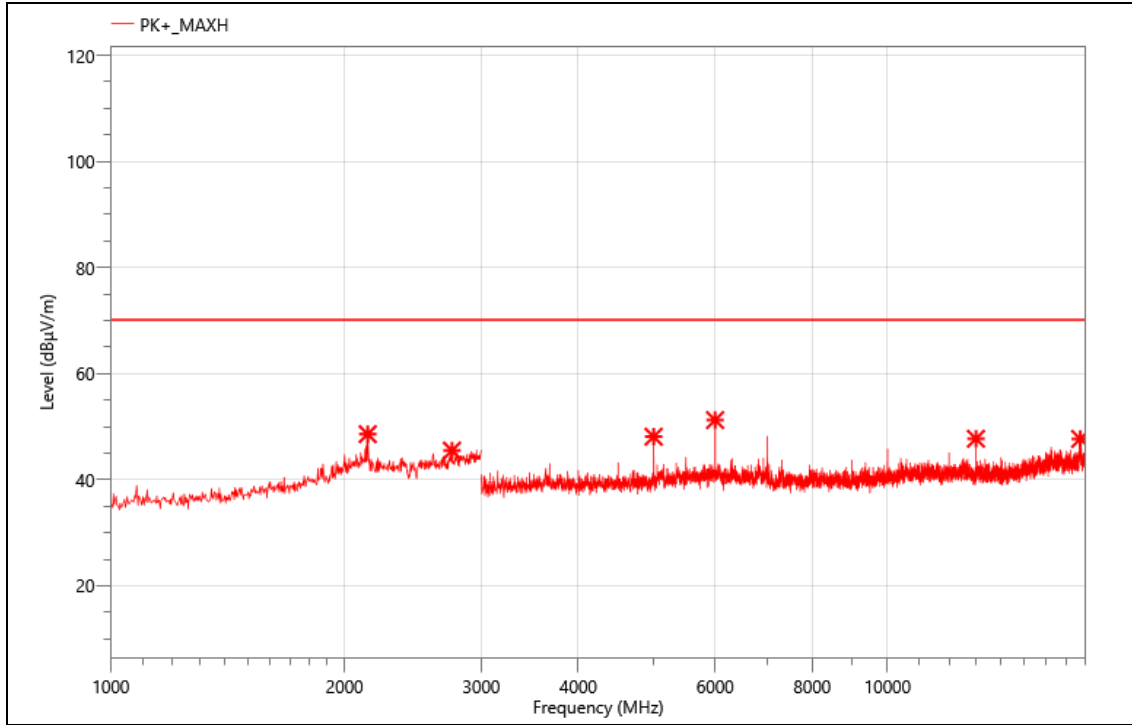

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2142.000	57.66	-9.05	48.61	70.25	21.64	PK+	V
2	2750.000	53.62	-8.11	45.51	70.25	24.74	PK+	V
3	4999.500	59.31	-11.18	48.13	70.25	22.12	PK+	V
4	6000.000	60.13	-8.87	51.26	70.25	18.99	PK+	V
5	13000.500	52.25	-4.51	47.74	70.25	22.51	PK+	V
6	17709.000	47.73	-0.02	47.71	70.25	22.54	PK+	V


Mode:	BAND38-38150
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

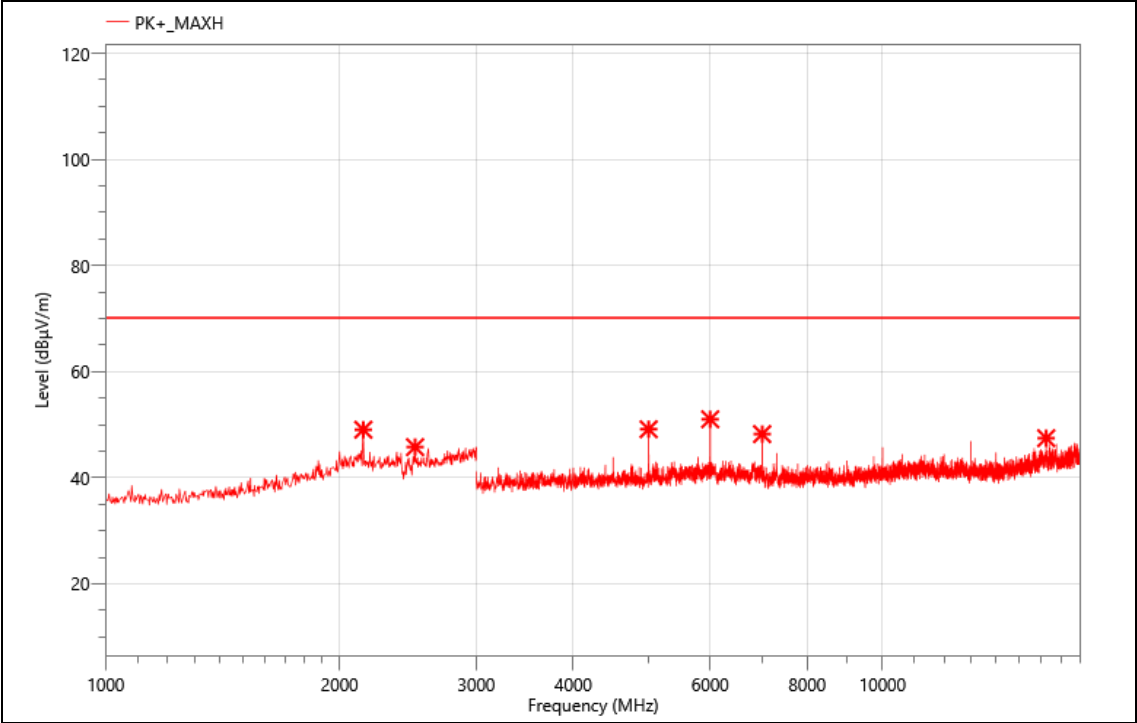

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2146.000	58.12	-9.05	49.07	70.25	21.18	PK+	V
2	2502.000	54.20	-8.41	45.79	70.25	24.46	PK+	V
3	4999.500	60.34	-11.18	49.16	70.25	21.09	PK+	V
4	6000.000	59.91	-8.87	51.04	70.25	19.21	PK+	V
5	7000.500	56.04	-7.8	48.24	70.25	22.01	PK+	V
6	16246.500	48.00	-0.53	47.47	70.25	22.78	PK+	V

Mode:	BAND38-38150
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

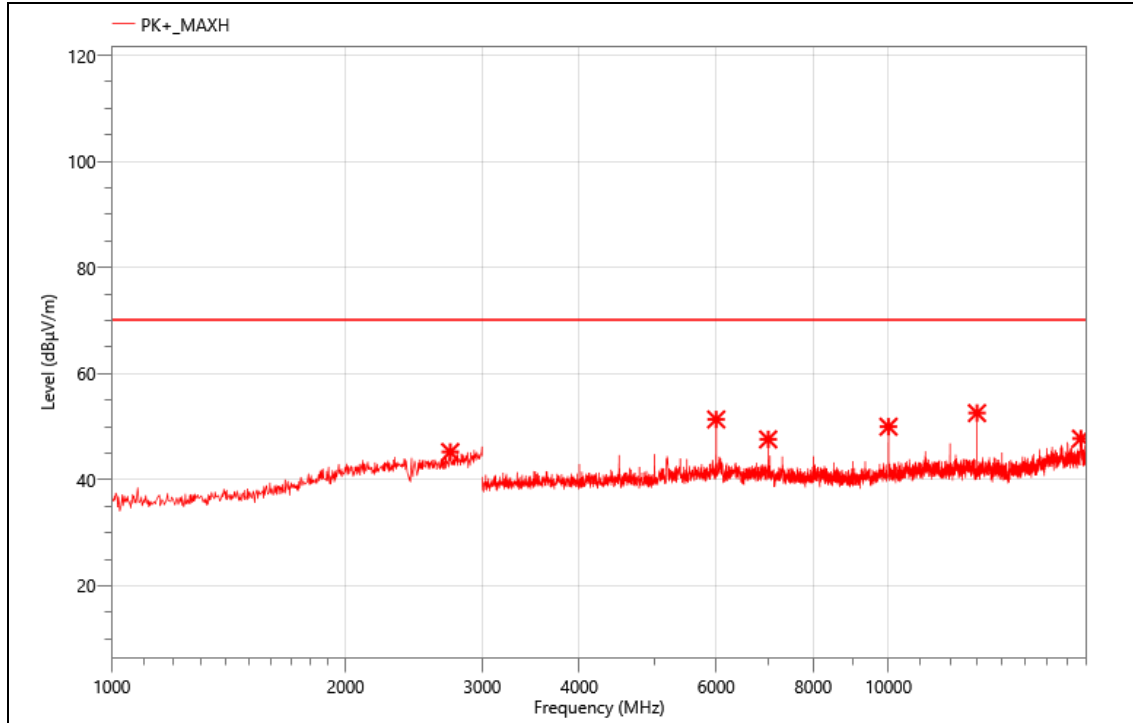


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2728.000	53.74	-8.5	45.24	70.25	25.01	PK+	H
2	6000.000	60.25	-8.87	51.38	70.25	18.87	PK+	H
3	7000.500	55.42	-7.8	47.62	70.25	22.63	PK+	H
4	10000.500	56.18	-6.17	50.01	70.25	20.24	PK+	H
5	13000.500	57.09	-4.51	52.58	70.25	17.67	PK+	H
6	17692.500	47.56	0.22	47.78	70.25	22.47	PK+	H

Note: Limit= -25dBm+95.25=70.25 dBuV/m


Mode:	BAND41-39750
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

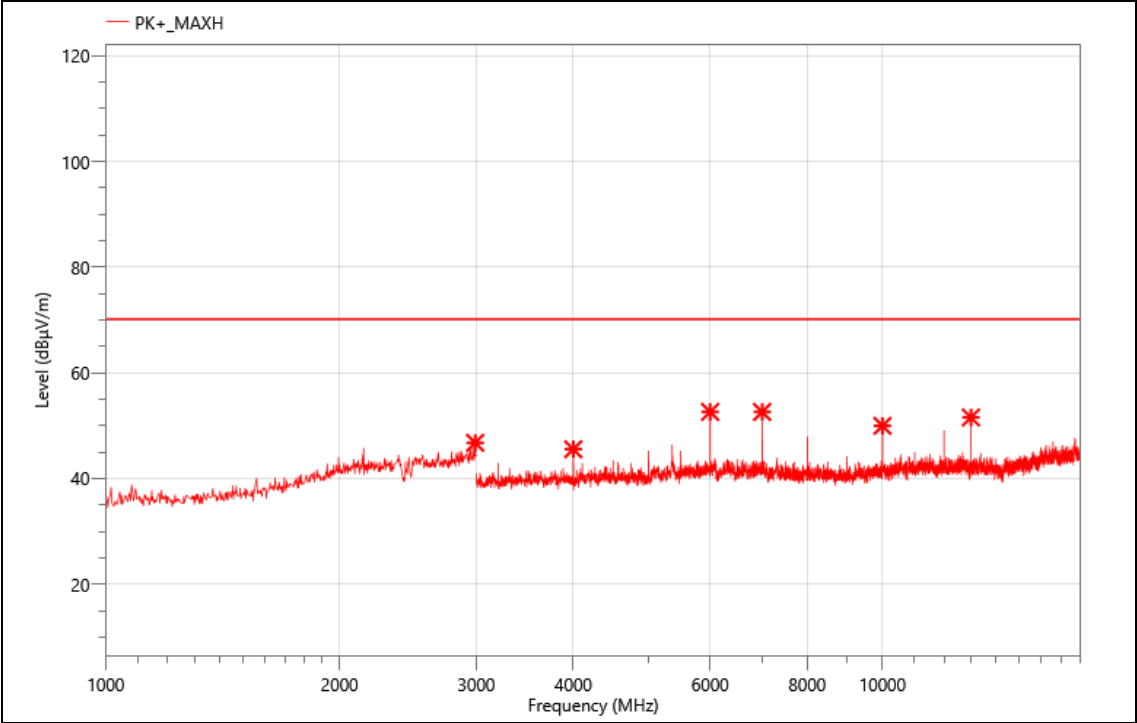

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2990.000	53.74	-6.98	46.76	70.25	23.49	PK+	H
2	3999.000	58.88	-13.34	45.54	70.25	24.71	PK+	H
3	6000.000	61.48	-8.87	52.61	70.25	17.64	PK+	H
4	7000.500	60.41	-7.8	52.61	70.25	17.64	PK+	H
5	10000.500	56.15	-6.17	49.98	70.25	20.27	PK+	H
6	13000.500	56.07	-4.51	51.56	70.25	18.69	PK+	H


Mode:	BAND41-39750
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

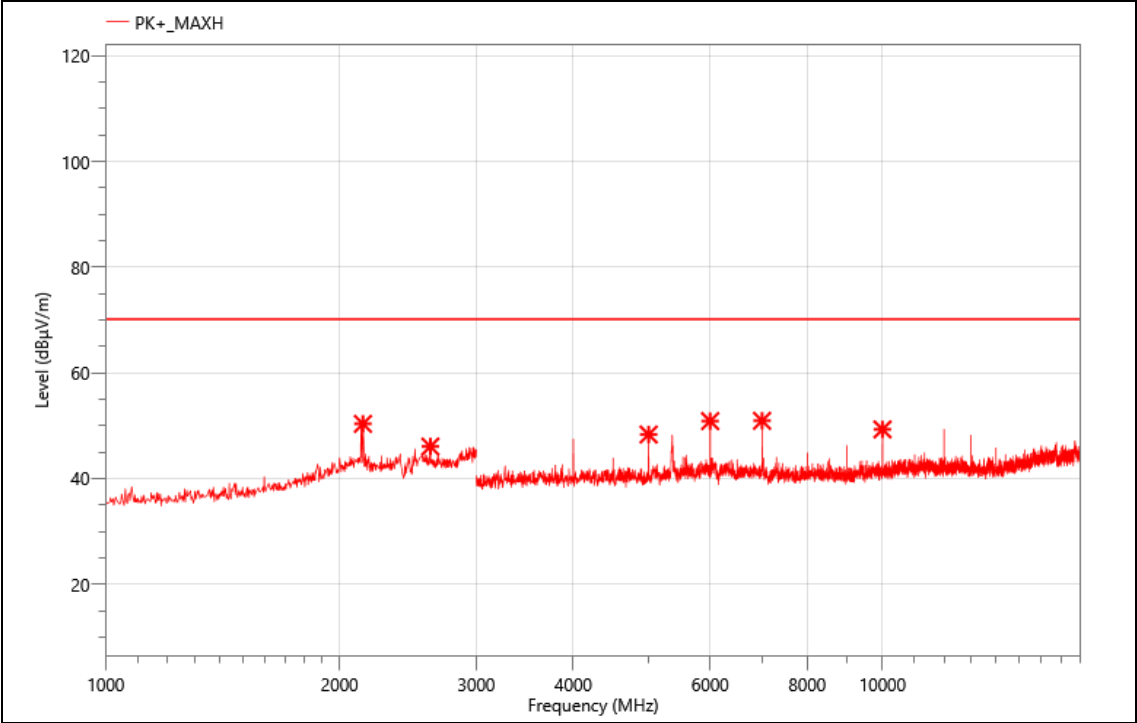

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2144.000	59.40	-9.05	50.35	70.25	19.90	PK+	V
2	2618.000	54.46	-8.4	46.06	70.25	24.19	PK+	V
3	4999.500	59.51	-11.18	48.33	70.25	21.92	PK+	V
4	6000.000	59.74	-8.87	50.87	70.25	19.38	PK+	V
5	6999.000	58.72	-7.79	50.93	70.25	19.32	PK+	V
6	10000.500	55.47	-6.17	49.30	70.25	20.95	PK+	V


Mode:	BAND41-40620
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

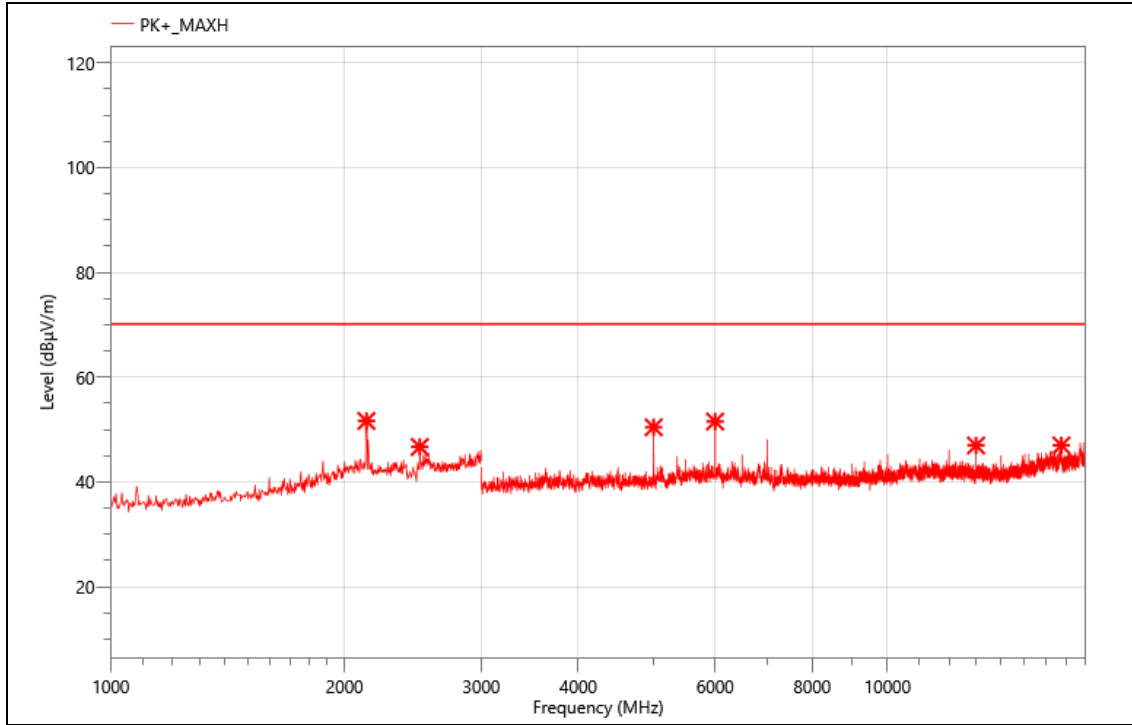

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2134.000	60.71	-9.05	51.66	70.25	18.59	PK+	V
2	2500.000	55.10	-8.41	46.69	70.25	23.56	PK+	V
3	4999.500	61.63	-11.18	50.45	70.25	19.80	PK+	V
4	6000.000	60.42	-8.87	51.55	70.25	18.70	PK+	V
5	13000.500	51.48	-4.51	46.97	70.25	23.28	PK+	V
6	16747.500	47.97	-0.98	46.99	70.25	23.26	PK+	V


Mode:	BAND41-40620
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

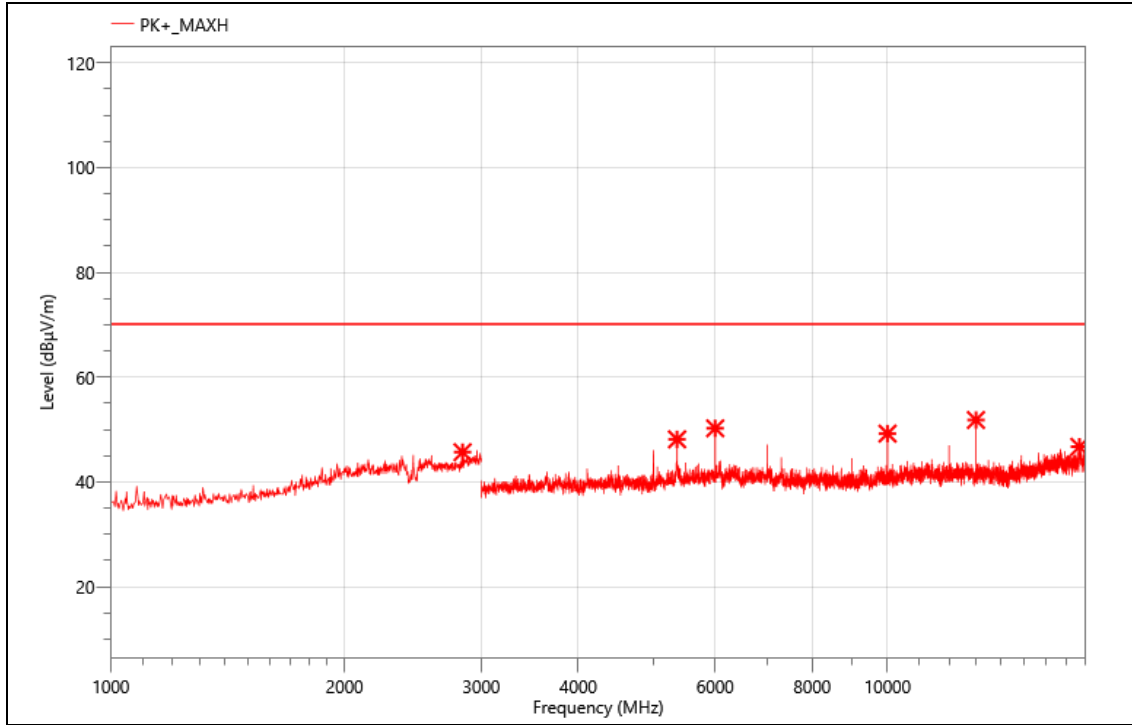

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2838.000	53.56	-7.86	45.70	70.25	24.55	PK+	H
2	5359.500	57.68	-9.53	48.15	70.25	22.10	PK+	H
3	6000.000	59.13	-8.87	50.26	70.25	19.99	PK+	H
4	10000.500	55.41	-6.17	49.24	70.25	21.01	PK+	H
5	13000.500	56.35	-4.51	51.84	70.25	18.41	PK+	H
6	17667.000	46.52	0.21	46.73	70.25	23.52	PK+	H


Mode:	BAND41-41490
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

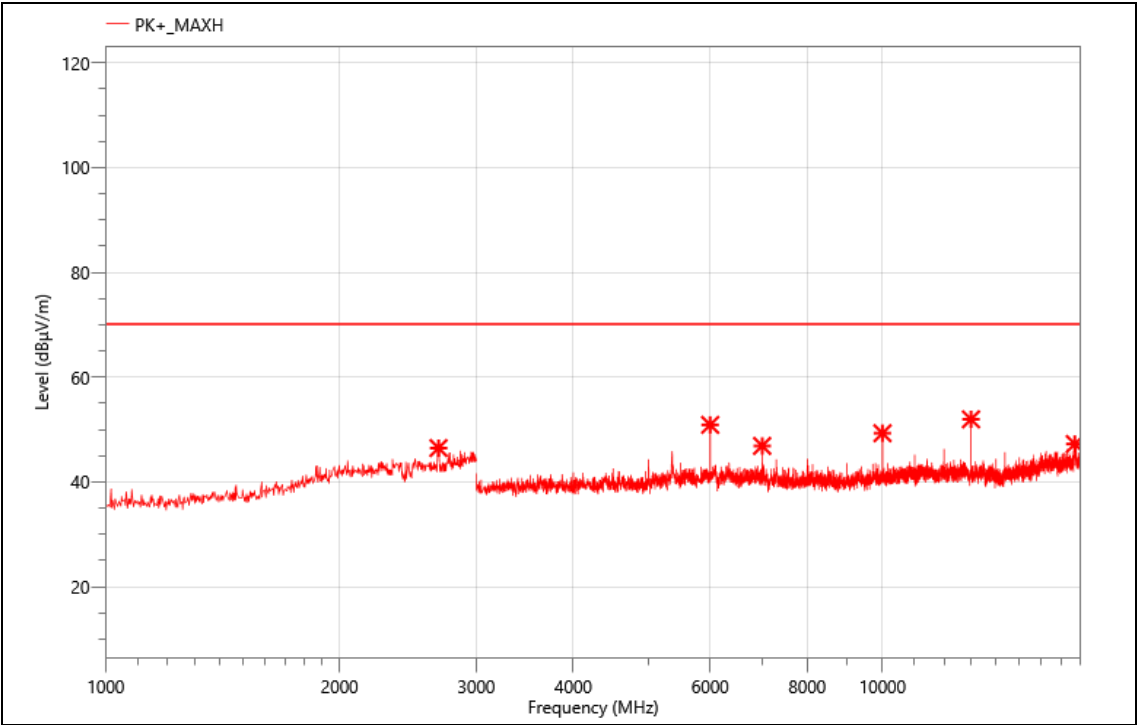

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Corr. (dB)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Det.	Pol.
1	2682.000	54.81	-8.33	46.48	70.25	23.77	PK+	H
2	6000.000	59.77	-8.87	50.90	70.25	19.35	PK+	H
3	7000.500	54.69	-7.8	46.89	70.25	23.36	PK+	H
4	10000.500	55.49	-6.17	49.32	70.25	20.93	PK+	H
5	13000.500	56.48	-4.51	51.97	70.25	18.28	PK+	H
6	17686.500	47.01	0.25	47.26	70.25	22.99	PK+	H

Mode:	BAND41-41490
Power:	Battery 3.7V
TE:	Berny
Date	2025/2/24
T/A/P	23.9°C/53%/101Kpa

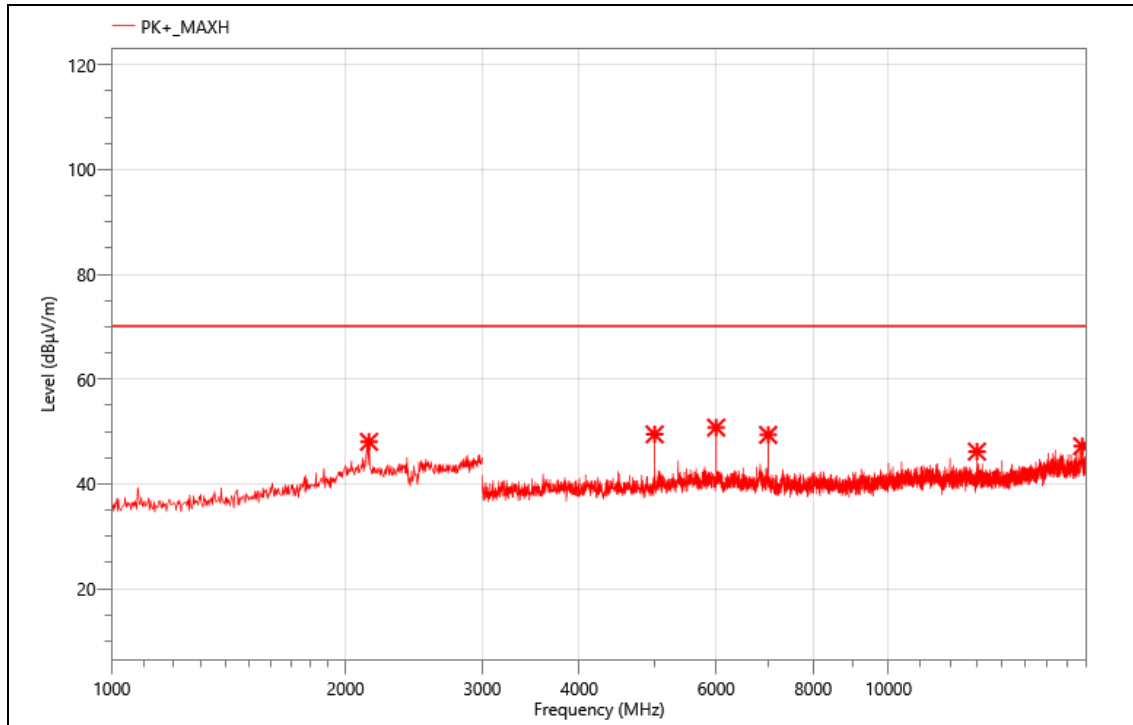

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Corr. (dB)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.
1	2144.000	57.10	-9.05	48.05	70.25	22.20	PK+	V
2	4999.500	60.66	-11.18	49.48	70.25	20.77	PK+	V
3	6000.000	59.64	-8.87	50.77	70.25	19.48	PK+	V
4	7000.500	57.18	-7.8	49.38	70.25	20.87	PK+	V
5	13000.500	50.71	-4.51	46.20	70.25	24.05	PK+	V
6	17760.000	47.70	-0.48	47.22	70.25	23.03	PK+	V

Note: Limit= -25dBm+95.25=70.25 dBuV/m