



# EMC TEST REPORT

**Report No. : EME-021030**

**Model No. : CBT1000**

**Issued Date : Sep. 25, 2002**

**Applicant : AboCom Systems, Inc.**  
**300 1F, No. 21, R&D Rd. II, SBIP, Hsin-Chu,**  
**Taiwan, R.O.C.**

**Test By : Intertek Testing Services Taiwan Ltd.**  
**No. 11, Ko-Tze-Nan Chia-Tung Li, Shiang-Shan District,**  
**Hsinchu, Taiwan, R.O.C.**

This test report consists of 23 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of ITS Laboratory. The test result in this report only applies to the tested sample.

Project Engineer

Jerry Liu

Reviewed By

Elton Chen



## Table of Contents

|                                                                      |    |
|----------------------------------------------------------------------|----|
| Summary of Tests .....                                               | 4  |
| 1. General information .....                                         | 5  |
| 1.1 Identification of the EUT .....                                  | 5  |
| 1.2 Additional information about the EUT .....                       | 5  |
| 1.3 Antenna description .....                                        | 6  |
| 1.4 Peripherals equipment.....                                       | 6  |
| 2. Test specifications.....                                          | 7  |
| 2.1 Test standard .....                                              | 7  |
| 2.2 Operation mode.....                                              | 7  |
| 2.4 Test equipment .....                                             | 8  |
| 3. 20dB Bandwidth test.....                                          | 9  |
| 3.1 Operating environment .....                                      | 9  |
| 3.2 Test setup & procedure .....                                     | 9  |
| 3.3 Measured data of modulated bandwidth test results.....           | 9  |
| 4. Carrier Frequency Separation test.....                            | 10 |
| 4.1 Operating environment .....                                      | 10 |
| 4.2 Test setup & procedure .....                                     | 10 |
| 4.3 Measured data of Carrier Frequency Separation test result.....   | 10 |
| 5. Number of hopping frequencies test.....                           | 11 |
| 5.1 Operating environment .....                                      | 11 |
| 5.2 Test setup & procedure .....                                     | 11 |
| 5.3 Measured data of number of hopping frequencies test result ..... | 11 |
| 6. Time of Occupancy (dwell time) test.....                          | 12 |
| 6.1 Operating environment .....                                      | 12 |
| 6.2 Test setup & procedure .....                                     | 12 |
| 7. Maximum Output Power test.....                                    | 13 |
| 7.1 Operating environment .....                                      | 13 |
| 7.2 Test setup & procedure .....                                     | 13 |
| 7.3 Measured data of Maximum Output Power test results.....          | 13 |
| 8. RF Antenna Conducted Spurious test.....                           | 14 |
| 8.1 Operating environment .....                                      | 14 |
| 8.2 Test setup & procedure .....                                     | 14 |



# Intertek Testing Services

## ETL SEMKO

FCC ID. : MQ4CTB1K

Report No.: EME-021030

Page 3 of 23

|                                                                                 |    |
|---------------------------------------------------------------------------------|----|
| 8.3 Measured data of the highest RF Antenna Conducted Spurious test result..... | 14 |
| 9. Radiated Emission test.....                                                  | 15 |
| 9.1 Operating environment .....                                                 | 15 |
| 9.2 Test setup & procedure .....                                                | 15 |
| 9.3 Emission limits.....                                                        | 16 |
| 9.4 Radiated spurious emission test data .....                                  | 17 |
| 9.4.1 Measurement results: frequencies equal to or less than 1 GHz .....        | 17 |
| 9.4.2 Measurement results: frequency above 1GHz .....                           | 18 |
| 10. Emission on the band edge §FCC 15.247(C) .....                              | 21 |
| 11. Power Line Conducted Emission test §FCC 15.207.....                         | 22 |
| 11.1 Operating environment .....                                                | 22 |
| 11.2 Test setup & procedure .....                                               | 22 |
| 11.3 Power Line Conducted Emission test data.....                               | 23 |



**Summary of Tests**

**Bluetooth CompactFlash card -Model: CBT1000**

**FCC ID: MQ4CBT1K**

| Test                                | Reference      | Results  |
|-------------------------------------|----------------|----------|
| Maximum Output Power test           | 15.247(b)      | Complies |
| Carrier Frequency Separation test   | 15.247(a)(1)   | Complies |
| Number of hopping frequencies test  | 15.247(a)(1)   | Complies |
| Time of Occupancy (dwell time) test | 15.247(a)(1)   | Complies |
| 20dB Bandwidth test                 | 15.247(a)(1)   | Complies |
| RF Antenna Conducted Spurious test  | 15.247(c)      | Complies |
| Radiated Spurious Emission test     | 15.205, 15.209 | Complies |
| Power Line Conducted Emission test  | 15.207         | Complies |



## 1. General information

### 1.1 Identification of the EUT

|                           |                                    |
|---------------------------|------------------------------------|
| Manufacturer              | : AboCom System, Inc.              |
| Product                   | : Bluetooth CompactFlash card      |
| Model No.                 | : CBT1000                          |
| FCC ID.                   | : MQ4CBT1K                         |
| Frequency Range           | : 2402MHz to 2480MHz               |
| Channel Number            | : 79                               |
| Frequency of Each Channel | : $2402 + k$ (MHz), $k: 0 \sim 78$ |
| Type of Modulation        | : GFSK                             |
| Power Supply              | : 3.3/5Vdc from Notebook           |
| Power Cord                | : N/A                              |
| Sample Received           | : Sep. 5, 2002                     |
| Test Date(s)              | : Sep. 5, 2002 to Sep. 12, 2002    |

A FCC DoC report has been generated for the client.

### 1.2 Additional information about the EUT

The EUT allows user to make short-range wireless connections between Bluetooth devices such as cellular phones, personal digital assistants (PDA), and desktop and notebook computers.

The EUT uses radio transmission, voice and data are transmitted almost immediately. Bluetooth™ transmission ensures both protection from interference and secure data transfers. It helps people share and access the information that's important to them more easily.

For more detail features, please refer to User's manual as file name "Installation guide.pdf"



### 1.3 Antenna description

The EUT uses a permanently connected antenna.

Antenna Gain : 1.74dBi max

Antenna Type : Internal antenna

Connector Type : N/A

### 1.4 Peripherals equipment

| Peripherals | Manufacturer | Product No. | Serial No.      | FCC ID              |
|-------------|--------------|-------------|-----------------|---------------------|
| Notebook    | Twinhead     | P79T        | H0905483        | FCC DoC<br>Approved |
| Printer     | HP           | C2642A      | TH86K1N2ZB      | FCC DoC<br>Approved |
| Modem       | Dynalink     | V1456VQE    | 00V230A00051494 | FCC DoC<br>Approved |



## **2. Test specifications**

### **2.1 Test standard**

The EUT was performed according to the procedures in FCC Part 15 Subpart C Section §15.207 、 §15.209 、 §15.247 and ANSI C63.4/1992.

The AC power conducted emissions was invested over the frequency range from 0.45MHz to 30MHz using a receiver bandwidth of 9kHz. (15.207 paragraph)

Radiated emissions were invested cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading recorded also on the report.

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of this frequency band were all meet limit requirement, thus we evaluate the EUT pass the specified test.

The EUT setup configurations please refer to the photo of test configuration in item.

### **2.2 Operation mode**

Plug the EUT into notebook via a CF extended card. Turn on the notebook power run the test program “Blue test.exe” which provided by manufacture.

The EUT was continuously transmit during the test.



# Intertek Testing Services

## ETL SEMKO

FCC ID. : MQ4CTB1K

Report No.: EME-021030

Page 8 of 23

### 2.4 Test equipment

| Equipment           | Brand           | Frequency range | Model No. | Series No. | Cal.Date      |
|---------------------|-----------------|-----------------|-----------|------------|---------------|
| EMI Test Receiver   | Rohde & Schwarz | 9kHz~2.75GHz    | ESCS 30   | 825788/014 | May 24, 2002  |
| EMI Test Receiver   | Rohde & Schwarz | 20Hz~26.5GHz    | ESMI      | 825428/005 | June 10, 2002 |
| Spectrum Analyzer   | Rohde & Schwarz | 9kHz~30GHz      | FSP 30    | 100137     | July 10, 2002 |
| Spectrum Analyzer   | Rohde & Schwarz | 20Hz~40GHz      | FSEK 30   | 100189     | June 4, 2002  |
| Horn Antenna        | EMCO            | 1GHz~18GHz      | 3115      | 9906-5890  | Sep. 19, 2002 |
| Horn Antenna        | SCHWARZBECK     | 14GHz~40GHz     | BBHA 9170 | 159        | June 20, 2002 |
| Bilog Antenna       | SCHWARZBECK     | 25MHz~1.7GHz    | VULB 9160 | 3111       | June 20, 2002 |
| Turn Table          | HDGmbH          | N/A             | DS 420S   | 420/669/01 | N/A           |
| Antenna Tower       | HDGmbH          | N/A             | MA 240    | 240/573    | N/A           |
| Microwave Amplifier | Agilent         | 2GHz~26.5GHz    | 8348A     | 3111A00567 | Dec. 20, 2001 |
| RF Power Meter      | Boonton         | 10kHz~100GHz    | 4231A     | 79401      | May 22, 2002  |
| Power Sensor        | Boonton         | 30MHz~8GHz      | 51011-EMC | 32482      | May 25, 2002  |

Note:

1. The calibration interval of the above instruments is 12 months.



### 3. 20dB Bandwidth test

#### 3.1 Operating environment

Temperature: 20 °C  
Relative Humidity: 59 %

#### 3.2 Test setup & procedure

The 20dB bandwidth per FCC § 15.247(a)(1)(i) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at 100 kHz, the video bandwidth  $\geq$  RBW, and the SPAN may equal to approximately 2 to 3 times the 20dB bandwidth. The test was performed at 3 channels (lowest, middle and highest channel). The maximum 20dB modulation bandwidth is in the following Table.

See 20dB Bbandwidth plot as file name “20dB Bandwidth plot.pdf”

#### 3.3 Measured data of modulated bandwidth test results

| Channel | Frequency (MHz) | Bandwidth (kHz) | Limit  |
|---------|-----------------|-----------------|--------|
| Low     | 2401.988        | 278             | 500kHz |
| Middle  | 2440.994        | 280             | 500kHz |
| High    | 2479.990        | 282             | 500kHz |

\* The EUT has its hopping function disable.



#### 4. Carrier Frequency Separation test

##### 4.1 Operating environment

Temperature: 20 °C  
Relative Humidity: 59 %

##### 4.2 Test setup & procedure

The carrier frequency separation per FCC §15.247(a)(1) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at  $\geq 1\%$  of the span, the video bandwidth  $\geq$  RBW, and the SPAN was wide enough to capture the peaks of two adjacent channels. The carrier frequency separation result is in the following Table.

See Carrier Frequency Separation plot as file name “Carrier Frequency Separation plot.pdf”

##### 4.3 Measured data of Carrier Frequency Separation test result

| Channel | Frequency (MHz) | Measurement<br>Frequency separation<br>(MHz) |
|---------|-----------------|----------------------------------------------|
| 1       | 2401.992        | 1                                            |
| 2       | 2402.992        |                                              |

\* The EUT has its hopping function enable.



## 5. Number of hopping frequencies test

### 5.1 Operating environment

Temperature: 20 °C  
Relative Humidity: 59 %

### 5.2 Test setup & procedure

The number of hopping frequencies per FCC § 15.247(a)(1) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at  $\geq 1\%$  of the span, the video bandwidth  $\geq$  RBW, and the SPAN was the frequency band of operation. The carrier frequency separation result is in the following Table.

See number of hopping frequencies plot as file name “number of hopping frequencies plot.pdf”

### 5.3 Measured data of number of hopping frequencies test result

| Frequency Range (MHz) | Number of hopping frequencies | Total hopping channels |
|-----------------------|-------------------------------|------------------------|
| 2400 ~ 2428.5         | 27                            | 79                     |
| 2429 ~ 2454.5         | 26                            |                        |
| 2455 ~ 2483.5         | 26                            |                        |

\* The EUT has its hopping function enable.



## 6. Time of Occupancy (dwell time) test

### 6.1 Operating environment

|                    |    |    |
|--------------------|----|----|
| Temperature:       | 20 | °C |
| Relative Humidity: | 59 | %  |

### 6.2 Test setup & procedure

The time of occupancy (dwell time) per FCC § 15.247(a)(1) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at 1MHz, the video bandwidth  $\geq$  RBW, and the zero span function of spectrum analyzer was enable. The EUT has its hopping function enable.

The time of occupancy (Dwell time) is  $(31 \times 400\text{us})(\text{dwell time in 3 sec}) \times 10 = 124\text{ms}$   
 $< 0.4\text{s}$  in 30sec.

See time of occupancy (dwell time) plot as file name “Time of Occupancy (dwell time).pdf”



## 7. Maximum Output Power test

### 7.1 Operating environment

Temperature: 22 °C  
Relative Humidity: 60 %

### 7.2 Test setup & procedure

The power output per FCC §15.247(b) was measured on the EUT using a 50 ohm SMA cable connected to power meter via power sensor. Power was read directly and cable loss correction (1dB) was added to the reading to obtain power at the EUT antenna terminals. The test was performed at 3 channels (lowest, middle and highest channel).

### 7.3 Measured data of Maximum Output Power test results

| Channel | Frequency<br>(MHz) | C.B.L.<br>(dB) | Reading<br>(dBm) | Power Output |       | Limit<br>(W) |
|---------|--------------------|----------------|------------------|--------------|-------|--------------|
|         |                    |                |                  | (dBm)        | (mW)  |              |
| Lowest  | 2402.00            | 1              | 3.41             | 4.41         | 2.760 | 1            |
| Middle  | 2441.00            | 1              | 3.87             | 4.87         | 3.069 | 1            |
| Highest | 2480.00            | 1              | 2.28             | 3.28         | 2.128 | 1            |

\* The EUT has its hopping function disable.



## 8. RF Antenna Conducted Spurious test

### 8.1 Operating environment

Temperature: 20 °C  
Relative Humidity: 59 %

### 8.2 Test setup & procedure

The measurements were performed from 30MHz to 25GHz RF antenna conducted per FCC 15.247 (c) was measured from the EUT antenna port using a 50ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 300 kHz.

Harmonics and spurious noise must be at least 20dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The table below is the results from the highest emission for each channel within the authorized band. This table was used to determine the spurious limits for each channel.

See RF Antenna Conducted plot as file name “RF Antenna Conducted plot.pdf”

### 8.3 Measured data of the highest RF Antenna Conducted Spurious test result

| Channel | Max Spurious level<br>at<br>Frequency<br>(MHz) | Spurious<br>Emission level<br>(dBuV) | Limit<br>(dBuV) |
|---------|------------------------------------------------|--------------------------------------|-----------------|
| Low     | 25000.00                                       | 59.34                                | 90.15           |
| Middle  | 24594.70                                       | 59.04                                | 90.43           |
| High    | 24864.90                                       | 58.8                                 | 88.84           |

\* The EUT has its hopping function disable.

Note: 1. Limit = peak power output (in 100kHz RBW) – 20dB  
2. All the other emissions were very low the limit.


## 9. Radiated Emission test

### 9.1 Operating environment

Temperature: 20 °C  
Relative Humidity: 59 %

### 9.2 Test setup & procedure

The Diagram below shows the test setup, which is utilized to make these measurements.

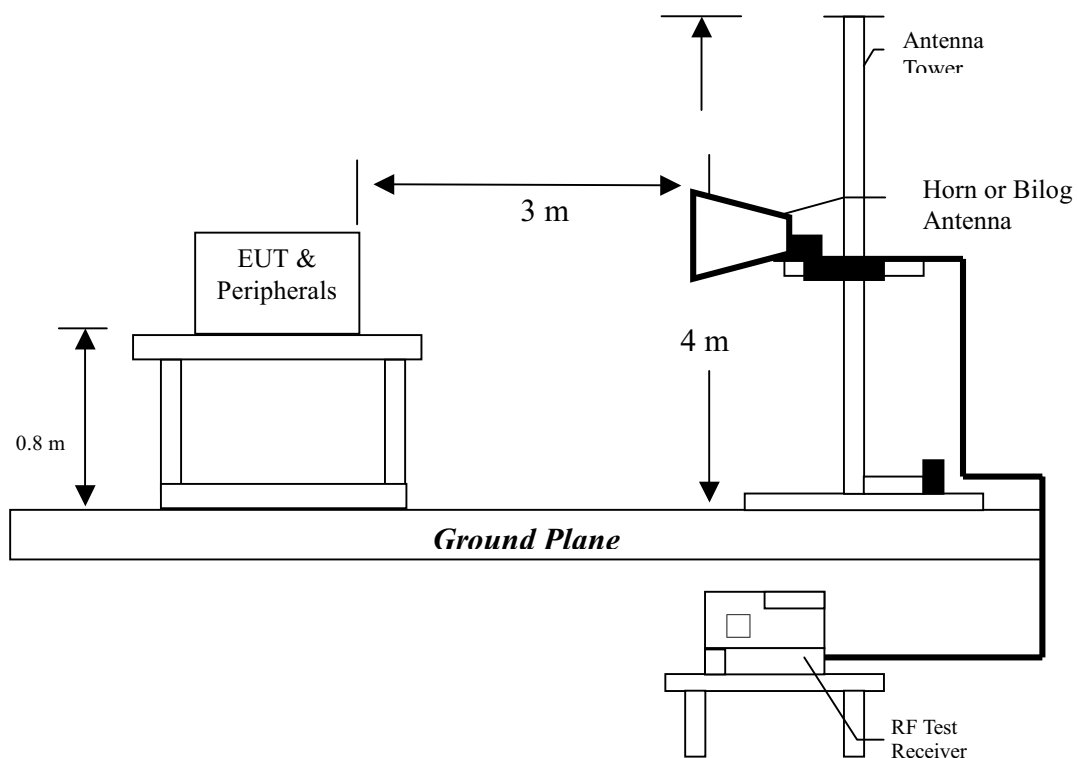

The signal is maximized through rotation and placement in the three orthogonal axes. Radiated emission measurements were performed from 30MHz to 25GHz. Spectrum Analyzer Resolution Bandwidth is 100kHz or greater for frequencies 30MHz to 1GHz, 1MHz – for frequencies above 1GHz.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.



### 9.3 Emission limits

The spurious Emission shall test through the 10th harmonic. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

| Frequency<br>(MHz) | Limits<br>(dB $\mu$ V/m@3m) |
|--------------------|-----------------------------|
| 30-88              | 40                          |
| 88-216             | 43.5                        |
| 216-960            | 46                          |
| Above 960          | 54                          |

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

Uncertainty was calculated in accordance with NAMAS NIS 81.

Expanded uncertainty (k=2) of radiated emission measurement is  $\pm 3.078$  dB.



#### 9.4 Radiated spurious emission test data

##### 9.4.1 Measurement results: frequencies equal to or less than 1 GHz

EUT : CBT1000  
Test Mode : Transmitted mode (Hopping enable)

| Frequency<br>(MHz) | Spectrum<br>Analyzer<br>Detector | Antenna<br>Polariz.<br>(H/V) | Correction<br>Factor<br>(dB/m) | Reading<br>(dBuV) | Corrected<br>Reading<br>(dBuV) | Limit<br>@ 3 m<br>(dBuV) | Margin<br>(dB) |
|--------------------|----------------------------------|------------------------------|--------------------------------|-------------------|--------------------------------|--------------------------|----------------|
| 199.75000          | QP                               | V                            | 12.03                          | 23.32             | 35.35                          | 43.50                    | -8.15          |
| 266.68000          | QP                               | V                            | 13.32                          | 22.55             | 35.87                          | 46.00                    | -10.13         |
| 299.66000          | QP                               | V                            | 14.39                          | 22.14             | 36.53                          | 46.00                    | -9.47          |
| 332.64000          | QP                               | V                            | 15.30                          | 27.21             | 42.51                          | 46.00                    | -3.49          |
| 655.65000          | QP                               | V                            | 21.49                          | 19.56             | 41.05                          | 46.00                    | -4.95          |
| 691.54000          | QP                               | V                            | 21.80                          | 19.17             | 40.97                          | 46.00                    | -5.03          |
| 299.66000          | QP                               | H                            | 14.39                          | 23.72             | 38.11                          | 46.00                    | -7.89          |
| 333.61000          | QP                               | H                            | 15.30                          | 23.03             | 38.33                          | 46.00                    | -7.67          |
| 623.64000          | QP                               | H                            | 21.31                          | 16.04             | 37.35                          | 46.00                    | -8.65          |
| 655.65000          | QP                               | H                            | 21.49                          | 16.62             | 38.11                          | 46.00                    | -7.89          |
| 691.54000          | QP                               | H                            | 21.80                          | 18.63             | 40.43                          | 46.00                    | -5.57          |
| 733.25000          | QP                               | H                            | 22.79                          | 15.77             | 38.56                          | 46.00                    | -7.44          |

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



### 9.4.2 Measurement results: frequency above 1GHz

EUT : CBT1000

Test Condition : Tx at low channel (Hopping disable)

| Frequency<br>(MHz) | Spectrum<br>Analyzer<br>Detector | Antenna<br>Polariz.<br>(H/V) | Preamplifier<br>(dB) | Correction<br>Factor<br>(dB/m) | Reading<br>(dBuV) | Corrected<br>Reading<br>(dBuV) | Limit<br>@ 3 m<br>(dBuV) | Margin<br>(dB) |
|--------------------|----------------------------------|------------------------------|----------------------|--------------------------------|-------------------|--------------------------------|--------------------------|----------------|
| 4804               | PK                               | V                            | 28.02                | 35.07                          | 39.15             | 46.2                           | 74                       | -27.8          |
| 4804               | AV                               | V                            | 28.02                | 35.07                          | 26.37             | 33.42                          | 54                       | -20.58         |
| 7206               | PK                               | V                            | 28.02                | 38.82                          | 40.14             | 50.94                          | 74                       | -23.06         |
| 7206               | AV                               | V                            | 28.02                | 38.82                          | 26.8              | 37.6                           | 54                       | -16.4          |
| 9608               | PK                               | V                            | 28.02                | 41.75                          | -                 | -                              | 74                       | -              |
| 9608               | AV                               | V                            | 28.02                | 41.75                          | -                 | -                              | 54                       | -              |
| 4804               | PK                               | H                            | 28.02                | 35.07                          | 37.85             | 44.9                           | 74                       | -29.1          |
| 4804               | AV                               | H                            | 28.02                | 35.07                          | 25.11             | 32.16                          | 54                       | -21.84         |
| 7206               | PK                               | H                            | 28.02                | 38.82                          | 39.93             | 50.73                          | 74                       | -23.27         |
| 7206               | AV                               | H                            | 28.02                | 38.82                          | 27.23             | 38.03                          | 54                       | -15.97         |
| 9608               | PK                               | H                            | 28.02                | 41.75                          | -                 | -                              | 74                       | -              |
| 9608               | AV                               | H                            | 28.02                | 41.75                          | -                 | -                              | 54                       | -              |

#### Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



# Intertek Testing Services

## ETL SEMKO

FCC ID. : MQ4CTB1K

Report No.: EME-021030

Page 19 of 23

EUT : CBT1000

Test Condition : Tx at middle channel (Hopping disable)

| Frequency<br>(MHz) | Spectrum<br>Analyzer<br>Detector | Antenna<br>Polariz.<br>(H/V) | Preamplifier<br>(dB) | Correction<br>Factor<br>(dB/m) | Reading<br>(dBuV) | Corrected<br>Reading<br>(dBuV) | Limit<br>@ 3 m<br>(dBuV) | Margin<br>(dB) |
|--------------------|----------------------------------|------------------------------|----------------------|--------------------------------|-------------------|--------------------------------|--------------------------|----------------|
| 4882               | PK                               | V                            | 28.02                | 35.07                          | 40.9              | 47.95                          | 74                       | -26.05         |
| 4882               | AV                               | V                            | 28.02                | 35.07                          | 26.4              | 33.45                          | 54                       | -20.55         |
| 7323               | PK                               | V                            | 28.02                | 38.82                          | 37.25             | 48.05                          | 74                       | -25.95         |
| 7323               | AV                               | V                            | 28.02                | 38.82                          | 25.11             | 35.91                          | 54                       | -18.09         |
| 9764               | PK                               | V                            | 28.02                | 41.75                          | -                 | -                              | 74                       | -              |
| 9764               | AV                               | V                            | 28.02                | 41.75                          | -                 | -                              | 54                       | -              |
| 4882               | PK                               | H                            | 28.02                | 35.07                          | 38.9              | 45.95                          | 74                       | -28.05         |
| 4882               | AV                               | H                            | 28.02                | 35.07                          | 25.47             | 32.52                          | 54                       | -21.48         |
| 7323               | PK                               | H                            | 28.02                | 38.82                          | 36.85             | 47.65                          | 74                       | -26.35         |
| 7323               | AV                               | H                            | 28.02                | 38.82                          | 24.09             | 34.89                          | 54                       | -19.11         |
| 9764               | PK                               | H                            | 28.02                | 41.75                          | -                 | -                              | 74                       | -              |
| 9764               | AV                               | H                            | 28.02                | 41.75                          | -                 | -                              | 54                       | -              |

### Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



# Intertek Testing Services

## ETL SEMKO

FCC ID. : MQ4CTB1K

Report No.: EME-021030

Page 20 of 23

EUT : CBT1000

Test Condition : Tx at high channel (Hopping disable)

| Frequency<br>(MHz) | Spectrum<br>Analyzer<br>Detector | Antenna<br>Polariz.<br>(H/V) | Preamplifier<br>(dB) | Correction<br>Factor<br>(dB/m) | Reading<br>(dBuV) | Corrected<br>Reading<br>(dBuV) | Limit<br>@ 3 m<br>(dBuV) | Margin<br>(dB) |
|--------------------|----------------------------------|------------------------------|----------------------|--------------------------------|-------------------|--------------------------------|--------------------------|----------------|
| 4960               | PK                               | V                            | 28.02                | 35.07                          | 39.91             | 46.96                          | 74                       | -27.04         |
| 4960               | AV                               | V                            | 28.02                | 35.07                          | 26.97             | 34.02                          | 54                       | -19.98         |
| 7440               | PK                               | V                            | 28.02                | 38.78                          | 36.05             | 46.81                          | 74                       | -27.19         |
| 7440               | AV                               | V                            | 28.02                | 38.78                          | 24.88             | 35.64                          | 54                       | -18.36         |
| 9920               | PK                               | V                            | 28.02                | 41.95                          | -                 | -                              | 74                       | -              |
| 9920               | AV                               | V                            | 28.02                | 41.95                          | -                 | -                              | 54                       | -              |
| 4960               | PK                               | H                            | 28.02                | 35.07                          | 38.15             | 45.2                           | 74                       | -28.8          |
| 4960               | AV                               | H                            | 28.02                | 35.07                          | 26.02             | 33.07                          | 54                       | -20.93         |
| 7440               | PK                               | H                            | 28.02                | 38.78                          | 37.29             | 48.05                          | 74                       | -25.95         |
| 7440               | AV                               | H                            | 28.02                | 38.78                          | 25.11             | 35.87                          | 54                       | -18.13         |
| 9920               | PK                               | H                            | 28.02                | 41.95                          | -                 | -                              | 74                       | -              |
| 9920               | AV                               | H                            | 28.02                | 41.95                          | -                 | -                              | 54                       | -              |

### Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-” means the emission is below the noise floor.



**10. Emission on the band edge §FCC 15.247(C)**

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

See band-edge plot as file name “Band-edge plot.pdf”.


### 11. Power Line Conducted Emission test §FCC 15.207

#### 11.1 Operating environment

Temperature: 24 °C

Relative Humidity: 59 %

#### 11.2 Test setup & procedure

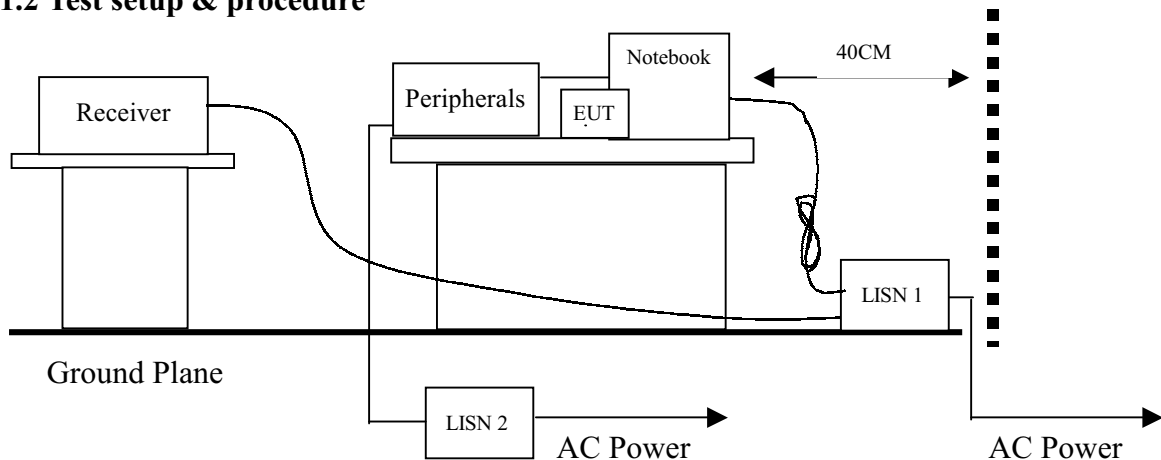

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/1992 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

See Power Line Conducted Emission plot as file name “Power Line Conducted Emission plot.pdf”.

#### Emission Limit

| FCC Part 15 Paragraph 15.207 |                         |      |
|------------------------------|-------------------------|------|
| Freq. (MHz)                  | Maximum RF Line Voltage |      |
|                              | uV                      | dBuV |
| 0.45 - 30                    | 250                     | 48.0 |



### 11.3 Power Line Conducted Emission test data

EUT : CBT1000  
Test Mode : Transmitted mode (Hopping enable)

| Power Line<br>(circle) | Freq.<br>(MHz) | Reading<br>(dB $\mu$ V)<br>QP | Limit<br>(dB $\mu$ V)<br>QP | Margin<br>(dB)<br>QP |
|------------------------|----------------|-------------------------------|-----------------------------|----------------------|
| LINE                   | 0.46600        | 31.8                          | 48.00                       | -16.20               |
| LINE                   | 0.74600        | 25.7                          | 48.00                       | -22.30               |
| LINE                   | 5.02600        | 31.7                          | 48.00                       | -16.30               |
| LINE                   | 6.23400        | 27.2                          | 48.00                       | -20.80               |
| LINE                   | 20.76200       | 16.3                          | 48.00                       | -31.70               |
| LINE                   | 22.44200       | 17.3                          | 48.00                       | -30.70               |
| NEUTRAL                | 0.46600        | 33.0                          | 48.00                       | -15.00               |
| NEUTRAL                | 0.65000        | 23.1                          | 48.00                       | -24.90               |
| NEUTRAL                | 0.74600        | 26.6                          | 48.00                       | -21.40               |
| NEUTRAL                | 1.02600        | 24.4                          | 48.00                       | -23.60               |
| NEUTRAL                | 1.30600        | 23.3                          | 48.00                       | -24.70               |
| NEUTRAL                | 6.15400        | 28.6                          | 48.00                       | -19.40               |

Remark:

1. The reading value included cable loss and LISN factor.
2. Uncertainty was calculated in accordance with NAMAS NIS 81.  
Expanded uncertainty (k=2) of conducted emission measurement is  $\pm 2.6$  dB.