PCTEST



7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



HEARING AID COMPATIBILITY

Applicant Name:

Samsung Electronics Co., Ltd. 129, Samsung-ro, Maetan dong, Yeongtong-gu, Suwon-si Gyeonggi-do 16677, Korea **Date of Testing:**

10/13/2020 - 11/12/2020 Test Site/Location: PCTEST, Columbia, MD, USA Test Report Serial No.: 1M2009140143-26-R1.A3L

Date of Issue: 11/25/2020

FCC ID: A3LSMG996U

APPLICANT: SAMSUNG ELECTRONICS CO., LTD.

Scope of Test: Audio Band Magnetic Testing (T-Coil)

Application Type: Certification
FCC Rule Part(s): CFR §20.19(b)
HAC Standard: ANSI C63.19-2011

CTIA Test Plan for Hearing Aid Compatibility Rev 3.1.1, May 2017

285076 D01 HAC Guidance v05

285076 D02 T-Coil testing for CMRS IP v03

DUT Type:Portable HandsetModel:SM-G996UAdditional Model(s):SM-G996U1

Test Device Serial No.: Pre-Production Sample [S/N: 0527M]

C63.19-2011 HAC Category: T3 (SIGNAL TO NOISE CATEGORY)

Note: This revised Test Report (S/N: 1M2009140143-26-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.





Authorized Test Lab





FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 1 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 1 of 104

TABLE OF CONTENTS

1.	INTRODUCTION	3
2.	DUT DESCRIPTION	4
3.	ANSI C63.19-2011 PERFORMANCE CATEGORIES	6
4.	METHOD OF MEASUREMENT	8
5.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	18
6.	VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION	23
7.	OTT VOIP TEST SYSTEM AND DUT CONFIGURATION	28
8.	FCC 3G MEASUREMENTS	34
9.	T-COIL TEST SUMMARY	36
10.	MEASUREMENT UNCERTAINTY	54
11.	EQUIPMENT LIST	55
12.	TEST DATA	56
13.	CALIBRATION CERTIFICATES	92
14.	CONCLUSION	99
15.	REFERENCES	100
16.	TEST SETUP PHOTOGRAPHS	102

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 2 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 2 of 104

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658¹ to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 3 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 3 01 104

2. DUT DESCRIPTION



FCC ID: A3LSMG996U

Applicant: Samsung Electronics Co., Ltd.

129, Samsung-ro, Maetan dong,

Yeongtong-gu, Suwon-si Gyeonggi-do 16677, Korea

Model: SM-G996U
Additional Model(s): SM-G996U1
Serial Number: 0527M
HW Version: rev1.0
SW Version: G996U.001
Antenna: Internal Antenna

DUT Type: Portable Handset

I. LTE Band Selection

This device supports the following pairs of LTE bands with similar frequencies: LTE B4 & B66 and B38 & B41. Each pair of LTE bands has the same target power and shares the same transmission path. Since the supported frequency spans for the smaller LTE bands are completely covered by the larger LTE bands, only the larger LTE bands (LTE B66 and B41) were evaluated for hearing-aid compliance. LTE B2 and B5 are LTE anchor bands for dual connectivity (EN-DC) scenarios between LTE and NR so they were additionally evaluated as independent LTE bands.

II. NR Band Selection

This device supports the following pair of NR bands with similar frequencies: NR n2 & n25. This pair of NR bands has the same target power and shares the same transmission path. Since the supported frequency span for the smaller NR band is completely covered by the larger NR band, only the larger NR band (n25) was evaluated for hearing-aid compliance.

FCC ID: A3LSMG996U	PCTEST Total to be part of Secured	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 4 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 4 01 104

Table 2-1 A3LSMG996U HAC Air Interfaces

			/ 10=	SINGSSOU HAC All lilleria			
Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service	Audio Codec Evaluated	
	835	VO	Yes	Yes: WIFI or BT	CMRS Voice ¹	EVRC	
CDMA	1900	VO	res	res. Wiri of B1	CIVINS VOICE	EVIC	
	EvDO	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS	
	850	vo	Yes	Yes: WIFI or BT	CMRS Voice ¹	EFR	
GSM	1900		1.63		CIVILO VOIGE	2.11	
	GPRS/EDGE	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS	
	850						
UMTS	1700	VD	Yes	Yes: WIFI or BT	CMRS Voice ¹ NB AMR		
	1900						
	HSPA	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS	
	680 (B71)		Yes ³				
	700 (B12)						
	780 (B13)						
	790 (B14)						
	850 (B5)				VoLTE ¹ , Google Duo ²		
LTE (FDD)	850 (B26)	VD		Yes: WIFI or BT VoLTE ¹ , Google Duo ²			VoLTE: NB AMR, WB AMR, EVS Google Duo: OPUS
2.2 (1.55)	1700 (B4)		Yes				
	1700 (B66)						
	1900 (B2)						
	1900 (B25)						
	2300 (B30)						
	2500 (B7)						
	2600 (B38)					V 175 NO 4440 N/O 4440 51/	
LTE (TDD)	2600 (B41)	VD	Yes	Yes: WIFI or BT	VoLTE ¹ , Google Duo ²	VoLTE: NB AMR, WB AMR, EVS Google Duo: OPUS	
	3600 (B48)					Google Buoi oi oo	
	680 (n71)		Yes ^{3,4}				
	700 (n12)						
	850 (n5)						
NR (FDD)	1700 (n66)	VD	4 Yes: WIFI or BT Google Du	V4	Google Duo ²	OPUS	
	1900 (n2)		Yes⁴				
ľ	1900 (n25)						
	2300 (n30)						
	2600 (n41)		v. 4				
ND (TDD)	3800 (n77)	\/D	Yes ⁴	Veer MUST on DT	Carala Dua?	OBLIC	
NR (TDD)	28000 (n261)	VD	No ⁵	Yes: WIFI or BT	Google Duo ²	OPUS	
	39000 (n260)		No				
	2450						
ĺ	5200 (U-NII 1)						
WIFI	5300 (U-NII 2A)	VD	Yes	Yes: CDMA, GSM, UMTS, LTE, or NR	VoWIFI ² , Google Duo ²	VoWIFI: NB AMR, WB AMR, EV Google Duo: OPUS	
ļ	5500 (U-NII 2C)					GOOGIC DUO. OF OS	
	5800 (U-NII 3)						
BT	2450	DT	No	Yes: CDMA, GSM, UMTS, LTE, or NR	N/A	N/A	
_			2. Reference lo 3. LTE B71 and existing HAC p 4. NR was eva	evel in accordance with 7.4.2.1 of ANSI C63.19-20 evel is -20dBm0 in accordance with FCC KDB 285! I NR n71, while outside the scope of ANSI C63.19 procedures with currently available test equipmer luated using an interim procedure outlined in Sec 261 are currently outside the scope of ANSI C63.1	076 D02 and FCC HAC regulations, were add nt. tion 7.II.5.	ditionally tested according to the	

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 5 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 5 of 104

3. ANSI C63.19-2011 PERFORMANCE CATEGORIES

I. MAGNETIC COUPLING

Axial and Radial Field Intensity

All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be \geq -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz – 3000 Hz per §8.3.2.

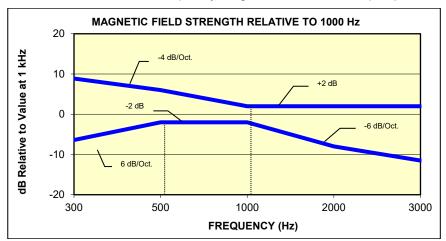


Figure 3-1
Magnetic field frequency response for Wireless Devices with an axial field ≤-15 dB(A/m) at 1 kHz

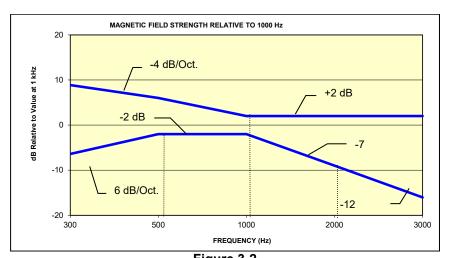


Figure 3-2
Magnetic Field frequency response for wireless devices with an axial field that exceeds
-15 dB(A/m) at 1 kHz

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 6 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		rage 6 01 104

Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Category	Telephone RF Parameters		
Category	Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB]		
T1	0 to 10 dB		
T2	10 to 20 dB		
Т3	20 to 30 dB		
T4	> 30 dB		
Table 3-1 Magnetic Coupling Parameters			

Note: The FCC limit for SNNR is 20dB and the test data margins will indicate a margin from the FCC limit for compliance.

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 7 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 7 of 104

4. METHOD OF MEASUREMENT

I. Test Setup

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:

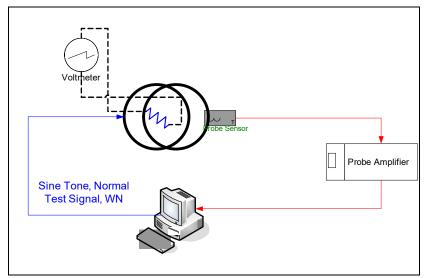


Figure 4-1 Validation Setup with Helmholtz Coil

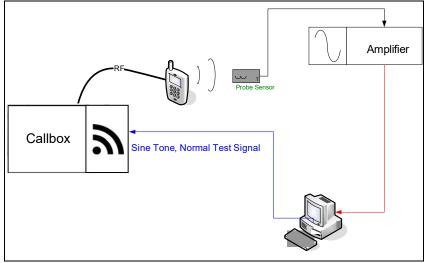


Figure 4-2 T-Coil Test Setup

FCC ID: A3LSMG996U	PCTEST Thought to be post of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 0 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 8 of 104

II. **Scanning Mechanism**

Manufacturer: TEM

Accuracy: ± 0.83 cm/meter

Minimum Step Size: 0.1 mm Maximum speed 6.1 cm/sec Line Voltage: 115 VAC Line Frequency: 60 Hz

Material Composite: Delrin (Acetal) Data Control: Parallel Port

45 x 31.75 x 47 cm Dynamic Range (X-Y-Z):

36" x 25" x 38" Dimensions: 36" x 49" x 55" Operating Area:

Reflections: < -20 dB (in anechoic chamber)




Figure 4-3 RF Near-Field Scanner

III. **3GPP2 Normal Test Signal (Speech)**

Manufacturer: 3GPP2 (TIA 1042 §3.3.1)

Modified-IRS weighted, multi-talker speech signal, 4 Male and 4

Stimulus Type: Female speakers (alternating)

Single Sample Duration: 51.62 seconds

77.4% Activity Level:





Figure 4-4 **Temporal Characteristic of Normal Test Signal**

FCC ID: A3LSMG996U	PCTEST Total to be part of Seminaria	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dogo 0 of 104	
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 9 of 104	



ABM2 Measurement Block Diagram:



Figure 4-5 Magnetic Measurement Processing Steps

IV. **Test Procedure**

- 1. Ambient Noise Check per C63.19 §7.3.1
 - Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
 - "A-weighting" and Half-Band Integration was applied to the measurements.
 - Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:

- 2. Measurement System Validation(See Figure 4-1)
 - a. The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
 - **ABM1 Validation** The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_c = \frac{NI}{r\sqrt{1.25^3}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^3}}$$

Where H_c = magnetic field strength in amperes per meter N = number of turns per coil

For the Helmholtz Coil, N=20; r=0.13m; R=10.193 Ω and using V=29mV:

$$H_c = \frac{20 \cdot (\frac{0.029}{10.193})}{0.13 \cdot \sqrt{1.25^3}} = 0.316A/m \approx -10dB(A/m)$$

Therefore a pure tone of 1kHz was applied into the coils such that 29mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of -10 dB(A/m) in the center of the Helmholtz coil which was used to validate the probe measurement at -10dB(A/m). This was verified to be within ± 0.5 dB of the -10dB(A/m) value (see Pages 51 & 52).

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 10 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		rage 10 01 104

c. Frequency Response Validation

The frequency response through the Helmholtz Coil was verified to be within 0.5 dB relative to 1kHz, between 300 – 3000 Hz using the Normal signal as shown below:



Figure 4-6 Frequency Response Validation

d. ABM2 Measurement Validation

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz – 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

Table 4-1
ABM2 Frequency Response Validation

	HBI, A -	HBI, A -	
f (Hz)	Measured	Theoretical	dB Var.
	(dB re 1kHz)	(dB re 1kHz)	
100	-16.180	-16.170	-0.010
125	-13.257	-13.250	-0.007
160	-10.347	-10.340	-0.007
200	-8.017	-8.010	-0.007
250	-5.925	-5.920	-0.005
315	-4.045	-4.040	-0.005
400	-2.405	-2.400	-0.005
500	-1.212	-1.210	-0.002
630	-0.349	-0.350	0.001
800	0.071	0.070	0.001
1000	0.000	0.000	0.000
1250	-0.503	-0.500	-0.003
1600	-1.513	-1.510	-0.003
2000	-2.778	-2.780	0.002
2500	-4.316	-4.320	0.004
3150	-6.166	-6.170	0.004
4000	-8.322	-8.330	0.008
5000	-10.573	-10.590	0.017
6300	-13.178	-13.200	0.022
8000	-16.241	-16.270	0.029
10000	-19.495	-19.520	0.025

FCC ID: A3LSMG996U	PCTEST Total to be part of Seminaria	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 11 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		rage 1101104




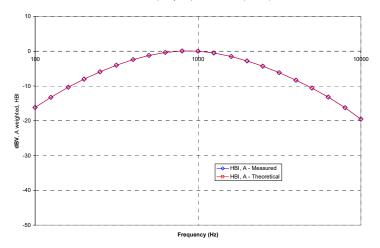


Figure 4-7
ABM2 Frequency Response Validation

The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and A-weighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-8). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:



The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

Table 4-2
ABM2 Power Sum Validation

WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)
-60	-60.36	-60.2	0.16
-50	-50.19	-50.13	0.06
-40	-40.14	-40.03	0.11
-30	-30.13	-30.01	0.12
-20	-20.12	-20	0.12
-10	-10.14	-10	0.14

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dog 10 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 12 of 104

© 2020 PCTEST REV 3.4.M 8/18/2020





Figure 4-9 **ABM2 Power Sum Validation**

3. Measurement Test Setup

- a. Fine scan above the WD (TEM)
 - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-11, the grid is not to scale but merely a graphical representation of the coordinate system in use):

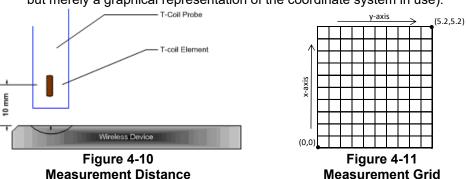

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure 4-13 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
 - i. C63.19 Table 7-1 states audio reference input levels for various technologies:

Standard	Technology	Input Level (dBm0)
TIA/EIA/IS-2000	CDMA	-18
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16

FCC ID: A3LSMG996U	PCTEST Total to be part of Seminaria	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 12 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 13 of 104

- ii. See Section 5 and 6 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE), and Voice Over WIFI (VoWIFI) testing.
- iii. See Section 7 for more information regarding audio level settings for Over-The-Top (OTT) Voice Over IP (VoIP) Testing.
- c. Real-Time Analyzer (RTA)
 - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
- d. WD Radio Configuration Selection
 - i. The device was chosen to be tested in the worst-case ABM2 condition (See Section 8 for more information regarding worst-case configurations for CDMA and UMTS. LTE configuration information can be found in Section 5 and 7. NR configuration information can be found in Section 7. WIFI configuration information can be found in Section 6 and 7.)
 - ii. Supported GSM vocoders were investigated for the worst-case ABM2 condition. GSM-EFR was deemed the worst-case condition for the GSM air interface.
- 4. Signal Quality Data Analysis
 - a. Narrow-band Magnetic Intensity
 - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.
 - b. Frequency Response
 - i. The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
 - ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-6. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
 - iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.
 - c. Signal Quality Index
 - i. Ensuring the WD was at maximum RF power, maximum volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz 10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
 - ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
 - iii. This result was subtracted from the ABM1 result in step 4.a, to obtain the Signal Quality.

FCC ID: A3LSMG996U	PCTEST Thought to be post of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 14 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 14 of 104

V. **Test Setup**




Figure 4-12 **Audio Magnetic Field Test Setup**

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

VI. **Deviation from C63.19 Test Procedure**

Non-conducted RF connection due to inaccessible RF ports.

VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications were tested for T-coil unless otherwise noted. See Table 2-1 for more details regarding which modes were tested.

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 15 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		raye 13 01 104

VIII. Wireless Device Channels and Frequencies

1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Low, middle and high channels were tested in each band for FCC compliance evaluation to ensure the maximum emission is captured across the entire band. Only middle channels were evaluated for data modes.

Table 4-3
Center Channels and Frequencies

Contai Chainneic and Frequencies				
Test frequencies & associated channels				
Channel	Frequency (MHz)			
Secondary Cellular 8	20			
564 (CDMA)	820.10			
Cellular 850				
384 (CDMA)	836.52			
190 (GSM)	836.60			
4183 (UMTS)	836.60			
AWS 1750				
1412 (UMTS)	1730.40			
PCS 1900				
600 (CDMA)	1880			
661 (GSM)	1880			
9400 (UMTS)	1880			

2. 4G (LTE) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. Low-mid and mid-high channels are additionally tested for LTE TDD B41. The middle channels and supported bandwidths from the worst-case bands according to Tables 7-6 and 7-7 were additionally evaluated with OTT VoIP for each probe orientation. See Tables 9-5 to 9-18 as well as Tables 9-27 to 9-28 for LTE bandwidths and channels.

3. 5G (NR)

The middle channels and supported bandwidths from the worst-case NR bands according to Tables 7-12 and 7-13 were evaluated with OTT VoIP for each probe orientation. NR TDD was additionally evaluated with OTT VoIP for each probe orientation as well. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. Low-mid and mid-high channels are additionally tested for NR TDD. See Tables 9-29 and 9-31 for NR bandwidths and channels.

4. WIFI

The middle channel for each IEEE 802.11 standard was tested for each probe orientation. The 2.4GHz IEEE 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels. The 5GHz IEEE 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested on higher U-NII bands as well as applicable low and high channels. See Tables 9-19 to 9-23 as well as Tables 9-33 to 9-37 for WIFI standards and channels.

FCC ID: A3LSMG996U	PCTEST: Noted to be part of & secured	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 16 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 16 of 104

IX. Test Flow

The flow diagram below was followed (From C63.19):

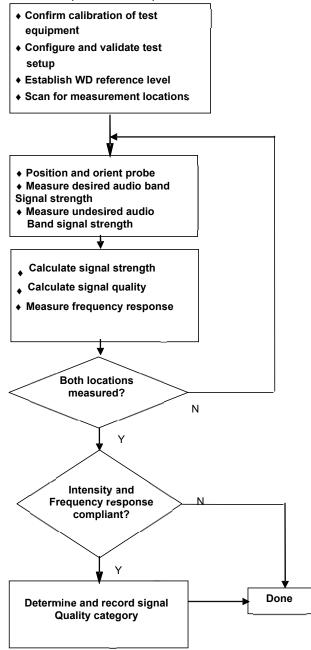


Figure 4-13 C63.19 T-Coil Signal Test Process

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 17 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		rage 17 01 104

5. VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoLTE over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

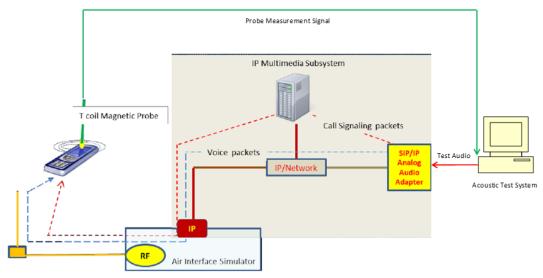


Figure 5-1
Test Setup for VoLTE over IMS T-Coil Measurements

2. Audio Level Settings

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level*. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

* http://c63.org/documents/misc/posting/new_interpretations.htm

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 10 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 18 of 104

© 2020 PCTEST REV 3.4.M

DUT Configuration for VoLTE over IMS T-coil Testing II.

1. Radio Configuration

An investigation was performed to determine the modulation and RB configuration to be used for testing. The effects of modulation and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. 16QAM, 1RB, 0RB offset was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different radio configurations:

> Table 5-1 **VoLTE over IMS SNNR by Radio Configuration**

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
66	1745.0	132322	20	QPSK	1	0	5.82	-49.61	55.43
66	1745.0	132322	20	QPSK	1	50	6.12	-49.41	55.53
66	1745.0	132322	20	QPSK	1	99	6.13	-49.26	55.39
66	1745.0	132322	20	QPSK	50	0	6.01	-51.05	57.06
66	1745.0	132322	20	QPSK	50	25	5.85	-51.15	57.00
66	1745.0	132322	20	QPSK	50	50	5.96	-50.97	56.93
66	1745.0	132322	20	QPSK	100	0	5.81	-51.51	57.32
66	1745.0	132322	20	16QAM	1	0	5.96	-45.33	51.29
66	1745.0	132322	20	16QAM	1	50	6.33	-45.22	51.55
66	1745.0	132322	20	16QAM	1	99	6.10	-45.76	51.86
66	1745.0	132322	20	16QAM	50	0	6.24	-51.06	57.30
66	1745.0	132322	20	16QAM	50	25	6.13	-50.63	56.76
66	1745.0	132322	20	16QAM	50	50	5.93	-50.93	56.86
66	1745.0	132322	20	16QAM	100	0	5.94	-50.65	56.59
66	1745.0	132322	20	64QAM	1	0	6.09	-45.95	52.04
66	1745.0	132322	20	64QAM	1	50	6.04	-46.20	52.24
66	1745.0	132322	20	64QAM	1	99	6.12	-45.66	51.78
66	1745.0	132322	20	64QAM	50	0	5.85	-50.69	56.54
66	1745.0	132322	20	64QAM	50	25	5.88	-50.70	56.58
66	1745.0	132322	20	64QAM	50	50	5.87	-50.71	56.58
66	1745.0	132322	20	64QAM	100	0	5.87	-50.48	56.35
66	1745.0	132322	20	256QAM	1	0	6.06	-50.86	56.92
66	1745.0	132322	20	256QAM	1	50	5.95	-51.03	56.98
66	1745.0	132322	20	256QAM	1	99	5.89	-50.65	56.54
66	1745.0	132322	20	256QAM	50	0	5.80	-50.42	56.22
66	1745.0	132322	20	256QAM	50	25	5.88	-51.09	56.97
66	1745.0	132322	20	256QAM	50	50	6.02	-50.90	56.92
66	1745.0	132322	20	256QAM	100	0	5.88	-50.58	56.46

FCC ID: A3LSMG996U	PCTEST* Proof to be part of ® secured	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 10 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 19 of 104

2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The NB AMR 4.75kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

Table 5-2
AMR Codec Investigation – VoLTE over IMS

AWIN Codec investigation - Volte over IWIS											
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel				
ABM1 (dBA/m)	10.24	9.64	6.11	5.85	— Axial	LTE Band 66 20MHz					
ABM2 (dBA/m)	-45.56	-45.86	-45.20	-45.42			132322				
Frequency Response	Pass	Pass	Pass	Pass							
S+N/N (dB)	55.80	55.50	51.31	51.27							

Table 5-3
EVS Codec Investigation - VoLTE over IMS

Codec Setting:	EVS Primary SWB 128kbps	EVS Primary SWB 9.6kbps	EVS Primary WB 128kbps	EVS Primary WB 5.9kbps	EVS Primary NB 24.4kbps	EVS Primary NB 5.9kbps	Orientation	Band / BW	Channel			
ABM1 (dBA/m)	8.17	7.53	10.36	9.93	5.75	5.57						
ABM2 (dBA/m)	-45.50	-45.39	-45.22	-46.00	-45.77	-46.37	A1	LTE Band 66 20MHz	132322			
Frequency Response	Pass	Pass	Pass	Pass	Pass	Pass	— Axial					
S+N/N (dB)	53.67	52.92	55.58	55.93	51.52	51.94						

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = "Max Power"




Figure 5-2
Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: A3LSMG996U	PCTEST Thought to be port of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 20 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 20 01 104

3. LTE TDD Uplink-Downlink Configuration Investigation for VoLTE over IMS

An investigation was performed to determine the worst-case Uplink-Downlink configuration for VoLTE over IMS T-Coil testing.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length T_f = 307200 \cdot T_s = 10 ms, where T_s is a number of time units equal to 1/(15000 x 2048) seconds. Additionally, each radio frame consists of 10 subframes, each of length 30720 \cdot T_s = 1 ms, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is 2192 \cdot Ts which occurs in the normal cyclic prefix and special subframe configuration 4.

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

Table 5-4
Uplink-Downlink Configurations for Type 2 Frame Structures

Uplink-downlink	Downlink-to-Uplink Switch-point periodicity	Subframe number									Calculated Transmission	
configuration		0	1	2	3	4	5	6	7	8	9	Duty Cycle (%)
0	5 ms	D	S	U	U	U	D	S	J	J	J	61.4%
1	5 ms	D	S	U	U	D	D	S	J	J	D	41.4%
2	5 ms	D	S	U	D	D	D	S	J	D	D	21.4%
3	10 ms	D	S	U	U	U	D	D	D	D	D	30.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	20.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	10.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	51.4%

a. Power Class 3 Uplink-Downlink Configuration Investigation

Power Class 3 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 0RB Offset. For Power Class 3, all configurations (0-6) are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 2 was used as the worst-case configuration for Power Class 3 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

Table 5-5
Power Class 3 VoLTE over IMS SNNR by UL-DL Configuration

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	0	0	6.10	-39.43	45.53
2593.0	40620	20	16QAM	1	0	1	6.21	-38.83	45.04
2593.0	40620	20	16QAM	1	0	2	5.98	-38.69	44.67
2593.0	40620	20	16QAM	1	0	3	5.80	-42.00	47.80
2593.0	40620	20	16QAM	1	0	4	5.99	-41.77	47.76
2593.0	40620	20	16QAM	1	0	5	5.84	-41.76	47.60
2593.0	40620	20	16QAM	1	0	6	5.88	-39.13	45.01

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 21 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		raye 21 01 104

b. Power Class 2 Uplink-Downlink Configuration Investigation

Power Class 2 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 0RB Offset. For Power Class 2, configurations 1-5 are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 1 was used as the worst-case configuration for Power Class 2 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

Table 5-6
Power Class 2 VoLTE over IMS SNNR by UL-DL Configuration

						,			
Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	0	1	5.70	-34.45	40.15
2593.0	40620	20	16QAM	1	0	2	5.80	-34.59	40.39
2593.0	40620	20	16QAM	1	0	3	5.55	-37.87	43.42
2593.0	40620	20	16QAM	1	0	4	5.88	-37.57	43.45
2593.0	40620	20	16QAM	1	0	5	6.03	-37.36	43.39

Note: LTE TDD B41 Power Class 2 only supports UL-DL configurations 1-5, not 0 or 6.

c. Conclusion

Per the investigations above, UL-DL Configuration 2 was used to evaluate Power Class 3 VoLTE over IMS and UL-DL Configuration 1 was used to evaluate Power Class 2 VoLTE over IMS.

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 22 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 22 of 104

6. **VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION**

I. Test System Setup for VoWIFI over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoWIFI over IMS, or CMRS WIFI Calling, is shown below. The callbox used when performing VoWIFI over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

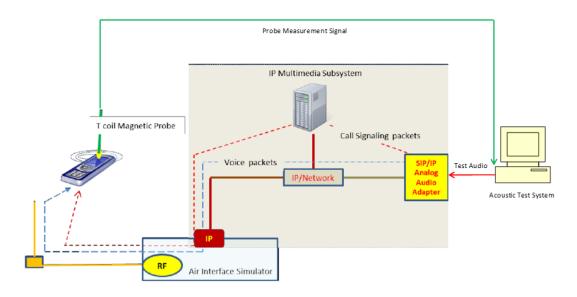


Figure 6-1 Test Setup for VoWIFI over IMS T-Coil Measurements

2. Audio Level Settings

According to KDB 285076 D02 released by the FCC OET regarding the appropriate audio levels to be used for VoWIFI over IMS T-Coil testing, -20dBm0 shall be used for the normal speech input level². The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the VoWIFI over IMS connection.

² FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

1 66 6 miles of Engineering and Teamhology RBB, 200010 Bb2 1 con Teaming for Civil Con 100, Ceptember 10, 2011									
FCC ID: A3LSMG996U	PCTEST* Proof to be port of ® remove	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager					
Filename: 1M2009140143-26-R1.A3L	Test Dates: 10/13/2020 - 11/12/2020	DUT Type: Portable Handset		Page 23 of 104					

© 2020 PCTEST **REV 3.4.M**

II. DUT Configuration for VoWIFI over IMS T-coil Testing

1. Radio Configuration

An investigation was performed on all applicable data rates and modulations to determine the radio configuration to be used for testing. See tables below for SNNR comparison between radio configurations in each IEEE 802.11 standard:

Table 6-1
IEEE 802.11b SNNR by Radio Configuration

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11b	6	DSSS	1	1.30	-31.60	32.90
IEEE 802.11b	6	DSSS	2	1.26	-32.27	33.53
IEEE 802.11b	6	CCK	5.5	1.36	-32.02	33.38
IEEE 802.11b	6	CCK	11	1.35	-32.15	33.50

Table 6-2 IEEE 802.11g/a SNNR by Radio Configuration

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
			LIAIDDO			
IEEE 802.11g	6	BPSK	6	1.38	-32.53	33.91
IEEE 802.11g	6	BPSK	9	1.54	-32.39	33.93
IEEE 802.11g	6	QPSK	12	1.52	-31.27	32.79
IEEE 802.11g	6	QPSK	18	1.29	-31.51	32.80
IEEE 802.11g	6	16QAM	24	1.41	-31.68	33.09
IEEE 802.11g	6	16QAM	36	1.37	-30.54	31.91
IEEE 802.11g	6	64QAM	48	1.35	-32.55	33.90
IEEE 802.11g	6	64QAM	54	1.47	-31.61	33.08

Table 6-3 IEEE 802.11n/ac 20MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11n	20	40	BPSK	0	1.40	-32.83	34.23
IEEE 802.11n	20	40	QPSK	1	1.31	-33.11	34.42
IEEE 802.11n	20	40	QPSK	2	1.30	-32.78	34.08
IEEE 802.11n	20	40	16QAM	3	1.50	-32.38	33.88
IEEE 802.11n	20	40	16QAM	4	1.30	-30.97	32.27
IEEE 802.11n	20	40	64QAM	5	1.09	-31.86	32.95
IEEE 802.11n	20	40	64QAM	6	1.17	-31.81	32.98
IEEE 802.11n	20	40	64QAM	7	1.20	-32.46	33.66
IEEE 802.11ac	20	40	256QAM	8	1.31	-32.68	33.99

FCC ID: A3LSMG996U	PCTEST Thought to be post of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 24 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 24 01 104

Table 6-4 IEEE 802.11ax SU 20MHz BW SNNR by Radio Configuration

	ILLE OUZ. I Tax GO ZOMITIZ DVV ONIVIX by Radio Configuration										
Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]				
IEEE 802.11ax SU	20	40	BPSK	0	1.22	-32.90	34.12				
IEEE 802.11ax SU	20	40	QPSK	1	1.23	-31.10	32.33				
IEEE 802.11ax SU	20	40	QPSK	2	1.56	-30.97	32.53				
IEEE 802.11ax SU	20	40	16QAM	3	1.44	-31.68	33.12				
IEEE 802.11ax SU	20	40	16QAM	4	1.16	-32.86	34.02				
IEEE 802.11ax SU	20	40	64QAM	5	1.63	-33.65	35.28				
IEEE 802.11ax SU	20	40	64QAM	6	1.80	-32.24	34.04				
IEEE 802.11ax SU	20	40	64QAM	7	1.64	-32.03	33.67				
IEEE 802.11ax SU	20	40	256QAM	8	1.67	-32.24	33.91				
IEEE 802.11ax SU	20	40	256QAM	9	1.71	-32.38	34.09				
IEEE 802.11ax SU	20	40	1024QAM	10	1.80	-32.07	33.87				
IEEE 802.11ax SU	20	40	1024QAM	11	1.69	-31.72	33.41				

Table 6-5 IEEE 802.11ax RU 20MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	RU Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11ax RU	20	40	QPSK	1	0	1.28	-32.63	33.91
IEEE 802.11ax RU	20	40	QPSK	1	8	1.63	-32.66	34.29
IEEE 802.11ax RU	20	40	QPSK	1	37	1.78	-31.76	33.54
IEEE 802.11ax RU	20	40	QPSK	1	40	1.78	-32.20	33.98
IEEE 802.11ax RU	20	40	QPSK	1	53	1.55	-32.10	33.65
IEEE 802.11ax RU	20	40	QPSK	1	54	1.82	-32.11	33.93
IEEE 802.11ax RU	20	40	QPSK	1	61	1.82	-33.57	35.39

Table 6-6 IEEE 802.11n/ac 40MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11n	40	38	BPSK	0	1.32	-30.69	32.01
IEEE 802.11n	40	38	QPSK	1	1.34	-32.03	33.37
IEEE 802.11n	40	38	QPSK	2	1.37	-30.00	31.37
IEEE 802.11n	40	38	16QAM	3	1.79	-32.94	34.73
IEEE 802.11n	40	38	16QAM	4	1.29	-33.09	34.38
IEEE 802.11n	40	38	64QAM	5	1.26	-32.24	33.50
IEEE 802.11n	40	38	64QAM	6	1.52	-33.24	34.76
IEEE 802.11n	40	38	64QAM	7	1.66	-32.15	33.81
IEEE 802.11ac	40	38	256QAM	8	1.57	-31.95	33.52
IEEE 802.11ac	40	38	256QAM	9	1.87	-31.82	33.69

FCC ID: A3LSMG996U	PCTEST* Proof to be part of ® secured	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 25 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 25 of 104

Table 6-7
IEEE 802.11ax SU 40MHz BW SNNR by Radio Configuration

	ILLE 002:11 ax 00 40 mile BW ONINE BY Nacio Configuration											
Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]					
IEEE 802.11ax SU	40	38	BPSK	0	1.75	-32.00	33.75					
IEEE 802.11ax SU	40	38	QPSK	1	1.52	-32.27	33.79					
IEEE 802.11ax SU	40	38	QPSK	2	1.63	-32.88	34.51					
IEEE 802.11ax SU	40	38	16QAM	3	1.26	-32.35	33.61					
IEEE 802.11ax SU	40	38	16QAM	4	1.40	-31.48	32.88					
IEEE 802.11ax SU	40	38	64QAM	5	1.39	-32.07	33.46					
IEEE 802.11ax SU	40	38	64QAM	6	1.37	-32.19	33.56					
IEEE 802.11ax SU	40	38	64QAM	7	1.57	-32.72	34.29					
IEEE 802.11ax SU	40	38	256QAM	8	1.43	-33.15	34.58					
IEEE 802.11ax SU	40	38	256QAM	9	1.73	-32.38	34.11					
IEEE 802.11ax SU	40	38	1024QAM	10	1.53	-30.82	32.35					
IEEE 802.11ax SU	40	38	1024QAM	11	1.32	-32.21	33.53					

Table 6-8
IEEE 802.11ax RU 40MHz BW SNNR by Radio Configuration

	ieee ooe: I tax ito foliile bit offitit by itaalo oomigaration											
Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	RU Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]				
IEEE 802.11ax RU	40	38	1024QAM	10	0	1.54	-32.53	34.07				
IEEE 802.11ax RU	40	38	1024QAM	10	17	1.57	-32.80	34.37				
IEEE 802.11ax RU	40	38	1024QAM	10	37	1.80	-32.94	34.74				
IEEE 802.11ax RU	40	38	1024QAM	10	44	1.59	-32.90	34.49				
IEEE 802.11ax RU	40	38	1024QAM	10	53	1.71	-33.98	35.69				
IEEE 802.11ax RU	40	38	1024QAM	10	56	1.62	-34.13	35.75				
IEEE 802.11ax RU	40	38	1024QAM	10	61	1.80	-34.82	36.62				
IEEE 802.11ax RU	40	38	1024QAM	10	62	1.56	-30.92	32.48				
IEEE 802.11ax RU	40	38	1024QAM	10	65	1.64	-33.76	35.40				

2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The NB AMR 4.75kbps setting was used for the audio codec on the CMW500 for VoWIFI over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

Table 6-9
AMR Codec Investigation – VoWIFI over IMS


Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	5.55	4.16	2.29	1.33		2.4GHz	IEEE 802.11b	6
ABM2 (dBA/m)	-31.68	-32.11	-31.98	-31.32	Axial			
Frequency Response	Pass	Pass	Pass	Pass	Axiai			
S+N/N (dB)	37.23	36.27	34.27	32.65				

FCC ID: A3LSMG996U	PCTEST Total to be part of Seminaria	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 26 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 20 01 104

Table 6-10
EVS Codec Investigation – VoWIFI over IMS

	240 Couce investigation Vovin Fover into														
Codec Setting:	EVS Primary SWB 128kbps	EVS Primary SWB 9.6kbps	EVS Primary WB 128kbps	EVS Primary WB 5.9kbps	EVS Primary NB 24.4kbps	EVS Primary NB 5.9kbps	Orientation	Band	Standard	Channel					
ABM1 (dBA/m)	3.23	2.48	5.43	5.43	1.06	1.44			IEEE 802.11b						
ABM2 (dBA/m)	-32.83	-33.00	-32.95	-32.64	-32.99	-32.19	Axial	2.4GHz		6					
Frequency Response	Pass	Pass	Pass	Pass	Pass	Pass	Axiai	2.4002							
S+N/N (dB)	36.06	35.48	38.38	38.07	34.05	33.63									

Mute on; Backlight off; Max Volume; Max Contrast



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 27 of 104
1M2009140143-26-R1.A3L 10/13/2020 - 11/12/2020		Portable Handset		raye 21 01 104

7. OTT VOIP TEST SYSTEM AND DUT CONFIGURATION

I. Test System Setup for OTT VoIP T-Coil Testing

1. OTT VoIP Application

Google Duo is a pre-installed application on the DUT which allows for VoIP calls in a held-to-ear scenario. Duo uses the OPUS audio codec and supports a bitrate range of 6kb/s to 75kb/s. All air interfaces capable of a data connection were evaluated with Google Duo.

2. Equipment Setup

A CMW500 callbox was used to perform OTT VoIP T-coil measurements. The Data Application Unit (DAU) of the CMW500 was connected to the internet and allowed for an IP data connection on the DUT. An auxiliary VoIP unit was used to initiate an OTT VoIP call to the DUT. The auxiliary VoIP unit allowed for the configuration and monitoring of the OTT VoIP codec bitrate during a call. Both high and low bitrate settings were evaluated in to determine the worst-case configuration.

3. Audio Level Settings

According to KDB 285076 D02, the average speech level of -20dBm0 shall be used for protocols not specifically listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation³. The auxiliary VoIP unit allowed for monitoring the signal input level to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the OTT VoIP call.

Note: The green highlighted text is approved by FCC under the TCB PAG Re-Use Policy 388624 D01 IV. D. for T-Coil Testing for WI-FI calling and Google Duo.

II. DUT Configuration for OTT VoIP T-Coil Testing

1. Codec Configuration

An investigation was performed for each applicable data mode to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration for each applicable data mode was used for these investigations. The 75kbps codec setting was used for the audio codec on the auxiliary VoIP unit for OTT VoIP T-Coil testing. See below tables for comparisons between codec data rates on all applicable data modes:

Table 7-1
Codec Investigation – OTT VoIP (EvDO)

Codec Setting:	75kbps	6kbps	Orientation	Channel	
ABM1 (dBA/m)	18.11	17.94		384	
ABM2 (dBA/m)	-35.54	-36.15	Axial		
Frequency Response	Pass	Pass	Axiai		
S+N/N (dB)	53.65	54.09			

³ FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

FCC ID: A3LSMG996U		HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dogg 20 of 104	
1M2009140143-26-R1.A3L		Portable Handset		Page 28 of 104	

Table 7-2
Codec Investigation – OTT VoIP (EDGE)

			· • · · \ •	· — /		
Codec Setting:	75kbps	6kbps	Orientation	Channel		
ABM1 (dBA/m)	18.04	18.08		190		
ABM2 (dBA/m)	-26.84	-26.97	Axial			
Frequency Response	Pass	Pass	Axiai			
S+N/N (dB)	44.88	45.05				

Table 7-3
Codec Investigation – OTT VoIP (HSPA)

Codec III	vestigatic	,,, – O i i i	1011 (1101	~)	
Codec Setting:	75kbps	6kbps	Orientation	Channel	
ABM1 (dBA/m)	17.78	18.01			
ABM2 (dBA/m)	-36.36	-37.10	Axial	4183	
Frequency Response	Pass	Pass	Axiai	4103	
S+N/N (dB)	54.14	55.11			


Table 7-4
Codec Investigation – OTT VoIP (LTE)

	<u> 400 111700</u>	• • • • • • • • • • • • • • • • • • • 	\= : = /			
Codec Setting:	75kbps	6kbps	Orientation	Band / BW	Channel	
ABM1 (dBA/m)	18.00	17.96				
ABM2 (dBA/m)	-35.17	-36.51		LTE Band 66	132322	
Frequency Response	Pass	Pass	- Axial	20MHz	132322	
S+N/N (dB)	53.17	54.47				

Table 7-5
Codec Investigation – OTT VoIP (WIFI)

Codec investigation – OTT voil (viii)													
Codec Setting:	75kbps 6kbps		Orientation	Band	Standard	Channel							
ABM1 (dBA/m)	17.83	17.67			1555 000 44								
ABM2 (dBA/m)	-32.38	-32.59	Axial	2.4GHz		6							
Frequency Response	Pass	Pass	Axiai	2.4002	IEEE 802.11b								
S+N/N (dB)	50.21	50.26				l							

- Mute on; Backlight off; Max Volume; Max Contrast
- Radio Configurations can be found in Section 9.II.H



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 29 of 104	
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		raye 29 01 104	

2. Radio Configuration for OTT VoIP (LTE)

An investigation was performed to determine the worst-case LTE FDD band to be used for OTT VoIP testing. LTE FDD Band 66 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE FDD bands:

Table 7-6
OTT VoIP (LTE FDD) SNNR by LTE Band

			• ,	·, ·	J				
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	Modulation RB Size I		ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
71	680.5	133297	20	16QAM	1	0	17.76	-39.18	56.94
12	707.5	23095	10	16QAM	1	0	18.27	-39.50	57.77
13	782.0	23230	10	16QAM	1	0	18.16	-38.71	56.87
14	793.0	23330	10	16QAM	1	0	17.79	-38.38	56.17
26	831.5	26865	15	16QAM	1	0	18.07	-36.47	54.54
5	836.5	20525	10	16QAM	1	0	18.14	-35.26	53.40
66	1745.0	132322	20	16QAM	1	0	18.00	-35.17	53.17
2	1880.0	18900	20	16QAM	1	0	17.83	-39.09	56.92
25	1882.5	26365	20	16QAM	1	0	18.09	-38.04	56.13
30	2310.0	27710	10	16QAM	1	0	17.73	-38.86	56.59
7	2535.0	21100	20	16QAM	1	0	17.87	-38.96	56.83

An investigation was performed to determine the worst-case LTE TDD band to be used for OTT VoIP testing. LTE TDD Band 41 (PC2) was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE TDD bands:

Table 7-7
OTT VoIP (LTE TDD) SNNR by LTE Band

			• · · • • · · ·	(CIC 100)	0111111 03	/y = : = = = a:: a					
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	ulation RB Size		ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]		
41 (PC3)	2593.0	40620	20	16QAM	1	0	18.03	-33.27	51.30		
41 (PC2)	2593.0	40620	20	16QAM	1	0	17.69	-31.44	49.13		
48	3625.0	55990	20	16QAM	1	0	17.94	-35.09	53.03		

3. LTE FDD Uplink Carrier Aggregation for OTT VolP

LTE FDD ULCA was evaluated to ensure LTE FDD standalone was the worst-case scenario. The configurations in Table 7-8 were determined from Table 7-6 and satisfy the configuration requirements as defined in 3GPP 36.101.

Table 7-8
LTE FDD SNNR for OTT VoIP Uplink Carrier Aggregation

	Tillibe chilik to: Ott von Opnink cantol Aggregation																
	PCC								SCC								
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL) Channel	SCC (UL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
CA_5B	LTE B5	10	20525	836.5	16QAM	1	0	LTE B5	5	20453	829.3	16QAM	1	24	18.49	-39.87	58.36
CA_66B	LTE B66	10	132322	1745.0	16QAM	1	0	LTE B66	10	132223	1735.1	16QAM	1	49	18.37	-38.87	57.24
CA_66C	LTE B66	20	132322	1745.0	16QAM	1	0	LTE B66	20	132124	1725.5	16QAM	1	99	17.68	-38.30	55.98

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 30 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 30 01 104

4. LTE TDD Uplink Carrier Aggregation for OTT VolP

LTE TDD ULCA was evaluated to ensure LTE TDD standalone was the worst-case scenario. The configurations in Table 7-9 were determined from Table 7-7 and satisfy the configuration requirements as defined in 3GPP 36.101.

> Table 7-9 LTE TDD SNNR for OTT VolP Uplink Carrier Aggregation

				PCC							SCC						
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
CA_41C (PC3)	LTE B41	20	40620	2593.0	16QAM	1	0	LTE B41	20	40422	2573.2	16QAM	1	99	18.29	-34.33	52.62
CA_41C (PC2)	LTE B41	20	40620	2593.0	16QAM	1	0	LTE B41	20	40422	2573.2	16QAM	1	99	18.32	-31.61	49.93
CA_48C	LTE B48	20	55990	3625.0	16QAM	1	0	LTE B48	20	55792	3605.2	16QAM	1	99	18.66	-34.10	52.76

5. Interim Procedure for evaluation OTT VoIP (NR)

The following procedure is used to evaluate OTT VoIP (NR) given equipment limitations.

- a. This procedure is applicable for OTT VoIP (NR) voice calls that use the same protocol, codec(s), and reference level as OTT VoIP (LTE) (i.e. -20dBm0).
- b. Establish the ABM1_{NR} value by using the ABM1_{LTE} magnetic intensity for an LTE call using a correlating LTE band through existing procedures and test equipment.
- Establish an ABM2_{NR} value using factory test mode (FTM) to simulate a NR connection for the desired NR band and channel under test.
- d. The following information is documented in Section 9:
 - i. ABM2_{LTE} and ABM2_{NR} for respective tests.
 - ii. Calculate SNNR:
 - 1. ABM1 = ABM1LTE
 - 2. $ABM2 = ABM2_{NR}$
 - $SNNR_{NR} = [ABM1_{LTE} ABM2_{NR}] 3dB$
 - a. A 3dB margin is built in to ensure conservative results with this interim procedure.

The above is only applicable for OTT VoIP scenarios, this device does not support VoNR over IMS.

The manufacturer has confirmed the handset as designed is expected to exhibit similar audio intensity levels between an OTT VoIP call placed over a 4G LTE and a 5G Sub-6GHz data connection.

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 21 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 31 of 104

6. Radio Configuration for OTT VoIP (NR)

An investigation was performed to determine the waveform, modulation, and RB configuration to be used for testing. Due to equipment limitations, the procedure outlined in 7.II.5 was used to evaluate the SNNR for each radio configuration below. CP-OFDM 16QAM, 1RB, 1RB offset was determined to be the worst-case configuration for the handset and will be used for full testing in Section 9.

> **Table 7-10** NR OTT VolP SNNR by Radio Configuration (CP-OFDM)

	_			JITITIC Dy I						
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1 _{LTE} [dB(A/m)]	ABM2 _{NR} [dB(A/m)]	SNNR _{NR}
n5	836.5	167300	20	CP-OFDM	QPSK	1	1	18.14	-42.85	60.99
n5	836.5	167300	20	CP-OFDM	QPSK	1	53	18.14	-42.86	61.00
n5	836.5	167300	20	CP-OFDM	QPSK	1	104	18.14	-43.20	61.34
n5	836.5	167300	20	CP-OFDM	QPSK	53	0	18.14	-44.00	62.14
n5	836.5	167300	20	CP-OFDM	QPSK	53	26	18.14	-43.38	61.52
n5	836.5	167300	20	CP-OFDM	QPSK	53	53	18.14	-42.33	60.47
n5	836.5	167300	20	CP-OFDM	QPSK	106	0	18.14	-44.25	62.39
n5	836.5	167300	20	CP-OFDM	16QAM	1	1	18.14	-41.62	59.76
n5	836.5	167300	20	CP-OFDM	16QAM	1	53	18.14	-42.13	60.27
n5	836.5	167300	20	CP-OFDM	16QAM	1	104	18.14	-42.53	60.67
n5	836.5	167300	20	CP-OFDM	16QAM	53	0	18.14	-43.77	61.91
n5	836.5	167300	20	CP-OFDM	16QAM	53	26	18.14	-43.83	61.97
n5	836.5	167300	20	CP-OFDM	16QAM	53	53	18.14	-43.66	61.80
n5	836.5	167300	20	CP-OFDM	16QAM	106	0	18.14	-44.19	62.33
n5	836.5	167300	20	CP-OFDM	64QAM	1	1	18.14	-41.68	59.82
n5	836.5	167300	20	CP-OFDM	64QAM	1	53	18.14	-43.42	61.56
n5	836.5	167300	20	CP-OFDM	64QAM	1	104	18.14	-41.86	60.00
n5	836.5	167300	20	CP-OFDM	64QAM	53	0	18.14	-44.14	62.28
n5	836.5	167300	20	CP-OFDM	64QAM	53	26	18.14	-44.20	62.34
n5	836.5	167300	20	CP-OFDM	64QAM	53	53	18.14	-44.14	62.28
n5	836.5	167300	20	CP-OFDM	64QAM	106	0	18.14	-43.99	62.13
n5	836.5	167300	20	CP-OFDM	256QAM	1	1	18.14	-43.17	61.31
n5	836.5	167300	20	CP-OFDM	256QAM	1	53	18.14	-42.25	60.39
n5	836.5	167300	20	CP-OFDM	256QAM	1	104	18.14	-42.46	60.60
n5	836.5	167300	20	CP-OFDM	256QAM	53	0	18.14	-42.23	60.37
n5	836.5	167300	20	CP-OFDM	256QAM	53	26	18.14	-44.18	62.32
n5	836.5	167300	20	CP-OFDM	256QAM	53	53	18.14	-43.74	61.88
n5	836.5	167300	20	CP-OFDM	256QAM	106	0	18.14	-43.80	61.94

FCC ID: A3LSMG996U	PCTEST* Proof to be part of ® secured	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 20 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 32 of 104

Table 7-11
NR OTT VolP SNNR by Radio Configuration (DFT-s-OFDM)

		INIX OI		ININ DY NO	uio coiiii	guratic	יו וש) ווי			
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1 _{LTE} [dB(A/m)]	ABM2 _{NR} [dB(A/m)]	SNNR _{NR} [dB]
n5	836.5	167300	20	DFT-s-OFDM	π/2-BPSK	1	1	18.14	-42.82	60.96
n5	836.5	167300	20	DFT-s-OFDM	π/2-BPSK	1	53	18.14	-41.73	59.87
n5	836.5	167300	20	DFT-s-OFDM	π/2-BPSK	1	104	18.14	-44.07	62.21
n5	836.5	167300	20	DFT-s-OFDM	π/2-BPSK	50	0	18.14	-43.90	62.04
n5	836.5	167300	20	DFT-s-OFDM	π/2-BPSK	50	28	18.14	-43.38	61.52
n5	836.5	167300	20	DFT-s-OFDM	π/2-BPSK	50	56	18.14	-43.15	61.29
n5	836.5	167300	20	DFT-s-OFDM	π/2-BPSK	100	0	18.14	-44.01	62.15
n5	836.5	167300	20	DFT-s-OFDM	QPSK	1	1	18.14	-42.23	60.37
n5	836.5	167300	20	DFT-s-OFDM	QPSK	1	53	18.14	-43.89	62.03
n5	836.5	167300	20	DFT-s-OFDM	QPSK	1	104	18.14	-44.10	62.24
n5	836.5	167300	20	DFT-s-OFDM	QPSK	50	0	18.14	-43.92	62.06
n5	836.5	167300	20	DFT-s-OFDM	QPSK	50	28	18.14	-43.68	61.82
n5	836.5	167300	20	DFT-s-OFDM	QPSK	50	56	18.14	-43.49	61.63
n5	836.5	167300	20	DFT-s-OFDM	QPSK	100	0	18.14	-43.43	61.57
n5	836.5	167300	20	DFT-s-OFDM	16QAM	1	1	18.14	-41.71	59.85
n5	836.5	167300	20	DFT-s-OFDM	16QAM	1	53	18.14	-42.45	60.59
n5	836.5	167300	20	DFT-s-OFDM	16QAM	1	104	18.14	-42.78	60.92
n5	836.5	167300	20	DFT-s-OFDM	16QAM	50	0	18.14	-44.15	62.29
n5	836.5	167300	20	DFT-s-OFDM	16QAM	50	28	18.14	-44.31	62.45
n5	836.5	167300	20	DFT-s-OFDM	16QAM	50	56	18.14	-43.57	61.71
n5	836.5	167300	20	DFT-s-OFDM	16QAM	100	0	18.14	-43.45	61.59
n5	836.5	167300	20	DFT-s-OFDM	64QAM	1	1	18.14	-43.08	61.22
n5	836.5	167300	20	DFT-s-OFDM	64QAM	1	53	18.14	-42.05	60.19
n5	836.5	167300	20	DFT-s-OFDM	64QAM	1	104	18.14	-43.09	61.23
n5	836.5	167300	20	DFT-s-OFDM	64QAM	50	0	18.14	-43.83	61.97
n5	836.5	167300	20	DFT-s-OFDM	64QAM	50	28	18.14	-43.98	62.12
n5	836.5	167300	20	DFT-s-OFDM	64QAM	50	56	18.14	-43.94	62.08
n5	836.5	167300	20	DFT-s-OFDM	64QAM	100	0	18.14	-44.31	62.45
n5	836.5	167300	20	DFT-s-OFDM	256QAM	1	1	18.14	-43.65	61.79
n5	836.5	167300	20	DFT-s-OFDM	256QAM	1	53	18.14	-43.21	61.35
n5	836.5	167300	20	DFT-s-OFDM	256QAM	1	104	18.14	-43.41	61.55
n5	836.5	167300	20	DFT-s-OFDM	256QAM	50	0	18.14	-44.56	62.70
n5	836.5	167300	20	DFT-s-OFDM	256QAM	50	28	18.14	-44.45	62.59
n5	836.5	167300	20	DFT-s-OFDM	256QAM	50	56	18.14	-44.36	62.50
n5	836.5	167300	20	DFT-s-OFDM	256QAM	100	0	18.14	-43.79	61.93

An investigation was performed to determine the worst-case NR FDD band to be used for OTT VoIP testing. NR n30 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different NR FDD bands:

Table 7-12
OTT VoIP (NR FDD) SNNR by Band

	=											
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1 _{LTE} [dB(A/m)]	ABM2 _{NR} [dB(A/m)]	SNNR _{NR} [dB]		
n71	680.5	136100	20	CP-OFDM	16QAM	1	1	17.76	-42.48	60.24		
n12	707.5	141500	15	CP-OFDM	16QAM	1	1	18.27	-43.23	61.50		
n5	836.5	167300	20	CP-OFDM	16QAM	1	1	18.14	-41.62	59.76		
n66 - Ant A	1745.0	349000	40	CP-OFDM	16QAM	1	1	18.00	-41.17	59.17		
n66 - Ant I	1745.0	349000	40	CP-OFDM	16QAM	1	1	18.00	-43.16	61.16		
n25 - Ant A	1882.5	376500	40	CP-OFDM	16QAM	1	1	18.09	-41.70	59.79		
n25 - Ant I	1882.5	376500	40	CP-OFDM	16QAM	1	1	18.09	-42.36	60.45		
n30	2310.0	462000	10	CP-OFDM	16QAM	1	1	17.87	-40.92	58.79		

An investigation was performed to determine the worst-case NR TDD band to be used for OTT VoIP testing. NR n41 (Ant B, PC3) was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different NR TDD bands:

Table 7-13
OTT VoIP (NR TDD) SNNR by Band

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1 _{LTE} [dB(A/m)]	ABM2 _{NR} [dB(A/m)]	SNNR _{NR} [dB]
n41 - Ant B (PC3)	2593.0	518598	100	CP-OFDM	16QAM	1	1	18.03	-26.45	44.48
n41 - Ant I (PC2)	2593.0	518598	100	CP-OFDM	16QAM	1	1	17.69	-33.18	50.87
n77 (PC2)	3750.0	650000	100	CP-OFDM	16QAM	1	1	17.94	-32.32	50.26

FCC ID: A3LSMG996U	PCTEST: Houd to be port of @ recessor	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 22 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 33 of 104

8. FCC 3G MEASUREMENTS

I. CDMA Test Configurations

Radio Configuration 1, Service Option 68 was used for the testing according to the CTIA Test Plan and also as one of the worst-case configuration for the handset due to vocoder gating from the EVRC logic. See below plot for an example of ABM noise comparison between operational field service options and radio configurations for a CDMA2000 handset:


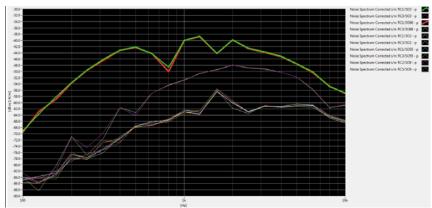


Figure 8-1
CDMA Audio Band Magnetic Noise

Table 8-1 FCC 3G ABM Measurements for A3LSMG996U (CDMA)

Configuration:	RC1/SO68	RC3/SO68	RC4/SO68	Orientation	Channel
ABM1 (dBA/m)	1.50	0.98	1.35		
ABM2 (dBA/m)	-42.09	-51.46	-51.79	Axial	384
Frequency Response	Pass	Pass	Pass	Axiai	
S+N/N (dB)	43.59	52.44	53.14		

- Mute on; Backlight off; Max Volume; Max Contrast
- Power Control Bits = "All Up"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 34 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 34 01 104

© 2020 PCTEST REV 3.4.M

II. UMTS Test Configurations

AMR at 12.2kbps, 13.6kbps SRB was used for the testing as the worst-case configuration for the handset. See below plot for ABM noise comparison between vocoder rates:


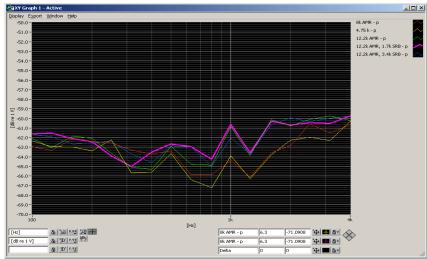


Figure 8-3
UMTS Audio Band Magnetic Noise

Table 8-2 Codec Investigation - UMTS

		ec mvestigatio			
Codec Setting:	AMR 12.2kbps	AMR 7.95kbps	AMR 4.75kbps	Orientation	Channel
ABM1 (dBA/m)	6.05	5.97	5.70		
ABM2 (dBA/m)	-51.39	-51.96	-52.10	Axial	4132
Frequency Response	Pass	Pass	Pass	Axiai	
S+N/N (dB)	57.44	57.93	57.80		

- Mute on; Backlight off; Max Volume; Max Contrast
- · TPC="All 1s"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: A3LSMG996U	PCTEST Thought to be post of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager		
Filename:	Test Dates:	DUT Type:		Page 35 of 104		
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 33 01 104		

Table 9-1 **Consolidated Tabled Results**

/		001.0	onaa	tou .	abiec		uito		
		Freq. Response Margin		Magnetic Intensity Verdict		FCC SNNR Verdict		Margin from FCC Limit	C63.19-2011
C63.19 Section		8.3	3.2	8.	3.1	8.3	3.4	(dB)	Rating
C63.19	9 Section	Axial	Radial	Axial	Radial	Axial	Radial	, í	
	Secondary Cellular	PASS	NA	PASS	PASS	PASS	PASS		
CDMA	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-16.64	T4
ODIIIA	PCS	PASS	NA NA	PASS	PASS	PASS	PASS	-10.04	
	Secondary Cellular	PASS	NA NA	PASS	PASS	PASS	PASS	22.50	
EvDO									
(OTT VoIP)	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-33.58	T4
	PCS	PASS	NA	PASS	PASS	PASS	PASS		
GSM	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-7.09	Т3
	PCS	PASS	NA	PASS	PASS	PASS	PASS		
EDGE	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-24.41	T4
(OTT VoIP)	PCS	PASS	NA	PASS	PASS	PASS	PASS	-24.41	
	Cellular	PASS	NA	PASS	PASS	PASS	PASS		
UMTS	AWS	PASS	NA	PASS	PASS	PASS	PASS	-32.31	T4
	PCS	PASS	NA	PASS	PASS	PASS	PASS		
	Cellular	PASS	NA	PASS	PASS	PASS	PASS		
HSPA	AWS	PASS	NA NA	PASS	PASS	PASS	PASS	-33.68	T4
(OTT VoIP)	PCS	PASS	NA NA	PASS	PASS	PASS	PASS	00.00	
	B71	PASS	NA NA	PASS	PASS	PASS	PASS		
	B12	PASS	NA	PASS	PASS	PASS	PASS		
	B13	PASS	NA	PASS	PASS	PASS	PASS		Т4
	B14	PASS	NA	PASS	PASS	PASS	PASS		
	B26	PASS	NA	PASS	PASS	PASS	PASS		
LTE FDD	B5	PASS	NA	PASS	PASS	PASS	PASS	-24.34	
	B66	PASS	NA	PASS	PASS	PASS	PASS	-	
	B2	PASS	NA	PASS	PASS	PASS	PASS		
	B25	PASS	NA	PASS	PASS	PASS	PASS		
	B30	PASS	NA	PASS	PASS	PASS	PASS		
	B7	PASS	NA	PASS	PASS	PASS	PASS		
LTE FDD (OTT VoIP)	B66	PASS	NA	PASS	PASS	PASS	PASS	-29.37	T4
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	B41 (PC3)	PASS	NA	PASS	PASS	PASS	PASS	+	
LTE TDD	B41 (PC2)	PASS	NA NA	PASS	PASS	PASS	PASS	-14.46	T4
LIE IDD	B41 (FC2)	PASS	NA NA	PASS	PASS	PASS	PASS	-14.40	14
	D40	FASS	NA	FAGG	FASS	FAGG	FASS		
(OTT VoIP)	B41 (PC2)	PASS	NA	PASS	PASS	PASS	PASS	-29.03	T4
NR FDD (OTT VoIP)	n30	NA	NA	PASS	PASS	PASS	PASS	-32.42	T4
NR TDD (OTT VoIP)	n41 - Ant B (PC3)	NA	NA	PASS	PASS	PASS	PASS	-22.02	T4
	IEEE 802.11b	PASS	NA	PASS	PASS	PASS	PASS		
	IEEE 802.11g	PASS	NA	PASS	PASS	PASS	PASS		
WLAN	IEEE 802.11n	PASS	NA NA	PASS	PASS	PASS	PASS	-9.47	Т3
	IEEE 802.11ax SU	PASS	NA NA	PASS	PASS	PASS	PASS		
	IEEE 802.11ax RU	PASS	NA NA	PASS	PASS	PASS	PASS		
	IEEE 802.11b	PASS	NA NA	PASS	PASS	PASS	PASS		
	IEEE 802.11B	PASS	NA NA	PASS	PASS	PASS	PASS		
WLAN	IEEE 802.11g	PASS	NA NA	PASS	PASS	PASS	PASS	-22.36	T4
(OTT VoIP)		PASS	NA NA	PASS	PASS	PASS	PASS	-22.30	14
	IEEE 802.11ax SU								
	IEEE 802.11ax RU	PASS	NA	PASS	PASS	PASS	PASS		
	IEEE 802.11a	PASS	NA	PASS	PASS	PASS	PASS		
	IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS	40.15	
U-NII	IEEE 802.11ac	PASS	NA	PASS	PASS	PASS	PASS	-10.10	T4
	IEEE 802.11ax SU	PASS	NA	PASS	PASS	PASS	PASS		
	IEEE 802.11ax RU	PASS	NA	PASS	PASS	PASS	PASS		
U-NII (OTT VoIP)	IEEE 802.11a	PASS	NA	PASS	PASS	PASS	PASS		
	IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS		
	IEEE 802.11ac	PASS	NA	PASS	PASS	PASS	PASS	-25.69	T4
	IEEE 802.11ax SU	PASS	NA	PASS	PASS	PASS	PASS		
	IEEE 802.11ax RU	PASS	NA	PASS	PASS	PASS	PASS		
		•							

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager		
Filename:	Test Dates:	DUT Type:		Dogo 26 of 104		
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 36 of 104		

© 2020 PCTEST REV 3.4.M

I. Raw Handset Data

Table 9-2
Raw Data Results for CDMA

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		476	1.32	-43.05		2.00	44.37	20.00	-24.37	T4	
	Axial	564	1.48	-42.93	-60.87	2.00	44.41	20.00	-24.41	T4	1.2, 1.4
Secondary		684	1.46	-43.03		2.00	44.49	20.00	-24.49	T4	
Cellular		476	-5.87	-43.65			37.78	20.00	-17.78	T4	
	Radial	564	-5.86	-43.51	-63.86	N/A	37.65	20.00	-17.65	T4	1.2, 0.6
		684	-6.00	-43.11			37.11	20.00	-17.11	T4	
		1013	1.48	-43.39]	2.00	44.87	20.00	-24.87	T4	
	Axial	384	1.09	-42.03	-60.87	2.00	43.12	20.00	-23.12	T4	1.2, 1.4
Cellular		777	1.71	-42.25		2.00	43.96	20.00	-23.96	T4	
Celidiai		1013	-6.12	-42.99			36.87	20.00	-16.87	T4	
	Radial	384	-6.11	-42.93	-63.86	N/A	36.82	20.00	-16.82	T4	1.2, 0.6
		777	-5.91	-42.55			36.64	20.00	-16.64	T4	
		25	1.62	-40.86		2.00	42.48	20.00	-22.48	T4	
	Axial	600	1.51	-41.63	-60.87	2.00	43.14	20.00	-23.14	T4	1.2, 1.4
PCS		1175	1.63	-40.66		2.00	42.29	20.00	-22.29	T4	
F03		25	-5.83	-49.68			43.85	20.00	-23.85	T4	
	Radial	600	-5.88	-49.73	-63.86	N/A	43.85	20.00	-23.85	T4	1.2, 0.6
		1175	-5.76	-49.44			43.68	20.00	-23.68	T4	

Table 9-3
Raw Data Results for GSM

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		128	6.41	-22.16		1.69	28.57	20.00	-8.57	T3		
	Axial	190	6.50	-21.29	-60.87	1.56	27.79	20.00	-7.79	Т3	1.2, 1.4	
GSM850		251	6.18	-20.91		1.64	27.09	20.00	-7.09	Т3		
GSIVIOSU		128	-0.61	-41.19	-39.45 -63.86		40.58	20.00	-20.58	T4		
	Radial	190	-0.60	-39.45	-63.86	N/A	38.85	20.00	-18.85	T4	1.2, 0.6	
		251	-0.78	-37.96	†			37.18	20.00	-17.18	T4	
		512	6.67	-25.42		1.66	32.09	20.00	-12.09	T4		
	Axial	661	6.55	-25.68	-60.87	1.66	32.23	20.00	-12.23	T4	1.2, 1.4	
GSM1900		810	6.20	-25.74		1.68	31.94	20.00	-11.94	T4		
G3W11900		512	-0.97	-35.96			34.99	20.00	-14.99	T4		
	Radial	661	-0.97	-36.95	-63.86	N/A	35.98	20.00	-15.98	T4	1.2, 0.6	
		810	-0.79	-39.86			39.07	20.00	-19.07	T4		

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 37 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		raye 37 01 104

Table 9-4
Raw Data Results for UMTS

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		4132	5.96	-51.68		1.93	57.64	20.00	-37.64	T4	
	Axial	4183	5.94	-51.89	-60.87	1.89	57.83	20.00	-37.83	T4	1.2, 1.4
UMTS V		4233	5.91	-51.32		1.92	57.23	20.00	-37.23	T4	
OW 10 V		4132	-1.62	-54.14			52.52	20.00	-32.52	T4	
	Radial	4183	-1.62	-54.31	-63.86	N/A	52.69	20.00	-32.69	T4	1.2, 0.6
		4233	-1.57	-53.88			52.31	20.00	-32.31	T4	
		1312	5.90	-50.74		1.89	56.64	20.00	-36.64	T4	
	Axial	1412	5.84	-51.13	-60.87	1.85	56.97	20.00	-36.97	T4	1.2, 1.4
UMTS IV		1513	5.89	-51.10		1.90	56.99	20.00	-36.99	T4	
OWIGIV		1312	-1.59	-54.28			52.69	20.00	-32.69	T4	
	Radial	1412	-1.59	-54.27	-63.86	N/A	52.68	20.00	-32.68	T4	1.2, 0.6
		1513	-1.56	-53.97			52.41	20.00	-32.41	T4	
		9262	5.94	-50.84		1.86	56.78	20.00	-36.78	T4	
	Axial	9400	5.94	-51.55	-60.87	1.91	57.49	20.00	-37.49	T4	1.2, 1.4
UMTS II		9538	5.94	-51.32		1.88	57.26	20.00	-37.26	T4	
OWISH		9262	-1.55	-54.17			52.62	20.00	-32.62	T4	
	Radial	9400	-1.57	-54.11	-63.86	N/A	52.54	20.00	-32.54	T4	1.2, 0.6
		9538	-1.55	-54.39			52.84	20.00	-32.84	T4	1

Table 9-5 Raw Data Results for LTE B71

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	133297	5.68	-48.18		2.00	53.86	20.00	-33.86	T4	
	Avial	15MHz	133297	5.99	-47.56	-62.81	2.00	53.55	20.00	-33.55	T4	1.2, 1.4
Axial -	10MHz	133297	5.94	-46.86	-02.61	2.00	52.80	20.00	-32.80	T4	1.2, 1.4	
LTE Band 71	5MHz	133297	5.79	-46.94	1	2.00	52.73	20.00	-32.73	T4		
LIE Ballu / I		20MHz	133297	-1.58	-49.09			47.51	20.00	-27.51	T4	
	Radial	15MHz	133297	-1.48	-48.23	- 04.00	NIA	46.75	20.00	-26.75	T4	1.2, 0.6
	Radial	10MHz	133297	-1.29	-48.43	-61.06	.06 N/A	47.14	20.00	-27.14	T4	1.2, 0.0
		5MHz	133297	-1.46	-48.91			47.45	20.00	-27.45	T4	

Table 9-6 Raw Data Results for LTE B12

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise	Frequency Response	S+N/N (dB)	FCC Limit	Margin from FCC Limit	C63.19-2011 Rating	Test Coordinates
					. , ,,		Margin (dB)			(dB)		
		10MHz	23095	5.74	-48.18		2.00	53.92	20.00	-33.92	T4	
	Avial	5MHz	23095	5.98	-46.25	-62.81	2.00	52.23	20.00	-32.23	T4	1.2, 1.4
	Axial -	3MHz	23095	6.09	-46.70	-02.61	2.00	52.79	20.00	-32.79	T4	1.2, 1.4
LTE Band 12	1.4MHz	23095	5.72	-47.25	1	2.00	52.97	20.00	-32.97	T4		
LIE Ballu 12	LTE Band 12	10MHz	23095	-1.29	-49.11			47.82	20.00	-27.82	T4	
	Radial	5MHz	23095	-1.14	-47.85	7 04 00	NI/A	46.71	20.00	-26.71	T4	1.2, 0.6
	Radial	3MHz	23095	-1.35	-48.24	-61.06	06 N/A	46.89	20.00	-26.89	T4	1.2, 0.6
		1.4MHz	23095	-1.45	-50.22			48.77	20.00	-28.77	T4	

Table 9-7 Raw Data Results for LTE B13

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	10MHz	23230	5.78	-45.66	-62.81	2.00	51.44	20.00	-31.44	T4	1.2. 1.4
LTE Band 13		5MHz	23230	5.96	-48.77	-02.01	2.00	54.73	20.00	-34.73	T4	1.2, 1.4
LIE Ballu 13	Radial	10MHz	23230	-1.35	-45.69	-61.06	N/A	44.34	20.00	-24.34	T4	1.2, 0.6
	Radiai	5MHz	23230	-1.50	-50.77	-01.06	IN/A	49.27	20.00	-29.27	T4	1.2, 0.6

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 38 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		raye 30 01 104

Table 9-8 Raw Data Results for LTE B14

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	10MHz	23330	5.95	-48.36	-62.81	2.00	54.31	20.00	-34.31	T4	1.2, 1.4
LTE Bond 44		5MHz	23330	5.79	-48.58	-02.01	2.00	54.37	20.00	-34.37	T4	1.2, 1.4
LTE Band 14	10MHz	23330	-1.68	-49.75	-61.06	N/A	48.07	20.00	-28.07	T4	1.2, 0.6	
	Radial	5MHz	23330	-1.65	-49.05	-61.06	IN/A	47.40	20.00	-27.40	T4	1.2, 0.6

Table 9-9 Raw Data Results for LTE B26

						counts to									
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates			
		15MHz	26865	5.91	-46.33		2.00	52.24	20.00	-32.24	T4				
		10MHz	26865	5.74	-46.41		2.00	52.15	20.00	-32.15	T4				
	Axial	5MHz	26865	5.79	-46.57	-62.81	2.00	52.36	20.00	-32.36	T4	1.2, 1.4			
	7,000	3MHz	26865	5.85	-46.22		2.00	52.07	20.00	-32.07	T4				
LTE Band 26		1.4MHz	26865	6.01	-46.17		2.00	52.18	20.00	-32.18	T4				
LIE Ballu 20		15MHz	26865	-1.92	-48.71			46.79	20.00	-26.79	T4				
	Radial	10MHz	26865	-1.73	-47.42	-61.06	1				45.69	20.00	-25.69	T4	
		5MHz	26865	-1.81	-47.52		N/A	45.71	20.00	-25.71	T4	1.2, 0.6			
		3MHz	26865	-1.60	-46.72			45.12	20.00	-25.12	T4				
		1.4MHz	26865	-1.70	-48.89			47.19	20.00	-27.19	T4				

Table 9-10 Raw Data Results for LTE B5

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		10MHz	20525	5.92	-47.06		2.00	52.98	20.00	-32.98	T4		
	Assiml	5MHz	20525	6.19	-46.20	-62.81	2.00	52.39	20.00	-32.39	T4	1.2, 1.4	
	Axial -	3MHz	20525	5.83	-46.69	-02.01	2.00	52.52	20.00	-32.52	T4	1.2, 1.4	
LTE Band E		1.4MHz	20525	6.14	-46.49		2.00	52.63	20.00	-32.63	T4		
LIE Ballu 5		10MHz	20525	-1.71	-47.88			46.17	20.00	-26.17	T4		
	Radial	5MHz	20525	-1.69	-47.33	-61.06	-61.06	N// A	45.64	20.00	-25.64	T4	12.06
	Radiai	3MHz	20525	-1.87	-47.59			-61.06 N/A	IN/A	45.72	20.00	-25.72	T4
		1.4MHz	20525	-1.75	-47.92			46.17	20.00	-26.17	T4		

Table 9-11 Raw Data Results for LTE B66

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		20MHz	132322	5.80	-45.58		2.00	51.38	20.00	-31.38	T4		
		15MHz	132322	5.78	-46.44		2.00	52.22	20.00	-32.22	T4		
	Axial	10MHz	132322	5.75	-46.31	-62.81	2.00	52.06	20.00	-32.06	T4	1.2, 1.4	
	Axiai	5MHz	132322	6.04	-45.81	-02.01	2.00	51.85	20.00	-31.85	T4	1.2, 1.4	
	66 1	3MHz	132322	5.81	-45.56		2.00	51.37	20.00	-31.37	T4		
LTE Bond 66		1.4MHz	132322	5.80	-46.39		2.00	52.19	20.00	-32.19	T4		
LIE Ballu 66		20MHz	132322	-1.54	-50.02			48.48	20.00	-28.48	T4		
	Radial -	15MHz	132322	-1.58	-50.22			48.64	20.00	-28.64	T4		
		10MHz	132322	-1.89	-50.21	-61.06 N/A	48.32	20.00	-28.32	T4	1.2, 0.6		
		5MHz	132322	-1.78	-50.16		-61.06	IN/A	48.38	20.00	-28.38	T4	1.2, 0.6
		3MHz	132322	-1.47	-50.08			48.61	20.00	-28.61	T4		
		1.4MHz	132322	-1.79	-50.13			48.34	20.00	-28.34	T4		

FCC ID: A3LSMG996U	PCTEST: Noted to be part of & secured	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 20 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 39 of 104

Table 9-12 Raw Data Results for LTE B25

					Duta III			- ·							
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates			
		20MHz	26365	6.23	-46.08		2.00	52.31	20.00	-32.31	T4				
		15MHz	26365	6.05	-46.10		2.00	52.15	20.00	-32.15	T4				
	Axial	10MHz	26365	5.85	-47.00	-62.81	2.00	52.85	20.00	-32.85	T4	1.2, 1.4			
	Axiai	5MHz	26365	6.16	-46.35	-02.01	2.00	52.51	20.00	-32.51	T4	1.2, 1.4			
	LTE Band 25	3MHz	26365	5.77	-46.49		2.00	52.26	20.00	-32.26	T4				
LTE Band 25		1.4MHz	26365	5.99	-46.70		2.00	52.69	20.00	-32.69	T4				
LIE Ballu 25		20MHz	26365	-1.54	-48.62			47.08	20.00	-27.08	T4				
		15MHz	26365	-1.80	-50.22			48.42	20.00	-28.42	T4				
	Radial	10MHz	26365	-1.76	-48.29	64.06	N/A	46.53	20.00	-26.53	T4	1.2, 0.6			
	radiai	5MHz	26365	-1.93	-49.30	-61.06 	-61.06	-61.06	-61.06	IWA	47.37	20.00	-27.37	T4	1.2, 0.6
		3MHz	26365	-1.80	-49.99							48.19	20.00	-28.19	T4
		1.4MHz	26365	-1.99	-50.26			48.27	20.00	-28.27	T4				

Table 9-13 Raw Data Results for LTE B2

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	18900	6.05	-46.12		2.00	52.17	20.00	-32.17	T4	
		15MHz	18900	6.02	-46.18		2.00	52.20	20.00	-32.20	T4	
	Axial	10MHz	18900	5.81	-46.36	-62.81	2.00	52.17	20.00	-32.17	T4	1.2, 1.4
	Axiai	5MHz	18900	5.83	-46.20	-02.01	2.00	52.03	20.00	-32.03	T4	1.2, 1.4
		3MHz	18900	5.78	-46.61		2.00	52.39	20.00	-32.39	T4	
LTE Band 2		1.4MHz	18900	6.09	-46.28		2.00	52.37	20.00	-32.37	T4	
LIE Banu 2		20MHz	18900	-1.80	-49.94			48.14	20.00	-28.14	T4	
		15MHz	18900	-1.74	-49.89			48.15	20.00	-28.15	T4	
	Radial	10MHz	18900	-1.84	-50.66	64.06	N/A	48.82	20.00	-28.82	T4	1.2, 0.6
	Radiai	5MHz	18900	-1.88	-50.77	-61.06	IN/A	48.89	20.00	-28.89	T4	1.2, 0.6
		3MHz	18900	-1.58	-50.14			48.56	20.00	-28.56	T4	
		1.4MHz	18900	-1.81	-50.88			49.07	20.00	-29.07	T4	

Table 9-14 Raw Data Results for LTE B30

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	10MHz	27710	5.99	-44.64	-62.81	2.00	50.63	20.00	-30.63	T4	1.2, 1.4
LTE Band 3		5MHz	27710	5.62	-46.05	-02.01	2.00	51.67	20.00	-31.67	T4	1.2, 1.4
LIE Band 3	Radial	10MHz	27710	-1.87	-48.35	-61.06	N/A	46.48	20.00	-26.48	T4	1.2. 0.6
	Radiai	5MHz	27710	-1.94	-48.44	-01.06	INA	46.50	20.00	-26.50	T4	1.2, 0.6

Table 9-15 Raw Data Results for LTE B7

					- 414	COUNTY IN	<u> </u>	•				
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	21100	5.76	-45.26		2.00	51.02	20.00	-31.02	T4	
	Axial	15MHz	21100	5.84	-45.80	-62.81	2.00	51.64	20.00	-31.64	T4	1.2, 1.4
	Axiai	10MHz	21100	5.71	-45.91	-02.01	2.00	51.62	20.00	-31.62	T4	1.2, 1.4
LTE Band 7		5MHz	21100	5.78	-45.20		2.00	50.98	20.00	-30.98	T4	
LIE Ballu /		20MHz	21100	-1.74	-49.58			47.84	20.00	-27.84	T4	
	Radial	15MHz	21100	-1.62	-49.68	-61.06	N/A	48.06	20.00	-28.06	T4	1.2. 0.6
	Naulai	10MHz	21100	-1.56	-48.69	-01.00	INA	47.13	20.00	-27.13	T4	1.2, 0.0
		5MHz	21100	-1.59	-48.45			46.86	20.00	-26.86	T4	1

FCC ID: A3LSMG996U	PCTEST: Noted to be part of & secured	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 40 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 40 of 104

Table 9-16 Raw Data Results for LTE B41 Power Class 3

				Duta i ii		-		o uuoo	•			
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	40620	6.00	-38.72		2.00	44.72	20.00	-24.72	T4	
	Axial	15MHz	40620	5.87	-37.39	-62.29	2.00	43.26	20.00	-23.26	T4	1.2, 1.4
	Axiai	10MHz	40620	5.76	-38.70	-02.29	2.00	44.46	20.00	-24.46	T4	1.2, 1.4
LTE Band 41		5MHz	40620	5.88	-38.25		2.00	44.13	20.00	-24.13	T4	
LIE Ballu 41		20MHz	40620	-1.53	-45.73			44.20	20.00	-24.20	T4	
	Radial	15MHz	40620	-1.72	-45.38	-61.06	N/A	43.66	20.00	-23.66	T4	1.2. 0.6
	Naulai	10MHz	40620	-1.56	-45.01	-01.00	IVA	43.45	20.00	-23.45	T4	1.2, 0.0
		5MHz	40620	-1.49	-45.08			43.59	20.00	-23.59	T4	

Table 9-17 Raw Data Results for LTE B41 Power Class 2

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates			
		20MHz	40620	5.69	-34.67		2.00	40.36	20.00	-20.36	T4				
		15MHz	40620	5.94	-34.50		2.00	40.44	20.00	-20.44	T4				
		10MHz	40620	5.93	-34.46		2.00	40.39	20.00	-20.39	T4	İ			
	Axial	5MHz	41490	6.09	-33.06	62.20	2.00	39.15	20.00	-19.15	T4	1.2, 1.4			
	Axiai	5MHz	41055	6.28	-34.26	-62.29 -	2.00	40.54	20.00	-20.54	T4	1.2, 1.4			
LTE Band 44		5MHz	40620	5.81	-34.19		2.00	40.00	20.00	-20.00	T4	Ì			
LIE Band 41	TE Band 41	5MHz	40185	6.10	-32.97		2.00	39.07	20.00	-19.07	T4	Ì			
		5MHz	39750	6.21	-33.69		2.00	39.90	20.00	-19.90	T4	Ì			
		20MHz	40620	-1.87	-40.44			38.57	20.00	-18.57	T4				
	Radial	15MHz	40620	-1.76	-40.78	-61.06 N	- 04.00	04.00		N/A	39.02	20.00	-19.02	T4	12.06
	Radiai	10MHz	40620	-1.78	-40.65		IVA	38.87	20.00	-18.87	T4	1.2, 0.6			
		5MHz	40620	-1.79	-40.42			38.63	20.00	-18.63	T4	İ			

Table 9-18 Raw Data Results for LTE B48

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	55990	5.74	-38.42		2.00	44.16	20.00	-24.16	T4	
	Axial	15MHz	55990	5.95	-38.01	-62.29	2.00	43.96	20.00	-23.96	T4	1.2, 1.4
	Axidi	10MHz	55990	6.06	-38.65	-02.29	2.00	44.71	20.00	-24.71	T4	1.2, 1.4
		5MHz	55990	5.84	-38.14		2.00	43.98	20.00	-23.98	T4	
LTE Band 48		20MHz	55990	-1.56	-36.78			35.22	20.00	-15.22	T4	
LIE Ballu 40		15MHz	55990	-1.82	-36.86			35.04	20.00	-15.04	T4	
	Radial	10MHz	55990	-1.57	-36.86	-61.06	N/A	35.29	20.00	-15.29	T4	1.2. 0.6
	Naulai	5MHz	56715	-1.31	-37.62	-01.00	INA	36.31	20.00	-16.31	T4	1.2, 0.0
		5MHz	55990	-1.86	-36.48			34.62	20.00	-14.62	T4	
		5MHz	55265	-1.56	-36.02			34.46	20.00	-14.46	T4	

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 41 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 41 of 104

Table 9-19
Raw Data Results for 2.4GHz WIFI

	Frequency Maroin from													
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates			
IEEE	Axial	6	1.58	-31.87	-62.65	2.00	33.45	20.00	-13.45	T4	1.2, 1.4			
802.11b	Radial	6	-5.77	-36.46	-60.51	N/A	30.69	20.00	-10.69	T4	1.2, 0.6			
		1	1.07	-34.29		2.00	35.36	20.00	-15.36	T4				
IEEE	Axial	6	1.39	-30.23	-62.65	2.00	31.62	20.00	-11.62	T4	1.2, 1.4			
802.11g		11	1.19	-32.37		2.00	33.56	20.00	-13.56	T4				
	Radial	6	-5.64	-39.13	-60.51	N/A	33.49	20.00	-13.49	T4	1.2, 0.6			
IEEE	Axial	6	1.30	-33.29	-62.65	2.00	34.59	20.00	-14.59	T4	1.2, 1.4			
802.11n	Radial	6	-5.77	-37.35	-60.51	N/A	31.58	20.00	-11.58	T4	1.2, 0.6			
IEEE	Axial	6	1.10	-32.69	-62.65	2.00	33.79	20.00	-13.79	T4	1.2, 1.4			
802.11ax SU	Radial	6	-6.05	-36.59	-60.51	N/A	30.54	20.00	-10.54	T4	1.2, 0.6			
	Axial	6	1.07	-31.33	-62.65	2.00	32.40	20.00	-12.40	T4	1.2, 1.4			
IEEE		1	-5.93	-36.07			30.14	20.00	-10.14	T4				
802.11ax RU	Radial	6	-6.07	-36.16	-60.51	N/A	30.09	20.00	-10.09	T4	1.2, 0.6			
		11	-5.84	-35.31			29.47	20.00	-9.47	Т3				

Table 9-20 Raw Data Results for 5GHz WIFI IEEE 802.11a

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	20MHz	1	40	1.20	-32.79	-62.65	2.00	33.99	20.00	-13.99	T4	1.2, 1.4
IEEE 802.11a													
	Radial	20MHz	1	40	-5.75	-40.62	-60.51	N/A	34.87	20.00	-14.87	T4	1.2, 0.6

Table 9-21
Raw Data Results for 5GHz WIFI IEEE 802.11n

	Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
		Axial	40MHz	1	38	1.22	-31.47	-62.65	2.00	32.69	20.00	-12.69	T4	1.2. 1.4
	IEEE 802.11n	Axidi	20MHz	1	40	1.69	-31.23	-02.05	2.00	32.92	20.00	-12.92	T4	1.2, 1.4
		Radial	40MHz	1	38	-5.49	-39.15	-60.51	51 N/A	33.66	20.00	-13.66	T4	1.2, 0.6
			20MHz	1	40	-5.73	-39.13			33.40	20.00	-13.40	T4	1.2, 0.0

Table 9-22 Raw Data Results for 5GHz WIFI IEEE 802.11ac

			1,	aw Date	i itosuii	13 101 0	GHZ WIF	11222	302. I Ia	•			
Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		40MHz	1	38	1.40	-31.81		2.00	33.21	20.00	-13.21	T4	
		20MHz	1	36	1.36	-32.29		2.00	33.65	20.00	-13.65	T4	
		20MHz	1	40	1.32	-30.88		2.00	32.20	20.00	-12.20	T4	
		20MHz	1	48	1.50	-32.91		2.00	34.41	20.00	-14.41	T4	
	Axial	40MHz	2A	54	1.64	-31.30	-62.65	2.00	32.94	20.00	-12.94	T4	1.2, 1.4
	Axidi	20MHz	2A	56	1.30	-31.32	-02.05	2.00	32.62	20.00	-12.62	T4	1.2, 1.4
		40MHz	2C	118	1.28	-31.36		2.00	32.64	20.00	-12.64	T4	
		20MHz	2C	120	1.46	-31.91		2.00	33.37	20.00	-13.37	T4	
		40MHz	3	151	1.46	-33.17		2.00	34.63	20.00	-14.63	T4	
IEEE		20MHz	3	157	1.26	-33.52		2.00	34.78	20.00	-14.78	T4	
802.11ac													
002.1100		40MHz	1	38	-6.04	-36.47		T	30.43	20.00	-10.43	T4	
		20MHz	1	36	-5.90	-38.08			32.18	20.00	-12.18	T4	
		20MHz	1	40	-5.63	-35.73			30.10	20.00	-10.10	T4	
		20MHz	1	48	-5.34	-39.50			34.16	20.00	-14.16	T4	
	Radial	40MHz	2A	54	-5.41	-38.13	-60.51	N/A	32.72	20.00	-12.72	T4	1.2, 0.6
	Naulai	20MHz	2A	56	-5.48	-37.93	-00.51	INA	32.45	20.00	-12.45	T4	1.2, 0.0
		40MHz	2C	118	-5.59	-37.70			32.11	20.00	-12.11	T4	
		20MHz	2C	120	-5.69	-39.35	35		33.66	20.00	-13.66	T4	
		40MHz	3	151	-5.39	-38.56			33.17	20.00	-13.17	T4	
		20MHz	3	157	-5.65	-37.36			31.71	20.00	-11.71	T4	

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 42 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 42 01 104

Table 9-23 Raw Data Results for 5GHz WIFI IEEE 802.11ax

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	40MHz	1	38	1.02	-31.72	-61.09	2.00	32.74	20.00	-12.74	T4	1.2, 1.4
IEEE	Axidi	20MHz	1	40	1.34	-30.96	-01.09	2.00	32.30	20.00	-12.30	T4	1.2, 1.4
802.11ax SU													
002.11ax 00	Radial	40MHz	1	38	-5.84	-39.34	-60.51	N/A	33.50	20.00	-13.50	T4	1.2, 0.6
		20MHz	1	40	-5.37	-37.58		IVA	32.21	20.00	-12.21	T4	1.2, 0.0
	Avial	40MHz	1	38	1.32	-31.32	-61.09	2.00	32.64	20.00	-12.64	T4	1.2, 1.4
IEEE	Axial	20MHz	1	40	1.40	-31.98	-01.09	2.00	33.38	20.00	-13.38	T4	1.2, 1.4
802.11ax RU													
002.11ax 10	Radial	40MHz	1	38	-6.05	-38.65	60.51	NI/A	32.60	20.00	-12.60	T4	1.2, 0.6
	Nadiai	20MHz	1	40	-5.54	-35.85	-60.51	N/A	30.31	20.00	-10.31	T4	1.2, 0.6

Table 9-24 Raw Data Results for EvDO (OTT VoIP)

			itat	Dutu IX	couito ioi	_,00	O 1 1 VOII	,			
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
Secondary Cellular	Axial	564	18.16	-36.57	-62.81	2.00	54.73	20.00	-34.73	T4	1.2, 1.4
EvDO	Radial	564	10.63	-44.12	-63.86	N/A	54.75	20.00	-34.75	T4	1.2, 0.6
Cellular	Axial	384	18.11	-35.47	-62.81	2.00	53.58	20.00	-33.58	T4	1.2, 1.4
EvDO	Radial	384	10.54	-44.30	-63.86	N/A	54.84	20.00	-34.84	T4	1.2, 0.6
PCS	Axial	600	18.18	-36.49	-62.81	2.00	54.67	20.00	-34.67	T4	1.2, 1.4
EvDO	Radial	600	10.40	-44.12	-63.86	N/A	54.52	20.00	-34.52	T4	1.2, 0.6

Table 9-25 Raw Data Results for EDGE (OTT VoIP)

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
EDGE850	Axial	190	18.06	-26.35	-62.81	2.00	44.41	20.00	-24.41	T4	1.2, 1.4
EDGE050	Radial	190	10.66	-41.95	-63.86	N/A	52.61	20.00	-32.61	T4	1.2, 0.6
EDCE1000	Axial	661	18.13	-29.67	-62.81	2.00	47.80	20.00	-27.80	T4	1.2, 1.4
EDGE1900	Radial	661	10.48	-42.56	-63.86	N/A	53.04	20.00	-33.04	T4	1.2, 0.6

Table 9-26 Raw Data Results for HSPA (OTT VoIP)

			itav	Data IN	couito ivi	1101×1	J 1 1 V O 11	,			
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
HSPA V	Axial	4183	18.11	-36.18	-60.87	2.00	54.29	20.00	-34.29	T4	1.2, 1.4
HOFA V	Radial	4183	10.31	-47.41	-63.86	N/A	57.72	20.00	-37.72	T4	1.2, 0.6
HSPA IV	Axial	1412	18.21	-35.47	-60.87	2.00	53.68	20.00	-33.68	T4	1.2, 1.4
HOFAIV	Radial	1412	10.69	-48.02	-63.86	N/A	58.71	20.00	-38.71	T4	1.2, 0.6
LICDA II	Axial	9400	18.08	-35.61	-60.87	2.00	53.69	20.00	-33.69	T4	1.2, 1.4
HSPA II	Radial	9400	10.78	-47.27	-63.86	N/A	58.05	20.00	-38.05	T4	1.2, 0.6

FCC ID: A3LSMG996U	Hour't to be part of the encountry		SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 42 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 43 of 104

Table 9-27
Raw Data Results for LTE FDD B66 (OTT VoIP)

				- u.u	<u> </u>			<u> </u>	<u> </u>			
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	132322	18.00	-35.17		2.00	53.17	20.00	-33.17	T4	
		15MHz	132322	18.61	-34.31		2.00	52.92	20.00	-32.92	T4	
		10MHz	132622	18.45	-35.47		2.00	53.92	20.00	-33.92	T4	
	Axial	10MHz	132322	18.44	-33.75	-62.29	2.00	52.19	20.00	-32.19	T4	1.2, 1.4
	Axiai	10MHz	132022	18.39	-34.47	-02.29	2.00	52.86	20.00	-32.86	T4	1.2, 1.4
		5MHz	132322	18.44	-34.45		2.00	52.89	20.00	-32.89	T4	
		3MHz	132322	18.40	-34.71		2.00	53.11	20.00	-33.11	T4	
LTE Band 66		1.4MHz	132322	18.49	-36.47		2.00	54.96	20.00	-34.96	T4	
LIE Danu 66		20MHz	132322	10.30	-39.29		2.00	49.59	20.00	-29.59	T4	
		15MHz	132322	10.03	-39.70			49.73	20.00	-29.73	T4	
		10MHz	132322	10.36	-40.32			50.68	20.00	-30.68	T4	
	Radial	5MHz	132647	10.42	-40.06	62.04	N/A	50.48	20.00	-30.48	T4	1.2, 0.6
	Raulai	5MHz	132322	10.17	-39.20	-63.94	IVA	49.37	20.00	-29.37	T4	1.2, 0.6
		5MHz	131997	10.28	-39.79	9		50.07	20.00	-30.07	T4	
		3MHz	132322	10.31	-40.13			50.44	20.00	-30.44	T4	
		1.4MHz	132322	10.35	-40.92			51.27	20.00	-31.27	T4	

Table 9-28
Raw Data Results for LTE TDD B41 (PC2) (OTT VoIP)

			Raw Dat	a ixesui	13 101 L	<u> </u>	<u> </u>	<u>-, (O 1 1 </u>	V OII /			
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	40620	18.39	-32.04		2.00	50.43	20.00	-30.43	T4	
		15MHz	41490	18.35	-31.32		2.00	49.67	20.00	-29.67	T4	
		15MHz	41055	18.36	-31.62		2.00	49.98	20.00	-29.98	T4	
	Axial	15MHz	40620	18.38	-31.49	-62.29	2.00	49.87	20.00	-29.87	T4	1011
	Axiai	15MHz	40185	18.33	-31.92	-02.29	2.00	50.25	20.00	-30.25	T4	1.2, 1.4
		15MHz	39750	18.32	-32.14		2.00	50.46	20.00	-30.46	T4	
		10MHz	40620	18.41	-32.29		2.00	50.70	20.00	-30.70	T4	
LTE Band 41		5MHz	40620	18.42	-31.80		2.00	50.22	20.00	-30.22	T4	
LIE Band 41		20MHz	40620	10.02	-40.25			50.27	20.00	-30.27	T4	
		15MHz	40620	10.52	-40.32			50.84	20.00	-30.84	T4	
		10MHz	40620	10.42	-41.00			51.42	20.00	-31.42	T4	
	Radial	5MHz	41490	10.43	-39.64	-63.94	N/A	50.07	20.00	-30.07	T4	1.2, 0.6
	Naulai	5MHz	41055	10.35	-39.66	-03.94	IWA	50.01	20.00	-30.01	T4	1.2, 0.0
		5MHz	40620	10.32	-39.80	0		50.12	20.00	-30.12	T4	
		5MHz	40185	10.41	-38.62			49.03	20.00	-29.03	T4	
		5MHz	39750	10.41	-39.93			50.34	20.00	-30.34	T4	

Table 9-29
Raw Data Results for NR FDD n30 (OTT VolP)

							1						
Mode	Orientation	Bandwidth	Channel	ABM1 _{LTE} [dB(A/m)]	ABM2 _{NR} [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N _{NR} (dB)	S+N/N _{NR} - 3 dB (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
	Axial	10MHz	462000	18.67	-40.92	-62.65	N/A	59.59	56.59	20.00	-36.59	T4	1.2. 1.4
ND n20		5MHz	462000	18.67	-41.78			60.45	57.45	20.00	-37.45	T4	1.2, 1.4
NR n30	Radial	10MHz	462000	10.35	-45.07	-60.51	N/A	55.42	52.42	20.00	-32.42	T4	1.2. 0.6
		5MHz	462000	10.35	-46.27			56.62	53.62	20.00	-33.62	T4	1.2, 0.0

Table 9-30 Raw Data Results for LTE B30 (OTT VoIP – Additional Measurements for NR)

		~			(•				•••••		• • ,	
Mode	Orientation	Bandwidth	Channel	ABM1 _{LTE} [dB(A/m)]	ABM2 _{LTE} [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N _{LTE} (dB)	S+N/N _{NR} - 3 dB (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE Band	Axial	10MHz	27710	18.67	-37.92	-62.65	N/A	56.59	N/A	20.00	-36.59	T4	1.2, 1.4
30	Radial	10MHz	27710	10.35	-40.97	-60.51	- N/A	51.32	N/A	20.00	-31.32	T4	1.2, 0.6

FCC ID: A3LSMG996U	PCTEST: Noted to be part of & secured	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 44 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 44 of 104

Table 9-31 Raw Data Results for NR TDD n41 (PC3) (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	ABM1 _{LTE} [dB(A/m)]	ABM2 _{NR} [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N _{NR} (dB)	S+N/N _{NR} - 3 dB (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		100MHz	518598	18.35	-26.94			45.29	42.29	20.00	-22.29	T4	
		90MHz	518598	18.35	-26.73			45.08	42.08	20.00	-22.08	T4	
		80MHz	518598	18.35	-26.85			45.20	42.20	20.00	-22.20	T4	
		60MHz	518598	18.35	-26.73			45.08	42.08	20.00	-22.08	T4	
		50MHz	518598	18.35	-26.82			45.17	42.17	20.00	-22.17	T4	
	Axial	40MHz	518598	18.35	-26.85	-61.09	N/A	45.20	42.20	20.00	-22.20	T4	1.2, 1.4
		20MHz	535998	18.35	-27.31			45.66	42.66	20.00	-22.66	T4	
		20MHz	527298	18.35	-27.42			45.77	42.77	20.00	-22.77	T4	
		20MHz	518598	18.35	-26.67			45.02	42.02	20.00	-22.02	T4	
		20MHz	509898	18.35	-27.27			45.62	42.62	20.00	-22.62	T4	
NR n41		20MHz	501204	18.35	-27.01			45.36	42.36	20.00	-22.36	T4	
MX II41		100MHz	518598	10.38	-39.29			49.67	46.67	20.00	-26.67	T4	
		90MHz	518598	10.38	-39.08			49.46	46.46	20.00	-26.46	T4	
		80MHz	518598	10.38	-39.26			49.64	46.64	20.00	-26.64	T4	
		60MHz	518598	10.38	-39.14			49.52	46.52	20.00	-26.52	T4	
		50MHz	518598	10.38	-39.28			49.66	46.66	20.00	-26.66	T4	
	Radial	40MHz	518598	10.38	-39.09	-60.51	N/A	49.47	46.47	20.00	-26.47	T4	1.2, 0.6
		20MHz	535998	10.38	-39.79			50.17	47.17	20.00	-27.17	T4	
		20MHz	527298	10.38	-39.34			49.72	46.72	20.00	-26.72	T4]
		20MHz	518598	10.38	-38.88			49.26	46.26	20.00	-26.26	T4]
		20MHz	509898	10.38	-39.81			50.19	47.19	20.00	-27.19	T4]
		20MHz	501204	10.38	-39.26			49.64	46.64	20.00	-26.64	T4	

Table 9-32

Raw Data Results for LTE B41 (PC3) (OTT VolP - Additional Measurements for NR)

	—				(., (,	
Mode	Orientation	Bandwidth	Channel	ABM1 _{LTE} [dB(A/m)]	ABM2 _{LTE} [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N _{LTE} (dB)	S+N/N _{NR} - 3 dB (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
LTE B41	Axial	20MHz	40620	18.35	-33.03	-61.09	N/A	51.38	N/A	20.00	-31.38	T4	1.2, 1.4
LIE B41	Radial	20MHz	40620	10.38	-43.85	-60.51	INA	54.23	- N/A	20.00	-34.23	T4	1.2, 0.6

Table 9-33 Raw Data Results for 2 4GHz WIFL (OTT VolP)

	Raw Data Results for 2.4GHz WIFT (OTT VOIP)											
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
IEEE	Axial	6	17.73	-32.09	-61.09	2.00	49.82	20.00	-29.82	T4	1.2, 1.4	
802.11b	Radial	6	10.04	-36.14	-60.51	N/A	46.18	20.00	-26.18	T4	1.2, 0.6	
		1	17.62	-34.41		2.00	52.03	20.00	-32.03	T4		
	Axial	6	17.80	-31.89	-61.09	2.00	49.69	20.00	-29.69	T4	1.2, 1.4	
IEEE		11	17.55	-34.65		2.00	52.20	20.00	-32.20	T4		
802.11g		1	10.09	-35.70			45.79	20.00	-25.79	T4		
	Radial	6	10.09	-32.27	-60.51	N/A	42.36	20.00	-22.36	T4	1.2, 0.6	
		11	10.11	-33.84			43.95	20.00	-23.95	T4		
IEEE	Axial	6	17.89	-33.48	-61.09	2.00	51.37	20.00	-31.37	T4	1.2, 1.4	
802.11n	Radial	6	10.08	-33.94	-60.51	N/A	44.02	20.00	-24.02	T4	1.2, 0.6	
IEEE	Axial	6	17.48	-34.24	-61.09	2.00	51.72	20.00	-31.72	T4	1.2, 1.4	
802.11ax SU	Radial	6	10.13	-34.98	-60.51	N/A	45.11	20.00	-25.11	T4	1.2, 0.6	
IEEE	Axial	6	17.55	-33.94	-61.09	2.00	51.49	20.00	-31.49	T4	1.2, 1.4	
802.11ax RU	Radial	6	10.11	-36.95	-60.51	N/A	47.06	20.00	-27.06	T4	1.2, 0.6	

Table 9-34 Raw Data Results for 5GHz WIFI IEEE 802.11a (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
IEEE	Axial	20MHz	1	40	17.66	-33.68	-61.09	2.00	51.34	20.00	-31.34	T4	1.2, 1.4
802.11a													
002.11a	Radial	20MHz	1	40	10.14	-37.19	-60.51	N/A	47.33	20.00	-27.33	T4	1.2, 0.6

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 45 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 45 01 104

Table 9-35 Raw Data Results for 5GHz WIFI IEEE 802.11n (OTT VoIP)

			<u> </u>	ata ixes	<u> </u>	<u> </u>			(•				
Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		40MHz	1	38	17.68	-34.54		2.00	52.22	20.00	-32.22	T4	
		20MHz	1	40	17.33	-33.67		2.00	51.00	20.00	-31.00	T4	
		40MHz	2A	54	17.41	-33.87		2.00	51.28	20.00	-31.28	T4	
		20MHz	2A	56	17.38	-34.73		2.00	52.11	20.00	-32.11	T4	
	Axial	40MHz	2C	118	17.33	-35.46	-61.09	2.00	52.79	20.00	-32.79	T4	1.2, 1.4
IEEE	Axidi	20MHz	2C	100	17.37	-34.71		2.00	52.08	20.00	-32.08	T4	1.2, 1.4
802.11n		20MHz	2C	120	17.35	-32.58		2.00	49.93	20.00	-29.93	T4	
002.1111		20MHz	2C	144	17.37	-33.94		2.00	51.31	20.00	-31.31	T4	
		40MHz	3	151	17.39	-34.59		2.00	51.98	20.00	-31.98	T4	
		20MHz	3	157	17.33	-35.14		2.00	52.47	20.00	-32.47	T4	
	Radial	40MHz	1	38	10.15	-37.45	-60.51	N/A	47.60	20.00	-27.60	T4	1.2, 0.6
	Natial	20MHz	1	40	10.14	-36.62		-60.51 N/A	IVA	46.76	20.00	-26.76	T4

Table 9-36 Raw Data Results for 5GHz WIFI IEEE 802.11ac (OTT VoIP)

										~~ (~ . .	,			
	Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
ı		Axial	40MHz	1	38	17.68	-33.68	-61.09	2.00	51.36	20.00	-31.36	T4	1.2. 1.4
	IEEE	Axidi	20MHz	1	40	17.65	-34.73	-01.09	2.00	52.38	20.00	-32.38	T4	1.2, 1.4
	802.11ac													
	002.1140	Radial	40MHz	1	38	10.50	-38.10	-60.51	N/A	48.60	20.00	-28.60	T4	1.2, 0.6
		Naulai	20MHz	1	40	10.62	-38.49	-60.51	INA	49.11	20.00	-29.11	T4	1.2, 0.0

Table 9-37 Raw Data Results for 5GHz WIFLIFFF 802 11ax (OTT VolP)

			411 Du			· · · ·	411 1 1FFF		ux (0	,				
Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
	Axial	40MHz	1	38	17.63	-34.09	-61.09	2.00	51.72	20.00	-31.72	T4	1.2, 1.4	
IEEE	Axidi	20MHz	1	40	17.69	-34.68	-01.09	2.00	52.37	20.00	-32.37	T4	1.2, 1.4	
802.11ax SU														
002.110.00	Radial	40MHz	1	38	10.31	-37.85	-60.51	N/A	48.16	20.00	-28.16	T4	1.2, 0.6	
	Naulai	20MHz	1	40	10.33	-35.62	-00.51	1471	45.95	20.00	-25.95	T4		
	Axial	40MHz	1	38	17.61	-35.46	-61.09	2.00	53.07	20.00	-33.07	T4	1.2, 1.4	
		20MHz	1	40	17.64	-34.29	-01.09	2.00	51.93	20.00	-31.93	T4	1.2, 1.4	
		40MHz	1	38	10.31	-38.83			49.14	20.00	-29.14	T4		
		20MHz	1	36	10.30	-35.88			46.18	20.00	-26.18	T4		
IEEE		20MHz	1	40	10.28	-35.41			45.69	20.00	-25.69	T4		
802.11ax RU		20MHz	1	48	10.28	-35.65			45.93	20.00	-25.93	T4		
002.11ax 10	Radial	40MHz	2A	54	10.37	-38.07	-60.51	N/A	48.44	20.00	-28.44	T4	1.2, 0.6	
	Naulai	20MHz	2A	56	10.28	-35.71	-00.51	IWA	45.99	20.00	-25.99	T4	1.2, 0.0	
		40MHz	2C	118	10.33	-39.82			50.15	20.00	-30.15	T4		
		20MHz	2C	120	10.29	-40.93			51.22	20.00	-31.22	T4		
		40MHz	3	151	10.27	-40.71		1		50.98	20.00	-30.98	T4	
		20MHz	3	157	10.26	-39.44			49.70	20.00	-29.70	T4		

II. **Test Notes**

A. General

- 1. Phone Condition: Mute on; Backlight off; Max Volume; Max Contrast
- 2. 'Radial' orientation refers to radial transverse.
- 3. Hearing Aid Mode (Phone→Settings→Other call settings→Hearing aid compatibility) was set to ON for Frequency Response compliance
- 4. Speech Signal: 3GPP2 Normal Test Signal
- 5. Bluetooth and WIFI were disabled while testing 2G/3G/4G/5G modes.
- 6. Licensed data modes and Bluetooth were disabled while testing WIFI modes.
- 7. The Margin from FCC limit column indicates a margin from the FCC limit for compliance (T3).

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 46 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 40 01 104

B. CDMA

- 1. Power Configuration: Power Control Bits = "All Up"
- 2. Vocoder Configuration: RC1/SO68 (CDMA EVRC–B)

C. GSM

- 1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0;
- 2. Vocoder Configuration: EFR (GSM);

D. UMTS

- 1. Power Configuration: TPC= "All 1s";
- 2. Vocoder Configuration: AMR 12.2 kbps (UMTS):

E. LTE FDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Vocoder Configuration: NB AMR 4.75kbps
- 4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 30 at 10MHz is the worst-case for the Axial probe orientation. LTE Band 13 at 10MHz bandwidth is the worst-case for the Radial probe orientation. However, since Bands 13 and 30 at 10MHz BW both support only one channel, no additional testing was performed.

F. LTE TDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Power Class 3 Uplink-Downlink configuration: 2
- 4. Power Class 2 Uplink-Downlink configuration: 1
- 5. Vocoder Configuration: NB AMR 4.75kbps
- 6. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for B41 or low and high channels for B48. LTE Band 41 (Power Class 2) at 5MHz is the worst-case for the Axial probe orientation. LTE Band 48 (Power Class 3) at 5MHz is the worst-case for the Radial probe orientation.

G. WIFI

- 1. Radio Configuration
 - a. IEEE 802.11b: DSSS, 1Mbps
 - b. IEEE 802.11g/a: 16QAM, 36Mbps
 - c. IEEE 802.11n/ac 20MHz: 16QAM, MCS 4
 - d. IEEE 802.11ax SU 20MHz: QPSK, MCS 1 e. IEEE 802.11n/ac 40MHz: QPSK, MCS 2
 - f. IEEE 802.11ax SU 40MHz: 1024QAM, MCS 10
- 2. RU Index
 - a. IEEE 802.11ax RU 20MHz: 37 b. IEEE 802.11ax RU 40MHz: 62

FCC ID: A3LSMG996U	PCTEST Thought to be port of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 47 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 47 01 104

- 3. Vocoder Configuration: NB AMR 4.75kbps
- 4. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11g is the worst-case for the Axial probe orientation. IEEE 802.11ax RU is the worst-case for the Radial probe orientation.
- 5. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. IEEE 802.11ac 20MHz BW (U-NII 1) is the worst-case for both the Axial and Radial probe orientations.

H. OTT VolP

- 1. Vocoder Configuration: 75kbps
- 2. EvDO Configuration
 - a. Revision: A
- 3. EDGE Configuration
 - a. MCS Index: 7
 - b. Number of TX slots: 2
- 4. HSPA Configuration:
 - a. Release: 6
 - b. 3GPP 34.121 Subtest 1
- 5. LTE FDD Configuration:
 - a. Power Configuration: TPC = "Max Power"
 - b. Radio Configuration: 16QAM, 1RB, 0RB offset
 - c. LTE Band 66 was the worst-case band from Table 7-6 and was used to test both Axial and Radial probe orientations.
 - d. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 66 at 10MHz is the worst-case for the Axial probe orientation. LTE Band 66 at 5MHz bandwidth is the worst-case for the Radial probe orientation.
- 6. LTE TDD Configuration:
 - a. Power Configuration: TPC = "Max Power"
 - b. Radio Configuration: 16QAM, 1RB, 0RB offset
 - c. Power Class 2 Uplink-Downlink configuration: 1
 - d. LTE Band 41 (PC2) was the worst-case band from Table 7-7 and was used to test both Axial and Radial probe orientations.
 - e. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Power Class 2) at 15MHz is the worst-case for the Axial probe orientation. LTE Band 41 (Power Class 2) at 5MHz is the worst-case for the Radial probe orientation.
- 7. NR FDD Configuration
 - a. Power Configuration: TxAGC is set such that the DUT operates at max power.
 - b. Radio Configuration: CP-OFDM, 16QAM, 1RB, 1RB Offset
 - Due to equipment limitations, ABM1 measurements were not possible. Therefore, the procedure outlined in Section 7.II.5 was followed to obtain SNNR values. Additionally, Frequency Response measurements were not possible due to equipment limitations.
 - d. NR Band 30 was the worst-case band from Table 7-12 and was used to test both Axial and Radial probe orientations.
 - e. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. NR n30 at 10MHz is the worst-case for the Axial probe orientation. NR n30 at 10MHz bandwidth is the worst-case for the Radial probe orientation. However, since n30 at 10MHz BW supports only one channel, no additional testing was performed.


FCC ID: A3LSMG996U	PCTEST Total to be post of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 48 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 46 01 104

8. NR TDD Configuration


- a. Power Configuration: TxAGC is set such that the DUT operates at max power.
- b. Radio Configuration: CP-OFDM, 16QAM, 1RB, 1RB Offset
- c. Due to equipment limitations, ABM1 measurements were not possible. Therefore, the procedure outlined in Section 7.II.5 was followed to obtain SNNR values. Additionally, Frequency Response measurements were not possible due to equipment limitations.
- d. NR Band 41 (Ant B, PC3) was the worst-case band from Table 7-13 and was used to test both Axial and Radial probe orientations.
- e. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. NR n41 (PC3) at 20MHz is the worst-case for both the Axial and Radial probe orientations.
- 9. WIFI Configuration:
 - a. Radio Configuration
 - i. IEEE 802.11b: DSSS, 1Mbps
 - ii. IEEE 802.11g/a: 16QAM, 36Mbps
 - iii. IEEE 802.11n/ac 20MHz: 16QAM, MCS 4
 - iv. IEEE 802.11ax SU 20MHz: QPSK, MCS 1
 - v. IEEE 802.11n/ac 40MHz: QPSK, MCS 2
 - vi. IEEE 802.11ax SU 40MHz: 1024QAM, MCS 10
 - b. RU Index
 - i. IEEE 802.11ax RU 20MHz: 37
 - ii. IEEE 802.11ax RU 40MHz: 62
 - c. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11g is the worst-case for both the Axial and Radial probe orientations.
 - d. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. IEEE 802.11n 20MHz BW (U-NII 2C) is the worst-case for the Axial probe orientation. IEEE 802.11ax RU 20MHz BW (U-NII 1) is the worst-case for the Radial probe orientation.

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 40 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 49 of 104


III. 1 kHz Vocoder Application Check



This model was verified to be within the linear region for ABM1 measurements at -18 dBm0 for CDMA. This measurement was taken in the axial configuration above the maximum location.



This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM, UMTS, and VoLTE over IMS. This measurement was taken in the axial configuration above the maximum location.



This model was verified to be within the linear region for ABM1 measurements at -20 dBm0 for VoWIFI over IMS and OTT VoIP. This measurement was taken in the axial configuration above the maximum location.

FCC ID: A3LSMG996U	PCTEST Total to be post of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 50 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 50 01 104

IV. T-Coil Validation Test Results

Table 9-38 Helmholtz Coil Validation Table of Results - 10/13/2020

Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.015	PASS
Environmental Noise	< -58 dBA/m	-60.87	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

Table 9-39 Helmholtz Coil Validation Table of Results - 10/19/2020

ltem	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.982	PASS
Environmental Noise	< -58 dBA/m	-62.81	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.118	PASS
Environmental Noise	< -58 dBA/m	-63.86	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

Table 9-40 Helmholtz Coil Validation Table of Results - 10/26/2020

Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.009	PASS
Environmental Noise	< -58 dBA/m	-62.29	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.219	PASS
Environmental Noise	< -58 dBA/m	-63.94	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 51 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 31 01 104

Table 9-41
Helmholtz Coil Validation Table of Results – 11/02/2020

ltem	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.031	PASS
Environmental Noise	< -58 dBA/m	-62.65	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.267	PASS
Environmental Noise	< -58 dBA/m	-61.06	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

Table 9-42
Helmholtz Coil Validation Table of Results – 11/09/2020

Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.036	PASS
Environmental Noise	< -58 dBA/m	-61.09	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.140	PASS
Environmental Noise	< -58 dBA/m	-60.51	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg F0 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 52 of 104

ABM1 Magnetic Field Distribution Scan Overlays ٧.

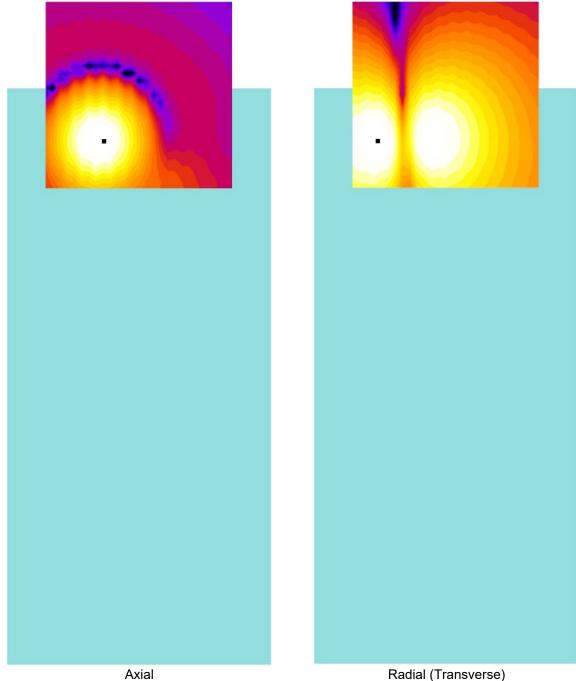


Figure 9-1 T-Coil Scan Overlay Magnetic Field Distributions

Notes:

- Final measurement locations are indicated by a cursor on the contour plots.
 See Test Setup Photographs for actual WD overlay.

FCC ID: A3LSMG996U	PCTEST Thought to be post of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags E2 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 53 of 104

MEASUREMENT UNCERTAINTY 10.

Table 10-1 Uncertainty Estimation Table

Contribution	Data +/- %	Data +/- dB	Data Type	Probability distribution	Divisor	Standard uncertainty	Standard Uncertainty (dB)
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%	
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%	
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%	
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%	
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%	
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%	
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%	
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%	
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%	
Combined standard uncertainty, uc (k=1)						17.7%	0.71
Expanded uncertainty (k=2),	Expanded uncertainty (k=2), 95% confidence level						1.31

Notes:

- 1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.
- All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: A3LSMG996U	PCTEST Total to be part of Seminaria	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 54 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 54 of 104

11. EQUIPMENT LIST

Table 11-1 Equipment List

		=40.6				
Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Dell	Latitude E6540	SoundCheck Acoustic Analyzer Laptop	9/29/2020	Biennial	9/29/2022	2655082910
Listen	SoundConnect	Microphone Power Supply	9/24/2020	Biennial	9/24/2022	0899-PS150
RME	Fireface UC	Soundcheck Acoustic Analyzer External Audio Interface	9/29/2020	Biennial	9/29/2022	23792992
Rohde & Schwarz	CMW500	Radio Communication Tester	5/21/2020	Annual	5/21/2021	128635
Rohde & Schwarz	CMW500	Radio Communication tester	9/4/2020	Annual	9/4/2021	140144
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2/4/2020	Annual	2/4/2021	162125
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	6/23/2020	Annual	6/23/2021	161662
Seekonk	NC-100	Torque Wrench (8" lb)	8/4/2020	Biennial	8/4/2022	21053
TEM	Axial T-Coil Probe	Axial T-Coil Probe	9/23/2020	Biennial	9/23/2022	TEM-1123
TEM		HAC Positioner	N/A		N/A	N/A
TEM		HAC System Controller with Software	N/A		N/A	N/A
TEM	Helmholtz Coil	Helmholtz Coil	9/23/2020	Biennial	9/23/2022	SBI 1052
TEM	Radial T-Coil Probe	Radial T-Coil Probe	9/23/2020	Biennial	9/23/2022	TEM-1129

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg FF of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 55 of 104

TEST DATA 12.

See following attached pages for Test Data.

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dago 56 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 56 of 104



DUT: HH Coil - SN: SBI 1052


Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1123; Calibrated: 09/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 09/23/2020

Noise Spectrum

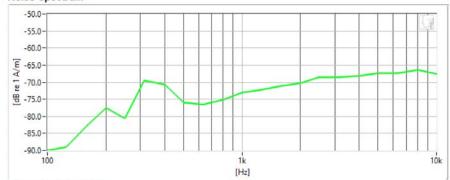

Frequency Response

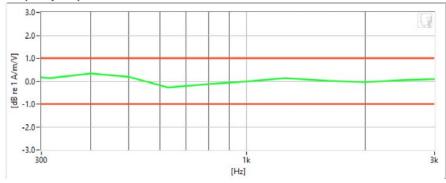

Results

Verification 1kHz Intensity	-10.015	dB		Max/Min	-9.5/-10.5
Verification ABM2	-60.87	dB	•	Maximum	-58.0
Frequency Response Margin	700m	dB	~	Tolerance curves	Aligned Data

FCC ID: A3LSMG996U		HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 57 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 37 01 104



DUT: HH Coil - SN: SBI 1052


Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1123; Calibrated: 09/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 09/23/2020

Noise Spectrum

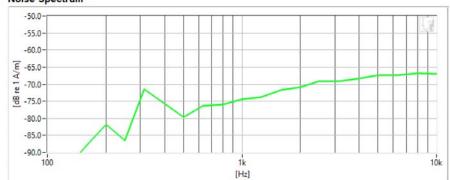

Frequency Response

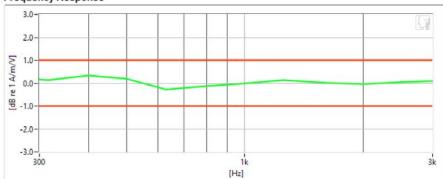

Results

Verification 1kHz Intensity	-9.982	dB	•	Max/Min	-9.5/-10.5
Verification ABM2	-62,81	dB	•	Maximum	-58.0
Frequency Response Margin	700m	dB	•	Tolerance curves	Aligned Data

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 58 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		raye 30 01 104



DUT: HH Coil - SN: SBI 1052


Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1123; Calibrated: 09/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 09/23/2020

Noise Spectrum

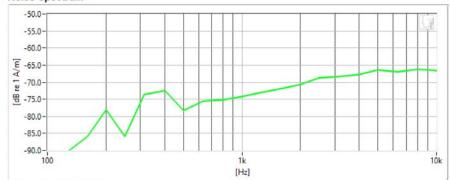

Frequency Response

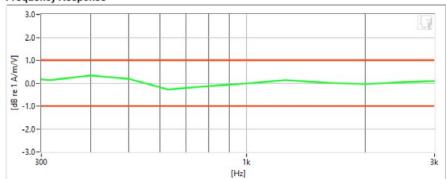

Results

Verification 1kHz Intensity	-10.009	dB	9	Max/Min	-9.5/-10.5
Verification ABM2	-62.29	dB	•	Maximum	-58.0
Frequency Response Margin	700m	dB	•	Tolerance curves	Aligned Data

FCC ID: A3LSMG996U	PCTEST*	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 59 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 39 01 104



DUT: HH Coil - SN: SBI 1052


Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1123; Calibrated: 09/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 09/23/2020

Noise Spectrum

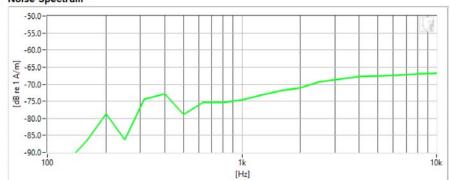

Frequency Response

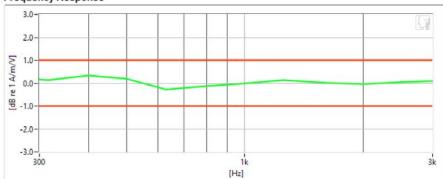

Results

Verification 1kHz Intensity	-10.031	dB	•	Max/Min	-9.5/-10.5
Verification ABM2	-62.65	dB	•	Maximum	-58.0
Frequency Response Margin	700m	dB	•	Tolerance curves	Aligned Data

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 60 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 60 01 104



DUT: HH Coil - SN: SBI 1052


Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1123; Calibrated: 09/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 09/23/2020

Noise Spectrum

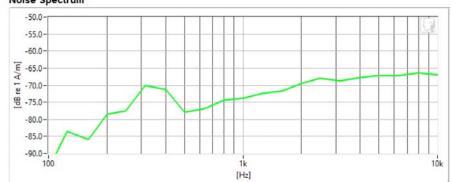

Frequency Response

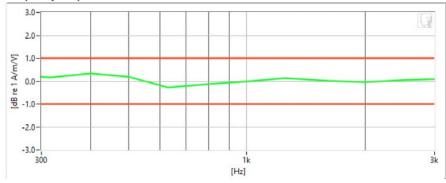

Results

Verification 1kHz Intensity	-10.036	dB	9	Max/Min	-9.5/-10.5
Verification ABM2	-61.09	dB	•	Maximum	-58.0
Frequency Response Margin	700m	dB	~	Tolerance curves	Aligned Data

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 61 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 01 01 104



DUT: HH Coil - SN: SBI 1052


Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1129; Calibrated: 09/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 09/23/2020

Noise Spectrum

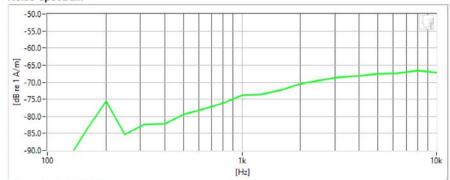

Frequency Response

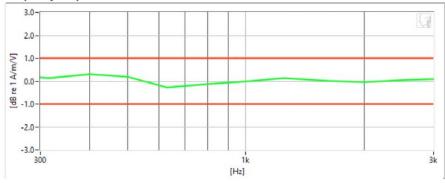

Results

Verification 1kHz Intensity	-10.118	dB	9	Max/Min	-9.5/-10.5
Verification ABM2	-63.86	dB	•	Maximum	-58.0
Frequency Response Margin	700m	dB	•	Tolerance curves	Aligned Data

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 62 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 62 01 104



DUT: HH Coil - SN: SBI 1052


Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1129; Calibrated: 09/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 09/23/2020

Noise Spectrum

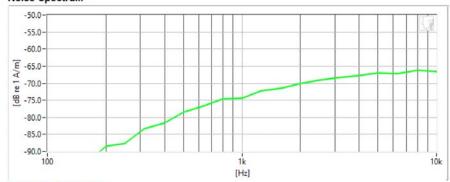

Frequency Response

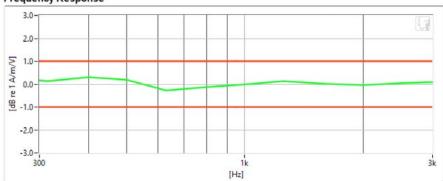

Results

Verification 1kHz Intensity	-10.219	dB		Max/Min	-9.5/-10.5
Verification ABM2	-63.94	dB	•	Maximum	-58.0
Frequency Response Margin	700m	dB	•	Tolerance curves	Aligned Data

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 63 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		raye 03 01 104



DUT: HH Coil - SN: SBI 1052


Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1129; Calibrated: 09/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 09/23/2020

Noise Spectrum

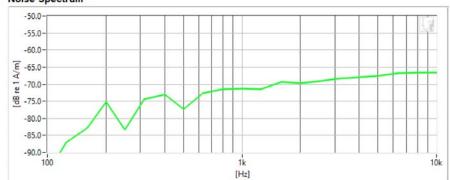

Frequency Response

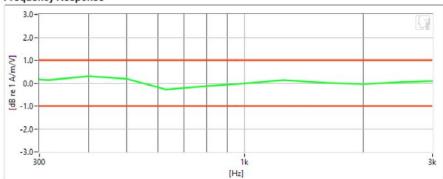

Results

Verification 1kHz Intensity	-10.267	dB	9	Max/Min	-9.5/-10.5
Verification ABM2	-61.06	dB	•	Maximum	-58.0
Frequency Response Margin	700m	dB	•	Tolerance curves	Aligned Data

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 64 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 04 01 104



DUT: HH Coil - SN: SBI 1052


Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1129; Calibrated: 09/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 09/23/2020

Noise Spectrum

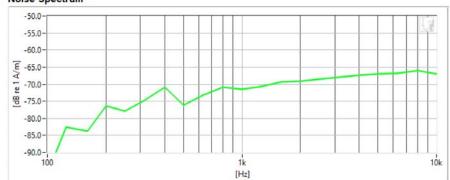

Frequency Response

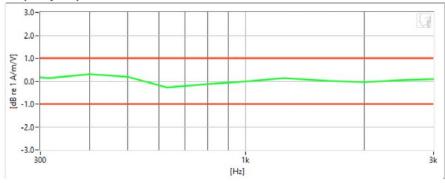

Results

Verification 1kHz Intensity	-10.14 dB	~	Max/Min	-9.5/-10.5
Verification ABM2	-60.51 dB	~	Maximum	-58.0
Frequency Response Margin	700m dB	•	Tolerance curves	Aligned Data

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 65 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 05 01 104



Type: Portable Handset Serial: 0527M


Measurement Standard: ANSI C63.19-2011 / CTIA HAC Test Plan v3.1.1

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/23/2020

Test Configuration:

- Mode: Secondary Cellular CDMA
- Channel: 476
- Speech Signal: 3GPP2 Normal Test Signal

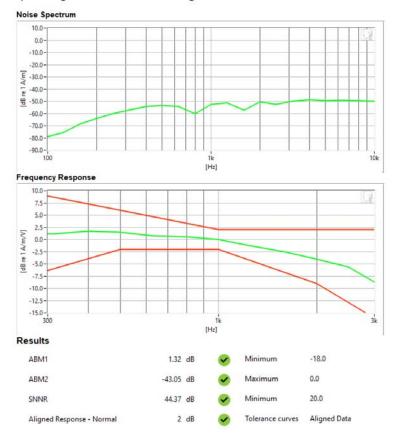

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 66 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		rage 00 01 104



Type: Portable Handset Serial: 0527M


Measurement Standard: ANSI C63.19-2011 / CTIA HAC Test Plan v3.1.1

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/23/2020

Test Configuration:

- Mode: Cellular CDMA
- Channel: 384
- Speech Signal: 3GPP2 Normal Test Signal

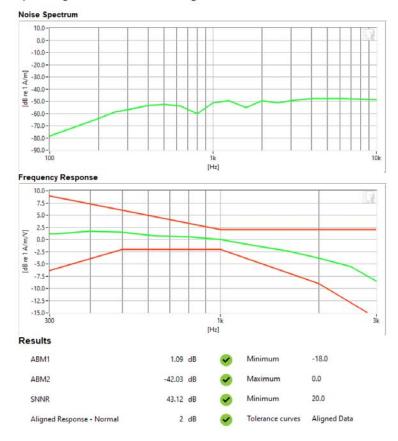

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 67 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 07 01 104



Type: Portable Handset Serial: 0527M


Measurement Standard: ANSI C63.19-2011 / CTIA HAC Test Plan v3.1.1

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/23/2020

Test Configuration:

- Mode: PCS CDMAChannel: 1175
- · Speech Signal: 3GPP2 Normal Test Signal

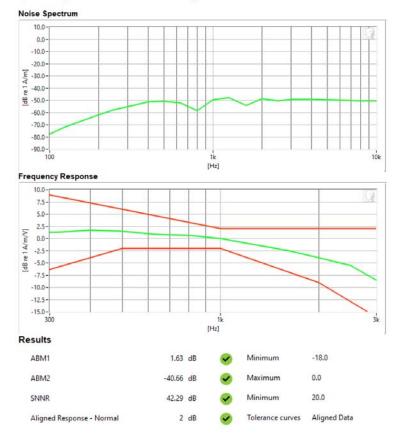

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 68 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 00 01 104



Type: Portable Handset Serial: 0527M


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/23/2020

Test Configuration:

- Mode: GSM850Channel: 251
- · Speech Signal: 3GPP2 Normal Test Signal

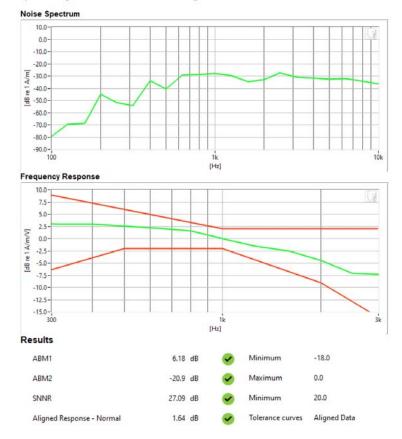

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 69 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 09 01 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/23/2020

Test Configuration:

Mode: GSM1900Channel: 810

· Speech Signal: 3GPP2 Normal Test Signal

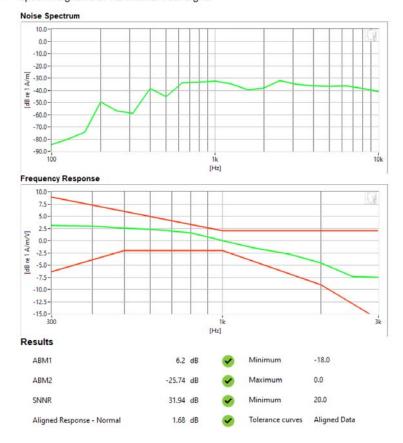

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 70 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		rage 70 01 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/23/2020

Test Configuration:

 Mode: UMTS V Channel: 4233

Speech Signal: 3GPP2 Normal Test Signal

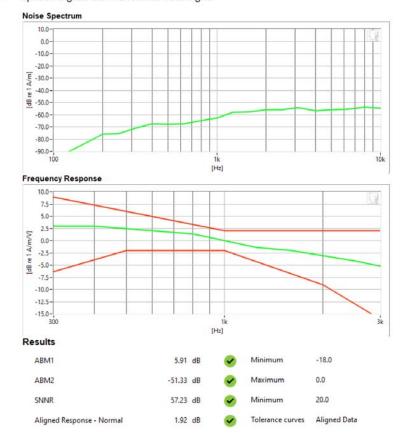

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 71 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		rage / 1 01 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/23/2020

Test Configuration:

Mode: UMTS IVChannel: 1312

· Speech Signal: 3GPP2 Normal Test Signal

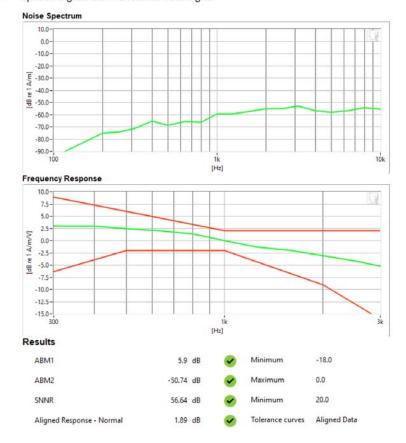

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 72 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage / 2 01 104



Type: Portable Handset Serial: 0527M


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/23/2020

Test Configuration:

- Mode: UMTS IIChannel: 9262
- · Speech Signal: 3GPP2 Normal Test Signal

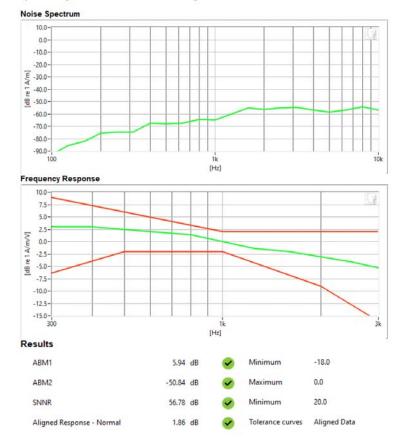

FCC ID: A3LSMG996U	HAC (T-COIL) TEST REPORT		SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 73 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 73 01 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011 / CTIA HAC Test Plan v3.1.1


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/23/2020

Test Configuration:

Mode: LTE FDD Band 30
Bandwidth: 10MHz
Channel: 27710

Speech Signal: 3GPP2 Normal Test Signal

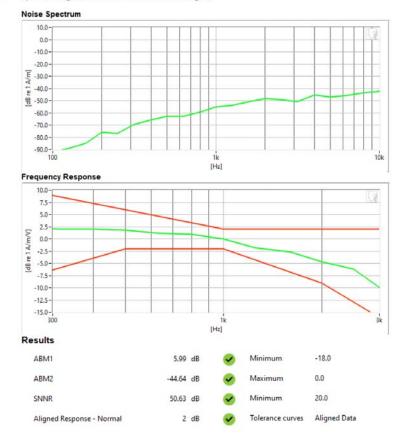

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 74 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 74 01 104



Type: Portable Handset Serial: 0527M


Measurement Standard: ANSI C63.19-2011 / CTIA HAC Test Plan v3.1.1

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/23/2020

Test Configuration:

- Mode: LTE TDD Band 41 (PC2)
- Bandwidth: 5MHzChannel: 40185
- Speech Signal: 3GPP2 Normal Test Signal

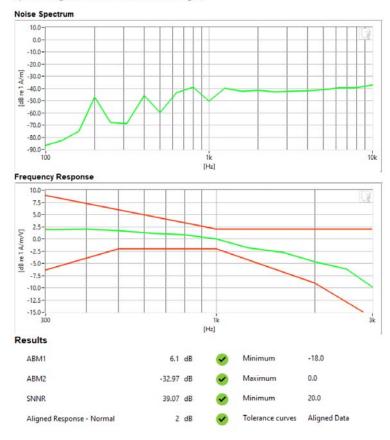

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 75 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		raye / 3 01 104



Type: Portable Handset Serial: 0527M


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/23/2020

Test Configuration:

- Mode: 2.4GHz WLAN
- Standard: IEEE 802.11g
- Channel: 6
- Speech Signal: 3GPP2 Normal Test Signal

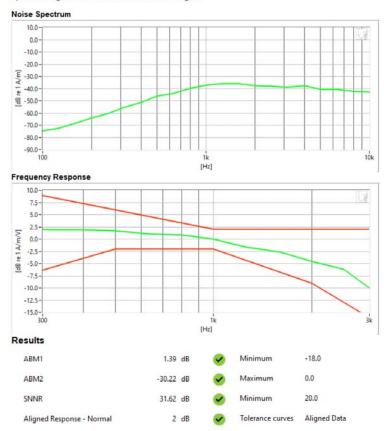

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 76 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		rage / 0 01 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/23/2020

Test Configuration:

Mode: 5GHz WLAN
 Standard: IEEE 802.11ac
 Bandwidth: 20MHz

Channel: 40

· Speech Signal: 3GPP2 Normal Test Signal

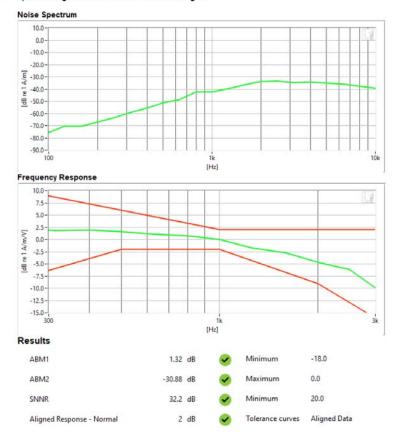

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 77 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		raye // 01 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/23/2020

Test Configuration:

VoIP Application: Google Duo
Mode: NR TDD n41 (PC3)
Bandwidth: 20MHz



FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 70 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 78 of 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011 / CTIA HAC Test Plan v3.1.1

Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/23/2020

Test Configuration:

Mode: Secondary Cellular CDMA

· Channel: 684

Noise Spectrum

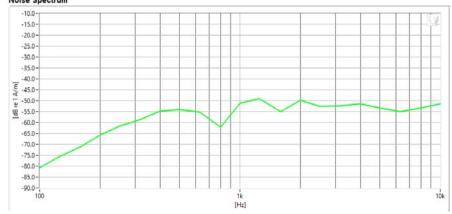

Results

ABM1	-6	dB	~	Minimum	-18.0
ABM2	-43.11	dB	~	Maximum	0.0
SNNR	37.11	dB		Minimum	20.0

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 70 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 79 of 104



DUT: A3LSMG996U Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011 / CTIA HAC Test Plan v3.1.1


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/23/2020

Test Configuration:

 Mode: Cellular CDMA Channel: 777

Noise Spectrum

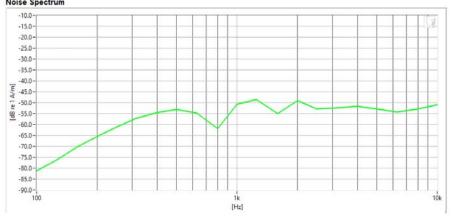

Results

ABM1	-5.91	dB	~	Minimum	-18.0
ABM2	-42.54	dB	~	Maximum	0.0
SNNR	36.64	dB		Minimum	20.0

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 80 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		rage 00 01 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011 / CTIA HAC Test Plan v3.1.1


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/23/2020

Test Configuration:

Mode: PCS CDMAChannel: 1175

Noise Spectrum

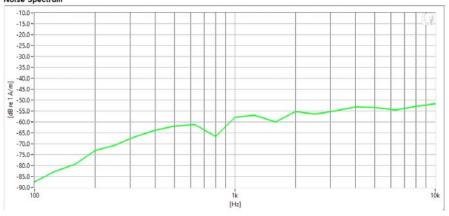

Results

ABM1	-5.76	dB	•	Minimum	-18.0
ABM2	-49.44	dB	•	Maximum	0.0
SNNR	43.68	dB	~	Minimum	20.0

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 91 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 81 of 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/23/2020

Test Configuration:

Mode: GSM850Channel: 251

Noise Spectrum

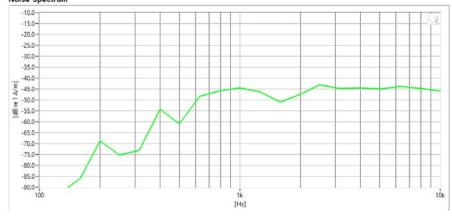

Results

ABM1	-780m d	IB	•	Minimum	-18.0
ABM2	-37.96 d	IB	•	Maximum	0.0
SNNR	37.18 d	IB	9	Minimum	20.0

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dama 92 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 82 of 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/23/2020

Test Configuration:

Mode: GSM1900Channel: 512

Noise Spectrum

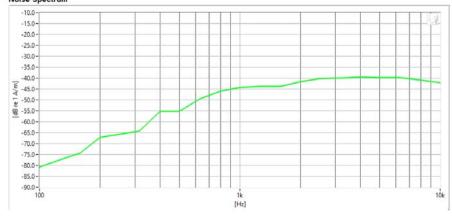

Results

ABM1	-970m	dB	~	Minimum	-18.0
ABM2	-35.96	dB	•	Maximum	0.0
SNNR	34.99	dB	•	Minimum	20.0

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 92 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 83 of 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/23/2020

Test Configuration:

 Mode: UMTS V Channel: 4233

Noise Spectrum

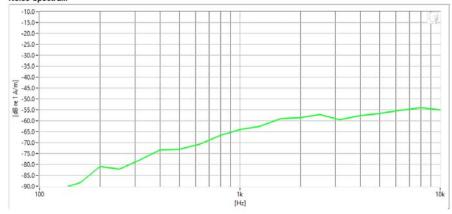

Results

ABM1	-1.57	dB	•	Minimum	-18.0
ABM2	-53.88	dB	•	Maximum	0.0
SNNR	52.31	dB	•	Minimum	20.0

FCC ID: A3LSMG996U	PCTEST . Road to be post of ® removed.	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 84 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 64 01 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/23/2020

Test Configuration:

Mode: UMTS IVChannel: 1513

Noise Spectrum

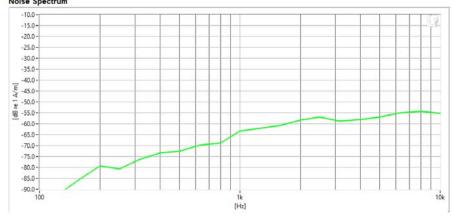

Results

ABM1	-1.56	dB	•	Minimum	-18.0
ABM2	-53.97	dB	•	Maximum	0.0
SNNR	52.41	dB	~	Minimum	20.0

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 05 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 85 of 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/23/2020

Test Configuration:

Mode: UMTS IIChannel: 9400

Noise Spectrum

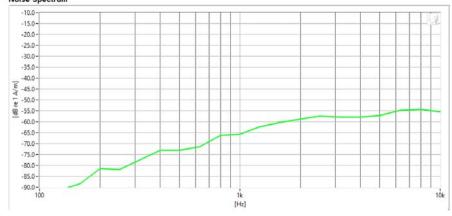

Results

ABM1	-1.57	dB	•	Minimum	-18.0
ABM2	-54.1	dB	•	Maximum	0.0
SNNR	52.54	dB	•	Minimum	20.0

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 96 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 86 of 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011 / CTIA HAC Test Plan v3.1.1


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/23/2020

Test Configuration:

Mode: LTE FDD Band 13 Bandwidth: 10MHz Channel: 23230

Noise Spectrum

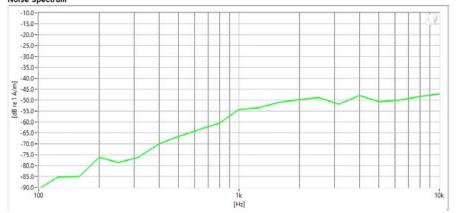

Results

ABM1	-1.35	dB		Minimum	-18.0
ABM2	-45.69	dB	•	Maximum	0.0
SNNR	44.34	dB	~	Minimum	20.0

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 87 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		rage 07 01 104



Type: Portable Handset Serial: 0527M


Measurement Standard: ANSI C63.19-2011 / CTIA HAC Test Plan v3.1.1

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/23/2020

Test Configuration:

Mode: LTE TDD Band 48Bandwidth: 5MHzChannel: 55265

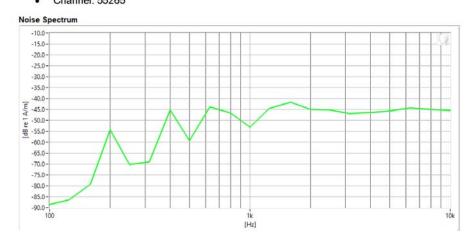

Results

ABM1	-1.56	dB	\checkmark	Minimum	-18.0
ABM2	-36.02	dB		Maximum	0.0
SNNR	34.46	dB	~	Minimum	20.0

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 99 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 88 of 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/23/2020

Test Configuration:

Mode: 2.4GHz WLAN

Standard: IEEE 802.11ax (RU)

Noise Spectrum

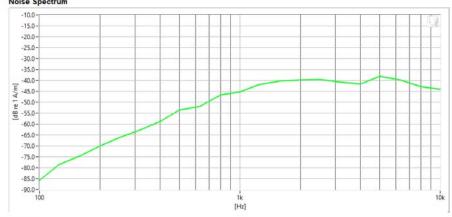

Results

ABM1	-5.84	dB		Minimum	-18.0
ABM2	-35.3	dB	~	Maximum	0.0
SNNR	29.47	dB	~	Minimum	20.0

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 89 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 69 01 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/23/2020

Test Configuration:

Mode: 5GHz WLANStandard: IEEE 802.11acBandwidth: 20MHz

Channel: 40

Noise Spectrum

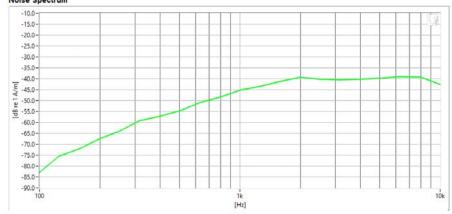

Results

ABM1	-5.63	dB	9	Minimum	-18.0
ABM2	-35.74	dB	~	Maximum	0.0
SNNR	30.1	dB	9	Minimum	20.0

FCC ID: A3LSMG996U	PCTEST . Road to be post of ® removed.	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 90 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		rage 90 01 104



Type: Portable Handset Serial: 0527M

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/23/2020


Test Configuration:

VoIP Application: Google Duo

Mode: 2.4GHz WLAN
 Standard UEEE 802.111

Standard: IEEE 802.11g

Channel: 6

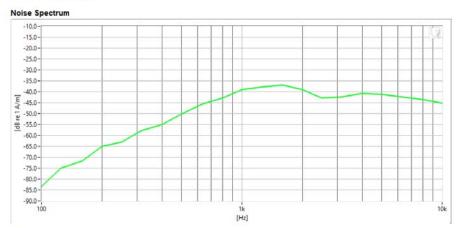

Results

ABM1	10.09	dB	$ \checkmark $	Minimum	-18.0
ABM2	-32.28	dB	•	Maximum	0.0
SNNR	42.36	dB	~	Minimum	20.0

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 91 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 91 01 104

13. CALIBRATION CERTIFICATES

FCC ID: A3LSMG996U	PCTEST Total to be part of Semental	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 92 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 92 01 104



Certificate of Conformance

for

AXIAL T COIL PROBE

Manufactured by: TEM CONSULTING Model No: AXIAL T COIL PROBE

Serial No: TEM-1123 Calibration Recall No: 31288

Submitted By:

Customer: ANDREW HARWELL

Company: PCTEST ENGINEERING LAB
Address: 6660-B DOBBIN ROAD

COLUMBIA MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the SI through the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No. AXIAL T C TEM C

And

Upon receipt for Calibration, the instrument was found to be:

10/13/2020

Within (X)

tolerance of the indicated specification. See attached Report of Calibration. The information supplied relates to the calibrated item listed above and statment of conformance for ALL given specifications and standards fall under the decision rule: A=(L-(U95)), where A is acceptance limit, L is manufacturer specifications and U95 is confidence level of 95% at k=2. This includes but not limited to:1. Measured value does not meet manufacturer's tolerance, 2.Manufacturer's tolerance is too small compared to calibration and measurement capability uncertainties, 3. Test uncertainty ratio does not meet the 4:1 ratio due to test instrumentation limitations. The decision rule has been communicated and approved by customer during contract

West Caldwell Calibration Laboratories' calibration control system meets the following requirements, ISO 10012-1 MIL STD 45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2015, and ISO 17025

Note: With this Certificate, Report of Calibration is included.

Approved by:

Calibration Date: 23-Sep-20

James Zhu

Certificate No: 31288 -2

Quality Manager ISO/IEC 17025:2017

QA Doc. #1051 Rev. 3.0 5/29/20

oc. #1051 Rev. 3.0 5/29/20 Certificate Page 1 of 1

ACCREDITED

Calibration
uncompromised calibration Laboratories, Inc.

1575 State Route 96, Victor, NY 14564, U.S.A.

Calibration Lab. Cert. # 1533.01

 FCC ID: A3LSMG996U
 PCTEST
 HAC (T-COIL) TEST REPORT
 Approved by: Quality Manager

 Filename:
 1M2009140143-26-R1.A3L
 DUT Type:
 Page 93 of 104

 1M2009140143-26-R1.A3L
 10/13/2020 - 11/12/2020
 Portable Handset
 Page 93 of 104

© 2020 PCTEST REV 3.4



ACCREDITED

ISO/IEC 17025: 2017

1575 State Route 96, Victor NY 14564

REPORT OF CALIBRATION

TEM Consulting LP Axial T Coil Probe Company: PCTest Engineering Lab

Model No.: Axial T Coil Probe

Serial No.: TEM-1123

°C

% RH

kPa

I. D. No.: XXXX

Calibration results:

Probe Sensitivity measured with Helmholtz Coil Helmholtz Coil;

the number of turns on each coil; 10 No. the radius of each coil, in meters; 0.204 m

the current in the coils, in amperes.; 0.08 Helmholtz Coil Constant: 7.04

Helmholtz Coil magnetic field; 5.71

> Probe Sensitivity at 1000 -60.24was

dBV/A/m 0.972 mV/A/m 898

Ohms

Α

A/m/V

A/m

Hz.

Report Number: Control Number:

Before & after data same: ... X ...

Laboratory Environment:

Ambient Temperature:

Ambient Humidity:

Ambient Pressure:

Calibration Due:

Calibration Date: 23-Sep-2020

31288 -2

31288

20.7

42.1

99.094


The above listed instrument meets or exceeds the tested manufacturer's specifications.

This Calibration is traceable through NIST test numbers:

684.07/O-0000001126-20

The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2. Graph represents Probes Frequency Response.

Probe resistance

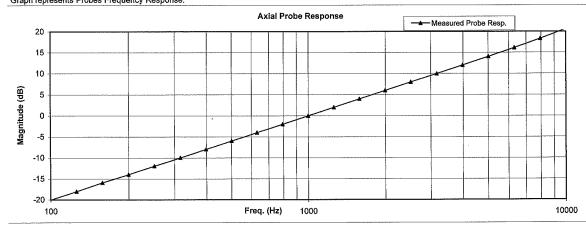

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure:

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MiL-STD-45662A) and ISO 9001:2015, ISO 17025

Cal. Date: 23-Sep-2020

Measurements performed by:

James Zhu

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Page 1 of 2

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 04 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 94 of 104

HCATEMC_TEM-1123_Sep-23-2020

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Axial T Coil Probe Company: PCTest Engineering Lab

for Model No.: Axial T Coil Probe

Serial No.: TEM-1123

Test	Function	Tolera	Measured values			
******				Before	Out	Remarks
1.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.24		
			dB			
2.0	Probe Level Linearity		6	6.03		
		Ref. (0 dB)	0	0.00		
			-6	-6.03		
			-12	-12.05		
			Hz			
3.0	Probe Frequency Response		100	-20.0		1
			126	-18.0		
			158	-15.9		
			200	-14.0		
			251	-12.0		
			316	-10.0		
			398	-8.0		
			501	-6.0		
			631	-4.0		
			794	-2.0		
		Ref. (0 dB)	1000	0.0		
			1259	2.0		
			1585	4.0		
			1995	6.0		
			2512	8.0		
			3162	10.0		
			3981	12.0		
			5012	14.0		
			6310	16.1		
			7943	18.3		
			10000	20.7		

Instruments u	ised for calibration:		Date of Cal.	Traceablity No.	Due Date
HP	34401A	S/N US360641	2-Jul-2020	,610119	2-Jul-2021
HP	34401A	S/N US361024	2-Jul-2020	,610119	2-Jul-2021
HP	33120A	S/N US360437	2-Jul-2020	,610119	2-Jul-2021
B&K	2133	S/N 1583254	1-Jul-2020	684.07/O-0000001126-20	1-Jul-2021

Cal. Date: 23-Sep-2020

Calibrated on WCCL system type 9700


This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal, Labs, Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Page 2 of 2

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 95 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		raye 93 01 104



Certificate of Conformance

for

RADIAL T COIL PROBE

Manufactured by:

TEM CONSULTING

Model No:

RADIAL T COIL PROBE

Serial No:

TEM-1129

Calibration Recall No: 31288

Submitted By:

Customer:

ANDREW HARWELL

Company: Address: PCTEST ENGINEERING LAB

6660-B DOBBIN ROAD

COLUMBIA

MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the SI through the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No.

RADIAL T TEM C

Upon receipt for Calibration, the instrument was found to be:

10/13/2020

Within (X

tolerance of the indicated specification. See attached Report of Calibration.

The information supplied relates to the calibrated item listed above and statment of conformance for ALL given specifications and standards fall under the decision rule: A=(L-(U95)), where A is acceptance limit, L is manufacturer specifications and U95 is confidence level of 95% at k=2. This includes but not limited to:1. Measured value does not meet manufacturer's tolerance, 2.Manufacturer's tolerance is too small compared to calibration and measurement capability uncertainties, 3. Test uncertainty ratio does not meet the 4:1 ratio due to test instrumentation limitations. The decision rule has been communicated and approved by customer during contract

West Caldwell Calibration Laboratories' calibration control system meets the following requirements, ISO 10012-1 MIL STD 45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2015, and ISO 17025

Note: With this Certificate, Report of Calibration is included.

Approved by:

Calibration Date:

23-Sep-20

James Zhu

Certificate No:

31288 - 1

West Caldwell

Quality Manager ISO/IEC 17025:2017

OA Doc. #1051 Rev. 3.0 5/29/20

Certificate Page 1 of 1

ACCREDITED

Calibration uncompromised calibration Laboratories. Inc.

1575 State Route 96, Victor, NY 14564, U.S.A.

Calibration Lab. Cert. # 1533.01

 FCC ID: A3LSMG996U
 PCTEST
 HAC (T-COIL) TEST REPORT
 Approved by: Quality Manager

 Filename:
 Test Dates:
 DUT Type:

 1M2009140143-26-R1.A3L
 10/13/2020 - 11/12/2020
 Portable Handset

© 2020 PCTEST

REV 3.4.M



ISO/IEC 17025: 2017 Calibration Lab. Cert. # 1533.01

1575 State Route 96, Victor NY 14564

REPORT OF CALIBRATION

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Lab


Model No.: Radial T Coil Probe

Serial No.: TEM-1129

I. D. No.: XXXX

Probe Sensitivity measured wit	h Helmhol	tz Coil			
Helmholtz Coil;			Before & after data same:	X	
the number of turns on each coil;	10	No.			
the radius of each coil, in meters;	0.204	m	Laboratory Environment:		
the current in the coils, in amperes.;	0.08	Α	Ambient Temperature:	20.7	°C
Helmholtz Coil Constant;	7.04	A/m/V	Ambient Humidity:	42.1	% RH
Helmholtz Coil magnetic field;	5.70	A/m	Ambient Pressure:	99.094	kPa
			Calibration Date:	23-Sep-2020)
Probe Sensitivity at	1000	Hz.	Re-calibration Due:		
was	-60.37	dBV/A/m	Report Number:	3128	8 -1
	0.959	mV/A/m	Control Number:	3128	8
Probe resistance	897	Ohms			
ne above listed instrument meets or exceeds	the tested	manufacturer's s	specifications.		
is Calibration is traceable through NIST test numbers	3:	684.07/O-0000	001126-20		
e expanded uncertainty of calibration; 0,30dB at 95% c	onfidence leve	el with a coverage fac	tor of k=2.		

Graph represents Probes Frequency Response.

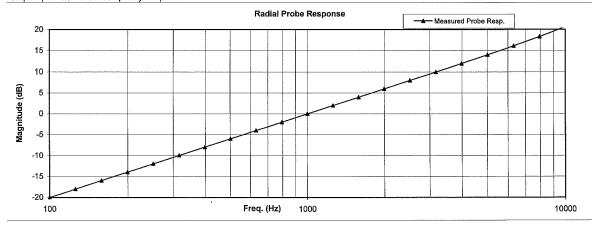

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2015, ISO 17/9/25

Cal. Date: 23-Sep-2020

Measurements performed by:

Calibrated on WCCL system type 9700

James Zhu

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal, Labs, inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 1 of 2

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 97 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 97 01 104

HCRTEMC_TEM-1129_Sep-23-2020

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Lab

for Model No.: Radial T Coil Probe

Serial No.: TEM-1129

Function	Tolera	Tolerance		Measured values		
				Out	Remarks	
Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.37			
		dB			· · · · · · · · · · · · · · · · · · ·	
Probe Level Linearity		6	6.04			
	Ref. (0 dB)	0	0.00			
		-6	-6.03			
		-12	-12.05			
		Hz	***************************************			
Probe Frequency Response			-20.0			
•						
			1			
,						
	Ref. (0 dB)					
			1 1			
					1	
					1	
		10000	20.7			
	Probe Sensitivity at	Probe Sensitivity at 1000 Hz. Probe Level Linearity Ref. (0 dB)	Probe Sensitivity at 1000 Hz. dBV/A/m Probe Level Linearity Ref. (0 dB) 0 -6 -12 Probe Frequency Response 100 126 158 200 251 316 398 501 631 794	Probe Sensitivity at 1000 Hz. dBV/A/m -60.37 Probe Level Linearity	Probe Sensitivity at 1000 Hz. dBV/A/m -60.37 Probe Level Linearity 6	

Instrumen	ts used for calibration:		Date of Cal.	Traceability No.	Due Date
HP	34401A	S/N US360641	2-Jul-2020	,610119	2-Jul-2021
HP	34401A	S/N US361024	2-Jul-2020	,610119	2-Jul-2021
HP	33120A	S/N US360437	2-Jul-2020	.610119	2-Jul-2021
B&K	2133	S/N 1583254	1-Jul-2020	684.07/O-0000001126-20	1-Jul-2021

Cal. Date: 23-Sep-2020

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 2 of 2

FCC ID: A3LSMG996U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 98 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 96 01 104

14. CONCLUSION

The measurements taken in accordance with the procedures provided in the CTIA Test Plan for Hearing Aid Compatibility Rev 3.1.1, May 2017, indicate that the wireless communications device complies with the HAC limits specified in the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

FCC ID: A3LSMG996U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dago 00 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Page 99 of 104

15. REFERENCES

- ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- CTIA Certification Program, "Test Plan for Hearing Aid Compatibility Rev 3.1.1", Washington, DC, CTIA, May 2017
- FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
- 4. FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- 5. FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- 6. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- 7. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- 8. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- 9. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, " IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- 10. Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 11. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells, " U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- 14. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- 15. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.

FCC ID: A3LSMG996U	PCTEST Thought to be port of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 100 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 100 01 104

- 17. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
- 18. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 19. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- 20. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- 21. Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 22. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- 23. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
- 24. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- 25. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- 26. Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- 27. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 28. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- 29. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- 30. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 31. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: A3LSMG996U	PCTEST Total to be part of Semental	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 101 of 104
1M2009140143-26-R1.A3L	10/13/2020 - 11/12/2020	Portable Handset		Fage 101 01 104