



1.4 EUT OPERATING CONDITION

1. Turned on EUT's power.
2. EUT will send/receive pockets to/from Terminal via WAN cable.
3. EUT will send/receive pockets to/from Terminal via Ethernet#1 cable.
4. EUT will send/receive pockets to/from Terminal via Ethernet#2 cable.
5. EUT will send/receive pockets to/from Terminal via Ethernet#3 cable.
6. EUT will send/receive pockets to/from Terminal via Ethernet#4 cable.
7. EUT will send/receive pockets to/from Line#1 via Ttelephone Line Emulator.
8. EUT will send/receive pockets to/from Line#2 via Ttelephone Line Emulator.
9. EUT will show statistics message to PC via RS-232 cable.
10. Repeat step 2~6.

1.5 DESCRIPTION OF TEST SITE

SITE DESCRIPTION	: FCC certificate NO. :31040/SIT DNV certificate NO. :510-96-1016 TUV certificate NO. : I9664582-9610 Lloyd's certificate NO. :LA003 BCIQ certificate NO. :SL2-IN-E-02 NVLAP Lab code : 200118-0 CNLA certificate NO. : CNLA-ZL97018 VCCI certificate NO. : R-629, C-650
NAME OF SITE	: Electronics Research & Service Organization Industrial Technology Research Institute
SITE LOCATION	: K500, 195-4 , sec. 4, Chung Hsing Rd., Chu-Tung Chen. Hsin-Chu, Taiwan 31015 R.O.C.




2. CONDUCTED POWERLINE TEST

2.1 TEST EQUIPMENTS

The following test equipments are used during the conducted powerline tests :

MANUFACTURER OR TYPE	MODEL No	SERIAL NO.	DATE OF CALIBRATION
SPECTRUM ANALYZER & DISPLAY	HP 8568A	2235A02320	MAR. 05, 1998
QUASI-PEAK ADAPTER	HP 85650 A	2341A00672	MAR. 05, 1998
ISOLATION TRANSFORMER	SOLAR 7032-1	N/A	N/A
L.I.S.N.	EMCO 3850/2	9311-1025 9401-1028	MAR. 24, 1998
TEST RECEIVER	R/S ESH3	8720791118	MAR. 13, 1998
SHIELDED ROOM	KEENE 5983	N/A	N/A

2.2 TEST SETUP

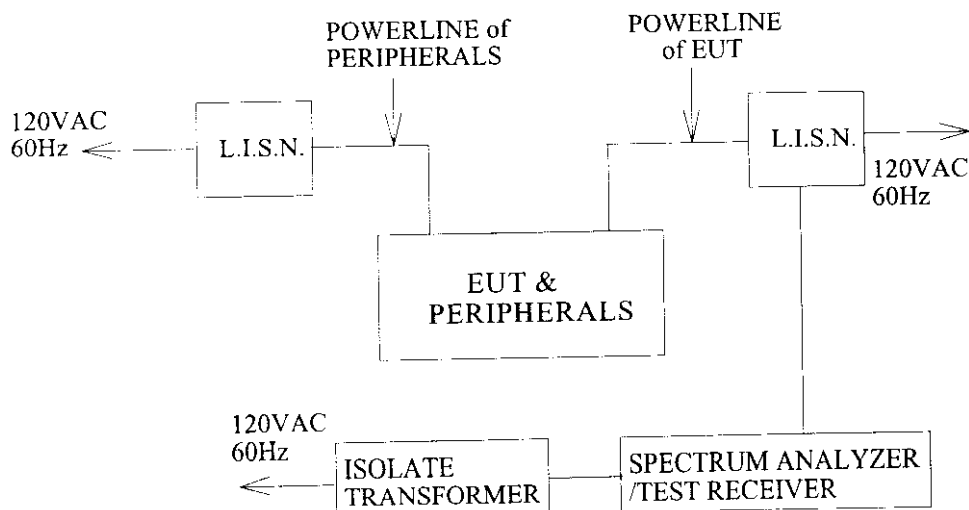



2.3 CONDUCTED POWER LINE EMISSION LIMIT

FREQUENCY (MHz)	MAXIMUM RF LINE VOLTAGE (dB μ V)	
	CLASS A	CLASS B
0.45 - 1.705	60	48
1.705 - 30.0	69.5	48

2.4 TEST PROCEDURE

The test procedure is performed in a 12ft \times 12ft \times 8ft(L \times W \times H) shielded room. the EUT along with its peripherals were placed on a 1.0m(W) \times 1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chasis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chasis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 UNCERTAINTY OF CONDUCTED EMISSION

The uncertainty of conducted emission is ± 1.36 dB.



2.6 LINE CONDUCTED RF VOLTAGE MEASUREMENT

The frequency spectrum from 0.45 MHz to 30 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are Quasi-peak values.

Temperature : 21 °C

Humidity : 58 % R.H.

FREQUENCY (MHz)	READING(dB μ V)		LIMITS (dB μ V)
	ONE END & GRD'D	THE OTHER END & GRD'D	
	Q.P.	Q.P.	
0.450	*	*	48.00
1.286	38.65	*	48.00
1.319	*	38.55	48.00
2.248	43.67	*	48.00
2.267	*	41.57	48.00
2.374	42.58	*	48.00
2.414	*	41.78	48.00
4.992	39.91	33.41	48.00
11.229	36.65	36.85	48.00
14.326	40.46	*	48.00
14.446	*	40.86	48.00
15.066	41.17	41.07	48.00
23.813	*	33.89	48.00
30.000	*	*	48.00

REMARKS : * Undetectable



3. RADIATED EMISSION TEST


3.1 TEST EQUIPMENTS

The following test equipments are utilized in making the measurements contained in this report.

MANUFACTURER OR TYPE	MODEL NO	SERIAL NO.	DATE OF CALIBRATION
CHASE BI-LOG ANTENNA	CBL6111A	1546	MAY.23, 1998
R/S TEST RECEIVER	ESMI	842088/005 841978/008	MAY.29, 1998
OPEN SITE	-----	No.1	JUL.18, 1997

3.2 TEST SETUP

The diagram below shows the test setup which is utilized to make these measurements.

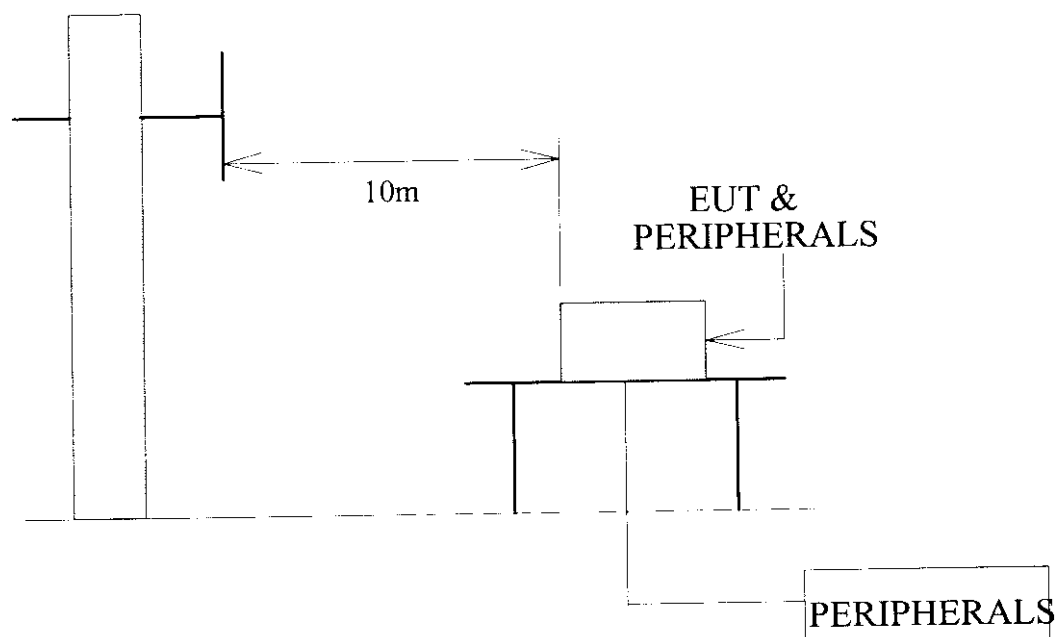

Antenna Elevation Variable



3.3 RADIATION LIMIT

All emanation from a class B computing device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below :

FREQUENCY (MHz)	FIELD STRENGTHS(dB μ V/M)	
	CLASS A(10m)	CLASS B(3m)
30 – 88	39.0	40.0
88 – 216	43.5	43.5
216 – 960	46.4	46.0
960 – 1000	49.5	54.0

Note : (1)The tighter limit shall apply at the edge between two frequency bands.

(2)Distance refers to the distance in meters between the measuring instrument antenna and the closest point of any part of the device or system.

3.4 TEST PROCEDURE

The devices under test were placed on a rotatable table top 0.8 meter above ground. The table was rotated 360 degrees to determine the position of the highest radiation. EUT is set 10 meters from the interference receiving antenna which is mounted on the top of a variable height mast. The antenna height is varied between one meter and four meters above ground to find the maximum value of the field strength Both horizontal polarization and vertical polarization of the antenna are set to make the measurement.

The bandwidth setting on the E.M.I. meter (R/S TEST RECEIVER ESMI) is 120 KHz.

The levels are quasi peak value readings. The frequency spectrum from 30MHz to 1000MHz was investigated.

3.5 UNCERTAINTY OF RADIATED EMISSION

The uncertainty of radiated emission is ± 2.72 dB.



3.6 RADIATED RF NOISE MEASUREMENT

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are quasi-peak values.

Temperature : 27 °C

Humidity : 71% RH

FREQ- UENCY (MHz)	ANTENNA FACTOR (dB)	CABLE LOSS (dB)	METER READING AT10m (dB μ V/M)		LIMITS (dB μ V/M)	EMISSION LEVEL AT3m (dB μ V/M)	
			HORIZON- TAL	VERTICAL		HORIZON- TAL	VERTICAL
30.00	19.71	1.20	*	*	40.00	*	*
122.89	11.92	2.26	*	7.66	43.50	*	31.83
138.25	11.93	2.39	*	8.22	43.50	*	32.54
169.34	9.98	2.56	12.42	14.10	43.50	34.96	36.64
184.33	9.13	2.72	7.10	7.66	43.50	28.95	29.51
197.57	8.97	2.79	8.78	13.26	43.50	30.54	35.02
211.63	9.76	2.87	*	8.78	43.50	*	31.41
245.77	12.15	3.08	14.94	13.82	46.00	40.17	39.05
307.22	13.46	3.33	13.82	12.14	46.00	40.61	38.93
310.46	13.53	3.35	9.90	*	46.00	36.78	*
368.66	15.01	3.64	11.86	11.02	46.00	40.51	39.67
400.00	15.79	3.80	13.26	14.94	46.00	42.85	44.53
430.10	16.41	3.92	10.74	7.38	46.00	41.07	37.71
450.00	16.82	4.00	5.98	*	46.00	36.80	*
1000.00	24.69	5.70	*	*	54.00	*	*

REMARKS :

1. * Undetectable
2. Emission level (dB μ V/M) = Antenna Factor (dB) + Cable loss (dB)
+ Meter Reading (dB μ V/M).
3. 10m measured data are transferred to 3m by the formula
 $L2 = L1(d1/d2) \mu$ V/M from CISPR 22
 $20\text{Log}L2 = 20\text{Log}L1 + 20\text{Log}(d1/d2)\text{dB} \mu$ V/M