

FCC Radio Test Report

FCC ID: QISME309-562

This report concerns (check one): ☒ Original Grant ☐ Class I Change ☐ Class II Change

Project No. : 1712C196
Equipment : eMTC Module
Test Model : ME309-562
Series Model : N/A
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : Dec. 29, 2017
Date of Test : Dec. 29, 2017 ~ Jan. 26, 2018
Issued Date : Feb. 06, 2018
Tested by : BTL Inc.

Technical Engineer : Shawn Xiao
(Shawn Xiao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3,Jinshagang 1st Road, Shixia,Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents

Page

REPORT ISSUED HISTORY	5
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION	11
3.3 BLOCK DIGRAM SHOWING THECONFIGURATIONOFSYSTEMTESTED FOR RADIATED	12
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . TEST RESULT	13
4.1 OUTPUT POWER MEASUREMENT	13
4.1.1 LIMIT	13
4.1.2 TEST PROCEDURE	13
4.1.3 TESTSETUP LAYOUT	13
4.1.4 TEST DEVIATION	13
4.1.5 TEST RESULTS	13
4.2 OCCUPIED BANDWIDTH MEASUREMENT	14
4.2.1 TEST PROCEDURE	14
4.2.2 TEST SETUP LAYOUT	14
4.2.3 TEST DEVIATION	14
4.2.4 TEST RESULTS	14
4.3 CONDUCTED EMISSIONS MEASUREMENT	15
4.3.1 LIMIT	15
4.3.2 TEST PROCEDURES	15
4.3.3 TESTSETUP LAYOUT	15
4.3.4 TESTDEVIATION	15
4.3.5 TEST RESULTS	15
4.4 RADIATED EMISSIONS MEASUREMENT	16
4.4.1 LIMIT	16
4.4.2 TEST PROCEDURES	16
4.4.3 TESTSETUP LAYOUT	16
4.4.4 TESTDEVIATION	17
4.4.5 TEST RESULTS	17
4.5 BAND EDGE MEASUREMENT	18
4.5.1 LIMIT	18
4.5.2 TEST PROCEDURES	18

Table of Contents	Page
4.5.3 TESTSETUP LAYOUT	18
4.5.4 TESTDEVIATION	18
4.5.5 TEST RESULTS	18
4.6 PEAK TO AVERAGE RATIO MEASUREMENT	19
4.6.1 LIMIT	19
4.6.2 TEST PROCEDURES	19
4.6.3 TESTSETUP LAYOUT	19
4.6.4 TESTDEVIATION	19
4.6.5 TEST RESULTS	19
4.7 FREQUENCY STABILITY MEASUREMENT	20
4.7.1 LIMIT	20
4.7.2 TEST PROCEDURES	20
4.7.3 TESTSETUP LAYOUT	20
4.7.4 TESTDEVIATION	20
4.7.5 TEST RESULTS	20
5. LIST OF MEASUREMENT EQUIPMENTS	21
APPENDIX A - OUTPUT POWER	23
APPENDIX B - OCCUPIED BANDWIDTH	28
APPENDIX C - CONDUCTED EMISSIONS	37
APPENDIX D - RADIATED EMISSION	46
APPENDIX E - BAND EDGE	79
APPENDIX F - PEAK TO AVERAGE RATIO	96
APPENDIX G - FREQUENCY STABILITY	101

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-2-1712C196	Original Issue.	Feb. 06, 2018

1. CERTIFICATION

Equipment : eMTC Module
Brand Name : HUAWEI
Test Model : ME309-562
Series Model : N/A
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Factory : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : Dec. 29, 2017 ~ Jan. 26, 2018
Test Sample : Engineering Sample
Standard(s) : 47 CFR FCC Part 27 Subpart L
47 CFR FCC Part 27 Subpart H
47 CFR FCC Part 27 Subpart F
47 CFR FCC Part 2 & ANSI/TIA-603-D-2010

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1712C196) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the eMTC Band 4, 12, 13 parts.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 27 Subpart L,H,F & Part 2			
Standard(s) Section	Test Item	Judgment	Tested By
2.1046 & 27.50(d)(4)	Radiated power	PASS	Paul Li
2.1046 & 27.50(d)(4)	Conducted Output Power	PASS	Paul Li
2.1049 & 27.53(h)	Occupied Bandwidth	PASS	Paul Li
2.1051 & 27.53(h)	Conducted Spurious Emissions	PASS	Paul Li
2.1053 / 27.53(h)	Radiated Spurious Emissions	PASS	Paul Li
27.53(h)	Band Edge Measurements	PASS	Paul Li
27.50(d)(5)	Peak To Average Ratio	PASS	Paul Li
2.1055 & 27.54	Frequency Stability	PASS	Paul Li

NOTE:

(1)" N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm registration number for FCC: 854385

BTL's designation number for FCC: CN5020

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor) $k=1.96$ or $k=2$ (which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$.

The BTL measurement uncertainty as below table:

A. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (1m)	CISPR	18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	eMTC Module	
Brand Name	HUAWEI	
Model Name	ME309-562	
Model Difference	N/A	
Antenna Type	Dipole Antenna (External)	
Antenna Gain	eMTC Band 4	2.5 dBi
	eMTC Band 12	2.5 dBi
	eMTC Band 13	2.5 dBi
Hardware Version	ML2ME309M Ver.A	
Software Version	11.511.00.00.00	
IMEI No.	Radiated	865790030009203
	Conducted	865790030009344
Power Source	#1 DC voltage supplied from AC/DC adapter. (Support uint.) #2 Supplied from USB port.	
Power Rating	#1 AC 100-240V, DC 5V (EUT I/P: DC 3.8V) #2 DC 5V (EUT I/P: DC 3.8V)	
eMTC Category	CAT-M1	
Modulation Type	QPSK, 16QAM	
Operation Frequency	eMTC Band 4 (Channel Bandwidth: 5MHz)	1712.5 ~ 1752.5 MHz
	eMTC Band 4 (Channel Bandwidth: 10MHz)	1715 ~ 1750 MHz
	eMTC Band 4 (Channel Bandwidth: 15MHz)	1717.5 ~ 1747.5 MHz
	eMTC Band 4 (Channel Bandwidth: 20MHz)	1720 ~ 1745 MHz
	eMTC Band 12 (Channel Bandwidth: 5MHz)	701.5 ~ 713.5 MHz
	eMTC Band 12 (Channel Bandwidth: 10MHz)	704 ~ 711 MHz
	eMTC Band 13 (Channel Bandwidth: 5MHz)	779.5 ~ 784.5 MHz
	eMTC Band 13 (Channel Bandwidth: 10MHz)	782 MHz

Max. EIRP Power	eMTC Band 4 (Channel Bandwidth: 5MHz)	QPSK	25.25	dBm
		16QAM	25.17	dBm
	eMTC Band 4 (Channel Bandwidth: 10MHz)	QPSK	25.45	dBm
		16QAM	25.21	dBm
	eMTC Band 4 (Channel Bandwidth: 15MHz)	QPSK	25.22	dBm
		16QAM	25.32	dBm
	eMTC Band 4 (Channel Bandwidth: 20MHz)	QPSK	25.17	dBm
		16QAM	25.19	dBm
Max. ERP Power	eMTC Band 12 (Channel Bandwidth: 5MHz)	QPSK	23.67	dBm
		16QAM	23.73	dBm
	eMTC Band 12 (Channel Bandwidth: 10MHz)	QPSK	23.84	dBm
		16QAM	23.82	dBm
	eMTC Band 13 (Channel Bandwidth: 5MHz)	QPSK	23.26	dBm
		16QAM	23.21	dBm
	eMTC Band 13 (Channel Bandwidth: 10MHz)	QPSK	23.38	dBm
		16QAM	23.35	dBm

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION

Following channel(s) was (were) selected for the final test as listed below:

Test item	Modes	Bandwidth (MHz)				Modulation		RB (%)			Test Channel		
		5	10	15	20	QPSK	16QAM	1	50	100	L	M	H
Radiated power	CAT-M1 B4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Conducted Output Power	CAT-M1 B4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Occupied Bandwidth	CAT-M1 B4	✓	✓	✓	✓	✓	✓			✓		✓	
Conducted Spurious Emissions	CAT-M1 B4	✓	✓	✓	✓	✓		✓				✓	
Radiated Spurious Emissions	CAT-M1 B4	✓			✓	✓		✓					✓
Band Edge Measurements	CAT-M1 B4	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
Peak To Average Ratio	CAT-M1 B4	✓	✓	✓	✓	✓	✓			✓		✓	
Frequency Stability	CAT-M1 B4	✓	✓	✓	✓	✓				✓		✓	


Test item	Modes	Bandwidth (MHz)		Modulation		RB (%)			Test Channel		
		5	10	QPSK	16QAM	1	50	100	L	M	H
Radiated power	CAT-M1 B12	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Conducted Output Power	CAT-M1 B12	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Occupied Bandwidth	CAT-M1 B12	✓	✓	✓	✓			✓		✓	
Conducted Spurious Emissions	CAT-M1 B12	✓	✓	✓		✓				✓	
Radiated Spurious Emissions	CAT-M1 B12	✓	✓	✓		✓					✓
Band Edge Measurements	CAT-M1 B12	✓	✓	✓	✓	✓		✓	✓		✓
Peak To Average Ratio	CAT-M1 B12	✓	✓	✓	✓			✓		✓	
Frequency Stability	CAT-M1 B12	✓	✓	✓				✓		✓	

Test item	Modes	Bandwidth (MHz)		Modulation		RB (%)			Test Channel		
		5	10	QPSK	16QAM	1	50	100	L	M	H
Radiated power	CAT-M1 B13	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Conducted Output Power	CAT-M1 B13	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Occupied Bandwidth	CAT-M1 B13	✓	✓	✓	✓			✓		✓	
Conducted Spurious Emissions	CAT-M1 B13	✓	✓	✓		✓				✓	
Radiated Spurious Emissions	CAT-M1 B13	✓	✓	✓		✓					✓
Band Edge Measurements	CAT-M1 B13	✓	✓	✓	✓	✓		✓	✓		✓
Peak To Average Ratio	CAT-M1 B13	✓	✓	✓	✓			✓		✓	
Frequency Stability	CAT-M1 B13	✓	✓	✓				✓		✓	

EUT TEST CONDITIONS:

Test Item	Environmental Conditions	Test Voltage
EIRP/ERP	24°C, 63%RH	DC 3.8V
Conducted Output Power	25°C, 65%RH	DC 3.8V
Occupied Bandwidth	25°C, 65%RH	DC 3.8V
Conducted Spurious Emissions	25°C, 65%RH	AC 120V/60Hz
Radiated Spurious Emissions	25°C, 60%RH	DC 3.8V
Band Edge	25°C, 65%RH	DC 3.8V
Peak to Average Ratio	25°C, 65%RH	DC 3.8V
Frequency Stability	Normal and Extreme	Normal and Extreme

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED FOR RADIATED



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Adapter	N/A	HW-050200E01	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	USB Cable

4. TEST RESULT

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMIT

Mobile / Portable station are limited to 1 watts e.i.r.p. (eMTC 4)

Mobile / Portable station are limited to 3 watts e.i.r.p. (eMTC 12, eMTC 13)

4.1.2 TEST PROCEDURE

EIRP/ERP:

EIRP= Conducted Power +Antenan gain


ERP power=EIPR power-2.15dBi.

Conducted Power:

The EUT was set up for the maximum power with CAT-M1 link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 TESTSETUP LAYOUT

Conducted Power Measurement



4.1.4 TEST DEVIATION

No deviation

4.1.5 TEST RESULTS


Please refer to the Appendix A.

4.2 OCCUPIED BANDWIDTH MEASUREMENT

4.2.1 TEST PROCEDURE

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth and 26dB bandwidth.

4.2.2 TEST SETUP LAYOUT

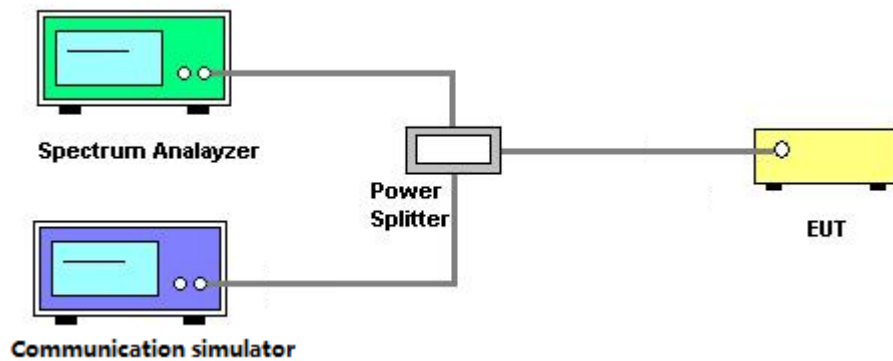

4.2.3 TEST DEVIATION

No deviation

4.2.4 TEST RESULTS

Please refer to the Appendix B.

4.3 CONDUCTED EMISSIONS MEASUREMENT


4.3.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

4.3.2 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set $RBW \geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10 \log(P)](dB)$
 $= [30 + 10 \log(P)](dBm) - [43 + 10 \log(P)](dB)$
 $= -13dBm$

4.3.3 TESTSETUP LAYOUT

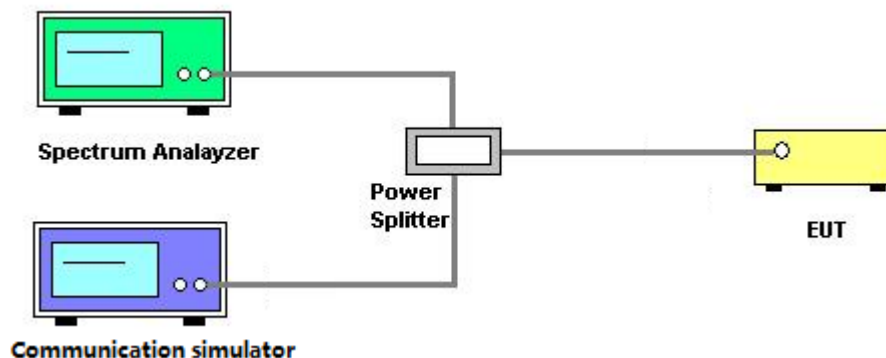

4.3.4 TESTDEVIATION

No deviation

4.3.5 TEST RESULTS

Please refer to the Appendix C.

4.4 RADIATED EMISSIONS MEASUREMENT

4.4.1 LIMIT


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.



4.4.2 TEST PROCEDURES

1. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
2. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
3. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
4. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power - 2.15dBi.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.4.3 TESTSETUP LAYOUT

Below 30MHz

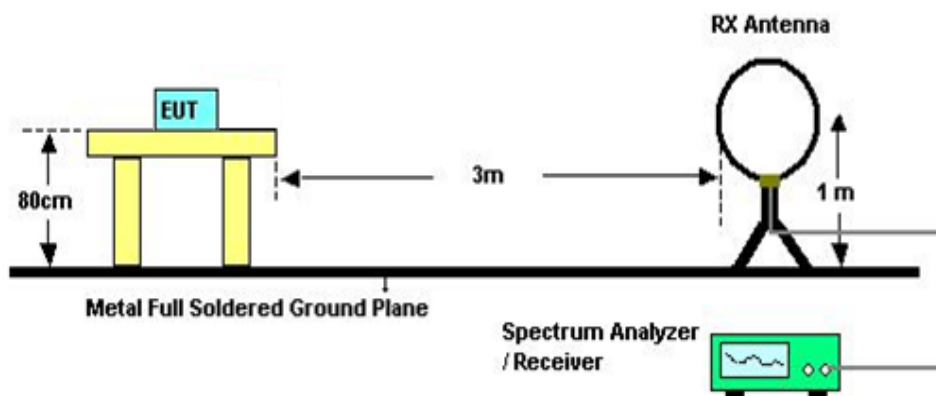

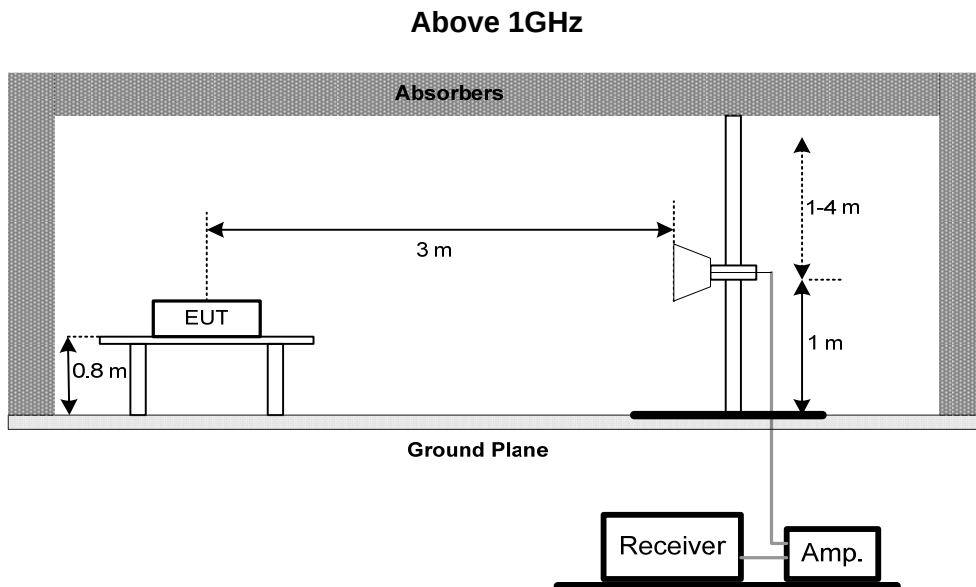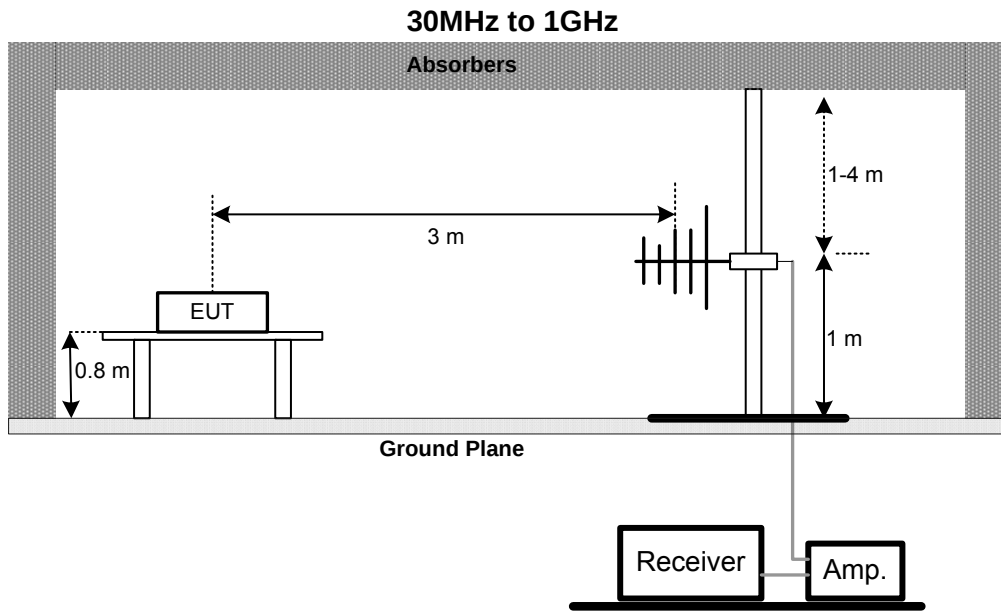

4.4.4 TEST DEVIATION

No deviation

4.4.5 TEST RESULTS

Please refer to the Appendix D.

4.5 BAND EDGE MEASUREMENT

4.5.1 LIMIT

For operations in the 699-716 and 777-787MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.


However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

For operations in the 1710-1755 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

4.5.2 TEST PROCEDURES

1. All measurements were done at low and high operational frequency range.
2. $RBW = 99\% OBW * (1\% \sim 5\%)$
 $VBW \geq 3 * RBW$
3. Record the max trace plot into the test report.

4.5.3 TESTSETUP LAYOUT

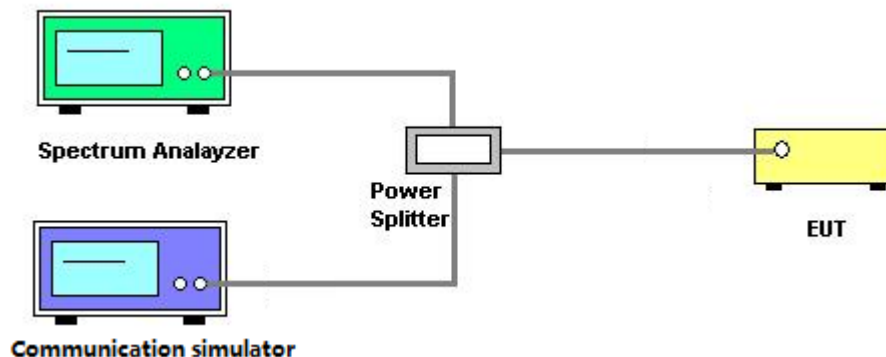

4.5.4 TESTDEVIATION

No deviation

4.5.5 TEST RESULTS

Please refer to the Appendix E.

4.6 PEAK TO AVERAGE RATIO MEASUREMENT


4.6.1 LIMIT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.6.3 TESTSETUP LAYOUT

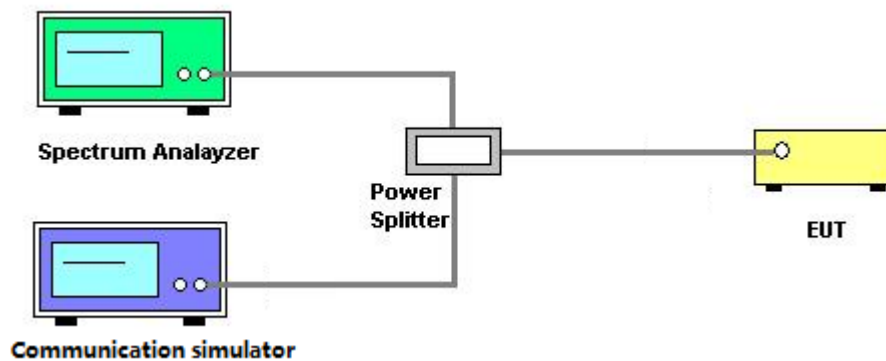

4.6.4 TESTDEVIATION

No deviation

4.6.5 TEST RESULTS

Please refer to the Appendix F.

4.7 FREQUENCY STABILITY MEASUREMENT


4.7.1 LIMIT

1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.7.2 TEST PROCEDURES

1. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
2. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
3. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. The frequency error was recorded frequency error from the communication simulator.

4.7.3 TESTSETUP LAYOUT

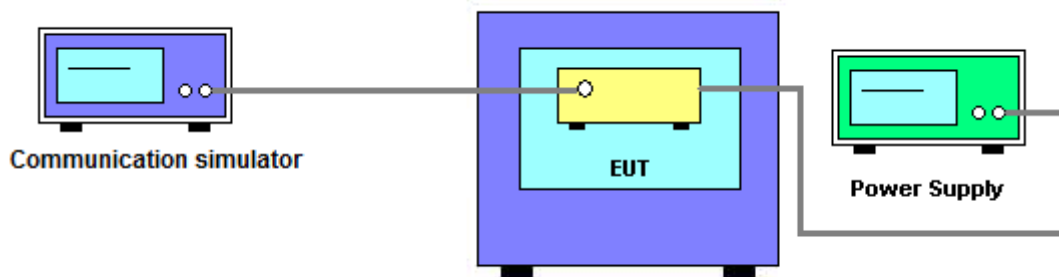

4.7.4 TESTDEVIATION

No deviation

4.7.5 TEST RESULTS

Please refer to the Appendix G.

5. LIST OF MEASUREMENT EQUIPMENTS

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
2	Amplifier	Agilent	8449B	3008A02274	May. 16, 2018
3	Amplifier	HP	8447D	2944A09673	Oct. 19, 2018
4	HighPass Filter	Wairwright Instruments Gmbh	WHK 1.5/15G-10ST	11	Feb. 20, 2018
5	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 1710/1785-1690/180 5-60/12SS	38	Feb. 15, 2018
6	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 824/849-810/863-60/ 9SS	7	Feb. 15, 2018
7	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 880/915-860/935-60/ 9SS	14	Feb. 15, 2018
8	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 1850/1910-1830/193 0-60/10SS	17	Feb. 15, 2018
9	HighPass Filter	Wairwright Instruments Gmbh	WHK3.1/18G-10SS	24	Feb. 20, 2018
10	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 26, 2018
11	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018
12	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
13	wideband radio communication tester	R&S	CMW500	152372	Mar. 26, 2018
14	High pass filter	KANGMAIWEI	ZHPF-M3-12.75G-38 69	B2015073763	Aug. 04, 2018
15	High pass filter	KANGMAIWEI	ZHPF-M1000-4000-1	B2015073762	Aug. 04, 2018
16	High pass filter	KANGMAIWEI	ZHPF-M6-186-1727	B2015073764	Aug. 04, 2018
17	Cable	emci	LMR-400(30MHz-1G Hz)(8m+5m)	N/A	Jun. 26, 2018
18	Cable	emci	EMC104-SM-SM-120 00(12m)	N/A	Jun. 26, 2018
19	Controller	ETS-Lindgren	2090	N/A	N/A
20	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
21	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 26, 2018
22	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Apr. 22, 2018
23	Antenna	EM	EM-6876-1	230	Mar. 06, 2018

Conducted Emission & Band Edge & Occupied Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 26, 2018
2	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	May. 16, 2018
3	wideband radio communication tester	R&S	CMW500	152372	Mar. 26, 2018

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-output DC Power Supply	GW Instek	GPC-3030DN	EK880675	Sep. 26, 2020
2	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	May. 16, 2018
3	wideband radio communication tester	R&S	CMW500	152372	Mar. 26, 2018
4	Const Temp,& Humidity Chamber	Bell	BTH-50C	20170306001	Mar. 26, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.

APPENDIX A - OUTPUT POWER

Test Mode: eMTC Band 4 - QPSK

Bandwidth	Channel	Frequency (MHz)	RB size	RB Offset	Index	Conducted Power	EIRP Power
5M	19975	1712.5	1	0	0	22.61	25.11
			6	0	0	21.51	24.01
	20175	1732.5	1	0	0	22.55	25.05
			6	0	0	21.53	24.03
	20375	1752.5	1	5	3	22.75	25.25
			6	0	3	21.51	24.01
10M	20000	1715	1	0	0	22.44	24.94
			4	0	0	22.95	25.45
	20175	1732.5	1	0	0	22.48	24.98
			4	0	0	22.63	25.13
	20350	1750	1	5	7	22.68	25.18
			4	2	7	22.88	25.38
15M	20025	1717.5	1	0	0	22.69	25.19
			6	0	0	22.34	24.84
	20175	1732.5	1	0	0	22.58	25.08
			6	0	0	22.37	24.87
	20325	1747.5	1	5	11	22.72	25.22
			6	0	11	22.34	24.84
20M	20050	1720	1	0	0	22.37	24.87
			6	0	0	22.32	24.82
	20175	1732.5	1	0	0	22.51	25.01
			6	0	0	22.35	24.85
	20300	1745	1	5	15	22.67	25.17
			6	0	15	22.52	25.02

Test Mode: eMTC Band 4 - 16QAM

Bandwidth	Channel	Frequency (MHz)	RB size	RB Offset	Index	Conducted Power	EIRP Power
5M	19975	1712.5	1	0	0	22.50	25.00
			5	0	0	20.77	23.27
	20175	1732.5	1	0	0	22.51	25.01
			5	0	0	20.16	22.66
	20375	1752.5	1	5	3	22.67	25.17
			5	0	3	20.42	22.92
10M	20000	1715	1	0	0	22.46	24.96
			4	0	0	22.01	24.51
	20175	1732.5	1	0	0	22.58	25.08
			4	0	0	21.85	24.35
	20350	1750	1	5	7	22.71	25.21
			4	2	7	22.05	24.55
15M	20025	1717.5	1	0	0	22.42	24.92
			5	0	0	22.17	24.67
	20175	1732.5	1	0	0	22.46	24.96
			5	0	0	22.08	24.58
	20325	1747.5	1	5	11	22.82	25.32
			5	0	11	22.31	24.81
20M	20050	1720	1	0	0	22.31	24.81
			5	0	0	22.04	24.54
	20175	1732.5	1	0	0	22.57	25.07
			5	0	0	22.08	24.58
	20300	1745	1	5	15	22.69	25.19
			5	0	15	22.22	24.72

Test Mode: eMTC Band 12 - QPSK

Bandwidth	Channel	Frequency (MHz)	RB size	RB Offset	Index	Conducted Power	ERP Power
5M	23035	701.5	1	0	0	23.25	23.60
			6	0	0	23.32	23.67
	23095	707.5	1	0	0	23.31	23.66
			6	0	0	23.26	23.61
	23155	713.5	1	5	3	23.3	23.65
			6	0	3	23.24	23.59
10M	23060	704	1	0	0	23.21	23.56
			4	0	0	23.47	23.82
	23095	707.5	1	0	0	23.22	23.57
			4	0	0	23.48	23.83
	23130	711	1	5	7	23.16	23.51
			4	2	7	23.49	23.84

Test Mode: eMTC Band 12 -16QAM

Bandwidth	Channel	Frequency (MHz)	RB size	RB Offset	Index	Conducted Power	ERP Power
5M	23035	701.5	1	0	0	23.16	23.51
			5	0	0	23.26	23.61
	23095	707.5	1	0	0	23.38	23.73
			5	0	0	23.29	23.64
	23155	713.5	1	5	3	23.27	23.62
			5	0	3	23.27	23.62
10M	23060	704	1	0	0	23.22	23.57
			4	0	0	23.44	23.79
	23095	707.5	1	0	0	23.21	23.56
			4	0	0	23.44	23.79
	23130	711	1	5	7	23.34	23.69
			4	2	7	23.47	23.82

Test Mode:	eMTC Band 13 - QPSK
-------------------	---------------------


Bandwidth	Channel	Frequency (MHz)	RB size	RB Offset	Index	Conducted Power	ERP Power
5M	23205	779.5	1	0	0	22.91	23.26
			6	0	0	22.86	23.21
	23230	782	1	0	0	22.91	23.26
			6	0	0	22.81	23.16
	23255	784.5	1	5	3	22.85	23.20
			6	0	3	22.81	23.16
10M	23230	782	1	0	0	23.03	23.38
			4	0	0	22.98	23.33

Test Mode:	eMTC Band 13 - 16QAM
-------------------	----------------------


Bandwidth	Channel	Frequency (MHz)	RB size	RB Offset	Index	Conducted Power	ERP Power
5M	23205	779.5	1	0	0	22.8	23.15
			5	0	0	22.47	22.82
	23230	782	1	0	0	22.86	23.21
			5	0	0	22.47	22.82
	23255	784.5	1	5	3	22.85	23.20
			5	0	3	22.44	22.79
10M	23230	782	1	0	0	23.00	23.35
			4	0	0	22.77	23.12

APPENDIX B - OCCUPIED BANDWIDTH


eMTC Band 4_5M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
20175	1732.5	1.1656	20175	1732.5	1.0416
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20175	1732.5	1.506	20175	1732.5	1.478

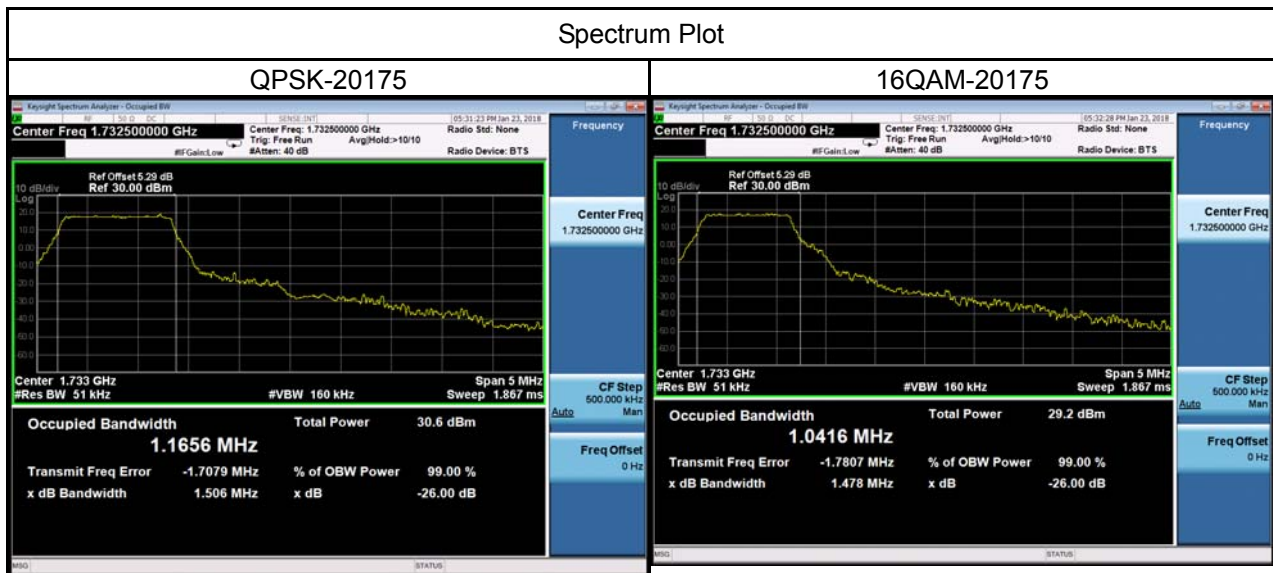


eMTC Band 4_10M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
20175	1732.5	1.1666	20175	1732.5	1.0260
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20175	1732.5	1.499	20175	1732.5	1.482

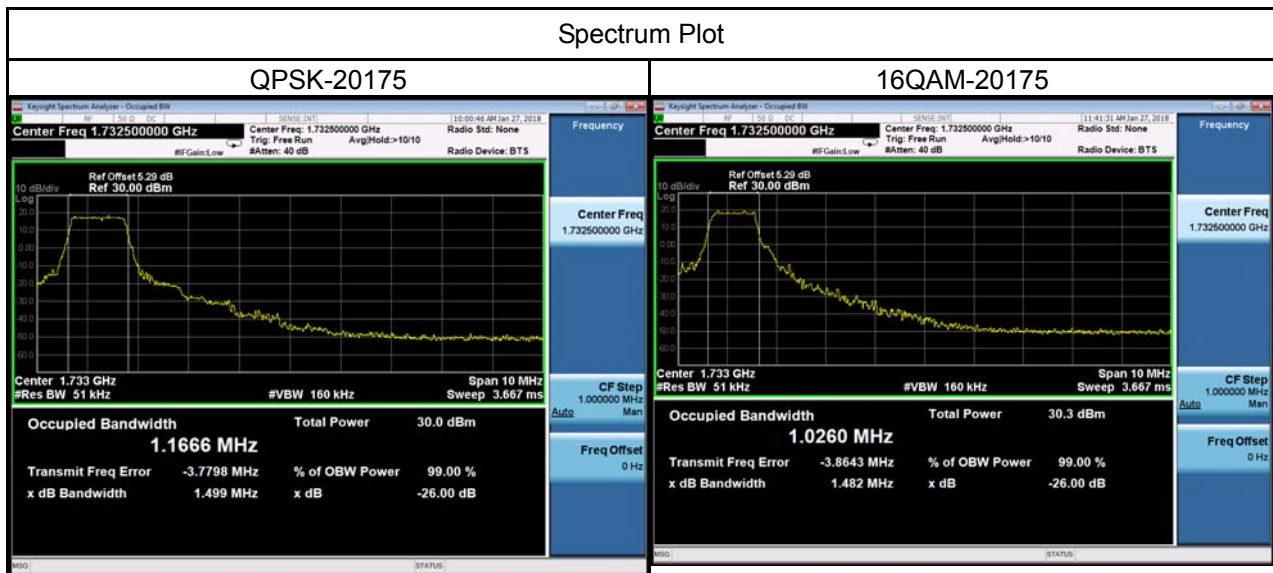


eMTC Band 4_15M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
20175	1732.5	1.1760	20175	1732.5	1.0382
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20175	1732.5	1.518	20175	1732.5	1.474

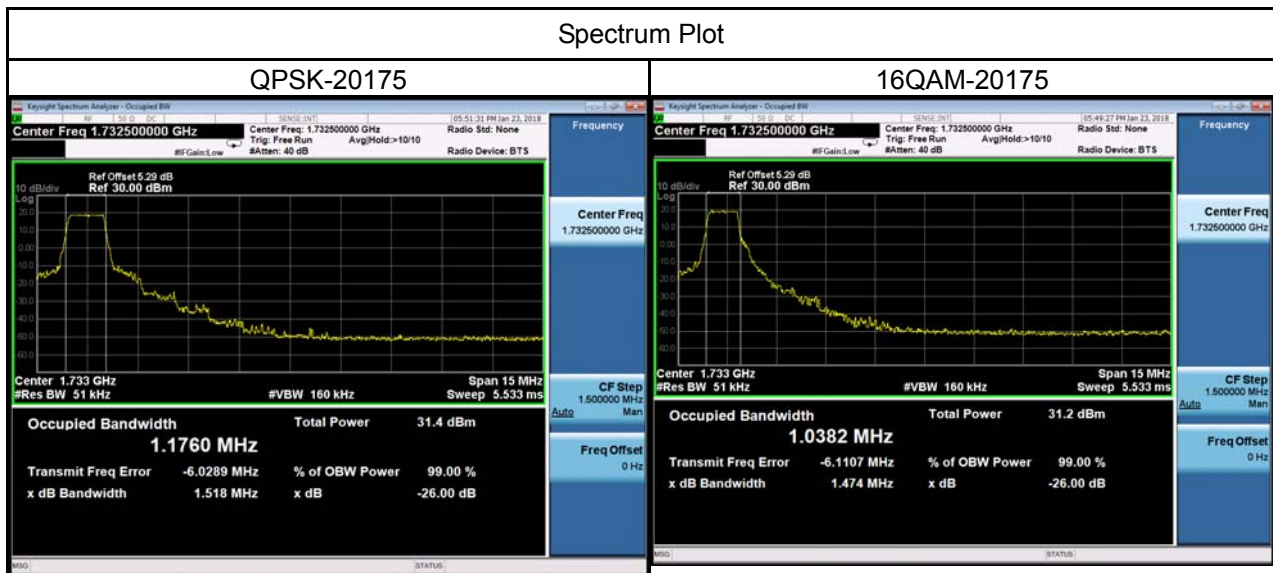


eMTC Band 4_20M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
20175	1732.5	1.1885	20175	1732.5	1.0461
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20175	1732.5	1.577	20175	1732.5	1.531

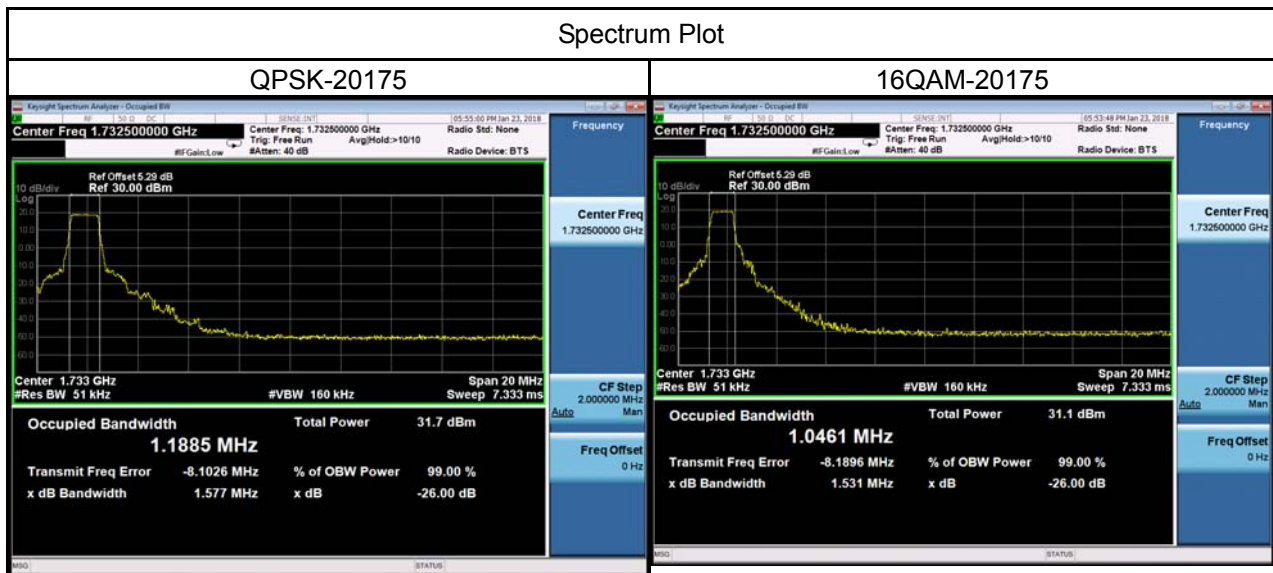


eMTC Band 12_5M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
23095	707.5	1.1800	23095	707.5	1.0174
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
23095	707.5	1.533	23095	707.5	1.462

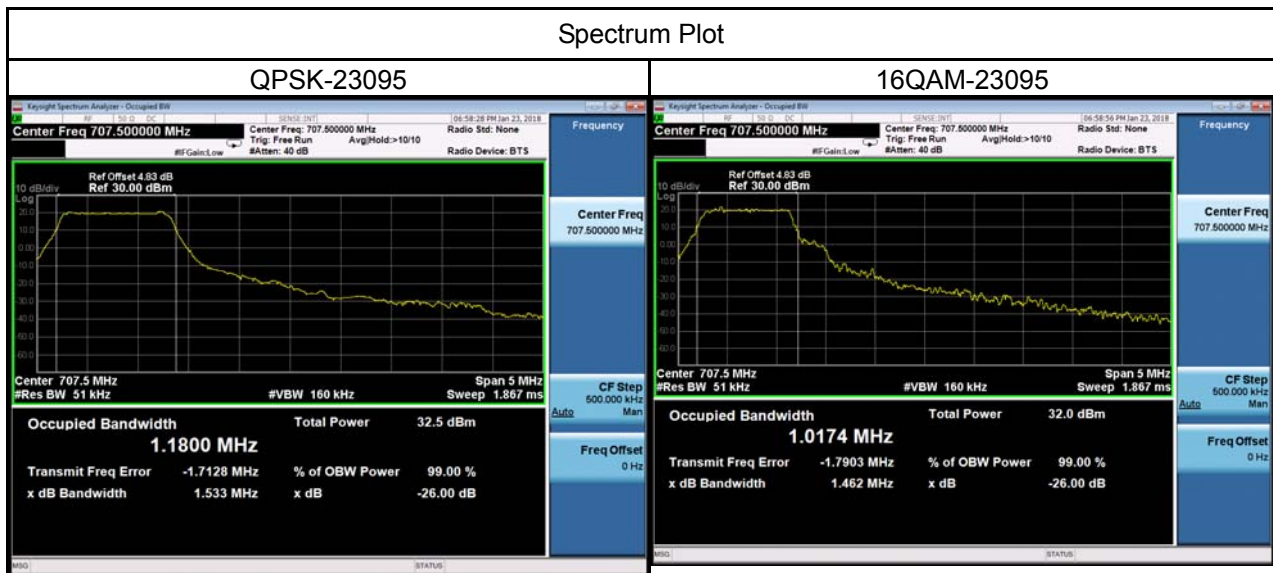

eMTC Band 12_10M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
23095	707.5	1.1483	23095	707.5	1.0184
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
23095	707.5	1.501	23095	707.5	1.454

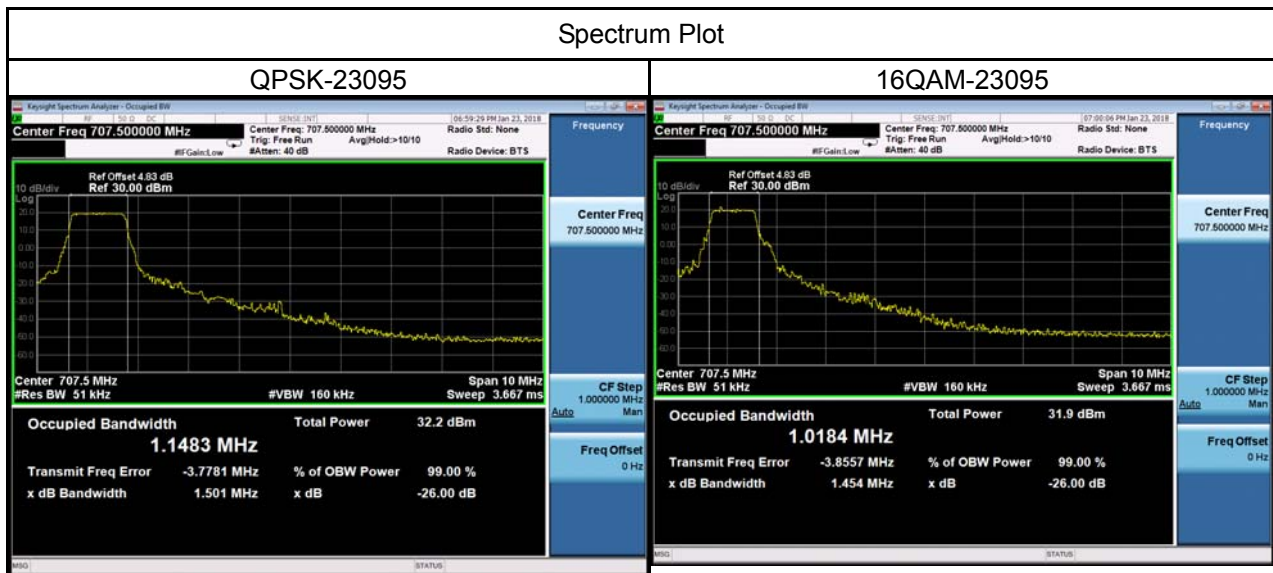


eMTC Band 13_5M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
23230	782.0	1.1517	23230	782.0	1.0097
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
23230	782.0	1.533	23230	782.0	1.458

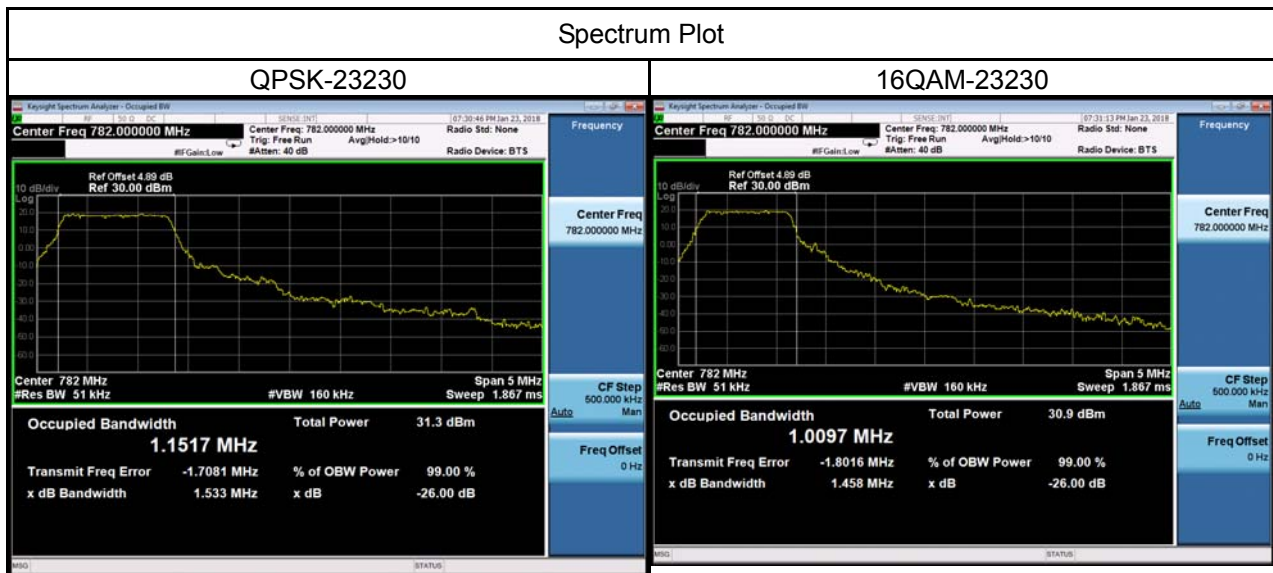

eMTC Band 13_10M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
23230	782.0	1.1652	23230	782.0	1.0306
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
23230	782.0	1.556	23230	782.0	1.462





APPENDIX C - CONDUCTED EMISSIONS

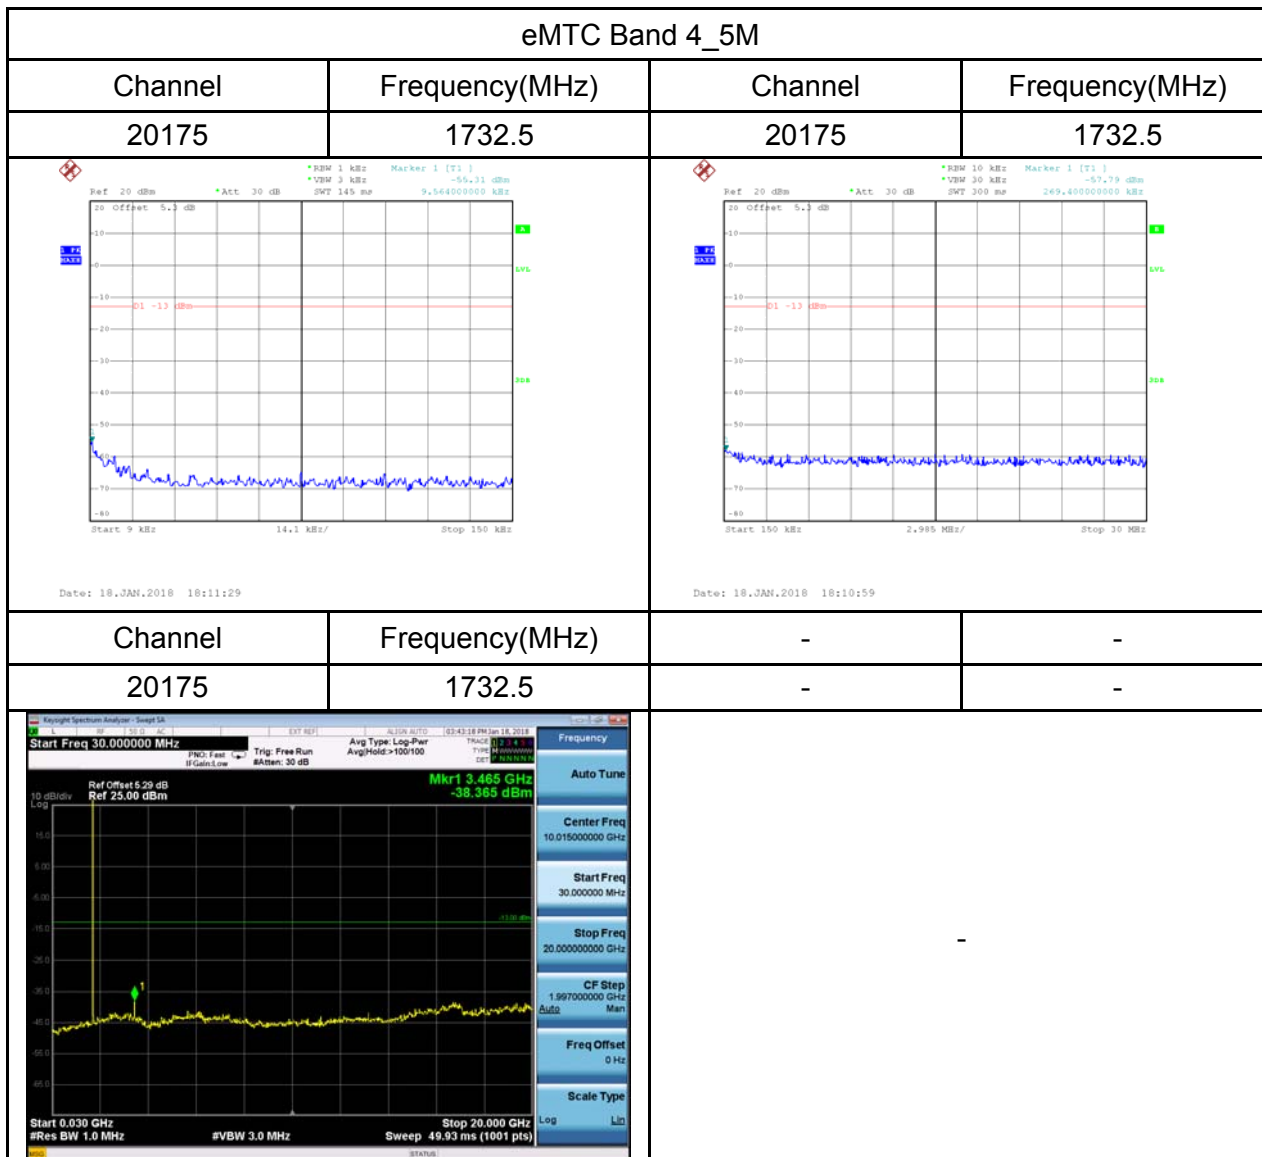


eMTC Band 4_10M			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
20175	1732.5	20175	1732.5
Date: 18.JAN.2018 18:12:04		Date: 18.JAN.2018 18:10:01	
Channel	Frequency(MHz)	-	-
20175	1732.5	-	-

eMTC Band 4_15M			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
20175	1732.5	20175	1732.5
Date: 18.JAN.2018 18:08:38		Date: 18.JAN.2018 18:09:10	
Channel	Frequency(MHz)	-	-
20175	1732.5	-	-
		-	

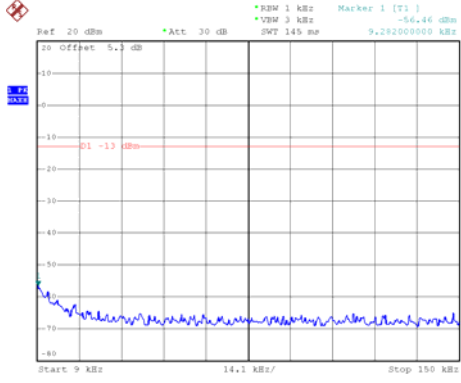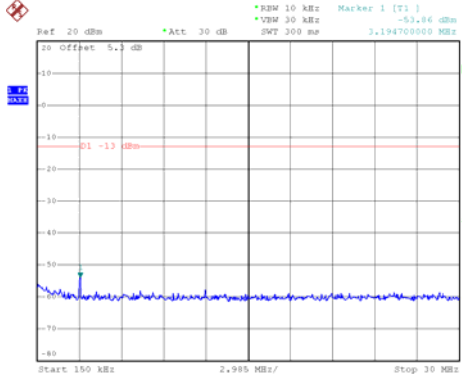eMTC Band 4_20M			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
20175	1732.5	20175	1732.5
 Date: 18.JAN.2018 18:04:54		 Date: 18.JAN.2018 18:07:31	
Channel	Frequency(MHz)	-	-
20175	1732.5	-	-
			

eMTC Band 12_5M			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
23095	707.5	23095	707.5
Channel	Frequency(MHz)	-	-
23095	707.5	-	-
		-	

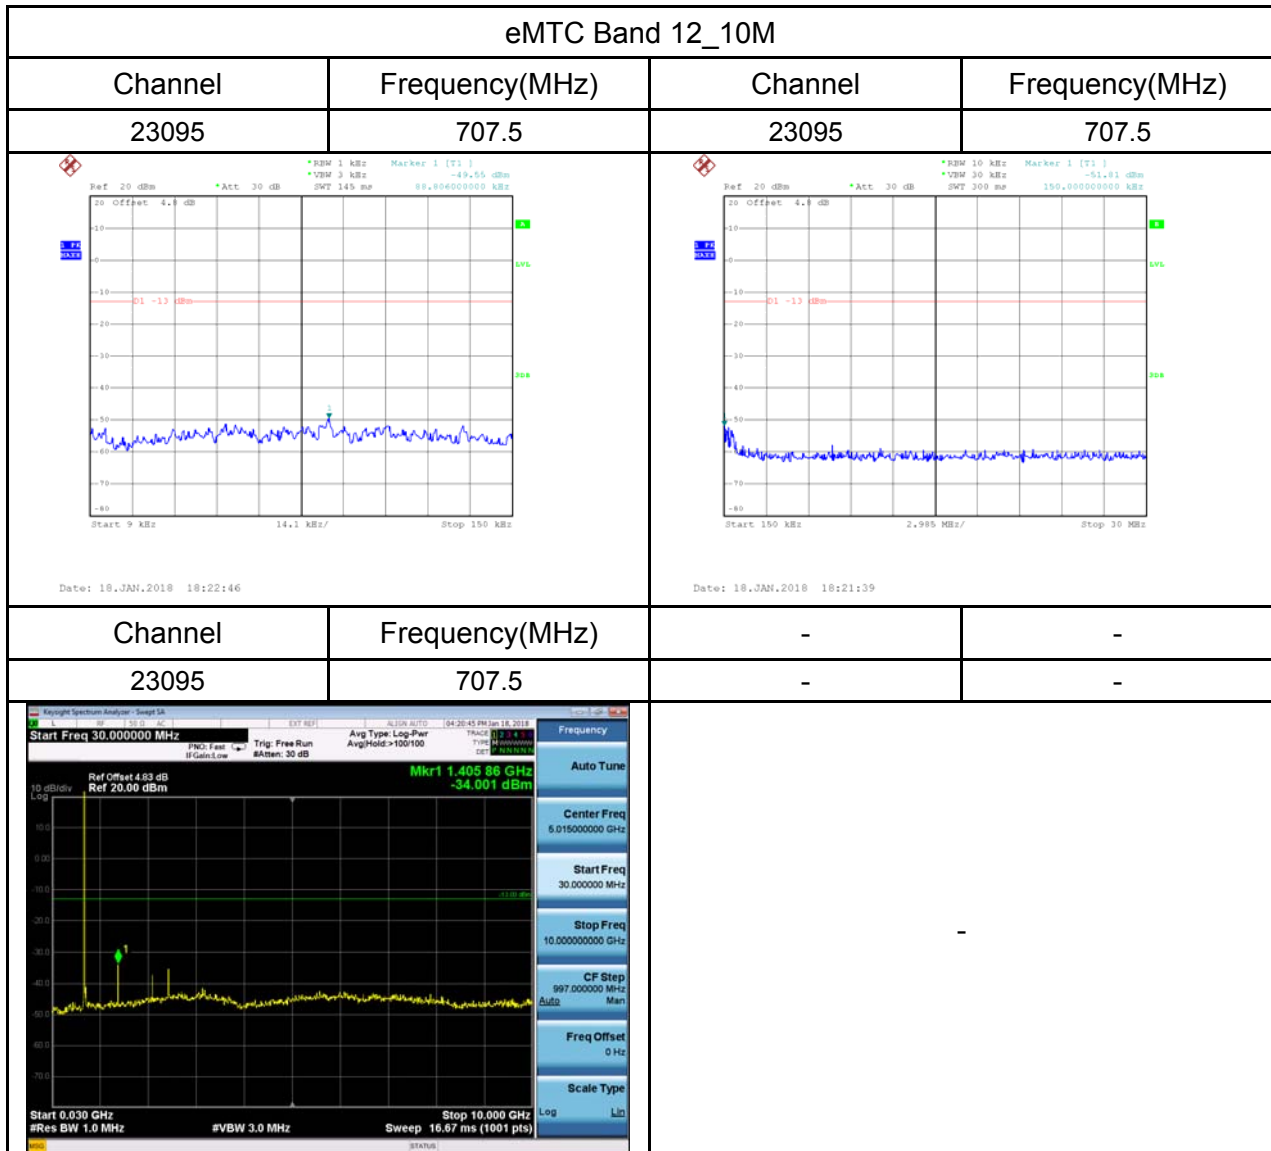


eMTC Band 13_5M			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
23230	782.0	23230	782.0
Channel	Frequency(MHz)	-	-
23230	782.0	-	-

eMTC Band 13_10M			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
23230	782.0	23230	782.0
Channel	Frequency(MHz)	-	-
23230	782.0	-	-

APPENDIX D - RADIATED EMISSION

Test Mode: TX Mode


Ant 0°

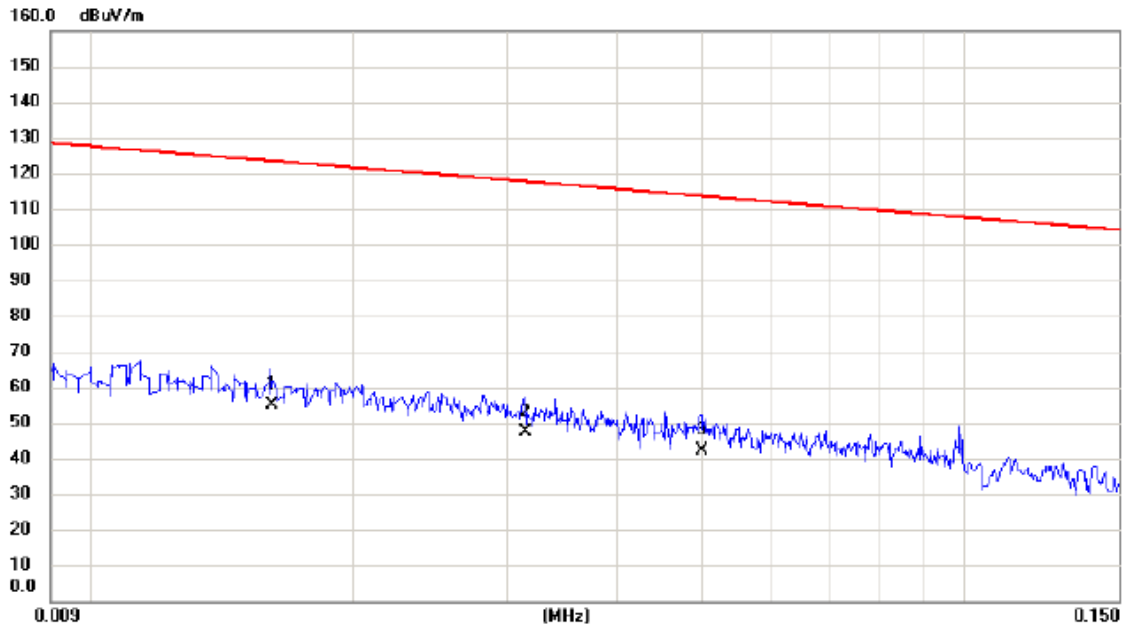

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0161	35.03	20.13	55.16	123.47	-68.31	AVG	
2		0.0314	28.08	19.28	47.36	117.67	-70.31	AVG	
3		0.0500	23.57	18.72	42.29	113.63	-71.34	AVG	

Test Mode: TX Mode


Ant 0°

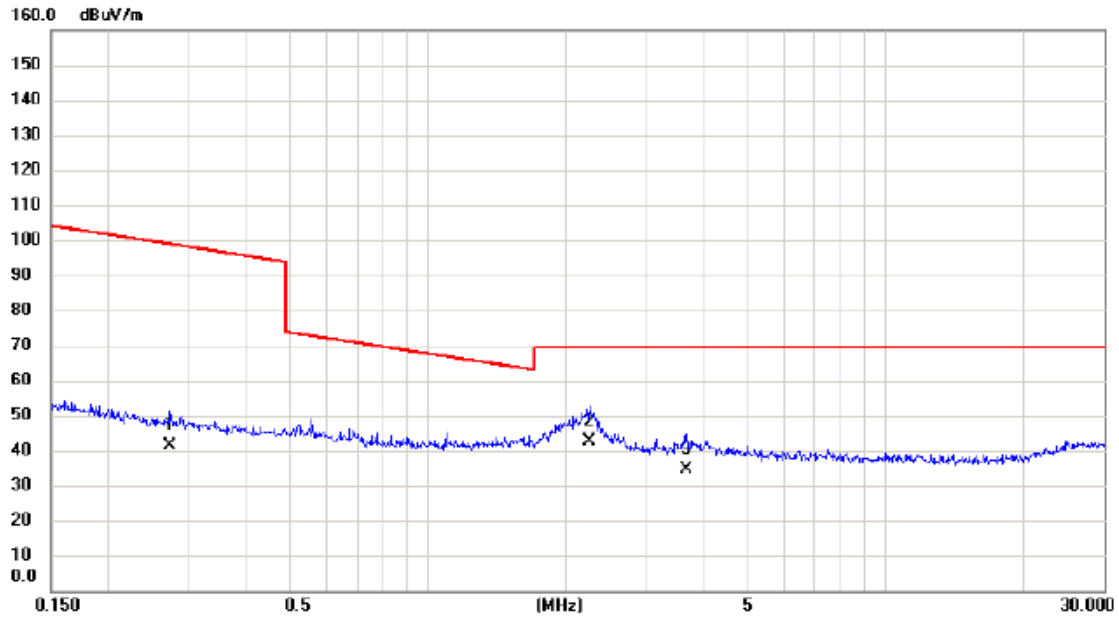

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2730	24.60	16.64	41.24	98.88	-57.64	AVG	
2	*	2.2486	27.00	15.44	42.44	69.54	-27.10	QP	
3		3.6611	19.37	15.04	34.41	69.54	-35.13	QP	

Test Mode: TX Mode


Ant 90°

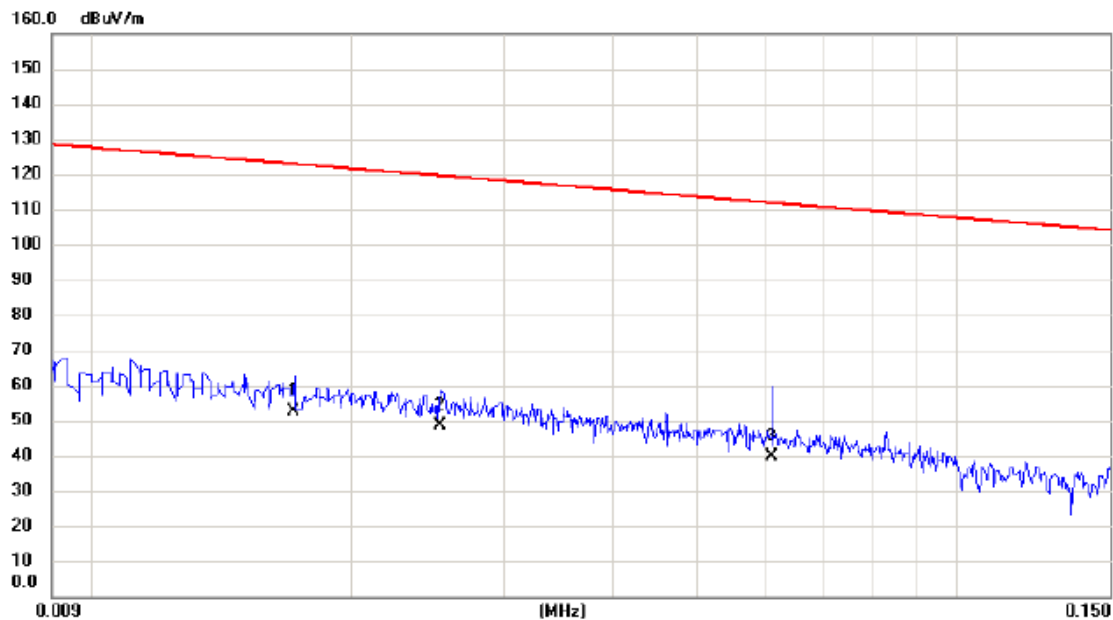

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0171	32.67	20.00	52.67	122.94	-70.27	AVG	
2		0.0253	28.96	19.46	48.42	119.54	-71.12	AVG	
3		0.0610	21.10	18.51	39.61	111.90	-72.29	AVG	

Test Mode: TX Mode


Ant 90°

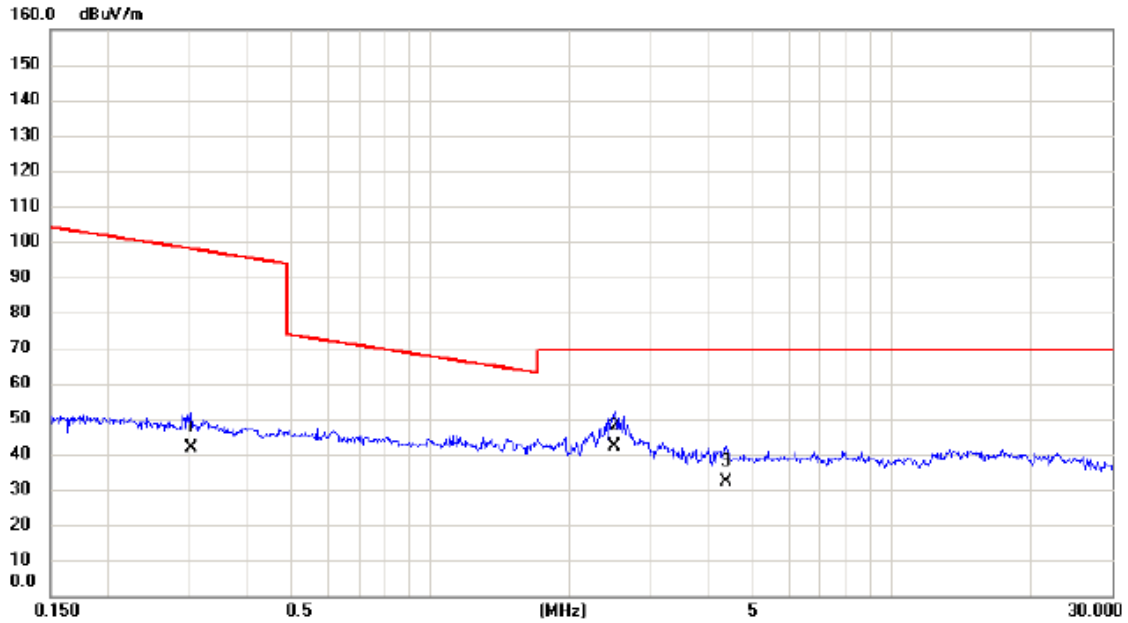

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.3034	25.08	16.62	41.70	97.96	-56.26	AVG	
2	*	2.5131	26.74	15.37	42.11	69.54	-27.43	QP	
3		4.3837	17.66	14.73	32.39	69.54	-37.15	QP	

Test Mode: eMTC Band 4_TX CH20375_5M


Vertical

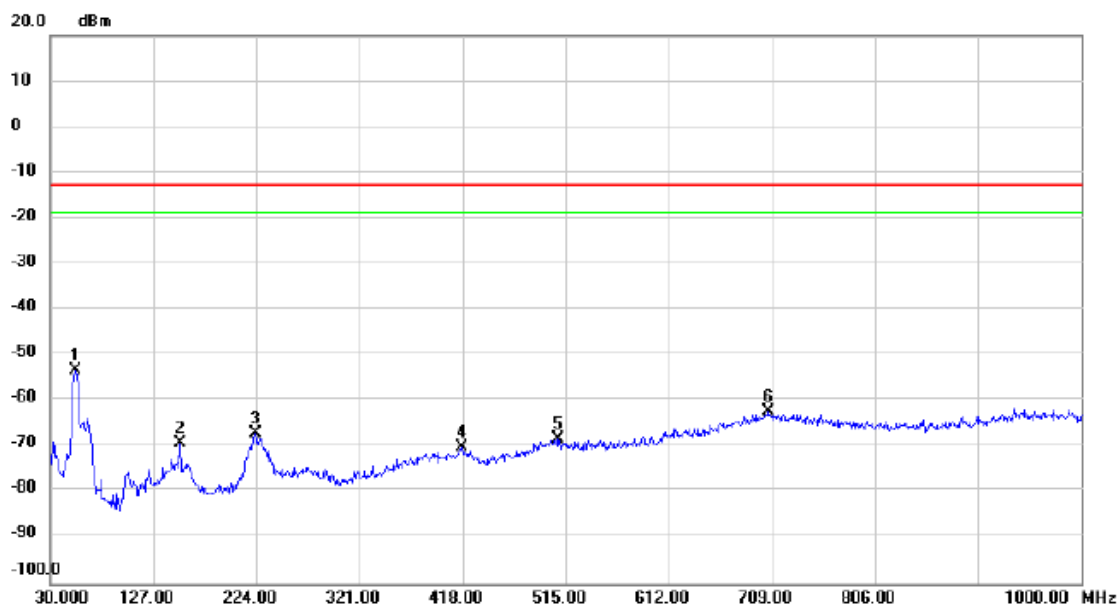

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	54.250	-55.74	2.40	-53.34	-13.00	-40.34	peak	
2		152.220	-72.29	3.16	-69.13	-13.00	-56.13	peak	
3		223.030	-66.41	-0.82	-67.23	-13.00	-54.23	peak	
4		417.030	-74.77	4.57	-70.20	-13.00	-57.20	peak	
5		508.210	-75.83	7.53	-68.30	-13.00	-55.30	peak	
6		705.120	-72.94	10.68	-62.26	-13.00	-49.26	peak	

Test Mode: eMTC Band 4_TX CH20375_5M


Horizontal

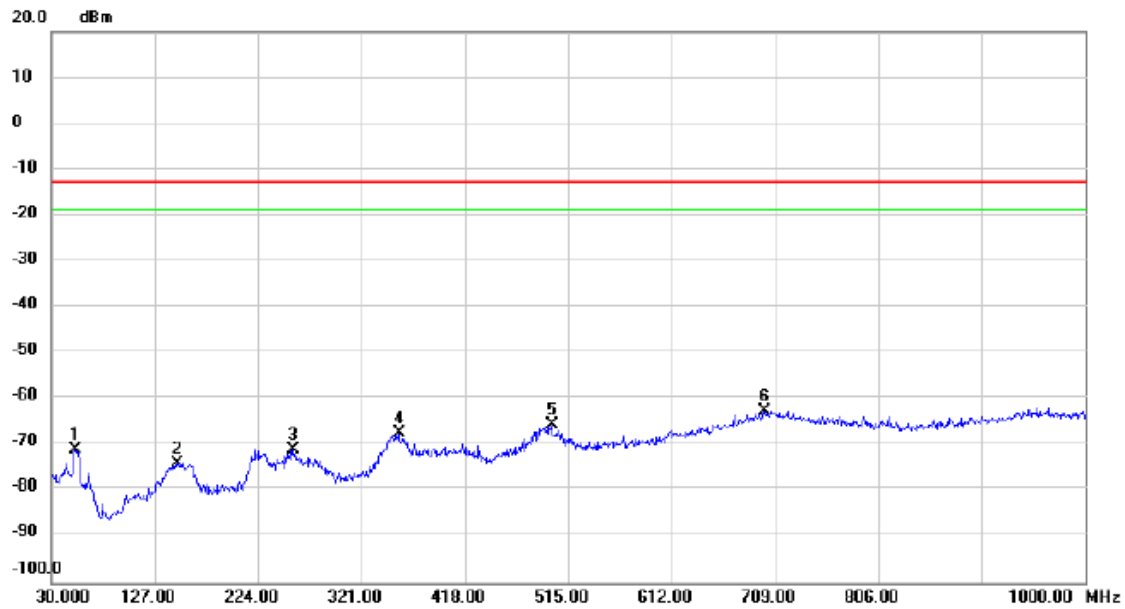

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		52.310	-72.90	1.92	-70.98	-13.00	-57.98	peak	
2		148.340	-78.02	4.06	-73.96	-13.00	-60.96	peak	
3		256.980	-72.91	1.91	-71.00	-13.00	-58.00	peak	
4		355.920	-70.86	3.48	-67.38	-13.00	-54.38	peak	
5		499.480	-73.58	8.02	-65.56	-13.00	-52.56	peak	
6	*	699.300	-76.52	13.93	-62.59	-13.00	-49.59	peak	

Test Mode: eMTC Band 4_TX CH20375_5M


Vertical

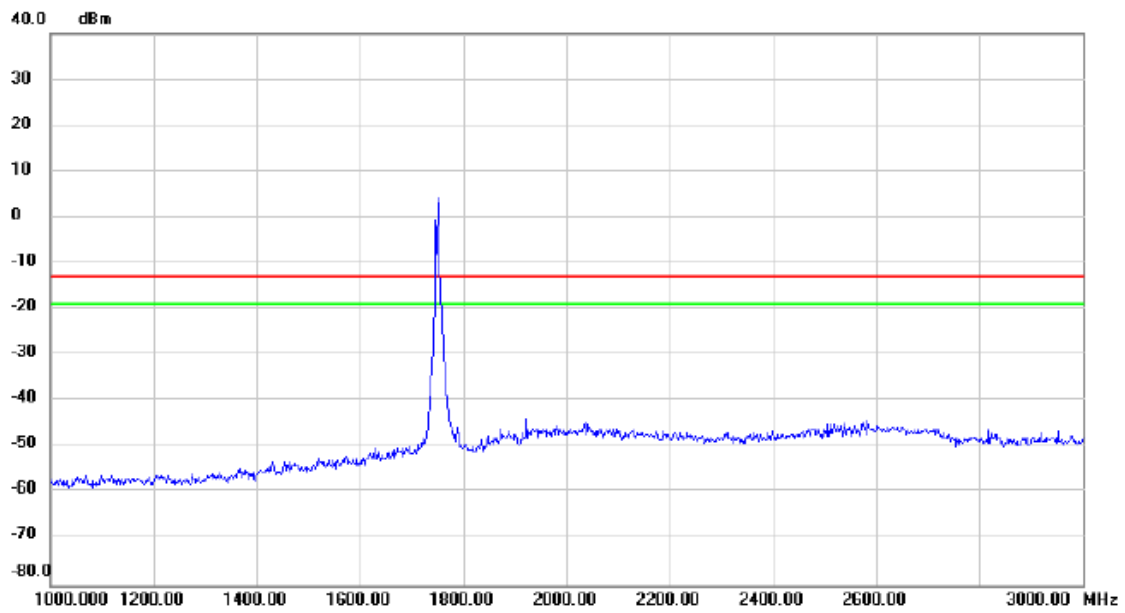

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment


Test Mode: eMTC Band 4_TX CH20375_5M

Horizontal

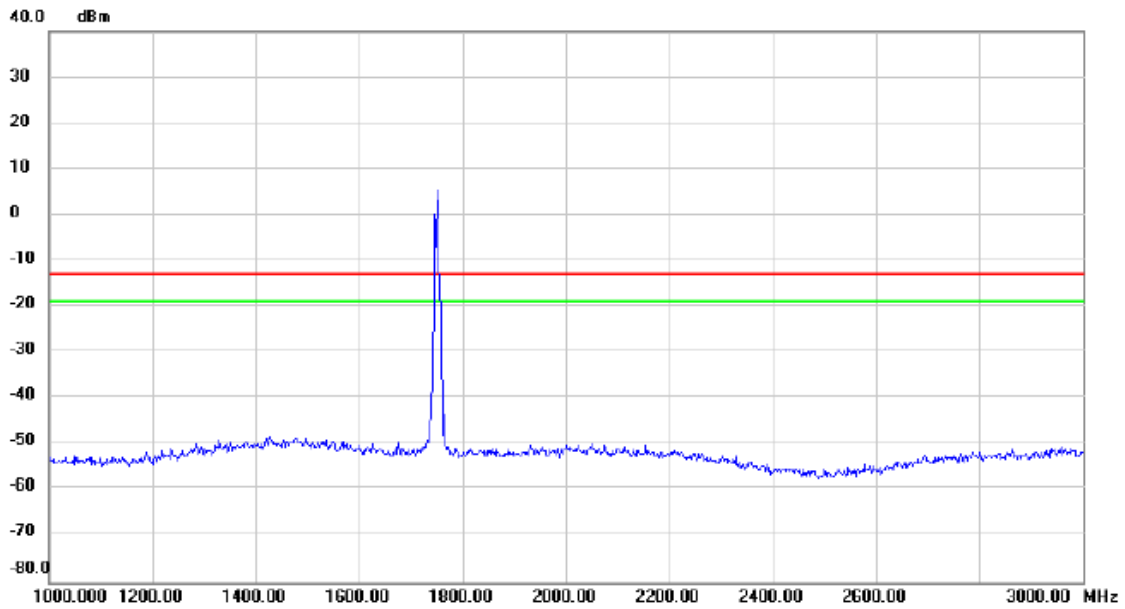

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		


Test Mode:	eMTC Band 4_TX CH20375_5M
------------	---------------------------

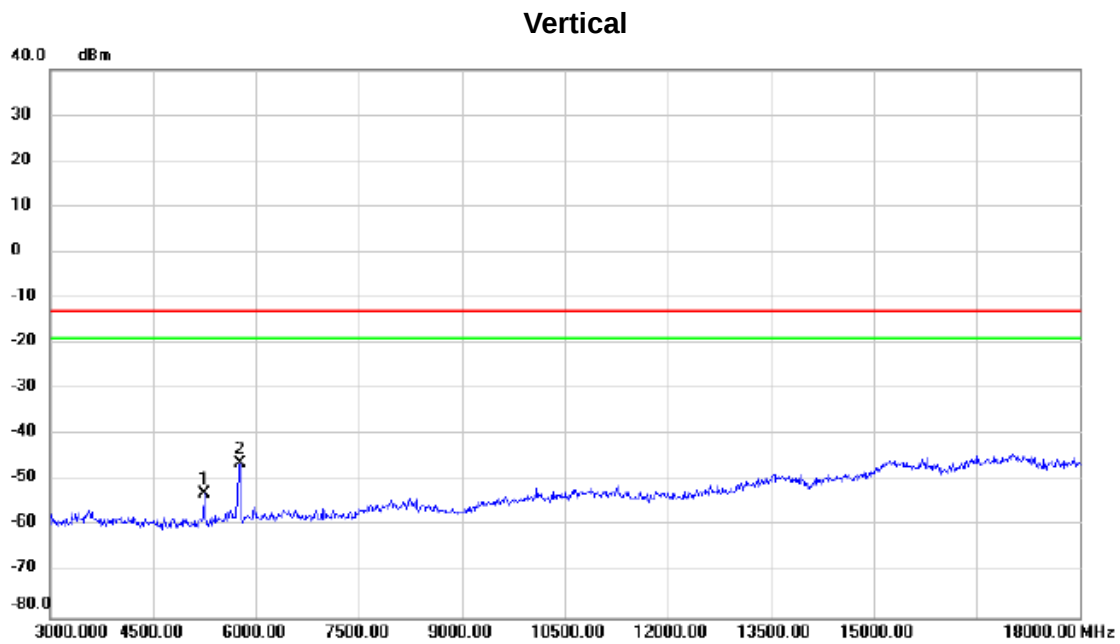

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		5250.000	-68.22	15.32	-52.90	-13.00	-39.90	peak	
2	*	5760.000	-62.88	16.51	-46.37	-13.00	-33.37	peak	

Test Mode: eMTC Band 4_TX CH20375_5M


Horizontal

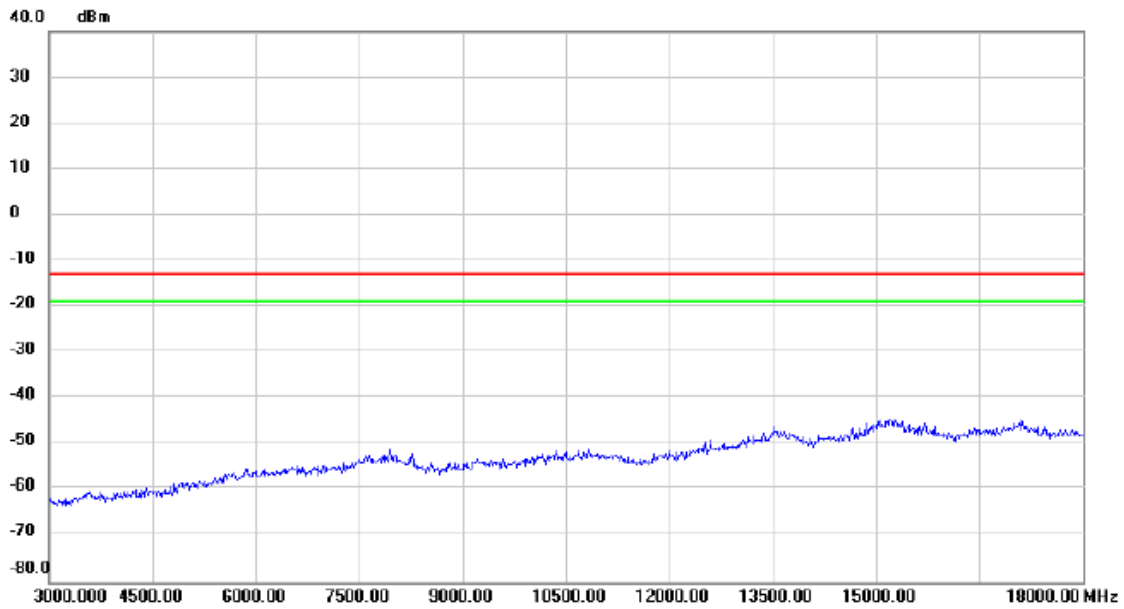

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode: eMTC Band 4_TX CH20300_20M


Vertical

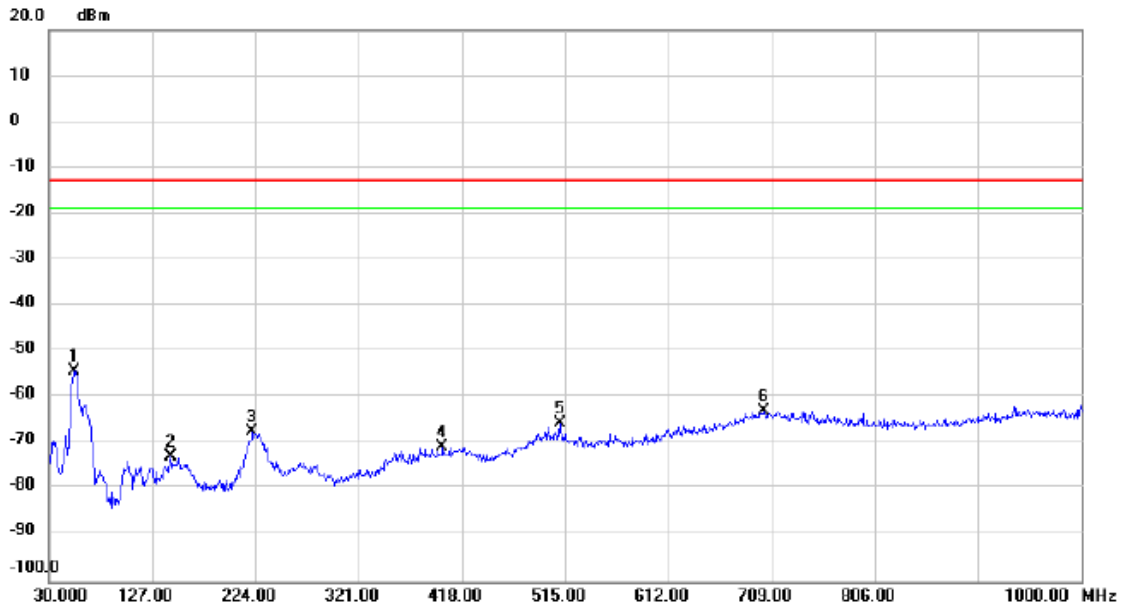

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	54.250	-56.56	2.40	-54.16	-13.00	-41.16	peak	
2		144.460	-75.57	2.60	-72.97	-13.00	-59.97	peak	
3		221.090	-66.12	-1.19	-67.31	-13.00	-54.31	peak	
4		399.570	-74.77	4.10	-70.67	-13.00	-57.67	peak	
5		510.150	-73.09	7.53	-65.56	-13.00	-52.56	peak	
6		702.210	-73.57	10.57	-63.00	-13.00	-50.00	peak	

Test Mode: eMTC Band 4_TX CH20300_20M


Horizontal

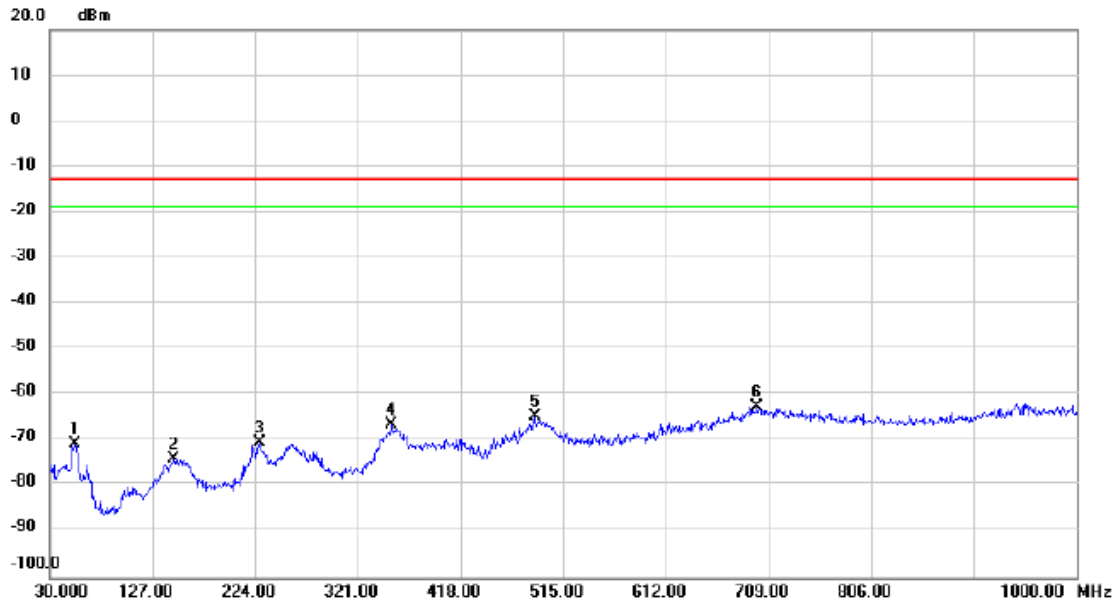

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		54.250	-73.23	2.47	-70.76	-13.00	-57.76	peak	
2		147.370	-77.96	3.95	-74.01	-13.00	-61.01	peak	
3		227.880	-73.06	2.68	-70.38	-13.00	-57.38	peak	
4		353.010	-69.86	3.30	-66.56	-13.00	-53.56	peak	
5		487.840	-71.82	7.18	-64.64	-13.00	-51.64	peak	
6	*	698.330	-76.61	13.87	-62.74	-13.00	-49.74	peak	

Test Mode: eMTC Band 4_TX CH20300_20M


Vertical

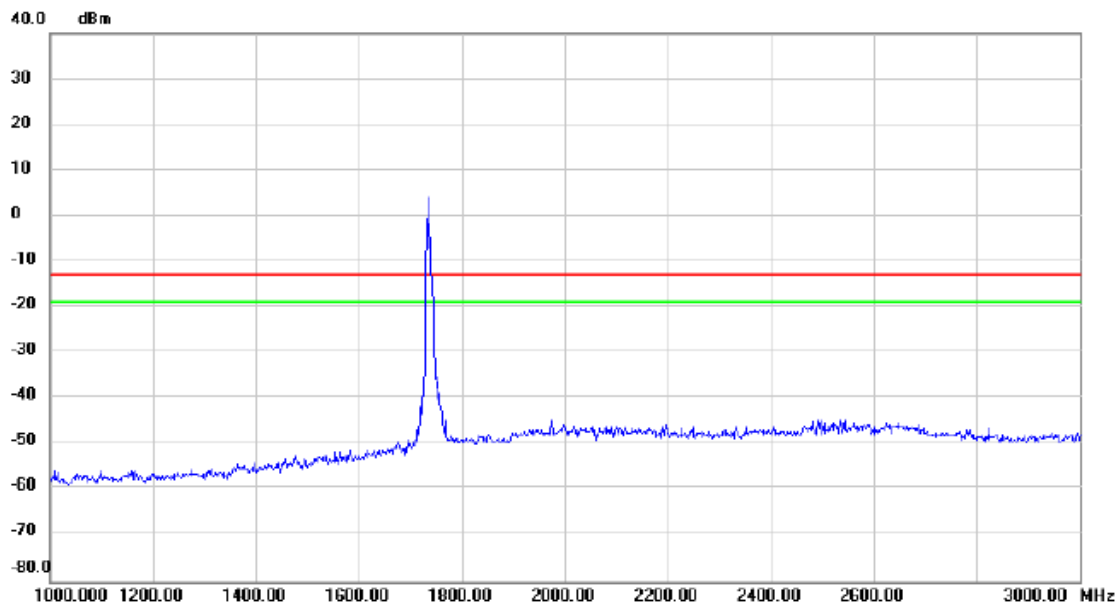

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode: eMTC Band 4_TX CH20300_20M


Horizontal

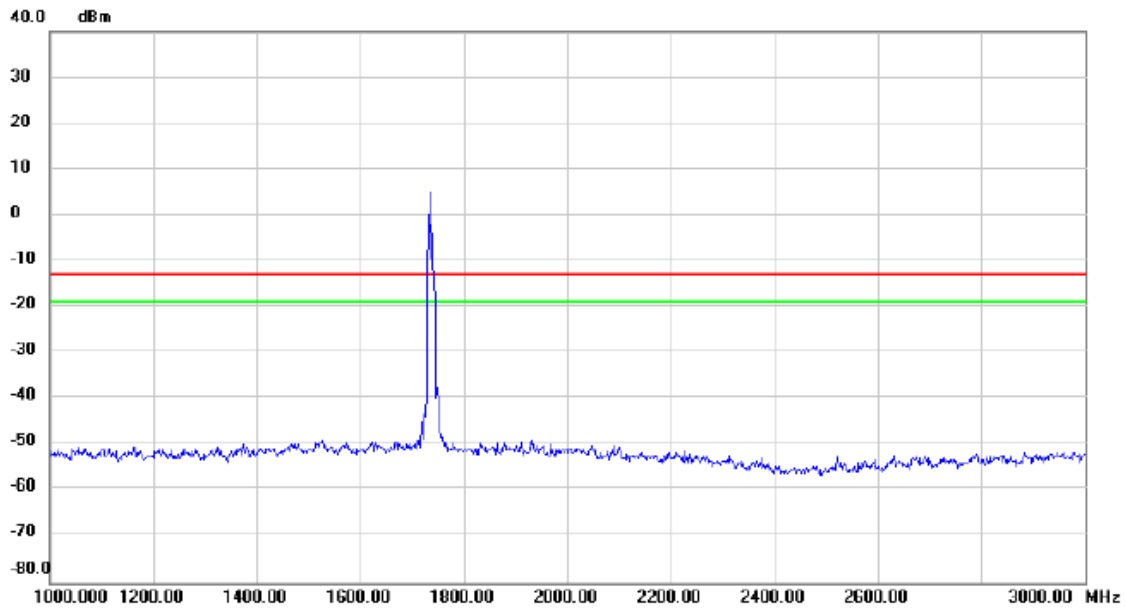

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode:


eMTC Band 4_TX CH20300_20M

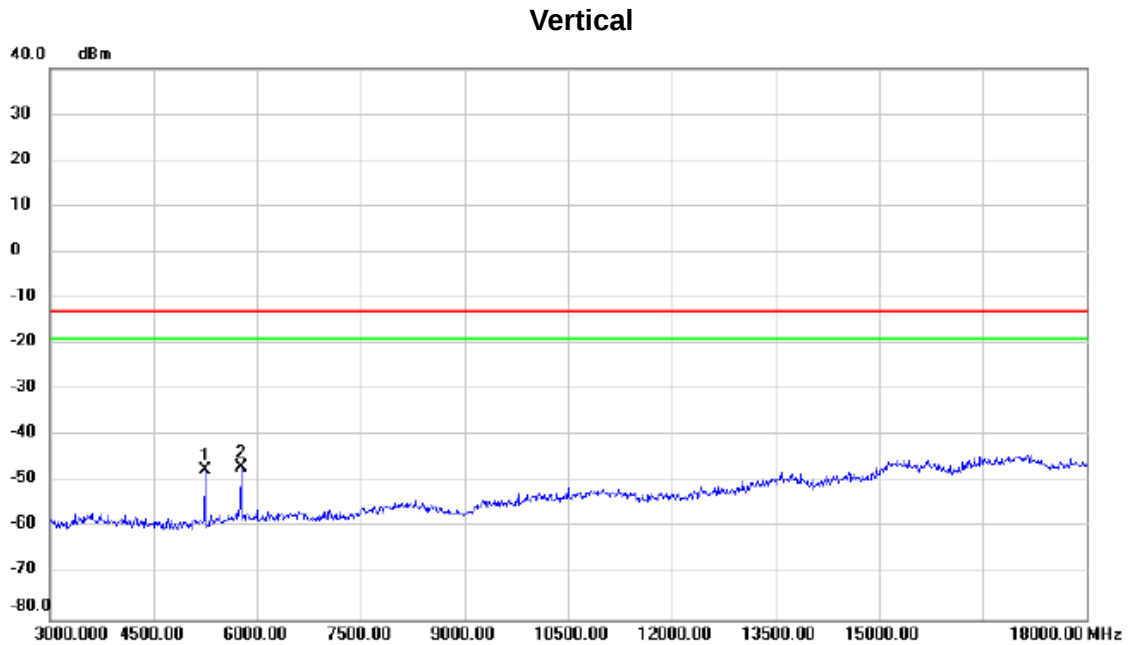

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		5250.000	-62.74	15.32	-47.42	-13.00	-34.42	peak	
2	*	5760.000	-63.44	16.51	-46.93	-13.00	-33.93	peak	

Test Mode: eMTC Band 4_TX CH20300_20M


Horizontal

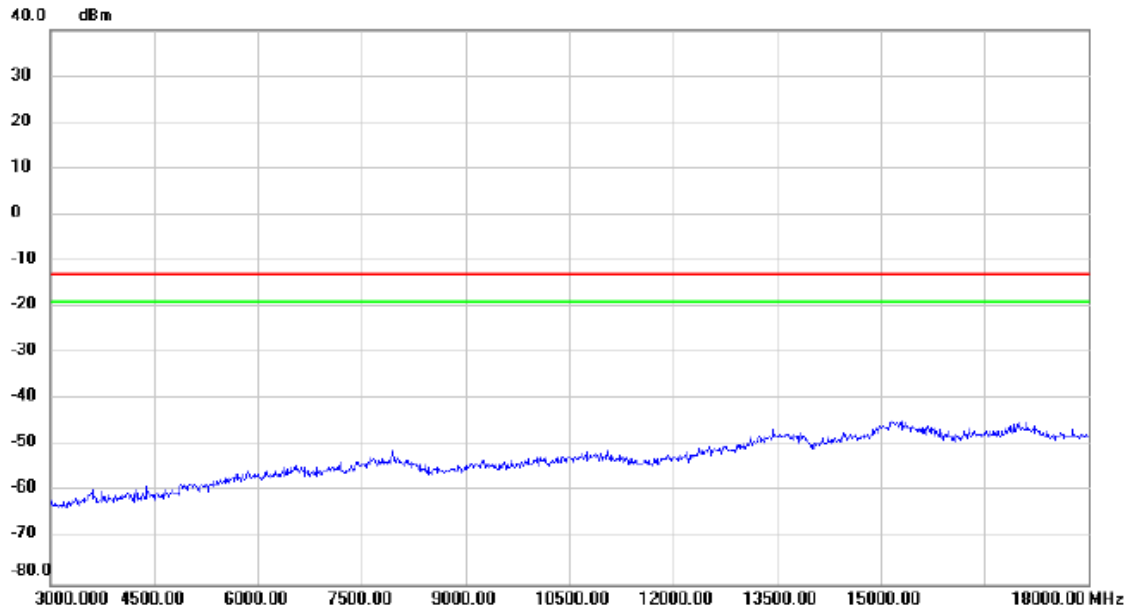

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode: eMTC Band 12_TX CH23095_5M


Vertical

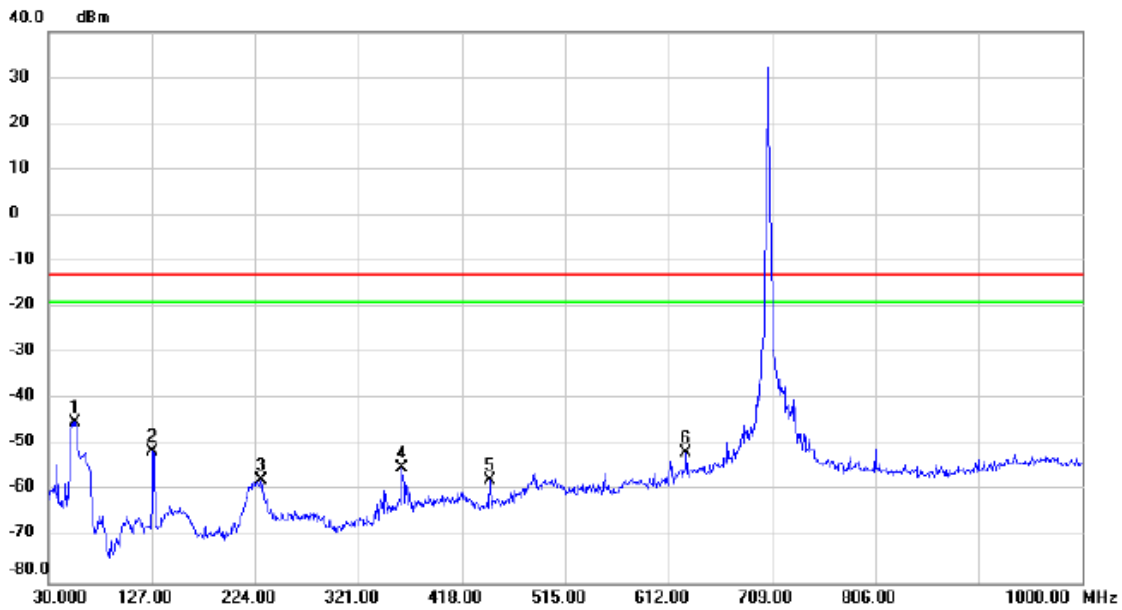

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	55.220	-47.55	2.61	-44.94	-13.00	-31.94	peak	
2		127.970	-50.34	-1.00	-51.34	-13.00	-38.34	peak	
3		229.820	-58.19	0.45	-57.74	-13.00	-44.74	peak	
4		361.740	-57.78	2.91	-54.87	-13.00	-41.87	peak	
5		444.190	-62.42	4.67	-57.75	-13.00	-44.75	peak	
6		628.490	-61.04	9.51	-51.53	-13.00	-38.53	peak	

Test Mode: eMTC Band 12_TX CH23095_5M


Horizontal

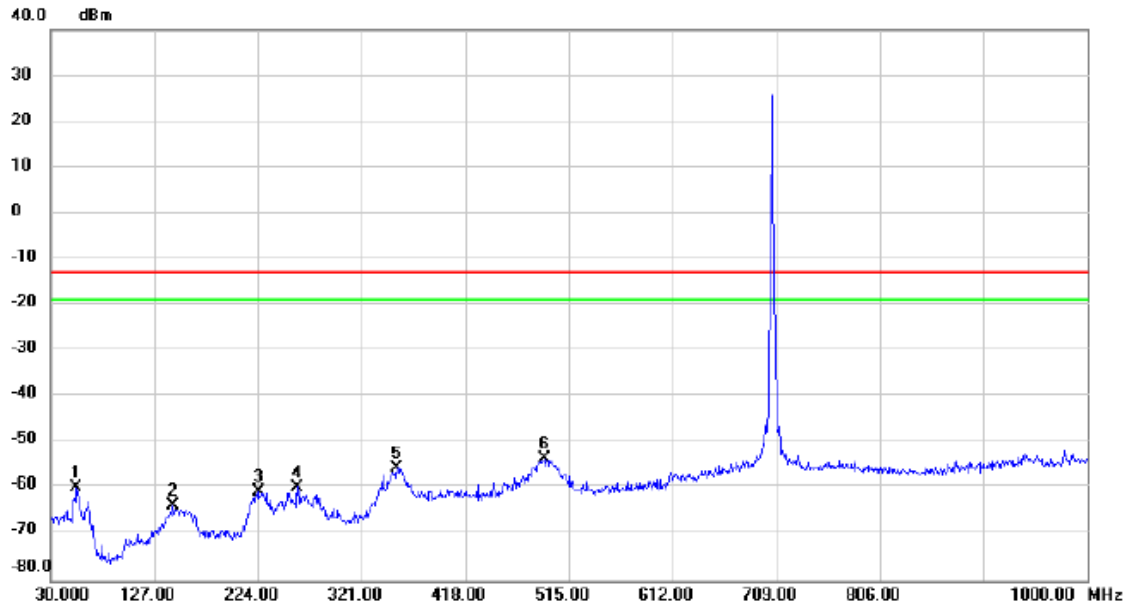

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		54.250	-62.21	2.47	-59.74	-13.00	-46.74	peak	
2		144.460	-67.20	3.63	-63.57	-13.00	-50.57	peak	
3		224.970	-62.52	1.89	-60.63	-13.00	-47.63	peak	
4		260.860	-61.62	2.02	-59.60	-13.00	-46.60	peak	
5		353.980	-58.88	3.36	-55.52	-13.00	-42.52	peak	
6	*	491.720	-60.96	7.46	-53.50	-13.00	-40.50	peak	

Test Mode:	eMTC Band 12_TX CH23095_5M
------------	----------------------------


Vertical

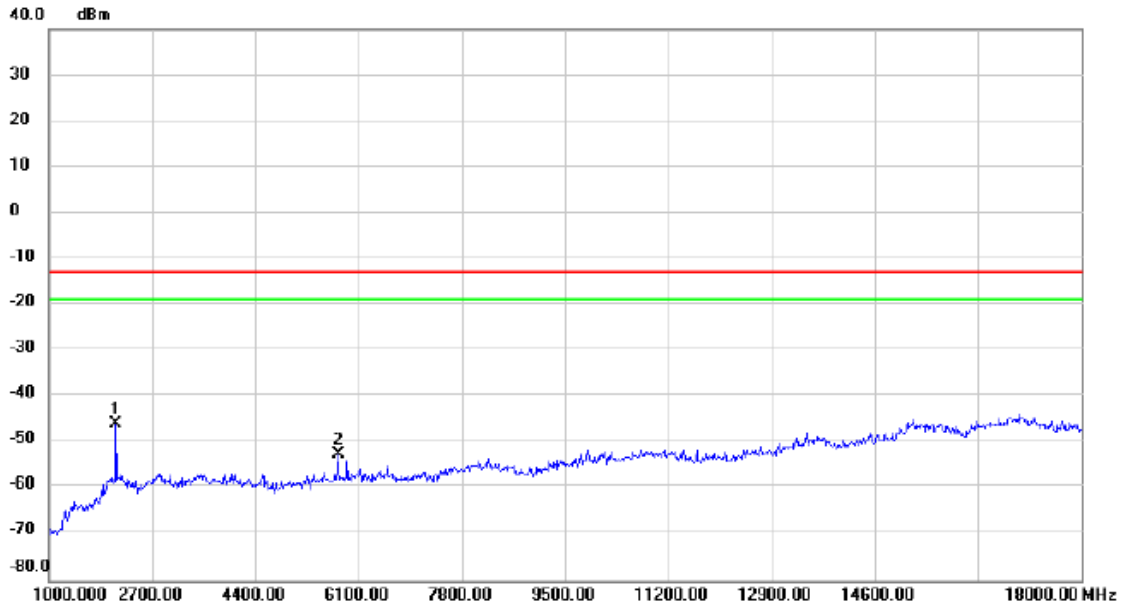

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	2105.000	-57.07	11.22	-45.85	-13.00	-32.85	peak	
2		5760.000	-69.04	16.51	-52.53	-13.00	-39.53	peak	


Test Mode:	eMTC Band 12_TX CH23095_5M
------------	----------------------------

Horizontal

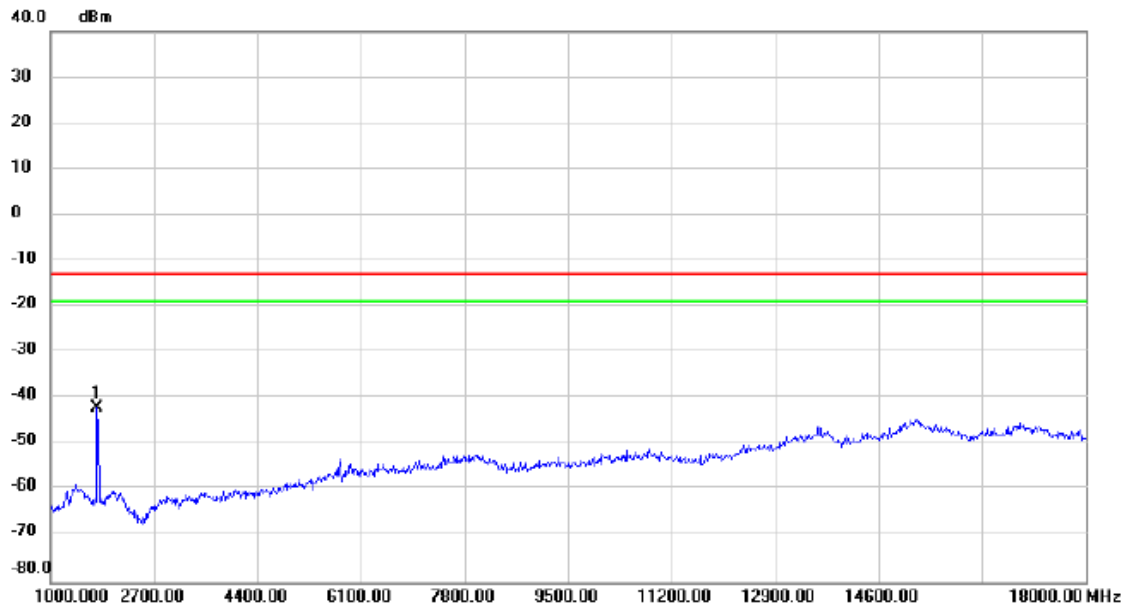

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	1765.000	-50.12	8.21	-41.91	-13.00	-28.91	peak	


Test Mode: eMTC Band 12_TX CH23060_10M

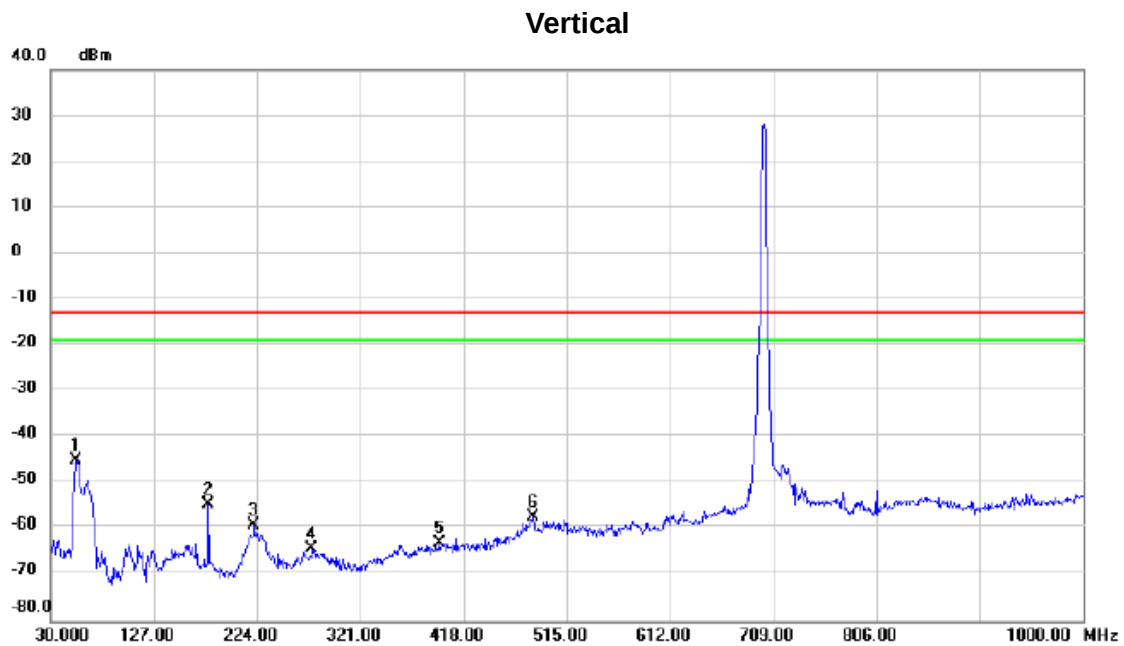

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	54.250	-47.32	2.40	-44.92	-13.00	-31.92	peak	
2		178.410	-55.19	0.63	-54.56	-13.00	-41.56	peak	
3		221.090	-57.92	-1.19	-59.11	-13.00	-46.11	peak	
4		275.410	-66.64	2.44	-64.20	-13.00	-51.20	peak	
5		395.690	-66.99	4.05	-62.94	-13.00	-49.94	peak	
6		482.990	-63.80	6.55	-57.25	-13.00	-44.25	peak	

Test Mode: eMTC Band 12_TX CH23060_10M


Horizontal

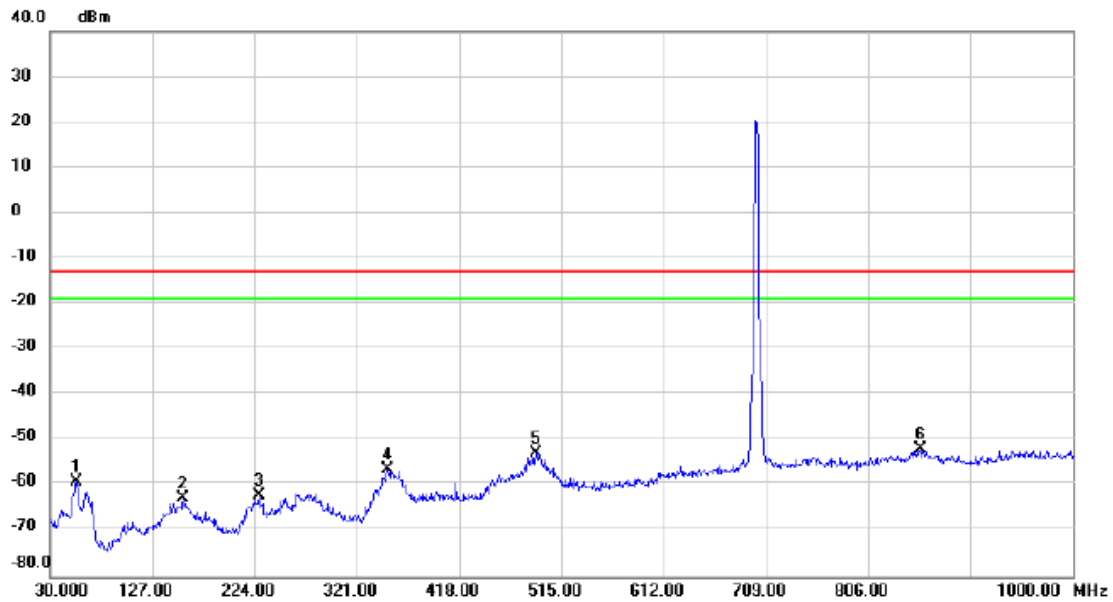

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		55.220	-61.64	2.53	-59.11	-13.00	-46.11	peak	
2		156.100	-66.12	3.33	-62.79	-13.00	-49.79	peak	
3		227.880	-64.78	2.68	-62.10	-13.00	-49.10	peak	
4		350.100	-59.54	3.13	-56.41	-13.00	-43.41	peak	
5		490.750	-60.20	7.39	-52.81	-13.00	-39.81	peak	
6	*	855.470	-63.84	11.96	-51.88	-13.00	-38.88	peak	

Test Mode: eMTC Band 12_TX CH23060_10M


Vertical

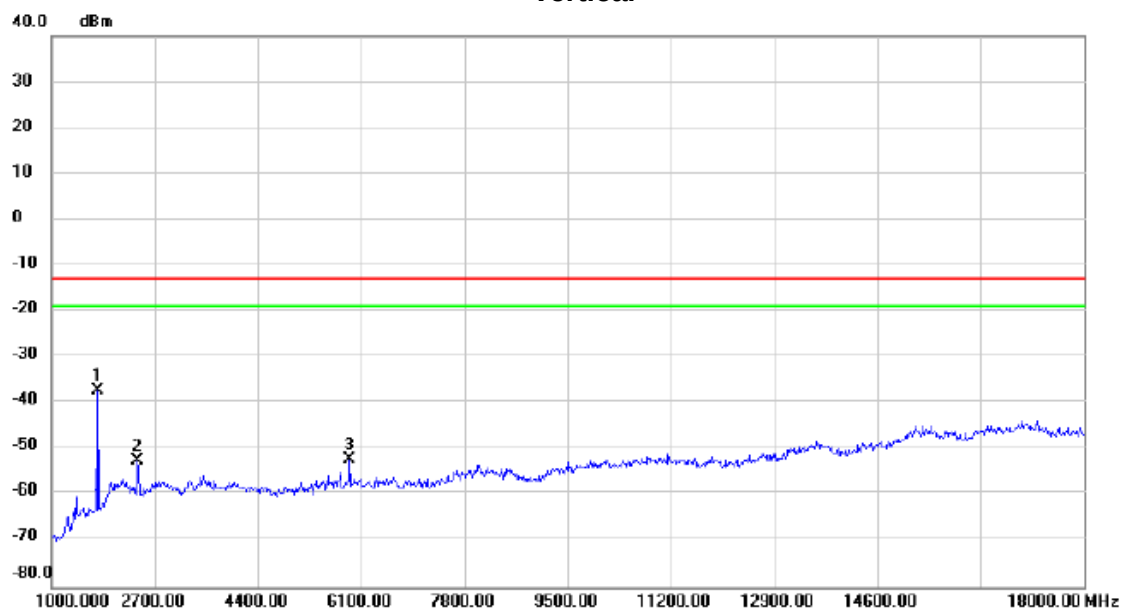

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1 *	1765.000	-44.98	7.75	-37.23	-13.00	-24.23	peak	
2	2411.000	-64.65	11.98	-52.67	-13.00	-39.67	peak	
3	5913.000	-69.17	16.77	-52.40	-13.00	-39.40	peak	

Test Mode:	eMTC Band 12_TX CH23060_10M
------------	-----------------------------


Horizontal

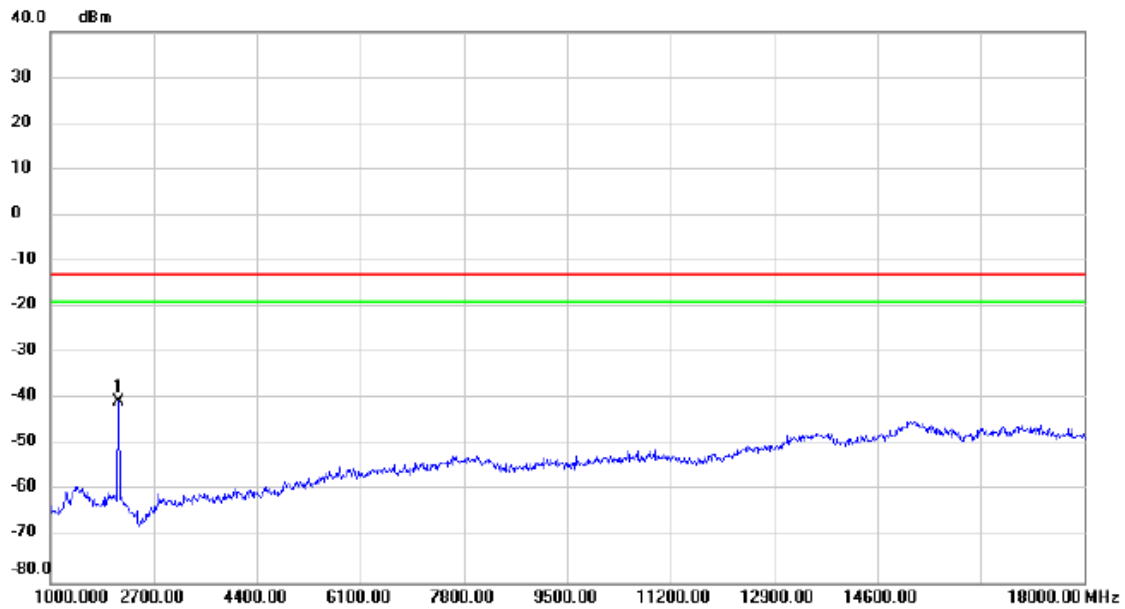

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	2122.000	-48.23	7.56	-40.67	-13.00	-27.67	peak	

Test Mode: eMTC Band 13_TX CH23230_5M


Vertical

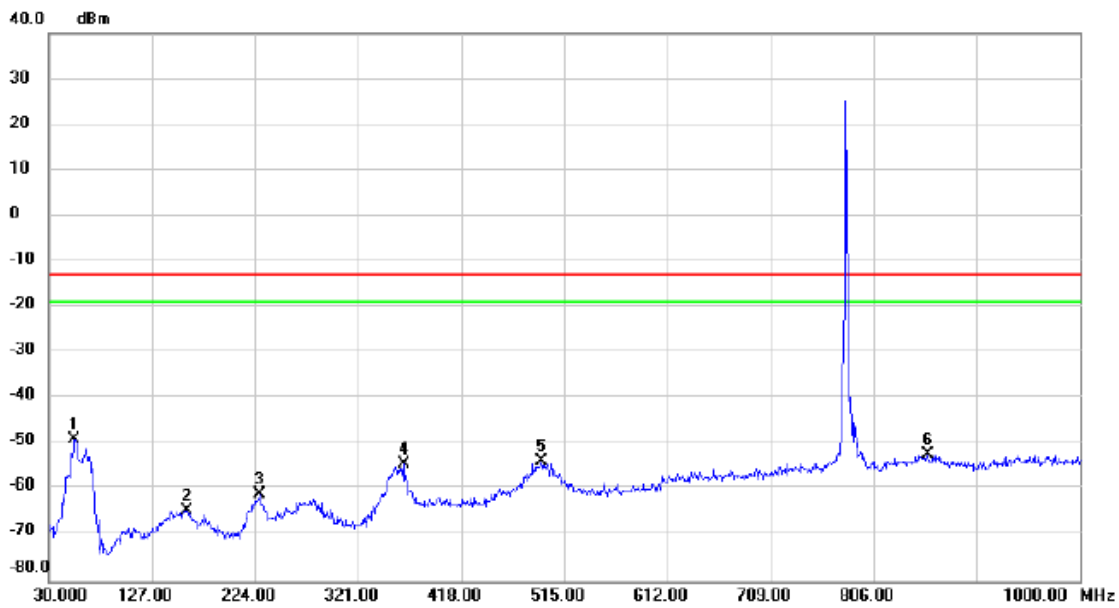

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	54.250	-51.42	2.47	-48.95	-13.00	-35.95	peak	
2		159.980	-67.18	2.75	-64.43	-13.00	-51.43	peak	
3		228.850	-63.98	2.94	-61.04	-13.00	-48.04	peak	
4		363.680	-58.51	4.16	-54.35	-13.00	-41.35	peak	
5		493.660	-61.30	7.60	-53.70	-13.00	-40.70	peak	
6		856.440	-64.14	11.98	-52.16	-13.00	-39.16	peak	

Test Mode: eMTC Band 13_TX CH23230_5M


Horizontal

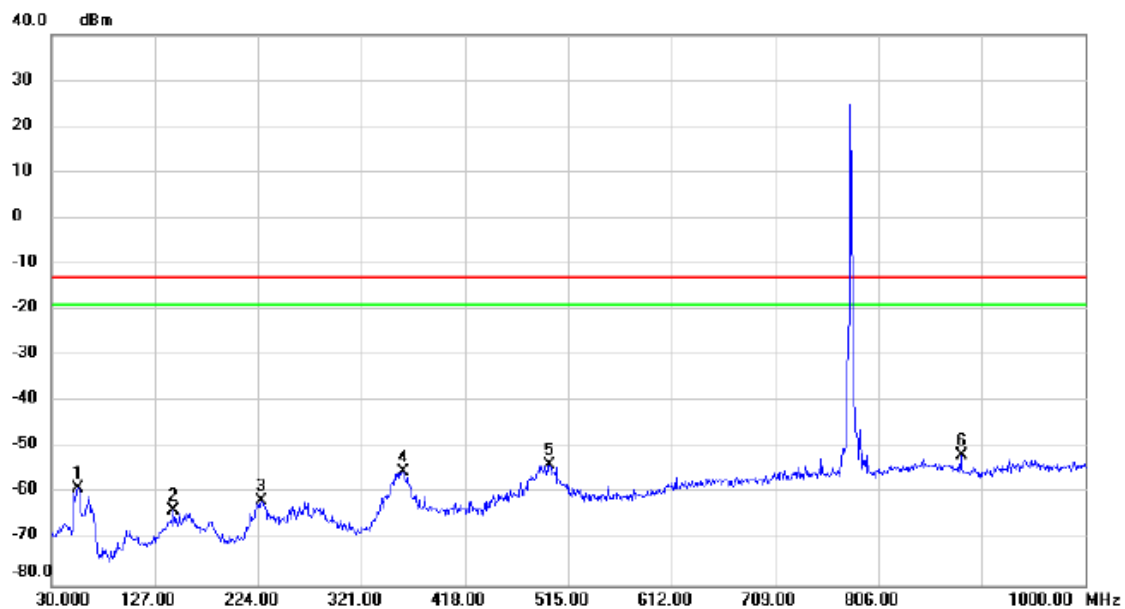

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		55.220	-61.42	2.53	-58.89	-13.00	-45.89	peak	
2		144.460	-67.34	3.63	-63.71	-13.00	-50.71	peak	
3		226.910	-63.89	2.41	-61.48	-13.00	-48.48	peak	
4		359.800	-58.90	3.71	-55.19	-13.00	-42.19	peak	
5		497.540	-61.54	7.88	-53.66	-13.00	-40.66	peak	
6	*	883.600	-64.38	12.58	-51.80	-13.00	-38.80	peak	

Test Mode: eMTC Band 13_TX CH23230_5M


Vertical

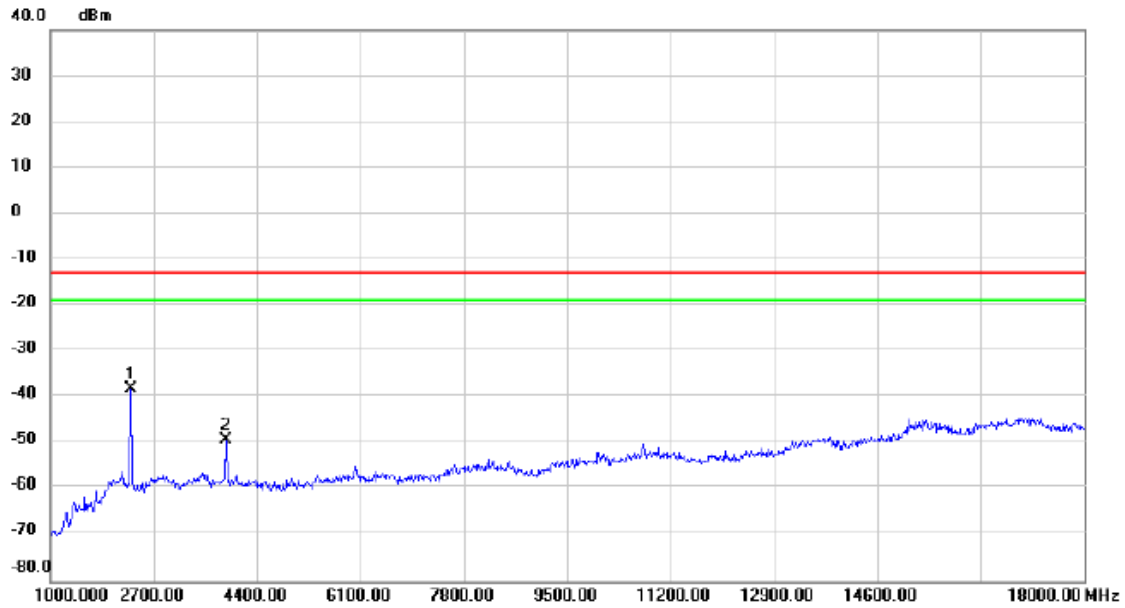

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	2326.000	-49.92	11.77	-38.15	-13.00	-25.15	peak	
2		3890.000	-63.79	14.63	-49.16	-13.00	-36.16	peak	


Test Mode: eMTC Band 13_TX CH23230_5M

Horizontal

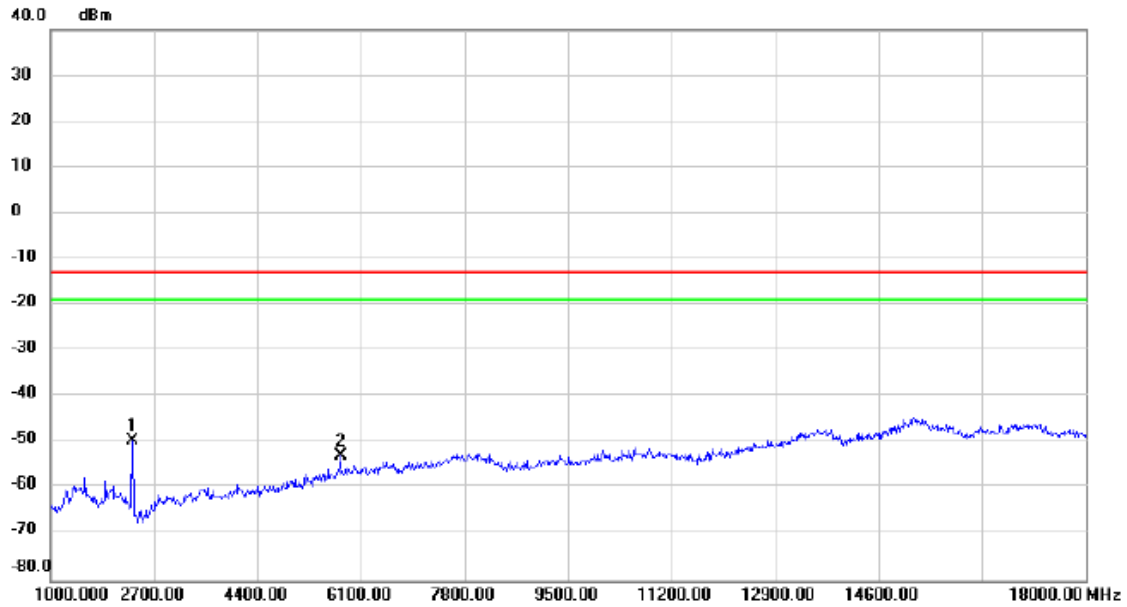

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	2343.000	-55.80	6.19	-49.61	-13.00	-36.61	peak	
2		5760.000	-70.39	17.43	-52.96	-13.00	-39.96	peak	


Test Mode: eMTC Band 13_TX CH23230_10M

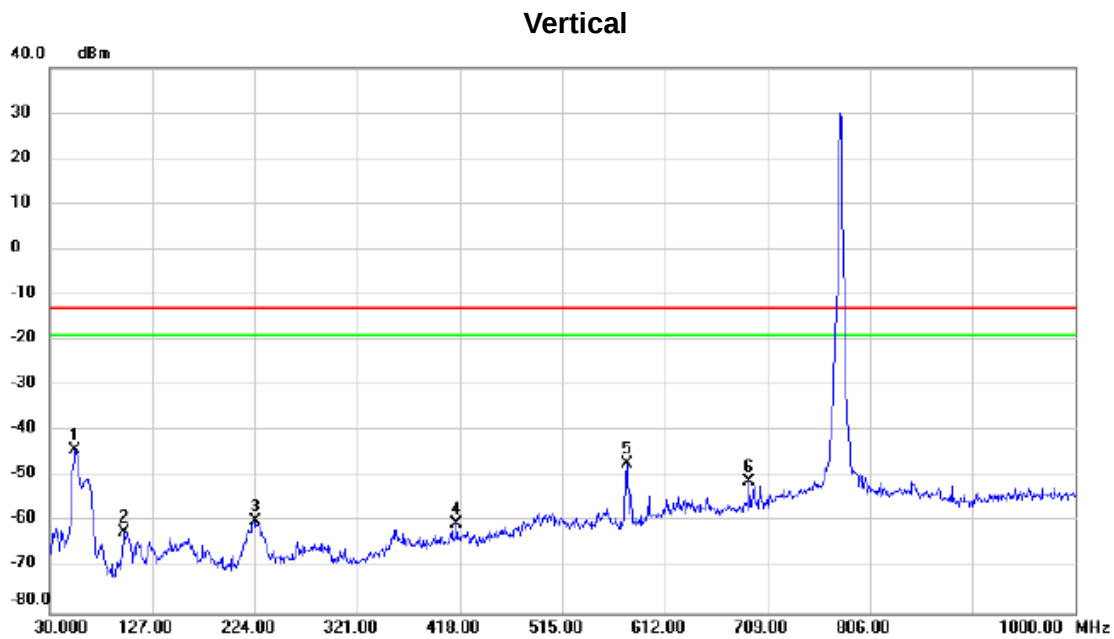

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	54.250	-46.59	2.40	-44.19	-13.00	-31.19	peak	
2		100.810	-60.81	-1.35	-62.16	-13.00	-49.16	peak	
3		224.000	-59.15	-0.64	-59.79	-13.00	-46.79	peak	
4		415.090	-64.73	4.52	-60.21	-13.00	-47.21	peak	
5		576.110	-55.13	8.10	-47.03	-13.00	-34.03	peak	
6		691.540	-61.60	10.42	-51.18	-13.00	-38.18	peak	

Test Mode: eMTC Band 13_TX CH23230_10M


Horizontal

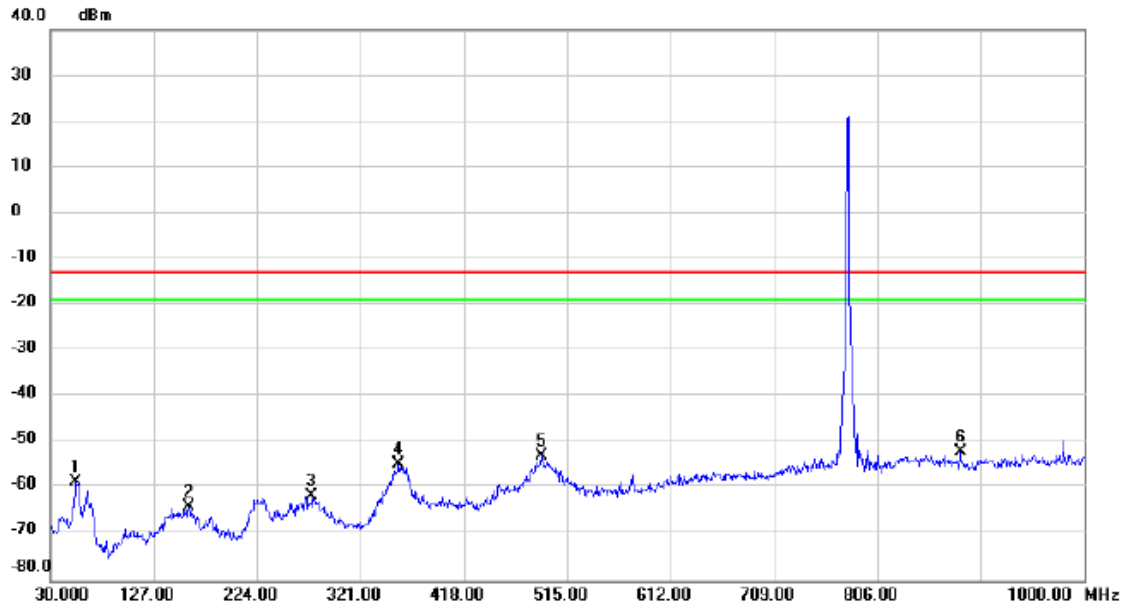

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		54.250	-61.11	2.47	-58.64	-13.00	-45.64	peak	
2		159.980	-66.70	2.75	-63.95	-13.00	-50.95	peak	
3		275.410	-64.19	2.74	-61.45	-13.00	-48.45	peak	
4		356.890	-58.26	3.53	-54.73	-13.00	-41.73	peak	
5		490.750	-60.17	7.39	-52.78	-13.00	-39.78	peak	
6	*	883.600	-64.42	12.58	-51.84	-13.00	-38.84	peak	

Test Mode: eMTC Band 13_TX CH23230_10M


Vertical

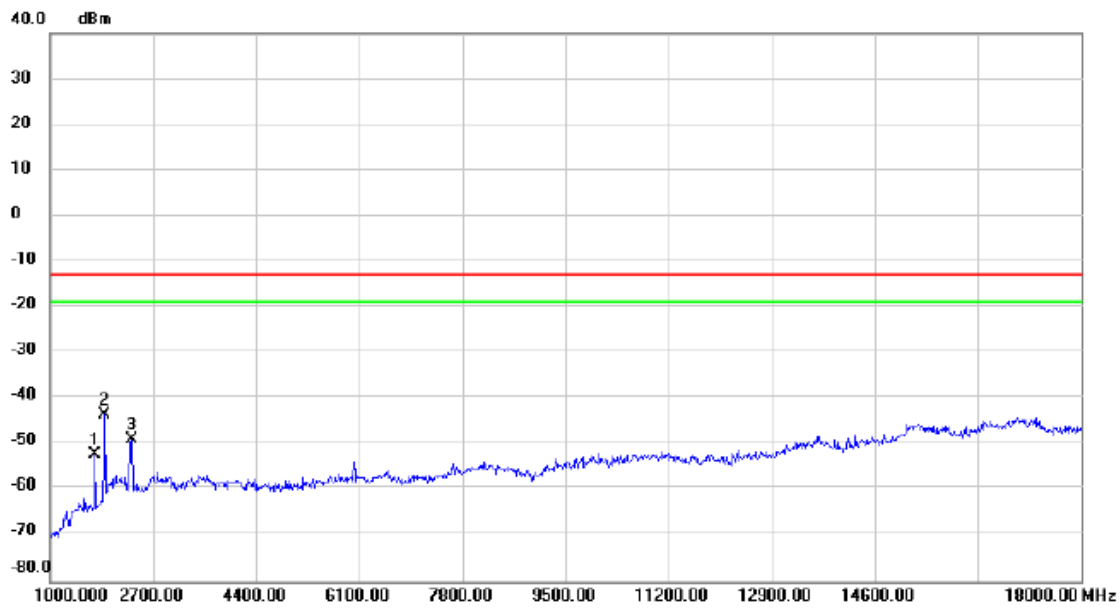

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		1731.000	-59.61	7.29	-52.32	-13.00	-39.32	peak	
2	*	1901.000	-53.24	9.61	-43.63	-13.00	-30.63	peak	
3		2343.000	-60.69	11.81	-48.88	-13.00	-35.88	peak	

Test Mode: eMTC Band 13_TX CH23230_10M

Horizontal

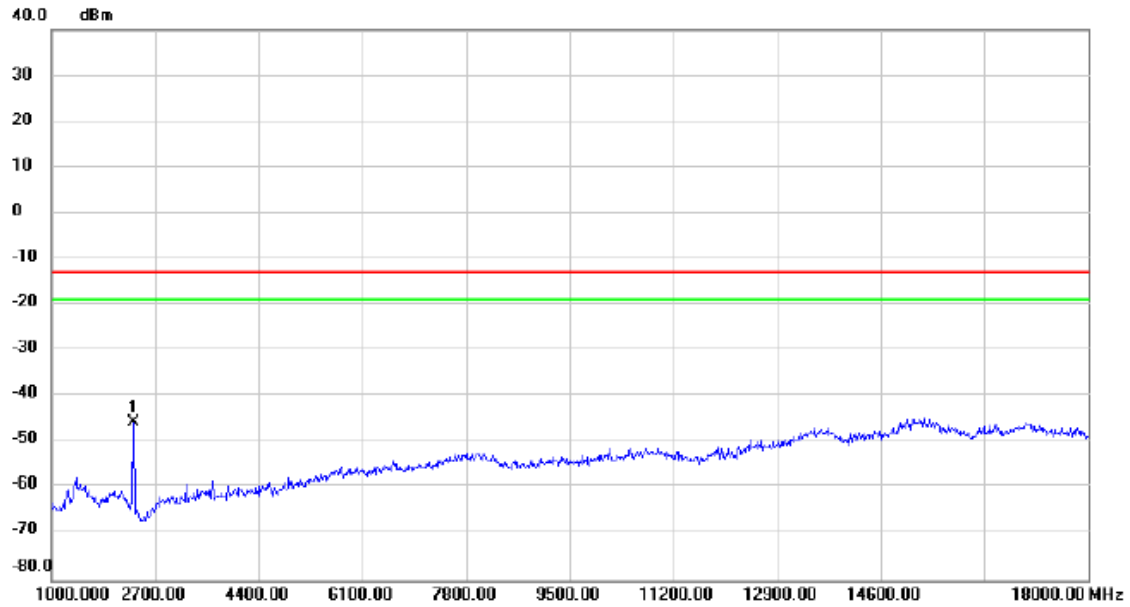

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	2343.000	-51.93	6.19	-45.74	-13.00	-32.74	peak	

APPENDIX E - BAND EDGE

eMTC Band 4_5M - QPSK

1RB0



1RB5

Channel

19975

Channel

20375

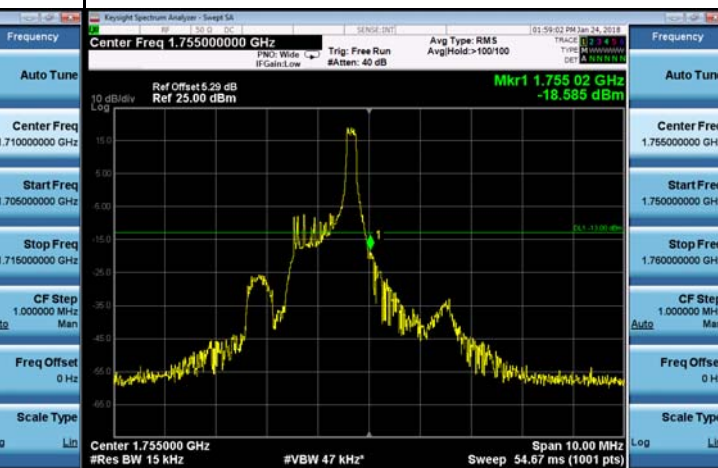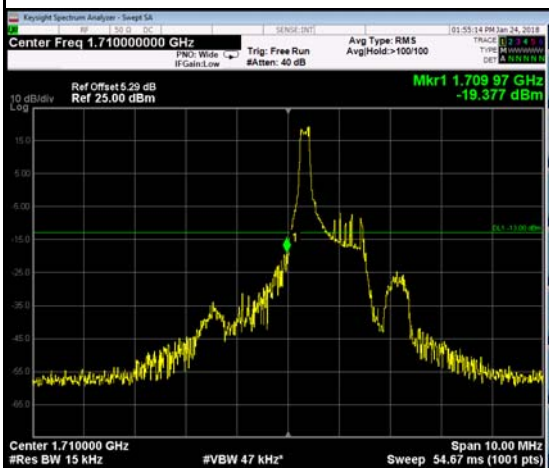



6RB0

Channel

19975

Channel

20375

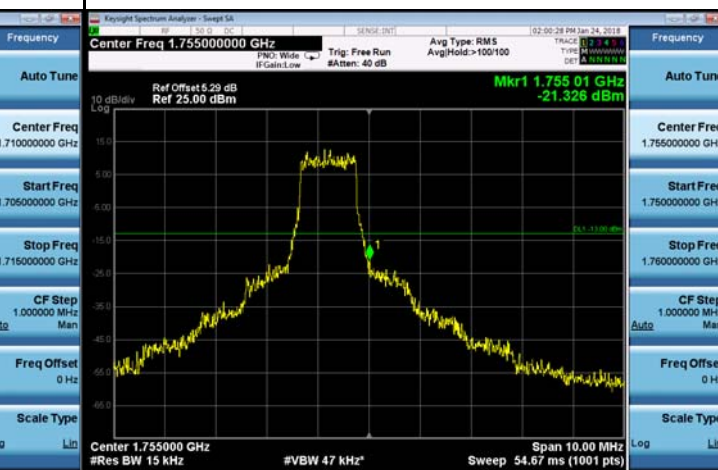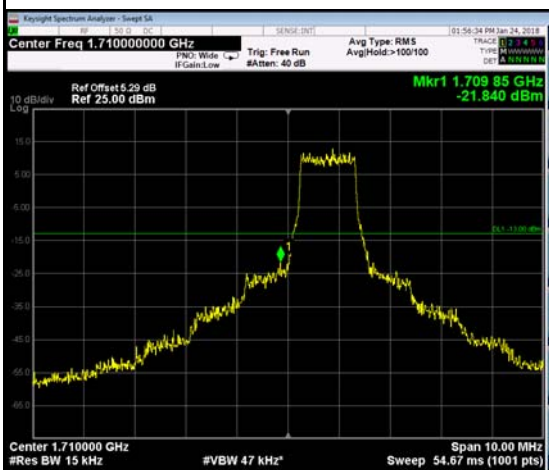

eMTC Band 4_5M - 16QAM

1RB0



1RB5

Channel

19975

Channel

20375

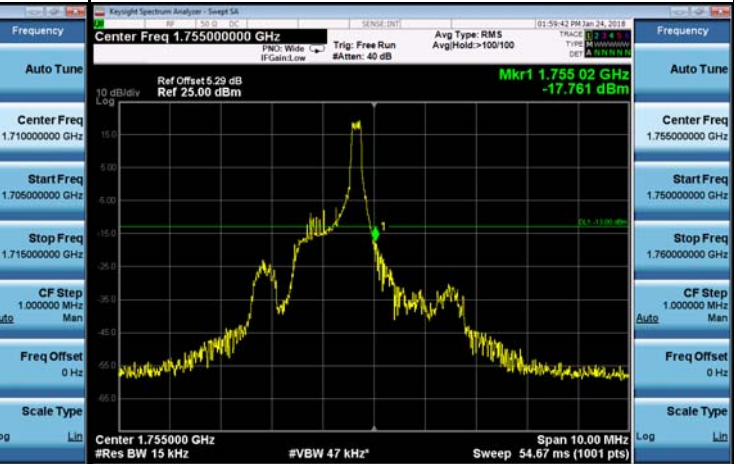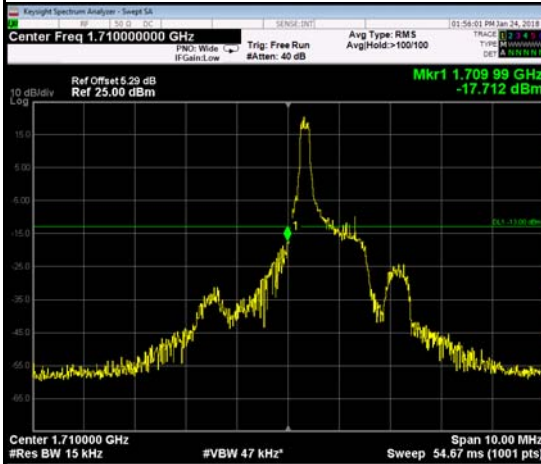



5RB0

Channel

19975

Channel

20375

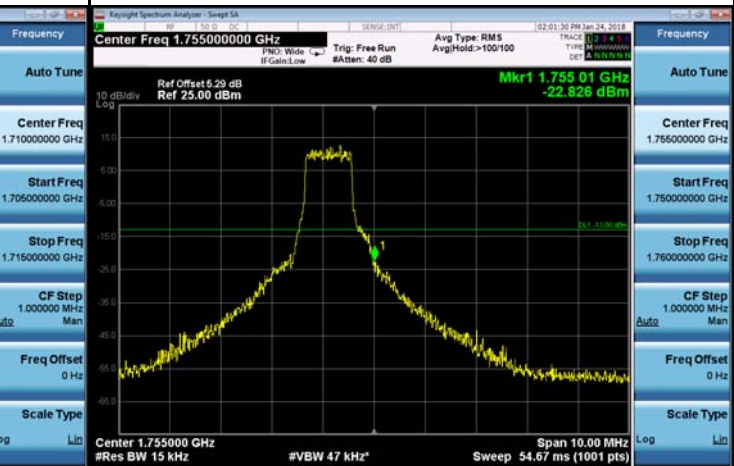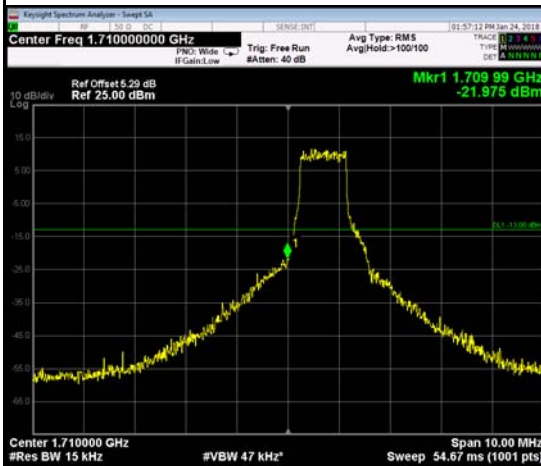

eMTC Band 4_10M - QPSK

1RB0



1RB5

Channel

20000

Channel

20350

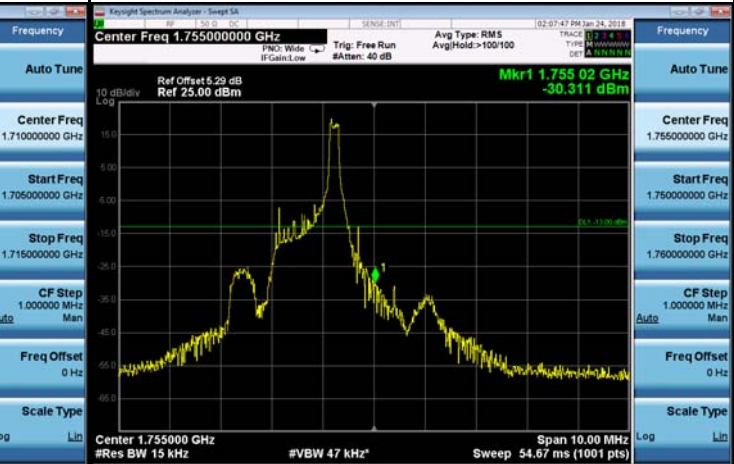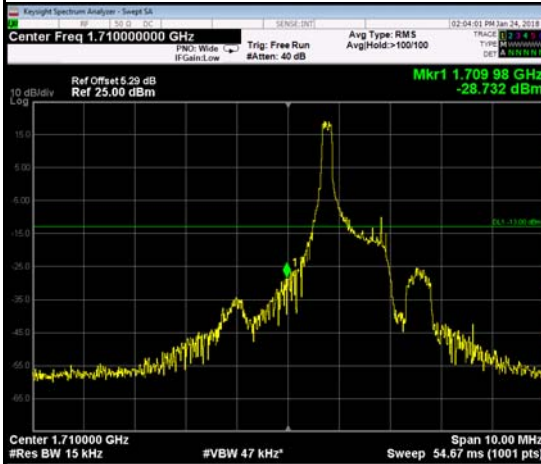



6RB0


Channel

20000

Channel

20350

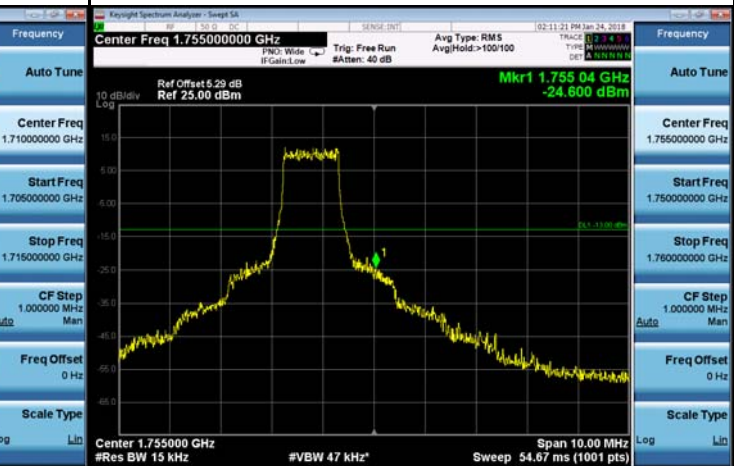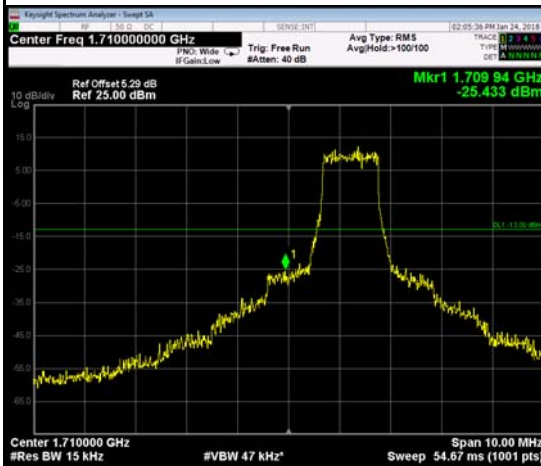

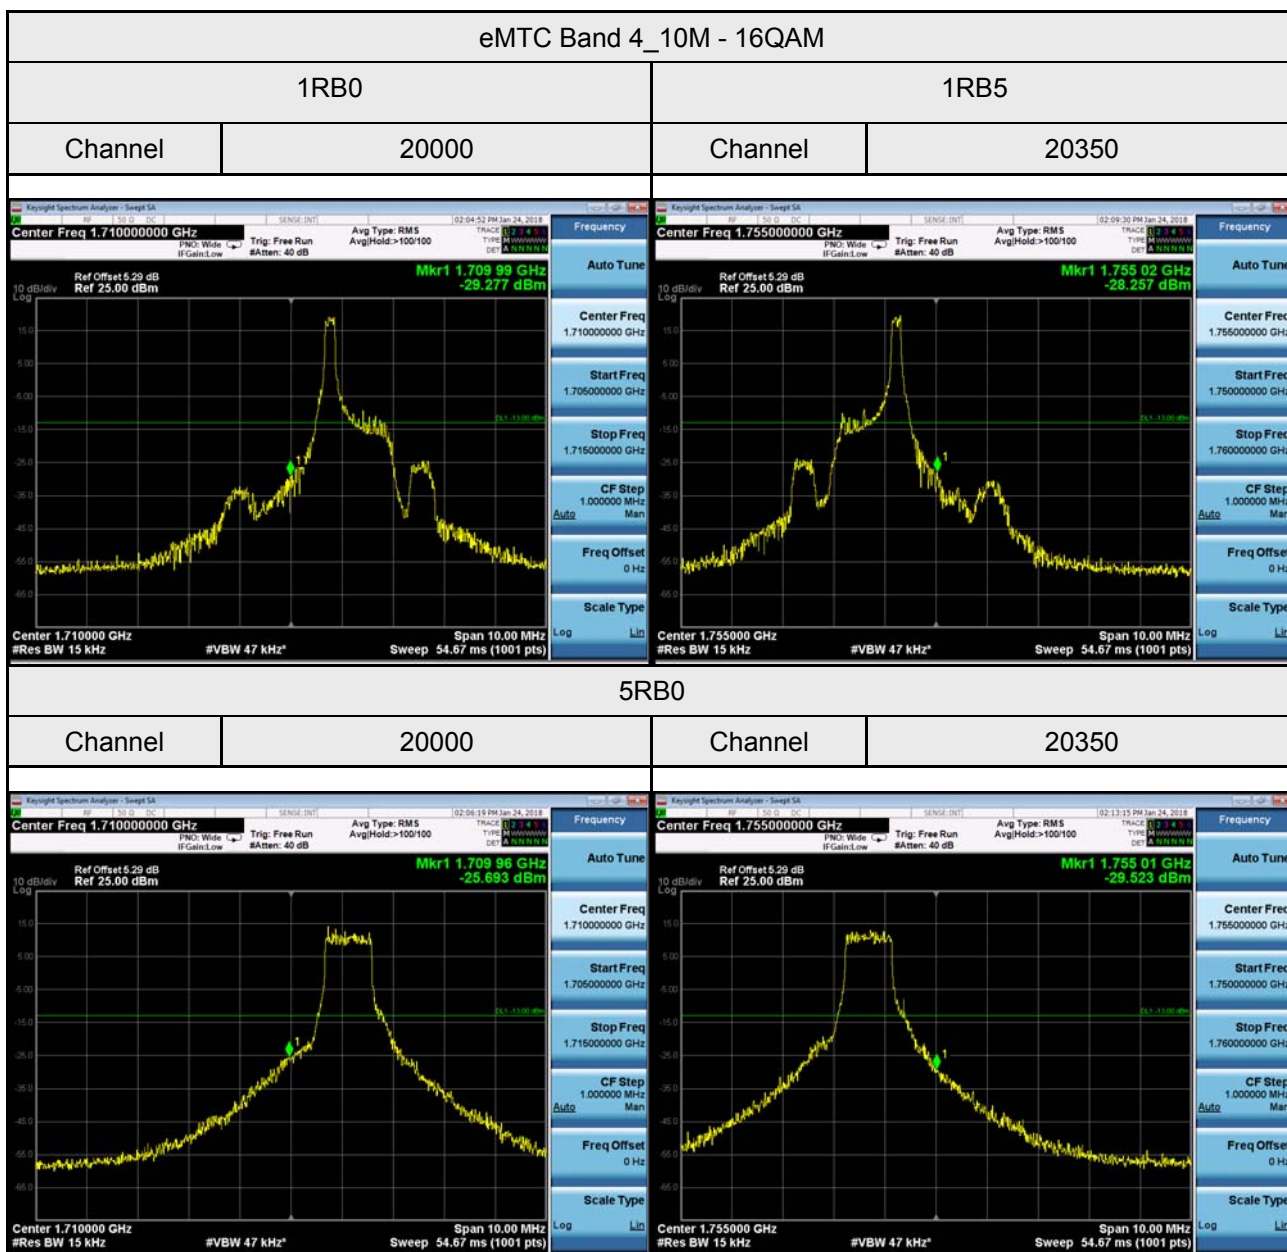

eMTC Band 4_15M - QPSK

1RB0



1RB5

Channel

20025

Channel

20325

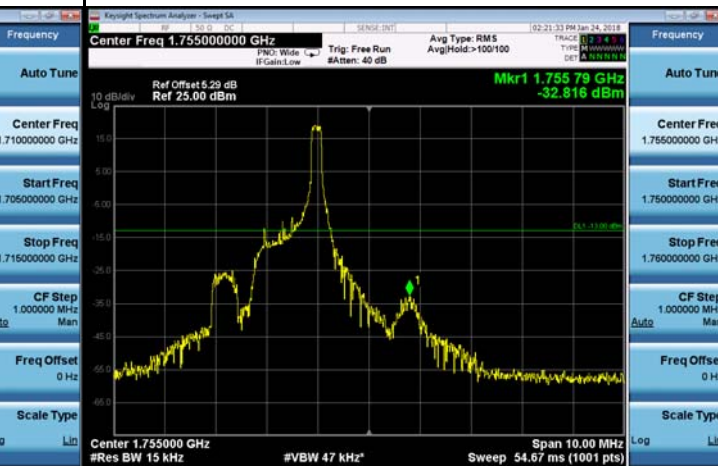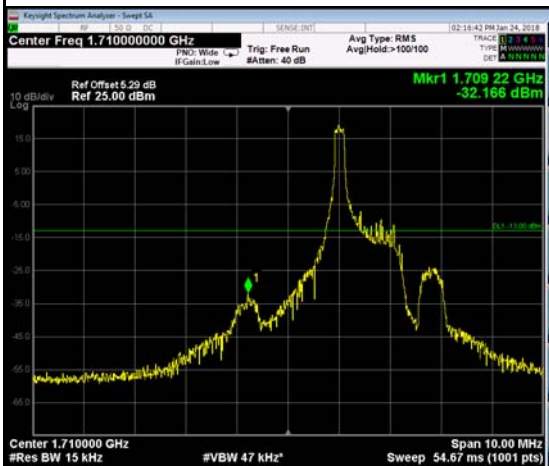



6RB0


Channel

20025

Channel

20325

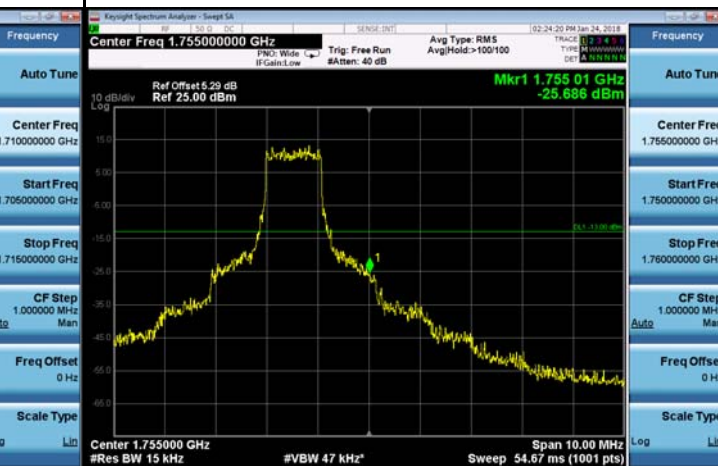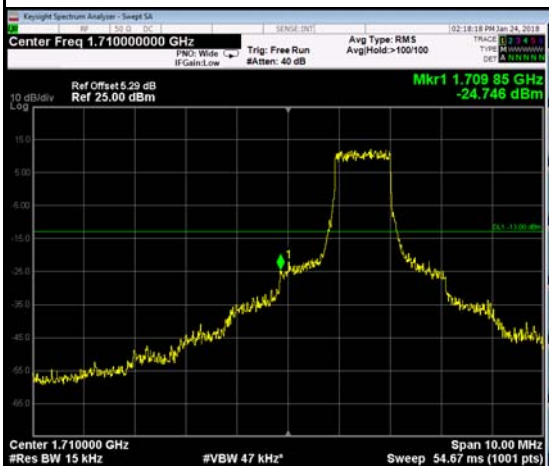

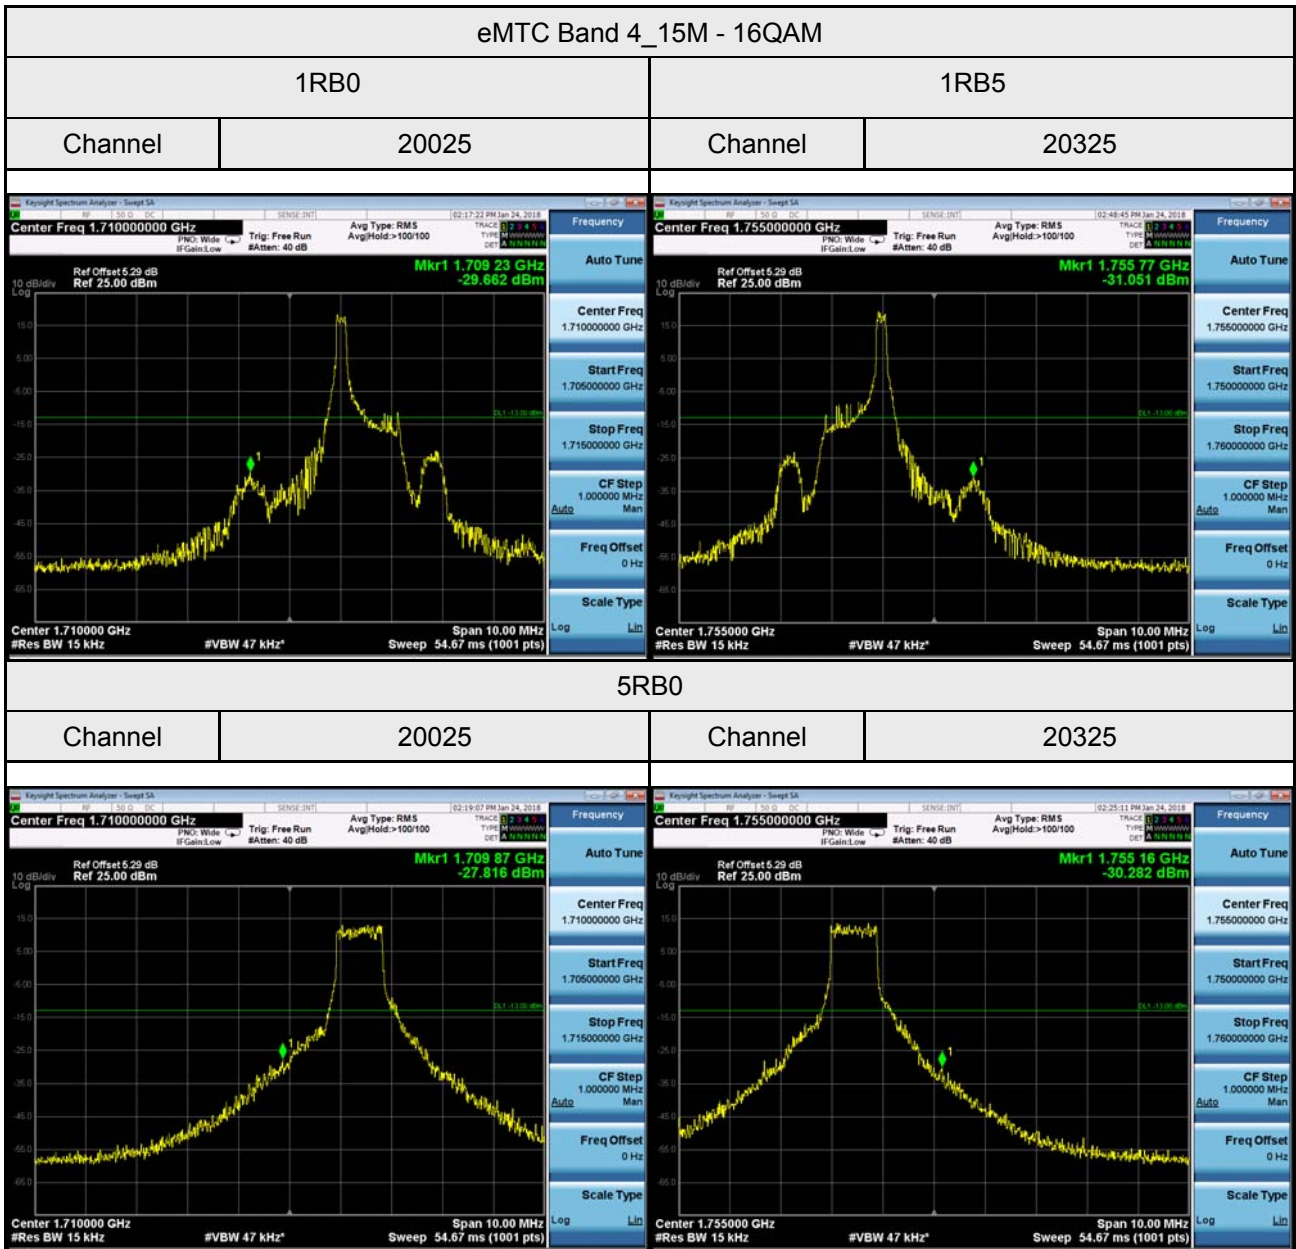

eMTC Band 4_20M - QPSK

1RB0



1RB5

Channel

20050

Channel

20300

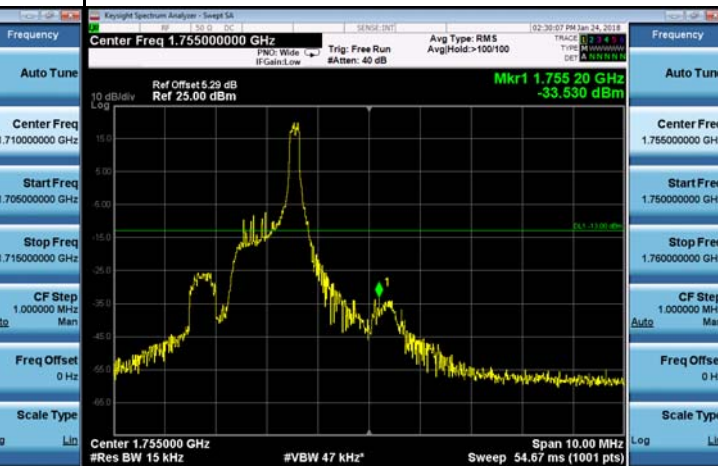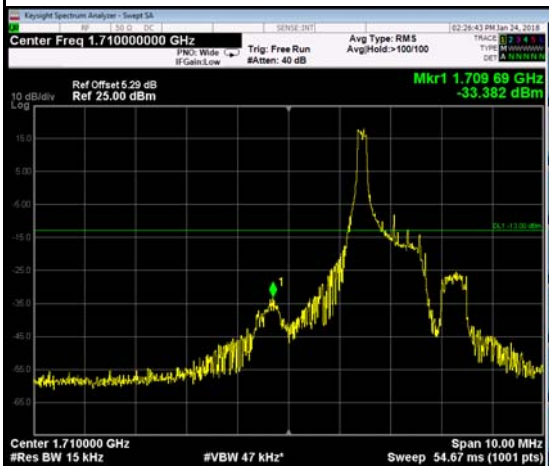



6RB0


Channel

20050

Channel

20300

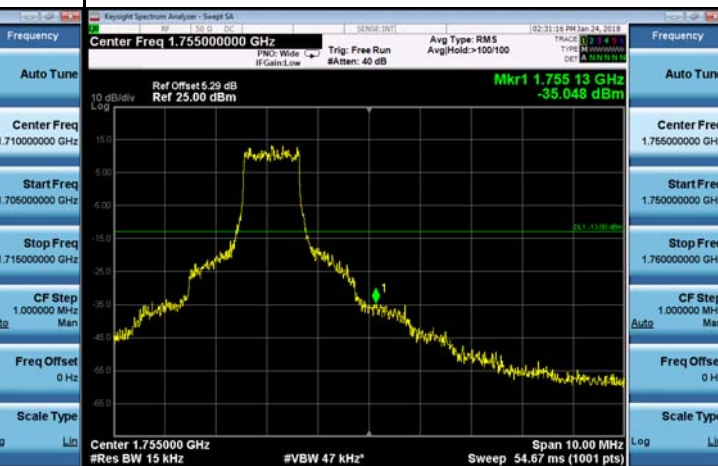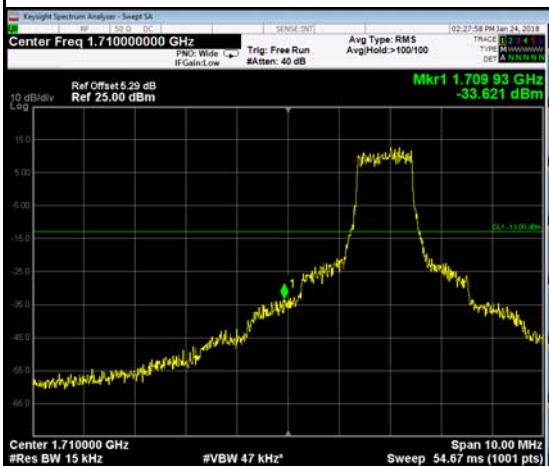

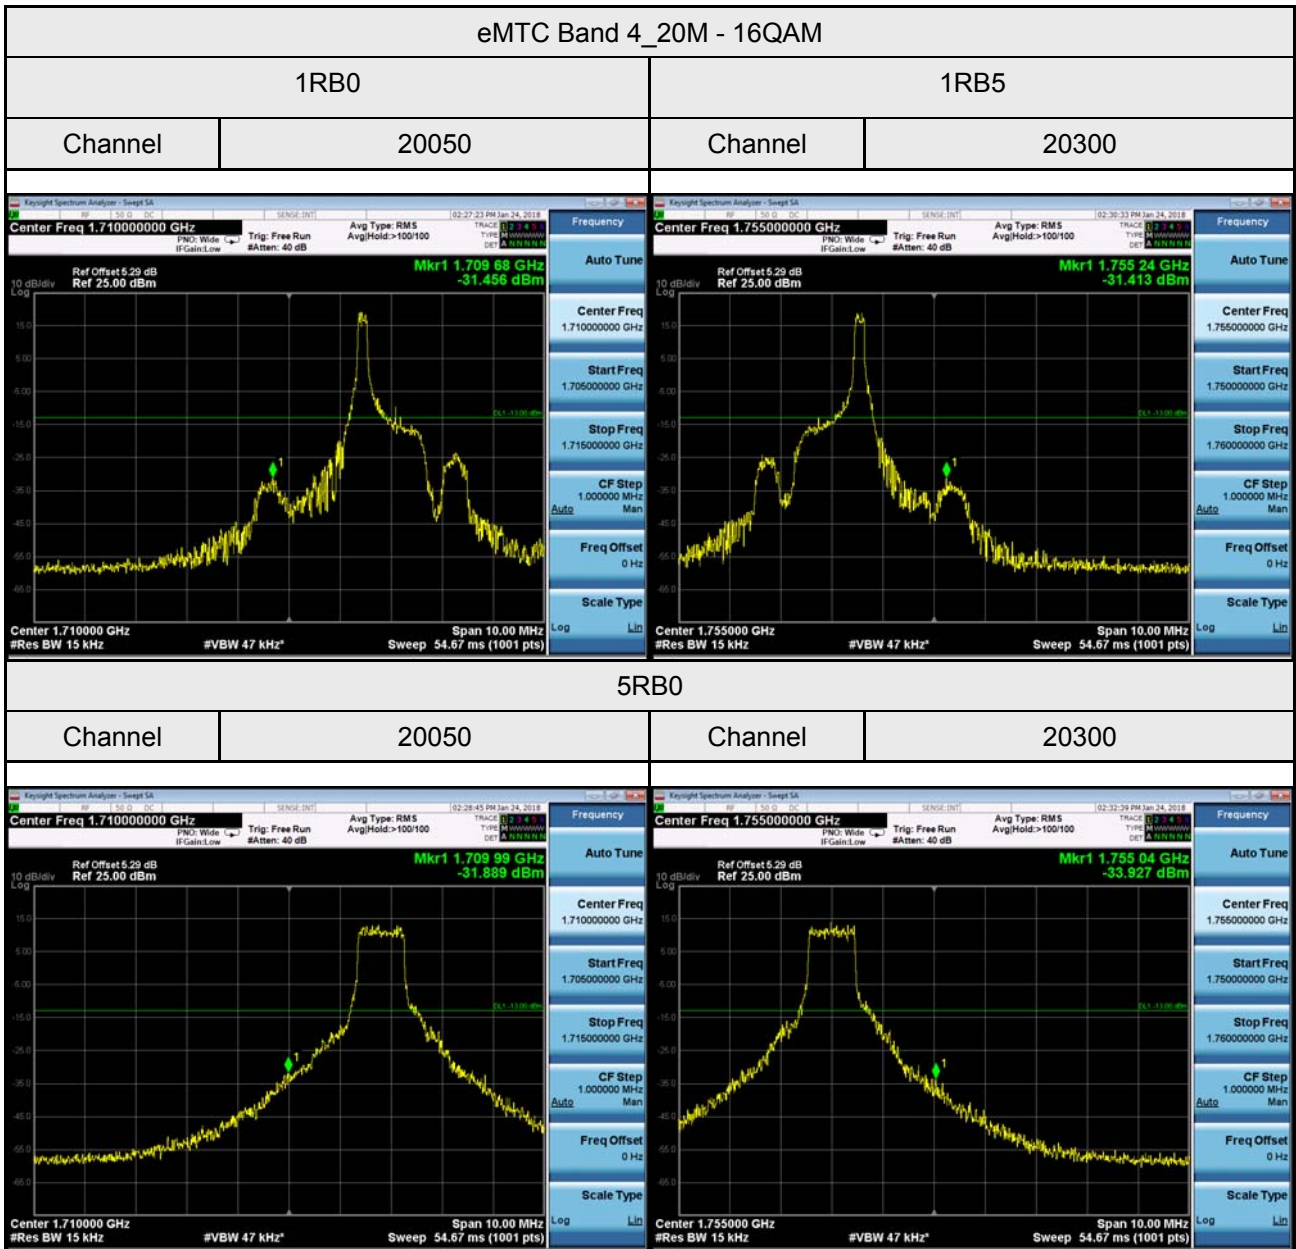

eMTC Band 12_5M - QPSK

1RB0



1RB5

Channel

23035

Channel

23155

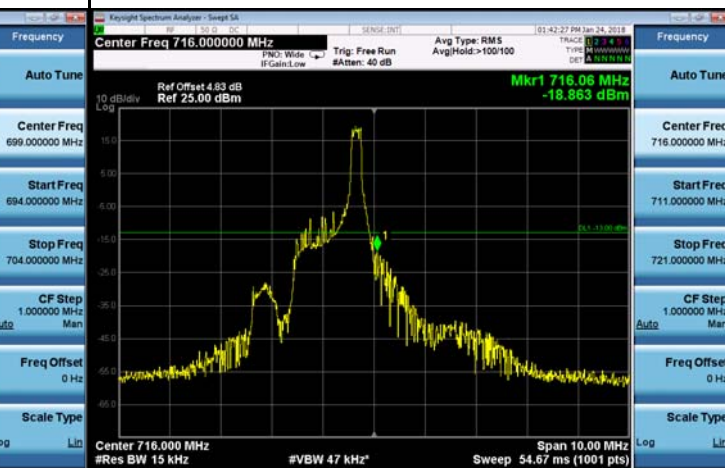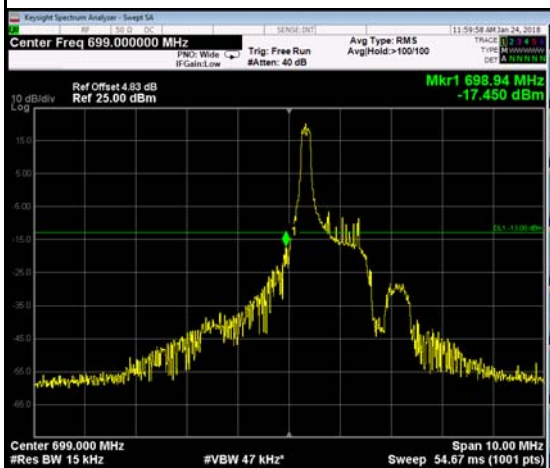



6RB0

Channel

23035

Channel

23155

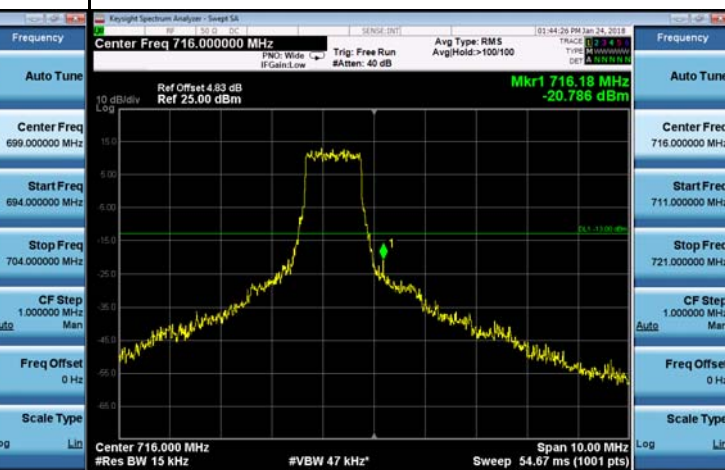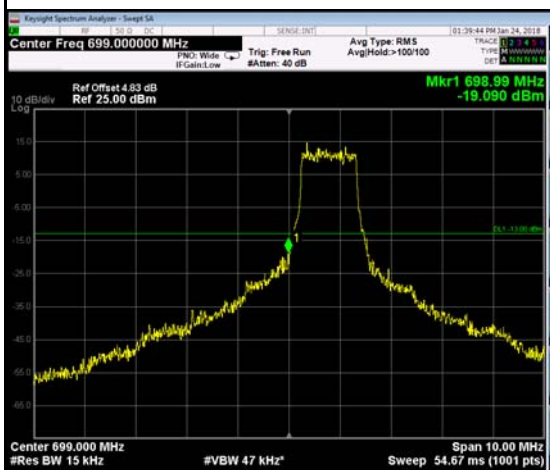

eMTC Band 12_5M - 16QAM

1RB0



1RB5

Channel

23035

Channel

23155

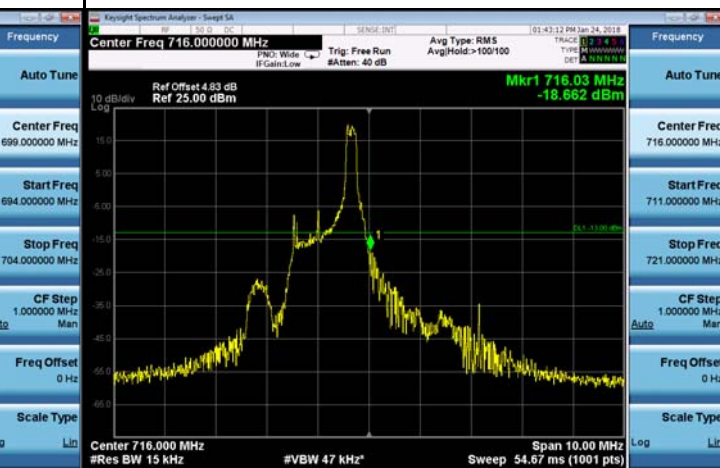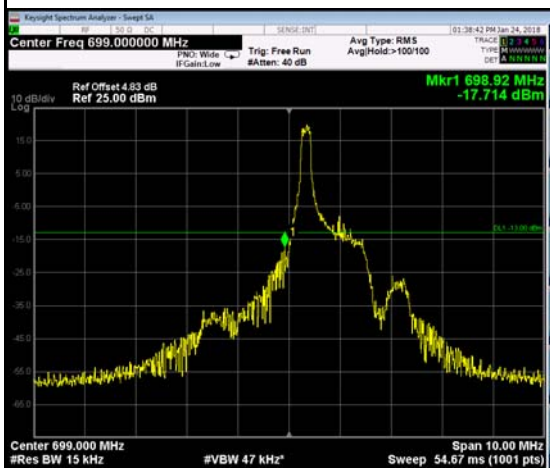



5RB0


Channel

23035

Channel

23155

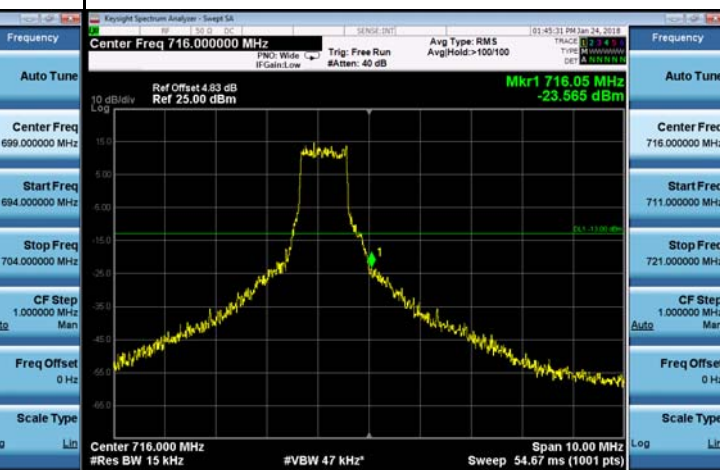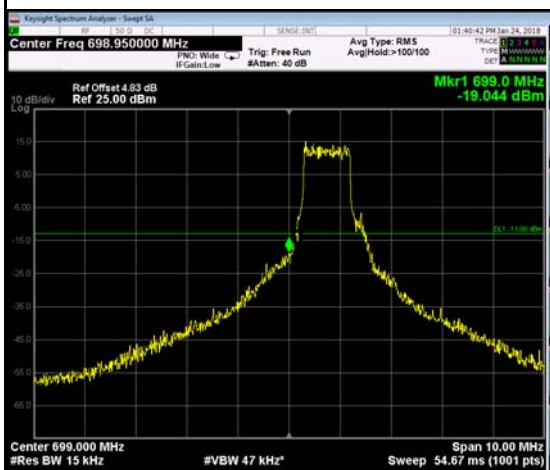

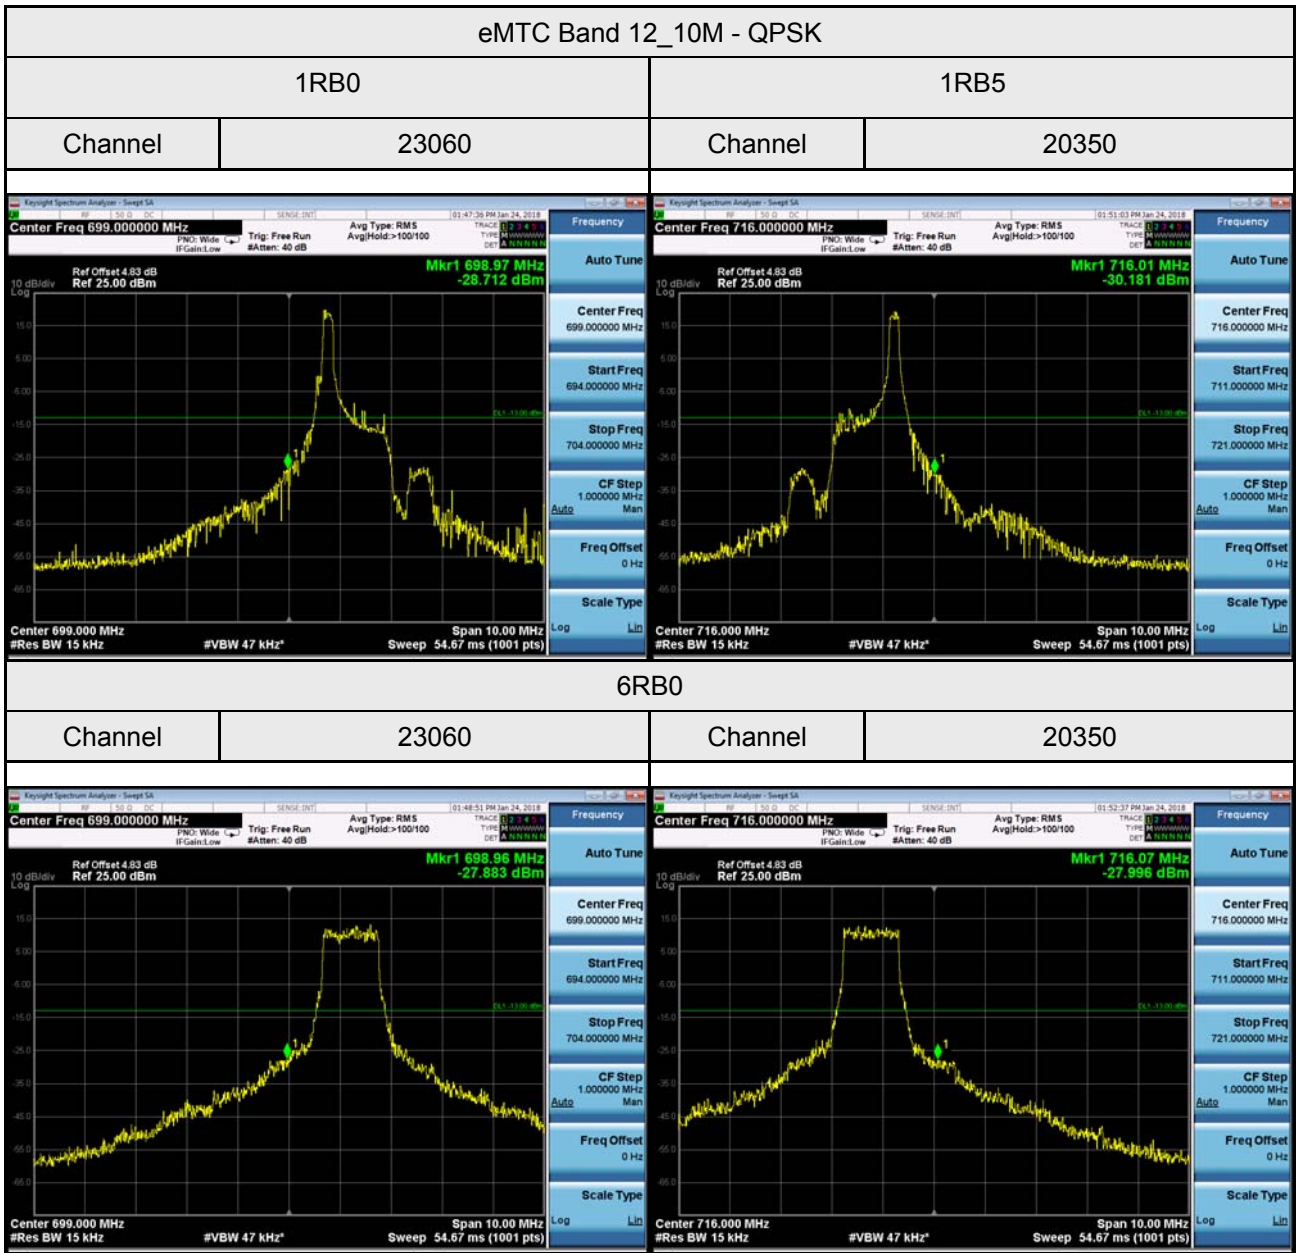

eMTC Band 12_10M - 16QAM

1RB0


1RB5

Channel

23060

Channel

20350

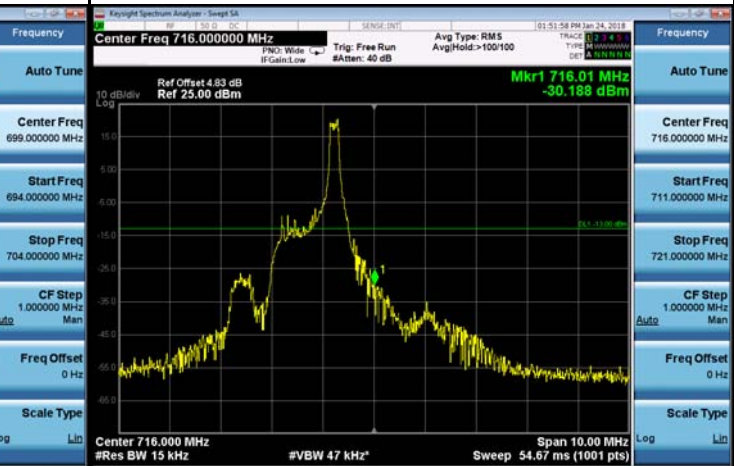



5RB0


Channel


23060

Channel

20350

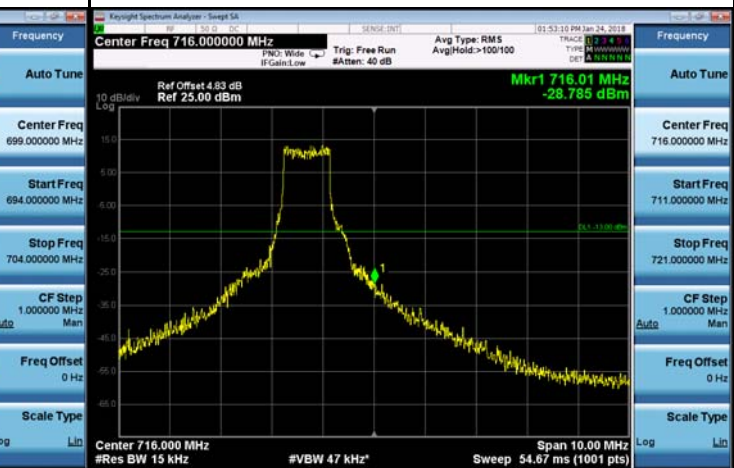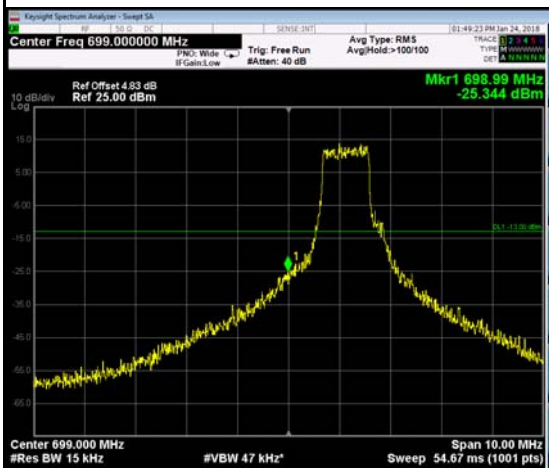

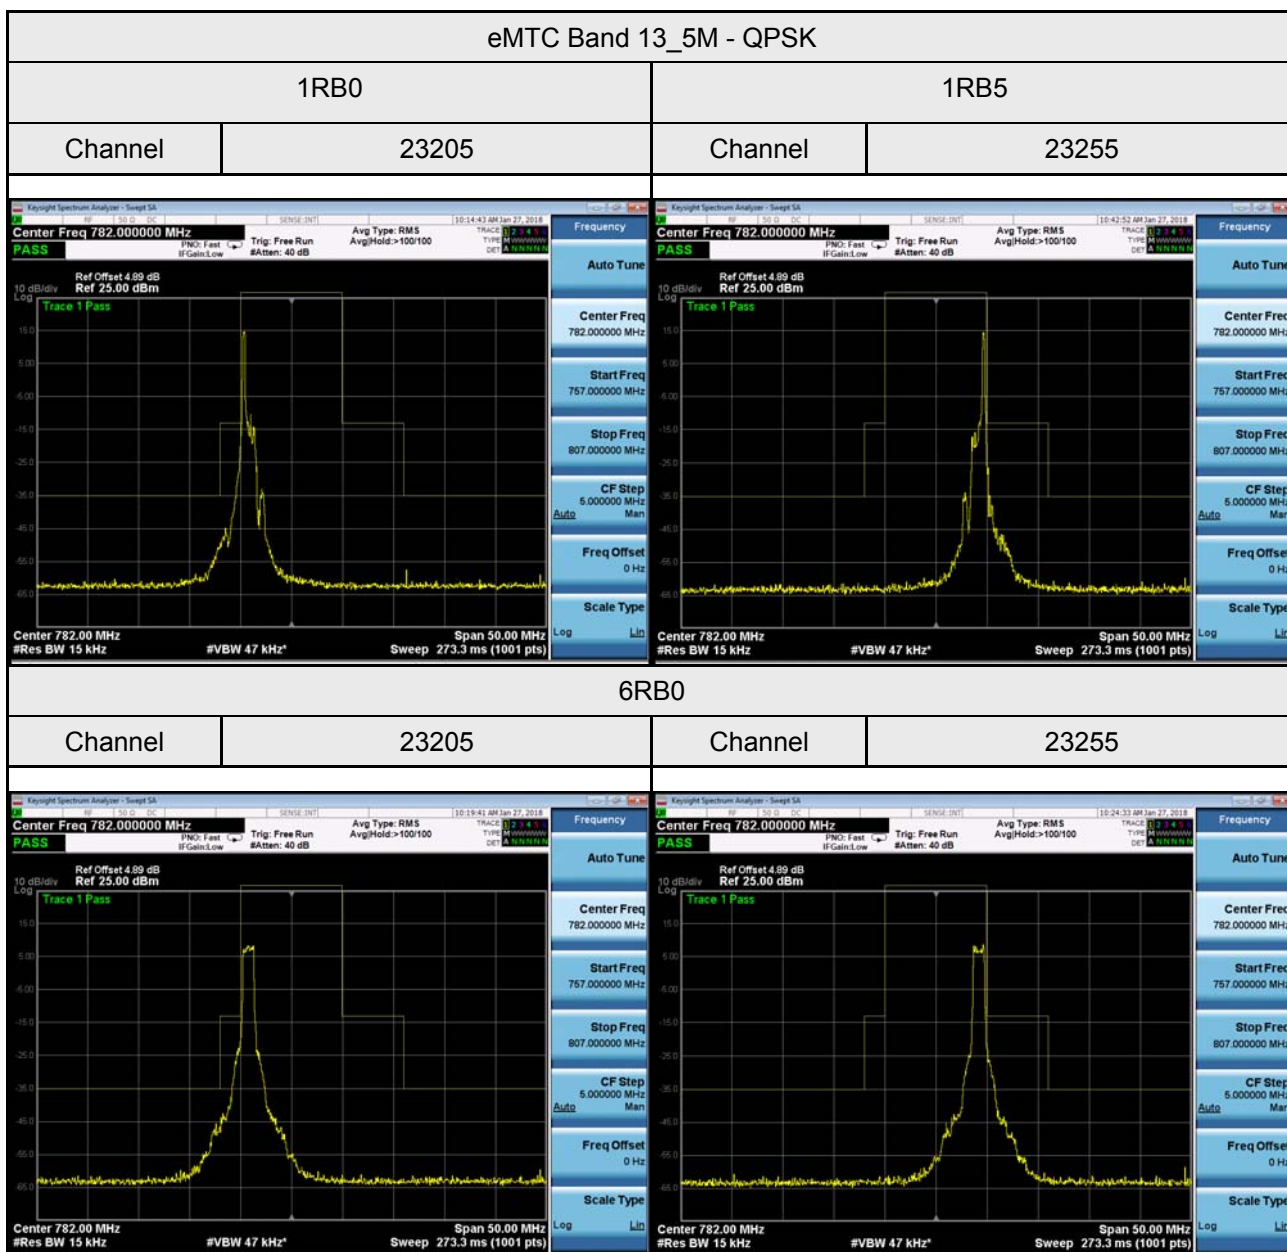

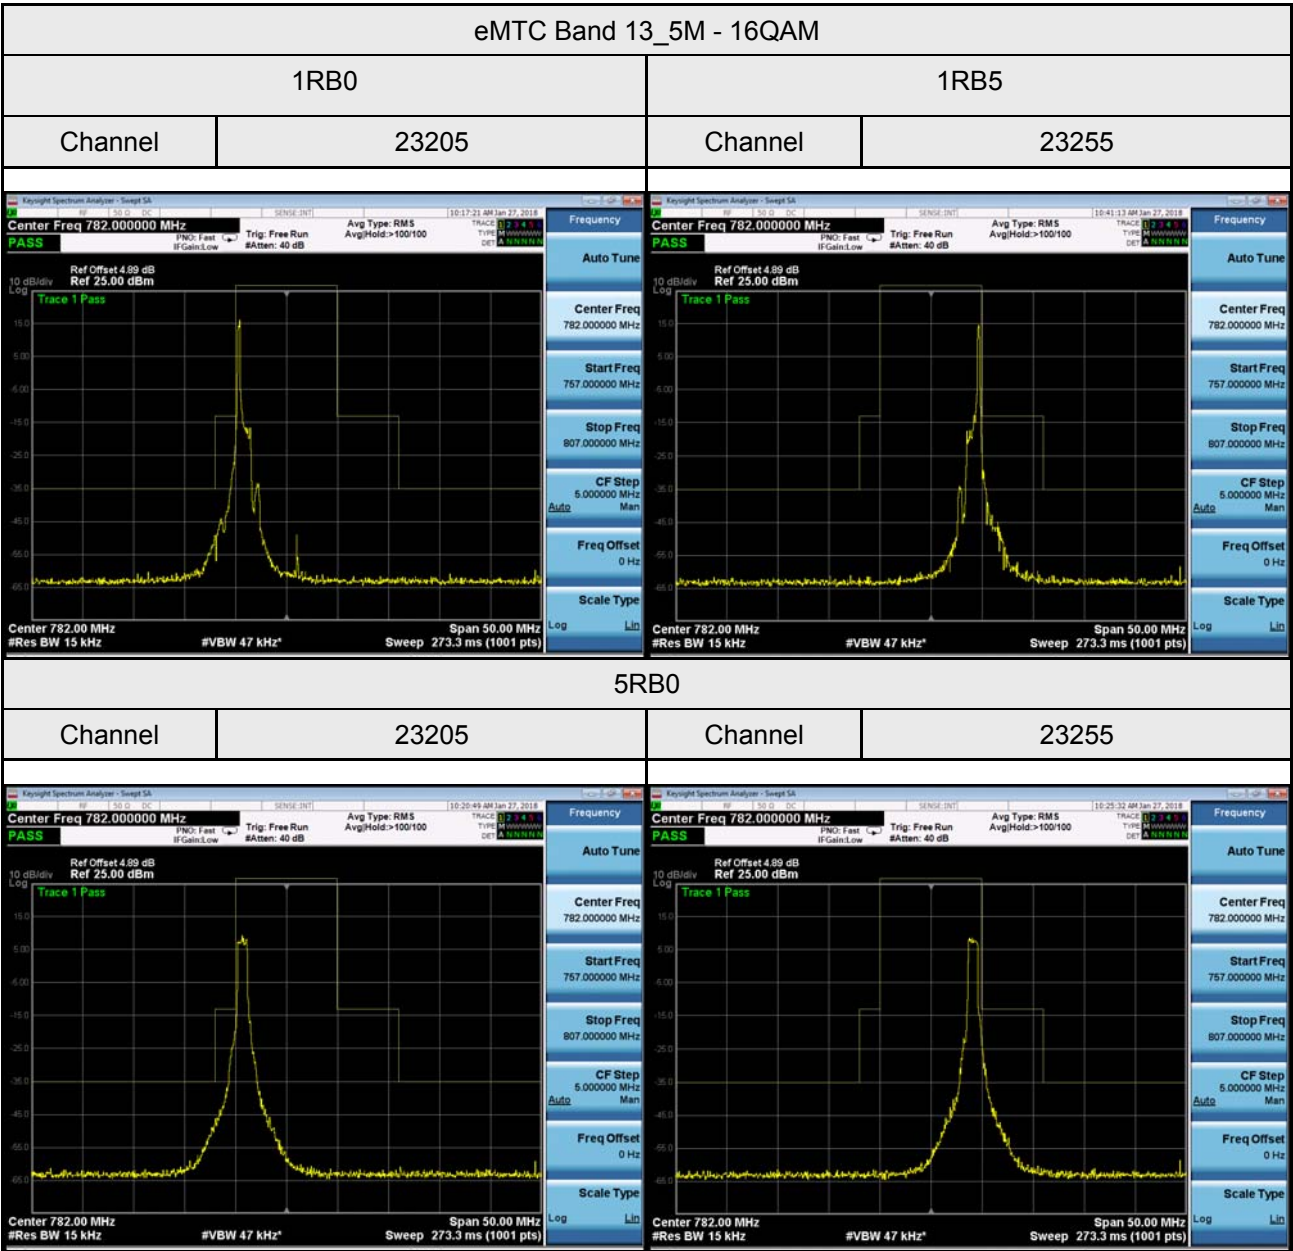

eMTC Band 13_10M - QPSK

1RB0



1RB5

Channel

23230

Channel

23230

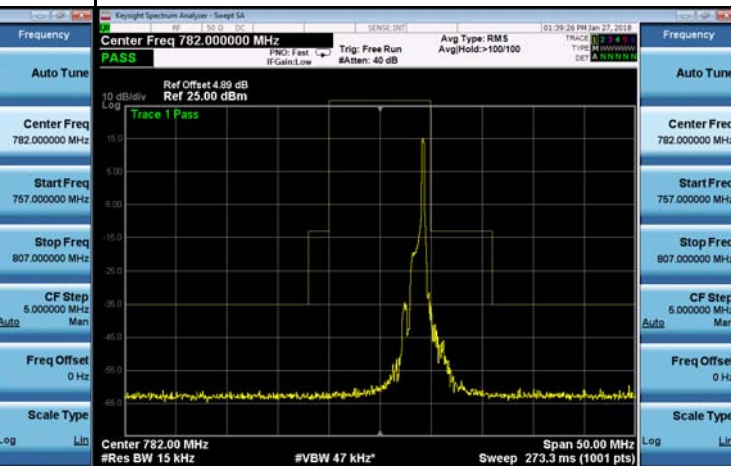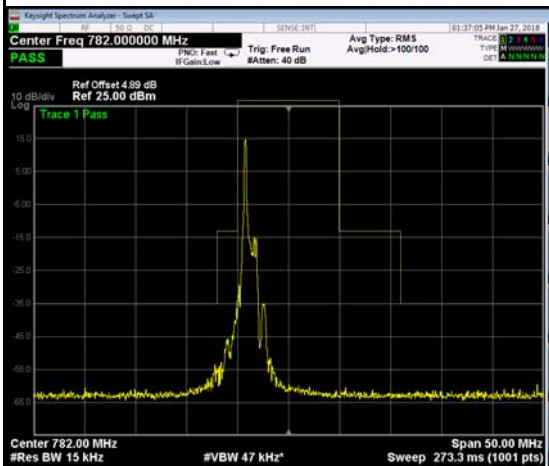



6RB0


Channel

23230

Channel


23230

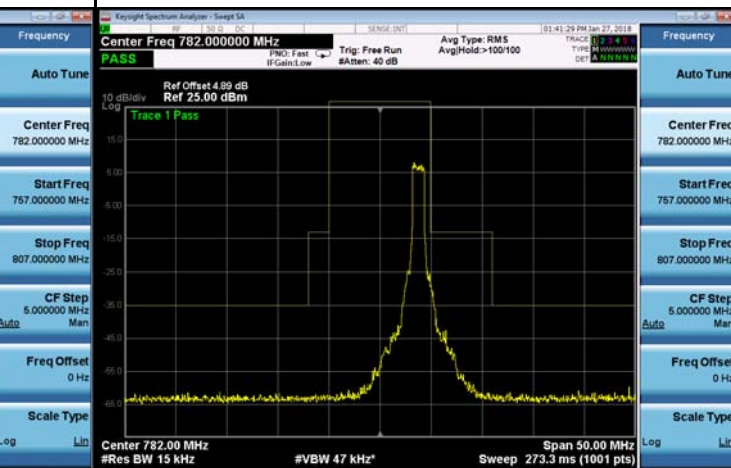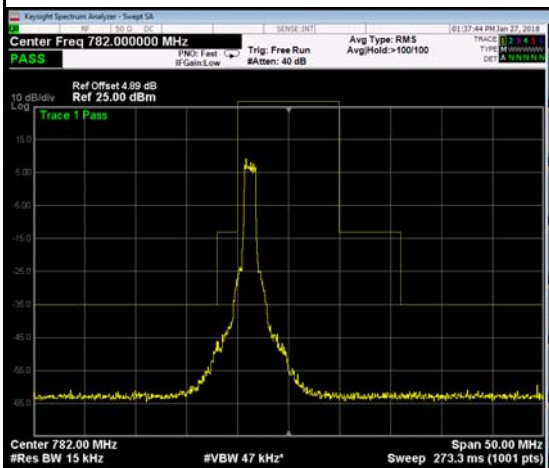

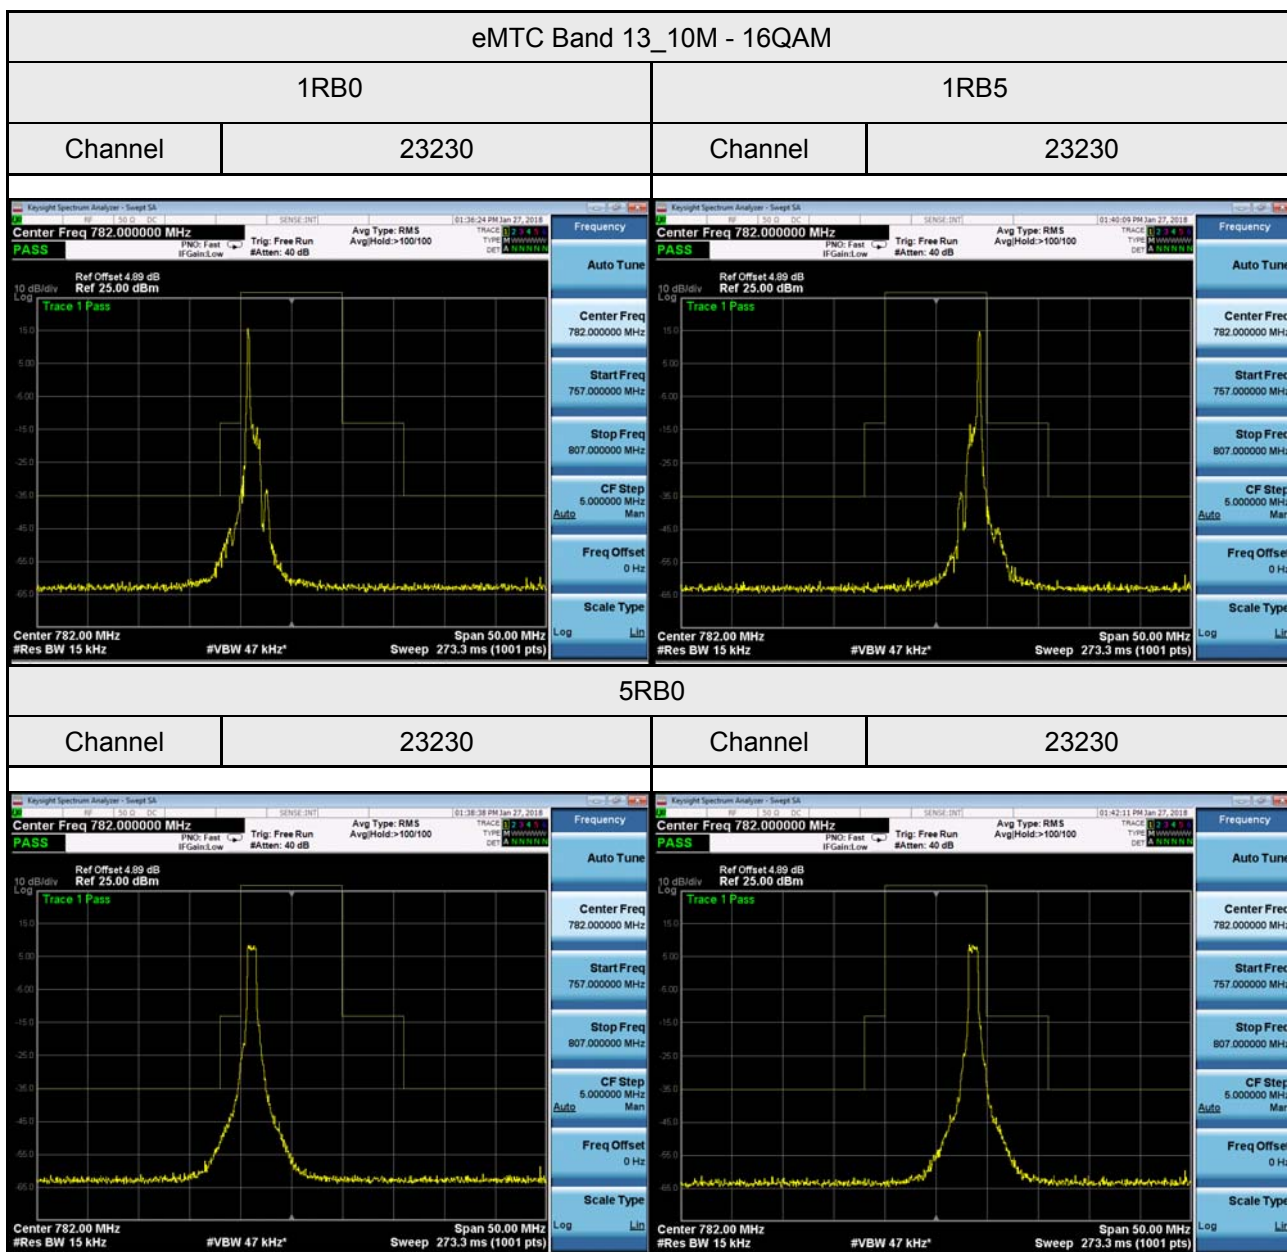


APPENDIX F - PEAK TO AVERAGE RATIO


eMTC Band 4 Spectrum Plot_5M

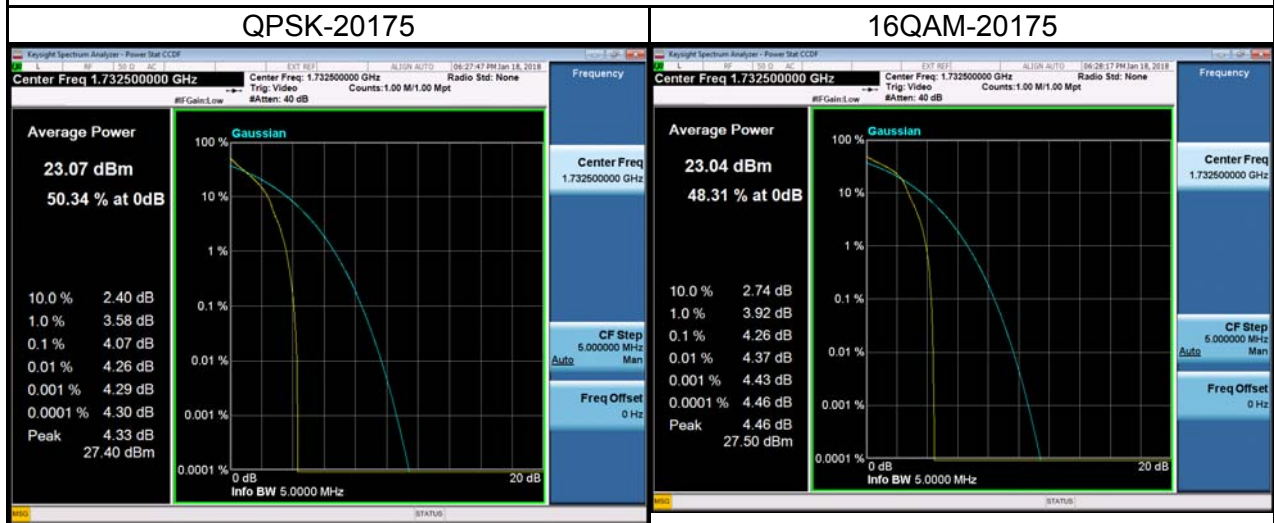


eMTC Band 4 Spectrum Plot_10M

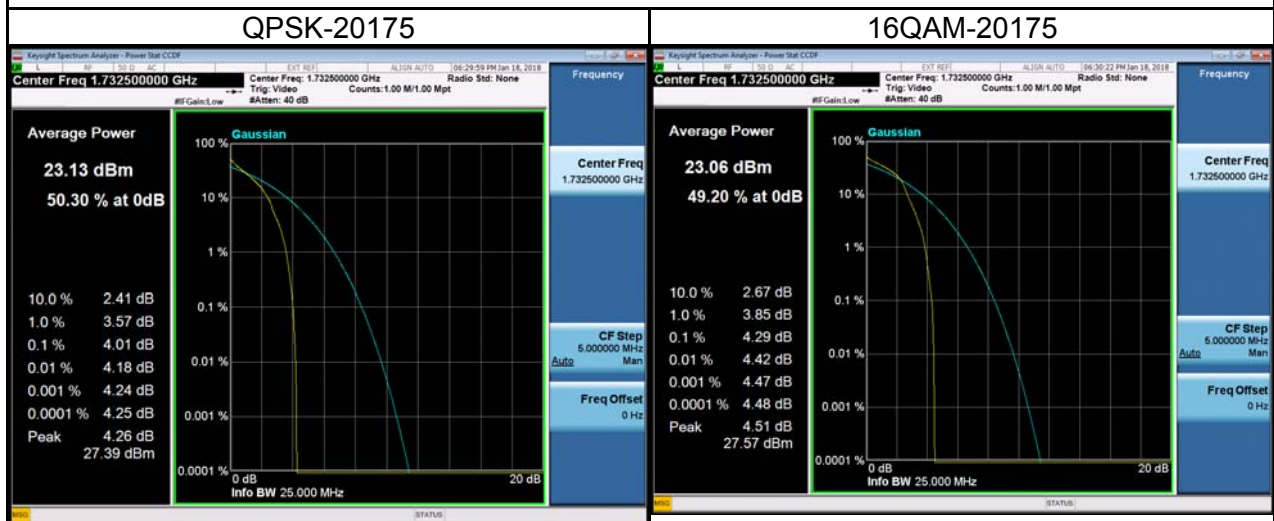


eMTC Band 4 Spectrum Plot_15M

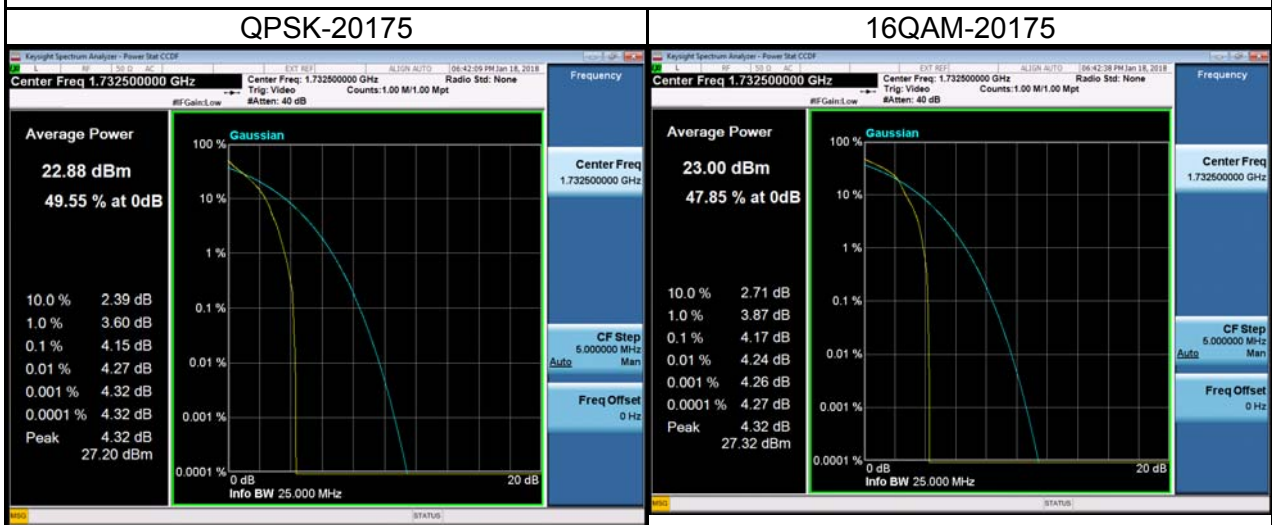


eMTC Band 4 Spectrum Plot_20M

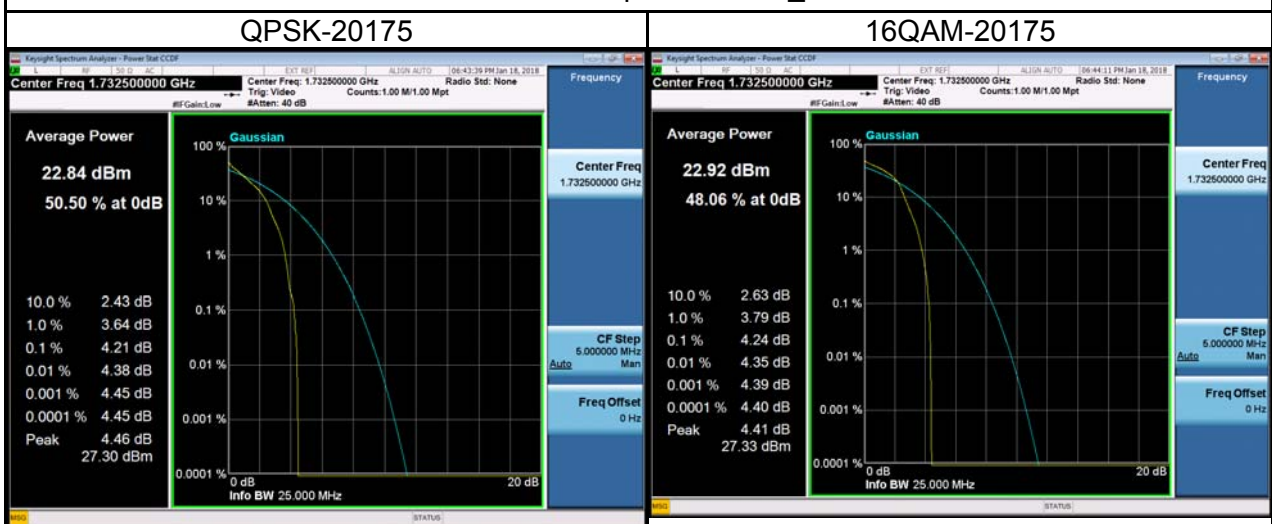


eMTC Band 12 Spectrum Plot_5M

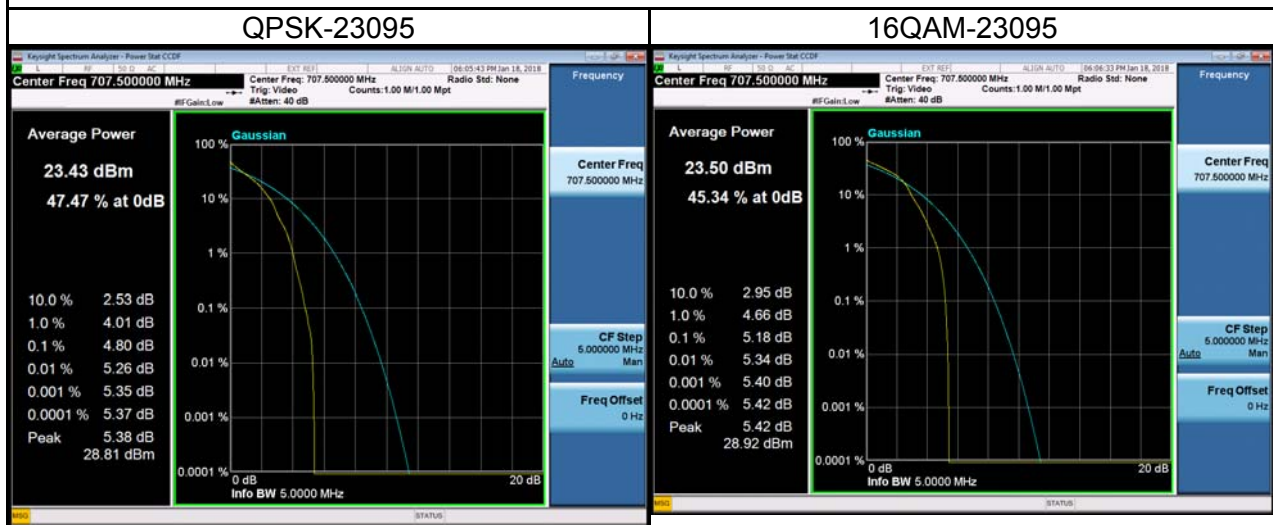


eMTC Band 12 Spectrum Plot_10M

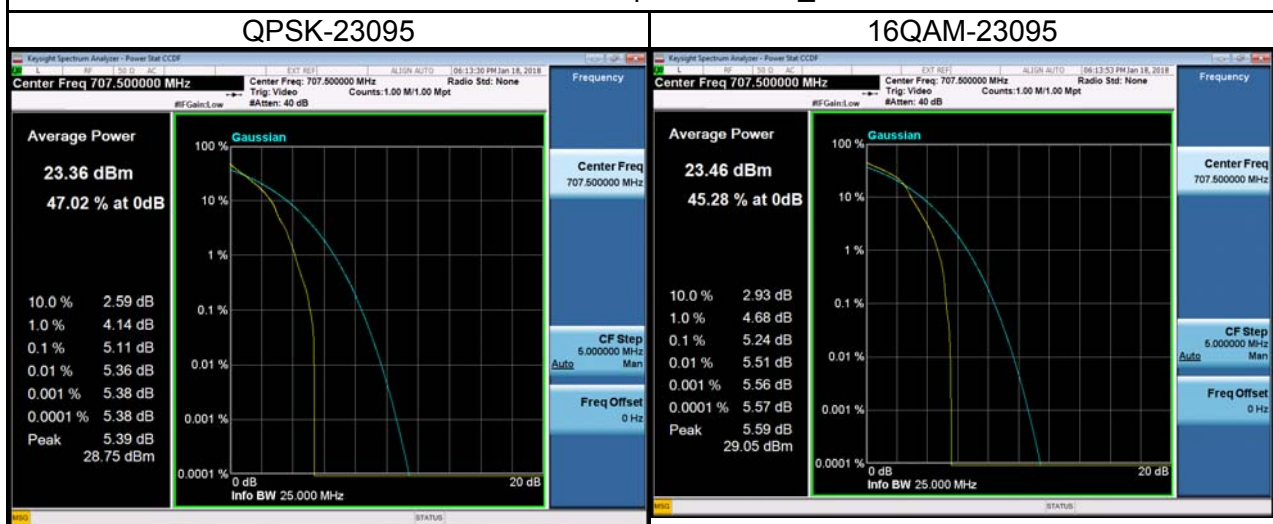

eMTC Band 13 Spectrum Plot_5M

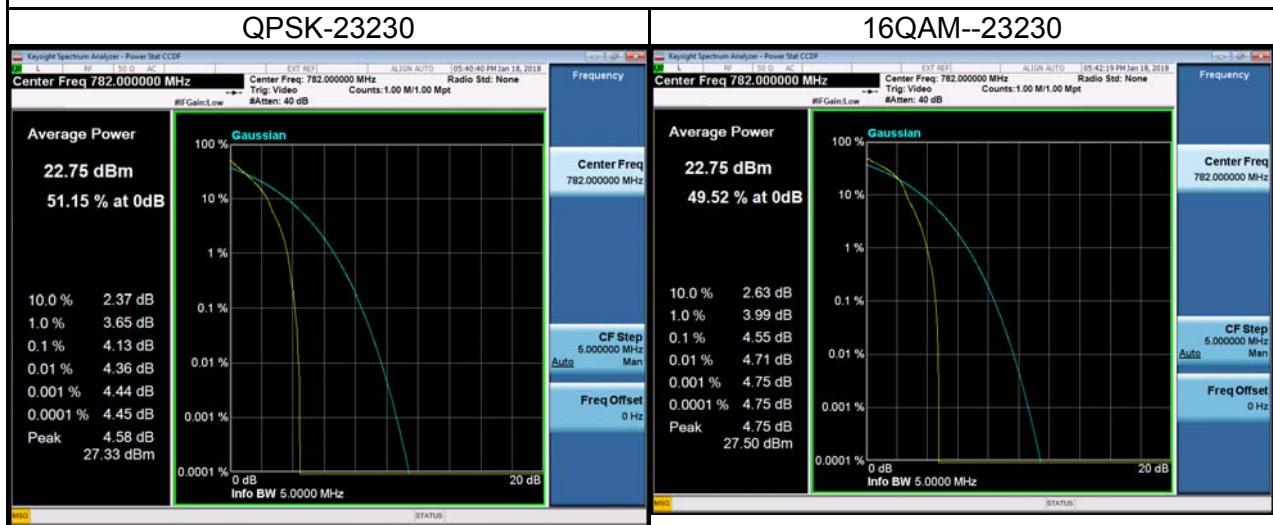

eMTC Band 13 Spectrum Plot_10M

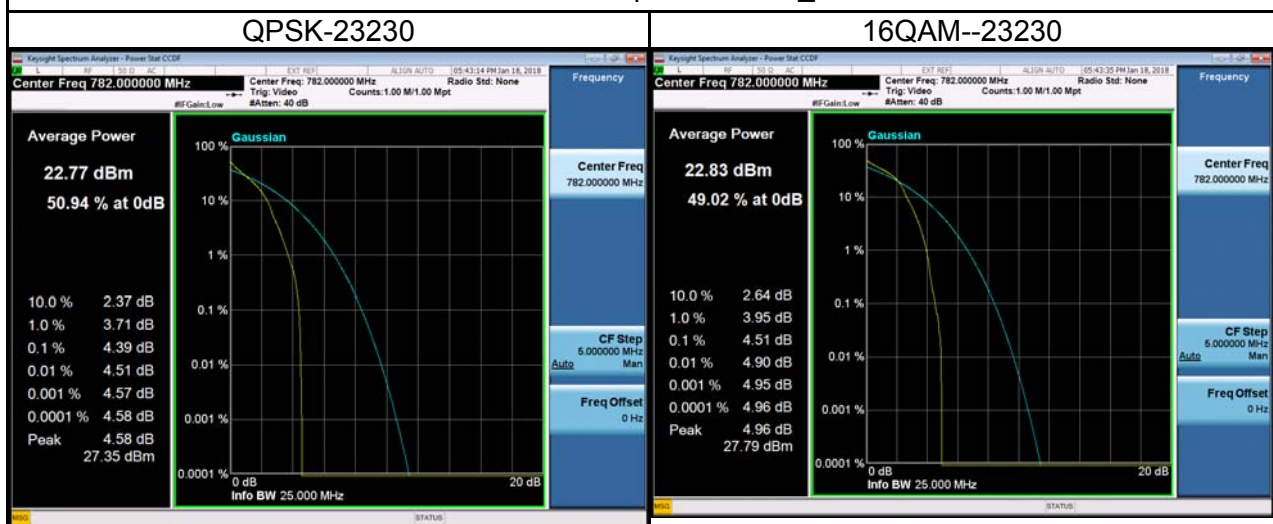

APPENDIX G - FREQUENCY STABILITY

Test Mode:	eMTC Band 4_CH20175_5M
------------	------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	14.18	0.008184704	1.5
-20	15.34	0.008854257	1.5
-10	-12.61	0.007278499	1.5
0	-24.37	0.014066378	1.5
10	21.94	0.012663781	1.5
20	13.72	0.007919192	1.5
30	-19.26	0.011116883	1.5
40	14.32	0.008265512	1.5
50	-15.57	0.008987013	1.5
60	13.32	0.007688312	1.5
70	18.96	0.010943723	1.5
75	17.07	0.009852814	1.5
Max. Deviation (ppm)	24.37	0.014066378	1.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.3	19.79	0.011422799	1.5
3.8	16.81	0.009702742	1.5
4.2	14.35	0.008282828	1.5
Max. Deviation (ppm)	19.79	0.011422799	1.5

Test Mode:	eMTC Band 4_CH20175_10M
------------	-------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	22.35	0.012900433	1.5
-20	-11.68	0.006741703	1.5
-10	14.17	0.008178932	1.5
0	15.38	0.008877345	1.5
10	-19.44	0.011220779	1.5
20	17.06	0.009847042	1.5
30	13.12	0.007572872	1.5
40	14.76	0.008519481	1.5
50	14.37	0.008294372	1.5
60	-20.15	0.011630592	1.5
70	-17.17	0.009910534	1.5
75	-18.66	0.010770563	1.5
Max. Deviation (ppm)	22.35	0.012900433	1.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.3	17.31	0.009991342	1.5
3.8	14.29	0.008248196	1.5
4.2	20.16	0.011636364	1.5
Max. Deviation (ppm)	20.16	0.011636364	1.5

Test Mode:	eMTC Band 4_CH20175_15M
------------	-------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	23.36	0.013483405	1.5
-20	13.87	0.008005772	1.5
-10	-18.27	0.010545455	1.5
0	15.32	0.008842713	1.5
10	17.68	0.010204906	1.5
20	14.21	0.008202020	1.5
30	18.05	0.010418470	1.5
40	-22.37	0.012911977	1.5
50	14.19	0.008190476	1.5
60	-14.44	0.008334776	1.5
70	-19.76	0.011405483	1.5
75	15.28	0.008819625	1.5
Max. Deviation (ppm)	23.36	0.013483405	1.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.3	15.42	0.008900433	1.5
3.8	20.96	0.012098124	1.5
4.2	-16.66	0.009616162	1.5
Max. Deviation (ppm)	20.96	0.012098124	1.5

Test Mode:	eMTC Band 4_CH20175_20M
------------	-------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	23.33	0.013466089	1.5
-20	14.76	0.008519481	1.5
-10	-19.68	0.011359307	1.5
0	15.81	0.009125541	1.5
10	17.62	0.010170274	1.5
20	21.34	0.012317460	1.5
30	-15.81	0.009125541	1.5
40	-17.63	0.010176046	1.5
50	18.54	0.010701299	1.5
60	12.29	0.007093795	1.5
70	-14.72	0.008496392	1.5
75	-20.03	0.011561328	1.5
Max. Deviation (ppm)	23.33	0.013466089	1.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.3	17.62	0.010170274	1.5
3.8	19.41	0.011203463	1.5
4.2	11.34	0.006545455	1.5
Max. Deviation (ppm)	19.41	0.011203463	1.5

Test Mode:	eMTC Band 12_CH23095_5M
------------	-------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	19.18	0.027109541	1.5
-20	-13.27	0.018756184	1.5
-10	-13.61	0.019236749	1.5
0	11.99	0.016946996	1.5
10	14.07	0.019886926	1.5
20	-23.69	0.033484099	1.5
30	17.87	0.025257951	1.5
40	14.12	0.019957597	1.5
50	16.62	0.023491166	1.5
60	-18.94	0.026770318	1.5
70	-15.75	0.022261484	1.5
75	20.34	0.028749117	1.5
Max. Deviation (ppm)	23.69	0.033484099	1.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.3	-14.17	0.020028269	1.5
3.8	-18.26	0.025809187	1.5
4.2	19.32	0.027307420	1.5
Max. Deviation (ppm)	19.32	0.027307420	1.5

Test Mode:	eMTC Band 12_CH23095_10M
------------	--------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	16.37	0.023137809	1.5
-20	12.63	0.017851590	1.5
-10	14.54	0.020551237	1.5
0	-22.72	0.032113074	1.5
10	16.15	0.022826855	1.5
20	-17.01	0.024042403	1.5
30	17.11	0.024183746	1.5
40	16.92	0.023915194	1.5
50	17.09	0.024155477	1.5
60	21.56	0.030473498	1.5
70	-14.80	0.020918728	1.5
75	-20.86	0.029484099	1.5
Max. Deviation (ppm)	22.72	0.032113074	1.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.3	20.88	0.029512367	1.5
3.8	-16.52	0.023349823	1.5
4.2	14.08	0.019901060	1.5
Max. Deviation (ppm)	20.88	0.029512367	1.5

Test Mode:	eMTC Band 13_CH23230_5M
------------	-------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	17.69	0.022621483	1.5
-20	15.34	0.019616368	1.5
-10	-17.37	0.022212276	1.5
0	14.91	0.019066496	1.5
10	-22.14	0.028312020	1.5
20	13.79	0.017634271	1.5
30	17.64	0.022557545	1.5
40	-13.82	0.017672634	1.5
50	20.44	0.026138107	1.5
60	-13.13	0.016790281	1.5
70	14.22	0.018184143	1.5
75	15.07	0.019271100	1.5
Max. Deviation (ppm)	22.14	0.028312020	1.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.3	-19.34	0.024731458	1.5
3.8	16.99	0.021726343	1.5
4.2	-20.07	0.025664962	1.5
Max. Deviation (ppm)	20.07	0.025664962	1.5

Test Mode: eMTC Band 13_CH23230_10M

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	17.13	0.021905371	1.5
-20	18.28	0.023375959	1.5
-10	15.41	0.019705882	1.5
0	-17.26	0.022071611	1.5
10	15.19	0.019424552	1.5
20	-18.64	0.023836317	1.5
30	-13.74	0.017570332	1.5
40	16.22	0.020741688	1.5
50	21.73	0.027787724	1.5
60	14.33	0.018324808	1.5
70	-19.41	0.024820972	1.5
75	-15.70	0.020076726	1.5
Max. Deviation (ppm)	21.73	0.027787724	1.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.3	-22.61	0.028913043	1.5
3.8	18.02	0.023043478	1.5
4.2	20.55	0.026278772	1.5
Max. Deviation (ppm)	22.61	0.028913043	1.5