

51/71/72/79 SERIES KEYBOARD

USER'S GUIDE


Features : The keyboards are fully compatible with IBM AT and PS/2.

KEYBOARD CABLE CONNECTOR

AT Compatible Cable

(5-pin Din Connector)


Pin#	Signal Name	Voltage
1	Keyboard Clock	+5VDC Signal
2	Ground	0
3	Keyboard Data	+5VDC Signal
4	Power Supply	+5VDC
5	No Connection	

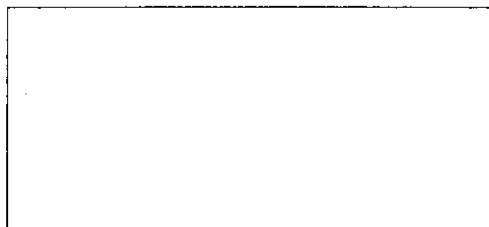

PS/2 Compatible Cable

(6-pin Miniatures Din Connector)

Pin#	Signal Name	Voltage
1	Keyboard Clock	+5VDC Signal
2	Ground	0
3	Keyboard Data	+5VDC Signal
4	Reserved	0
5	+5VDC	+5VDC
6	Reserved	0



TECHNICAL DATA

Power Requirement

+5 VDC @ 170 mA nominal

Environment Data

Operating temperature	: 0°C to 55°C
Relative humidity	: 20% to 95% non-condensing
Altitude	: 1000 ft. to 10000 ft.

Mechanical Data

Total Travel	: 3.5 ± 0.5 mm
Pretravel	: 1.0 ± 0.5 mm
Operating Life (normal key)	: 20 million cycles min. per key
Peak Load before Make (normal key)	: 60 ± 20 grams

IBM, AT and PS 2 are registered trademarks of International Business Machines Corporation.