

 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 1 of 22

RF-Emission Test Report

Application No.:	SEWM2206000064RG
Applicant:	COOSEA GROUP (HK) COMPANY LIMITED
Manufacturer:	COOSEA GROUP (HK) COMPANY LIMITED
Product Name:	Smart Phone
Model No.(EUT):	SL201D
Trade Mark:	bounce
FCC ID:	2A28USL201D
Standards:	ANSI C63.19-2011 CFR 47 FCC Part 20
Date of Receipt:	2022-06-27
Date of Test:	2022-07-04 to 2022-07-04
Date of Issue:	2022-07-12
Test conclusion:	PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Panta Sun

Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and third document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the authenticity of testing finspection report & certificate, plase retained for 30 days only. Attention: To check the authenticity of testing finspection report & certificate, plase cut us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@asgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业团区测胜路1号的6号厂房南部 邮编: 215000



 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 2 of 22

REVISION HISTORY

Revision Record					
Version	Chapter	Date	Modifier	Remark	
01		2022-07-12		Original	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document is at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document is at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, sadvised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forger or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000



 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 3 of 22

TEST SUMMARY

Frequency Band	HAC RF Emiss	ion Test result*	M-rating
GSM 850	E-Field dB(V/m)	37.38	M4
PCS 1900	E-Field dB(V/m)	26.09	M4
WCDMA Band II	E-Field dB(V/m)	1	M4
WCDMA Band IV	E-Field dB(V/m)	1	M4
WCDMA Band V	E-Field dB(V/m)	1	M4
LTE Band 2	E-Field dB(V/m)	1	M4
LTE Band 4	E-Field dB(V/m)	1	M4
LTE Band 5	E-Field dB(V/m)	1	M4
LTE Band 12	E-Field dB(V/m)	1	M4
LTE band 25	E-Field dB(V/m)	/	M4
LTE Band 26	E-Field dB(V/m)	/	M4
LTE Band 30	E-Field dB(V/m)	/	M4
LTE Band 66	E-Field dB(V/m)	/	M4
LTE band 71	E-Field dB(V/m)		M4
WI-FI (2.4GHz)	E-Field dB(V/m)	/	M4
WI-FI (5GHz)	E-Field dB(V/m)	/	M4
· · · · · ·	HAC Ra	ate Category: M4	

Note:

1) This portable wireless equipment has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std.C63.19-2011 and had been tested in accordance with the specified measurement procedures, Hear-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. Test results reported herein relate only to the item(s) tested and are for North American Bands only.

2) *- HAC RF Emission Test for low power exemption according to ANSI C63.19-2011 and HAC RF Emission rating is M4 (Refer to Section 9.3 for details).

Reviewed by

Well Wei

Prepared by

Njek Un

Nick Hu



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com SGS

 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 4 of 22

CONTENTS

1	Gen	eral Information	5
	1.1 1.2 1.3 1.4 1.5 <i>1.5.1</i> <i>1.5.2</i> 1.6 1.7		
2	Calil	bration certificate	10
3	HAC	: (T Coil) Measurement System	11
	3.1 3.2 3.3 3.4	Measurement System Diagram for SPEAG Robotic E-Field Probe Test Arch Phone Holder	12 12
4	Mea	surement uncertainty evaluation	13
5	RF E	Emission Measurements Reference and Plane	14
6	Syst	em Verification Procedure	15
	6.1 6.2	System Check System Check Result	
7	Mod	ulation Interference Factor	16
8	HAC	Measurement Procedure	17
9	HAC	RF Measurement Results	18
	9.1 9.2 9.3 9.4	Max Tune-up Conducted RF Output Power Low-power Exemption HAC RF Emission Test Results	19 20 21
1() Equi	ipment list	22



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-enDecument.aspx. Attention is drawn to the limitation of liability, indermification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company hay nuaruhtorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Studhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 5 of 22

1 General Information

1.1 Introduction

The purpose of the Hearing Aid Compatibility is to enable measurements of the near electric fields generated by wireless communication devices in the region controlled for use by a hearing aid in accordance with ANSI-C63.19-2011

The purpose of this standard is to establish categories for hearing aids and for WD (wireless communications devices) that can indicate to health care practitioners and hearing aid users which hearing aids are compatible with which WD, and to provide tests that can be used to assess the electromagnetic characteristics of hearing aids and WD and assign them to these categories. The various parameters required, in order to demonstrate compatibility and accessibility are measured. The design of the standard is such that when a hearing aid and WD achieve one of the categories specified, as measured by the methodology of this standard, the indicated performance is realized.

In order to provide for the usability of a hearing aid with a WD, several factors must be coordinated: a) Radio frequency (RF) measurements of the near-field electric fields emitted by a WD to categorize these emissions for correlation with the RF immunity of a hearing aid.

Hence, the following are measurements made for the WD: RF E-Field emissions

The measurement plane is parallel to, and 1.5cm in front of, the reference plane.

Applications for certification of equipment operation under part 20, that a manufacturer is seeking to certify as hearing aid compatible, as set forth in §20.19 of that part, shall include a statement indication compliance with the test requirements of §20.19 and indicating the appropriate U-rating for the equipment. The manufacturer of the equipment shall be responsible for maintaining the test results.

1.2 Details of Client

Applicant:	COOSEA GROUP (HK) COMPANY LIMITED
Address:	UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL, HONG KONG, CHINA
Manufacturer:	COOSEA GROUP (HK) COMPANY LIMITED
Address:	UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL, HONG KONG, CHINA



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent for the avective stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: <u>O shock the authenticity of testing / Inspection report & certificate, please contact us at telehome: (86-755) 8307 1443, </u>

South of No. 6 Plant, No. 1, Runsheng Road, Studiou Industrial Park, Studhou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 6 of 22

1.3 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.		
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone		
Post code:	215000		
Test Engineer:	Nature Shen		

1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC – Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions for Terms and Conditions for Terms on Counditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law context. The company is stelled the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 7 of 22

1.5 General Description of EUT

S

Device Type:	portable device					
Exposure Category:		uncontrolled environment / general population				
Product Name:	Smart Phone					
Model No.(EUT):	SL201D					
Trade Mark:	bounce					
FCC ID:	2A28USL201D					
Product Phase:	Identical Prototype					
IMEI:	355171430009902					
Hardware Version:	1.0					
Software Version:	SL201DD10005					
Antenna Type:	Integrated					
Device Operating Configuration	IS :					
Modulation Mode:	LTE: QPSK,16QAM	DMA: QPSK, HSPA+(16QAM); GFSK, π/4DQPSK,8DPSK				
Device Class:	В	· · · ·				
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	12			
HSDPA UE Category:	24	HSUPA UE Category	7			
DC-HSDPA UE Category:	24		•			
	4,tested with power level	5(GSM850)				
Deven Ole est	1,tested with power level					
Power Class:	3, tested with power cont	rol "all up"(WCDMA Bands)				
		rol Max Power(LTE Band)				
	Band	Tx (MHz)	Rx (MHz)			
	GSM 850	824 - 849	869 - 894			
	PCS 1900	1850 - 1910	1930 - 1990			
	WCDMA Band II	1850 -1910	1930 - 1990			
	WCDMA Band IV	1710 -1755	2110 - 2155			
	WCDMA Band V	824 - 849	869 - 894			
	LTE Band 2	1850 - 1910	1930 - 1990			
	LTE Band 4	1710 - 1755	2110 - 2155			
Frequency Bands:	LTE Band 5	824 - 849	869 - 894			
	LTE Band 12	699 - 716	729 - 746			
	LTE band 25	1850 - 1915	1930 - 1995			
	LTE Band 26	814 - 849	859 - 894			
	LTE Band 29	/	717 - 728			
	LTE Band 30	2305 - 2315	2350 - 2360			
	LTE band 66	1710 - 1780	2110 - 2180			
	LTE band 71	663 - 698	617 - 652			
	Bluetooth	2402~2480	2402~2480			
	Wi-Fi 2.4G	2412~2462	2412~2462			
		5150~5250	5150~5250			
	Wi-Fi 5G	5250~5350	5250~5350			
	WI-FI 5G	5470~5725	5470~5725			
	5725~5850 5725~58					
RF Cable:		led by the aplicant 🔲 Provided by th	ne laboratory			
	Model: BL-A41CT					
	Normal Voltage:	3.8V				
Battery Information:	Rated capacity:					
	Manufacturer:	Shenzhen Aerospace Electronic Co.,Ltd.				




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document is at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document is at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, sadvised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forger or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.:	SEWM2206000064RG08
Rev.:	01
Page:	8 of 22


1.5.1 DUT Antenna Locations

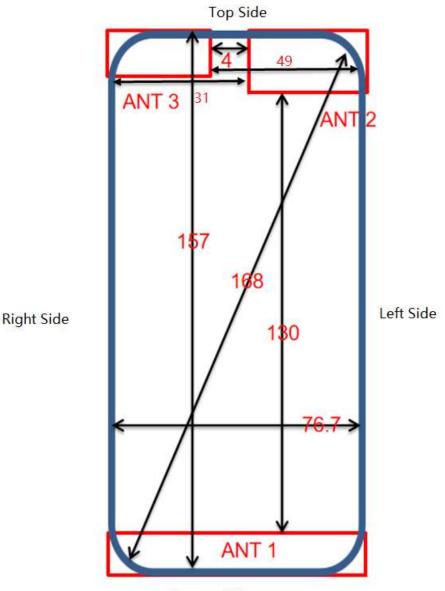

Bottom Side

Antenna	Support Band
Ant 1	GSM 850 WCDMA B5 LTE B5/B12/B26/B71/B30
Ant 2	GSM 1900 WCDMA B2/B4 LTE B2/B4/B25/B66
Ant 3	2.4GWIFI/BT 5GWIFI





1.5.2 List of air interfaces/frequency bands

Air Interface	Band (MHz)	Туре	ANSI C63.19 Tested	Simultaneous Transmitter	Name of Voice Service	Power Reduction
	850	vo	Yes	BT, Wi-Fi	CMRS Voice	NA
GSM	1900	0	res			
	EDGE	VD	Yes		NA	
	Band II					
WCDMA	Band IV	vo	Yes	BT, Wi-Fi	CMRS Voice	NA
	Band V					
	HSPA	DT	No	BT, Wi-Fi	NA	NA
	Band 2			BT, Wi-Fi		NA
	Band 4				VoLTE Google Duo*	
	Band 5					
	Band 12					
LTE (FDD)	Band 25	VD	Yes			
(100)	Band 26					
	Band 30					
	Band 66					
	Band 71					
	2450				VOWIFI - Google Duo* -	NA
	5200					NA
Wi-Fi	5300	VD	Yes	WWAN		NA
	5500					NA
	5800					NA
BT	2450	DT	No	WWAN	NA	NA

VO: Legacy Cellular Voice Service from Table 7.1 in 7.4.2.1 of ANSI C63.19-2011

DT: Digital Transport (no voice)

VD: IP Voice Service over Digital Transport

For protocols not listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation, the average speech level of -20 dBm0 should be used.

Remark:

1. The air interface is exempted from testing by low power exemption that its average antenna input power plus its MIF is ≤17 dBm and is rated as M4.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document is at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indermification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM-Doccheck@ss.com

South of No. 6 Plant, No. 1, Runsheng Road, Studiou Industrial Park, Studhou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 10 of 22

1.6 Test Specification

Identity	Document Title		
CFR 47 FCC Part 20	20.19 Hearing aid-compatible mobile handsets.		
	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices		
KDB 285076 D01	HAC Guidance v05r01		

1.7 ANSI C63.19-2011 limits

Emission Cotogorios	E-field emissions dB(V/m)			
Emission Categories	< 960 MHz	> 960 MHz		
Category M1	50-55	40-45		
Category M2	45-50	35-40		
Category M3	40-45	30-45		
Category M4	<40	<30		

Table 1: Telephone near-field categories in linear units

2 Calibration certificate


Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%

 Table 2:
 The Ambient Conditions



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, save at terms and conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of Idability, indermification and Jurisdiction issues defined therein. Any holder of this document is a dvised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forger or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000



3 HAC (T Coil) Measurement System

3.1 Measurement System Diagram for SPEAG Robotic

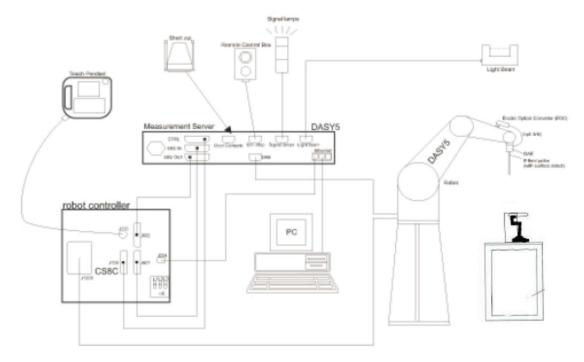


Fig. 1. The SPEAG Robotic Diagram

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- An Audio Magnetic probe.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The Test Arch SAM phantom
- The device holder for handheld mobile phones.
- Validation dipole kits allowing to validate the proper functioning of the system.



Unless otherwise agreed in writing, this document is issued by the Comp overleaf, available on request or accessible at http://www.sgs.com/en/Terms subject to Terms and Conditions for Electronic Documents at http://www.sg Advised that information contained hereon reflects the Company's findings Client's instructions, if any. The Company's sole responsibility is to its Cl transaction from exercising all their rights and obligations under the trans except in full, without prior written approval of the Company. Any unauthor appearance of this document is unlawful and offenders may be prosecuted to results shown in this test report refer only to the sample(s) tested and such as Attention: To check the authenticity of testing /inspection report & certifi- or email: CN.Doccheck@ss.com	-and-Conditions.aspx and, for electronic format documents, is com/en/Terms-and-Conditions/Terms-en-Document aspx. on issues defined therein. Any holder of this document is at the time of its intervention only and within the limits of lent and this document does not exonerate parlies to a action documents. This document cannot be reproduced traced alteration, forgery or faisification of the content or the fullest extent of the law. Unless otherwise stated the mple(s) are retained for 30 days only.
South of No. 6 Plant. No. 1, Runsheno Road, Suzhou Industrial Park. Suzhou Area. China (Jianosu) Pilot Free Trade Zone 215000	t (86–512) 62992980 www.sgsgroup.com.cn

Sourn of No. 6 Plant, No. 1, Kurstneng Koad, Suzhou industnai Park, Suzhou Area, China (Jiangsu) Piot Free Irade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 12 of 22

3.2 E-Field Probe

S

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material	
Calibration	In air from 100 MHz to 6.0 GHz (absolute accuracy ±6.0%, k=2)	
Frequency	(extended to 20 MHz for MRI), Linearity: ± 0.2 dB (100 MHz to 6 GHz)	
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)	solo and
Dynamic Range	2 V/m to > 1000 V/m; Linearity: ± 0.2 dB	
Dimensions	Tip diameter: 8 mm Distance from probe tip to dipole centers: 2.5 mm	EF3DV3 E-Field Probe

3.3 Test Arch

Description	Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot.	
Dimensions	length: 370 mm width: 370 mm height: 370 mm	Test Arch

3.4 Phone Holder

Description	Supports accurate and reliable positioning of any phone Effect on near field <+/- 0.5 dB	
		Phone Holder



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of fils document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report report roly to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CM.Doccheck@sgs.com"

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000



 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 13 of 22

4 Measurement uncertainty evaluation

Uncertainty Component	Uncertainty Value (%)	Probability Distribution	Divisor	ci €	Standard Uncertainty € (%)
Measurement system					
Probe calibration	±5.1	N	1	1	±5.1
Axial isotropy	±4.7	R	$\sqrt{3}$	1	±2.7
Sensor position	±16.5	R	$\sqrt{3}$	1	±9.5
Boundary effect	±2.4	R	$\sqrt{3}$	1	±1.4
Phantom Boundary Effect	±7.2	R	$\sqrt{3}$	1	±4.1
Linearity	±4.7	R	$\sqrt{3}$	1	±2.7
Scaling with PMR calibration	±10.0	R	$\sqrt{3}$	1	±5.8
System Detection limit	±1.0	R	$\sqrt{3}$	1	±0.6
Readout Electronics	±0.3	N	1	1	±0.3
Response time	±0.8	R	$\sqrt{3}$	1	±0.5
Integration time	±2.6	R	$\sqrt{3}$	1	±1.5
RF ambient conditions	±3.0	R	$\sqrt{3}$	1	±1.7
RF reflection	±12.0	R	$\sqrt{3}$	1	±6.9
Probe positioner	±1.2	R	$\sqrt{3}$	1	±0.7
Probe positioning	±4.7	R	$\sqrt{3}$	1	±2.7
Extrapolation and interpolation	±1.0	R	$\sqrt{3}$	1	±0.6
Related to test samples	•	•			
Device Positioning Vertical	±4.7	R	$\sqrt{3}$	1	±2.7
Device Positioning Lateral	±1.0	R	$\sqrt{3}$	1	±0.6
Device Holder and Phantom	±2.4	R	$\sqrt{3}$	1	±1.4
Power drift	±5.0	R	$\sqrt{3}$	1	±2.9
Phantom and Setup Related					
Phantom Thickness	±2.4	R	$\sqrt{3}$	1	±1.4
Combined Std. Uncertainty		$u'_{c} = \sqrt{\sum_{i=1}^{21} c}$	$u_i^2 u_i^2$		±16.3
Expanded Std. Uncertainty on Power (K=2)					±32.6
Expanded Std. Uncertainty on Field (K=2)					±16.3

Table 3: Measurement uncertainties for RF



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of fils document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report report roly to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CM.Doccheck@sgs.com"

South of No. 6 Plant, No. 1, Runsheng Road, Studhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 14 of 22

5 RF Emission Measurements Reference and Plane

Fig.3 illustrate the references and reference plane that shall be used in a typical EUT emissions measurement. The principle of this section is applied to EUT with similar geometry. Please refer to Appendix C for the setup photographs.

• The area is 5 cm by 5 cm.

The area is centered on the audio frequency output transducer of the EUT.

• The area is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.

• The measurement plane is parallel to, and 10 mm in front of, the reference plane.

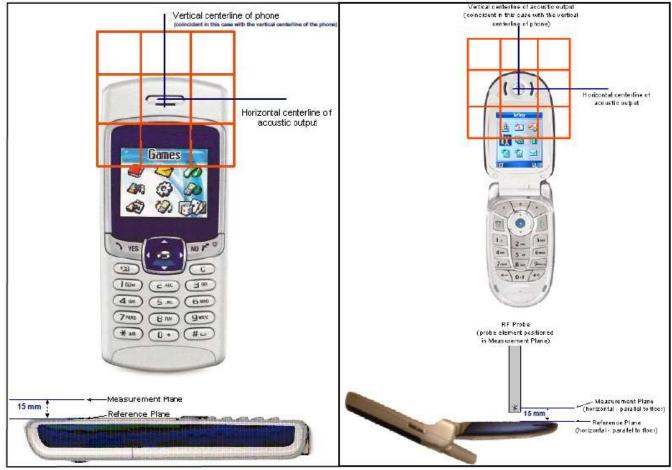


Fig.3 WD reference and plane for RF emission measurements



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein, Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in the set report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Studiou Industrial Park, Studhou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

Report No.: SEWM2206000064RG08 Rev.: 01 15 of 22 Page:

System Verification Procedure 6

6.1 System Check

Place a dipole antenna meeting the requirements given in ANSI C63.19-2011 in the position normally occupied by the WD. The dipole antenna serves as a known source for an electrical and magnetic output. Position the E-field probe so that the following occurs:

• The probes and their cables are parallel to the coaxial feed of the dipole antenna

 The probe cables and the coaxial feed of the dipole antenna approach the measurement area from opposite directions

• The center point of the probe element(s) are 15 mm from the closest surface of the dipole elements. Scan the length of the dipole with the E-field probe and record the two maximum values found near the dipole ends. Average the two readings and compare the reading to the expected value in the calibration certificate or the expected value in this standard.

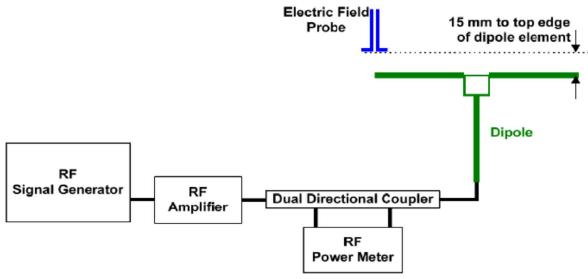


Fig.4 System verification

6.2 System Check Result

Mode	Frequency (MHz)	Input Power (mW)	E- Field 1 (V/m)	E- Field 2 (V/m)	Average Value (V/m)	Target Value (V/m)	Deviation (%)	Limit (%)	Test Date
CW	850	100	112.2	105.6	103.8	104.7	-6.68	±18	2022-07-04
CW	1880	100	86.6	86.43	81.69	84.06	-2.93	±18	2022-07-04
CW	2450	100	86	86.48	85.88	86.18	0.21	±18	2022-07-04

Note:

* Please refer to the appendix A for detailed measurement data and plot.

** Target value is provided by SPEAD in the calibration certificate of specific dipoles.

*** Deviation (%) = 100 * (Measured value minus Target value) divided by Target value.

**** ANSI C63.19 requires values within ± 18% are acceptable.



t (86-512) 62992980

 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 16 of 22

7 Modulation Interference Factor

The HAC Standard ANSI C63.19-2011 defines a new scaling using the Modulation Interference Factor (MIF). For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be developed that relates its interference potential to its steady-state rms signal level or average power level. This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. It is important to emphasize that the MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic. Any change in modulation characteristic requires determination and application of a new MIF

The Modulation Interference factor (MIF, in dB) is added to the measured average E-field (in dBV/m) and converts it to the RF Audio Interference level (in dBV/m). This level considers the audible amplitude modulation components in the RF E-field. CW fields without amplitude modulation are assumed to not interfere with the hearing aid electronics.

Modulations without time slots and low fluctuations at low frequencies have low MIF values, TDMA modulations with narrow transmission and repetition rates of few 100 Hz have high MIF values and give similar classifications as ANSI C63.19-2011.

ER3D, EF3D and EU2D E-field probes have a bandwidth <10 kHz and can therefore not evaluate the RF envelope in the full audio band. DASY52 is therefore using the indirect measurement method according to ANSI C63.19-2011 which is the primary method. These near field probes read the averaged E-field measurement. Especially for the new high peak-to-average (PAR) signal types, the probes shall be linearized by PMR calibration in order to not overestimate the field reading. Probe Modulation Response (PMR) calibration linearizes the probe response over its dynamic range for specific modulations which are characterized by their UID and result in an uncertainty specified in the probe calibration certificate. The MIF is characteristic for a given waveform envelope and can be used as a constant conversion factor if the probe has been PMR calibrated.

The evaluation method for the MIF is defined in ANSI C63.19-2011 section D.7. An RMS demodulated RF signal is fed to a spectral filter (similar to an A weighting filter) and forwarded to a temporal filter acting as a quasi-peak detector. The averaged output of these filtering is scaled to a 1 kHz 80% AM signal as reference. MIF measurement requires additional instrumentation and is not well suited for evaluation by the end user with reasonable uncertainty.

It may alliteratively be determined through analysis and simulation, because it is constant and characteristic for a communication signal. DASY52 uses well-defined signals for PMR calibration. The MIF of these signals has been determined by simulation and it is automatically applied.

The MIF measurement uncertainty is estimated as follows, declared by HAC equipment provider SPEAG, for modulation frequencies from slotted waveforms with fundamental frequency and at least 2 harmonics within 10 kHz:

1. 0.2 dB for MIF: -7 to +5 dB

2. 0.5 dB for MIF: -13 to +11 dB

3. 1 dB for MIF: > -20 dB


MIF values applied in this test report were provided by the HAC equipment provider of SPEAG, and the worst values for all air interface are listed below to be determine the Low-power Exemption.

SPEAG UID	UID version	Communication system	MIF(dB)
10021	DAC	GSM-FDD (TDMA,GMSK)	3.63
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	3.75
10460	AAA	UMTS-FDD (WCDMA, AMR)	-25.43
10225	AAA	UMTS-FDD (HSPA+)	-20.39
10169	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	-15.63
10170	CAE	LTE-FDD (SC-FDMA,1RB, 20 MHz,16-QAM)	-9.76
10172	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	-1.62
10173	CAG	LTE-TDD (SC-FDMA,1RB, 20 MHz,16-QAM)	-1.44
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	-2.02
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps)	0.12
10427	AAB	IEEE 802.11n (HT Green eld, 150 Mbps, 64-QAM)	-13.44
10069	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	-3.15
10616	AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	-5.57



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.rems-ep-coursent.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (68-75) 8307 1443, or email: CN_Doccheck@sss.com

South of No. 6 Prart, No. 1, Runsheng Read, Subdou Industrial Park, Subdou Area, China (Jaragos) Pilot Free Trade Zone 215000 t (86--512) 62992980 www.sgsgroup.com. 中国 - 苏州 - 中国 (江苏)自由贸易试验区苏州工业园区洞脏路1号的6号厂房南部 単编: 215000 t (86--512) 62992980 sgs.cohina@sgs.com



8 HAC Measurement Procedure

The evaluation was performed with the following procedure:

a) Confirm the proper operation of the field probe, probe measurement system, and other instrumentation and the positioning system.

b) Position the WD in its intended test position.

c) Set the WD to transmit a fixed and repeatable combination of signal power and modulation characteristic that is representative of the worst case (highest interference potential) encountered in normal use. Transiently occurring start-up, changeover, or termination conditions, or other operations likely to occur less than 1% of the time during normal operation, may be excluded from consideration.

d) The center subgrid shall be centered on the T-Coil mode perpendicular measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane, refer to illustrated in Figure 3. If the field alignment method is used, align the probe for maximum field reception.

e) Record the reading at the output of the measurement system.

f) Scan the entire 50 mm by 50 mm region in equally spaced increments and record the reading at each measurement point. The distance between measurement points shall be sufficient to assure the identification of the maximum reading.

g) Identify the five contiguous subgrids around the center subgrid whose maximum reading is the lowest of all available choices. This eliminates the three subgrids with the maximum readings. Thus, the six areas to be used to determine the WD's highest emissions are identified.

h) Identify the maximum reading within the nonexcluded subgrids identified in step g).

i) Convert the maximum reading identified in step h) to RF audio interference level, in, V/m, by taking the square root of the reading and then dividing it by the measurement system transfer function, established in 5.5.1.1. Convert the result to dB(V/m) by taking the base-10 logarithmand multiplying it by 20.

Indirect measurement method

Replacing step i) of 5.5.1.2, the RF audio interference level in dB(V/m) is obtained by adding the MIF (in dB) to the maximum steady-state rms field-strength reading, in dB(V/m), from step h). Use this result to determine the category rating.

j) Compare this RF audio interference level with the categories in Clause 8 and record the resulting WD category rating.


k) For the T-Coil mode M-rating assessment, determine whether the chosen perpendicular measurement point is contained in an included subgrid of the first scan. If so, then a second scan is not necessary. The first scan and resultant category rating may be used for the T-Coil mode M rating.

Otherwise, repeat step a) through step i), with the grid shifted so that it is centered on the perpendicular measurement point. Record the WD category rating.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Com-Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Studiou Industrial Park, Studhou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000



9 HAC RF Measurement Results

9.1 Max Tune-up

S

	Frequency Band	Tune-up (dBm)
	GSM850	34.00
0014	EDGE850	28.00
GSM	GSM1900	25.00
	EDGE1900	21.00
	Band V	24.50
	Band IV	18.00
WCDMA	Band II	18.00
	HSPA	23.00
	Band 2	19.00
	Band 4	19.00
	Band 5	25.00
	Band 12	25.00
LTE	Band 25	19.00
	Band 26	25.00
	Band 30	24.00
	Band 66	19.00
	Band 71	25.00

	Tune-up (dBm)	
	802.11b	16.00
	802.11g	16.00
2.4GHz WLAN	802.11n-HT20	16.00
	802.11n-HT40	16.00

	Tune-up (dBm)	
	802.11a	12.00
	802.11n-HT20	12.00
WLAN5GHz WLAN	802.11n-HT40	12.00
	802.11ac-HT20	12.00
	802.11ac-HT40	12.00
	802.11ac-HT80	12.00

Remark:

A fixed level power reduction is applied for LTE B2/B4/B25/B66, WCDAM B2/B4,GSM1900 and WLAN when handset operate "held to the ear" condition, the power reduction triggered by audio receiver detection. The audio receiver detection is used to determine head or body scenario.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions, Terms-and-Conditions, and the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be proceduced to the full-list extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) terretianed for 30 days only. Attention: To check the authenticity of testing / Inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or amail: Ch.Doccheck@ags.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 卸编: 215000

 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 19 of 22

9.2 Conducted RF Output Power

S

GSM 850						
	Burst Output Power(dBm)					
Chanr	nel	128	190	251	Tune up	
GSM(GMSK)	GSM	32.51	32.67	32.68	34.00	
	1 TX Slot	32.73	32.71	32.74	34.00	
GPRS/EGPRS	2 TX Slots	31.78	31.76	31.72	32.00	
(GMSK)	3 TX Slots	29.84	29.75	29.82	30.00	
	4 TX Slots	28.77	28.79	28.76	29.00	
	1 TX Slot	26.39	26.41	26.43	27.00	
	2 TX Slots	25.43	25.04	25.27	26.00	
EGPRS(8PSK)	3 TX Slots	23.17	22.83	23.13	24.00	
	4 TX Slots	21.86	21.81	21.78	22.00	

GSM 1900							
Chanr	512	661	810	Tune up			
GSM(GMSK)	GSM	23.78	23.81	23.55	25.00		
	1 TX Slot		23.94	23.97	25.00		
GPRS/EGPRS (GMSK)	2 TX Slots	22.39	22.38	22.34	22.50		
	3 TX Slots	20.84	20.95	20.88	21.00		
	4 TX Slots	19.99	19.88	19.61	20.50		
	1 TX Slot	20.41	20.46	20.35	21.00		
EGPRS(8PSK)	2 TX Slots	19.23	19.18	19.14	20.00		
EGPRS(OPSK)	3 TX Slots	17.04	17.04	17.12	18.00		
	4 TX Slots	15.68	15.87	15.64	16.00		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document is at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document is at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, sadvised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forger or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 20 of 22

9.3 Low-power Exemption

According to ANSI C63.19-2011, a RF air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤17 dBm for any of its operation modes.

Air Interface (Ant)	Max Average Antenna Input	Worst Case	Power +	C63.19 test required	
	Power (dBm)	MIF (dB)	MIF(dB)		
GSM850	34	3.63	37.63	Yes	
EDGE850	27	3.75	30.75	Yes	
GSM1900	25	3.63	28.63	Yes	
EDGE1900	21	3.75	24.75	Yes	
WCDMA	24	-25.43	-1.43	No	
WCDMA - HSPA	23	-20.39	2.61	No	
LTE - FDD	24	-9.76	14.24	No	
802.11b	16	-2.02	13.98	No	
802.11g	16	0.12	16.12	No	
802.11n-HT40	16	-13.44	2.56	No	
802.11n-HT20	16	-13.44	2.56	No	
802.11a	12	-3.15	8.85	No	
802.11n-HT20	12	-13.44	-1.44	No	
802.11n-HT40	12	-13.44	-1.44	No	
802.11ac-HT20	12	-5.57	6.43	No	
802.11ac-HT40	12	-5.57	6.43	No	
802.11ac-HT80	12	-5.57	6.43	No	

General Note:

1. According to ANSI C63.19 2011-version, for the air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is \leq 17 dBm for any of its operating modes.

2. HAC RF rating is M4 for the air interface which meets the low power exemption.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ss.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 21 of 22

Band	Test Mode	Channel	Frequency (MHz)	MIF (dB)	Audio Interference Level (dBV/m)	Margin to the next Level (dBV/m)	Power Drift (dB)	Category
GSM850	Voice	128	824.2	3.63	37.34	2.66	-0.09	M4
GSM850	Voice	190	836.6	3.63	37.38	2.62	-0.02	M4
GSM850	Voice	251	848.8	3.63	36.31	3.69	-0.04	M4
GSM1900	Voice	512	1850.2	3.63	23.91	6.09	-0.05	M4
GSM1900	Voice	661	1880	3.63	24.10	5.90	-0.01	M4
GSM1900	Voice	810	1909.8	3.63	26.09	3.91	0.01	M4

9.4 HAC RF Emission Test Results

Remark:

S

1. The detail RF Emission results please refer to appendix B.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document is at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Document is at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, sadvised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forger or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2206000064RG08

 Rev.:
 01

 Page:
 22 of 22

10 Equipment list

S

Equipment		Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
	Software	SPEAG	DASY52 52.10.4	NA	NCR	NCR
	DAE	SPEAG	DAE4	1327	2021-11-05	2022-11-04
	E-Field Probe	SPEAG	ER3DV6	2344	2021-07-19	2022-07-18
\square	Validation Kits	SPEAG	CD835V3	1052	2022-05-25	2023-05-24
	Validation Kits	SPEAG	CD1880V3	1044	2022-05-25	2023-05-24
	Validation Kits	SPEAG	CD2450V3	1044	2022-05-25	2023-05-24
\square	Test Arch SD HAC	SPEAG	NA	NA	NCR	NCR
	Universal Radio Communication Tester	R&S	CMW500	169633	2022-02-14	2023-02-13
\square	Signal Generator	R&S	SMB100A	182393	2022-02-15	2023-02-14
	Preamplifier	Qiji	YX28980933	202104001	NCR	NCR
\square	Power Meter	Anritsu	ML2495A	2136003	2021-12-4	2022-12-3
	Power Sensor	Anritsu	MA2411B	1911376	2021-12-4	2022-12-3
\square	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
\square	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR
\square	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR
	Humidity and Temperature Indicator	MingGao	MingGao	NA	2021-10-09	2022-10-08

Note:

1. All the equipments are within the valid period when the tests are performed.

----END----



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indexing the subject to Terms and Conditions on the rein any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000