


EUT	BE5000 Ceiling Mount Wi-Fi 7 Access Point	Date of Test	2025-01-07
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	21.2°C /50%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

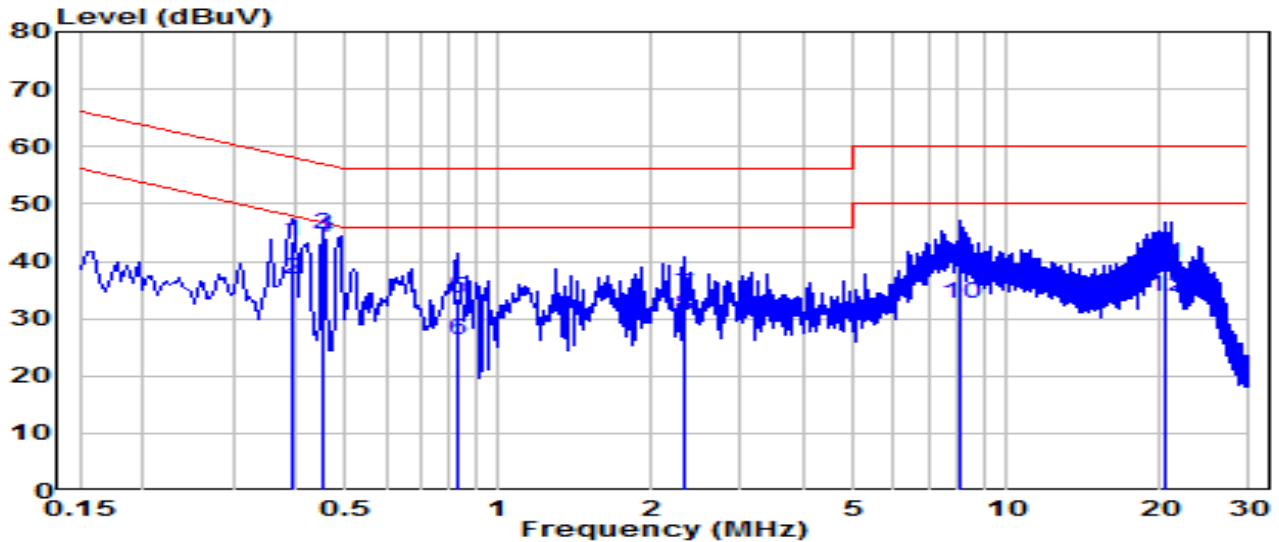

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.393	33.97	9.64	43.61	-14.39	58.00	QP
2	0.393	27.25	9.64	36.89	-11.11	48.00	Average
3	* 0.451	35.03	9.65	44.68	-12.17	56.85	QP
4	* 0.451	34.38	9.65	44.03	-2.82	46.85	Average
5	0.829	23.96	9.67	33.64	-22.36	56.00	QP
6	0.829	16.46	9.67	26.13	-19.87	46.00	Average
7	2.328	24.46	9.71	34.17	-21.83	56.00	QP
8	2.328	20.65	9.71	30.37	-15.63	46.00	Average
9	8.051	29.14	9.84	38.98	-21.02	60.00	QP
10	8.051	22.64	9.84	32.48	-17.52	50.00	Average
11	20.474	29.42	10.00	39.42	-20.58	60.00	QP
12	20.474	23.72	10.00	33.72	-16.28	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2412TW0127-UT” file.

Appendix B : External Photograph

Refer to “2412TW0127-UE” file.

Appendix C : Internal Photograph

Refer to “2412TW0127-UI” file.

_____ The End _____