


REV.	DESCRIPTION	REFERENCE	DATE	APPROVED
A	FIRST RELEASE		21/06/2020	Gilad E

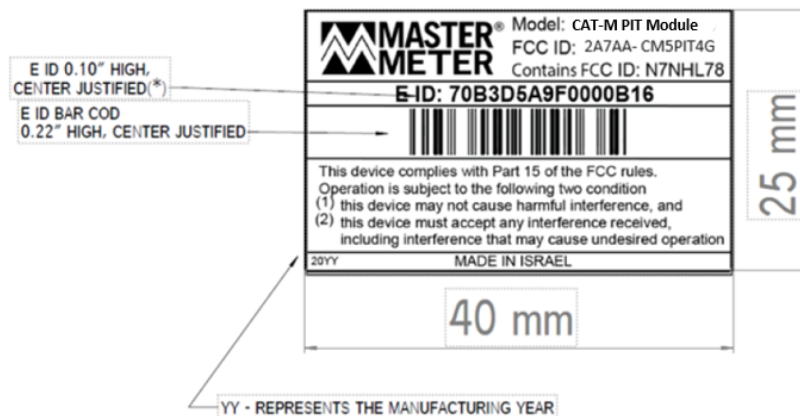

NOTES:

1. MATERIAL:
 - a. WHITE POLYESTER.
 - b. TOTAL LABEL THICKNESS: 0.06mm
 - c. ADHESIVE: PERMANENT ACRYLIC.
 - d. LAMINATION REQUIRED.
 - e. TEMPERATURE RANGE: -40° TO 150°C.
 - f. CHEMICAL RESISTANCE TO ALCOHOL (ISOPROPYL) 70% AND 99%.
 - g. - UL APPROVED LABEL MATERIAL.
 - UL APPROVED PRINTING.
2. PRINTING:
 - a. THE FONT AND HEIGHT OF THE TEXT ARE SPECIFIED ON THE DRAWING.
 - b. COLOR - BLACK

WEIGHT [g] :

MATERIAL [generic name] :

Arad Measuring Technologies
ENGINEERING DEPARTMENT

STATUS:

	NAME	DATE	NAME	Water-UV resistant CAT-M-Booster FCCID 25x40						
DRAWN	Yanina Milavsky	21/06/2020								
DESIGNED	Yanina Milavsky	21/06/2020								
CHECKED										
APPROVED										
				ISO 2768	0.5-6	6-30	30-120	120-400	400-1000	ANGULAR
				TOLERANCE	±0.1	±0.2	±0.3	±0.5	±0.8	±30'
SHEET 1 OF 1				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS						
DR				CAT.NO./ REV: 9 50 035 18 /A						

Water-UV resistant CAT-M-Booster
FCCID 25x40

ISO 2768	0.5-6	6-30	30-120	120-400	400-1000	ANGULAR
TOLERANCE	±0.1	±0.2	±0.3	±0.5	±0.8	±30'



A4

CONTENTS PROPERTY OF
ARAD MEASURING TECHNOLOGIES LTD.
UNAUTHORIZED USE IS NOT PERMITTED

SCALE
1:1
()



Dwg: C:\Arad_Tech_Vault\products\inle booster flute\mechanical\95003518_Water-UV resistant CAT-M-Booster FCCID 25x40

Model:

Model Rev: