



TEST REPORT

REGULATIONS : FCC Part15 C §15.247
RSS-210 Issue 8

Applicant	Testing Laboratory
JVC KENWOOD Corporation 1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan Tel. +81 45 939 6254 Fax.: +81 45 939 6261	Intertek Japan K.K. Matsuda Laboratory (Open area test site) 1283 Yadoriki, Matsuda-machi, Ashigarakami-gun, Kanagawa-ken, 258-0001 Japan Tel.: +81 465 89 2316 Fax.: +81 465 89 2160 (Anechoic chamber) 1386 Yadoriki, Matsuda-machi, Ashigarakami-gun, Kanagawa-ken, 258-0001 Japan Tel.: +81 465 88 4100 Fax.: +81 465 88 4300 URL: http://www.japan.intertek-etlsemko.com

Equipment Type	UHF DIGITAL TRANSCEIVER with Bluetooth
Trademark	KENWOOD
FCC Model(s)	NX-5800-K2, NX-5800-F2
IC Model(s)	NX-5800-K2
Serial No.	No.25 (for Radiated testing) No.27 (for Antenna Port Conductive testing)
FCC ID	K44471201
IC CN and UPN	282F-471201
Test Result	Complied
Report Number	14080361JMA-001
Original Issue Date	September 24, 2014

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Approved by

Hideaki Kosemura
[Manager]

Tested by

Shiro Kobayashi
[Engineer]

TABLE OF CONTENTS

	Page
SECTION 1. GENERAL INFORMATION	3
SECTION 2. SUMMARY OF TEST RESULTS	4
SECTION 3. EQUIPMENT UNDER TEST	5
SECTION 4. SUPPORT EQUIPMENT	6
SECTION 5. USED CABLE(S).....	7
SECTION 6. TEST CONFIGURATION	8
SECTION 7. OPERATING CONDITION	9
SECTION 8. UNCERTAINTY	10
SECTION 9. TEST DATA	11
9.1 20 dB Bandwidth and 99 % Occupied Bandwidth	11
9.2 Maximum Peak Output Power.....	12
9.3 Carrier Frequency Separation	14
9.4 Number of Hopping Frequency	15
9.5 Time of Occupancy.....	16
9.6 Radiated Spurious Emissions and Band Edge of Restrict Band.....	18
9.7 Band Edge of Authorized Frequency Band	28
9.8 Spurious RF Conducted Emissions.....	31
9.9 AC Conducted Emissions	32
9.10 Receiver Spurious Emissions.....	34
SECTION 10. LIST AND DIAGRAM OF MEASURING INSTRUMENTS	35
ANNEX	40
A. HARD COPY OF SPECTRUM PLOTS.....	41
B. PHOTOGRAPHS OF EMISSION SET-UP	64

SECTION 1. GENERAL INFORMATION

Test Performed

EUT Received	August 11, 2014
Date of Test	From August 25 2014 to September 12, 2014
Standard Applied	FCC Part15 C §15.247 RSS-210 Issue 8
Test methods	FCC Public Notice DA 00-705 ANSI C63.4-2003 RSS-210 Issue 8 RSS-Gen Issue 3
Deviation from Standard(s)	None

Qualifications of Testing Laboratory

Accreditation	Scope	Lab. Code	Remarks
VLAC	EMC Testing	VLAC-008-3	JAPAN
BSMI	EMC Testing	SL2-IN-E-6009	TAIWAN
Filing			
VCCI	EMC Testing	A-0127	JAPAN
FCC	EMC Testing	Designation Number : JP0009	USA
IC	EMC Testing	2042S-1, 2042S-2, 2042S-3, 2042S-4	Canada
CB-Scheme	EMC Testing	TL223	IECEE
SAUDI ARABIA	EMC Testing	N/A	

Abbreviations

EUT	Equipment Under Test	DoC	Declaration of Conformity
AMN	Artificial Mains Network	ISN	Impedance Stabilization Network
LISN	Line Impedance Stabilization Network	Q-P	Quasi-peak
AMP	Amplifier	AVG	Average
ATT	Attenuator	PK	Peak
ANT	Antenna	Cal	Calibration
BBA	Broadband Antenna	N/A	Not applicable or Not available
DIP	Dipole Antenna	LCD	Liquid-Crystal Display
AE	Associated Equipment	HDMI	High-Definition Multimedia Interface

SECTION 2. SUMMARY OF TEST RESULTS

Test Item	Specification	Results	Detail
20 dB Bandwidth and 99 % Occupied Bandwidth	FCC Part15C §15.247 (a) (1) RSS-210 A8.1 (a) RSS-Gen 4.6.1	N/A	Section 9.1
Maximum Peak Output Power	FCC Part15C §15.247 (b) (1) RSS-210 A8.4 (2)	PASS	Section 9.2
Carrier Frequency Separation	FCC Part15C §15.247 (a) (1) RSS-210 A8.1 (b)	PASS	Section 9.3
Number of Hopping Frequency	FCC Part15C §15.247 (a) (1) (iii) RSS-210 A8.1 (d)	PASS	Section 9.4
Time of occupancy	FCC Part15C §15.247 (a) (1) (iii) RSS-210 A8.1 (d)	PASS	Section 9.5
Radiated Spurious Emissions and Restrict Band edge	FCC Part15C §15.209, §15.205 RSS-210 2.2, A8.5	PASS	Section 9.6
Band Edge of Authorized Frequency Band	FCC Part15C §15.247 (d) RSS-210 A8.5	PASS	Section 9.7
Spurious RF Conducted Emissions	FCC Part15C §15.247 (d) RSS-210 A8.5	PASS	Section 9.8
AC Conducted Emissions	FCC Part15C §15.207 RSS-Gen 7.2.2	PASS	Section 9.9
Receiver Spurious Emissions	RSS-Gen 6.1	PASS	Section 9.10

Limitation on Results

The test result of this report is effective equipment under test itself and under the test configuration described on the report.

This test report does not assure that whether the test result taken in other testing laboratory is compatible or reproducible to the test result on this report or not.

SECTION 3. EQUIPMENT UNDER TEST

The equipment under test (EUT) consisted of the following apparatus.

3.1 System Configuration

Symbol	Item	Model No.	Serial No.	Manufacturer
A	UHF DIGITAL TRANSCEIVER with Bluetooth	NX-5800-K2 NX-5800-F2	No.25 (for Radiated testing) No.27 (for ANT Port Conductive testing)	JVC KENWOOD Corporation
Rated Power : DC 13.6 V +/- 15 %, 13.0 A Maximum				
Supplied Power : DC 13.6 V				
Condition of Equipment		Prototype		
Type		Mobile type		
Suppression Devices		No Modifications by the laboratory were made to the device		

3.2 Port(s)/Connector(s)

Port Name	Connector Type	Connector Pin	Remarks
ACC	D-sub	25 pin	
External Speaker	3.5φ	2 pin	
RF Antenna	M	2 pin	
Microphone	RJ-45	8 pin	
GPS Antenna	SMA	2 pin	
Ignition sense	Original	2 pin	

3.3 Highest Frequency Generated / Used

Operating Frequency	Board Name	Remarks
512 MHz	TXRX UNIT	
4960 MHz	Bluetooth UNIT	

3.4 Over View of EUT

Access method	Bluetooth Version 3.0
Rated Output Power	2.5 mW
Frequency Range of Operating	2402 – 2480 MHz
Number of Channels	79 ch, 1 MHz step
Modulation Method	FHSS (GFSK, π /4DQPSK, 8DPSK)
Antenna Type and Gain	Integrated Printed PCB Antenna, 1.69 dBi
Antenna Connector	None

SECTION 4. SUPPORT EQUIPMENT

The EUT was supported by the following equipment during the test.


Symbol	Item	Model No.	Serial No.	Manufacturer	FCC ID
B	REMOTE CONTROL HEAD	KCH-19	No.25 (for Radiated testing) No.27 (for ANT Port Conductive testing)	JVC KENWOOD Corporation	N/A
C	SECURE CRYPTOGRAPHIC MODULE	KWD-AE30	No.25 (for Radiated testing) No.27 (for ANT Port Conductive testing)	JVC KENWOOD Corporation	N/A
D	External Speaker	KES-3	No.1	JVC KENWOOD Corporation	N/A
E	Microphone with 12-Keypad	KMC-36	CGI-51327	JVC KENWOOD Corporation	N/A
F	Dummy Load	SK-50	None	JVC KENWOOD Corporation	N/A
G	GPS Antenna	KRA-40	N/A	JVC KENWOOD Corporation	N/A
H	DC Power Supply (1)	PAB 25-1TR	28020014	KIKUSUI	N/A
I	DC Power Supply (2)	PMC35-3A	LE000716	KIKUSUI	N/A
Supplied Power:					
H, I	AC 100 V, 50 Hz				

SECTION 5. USED CABLE(S)

The following cable(s) was used for the test.

No.	Name	Length (m)	Shield	Metal Connector	Ferrite Core
1	Speaker cable	2.90	No	No	
2	Mic. Cable	0.55	No	No	
3	Ignition sense cable	0.12	No	No	
4	KCT-46 (Ignition sense cable)	3.10	No	No	
5	GPS Antenna cable	2.00	No	No	
6	ACC cable	1.80	Yes	Yes	
7	DC cable	0.25	No	No	
8	DC cable	3.40	No	No	
9	Power cable for DC Power Supply	2.00	No	No	

SECTION 6. TEST CONFIGURATION

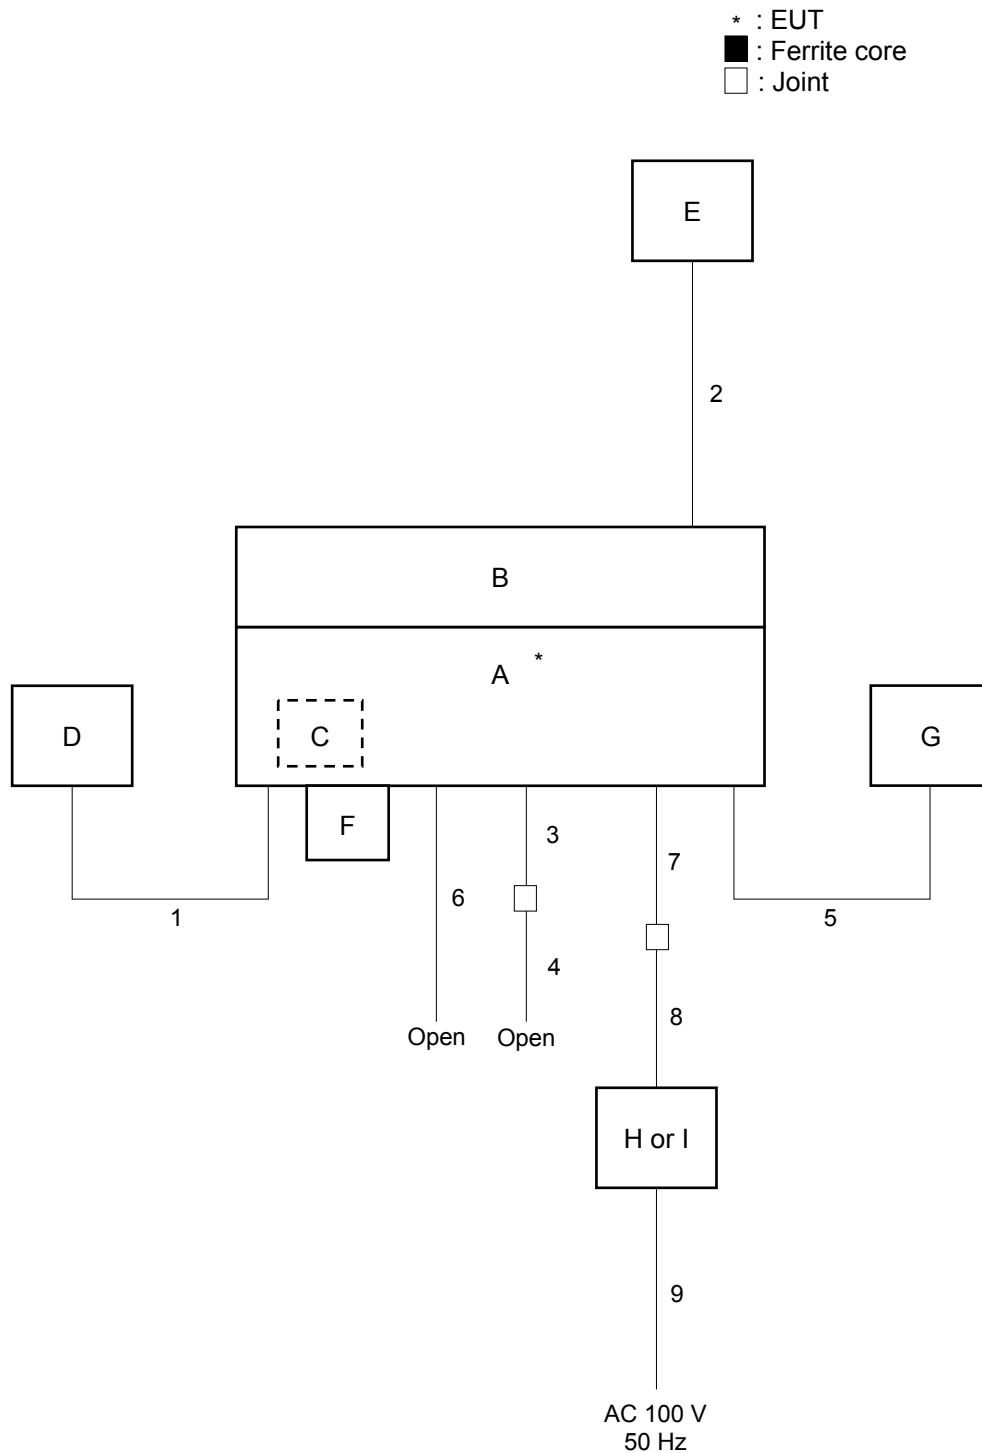

The symbols and numbers assigned to the equipment and cables on this diagram correspond to the ones in Sections 3 to 5.

SECTION 7. OPERATING CONDITION

The test was carried out under the following mode.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

7.1 Test Channel

In accordance with Section 15.31 (m), all test items was conducted in the following three channels:

Test Channel	Frequency [MHz]
Low	2402
Middle	2441
High	2480

7.2 Test modes

Test Item	Operating modes
Maximum Peak Output Power	Hopping OFF DH1, DH3, DH5 2-DH1, 2-DH3, 2-DH5 3-DH1, 3-DH3, 3-DH5
Carrier Frequency Separation	Hopping ON DH5, 2-DH5, 3-DH5
Number of Hopping Frequency	Hopping ON DH5, 2-DH5, 3-DH5
Time of occupancy	Hopping OFF DH1, DH3, DH5 2-DH1, 2-DH3, 2-DH5 3-DH1, 3-DH3, 3-DH5
Radiated Spurious Emissions and Restrict Band edge	Hopping OFF DH5, 2-DH5, 3-DH5
Band Edge of Authorized Frequency Band	Hopping OFF/ON DH5, 2-DH5, 3-DH5
Spurious RF Conducted Emissions	Hopping ON DH5, 2-DH5, 3-DH5
AC Conducted Emissions	Hopping ON DH5, 2-DH5, 3-DH5
Receiver Spurious Emissions	Transmit OFF, Receive mode

Note: The Test modes were configured in typical fashion as a customer would normally use it.

SECTION 8. UNCERTAINTY

The following uncertainty represents the expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Traceability to national standard in SI units is ensured with these values.

Compliance with the limits in this standard are determined without in consideration of the measurement uncertainty of the measurement instrumentation.

8.1 Emission tests

Test items	$U_{lab} [k = 2]$	U_{cisp}
Radiated Spurious Emissions at 3m		
30 MHz – 1000 MHz	+/- 3.96 dB	6.3 dB
Above 1 GHz	+/- 4.46 dB	5.2 dB
AC Conducted Emissions		
150 kHz – 30 MHz	+/- 1.54 dB	3.4 dB

The above expanded instrumentation uncertainty, U_{lab} , is estimated in accordance with CISPR 16-4-2:2011.

8.2 RF Conducted tests

Test Items	$U_{lab} [k = 2]$
Bandwidth	+/- 1.42 %
Conducted Emissions	+/- 1.82 dB

SECTION 9. TEST DATA

9.1 20 dB Bandwidth and 99 % Occupied Bandwidth

Regulations	FCC Part15C §15.247 (a) (1) RSS-210 A8.1 (a) RSS-Gen 4.6.1
Test Method/Guide	FCC Public Notice DA 00-705

Test Procedure

- The EUT and test instrument were set up as shown on section 10.1.
- Adjust the test instrument for the following setting:

RBW	:	≥ 1 % of the 20 dB bandwidth
VBW	:	≥ 3 x RBW
Span	:	approximately 3 times the 20 dB bandwidth
Detector	:	Peak
Sweep Time	:	Auto
Trace mode	:	Max Hold
- Allow trace to fully stabilize.
- Use "Occupied Bandwidth Measurement" function to measure the 20 dB bandwidth.

Test Result

Location	Matsuda No.4 Test Site
Test date	Sep. 08, 2014
Temperature	23.8 [degree C]
Humidity variation	47.0 [%]
Test Engineer	Shiro Kobayashi

Operating modes	Frequency [MHz]	20 dB Bandwidth [MHz]	99 % Bandwidth [MHz]
DH5	2402	0.968	0.860
	2441	0.971	0.862
	2480	0.968	0.861
2-DH5	2402	1.322	1.195
	2441	1.323	1.196
	2480	1.320	1.194
3-DH5	2402	1.309	1.197
	2441	1.309	1.197
	2480	1.312	1.198

Spectrum Plots

See ANNEX A.1.

9.2 Maximum Peak Output Power

Regulations	FCC Part15C §15.247 (b) (1) RSS-210 A8.4 (2)
Test Method/Guide	FCC Public Notice DA 00-705

Test Procedure

1. The EUT and test instrument were set up as shown on section 10.1.
2. Adjust the test instrument for the following setting:

RBW	:	$\geq 1\%$ of the 20 dB bandwidth
VBW	:	$\geq 3 \times$ RBW
Span	:	approximately 5 times the 20 dB bandwidth
Detector	:	Peak
Sweep Time	:	Auto
Trace mode	:	Max Hold

Note: The value of the "20 dB bandwidth", from the result of section 9.1.

3. Allow trace to fully stabilize.
4. Use the peak search function to measure the peak of the emission.
5. Measurement data correction;

Measured Value [dBm] = Reading [dBm] + Factor [dB]

*Factor = Cable Loss [dB] + Attenuator [dB]

Margin [dB] = Limit [dBm] - Measured Value [dBm]

Test Result

Location	Matsuda No.4 Test Site
Test date	Sep. 08, 2014
Temperature	23.8 [degree C]
Humidity variation	47.0 [%]
Test Engineer	Shiro Kobayashi

Operating modes	Freq. [MHz]	Reading [dBm]	Factor [dBm]	Measured Value [dBm]	Limit		Margin [dB]
					[mW]	[dBm]	
DH1	2402	-21.77	20.57	-1.20	125	20.97	22.17
	2441	-21.48	20.57	-0.91			21.88
	2480	-21.10	20.58	-0.52			21.49
DH3	2402	-21.79	20.57	-1.22			22.19
	2441	-21.53	20.57	-0.96			21.93
	2480	-21.12	20.58	-0.54			21.51
DH5	2402	-21.79	20.57	-1.22			22.19
	2441	-21.51	20.57	-0.93			21.90
	2480	-21.13	20.58	-0.55			21.52
2-DH1	2402	-21.19	20.57	-0.62			21.59
	2441	-20.88	20.57	-0.31			21.28
	2480	-20.50	20.58	0.08			20.89
2-DH3	2402	-21.19	20.57	-0.62			21.59
	2441	-20.88	20.57	-0.31			21.28
	2480	-20.51	20.58	0.07			20.90
2-DH5	2402	-21.19	20.57	-0.62			21.59
	2441	-20.89	20.57	-0.32			21.29
	2480	-20.51	20.58	0.07			20.90
3-DH1	2402	-20.56	20.57	0.01			20.96
	2441	-20.26	20.57	0.32			20.65
	2480	-19.86	20.58	0.71			20.26
3-DH3	2402	-20.58	20.57	-0.01			20.98
	2441	-20.25	20.57	0.32			20.65
	2480	-19.86	20.58	0.72			20.25
3-DH5	2402	-20.60	20.57	-0.03			21.00
	2441	-20.27	20.57	0.31			20.66
	2480	-19.89	20.58	0.68			20.29

Spectrum Plots

See ANNEX A.2

9.3 Carrier Frequency Separation

Regulations	FCC Part15C §15.247 (a) (1) RSS-210 A8.1 (b)
Test Method/Guide	FCC Public Notice DA 00-705

Test Procedure

1. The EUT and test instrument were set up as shown on section 10.1.
2. Adjust the test instrument for the following setting:

RBW	:	≥ 1 % of the span
VBW	:	≥ 3 x RBW
Span	:	Including emission band
Detector	:	Peak
Sweep Time	:	Auto
Trace mode	:	Max Hold
3. Allow trace to fully stabilize.
4. Use delta marker function to measure the separation between the two channels.

Test Result

Location	Matsuda No.4 Test Site
Test date	Sep. 08, 2014
Temperature	23.8 [degree C]
Humidity variation	47.0 [%]
Test Engineer	Shiro Kobayashi

Operating modes	Frequency [MHz]	Measured Value [MHz]	Limit [MHz]
DH5	2402	1.000	≥ 0.645
	2441	1.000	≥ 0.647
	2480	1.000	≥ 0.645
2-DH5	2402	1.000	≥ 0.881
	2441	1.000	≥ 0.882
	2480	1.000	≥ 0.88
3-DH5	2402	1.000	≥ 0.873
	2441	1.000	≥ 0.873
	2480	1.000	≥ 0.875

Note: Limits were applied to two-thirds of 20 dB bandwidth.
The value of the "20 dB bandwidth", from the result of section 9.1.

Spectrum Plots

See ANNEX A.3

9.4 Number of Hopping Frequency

Regulations	FCC Part15C §15.247 (a) (1) (iii) RSS-210 A8.1 (d)
Test Method/Guide	FCC Public Notice DA 00-705

Test Procedure

1. The EUT and test instrument were set up as shown on section 10.1.
2. Adjust the test instrument for the following setting:

RBW	:	≥ 1% of the span
VBW	:	≥ 3 x RBW
Span	:	Including emission band
Detector	:	Peak
Sweep Time	:	Auto
Trace mode	:	Max Hold
3. Allow trace to fully stabilize.
4. Count the peaks.

Test Result

Location	Matsuda No.4 Test Site
Test date	Sep. 08, 2014
Temperature	23.8 [degree C]
Humidity variation	47.0 [%]
Test Engineer	Shiro Kobayashi

Operating modes	Measured Value	Limit
DH5	79	≥ 15
2-DH5	79	
3-DH5	79	

Spectrum Plots

See ANNEX A.4

9.5 Time of Occupancy

Regulations	FCC Part15C §15.247 (a) (1) (iii) RSS-210 A8.1 (d)
Test Method/Guide	FCC Public Notice DA 00-705

Test Procedure

1. The EUT and test instrument were set up as shown on section 10.1.
2. Adjust the test instrument for the following setting:

RBW	:	1 MHz
VBW	:	3 MHz
Span	:	0 Hz
Detector	:	Peak
Sweep Time	:	As necessary to capture the entire dwell time per hopping channel
Trace mode	:	Single, Use Video Trigger
3. Use delta marker function to measure the transmit time as per hop.
4. By the following method, calculated time of occupancy;

[illegible]

(2) Number of hops per sec in each channel
= Number of hops per sec / number of hopping channel.

(3) Specified periods [sec]
= 0.4 [sec] x number of hopping channels.

(4) Number of hops per specified periods in each channel
= Number of hops per sec in each channel x Specified periods [sec].

(5) Time of occupancy [ms]
= Number of hops per specified periods in each channel x the transmit time as per hop [ms].

Test Result

Test date	Sep. 08, 2014
Location	Matsuda No.4 Test Site
Temperature	23.8 [degree C]
Humidity variation	47.0 [%]
Test Engineer	Shiro Kobayashi

Operating modes	Number of hops per channel in specified period	Transmit Time per Hop [ms]	Time of Occupancy [ms]	Limit [ms]
DH1	320.00	0.3991	127.71	400.00
DH3	160.00	1.6550	264.80	
DH5	106.67	2.9030	309.65	
2-DH1	320.00	0.3191	102.11	
2-DH3	160.00	0.9421	150.74	
2-DH5	106.67	1.5660	167.04	
3-DH1	320.00	0.2778	88.90	
3-DH3	160.00	0.6891	110.26	
3-DH5	106.67	1.1040	117.76	

Spectrum Chart

See ANNEX A.5

9.6 Radiated Spurious Emissions and Band Edge of Restrict Band

Regulations	FCC Part15C §15.209, §15.205 RSS-210 2.2, A8.5
Test Method/Guide	ANSI C63.4-2003

Test Procedure

1. The EUT and test instrument were set up as shown on section 10.3.
2. The measurement antenna was placed at a distance of 3 m from the EUT.
4. The turntable azimuth (EUT direction) and antenna height are adjusted the position so that maximum field strength is obtained for each frequency spectrum to be measured.
The equipment and cables are arranged or manipulated within the range of the test standard in the above condition. At least six highest spectrums are measured by the test receiver (below 1 GHz) and spectrum analyzer (above 1 GHz).
5. Adjust the test instrument for the following setting:

Frequency	Instruments	Detector	RBW	VBW	Remarks
30 – 1000 MHz	CISPR Receiver	QP	120 kHz	N/A	-
Above 1000 MHz	Spectrum Analyzer	Peak	1 MHz	1 MHz	for Peak
				10 Hz	for Average

6. Measurement data correction;

$$\text{Emission Level [dBuV/m]} = \text{Reading [dBuV]} + \text{Factor [dB/m]}$$

$$\text{Margin [dB]} = \text{Limit [dBuV/m]} - \text{Emission Level [dBuV/m]}$$

* Factor = Antenna Factor + Amplifier gain + Cable loss + Attenuator (+ Filter)

Note: Did not carried out the fainal measurement about frequency range of 9 kHz to 30 MHz, because result of pre-check in shield room, spurious emissions was not detected.

Test Result

Operating mode	DH5, 2402 MHz				
Location	Matsuda No.4 Test Site				
Test date	30 – 1000 MHz,		2 – 3 GHz,		1-2, 3-18 GHz, 18 – 25 GHz
	Sep. 4, 2014,		Aug. 26, 2014,		Aug. 27, 2014, Aug. 26, 2014
Temperature	23.0,	24.0,	22.0,	24.0	[degree C]
Humidity variation	58.0	70.0,	68.0,	70.0	[%]
Test Engineer	Shiro Kobayashi				

No.	Freq. [MHz]	Detector	Reading [dBuV]		Factor [dB/m]	Emission Level [dBuV/m]		Limit [dBuV/m]	Margin [dB]	
			Hori	Vert		Hori	Vert		Hori	Vert
1	44.16	QP	-	32.7	-7.9	-	24.8	40.0	-	15.2
2	97.92	QP	-	33.2	-11.4	-	21.8	43.5	-	21.7
3	132.48	QP	32.0	33.2	-7.4	24.6	25.8	43.5	18.9	17.7
4	193.92	QP	29.5	31.7	-8.5	21.0	23.2	43.5	22.5	20.3
5	205.44	QP	31.6	31.9	-8.7	22.9	23.2	43.5	20.6	20.3
6	224.64	QP	34.2	33.7	-7.9	26.3	25.8	46.0	19.7	20.2
7	288.00	QP	40.0	34.3	-5.4	34.6	28.9	46.0	11.4	17.1
8	595.20	QP	26.5	24.6	3.3	29.8	27.9	46.0	16.2	18.1
9	633.60	QP	25.4	24.4	4.2	29.6	28.6	46.0	16.4	17.4
10	902.40	QP	21.7	21.1	8.6	30.3	29.7	46.0	15.7	16.3
11	1171.20	PEK	36.3	36.1	-3.6	32.7	32.5	74.0	41.3	41.5
12	1171.20	AVG	28.0	27.2	-3.6	24.4	23.6	54.0	29.6	30.4
13	1209.60	PEK	35.3	35.3	-3.4	31.9	31.9	74.0	42.1	42.1
14	1209.60	AVG	25.9	26.0	-3.4	22.5	22.6	54.0	31.5	31.4
15	2351.85	PEK	44.5	46.0	3.7	48.2	49.7	74.0	25.8	24.3
16	2351.85	AVG	28.3	28.4	3.7	32.0	32.1	54.0	22.0	21.9
17*	2376.88	PEK	48.3	49.3	3.7	52.0	53.0	74.0	22.0	21.0
18*	2376.88	AVG	28.4	28.4	3.7	32.1	32.1	54.0	21.9	21.9
19	4804.00	PEK	33.9	33.8	7.7	41.6	41.5	74.0	32.4	32.5
20	4804.00	AVG	24.7	24.8	7.7	32.4	32.5	54.0	21.6	21.5
21	6411.60	PEK	37.4	38.3	9.8	47.2	48.1	74.0	26.8	25.9
22	6411.60	AVG	28.5	29.7	9.8	38.3	39.5	54.0	15.7	14.5
23	7206.00	PEK	34.0	33.5	12.6	46.6	46.1	74.0	27.4	27.9
24	7206.00	AVG	24.9	24.9	12.6	37.5	37.5	54.0	16.5	16.5
25	9608.00	PEK	33.0	33.3	17.1	50.1	50.4	74.0	23.9	23.6
26	9608.00	AVG	24.0	24.1	17.1	41.1	41.2	54.0	12.9	12.8

Note.

- * : Band Edge of Restrict Band
- : Measurement limit

Any Spurious emissions higher than the frequency reported in the table above were not detected during the measurement.

Operating mode	DH5, 2441 MHz				
Location	Matsuda No.4 Test Site				
Test date	30 – 1000 MHz,		2 – 3 GHz,		1-2, 3-18 GHz, 18 – 25 GHz
	Sep. 4, 2014,		Aug. 26, 2014,		Aug. 27, 2014, Aug. 26, 2014
Temperature	23.0,	24.0,	22.0,	24.0	[degree C]
Humidity variation	58.0	70.0,	68.0,	70.0	[%]
Test Engineer	Shiro Kobayashi				

No.	Freq. [MHz]	Detector	Reading [dBuV]		Factor [dB/m]	Emission Level [dBuV/m]		Limit [dBuV/m]	Margin [dB]	
			Hori	Vert		Hori	Vert		Hori	Vert
1	44.16	QP	-	32.2	-7.9	-	24.3	40.0	-	15.7
2	97.92	QP	-	33.4	-11.4	-	22.0	43.5	-	21.5
3	132.48	QP	31.8	33.2	-7.4	24.4	25.8	43.5	19.1	17.7
4	193.92	QP	29.7	31.6	-8.5	21.2	23.1	43.5	22.3	20.4
5	205.44	QP	31.3	32.1	-8.7	22.6	23.4	43.5	20.9	20.1
6	224.64	QP	34.2	33.7	-7.9	26.3	25.8	46.0	19.7	20.2
7	288.00	QP	40.1	34.2	-5.4	34.7	28.8	46.0	11.3	17.2
8	595.20	QP	26.3	24.6	3.3	29.6	27.9	46.0	16.4	18.1
9	633.60	QP	27.4	24.4	4.2	31.6	28.6	46.0	14.4	17.4
10	902.40	QP	21.7	21.1	8.6	30.3	29.7	46.0	15.7	16.3
11	1171.20	PEK	36.5	35.8	-3.6	32.9	32.2	74.0	41.1	41.8
12	1171.20	AVG	28.3	25.7	-3.6	24.7	22.1	54.0	29.3	31.9
13	1209.60	PEK	35.0	35.0	-3.4	31.6	31.6	74.0	42.4	42.4
14	1209.60	AVG	26.5	26.1	-3.4	23.1	22.7	54.0	30.9	31.3
15*	2389.96	PEK	42.5	47.1	3.7	46.2	50.8	74.0	27.8	23.2
16*	2389.96	AVG	28.2	28.3	3.7	31.9	32.0	54.0	22.1	22.0
17*	2491.75	PEK	41.9	43.9	3.8	45.7	47.7	74.0	28.3	26.3
18*	2491.75	AVG	28.5	28.4	3.8	32.3	32.2	54.0	21.7	21.8
19	4882.00	PEK	33.6	33.9	7.8	41.4	41.7	74.0	32.6	32.3
20	4882.00	AVG	25.0	25.0	7.8	32.8	32.8	54.0	21.2	21.2
21	6411.60	PEK	37.3	37.7	9.8	47.1	47.5	74.0	26.9	26.5
22	6411.60	AVG	28.7	29.3	9.8	38.5	39.1	54.0	15.5	14.9
23	7323.00	PEK	32.4	32.9	13.0	45.4	45.9	74.0	28.6	28.1
24	7323.00	AVG	24.1	24.1	13.0	37.1	37.1	54.0	16.9	16.9
25	9764.00	PEK	33.4	33.2	17.2	50.6	50.4	74.0	23.4	23.6
26	9764.00	AVG	24.6	24.6	17.2	41.8	41.8	54.0	12.2	12.2

Note.

- * : Band Edge of Restrict Band
- : Measurement limit

Any Spurious emissions higher than the frequency reported in the table above were not detected during the measurement.

Operating mode	DH5, 2480 MHz				
Location	Matsuda No.4 Test Site				
Test date	30 – 1000 MHz,		2 – 3 GHz,		1-2, 3-18 GHz, 18 – 25 GHz
	Sep. 4, 2014,		Aug. 26, 2014,		Aug. 27, 2014, Aug. 26, 2014
Temperature	23.0,	24.0,	22.0,	24.0	[degree C]
Humidity variation	58.0	70.0,	68.0,	70.0	[%]
Test Engineer	Shiro Kobayashi				

No.	Freq. [MHz]	Detector	Reading [dBuV]		Factor [dB/m]	Emission Level [dBuV/m]		Limit [dBuV/m]	Margin [dB]	
			Hori	Vert		Hori	Vert		Hori	Vert
1	44.16	QP	-	32.6	-7.9	-	24.7	40.0	-	15.3
2	97.92	QP	-	33.7	-11.4	-	22.3	43.5	-	21.2
3	132.48	QP	32.1	34.0	-7.4	24.7	26.6	43.5	18.8	16.9
4	193.92	QP	29.2	31.5	-8.5	20.7	23.0	43.5	22.8	20.5
5	205.44	QP	31.6	32.0	-8.7	22.9	23.3	43.5	20.6	20.2
6	224.64	QP	34.2	33.7	-7.9	26.3	25.8	46.0	19.7	20.2
7	288.00	QP	32.6	27.2	-5.4	27.2	21.8	46.0	18.8	24.2
8	595.20	QP	26.5	24.6	3.3	29.8	27.9	46.0	16.2	18.1
9	633.60	QP	27.4	24.3	4.2	31.6	28.5	46.0	14.4	17.5
10	902.40	QP	21.7	21.1	8.6	30.3	29.7	46.0	15.7	16.3
11	1171.20	PEK	37.6	36.4	-3.6	34.0	32.8	74.0	40.0	41.2
12	1171.20	AVG	28.3	27.3	-3.6	24.7	23.7	54.0	29.3	30.3
13	1209.60	PEK	37.6	36.6	-3.4	34.2	33.2	74.0	39.8	40.8
14	1209.60	AVG	27.9	27.5	-3.4	24.5	24.1	54.0	29.5	29.9
15*	2483.50	PEK	41.5	44.2	3.8	45.3	48.0	74.0	28.7	26.0
16*	2483.50	AVG	28.9	29.2	3.8	32.7	33.0	54.0	21.3	21.0
17	2499.27	PEK	42.0	43.1	3.8	45.8	46.9	74.0	28.2	27.1
18	2499.27	AVG	30.3	31.5	3.8	34.1	35.3	54.0	19.9	18.7
19	4960.00	PEK	35.9	36.3	7.9	43.8	44.2	74.0	30.2	29.8
20	4960.00	AVG	26.3	26.6	7.9	34.2	34.5	54.0	19.8	19.5
21	6411.60	PEK	37.3	38.8	9.8	47.1	48.6	74.0	26.9	25.4
22	6411.60	AVG	28.5	31.1	9.8	38.3	40.9	54.0	15.7	13.1
23	7440.00	PEK	35.6	34.5	13.6	49.2	48.1	74.0	24.8	25.9
24	7440.00	AVG	24.1	24.2	13.6	37.7	37.8	54.0	16.3	16.2
25	9920.00	PEK	33.5	33.8	17.6	51.1	51.4	74.0	22.9	22.6
26	9920.00	AVG	23.9	24.2	17.6	41.5	41.8	54.0	12.5	12.2

Note.

- * : Band Edge of Restrict Band
- : Measurement limit

Any Spurious emissions higher than the frequency reported in the table above were not detected during the measurement.

Operating mode	2-DH5, 2402 MHz				
Location	Matsuda No.4 Test Site				
Test date	30 – 1000 MHz,		2 – 3 GHz,		1-2, 3-18 GHz, 18 – 25 GHz
	Sep. 4, 2014,		Aug. 26, 2014,		Aug. 29, 2014, Aug. 26, 2014
Temperature	23.0,	24.0,	21.0,	24.0	[degree C]
Humidity variation	58.0	70.0,	64.0,	70.0	[%]
Test Engineer	Shiro Kobayashi				

No.	Freq. [MHz]	Detector	Reading [dBuV]		Factor [dB/m]	Emission Level [dBuV/m]		Limit [dBuV/m]	Margin [dB]	
			Hori	Vert		Hori	Vert		Hori	Vert
1	44.16	QP	-	32.3	-7.9	-	24.4	40.0	-	15.6
2	97.92	QP	-	34.1	-11.4	-	22.7	43.5	-	20.8
3	132.48	QP	32.2	33.9	-7.4	24.8	26.5	43.5	18.7	17.0
4	193.92	QP	29.6	31.6	-8.5	21.1	23.1	43.5	22.4	20.4
5	205.44	QP	31.6	31.7	-8.7	22.9	23.0	43.5	20.6	20.5
6	224.64	QP	34.0	33.8	-7.9	26.1	25.9	46.0	19.9	20.1
7	288.00	QP	40.0	34.4	-5.4	34.6	29.0	46.0	11.4	17.0
8	595.20	QP	26.1	23.9	3.3	29.4	27.2	46.0	16.6	18.8
9	633.60	QP	27.4	24.4	4.2	31.6	28.6	46.0	14.4	17.4
10	902.40	QP	21.5	21.0	8.6	30.1	29.6	46.0	15.9	16.4
11	1171.20	PEK	36.7	37.3	-3.6	33.1	33.7	74.0	40.9	40.3
12	1171.20	AVG	27.3	27.9	-3.6	23.7	24.3	54.0	30.3	29.7
13	1209.60	PEK	37.8	37.1	-3.4	34.4	33.7	74.0	39.6	40.3
14	1209.60	AVG	28.2	28.0	-3.4	24.8	24.6	54.0	29.2	29.4
15	2364.10	PEK	57.0	59.6	3.7	60.7	63.3	74.0	13.3	10.7
16	2364.10	AVG	28.2	28.4	3.7	31.9	32.1	54.0	22.1	21.9
17*	2386.66	PEK	54.9	57.3	3.7	58.6	61.0	74.0	15.4	13.0
18*	2386.66	AVG	28.5	28.8	3.7	32.2	32.5	54.0	21.8	21.5
19	4804.00	PEK	35.8	35.8	7.7	43.5	43.5	74.0	30.5	30.5
20	4804.00	AVG	26.1	25.8	7.7	33.8	33.5	54.0	20.2	20.5
21	6411.60	PEK	37.3	39.1	9.8	47.1	48.9	74.0	26.9	25.1
22	6411.60	AVG	28.7	31.9	9.8	38.5	41.7	54.0	15.5	12.3
23	7206.00	PEK	34.8	35.0	12.6	47.4	47.6	74.0	26.6	26.4
24	7206.00	AVG	25.6	25.5	12.6	38.2	38.1	54.0	15.8	15.9
25	9608.00	PEK	33.6	34.0	17.1	50.7	51.1	74.0	23.3	22.9
26	9608.00	AVG	24.6	24.4	17.1	41.7	41.5	54.0	12.3	12.5
27	19216.00	PEK	36.0	35.9	10.3	46.3	46.2	74.0	27.7	27.8
28	19216.00	AVG	25.6	25.8	10.3	35.9	36.1	54.0	18.1	17.9

Note.

- * : Band Edge of Restrict Band
- : Measurement limit

Any Spurious emissions higher than the frequency reported in the table above were not detected during the measurement.

Operating mode	2-DH5, 2441 MHz				
Location	Matsuda No.4 Test Site				
Test date	30 – 1000 MHz,		2 – 3 GHz,		1-2, 3-18 GHz, 18 – 25 GHz
	Sep. 4, 2014,		Aug. 26, 2014,		Aug. 29, 2014, Aug. 26, 2014
Temperature	23.0,	24.0,	21.0,	24.0	[degree C]
Humidity variation	58.0	70.0,	64.0,	70.0	[%]
Test Engineer	Shiro Kobayashi				

No.	Freq. [MHz]	Detector	Reading [dBuV]		Factor [dB/m]	Emission Level [dBuV/m]		Limit [dBuV/m]	Margin [dB]	
			Hori	Vert		Hori	Vert		Hori	Vert
1	44.16	QP	-	31.7	-7.9	-	23.8	40.0	-	16.2
2	97.92	QP	-	33.1	-11.4	-	21.7	43.5	-	21.8
3	132.48	QP	32.2	33.0	-7.4	24.8	25.6	43.5	18.7	17.9
4	193.92	QP	29.6	31.1	-8.5	21.1	22.6	43.5	22.4	20.9
5	205.44	QP	31.5	32.0	-8.7	22.8	23.3	43.5	20.7	20.2
6	224.64	QP	34.0	33.7	-7.9	26.1	25.8	46.0	19.9	20.2
7	288.00	QP	39.2	33.6	-5.4	33.8	28.2	46.0	12.2	17.8
8	595.20	QP	26.4	24.6	3.3	29.7	27.9	46.0	16.3	18.1
9	633.60	QP	27.4	24.2	4.2	31.6	28.4	46.0	14.4	17.6
10	902.40	QP	21.7	21.2	8.6	30.3	29.8	46.0	15.7	16.2
11	1171.20	PEK	37.2	36.9	-3.6	33.6	33.3	74.0	40.4	40.7
12	1171.20	AVG	28.0	27.7	-3.6	24.4	24.1	54.0	29.6	29.9
13	1209.60	PEK	36.8	36.9	-3.4	33.4	33.5	74.0	40.6	40.5
14	1209.60	AVG	28.0	28.0	-3.4	24.6	24.6	54.0	29.4	29.4
15	2363.40	PEK	55.7	58.3	3.7	59.4	62.0	74.0	14.6	12.0
16	2363.40	AVG	28.1	28.3	3.7	31.8	32.0	54.0	22.2	22.0
17*	2390.00	PEK	54.6	56.1	3.7	58.3	59.8	74.0	15.7	14.2
18*	2390.00	AVG	28.2	28.3	3.7	31.9	32.0	54.0	22.1	22.0
19	4882.00	PEK	35.7	35.9	7.8	43.5	43.7	74.0	30.5	30.3
20	4882.00	AVG	26.2	26.2	7.8	34.0	34.0	54.0	20.0	20.0
21	6411.60	PEK	37.5	38.2	9.8	47.3	48.0	74.0	26.7	26.0
22	6411.60	AVG	29.5	31.0	9.8	39.3	40.8	54.0	14.7	13.2
23	7323.00	PEK	34.8	34.1	13.0	47.8	47.1	74.0	26.2	26.9
24	7323.00	AVG	24.6	24.7	13.0	37.6	37.7	54.0	16.4	16.3
25	9764.00	PEK	34.5	34.3	17.2	51.7	51.5	74.0	22.3	22.5
26	9764.00	AVG	24.8	24.9	17.2	42.0	42.1	54.0	12.0	11.9
27	19528.00	PEK	36.2	35.6	10.6	46.8	46.2	74.0	27.2	27.8
28	19528.00	AVG	25.6	25.5	10.6	36.2	36.1	54.0	17.8	17.9

Note.

- * : Band Edge of Restrict Band
- : Measurement limit

Any Spurious emissions higher than the frequency reported in the table above were not detected during the measurement.

Operating mode	2-DH5, 2480 MHz				
Location	Matsuda No.4 Test Site				
Test date	30 – 1000 MHz,		2 – 3 GHz,		1-2, 3-18 GHz, 18 – 25 GHz
	Sep. 4, 2014,		Aug. 26, 2014,		Aug. 29, 2014, Aug. 26, 2014
Temperature	23.0,	24.0,	21.0,	24.0	[degree C]
Humidity variation	58.0	70.0,	64.0,	70.0	[%]
Test Engineer	Shiro Kobayashi				

No.	Freq. [MHz]	Detector	Reading [dBuV]		Factor [dB/m]	Emission Level [dBuV/m]		Limit [dBuV/m]	Margin [dB]	
			Hori	Vert		Hori	Vert		Hori	Vert
1	44.16	QP	-	32.1	-7.9	-	24.2	40.0	-	15.8
2	97.92	QP	-	33.2	-11.4	-	21.8	43.5	-	21.7
3	132.48	QP	31.8	32.7	-7.4	24.4	25.3	43.5	19.1	18.2
4	193.92	QP	29.6	31.6	-8.5	21.1	23.1	43.5	22.4	20.4
5	205.44	QP	31.4	31.9	-8.7	22.7	23.2	43.5	20.8	20.3
6	224.64	QP	34.0	33.6	-7.9	26.1	25.7	46.0	19.9	20.3
7	288.00	QP	39.9	34.5	-5.4	34.5	29.1	46.0	11.5	16.9
8	595.20	QP	26.5	24.6	3.3	29.8	27.9	46.0	16.2	18.1
9	633.60	QP	27.4	24.1	4.2	31.6	28.3	46.0	14.4	17.7
10	902.40	QP	21.7	21.3	8.6	30.3	29.9	46.0	15.7	16.1
11	1171.20	PEK	37.2	37.0	-3.6	33.6	33.4	74.0	40.4	40.6
12	1171.20	AVG	28.1	27.3	-3.6	24.5	23.7	54.0	29.5	30.3
13	1209.60	PEK	37.4	36.6	-3.4	34.0	33.2	74.0	40.0	40.8
14	1209.60	AVG	28.2	27.5	-3.4	24.8	24.1	54.0	29.2	29.9
15	2362.60	PEK	56.6	57.8	3.7	60.3	61.5	74.0	13.7	12.5
16	2362.60	AVG	28.1	28.2	3.7	31.8	31.9	54.0	22.2	22.1
17*	2389.95	PEK	55.7	58.0	3.7	59.4	61.7	74.0	14.6	12.3
18*	2389.95	AVG	28.2	28.4	3.7	31.9	32.1	54.0	22.1	21.9
19*	2483.50	PEK	47.7	48.2	3.8	51.5	52.0	74.0	22.5	22.0
20*	2483.50	AVG	29.5	30.5	3.8	33.3	34.3	54.0	20.7	19.7
21	2494.19	PEK	48.8	52.1	3.8	52.6	55.9	74.0	21.4	18.1
22	2494.19	AVG	28.6	28.9	3.8	32.4	32.7	54.0	21.6	21.3
23	4960.00	PEK	36.5	36.2	7.9	44.4	44.1	74.0	29.6	29.9
24	4960.00	AVG	26.7	26.5	7.9	34.6	34.4	54.0	19.4	19.6
25	6411.60	PEK	37.5	38.7	9.8	47.3	48.5	74.0	26.7	25.5
26	6411.60	AVG	28.4	31.9	9.8	38.2	41.7	54.0	15.8	12.3
27	7440.00	PEK	33.7	33.7	13.6	47.3	47.3	74.0	26.7	26.7
28	7440.00	AVG	24.1	24.1	13.6	37.7	37.7	54.0	16.3	16.3
29	9920.00	PEK	33.5	33.7	17.6	51.1	51.3	74.0	22.9	22.7
30	9920.00	AVG	23.9	24.0	17.6	41.5	41.6	54.0	12.5	12.4
31	19840.00	PEK	35.5	35.3	11.0	46.5	46.3	74.0	27.5	27.7
32	19840.00	AVG	25.2	25.2	11.0	36.2	36.2	54.0	17.8	17.8

Note.

- * : Band Edge of Restrict Band
- : Measurement limit

Any Spurious emissions higher than the frequency reported in the table above were not detected during the measurement.

Operating mode	3-DH5, 2402 MHz				
Location	Matsuda No.4 Test Site				
Test date	30 – 1000 MHz,		2 – 3 GHz,		1-2, 3-18 GHz, 18 – 25 GHz
	Sep. 4, 2014,		Aug. 26, 2014,		Aug. 28, 2014, Aug. 26, 2014
Temperature	23.0,	24.0,	20.0,	24.0	[degree C]
Humidity variation	58.0	70.0,	70.0,	70.0	[%]
Test Engineer	Shiro Kobayashi				

No.	Freq. [MHz]	Detector	Reading [dBuV]		Factor [dB/m]	Emission Level [dBuV/m]		Limit [dBuV/m]	Margin [dB]	
			Hori	Vert		Hori	Vert		Hori	Vert
1	44.16	QP	-	31.5	-7.9	-	23.6	40.0	-	16.4
2	97.92	QP	-	32.8	-11.4	-	21.4	43.5	-	22.1
3	132.48	QP	31.8	33.5	-7.4	24.4	26.1	43.5	19.1	17.4
4	190.08	QP	29.4	31.7	-8.2	21.2	23.5	43.5	22.3	20.0
5	205.44	QP	31.7	32.3	-8.7	23.0	23.6	43.5	20.5	19.9
6	224.64	QP	34.1	34.4	-7.9	26.2	26.5	46.0	19.8	19.5
7	288.00	QP	40.1	34.2	-5.4	34.7	28.8	46.0	11.3	17.2
8	595.20	QP	26.8	24.4	3.3	30.1	27.7	46.0	15.9	18.3
9	633.60	QP	27.1	24.3	4.2	31.3	28.5	46.0	14.7	17.5
10	902.40	QP	21.5	21.0	8.6	30.1	29.6	46.0	15.9	16.4
11	1171.20	PEK	37.4	37.2	-3.6	33.8	33.6	74.0	40.2	40.4
12	1171.20	AVG	28.0	27.6	-3.6	24.4	24.0	54.0	29.6	30.0
13	1209.60	PEK	37.1	37.3	-3.4	33.7	33.9	74.0	40.3	40.1
14	1209.60	AVG	28.4	28.2	-3.4	25.0	24.8	54.0	29.0	29.2
15	2365.85	PEK	57.2	59.3	3.7	60.9	63.0	74.0	13.1	11.0
16	2365.85	AVG	28.5	28.6	3.7	32.2	32.3	54.0	21.8	21.7
17*	2387.67	PEK	56.5	59.3	3.7	60.2	63.0	74.0	13.8	11.0
18*	2387.67	AVG	28.8	29.1	3.7	32.5	32.8	54.0	21.5	21.2
19	4804.00	PEK	35.8	35.7	7.7	43.5	43.4	74.0	30.5	30.6
20	4804.00	AVG	26.0	26.0	7.7	33.7	33.7	54.0	20.3	20.3
21	6411.60	PEK	37.9	38.8	9.8	47.7	48.6	74.0	26.3	25.4
22	6411.60	AVG	29.4	31.8	9.8	39.2	41.6	54.0	14.8	12.4
23	7206.00	PEK	35.2	35.1	12.6	47.8	47.7	74.0	26.2	26.3
24	7206.00	AVG	25.6	25.6	12.6	38.2	38.2	54.0	15.8	15.8
25	9608.00	PEK	33.7	33.6	17.1	50.8	50.7	74.0	23.2	23.3
26	9608.00	AVG	24.6	24.4	17.1	41.7	41.5	54.0	12.3	12.5
27	19215.99	PEK	35.9	36.3	10.3	46.2	46.6	74.0	27.8	27.4
28	19215.99	AVG	25.7	25.7	10.3	36.0	36.0	54.0	18.0	18.0

Note.

- * : Band Edge of Restrict Band
- : Measurement limit

Any Spurious emissions higher than the frequency reported in the table above were not detected during the measurement.

Operating mode	3-DH5, 2441 MHz				
Location	Matsuda No.4 Test Site				
Test date	30 – 1000 MHz, 2 – 3 GHz,		1-2, 3-18 GHz,		18 – 25 GHz
	Sep. 4, 2014,		Aug. 26, 2014,		Aug. 28, 2014, Aug. 26, 2014
Temperature	23.0,	24.0,	20.0,	24.0	[degree C]
Humidity variation	58.0	70.0,	70.0,	70.0	[%]
Test Engineer	Shiro Kobayashi				

No.	Freq. [MHz]	Detector	Reading [dBuV]		Factor [dB/m]	Emission Level [dBuV/m]		Limit [dBuV/m]	Margin [dB]	
			Hori	Vert		Hori	Vert		Hori	Vert
1	44.16	QP	-	32.3	-7.9	-	24.4	40.0	-	15.6
2	97.92	QP	-	33.3	-11.4	-	21.9	43.5	-	21.6
3	132.48	QP	32.1	33.6	-7.4	24.7	26.2	43.5	18.8	17.3
4	190.08	QP	29.4	32.1	-8.2	21.2	23.9	43.5	22.3	19.6
5	205.44	QP	31.5	31.6	-8.7	22.8	22.9	43.5	20.7	20.6
6	224.64	QP	33.7	33.6	-7.9	25.8	25.7	46.0	20.2	20.3
7	288.00	QP	39.9	34.5	-5.4	34.5	29.1	46.0	11.5	16.9
8	595.20	QP	26.5	24.5	3.3	29.8	27.8	46.0	16.2	18.2
9	633.60	QP	27.3	24.4	4.2	31.5	28.6	46.0	14.5	17.4
10	902.40	QP	21.5	21.2	8.6	30.1	29.8	46.0	15.9	16.2
11	1171.20	PEK	37.7	37.1	-3.6	34.1	33.5	74.0	39.9	40.5
12	1171.20	AVG	28.2	27.4	-3.6	24.6	23.8	54.0	29.4	30.2
13	1209.60	PEK	37.0	37.0	-3.4	33.6	33.6	74.0	40.4	40.4
14	1209.60	AVG	28.1	27.9	-3.4	24.7	24.5	54.0	29.3	29.5
15	2363.97	PEK	56.2	60.1	3.7	59.9	63.8	74.0	14.1	10.2
16	2363.97	AVG	28.5	28.6	3.7	32.2	32.3	54.0	21.8	21.7
17*	2386.50	PEK	55.3	59.8	3.7	59.0	63.5	74.0	15.0	10.5
18*	2386.50	AVG	28.4	28.7	3.7	32.1	32.4	54.0	21.9	21.6
19	4882.00	PEK	35.7	36.0	7.8	43.5	43.8	74.0	30.5	30.2
20	4882.00	AVG	26.2	26.2	7.8	34.0	34.0	54.0	20.0	20.0
21	6411.60	PEK	36.8	38.8	9.8	46.6	48.6	74.0	27.4	25.4
22	6411.60	AVG	28.6	31.3	9.8	38.4	41.1	54.0	15.6	12.9
23	7323.00	PEK	34.1	34.3	13.0	47.1	47.3	74.0	26.9	26.7
24	7323.00	AVG	24.7	24.6	13.0	37.7	37.6	54.0	16.3	16.4
25	9764.00	PEK	34.1	34.5	17.2	51.3	51.7	74.0	22.7	22.3
26	9764.00	AVG	24.9	24.8	17.2	42.1	42.0	54.0	11.9	12.0
27	19527.99	PEK	35.9	36.0	10.6	46.5	46.6	74.0	27.5	27.4
28	19527.99	AVG	25.5	25.5	10.6	36.1	36.1	54.0	17.9	17.9

Note.

- * : Band Edge of Restrict Band
- : Measurement limit

Any Spurious emissions higher than the frequency reported in the table above were not detected during the measurement.

Operating mode	3-DH5, 2480 MHz				
Location	Matsuda No.4 Test Site				
Test date	30 – 1000 MHz, 2 – 3 GHz,		1-2, 3-18 GHz,		18 – 25 GHz
	Sep. 4, 2014,		Aug. 26, 2014,		Aug. 28, 2014, Aug. 26, 2014
Temperature	23.0,	24.0,	20.0,	24.0	[degree C]
Humidity variation	58.0	70.0,	70.0,	70.0	[%]
Test Engineer	Shiro Kobayashi				

No.	Freq. [MHz]	Detector	Reading [dBuV]		Factor [dB/m]	Emission Level [dBuV/m]		Limit [dBuV/m]	Margin [dB]	
			Hori	Vert		Hori	Vert		Hori	Vert
1	44.16	QP	-	32.6	-7.9	-	24.7	40.0	-	15.3
2	97.92	QP	-	33.5	-11.4	-	22.1	43.5	-	21.4
3	132.48	QP	32.0	33.3	-7.4	24.6	25.9	43.5	18.9	17.6
4	193.92	QP	29.6	31.9	-8.5	21.1	23.4	43.5	22.4	20.1
5	205.44	QP	31.5	32.2	-8.7	22.8	23.5	43.5	20.7	20.0
6	224.64	QP	34.3	33.9	-7.9	26.4	26.0	46.0	19.6	20.0
7	288.00	QP	40.0	34.6	-5.4	34.6	29.2	46.0	11.4	16.8
8	595.20	QP	26.6	24.8	3.3	29.9	28.1	46.0	16.1	17.9
9	633.60	QP	24.4	24.5	4.2	28.6	28.7	46.0	17.4	17.3
10	902.40	QP	21.7	21.2	8.6	30.3	29.8	46.0	15.7	16.2
11	1171.20	PEK	37.4	36.7	-3.6	33.8	33.1	74.0	40.2	40.9
12	1171.20	AVG	28.2	27.0	-3.6	24.6	23.4	54.0	29.4	30.6
13	1209.60	PEK	37.0	36.8	-3.4	33.6	33.4	74.0	40.4	40.6
14	1209.60	AVG	28.1	27.8	-3.4	24.7	24.4	54.0	29.3	29.6
15	2363.03	PEK	57.0	60.0	3.7	60.7	63.7	74.0	13.3	10.3
16	2363.03	AVG	28.4	28.6	3.7	32.1	32.3	54.0	21.9	21.7
17*	2390.00	PEK	55.6	56.8	3.7	59.3	60.5	74.0	14.7	13.5
18*	2390.00	AVG	28.5	28.6	3.7	32.2	32.3	54.0	21.8	21.7
19*	2483.50	PEK	46.2	50.6	3.8	50.0	54.4	74.0	24.0	19.6
20*	2483.50	AVG	29.4	29.9	3.8	33.2	33.7	54.0	20.8	20.3
21	2492.16	PEK	47.4	50.6	3.8	51.2	54.4	74.0	22.8	19.6
22	2492.16	AVG	29.0	28.9	3.8	32.8	32.7	54.0	21.2	21.3
23	4960.00	PEK	36.2	36.0	7.9	44.1	43.9	74.0	29.9	30.1
24	4960.00	AVG	26.6	26.5	7.9	34.5	34.4	54.0	19.5	19.6
25	6411.60	PEK	37.2	37.9	9.8	47.0	47.7	74.0	27.0	26.3
26	6411.60	AVG	29.1	30.2	9.8	38.9	40.0	54.0	15.1	14.0
27	7440.00	PEK	34.3	33.8	13.6	47.9	47.4	74.0	26.1	26.6
28	7440.00	AVG	24.3	24.2	13.6	37.9	37.8	54.0	16.1	16.2
29	9920.00	PEK	33.9	33.0	17.6	51.5	50.6	74.0	22.5	23.4
30	9920.00	AVG	24.0	23.9	17.6	41.6	41.5	54.0	12.4	12.5
31	19839.99	PEK	36.5	36.3	11.0	47.5	47.3	74.0	26.5	26.7
32	19839.99	AVG	25.4	25.4	11.0	36.4	36.4	54.0	17.6	17.6

Note.

- * : Band Edge of Restrict Band
- : Measurement limit

Any Spurious emissions higher than the frequency reported in the table above were not detected during the measurement.

9.7 Band Edge of Authorized Frequency Band

Regulations	FCC Part15C §15.247 (d) RSS-210 A8.5
Test Method/Guide	FCC Public Notice DA 00-705

Test Procedure

1. The EUT and test instrument were set up as shown on section 10.1.
2. Adjust the measurement instrument for the following setting:

RBW	:	100 kHz
VBW	:	300 kHz
Span	:	20 MHz
Detector	:	Peak
Sweep Time	:	Auto
Correction Factor	:	Input Cable loss and Attenuator
Trace mode	:	Max Hold
3. Allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within in-band emission.
5. Use the marker function to ensure that the band edge level of the authorized frequency band was attenuated by at least the minimum requirements specified.
6. Band Edge Measurement data correction;
 $\text{Limit [dBm]} = \text{Peak level within in-band emission [dBm]} - 20 \text{ [dB]}$
 $\text{Margin [dB]} = \text{Limit [dBm]} - \text{Band edge Level [dBm]}$

Test Result

Location	Matsuda No.4 Test Site		
Test date	Sep. 9, Sep. 11, 2014		
Temperature	23.0	23.6	[degree C]
Humidity variation	45.0	54.0	[%]
Test Engineer	Shiro Kobayashi		

Operating mode	DH5, Hopping OFF			
Freq. [MHz]	Peak level within in-band emission [dBm]	Limit [dBm]	Band edge level [dBm]	Margin [dB]
2400	-1.215	-21.215	-51.676	30.461
2483.5	-0.436	-20.436	-51.050	30.614

Operating mode	DH5, Hopping ON			
Freq. [MHz]	Peak level within in-band emission [dBm]	Limit [dBm]	Band edge level [dBm]	Margin [dB]
2400	-1.117	-21.117	-51.814	30.697
2483.5	-0.780	-20.780	-51.035	30.255

Operating mode	2-DH5, Hopping OFF			
Freq. [MHz]	Peak level within in-band emission [dBm]	Limit [dBm]	Band edge level [dBm]	Margin [dB]
2400	-2.710	-22.710	-48.691	25.981
2483.5	-2.080	-22.080	-50.084	28.004

Operating mode	2-DH5, Hopping ON			
Freq. [MHz]	Peak level within in-band emission [dBm]	Limit [dBm]	Band edge level [dBm]	Margin [dB]
2400	-2.778	-22.778	-51.743	28.965
2483.5	-2.296	-22.296	-51.322	29.026

Operating mode	3-DH5, Hopping OFF			
Freq. [MHz]	Peak level within in-band emission [dBm]	Limit [dBm]	Band edge level [dBm]	Margin [dB]
2400	-2.650	-22.650	-46.313	23.663
2483.5	-1.983	-21.983	-51.494	29.511

Operating mode	3-DH5, Hopping ON			
Freq. [MHz]	Peak level within in-band emission [dBm]	Limit [dBm]	Band edge level [dBm]	Margin [dB]
2400	-2.718	-22.718	-50.927	28.209
2483.5	-1.989	-21.989	-51.453	29.464

Spectrum Plots
See ANNEX A.6

9.8 Spurious RF Conducted Emissions

Regulations	FCC Part15C §15.247 (d) RSS-210 A8.5
Test Method/Guide	FCC Public Notice DA 00-705

Test Procedure

1. The EUT and test instrument were set up as shown on section 10.1.
2. Adjust the measurement instrument for the following setting:

RBW	:	100 kHz
VBW	:	300 kHz
Span	:	Set span to encompass the spectrum to be examined
Detector	:	Peak
Sweep Time	:	Auto
Correction Factor	:	Input Cable loss and Attenuator
Trace mode	:	Max Hold, Allow trace to fully stabilize.
3. Use the marker function to ensure that the amplitude of all unwanted emissions outside of the authorized frequency band is attenuated by at least the minimum requirements specified.

Spectrum Plots

See ANNEX A.7

9.9 AC Conducted Emissions

Regulations	FCC Part15C §15.207 RSS-Gen 7.2.2
Test Method/Guide	ANSI C63.4-2003

Test Procedure

1. The EUT and test instrument were set up as shown on section 10.3.
2. The spectrum analyzer is controlled by the computer program to sweep the frequency range to be measured, then spectrum chart is plotted out to find the worst emission.

At least six highest spectrum are measured in quasi-peak and average (if necessary) using the CISPR Receiver.

3. Adjust the test instrument for the following setting:

Frequency	Instruments	Detector	RBW	VBW
0.15 – 30 MHz	CISPR Receiver	QP	9 kHz	N/A
		AVG		

6. Measurement data correction;

Emission Level [dBuV] = Reading [dBuV] + Factor [dB]

Margin [dB] = Limit [dBuV] – Emission Level [dBuV]

* Factor = LISN Factor + Cable loss + Attenuator

Test Result

Test date	Oct. 03, 2012										
Location	Matsuda No.4 Test Site										
Temperature	23.0	[degree C]									
Humidity variation	54.0	[%] Turntable									
Test Engineer	Shiro Kobayashi										

Operating mode			DH5, Hopping ON								
No.	Freq [MHz]	Detector	Reading [dBuV]		Factor [dB]		Emission Level [dBuV]		Limit [dBuV/m]	Margin [dB]	
			L1	L2	L1	L2	L1	L2		L1	L2
1	0.1500	QP	37.7	37.7	10.0	10.0	47.7	47.7	66.0	18.3	18.3
2	0.2000	QP	35.4	35.5	10.1	10.1	45.5	45.6	63.6	18.1	18.0
3	0.3000	QP	31.0	31.2	10.1	10.1	41.1	41.3	60.2	19.1	18.9
4	0.5000	QP	22.5	22.3	10.1	10.1	32.6	32.4	56.0	23.4	23.6
5	1.1215	QP	5.5	5.0	10.2	10.2	15.7	15.2	56.0	40.3	40.8
6	1.9330	QP	-8.8	-8.7	10.3	10.3	1.5	1.6	56.0	54.5	54.4
7	3.3060	QP	-8.6	-9.0	10.4	10.4	1.8	1.4	56.0	54.2	54.6

Operating mode			2-DH5, Hopping ON								
No.	Freq [MHz]	Detector	Reading [dBuV]		Factor [dB]		Emission Level [dBuV]		Limit [dBuV/m]	Margin [dB]	
			L1	L2	L1	L2	L1	L2		L1	L2
1	0.1500	QP	37.3	37.5	10.0	10.0	47.3	47.5	66.0	18.7	18.5
2	0.2000	QP	35.2	35.3	10.1	10.1	45.3	45.4	63.6	18.3	18.2
3	0.3000	QP	30.7	30.8	10.1	10.1	40.8	40.9	60.2	19.4	19.3
4	0.5000	QP	21.9	22.0	10.1	10.1	32.0	32.1	56.0	24.0	23.9
5	1.1215	QP	5.1	4.9	10.2	10.2	15.3	15.1	56.0	40.7	40.9
6	1.9330	QP	-8.8	-8.8	10.3	10.3	1.5	1.5	56.0	54.5	54.5
7	3.3060	QP	-8.8	-8.9	10.4	10.4	1.6	1.5	56.0	54.4	54.5

Operating mode			3-DH5, Hopping ON								
No.	Freq [MHz]	Detector	Reading [dBuV]		Factor [dB]		Emission Level [dBuV]		Limit [dBuV/m]	Margin [dB]	
			L1	L2	L1	L2	L1	L2		L1	L2
1	0.1500	QP	36.4	36.3	10.0	10.0	46.4	46.3	66.0	19.6	19.7
2	0.2000	QP	34.9	35.4	10.1	10.1	45.0	45.5	63.6	18.6	18.1
3	0.3000	QP	30.6	30.5	10.1	10.1	40.7	40.6	60.2	19.5	19.6
4	0.5000	QP	22.2	21.9	10.1	10.1	32.3	32.0	56.0	23.7	24.0
5	1.1215	QP	4.3	4.2	10.2	10.2	14.5	14.4	56.0	41.5	41.6
6	1.9330	QP	-8.8	-8.6	10.3	10.3	1.5	1.7	56.0	54.5	54.3
7	3.3060	QP	-8.8	-8.7	10.4	10.4	1.6	1.7	56.0	54.4	54.3

9.10 Receiver Spurious Emissions

Regulations	RSS-Gen 6.1
Test Method/Guide	ANSI C63.4-2003

Test Procedure

See section 9.6

Test Result

Operating mode	Receive mode			
Location	Matsuda No.4 Test Site			
Test date	30 – 1000 MHz, 2 – 3 GHz, 1-2, 3-18 GHz, 18 – 25 GHz			
	Sep. 4, 2014,	Aug. 26, 2014,	Aug. 28, 2014,	Aug. 26, 2014
Temperature	23.0,	24.0,	20.0,	24.0 [degree C]
Humidity variation	58.0	70.0,	70.0,	70.0 [%]
Test Engineer	Shiro Kobayashi			

No.	Freq. [MHz]	Detector	Reading [dBuV]		Factor [dB/m]	Emission Level [dBuV/m]		Limit [dBuV/m]	Margin [dB]	
			Hori	Vert		Hori	Vert		Hori	Vert
1	44.16	QP	-	32.0	-7.9	-	24.1	40.0	-	15.9
2	97.92	QP	-	33.2	-11.4	-	21.8	43.5	-	21.7
3	132.48	QP	32.5	32.9	-7.4	25.1	25.5	43.5	18.4	18.0
4	193.92	QP	29.4	31.5	-8.5	20.9	23.0	43.5	22.6	20.5
5	205.44	QP	31.4	31.8	-8.7	22.7	23.1	43.5	20.8	20.4
6	224.64	QP	34.0	33.8	-7.9	26.1	25.9	46.0	19.9	20.1
7	288.00	QP	39.9	34.4	-5.4	34.5	29.0	46.0	11.5	17.0
8	595.20	QP	26.6	24.8	3.3	29.9	28.1	46.0	16.1	17.9
9	633.60	QP	27.3	24.4	4.2	31.5	28.6	46.0	14.5	17.4
10	902.40	QP	21.6	21.1	8.6	30.2	29.7	46.0	15.8	16.3
11	1171.20	PEK	37.7	37.2	-3.6	34.1	33.6	74.0	39.9	40.4
12	1171.20	AVG	28.0	27.6	-3.6	24.4	24.0	54.0	29.6	30.0
13	1209.60	PEK	37.3	37.0	-3.4	33.9	33.6	74.0	40.1	40.4
14	1209.60	AVG	28.2	27.9	-3.4	24.8	24.5	54.0	29.2	29.5
15	6411.60	PEK	36.9	38.5	9.8	46.7	48.3	74.0	27.3	25.7
16	6411.60	AVG	28.1	31.4	9.8	37.9	41.2	54.0	16.1	12.8

Note.

- * : Band Edge of Restrict Band
- : Measurement limit

Any Spurious emissions higher than the frequency reported in the table above were not detected during the measurement.

SECTION 10. LIST AND DIAGRAM OF MEASURING INSTRUMENTS


Test instruments are calibrated according to Quality Manual and Calibration Rules of Intertek Japan K.K.

10.1 RF Conducted

Measurement Instruments

Instrument	Model No.	Serial No.	Manufacturer	Cal. Interval	Effective period
Spectrum Analyzer	N9030A	MY52350520	Agilent	1 Y	Mar.31, 2015
20 dB Attenuator	8493C	78585	Agilent	1 Y	Dec.31, 2014
Coaxial Cable	SUCOFLEX 104PE	94703/4PE	SUHNER	1 Y	Dec.31, 2014

Measurement Equipment Configuration

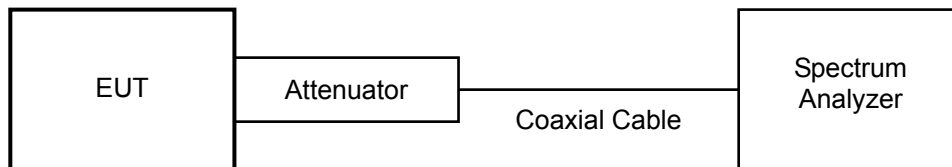

10.2 Radiated Emission

Measurement Instruments

Instrument	Model No.	Serial No.	Manufacturer	Cal. Interval	Effective period
30 – 1000 MHz					
Broad Band Antenna	VULB9168	111	Schwarzbeck	1 Y	Jul.30, 2015
Amplifier	8447D	1937A02669	Hewlett Packard	1 Y	Aug.31, 2015
6dB Attenuator	6806.17.AC	E04AT3RB	HUBER+SUHNER	1 Y	Aug.31, 2015
Step Attenuator	8494A	1510A08521	Hewlett Packard	1 Y	Aug.31, 2015
Coaxial Cable (R1)	RG214HF(9.0m)	MTS04R3-1	SUHNER	1 Y	Aug.31, 2015
Coaxial Cable (R2)	8D-2W(15.0m)	MTS04R3-2	Intertek	1 Y	Aug.31, 2015
Coaxial Cable (R3)	RG214HF(2.0m)	MTS04R3-3	SUHNER	1 Y	Aug.31, 2015
Coaxial Cable (R4)	RG214HF(0.4m)	MTS04R3-4	SUHNER	1 Y	Aug.31, 2015
Coaxial Cable (R5)	RG214HF(0.4m)	MTS04R3-5	SUHNER	1 Y	Aug.31, 2015
Coaxial Cable (R6)	RG214HF(1.5m)	MTS04R3-6	SUHNER	1 Y	Aug.31, 2015
Coaxial Cable (R7)	RG214HF(1.5m)	MTS04R3-7	SUHNER	1 Y	Aug.31, 2015
Coaxial Cable (R8)	RG214HF(1.5m)	MTS04R3-8	SUHNER	1 Y	Aug.31, 2015
Coaxial Cable (R9)	RG214HF(6.0m)	MTS04R3-9	SUHNER	1 Y	Aug.31, 2015
Test Receiver	ESS (Firmware Version 1.21)	842123/007	Rohde & Schwarz	1 Y	Mar.31, 2015
RF Switch(1)	MP59B	M21448	ANRITSU	1 Y	Aug.31, 2015
RF Switch(2)	ACX-150-1	E04301501	Intertek	1 Y	Aug.31, 2015
Site Attenuation	-	-	-	1 Y	May.31, 2015
Above 1000 MHz					
Double Ridged Antenna	3115	2568	EMCO	1 Y	Oct.31, 2014
Notch Filter	BRM50702	111	Micro-Tronics	1 Y	Dec.31, 2014
3dB Attenuator	6803.17.B	E00AT3GA	SUNNER	1 Y	Apr.30, 2015
6dB Attenuator	6806.17.B	E00AT6GA	SUNNER	1 Y	Apr.30, 2015
Amplifier	TPA0118-30	950186	TOYO Corporation	1 Y	Apr.30, 2015
Coaxial Cable (R11)	SUCOFLEX 104(6.0m)	64611/4PE	SUNNER	1 Y	Apr.30, 2015
Coaxial Cable (R12)	SUCOFLEX 104(1.0m)	94703/4PE	SUNNER	1 Y	Dec.31, 2014
Coaxial Cable (R13)	SUCOFLEX 104(1.0m)	64587/4PE	SUNNER	1 Y	Apr.30, 2015
Coaxial Cable (R14)	5B-048-98-98-6000	120315	Candox	1 Y	Aug.31, 2014
Horn Antenna with Preamplifier	MLA-18265-B03-30	1694440	TSJ	1 Y	Sep.30, 2014
Spectrum Analyzer	N9030A	MY52350520	Agilent	1 Y	Mar.31, 2015
Common					
Testing Software	emiT (Version 3,0,0,0)	-	-	--	-

Measurement Instruments Configurations

Diagram of the measurement instruments (30-1000 MHz)

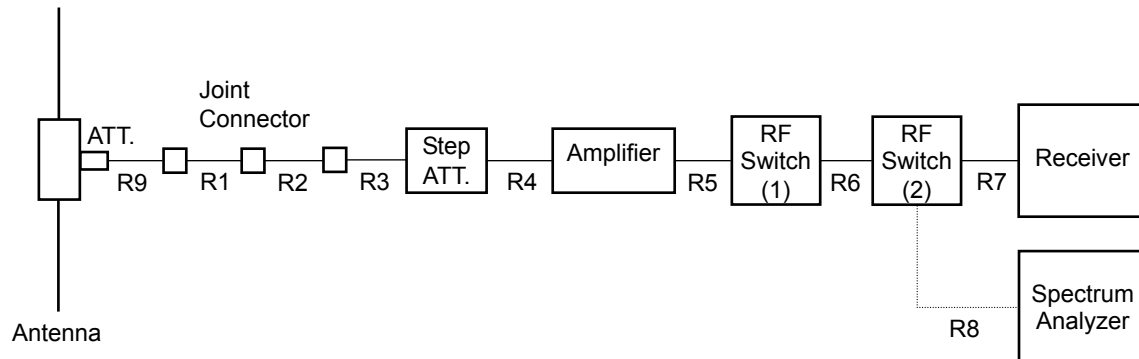


Diagram of the measurement instruments (2000 - 3000 MHz)

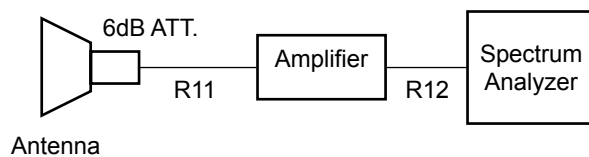


Diagram of the measurement instruments (1000- 2000 and 3000 – 18000 MHz)



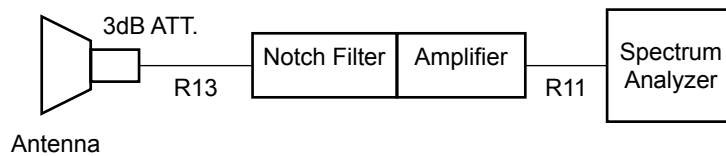


Diagram of the measurement instruments (18000 - 25000 MHz)

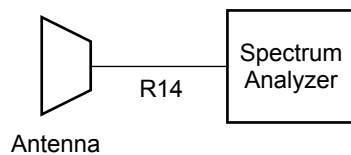

EUT set-up as per standard

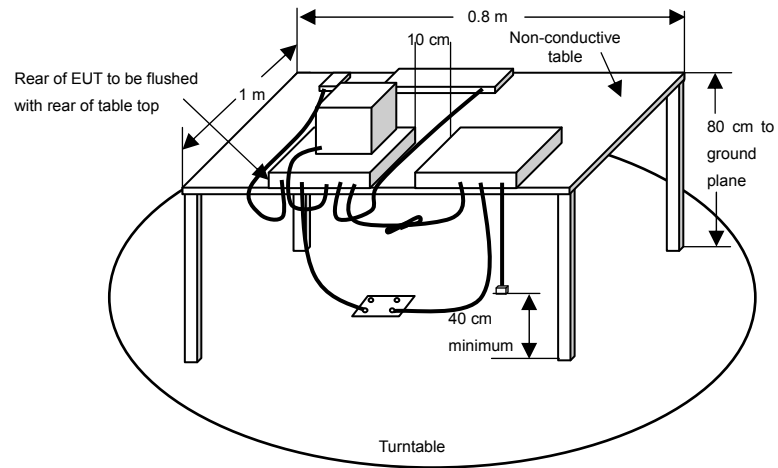


10.3 AC Line Conducted Emission


Measurement Instrument

Instrument	Model No.	Serial No.	Manufacturer	Cal. Interval	Effective period
LISN(EUT)	ESH2-Z5	882395/019	Rohde & Schwarz	1 Y	Jun. 30, 2015
10dB LISN Pad	CFA-01	E04AT10B	TAMAGAWA	1 Y	Jun. 30, 2015
50Ω Termination	65BNC-50-0-2/133NE	E03TRM50C	SUHNER	1 Y	Aug. 31, 2015
Coaxial Cable (C1)	3D-2W(5.0m)	MTS04CSR-1	Intertek	1 Y	Aug. 31, 2015
Coaxial Cable (C2)	RG-5A/U(4.0m)	MTS04CSR-2	Intertek	1 Y	Aug. 31, 2015
Coaxial Cable (C3)	RG214HF(1.5m)	MTS04CSR-3	SUHNER	1 Y	Aug. 31, 2015
Coaxial Cable (C4)	RG214HF(1.5m)	MTS04CSR-4	SUHNER	1 Y	Aug. 31, 2015
Coaxial Cable (C5)	RG214HF(1.5m)	MTS04CSR-5	SUHNER	1 Y	Aug. 31, 2015
Test Receiver	ESS (Firmware Version 1.21)	842123/007	Rohde & Schwarz	1 Y	Mar. 30, 2015
RF Switch(1)	MP59B	M21448	ANRITSU	1 Y	Aug. 31, 2015
RF Switch(2)	ACX-150-1	E04301501	Intertek	1 Y	Aug. 31, 2015
Testing Software	emiT (Version 3,0,0,0)	-	-	-	-

Measurement Instruments Configurations

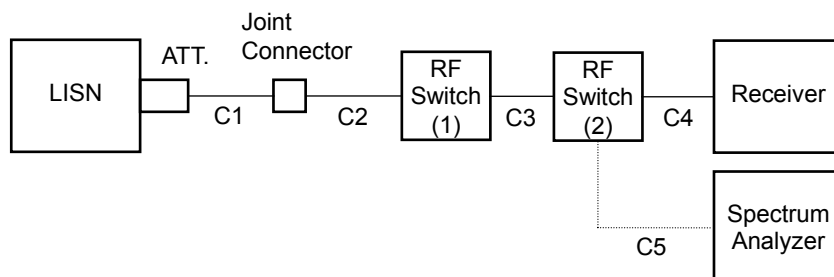

Test setup as per standard

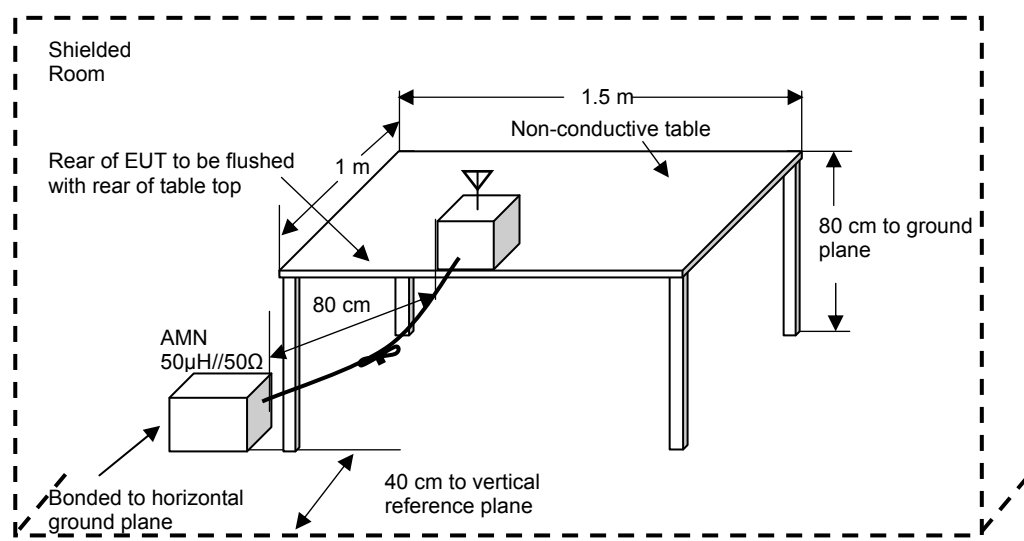

* Reference Ground plane : greater than 2 x 2m

ANNEX

A. HARD COPY OF SPECTRUM PLOTS

A.1 20 dB Bandwidth and 99 % Occupied Bandwidth

DH5

2402 MHz



2-DH5

2402 MHz



2441 MHz




2441 MHz



2480 MHz



2480 MHz

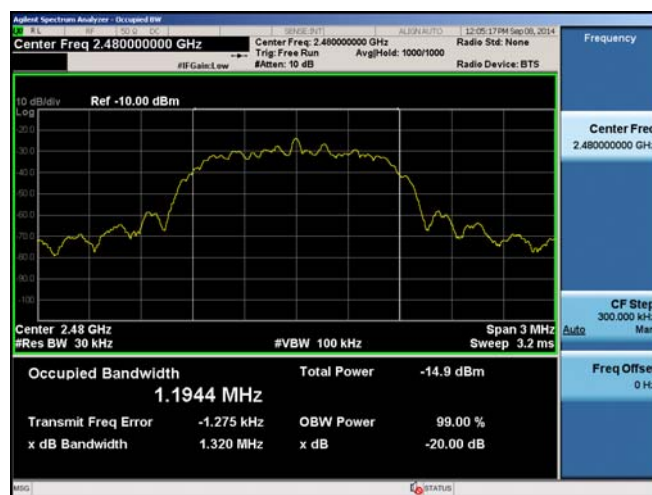

3-DH5

2402 MHz



2441 MHz




2480 MHz



A.2 Maximum Peak Output Power

DH5

2402 MHz

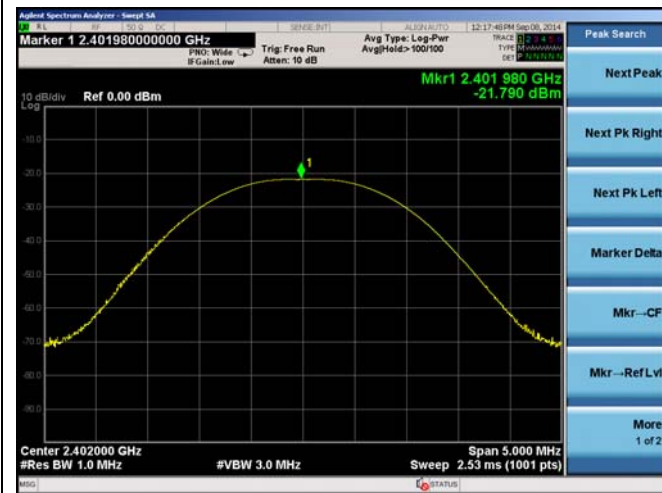

2-DH5

2402 MHz




2441 MHz



2441 MHz



2480 MHz

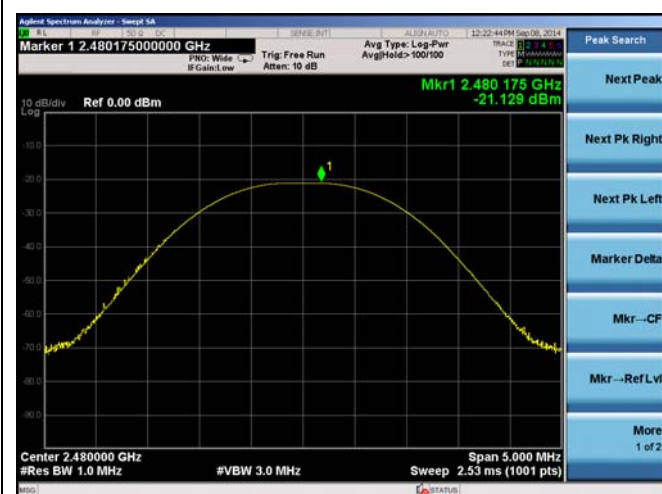

2480 MHz



3-DH5

2402 MHz



2441 MHz



2480 MHz



A.3 Carrier Frequency Separation

DH5

2402 MHz




2-DH5

2402 MHz



2441 MHz

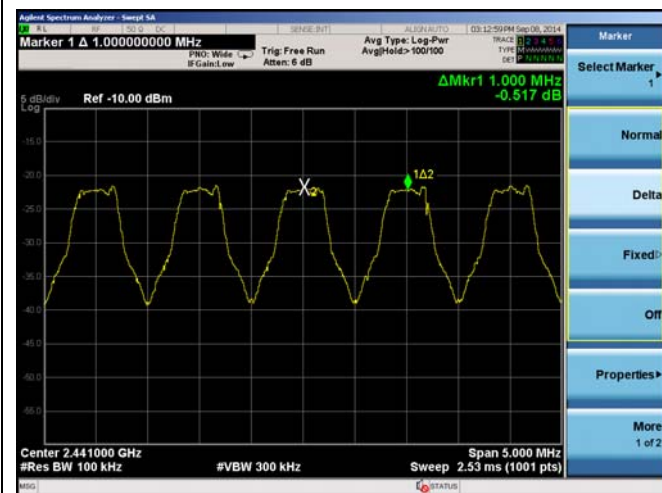

2441 MHz



2480 MHz



2480 MHz



3-DH5

2402 MHz



2441 MHz




2480 MHz




A.4 Number of Hopping Frequency


DH5_1

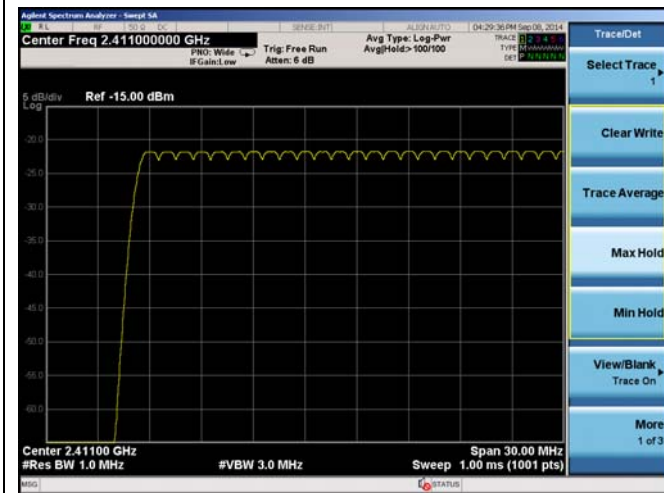


2-DH5_1

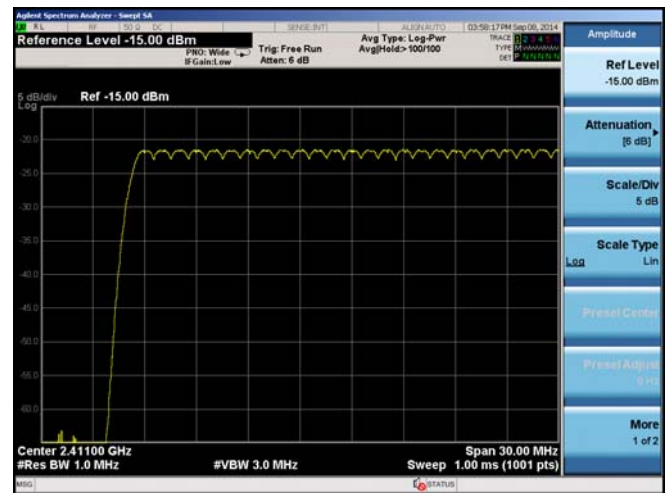

DH5_2

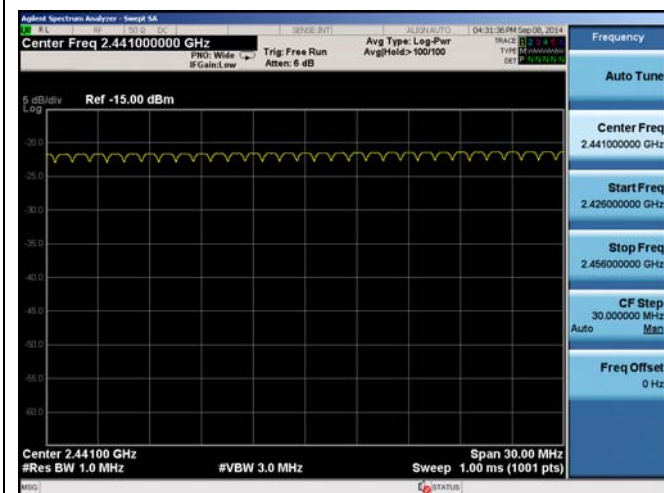


2-DH5_2

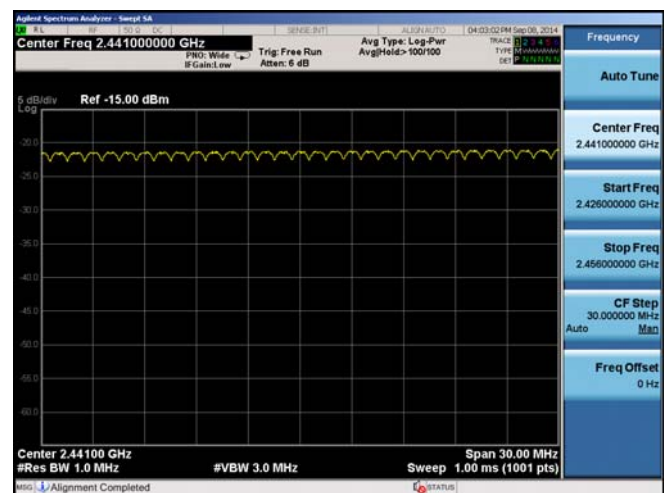


DH5_3




2-DH5_3

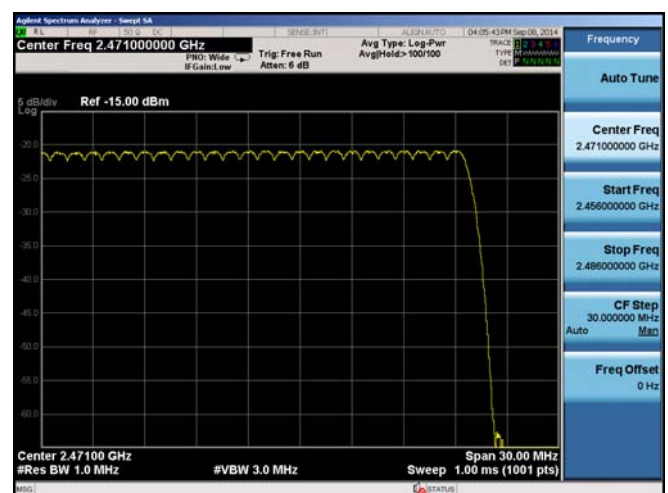

3-DH5_1

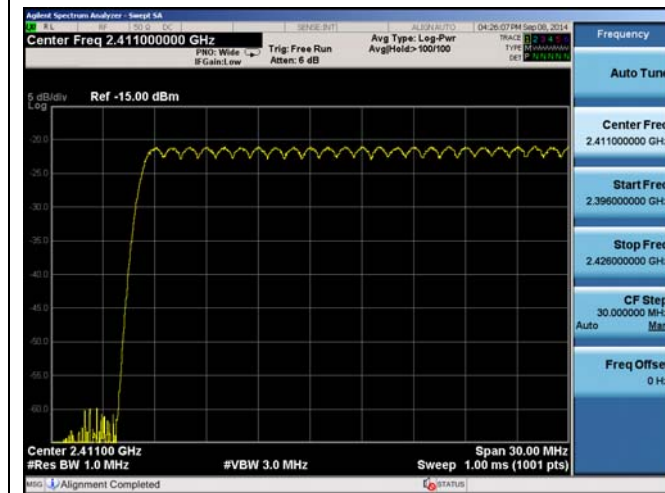

3-DH5_2

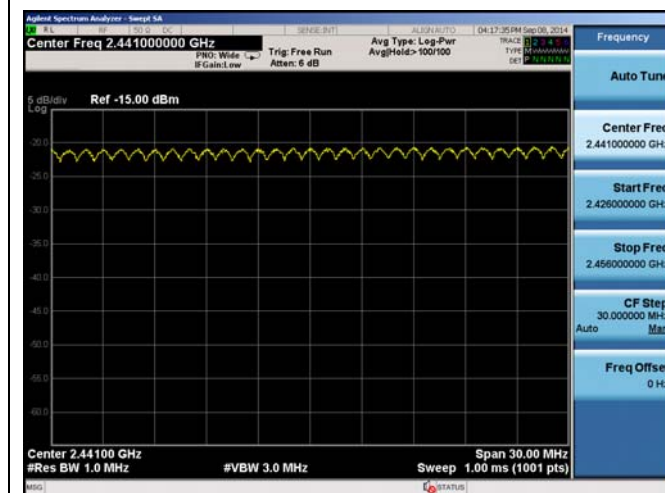


3-DH5_3




A.5 Time of Occupancy


DH1

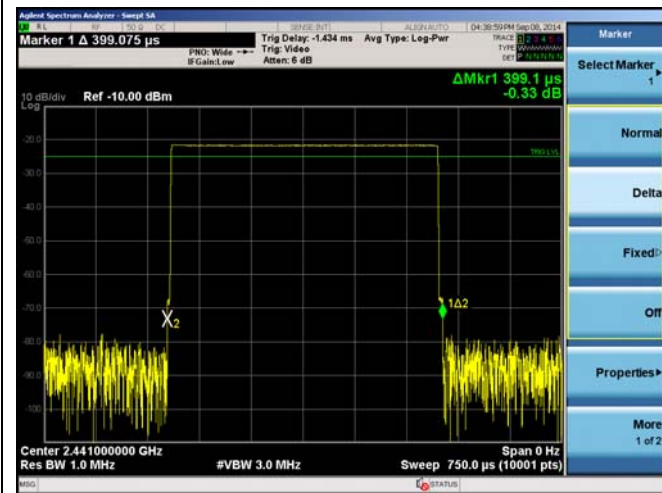


2-DH1

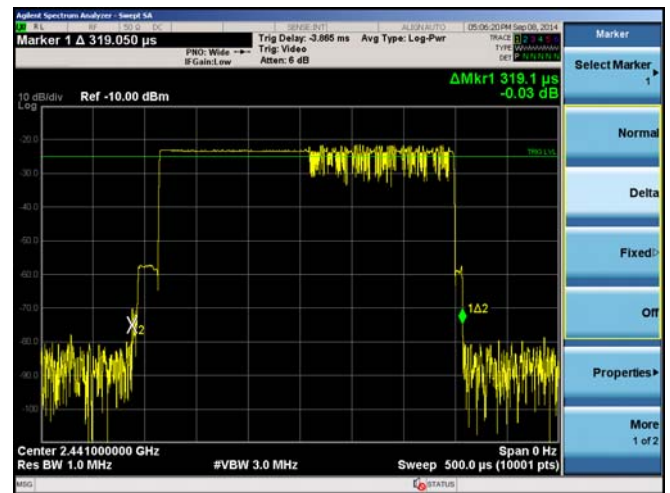


DH3

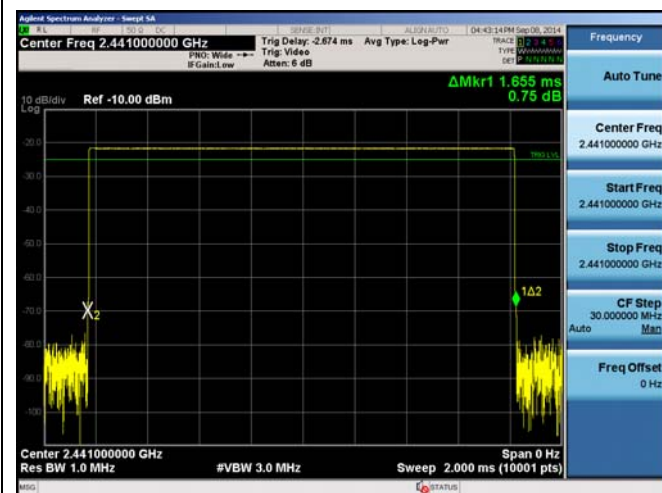


2-DH3

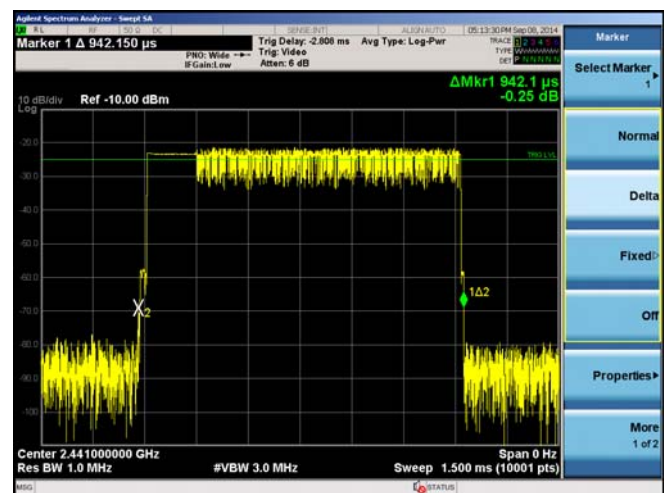


DH5

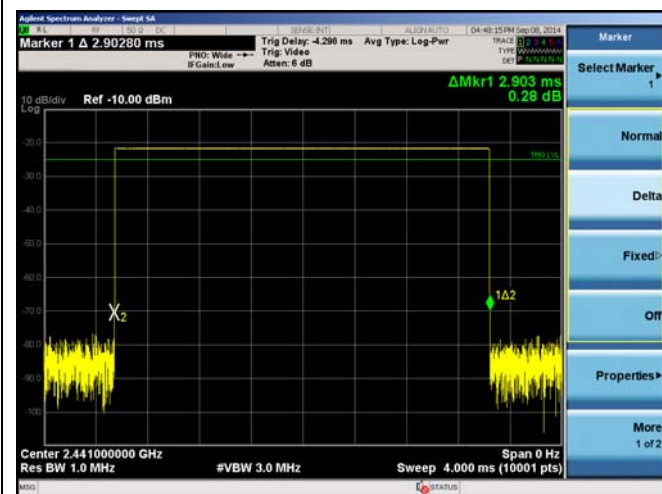


2-DH5

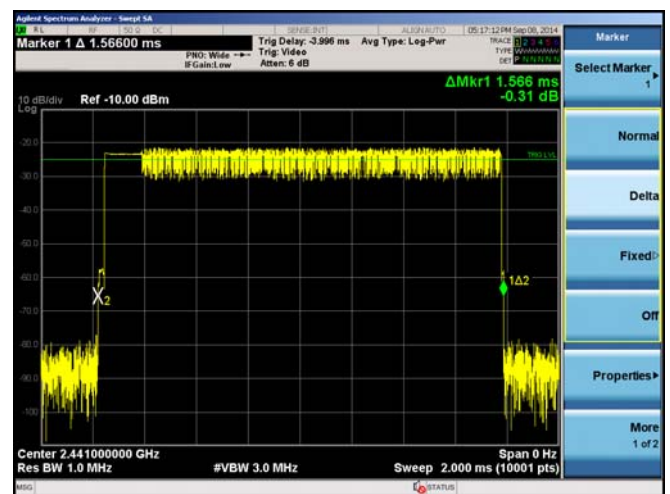


3-DH1

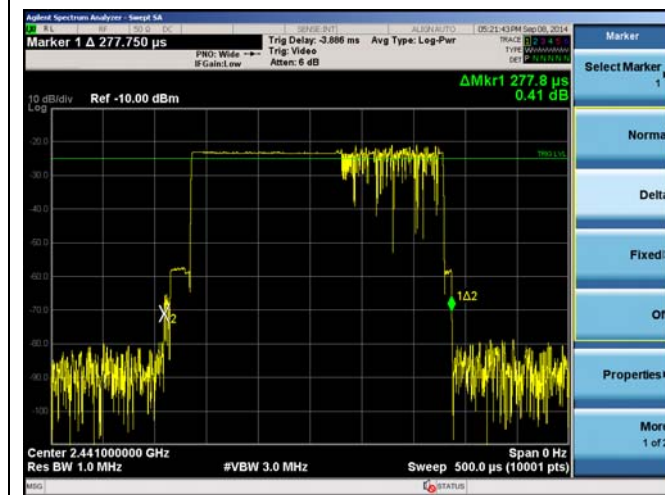

3-DH53

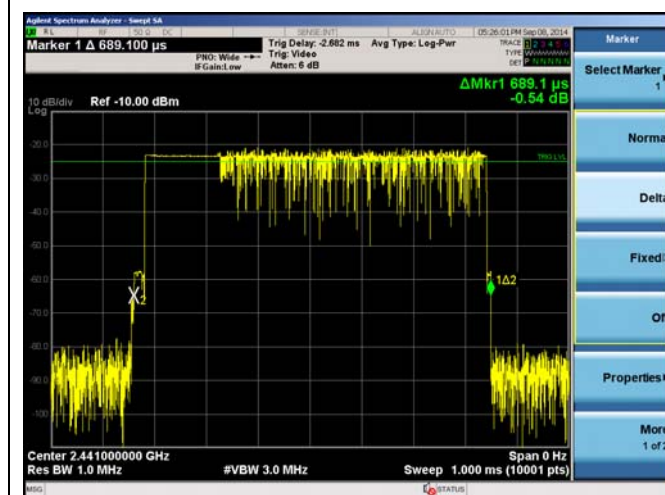

3-DH5

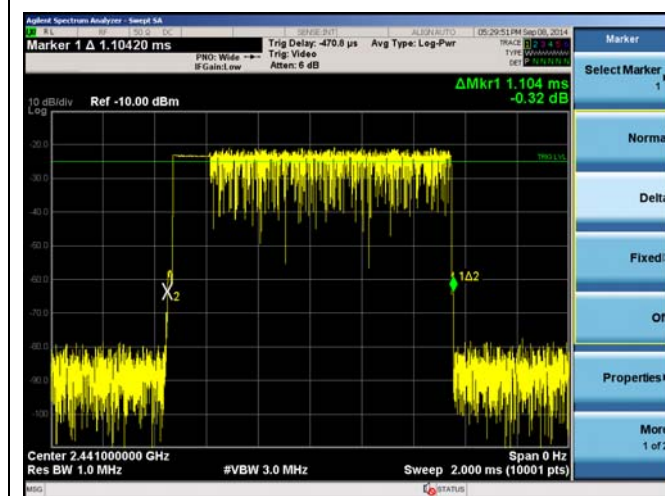


A.6 Band Edge of Authorized Frequency Band


DH5, Hopping OFF




DH5, Hopping ON

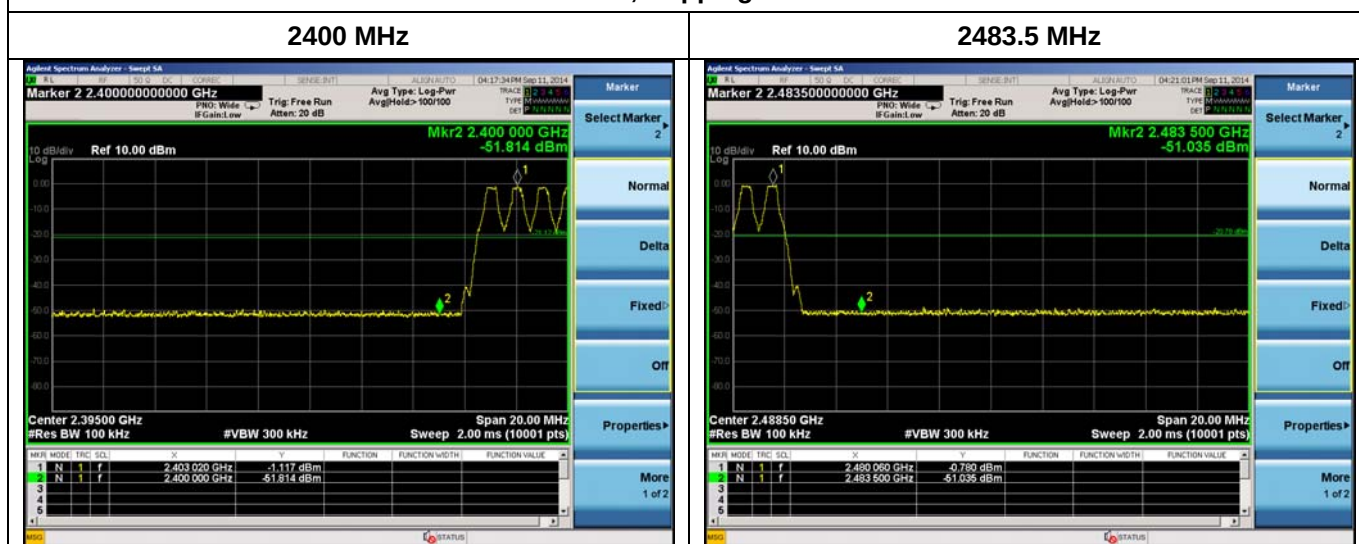


2-DH5, Hopping OFF

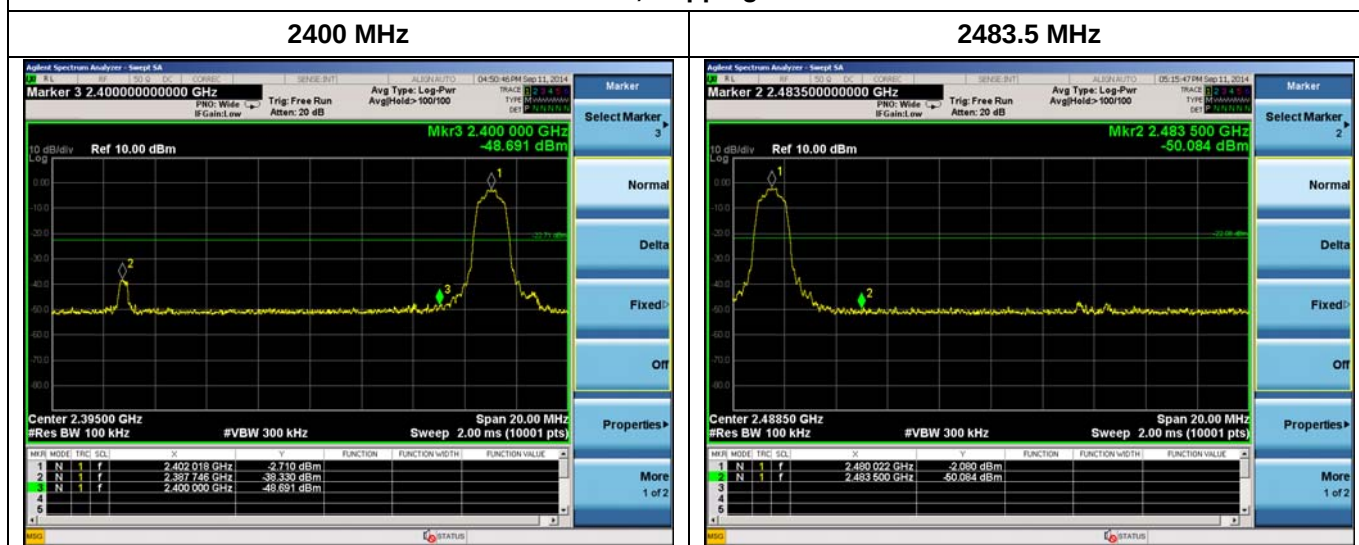


2-DH5, Hopping ON

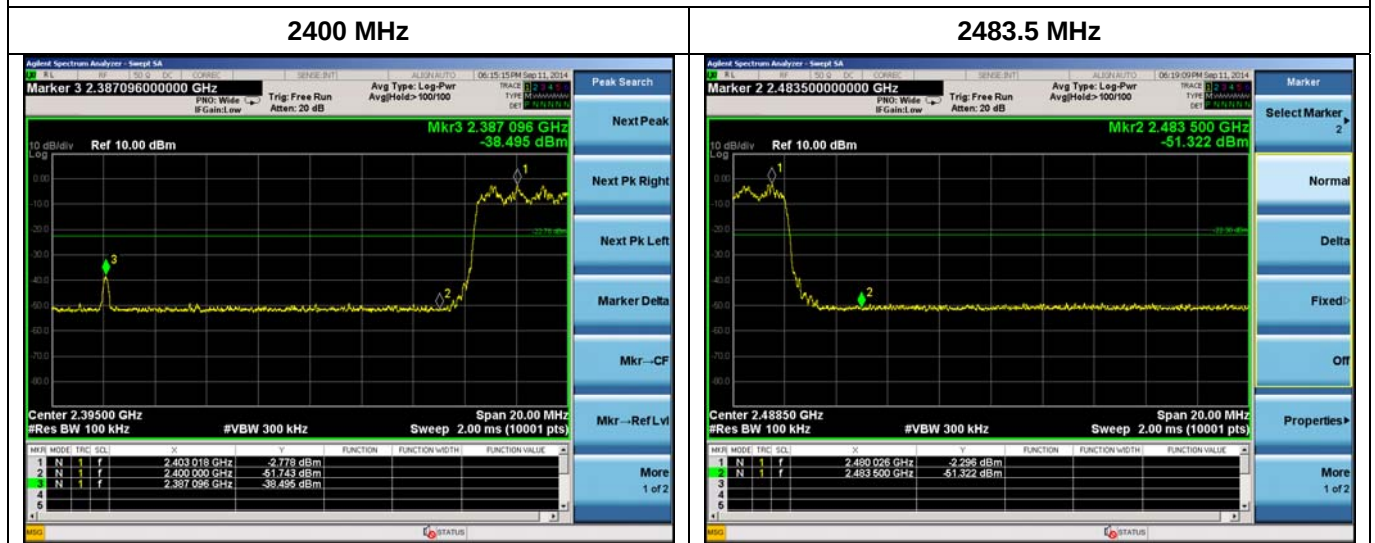

3-DH5, Hopping OFF

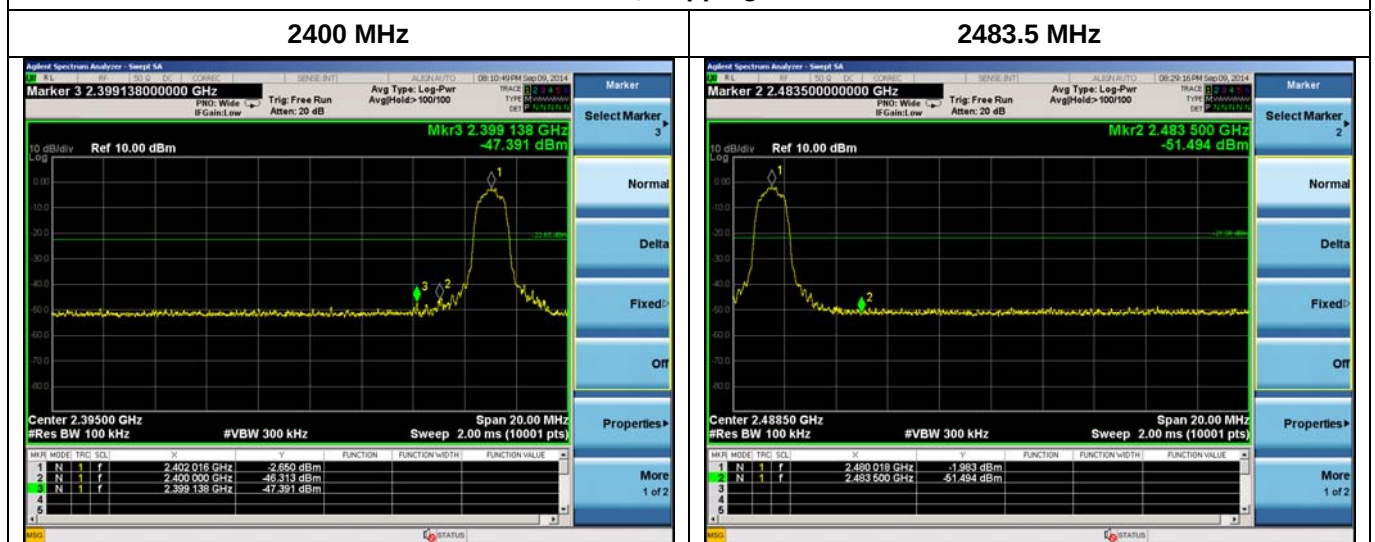


3-DH5, Hopping ON

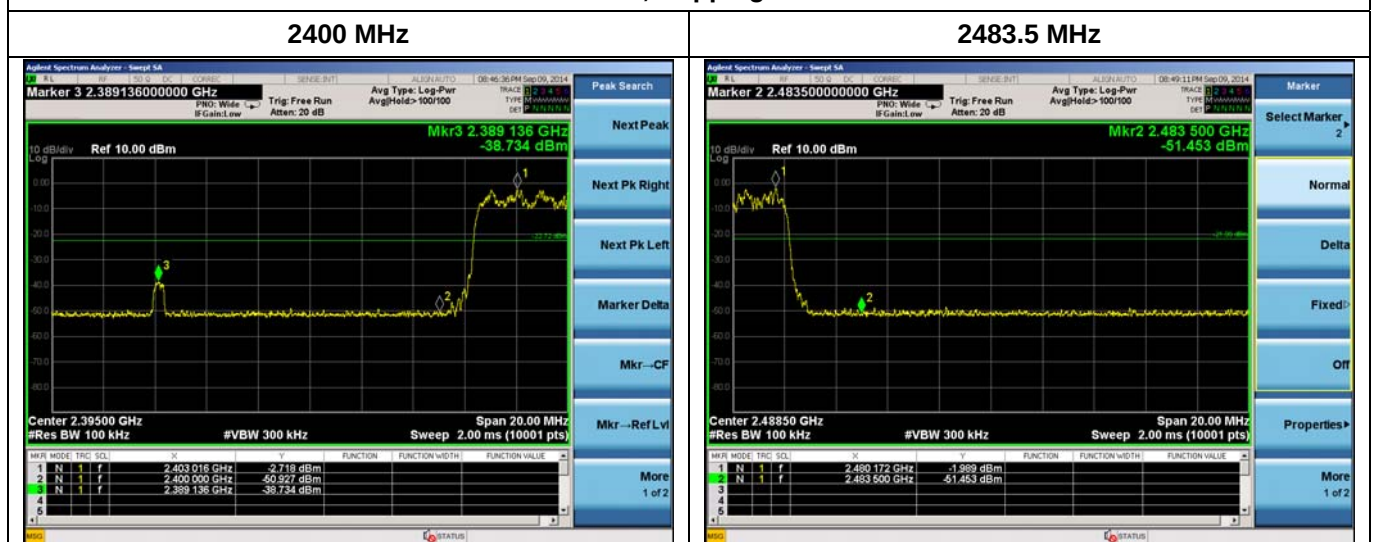


A.7 Spurious RF Conducted Emissions

DH5, Hopping ON


1 – 5 GHz

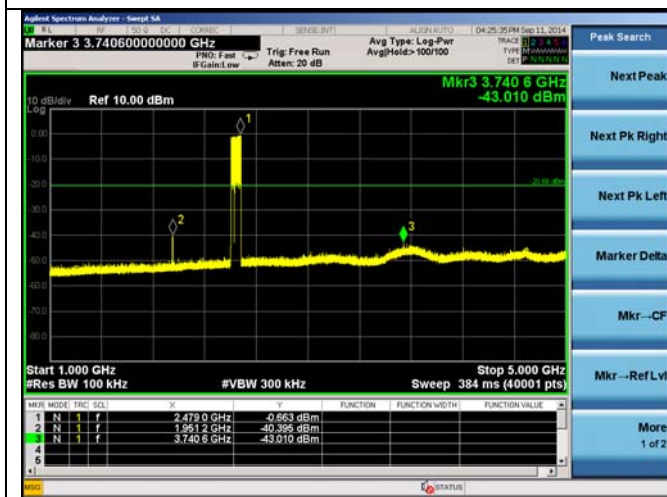


5 – 9 GHz

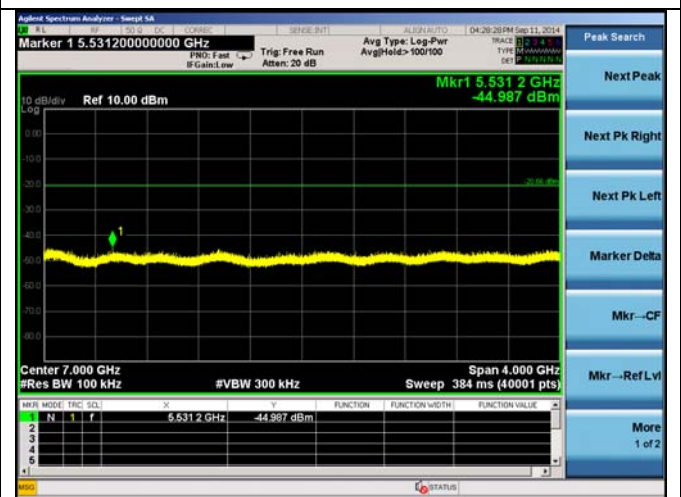


9 – 13 GHz

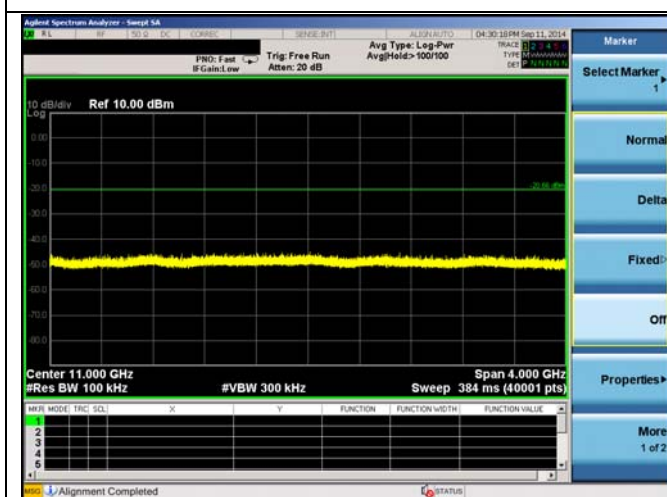


13 – 17 GHz

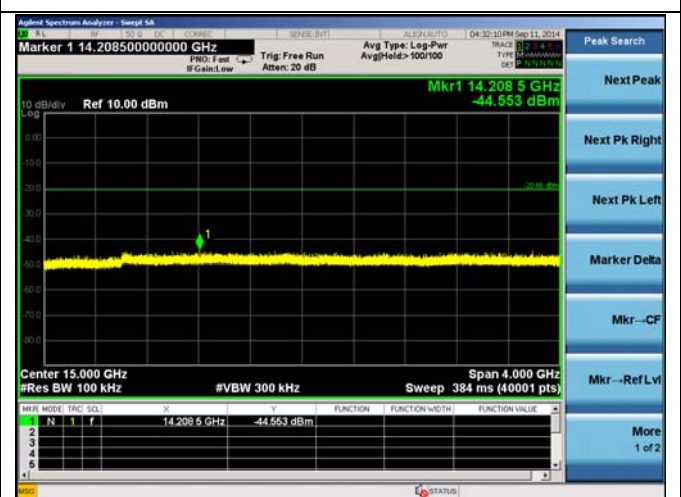

17 – 21 GHz

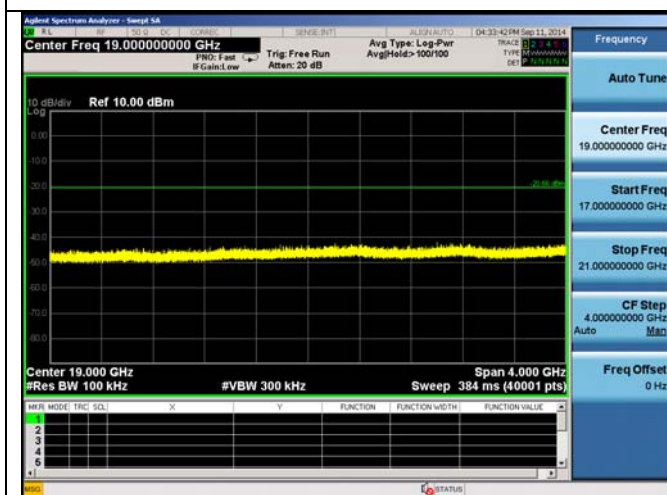


21 – 25 GHz

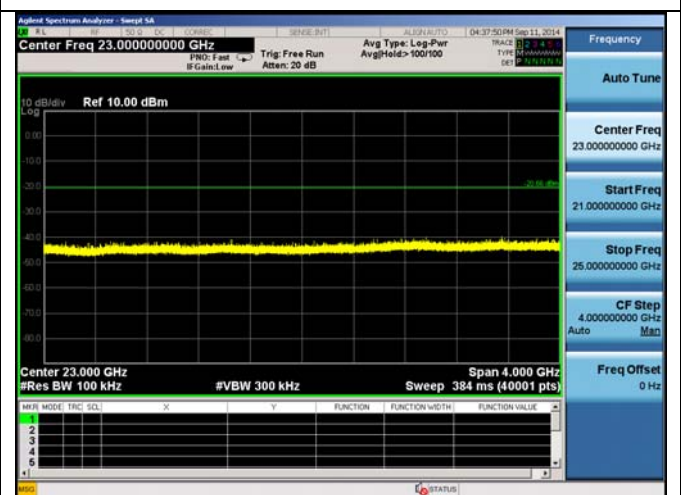


2-DH5, Hopping ON


1 – 5 GHz

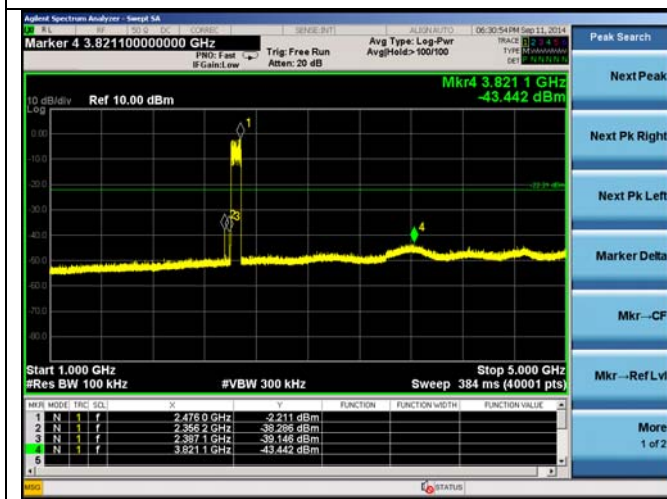


5 – 9 GHz

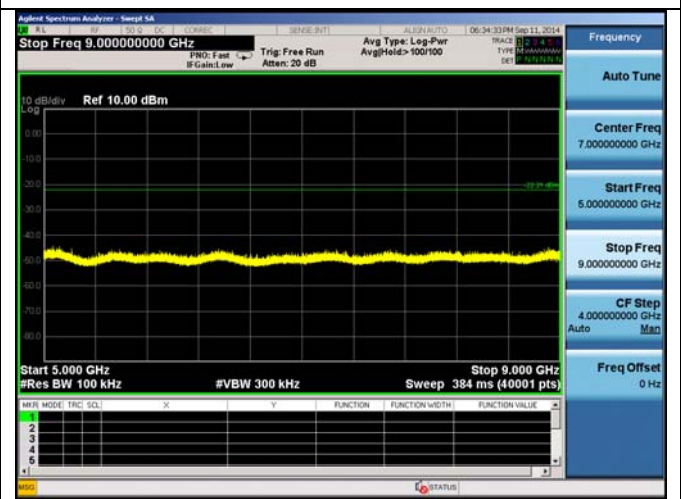


9 – 13 GHz

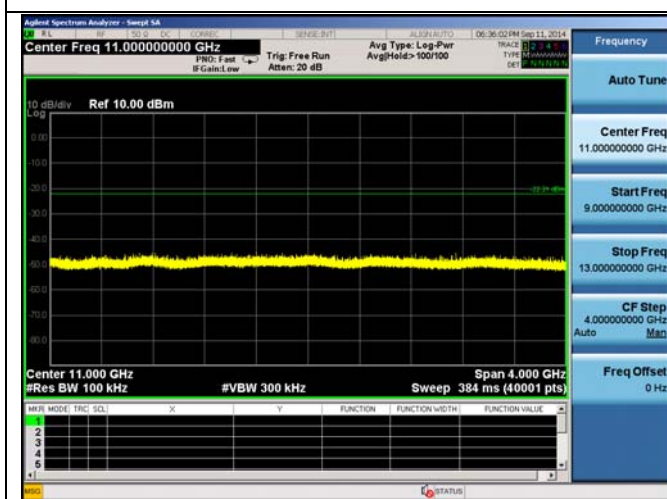


13 – 17 GHz

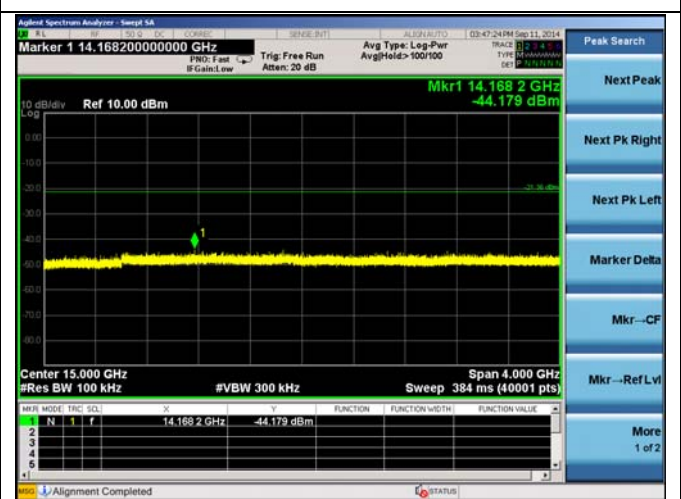

17 – 21 GHz

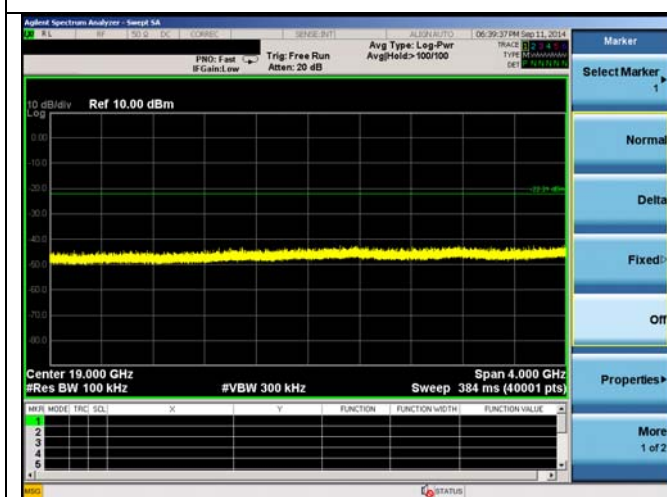


21 – 25 GHz

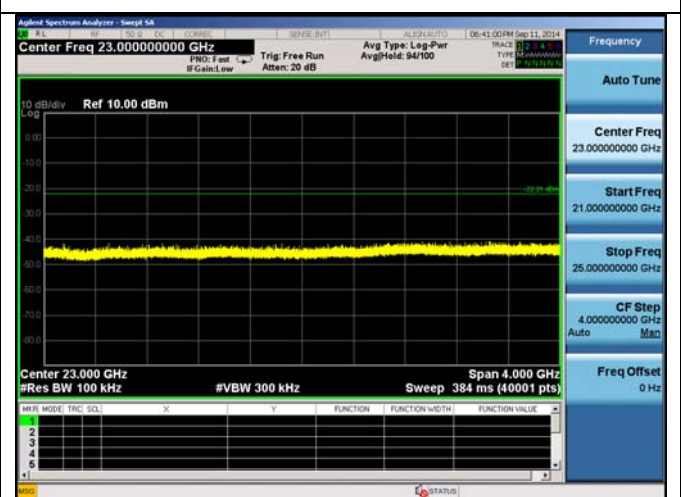


3-DH5, Hopping ON


1 – 5 GHz

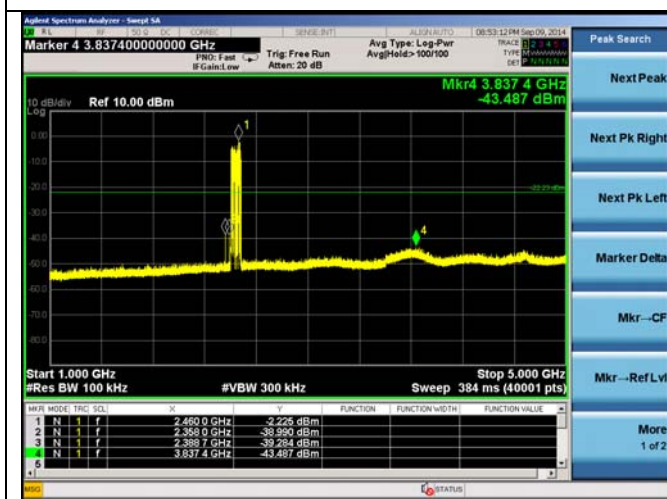


5 – 9 GHz

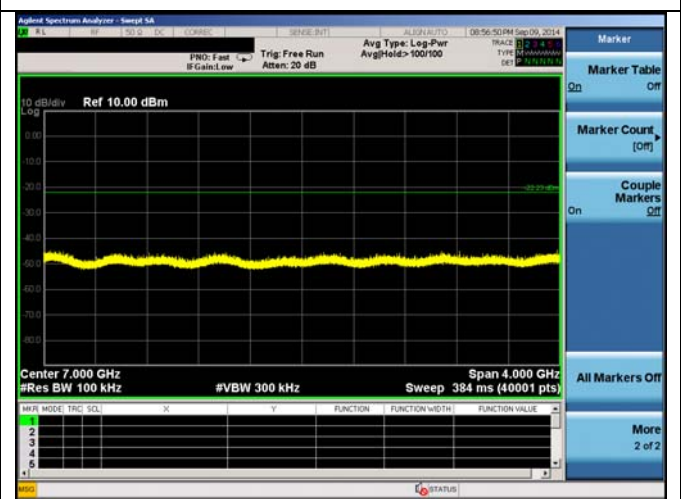


9 – 13 GHz

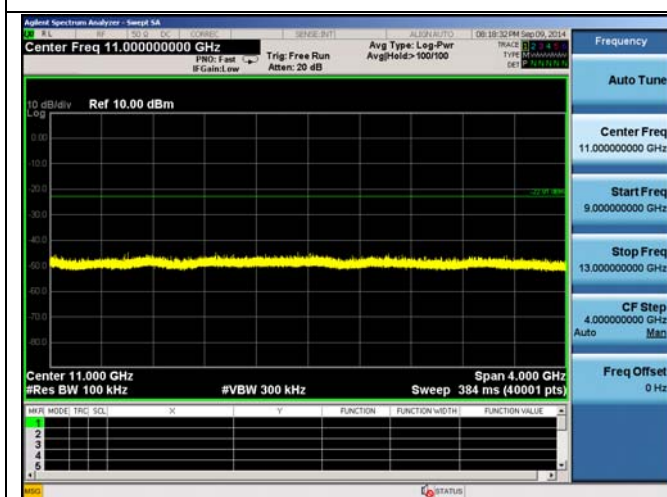


13 – 17 GHz

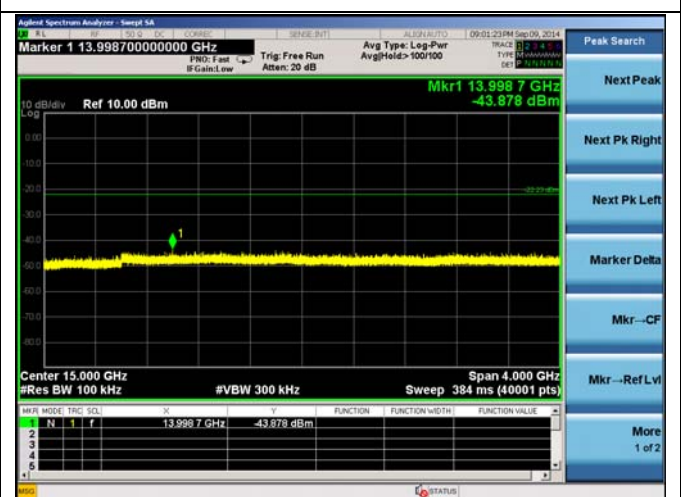

17 – 21 GHz

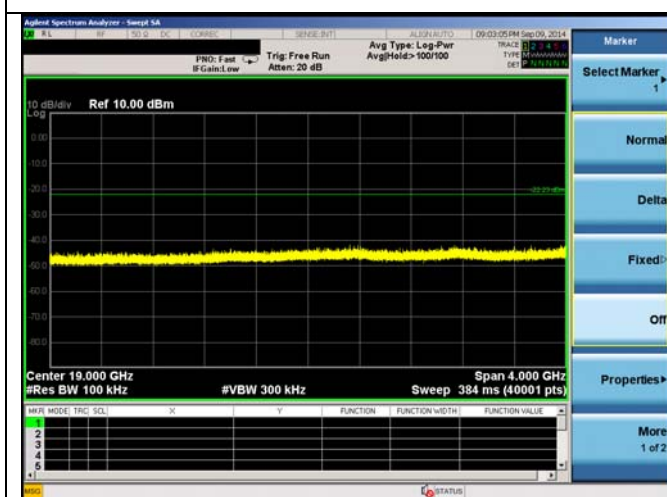


21 – 25 GHz

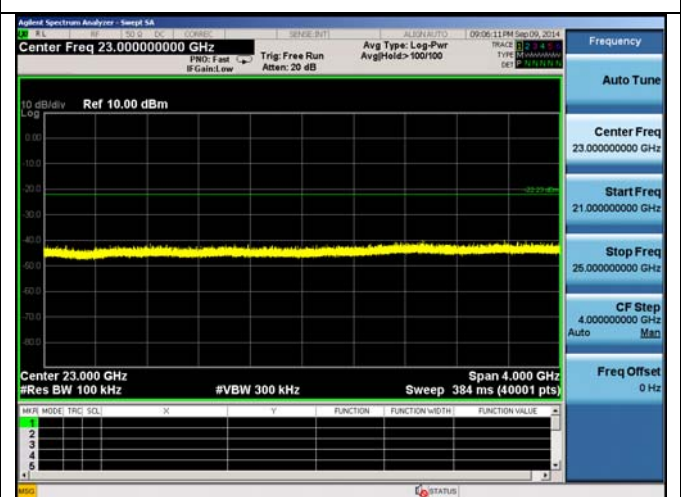

B. PHOTOGRAPHS OF EMISSION SET-UP

A.2.1 Radiated Spurious Emissions

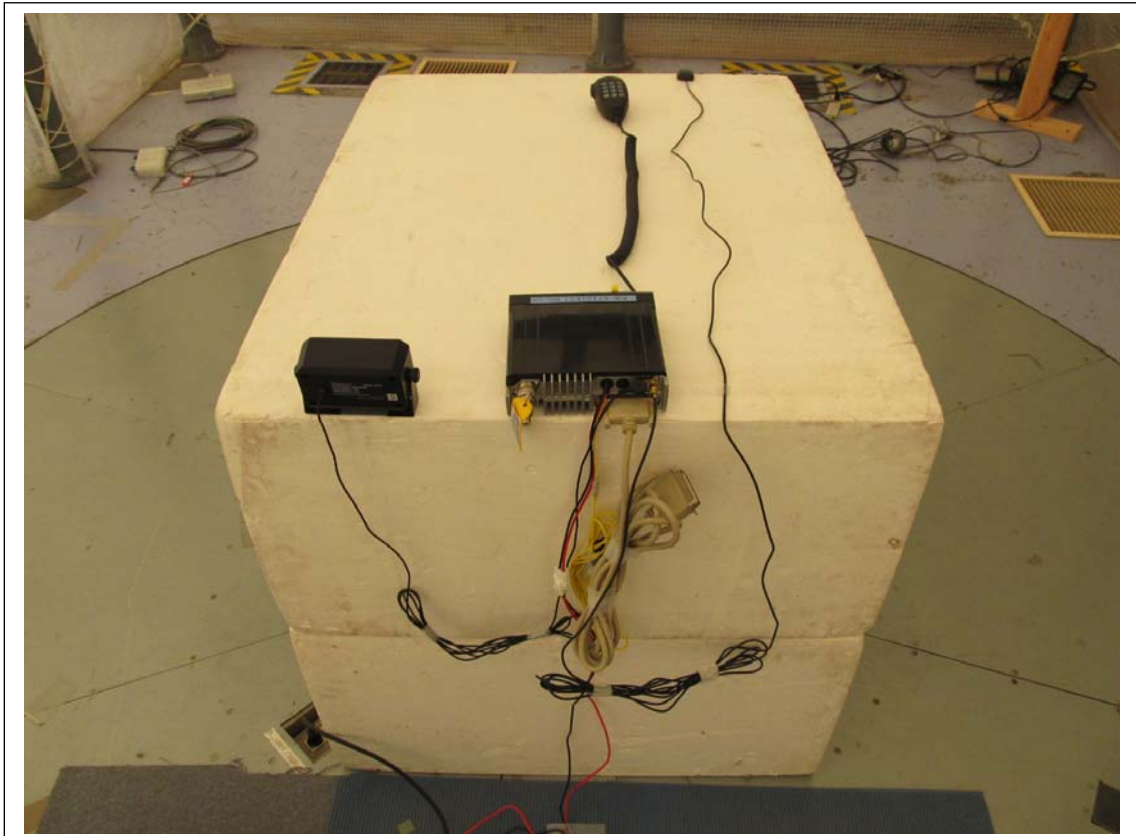

Note : Maintaining 10cm spacing between all the equipment cabinets.

A.2.2 AC Conducted Emissions



Note : Maintaining 10cm spacing between all the equipment cabinets.