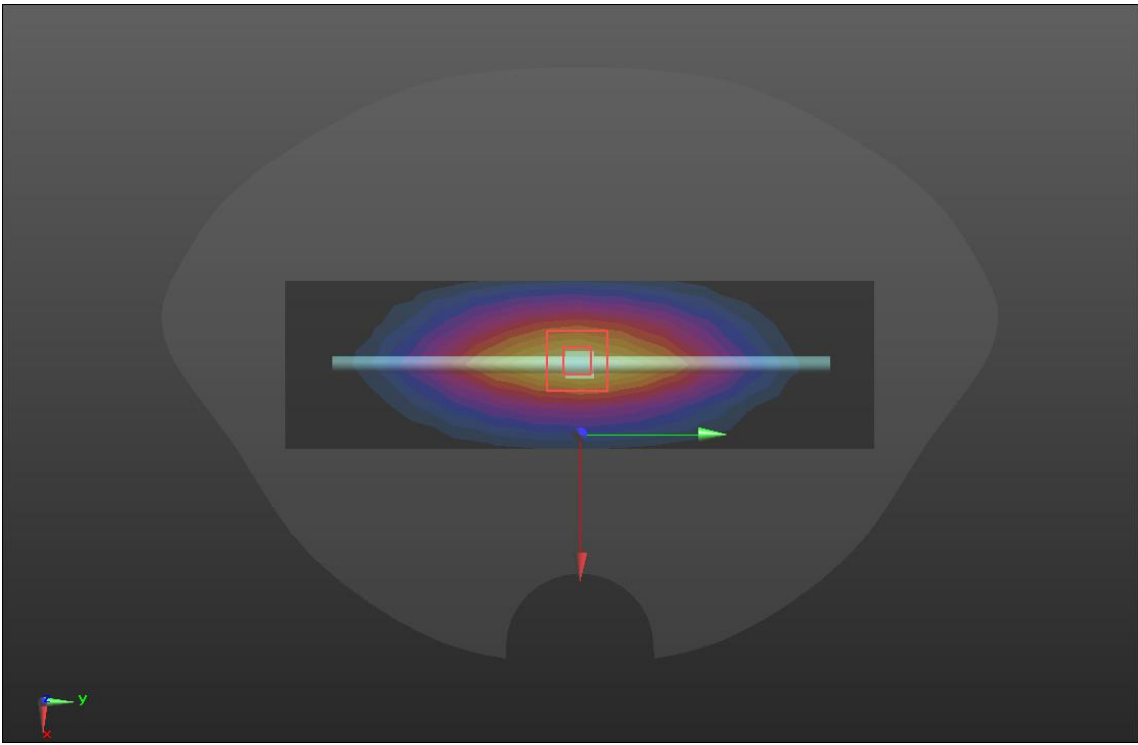
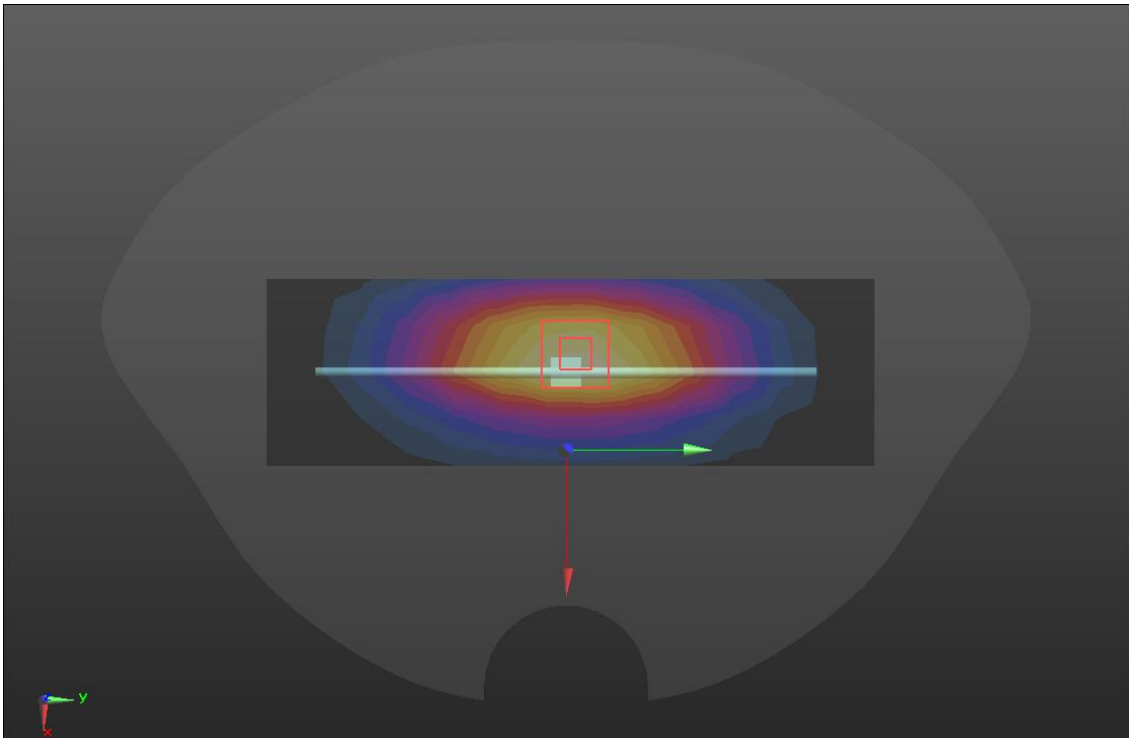
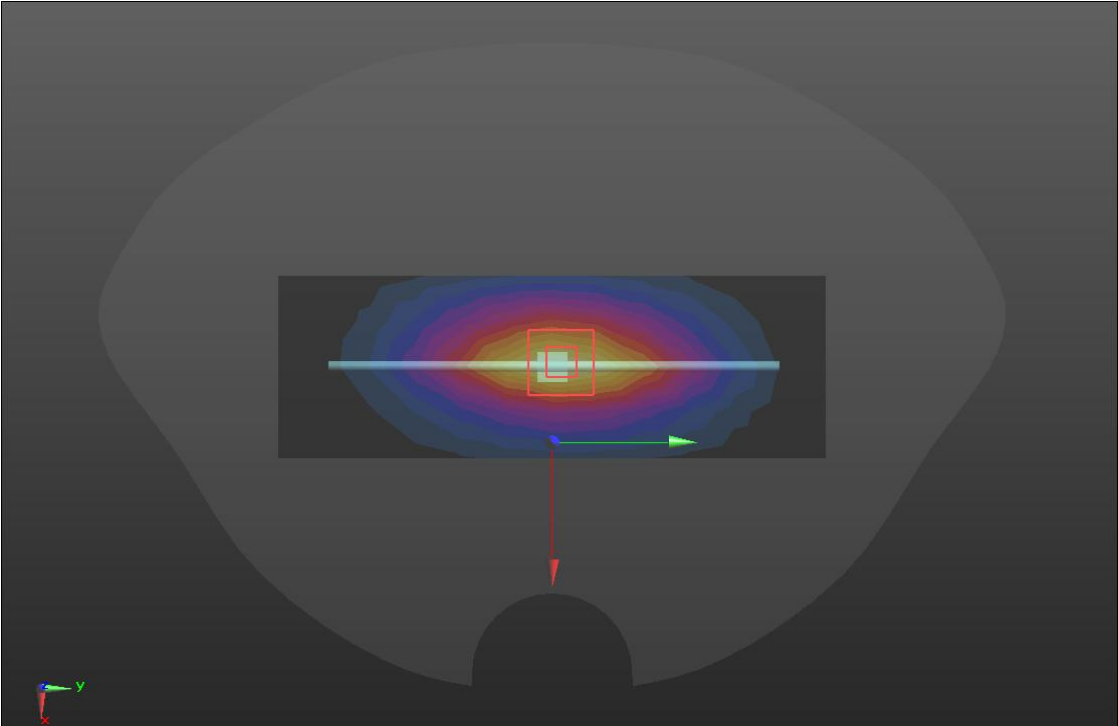


System check	750MHz
Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 43.07$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.4, 6.4, 6.4); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) 750/Dipole 750MHz/Area Scan (5x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.83 W/kg 750/Dipole 750MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 58.50 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 3.24 W/kg SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.47 W/kg Maximum value of SAR (measured) = 2.85 W/kg 	

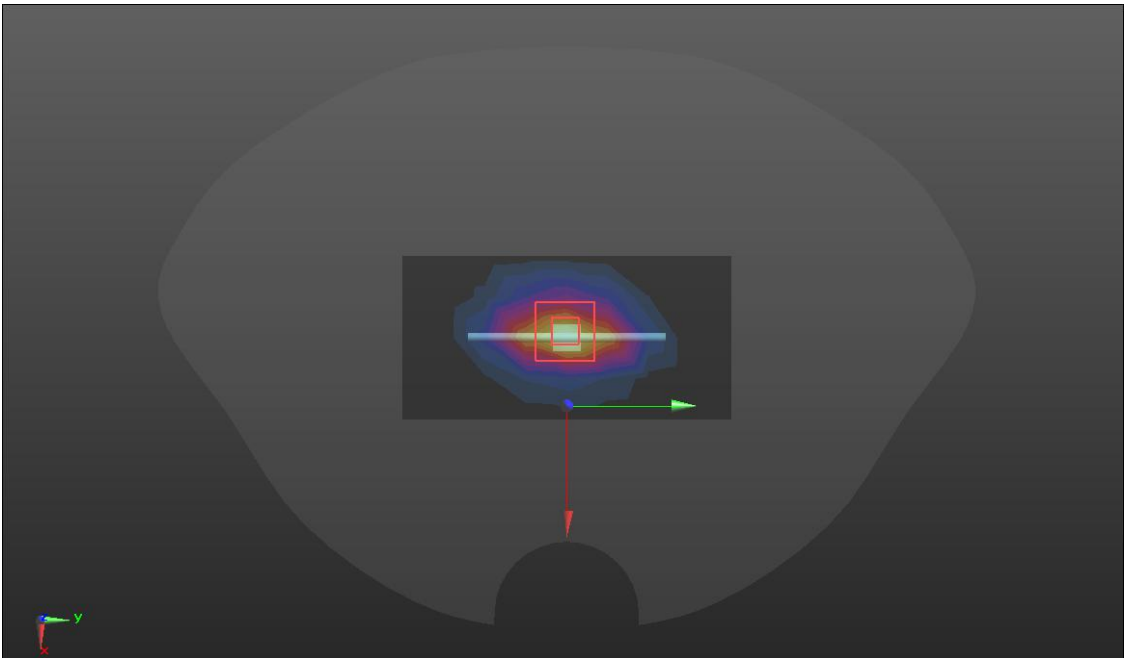
SRTC performed system check by using 250mw at antenna port

System check	835MHz
Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 42.99$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.2, 6.2, 6.2); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D835/Dipole 835MHz/Area Scan (5x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.71 W/kg D835/Dipole 835MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 56.70 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 3.50 W/kg SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.52 W/kg Maximum value of SAR (measured) = 3.04 W/kg 	

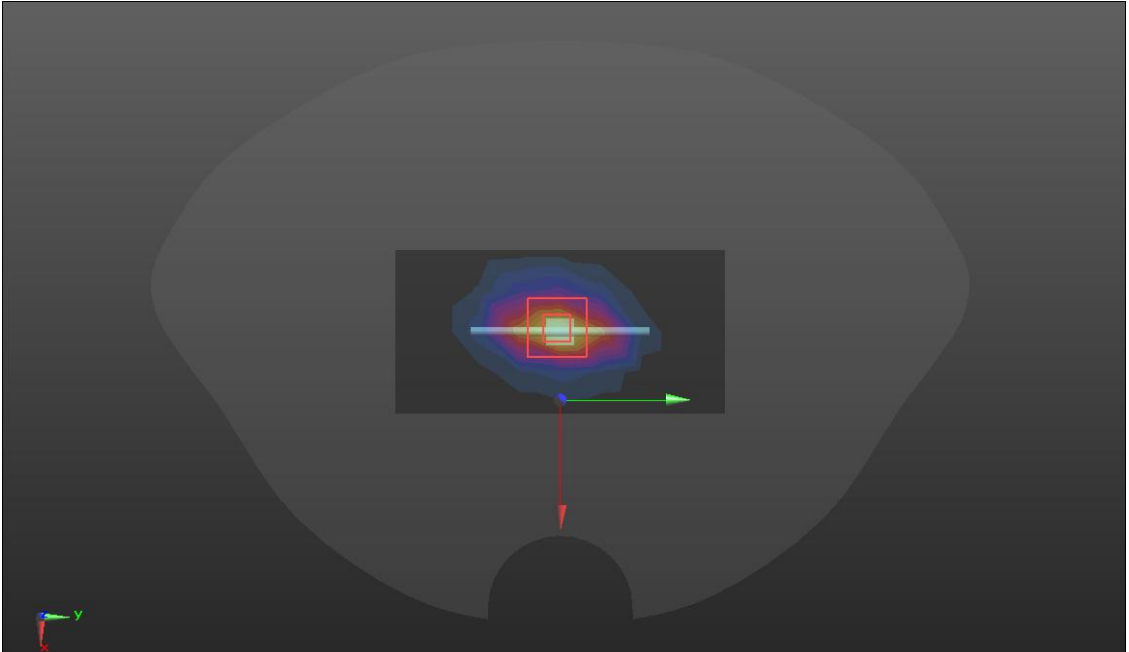
SRTC performed system check by using 250mw at antenna port

System check	900MHz
Communication System: UID 0, CW (0); Frequency: 900 MHz; Duty Cycle: 1:1 parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.01 \text{ S/m}$; $\epsilon_r = 40.05$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.2, 6.2, 6.2); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D900/Dipole 900MHz/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 3.85 W/kg D900/Dipole 900MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 66.17 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 4.74 W/kg SAR(1 g) = 2.68 W/kg; SAR(10 g) = 1.83 W/kg Maximum value of SAR (measured) = 3.99 W/kg 	

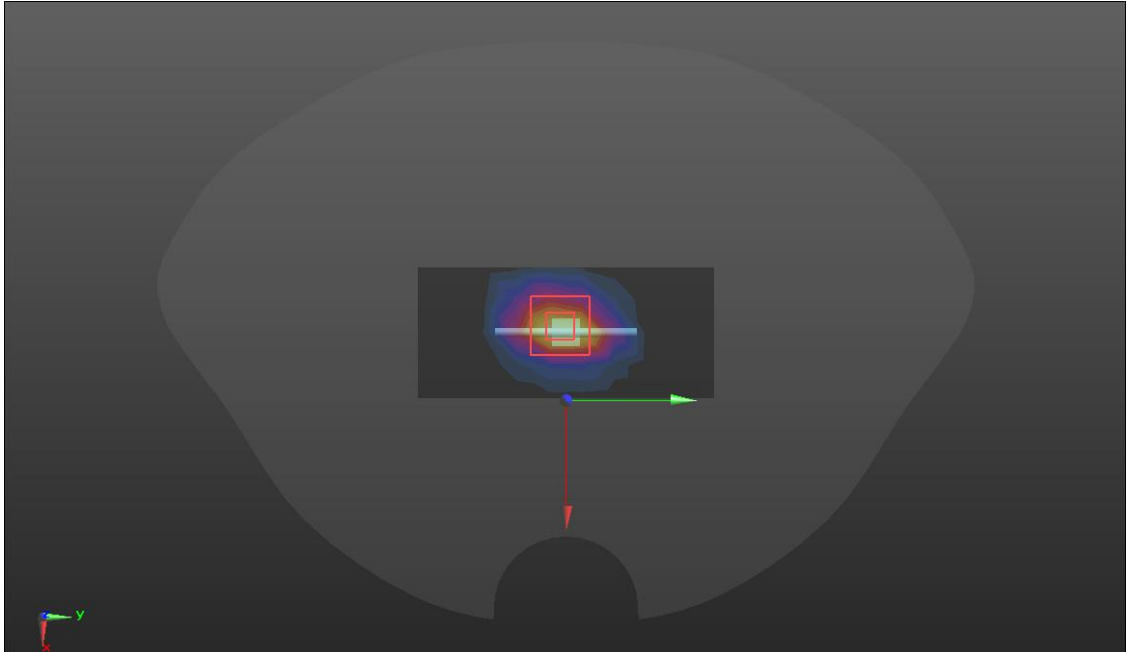
SRTC performed system check by using 250mw at antenna port

System check	1800MHz
Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.4 \text{ S/m}$; $\epsilon_r = 39.31$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.07, 5.07, 5.07); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D1800/Dipole 1800MHz/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 15.3 W/kg D1800/Dipole 1800MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 107.8 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 18.7 W/kg SAR(1 g) = 10.0 W/kg; SAR(10 g) = 5.22 W/kg Maximum value of SAR (measured) = 15.6 W/kg 	

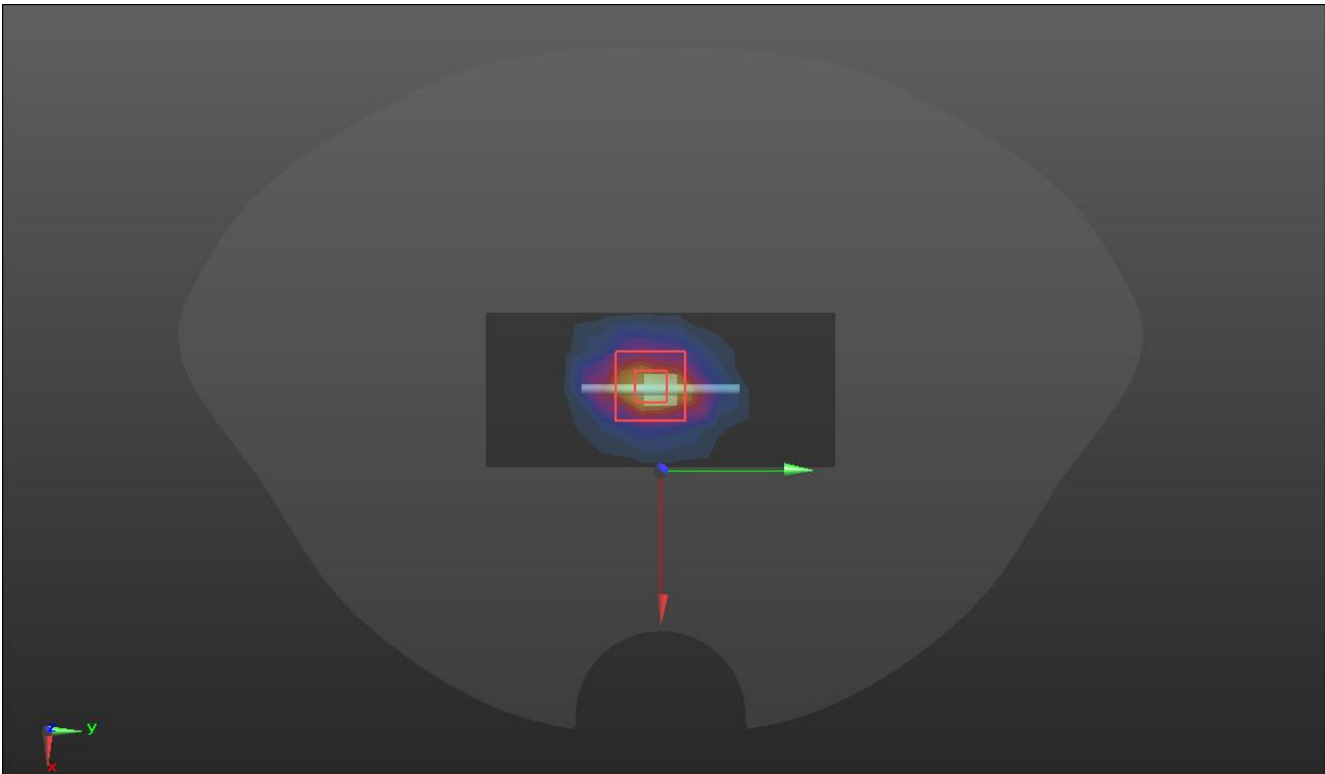
SRTC performed system check by using 250mw at antenna port

System check	2000MHz
Communication System: UID 0, CW (0); Frequency: 2000 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.47 \text{ S/m}$; $\epsilon_r = 41.31$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.99, 4.99, 4.99); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D2000/Dipole 2000MHz/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 15.2 W/kg D2000/Dipole 2000MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 107.6 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 18.9 W/kg SAR(1 g) = 10.64 W/kg; SAR(10 g) = 4.99 W/kg Maximum value of SAR (measured) = 15.5 W/kg 	

SRTC performed system check by using 250mw at antenna port

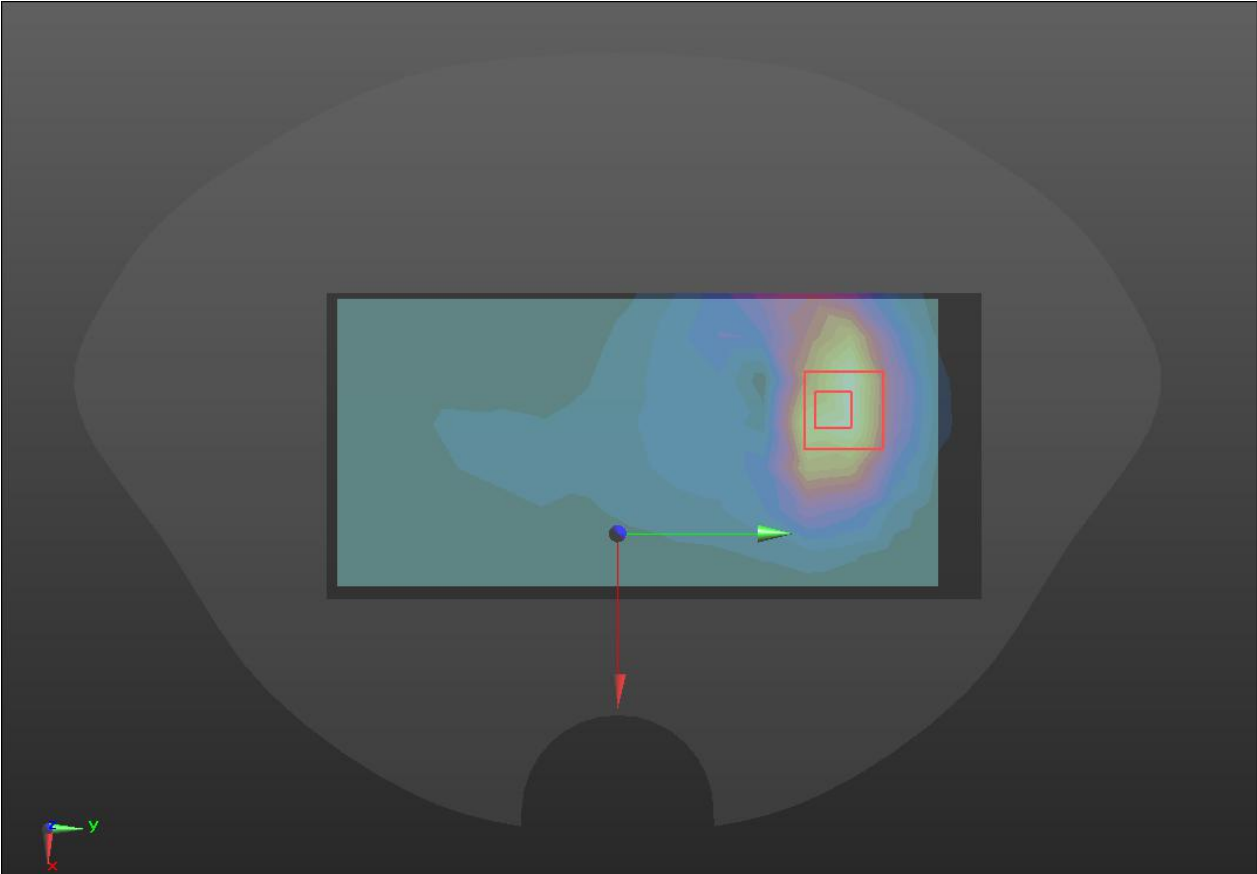
System check	2450MHz
Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.74 \text{ S/m}$; $\epsilon_r = 40.83$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D2450/Dipole 2450MHz/Area Scan (5x10x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 18.1 W/kg D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 107.6 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 25.1 W/kg SAR(1 g) = 12.69 W/kg; SAR(10 g) = 6.36 W/kg Maximum value of SAR (measured) = 20.3 W/kg 	

SRTC performed system check by using 250mw at antenna port

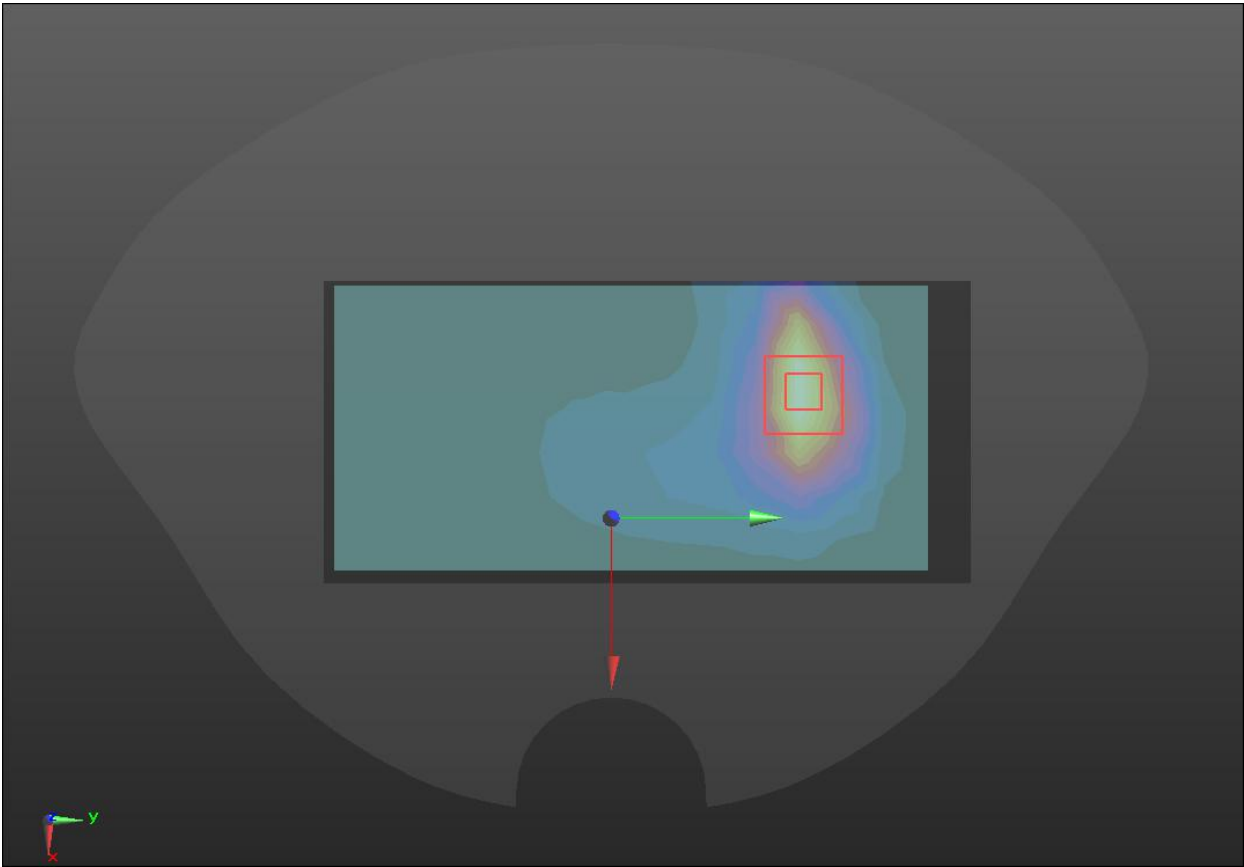
System check	2600MHz
Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.65$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.41, 4.41, 4.41); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D2600/Dipole 2600MHz/Area Scan (5x10x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 21.0 W/kg D2600/Dipole 2600MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 107.0 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 27.8 W/kg SAR(1 g) = 14.02 W/kg; SAR(10 g) = 6.53 W/kg Maximum value of SAR (measured) = 21.7 W/kg 	

SRTC performed system check by using 250mw at antenna port

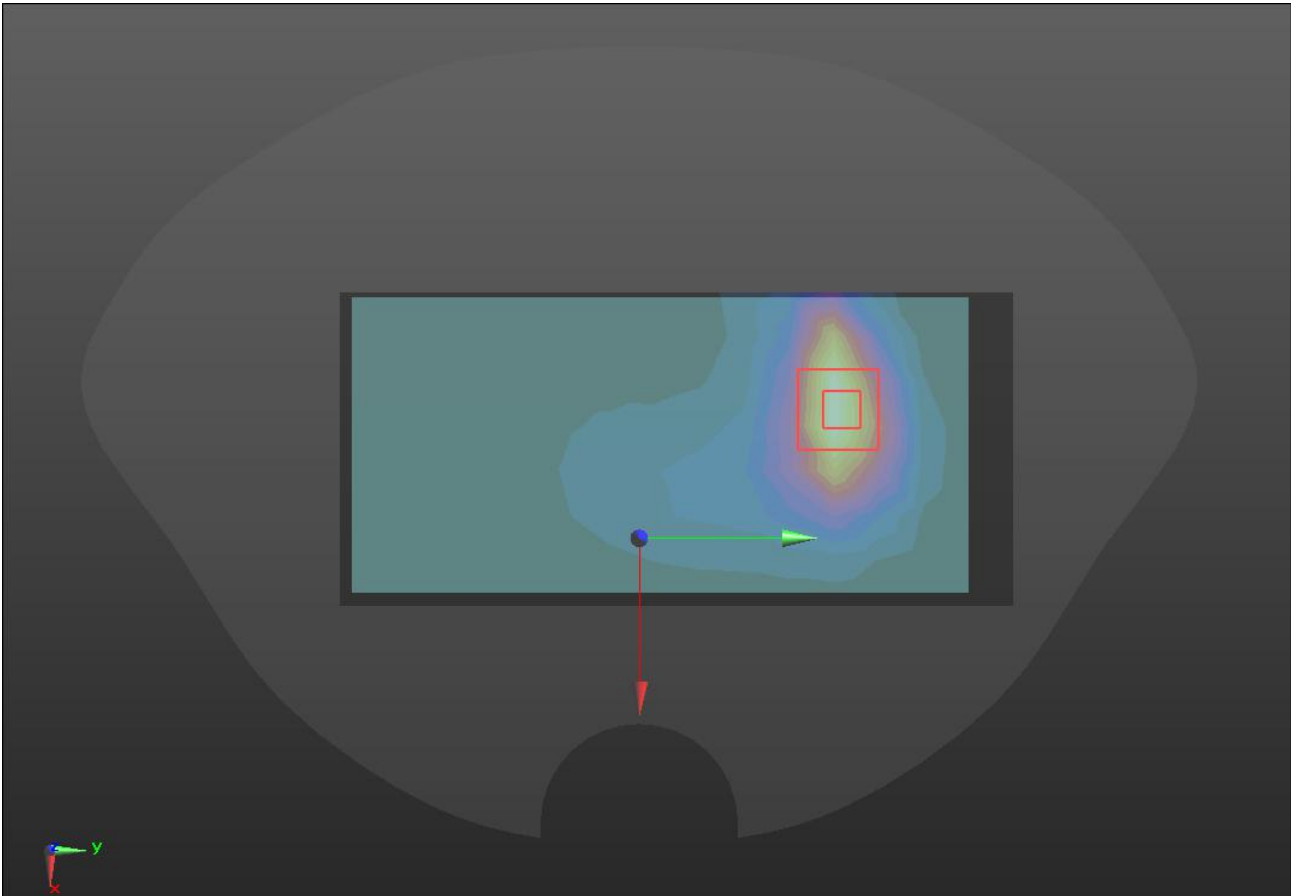
GSM850

Hotspot	Back
Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 2:8 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.2, 6.2, 6.2); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/GSM850/Area Scan (8x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.0339 W/kg BACK/GSM850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.206 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.0580 W/kg SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.019 W/kg Maximum value of SAR (measured) = 0.0392 W/kg	
	

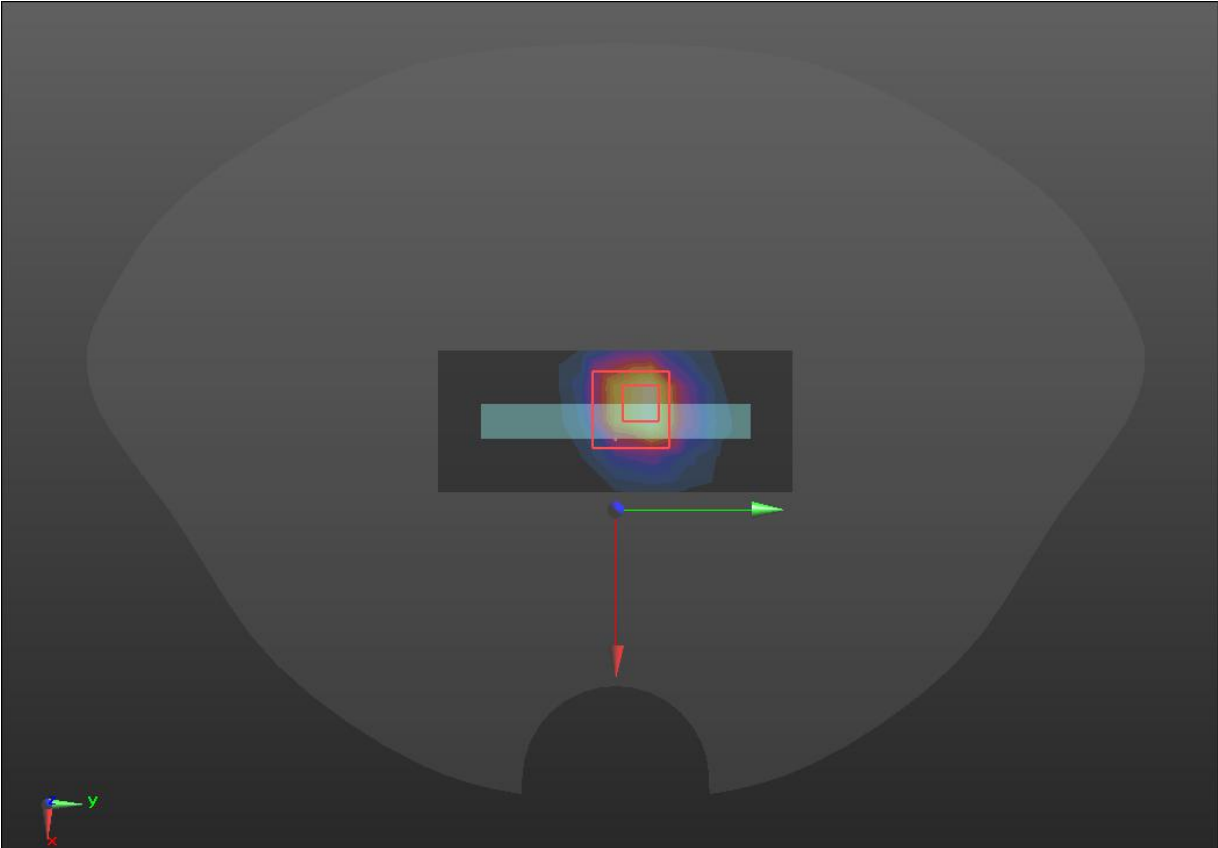
GSM1900

Hotspot	Back
Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 3:8 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.07, 5.07, 5.07); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/GSM1900/Area Scan (8x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.307 W/kg BACK/GSM1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 4.857 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.449 W/kg SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.141 W/kg Maximum value of SAR (measured) = 0.324 W/kg 	

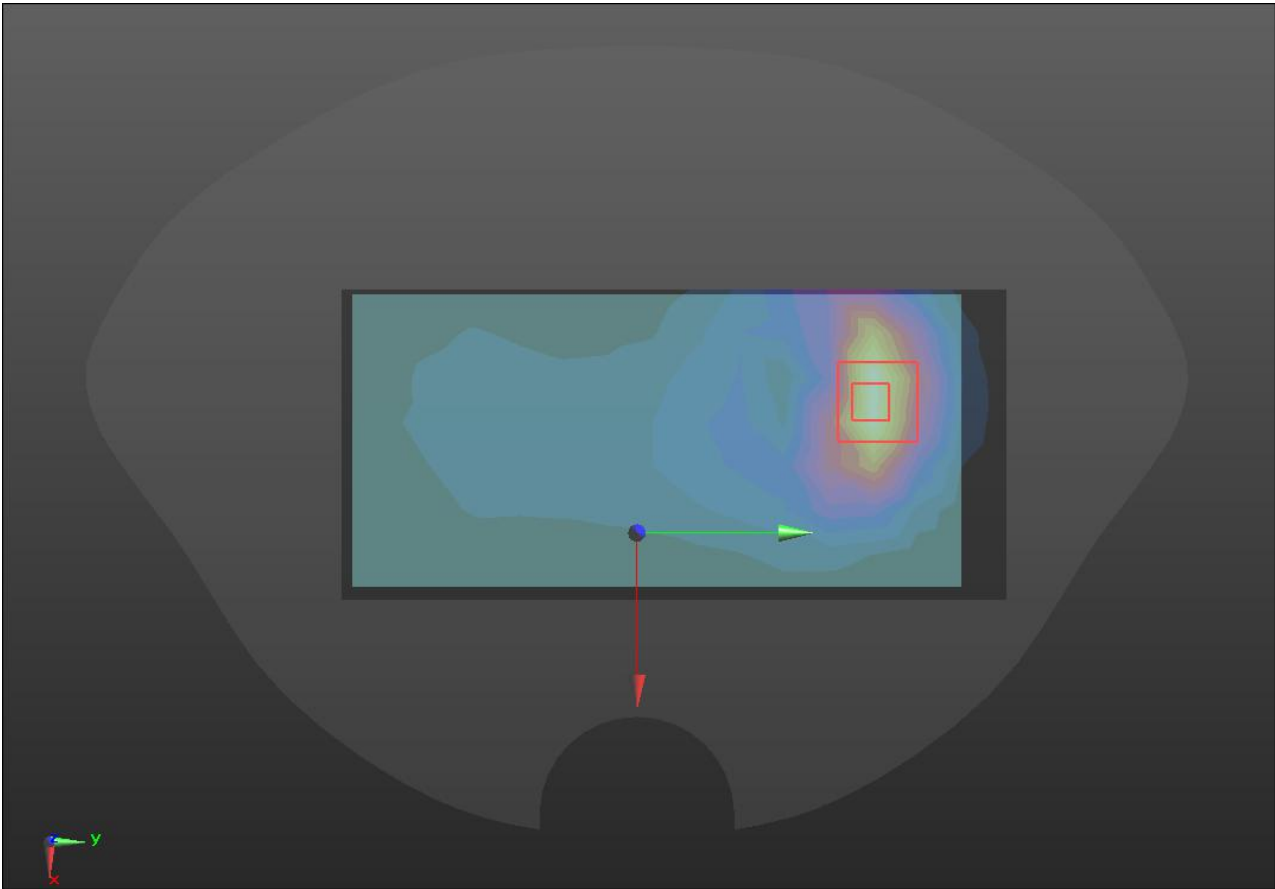
WCDMA Band II

Hotspot	Back
Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.07, 5.07, 5.07); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/W2/Area Scan (8x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.520 W/kg BACK/W2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 6.469 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.750 W/kg SAR(1 g) = 0.485W/kg; SAR(10 g) = 0.243 W/kg Maximum value of SAR (measured) = 0.548 W/kg 	

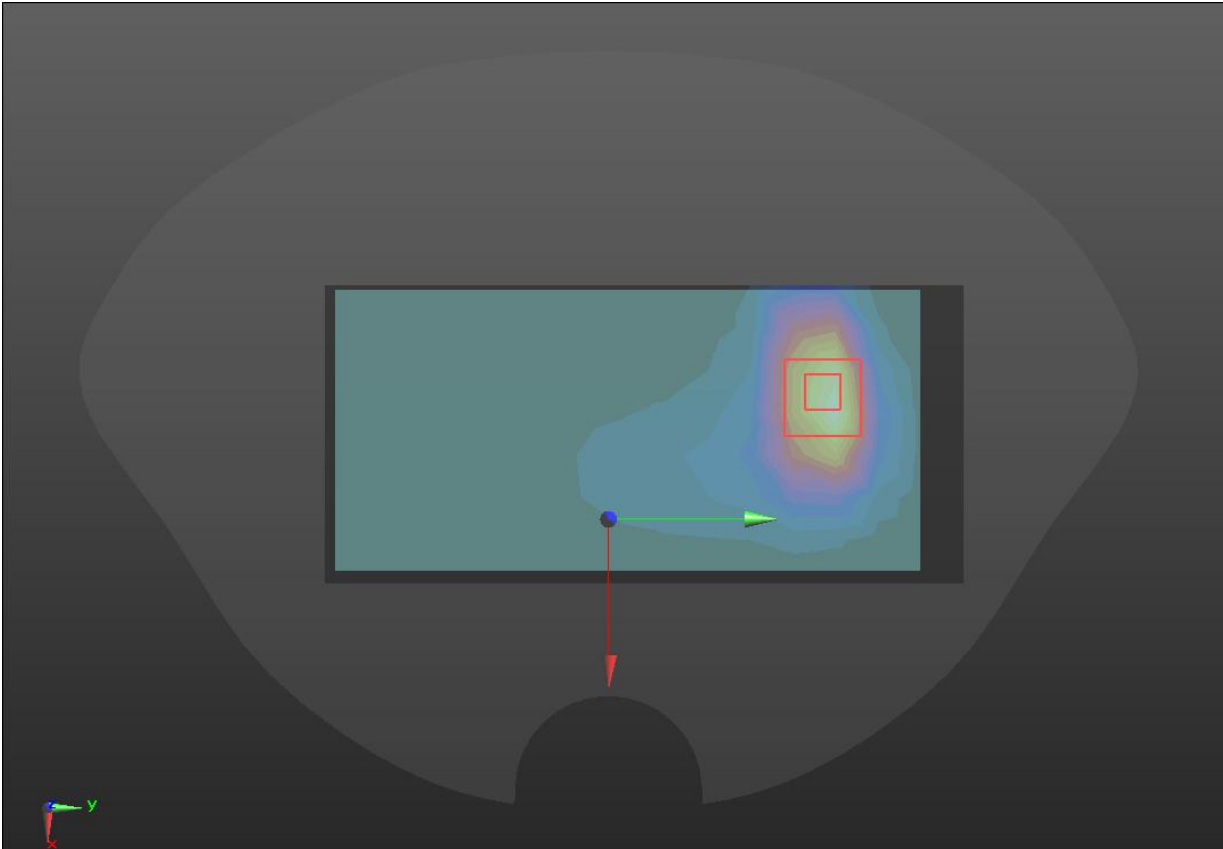
WCDMA Band IV

Hotspot	Bottom
Communication System: UID 0, WCDMA BAND4 (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.6 \text{ MHz}$; $\sigma = 1.376 \text{ S/m}$; $\epsilon_r = 40.07$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.07, 5.07, 5.07); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BOTTOM/W4/Area Scan (8x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.649 W/kg BOTTOM/W4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.418 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.890 W/kg SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.307 W/kg Maximum value of SAR (measured) = 0.673 W/kg	
	

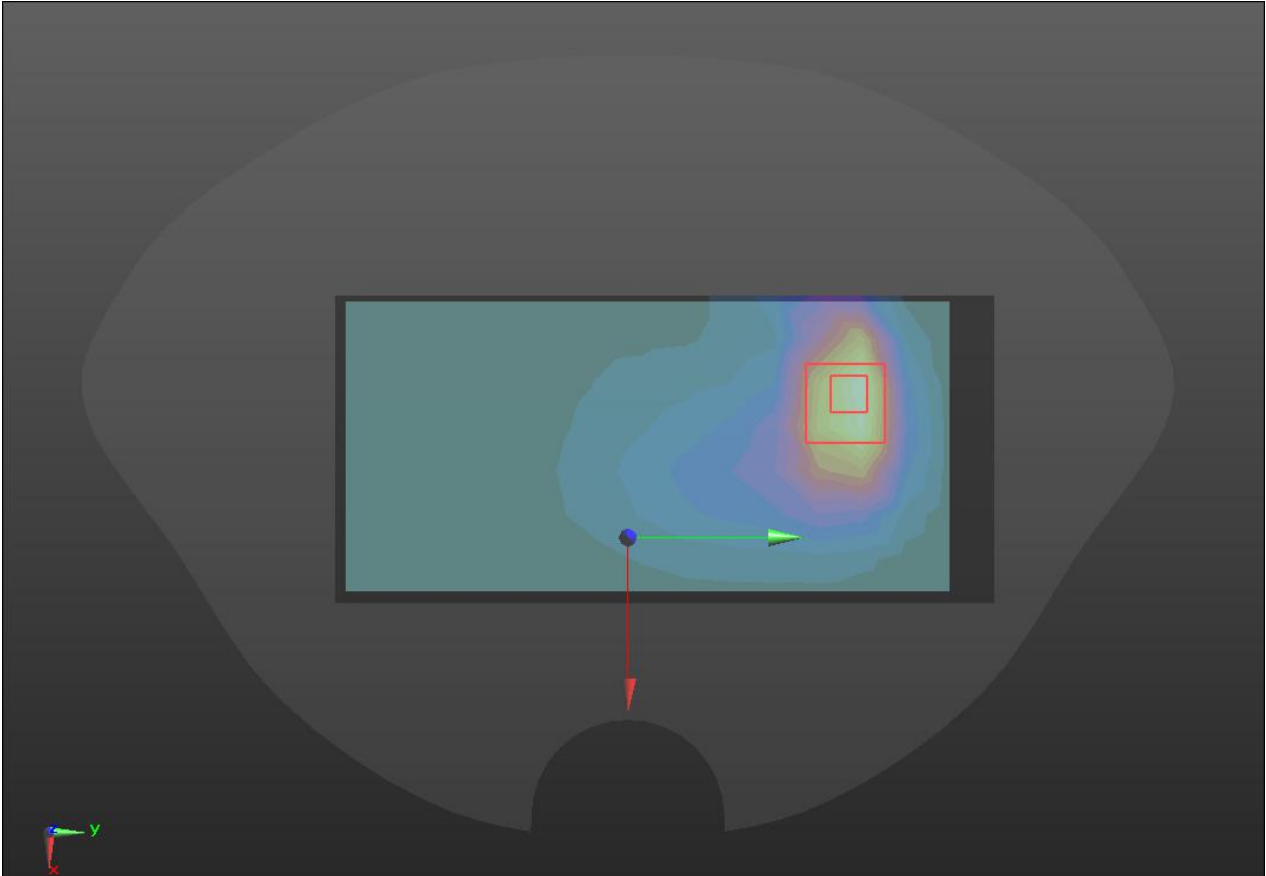
WCDMA Band V

Hotspot	Front
Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.2, 6.2, 6.2); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Front/W5/Area Scan (8x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.0299 W/kg Front /W5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.207 V/m; Power Drift = 0.17 dB Peak SAR (extrapolated) = 0.0460 W/kg SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.014 W/kg Maximum value of SAR (measured) = 0.0300 W/kg	
	

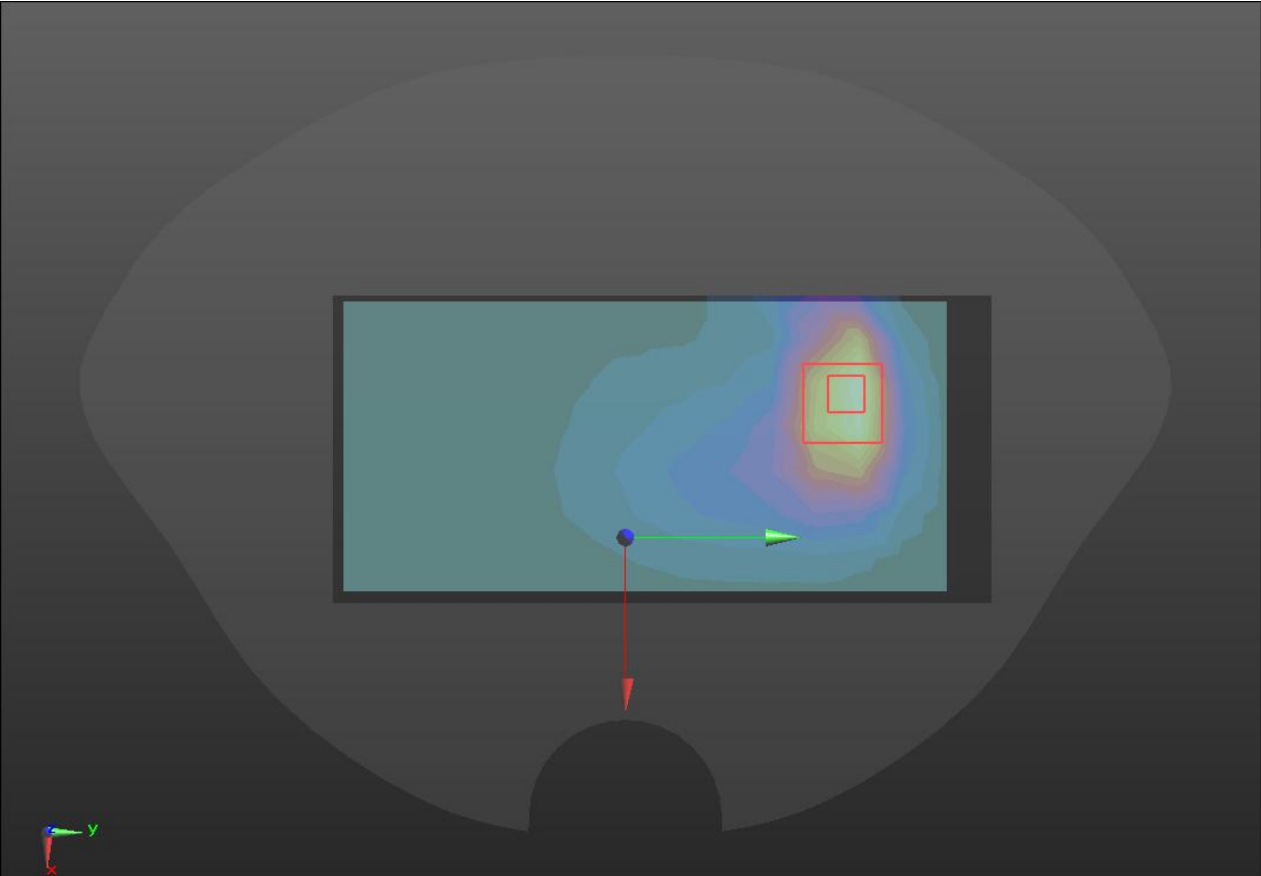
LTE Band 2

Hotspot	Back
Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880 \text{ MHz}$; $\sigma = 1.4 \text{ S/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.07, 5.07, 5.07); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B2/Area Scan (8x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.692 W/kg BACK/LTE B2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.403 V/m; Power Drift = -0.18 dB Peak SAR (extrapolated) = 1.07 W/kg SAR(1 g) = 0.617 W/kg; SAR(10 g) = 0.336 W/kg Maximum value of SAR (measured) = 0.775 W/kg 	

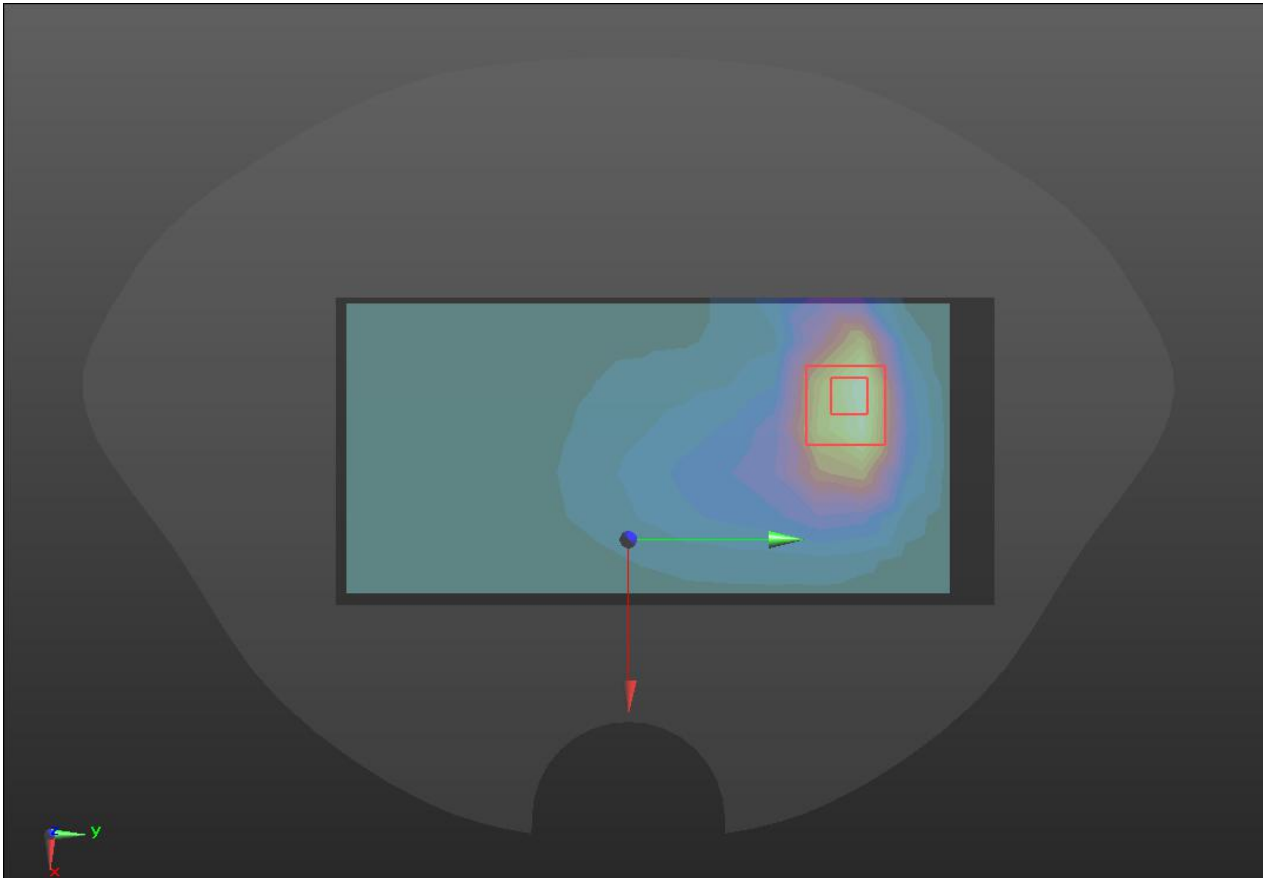
LTE Band 4

Hotspot	Back
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.07, 5.07, 5.07); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B4/Area Scan (8x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.694 W/kg BACK/LTE B4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 8.597 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 1.10 W/kg SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.369 W/kg Maximum value of SAR (measured) = 0.830 W/kg 	

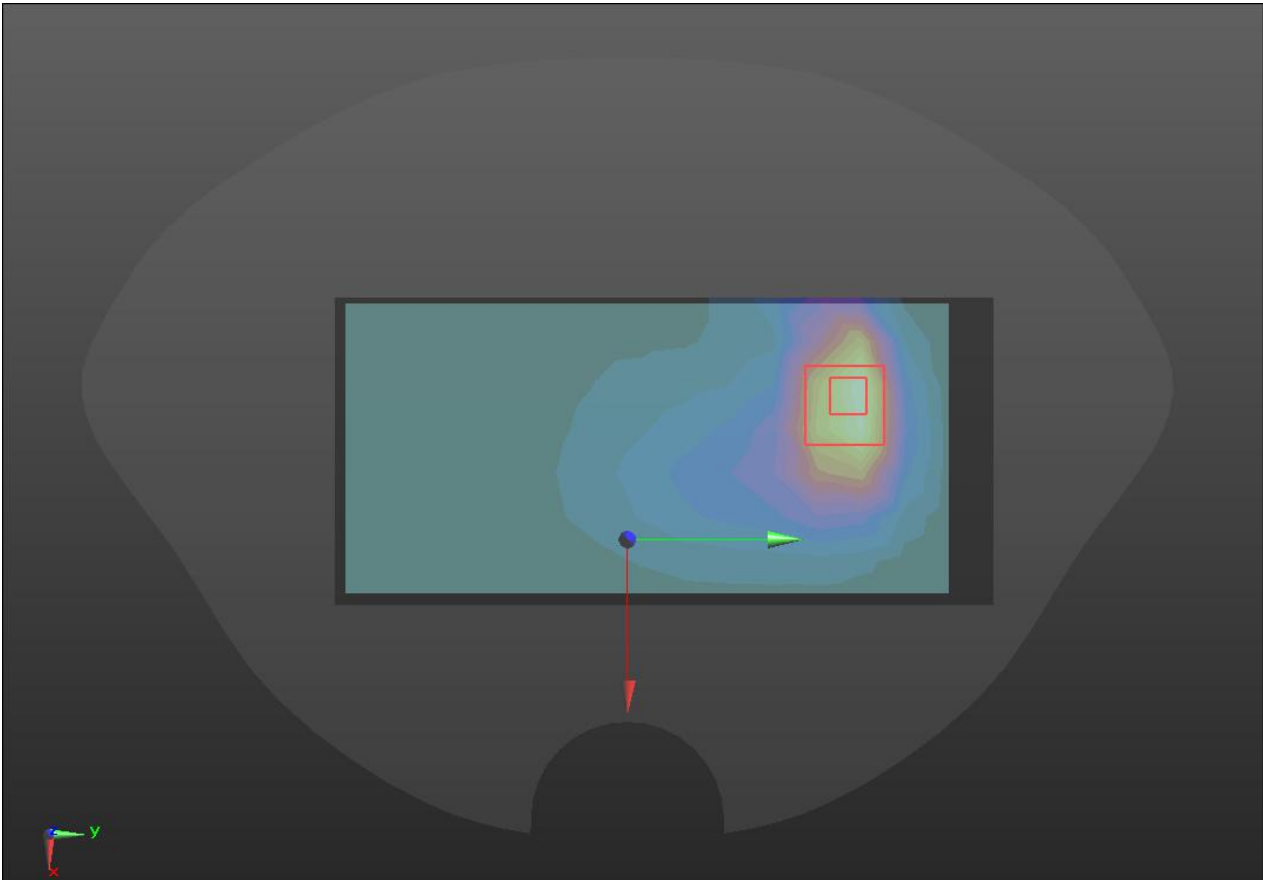
LTE Band 4(secondary battery supply)

Hotspot	Back
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.375 \text{ S/m}$; $\epsilon_r = 40.07$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.07, 5.07, 5.07); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B4/Area Scan (8x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.587 W/kg BACK/LTE B4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.97 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.96 W/kg SAR(1 g) = 0.70 W/kg; SAR(10 g) = 0.363 W/kg Maximum value of SAR (measured) = 0.650 W/kg 	

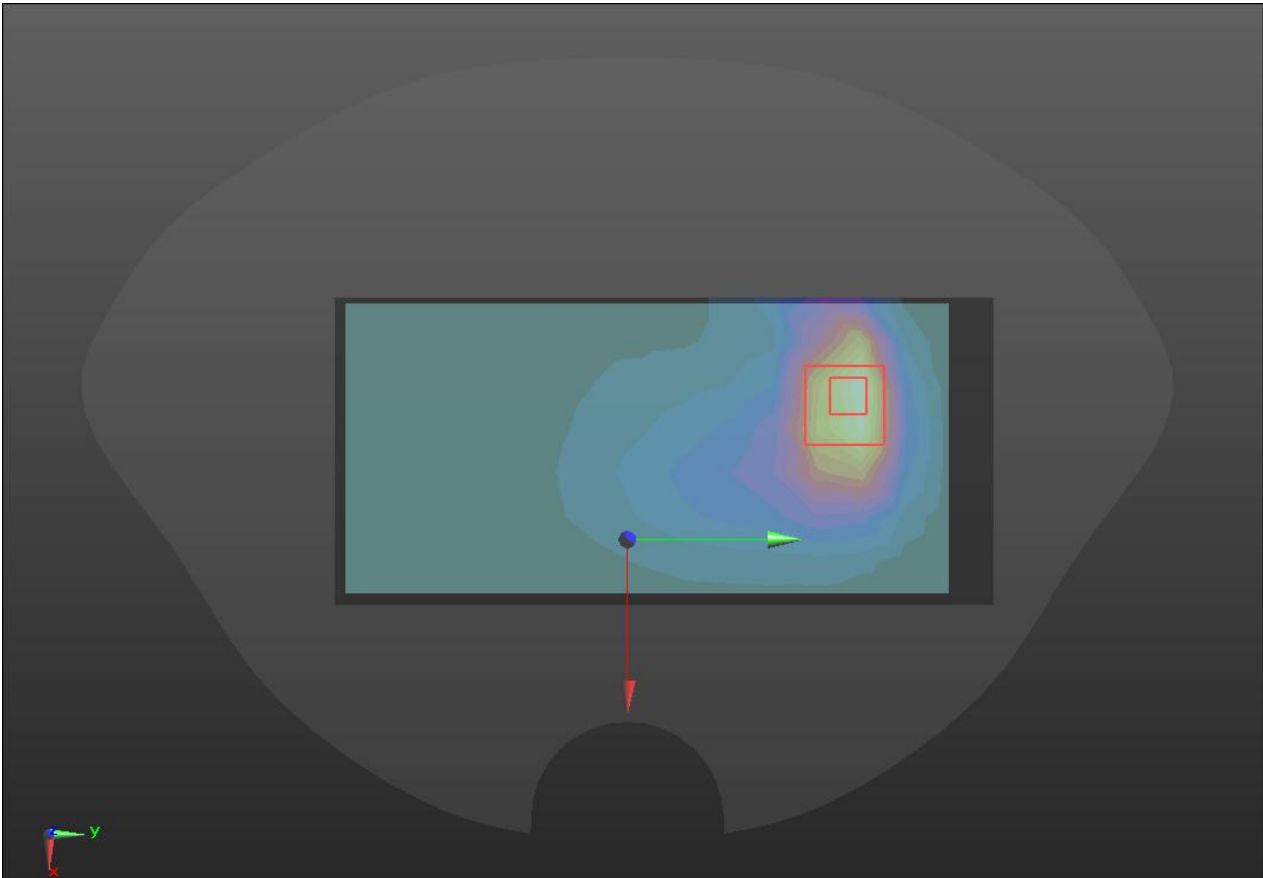
LTE Band 4(single card memory 64)

Hotspot	Back
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.07, 5.07, 5.07); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B4/Area Scan (8x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.594 W/kg BACK/LTE B4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 7.99 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.973 W/kg SAR(1 g) = 0.70 W/kg; SAR(10 g) = 0.365 W/kg Maximum value of SAR (measured) = 0.653 W/kg	
	

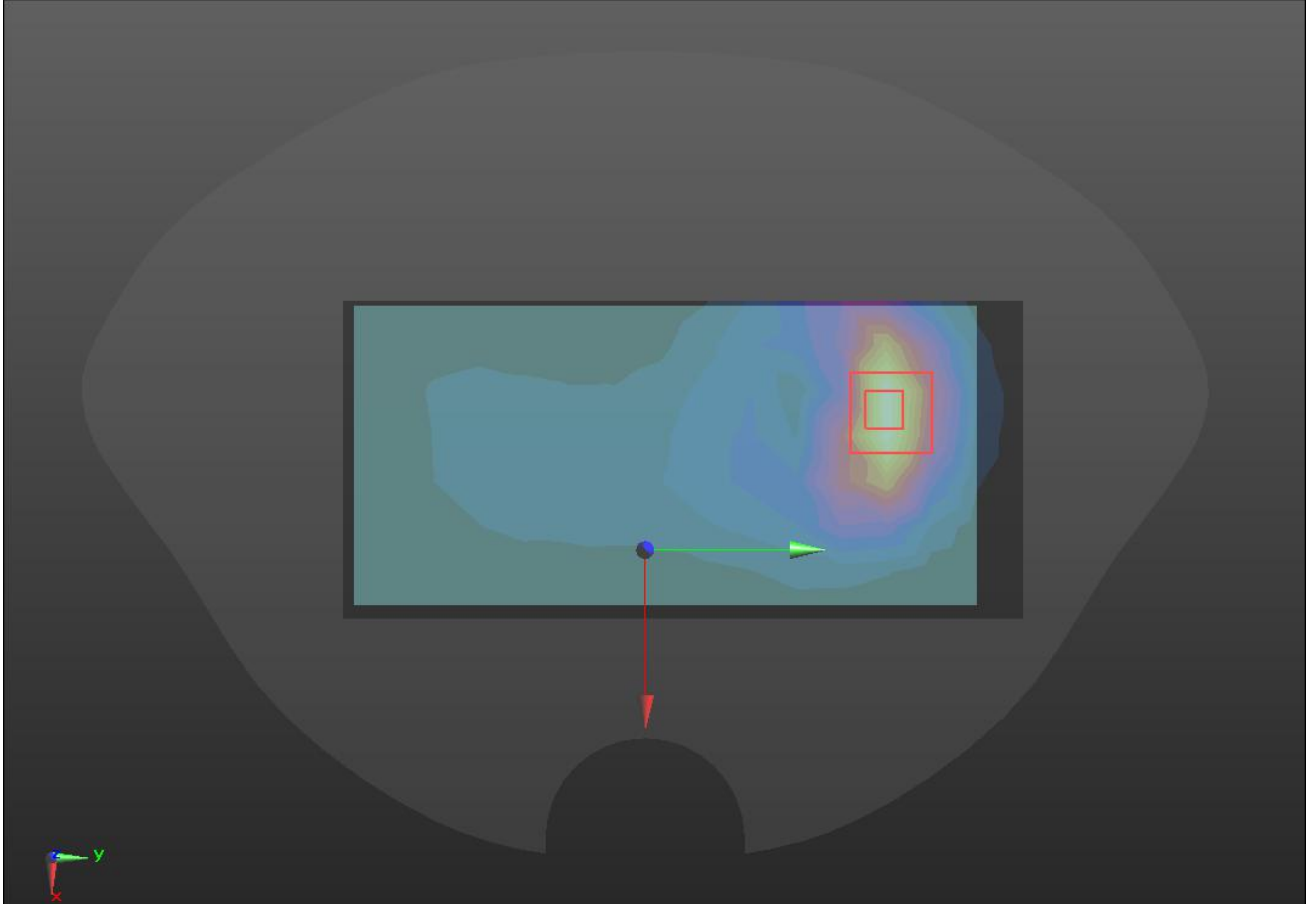
LTE Band 4(single card memory 32)

Hotspot	Back
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.07, 5.07, 5.07); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B4/Area Scan (8x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.528 W/kg BACK/LTE B4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 7.34 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.89 W/kg SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.355 W/kg Maximum value of SAR (measured) = 0.634 W/kg 	

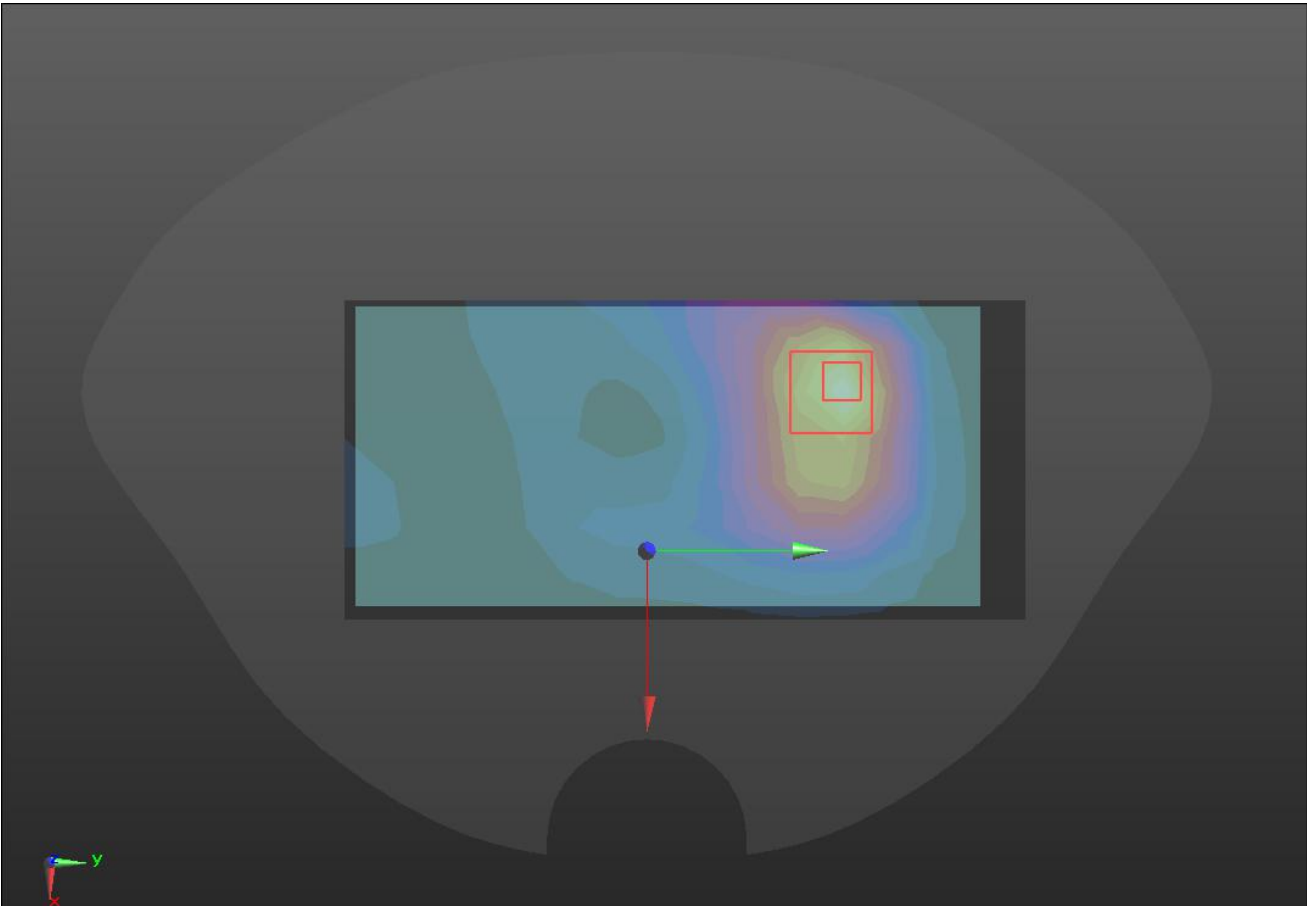
LTE Band 4(dual card memory 32)

Hotspot	Back
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.07, 5.07, 5.07); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B4/Area Scan (8x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.519 W/kg BACK/LTE B4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 7.3 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.85 W/kg SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.353 W/kg Maximum value of SAR (measured) = 0.622 W/kg 	

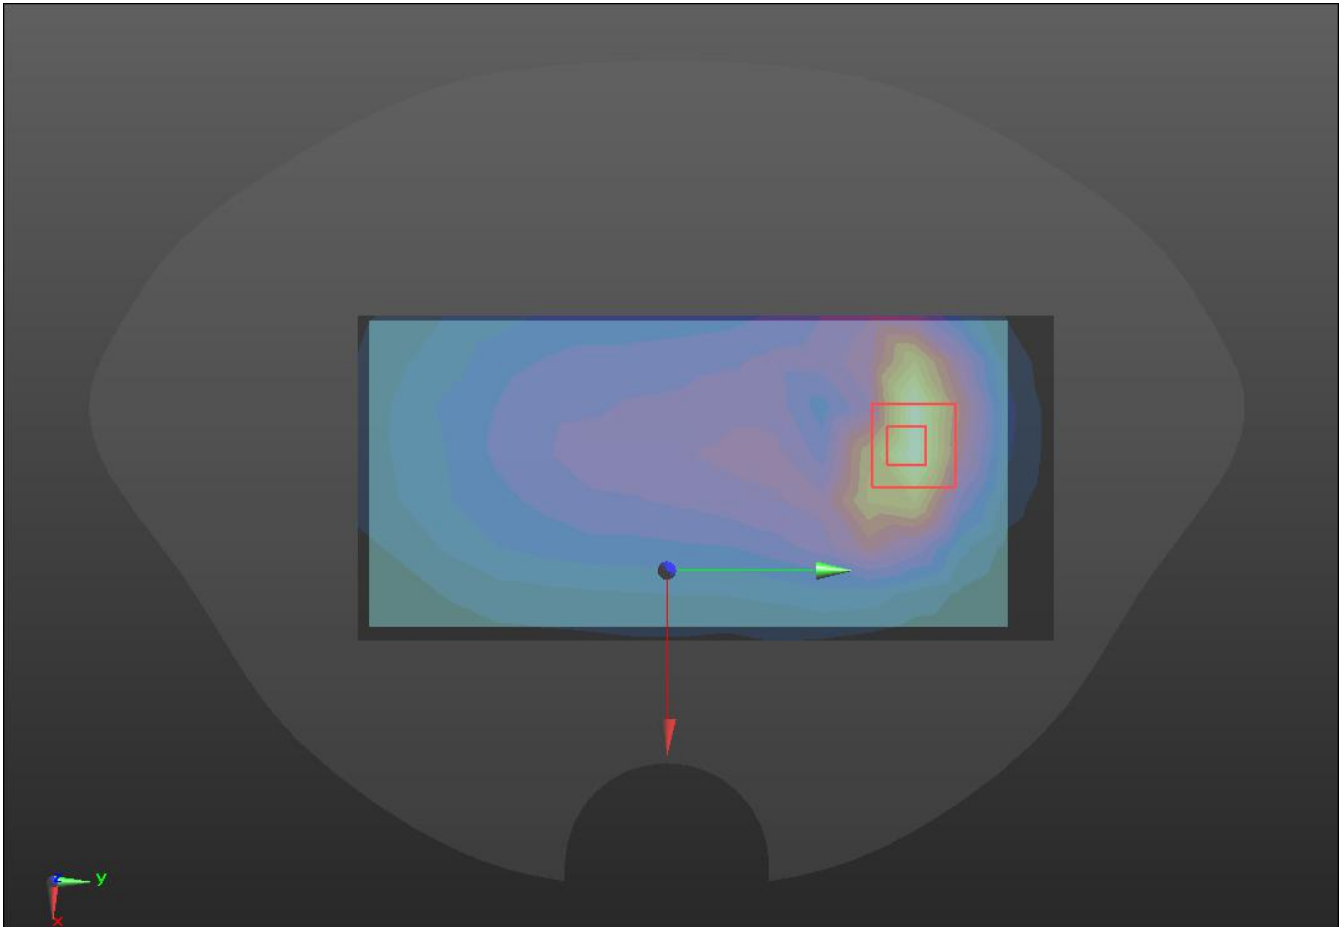
LTE Band 5

Hotspot	Back
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.2, 6.2, 6.2); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B5/Area Scan (8x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.0347 W/kg BACK/LTE B5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.341 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.0520 W/kg SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.016 W/kg 	

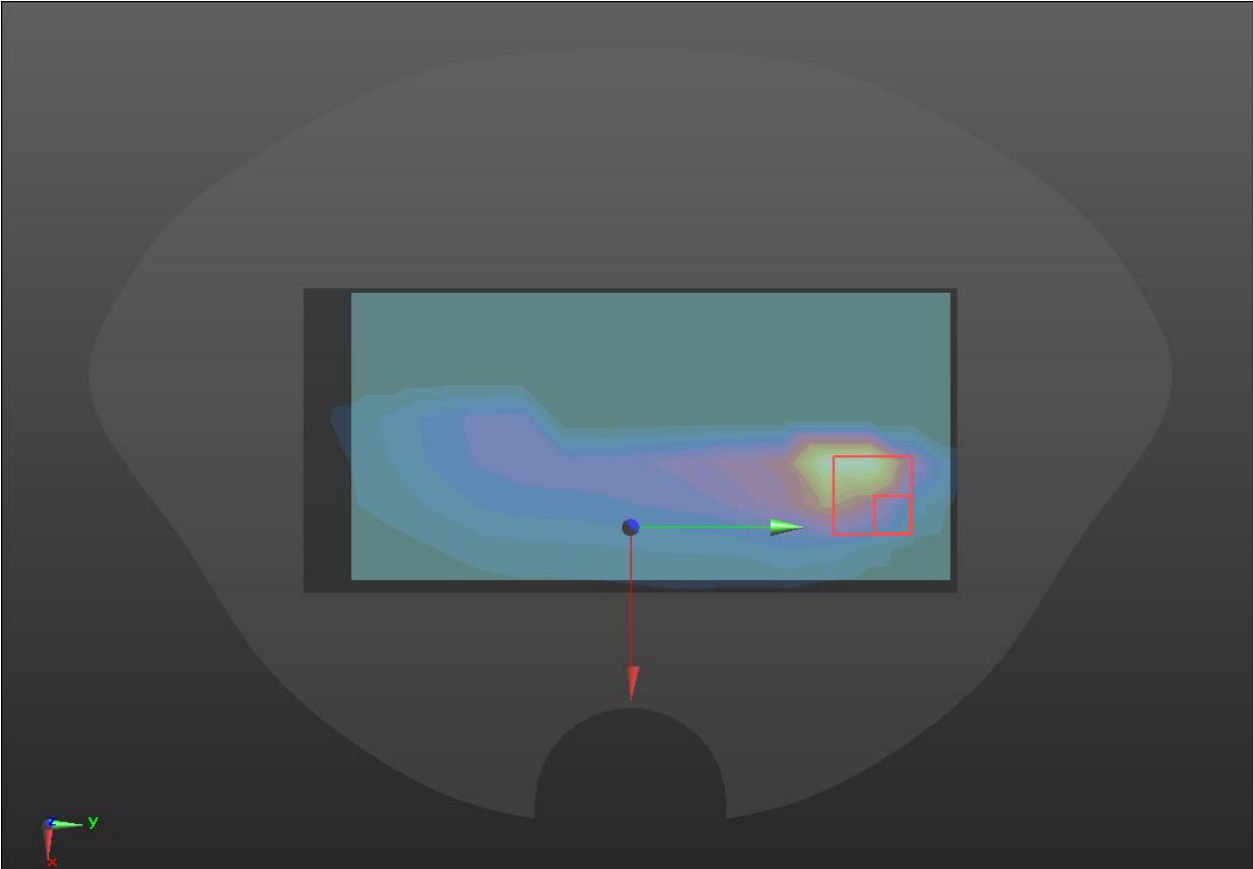
LTE Band 7

Hotspot	Back
Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.888$ S/m; $\epsilon_r = 39.084$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF((4.41, 4.41, 4.41); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B7/Area Scan (8x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 1.64 W/kg BACK/LTE B7/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 9.91 V/m; Power Drift = -0.15 dB Peak SAR (extrapolated) = 2.20 W/kg SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.212 W/kg Maximum value of SAR (measured) = 1.71 W/kg 	

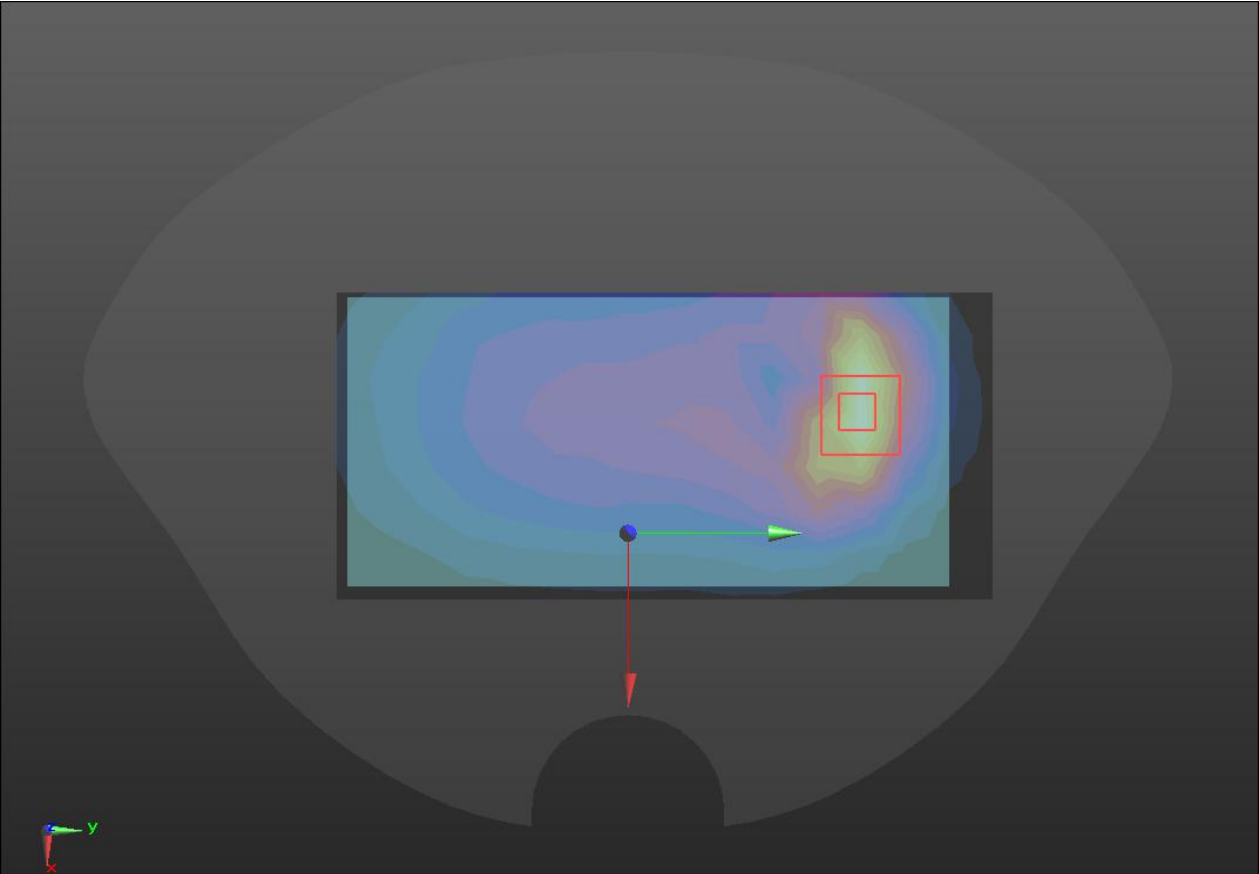
LTE Band 12

Hotspot	Back
Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 707.5 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 42.115$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.4, 6.4, 6.4); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B12/Area Scan (8x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.0261 W/kg BACK/LTE B12/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.436 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 0.0400 W/kg SAR(1 g) = 0.01 W/kg; SAR(10 g) = 0.012 W/kg Maximum value of SAR (measured) = 0.0270 W/kg	
	

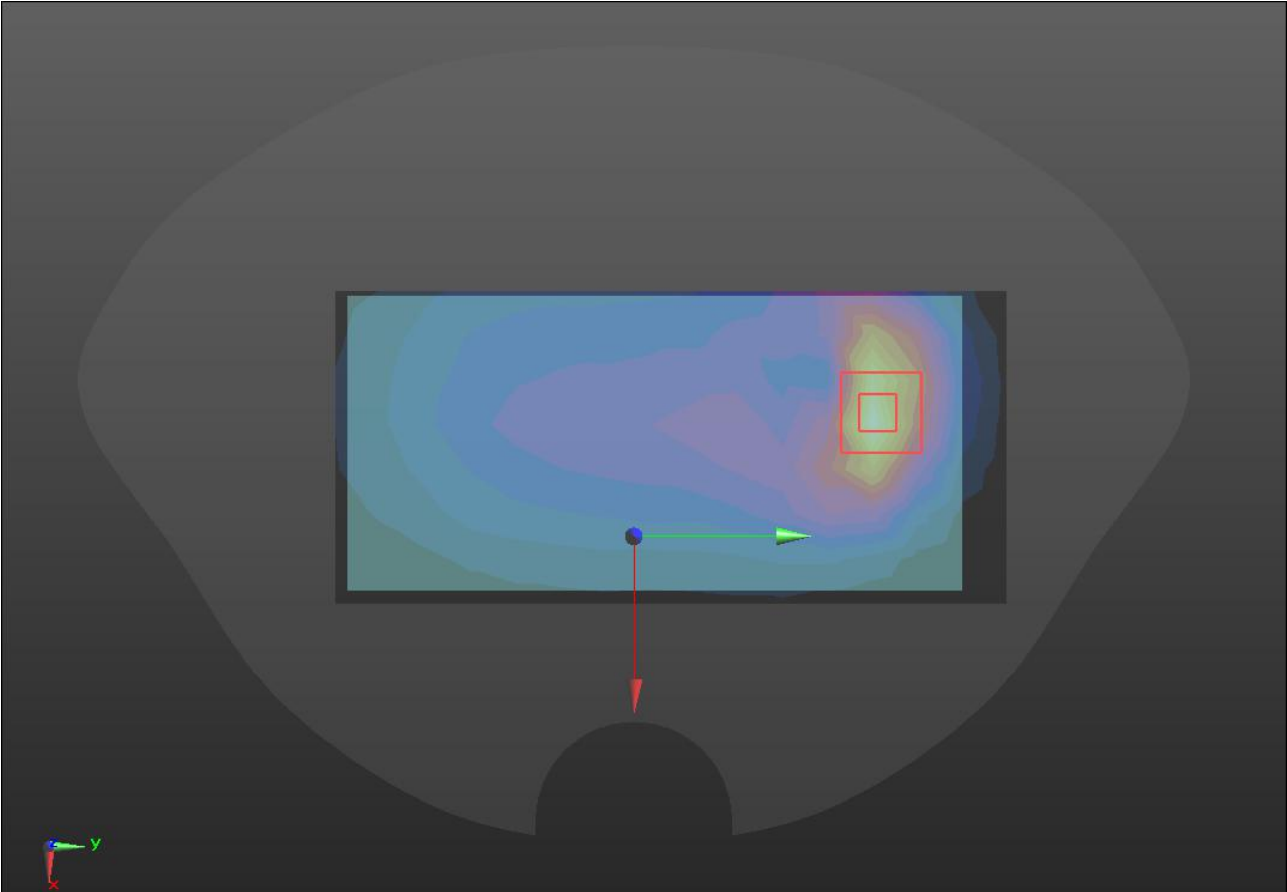
LTE Band 13

Hotspot	Back
Communication System: UID 0, LTE band 13 (0); Frequency: 782 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 782 \text{ MHz}$; $\sigma = 0.893 \text{ S/m}$; $\epsilon_r = 41.712$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.4, 6.4, 6.4); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B13/Area Scan (8x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.183 W/kg BACK/LTE B13/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.724 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 0.0963 W/kg SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.013 W/kg Maximum value of SAR (measured) = 0.135 W/kg 	

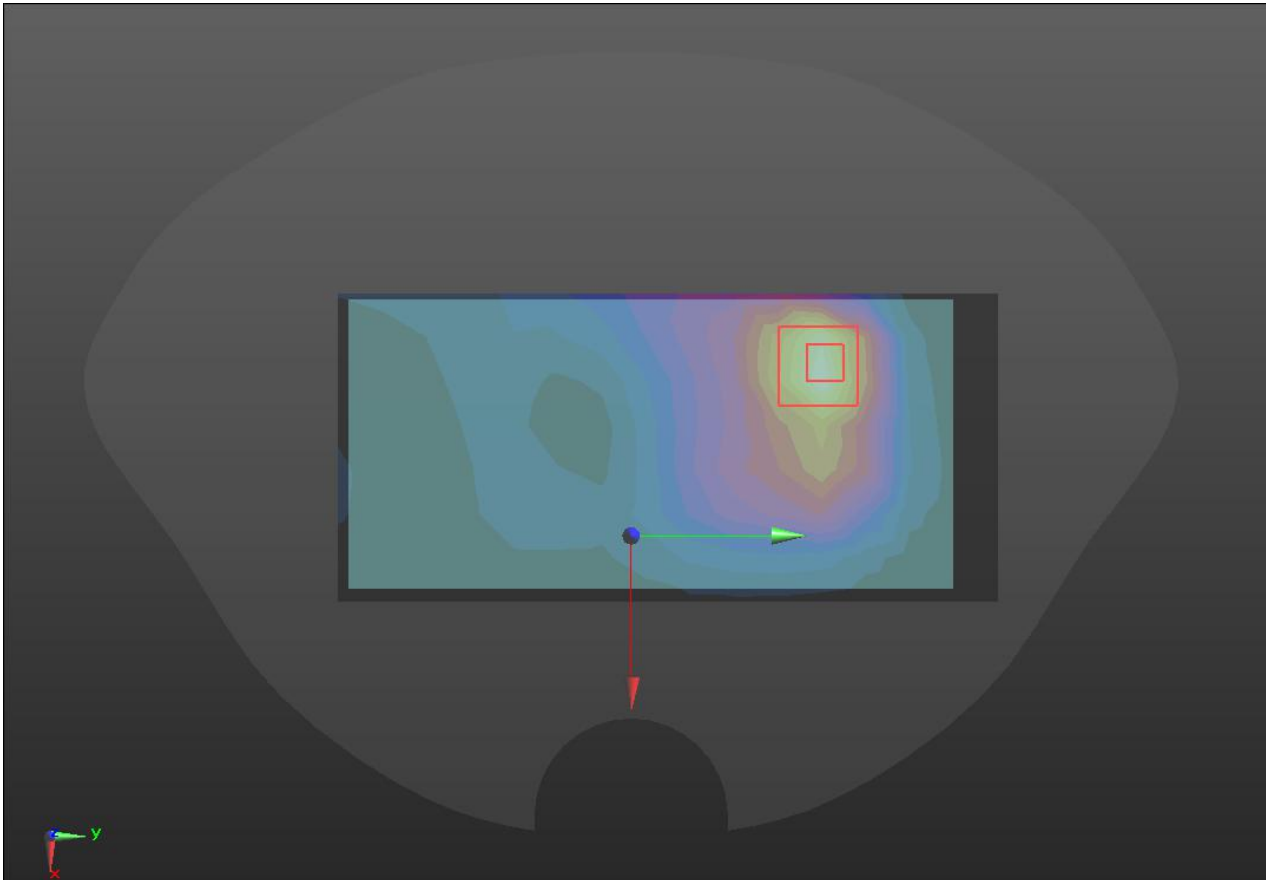
LTE Band 17

Hotspot	Back
Communication System: UID 0, LTE Band 17 (0); Frequency: 710 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 710 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 42.102$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.4, 6.4, 6.4); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B17/Area Scan (8x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.0266 W/kg BACK/LTE B17/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.450 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 0.0410 W/kg SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.013 W/kg Maximum value of SAR (measured) = 0.0279 W/kg 	

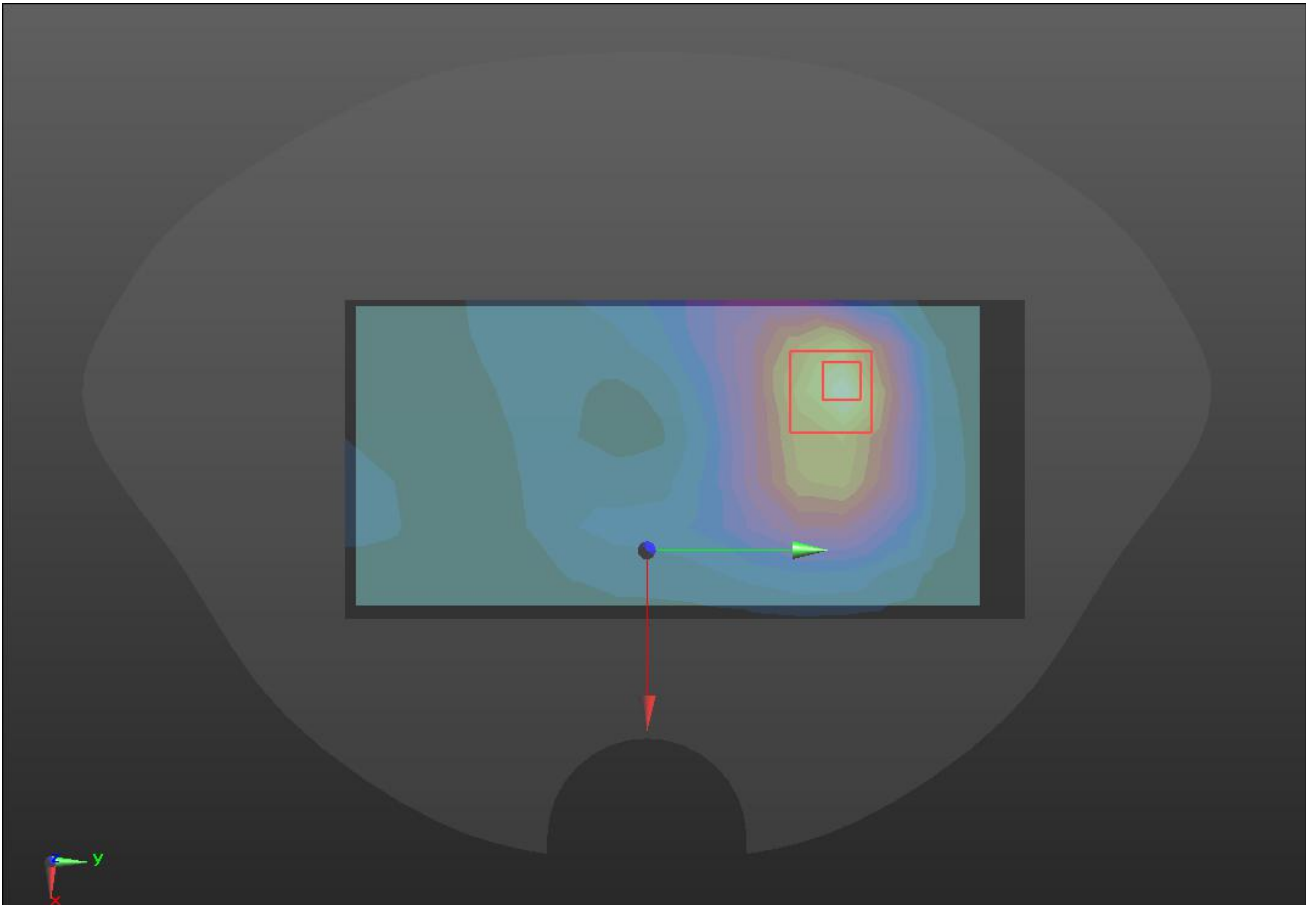
LTE Band 28

Hotspot	Back
Communication System: UID 0, LTE band 28 (0); Frequency: 728 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 728 \text{ MHz}$; $\sigma = 0.888 \text{ S/m}$; $\epsilon_r = 42.011$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.4, 6.4, 6.4); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B28/Area Scan (8x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.0302 W/kg BACK/LTE B28/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.449 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.0440 W/kg SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.013 W/kg Maximum value of SAR (measured) = 0.0295 W/kg 	

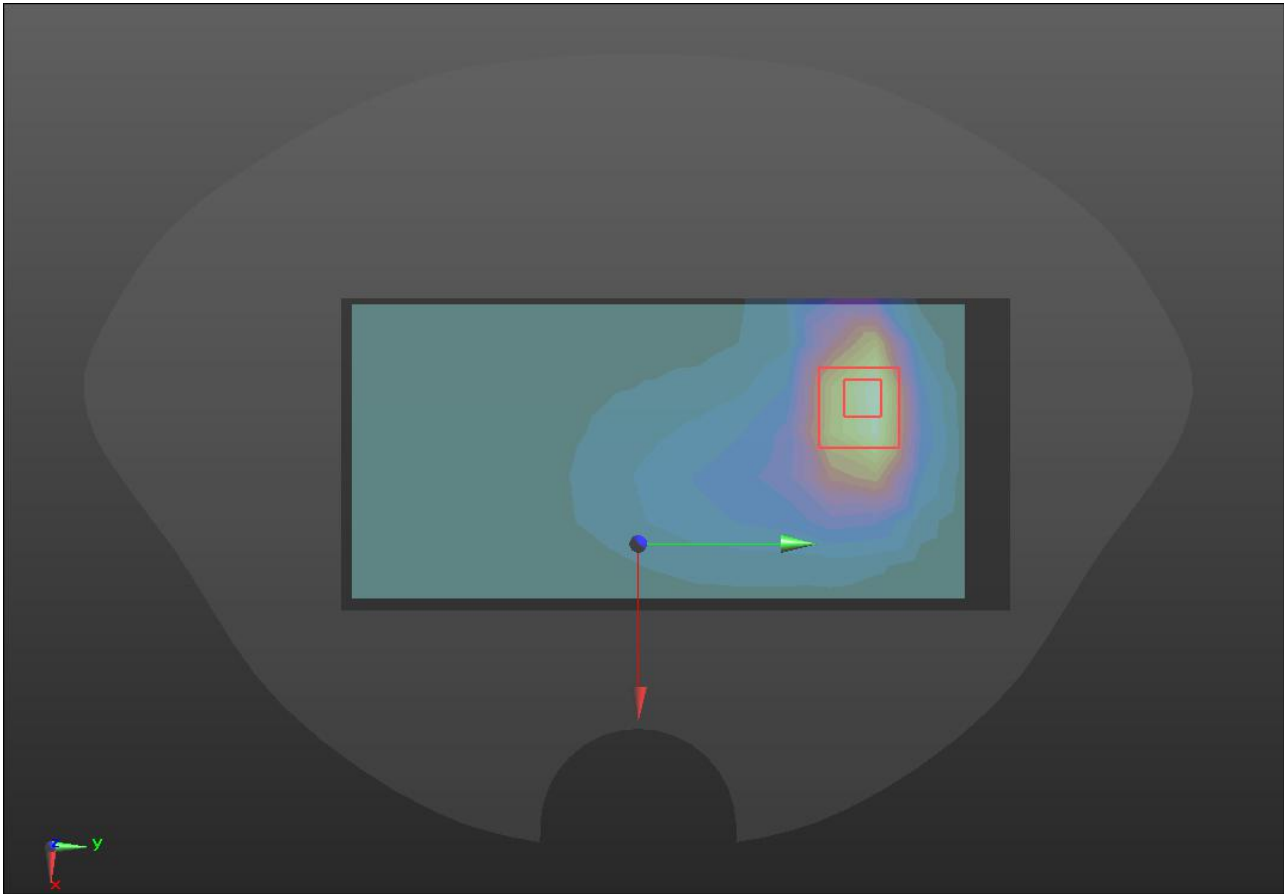
LTE Band 38

Hotspot	Back
Communication System: UID 0, LTE Band 38 (0); Frequency: 2595 MHz; Duty Cycle: 0.633:1 Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 39.006$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.41, 4.41, 4.41); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B38/Area Scan (8x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.309 W/kg BACK/LTE B38/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 4.430 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.519 W/kg SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.159 W/kg Maximum value of SAR (measured) = 0.323 W/kg 	

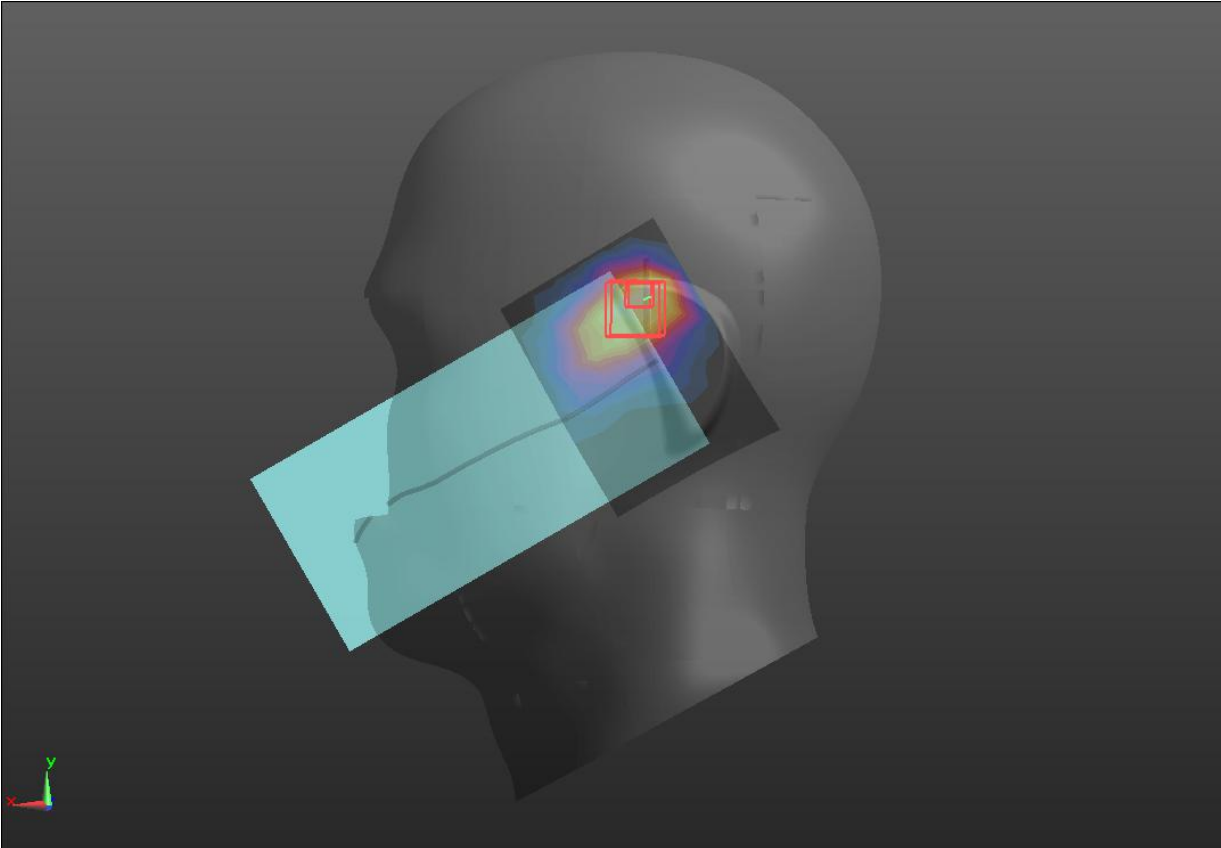
LTE Band 40

Hotspot	Back
Communication System: UID 0, LTE band 40 (0); Frequency: 2350 MHz; Duty Cycle: 0.633:1 Medium parameters used: $f = 2350$ MHz; $\sigma = 1.709$ S/m; $\epsilon_r = 39.355$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.78, 4.78, 4.78); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B40/Area Scan (8x16x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.339 W/kg BACK/LTE B40/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 3.596 V/m; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.510 W/kg SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.152 W/kg Maximum value of SAR (measured) = 0.331 W/kg 	

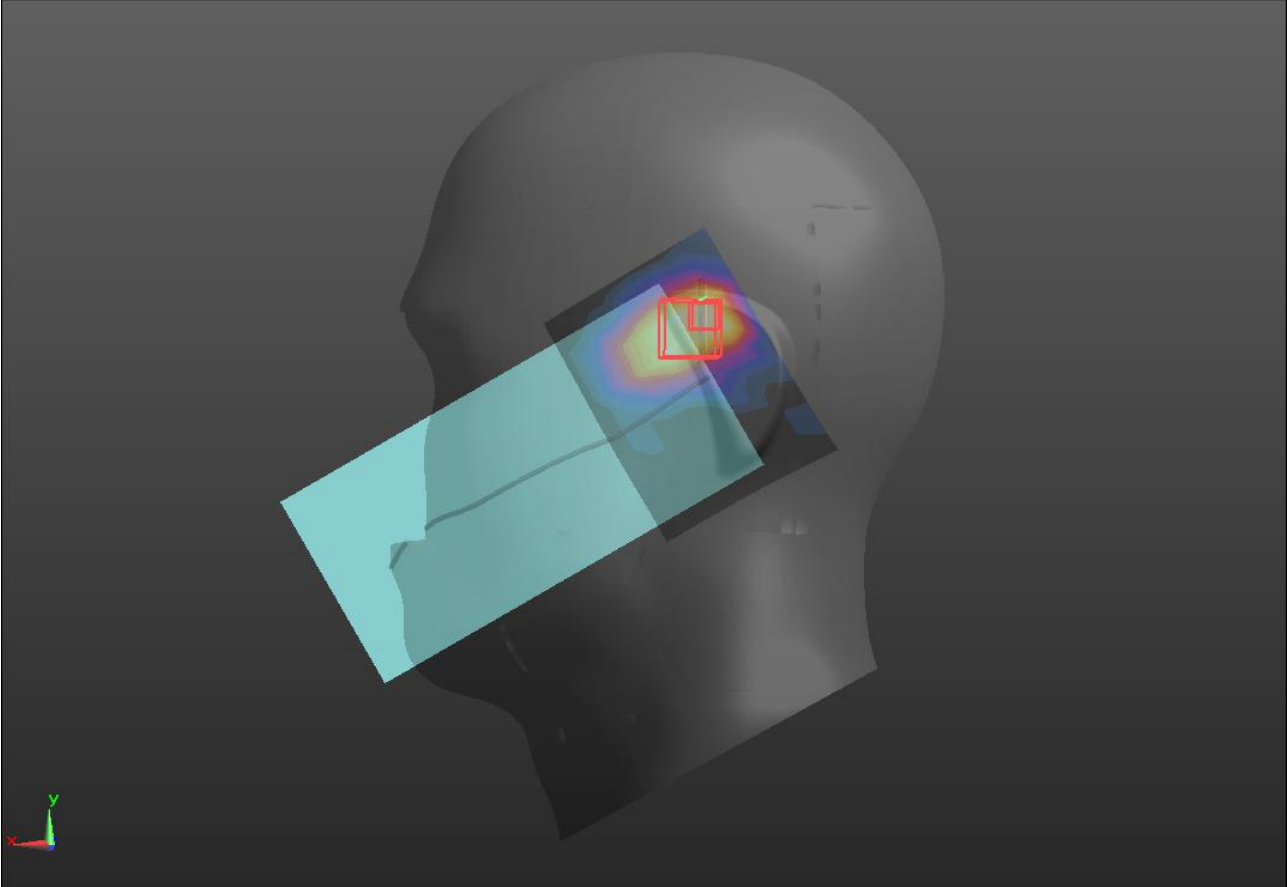
LTE Band 66

Hotspot	Back
Communication System: UID 0, LTE band 66 (0); Frequency: 1745 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1745 \text{ MHz}$; $\sigma = 1.383 \text{ S/m}$; $\epsilon_r = 40.047$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.07, 5.07, 5.07); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) BACK/LTE B66/Area Scan (8x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.708 W/kg BACK/LTE B66/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 0 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 1.09 W/kg SAR(1 g) = 0.676 W/kg; SAR(10 g) = 0.368 W/kg Maximum value of SAR (measured) = 0.820 W/kg 	

WIFI2.4GHz

Head	Left cheek
Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz; Duty Cycle: 0.9978:1 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 39.219$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) LC/WIFI2.4/Area Scan (7x9x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.0243 W/kg LC/WIFI2.4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.306 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 0.0440 W/kg SAR(1 g) = 0.042W/kg; SAR(10 g) = 0.021 W/kg Maximum value of SAR (measured) = 0.0274 W/kg	
	

BT

Head	Left cheek
Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 0.795:1 Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 39.213$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.58, 4.58, 4.58); Calibrated: 2022/9/23; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2022/9/15 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) LC/BT/Area Scan (7x9x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.00357 W/kg LC/BT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 0.7960 V/m; Power Drift = 0.16 dB Peak SAR (extrapolated) = 0.0110 W/kg SAR(1 g) = 0.014W/kg; SAR(10 g) = 0.006 W/kg Maximum value of SAR (measured) = 0.00480 W/kg 	

Note: All the modulated signal with different PAR (refers to RF WWAN report) already take into account, but not mentioned in this inherent log file template.