


Emission level measurement

11B_Ant1_2412_0~Reference



11B_Ant1_2412_30~1000

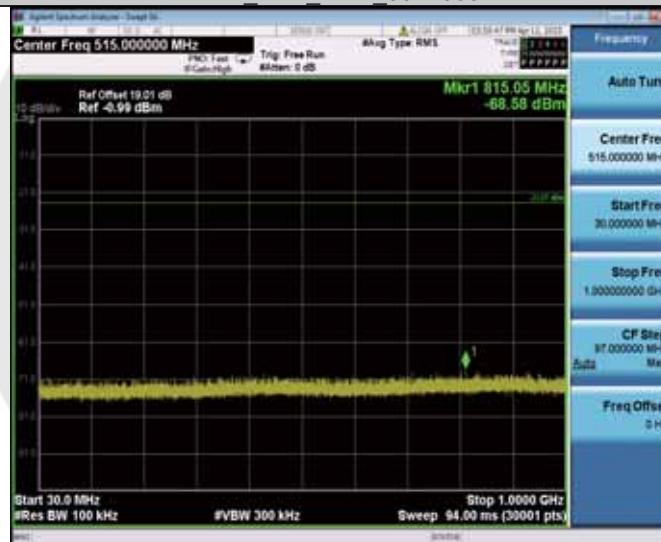


11B_Ant1_2412_1000~26500



11B_Ant2_2412_0~Reference



11B_Ant2_2412_30~1000

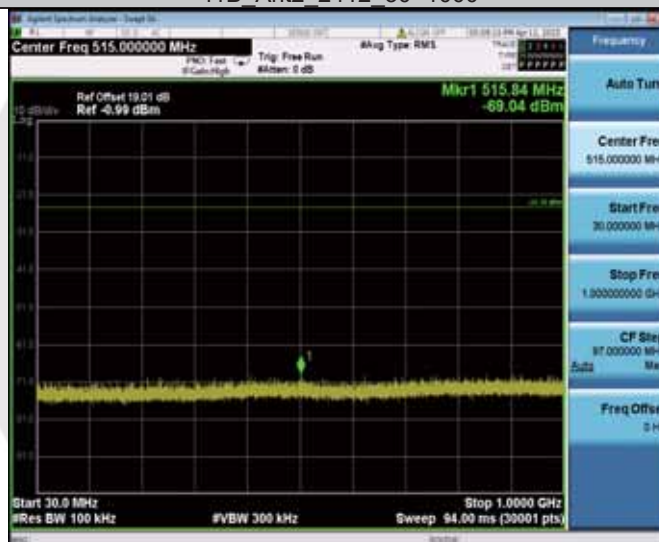

11B_Ant2_2412_1000~26500



11B_Ant1_2437_0~Reference



11B_Ant1_2437_30~1000




11B_Ant1_2437_1000~26500



11B_Ant2_2437_0~Reference



11B_Ant2_2437_30~1000

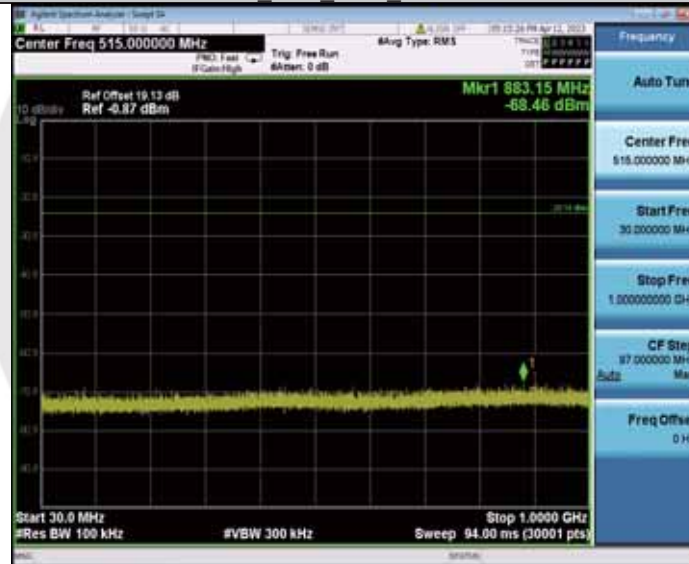


11B_Ant2_2437_1000~26500



11B_Ant1_2462_0~Reference



11B_Ant1_2462_30~1000

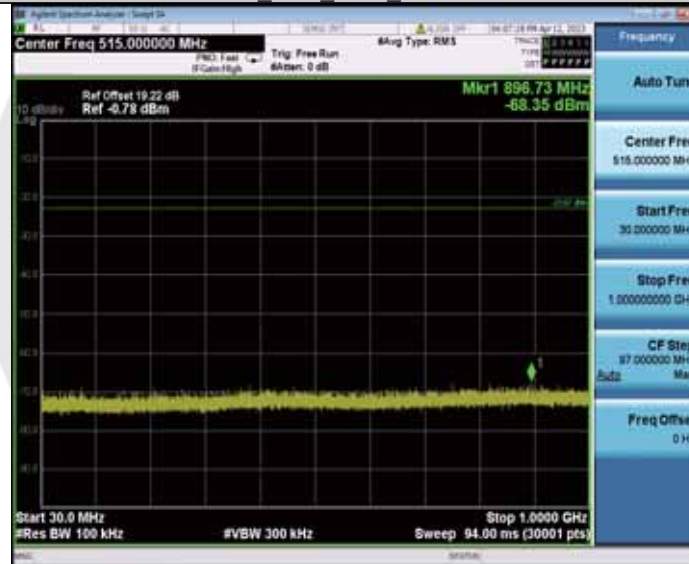


11B_Ant1_2462_1000~26500



11B_Ant2_2462_0~Reference



11B_Ant2_2462_30~1000

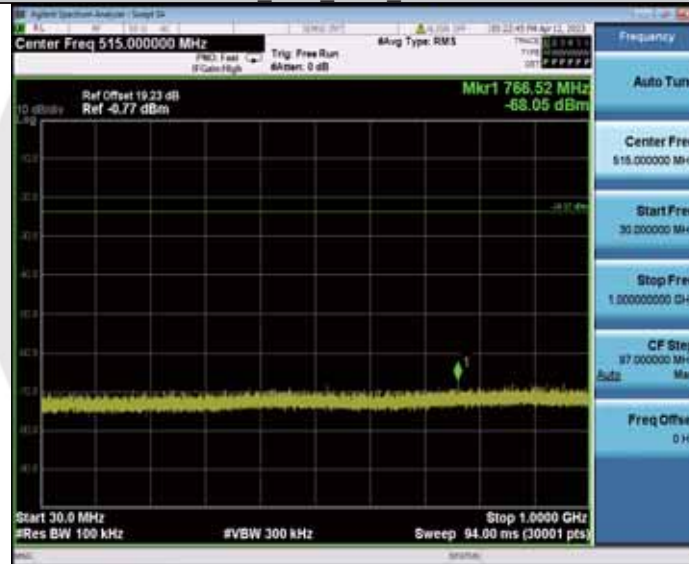


11B_Ant2_2462_1000~26500



11G Ant1 2412 0~Reference



11G Ant1 2412 30~1000

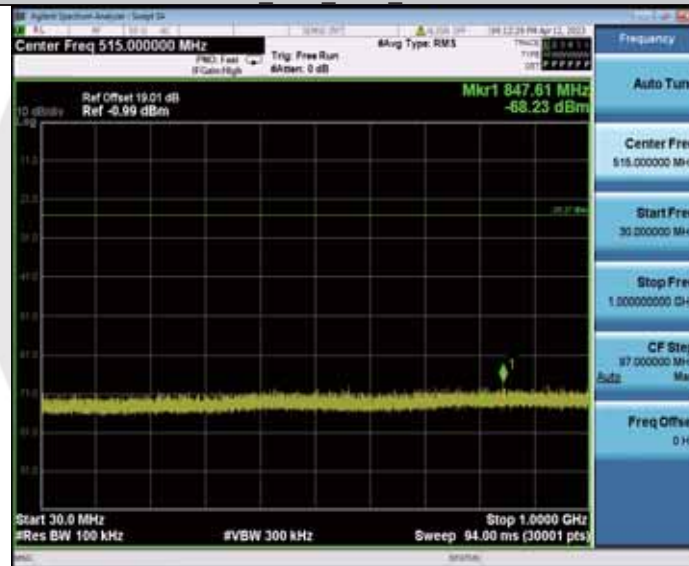


11G Ant1 2412 1000~26500



11G Ant2 2412 0~Reference



11G Ant2 2412 30~1000

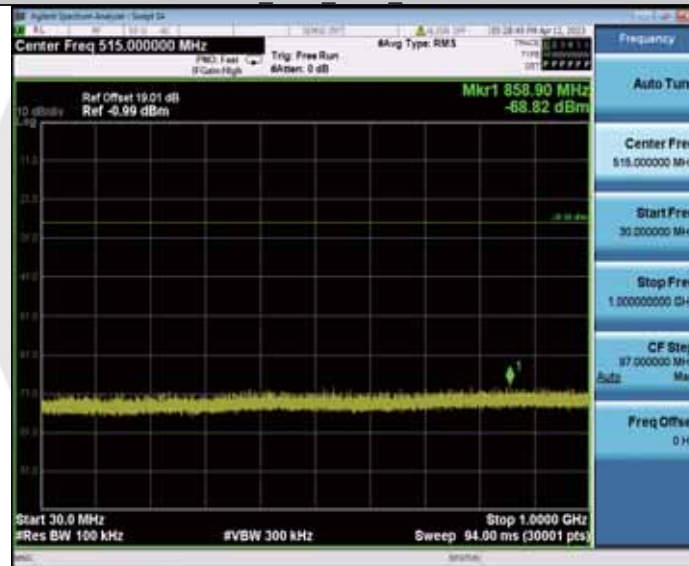


11G Ant2 2412 1000~26500



11G Ant1 2437 0~Reference



11G Ant1 2437 30~1000

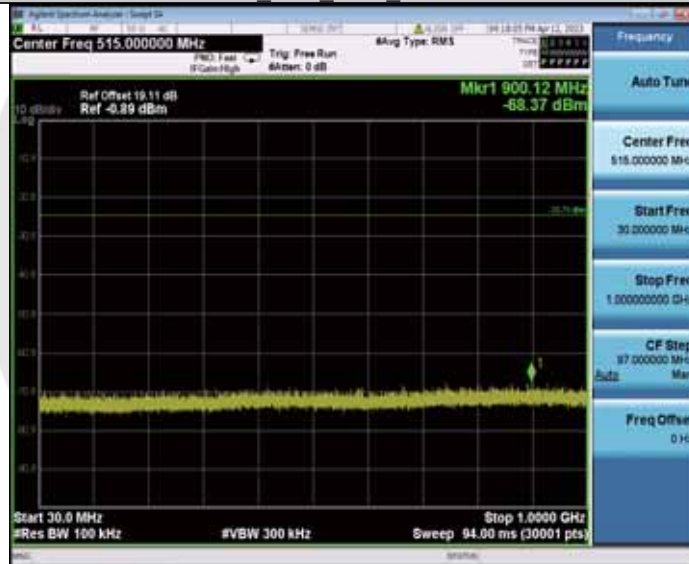


11G Ant1 2437 1000~26500



11G Ant2 2437 0~Reference



11G Ant2 2437 30~1000

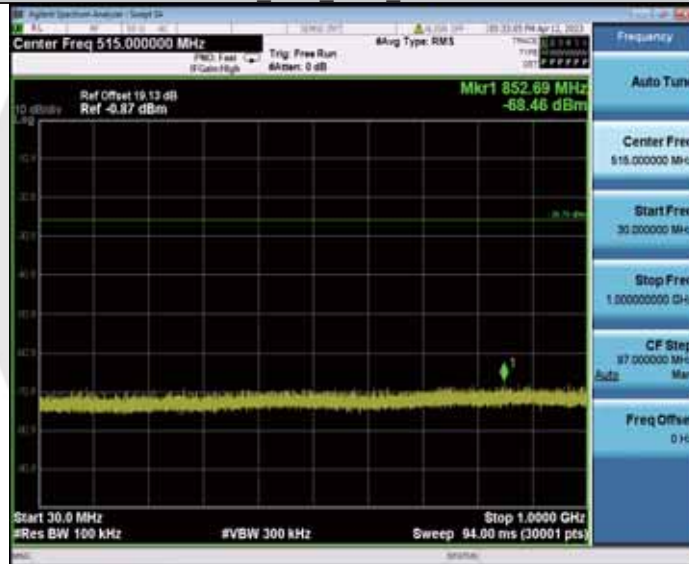


11G Ant2 2437 1000~26500



11G Ant1 2462 0~Reference



11G Ant1 2462 30~1000

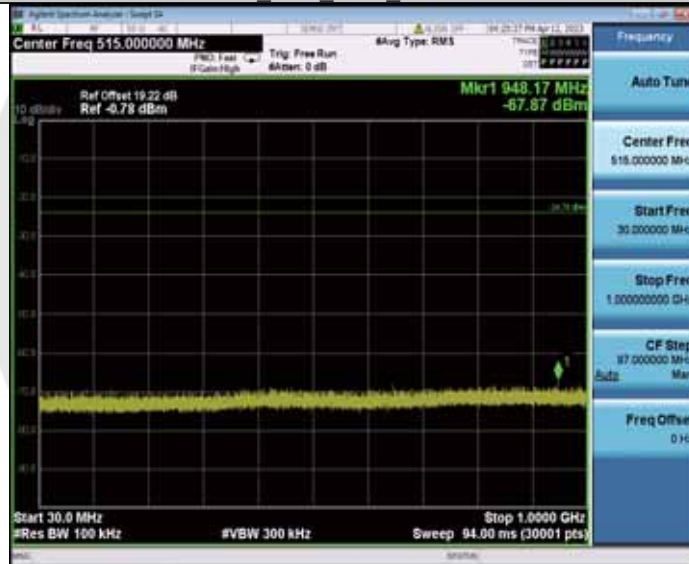


11G Ant1 2462 1000~26500



11G Ant2 2462 0~Reference



11G Ant2 2462 30~1000

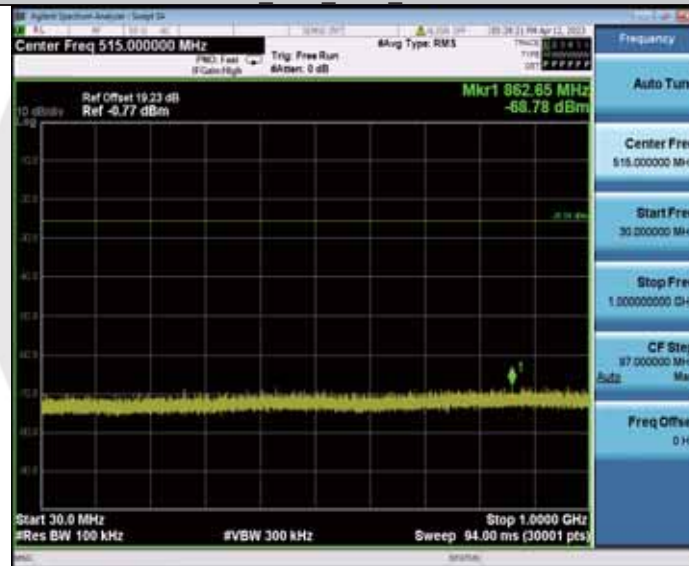


11G Ant2 2462 1000~26500



11N20MIMO_Ant1_2412_0~Reference



11N20MIMO_Ant1_2412_30~1000

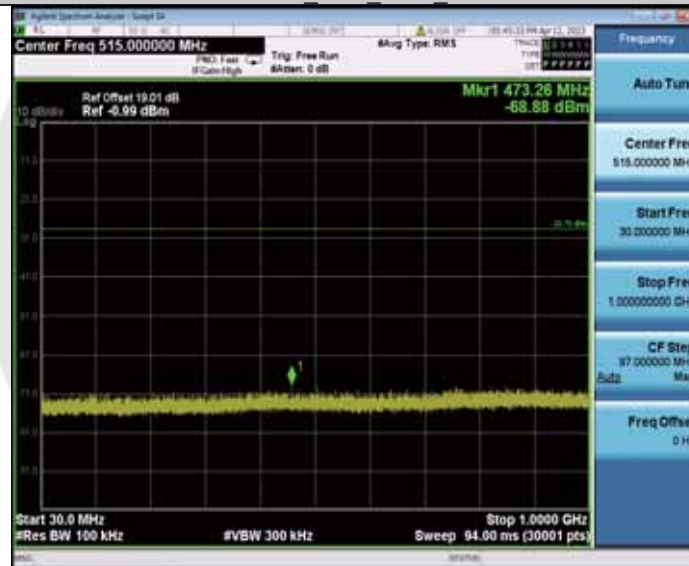


11N20MIMO_Ant1_2412_1000~26500



11N20MIMO_Ant2_2412_0~Reference



11N20MIMO_Ant2_2412_30~1000

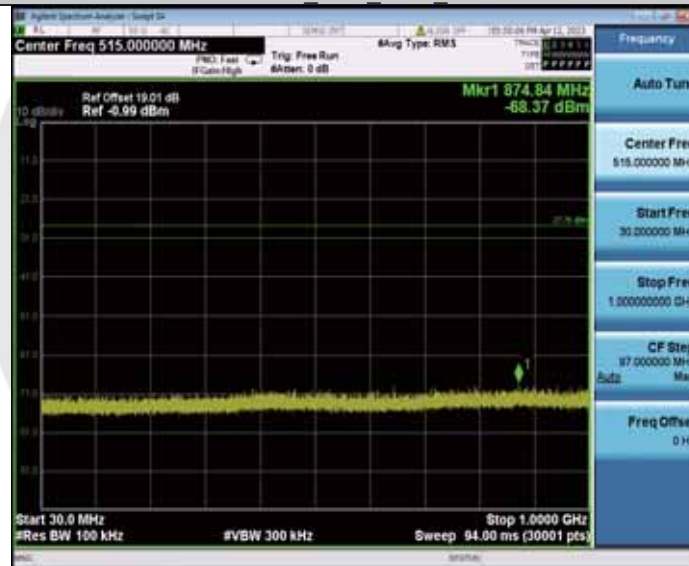


11N20MIMO_Ant2_2412_1000~26500



11N20MIMO_Ant1_2437_0~Reference



11N20MIMO_Ant1_2437_30~1000

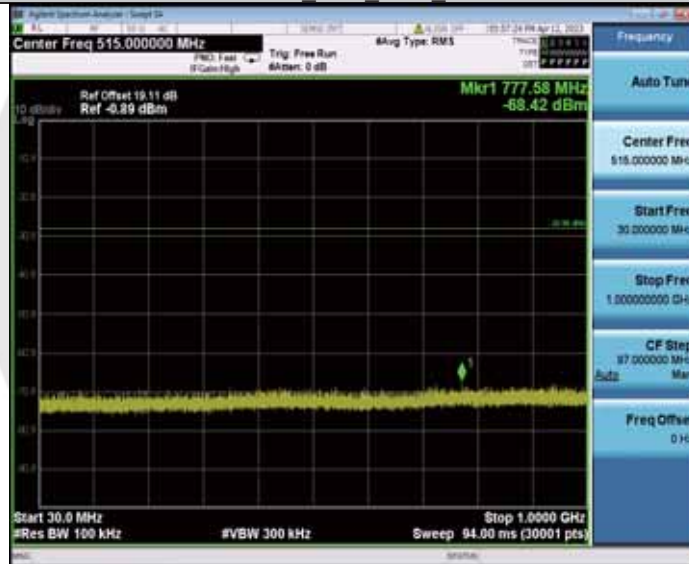


11N20MIMO_Ant1_2437_1000~26500



11N20MIMO_Ant2_2437_0~Reference



11N20MIMO_Ant2_2437_30~1000

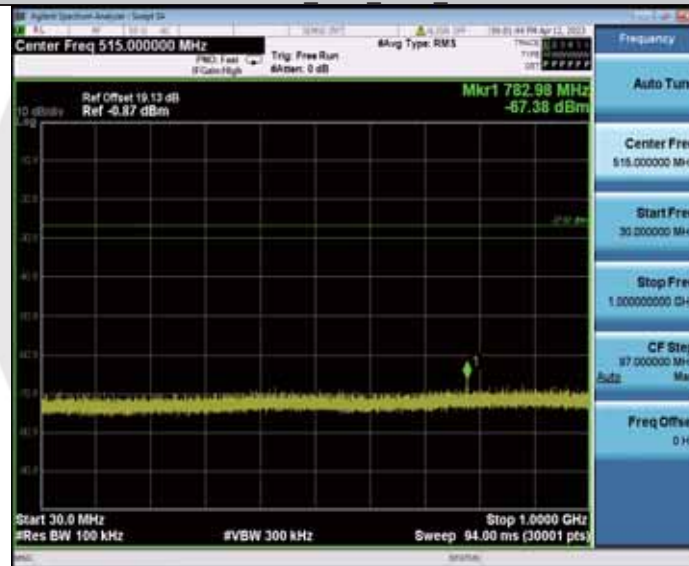


11N20MIMO_Ant2_2437_1000~26500



11N20MIMO_Ant1_2462_0~Reference



11N20MIMO_Ant1_2462_30~1000

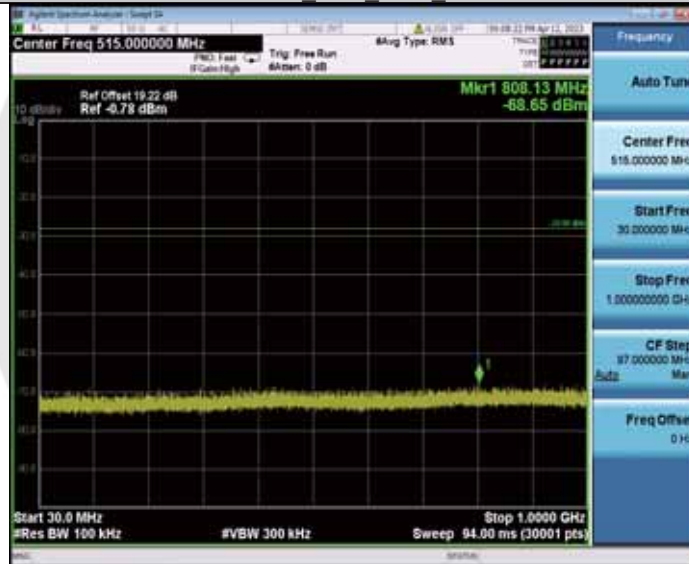


11N20MIMO_Ant1_2462_1000~26500



11N20MIMO_Ant2_2462_0~Reference



11N20MIMO_Ant2_2462_30~1000

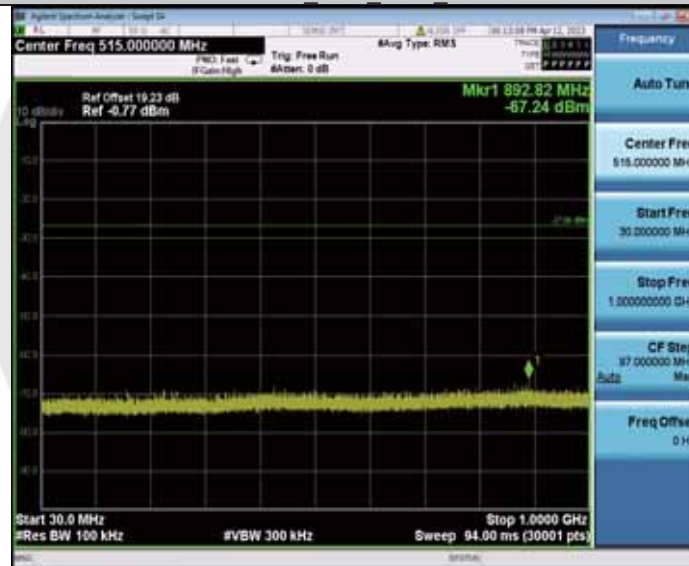


11N20MIMO_Ant2_2462_1000~26500



11N40MIMO_Ant1_2422_0~Reference




11N40MIMO_Ant1_2422_30~1000

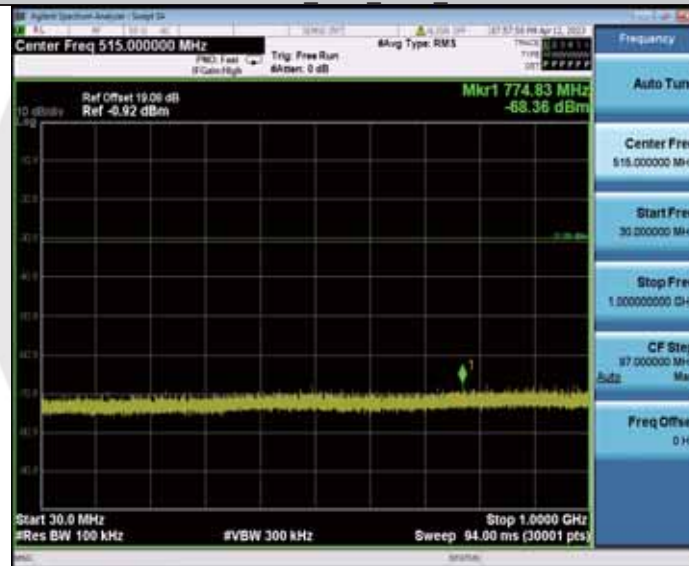


11N40MIMO_Ant1_2422_1000~26500



11N40MIMO_Ant2_2422_0~Reference

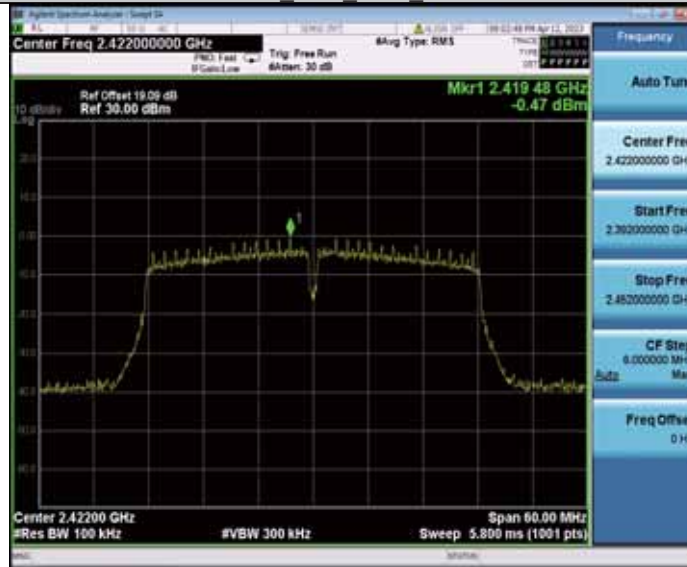

11N40MIMO_Ant2_2422_30~1000

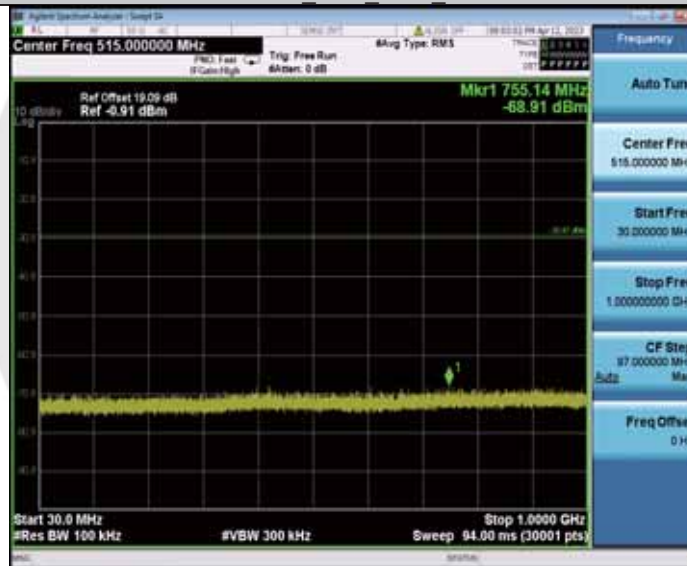


11N40MIMO_Ant2_2422_1000~26500



11N40MIMO_Ant1_2437_0~Reference



11N40MIMO_Ant1_2437_30~1000

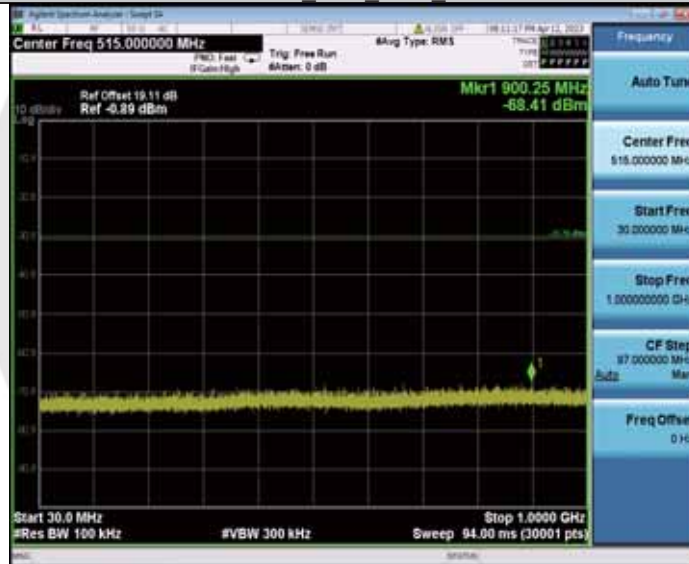


11N40MIMO_Ant1_2437_1000~26500



11N40MIMO_Ant2_2437_0~Reference



11N40MIMO_Ant2_2437_30~1000

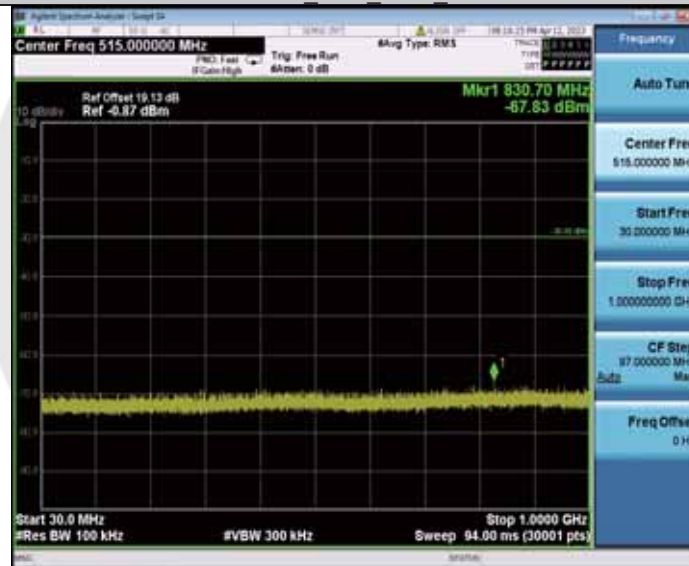


11N40MIMO_Ant2_2437_1000~26500



11N40MIMO_Ant1_2452_0~Reference



11N40MIMO_Ant1_2452_30~1000

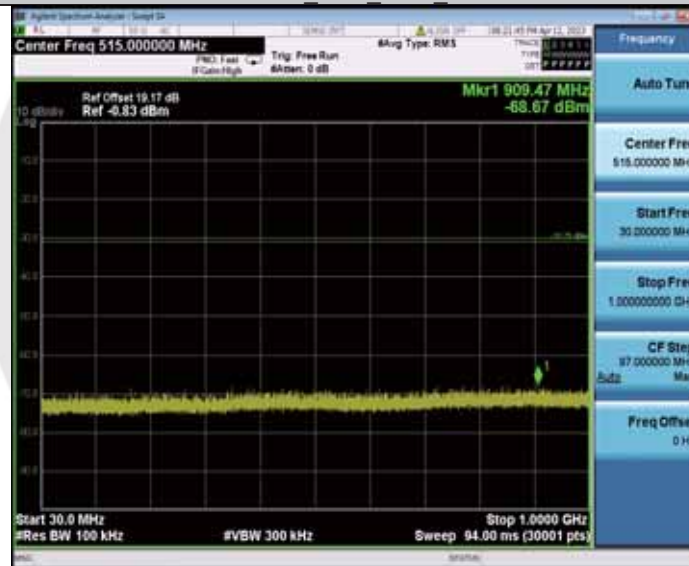


11N40MIMO_Ant1_2452_1000~26500



11N40MIMO_Ant2_2452_0~Reference



11N40MIMO_Ant2_2452_30~1000

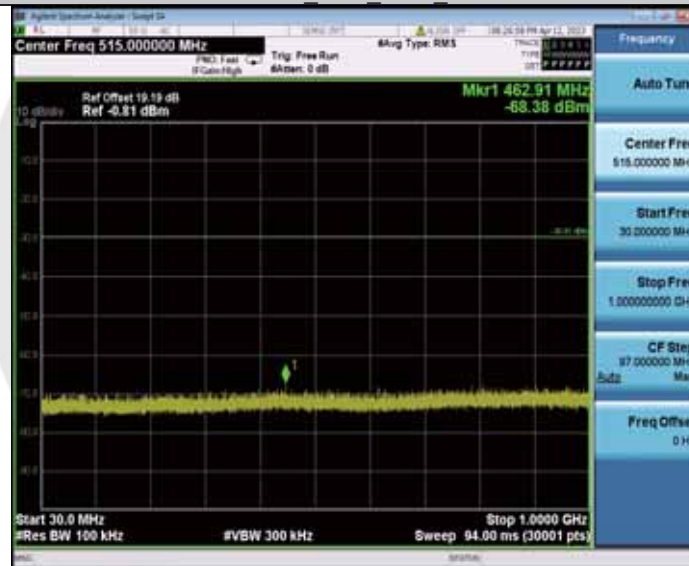

11N40MIMO_Ant2_2452_1000~26500



BL-M8832AU1

Band-edge measurement

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	5.10	-35.42	≤-24.9	PASS
	Ant2	Low	2412	6.68	-35.62	≤-23.32	PASS
	Ant1	High	2462	4.85	-36.78	≤-25.15	PASS
	Ant2	High	2462	6.98	-36.44	≤-23.02	PASS
11G	Ant1	Low	2412	3.85	-35	≤-26.15	PASS
	Ant2	Low	2412	5.43	-33.25	≤-24.57	PASS
	Ant1	High	2462	3.89	-36.7	≤-26.11	PASS
	Ant2	High	2462	5.94	-36.22	≤-24.06	PASS
11N20MIMO	Ant1	Low	2412	1.61	-35.94	≤-28.39	PASS
	Ant2	Low	2412	3.24	-36.46	≤-26.76	PASS
	Ant1	High	2462	1.21	-37.06	≤-28.79	PASS
	Ant2	High	2462	3.56	-36.74	≤-26.44	PASS
11N40MIMO	Ant1	Low	2422	-0.98	-36.27	≤-30.98	PASS
	Ant2	Low	2422	0.42	-36.55	≤-29.58	PASS
	Ant1	High	2452	-1.29	-36.09	≤-31.29	PASS
	Ant2	High	2452	0.93	-34.97	≤-29.07	PASS

Emission level measurement

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	4.97	4.97	---	PASS
			30~1000	4.97	-46.54	≤-25.03	PASS
			1000~26500	4.97	-29.77	≤-25.03	PASS
	Ant2	2412	Reference	6.78	6.78	---	PASS
			30~1000	6.78	-46.34	≤-23.22	PASS
			1000~26500	6.78	-29.45	≤-23.22	PASS
	Ant1	2437	Reference	5.50	5.50	---	PASS
			30~1000	5.50	-46.03	≤-24.5	PASS
			1000~26500	5.50	-29.4	≤-24.5	PASS
	Ant2	2437	Reference	7.11	7.11	---	PASS
			30~1000	7.11	-46.21	≤-22.89	PASS
			1000~26500	7.11	-29.09	≤-22.89	PASS
	Ant1	2462	Reference	4.87	4.87	---	PASS
			30~1000	4.87	-45.15	≤-25.13	PASS
			1000~26500	4.87	-29.52	≤-25.13	PASS
	Ant2	2462	Reference	7.00	7.00	---	PASS
			30~1000	7.00	-45.12	≤-23	PASS
			1000~26500	7.00	-29.59	≤-23	PASS
11G	Ant1	2412	Reference	4.12	4.12	---	PASS
			30~1000	4.12	-46.44	≤-25.88	PASS
			1000~26500	4.12	-29.54	≤-25.88	PASS
	Ant2	2412	Reference	5.87	5.87	---	PASS
			30~1000	5.87	-46.13	≤-24.13	PASS
			1000~26500	5.87	-29.98	≤-24.13	PASS
	Ant1	2437	Reference	3.82	3.82	---	PASS
			30~1000	3.82	-45.84	≤-26.18	PASS
			1000~26500	3.82	-29.51	≤-26.18	PASS
	Ant2	2437	Reference	5.87	5.87	---	PASS
			30~1000	5.87	-45.85	≤-24.13	PASS

	Ant1	2462	1000~26500	5.87	-29.57	≤-24.13	PASS
			Reference	3.59	3.59	---	PASS
			30~1000	3.59	-45.94	≤-26.41	PASS
	Ant2	2462	1000~26500	3.59	-29.51	≤-26.41	PASS
			Reference	6.27	6.27	---	PASS
			30~1000	6.27	-44.87	≤-23.73	PASS
11N20MIMO	Ant1	2412	1000~26500	6.27	-29.17	≤-23.73	PASS
			Reference	1.67	1.67	---	PASS
			30~1000	1.67	-44.96	≤-28.33	PASS
	Ant2	2412	1000~26500	1.67	-31.04	≤-28.33	PASS
			Reference	3.45	3.45	---	PASS
			30~1000	3.45	-45.9	≤-26.55	PASS
	Ant1	2437	1000~26500	3.45	-30.57	≤-26.55	PASS
			Reference	1.16	1.16	---	PASS
			30~1000	1.16	-46.17	≤-28.84	PASS
	Ant2	2437	1000~26500	1.16	-30.14	≤-28.84	PASS
			Reference	3.43	3.43	---	PASS
			30~1000	3.43	-45.8	≤-26.57	PASS
	Ant1	2462	1000~26500	3.43	-29.92	≤-26.57	PASS
			Reference	1.47	1.47	---	PASS
			30~1000	1.47	-46.03	≤-28.53	PASS
	Ant2	2462	1000~26500	1.47	-30.23	≤-28.53	PASS
			Reference	3.78	3.78	---	PASS
			30~1000	3.78	-45.75	≤-26.22	PASS
11N40MIMO	Ant1	2422	1000~26500	3.78	-28.73	≤-26.22	PASS
			Reference	-1.06	-1.06	---	PASS
			30~1000	-1.06	-68.55	≤-31.06	PASS
	Ant2	2422	1000~26500	-1.06	-53.16	≤-31.06	PASS
			Reference	0.41	0.41	---	PASS
			30~1000	0.41	-68.73	≤-29.59	PASS
	Ant1	2437	1000~26500	0.41	-53.2	≤-29.59	PASS
			Reference	-1.23	-1.23	---	PASS
			30~1000	-1.23	-69.14	≤-31.23	PASS
	Ant2	2437	1000~26500	-1.23	-53.28	≤-31.23	PASS
			Reference	0.39	0.39	---	PASS
			30~1000	0.39	-69.23	≤-29.61	PASS
	Ant1	2452	1000~26500	0.39	-52.71	≤-29.61	PASS
			Reference	-1.50	-1.50	---	PASS
			30~1000	-1.50	-68.77	≤-31.5	PASS
	Ant2	2452	1000~26500	-1.50	-52.77	≤-31.5	PASS
			Reference	0.92	0.92	---	PASS
			30~1000	0.92	-68.47	≤-29.08	PASS
	Ant2	2452	1000~26500	0.92	-53.05	≤-29.08	PASS

Band-edge measurement

11B Ant1 Low 2412



11B Ant2 Low 2412



11B Ant1 High 2462



11B_Ant2_High_2462



11G_Ant1_Low_2412



11G_Ant2_Low_2412



11G_Ant1_High_2462



11G_Ant2_High_2462



11N20MIMO_Ant1_Low_2412



11N20MIMO_Ant2_Low_2412



11N20MIMO_Ant1_High_2462



11N20MIMO_Ant2_High_2462



11N40MIMO_Ant1_Low_2422



11N40MIMO_Ant2_Low_2422



11N40MIMO_Ant1_High_2452



11N40MIMO_Ant2_High_2452




Emission level measurement

11B_Ant1_2412_0~Reference




11B_Ant1_2412_30~1000

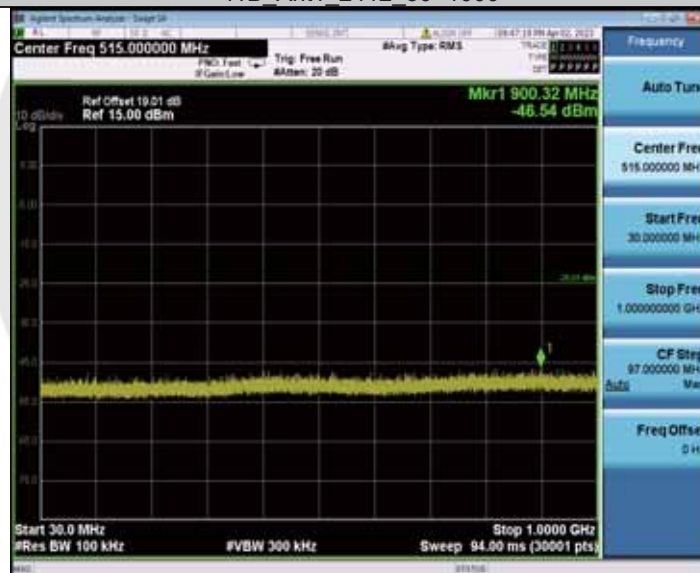


11B_Ant1_2412_1000~26500



11B_Ant2_2412_0~Reference

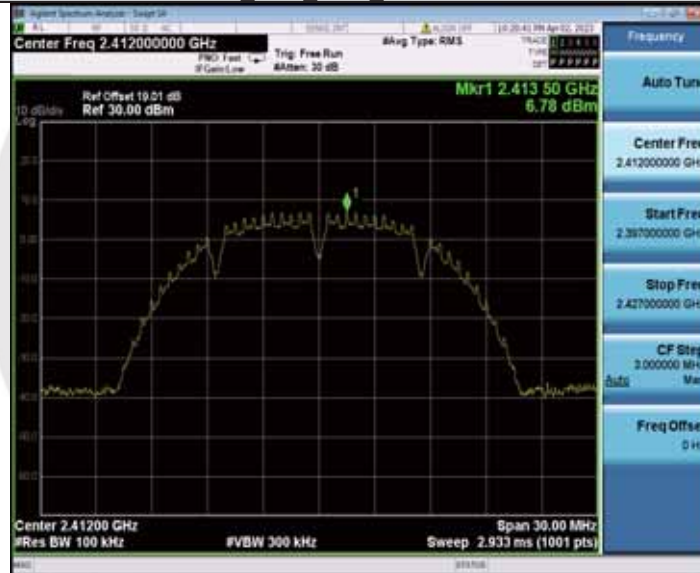

11B_Ant2_2412_30~1000

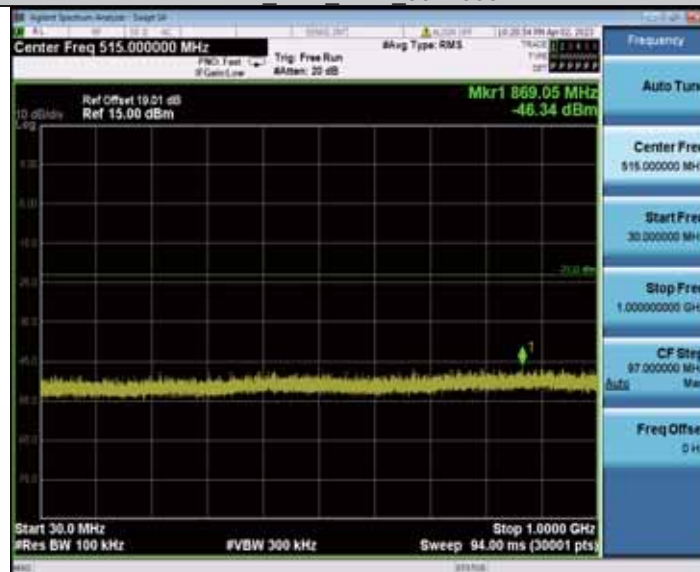

11B_Ant2_2412_1000~26500



11B_Ant1_2437_0~Reference



11B_Ant1_2437_30~1000




11B Ant1 2437 1000~26500



11B Ant2 2437 0~Reference



11B_Ant2_2437_30~1000

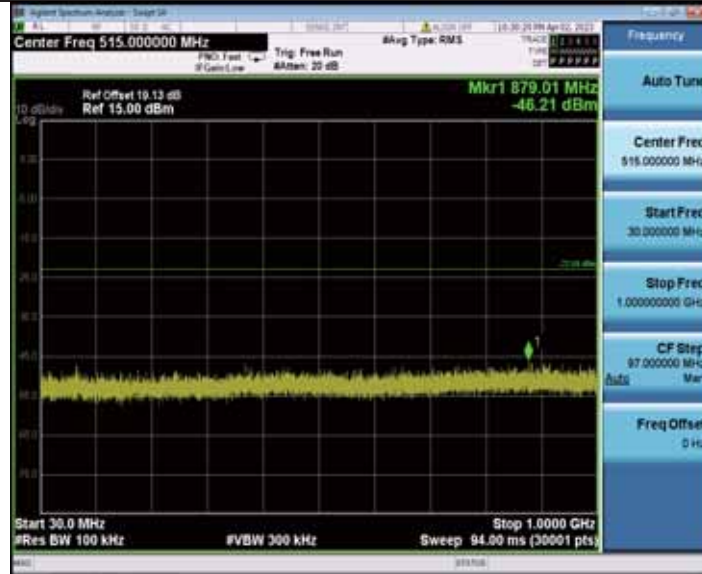


11B_Ant2_2437_1000~26500



11B_Ant1_2462_0~Reference



11B_Ant1_2462_30~1000

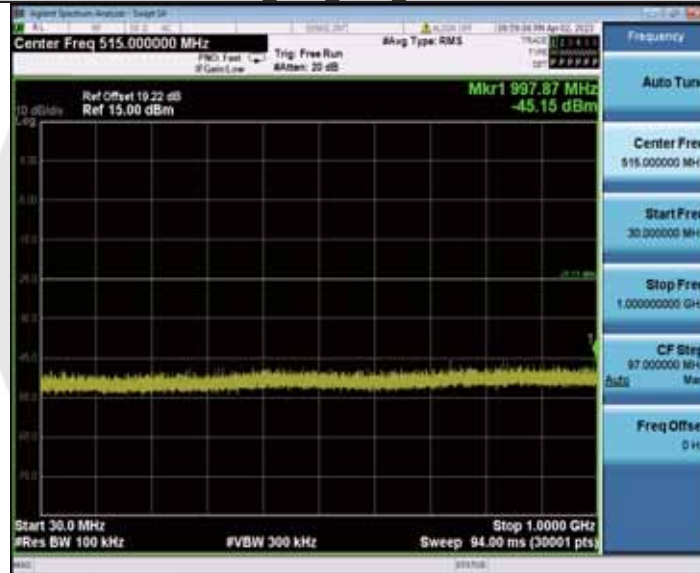


11B_Ant1_2462_1000~26500



11B_Ant2_2462_0~Reference



11B_Ant2_2462_30~1000

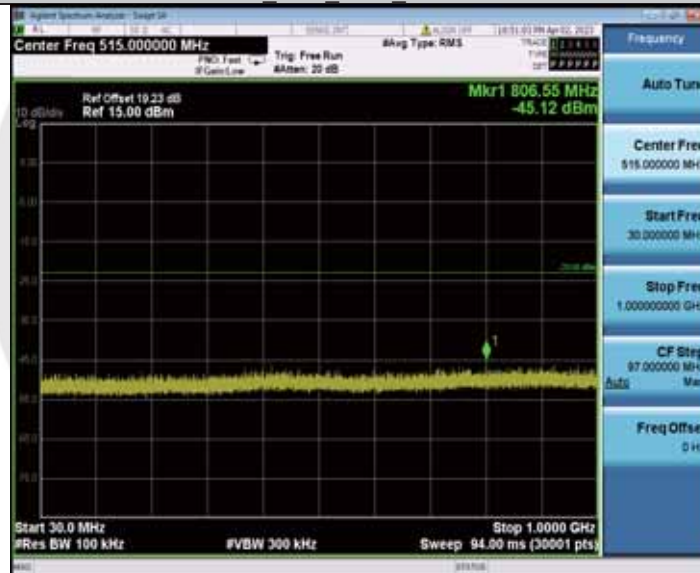


11B_Ant2_2462_1000~26500



11G Ant1 2412 0~Reference



11G Ant1 2412 30~1000

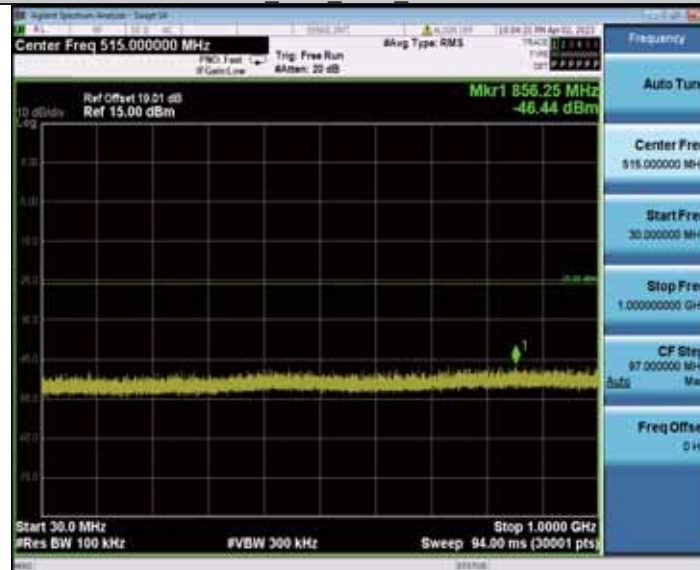

11G_Ant1_2412_1000~26500



11G_Ant2_2412_0~Reference



11G_Ant2_2412_30~1000



11G Ant2 2412 1000~26500



11G Ant1 2437 0~Reference



11G_Ant1_2437_30~1000




11G_Ant1_2437_1000~26500



11G_Ant2_2437_0~Reference



11G_Ant2_2437_30~1000

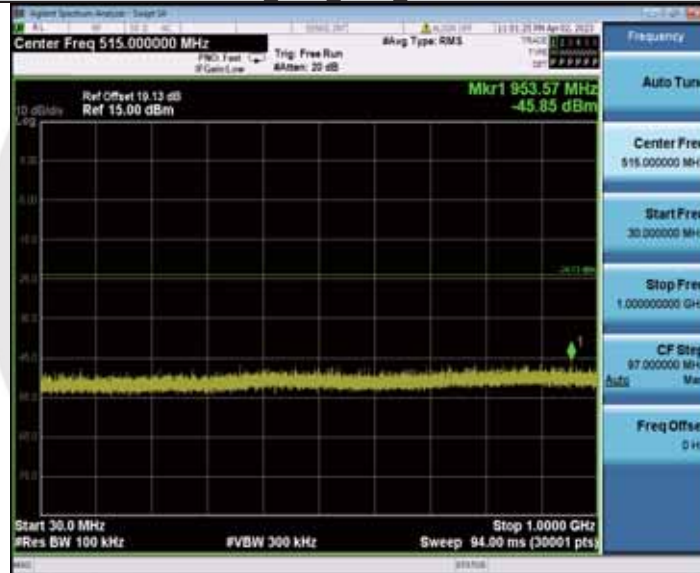


11G_Ant2_2437_1000~26500



11G_Ant1_2462_0~Reference



11G_Ant1_2462_30~1000

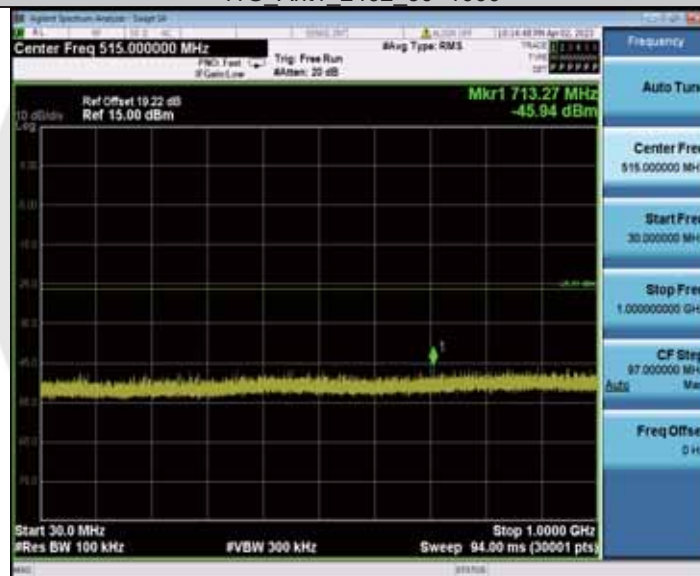


11G_Ant1_2462_1000~26500



11G Ant2 2462 0~Reference



11G Ant2 2462 30~1000

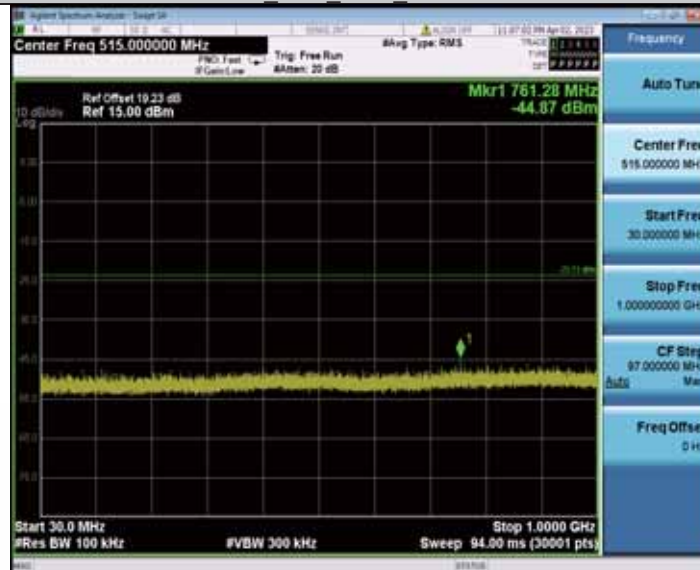

11G_Ant2_2462_1000~26500



11N20MIMO_Ant1_2412_0~Reference




11N20MIMO_Ant1_2412_30~1000




11N20MIMO Ant1 2412 1000~26500



11N20MIMO Ant2 2412 0~Reference

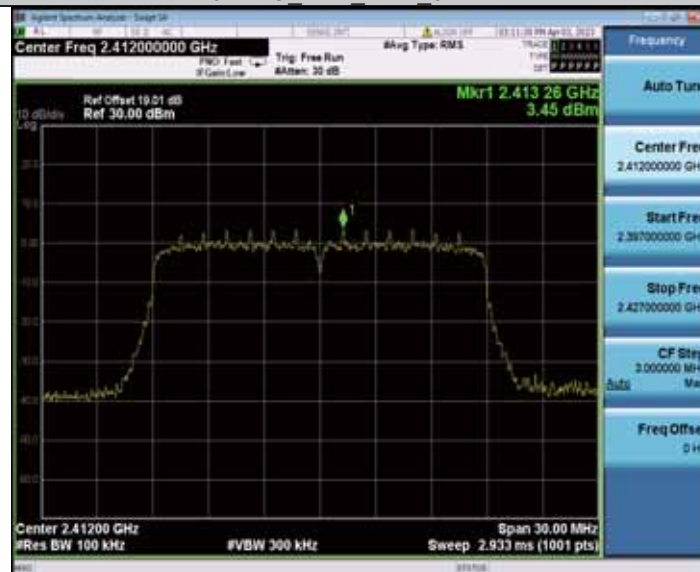


11N20MIMO_Ant2_2412_30~1000

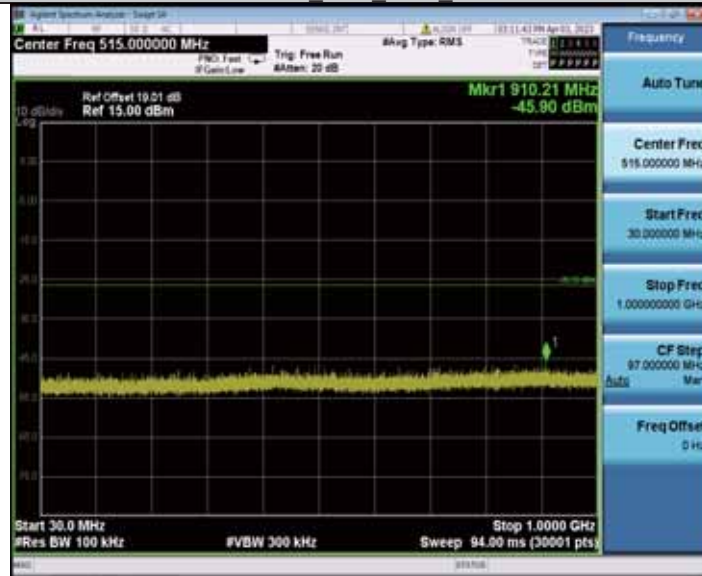

11N20MIMO_Ant2_2412_1000~26500



11N20MIMO_Ant1_2437_0~Reference

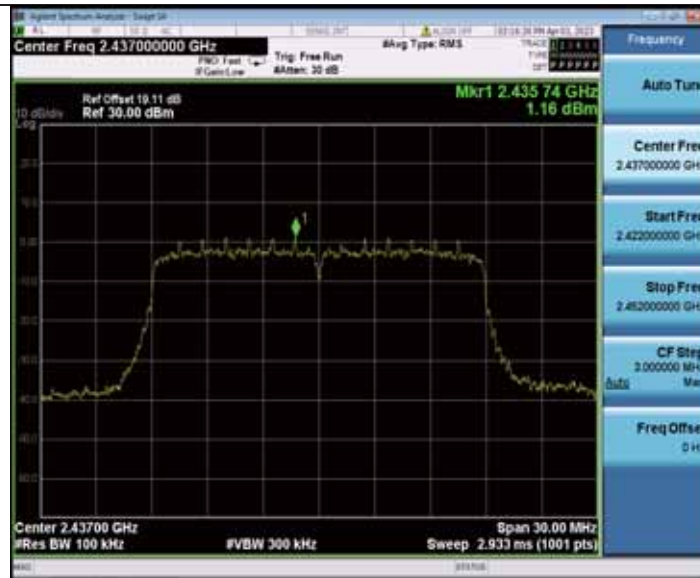


11N20MIMO Ant1 2437 30~1000




11N20MIMO Ant1 2437 1000~26500



11N20MIMO_Ant2_2437_0~Reference

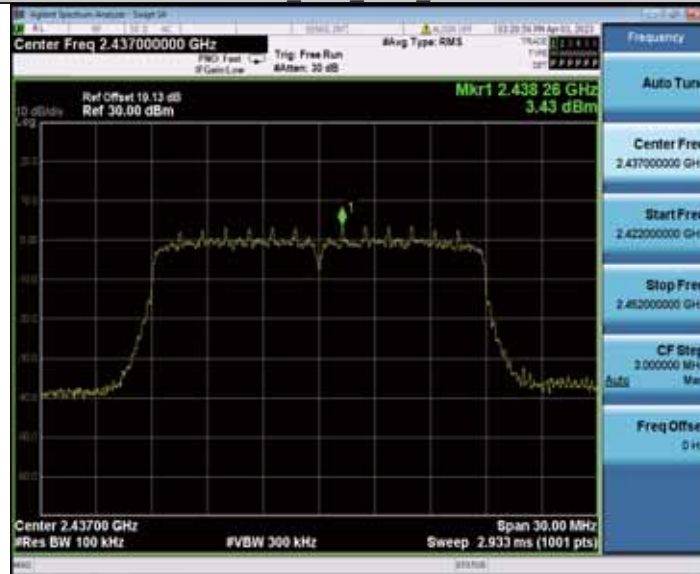

11N20MIMO_Ant2_2437_30~1000

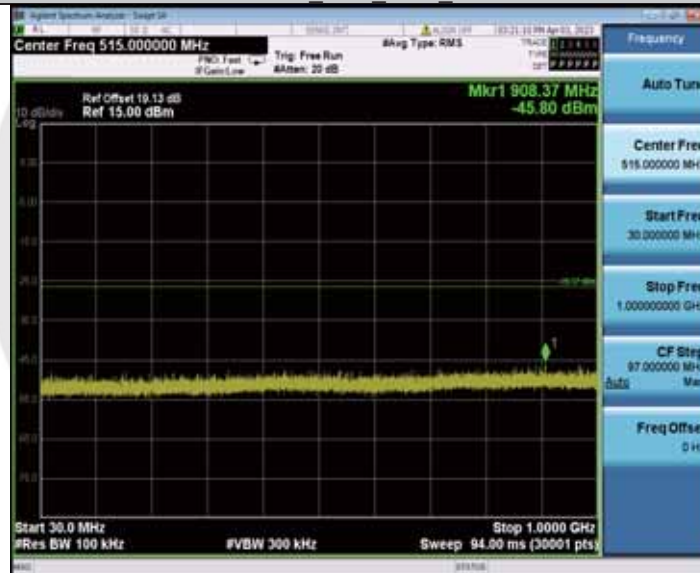


11N20MIMO_Ant2_2437_1000~26500



11N20MIMO_Ant1_2462_0~Reference




11N20MIMO_Ant1_2462_30~1000

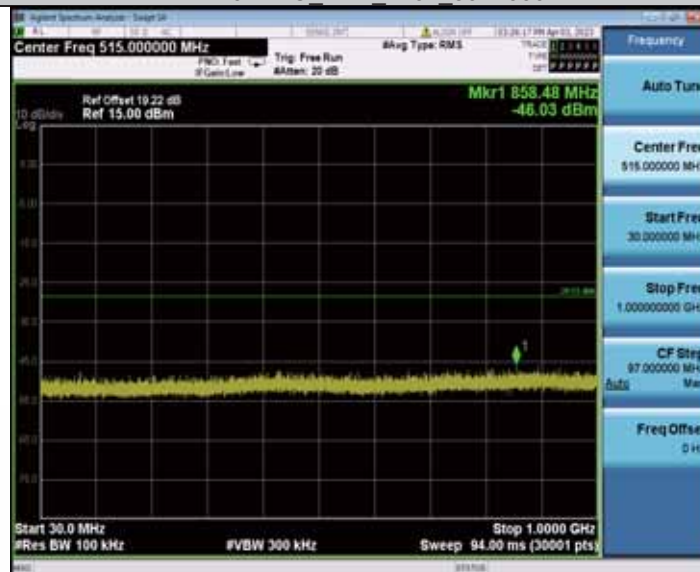

11N20MIMO_Ant1_2462_1000~26500



11N20MIMO_Ant2_2462_0~Reference

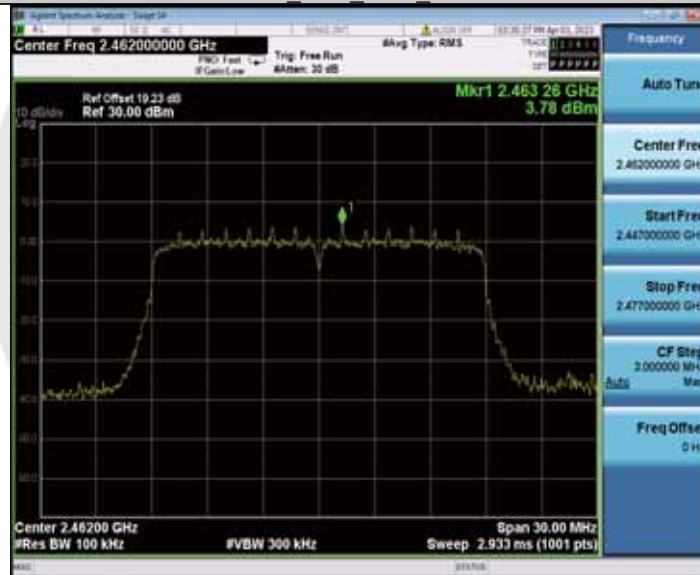


11N20MIMO_Ant2_2462_30~1000




11N20MIMO Ant2 2462 1000~26500



11N40MIMO Ant1 2422 0~Reference

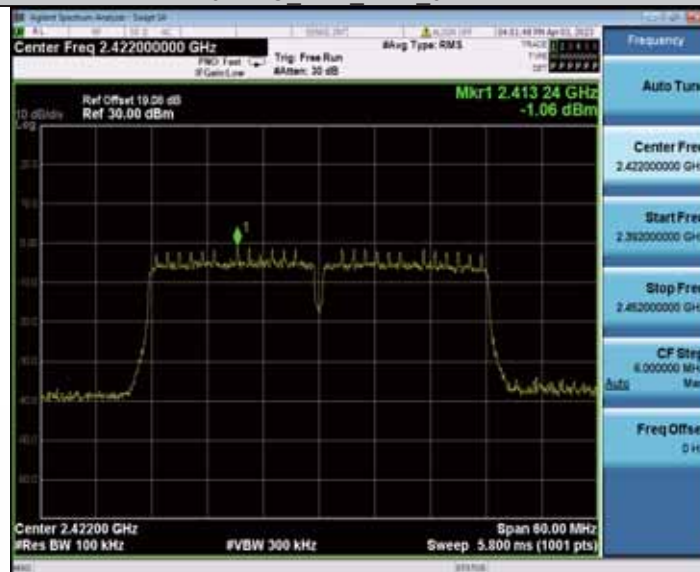


11N40MIMO_Ant1_2422_30~1000

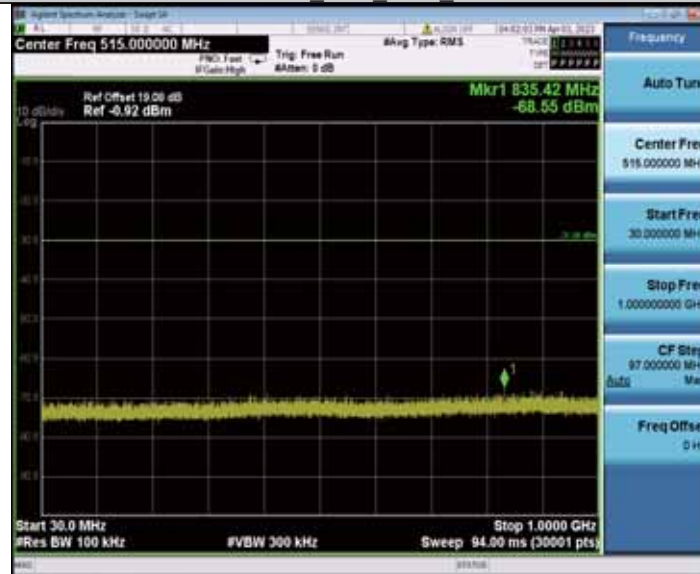


11N40MIMO_Ant1_2422_1000~26500



11N40MIMO_Ant2_2422_0~Reference

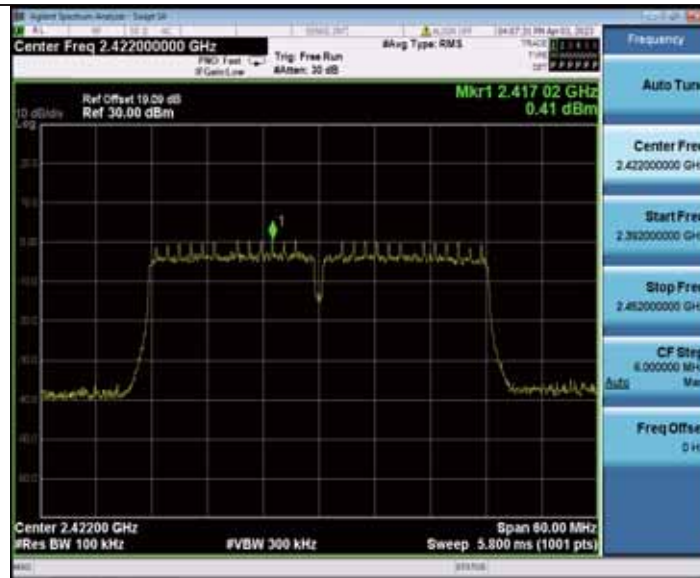


11N40MIMO Ant2_2422_30~1000

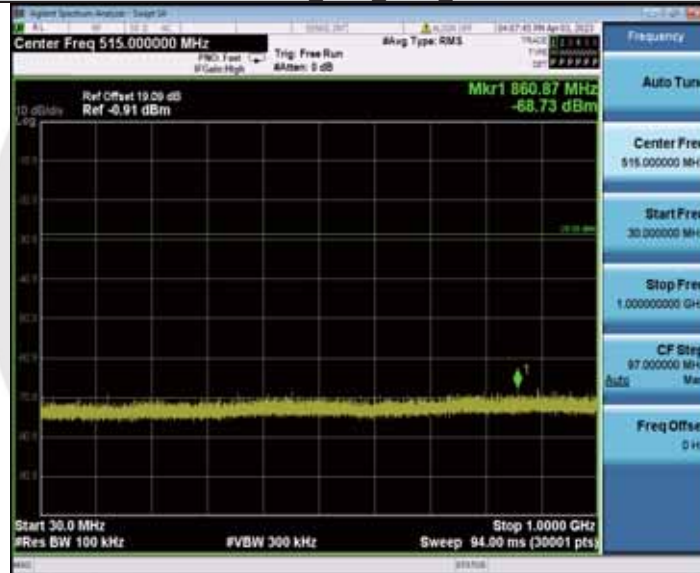


11N40MIMO Ant2_2422_1000~26500



11N40MIMO_Ant1_2437_0~Reference

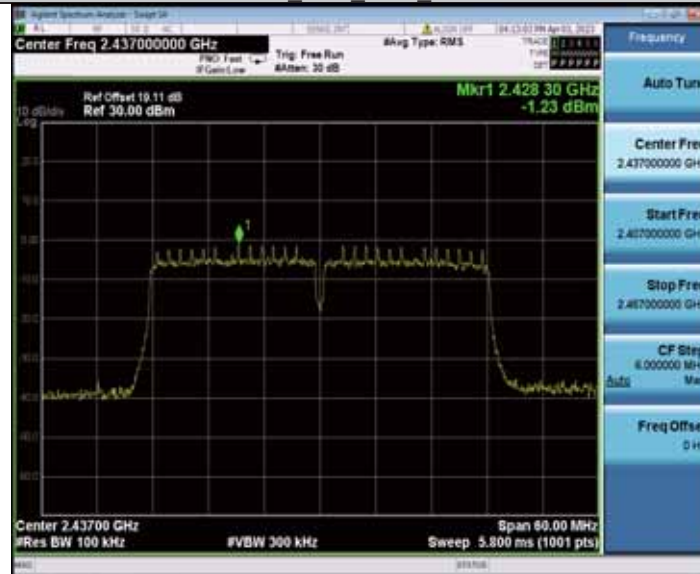


11N40MIMO_Ant1_2437_30~1000

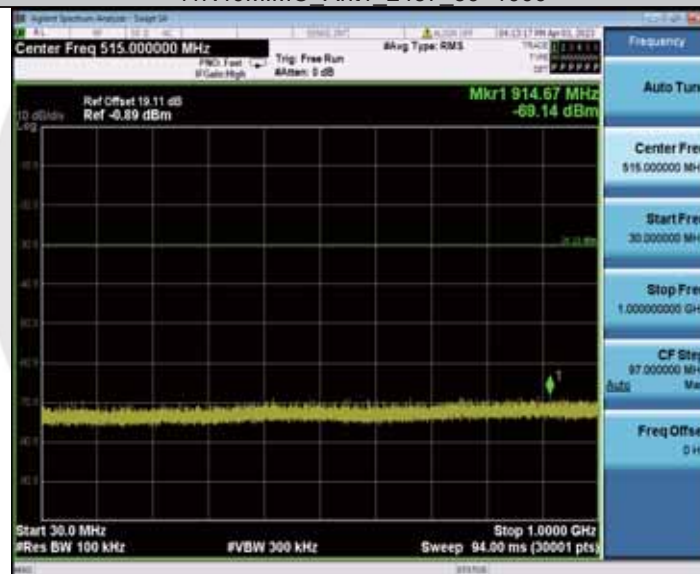

11N40MIMO_Ant1_2437_1000~26500



11N40MIMO_Ant2_2437_0~Reference

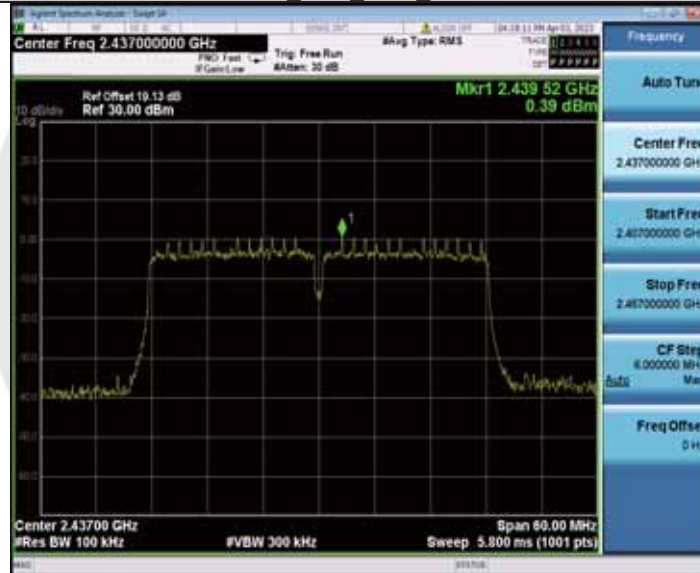


11N40MIMO_Ant2_2437_30~1000




11N40MIMO_Ant2_2437_1000~26500



11N40MIMO_Ant1_2452_0~Reference

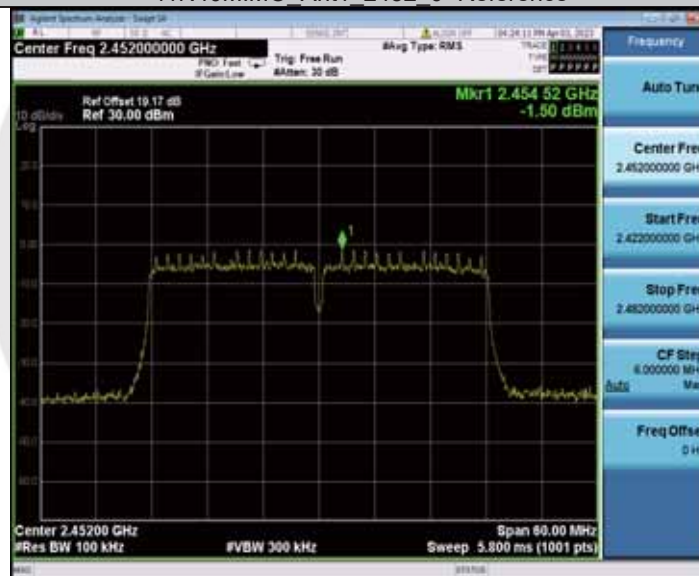


11N40MIMO_Ant1_2452_30~1000

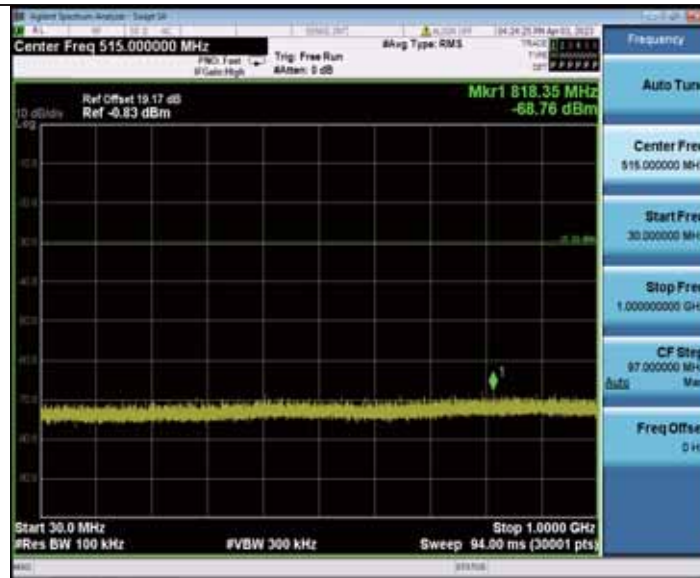


11N40MIMO Ant1 2452 1000~26500



11N40MIMO Ant2 2452 0~Reference

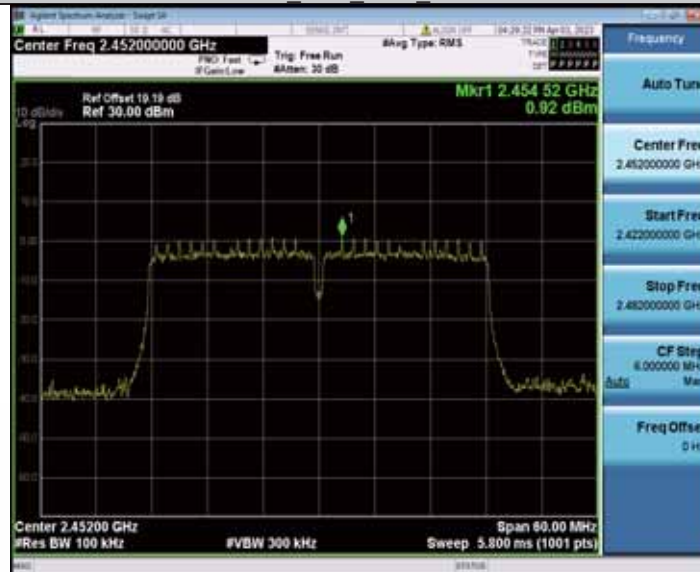

11N40MIMO_Ant2_2452_30~1000

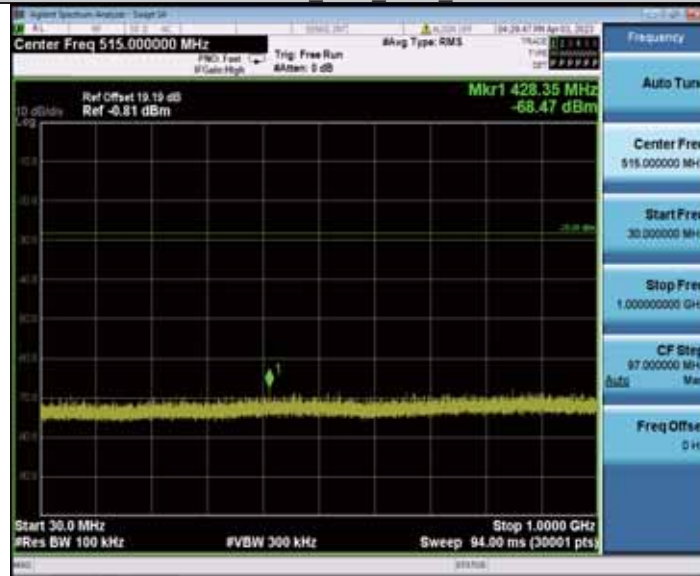

11N40MIMO_Ant2_2452_1000~26500



8.6 RADIATED SPURIOUS EMISSION

8.6.1 Applicable Standard

According to FCC Part 15.247(d), 15.205, 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02
According to IC RSS-Gen and RSS-247

8.6.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205 the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.6.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

8.6.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit. Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.6.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/ \text{test distance})(\text{dB})$;

Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz(1GHz to 25GHz)

All the antenna(Antenna 1&2) and modes(802.11b/g/n) have been tested and the worst(Antenna 1&2, 802.11b) result recorded was report as below:

BL-M7621AX7

Test mode:	802.11b	Frequency:	Channel 1: 2412MHz
Antenna:	1&2		

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
11463.7	V	60.55	49.39	74	54	13.45	4.61
14619.3	V	63.97	51.02	74	54	10.03	2.98
17962.5	V	70.15	47.62	74	54	3.85	6.38
11527.5	H	61.54	49.31	74	54	12.46	4.69
14578.1	H	63.62	50.78	74	54	10.38	3.22
17626.8	H	69.79	49.52	74	54	4.21	4.48

Test mode:	802.11b	Frequency:	Channel 6: 2437MHz
Antenna:	1&2		

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
11516.2	V	60.57	49.61	74	54	13.43	4.39
14566.8	V	64.79	50.77	74	54	9.21	3.23
17598.7	V	69.90	50.36	74	54	4.10	3.64
11555.6	H	60.42	48.77	74	54	13.58	5.23
14617.5	H	64.19	50.43	74	54	9.81	3.57
17604.3	H	70.78	50.22	74	54	3.22	3.78

Test mode:	802.11b	Frequency:	Channel 11: 2462MHz
Antenna:	1&2		

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
11491.8	V	60.28	49.82	74	54	13.72	4.18
14578.1	V	64.13	51.10	74	54	9.87	2.90
17619.3	V	70.64	49.74	74	54	3.36	4.26
11535	H	60.18	49.16	74	54	13.82	4.84
14596.8	H	63.66	50.70	74	54	10.34	3.30
17587.5	H	70.55	50.12	74	54	3.45	3.88

BL-M8832AU1

Test mode: 802.11b Frequency: Channel 1: 2412MHz
Antenna: 1&2

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
11467.5	V	61.72	49.42	74	54	12.28	4.58
14585.6	V	64.44	50.99	74	54	9.56	3.01
17623.1	V	69.64	50.03	74	54	4.36	3.97
11394.3	H	60.78	48.57	74	54	13.22	5.43
14574.3	H	63.83	50.69	74	54	10.17	3.31
17593.1	H	70.41	50.12	74	54	3.59	3.88

Test mode: 802.11b Frequency: Channel 6: 2437MHz
Antenna: 1&2

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
11456.2	V	59.56	49.65	74	54	14.44	4.35
14626.8	V	63.82	50.87	74	54	10.18	3.13
17606.2	V	69.78	50.51	74	54	4.22	3.49
11326.8	H	60.47	49.04	74	54	13.53	4.96
14662.5	H	63.85	50.10	74	54	10.15	3.90
17975.6	H	69.41	47.79	74	54	4.59	6.21

Test mode: 802.11b Frequency: Channel 11: 2462MHz
Antenna: 1&2

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
11508.7	V	60.61	49.73	74	54	13.33	4.27
14655	V	63.74	50.26	74	54	10.26	3.74
17960.6	V	69.67	47.60	74	54	4.33	6.40
11261.2	H	60.05	48.71	74	54	13.95	5.29
14675.6	H	64.21	49.84	74	54	9.79	4.16
17655	H	68.86	49.00	74	54	5.14	5.00

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All the antenna(Antenna 1&2) and modes(802.11b/g/n/ax) have been tested and the worst(Antenna 1&2, 802.11ax(HE40)) result recorded was report as below:

BL-M7621AX7

Test mode:	802.11ax(HE40)	Frequency:	Channel 1: 2412MHz
Antenna:	1&2		


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2326.53	H	45.37	74	41.20	54
2341.28	V	45.31	74	41.23	54

Test mode:	802.11ax(HE40)	Frequency:	Channel 11: 2462MHz
Antenna:	1&2		


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2487.41	H	46.56	74	42.34	54
2485.63	V	47.73	74	42.56	54

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Test Model	802.11b	Spurious Emission in Restricted Band 2310-2390MHz	Channel 1: 2412MHz	VBW=3MHz	Polarity: H
------------	---------	---	--------------------	----------	-------------

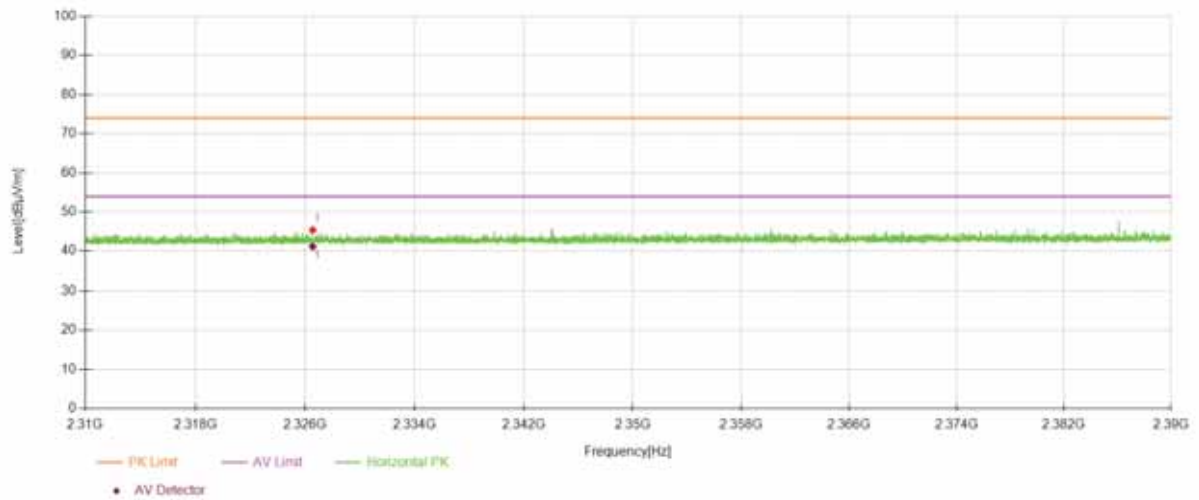


Test Model	802.11b	Spurious Emission in Restricted Band 2310-2390MHz	Channel 1: 2412MHz	VBW=3MHz	Polarity: V
------------	---------	---	--------------------	----------	-------------

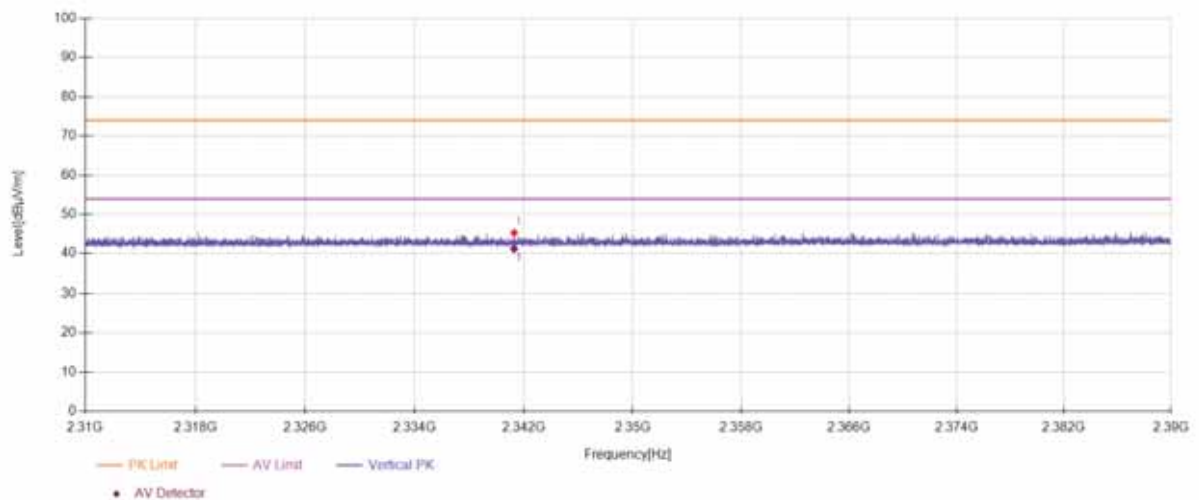

Test Model 802.11b Spurious Emission in Restricted Band 2483.5-2500MHz
Channel 11: 2462MHz VBW=3MHz Polarity: H

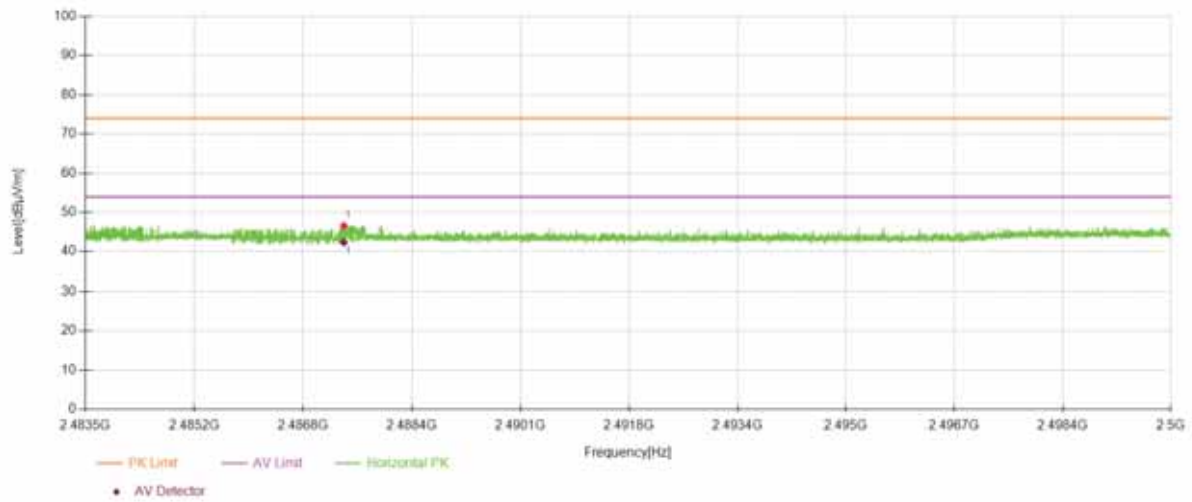

Test Model 802.11b Spurious Emission in Restricted Band 2483.5-2500MHz
Channel 11: 2462MHz VBW=3MHz Polarity: V

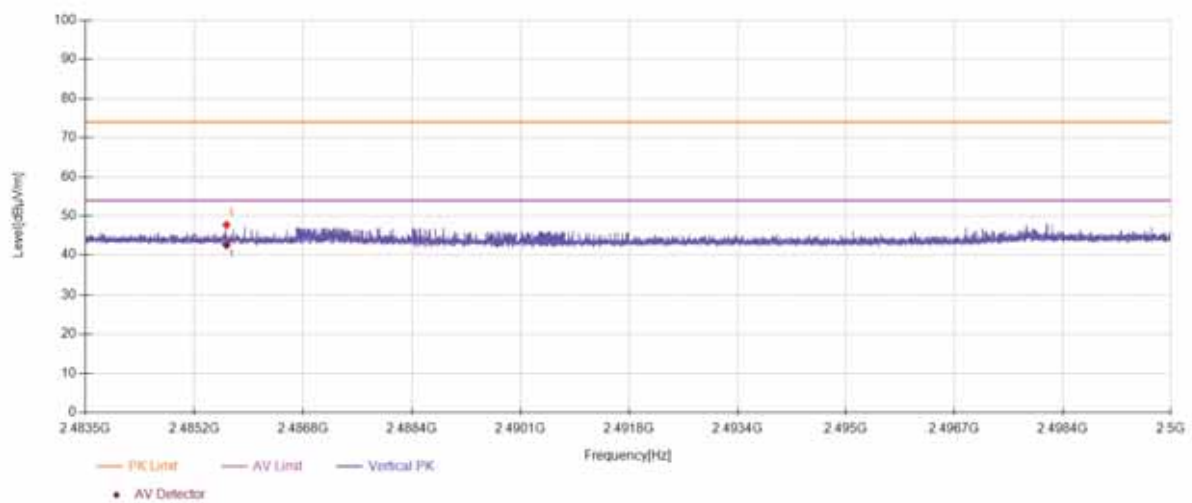

BL-M8832AUI

Test mode:	802.11ax(HE40)	Frequency:	Channel 1: 2412MHz
Antenna:	1&2		


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2357.6	H	45.08	74	41.22	54
2322.53	V	48.18	74	41.97	54

Test mode:	802.11ax(HE40)	Frequency:	Channel 11: 2462MHz
Antenna:	1&2		


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2486.69	H	45.91	74	41.23	54
2487.64	V	45.70	74	41.34	54

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Test Model	802.11b	Spurious Emission in Restricted Band 2310-2390MHz	Channel 1: 2412MHz	VBW=3MHz	Polarity: H
------------	---------	---	--------------------	----------	-------------

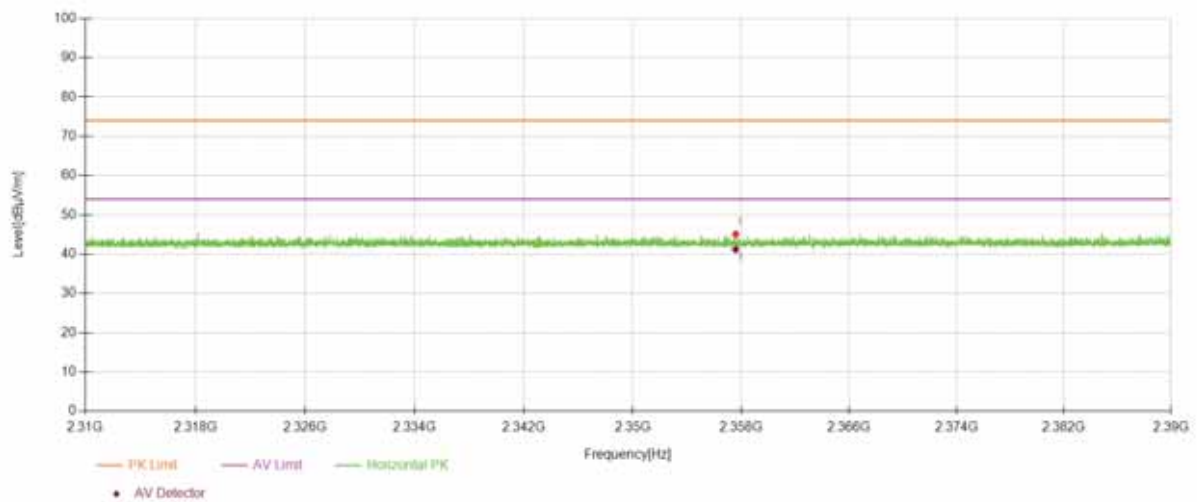


Test Model	802.11b	Spurious Emission in Restricted Band 2310-2390MHz	Channel 1: 2412MHz	VBW=3MHz	Polarity: V
------------	---------	---	--------------------	----------	-------------

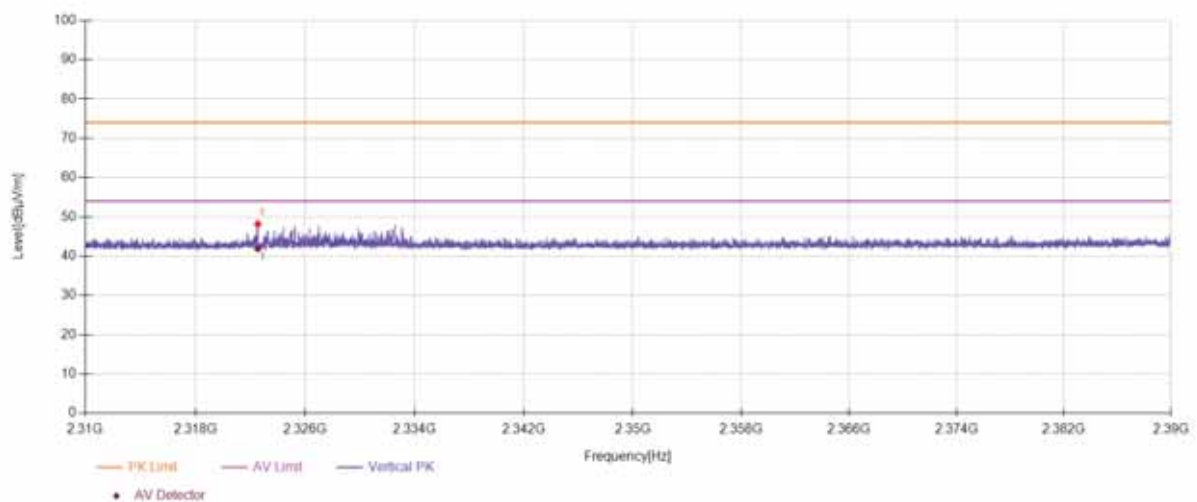

Test Model	802.11b	Spurious Emission in Restricted Band 2483.5-2500MHz		
		Channel 11: 2462MHz	VBW=3MHz	Polarity: H

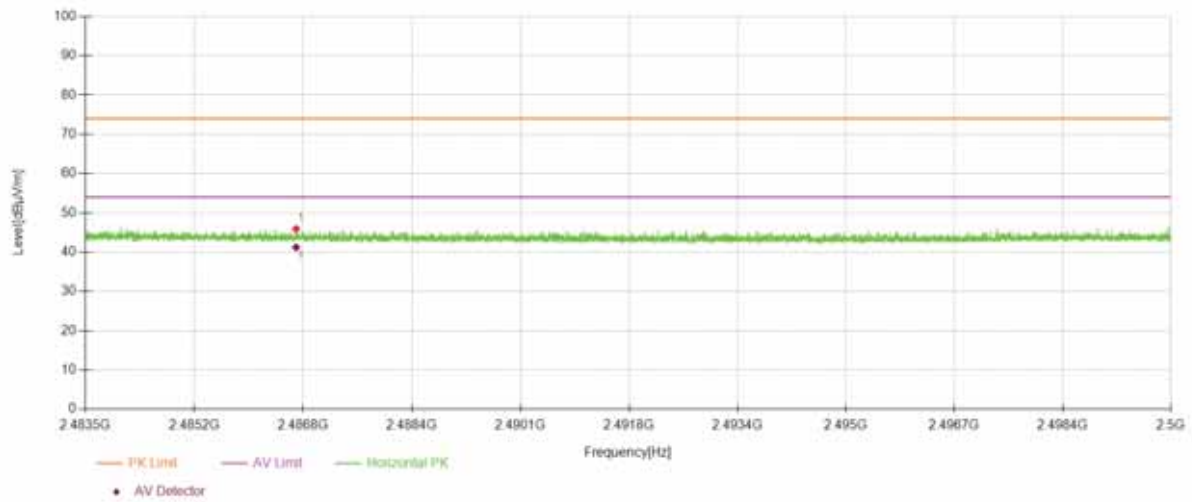

Test Model	802.11b	Spurious Emission in Restricted Band 2483.5-2500MHz		
		Channel 11: 2462MHz	VBW=3MHz	Polarity: V

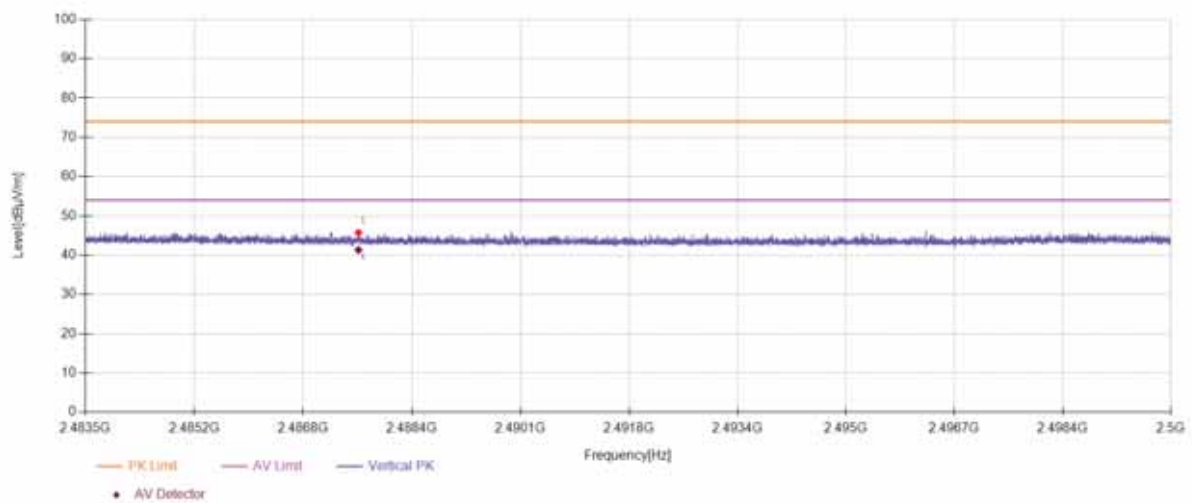


■ Spurious Emission below 1GHz (30MHz to 1GHz)


All the antenna(Antenna 1&2) and modes(802.11b/g/n/ax) have been tested and the worst(Antenna 1&2, 802.11ax(HE40)) result recorded was report as below:

BL-M7621AX7

2412

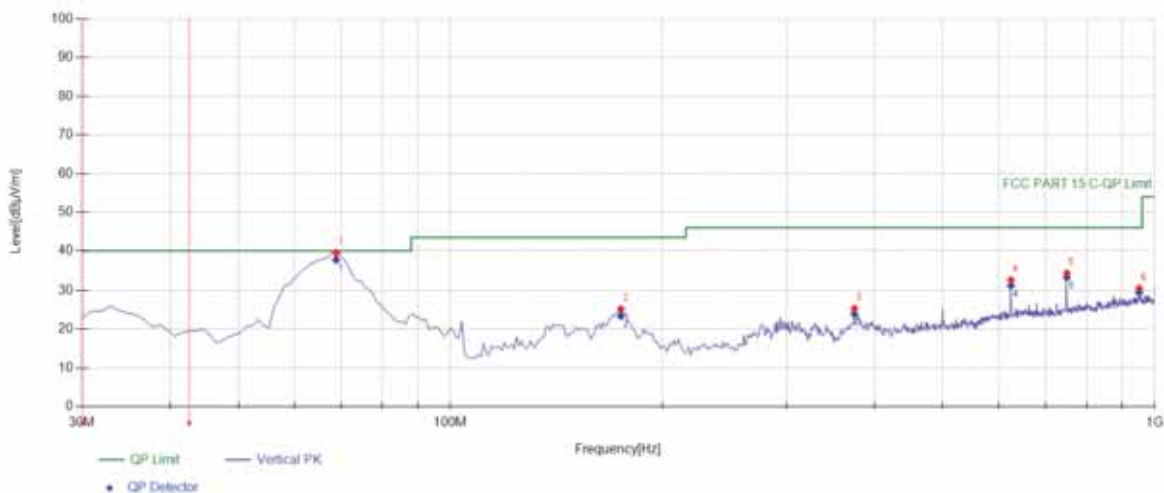


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	68.8388	59.39	-19.80	39.59	PK	40.00	0.41	Vertical
2	174.674	43.91	-18.69	25.22	PK	43.50	18.28	Vertical
3	374.694	37.65	-12.26	25.39	PK	46.00	20.61	Vertical
4	625.205	39.65	-6.92	32.73	PK	46.00	13.27	Vertical
5	750.460	39.83	-5.33	34.50	PK	46.00	11.50	Vertical
6	950.480	32.89	-2.33	30.56	PK	46.00	15.44	Vertical

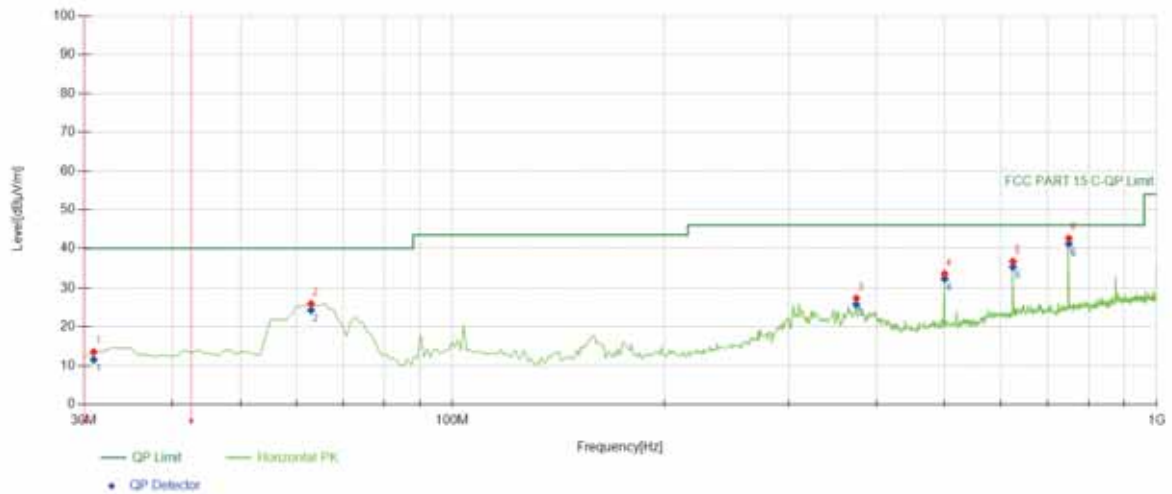

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	30.971	32.02	-18.47	13.55	PK	40.00	26.45	Horizontal
2	63.013	44.95	-18.98	25.97	PK	40.00	14.03	Horizontal
3	374.694	39.64	-12.26	27.38	PK	46.00	18.62	Horizontal
4	499.95	43.44	-9.76	33.68	PK	46.00	12.32	Horizontal
5	625.205	43.84	-6.92	36.92	PK	46.00	9.08	Horizontal
6	750.460	47.97	-5.33	42.64	PK	46.00	3.36	Horizontal

2437

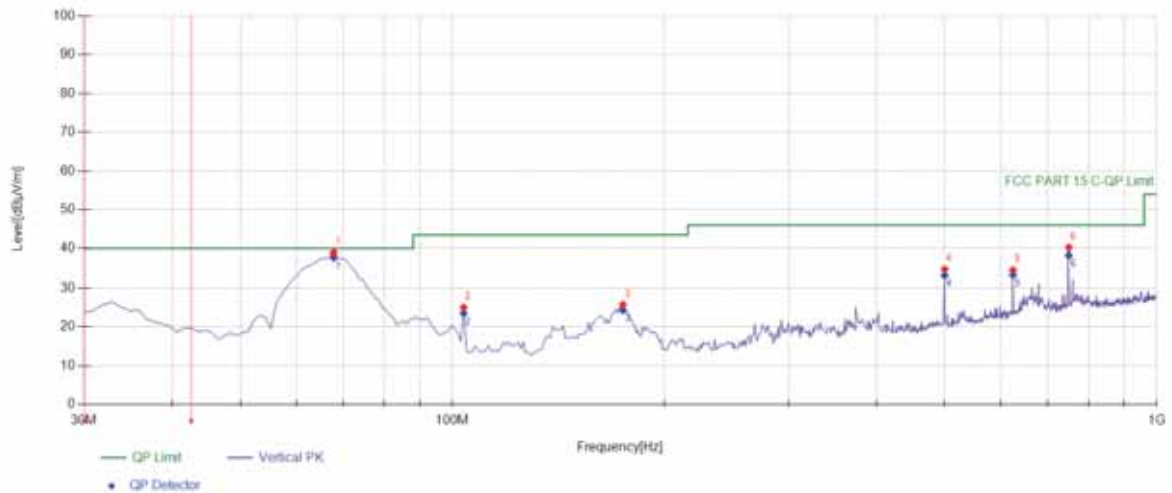

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	67.8679	58.67	-19.66	39.01	PK	40.00	0.99	Vertical
2	103.793	42.01	-17.00	25.01	PK	43.50	18.49	Vertical
3	174.674	44.43	-18.69	25.74	PK	43.50	17.76	Vertical
4	499.95	44.65	-9.76	34.89	PK	46.00	11.11	Vertical
5	625.205	41.56	-6.92	34.64	PK	46.00	11.36	Vertical
6	750.460	45.59	-5.33	40.26	PK	46.00	5.74	Vertical

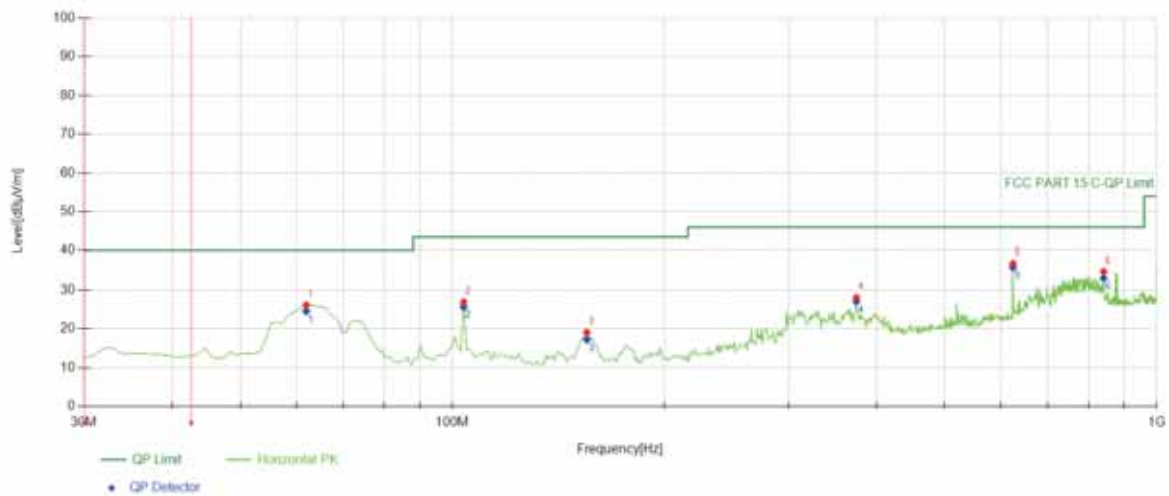


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	62.042	45.00	-18.84	26.16	PK	40.00	13.84	Horizontal
2	103.793	43.93	-17.00	26.93	PK	43.50	16.57	Horizontal
3	155.255	38.78	-19.68	19.10	PK	43.50	24.40	Horizontal
4	374.694	40.36	-12.26	28.10	PK	46.00	17.90	Horizontal
5	625.205	43.82	-6.92	36.90	PK	46.00	9.10	Horizontal
6	840.760	38.63	-3.86	34.77	PK	46.00	11.23	Horizontal

2462

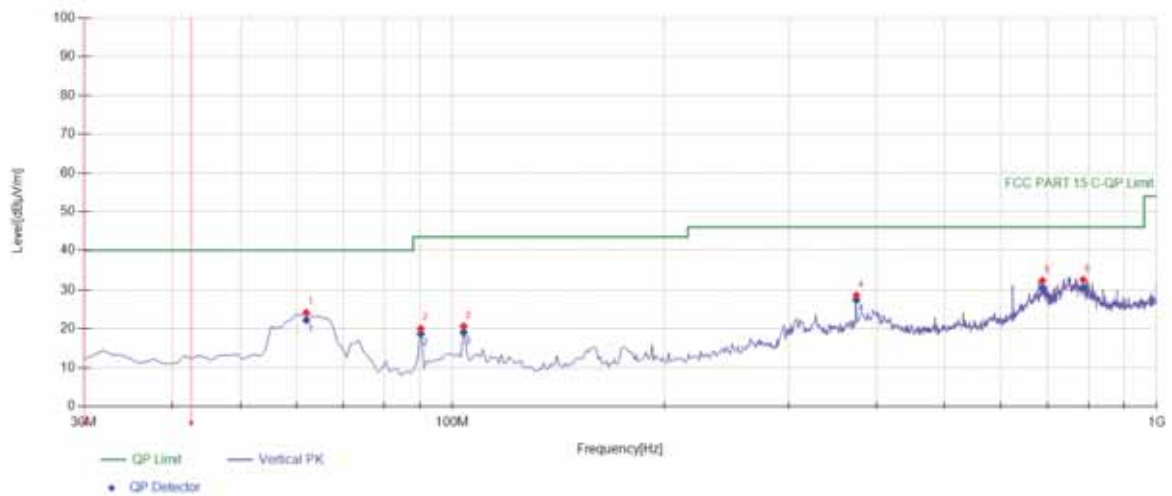

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	62.042	43.03	-18.84	24.19	PK	40.00	15.81	Vertical
2	90.2002	39.20	-19.12	20.08	PK	43.50	23.42	Vertical
3	103.793	37.64	-17.00	20.64	PK	43.50	22.86	Vertical
4	374.694	40.88	-12.26	28.62	PK	46.00	17.38	Vertical
5	688.318	38.49	-6.04	32.45	PK	46.00	13.55	Vertical
6	786.386	37.27	-4.56	32.71	PK	46.00	13.29	Vertical

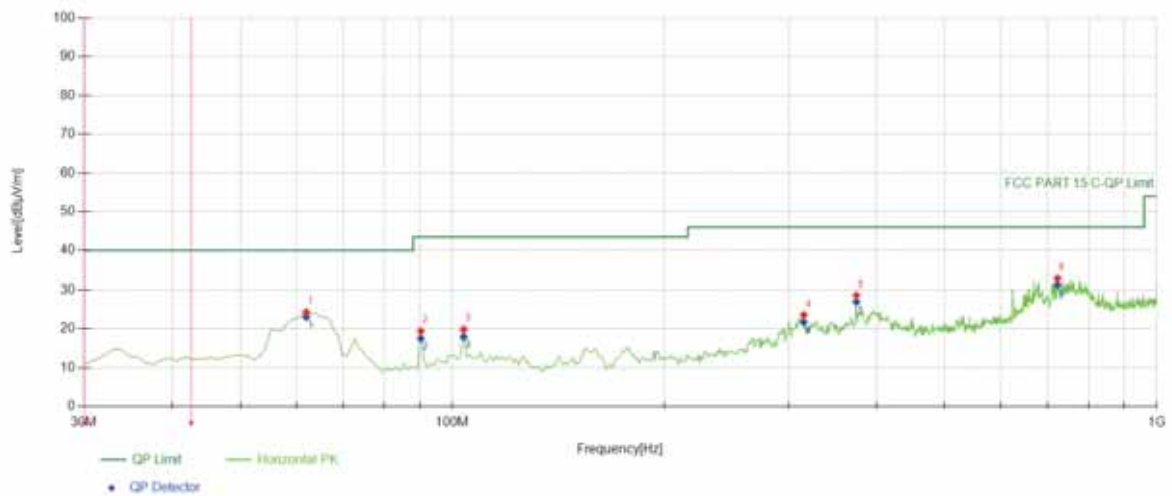


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	62.042	43.17	-18.84	24.33	PK	40.00	15.67	Horizontal
2	90.2002	38.56	-19.12	19.44	PK	43.50	24.06	Horizontal
3	103.793	36.87	-17.00	19.87	PK	43.50	23.63	Horizontal
4	315.465	37.76	-14.14	23.62	PK	46.00	22.38	Horizontal
5	374.694	40.90	-12.26	28.64	PK	46.00	17.36	Horizontal
6	723.273	38.79	-5.76	33.03	PK	46.00	12.97	Horizontal


BL-M8832AU1

2412

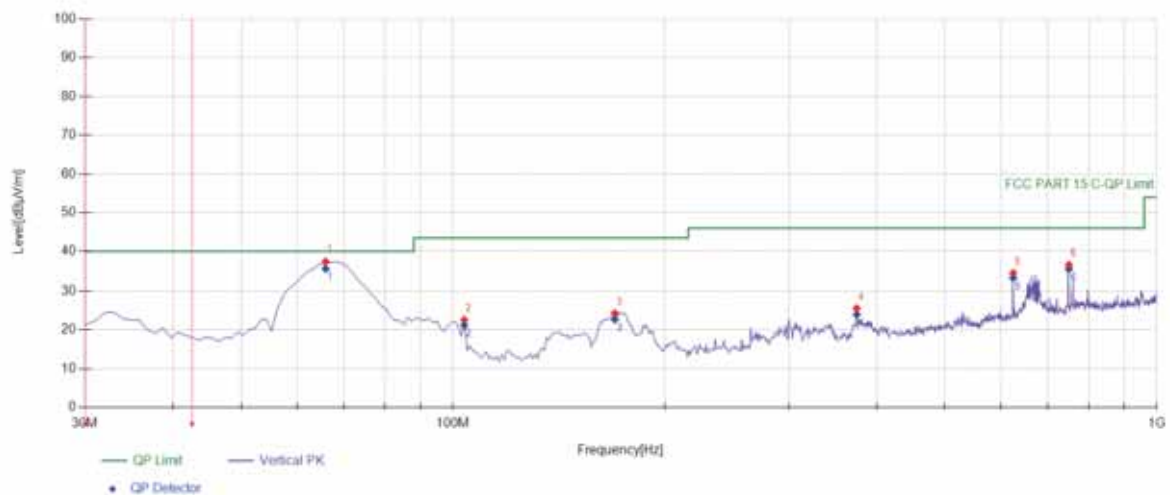

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	65.9259	57.01	-19.39	37.62	PK	40.00	2.38	Vertical
2	103.793	39.62	-17.00	22.62	PK	43.50	20.88	Vertical
3	169.819	43.30	-18.97	24.33	PK	43.50	19.17	Vertical
4	374.694	37.83	-12.26	25.57	PK	46.00	20.43	Vertical
5	625.205	41.61	-6.92	34.69	PK	46.00	11.31	Vertical
6	750.460	42.14	-5.33	36.81	PK	46.00	9.19	Vertical

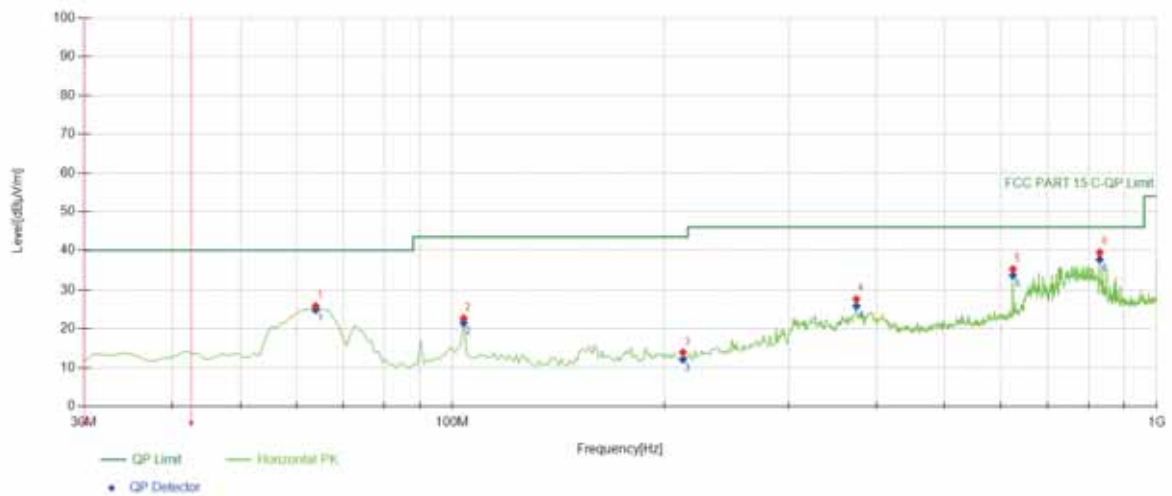

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	63.984	45.01	-19.11	25.90	PK	40.00	14.10	Horizontal
2	103.793	39.72	-17.00	22.72	PK	43.50	20.78	Horizontal
3	212.542	31.07	-17.12	13.95	PK	43.50	29.55	Horizontal
4	374.694	39.96	-12.26	27.70	PK	46.00	18.30	Horizontal
5	625.205	42.35	-6.92	35.43	PK	46.00	10.57	Horizontal
6	830.080	43.63	-4.12	39.51	PK	46.00	6.49	Horizontal

2437

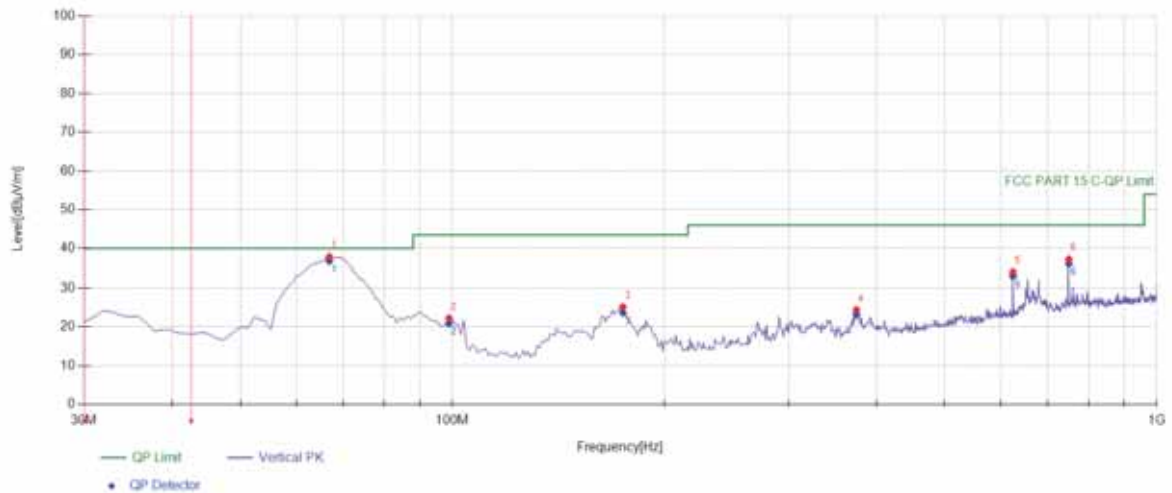

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	66.8969	57.61	-19.53	38.08	PK	40.00	1.92	Vertical
2	98.9389	39.31	-17.05	22.26	PK	43.50	21.24	Vertical
3	174.674	43.85	-18.69	25.16	PK	43.50	18.34	Vertical
4	374.694	36.68	-12.26	24.42	PK	46.00	21.58	Vertical
5	625.205	41.13	-6.92	34.21	PK	46.00	11.79	Vertical
6	750.460	42.81	-5.33	37.48	PK	46.00	8.52	Vertical

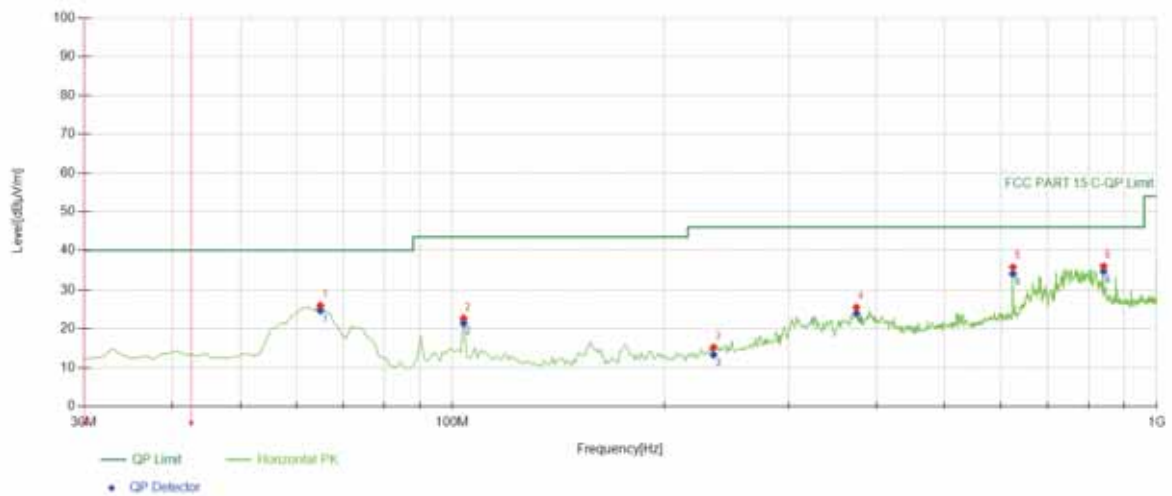

Suspected Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	64.955	45.26	-19.25	26.01	PK	40.00	13.99	Horizontal
2	103.793	39.73	-17.00	22.73	PK	43.50	20.77	Horizontal
3	234.874	30.91	-15.68	15.23	PK	46.00	30.77	Horizontal
4	374.694	37.81	-12.26	25.55	PK	46.00	20.45	Horizontal
5	625.205	42.83	-6.92	35.91	PK	46.00	10.09	Horizontal
6	840.760	40.05	-3.86	36.19	PK	46.00	9.81	Horizontal

2462

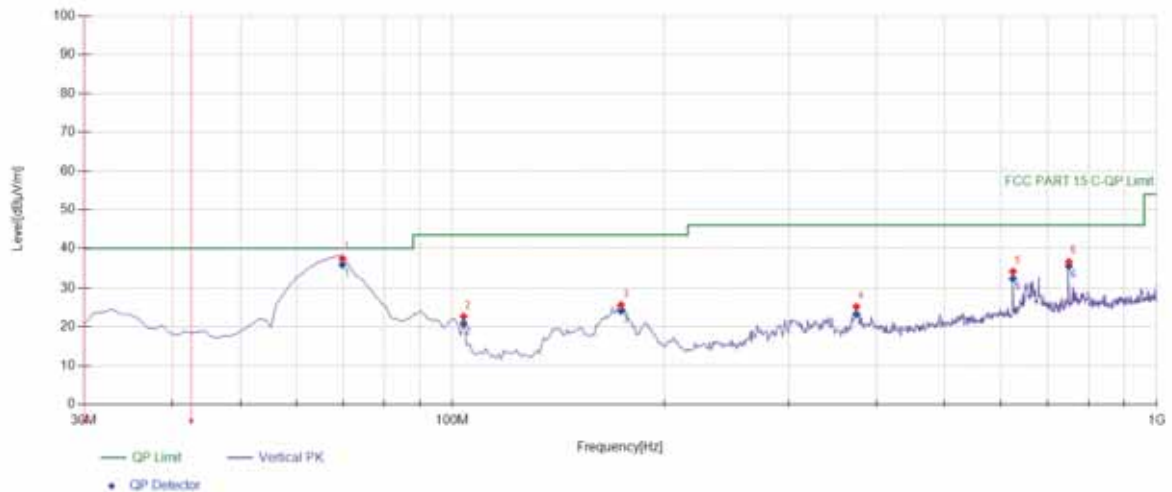

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	69.8098	57.63	-19.94	37.69	PK	40.00	2.31	Vertical
2	103.793	39.67	-17.00	22.67	PK	43.50	20.83	Vertical
3	173.703	44.45	-18.75	25.70	PK	43.50	17.80	Vertical
4	374.694	37.45	-12.26	25.19	PK	46.00	20.81	Vertical
5	625.205	41.25	-6.92	34.33	PK	46.00	11.67	Vertical
6	750.460	42.07	-5.33	36.74	PK	46.00	9.26	Vertical

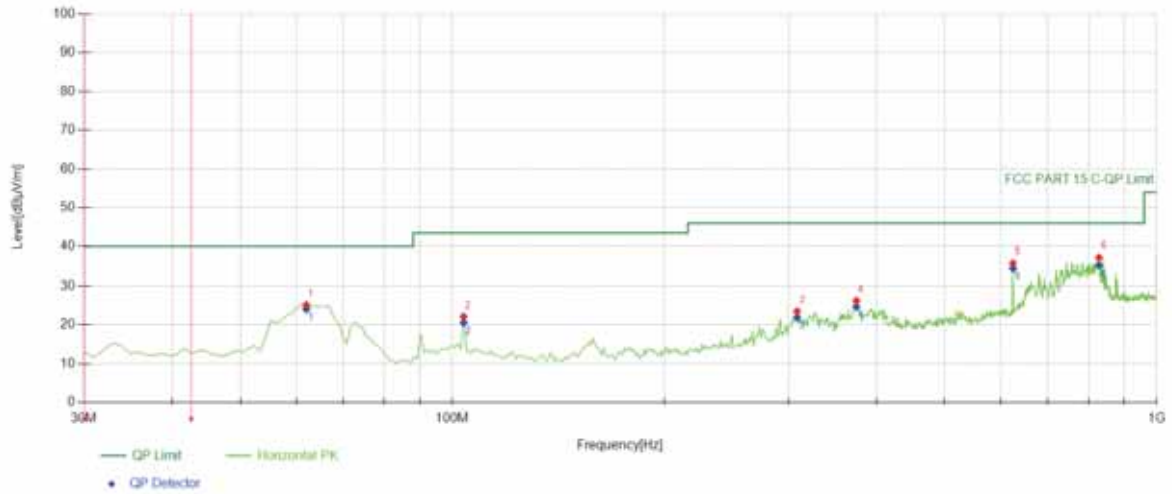

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	62.042	44.01	-18.84	25.17	PK	40.00	14.83	Horizontal
2	103.793	39.15	-17.00	22.15	PK	43.50	21.35	Horizontal
3	308.668	37.66	-14.15	23.51	PK	46.00	22.49	Horizontal
4	374.694	38.51	-12.26	26.25	PK	46.00	19.75	Horizontal
5	625.205	42.85	-6.92	35.93	PK	46.00	10.07	Horizontal
6	828.138	41.52	-4.15	37.37	PK	46.00	8.63	Horizontal

8.7 CONDUCTED EMISSION TEST

8.7.1 Applicable Standard

According to FCC Part 15.207(a)

According to IC RSS-Gen 8.8

8.7.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.7.3 Test Configuration

Test according to clause 6.3 conducted emission test setup

8.7.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.


Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

8.7.5 Test Results

Pass

The AC120V &240V voltage have been tested, and the worst result recorded was report as below:

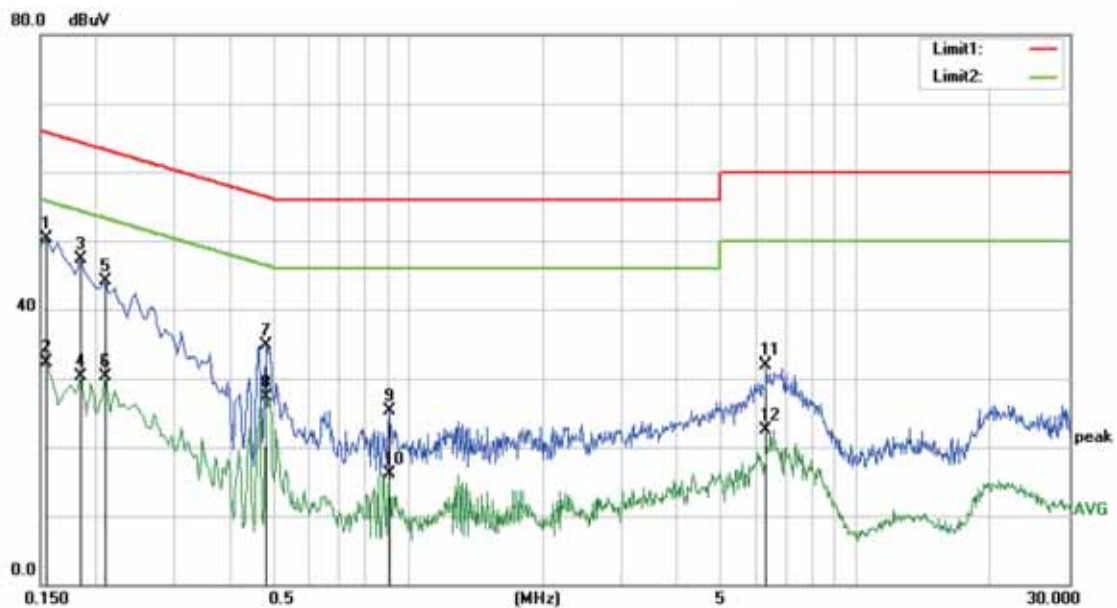

Site Conduction #1

Phase: **N**

Temperature: 21.9

Limit: (CE)FCC PART 15 class A_QP


Power: AC 230V/50Hz

Humidity: 58 %

Mode: WiFi mode 1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1550	40.80	9.53	50.33	65.73	-15.40	QP	
2		0.1550	22.84	9.53	32.37	55.73	-23.36	AVG	
3		0.1850	37.71	9.53	47.24	64.26	-17.02	QP	
4		0.1850	20.79	9.53	30.32	54.26	-23.94	AVG	
5		0.2100	34.57	9.53	44.10	63.21	-19.11	QP	
6		0.2100	20.82	9.53	30.35	53.21	-22.86	AVG	
7		0.4800	25.20	9.53	34.73	56.34	-21.61	QP	
8		0.4800	17.78	9.53	27.31	46.34	-19.03	AVG	
9		0.9050	15.66	9.55	25.21	56.00	-30.79	QP	
10		0.9050	6.54	9.55	16.09	46.00	-29.91	AVG	
11		6.3050	22.21	9.60	31.81	60.00	-28.19	QP	
12		6.3050	12.91	9.60	22.51	50.00	-27.49	AVG	

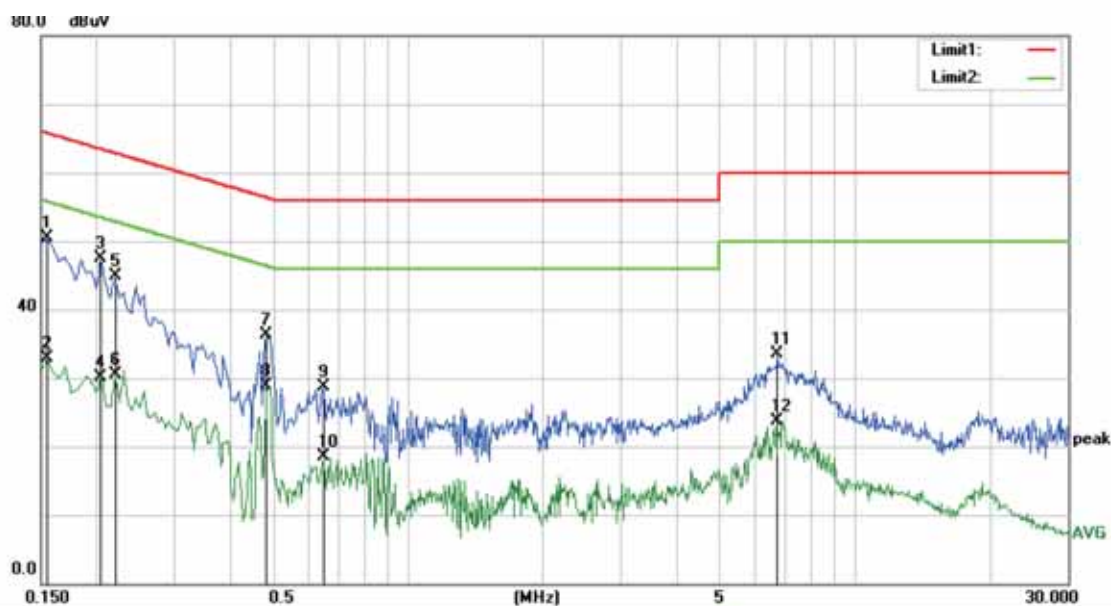

Site Conduction #1

Phase: **L1**

Temperature: 21.9

Limit: (CE)FCC PART 15 class A_QP

Power: AC 230V/50Hz

Humidity: 58 %

Mode: WiFi mode 1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1550	40.89	9.53	50.42	65.73	-15.31	QP	
2		0.1550	23.28	9.53	32.81	55.73	-22.92	AVG	
3		0.2050	37.94	9.53	47.47	63.41	-15.94	QP	
4		0.2050	20.66	9.53	30.19	53.41	-23.22	AVG	
5		0.2200	35.36	9.53	44.89	62.82	-17.93	QP	
6		0.2200	21.02	9.53	30.55	52.82	-22.27	AVG	
7		0.4800	26.68	9.53	36.21	56.34	-20.13	QP	
8		0.4800	19.43	9.53	28.96	46.34	-17.38	AVG	
9		0.6450	19.25	9.54	28.79	56.00	-27.21	QP	
10		0.6450	8.95	9.54	18.49	46.00	-27.51	AVG	
11		6.7300	23.99	9.61	33.60	60.00	-26.40	QP	
12		6.7300	14.05	9.61	23.66	50.00	-26.34	AVG	

8.8 ANTENNA APPLICATION

8.8.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
FCC 47 CFR Part 15.247 (b)	If transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.
RSS-Gen Section 6.8	The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.
RSS-247 Section 5.4	If the transmitter employs an antenna system that emits multiple directional beams, but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device (i.e. the sum of the power supplied to all antennas, antenna elements, staves, etc., and summed across all carriers or frequency channels) shall not exceed the applicable output power limit. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

8.8.2 Result

PASS.

- Note:
- ☒ Antenna use a permanently attached antenna which is not replaceable.
 - ☐ Not using a standard antenna jack or electrical connector for antenna replacement
 - ☐ The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached document Internal Photos to show the antenna connector.

Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

*** End of Report ***