


FCC Radio Test Report

FCC ID: 2AIMRRN06

Report No. : BTL-FCCP-2-2405C239E
Equipment : Xiaomi Router BE3600
Model Name : RN06
Brand Name : Xiaomi
Applicant : Beijing Xiaomi Electronics Co., Ltd.
Address : Room 802, Floor 8, Building 5, No.15 KeChuang 10th Road, Beijing
Economic and Technological Development Zone, Beijing City, China.
Manufacturer : Beijing Xiaomi Electronics Co., Ltd.
Address : Room 802, Floor 8, Building 5, No.15 KeChuang 10th Road, Beijing
Economic and Technological Development Zone, Beijing City, China.
Radio Function : RLAN 5 GHz (U-NII 1, U-NII 2a, U-NII 2c, U-NII 3)
FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart E (15.407)
Measurement : ANSI C63.10-2013
Procedure(s)
Date of Receipt : 2024/10/22
Date of Test : 2024/10/22 - 2024/11/15
Issued Date : 2024/12/4

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : 
Poken Huang, Engineer

Approved by : 
Peter Chen, Manager

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	6
1.1	TEST FACILITY	7
1.2	MEASUREMENT UNCERTAINTY	7
1.3	TEST ENVIRONMENT CONDITIONS	7
1.4	DUTY CYCLE	8
2	GENERAL INFORMATION	12
2.1	DESCRIPTION OF EUT	12
2.2	TEST MODES	16
2.30.1	PARAMETERS OF TEST SOFTWARE	18
2.4	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	21
2.5	SUPPORT UNITS	22
3	AC POWER LINE CONDUCTED EMISSIONS TEST	23
3.1	LIMIT	23
3.2	TEST PROCEDURE	23
3.3	DEVIATION FROM TEST STANDARD	23
3.4	TEST SETUP	24
3.5	TEST RESULT	24
4	RADIATED EMISSIONS TEST	25
4.1	LIMIT	25
4.2	TEST PROCEDURE	26
4.3	DEVIATION FROM TEST STANDARD	26
4.4	TEST SETUP	27
4.5	EUT OPERATING CONDITIONS	28
4.6	TEST RESULT – 30 MHZ TO 1 GHZ	28
4.7	TEST RESULT – ABOVE 1 GHZ	28
5	BANDWIDTH TEST	29
5.1	LIMIT	29
5.2	TEST PROCEDURE	29
5.3	DEVIATION FROM TEST STANDARD	29
5.4	TEST SETUP	29
5.5	EUT OPERATING CONDITIONS	29
5.6	TEST RESULT	29
6	OUTPUT POWER TEST	30
6.1	LIMIT	30
6.2	TEST PROCEDURE	30
6.3	DEVIATION FROM TEST STANDARD	30
6.4	TEST SETUP	30
6.5	EUT OPERATING CONDITIONS	30
6.6	TEST RESULT	30
7	POWER SPECTRAL DENSITY	31
7.1	LIMIT	31
7.2	TEST PROCEDURE	31
7.3	DEVIATION FROM TEST STANDARD	31
7.4	TEST SETUP	31
7.5	EUT OPERATING CONDITIONS	31
7.6	TEST RESULT	31
8	LIST OF MEASURING EQUIPMENTS	32

9	EUT TEST PHOTO	34
10	EUT PHOTOS	34
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	35
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	40
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	43
APPENDIX D	BANDWIDTH	316
APPENDIX E	OUTPUT POWER	363
APPENDIX F	POWER SPECTRAL DENSITY	418

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2405C239E	R00	Original Report.	2024/12/4	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.407(b)	Radiated Emissions	APPENDIX B APPENDIX C	Pass	-----
15.407(a)	Bandwidth	APPENDIX D	Pass	-----
15.407(a)	Output Power	APPENDIX E	Pass	-----
15.407(a)	Power Spectral Density	APPENDIX F	Pass	-----
15.407(c)	Antenna Requirement	-----	Pass	-----
15.203	Automatically Discontinue Transmission	-----	Pass	-----

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No.64, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 674415 and DN: TW0659.

☒ TR01 ☒ C01 ☒ CB20

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C01	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test :

Test Site	Measurement Frequency Range (GHz)	U (dB)	U_{CISPR} (dB)
CB20 (3m)	0.03~0.2	4.01	6
	0.02~1	4.64	6
	1 ~ 6	5.91	6
	6 ~ 18	6.24	6
	18 ~ 26	3.93	6
	26 ~ 40	4.06	6

C. Conducted test :

Test Item	U
Occupied Bandwidth	0.83 %
Output power	0.8672 dB
Power Spectral Density	0.8886 dB
Timing	2.12 %

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS


Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	25°C, 45%	AC 120V	Ken Lu
Radiated emissions below 1 GHz	25°C, 65%	AC 120V	Barry Tsui
Radiated emissions above 1 GHz	25°C, 65%	AC 120V	Barry Tsui
Bandwidth	25°C, 45%	AC 120V	Cheng Tsai
Output Power	25°C, 45%	AC 120V	Cheng Tsai
Power Spectral Density	25°C, 45%	AC 120V	Cheng Tsai

1.4 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)	1/On Time (B)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)	1/B Minimum VBW (kHz)
IEEE 802.11a	1.000	1	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11n (HT20)	1.000	1	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11n (HT20)	1.000	1	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11ac (VHT20)	1.000	1	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11ac (VHT40)	1.000	1	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11ac (VHT80)	1.000	1	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11ac (VHT160)	1.000	1	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11ax (HEW20)	1.000	1	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11ax (HEW40)	1.000	1	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11ax (HEW80)	1.000	1	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11ax (HEW160)	1.000	1	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11be (EHT20)	1.000	1	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11be (EHT40)	1.000	1	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11be (EHT80)	1.000	1	1.000	1.000	100.00%	0.00	0.010
IEEE 802.11be (EHT160)	1.000	1	1.000	1.000	100.00%	0.00	0.010

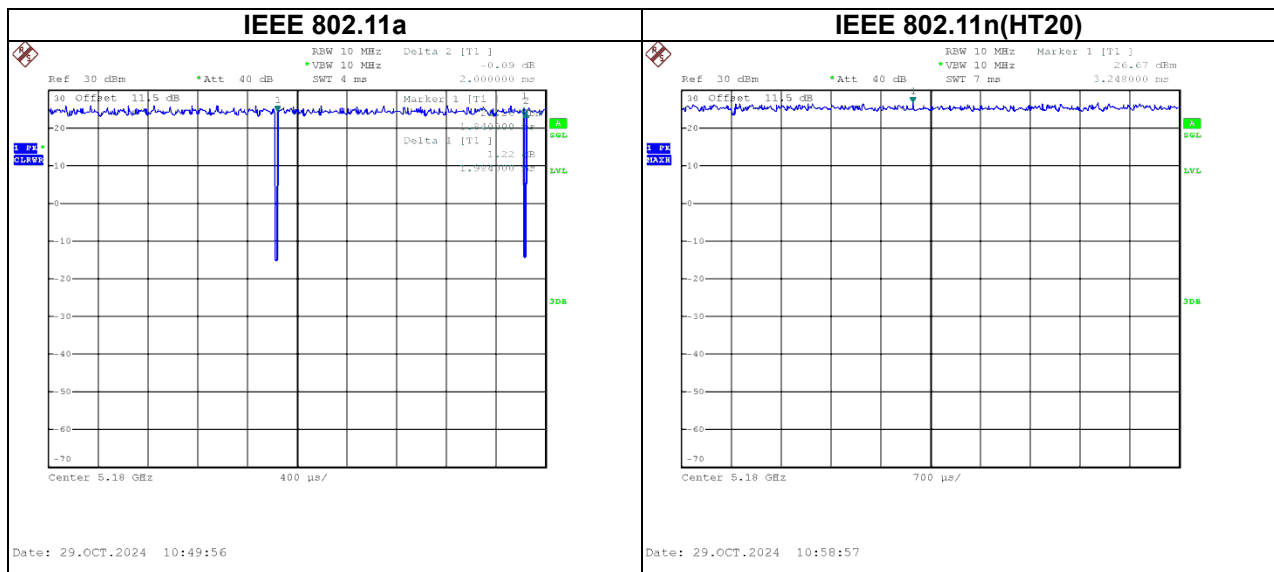


IEEE 802.11n(HT40)

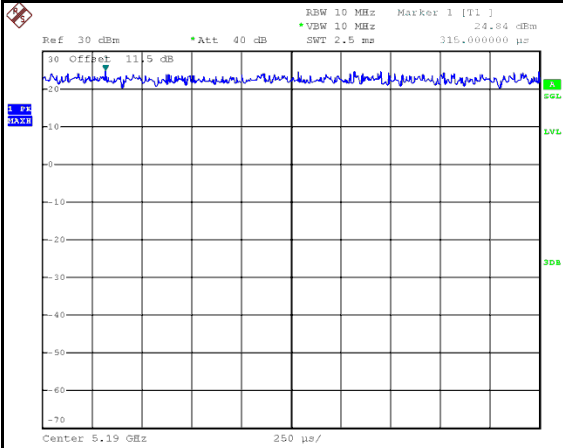


Date: 29.OCT.2024 11:01:46

IEEE 802.11ac(VHT20)

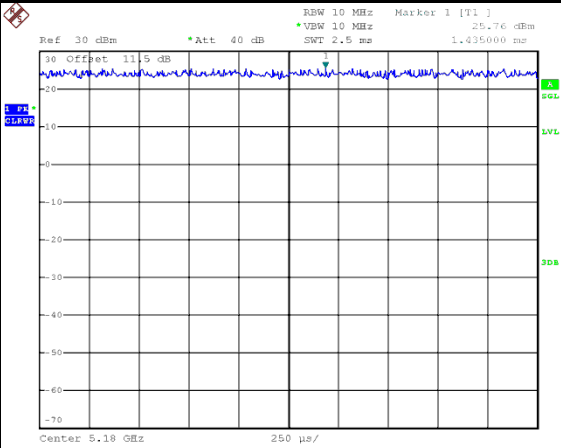


Date: 29.OCT.2024 11:09:33

IEEE 802.11ac(VHT40)

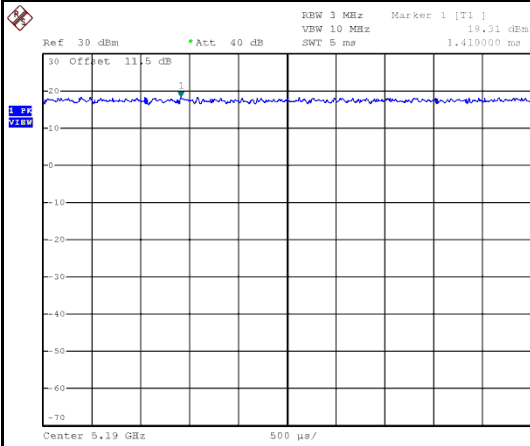


Date: 14.JUN.2024 10:20:53

IEEE 802.11ac(VHT80)

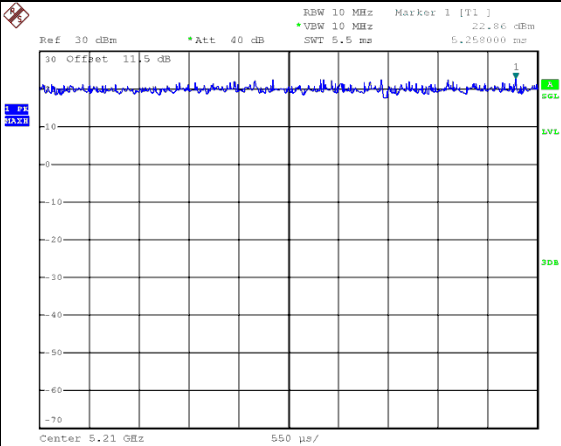


Date: 29.OCT.2024 11:26:38

IEEE 802.11ac(VHT160)

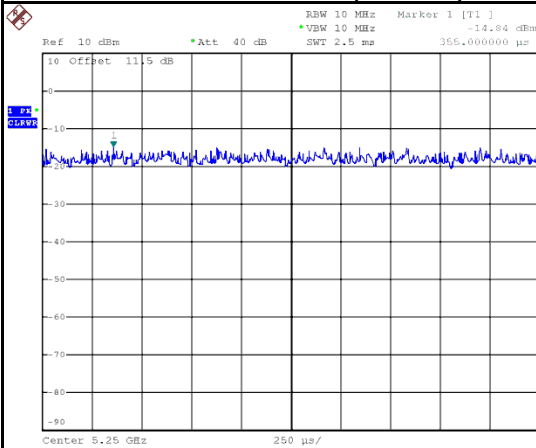


Date: 29.OCT.2024 11:30:49

IEEE 802.11ax(HE20)

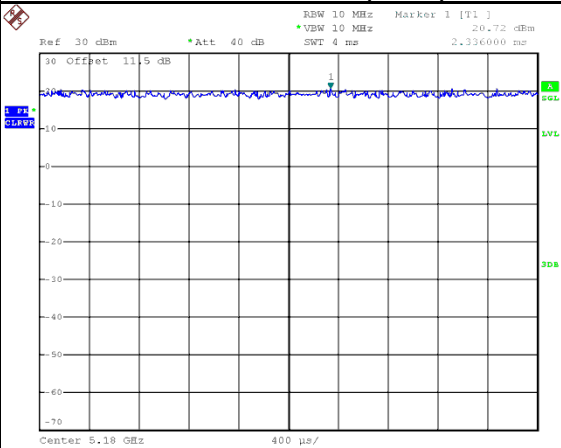


Date: 29.OCT.2024 11:38:14

IEEE 802.11ax(HE40)

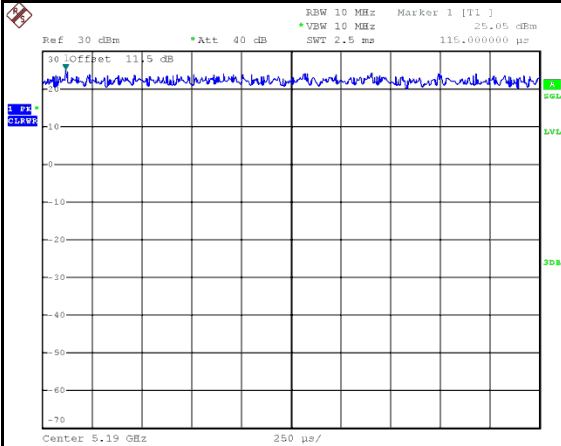


Date: 29.OCT.2024 11:41:01

IEEE 802.11ax(HE80)

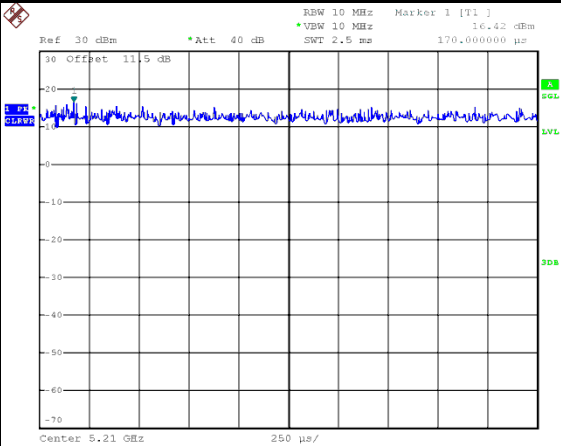


Date: 29.OCT.2024 11:41:34

IEEE 802.11ax(HE160)

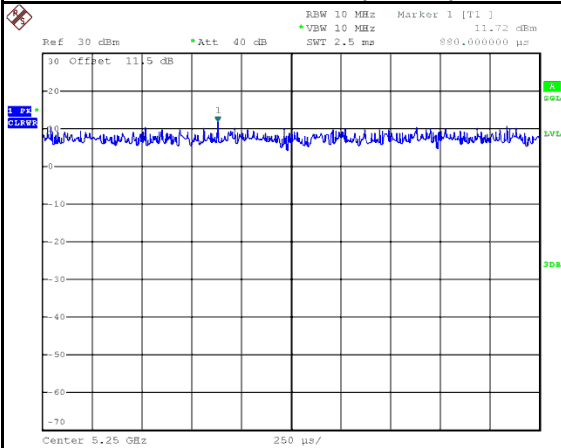


Date: 29.OCT.2024 11:42:11

IEEE 802.11be(EHT20)

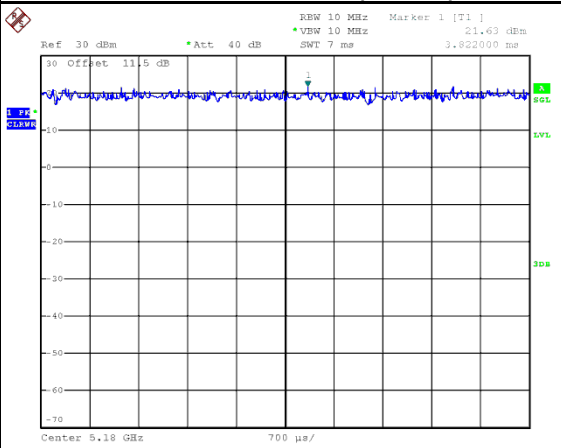


Date: 29.OCT.2024 11:44:08

IEEE 802.11be(EHT40)

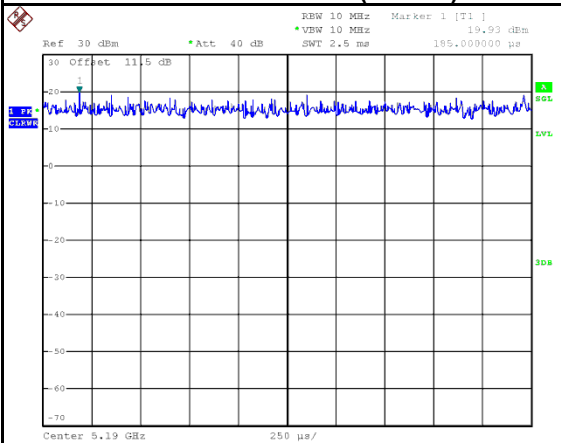

Date: 29.OCT.2024 11:44:32

IEEE 802.11be(EHT80)

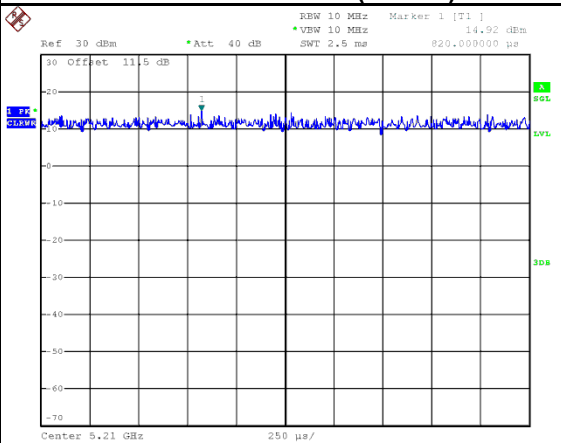

Date: 29.OCT.2024 11:44:57



2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	Xiaomi Router BE3600
Model Name	RN06
Brand Name	Xiaomi
Model Difference	N/A
Power Source	DC Voltage supplied from AC adapter. Model: ADS-18MC-1212018EPCU
Power Rating	I/P: 100-240V~ 50/60Hz 0.6A O/P: 12.0V  1.5A
HW Version	MD15
SW Version	2.0.1
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM IEEE 802.11ax/be: OFDMA
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ac: up to 1733.4 Mbps IEEE 802.11ax: up to 2402 Mbps IEEE 802.11be: up to 2882 Mbps
Maximum Output Power for UNII-1	IEEE 802.11ax(HE40): 26.25 dBm (0.4217 W)
Maximum Output Power for UNII-2A	IEEE 802.11ax(HE40): 20.20 dBm (0.1047 W)
Maximum Output Power for UNII-2C	IEEE 802.11n(HT20): 20.51 dBm (0.1125 W)
Maximum Output Power for UNII-3	IEEE 802.11be(EHT80): 26.47 dBm (0.4436 W)
Test Software Version	D10-36062-101_MI_2G_2x2_WKK_5G_4x4_RDP444_RevB-MD08-20230614
Test Model	RN06
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

UNII-1					
IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-2A					
IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

UNII-2C					
IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

UNII-3					
IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

802.11ac (VHT160) 802.11ax (HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)
50	5250
114	5570

(3) Table for Filed Antenna:

Group 1:

Ant.	Manufacture	P/N	Antenna Type	Connector	Gain (dBi)
1	Shenzhen Etheta Communication Technology Co., LTD	L530100082713	PCB	N/A	6.21
2	Shenzhen Etheta Communication Technology Co., LTD	L530100082913	PCB	N/A	5.94

Group 2:

Ant.	Manufacture	P/N	Antenna Type	Connector	Gain (dBi)
1	KunShan Innware Communication Technology Co., LTD	L530100082639	PCB	N/A	5.6
2	KunShan Innware Communication Technology Co., LTD	L530100082839	PCB	N/A	5.8

NOTE:

- (a) This EUT supports CDD, and all antennas are not equal, Directional gain = $G_{ANT} + \text{Array Gain}$.
For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=6.21.
Then, the UNII-1, UNII-3 output power limit is $30 - (6.21 - 6) = 29.79$,
the UNII-2A, UNII-2C output power limit is $23.98 - (6.21 - 6) = 23.77$.

For power spectral density measurements, $N_{ANT}=2$, $N_{SS}=1$.
So the Directional gain= $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 6.21 + 10\log(2/1)\text{dBi} = 9.22$.
Then, the UNII-1 power spectral density limit is $17 - (9.22 - 6) = 13.78$,
the UNII-2A, UNII-2C power spectral density limit is $11 - (9.22 - 6) = 7.78$,
the UNII-3 power spectral density limit is $30 - (9.22 - 6) = 26.78$.

- (b) Beamforming Gain: 3 dB.

- (4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

(5) Operating Mode and Antenna Configuration

For Non Beamforming:

Operating Mode	TX Mode	2 TX
IEEE 802.11a		V(Ant. 1 + Ant. 2)
IEEE 802.11n (HT20)		V(Ant. 1 + Ant. 2)
IEEE 802.11n (HT40)		V(Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT20)		V(Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT40)		V(Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT80)		V(Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT160)		V(Ant. 1 + Ant. 2)
IEEE 802.11ax (HE20)		V(Ant. 1 + Ant. 2)
IEEE 802.11ax (HE40)		V(Ant. 1 + Ant. 2)
IEEE 802.11ax (HE80)		V(Ant. 1 + Ant. 2)
IEEE 802.11ax (HE160)		V(Ant. 1 + Ant. 2)
IEEE 802.11be (EHT20)		V(Ant. 1 + Ant. 2)
IEEE 802.11be (EHT40)		V(Ant. 1 + Ant. 2)
IEEE 802.11be (EHT80)		V(Ant. 1 + Ant. 2)
IEEE 802.11be (EHT160)		V(Ant. 1 + Ant. 2)

For Beamforming:

Operating Mode \ TX Mode	2 TX
IEEE 802.11n (HT20)	V(Ant. 1 + Ant. 2)
IEEE 802.11n (HT40)	V(Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT20)	V(Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT40)	V(Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT80)	V(Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT160)	V(Ant. 1 + Ant. 2)
IEEE 802.11ax (HE20)	V(Ant. 1 + Ant. 2)
IEEE 802.11ax (HE40)	V(Ant. 1 + Ant. 2)
IEEE 802.11ax (HE80)	V(Ant. 1 + Ant. 2)
IEEE 802.11ax (HE160)	V(Ant. 1 + Ant. 2)
IEEE 802.11be (EHT20)	V(Ant. 1 + Ant. 2)
IEEE 802.11be (EHT40)	V(Ant. 1 + Ant. 2)
IEEE 802.11be (EHT80)	V(Ant. 1 + Ant. 2)
IEEE 802.11be (EHT160)	V(Ant. 1 + Ant. 2)

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	IEEE 802.11be (EHT80)	155	-
Transmitter Radiated Emissions (above 1GHz)	IEEE 802.11a	36/48	Bandedge
	IEEE 802.11n (HT20)	52/64	
	IEEE 802.11ax (HE20)	100/140	
	IEEE 802.11be (EHT20)	149/165	
	IEEE 802.11n (HT40)	38/46	
	IEEE 802.11ax (HE40)	54/62	
	IEEE 802.11be (EHT40)	102/134	
	IEEE 802.11be (EHT40)	151/159	
	IEEE 802.11ac (VHT80)	42	Harmonic
	IEEE 802.11ax (HE80)	58	
	IEEE 802.11be (EHT80)	106/122	
	IEEE 802.11be (EHT80)	155	
	IEEE 802.11ac (VHT160)	50	
	IEEE 802.11ax (HE160)	114	
	IEEE 802.11be (EHT160)	114	
	IEEE 802.11a	36/40/48	Harmonic
	IEEE 802.11n (HT20)	52/60/64	
	IEEE 802.11ax (HE20)	100/116/140	
	IEEE 802.11be (EHT20)	149/157/165	
	IEEE 802.11n (HT40)	38/46	
	IEEE 802.11ax (HE40)	54/62	
	IEEE 802.11be (EHT40)	102/110/134	
	IEEE 802.11be (EHT40)	151/159	
	IEEE 802.11ac (VHT80)	42	Harmonic
	IEEE 802.11ax (HE80)	58	
	IEEE 802.11be (EHT80)	106/122	
	IEEE 802.11be (EHT80)	155	
	IEEE 802.11ac (VHT160)	50	
	IEEE 802.11ax (HE160)	114	
	IEEE 802.11be (EHT160)	114	
Transmitter Radiated Emissions (above 18GHz)	IEEE 802.11be (EHT80)	155	-
Output Power	IEEE 802.11a	36/40/48	-
	IEEE 802.11n (HT20)	52/60/64	
	IEEE 802.11ac (VHT20)	100/116/140	
	IEEE 802.11ax (HE20)	149/157/165	
	IEEE 802.11be (EHT20)	149/157/165	
	IEEE 802.11n (HT40)	38/46	
	IEEE 802.11ac (VHT40)	54/62	
	IEEE 802.11ax (HE40)	102/110/134	
	IEEE 802.11be (EHT40)	151/159	
	IEEE 802.11ac (VHT80)	42	
	IEEE 802.11ax (HE80)	58	
	IEEE 802.11be (EHT80)	106/122	
	IEEE 802.11be (EHT80)	155	
	IEEE 802.11ac (VHT160)	50	
	IEEE 802.11ax (HE160)	114	
	IEEE 802.11be (EHT160)	114	

Test Items	Test mode	Channel	Note
Bandwidth & Power Spectral Density	IEEE 802.11a	36/40/48	-
	IEEE 802.11n (HT20)	52/60/64	
	IEEE 802.11ax (HE20)	100/116/140	
	IEEE 802.11be (EHT20)	149/157/165	
	IEEE 802.11n (HT40)	38/46	
	IEEE 802.11ax (HE40)	54/62	
	IEEE 802.11be (EHT40)	102/110/134 151/159	
	IEEE 802.11ac (VHT80)	42	
	IEEE 802.11ax (HE80)	58	
	IEEE 802.11be (EHT80)	106/122 155	
	IEEE 802.11ac (VHT160)	50	
	IEEE 802.11ax (HE160)	114	
	IEEE 802.11be (EHT160)		

NOTE:

- (1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (2) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.
- (3) IEEE 802.11ax mode and IEEE 802.11be mode only supports full RU, so only the full RU is evaluated and measured inside report.
- (4) For AC power line conducted emissions and radiated emission below 1 GHz test, the IEEE 802.11be(EHT80) channel 155 is found to be the worst case and recorded.
- (5) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (6) The measurements for Output Power are tested, the worst case are IEEE 802.11a mode, IEEE 802.11n(HT20) mode, IEEE 802.11n(HT40) mode, IEEE 802.11ac(VHT80) mode, IEEE 802.11ac(VHT160) mode, IEEE 802.11ax(HE20) mode, IEEE 802.11ax(HE40) mode, IEEE 802.11ax(HE80) mode, IEEE 802.11ax(HE160) mode, IEEE 802.11be(EHT20) mode, IEEE 802.11be(EHT40) mode, IEEE 802.11be(EHT80) mode, IEEE 802.11be(EHT160) mode only the worst cases are documented for other test items.
- (7) The Power of the Beamforming mode will be lower than that of the non-Beamforming mode. Only non-Beamforming mode will be evaluated for other all test items and recorded in the report.
- (8) For radiated emission test, the Antenna Group1 is found to be the worst case and recorded.
- (9) The electric field intensity signal emitted at 9 kHz–30 MHz is too weak (20 dB below the limit), so the measured value is not recorded in this report.

2.3 0.1 PARAMETERS OF TEST SOFTWARE

Non Beamforming

UNII-1			
Test Software Version	D10-36062-101_MI_2G_2x2_WKK_5G_4x4_RDP444_RevB-MD08-20230614		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	23	23	23
IEEE 802.11n(HT20)	24	24	23
IEEE 802.11ac(VHT20)	24	24	24
IEEE 802.11ax(HE20)	24	24	24
IEEE 802.11be(EHT20)	24	24	24
Frequency (MHz)	5190	5230	
IEEE 802.11n(HT40)	19	25	
IEEE 802.11ac(VHT40)	19	24.5	
IEEE 802.11ax(HE40)	16	24.5	
IEEE 802.11be(EHT40)	17	24.5	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	15		
IEEE 802.11ax(HE80)	14		
IEEE 802.11be(EHT80)	15		

UNII-2A			
Test Software Version	D10-36062-101_MI_2G_2x2_WKK_5G_4x4_RDP444_RevB-MD08-20230614		
Frequency (MHz)	5260	5300	5320
IEEE 802.11a	18	18	18
IEEE 802.11n(HT20)	19	18	18
IEEE 802.11ac(VHT20)	18	18	18
IEEE 802.11ax(HE20)	18	18	18
IEEE 802.11be(EHT20)	18	18	18
Frequency (MHz)	5270	5310	
IEEE 802.11n(HT40)	19	17	
IEEE 802.11ac(VHT40)	18.5	17	
IEEE 802.11ax(HE40)	18.5	15	
IEEE 802.11be(EHT40)	18.5	17	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	14		
IEEE 802.11ax(HE80)	14		
IEEE 802.11be(EHT80)	12		

UNII-1+UNII-2A	
Test Software Version	D10-36062-101_MI_2G_2x2_WKK_5G_4x4_RDP444_RevB-MD08-20230614
Frequency (MHz)	5250
IEEE 802.11ac(VHT160)	15
IEEE 802.11ax(HE160)	15
IEEE 802.11be(EHT160)	15


UNII-2C			
Test Software Version	D10-36062-101_MI_2G_2x2_WKK_5G_4x4_RDP444_RevB-MD08-20230614		
Frequency (MHz)	5500	5580	5700
IEEE 802.11a	18	19	19
IEEE 802.11n(HT20)	18	19	19
IEEE 802.11ac(VHT20)	18	19	19
IEEE 802.11ax(HE20)	18	18	12
IEEE 802.11be(EHT20)	18	18	18
Frequency (MHz)	5510	5550	5670
IEEE 802.11n(HT40)	18	18	18
IEEE 802.11ac(VHT40)	18	18	18.5
IEEE 802.11ax(HE40)	18	18	18.5
IEEE 802.11be(EHT40)	16	18	17
Frequency (MHz)	5530	5610	
IEEE 802.11ac(VHT80)	16	19	
IEEE 802.11ax(HE80)	16	18.5	
IEEE 802.11be(EHT80)	14	18.5	
Frequency (MHz)	5570		
IEEE 802.11ac(VHT160)	16		
IEEE 802.11ax(HE160)	15		
IEEE 802.11be(EHT160)	15		

UNII-3			
Test Software Version	D10-36062-101_MI_2G_2x2_WKK_5G_4x4_RDP444_RevB-MD08-20230614		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	25	25	25
IEEE 802.11n(HT20)	25	25	25
IEEE 802.11ac(VHT20)	25	25	25
IEEE 802.11ax(HE20)	24.5	24.5	24.5
IEEE 802.11be(EHT20)	24.5	24.5	24.5
Frequency (MHz)	5755	5795	
IEEE 802.11n(HT40)	25	25	
IEEE 802.11ac(VHT40)	24.5	24.5	
IEEE 802.11ax(HE40)	24.5	24.5	
IEEE 802.11be(EHT40)	24.5	24.5	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	25		
IEEE 802.11ax(HE80)	25		
IEEE 802.11be(EHT80)	25		


2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC Power Line Conducted Emissions Test

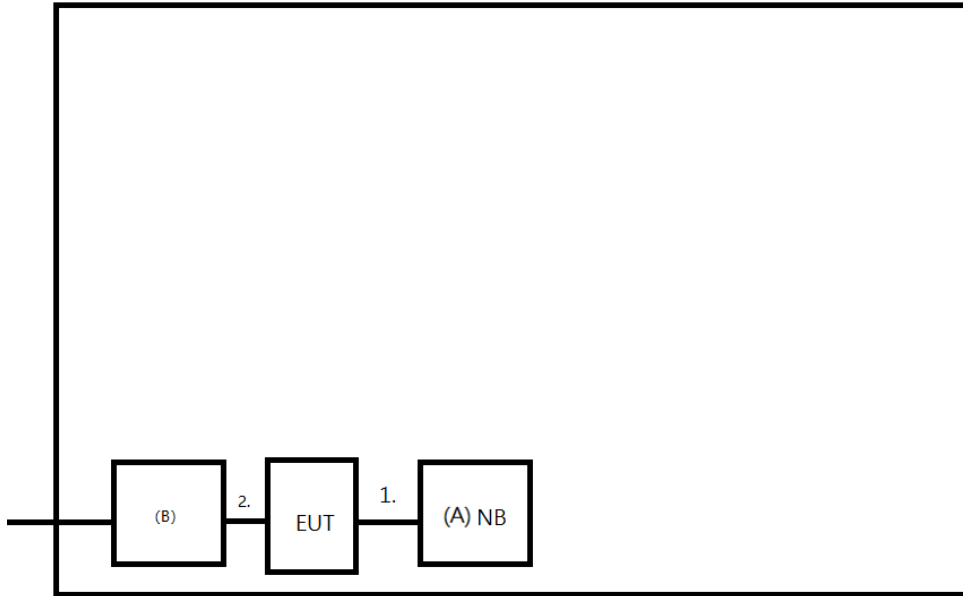

Radiated Emissions Test

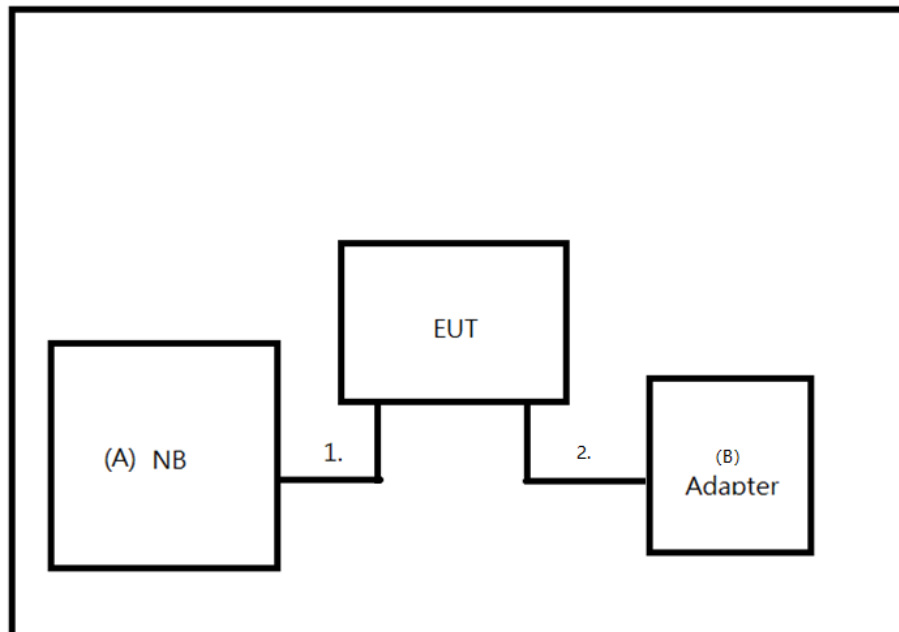

2.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	NB	Lenovo	ThinkBook 14 G4 IAP	N/A	Furnished by test lab
B	Adapter	MI	ADS-18MC-1212018EPCU	N/A	Supplied by test requester

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	NO	NO	1m	RJ45 cable	Supplied by test requester
2	NO	NO	1.5m	DC cable	Supplied by test requester

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level (dBμV)		Correct Factor (dB)		Measurement Value (dBμV)
38.22	+	3.45	=	41.67

Measurement Value (dBμV)		Limit Value (dBμV)		Margin Level (dB)
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

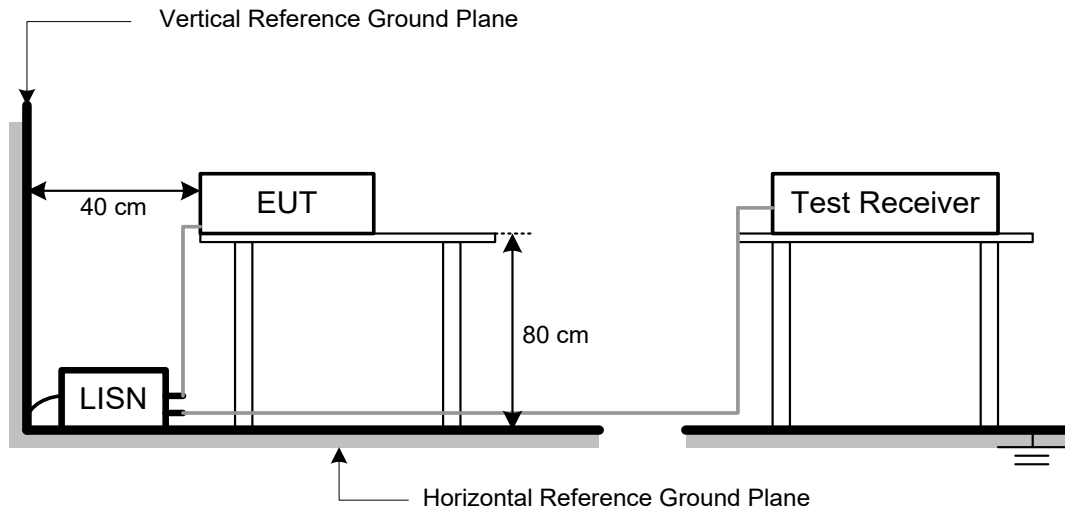

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (NOTE 2)	68.3
	10 (NOTE 2)	105.3
	15.6 (NOTE 2)	110.9
	27 (NOTE 2)	122.3

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBuV)		Correct Factor (dB/m)		Measurement Value (dBuV/m)
19.11	+	2.11	=	21.22

Measurement Value (dBuV/m)		Limit Value (dBuV/m)		Margin Level (dB)
21.22	-	68.3	=	-47.08

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

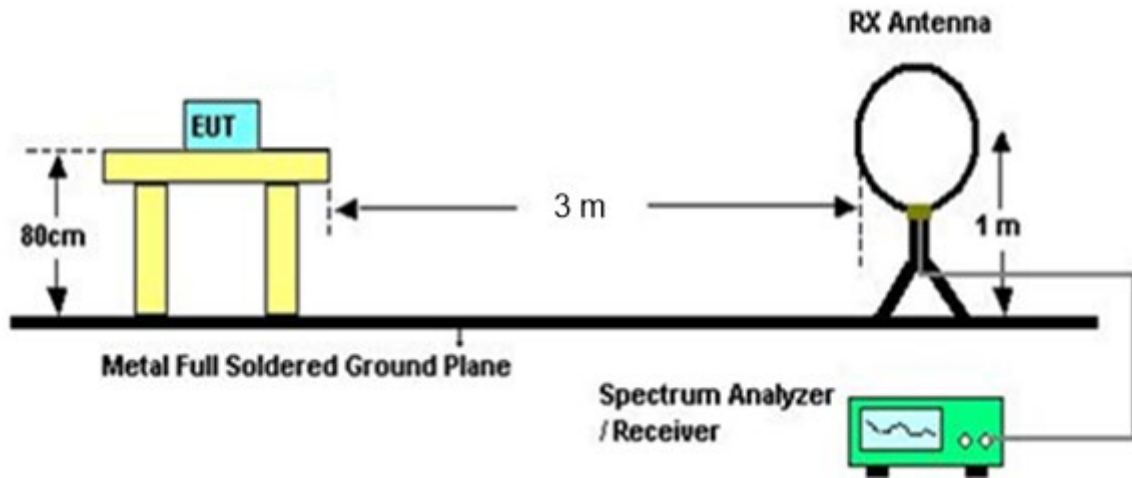

30 MHz to 1 GHz

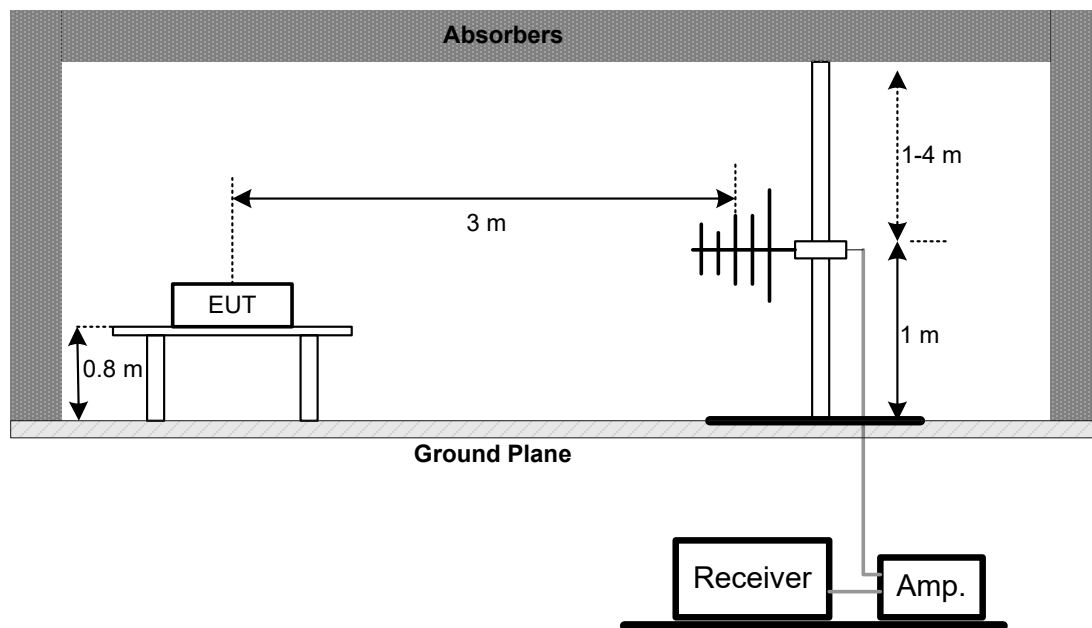

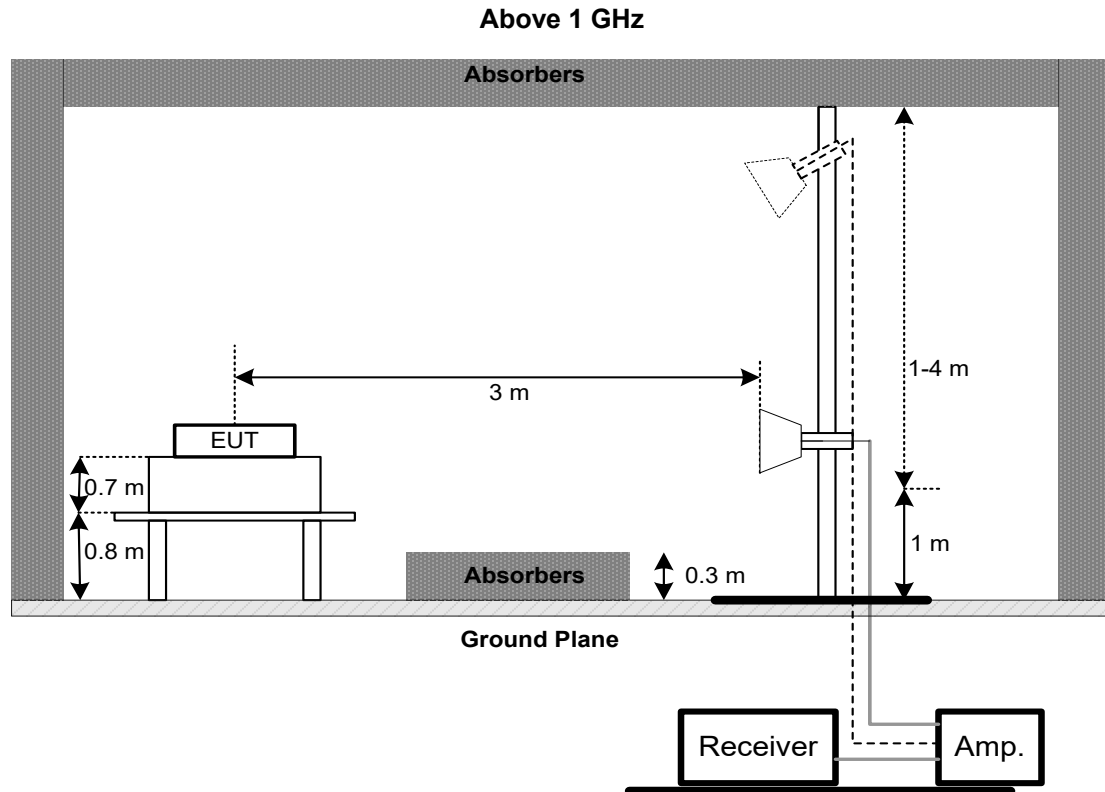

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

NOTE:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.7 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST

5.1 LIMIT

Section	Test Item	Frequency Range (MHz)
15.407(a)	26 dB Bandwidth	5150-5250
		5250-5350
		5470-5725
	Minimum 500 kHz 6 dB Bandwidth	5725-5850

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RBW	300 kHz(Bandwidth 20 MHz) 1 MHz(Bandwidth 40 MHz and 80 MHz)
VBW	1 MHz(Bandwidth 20 MHz) 3 MHz(Bandwidth 40 MHz and 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX D.

6 OUTPUT POWER TEST

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	Fixed:1 Watt (30 dBm) Mobile and portable: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
			5470-5725
		1 Watt (30dBm)	5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).


6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. The maximum peak conducted output power was performed in accordance with method of clause E. 3. a) FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
 - a)Method PM (Measurement using an RF average power meter):
 - (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied
The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
 - (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

6.3 DEVIATION FROM TEST STANDARD

No deviation.

6.4 TEST SETUP

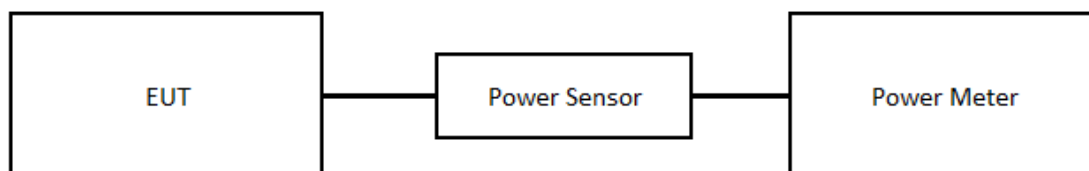

6.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULT

Please refer to the APPENDIX E.

7 POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Power Spectral Density	Other than Mobile and portable: 17 dBm/MHz	5150-5250
		Mobile and portable: 11 dBm/MHz	
		11 dBm/MHz	5250-5350
		30 dBm/500 kHz	5470-5725
			5725-5850

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz
VBW	≥ 3 MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM TEST STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULT

Please refer to the APPENDIX F.

8 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Two-Line V-Network	R&S	ENV216	101051	2024/6/26	2025/6/25
2	Test Cable	EMCI	EMCRG58-BM-BM-9000	210501	2023/12/11	2024/12/10
3	EMC Receiver	Keysight	N9038A	MY54130009	2024/6/27	2025/6/26
4	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Pre-Amplifier	EMCI	EMC184045SE	980512	2023/12/11	2024/12/10
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	340	2024/6/27	2025/6/26
3	Test Cable	EMCI	EMC102-KM-KM-1000	220328	2023/12/11	2024/12/10
4	Test Cable	EMCI	EMC101G-KM-KM-3000	220330	2023/12/11	2024/12/10
5	Broad-Band Horn Antenna	RFSPIN	DRH18-E	210109A18E	2024/1/10	2025/1/9
6	Pre-Amplifier	EMCI	EMC051845SE	980779	2023/12/11	2024/12/10
7	Test Cable	EMCI	EMC105-SM-SM-1000	210119	2023/12/11	2024/12/10
8	Test Cable	EMCI	EMC105-SM-SM-3000	210118	2023/12/11	2024/12/10
9	Test Cable	EMCI	EMC105-SM-SM-7000	210117	2023/12/11	2024/12/10
10	EXA Spectrum Analyzer	keysight	N9010A	MY56480554/016	2024/9/13	2025/9/12
11	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01207	2023/12/18	2024/12/17
12	EMC Receiver	Keysight	N9038A	MY54130009	2024/6/27	2025/6/26
13	Pre-Amplifier	EMCI	EMC001330-20201222	980807	2023/12/11	2024/12/10
14	Test Cable	EMCI	EMC-8D-NM-NM-5000	150106	2023/12/11	2024/12/10
15	Test Cable	EMCI	EMC-CFD-400-NM-NM-8000	200348	2023/12/11	2024/12/10
16	Test Cable	EMCI	EMC-CFD-400-NM-NM-3300	200343	2023/12/11	2024/12/10
17	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2024/6/27	2025/6/26
2	10dbAttenuator	INMET	AHC-10dB	1	N/A	N/A
3	BTL-Conducted Test	BTL	1247788684	N/A	N/A	N/A

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	POWER METER	Anritsu	MA24408A	12591	2024/10/25	2025/10/24
2	10dbAttenuator	INMET	AHC-10dB	1	N/A	N/A
3	Measurement Software	Anritsu	MA2440A Peak Power analyzer (Ver1.1.0.0)	N/A	N/A	N/A

Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2024/6/27	2025/6/26
2	10dbAttenuator	INMET	AHC-10dB	1	N/A	N/A
3	BTL-Conducted Test	BTL	1247788684	N/A	N/A	N/A

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

9 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2405C239E-FCCP-1 (APPENDIX-TEST PHOTOS).

10 EUT PHOTOS

Please refer to document Appendix No.: EP-2405C239E -1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2024/11/7
Test Frequency	-	Phase	Line

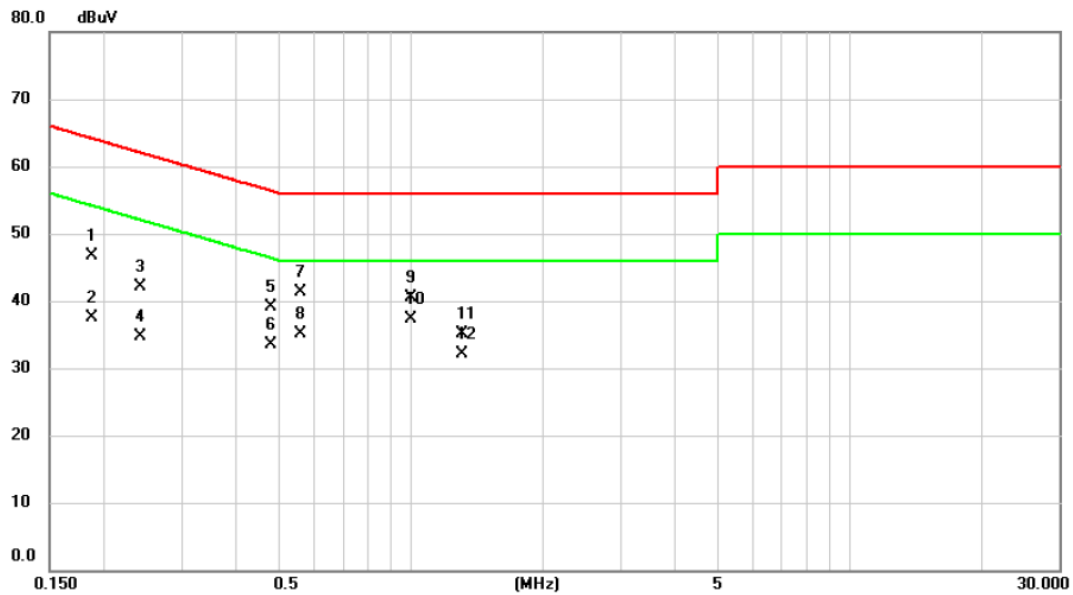


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1874	37.09	9.64	46.73	64.15	-17.42	QP	
2		0.1874	27.79	9.64	37.43	54.15	-16.72	AVG	
3		0.2417	32.53	9.64	42.17	62.04	-19.87	QP	
4		0.2417	25.16	9.64	34.80	52.04	-17.24	AVG	
5		0.4801	29.36	9.66	39.02	56.34	-17.32	QP	
6		0.4801	23.79	9.66	33.45	46.34	-12.89	AVG	
7		0.5585	31.73	9.66	41.39	56.00	-14.61	QP	
8		0.5585	25.44	9.66	35.10	46.00	-10.90	AVG	
9		0.9995	30.71	9.70	40.41	56.00	-15.59	QP	
10	*	0.9995	27.69	9.70	37.39	46.00	-8.61	AVG	
11		1.3100	25.37	9.72	35.09	56.00	-20.91	QP	
12		1.3100	22.29	9.72	32.01	46.00	-13.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2024/11/7
Test Frequency	-	Phase	Neutral

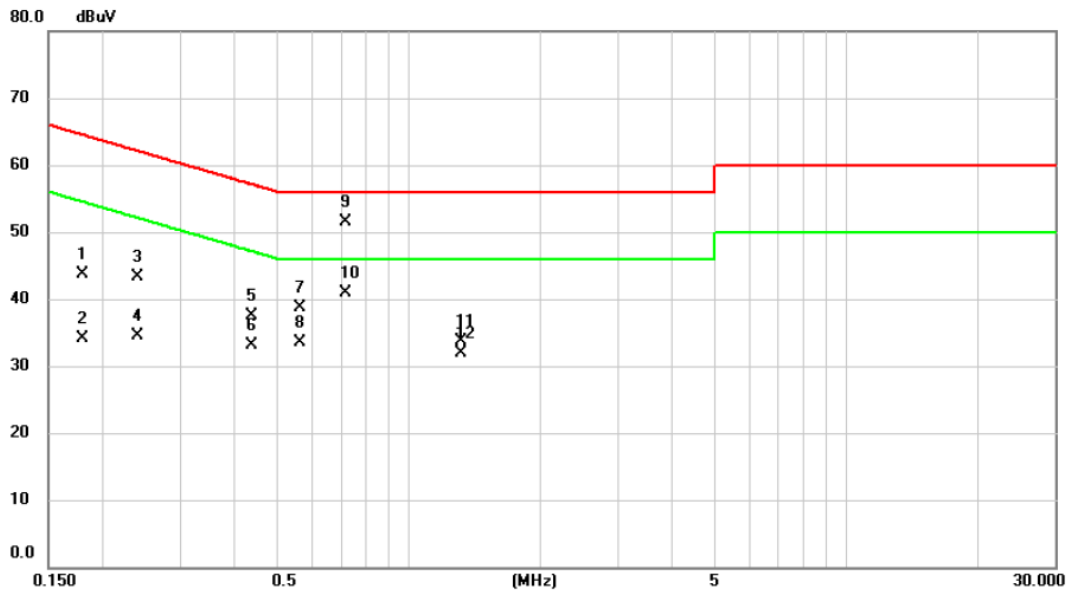


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1790	34.10	9.63	43.73	64.53	-20.80	QP	
2	0.1790	24.42	9.63	34.05	54.53	-20.48	AVG	
3	0.2403	33.62	9.63	43.25	62.09	-18.84	QP	
4	0.2403	24.96	9.63	34.59	52.09	-17.50	AVG	
5	0.4377	27.93	9.64	37.57	57.11	-19.54	QP	
6	0.4377	23.47	9.64	33.11	47.11	-14.00	AVG	
7	0.5630	28.96	9.65	38.61	56.00	-17.39	QP	
8	0.5630	23.88	9.65	33.53	46.00	-12.47	AVG	
9 *	0.7160	41.86	9.67	51.53	56.00	-4.47	QP	
10	0.7160	31.25	9.67	40.92	46.00	-5.08	AVG	
11	1.3145	23.90	9.72	33.62	56.00	-22.38	QP	
12	1.3145	22.17	9.72	31.89	46.00	-14.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2024/11/7
Test Frequency	-	Phase	Line

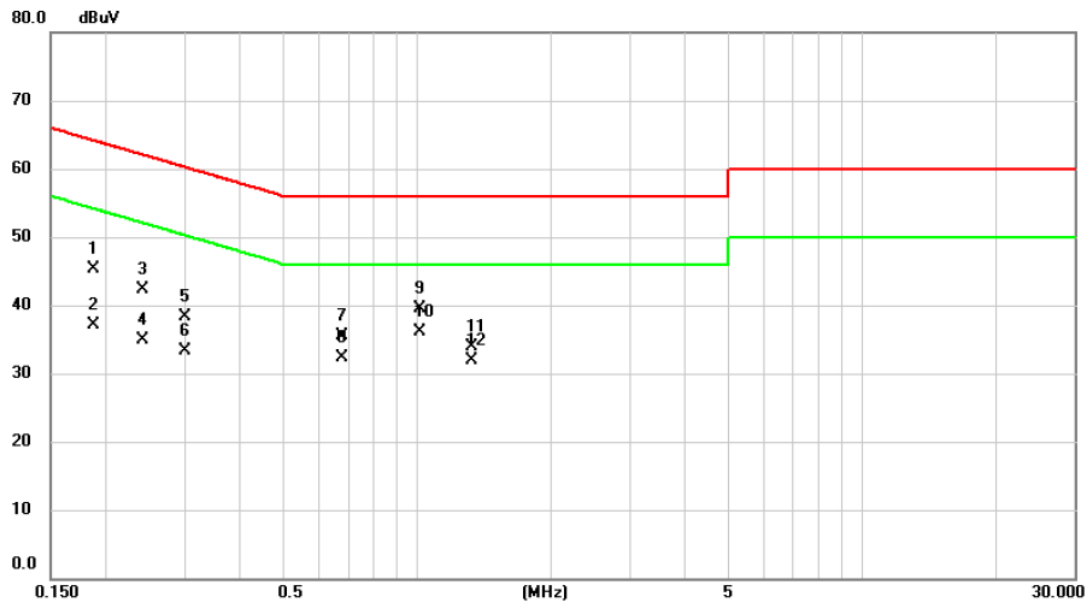


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1870	35.60	9.64	45.24	64.17	-18.93	QP	
2	0.1870	27.46	9.64	37.10	54.17	-17.07	AVG	
3	0.2413	32.72	9.64	42.36	62.05	-19.69	QP	
4	0.2413	25.20	9.64	34.84	52.05	-17.21	AVG	
5	0.3005	28.62	9.65	38.27	60.23	-21.96	QP	
6	0.3005	23.58	9.65	33.23	50.23	-17.00	AVG	
7	0.6755	25.78	9.67	35.45	56.00	-20.55	QP	
8	0.6755	22.55	9.67	32.22	46.00	-13.78	AVG	
9	1.0130	29.74	9.70	39.44	56.00	-16.56	QP	
10 *	1.0130	26.38	9.70	36.08	46.00	-9.92	AVG	
11	1.3235	24.18	9.73	33.91	56.00	-22.09	QP	
12	1.3235	22.17	9.73	31.90	46.00	-14.10	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2024/11/7
Test Frequency	-	Phase	Neutral

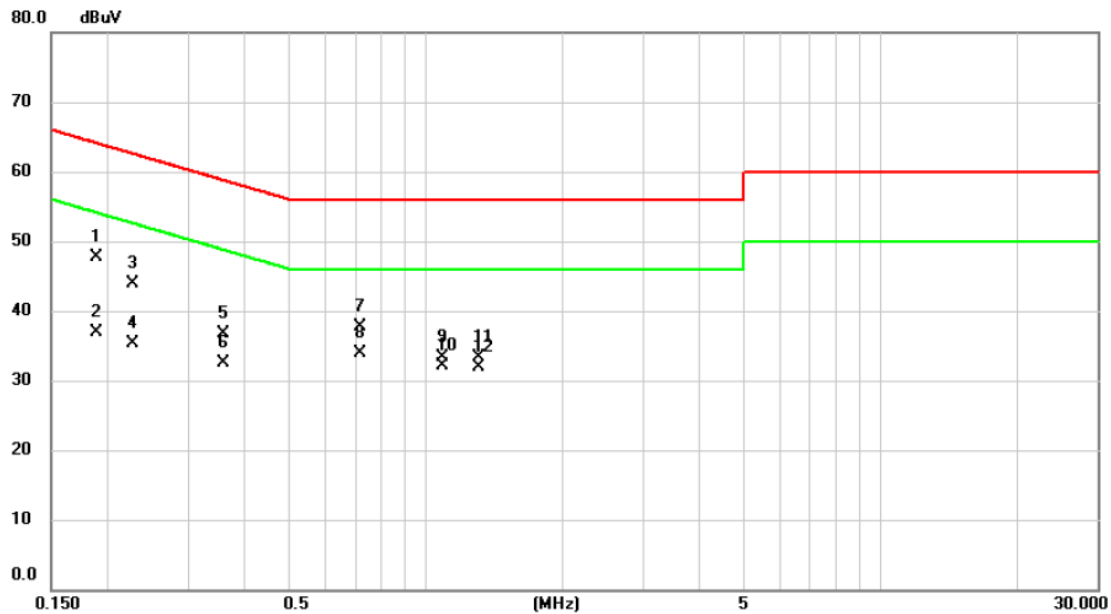


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1881	38.16	9.63	47.79	64.12	-16.33	QP	
2	0.1881	27.34	9.63	36.97	54.12	-17.15	AVG	
3	0.2270	34.26	9.63	43.89	62.56	-18.67	QP	
4	0.2270	25.77	9.63	35.40	52.56	-17.16	AVG	
5	0.3580	26.99	9.63	36.62	58.77	-22.15	QP	
6	0.3580	22.93	9.63	32.56	48.77	-16.21	AVG	
7	0.7160	28.01	9.67	37.68	56.00	-18.32	QP	
8 *	0.7160	24.22	9.67	33.89	46.00	-12.11	AVG	
9	1.0895	23.51	9.70	33.21	56.00	-22.79	QP	
10	1.0895	22.31	9.70	32.01	46.00	-13.99	AVG	
11	1.3100	23.56	9.71	33.27	56.00	-22.73	QP	
12	1.3100	22.12	9.71	31.83	46.00	-14.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/10/24
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

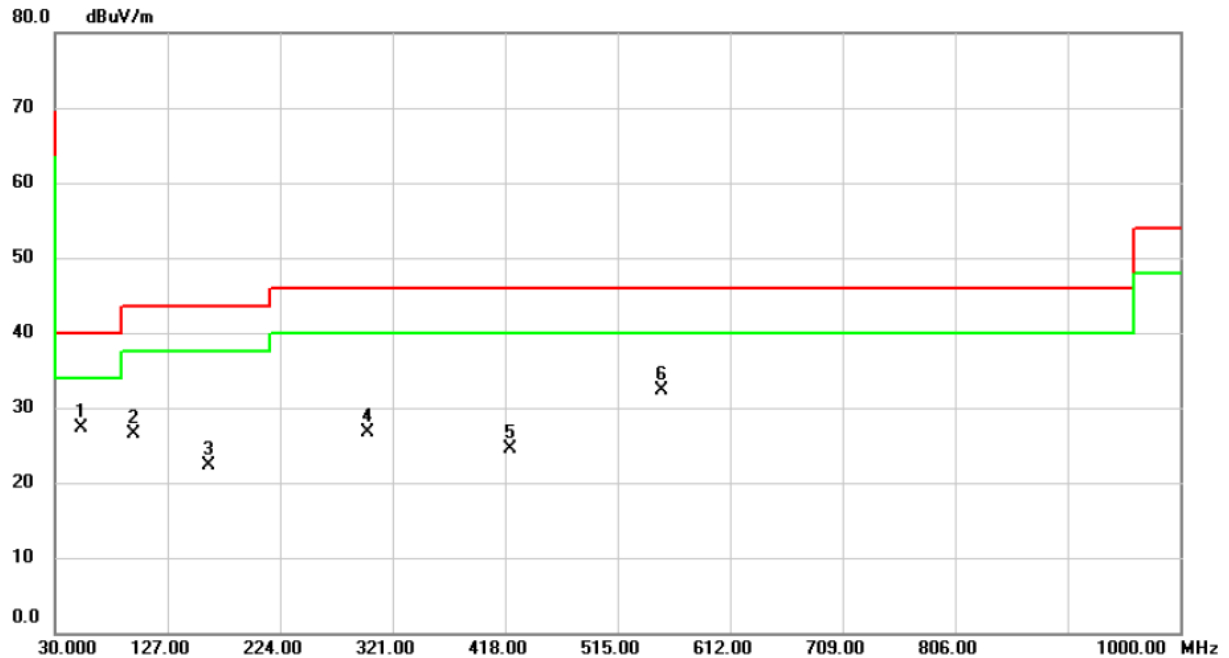


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	52.3100	38.85	-11.48	27.37	40.00	-12.63	peak	
2		97.9000	42.84	-16.43	26.41	43.50	-17.09	peak	
3		162.8900	33.51	-11.26	22.25	43.50	-21.25	peak	
4		299.6600	36.96	-10.25	26.71	46.00	-19.29	peak	
5		422.8500	31.23	-6.81	24.42	46.00	-21.58	peak	
6		553.8000	36.42	-4.08	32.34	46.00	-13.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/10/24
Test Frequency	5775MHz	Polarization	Horizontal
Temp	21°C	Hum.	59%

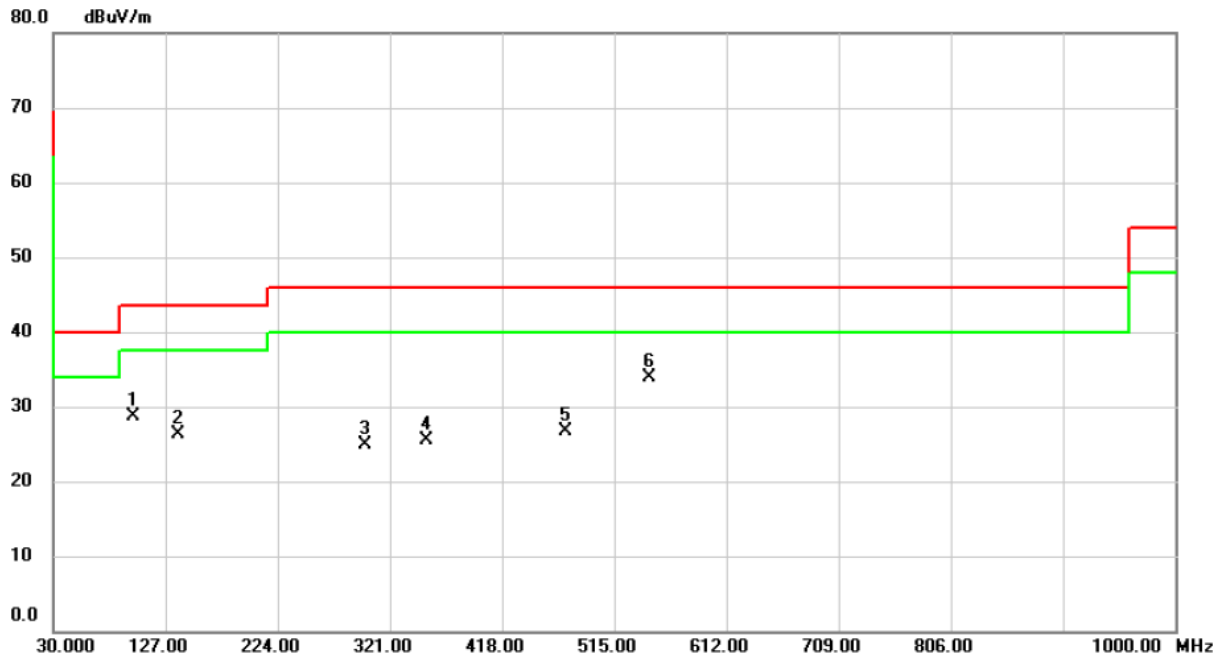


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		98.8700	45.01	-16.33	28.68	43.50	-14.82	peak	
2		137.6700	38.52	-12.21	26.31	43.50	-17.19	peak	
3		299.6600	35.18	-10.25	24.93	46.00	-21.07	peak	
4		352.0400	34.29	-8.86	25.43	46.00	-20.57	peak	
5		472.3200	32.37	-5.66	26.71	46.00	-19.29	peak	
6	*	545.0700	38.12	-4.31	33.81	46.00	-12.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11a	Test Date	2024/10/28
Test Frequency	5180MHz	Polarization	Vertical

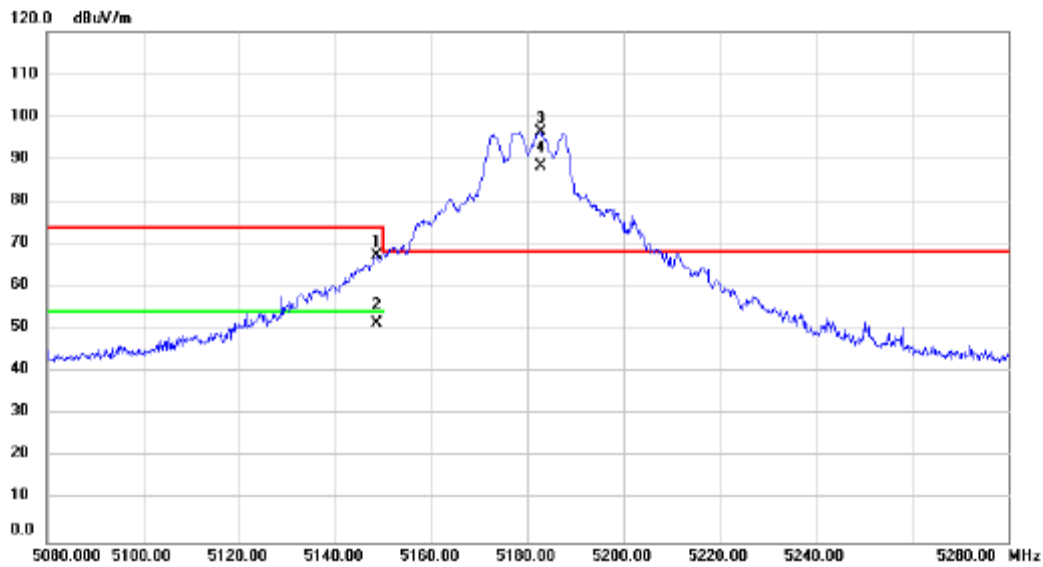

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5148.600	65.46	1.93	67.39	74.00	-6.61	peak	200	360	
2	5148.600	49.51	1.93	51.44	54.00	-2.56	AVG	200	360	
3 *	5182.800	94.38	1.95	96.33	68.20	28.13	peak	300	204	No Limit
4 X	5182.800	86.35	1.95	88.30	68.20	20.10	AVG	300	204	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/10/28
Test Frequency	5240MHz	Polarization	Vertical




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5143.000	45.71	1.93	47.64	74.00	-26.36	peak		
2		5143.000	30.42	1.93	32.35	54.00	-21.65	AVG		
3	*	5240.800	97.03	1.97	99.00	68.20	30.80	peak		No Limit
4	X	5240.800	89.43	1.97	91.40	68.20	23.20	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/10/28
Test Frequency	5260MHz	Polarization	Vertical

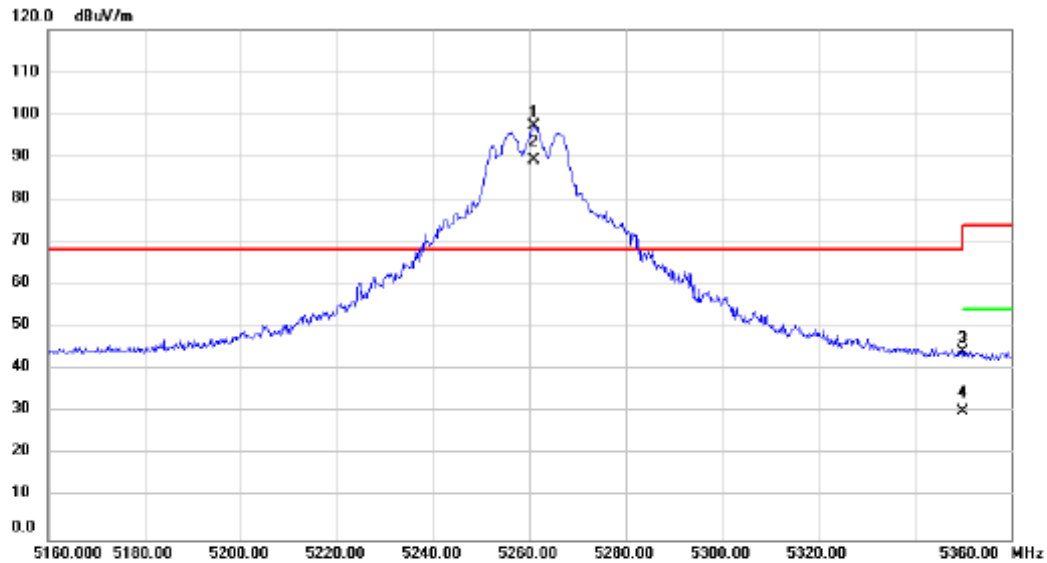


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5261.000	95.27	1.98	97.25	68.20	29.05	peak		No Limit
2	X	5261.000	87.27	1.98	89.25	68.20	21.05	AVG		No Limit
3		5350.000	42.37	2.01	44.38	74.00	-29.62	peak		
4		5350.000	28.17	2.01	30.18	54.00	-23.82	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/7
Test Frequency	5320MHz	Polarization	Vertical

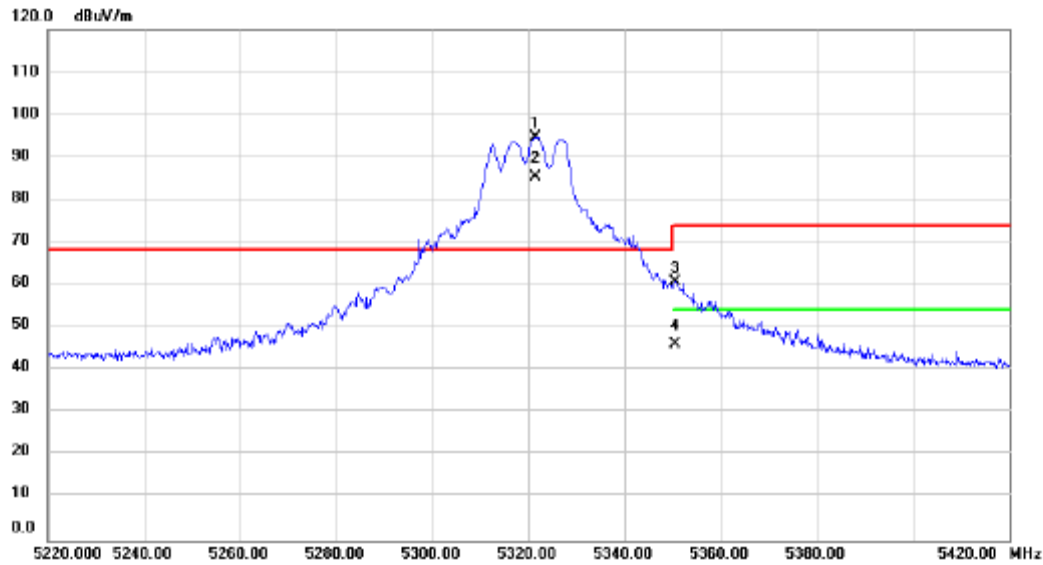


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5321.400	92.63	2.00	94.63	68.20	26.43	peak		
2	X	5321.400	83.42	2.00	85.42	68.20	17.22	AVG		
3		5350.600	58.66	2.01	60.67	74.00	-13.33	peak		
4		5350.600	43.95	2.01	45.96	54.00	-8.04	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/7
Test Frequency	5500MHz	Polarization	Vertical

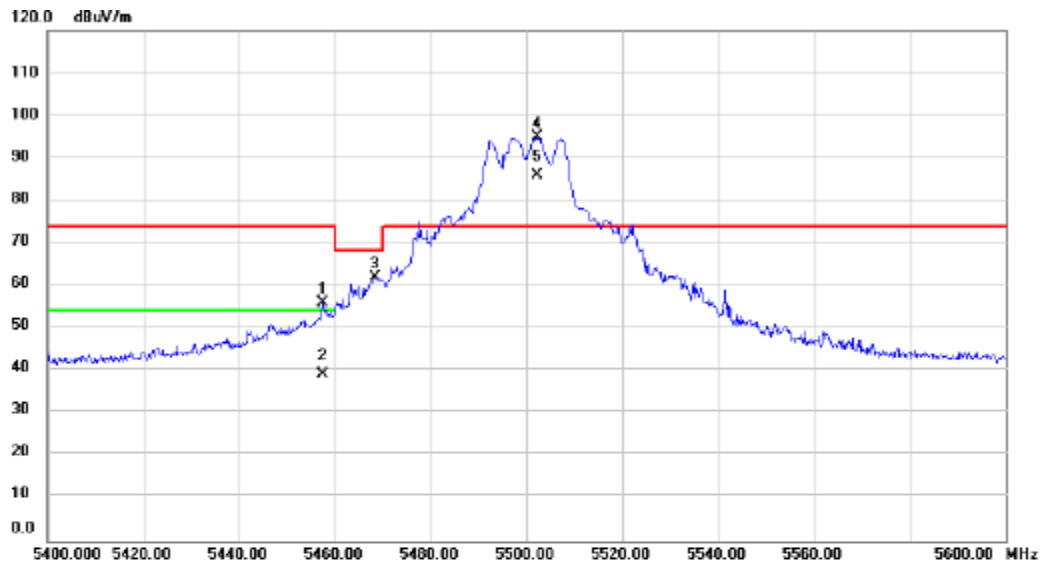


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5457.400	53.83	2.05	55.88	74.00	-18.12	peak		
2		5457.400	37.01	2.05	39.06	54.00	-14.94	AVG		
3		5468.400	60.03	2.05	62.08	68.20	-6.12	peak		
4	*	5502.200	92.85	2.07	94.92	74.00	20.92	peak		No Limit
5	X	5502.200	83.81	2.07	85.88	74.00	11.88	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/10/29
Test Frequency	5700MHz	Polarization	Vertical

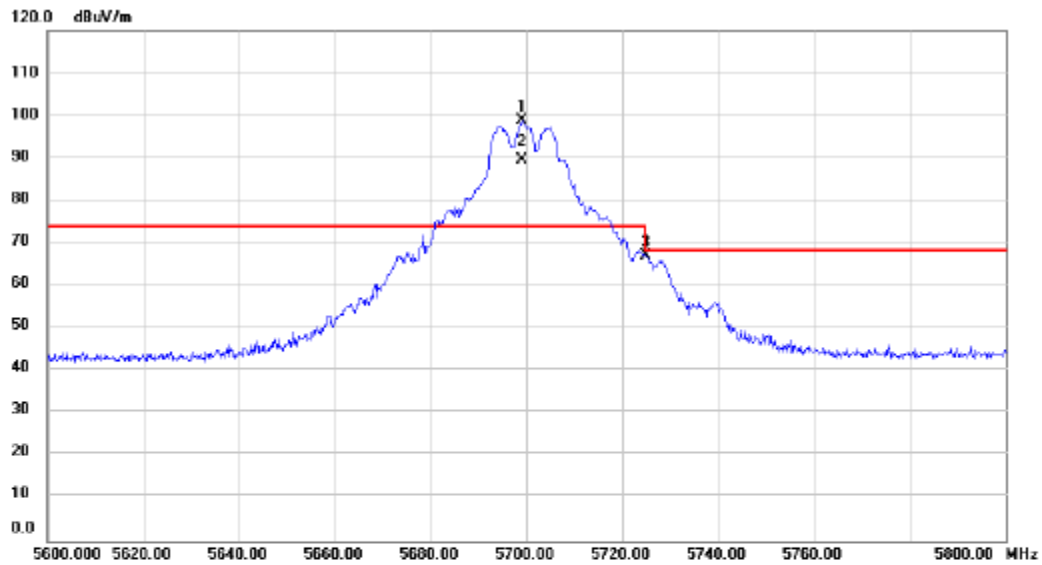


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5699.200	96.34	2.39	98.73	74.00	24.73	peak		No Limit
2	X	5699.200	87.23	2.39	89.62	74.00	15.62	AVG		No Limit
3		5725.000	64.60	2.42	67.02	68.20	-1.18	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/10/29
Test Frequency	5745MHz	Polarization	Vertical

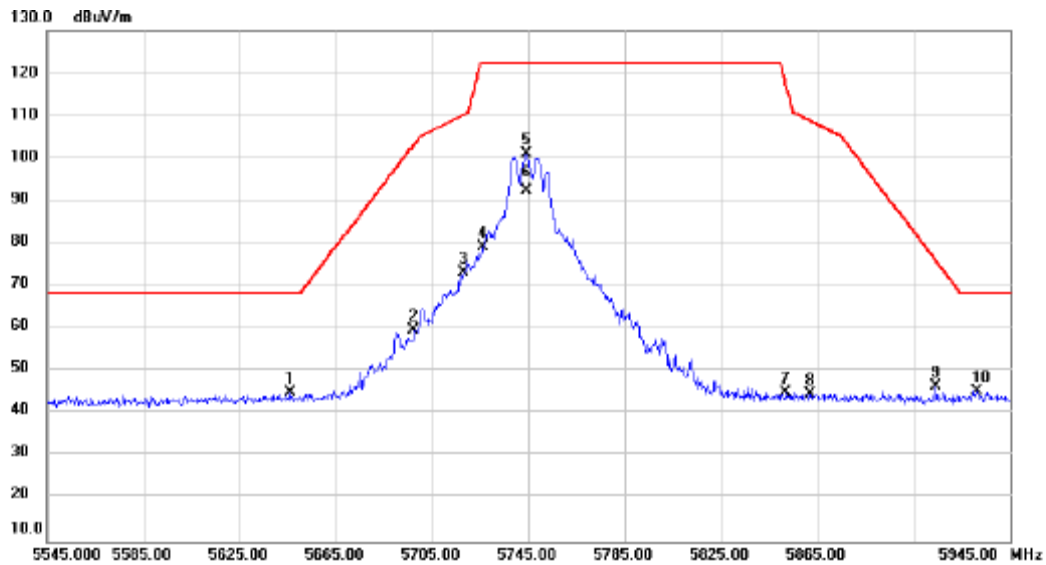


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5646.200	42.51	2.30	44.81	68.20	-23.39	peak		
2		5697.400	57.16	2.38	59.54	103.28	-43.74	peak		
3		5718.200	70.71	2.41	73.12	110.30	-37.18	peak		
4		5726.200	76.87	2.42	79.29	122.20	-42.91	peak		
5	*	5744.200	98.65	2.45	101.10	122.20	-21.10	peak		No Limit
6		5744.200	89.97	2.45	92.42	122.20	-29.78	AVG		No Limit
7		5852.200	42.31	2.62	44.93	117.18	-72.25	peak		
8		5862.200	42.10	2.63	44.73	108.78	-64.05	peak		
9		5914.200	43.59	2.72	46.31	76.17	-29.86	peak		
10		5931.400	42.58	2.74	45.32	68.20	-22.88	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/10/29
Test Frequency	5825MHz	Polarization	Vertical

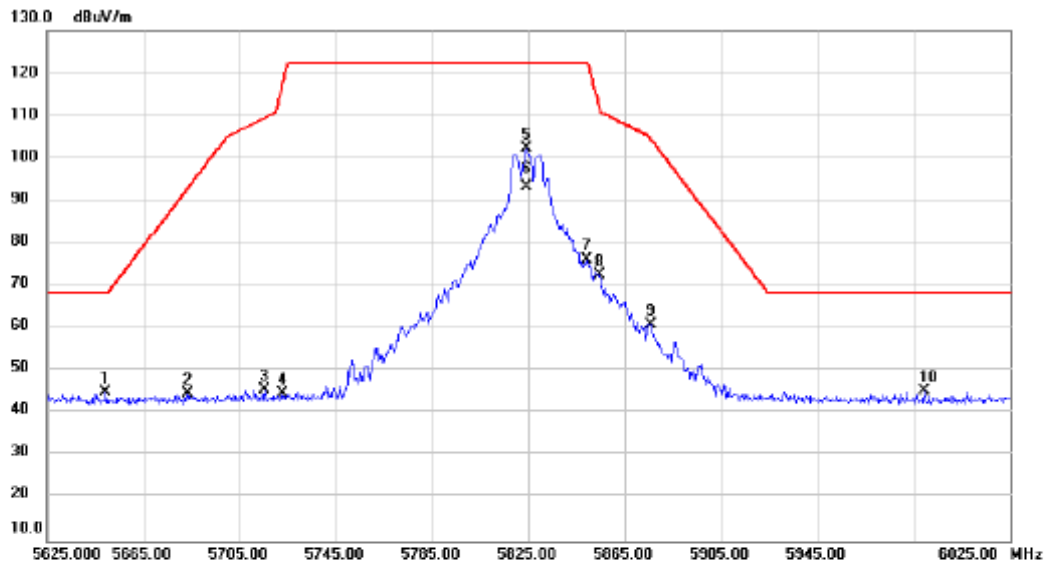


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5649.400	42.55	2.30	44.85	68.20	-23.35	peak		
2		5683.400	42.16	2.35	44.51	92.95	-48.44	peak		
3		5715.400	43.14	2.41	45.55	109.51	-63.96	peak		
4		5722.600	42.38	2.42	44.80	116.73	-71.93	peak		
5	*	5824.200	99.62	2.58	102.20	122.20	-20.00	peak		No Limit
6		5824.200	90.77	2.58	93.35	122.20	-28.85	AVG		No Limit
7		5849.400	73.50	2.62	76.12	122.20	-46.08	peak		
8		5854.600	69.93	2.63	72.56	111.71	-39.15	peak		
9		5876.200	58.15	2.66	60.81	104.31	-43.50	peak		
10		5989.400	42.54	2.83	45.37	68.20	-22.83	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/7
Test Frequency	5180MHz	Polarization	Vertical

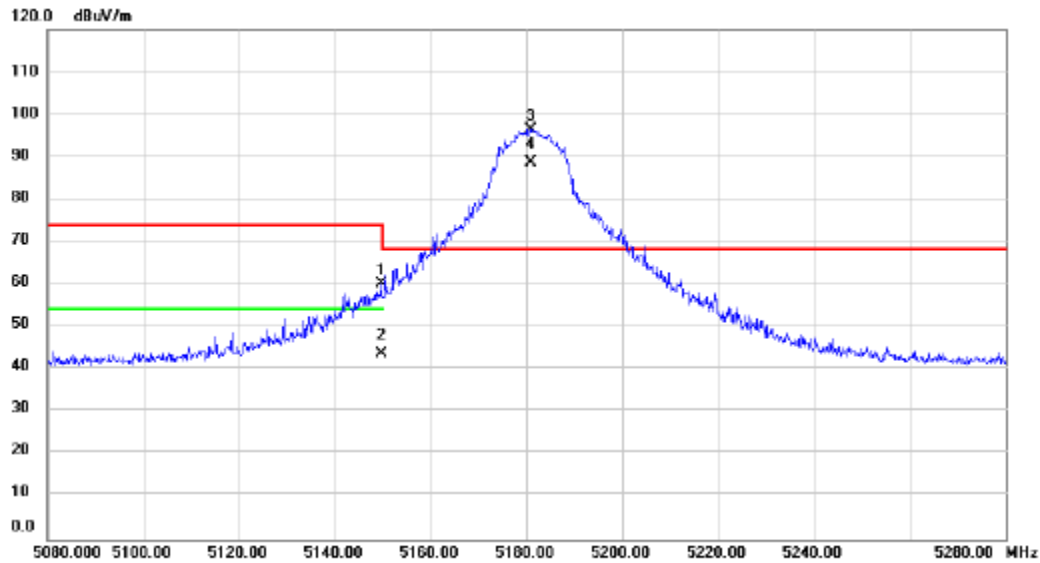


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.600	58.09	1.93	60.02	74.00	-13.98			peak
2		5149.600	41.68	1.93	43.61	54.00	-10.39			AVG
3	*	5180.800	94.47	1.94	96.41	68.20	28.21			peak
4	X	5180.800	86.59	1.94	88.53	68.20	20.33			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/10/29
Test Frequency	5240MHz	Polarization	Vertical

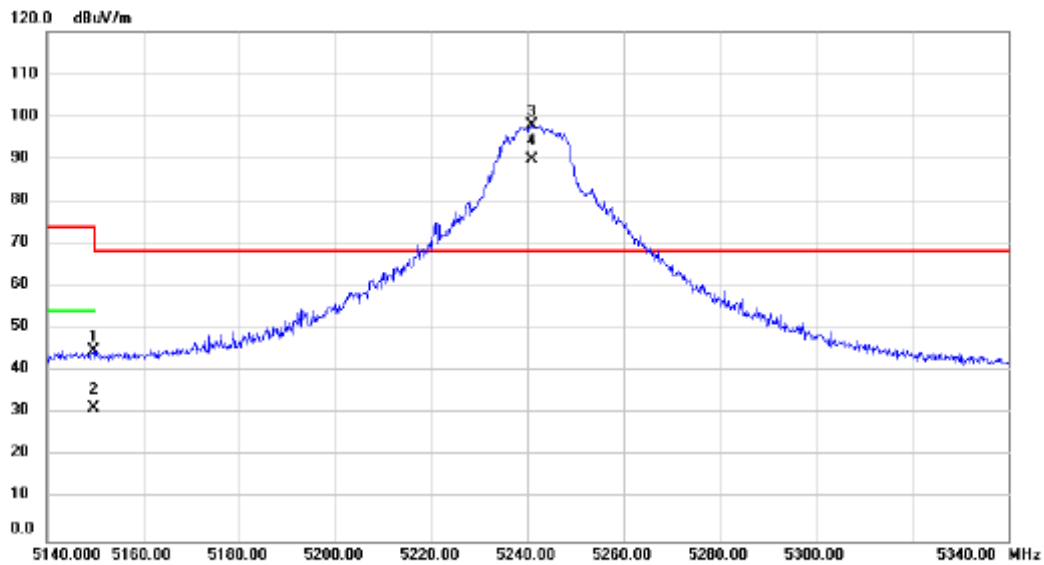


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	5149.600	42.94	1.93	44.87	74.00	-29.13	peak		
2	5149.600	29.48	1.93	31.41	54.00	-22.59	AVG		
3 *	5241.000	96.08	1.97	98.05	68.20	29.85	peak		No Limit
4 X	5241.000	87.92	1.97	89.89	68.20	21.69	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/10/30
Test Frequency	5260MHz	Polarization	Vertical

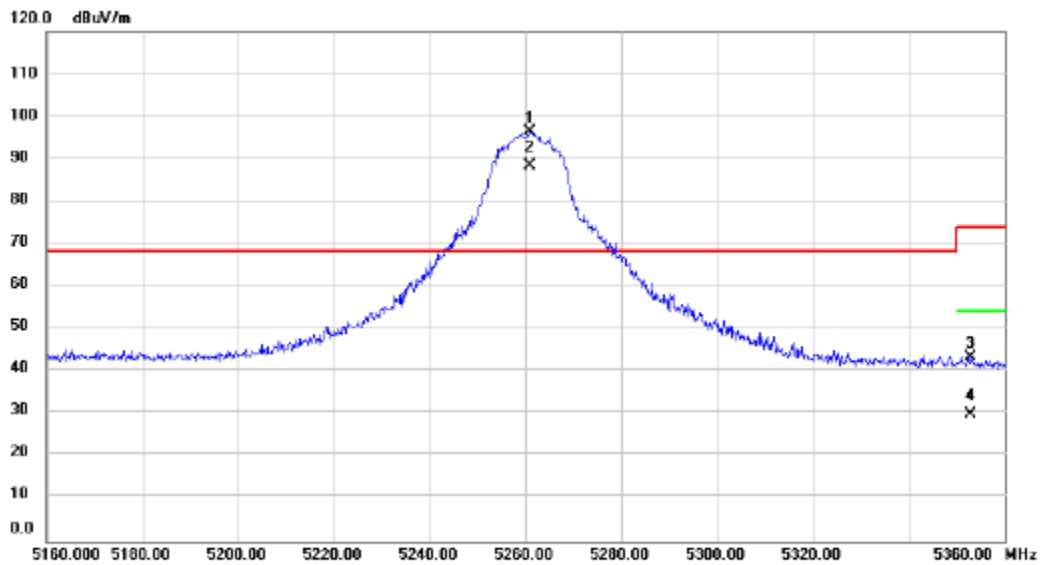


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5260.800	94.42	1.98	96.40	68.20	28.20	peak		No Limit
2	X	5260.800	86.26	1.98	88.24	68.20	20.04	AVG		No Limit
3		5353.000	41.42	2.01	43.43	74.00	-30.57	peak		
4		5353.000	27.80	2.01	29.81	54.00	-24.19	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/7
Test Frequency	5320MHz	Polarization	Vertical

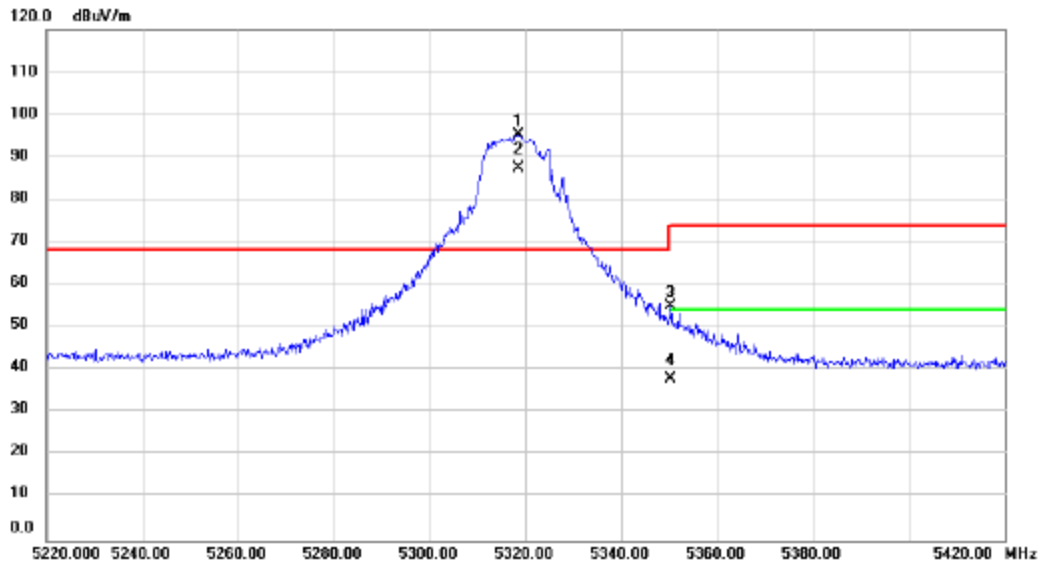


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5318.600	93.24	2.00	95.24	68.20	27.04	peak		No Limit
2	X	5318.600	85.35	2.00	87.35	68.20	19.15	AVG		No Limit
3		5350.400	53.06	2.01	55.07	74.00	-18.93	peak		
4		5350.400	35.82	2.01	37.83	54.00	-16.17	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/7
Test Frequency	5500MHz	Polarization	Vertical

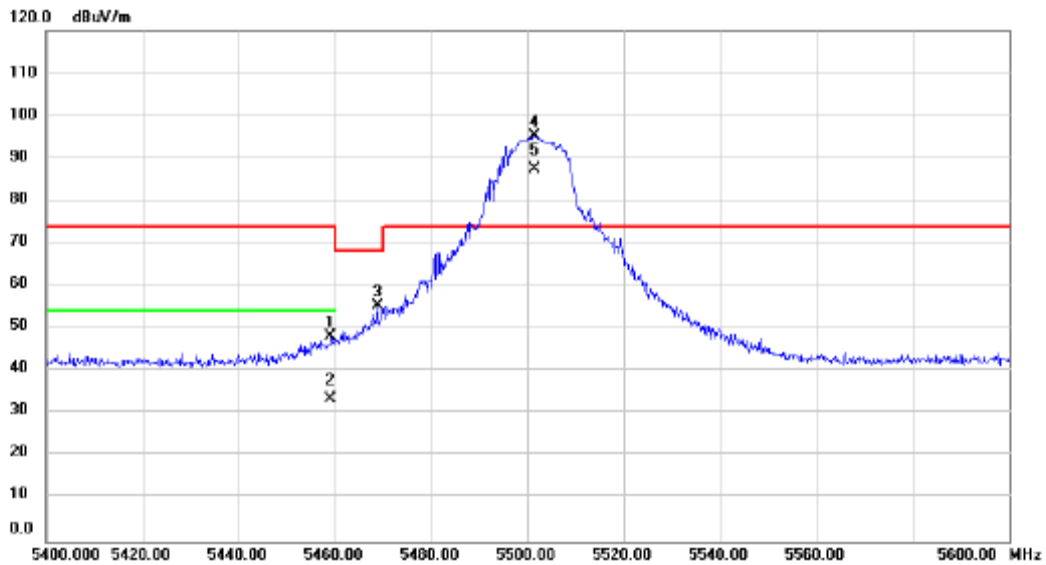


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5459.200	45.99	2.06	48.05	74.00	-25.95	peak		
2		5459.200	31.34	2.06	33.40	54.00	-20.60	AVG		
3		5468.800	53.15	2.05	55.20	68.20	-13.00	peak		
4	*	5501.400	93.06	2.07	95.13	74.00	21.13	peak		No Limit
5	X	5501.400	85.32	2.07	87.39	74.00	13.39	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/10/30
Test Frequency	5700MHz	Polarization	Vertical

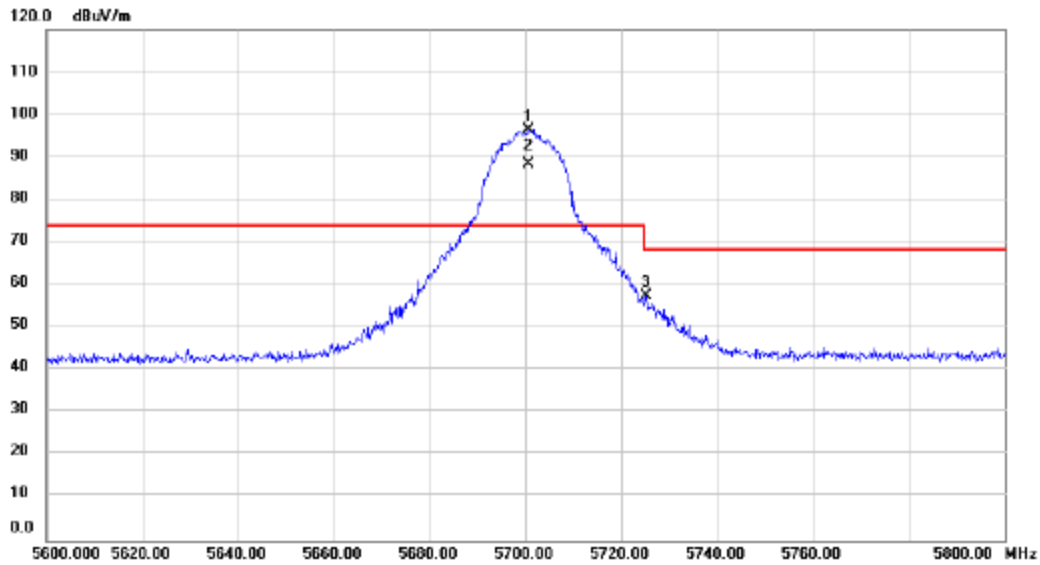


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5700.600	94.06	2.39	96.45	74.00	22.45	peak		No Limit
2	X	5700.600	86.05	2.39	88.44	74.00	14.44	AVG		No Limit
3		5725.200	54.95	2.42	57.37	68.20	-10.83	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/10/28
Test Frequency	5745MHz	Polarization	Vertical

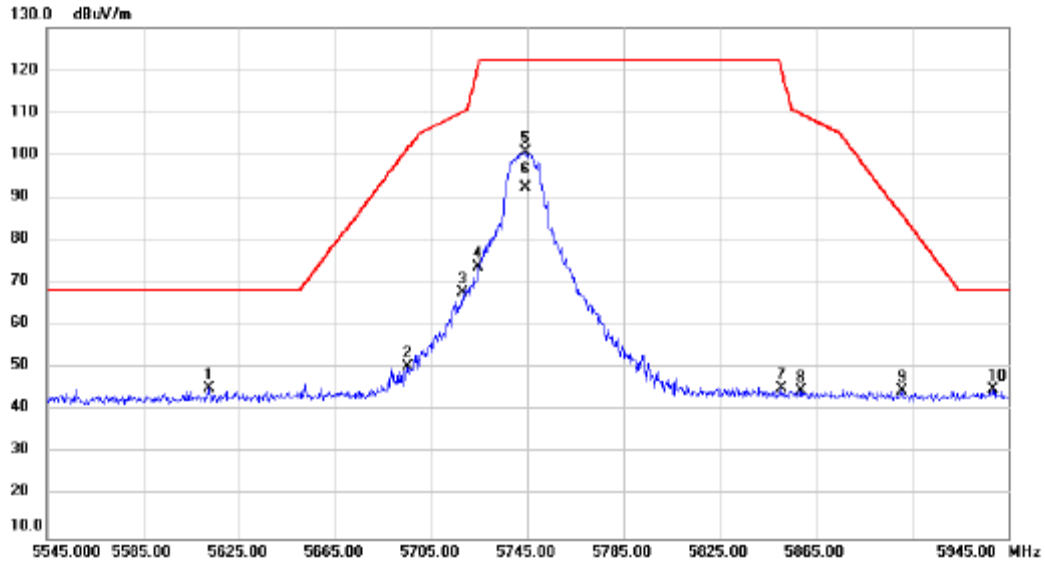


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5612.600	43.02	2.25	45.27	68.20	-22.93	peak		
2		5695.000	48.03	2.37	50.40	101.51	-51.11	peak		
3		5718.200	65.33	2.41	67.74	110.30	-42.56	peak		
4		5724.600	71.30	2.42	73.72	121.29	-47.57	peak		
5	*	5744.200	98.30	2.45	100.75	122.20	-21.45	peak		No Limit
6		5744.200	89.79	2.45	92.24	122.20	-29.96	AVG		No Limit
7		5850.600	42.55	2.62	45.17	120.83	-75.66	peak		
8		5859.000	42.11	2.63	44.74	109.68	-64.94	peak		
9		5901.000	41.86	2.69	44.55	85.92	-41.37	peak		
10		5938.600	42.21	2.76	44.97	68.20	-23.23	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/10/29
Test Frequency	5825MHz	Polarization	Vertical

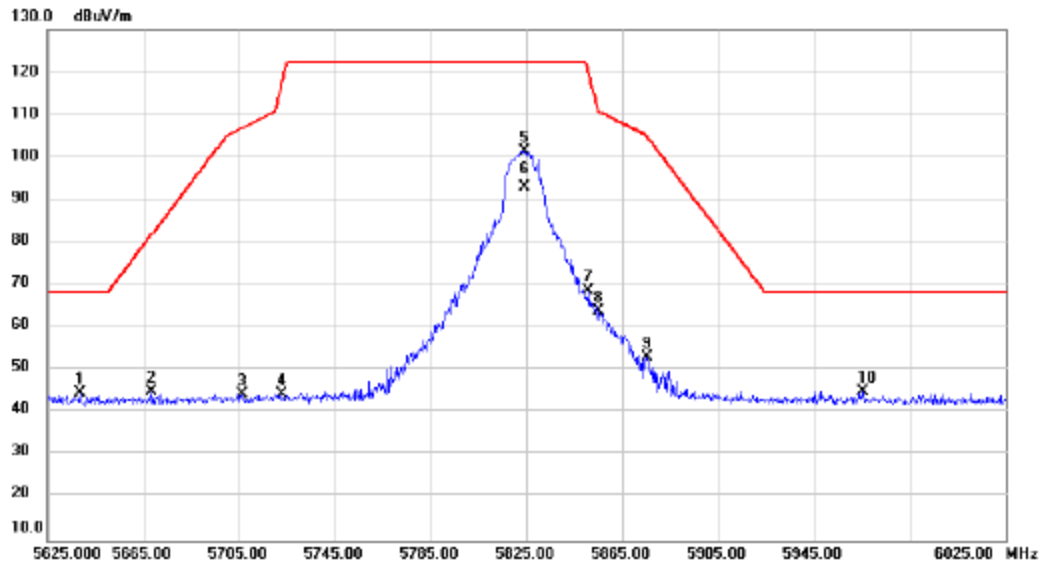


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5638.600	42.32	2.29	44.61	68.20	-23.59	peak		
2		5668.600	42.55	2.33	44.88	82.00	-37.12	peak		
3		5706.200	41.98	2.39	44.37	106.94	-62.57	peak		
4		5723.000	41.96	2.42	44.38	117.64	-73.26	peak		
5	*	5824.200	98.88	2.58	101.46	122.20	-20.74	peak		No Limit
6		5824.200	90.42	2.58	93.00	122.20	-29.20	AVG		No Limit
7		5851.000	65.96	2.62	68.58	119.92	-51.34	peak		
8		5855.400	61.09	2.63	63.72	110.69	-46.97	peak		
9		5875.400	50.44	2.66	53.10	104.90	-51.80	peak		
10		5965.400	42.15	2.80	44.95	68.20	-23.25	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/10/29
Test Frequency	5190MHz	Polarization	Vertical

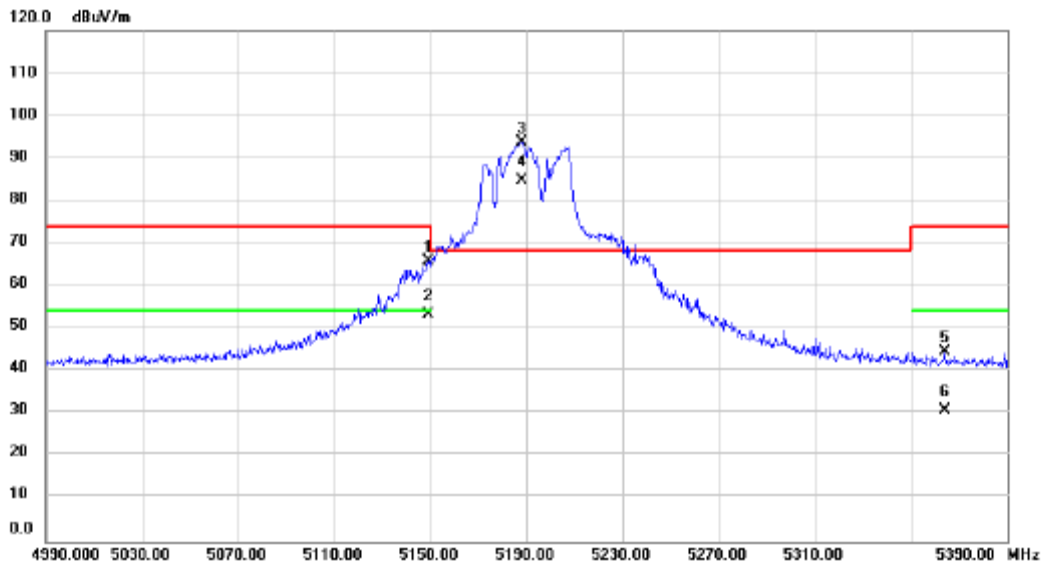


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5149.200	63.95	1.93	65.88	74.00	-8.12	peak		
2		5149.200	51.42	1.93	53.35	54.00	-0.65	AVG		
3	*	5188.400	91.67	1.94	93.61	68.20	25.41	peak		No Limit
4	X	5188.400	82.84	1.94	84.78	68.20	16.58	AVG		No Limit
5		5364.000	42.58	2.02	44.60	74.00	-29.40	peak		
6		5364.000	28.85	2.02	30.87	54.00	-23.13	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/10/29
Test Frequency	5230MHz	Polarization	Vertical

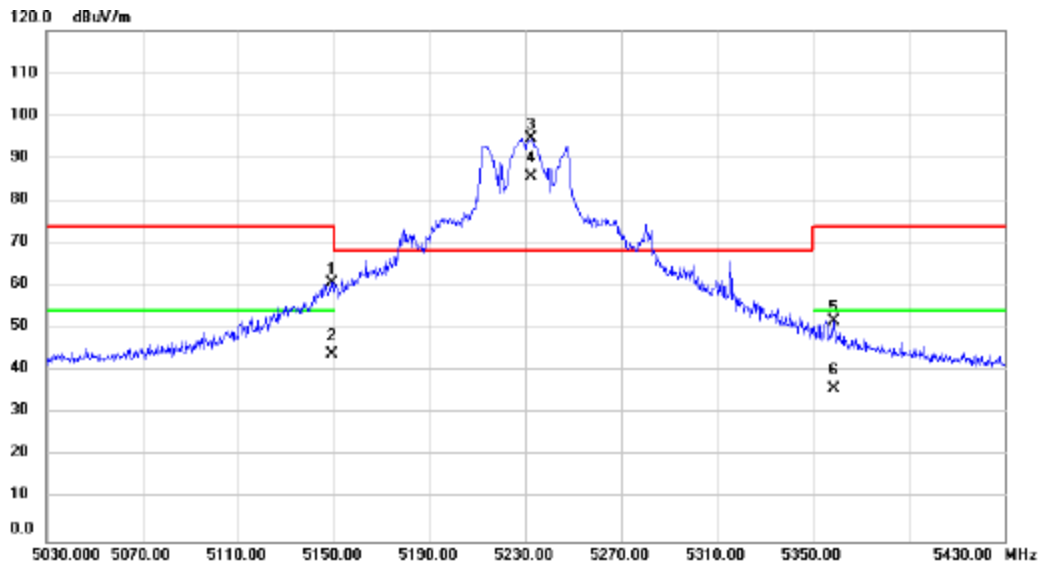


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.200	58.76	1.93	60.69	74.00	-13.31	peak		
2		5149.200	42.16	1.93	44.09	54.00	-9.91	AVG		
3	*	5232.400	92.63	1.96	94.59	68.20	26.39	peak		No Limit
4	X	5232.400	83.70	1.96	85.66	68.20	17.46	AVG		No Limit
5		5358.800	49.68	2.02	51.70	74.00	-22.30	peak		
6		5358.800	33.88	2.02	35.90	54.00	-18.10	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/10/29
Test Frequency	5270MHz	Polarization	Vertical

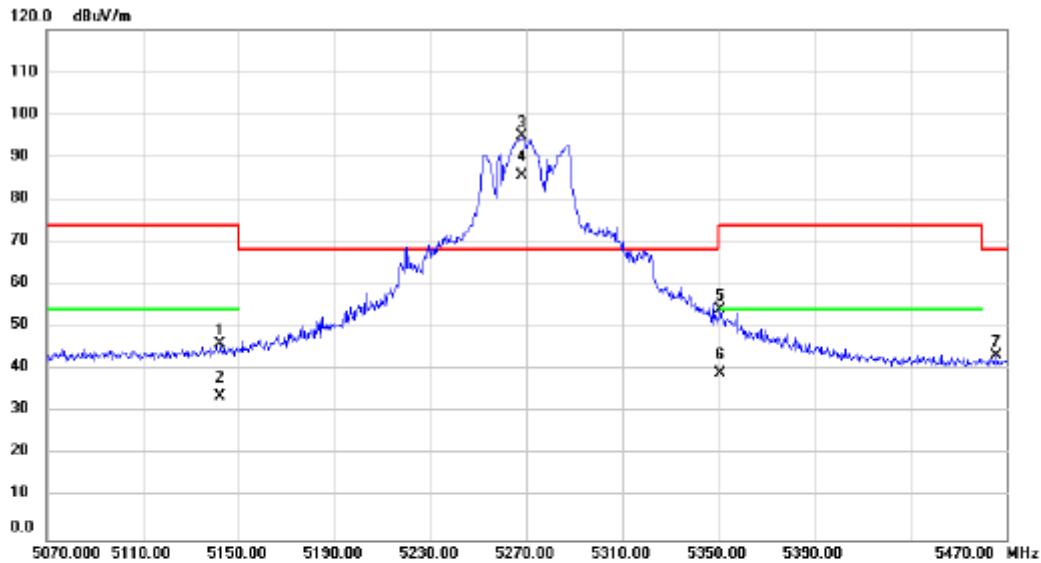

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5142.400	44.15	1.93	46.08	74.00	-27.92	peak		
2		5142.400	31.94	1.93	33.87	54.00	-20.13	AVG		
3	*	5268.400	92.86	1.98	94.84	68.20	26.64	peak		No Limit
4	X	5268.400	83.62	1.98	85.60	68.20	17.40	AVG		No Limit
5		5350.800	52.12	2.01	54.13	74.00	-19.87	peak		
6		5350.800	37.07	2.01	39.08	54.00	-14.92	AVG		
7		5466.000	41.19	2.05	43.24	68.20	-24.96	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/10/29
Test Frequency	5310MHz	Polarization	Vertical




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5144.400	43.24	1.94	45.18	74.00	-28.82	peak			
2		5144.400	29.81	1.94	31.75	54.00	-22.25	AVG			
3	*	5311.600	92.22	2.00	94.22	68.20	26.02	peak			No Limit
4	X	5311.600	83.24	2.00	85.24	68.20	17.04	AVG			No Limit
5		5350.000	63.71	2.01	65.72	74.00	-8.28	peak			
6		5350.000	51.00	2.01	53.01	54.00	-0.99	AVG			
7		5462.800	40.67	2.06	42.73	68.20	-25.47	peak			
8		5472.800	41.42	2.06	43.48	74.00	-30.52	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/10/29
Test Frequency	5510MHz	Polarization	Vertical

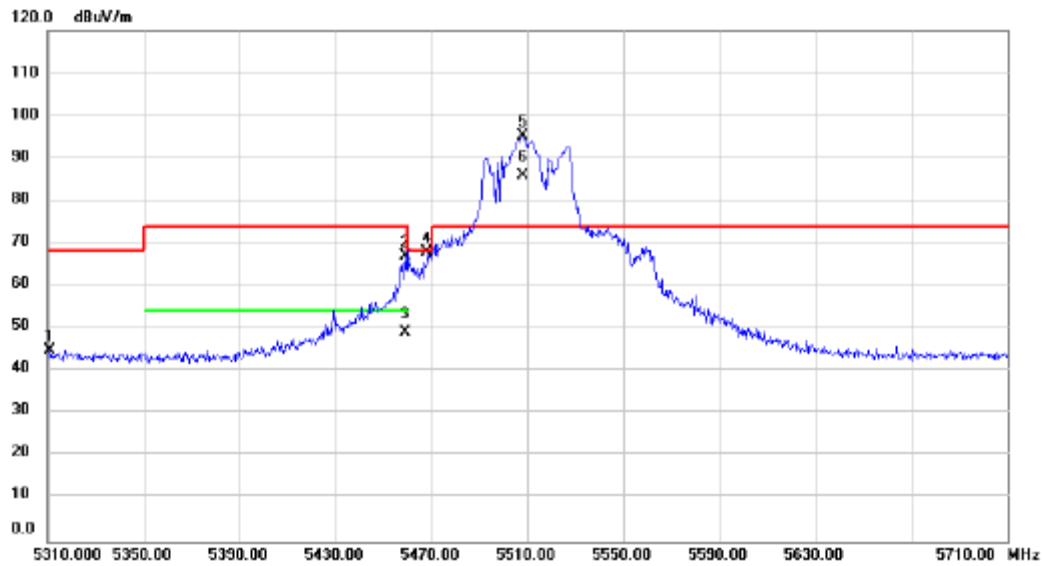

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5310.800	42.87	2.00	44.87	68.20	-23.33			peak
2		5459.200	65.08	2.06	67.14	74.00	-6.86			peak
3		5459.200	47.05	2.06	49.11	54.00	-4.89			AVG
4		5468.400	66.02	2.05	68.07	68.20	-0.13			peak
5	*	5508.400	93.06	2.09	95.15	74.00	21.15			peak No Limit
6	X	5508.400	83.73	2.09	85.82	74.00	11.82			AVG No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/10/29
Test Frequency	5670MHz	Polarization	Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5667.600	93.57	2.33	95.90	74.00	21.90	peak		No Limit
2	X	5667.600	84.50	2.33	86.83	74.00	12.83	AVG		No Limit
3		5728.400	59.62	2.43	62.05	68.20	-6.15	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/10/29
Test Frequency	5755MHz	Polarization	Vertical




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Detector	Comment
1	*	5649.000	54.76	2.30	57.06	68.20	-11.14			peak	
2		5699.000	65.94	2.39	68.33	104.46	-36.13			peak	
3		5719.000	76.94	2.41	79.35	110.52	-31.17			peak	
4		5724.600	77.60	2.42	80.02	121.29	-41.27			peak	
5		5753.800	96.95	2.46	99.41	122.20	-22.79			peak	No Limit
6		5753.800	87.83	2.46	90.29	122.20	-31.91			AVG	No Limit
7		5848.600	58.52	2.62	61.14	122.20	-61.06			peak	
8		5855.000	56.68	2.63	59.31	110.80	-51.49			peak	
9		5876.600	50.84	2.66	53.50	104.01	-50.51			peak	
10		5949.800	42.28	2.78	45.06	68.20	-23.14			peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/10/29
Test Frequency	5795MHz	Polarization	Vertical

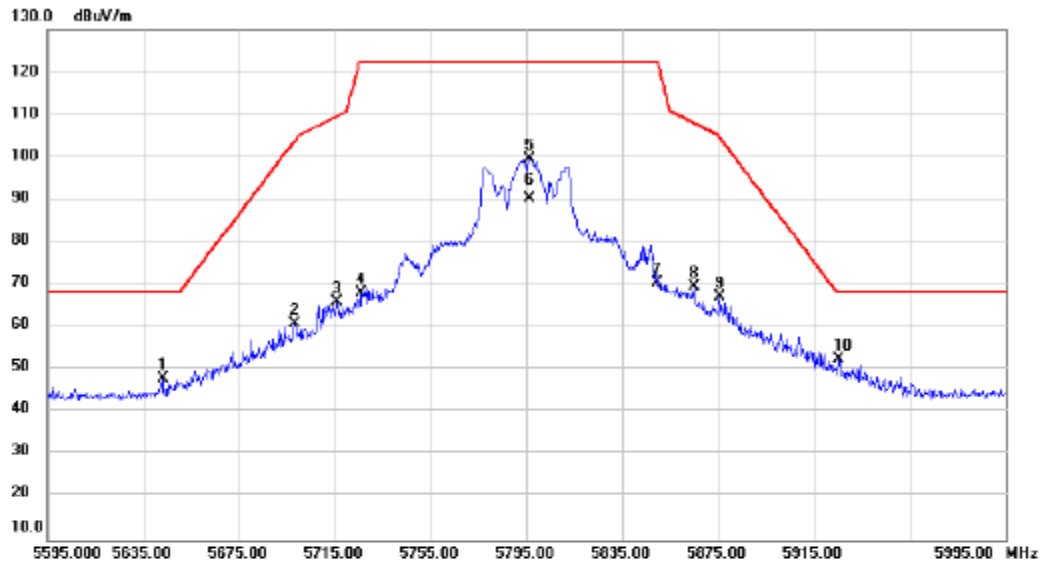


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		5643.000	45.55	2.29	47.84	68.20	-20.36	peak	
2		5698.200	58.37	2.38	60.75	103.87	-43.12	peak	
3		5715.800	63.53	2.41	65.94	109.63	-43.69	peak	
4		5726.200	65.57	2.42	67.99	122.20	-54.21	peak	
5		5796.200	96.87	2.54	99.41	122.20	-22.79	peak	No Limit
6		5796.200	87.82	2.54	90.36	122.20	-31.84	AVG	No Limit
7		5849.800	67.90	2.62	70.52	122.20	-51.68	peak	
8		5865.000	66.83	2.64	69.47	108.00	-38.53	peak	
9		5875.800	64.36	2.66	67.02	104.61	-37.59	peak	
10	*	5925.400	49.84	2.73	52.57	68.20	-15.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/10/30
Test Frequency	5210MHz	Polarization	Vertical

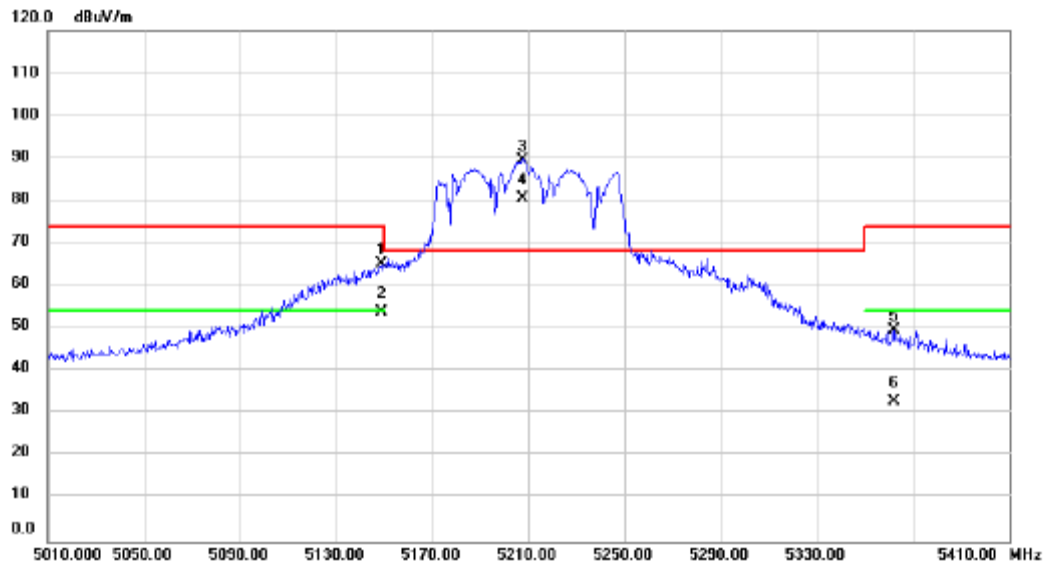


Vo.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.200	63.33	1.93	65.26	74.00	-8.74	peak		
2		5149.200	51.87	1.93	53.80	54.00	-0.20	AVG		
3	*	5207.600	87.75	1.95	89.70	68.20	21.50	peak		No Limit
4	X	5207.600	78.57	1.95	80.52	68.20	12.32	AVG		No Limit
5		5362.400	47.51	2.02	49.53	74.00	-24.47	peak		
6		5362.400	30.98	2.02	33.00	54.00	-21.00	AVG		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/10/30
Test Frequency	5290MHz	Polarization	Vertical

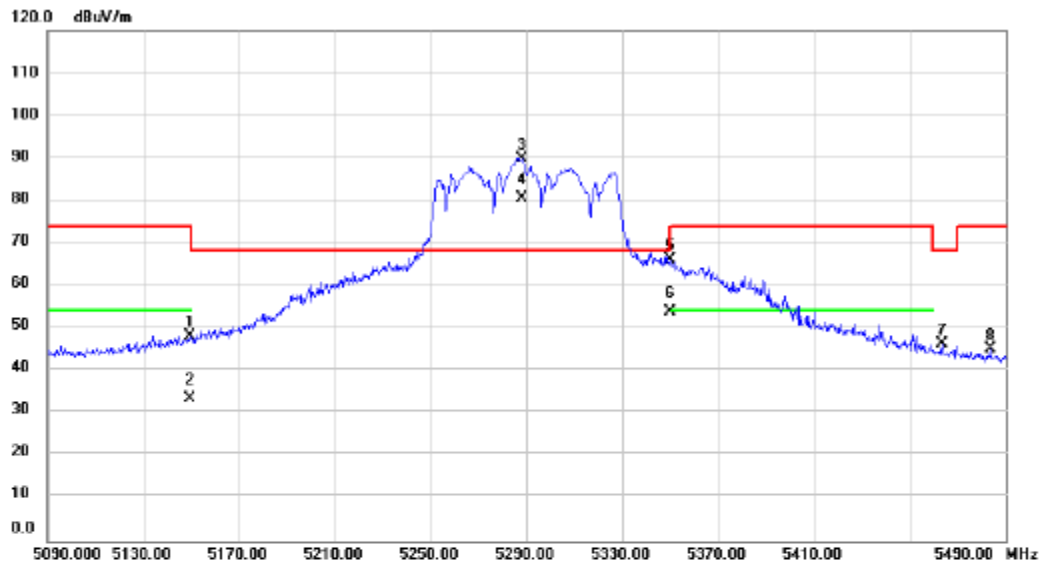


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5149.600	46.37	1.93	48.30	74.00	-25.70	peak		
2		5149.600	31.58	1.93	33.51	54.00	-20.49	AVG		
3	*	5288.000	87.93	1.98	89.91	68.20	21.71	peak		No Limit
4	X	5288.000	78.61	1.98	80.59	68.20	12.39	AVG		No Limit
5		5350.000	64.27	2.01	66.28	74.00	-7.72	peak		
6		5350.000	51.82	2.01	53.83	54.00	-0.17	AVG		
7		5463.600	44.40	2.06	46.46	68.20	-21.74	peak		
8		5483.600	43.16	2.06	45.22	74.00	-28.78	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/10/30
Test Frequency	5530MHz	Polarization	Vertical

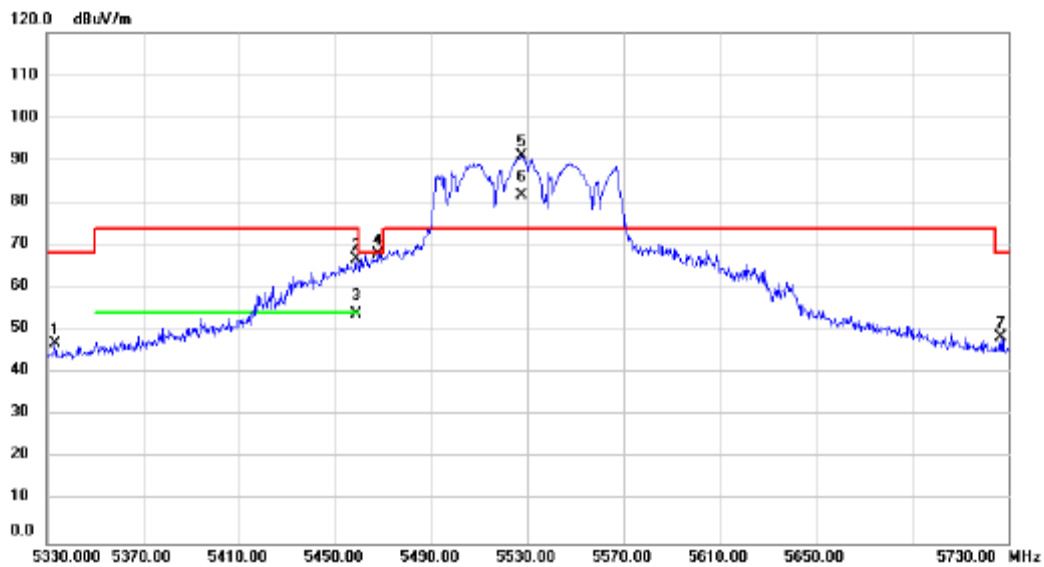


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5333.600	45.07	2.00	47.07	68.20	-21.13	peak		
2		5458.800	64.61	2.06	66.67	74.00	-7.33	peak		
3		5458.800	51.83	2.06	53.89	54.00	-0.11	AVG		
4		5468.000	65.93	2.05	67.98	68.20	-0.22	peak		
5	*	5527.600	88.83	2.11	90.94	74.00	16.94	peak		No Limit
6	X	5527.600	79.56	2.11	81.67	74.00	7.67	AVG		No Limit
7		5726.800	46.10	2.42	48.52	68.20	-19.68	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/10/30
Test Frequency	5610MHz	Polarization	Vertical

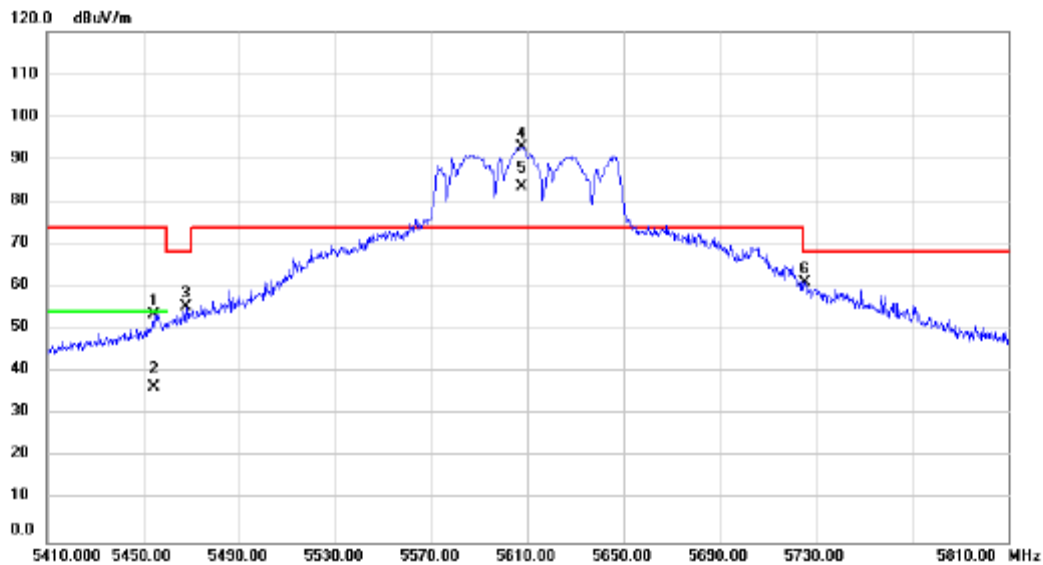


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	5454.400	51.59	2.05	53.64	74.00	-20.36	peak			
2	5454.400	34.35	2.05	36.40	54.00	-17.60	AVG			
3	5467.600	53.24	2.05	55.29	68.20	-12.91	peak			
4 *	5607.600	90.55	2.24	92.79	74.00	18.79	peak			No Limit
5 X	5607.600	81.38	2.24	83.62	74.00	9.62	AVG			No Limit
6	5725.600	58.64	2.42	61.06	68.20	-7.14	peak			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/10/30
Test Frequency	5775MHz	Polarization	Vertical

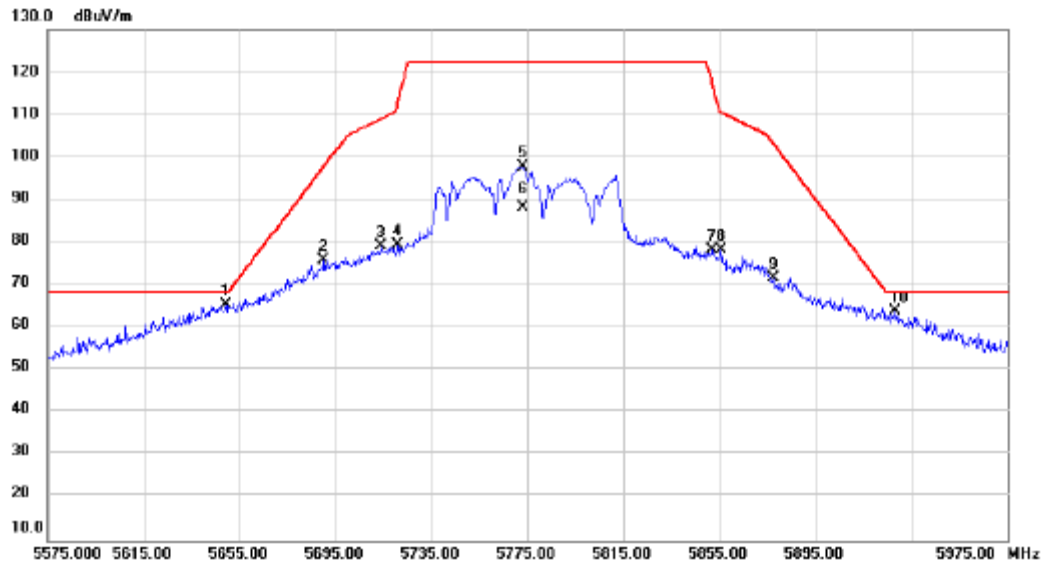


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	5649.400	63.00	2.30	65.30	68.20	-2.90	peak			
2		5690.200	73.54	2.37	75.91	97.97	-22.06	peak			
3		5714.200	76.71	2.41	79.12	109.18	-30.06	peak			
4		5721.000	77.02	2.42	79.44	113.08	-33.64	peak			
5		5773.400	95.31	2.50	97.81	122.20	-24.39	peak			No Limit
6		5773.400	85.78	2.50	88.28	122.20	-33.92	AVG			No Limit
7		5852.200	75.58	2.62	78.20	117.18	-38.98	peak			
8		5855.800	75.58	2.63	78.21	110.58	-32.37	peak			
9		5877.800	69.07	2.66	71.73	103.12	-31.39	peak			
10		5928.200	61.09	2.73	63.82	68.20	-4.38	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT160)	Test Date	2024/10/30
Test Frequency	5250MHz	Polarization	Vertical

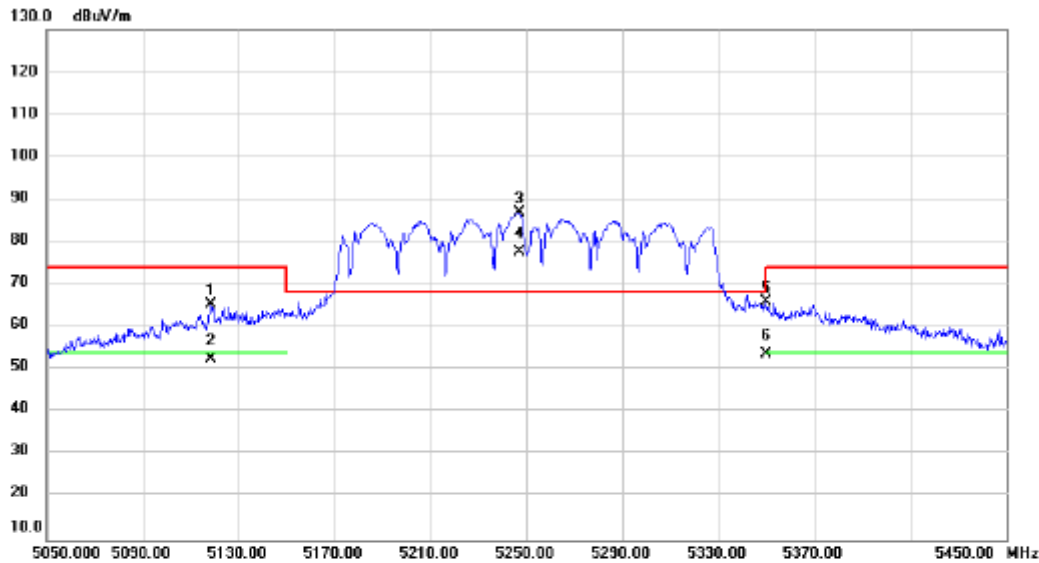


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5118.400	63.29	1.91	65.20	74.00	-8.80	peak		
2		5118.400	50.53	1.91	52.44	54.00	-1.56	AVG		
3	*	5246.800	84.85	1.97	86.82	68.20	18.62	peak		No Limit
4	X	5246.800	75.64	1.97	77.61	68.20	9.41	AVG		No Limit
5		5350.000	64.08	2.01	66.09	74.00	-7.91	peak		
6		5350.000	51.63	2.01	53.64	54.00	-0.36	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT160)	Test Date	2024/10/30
Test Frequency	5570MHz	Polarization	Vertical

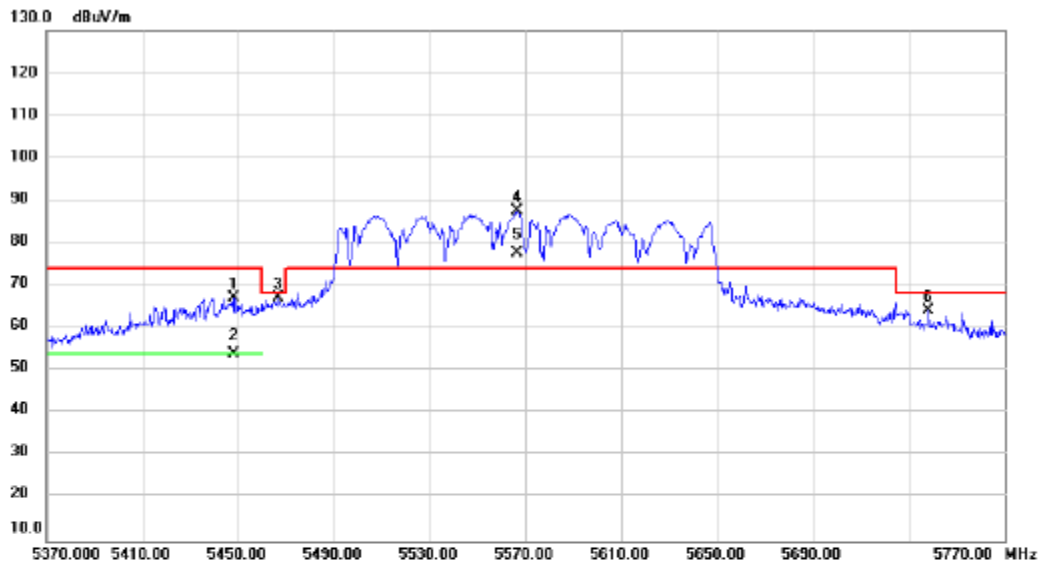


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5448.000	64.96	2.05	67.01	74.00	-6.99	peak		
2		5448.000	51.93	2.05	53.98	54.00	-0.02	AVG		
3		5466.800	65.14	2.05	67.19	68.20	-1.01	peak		
4	*	5566.400	85.22	2.18	87.40	74.00	13.40	peak		No Limit
5	X	5566.400	75.38	2.18	77.56	74.00	3.56	AVG		No Limit
6		5738.400	61.63	2.44	64.07	68.20	-4.13	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/10/30
Test Frequency	5180MHz	Polarization	Vertical

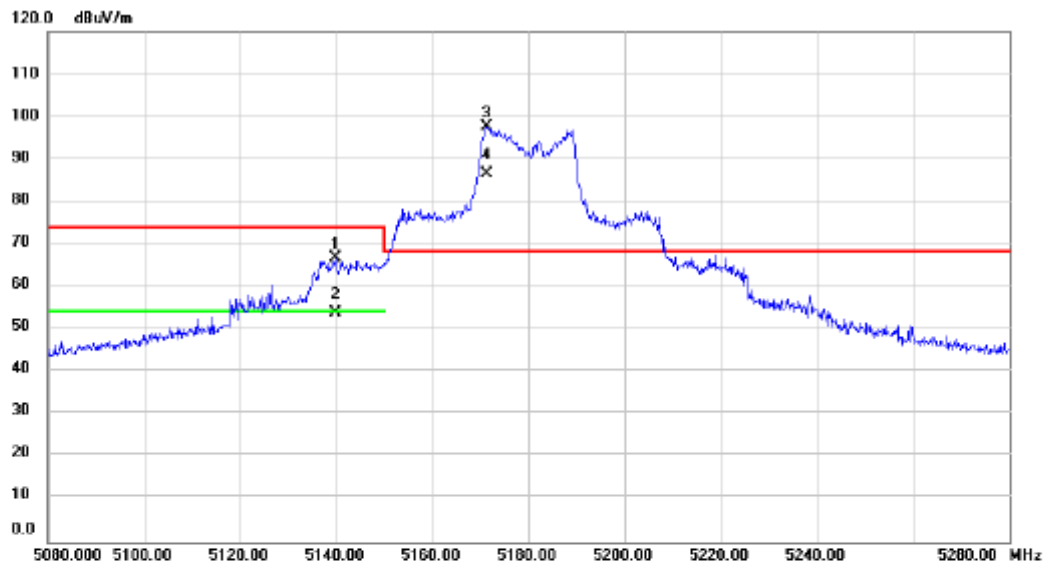


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5139.800	64.74	1.92	66.66	74.00	-7.34	peak		
2		5139.800	51.79	1.92	53.71	54.00	-0.29	AVG		
3	*	5171.400	95.61	1.94	97.55	68.20	29.35	peak		No Limit
4	X	5171.400	84.53	1.94	86.47	68.20	18.27	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/10/30
Test Frequency	5240MHz	Polarization	Vertical

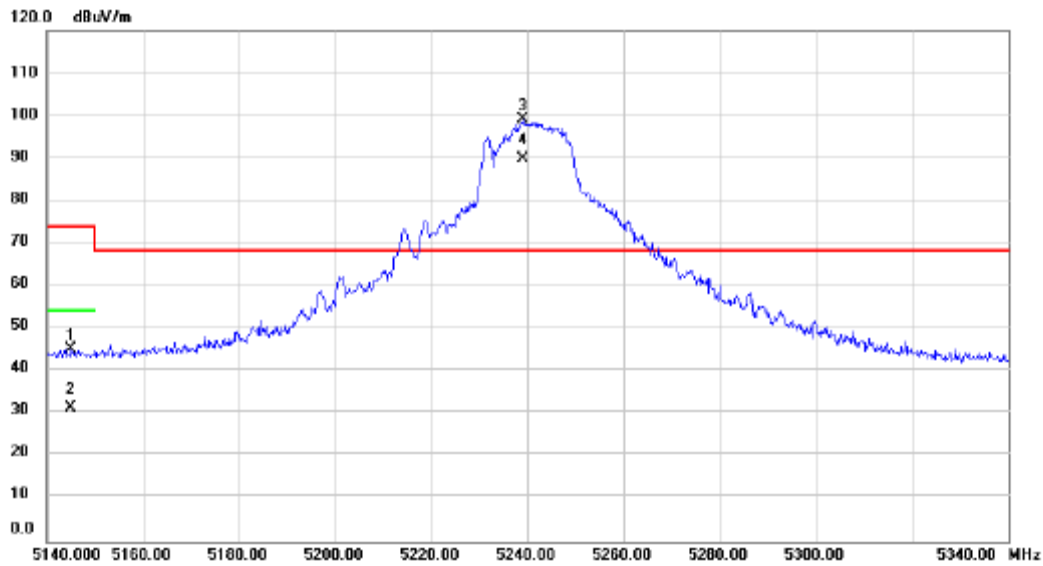


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5145.000	43.34	1.94	45.28	74.00	-28.72	peak		
2		5145.000	29.42	1.94	31.36	54.00	-22.64	AVG		
3	*	5239.000	97.05	1.96	99.01	68.20	30.81	peak		No Limit
4	X	5239.000	87.77	1.96	89.73	68.20	21.53	AVG		No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/10/30
Test Frequency	5260MHz	Polarization	Vertical

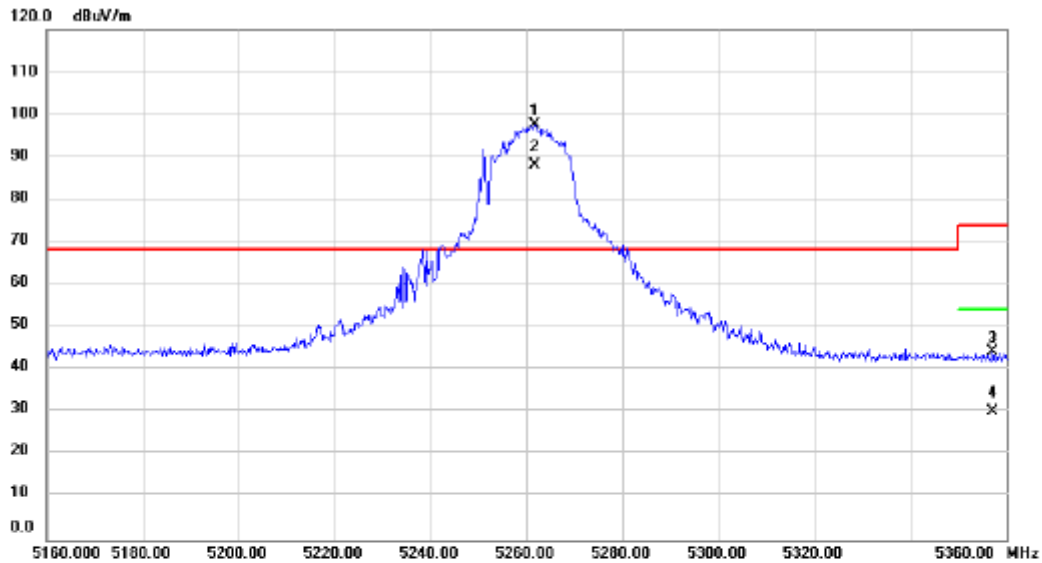


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5261.800	95.65	1.98	97.63	68.20	29.43	peak		No Limit
2	X	5261.800	86.03	1.98	88.01	68.20	19.81	AVG		No Limit
3		5357.200	42.19	2.01	44.20	74.00	-29.80	peak		
4		5357.200	28.15	2.01	30.16	54.00	-23.84	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/10/30
Test Frequency	5320MHz	Polarization	Vertical

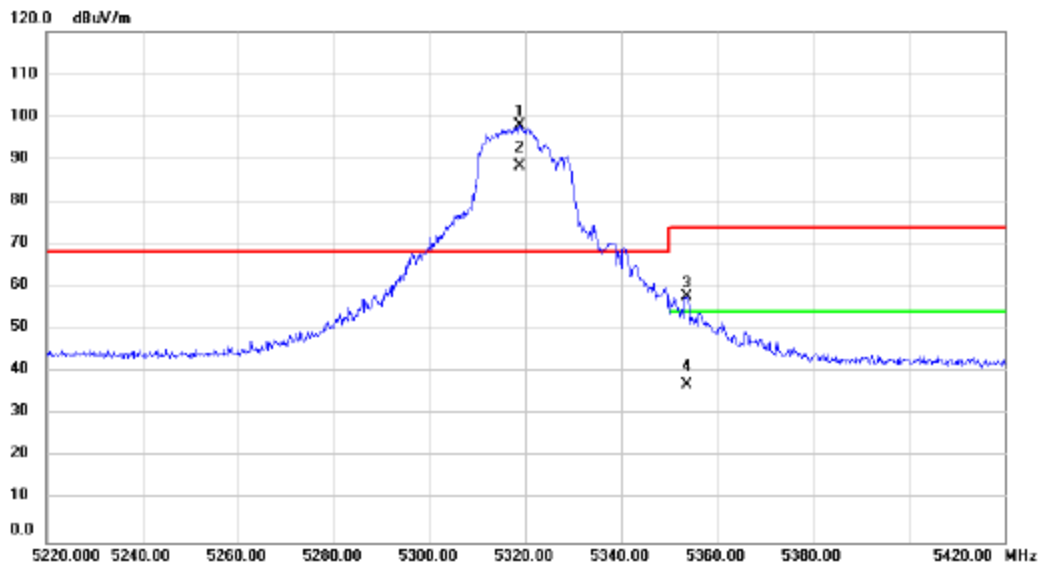


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5318.800	95.95	2.00	97.95	68.20	29.75	peak		No Limit
2	X	5318.800	86.29	2.00	88.29	68.20	20.09	AVG		No Limit
3		5353.600	55.70	2.01	57.71	74.00	-16.29	peak		
4		5353.600	35.01	2.01	37.02	54.00	-16.98	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/10/30
Test Frequency	5500MHz	Polarization	Vertical

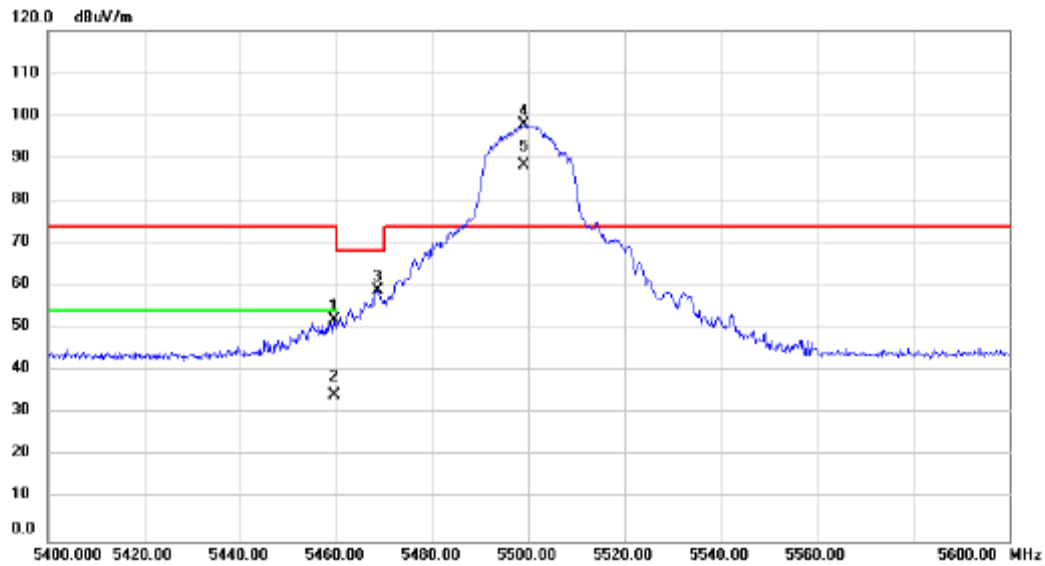


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5459.600	49.87	2.06	51.93	74.00	-22.07			peak
2		5459.600	32.20	2.06	34.26	54.00	-19.74			AVG
3		5468.600	56.79	2.05	58.84	68.20	-9.36			peak
4	*	5499.200	96.00	2.07	98.07	74.00	24.07			No Limit
5	X	5499.200	86.30	2.07	88.37	74.00	14.37			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/10/30
Test Frequency	5700MHz	Polarization	Vertical

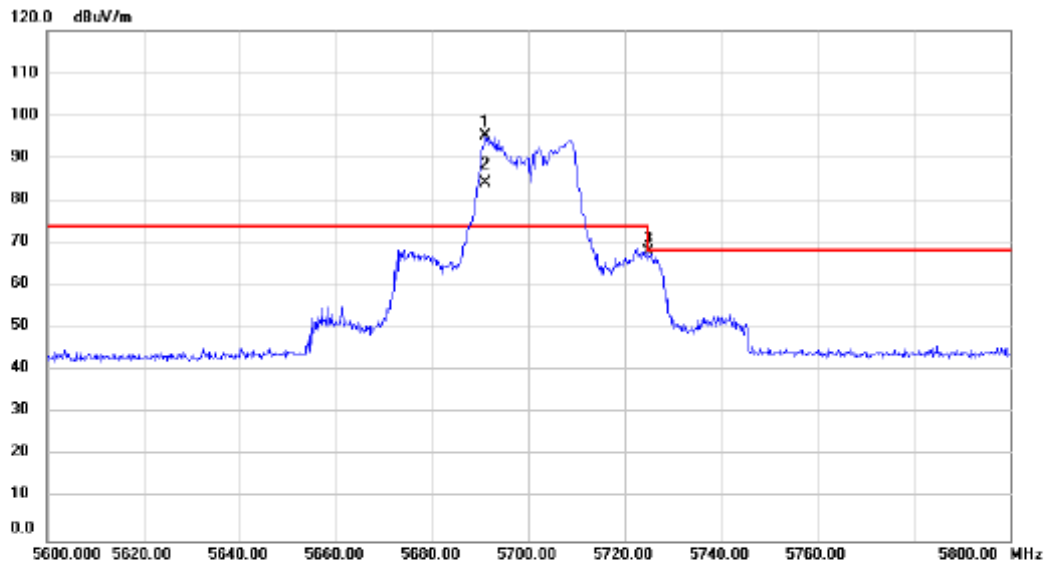


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5691.200	92.82	2.37	95.19	74.00	21.19	peak		No Limit
2	X	5691.200	81.70	2.37	84.07	74.00	10.07	AVG		No Limit
3		5725.000	65.53	2.42	67.95	68.20	-0.25	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/10/30
Test Frequency	5745MHz	Polarization	Vertical

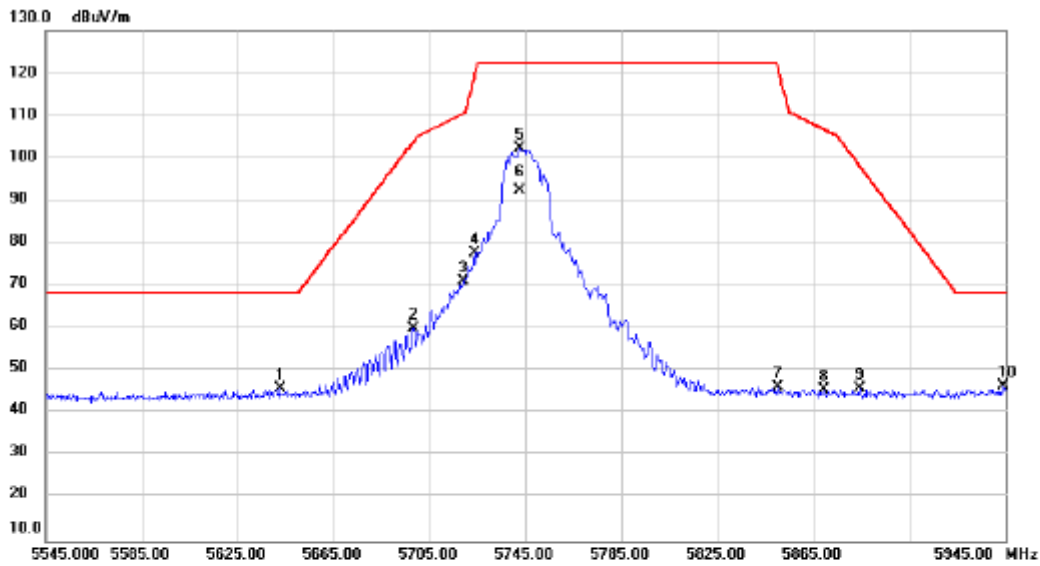


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5642.600	43.45	2.29	45.74	68.20	-22.46	peak		
2		5698.200	57.68	2.38	60.06	103.87	-43.81	peak		
3		5719.400	68.66	2.41	71.07	110.63	-39.56	peak		
4		5723.800	75.15	2.42	77.57	119.46	-41.89	peak		
5	*	5742.600	99.72	2.44	102.16	122.20	-20.04	peak		No Limit
6		5742.600	90.04	2.44	92.48	122.20	-29.72	AVG		No Limit
7		5850.200	43.54	2.62	46.16	121.74	-75.58	peak		
8		5869.400	42.91	2.64	45.55	106.77	-61.22	peak		
9		5884.600	43.20	2.67	45.87	98.07	-52.20	peak		
10		5944.200	43.58	2.76	46.34	68.20	-21.86	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/10/30
Test Frequency	5825MHz	Polarization	Vertical

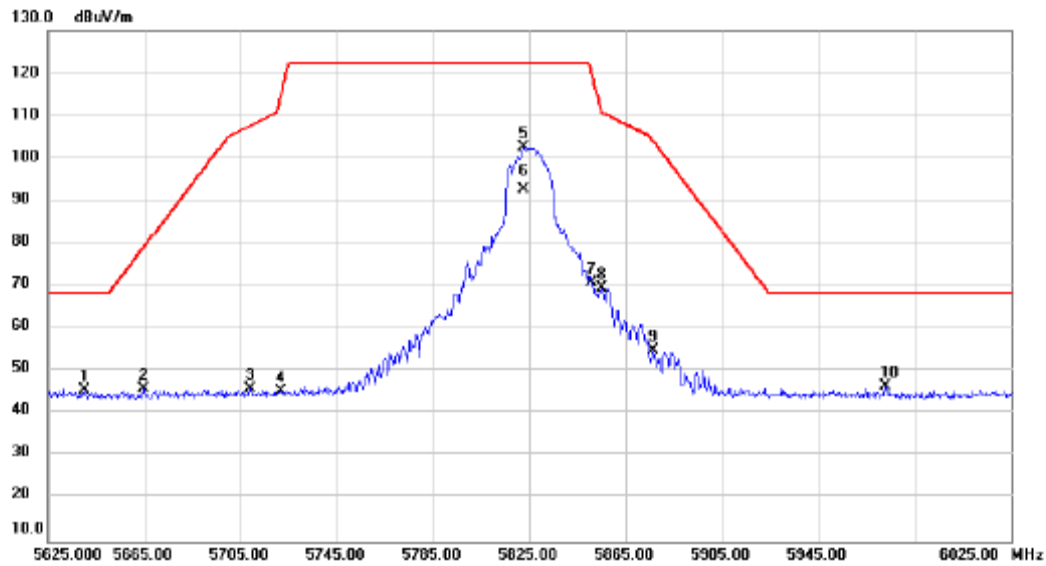


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5640.200	43.14	2.30	45.44	68.20	-22.76	peak		
2		5664.600	43.45	2.33	45.78	79.04	-33.26	peak		
3		5709.000	43.35	2.39	45.74	107.72	-61.98	peak		
4		5721.800	42.91	2.42	45.33	114.91	-69.58	peak		
5	*	5822.600	99.89	2.58	102.47	122.20	-19.73	peak		No Limit
6		5822.600	90.18	2.58	92.76	122.20	-29.44	AVG		No Limit
7		5850.600	68.10	2.62	70.72	120.83	-50.11	peak		
8		5855.400	66.77	2.63	69.40	110.69	-41.29	peak		
9		5876.600	52.24	2.66	54.90	104.01	-49.11	peak		
10		5973.000	43.54	2.81	46.35	68.20	-21.85	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/10/30
Test Frequency	5190MHz	Polarization	Vertical

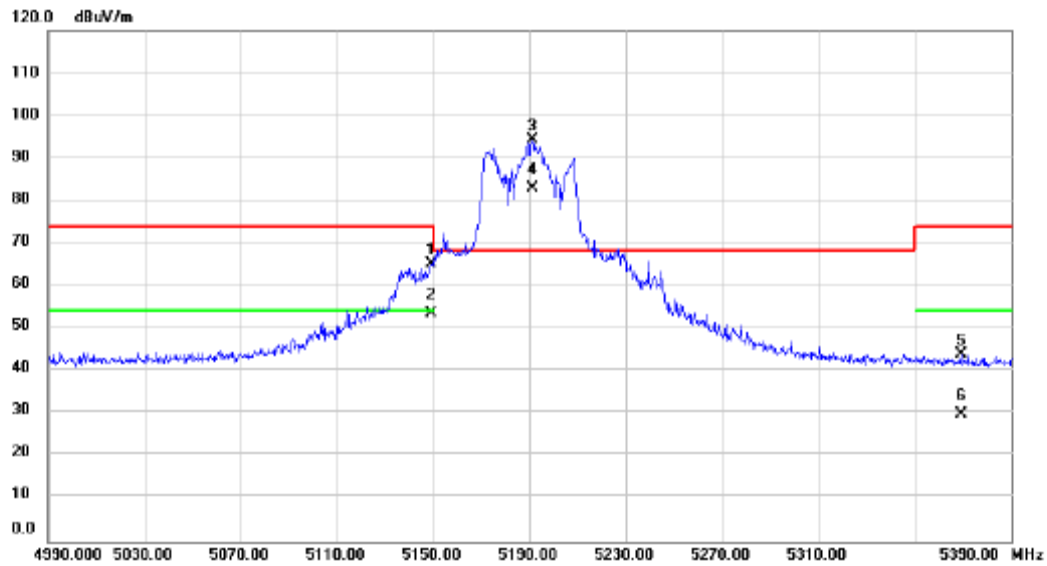


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.200	63.35	1.93	65.28	74.00	-8.72	peak		
2		5149.200	51.70	1.93	53.63	54.00	-0.37	AVG		
3	*	5191.200	92.49	1.94	94.43	68.20	26.23	peak		No Limit
4	X	5191.200	81.02	1.94	82.96	68.20	14.76	AVG		No Limit
5		5369.600	41.96	2.01	43.97	74.00	-30.03	peak		
6		5369.600	27.96	2.01	29.97	54.00	-24.03	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/10/30
Test Frequency	5230MHz	Polarization	Vertical

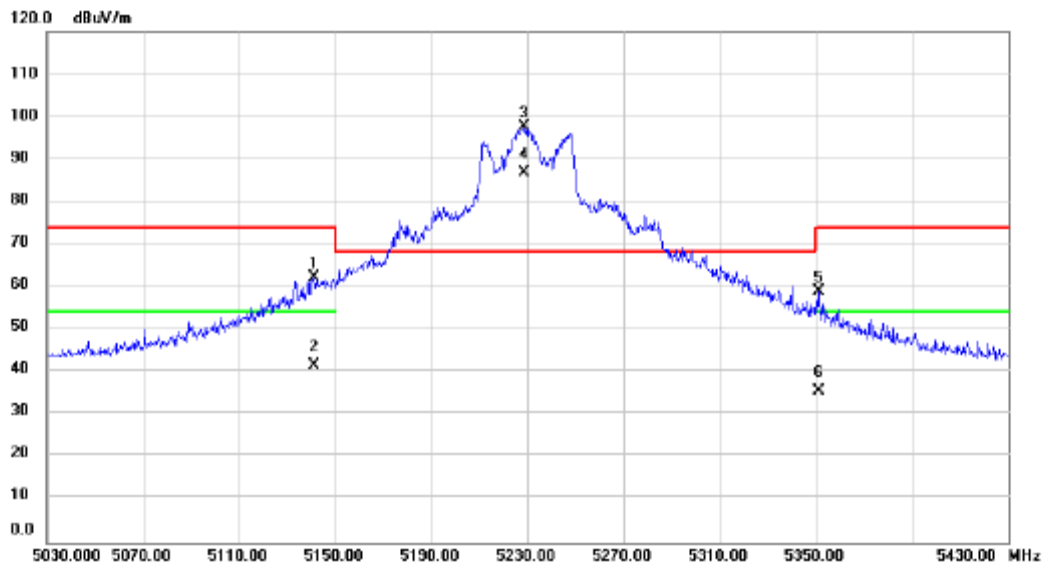


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5141.200	60.35	1.92	62.27	74.00	-11.73	peak		
2		5141.200	39.74	1.92	41.66	54.00	-12.34	AVG		
3	*	5228.800	95.55	1.97	97.52	68.20	29.32	peak		No Limit
4	X	5228.800	84.84	1.97	86.81	68.20	18.61	AVG		No Limit
5		5351.200	56.84	2.01	58.85	74.00	-15.15	peak		
6		5351.200	33.60	2.01	35.61	54.00	-18.39	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/10/30
Test Frequency	5270MHz	Polarization	Vertical

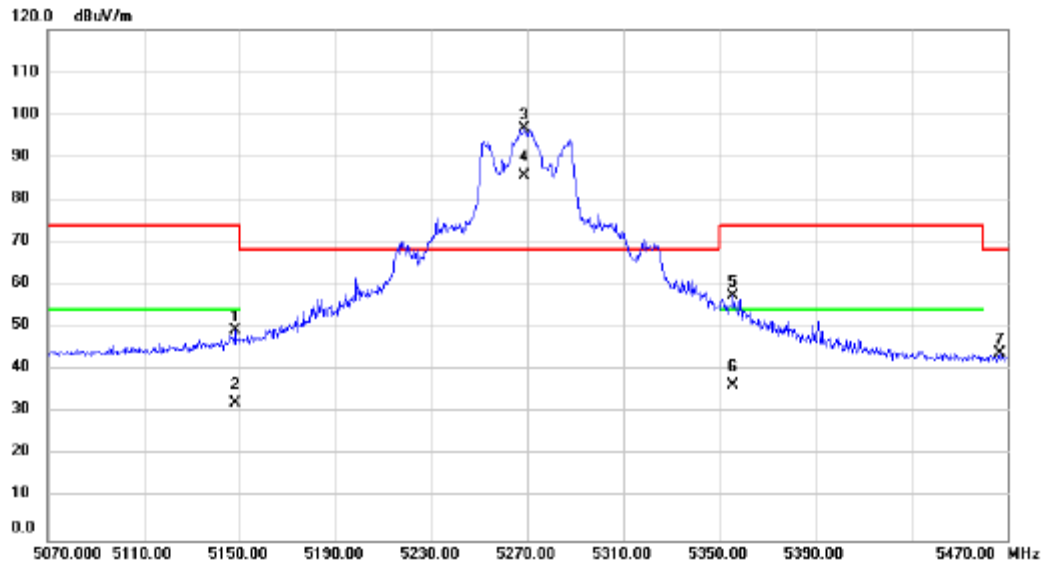


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	5148.000	47.31	1.93	49.24	74.00	-24.76	peak			
2	5148.000	30.42	1.93	32.35	54.00	-21.65	AVG			
3 *	5268.800	94.91	1.98	96.89	68.20	28.69	peak			No Limit
4 X	5268.800	83.55	1.98	85.53	68.20	17.33	AVG			No Limit
5	5355.600	55.57	2.00	57.57	74.00	-16.43	peak			
6	5355.600	34.51	2.00	36.51	54.00	-17.49	AVG			
7	5466.800	41.79	2.05	43.84	68.20	-24.36	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/10/30
Test Frequency	5310MHz	Polarization	Vertical

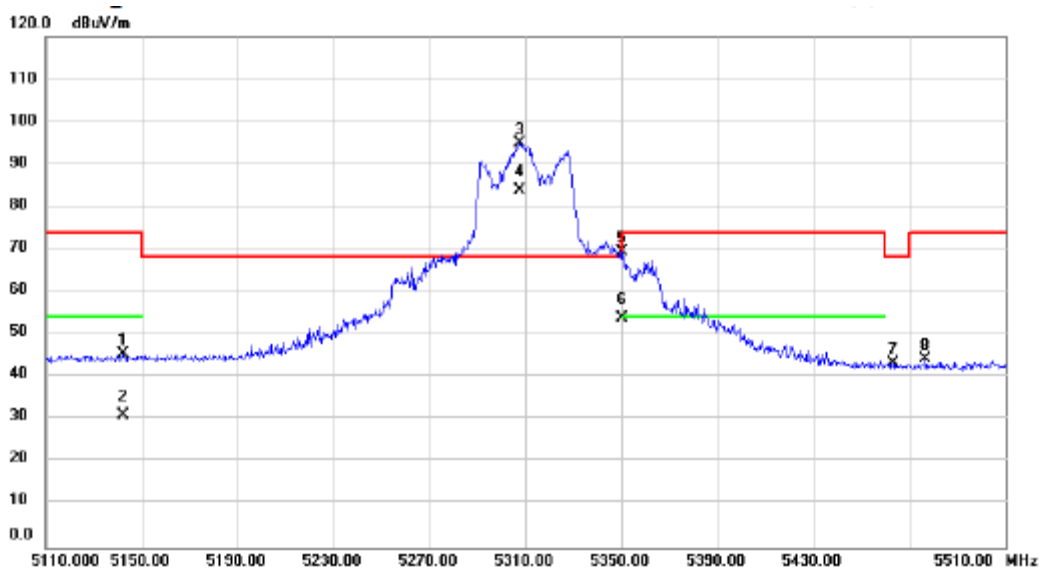


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	5142.000	43.54	1.93	45.47	74.00	-28.53	peak		
2	5142.000	29.18	1.93	31.11	54.00	-22.89	AVG		
3 *	5307.600	93.02	1.99	95.01	68.20	26.81	peak		No Limit
4 X	5307.600	81.73	1.99	83.72	68.20	15.52	AVG		No Limit
5	5350.400	67.30	2.01	69.31	74.00	-4.69	peak		
6	5350.400	51.96	2.01	53.97	54.00	-0.03	AVG		
7	5463.200	41.37	2.06	43.43	68.20	-24.77	peak		
8	5476.800	42.29	2.07	44.36	74.00	-29.64	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/10/30
Test Frequency	5510MHz	Polarization	Vertical

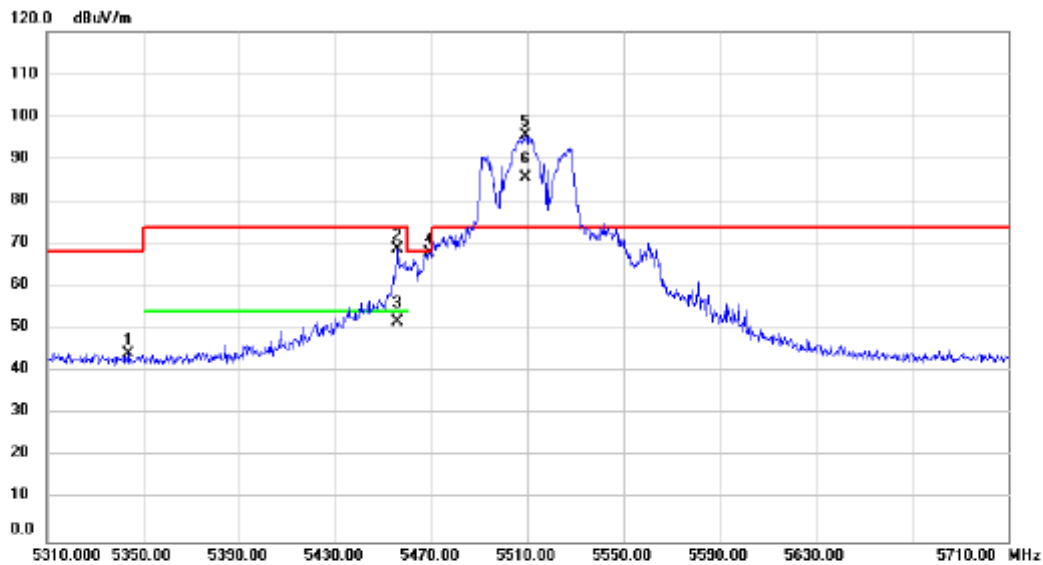


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	5343.600	42.34	2.01	44.35	68.20	-23.85	peak			
2	5456.000	66.73	2.05	68.78	74.00	-5.22	peak			
3	5456.000	49.71	2.05	51.76	54.00	-2.24	AVG			
4	5469.200	65.81	2.05	67.86	68.20	-0.34	peak			
5 *	5509.200	93.58	2.09	95.67	74.00	21.67	peak			No Limit
6 X	5509.200	83.64	2.09	85.73	74.00	11.73	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/10/30
Test Frequency	5670MHz	Polarization	Vertical

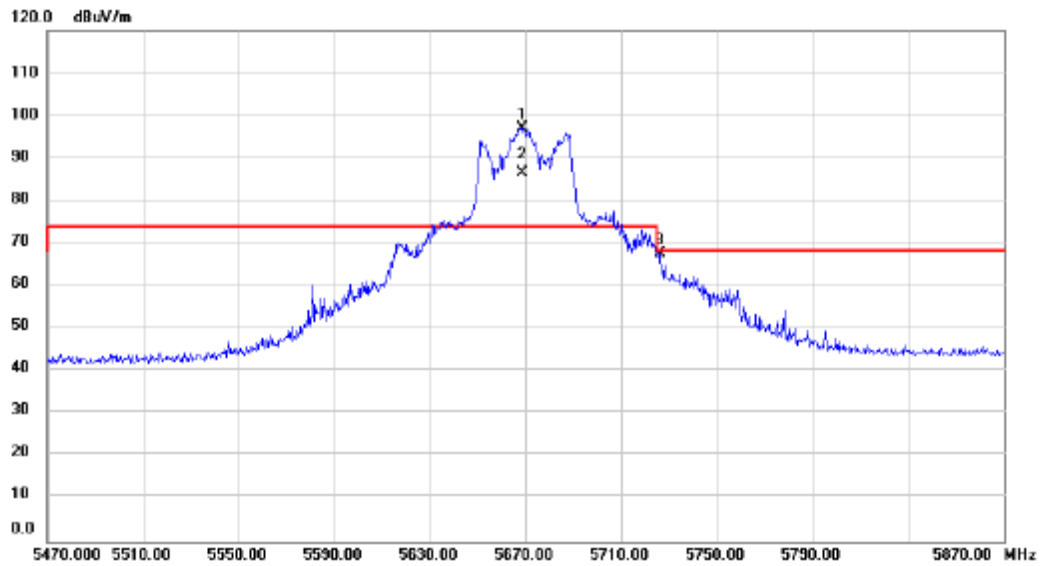


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5668.800	94.83	2.33	97.16	74.00	23.16	peak		No Limit
2	X	5668.800	84.32	2.33	86.65	74.00	12.65	AVG		No Limit
3		5726.000	65.11	2.42	67.53	68.20	-0.67	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/10/30
Test Frequency	5755MHz	Polarization	Vertical

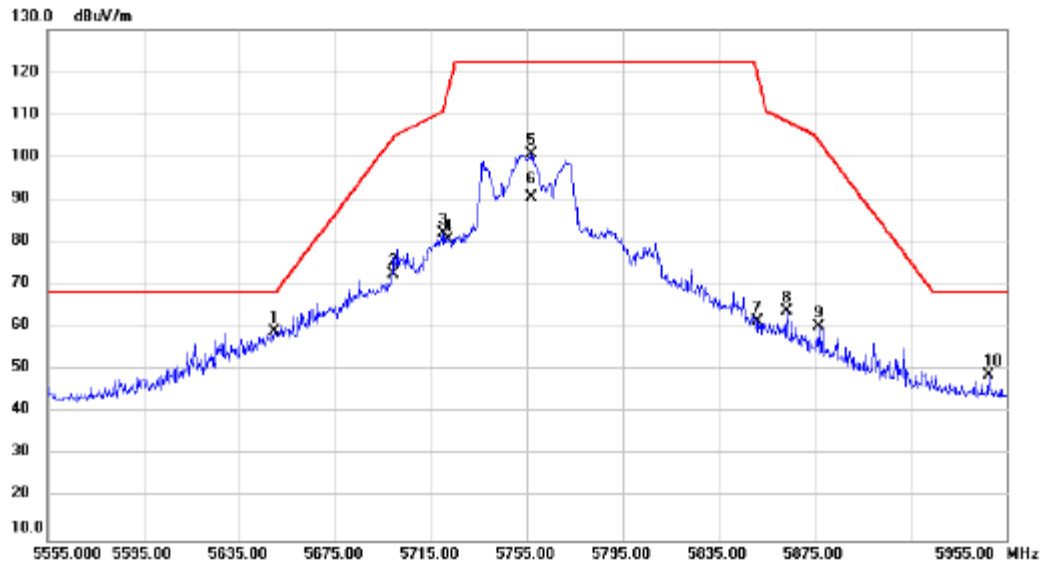


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1 *	5649.800	56.69	2.30	58.99	68.20	-9.21	peak			
2	5699.000	70.14	2.39	72.53	104.46	-31.93	peak			
3	5720.200	79.75	2.41	82.16	111.26	-29.10	peak			
4	5722.200	78.27	2.42	80.69	115.82	-35.13	peak			
5	5757.000	98.24	2.47	100.71	122.20	-21.49	peak			No Limit
6	5757.000	87.94	2.47	90.41	122.20	-31.79	AVG			No Limit
7	5851.400	58.73	2.62	61.35	119.01	-57.66	peak			
8	5863.400	61.23	2.64	63.87	108.45	-44.58	peak			
9	5877.000	57.69	2.66	60.35	103.71	-43.36	peak			
10	5947.800	46.12	2.77	48.89	68.20	-19.31	peak			

REMA

RKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/10/30
Test Frequency	5795MHz	Polarization	Vertical

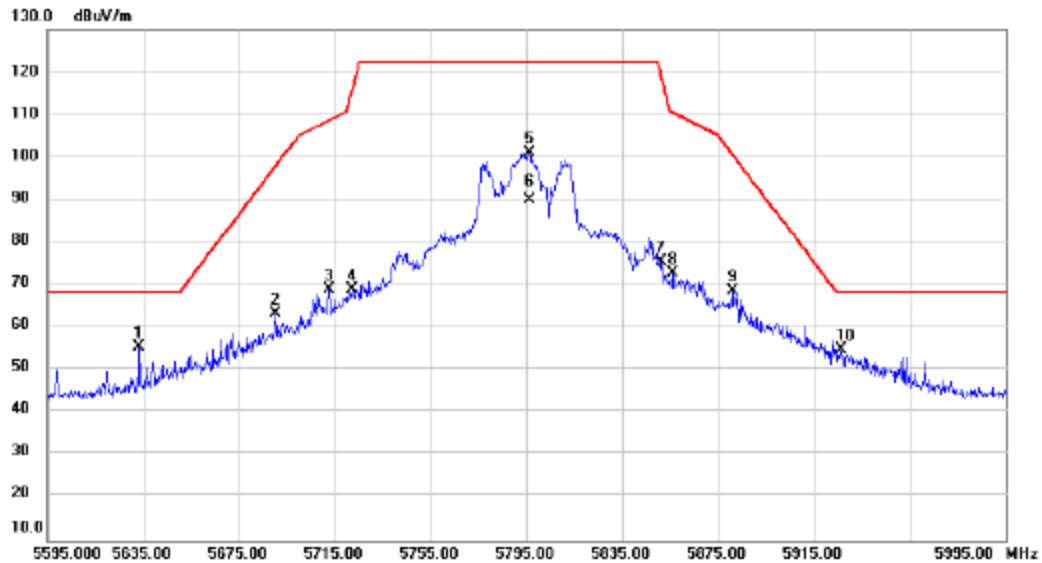


Io.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5633.400	53.30	2.28	55.58	68.20	-12.62	peak		
2		5690.200	60.90	2.37	63.27	97.97	-34.70	peak		
3		5712.600	66.53	2.40	68.93	108.73	-39.80	peak		
4		5722.200	66.46	2.42	68.88	115.82	-46.94	peak		
5		5796.200	98.53	2.54	101.07	122.20	-21.13	peak		No Limit
6		5796.200	87.33	2.54	89.87	122.20	-32.33	AVG		No Limit
7		5851.400	72.87	2.62	75.49	119.01	-43.52	peak		
8		5856.200	70.17	2.63	72.80	110.46	-37.66	peak		
9		5881.400	65.85	2.67	68.52	100.45	-31.93	peak		
10		5926.600	52.09	2.73	54.82	68.20	-13.38	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/10/30
Test Frequency	5210MHz	Polarization	Vertical

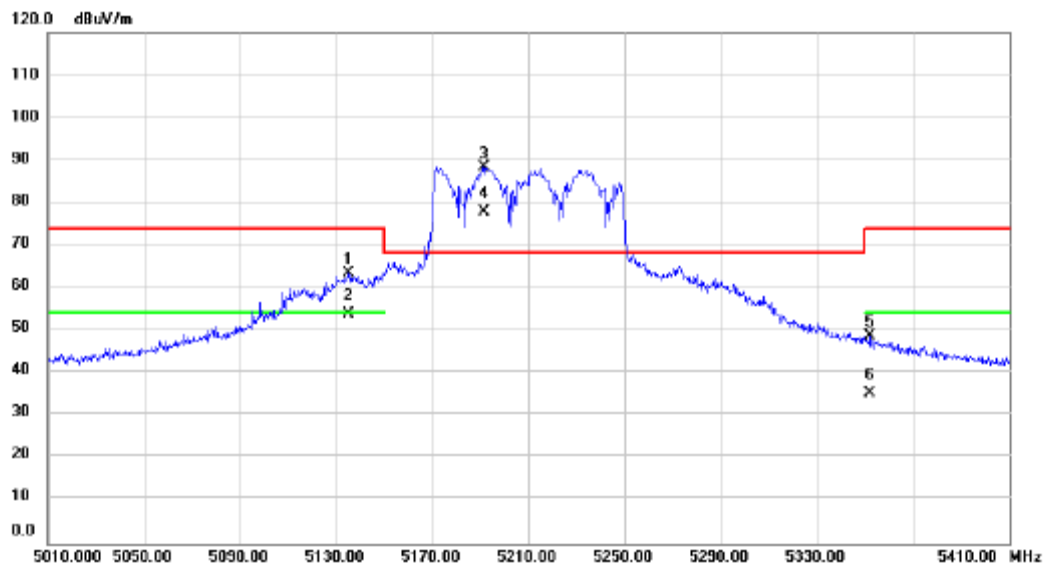


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5135.200	61.43	1.92	63.35	74.00	-10.65	peak		
2		5135.200	51.86	1.92	53.78	54.00	-0.22	AVG		
3	*	5191.600	86.41	1.94	88.35	68.20	20.15	peak		No Limit
4	X	5191.600	75.91	1.94	77.85	68.20	9.65	AVG		No Limit
5		5352.400	46.87	2.01	48.88	74.00	-25.12	peak		
6		5352.400	33.12	2.01	35.13	54.00	-18.87	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/10/30
Test Frequency	5290MHz	Polarization	Vertical

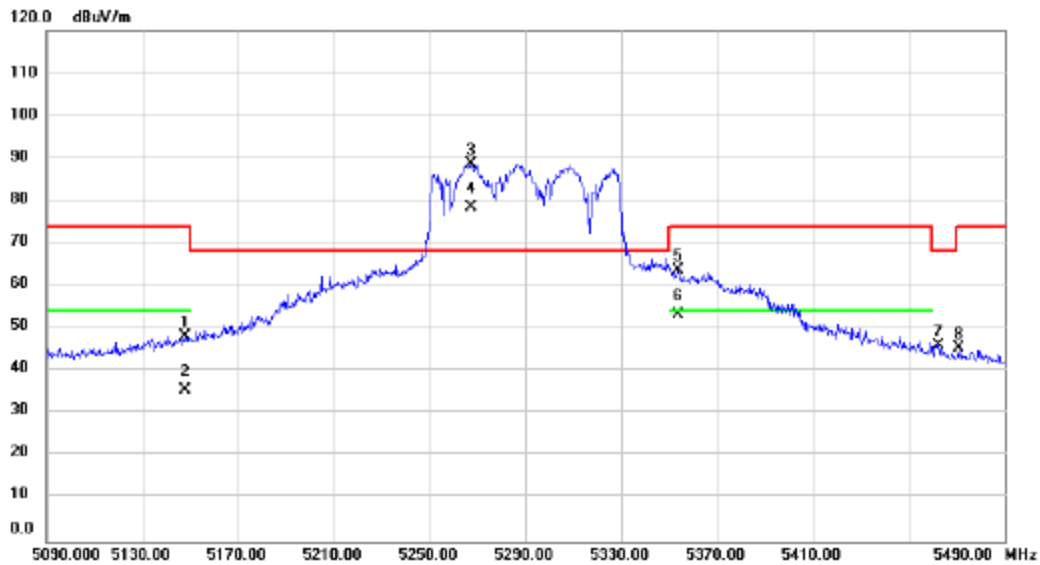


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5148.000	46.23	1.93	48.16	74.00	-25.84	peak		
2		5148.000	33.55	1.93	35.48	54.00	-18.52	AVG		
3	*	5267.200	86.60	1.98	88.58	68.20	20.38	peak		No Limit
4	X	5267.200	76.37	1.98	78.35	68.20	10.15	AVG		No Limit
5		5353.600	61.69	2.01	63.70	74.00	-10.30	peak		
6		5353.600	51.39	2.01	53.40	54.00	-0.60	AVG		
7		5462.400	44.05	2.06	46.11	68.20	-22.09	peak		
8		5470.800	43.40	2.05	45.45	74.00	-28.55	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/10/30
Test Frequency	5530MHz	Polarization	Vertical

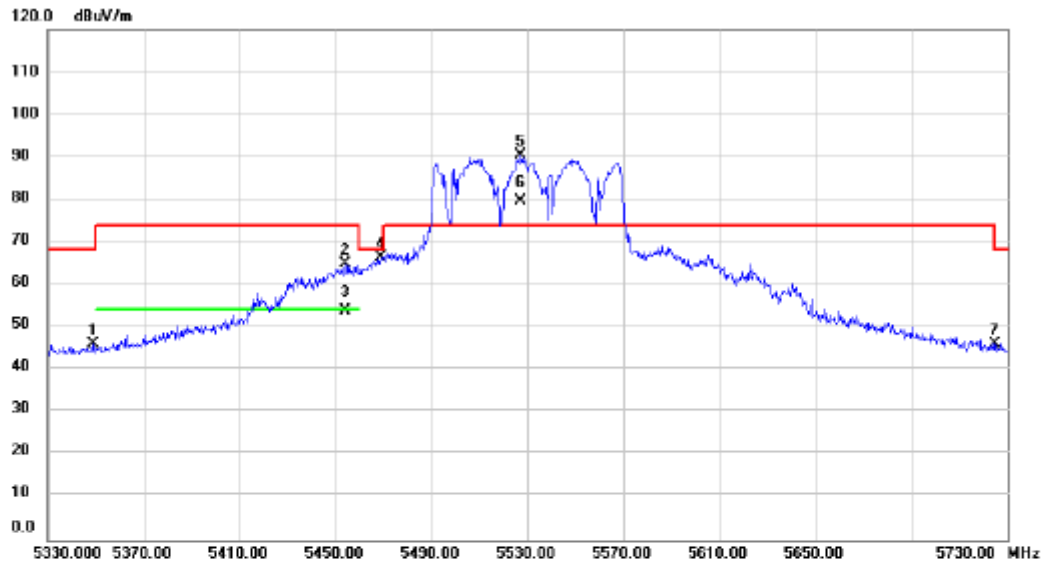


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		5348.800	44.17	2.01	46.18	68.20	-22.02	peak			
2		5454.000	62.89	2.05	64.94	74.00	-9.06	peak			
3		5454.000	51.68	2.05	53.73	54.00	-0.27	AVG			
4		5468.800	64.44	2.05	66.49	68.20	-1.71	peak			
5	*	5527.200	88.29	2.11	90.40	74.00	16.40	peak			No Limit
6	X	5527.200	77.55	2.11	79.66	74.00	5.66	AVG			No Limit
7		5724.800	43.77	2.42	46.19	74.00	-27.81	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/10/30
Test Frequency	5610MHz	Polarization	Vertical

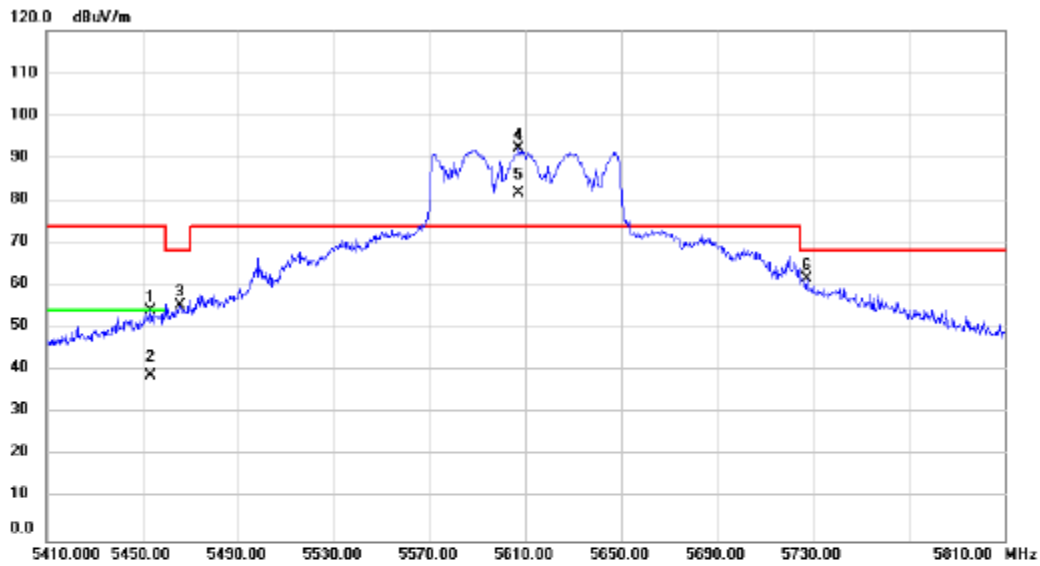


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5453.600	52.20	2.05	54.25	74.00	-19.75			peak
2		5453.600	36.67	2.05	38.72	54.00	-15.28			AVG
3		5465.600	53.34	2.05	55.39	68.20	-12.81			peak
4	*	5607.200	90.05	2.24	92.29	74.00	18.29			peak
5	X	5607.200	79.47	2.24	81.71	74.00	7.71			AVG
6		5727.600	59.30	2.42	61.72	68.20	-6.48			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/10/30
Test Frequency	5775MHz	Polarization	Vertical

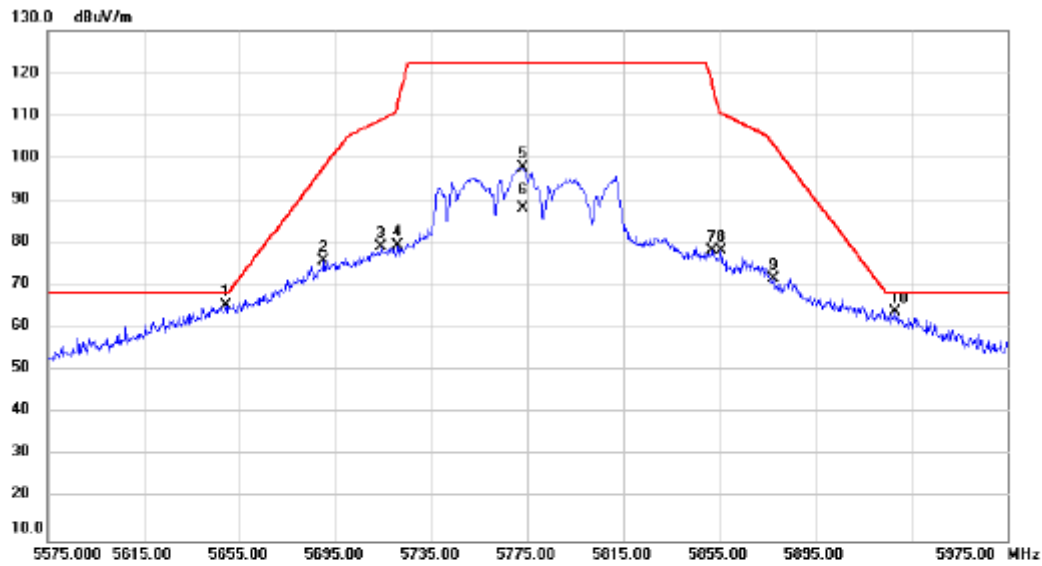


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5649.400	63.00	2.30	65.30	68.20	-2.90	peak		
2		5690.200	73.54	2.37	75.91	97.97	-22.06	peak		
3		5714.200	76.71	2.41	79.12	109.18	-30.06	peak		
4		5721.000	77.02	2.42	79.44	113.08	-33.64	peak		
5		5773.400	95.31	2.50	97.81	122.20	-24.39	peak		No Limit
6		5773.400	85.78	2.50	88.28	122.20	-33.92	AVG		No Limit
7		5852.200	75.58	2.62	78.20	117.18	-38.98	peak		
8		5855.800	75.58	2.63	78.21	110.58	-32.37	peak		
9		5877.800	69.07	2.66	71.73	103.12	-31.39	peak		
10		5928.200	61.09	2.73	63.82	68.20	-4.38	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/10/30
Test Frequency	5250MHz	Polarization	Vertical

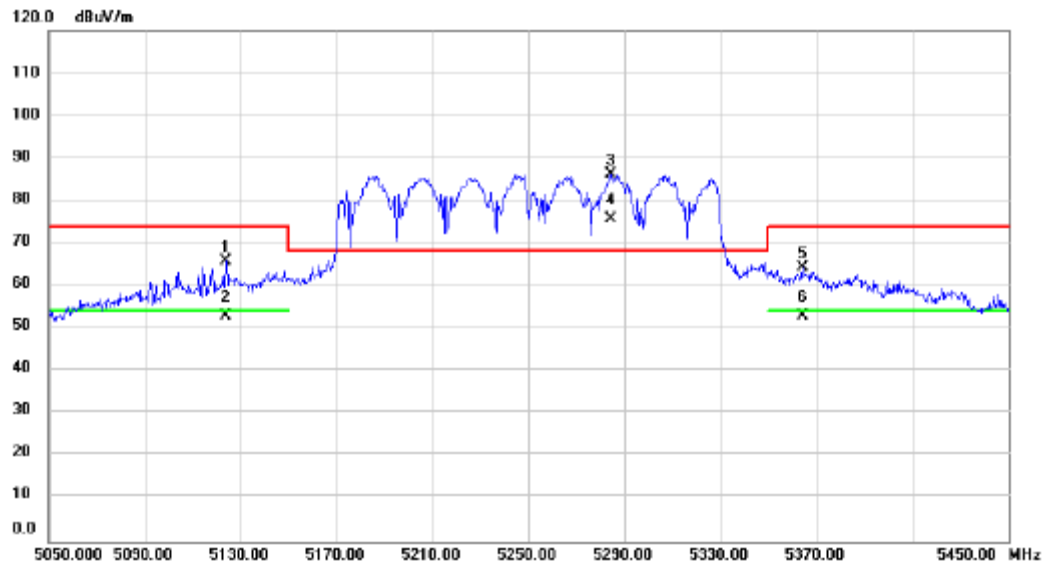


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5124.000	64.09	1.91	66.00	74.00	-8.00			peak
2		5124.000	51.12	1.91	53.03	54.00	-0.97			AVG
3	*	5284.400	84.24	1.99	86.23	68.20	18.03			No Limit
4	X	5284.400	73.80	1.99	75.79	68.20	7.59			No Limit
5		5364.400	62.26	2.02	64.28	74.00	-9.72			peak
6		5364.400	51.07	2.02	53.09	54.00	-0.91			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2024/10/30
Test Frequency	5570MHz	Polarization	Vertical

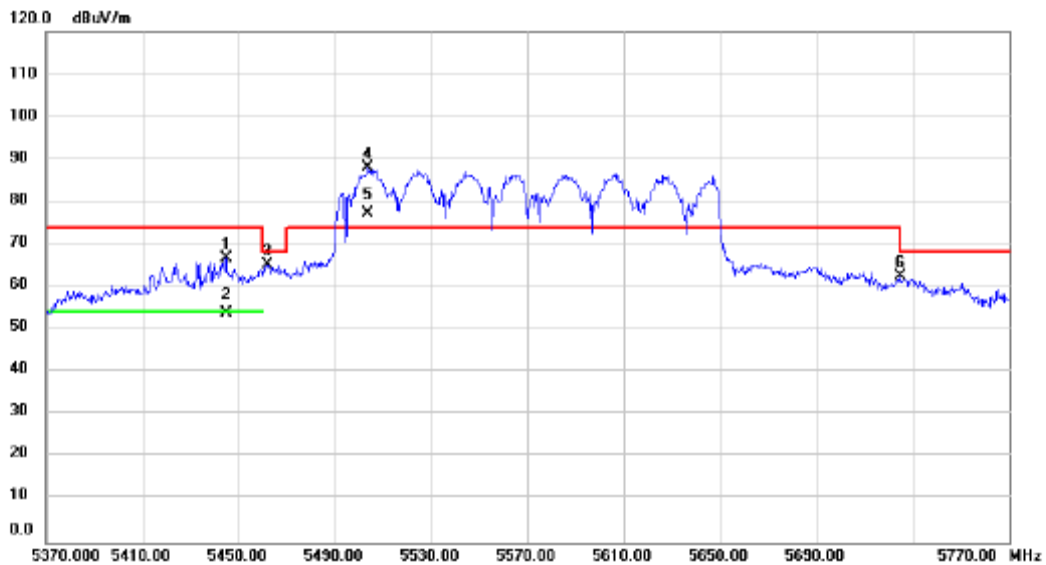


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5444.800	64.82	2.05	66.87	74.00	-7.13	peak		
2		5444.800	51.88	2.05	53.93	54.00	-0.07	AVG		
3		5462.000	63.25	2.06	65.31	68.20	-2.89	peak		
4	*	5503.600	85.89	2.07	87.96	74.00	13.96	peak		No Limit
5	X	5503.600	75.08	2.07	77.15	74.00	3.15	AVG		No Limit
6		5724.800	60.00	2.42	62.42	74.00	-11.58	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/11/4
Test Frequency	5180MHz	Polarization	Vertical

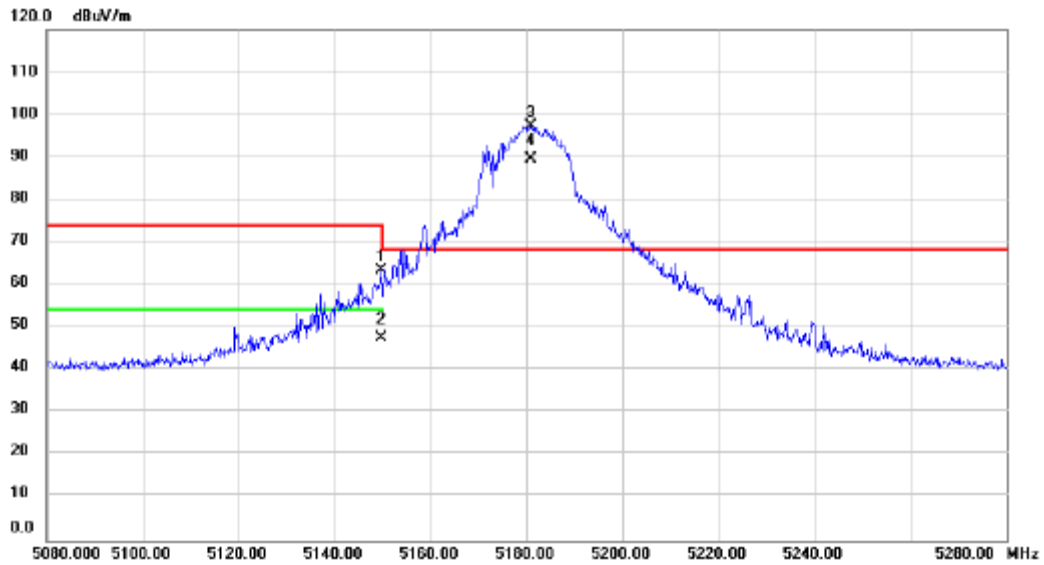


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	5149.800	61.67	1.93	63.60	74.00	-10.40	peak		
2	5149.800	45.74	1.93	47.67	54.00	-6.33	AVG		
3 *	5180.800	95.45	1.94	97.39	68.20	29.19	peak		No Limit
4 X	5180.800	87.52	1.94	89.46	68.20	21.26	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/11/4
Test Frequency	5240MHz	Polarization	Vertical

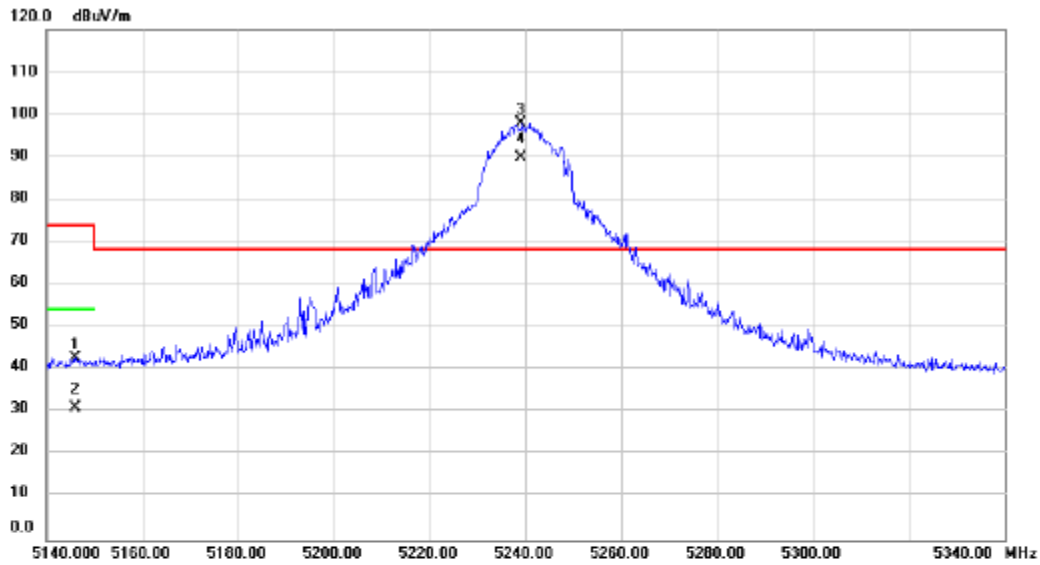


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5146.000	40.73	1.93	42.66	74.00	-31.34	peak		
2		5146.000	29.27	1.93	31.20	54.00	-22.80	AVG		
3	*	5239.200	96.06	1.96	98.02	68.20	29.82	peak		No Limit
4	X	5239.200	87.92	1.96	89.88	68.20	21.68	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/11/4
Test Frequency	5260MHz	Polarization	Vertical

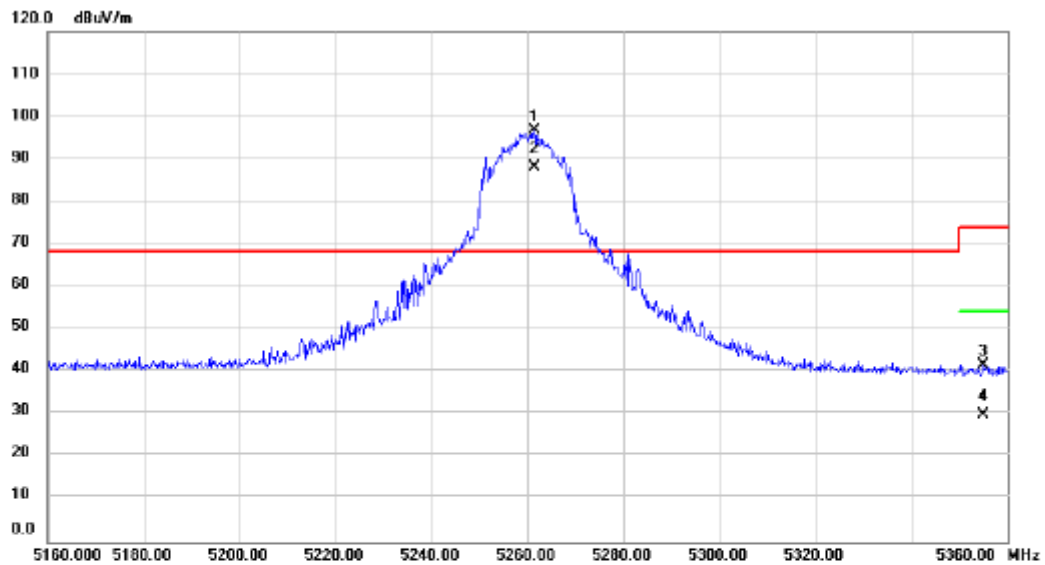


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5261.400	94.65	1.98	96.63	68.20	28.43	peak		No Limit
2	X	5261.400	86.13	1.98	88.11	68.20	19.91	AVG		No Limit
3		5355.200	39.69	2.00	41.69	74.00	-32.31	peak		
4		5355.200	27.98	2.00	29.98	54.00	-24.02	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/11/4
Test Frequency	5320MHz	Polarization	Vertical

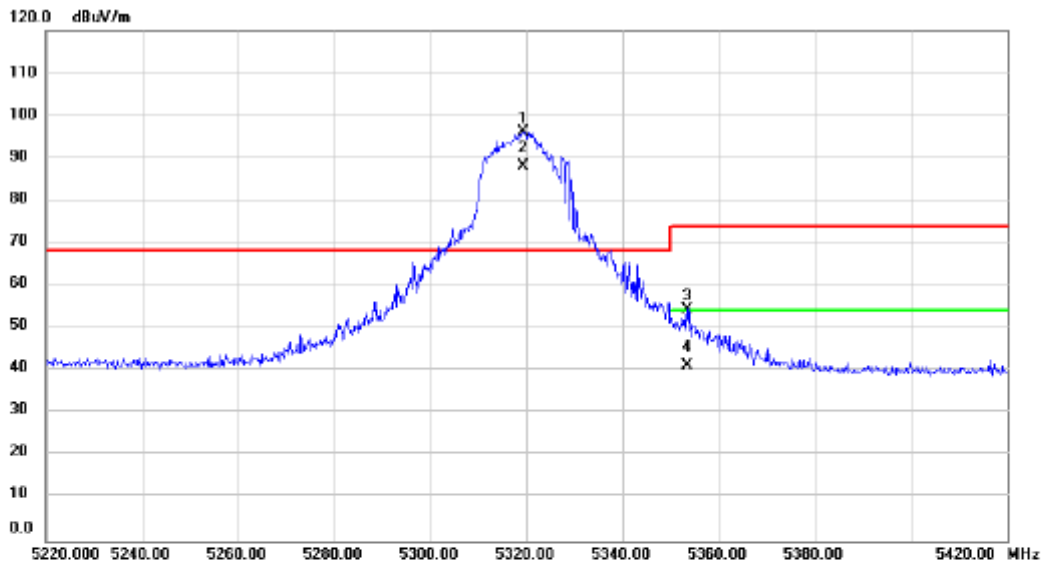


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5319.400	94.28	2.00	96.28	68.20	28.08	peak		No Limit
2	X	5319.400	86.05	2.00	88.05	68.20	19.85	AVG		No Limit
3		5353.400	52.44	2.01	54.45	74.00	-19.55	peak		
4		5353.400	39.33	2.01	41.34	54.00	-12.66	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/11/4
Test Frequency	5500MHz	Polarization	Vertical

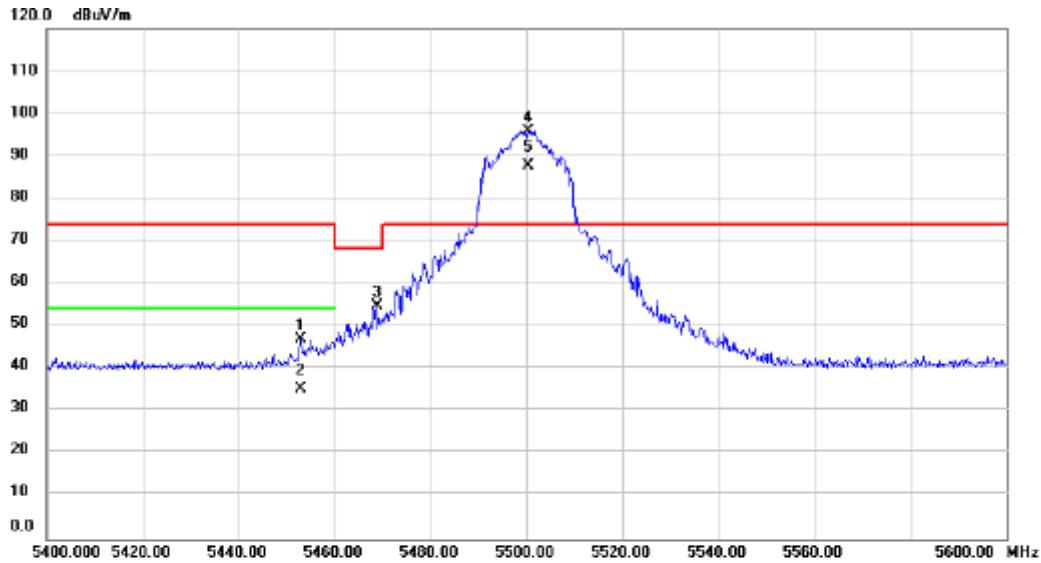


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5453.000	45.02	2.05	47.07	74.00	-26.93	peak		
2		5453.000	33.31	2.05	35.36	54.00	-18.64	AVG		
3		5468.800	52.77	2.05	54.82	68.20	-13.38	peak		
4	*	5500.400	93.89	2.07	95.96	74.00	21.96	peak		No Limit
5	X	5500.400	85.76	2.07	87.83	74.00	13.83	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/11/4
Test Frequency	5700MHz	Polarization	Vertical

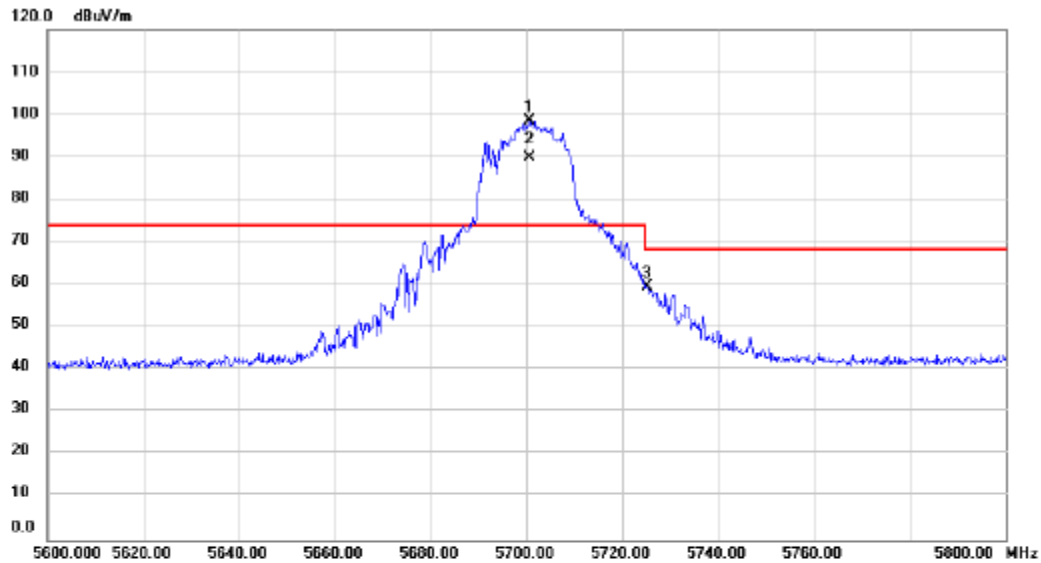


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5700.600	96.20	2.39	98.59	74.00	24.59	peak		No Limit
2	X	5700.600	87.41	2.39	89.80	74.00	15.80	AVG		No Limit
3		5725.200	57.11	2.42	59.53	68.20	-8.67	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/11/4
Test Frequency	5745MHz	Polarization	Vertical

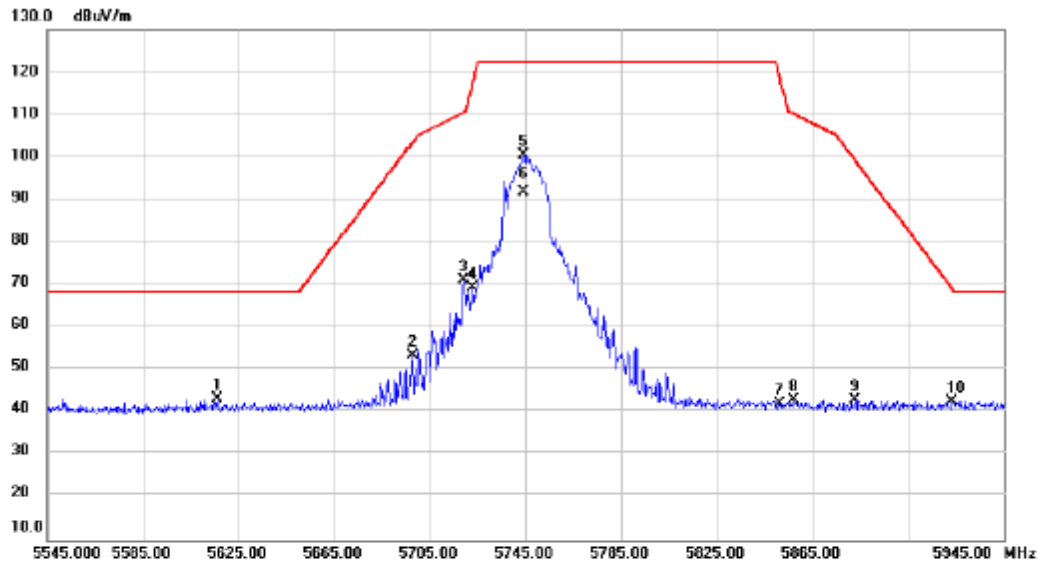


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	5616.200	41.00	2.25	43.25	68.20	-24.95	peak			
2	5697.800	50.84	2.38	53.22	103.58	-50.36	peak			
3	5719.000	68.69	2.41	71.10	110.52	-39.42	peak			
4	5723.000	66.80	2.42	69.22	117.64	-48.42	peak			
5 *	5744.200	97.96	2.45	100.41	122.20	-21.79	peak			No Limit
6	5744.200	89.20	2.45	91.65	122.20	-30.55	AVG			No Limit
7	5851.400	39.33	2.62	41.95	119.01	-77.06	peak			
8	5857.000	40.28	2.63	42.91	110.24	-67.33	peak			
9	5883.000	40.20	2.67	42.87	99.26	-56.39	peak			
10	5923.400	39.85	2.73	42.58	69.38	-26.80	peak			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/11/4
Test Frequency	5825MHz	Polarization	Vertical

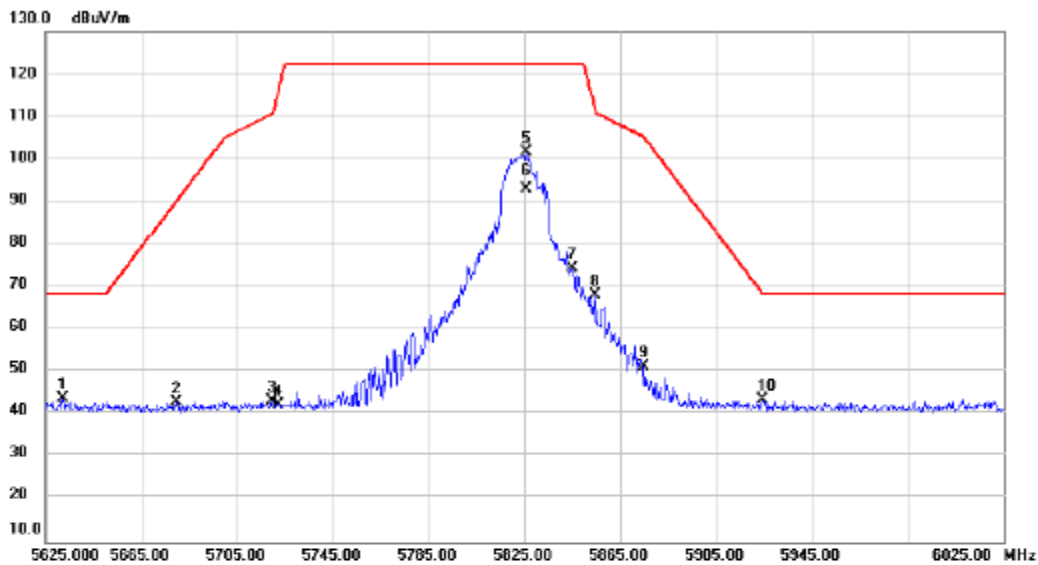

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5632.200	41.47	2.28	43.75	68.20	-24.45	peak			
2	5679.800	40.63	2.35	42.98	90.29	-47.31	peak			
3	5719.800	40.71	2.41	43.12	110.74	-67.62	peak			
4	5722.200	39.98	2.42	42.40	115.82	-73.42	peak			
5 *	5825.800	99.14	2.58	101.72	122.20	-20.48	peak			No Limit
6	5825.800	90.24	2.58	92.82	122.20	-29.38	AVG			No Limit
7	5845.000	71.61	2.60	74.21	122.20	-47.99	peak			
8	5854.600	65.28	2.63	67.91	111.71	-43.80	peak			
9	5875.000	48.47	2.66	51.13	105.20	-54.07	peak			
10	5924.600	40.68	2.73	43.41	68.49	-25.08	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/11/4
Test Frequency	5190MHz	Polarization	Vertical




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5135.600	63.21	1.92	65.13	74.00	-8.87	peak		
2		5135.600	51.18	1.92	53.10	54.00	-0.90	AVG		
3	*	5191.200	90.25	1.94	92.19	68.20	23.99	peak		No Limit
4	X	5191.200	81.42	1.94	83.36	68.20	15.16	AVG		No Limit
5		5371.200	39.79	2.01	41.80	74.00	-32.20	peak		
6		5371.200	29.19	2.01	31.20	54.00	-22.80	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/11/4
Test Frequency	5230MHz	Polarization	Vertical

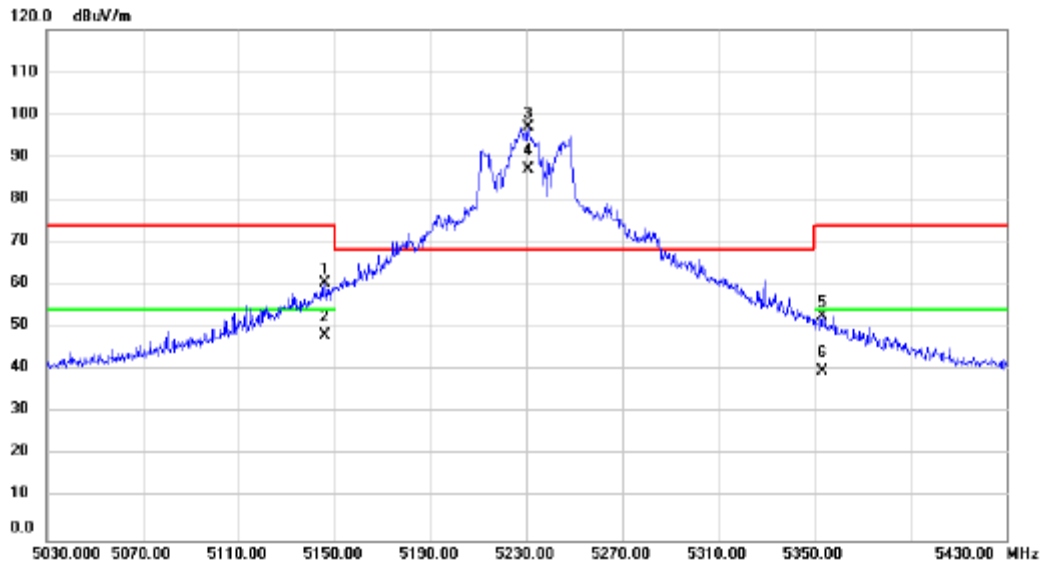


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5146.000	58.46	1.93	60.39	74.00	-13.61	peak		
2		5146.000	46.08	1.93	48.01	54.00	-5.99	AVG		
3	*	5230.800	95.13	1.96	97.09	68.20	28.89	peak		No Limit
4	X	5230.800	85.26	1.96	87.22	68.20	19.02	AVG		No Limit
5		5353.600	50.58	2.01	52.59	74.00	-21.41	peak		
6		5353.600	37.86	2.01	39.87	54.00	-14.13	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/11/4
Test Frequency	5270MHz	Polarization	Vertical

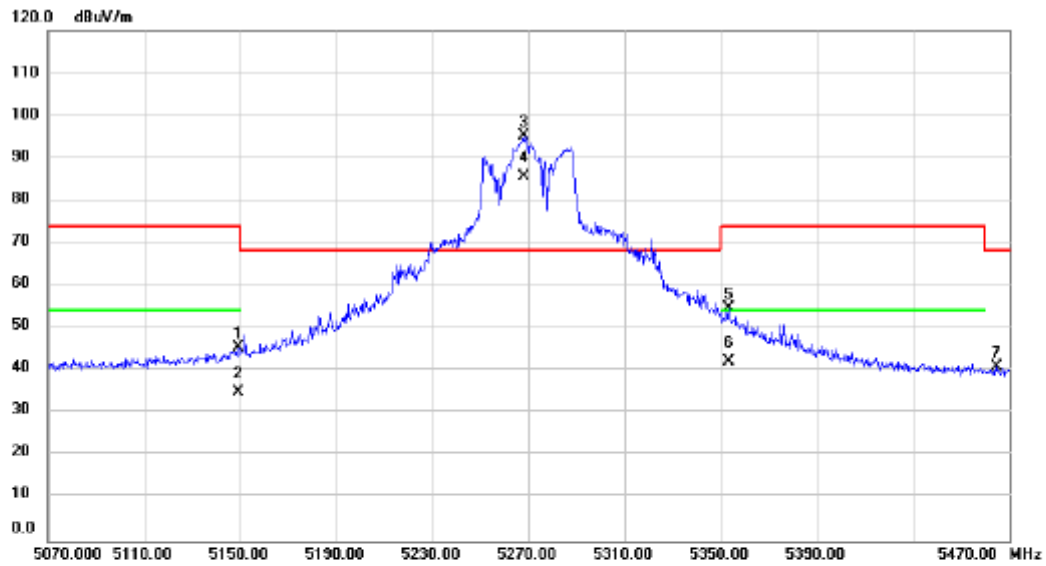

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	5149.200	43.41	1.93	45.34	74.00	-28.66	peak			
2	5149.200	32.88	1.93	34.81	54.00	-19.19	AVG			
3 *	5268.000	93.13	1.98	95.11	68.20	26.91	peak			No Limit
4 X	5268.000	83.78	1.98	85.76	68.20	17.56	AVG			No Limit
5	5353.600	52.63	2.01	54.64	74.00	-19.36	peak			
6	5353.600	40.10	2.01	42.11	54.00	-11.89	AVG			
7	5464.800	39.01	2.06	41.07	68.20	-27.13	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/11/4
Test Frequency	5310MHz	Polarization	Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5125.600	41.70	1.93	43.63	74.00	-30.37	peak		
2		5125.600	30.23	1.93	32.16	54.00	-21.84	AVG		
3	*	5307.200	91.14	1.99	93.13	68.20	24.93	peak		No Limit
4	X	5307.200	82.82	1.99	84.81	68.20	16.61	AVG		No Limit
5		5354.000	62.71	2.01	64.72	74.00	-9.28	peak		
6		5354.000	51.81	2.01	53.82	54.00	-0.18	AVG		
7		5467.200	39.64	2.05	41.69	68.20	-26.51	peak		
8		5492.800	39.51	2.08	41.59	74.00	-32.41	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/11/4
Test Frequency	5510MHz	Polarization	Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5324.000	41.08	2.00	43.08	68.20	-25.12	peak		
2		5454.000	65.71	2.05	67.76	74.00	-6.24	peak		
3		5454.000	51.55	2.05	53.60	54.00	-0.40	AVG		
4		5468.800	64.14	2.05	66.19	68.20	-2.01	peak		
5	*	5510.800	92.79	2.09	94.88	74.00	20.88	peak		No Limit
6	X	5510.800	83.40	2.09	85.49	74.00	11.49	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/11/4
Test Frequency	5670MHz	Polarization	Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5670.400	94.35	2.34	96.69	74.00	22.69	peak		
2	X	5670.400	84.57	2.34	86.91	74.00	12.91	AVG		
3		5725.600	65.32	2.42	67.74	68.20	-0.46	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/11/4
Test Frequency	5755MHz	Polarization	Vertical




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5647.400	53.90	2.30	56.20	68.20	-12.00	peak		
2		5698.600	67.55	2.39	69.94	104.17	-34.23	peak		
3		5720.200	77.54	2.41	79.95	111.26	-31.31	peak		
4		5720.200	77.54	2.41	79.95	111.26	-31.31	peak		
5		5756.200	96.23	2.47	98.70	122.20	-23.50	peak		No Limit
6		5756.200	86.89	2.47	89.36	122.20	-32.84	A/VG		No Limit
7		5849.000	53.68	2.62	56.30	122.20	-65.90	peak		
8		5862.200	55.39	2.63	58.02	108.78	-50.76	peak		
9		5881.000	50.84	2.67	53.51	100.74	-47.23	peak		
10		5952.600	41.68	2.78	44.46	68.20	-23.74	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/11/4
Test Frequency	5795MHz	Polarization	Vertical

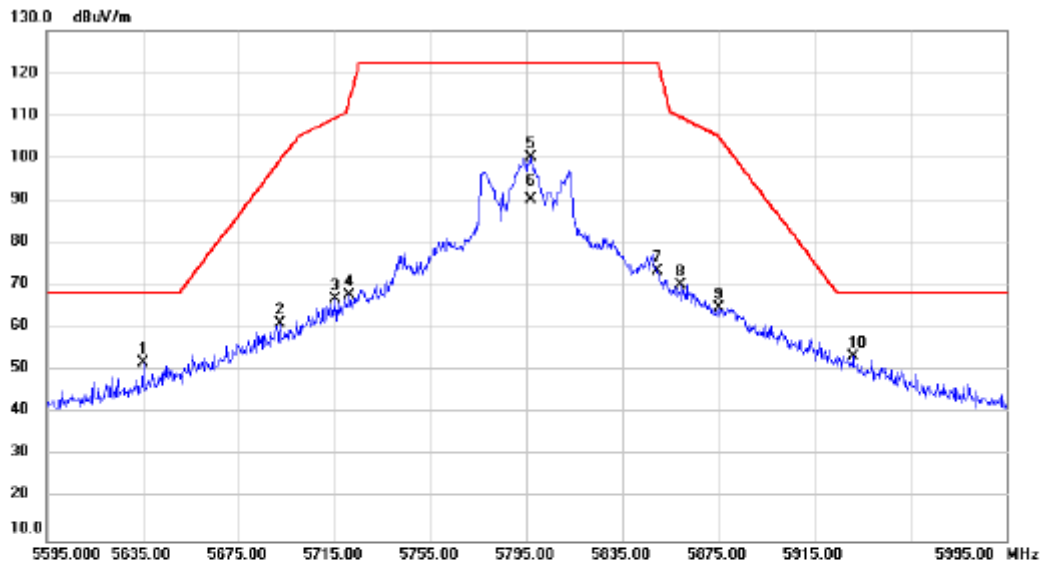


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	5635.000	49.63	2.28	51.91	68.20	-16.29	peak			
2	5692.200	58.77	2.37	61.14	99.45	-38.31	peak			
3	5715.400	64.46	2.41	66.87	109.51	-42.64	peak			
4	5721.400	65.42	2.42	67.84	113.99	-46.15	peak			
5	5797.000	97.53	2.53	100.06	122.20	-22.14	peak			No Limit
6	5797.000	87.81	2.53	90.34	122.20	-31.86	AVG			No Limit
7	5849.800	70.76	2.62	73.38	122.20	-48.82	peak			
8	5859.400	67.63	2.62	70.25	109.57	-39.32	peak			
9	5875.400	62.15	2.66	64.81	104.90	-40.09	peak			
10 *	5931.000	50.52	2.74	53.26	68.20	-14.94	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/11/4
Test Frequency	5210MHz	Polarization	Vertical

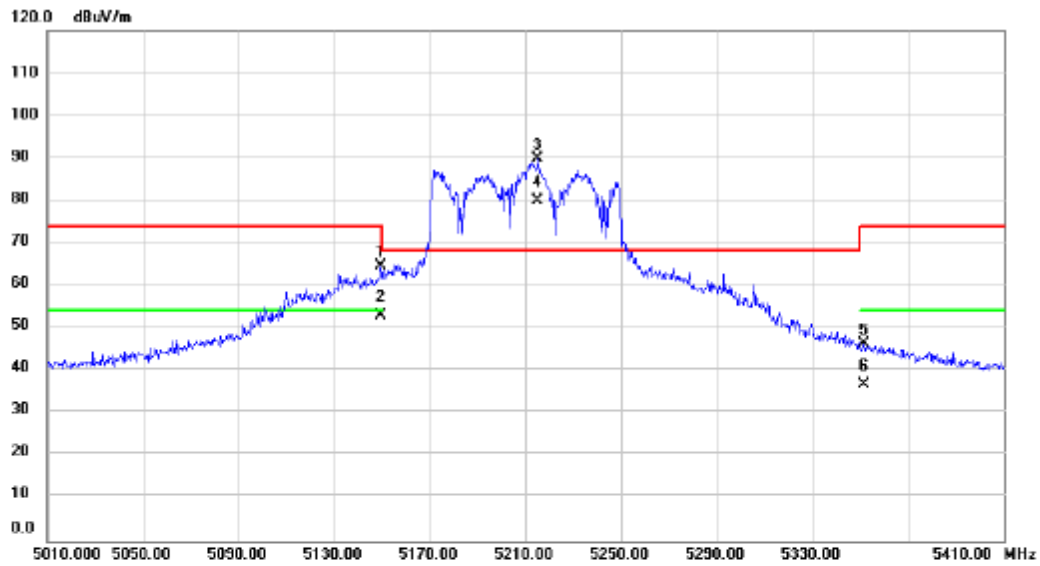


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5149.600	62.70	1.93	64.63	74.00	-9.37	peak			
2		5149.600	51.13	1.93	53.06	54.00	-0.94	AVG			
3	*	5215.200	87.85	1.96	89.81	68.20	21.61	peak			No Limit
4	X	5215.200	77.95	1.96	79.91	68.20	11.71	AVG			No Limit
5		5351.600	44.32	2.01	46.33	74.00	-27.67	peak			
6		5351.600	34.76	2.01	36.77	54.00	-17.23	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/11/4
Test Frequency	5290MHz	Polarization	Vertical

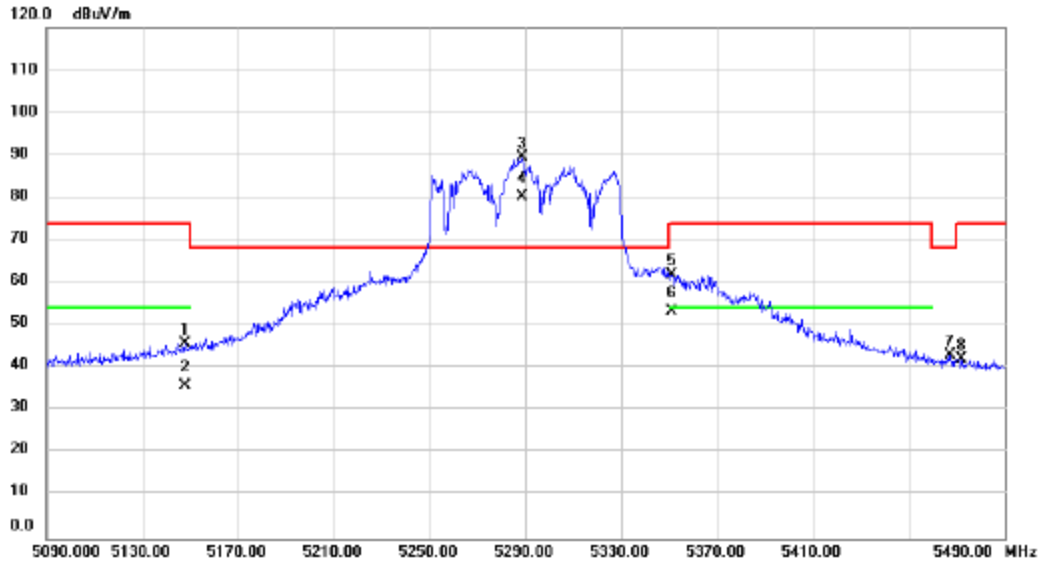


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5147.600	43.74	1.93	45.67	74.00	-28.33	peak		
2		5147.600	33.95	1.93	35.88	54.00	-18.12	AVG		
3	*	5288.800	87.60	1.98	89.58	68.20	21.38	peak		No Limit
4	X	5288.800	78.13	1.98	80.11	68.20	11.91	AVG		No Limit
5		5351.200	60.04	2.01	62.05	74.00	-11.95	peak		
6		5351.200	51.26	2.01	53.27	54.00	-0.73	AVG		
7		5467.200	40.87	2.05	42.92	68.20	-25.28	peak		
8		5472.400	40.01	2.06	42.07	74.00	-31.93	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/11/4
Test Frequency	5530MHz	Polarization	Vertical

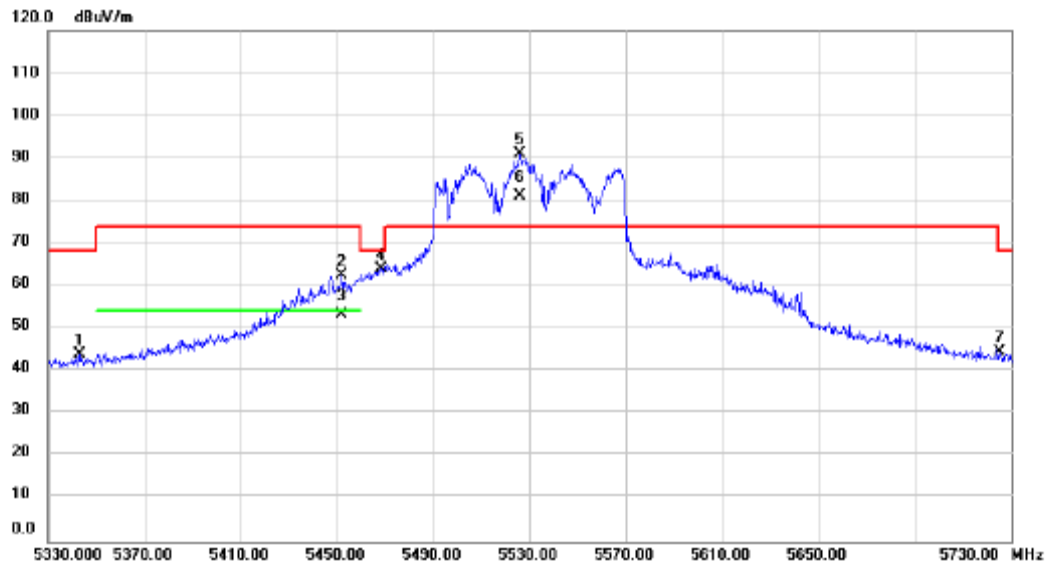


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5342.800	41.80	2.01	43.81	68.20	-24.39	peak		
2		5452.000	60.36	2.05	62.41	74.00	-11.59	peak		
3		5452.000	51.21	2.05	53.26	54.00	-0.74	AVG		
4		5468.400	62.07	2.05	64.12	68.20	-4.08	peak		
5	*	5526.000	88.95	2.11	91.06	74.00	17.06	peak		No Limit
6	X	5526.000	79.03	2.11	81.14	74.00	7.14	AVG		No Limit
7		5725.600	42.26	2.42	44.68	68.20	-23.52	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/11/4
Test Frequency	5610MHz	Polarization	Vertical

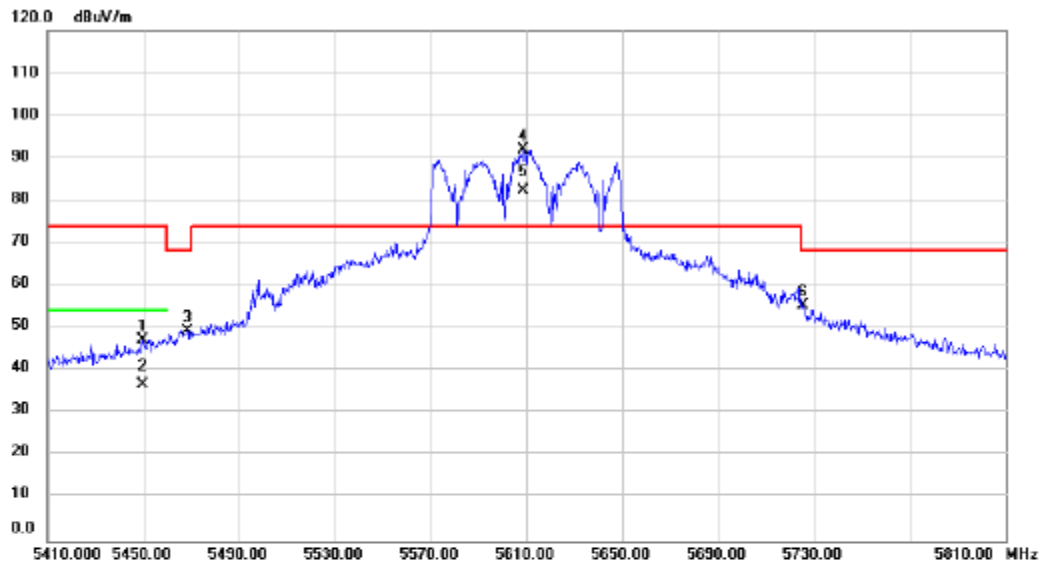


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5449.600	45.32	2.05	47.37	74.00	-26.63	peak		
2		5449.600	34.81	2.05	36.86	54.00	-17.14	AVG		
3		5468.400	47.35	2.05	49.40	68.20	-18.80	peak		
4	*	5608.800	89.73	2.24	91.97	74.00	17.97	peak		No Limit
5	X	5608.800	80.20	2.24	82.44	74.00	8.44	AVG		No Limit
6		5725.600	53.04	2.42	55.46	68.20	-12.74	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/11/4
Test Frequency	5775MHz	Polarization	Vertical

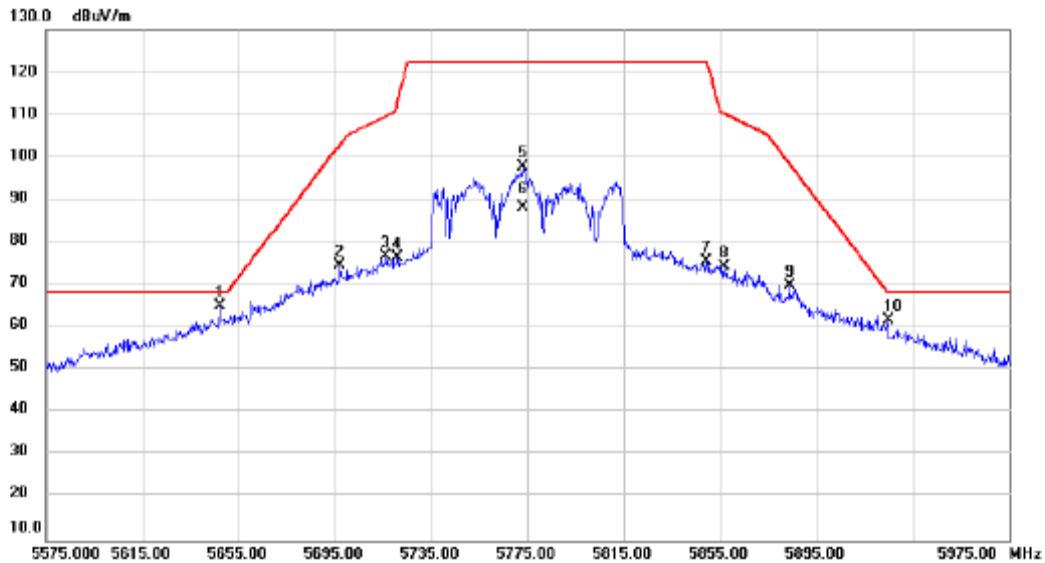


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1 *	5647.000	62.60	2.30	64.90	68.20	-3.30	peak			
2	5697.000	72.24	2.38	74.62	102.99	-28.37	peak			
3	5716.200	74.23	2.41	76.64	109.74	-33.10	peak			
4	5721.000	74.00	2.42	76.42	113.08	-36.66	peak			
5	5773.000	95.11	2.50	97.61	122.20	-24.59	peak			No Limit
6	5773.000	85.71	2.50	88.21	122.20	-33.99	A/VG			No Limit
7	5849.400	72.97	2.62	75.59	122.20	-46.61	peak			
8	5856.600	71.69	2.63	74.32	110.35	-36.03	peak			
9	5883.800	67.27	2.67	69.94	98.67	-28.73	peak			
10	5925.000	59.08	2.73	61.81	68.20	-6.39	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2024/11/4
Test Frequency	5250MHz	Polarization	Vertical

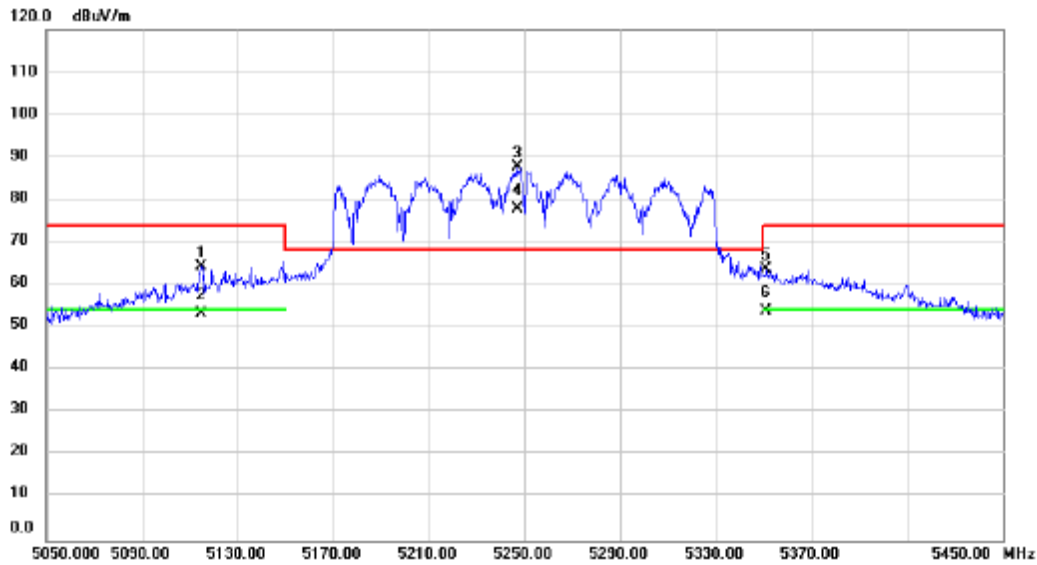


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5114.800	62.37	1.92	64.29	74.00	-9.71	peak		
2		5114.800	51.29	1.92	53.21	54.00	-0.79	AVG		
3	*	5247.200	85.91	1.97	87.88	68.20	19.68	peak		No Limit
4	X	5247.200	75.80	1.97	77.77	68.20	9.57	AVG		No Limit
5		5351.200	61.66	2.01	63.67	74.00	-10.33	peak		
6		5351.200	51.73	2.01	53.74	54.00	-0.26	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2024/11/4
Test Frequency	5570MHz	Polarization	Vertical

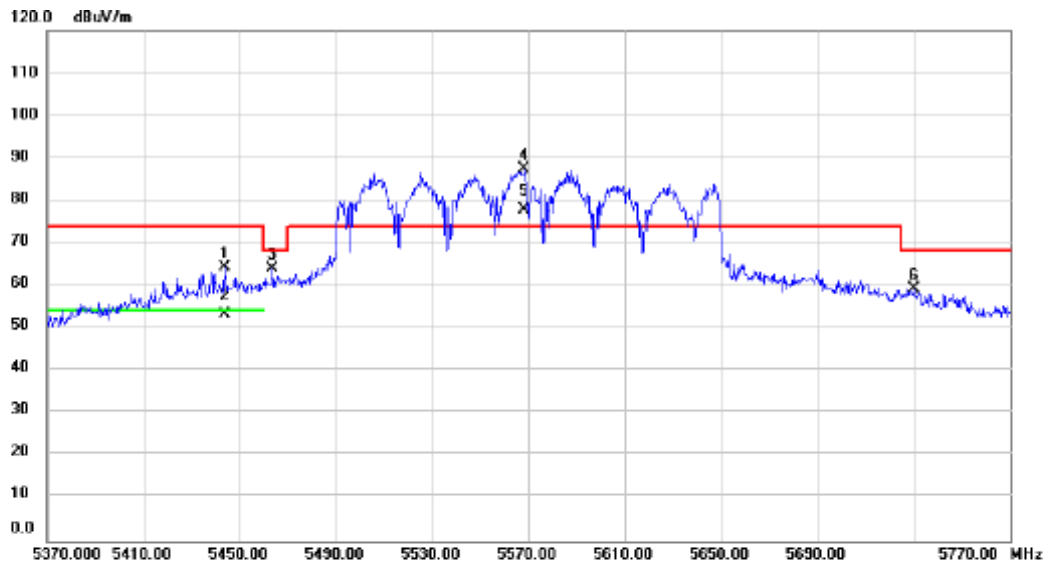


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5444.000	62.22	2.05	64.27	74.00	-9.73	peak		
2		5444.000	51.14	2.05	53.19	54.00	-0.81	AVG		
3		5463.600	62.13	2.06	64.19	68.20	-4.01	peak		
4	*	5568.400	85.15	2.18	87.33	74.00	13.33	peak		No Limit
5	X	5568.400	75.80	2.18	77.98	74.00	3.98	AVG		No Limit
6		5730.400	56.86	2.44	59.30	68.20	-8.90	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/4
Test Frequency	5180MHz	Polarization	Vertical

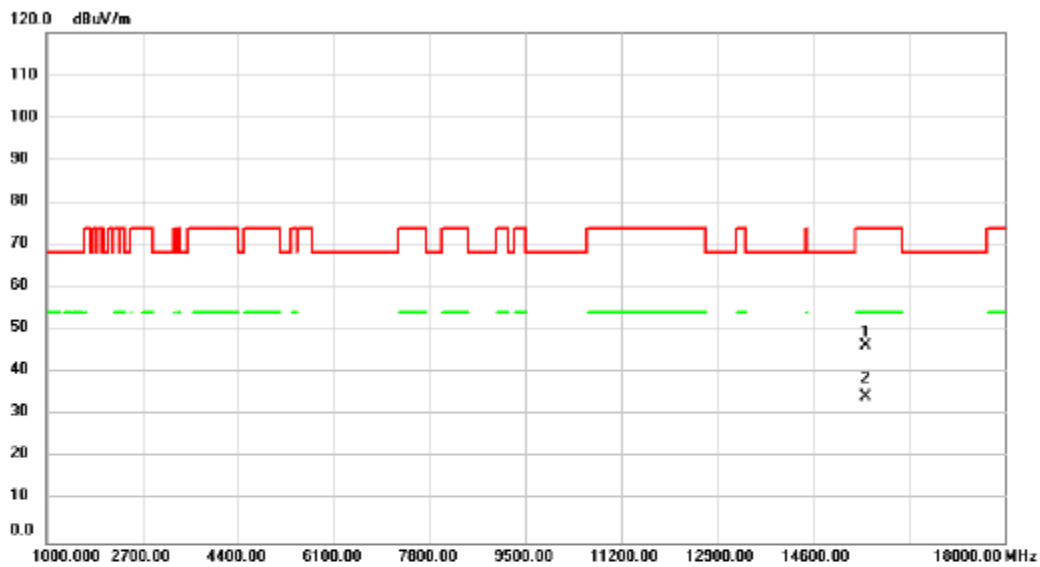


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15535.00	41.87	4.55	46.42	74.00	-27.58	peak		
2	*	15535.00	29.92	4.55	34.47	54.00	-19.53	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/4
Test Frequency	5180MHz	Polarization	Horizontal

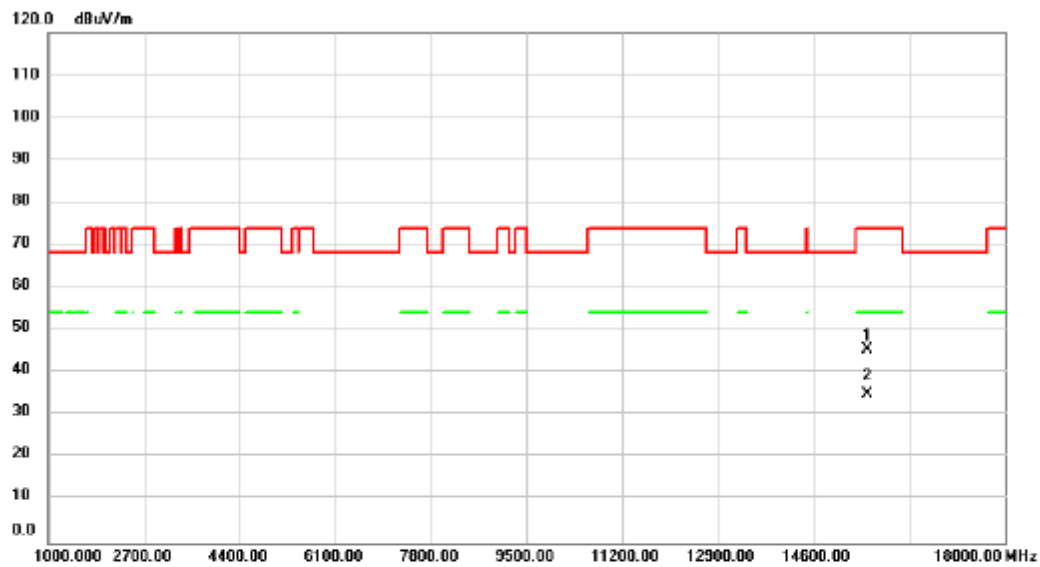


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15552.00	40.83	4.57	45.40	74.00	-28.60	peak		
2	*	15552.00	30.43	4.57	35.00	54.00	-19.00	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5200MHz	Polarization	Vertical

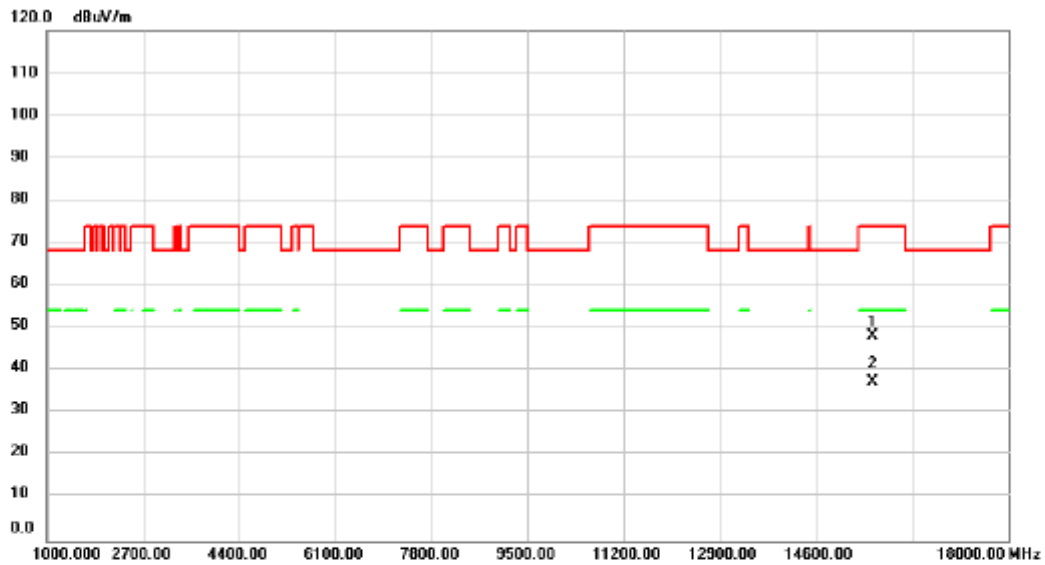


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15603.00	43.38	4.63	48.01	74.00	-25.99	peak		
2	*	15603.00	32.67	4.63	37.30	54.00	-16.70	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5200MHz	Polarization	Horizontal

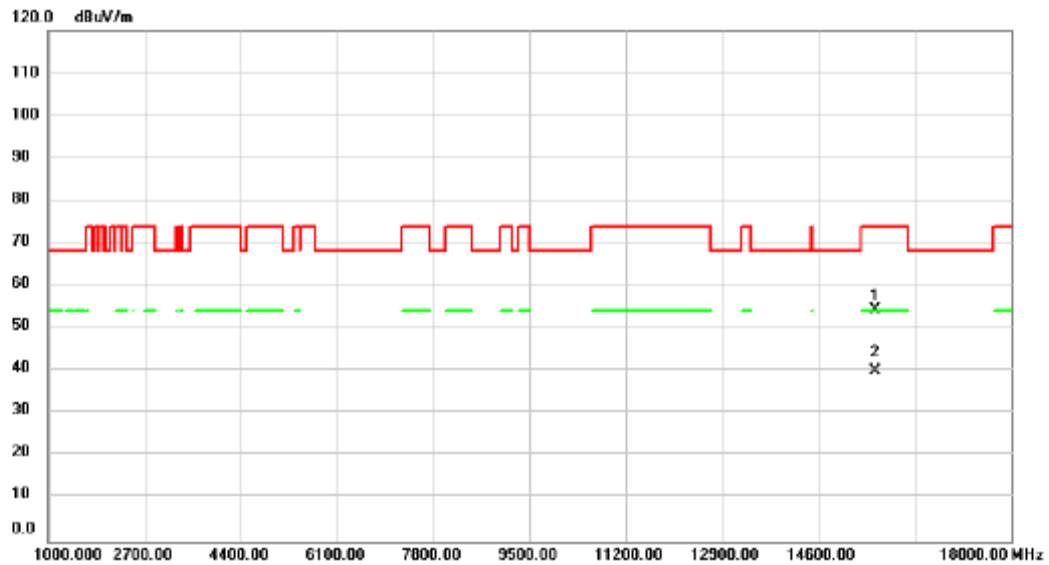


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15603.00	49.74	4.63	54.37	74.00	-19.63	peak		
2	*	15603.00	35.31	4.63	39.94	54.00	-14.06	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5240MHz	Polarization	Vertical

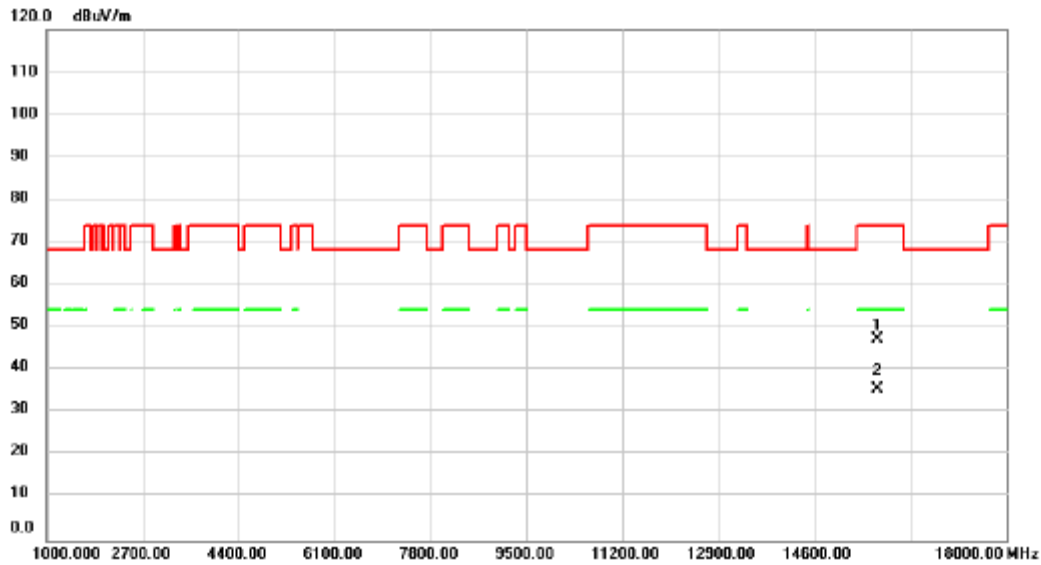


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15722.00	42.59	4.77	47.36	74.00	-26.64	peak		
2	*	15722.00	30.86	4.77	35.63	54.00	-18.37	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5240MHz	Polarization	Horizontal

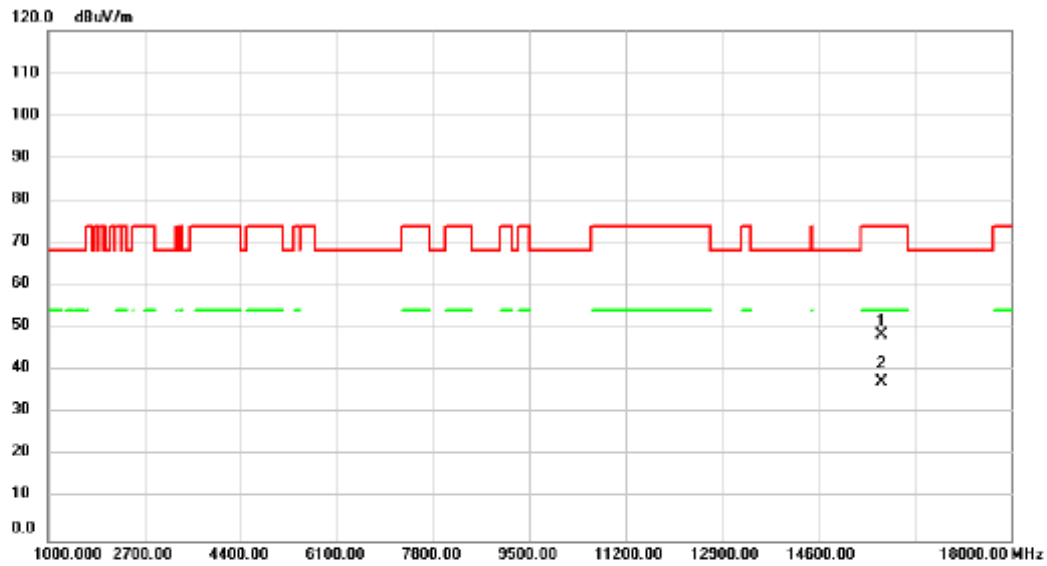


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15722.00	43.59	4.77	48.36	74.00	-25.64	peak		
2	*	15722.00	32.50	4.77	37.27	54.00	-16.73	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5260MHz	Polarization	Vertical

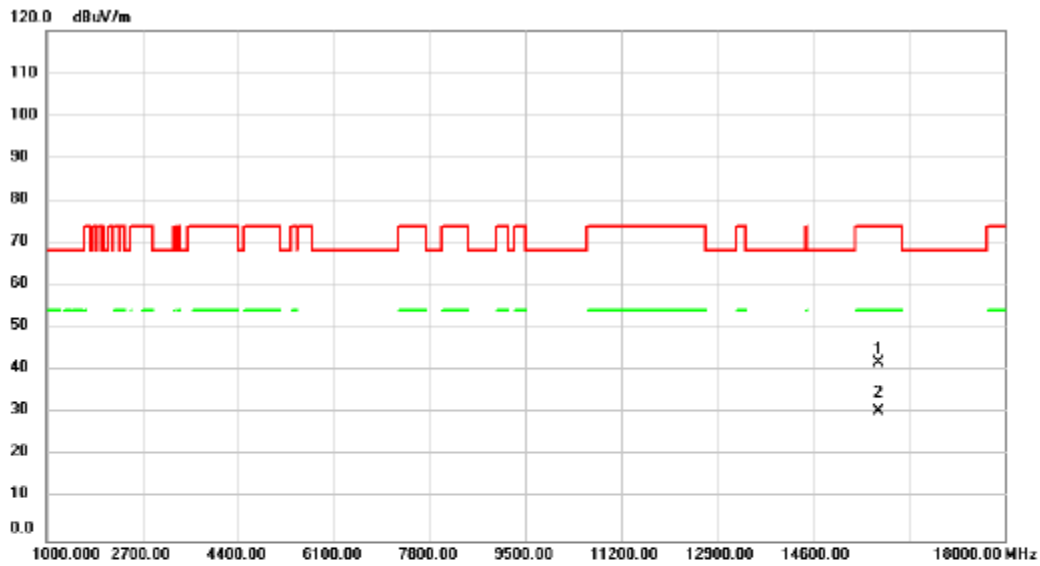


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15773.00	36.90	4.83	41.73	74.00	-32.27	peak		
2	*	15773.00	25.71	4.83	30.54	54.00	-23.46	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5260MHz	Polarization	Horizontal

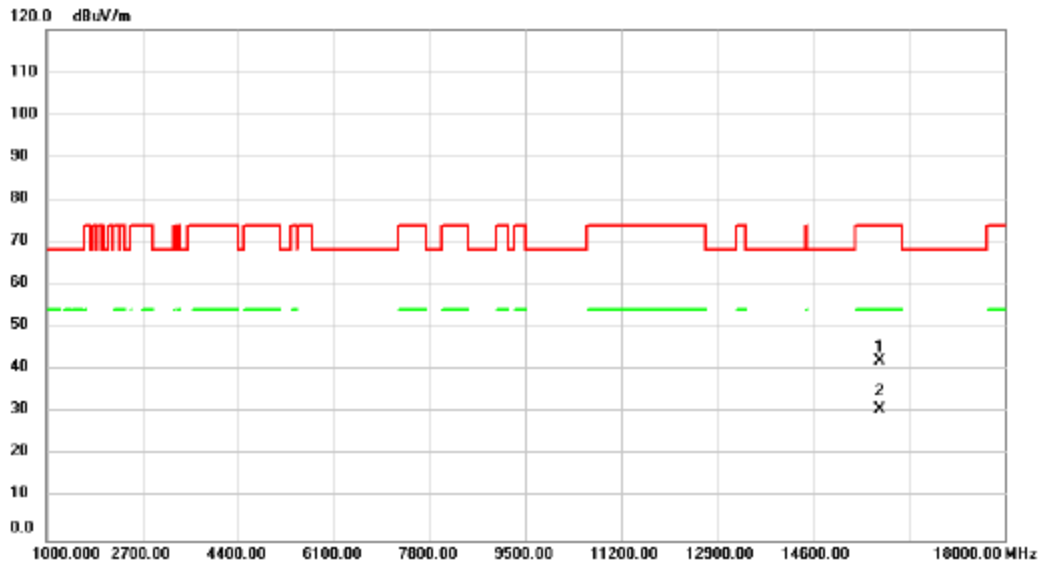


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		15790.00	37.20	4.85	42.05	74.00	-31.95	peak	
2	*	15790.00	25.83	4.85	30.68	54.00	-23.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5300MHz	Polarization	Vertical

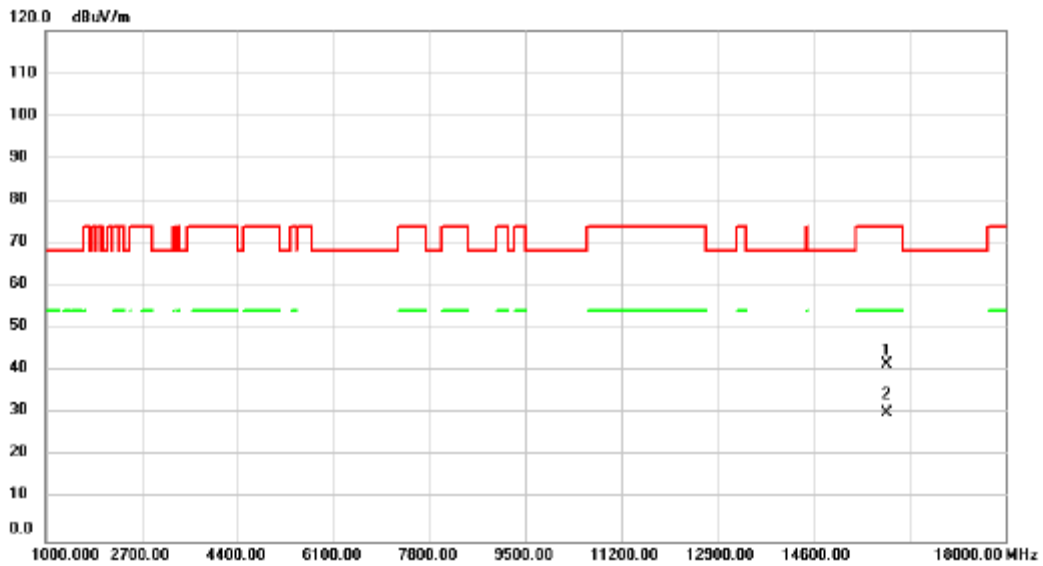


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15892.00	36.53	4.97	41.50	74.00	-32.50	peak		
2	*	15892.00	25.29	4.97	30.26	54.00	-23.74	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5300MHz	Polarization	Horizontal

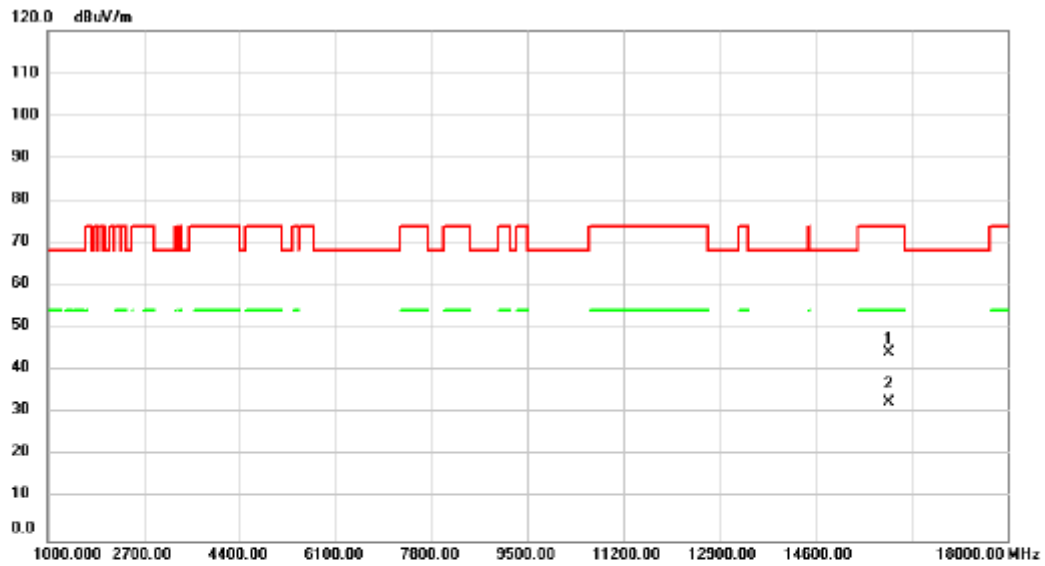


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15892.00	39.26	4.97	44.23	74.00	-29.77	peak		
2	*	15892.00	27.57	4.97	32.54	54.00	-21.46	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5320MHz	Polarization	Vertical

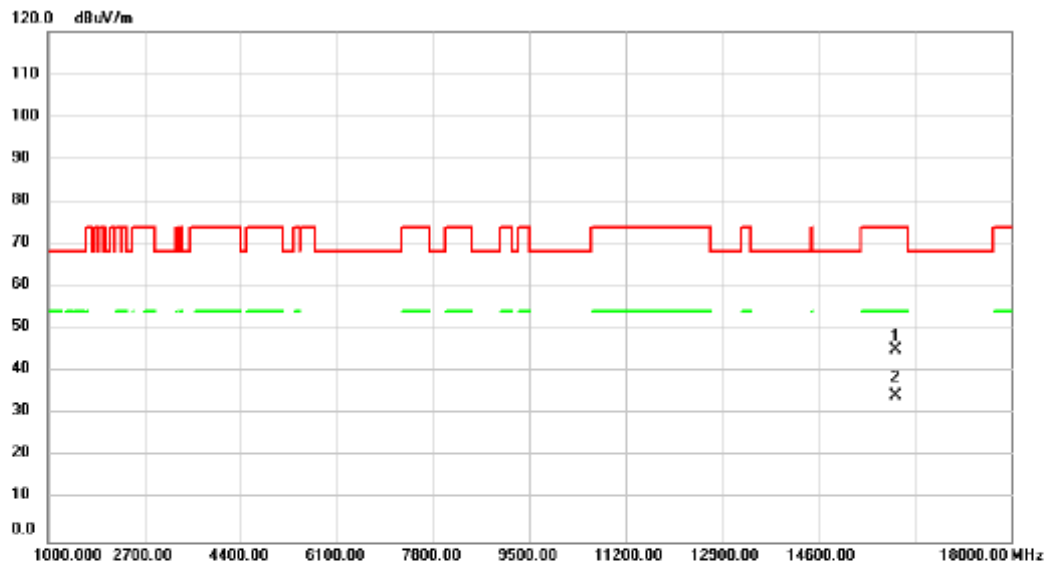


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15960.00	40.19	5.06	45.25	74.00	-28.75	peak		
2	*	15960.00	29.30	5.06	34.36	54.00	-19.64	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5320MHz	Polarization	Horizontal

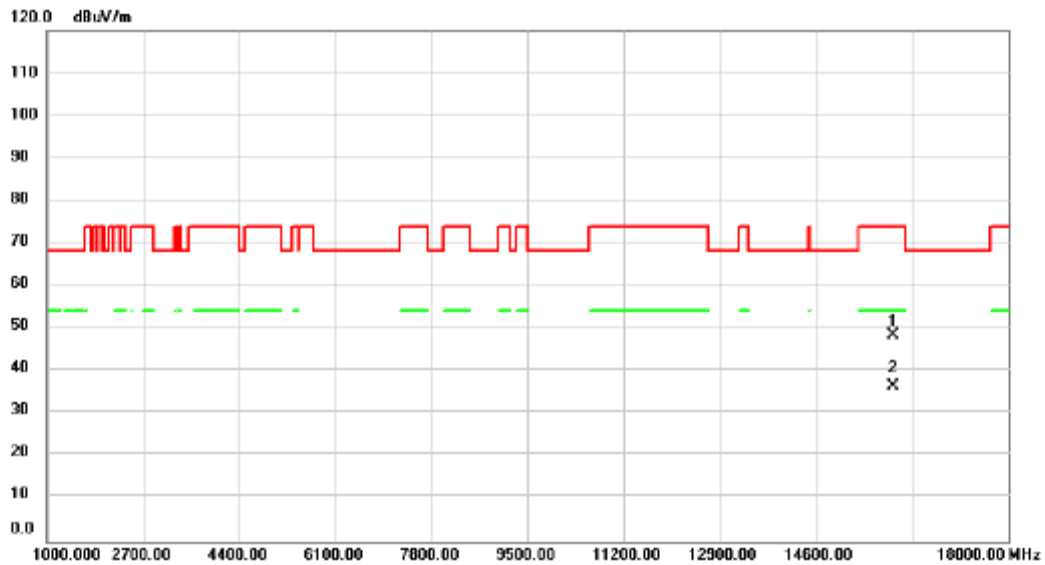


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15960.00	43.49	5.06	48.55	74.00	-25.45	peak		
2	*	15960.00	31.30	5.06	36.36	54.00	-17.64	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5500MHz	Polarization	Vertical

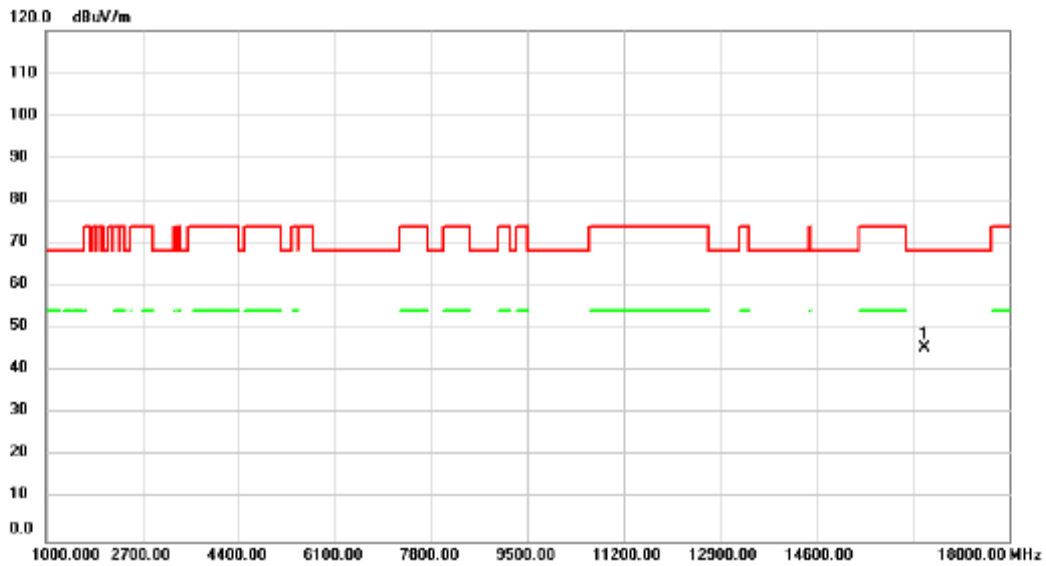


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	16504.00	43.74	1.59	45.33	68.20	-22.87	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5500MHz	Polarization	Horizontal

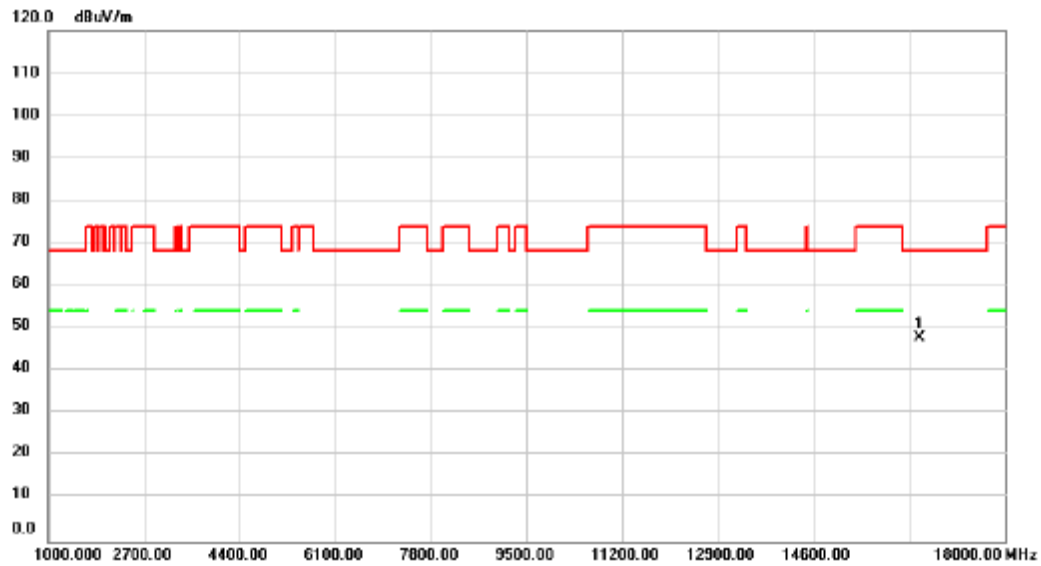


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	16487.00	46.18	1.67	47.85	68.20	-20.35	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5580MHz	Polarization	Vertical

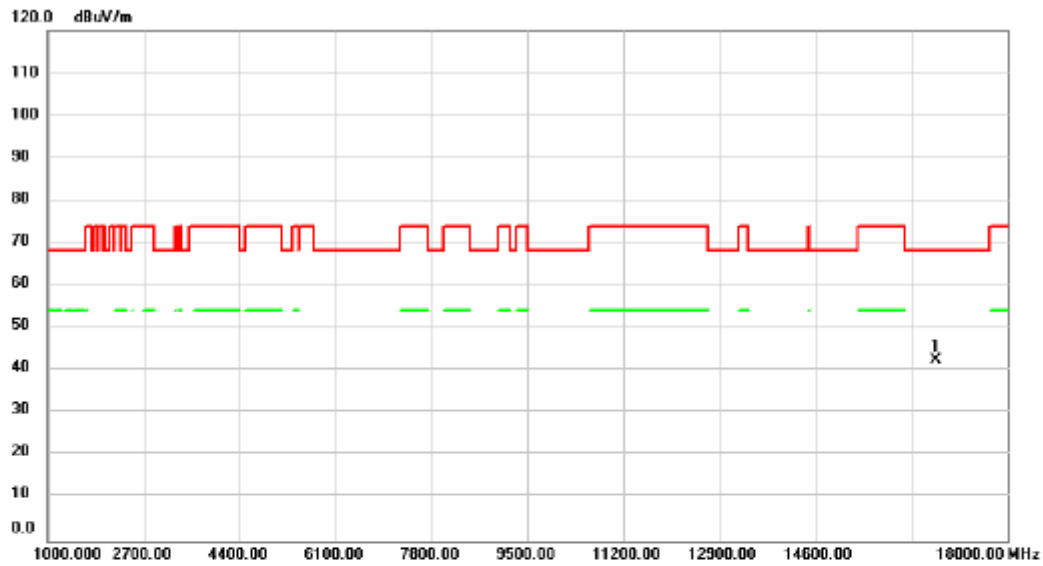


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	16742.00	39.53	2.98	42.51	68.20	-25.69	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5580MHz	Polarization	Horizontal

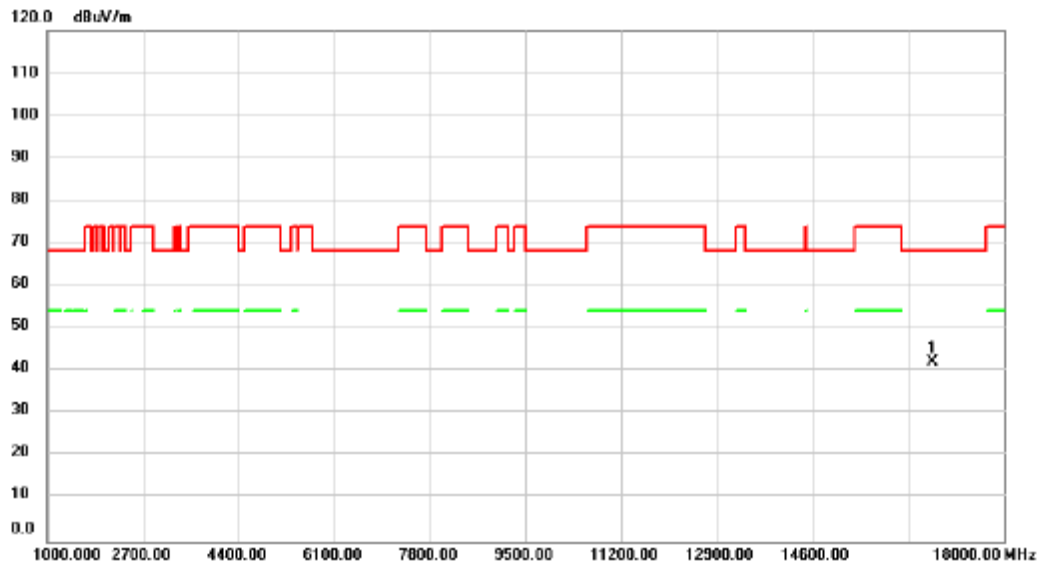


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	16742.00	39.17	2.98	42.15	68.20	-26.05	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5700MHz	Polarization	Vertical

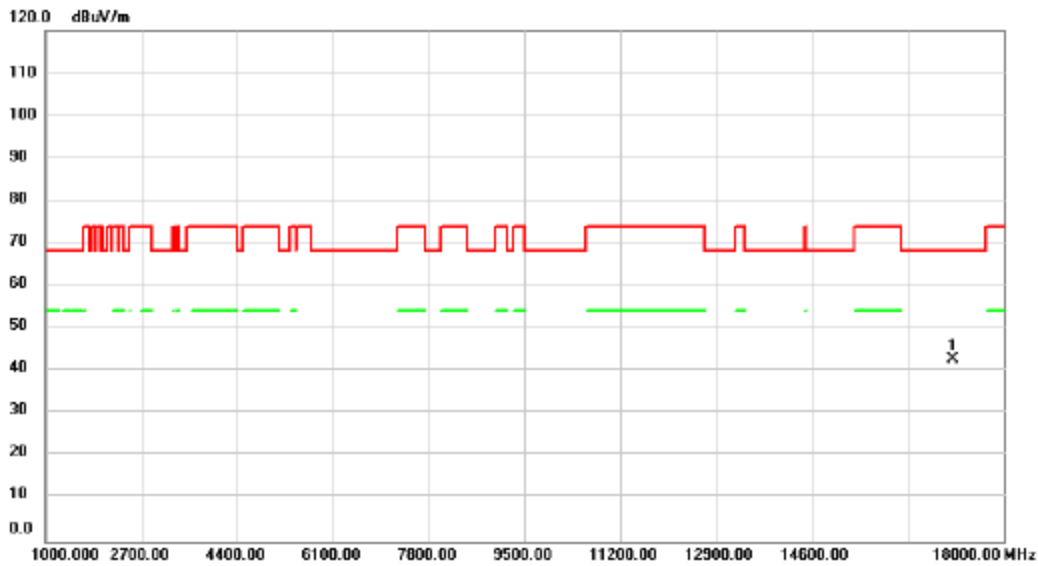


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	17099.00	38.15	4.62	42.77	68.20	-25.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5700MHz	Polarization	Horizontal

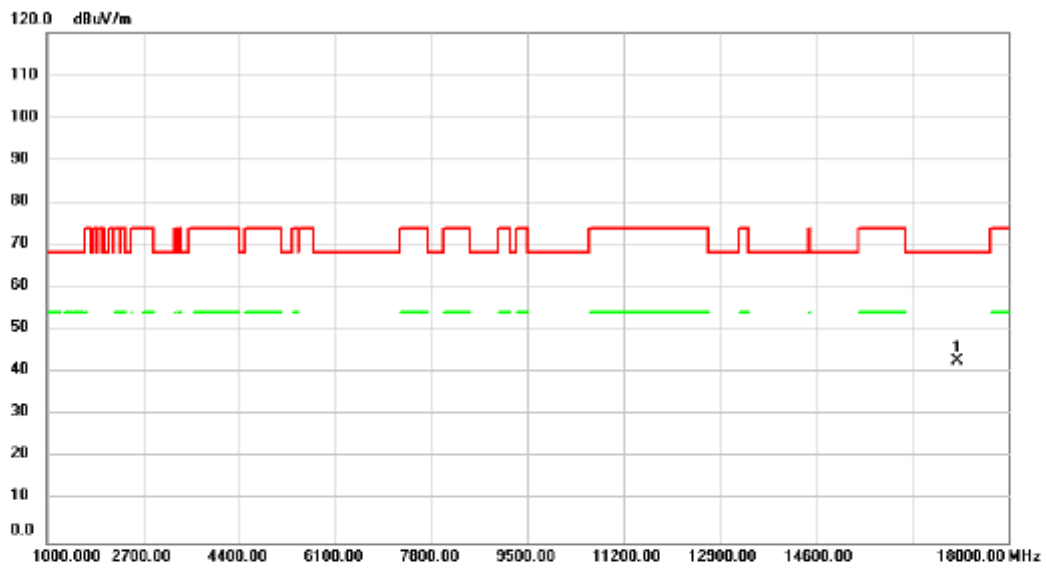


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17099.00	38.21	4.62	42.83	68.20	-25.37	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5745MHz	Polarization	Vertical

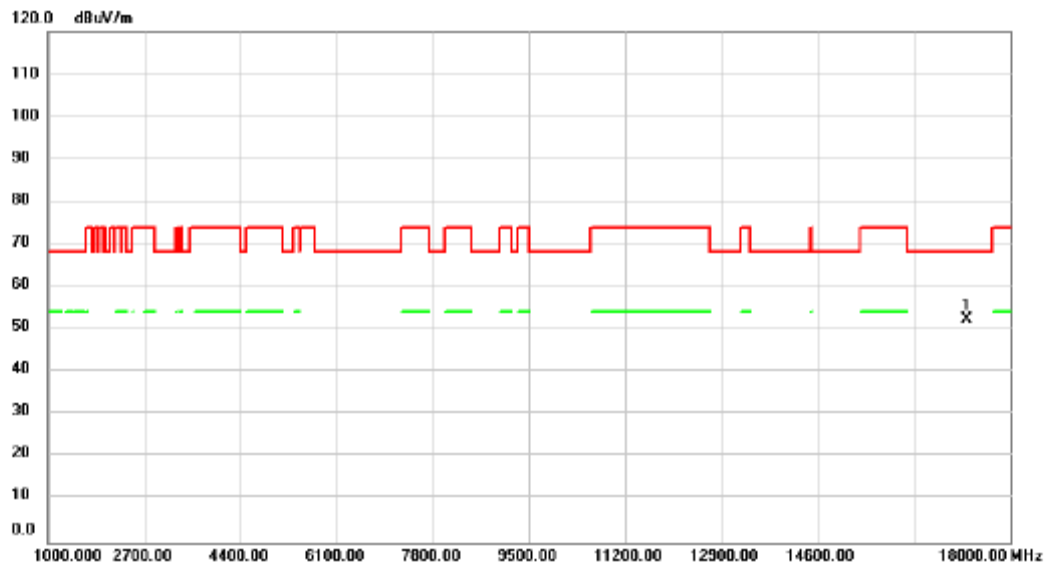


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17235.00	47.43	4.81	52.24	68.20	-15.96	peak		

REM

ARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5745MHz	Polarization	Horizontal

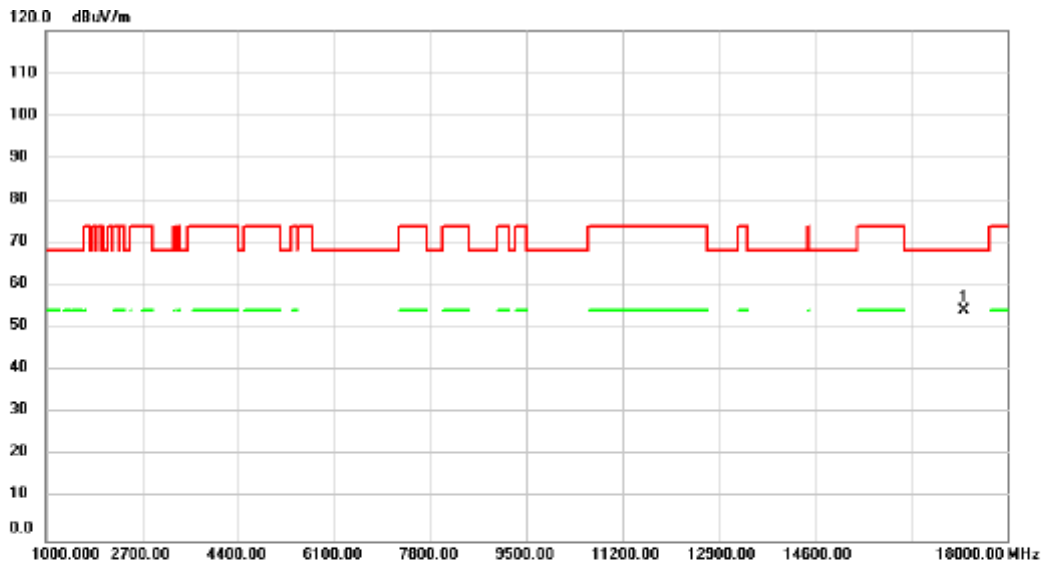


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17235.00	49.21	4.81	54.02	68.20	-14.18	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5785MHz	Polarization	Vertical

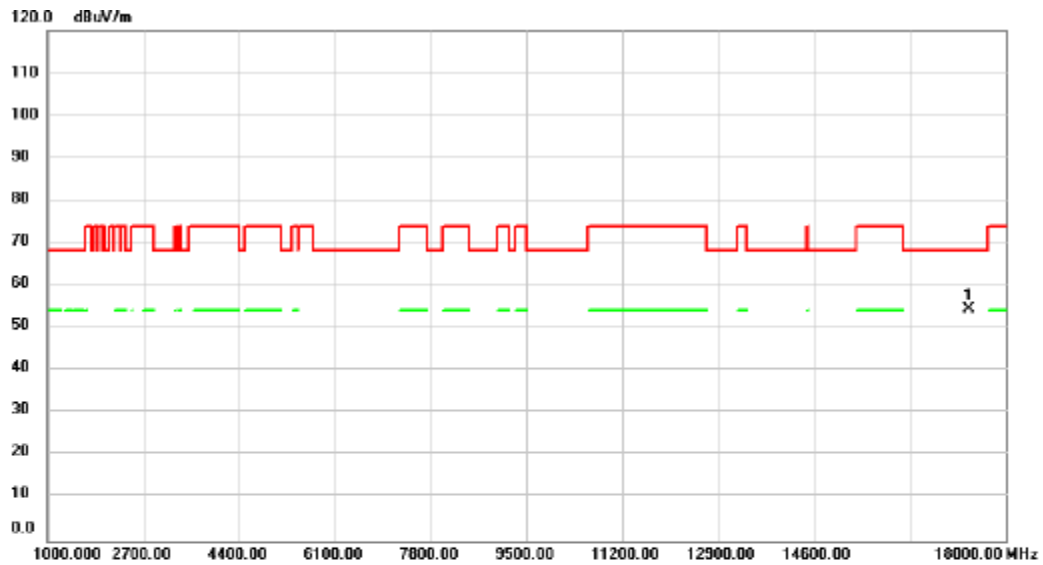


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17354.00	49.45	4.97	54.42	68.20	-13.78	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5785MHz	Polarization	Horizontal

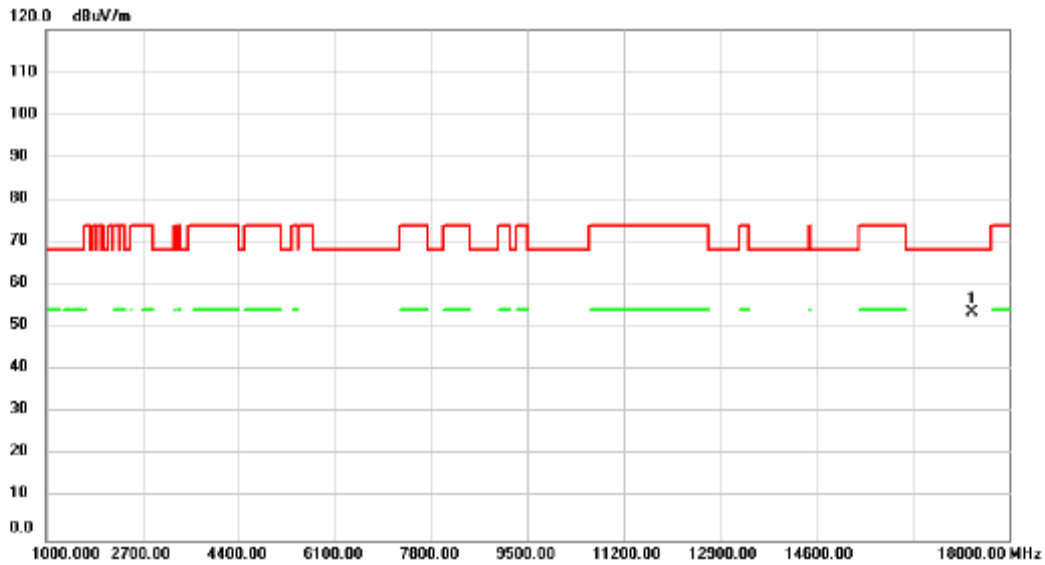


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17354.00	48.63	4.97	53.60	68.20	-14.60	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5825MHz	Polarization	Vertical

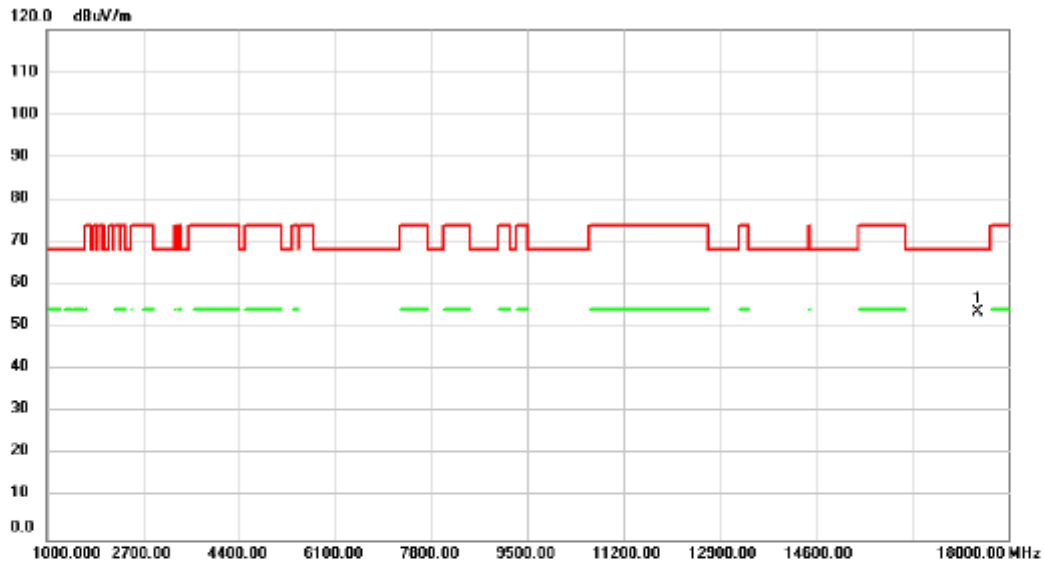


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17473.00	48.34	5.14	53.48	68.20	-14.72	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/11/5
Test Frequency	5825MHz	Polarization	Horizontal

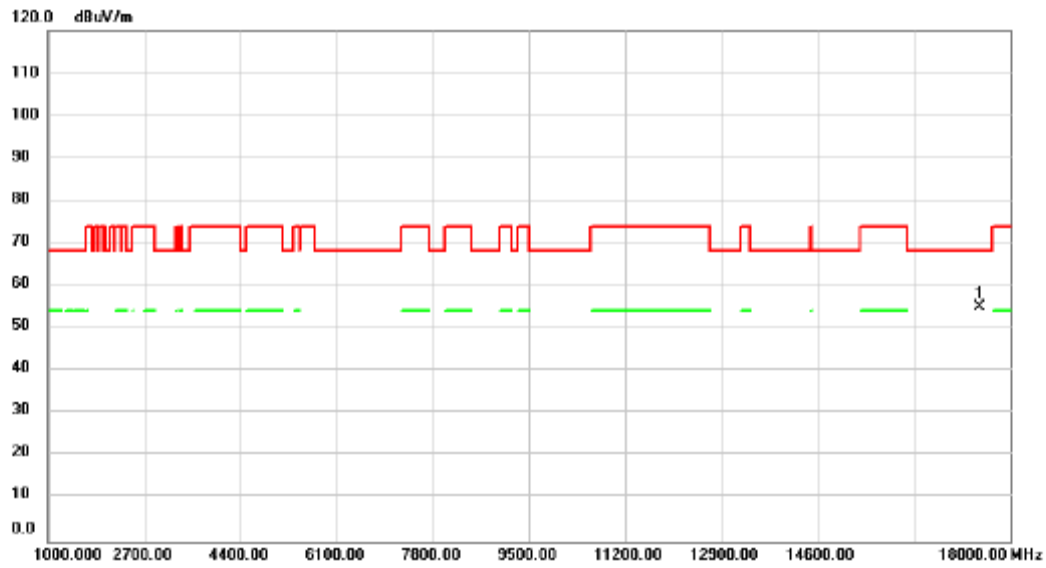


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17473.00	49.96	5.14	55.10	68.20	-13.10	peak		Comment

REM

ARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5180MHz	Polarization	Vertical

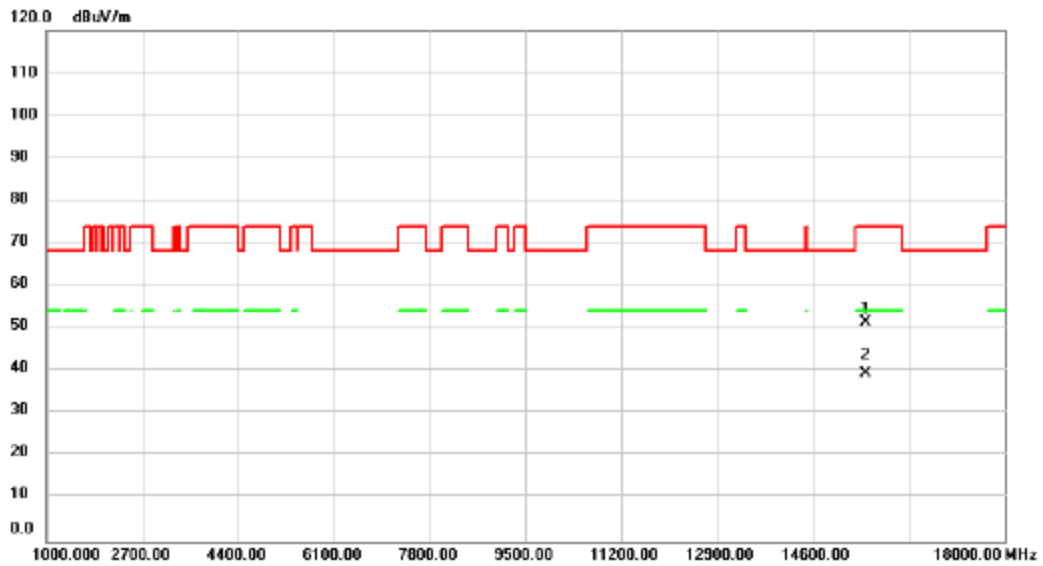


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15535.00	46.77	4.55	51.32	74.00	-22.68	peak		
2	*	15535.00	34.84	4.55	39.39	54.00	-14.61	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5180MHz	Polarization	Horizontal

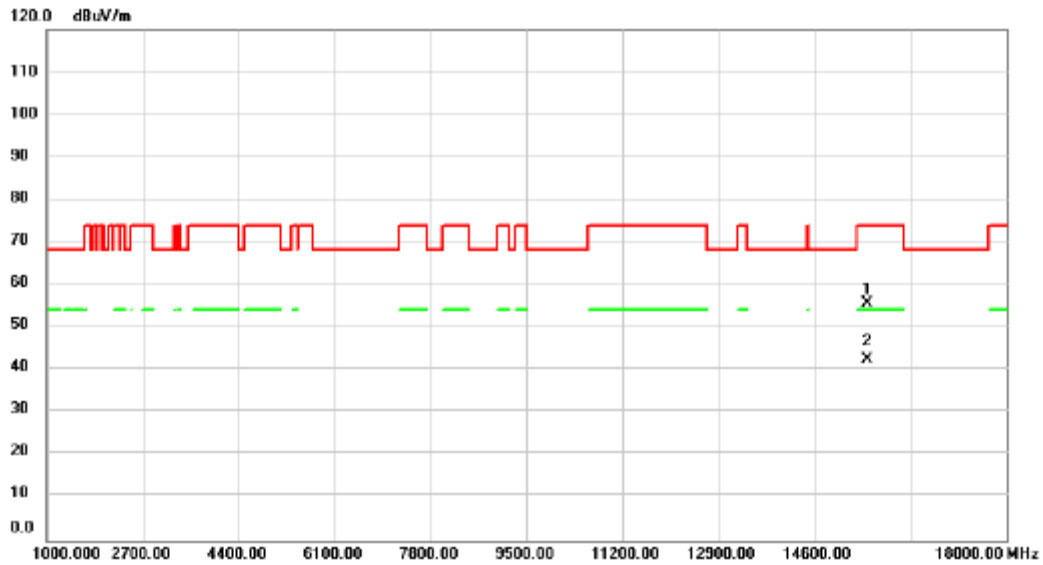


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15535.00	51.16	4.55	55.71	74.00	-18.29	peak		
2	*	15535.00	37.84	4.55	42.39	54.00	-11.61	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5200MHz	Polarization	Vertical

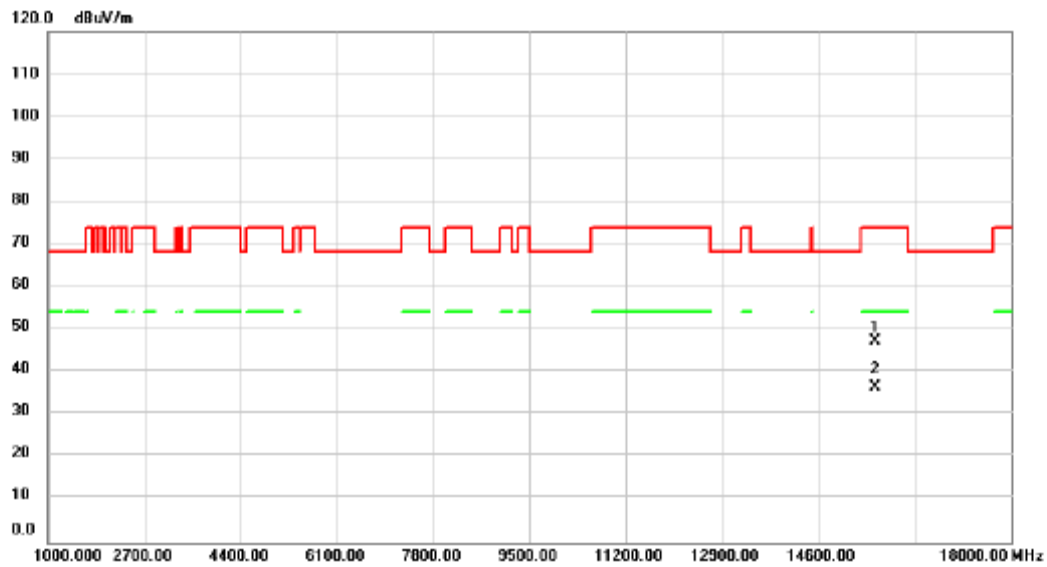


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15603.00	42.67	4.63	47.30	74.00	-26.70	peak		
2	*	15603.00	31.83	4.63	36.46	54.00	-17.54	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5200MHz	Polarization	Horizontal

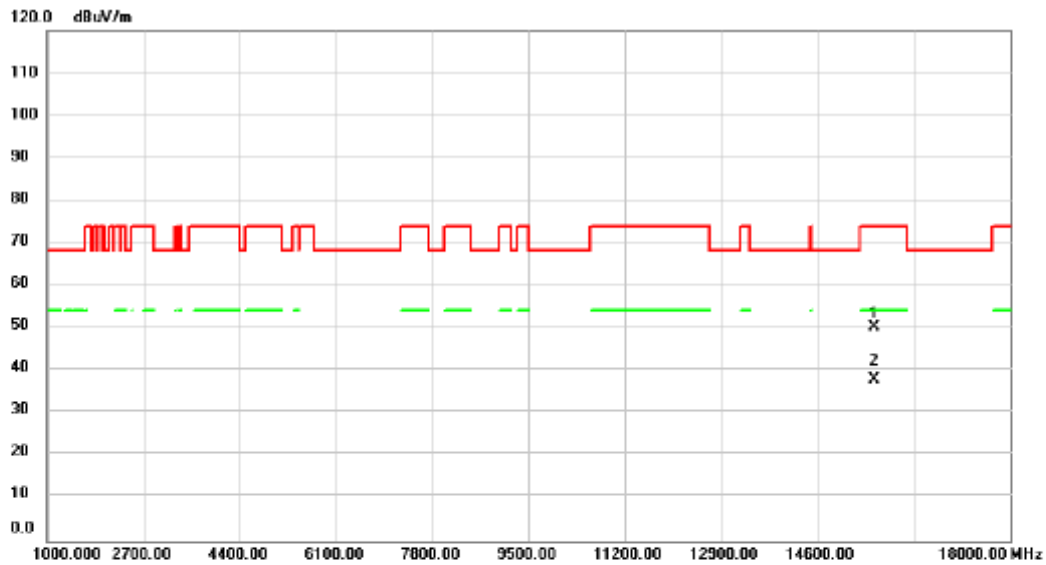


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15603.00	45.57	4.63	50.20	74.00	-23.80	peak		
2	*	15603.00	33.44	4.63	38.07	54.00	-15.93	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5240MHz	Polarization	Vertical

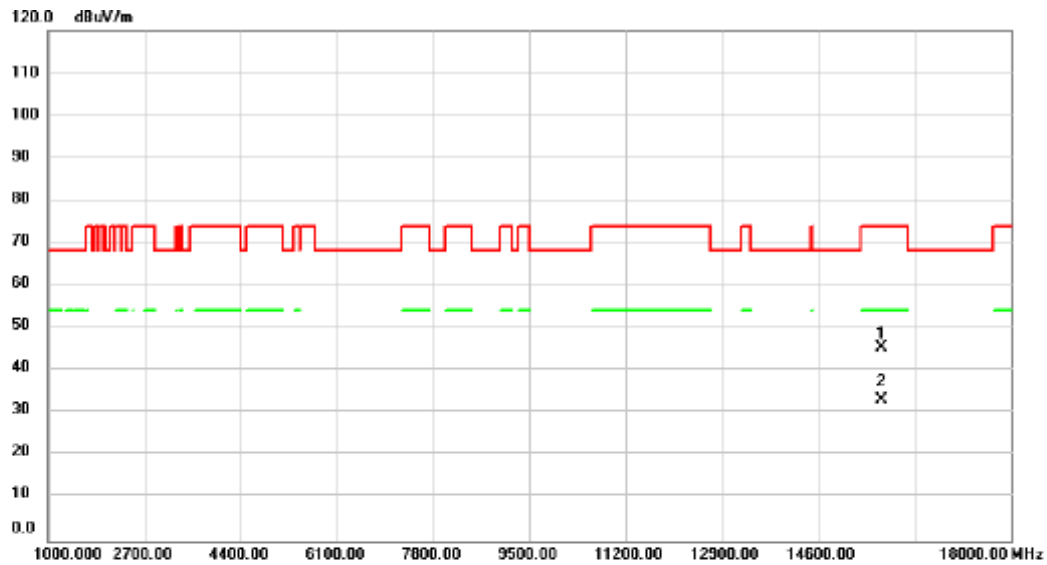


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15722.00	40.54	4.77	45.31	74.00	-28.69	peak		
2	*	15722.00	28.44	4.77	33.21	54.00	-20.79	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5240MHz	Polarization	Horizontal

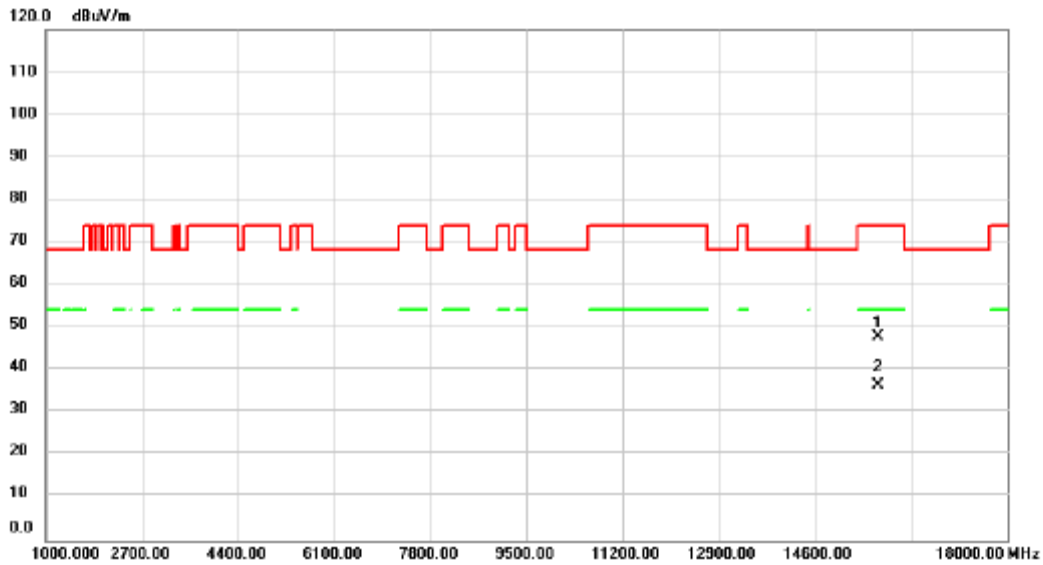


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15722.00	43.04	4.77	47.81	74.00	-26.19	peak		
2	*	15722.00	31.66	4.77	36.43	54.00	-17.57	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5260MHz	Polarization	Vertical

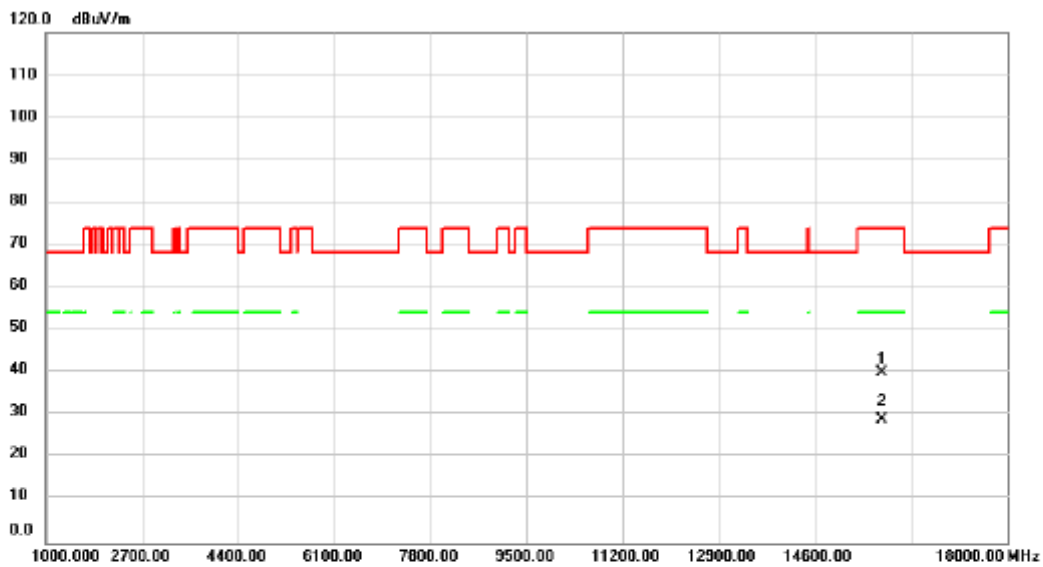


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15790.00	35.23	4.85	40.08	74.00	-33.92	peak		
2	*	15790.00	23.96	4.85	28.81	54.00	-25.19	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5260MHz	Polarization	Horizontal

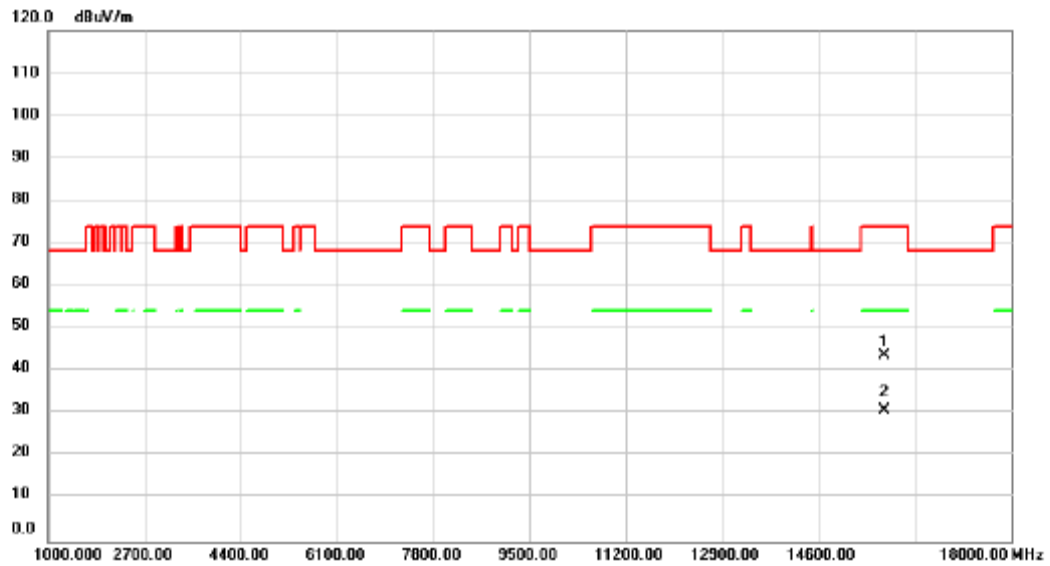


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15773.00	38.76	4.83	43.59	74.00	-30.41	peak		
2	*	15773.00	25.78	4.83	30.61	54.00	-23.39	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5300MHz	Polarization	Vertical

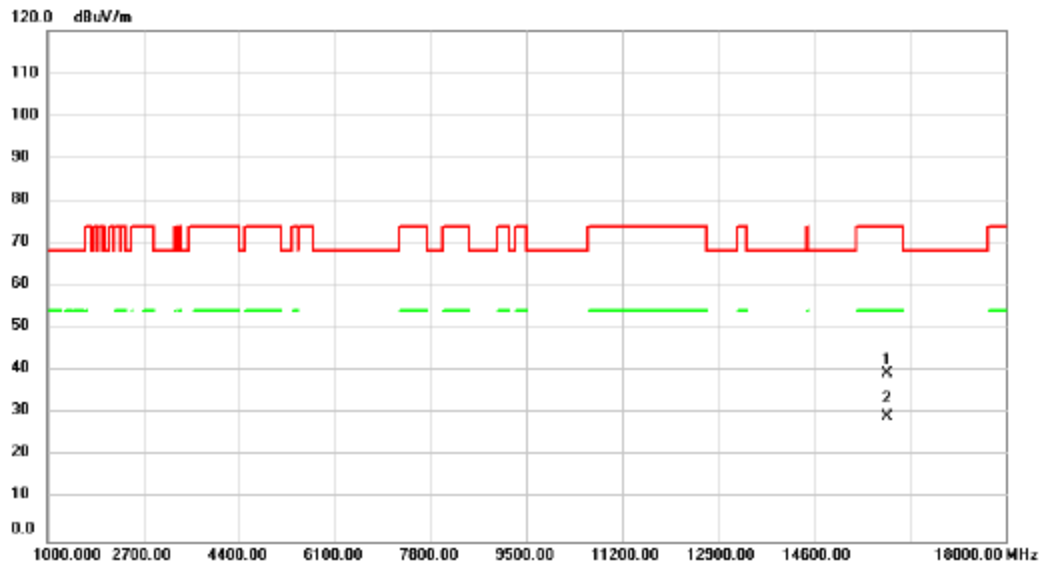


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15892.00	34.55	4.97	39.52	74.00	-34.48	peak		
2	*	15892.00	24.27	4.97	29.24	54.00	-24.76	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5300MHz	Polarization	Horizontal

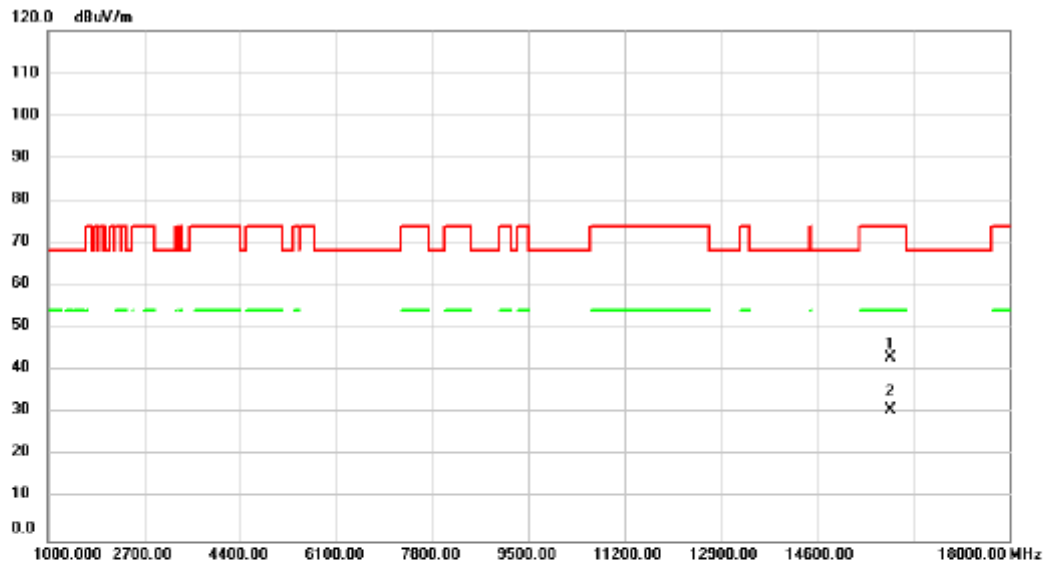


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		15909.00	37.94	4.99	42.93	74.00	-31.07	peak		
2	*	15909.00	25.87	4.99	30.86	54.00	-23.14	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5320MHz	Polarization	Vertical

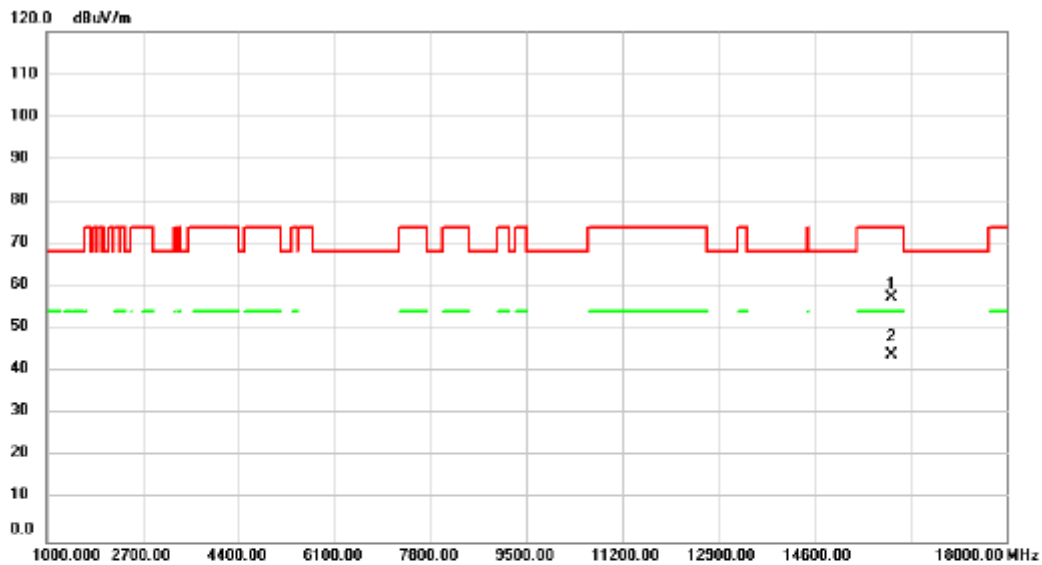


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15960.00	52.46	5.06	57.52	74.00	-16.48	peak		
2	*	15960.00	39.02	5.06	44.08	54.00	-9.92	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5320MHz	Polarization	Horizontal

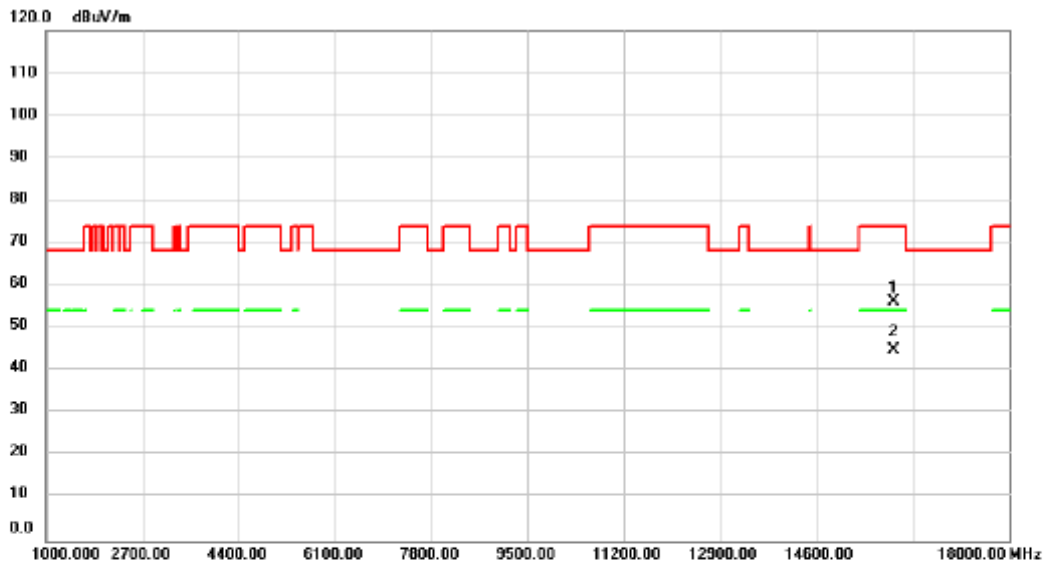


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15960.00	51.08	5.06	56.14	74.00	-17.86	peak		
2	*	15960.00	39.87	5.06	44.93	54.00	-9.07	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5500MHz	Polarization	Vertical

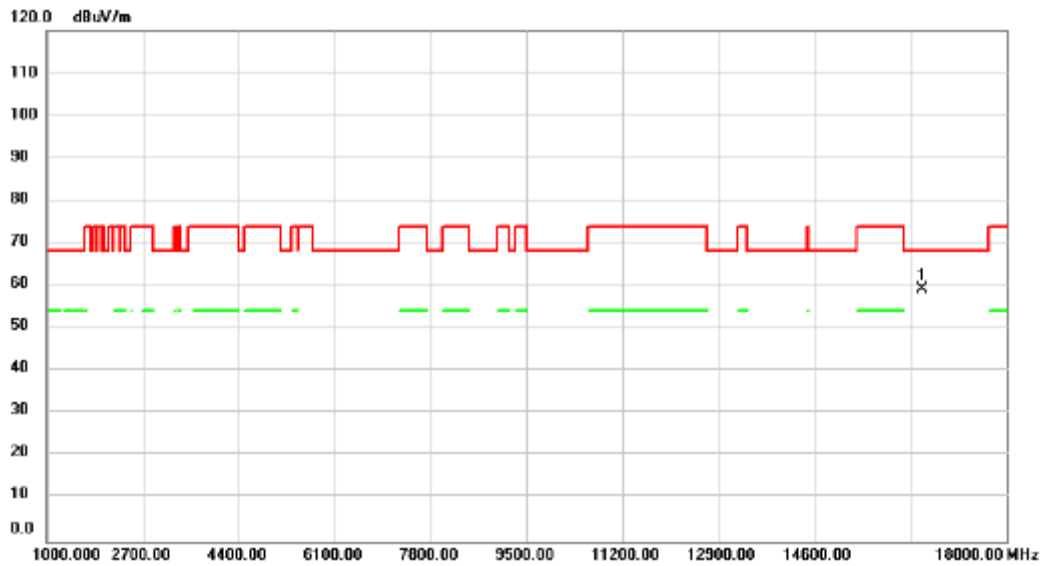


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	16504.00	57.69	1.59	59.28	68.20	-8.92	peak		Comment

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5500MHz	Polarization	Horizontal

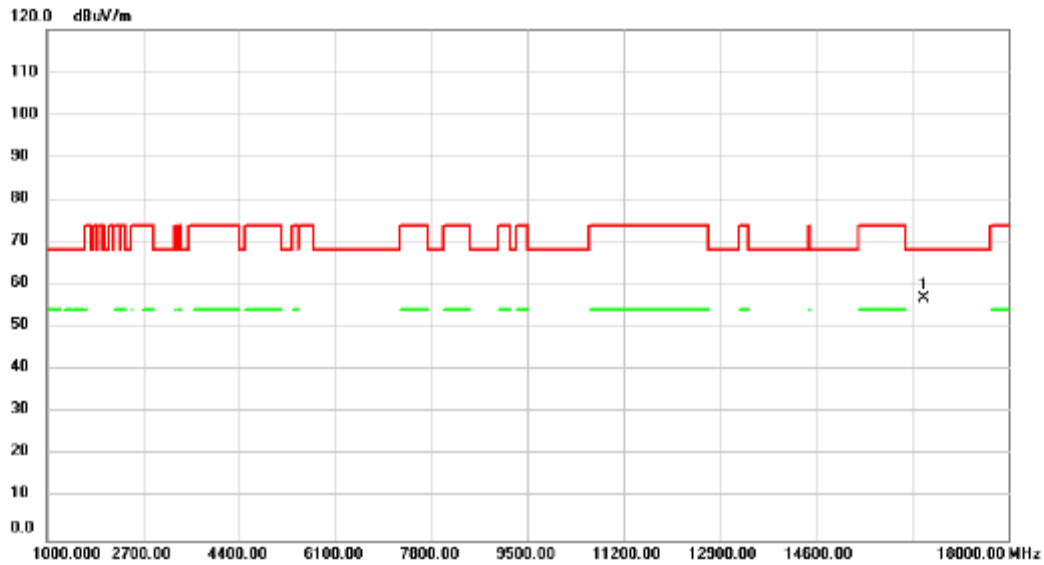


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	16504.00	55.18	1.59	56.77	68.20	-11.43	peak		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5580MHz	Polarization	Vertical

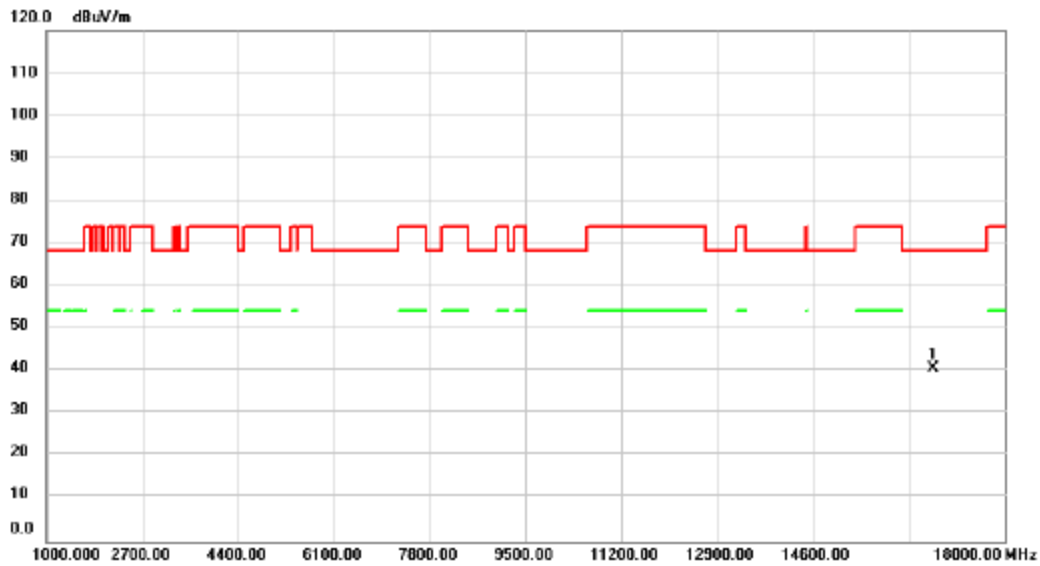


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	16742.00	37.67	2.98	40.65	68.20	-27.55	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5580MHz	Polarization	Horizontal

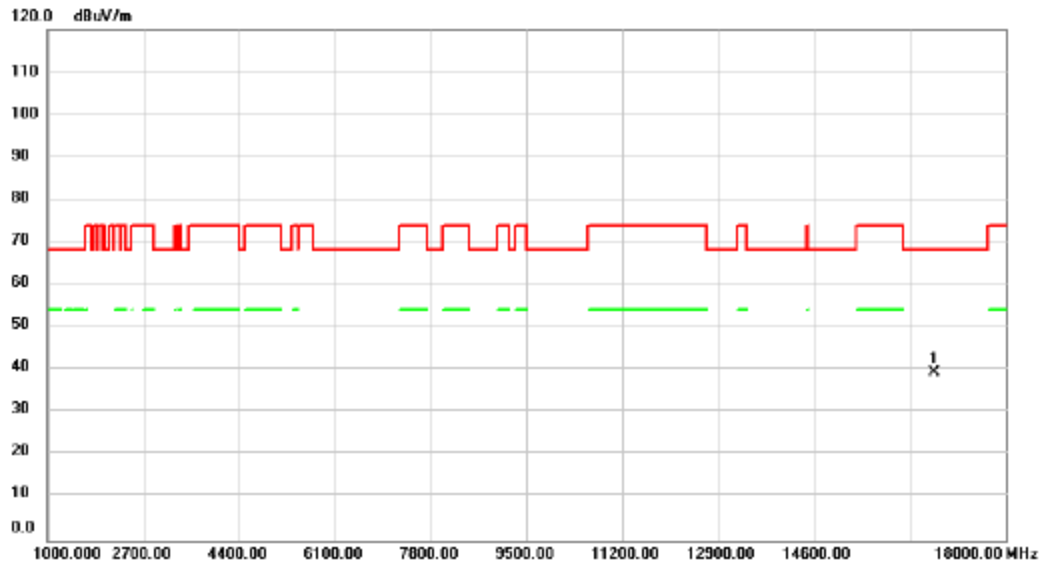


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	16740.00	36.35	2.97	39.32	68.20	-28.88	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5700MHz	Polarization	Vertical

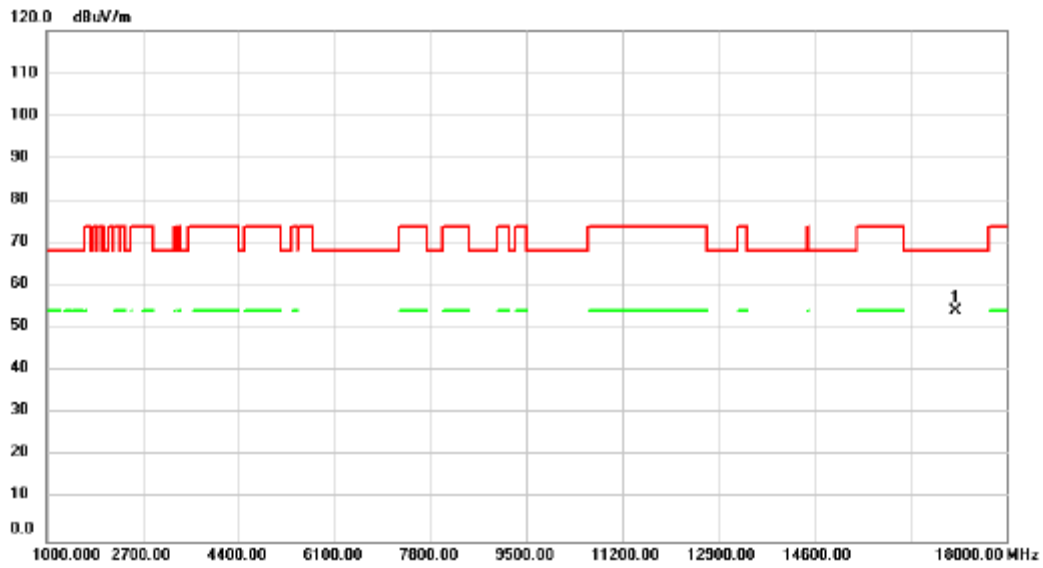


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	17099.00	49.39	4.62	54.01	68.20	-14.19	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5700MHz	Polarization	Horizontal

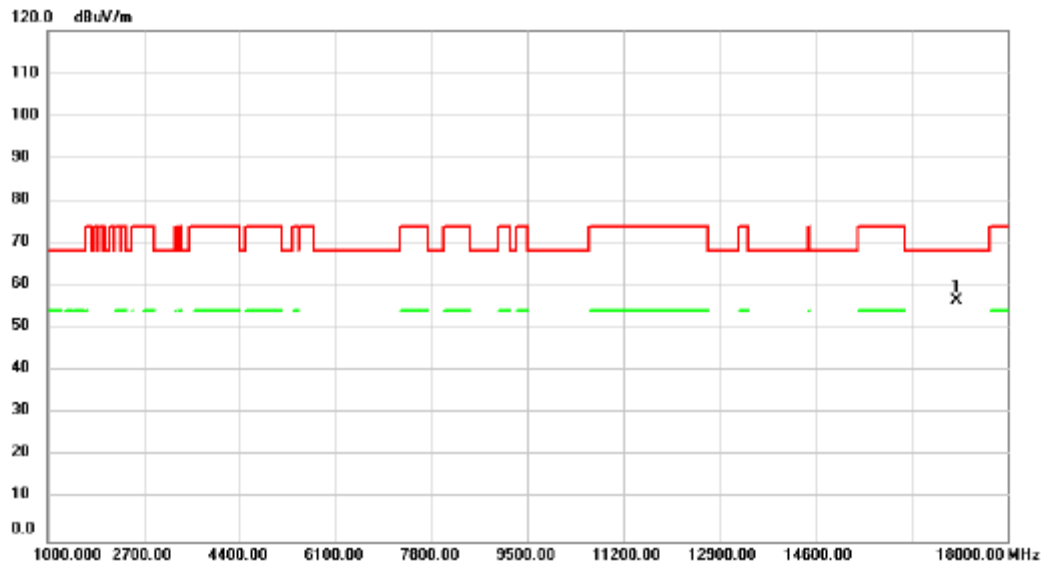


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17099.00	52.06	4.62	56.68	68.20	-11.52	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5745MHz	Polarization	Vertical

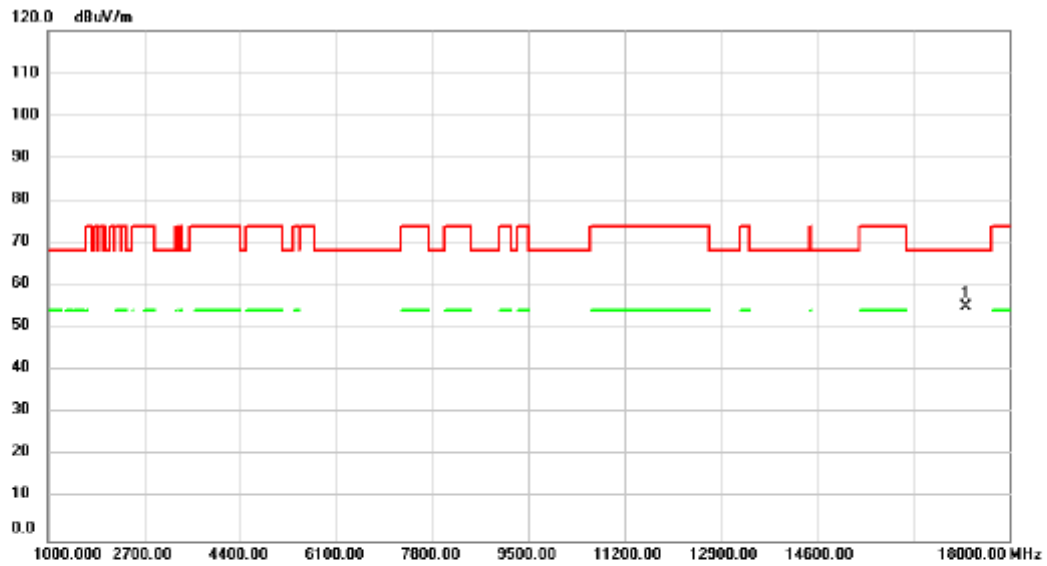


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17235.00	50.18	4.81	54.99	68.20	-13.21	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5745MHz	Polarization	Horizontal

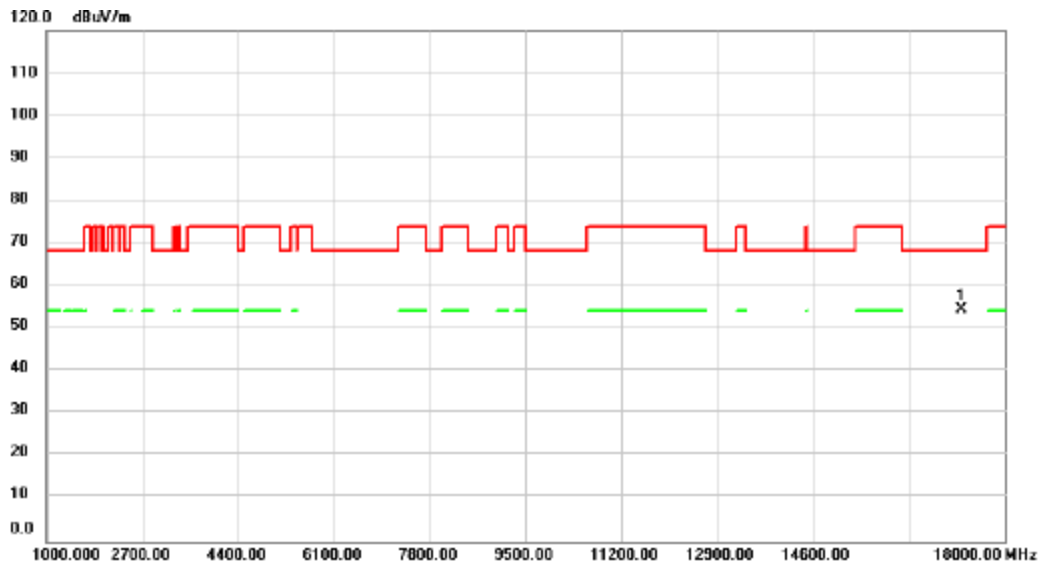


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17235.00	49.66	4.81	54.47	68.20	-13.73	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5785MHz	Polarization	Vertical

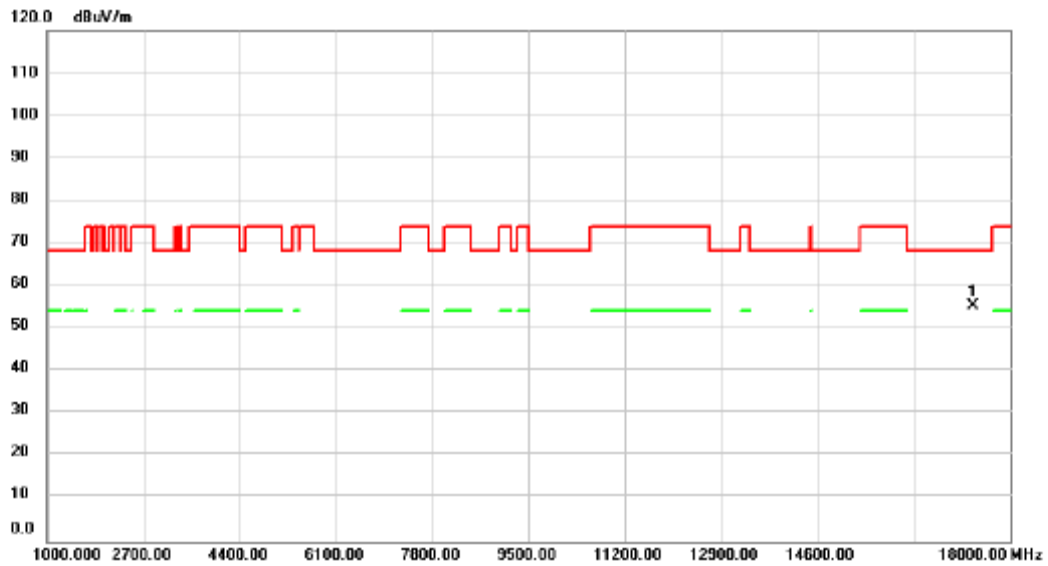


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17354.00	50.44	4.97	55.41	68.20	-12.79	peak		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5785MHz	Polarization	Horizontal

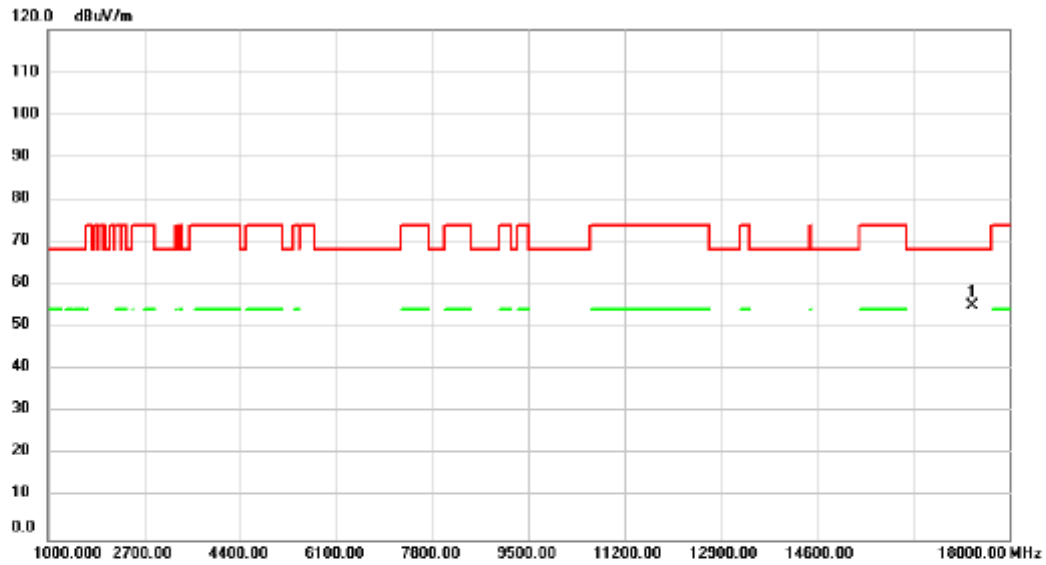


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17354.00	50.15	4.97	55.12	68.20	-13.08	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5825MHz	Polarization	Vertical

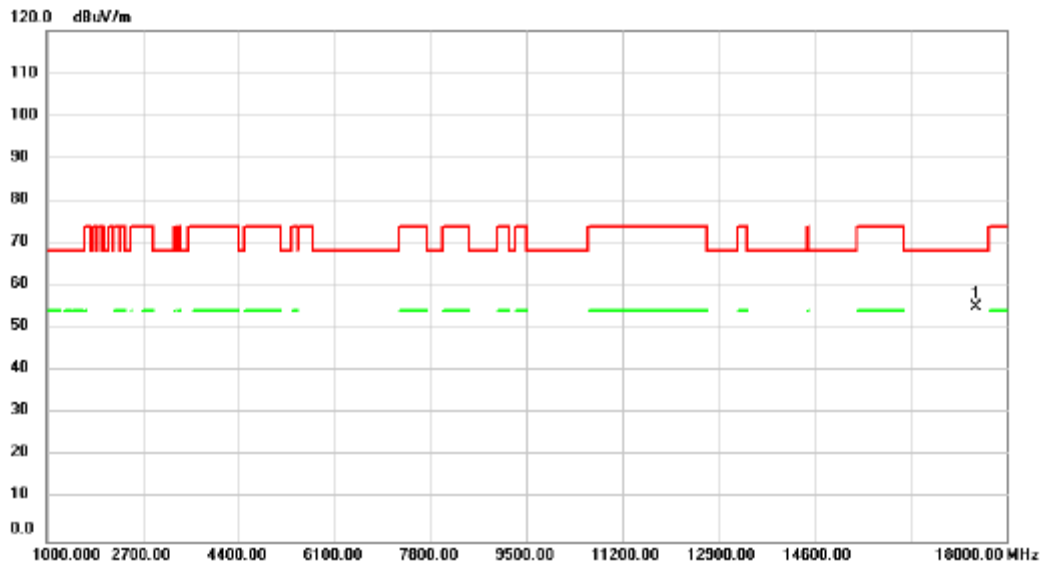


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	17473.00	49.94	5.14	55.08	68.20	-13.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/5
Test Frequency	5825MHz	Polarization	Horizontal

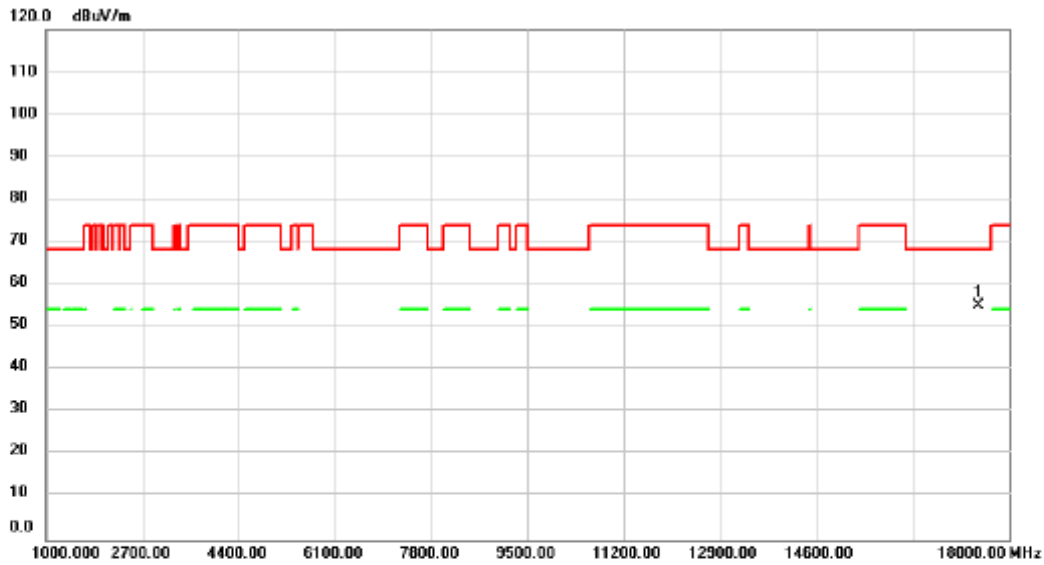


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17473.00	49.97	5.14	55.11	68.20	-13.09	peak		Comment

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/6
Test Frequency	5190MHz	Polarization	Vertical

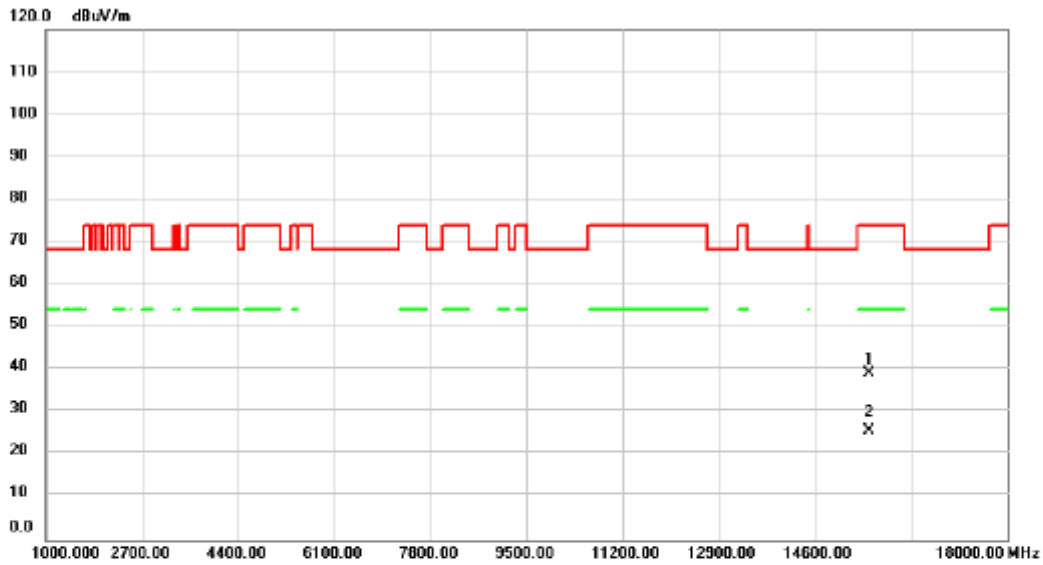


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15569.00	34.46	4.59	39.05	74.00	-34.95	peak		
2	*	15569.00	21.01	4.59	25.60	54.00	-28.40	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/6
Test Frequency	5190MHz	Polarization	Horizontal

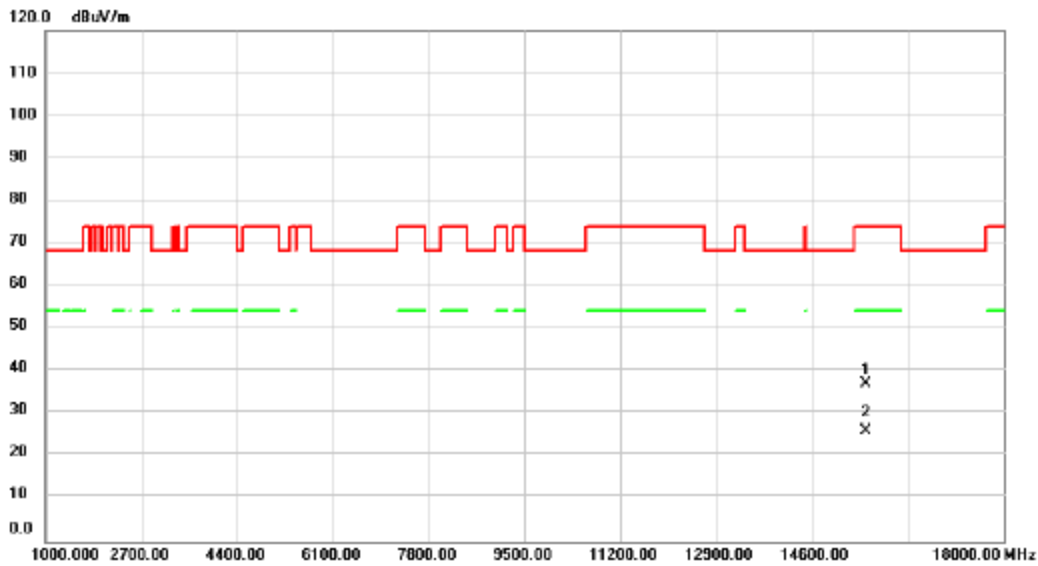


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15570.00	32.32	4.59	36.91	74.00	-37.09	peak		
2	*	15570.00	21.41	4.59	26.00	54.00	-28.00	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT20)	Test Date	2024/11/6
Test Frequency	5230MHz	Polarization	Vertical

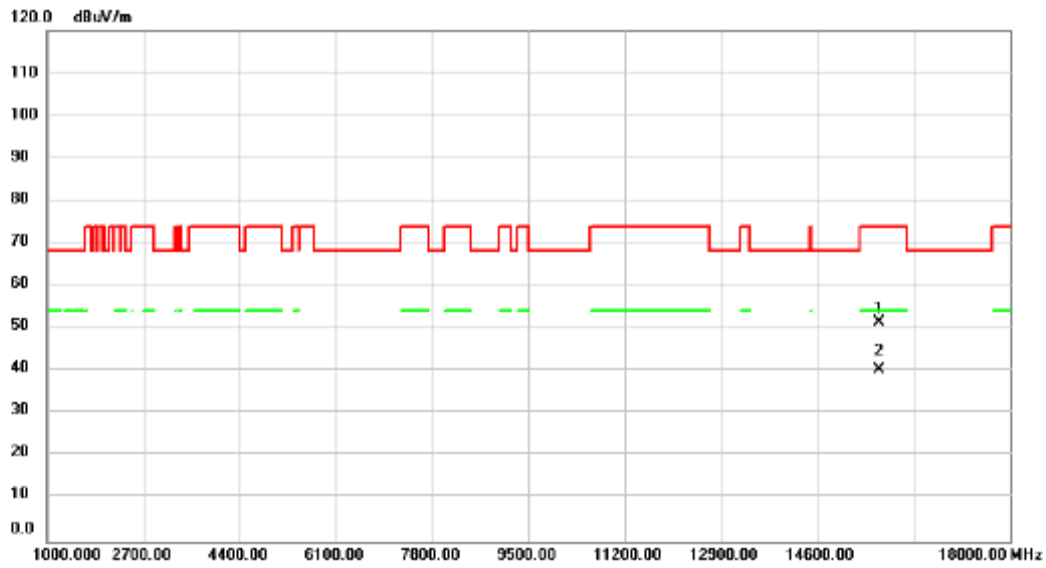


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15688.00	46.80	4.74	51.54	74.00	-22.46	peak		
2	*	15688.00	35.69	4.74	40.43	54.00	-13.57	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5230MHz	Polarization	Horizontal

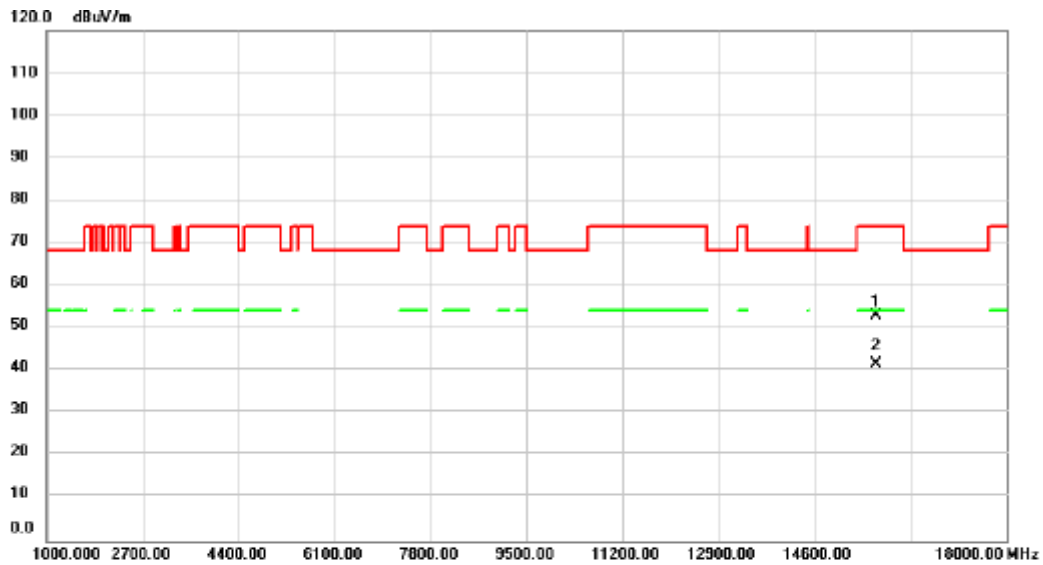


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15705.00	48.08	4.75	52.83	74.00	-21.17	peak		
2	*	15705.00	36.66	4.75	41.41	54.00	-12.59	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5270MHz	Polarization	Vertical

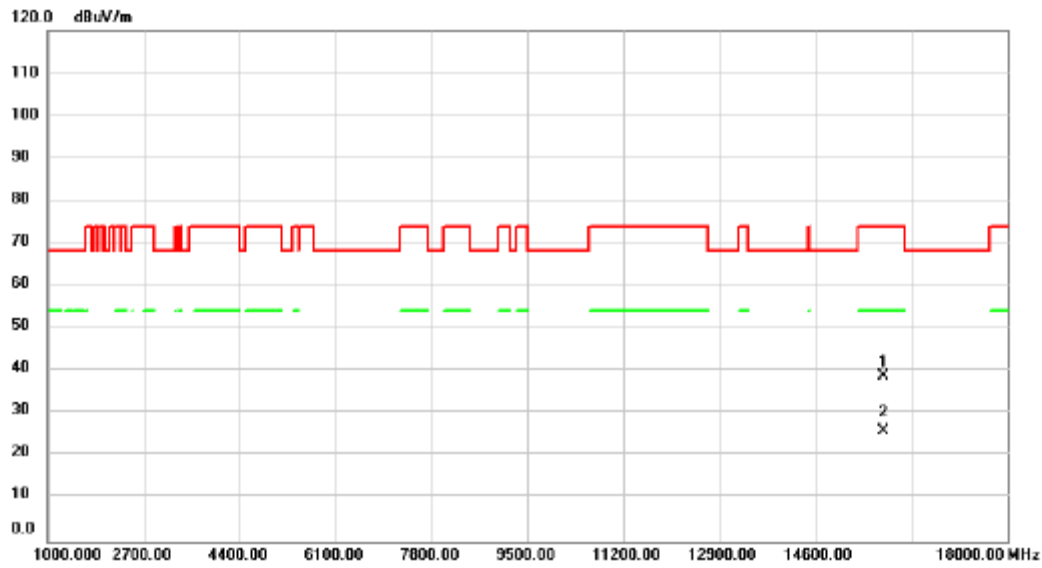


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15810.00	34.00	4.87	38.87	74.00	-35.13	peak		
2	*	15810.00	21.21	4.87	26.08	54.00	-27.92	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5270MHz	Polarization	Horizontal

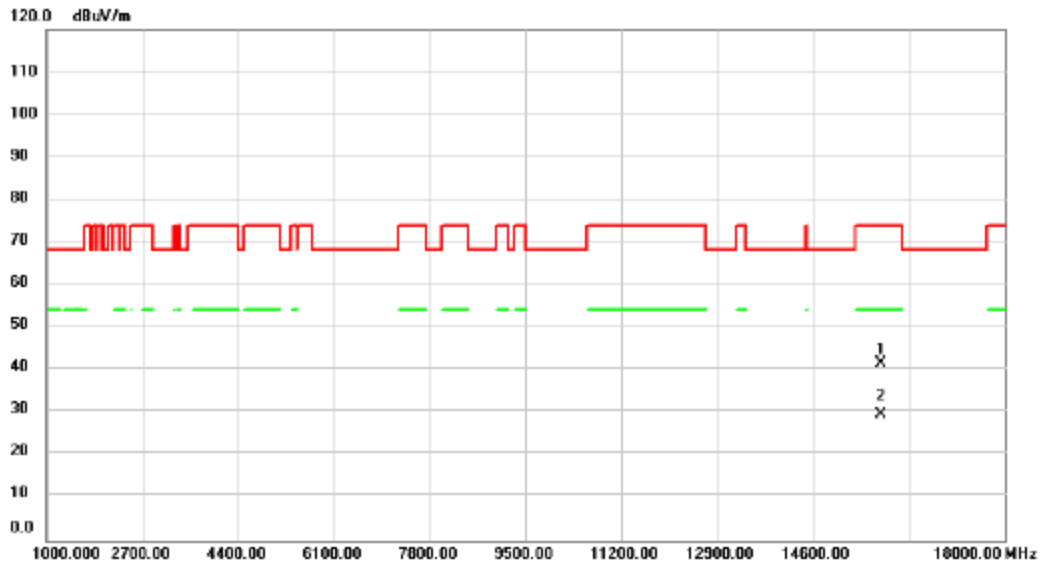


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15807.00	36.78	4.87	41.65	74.00	-32.35	peak		
2	*	15807.00	24.74	4.87	29.61	54.00	-24.39	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5310MHz	Polarization	Vertical

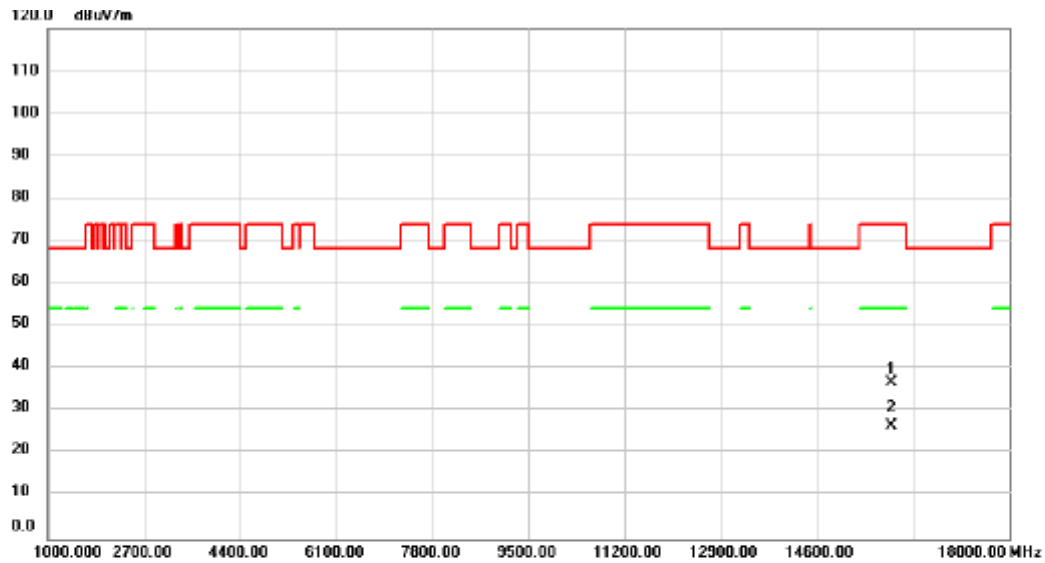


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15930.00	31.86	5.02	36.88	74.00	-37.12	peak		
2	*	15930.00	21.47	5.02	26.49	54.00	-27.51	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5310MHz	Polarization	Horizontal

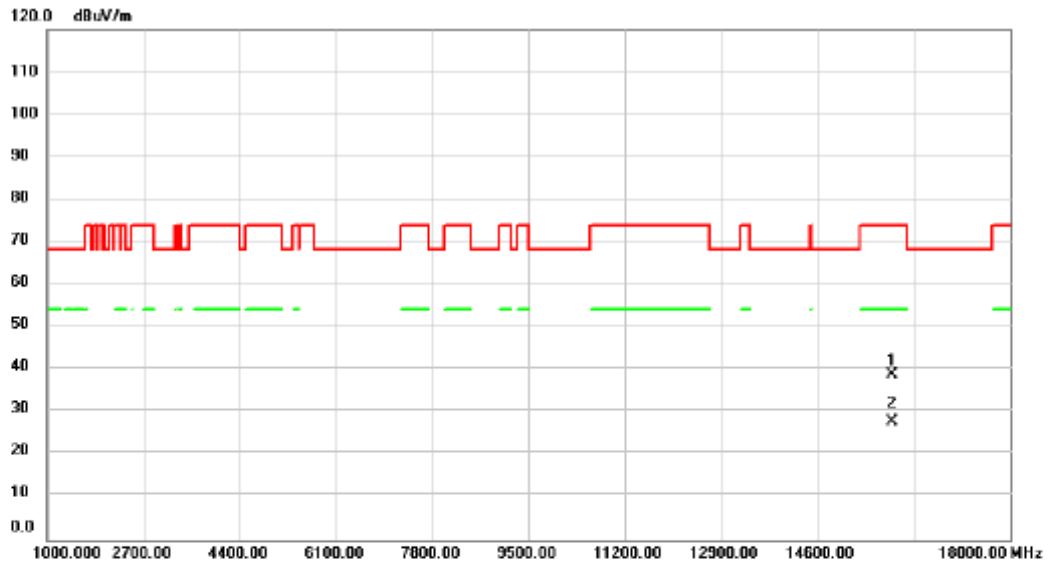


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15930.00	33.75	5.02	38.77	74.00	-35.23	peak		
2	*	15930.00	22.62	5.02	27.64	54.00	-26.36	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5510MHz	Polarization	Vertical

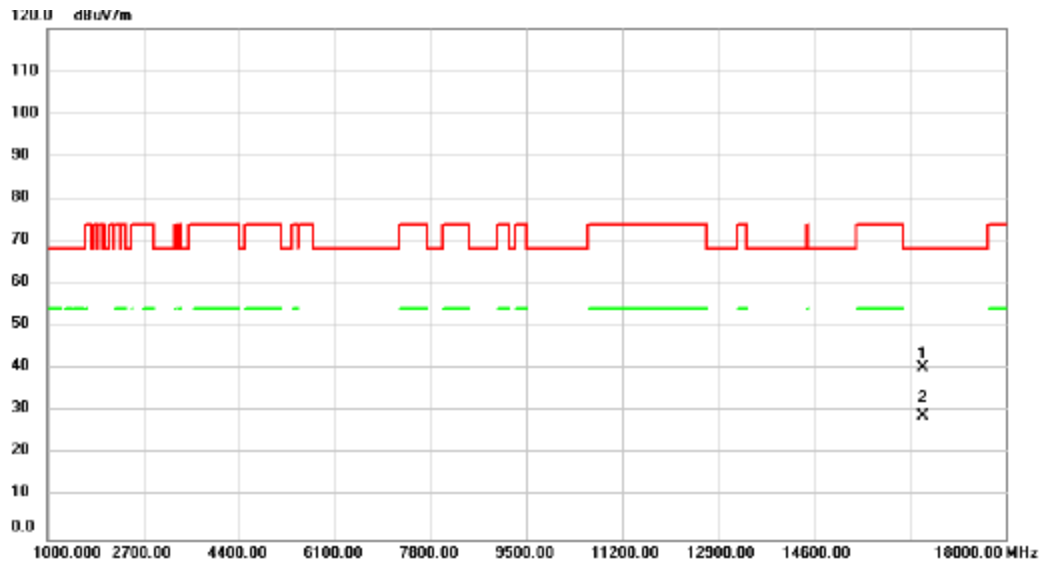


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	16538.00	38.42	1.79	40.21	68.20	-27.99	peak		
2		16538.00	27.07	1.79	28.86	68.20	-39.34	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5510MHz	Polarization	Horizontal

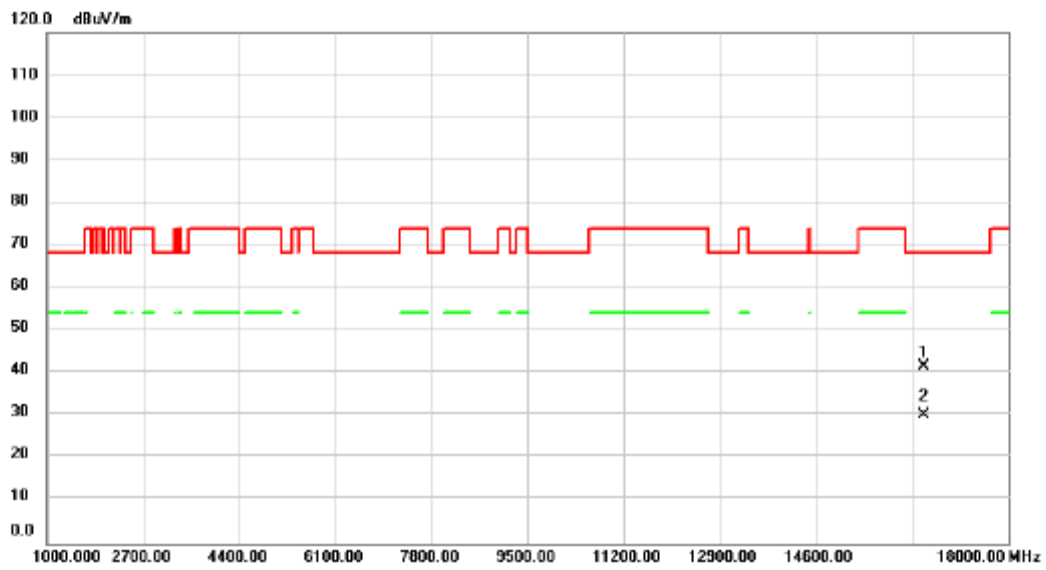


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	*	16521.00	39.72	1.70	41.42	68.20	-26.78	peak		
2		16521.00	28.48	1.70	30.18	68.20	-38.02	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5550MHz	Polarization	Vertical

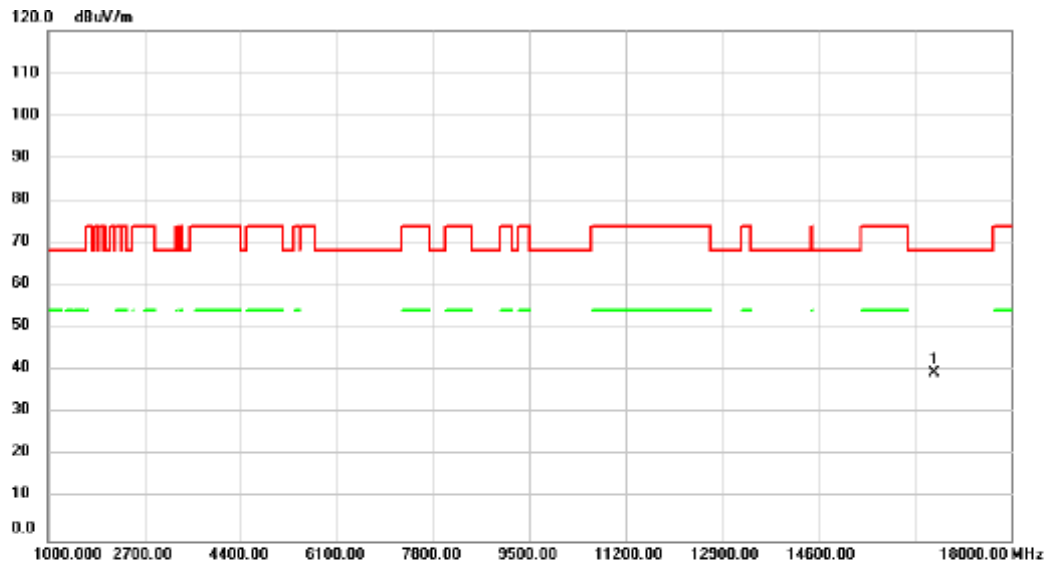


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	16657.00	37.01	2.49	39.50	68.20	-28.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5550MHz	Polarization	Horizontal

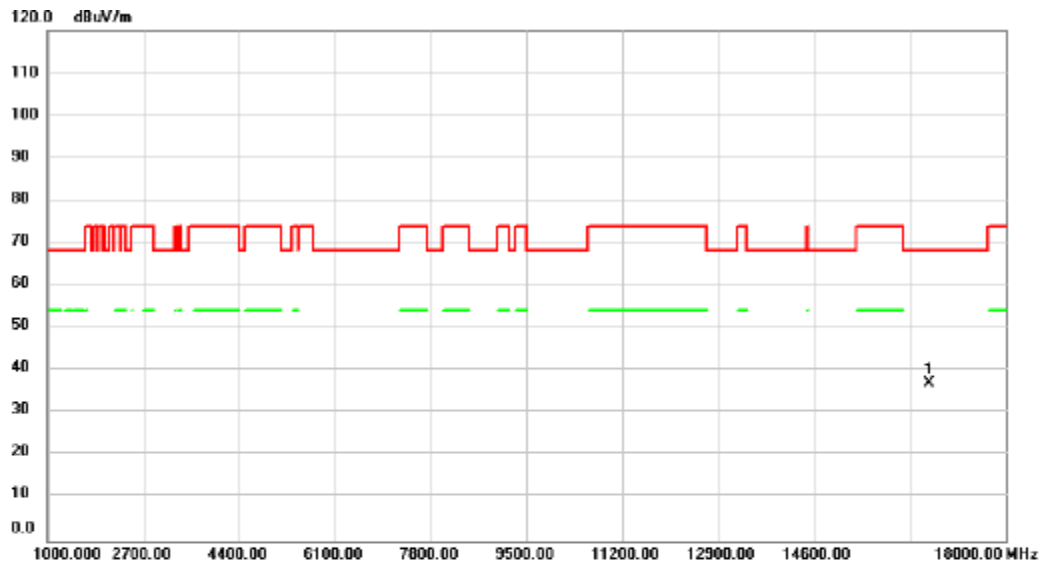


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	16650.00	34.50	2.45	36.95	68.20	-31.25	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5670MHz	Polarization	Vertical

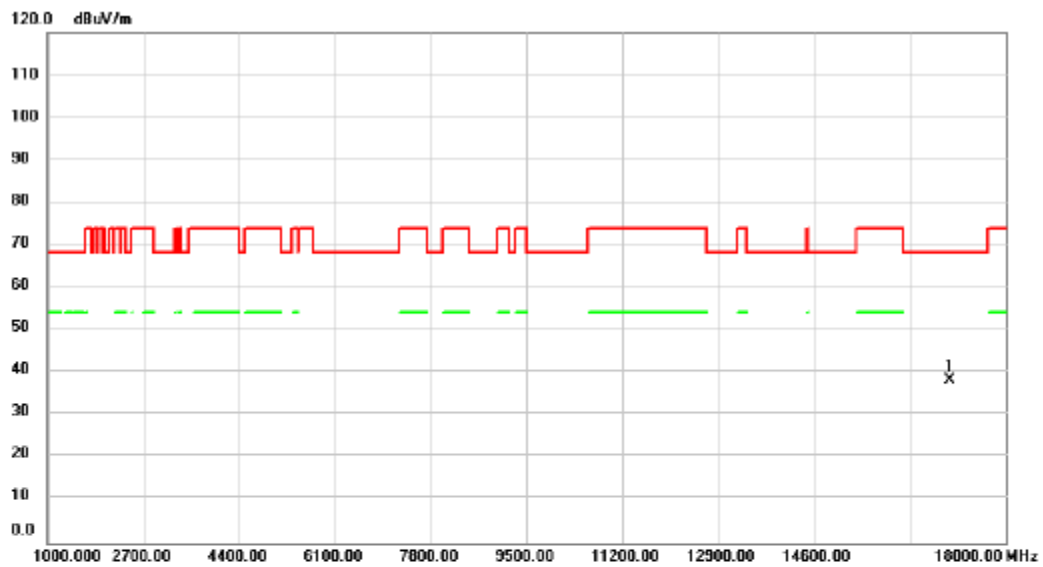


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17010.00	33.80	4.49	38.29	68.20	-29.91	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5670MHz	Polarization	Horizontal

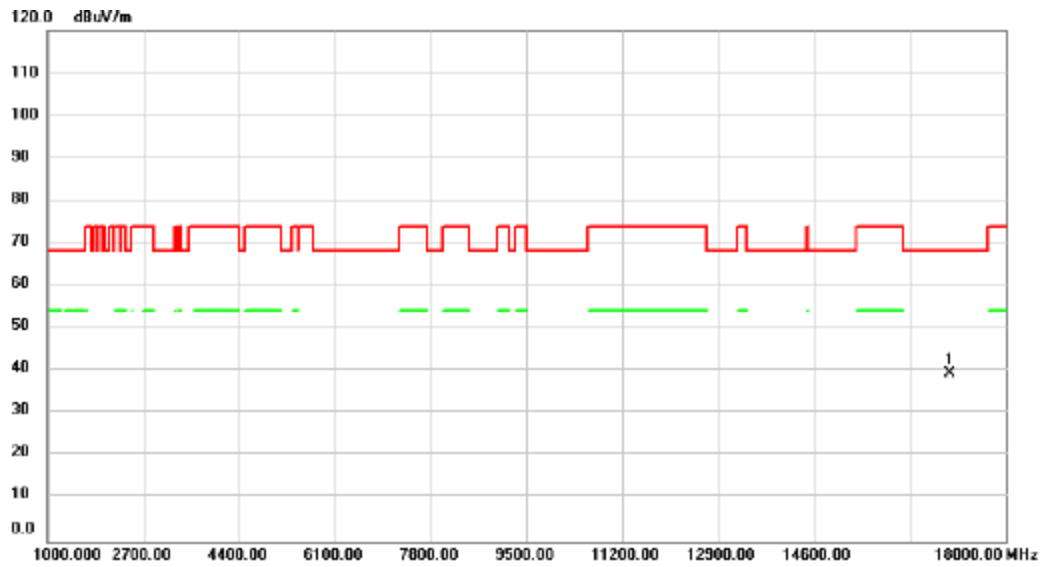


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17010.00	34.93	4.49	39.42	68.20	-28.78	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5670MHz	Polarization	Vertical

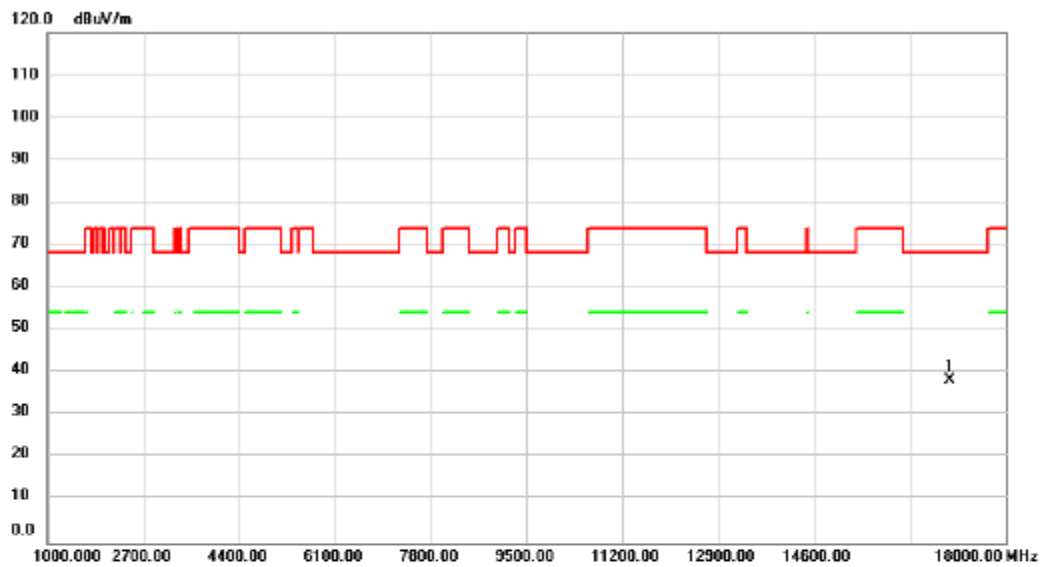


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17010.00	33.80	4.49	38.29	68.20	-29.91	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5670MHz	Polarization	Horizontal

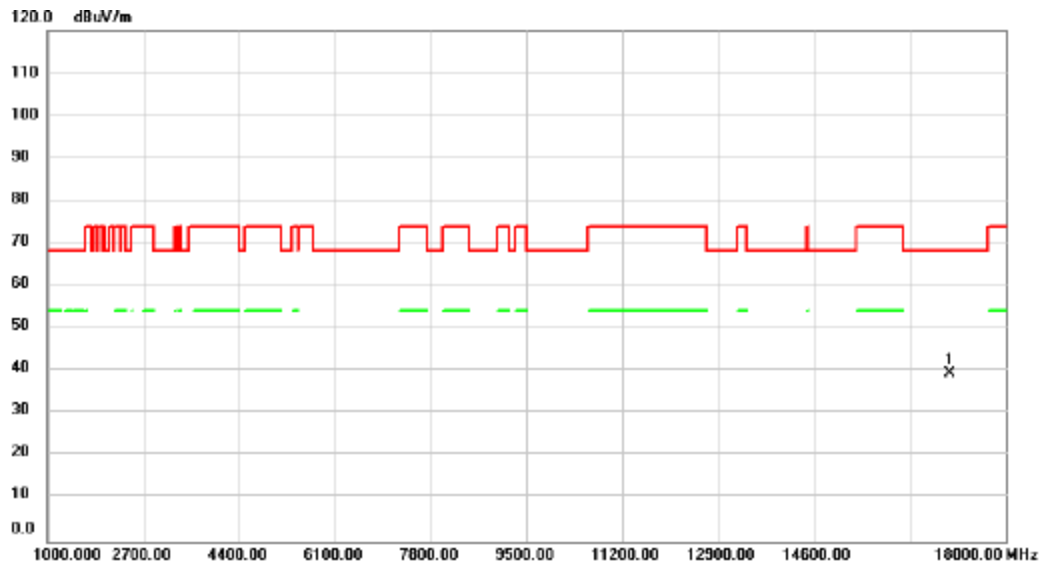


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17010.00	34.93	4.49	39.42	68.20	-28.78	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5755MHz	Polarization	Vertical

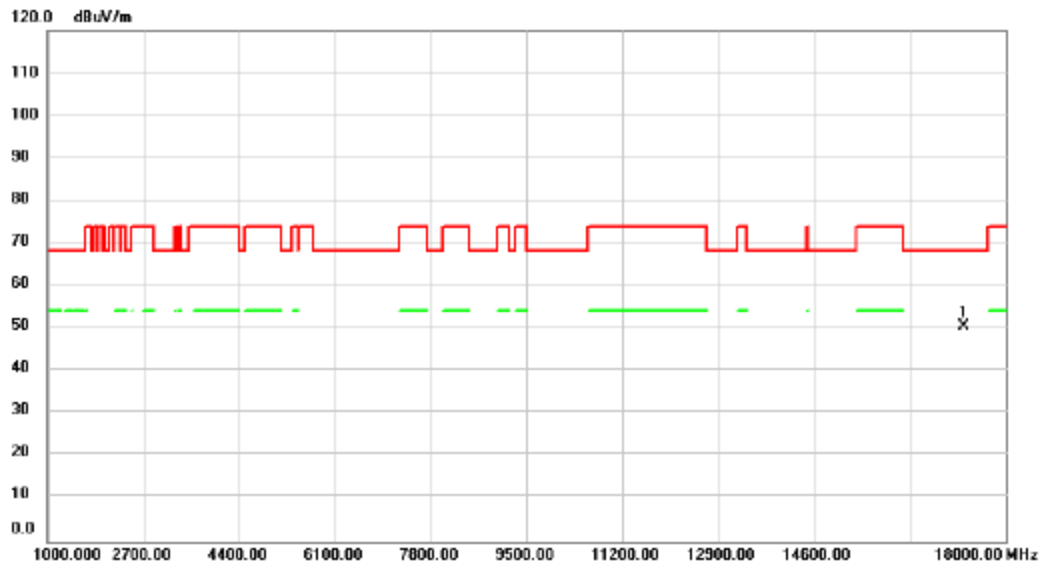


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17269.00	45.67	4.85	50.52	68.20	-17.68	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5755MHz	Polarization	Horizontal

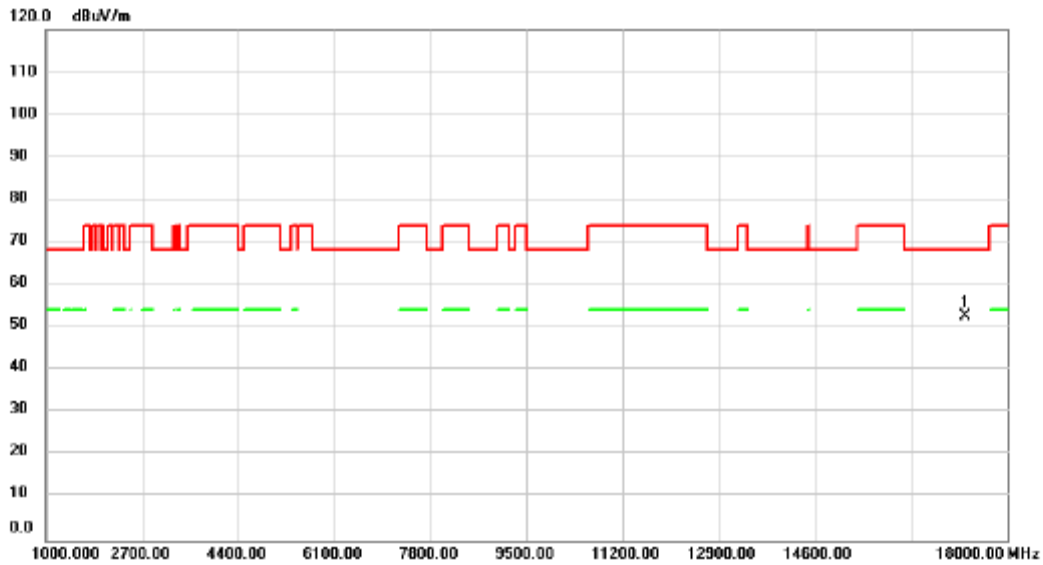


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17269.00	47.82	4.85	52.67	68.20	-15.53	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5795MHz	Polarization	Vertical

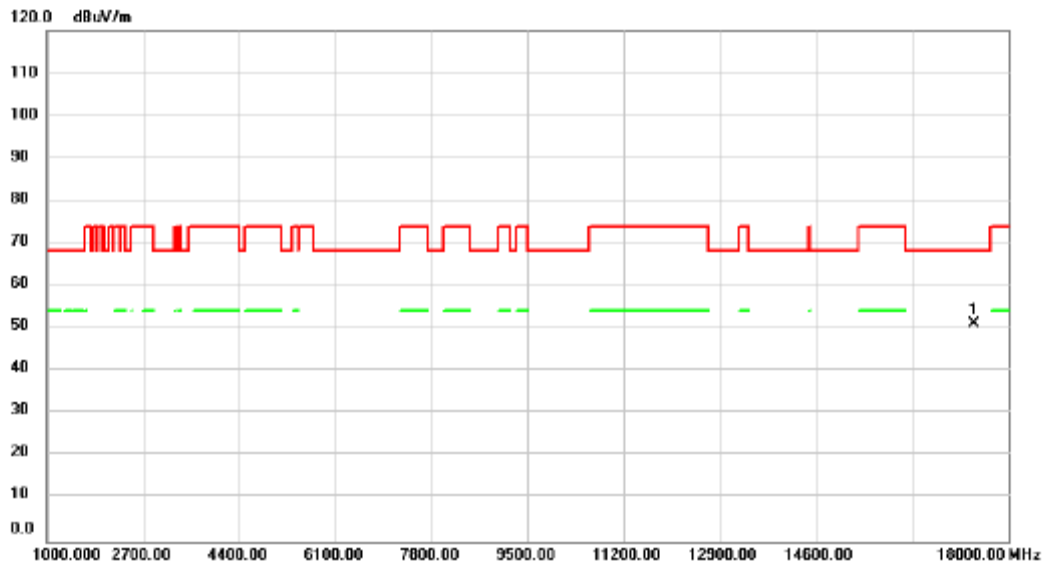


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17388.00	46.26	5.03	51.29	68.20	-16.91	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n(HT40)	Test Date	2024/11/6
Test Frequency	5795MHz	Polarization	Horizontal

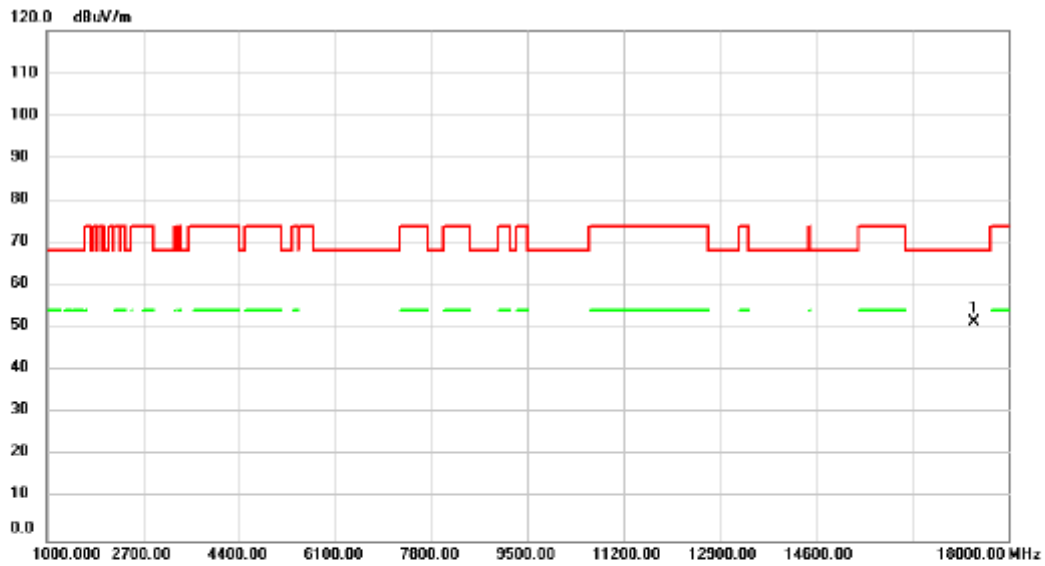


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17388.00	46.28	5.03	51.31	68.20	-16.89	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/6
Test Frequency	5210MHz	Polarization	Vertical

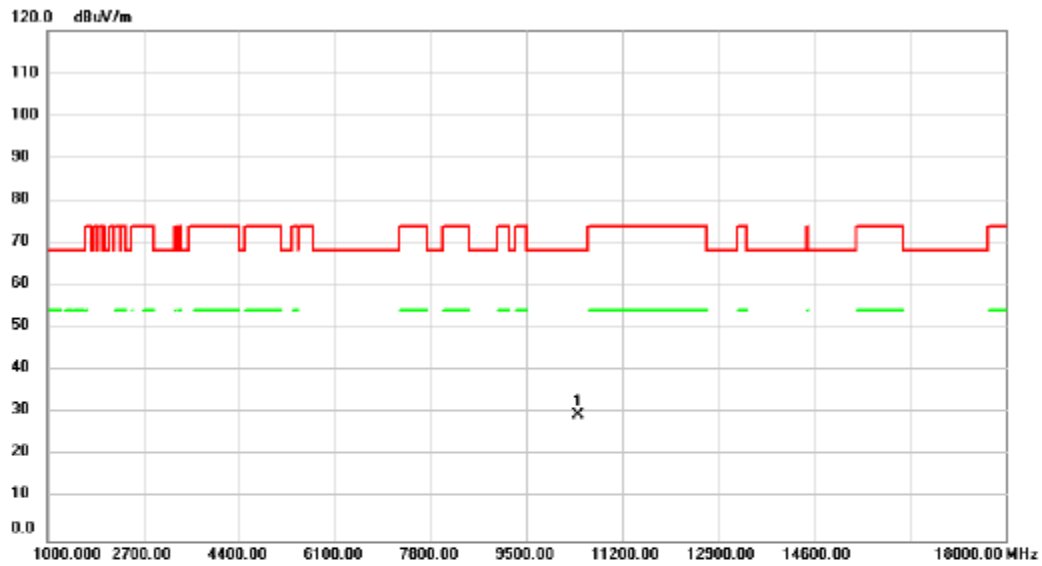


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10420.00	30.04	-0.54	29.50	68.20	-38.70	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/6
Test Frequency	5210MHz	Polarization	Horizontal

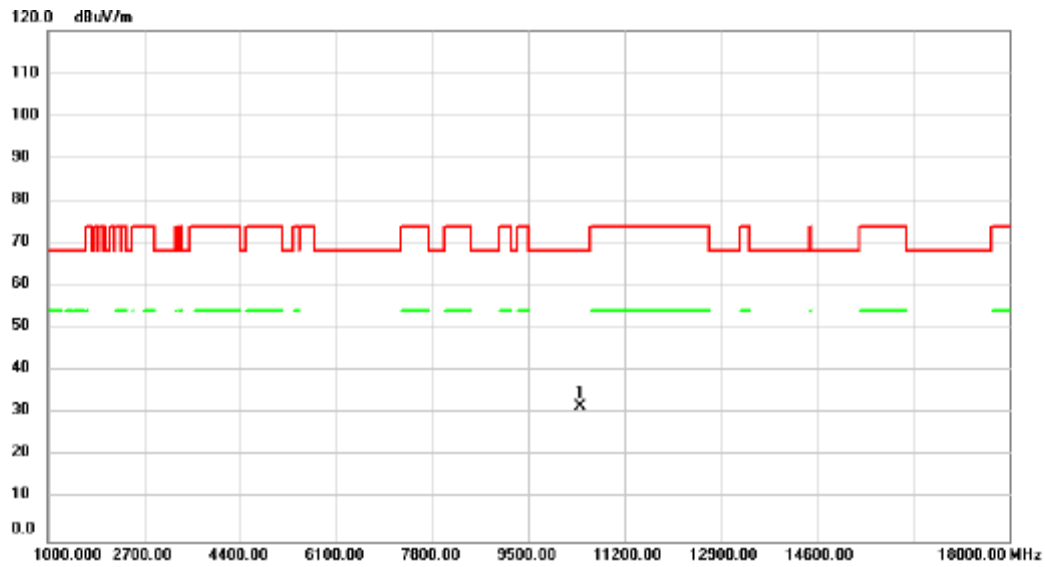


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10420.00	32.26	-0.54	31.72	68.20	-36.48	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/6
Test Frequency	5290MHz	Polarization	Vertical

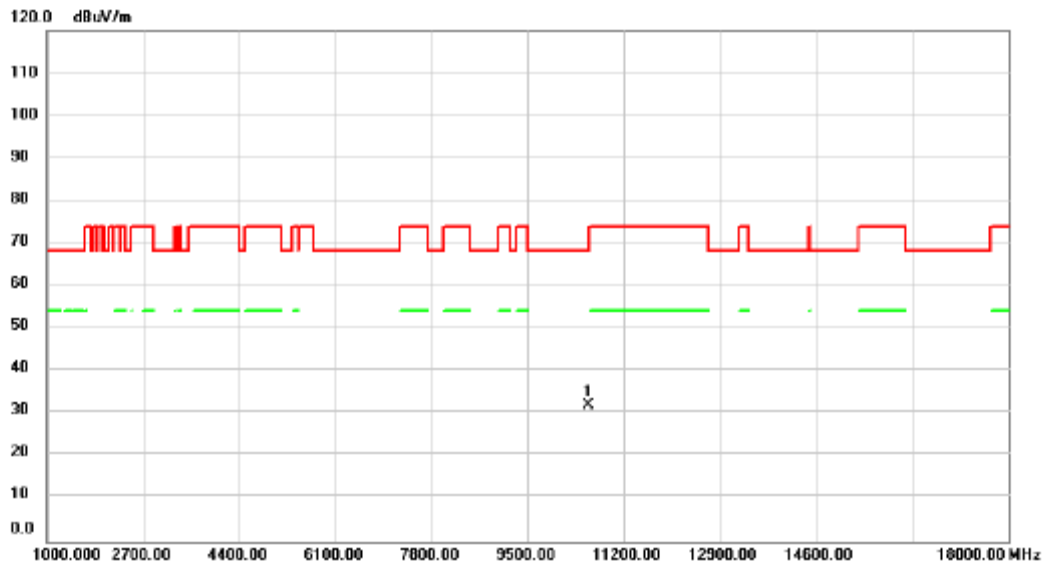


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10580.00	32.46	-0.42	32.04	68.20	-36.16	peak		Comment

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/6
Test Frequency	5290MHz	Polarization	Horizontal

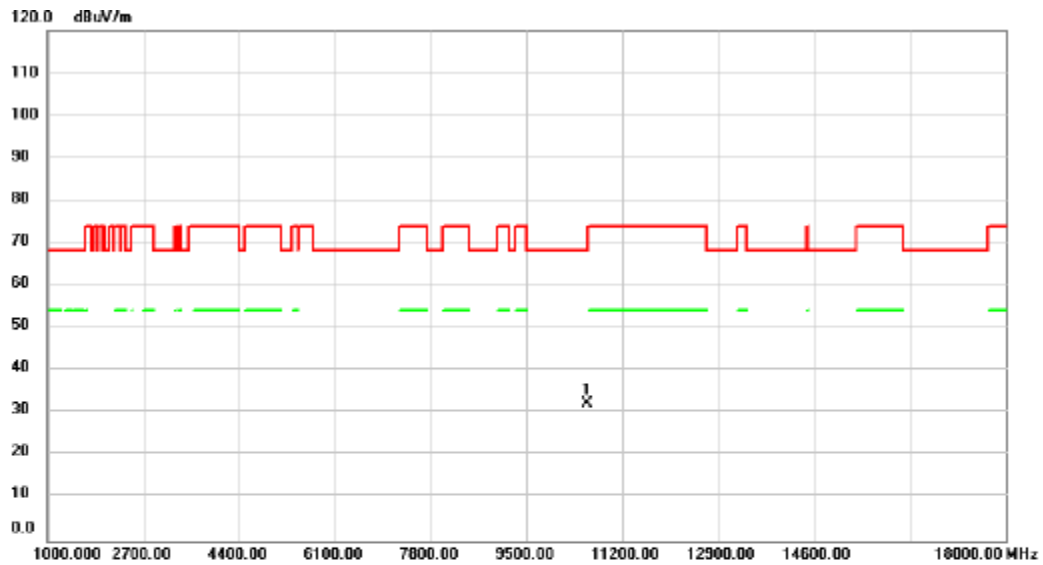


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10580.00	32.73	-0.42	32.31	68.20	-35.89	peak		Comment

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/6
Test Frequency	5530MHz	Polarization	Vertical

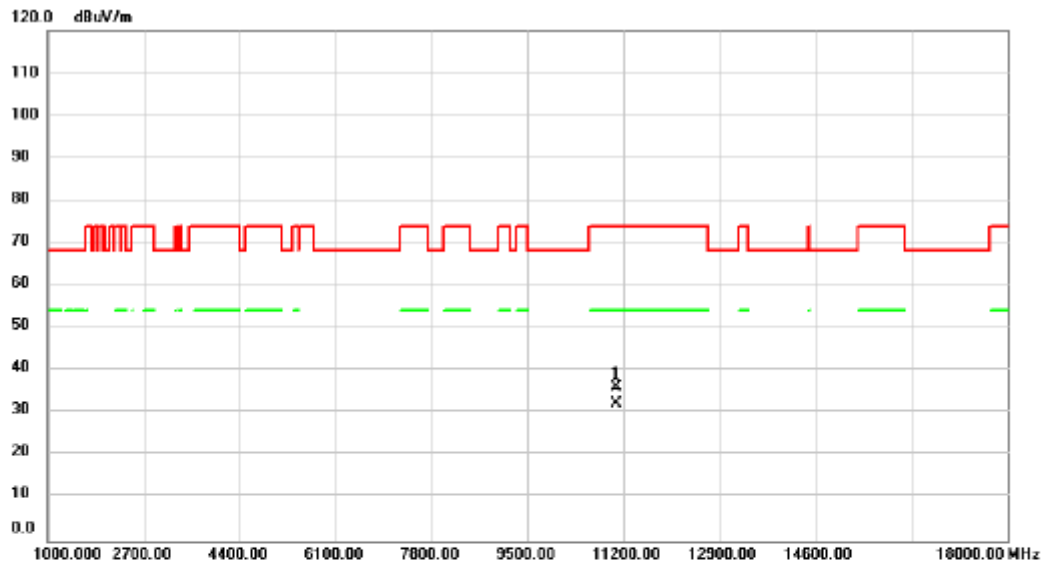


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11064.00	36.13	-0.12	36.01	74.00	-37.99	peak		
2	*	11064.00	32.41	-0.12	32.29	54.00	-21.71	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/6
Test Frequency	5530MHz	Polarization	Horizontal

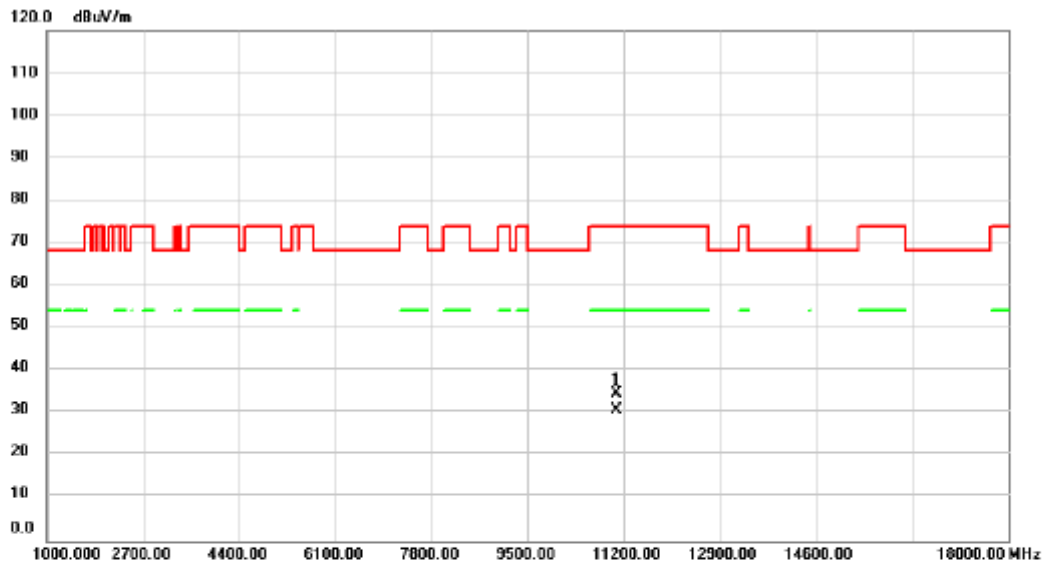


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		11064.00	34.82	-0.12	34.70	74.00	-39.30	peak	
2	*	11064.00	30.78	-0.12	30.66	54.00	-23.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/6
Test Frequency	5610MHz	Polarization	Vertical

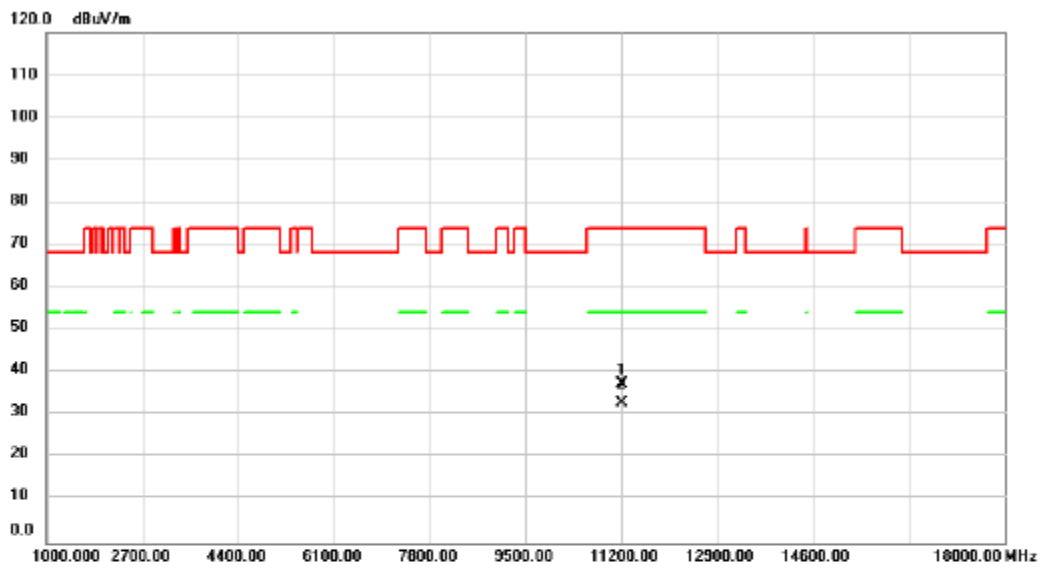


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11217.00	37.19	0.21	37.40	74.00	-36.60	peak		
2	*	11217.00	32.67	0.21	32.88	54.00	-21.12	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/6
Test Frequency	5610MHz	Polarization	Horizontal

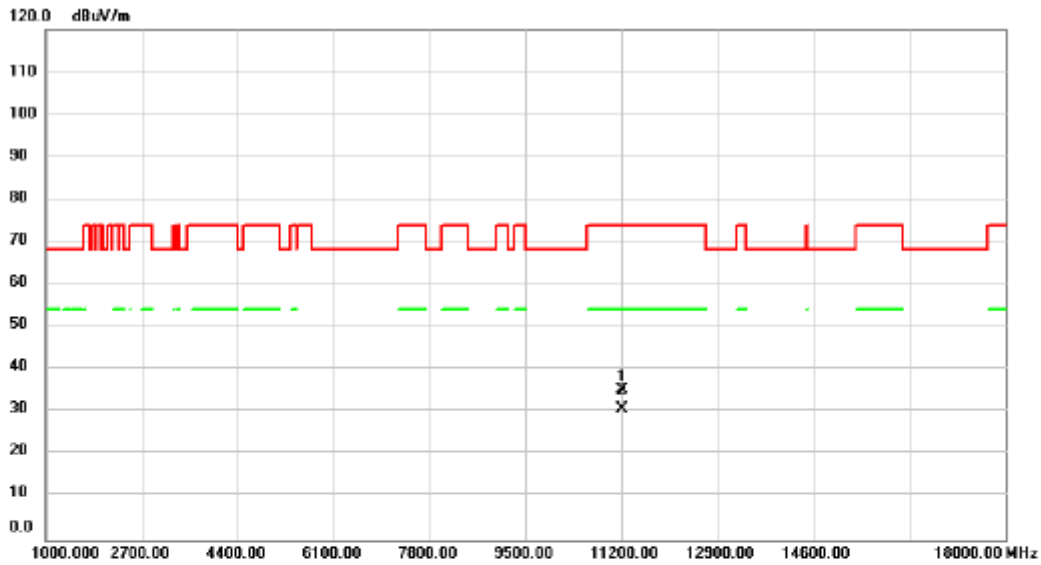


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11217.00	34.91	0.21	35.12	74.00	-38.88			peak
2	*	11217.00	30.64	0.21	30.85	54.00	-23.15			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/6
Test Frequency	5775MHz	Polarization	Vertical

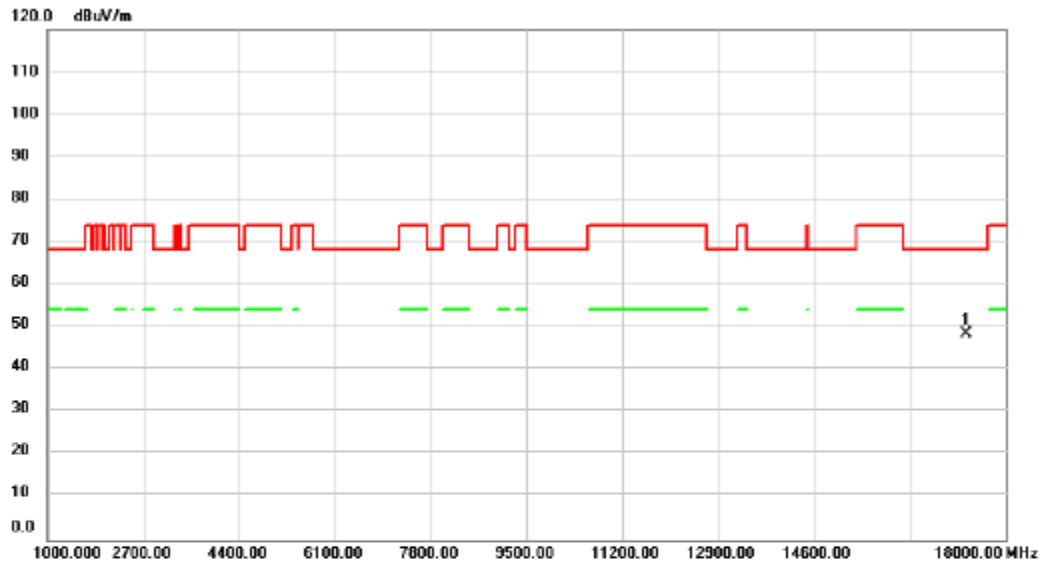


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17303.00	43.63	4.90	48.53	68.20	-19.67	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/6
Test Frequency	5775MHz	Polarization	Horizontal

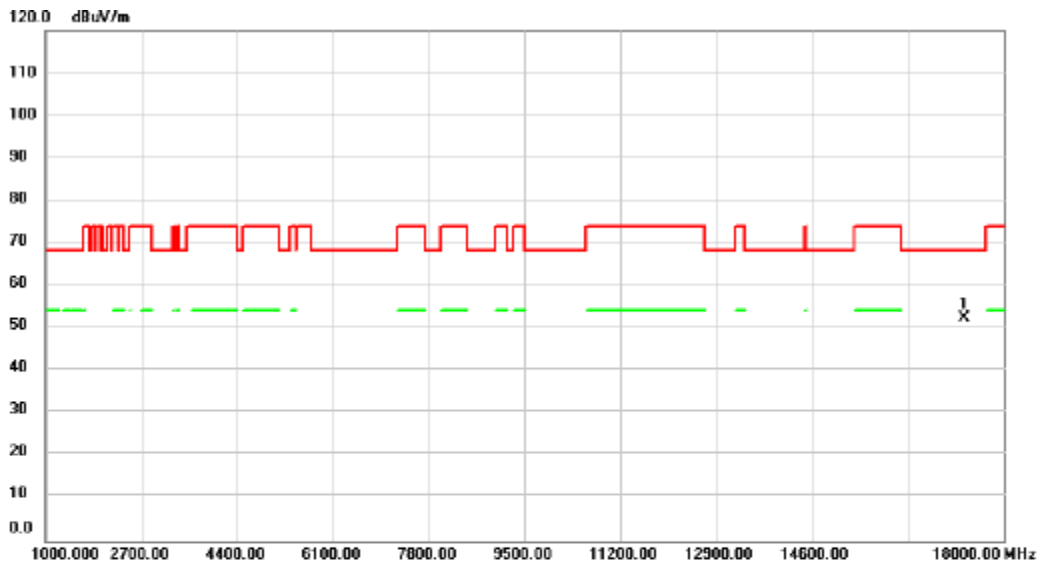


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	17303.00	47.42	4.90	52.32	68.20	-15.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT160)	Test Date	2024/11/6
Test Frequency	5250MHz	Polarization	Vertical

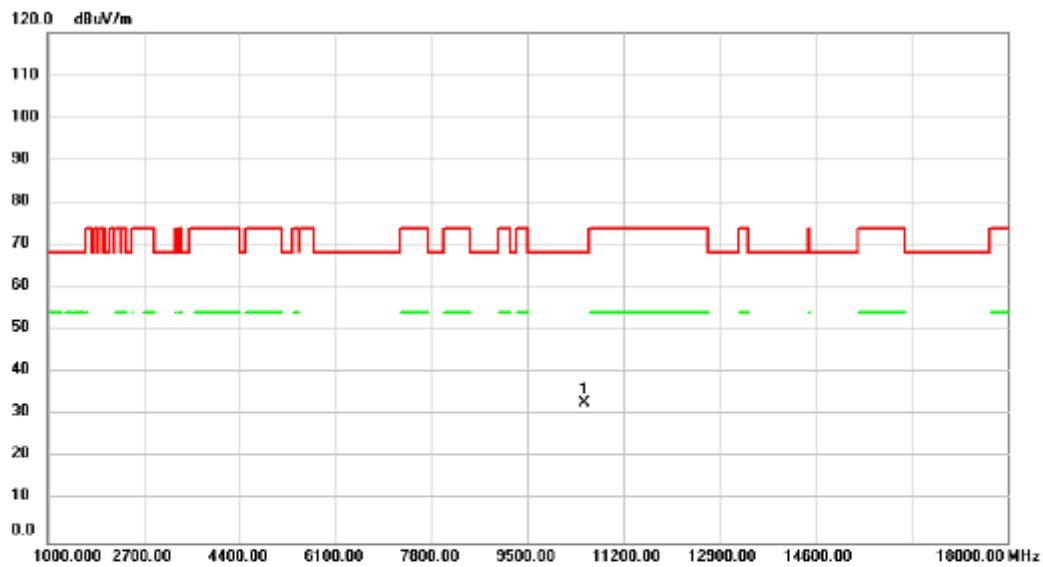


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10500.00	33.34	-0.45	32.89	68.20	-35.31	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT160)	Test Date	2024/11/6
Test Frequency	5250MHz	Polarization	Horizontal

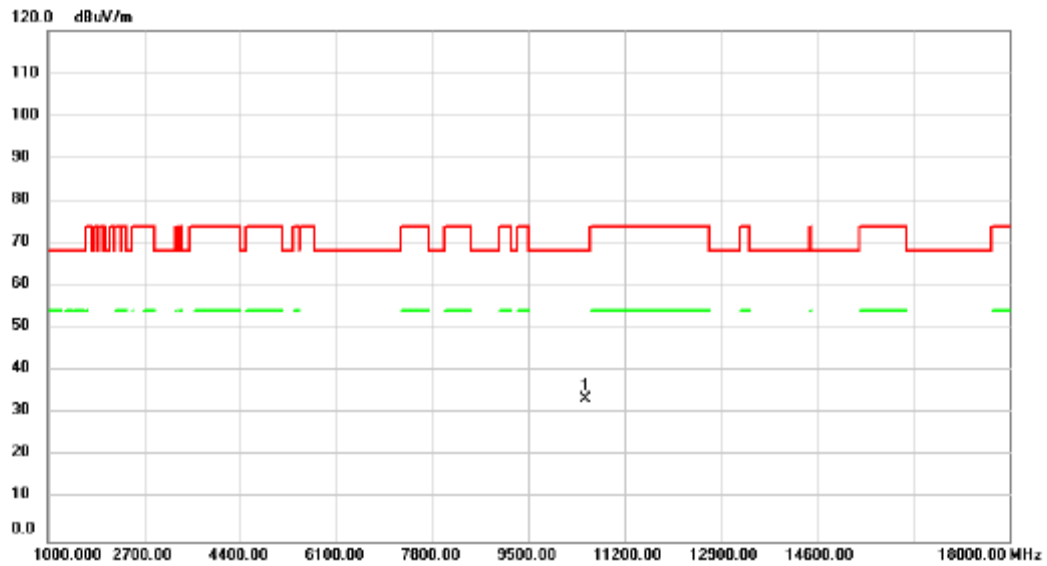


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10500.00	33.88	-0.45	33.43	68.20	-34.77	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT160)	Test Date	2024/11/6
Test Frequency	5570MHz	Polarization	Vertical

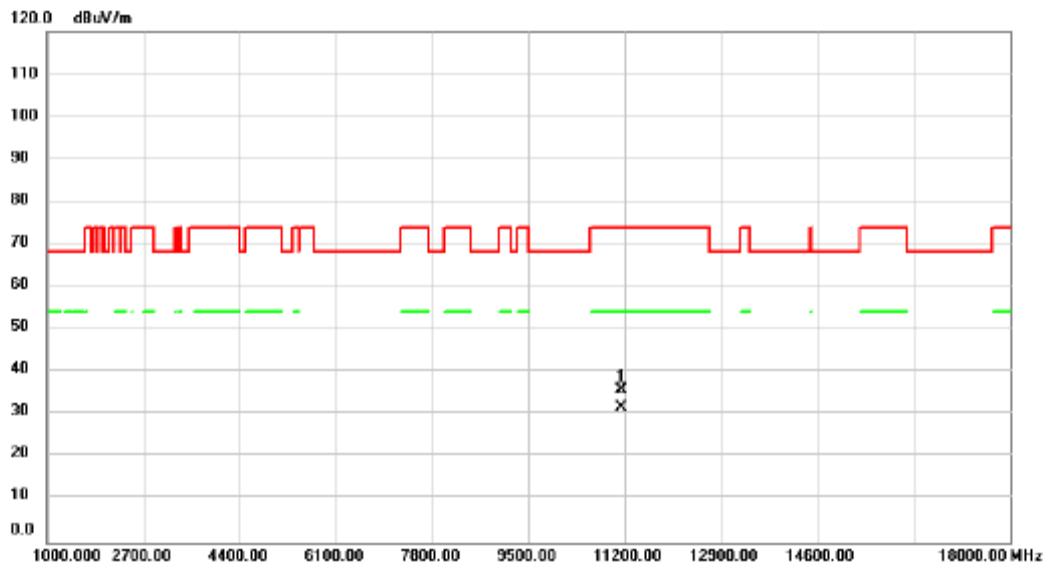


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11132.00	35.77	0.02	35.79	74.00	-38.21	peak		
2	*	11132.00	31.63	0.02	31.65	54.00	-22.35	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT160)	Test Date	2024/11/6
Test Frequency	5570MHz	Polarization	Horizontal

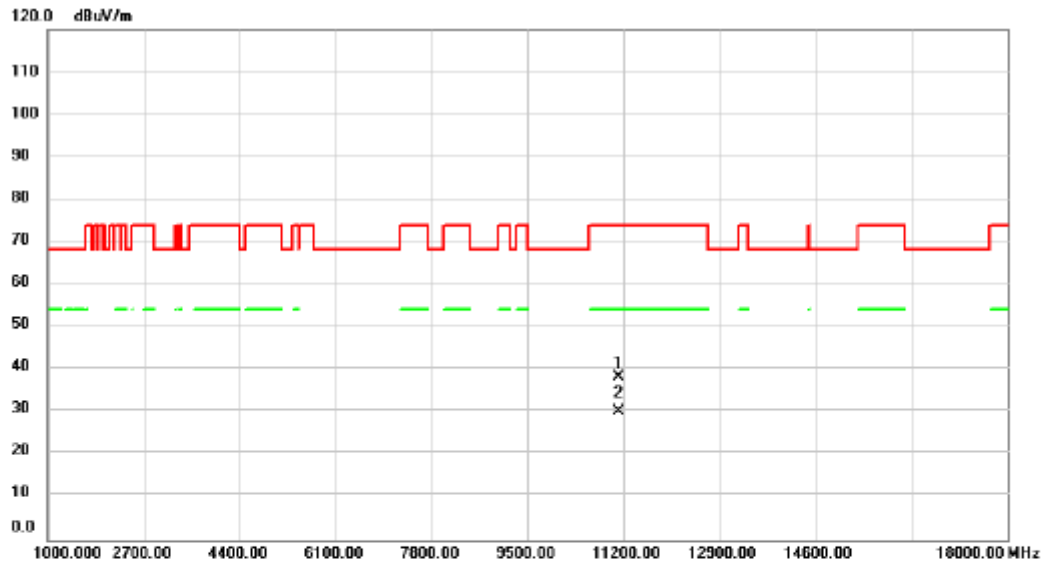


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11115.00	38.19	-0.01	38.18	74.00	-35.82			peak
2	*	11115.00	30.06	-0.01	30.05	54.00	-23.95			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5180MHz	Polarization	Vertical

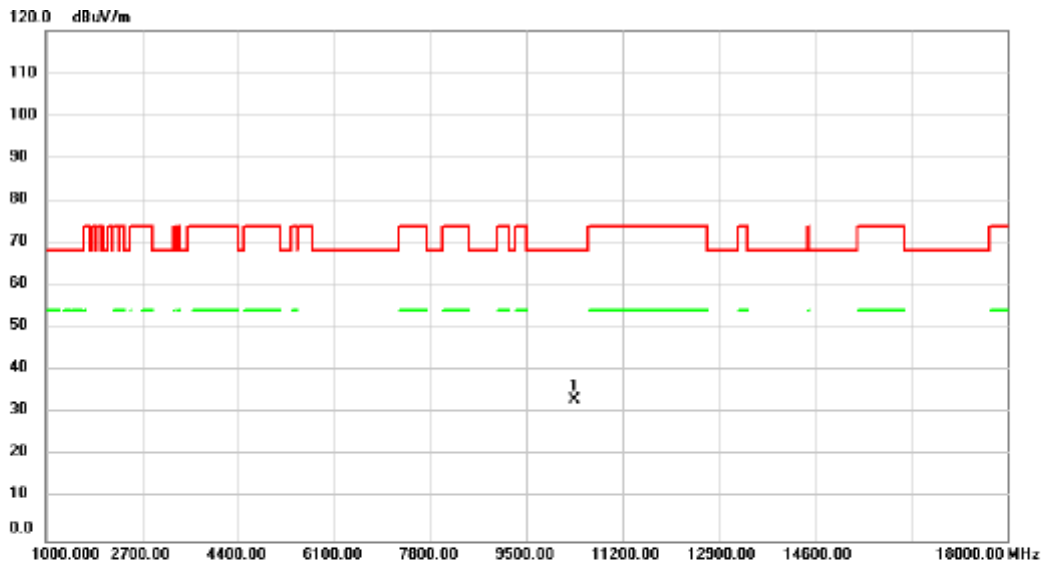


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10360.00	33.82	-0.60	33.22	68.20	-34.98	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5180MHz	Polarization	Horizontal

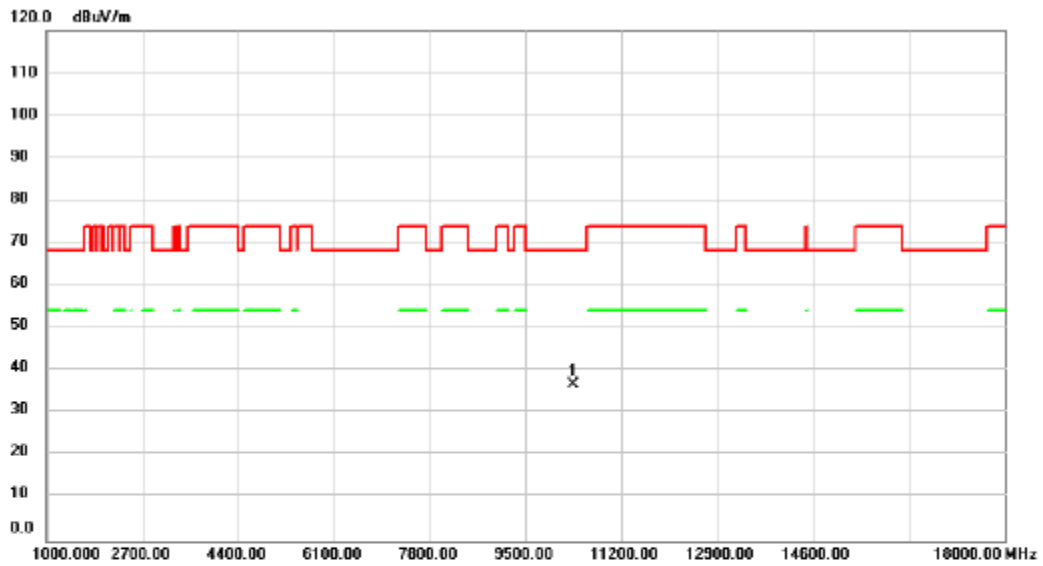


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10350.00	37.50	-0.61	36.89	68.20	-31.31	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5200MHz	Polarization	Vertical

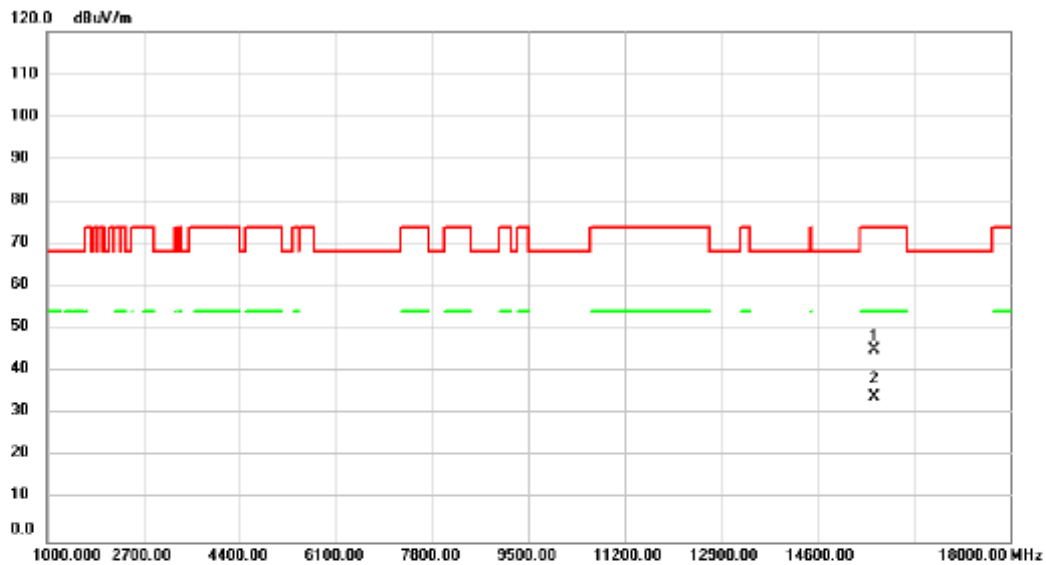


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15603.00	40.42	4.63	45.05	74.00	-28.95	peak		
2	*	15603.00	29.42	4.63	34.05	54.00	-19.95	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5200MHz	Polarization	Horizontal

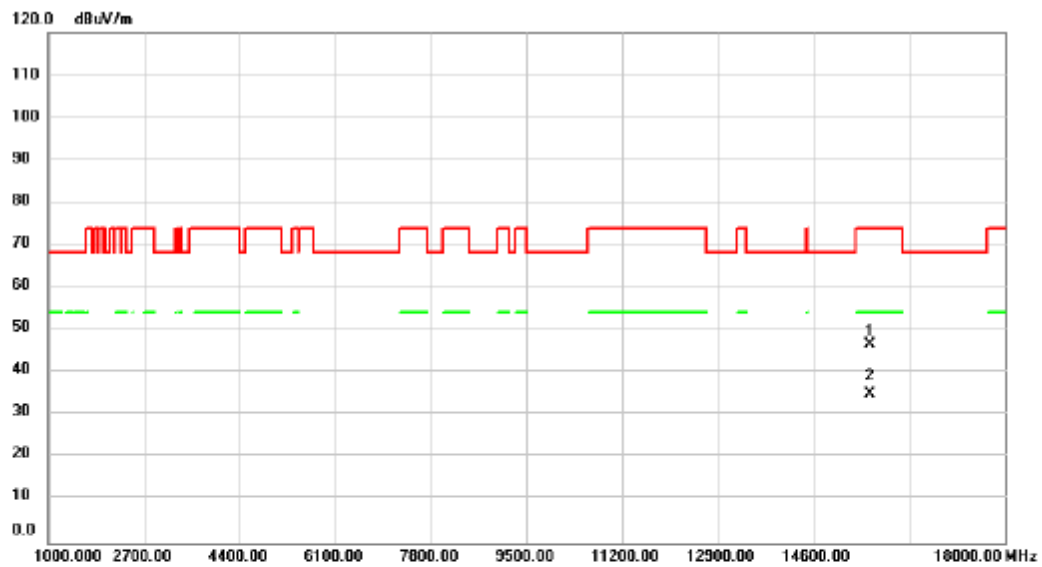


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15603.00	42.06	4.63	46.69	74.00	-27.31	peak		
2	*	15603.00	30.31	4.63	34.94	54.00	-19.06	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5240MHz	Polarization	Vertical

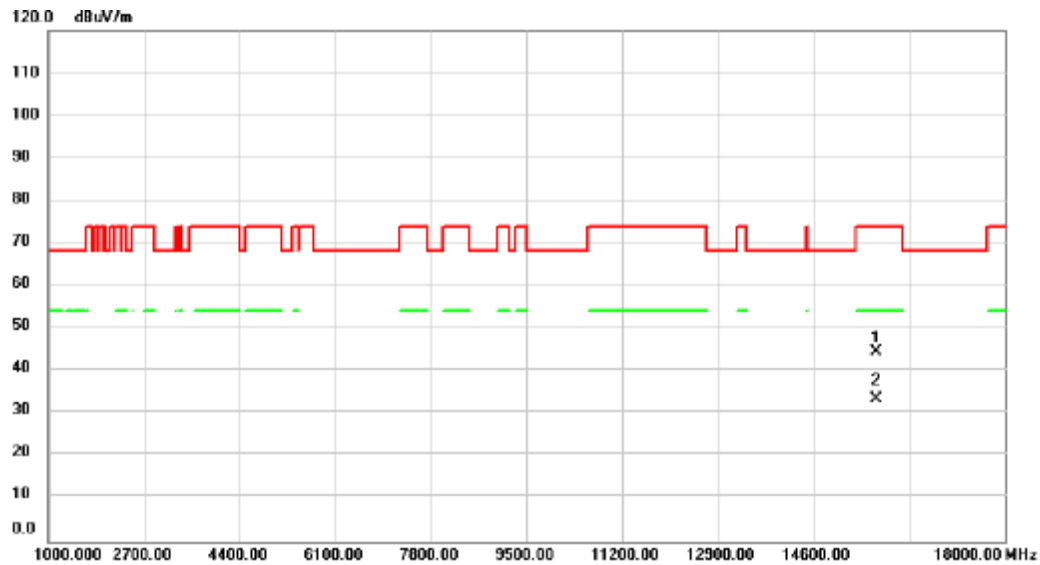


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15722.00	39.88	4.77	44.65	74.00	-29.35	peak		
2	*	15722.00	28.82	4.77	33.59	54.00	-20.41	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5240MHz	Polarization	Horizontal

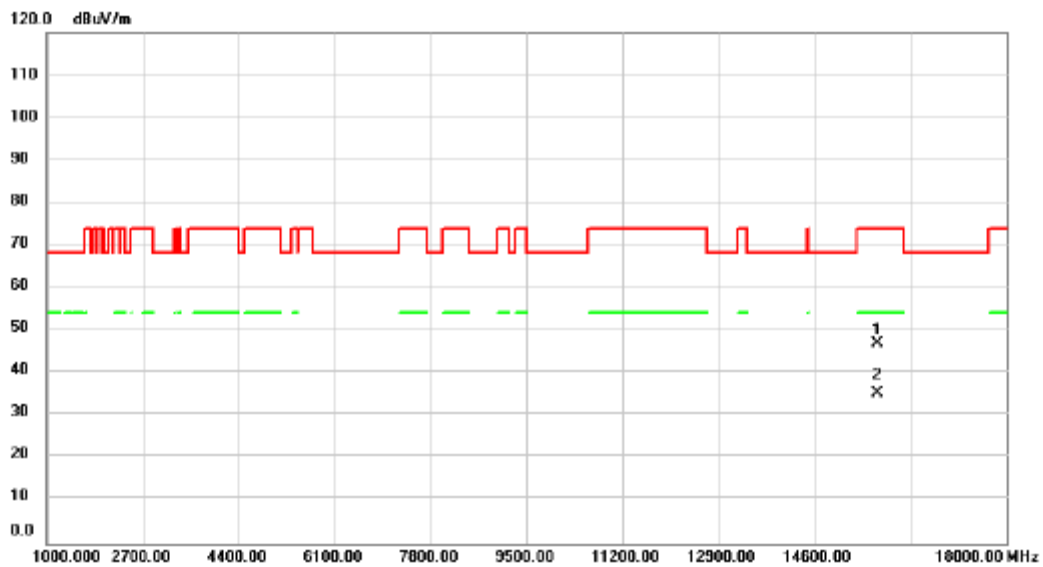


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15722.00	42.16	4.77	46.93	74.00	-27.07	peak		
2	*	15722.00	30.45	4.77	35.22	54.00	-18.78	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5260MHz	Polarization	Vertical

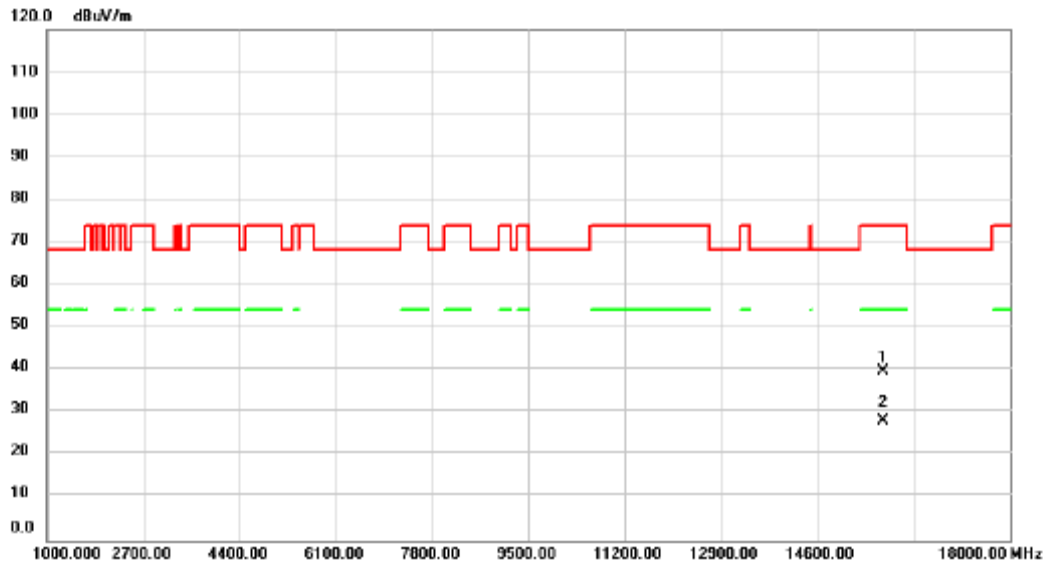


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	15773.00	34.95	4.83	39.78	74.00	-34.22			peak
2 *	15773.00	23.09	4.83	27.92	54.00	-26.08			AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5260MHz	Polarization	Horizontal

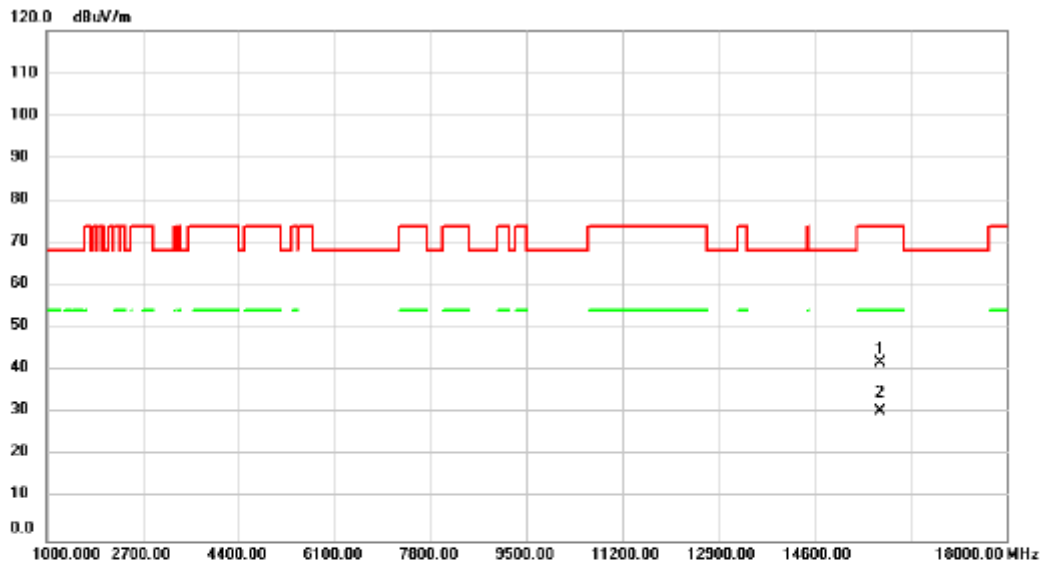


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15773.00	37.14	4.83	41.97	74.00	-32.03	peak		
2	*	15773.00	25.70	4.83	30.53	54.00	-23.47	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5300MHz	Polarization	Vertical

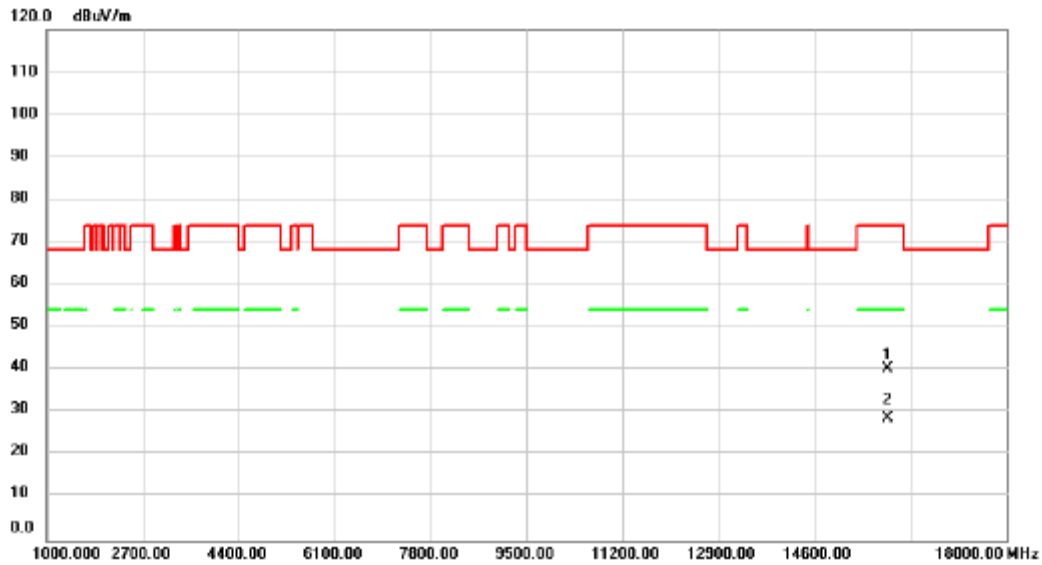


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15909.00	35.48	4.99	40.47	74.00	-33.53	peak		
2	*	15909.00	23.75	4.99	28.74	54.00	-25.26	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5300MHz	Polarization	Horizontal

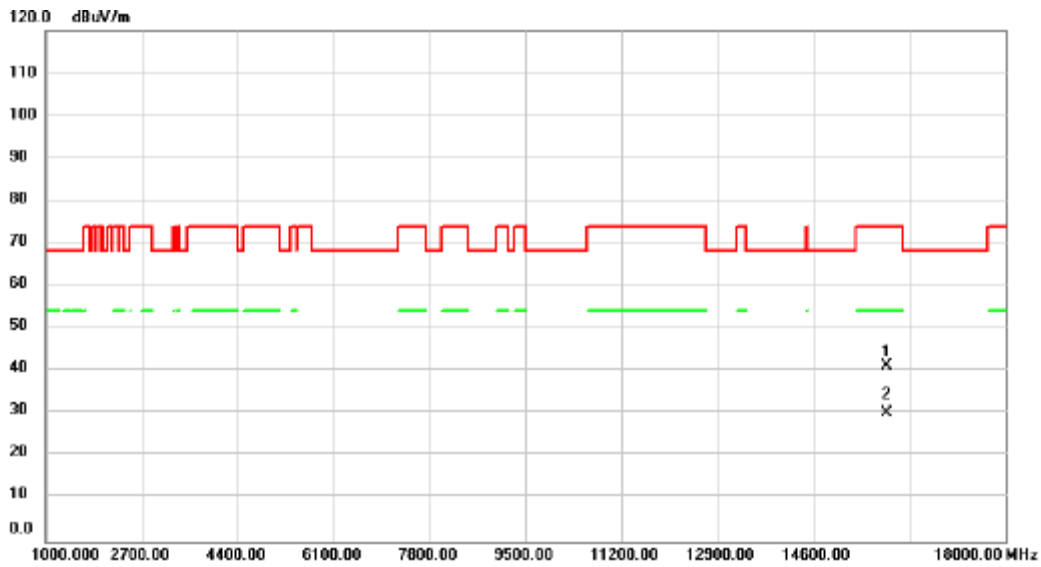


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15892.00	36.22	4.97	41.19	74.00	-32.81	peak		
2	*	15892.00	25.13	4.97	30.10	54.00	-23.90	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5320MHz	Polarization	Vertical

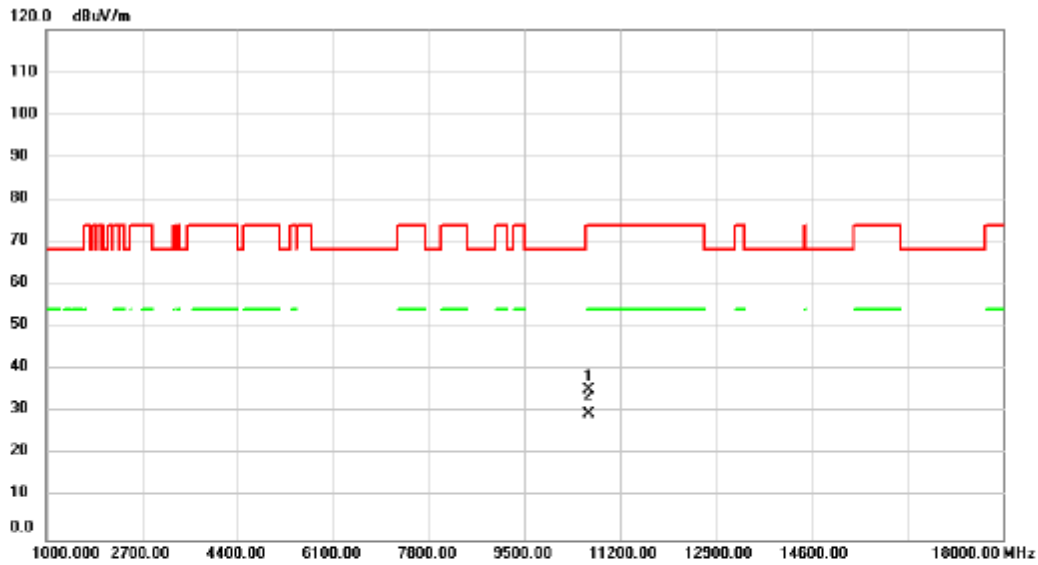


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10639.00	35.77	-0.41	35.36	74.00	-38.64	peak		
2	*	10639.00	29.83	-0.41	29.42	54.00	-24.58	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5320MHz	Polarization	Horizontal

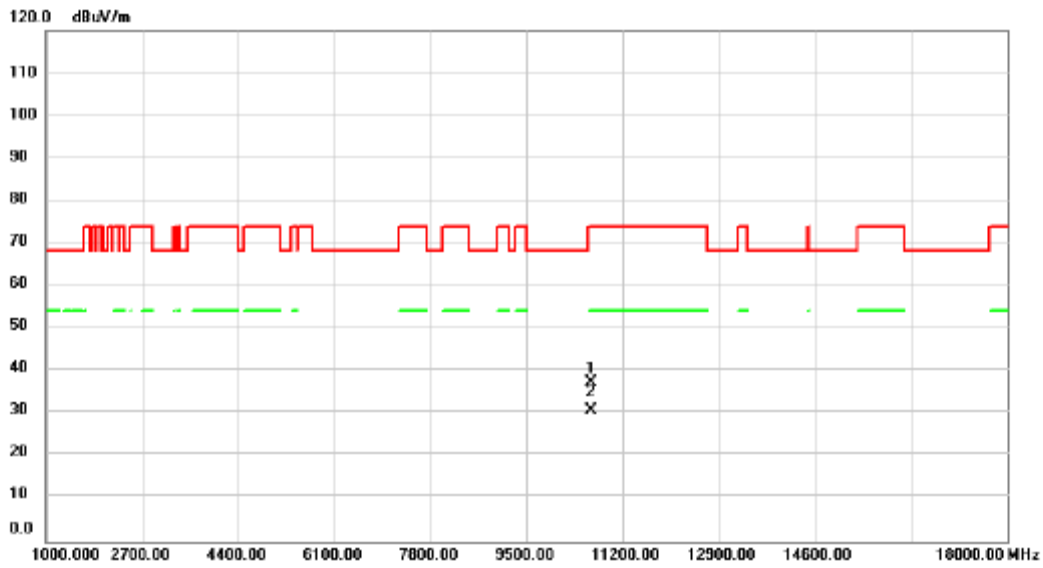


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		10639.00	37.70	-0.41	37.29	74.00	-36.71	peak		
2	*	10639.00	31.22	-0.41	30.81	54.00	-23.19	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5500MHz	Polarization	Vertical

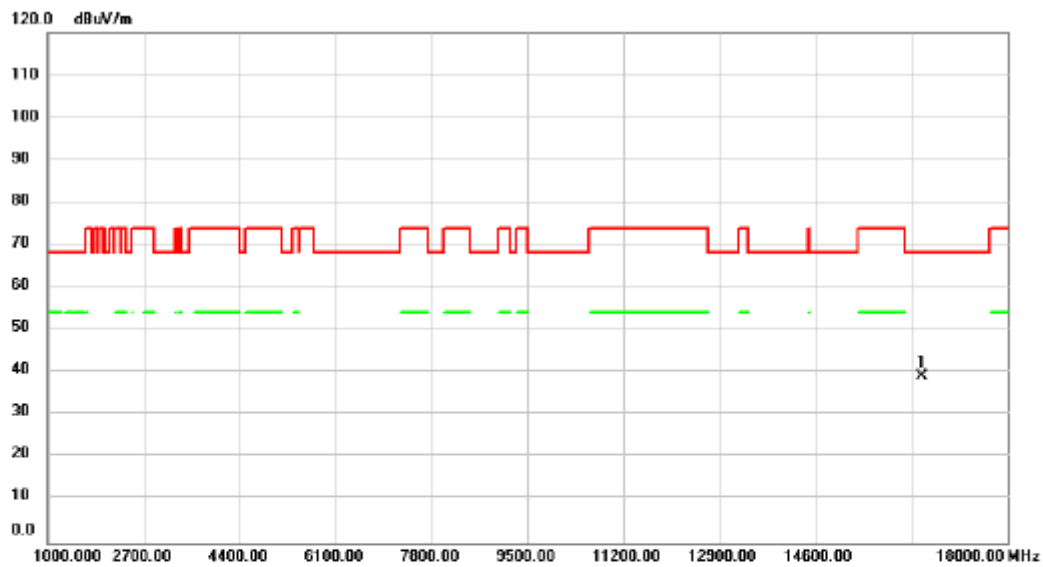


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	16487.00	37.63	1.67	39.30	68.20	-28.90	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5500MHz	Polarization	Horizontal

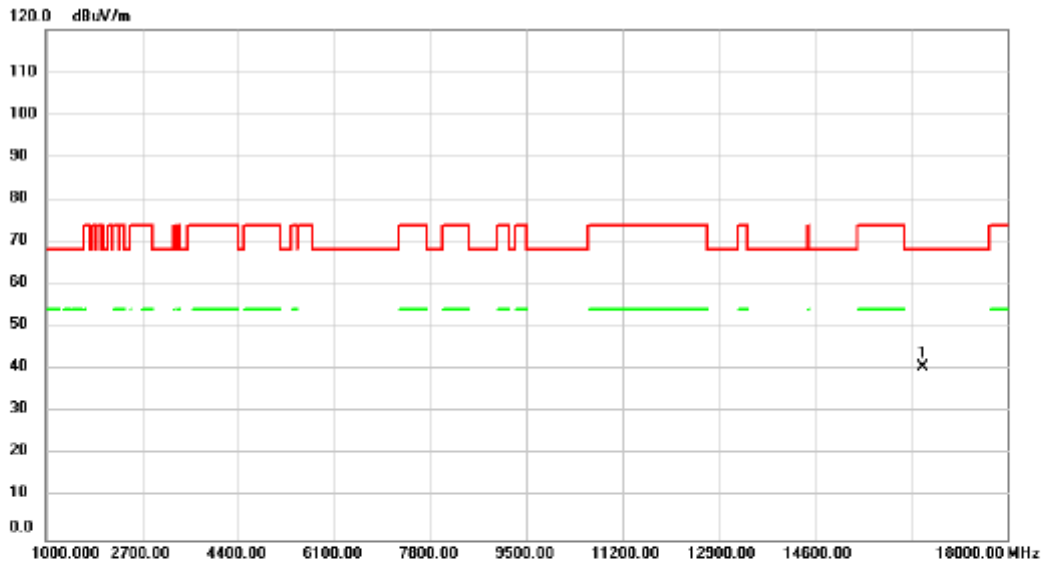


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	16504.00	38.97	1.59	40.56	68.20	-27.64	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5580MHz	Polarization	Vertical

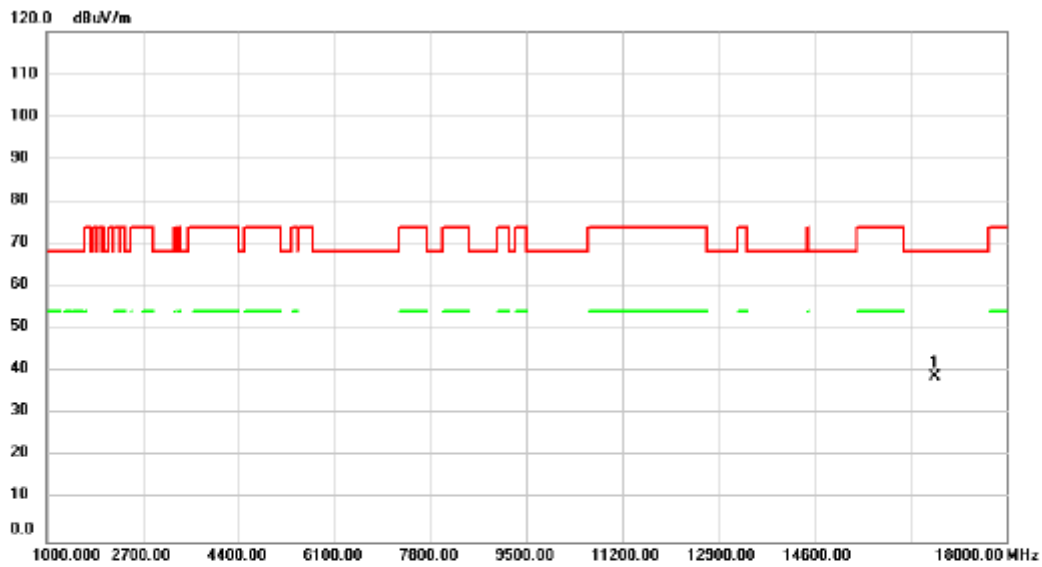


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	16742.00	35.79	2.98	38.77	68.20	-29.43			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5580MHz	Polarization	Horizontal

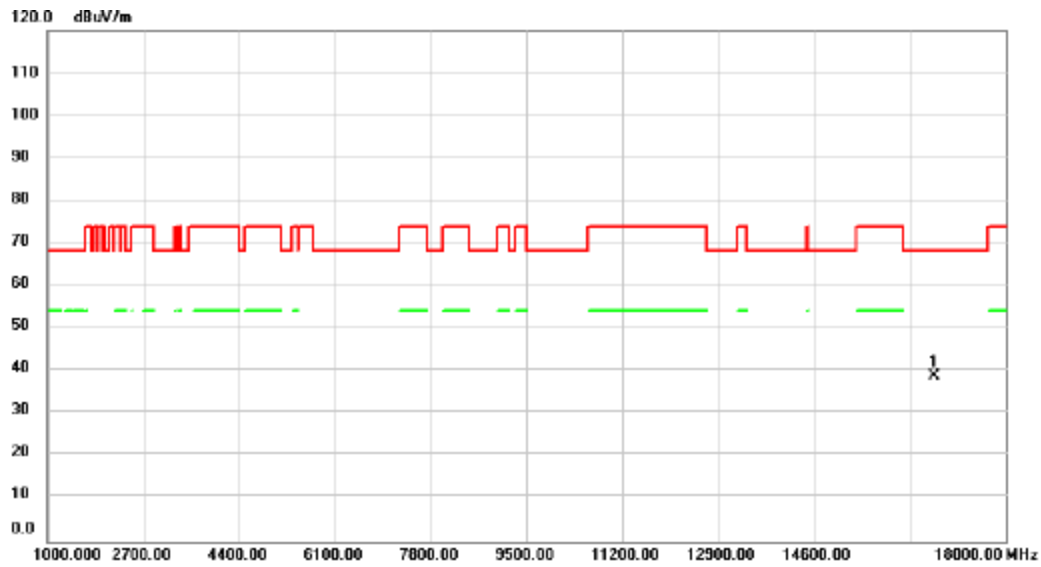


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	16742.00	35.92	2.98	38.90	68.20	-29.30	peak		Comment

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5700MHz	Polarization	Vertical

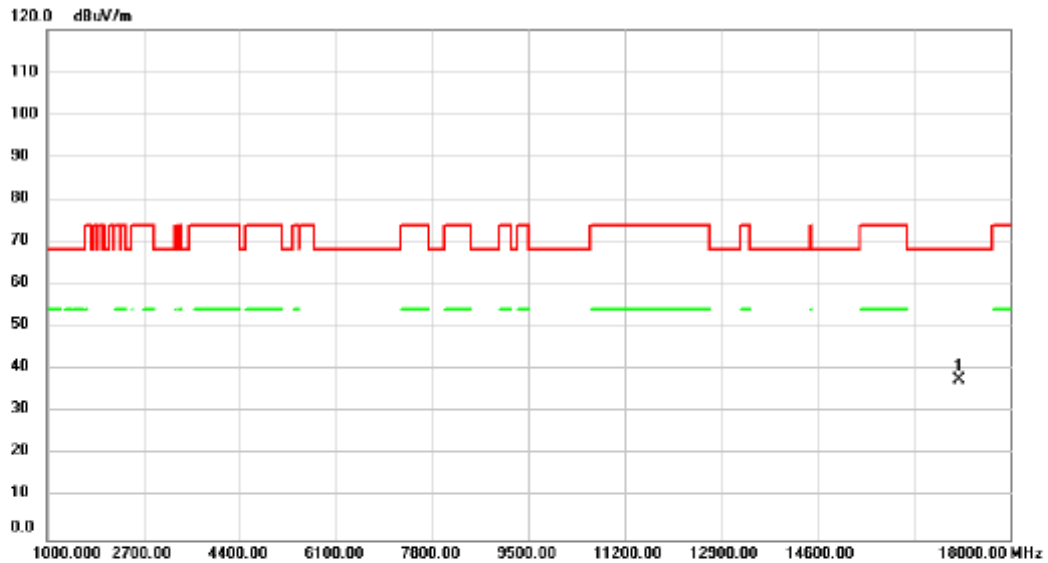


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17100.00	32.95	4.62	37.57	68.20	-30.63	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5700MHz	Polarization	Horizontal

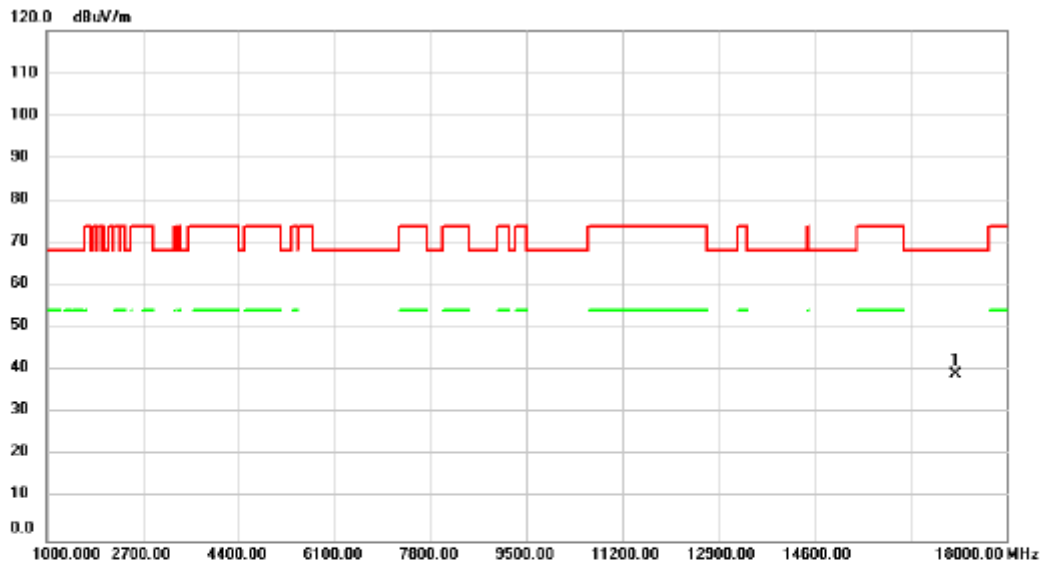


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17100.00	34.50	4.62	39.12	68.20	-29.08	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5745MHz	Polarization	Vertical

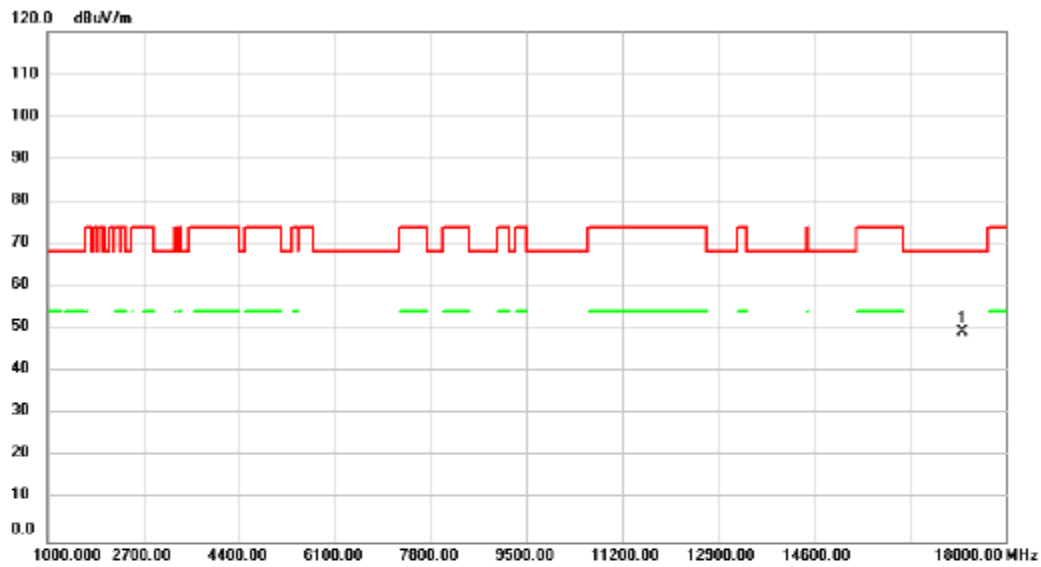


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17235.00	44.44	4.81	49.25	68.20	-18.95			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5745MHz	Polarization	Horizontal

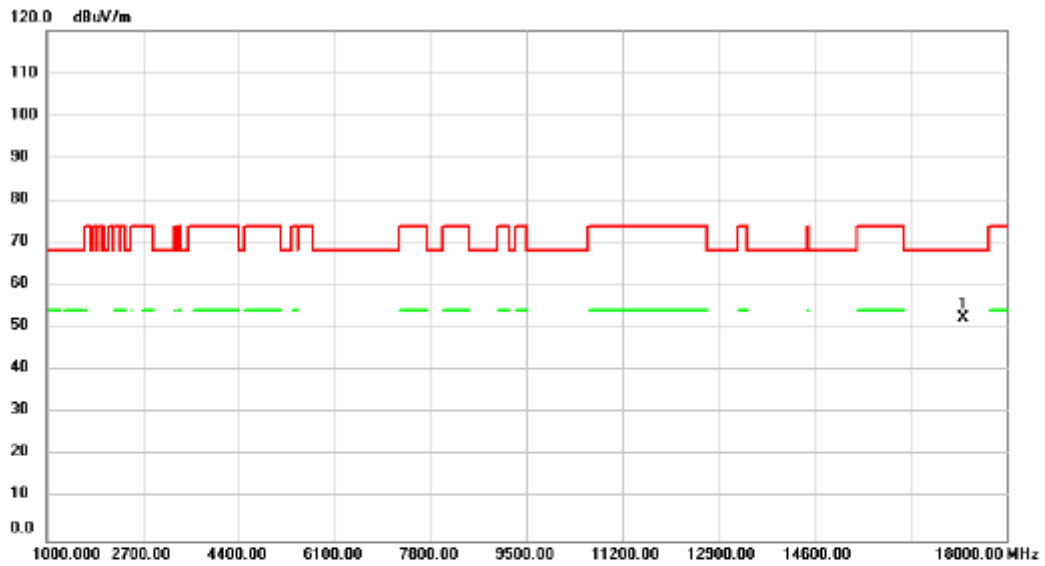


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17235.00	47.52	4.81	52.33	68.20	-15.87	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5785MHz	Polarization	Vertical

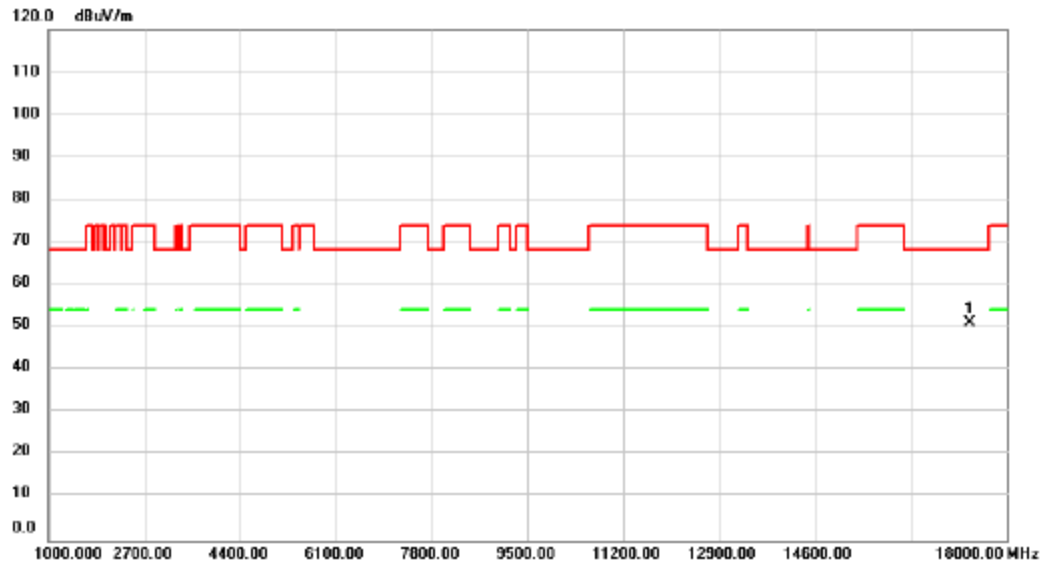


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17354.00	46.30	4.97	51.27	68.20	-16.93	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5785MHz	Polarization	Horizontal

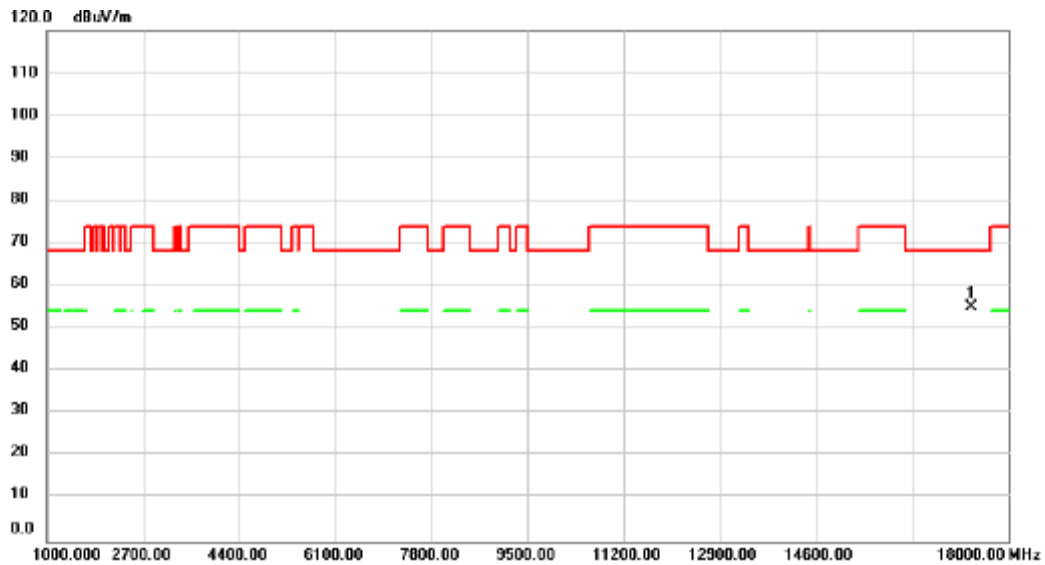


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17354.00	49.94	4.97	54.91	68.20	-13.29	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5825MHz	Polarization	Vertical

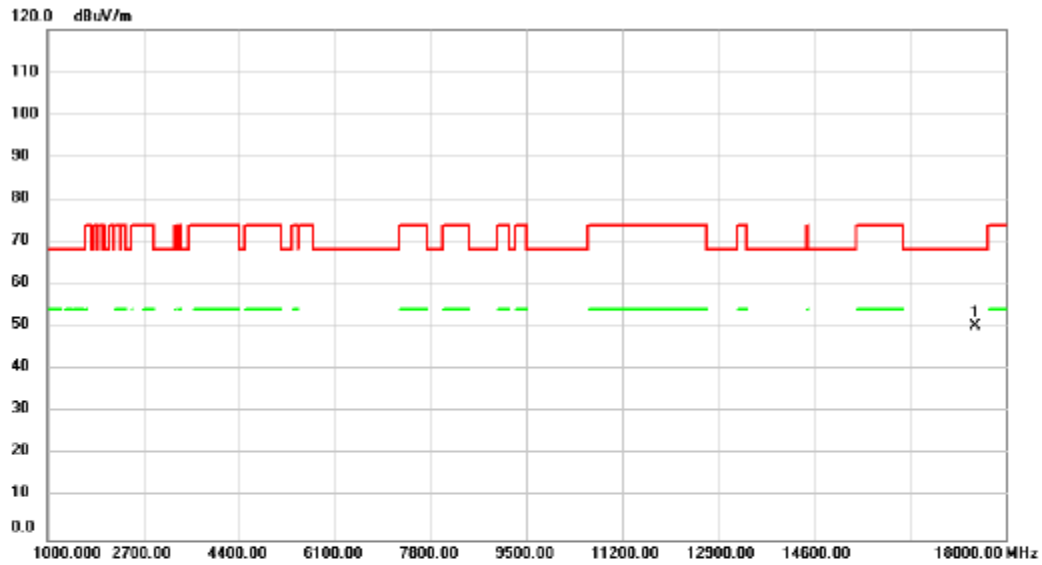


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17473.00	45.16	5.14	50.30	68.20	-17.90	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/11/6
Test Frequency	5825MHz	Polarization	Horizontal

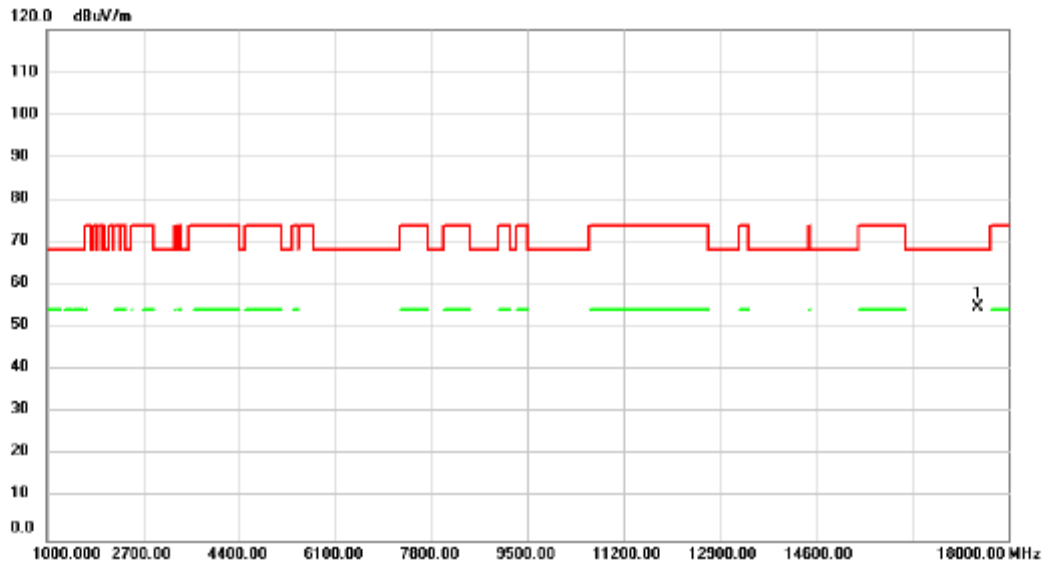


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17473.00	49.49	5.14	54.63	68.20	-13.57	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/11/6
Test Frequency	5190MHz	Polarization	Vertical

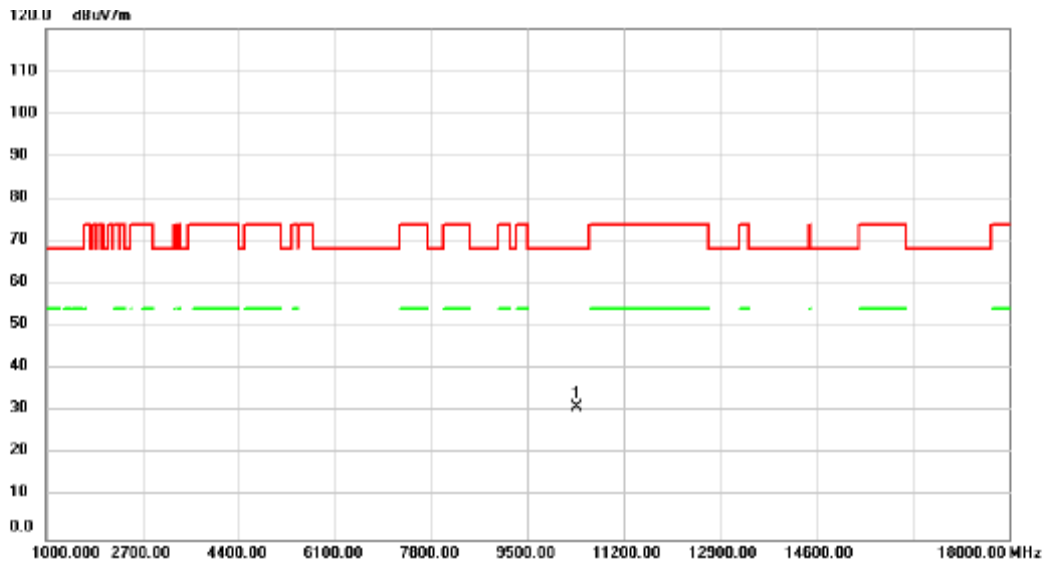


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10380.00	31.51	-0.57	30.94	68.20	-37.26	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/11/6
Test Frequency	5190MHz	Polarization	Horizontal

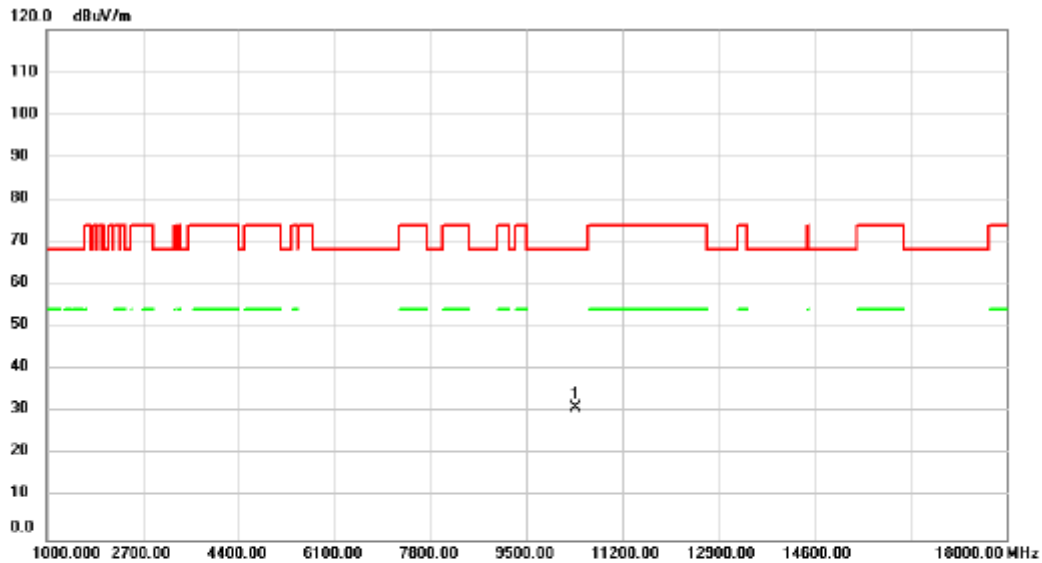


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10380.00	31.75	-0.57	31.18	68.20	-37.02	peak		Comment

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/11/6
Test Frequency	5230MHz	Polarization	Vertical

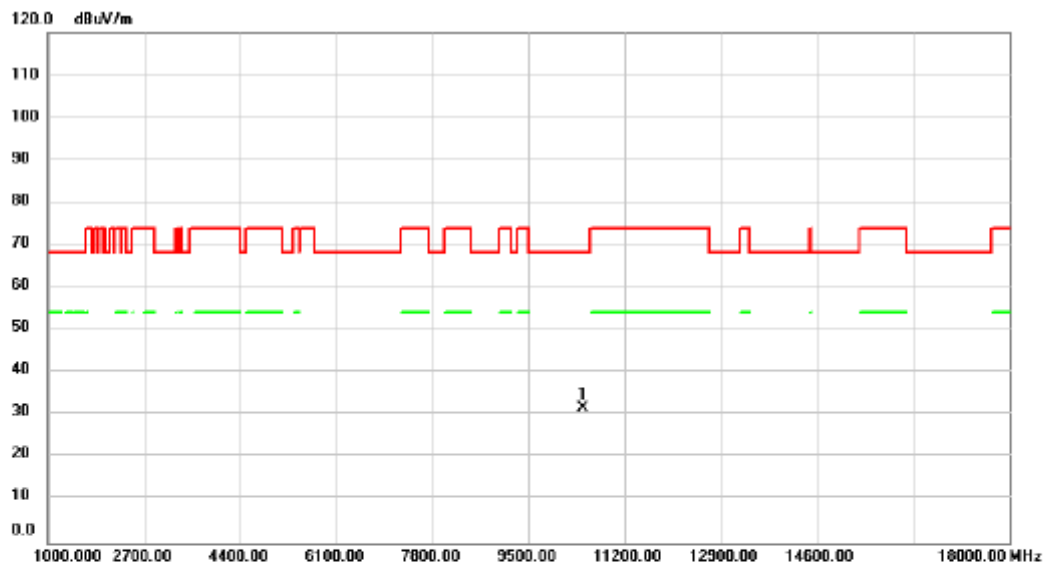


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10460.00	32.03	-0.49	31.54	68.20	-36.66	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/11/6
Test Frequency	5230MHz	Polarization	Horizontal

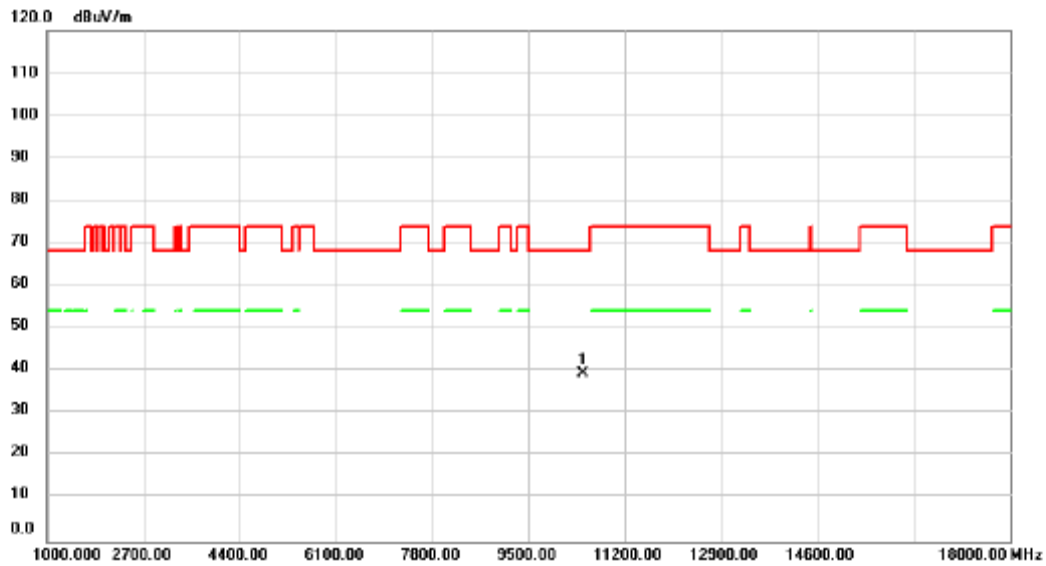


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10452.00	39.83	-0.50	39.33	68.20	-28.87	peak		Comment

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/6
Test Frequency	5270MHz	Polarization	Vertical

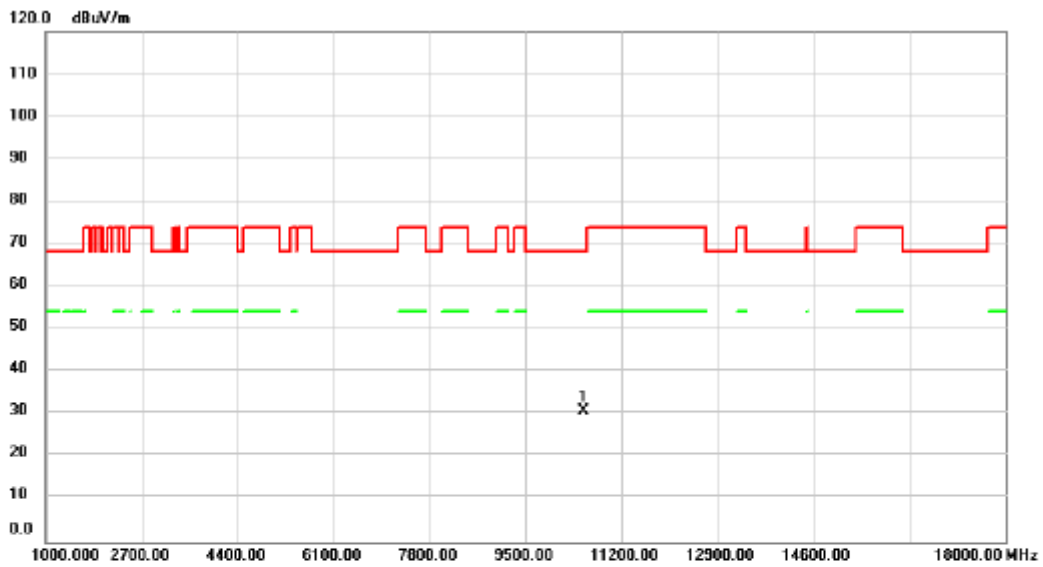


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10540.00	31.33	-0.44	30.89	68.20	-37.31	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/6
Test Frequency	5270MHz	Polarization	Horizontal

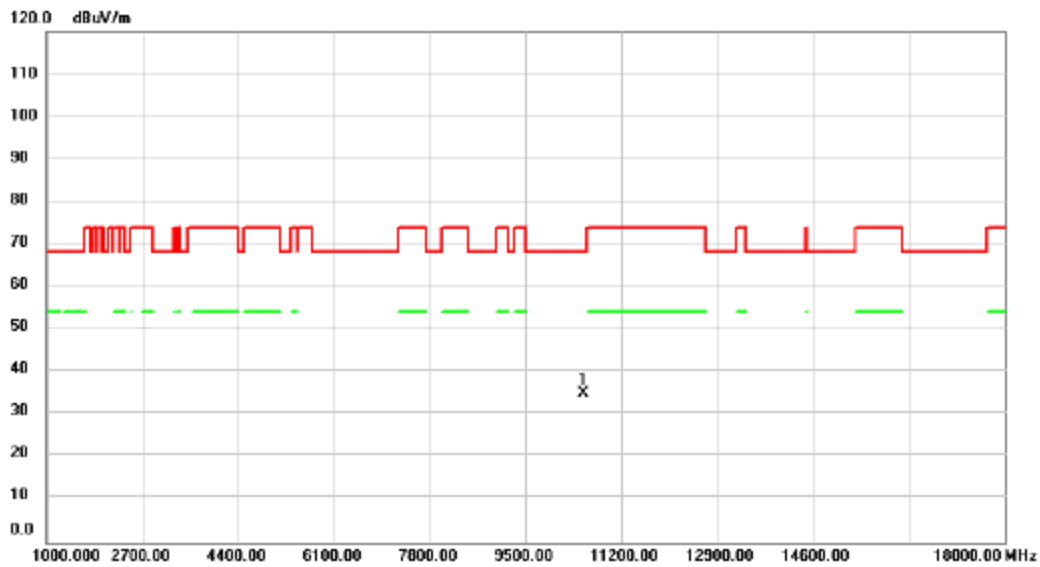


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10537.00	35.39	-0.44	34.95	68.20	-33.25	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/6
Test Frequency	5310MHz	Polarization	Vertical

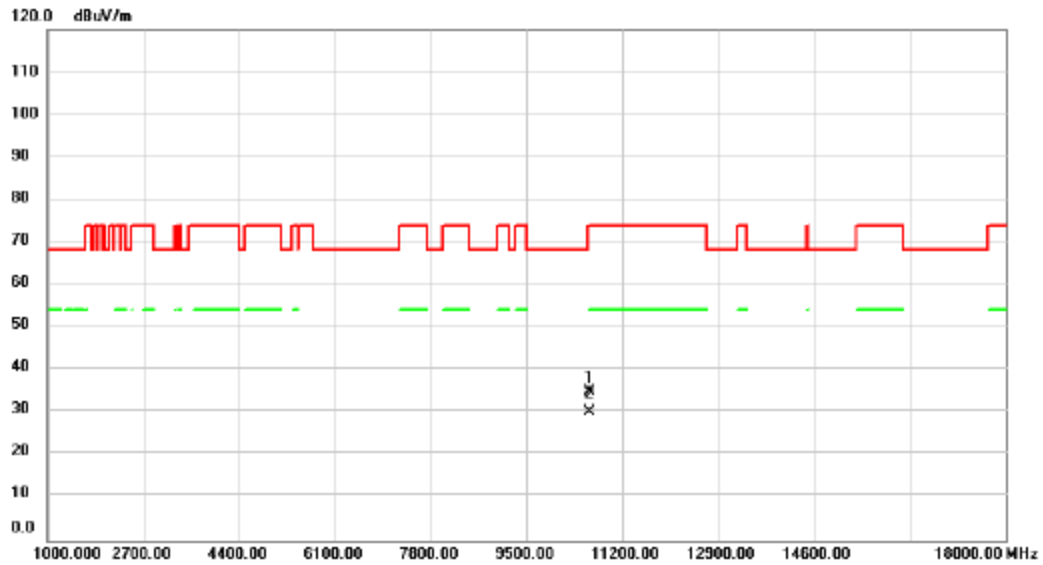


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		10622.00	35.40	-0.41	34.99	74.00	-39.01	peak		
2	*	10622.00	30.43	-0.41	30.02	54.00	-23.98	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/6
Test Frequency	5310MHz	Polarization	Horizontal

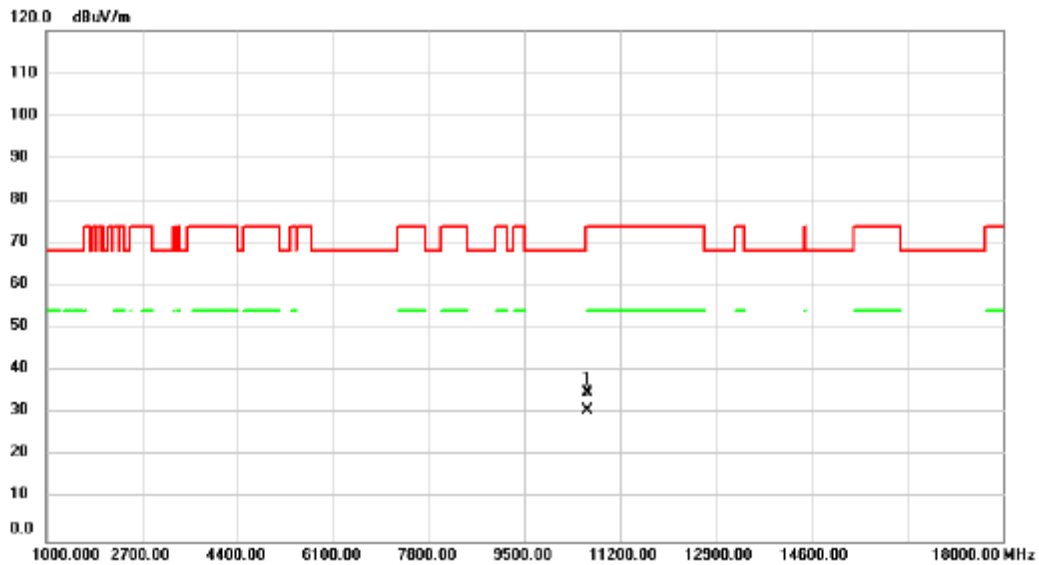


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		10622.00	35.46	-0.41	35.05	74.00	-38.95	peak		
2	*	10622.00	31.15	-0.41	30.74	54.00	-23.26	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/6
Test Frequency	5510MHz	Polarization	Vertical

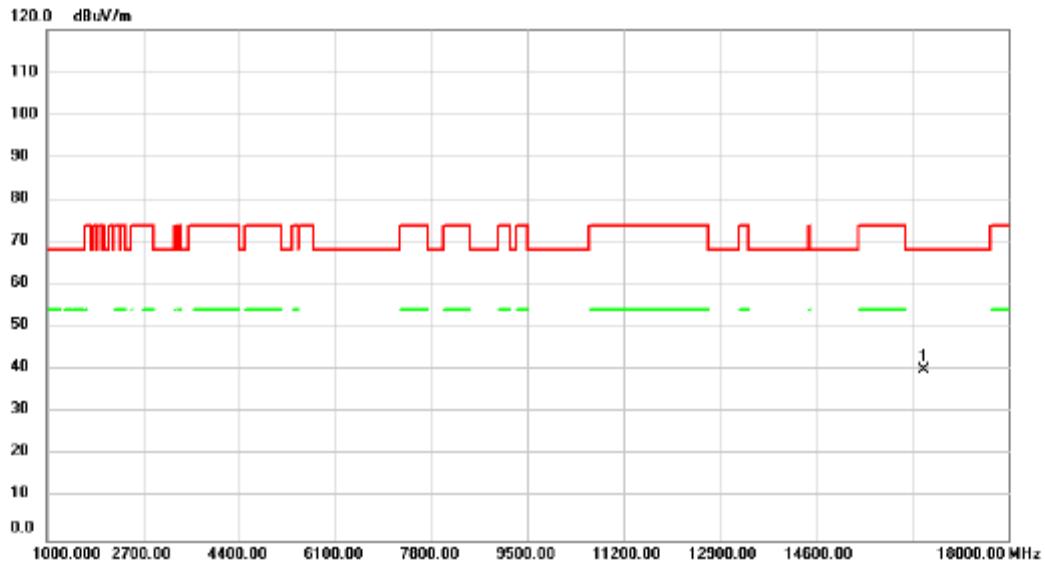


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	16521.00	38.28	1.70	39.98	68.20	-28.22	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/6
Test Frequency	5510MHz	Polarization	Horizontal

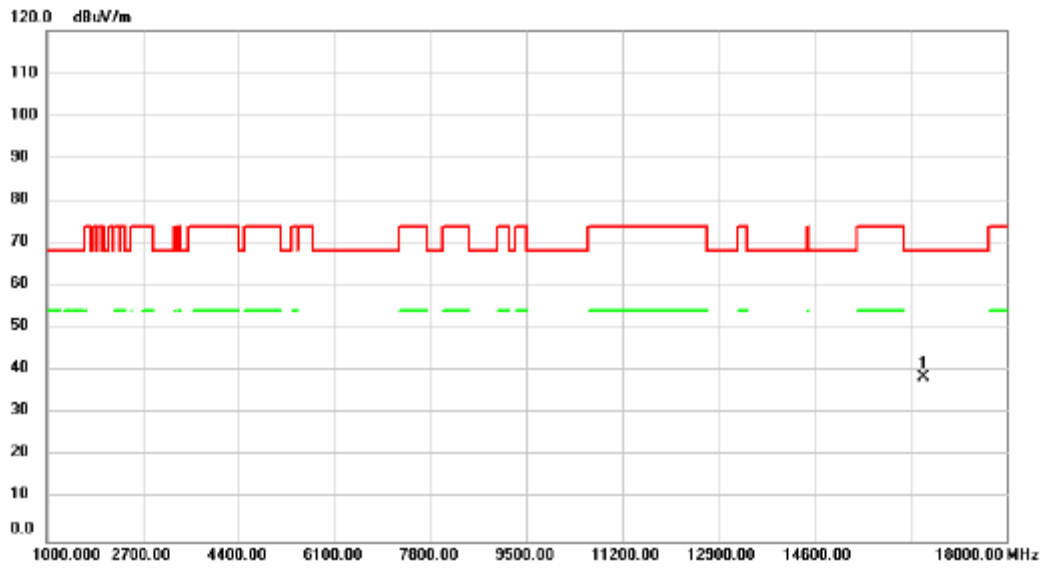


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	16530.00	36.80	1.75	38.55	68.20	-29.65	peak		Comment

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/6
Test Frequency	5550MHz	Polarization	Vertical

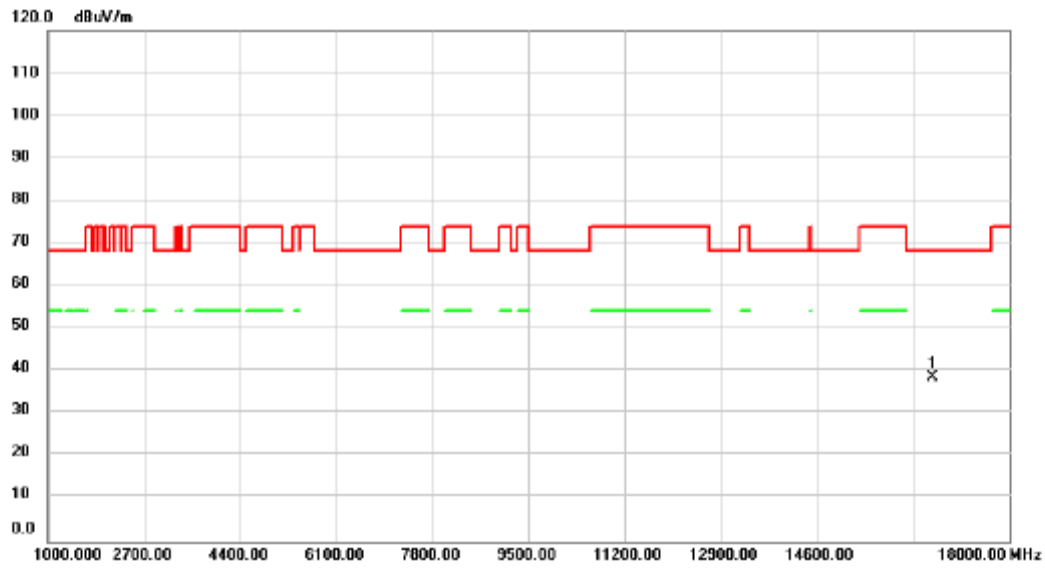


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	16650.00	36.18	2.45	38.63	68.20	-29.57	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/6
Test Frequency	5550MHz	Polarization	Horizontal

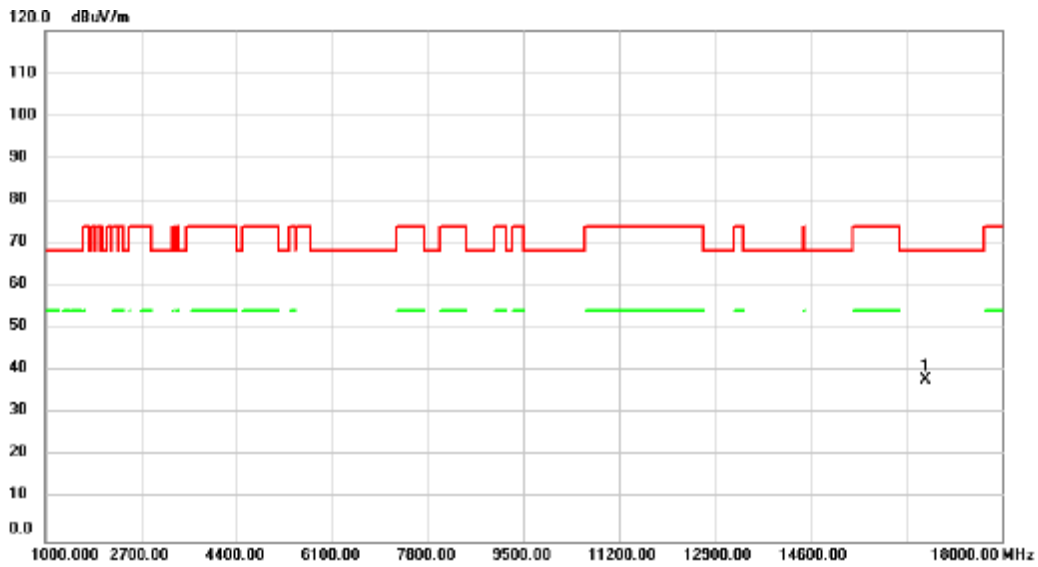


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	16650.00	35.52	2.45	37.97	68.20	-30.23	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/6
Test Frequency	5670MHz	Polarization	Horizontal

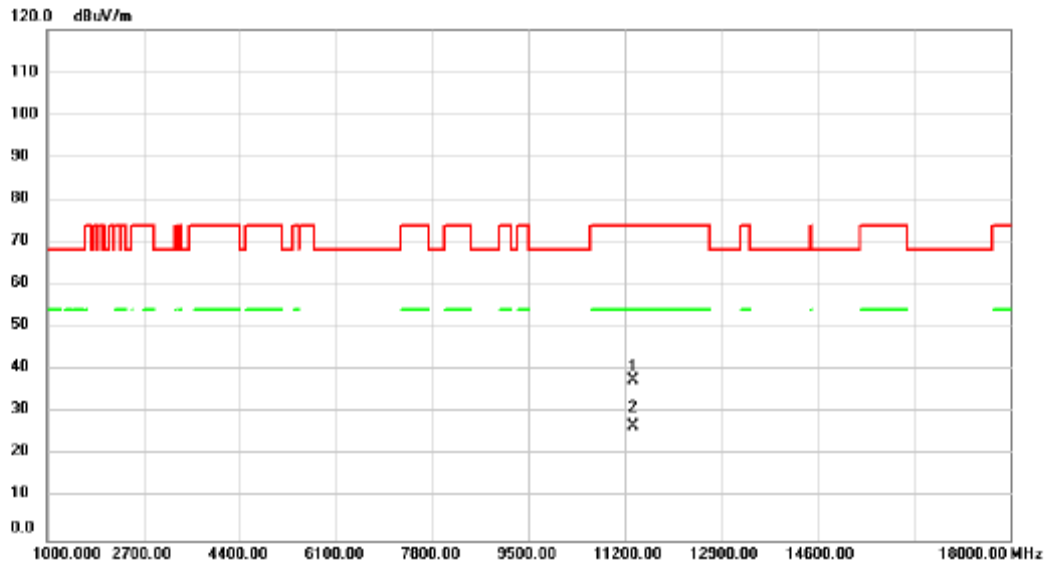


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		11336.00	37.27	0.47	37.74	74.00	-36.26	peak	
2	*	11336.00	26.33	0.47	26.80	54.00	-27.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/6
Test Frequency	5755MHz	Polarization	Vertical

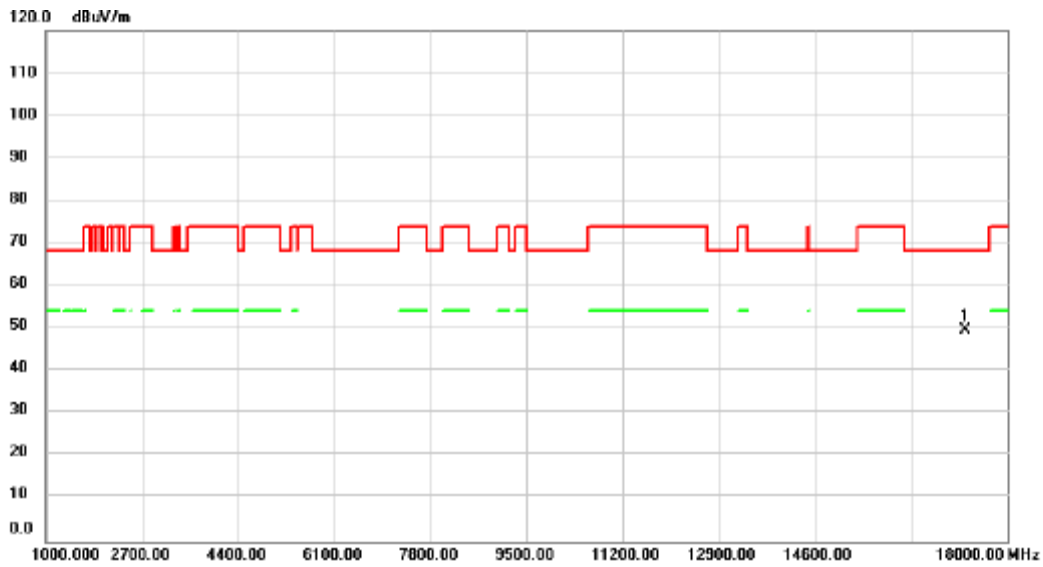


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17269.00	44.70	4.85	49.55	68.20	-18.65	peak		Comment

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/6
Test Frequency	5755MHz	Polarization	Horizontal

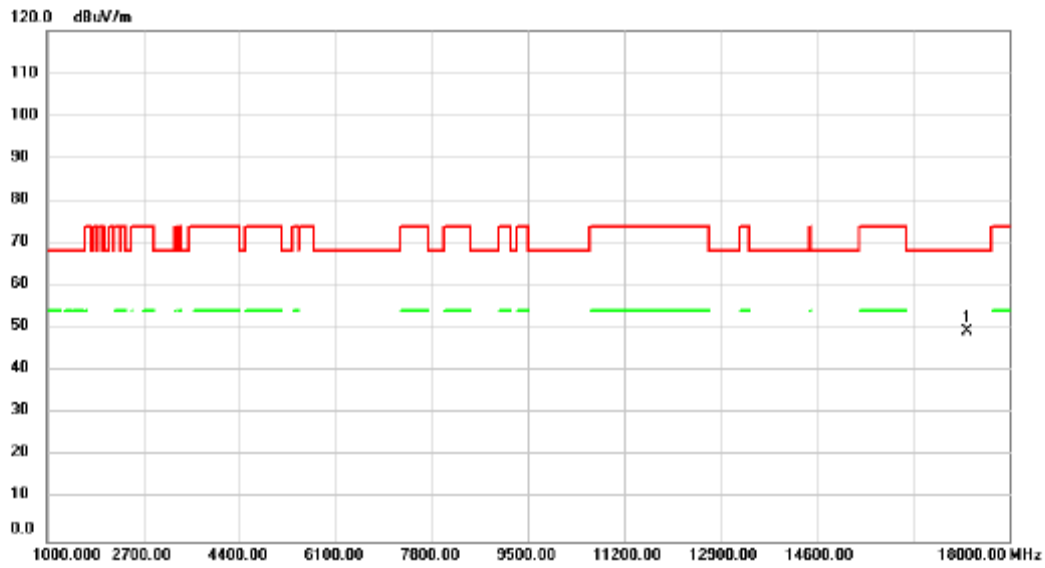


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17269.00	44.37	4.85	49.22	68.20	-18.98	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/6
Test Frequency	5795MHz	Polarization	Vertical

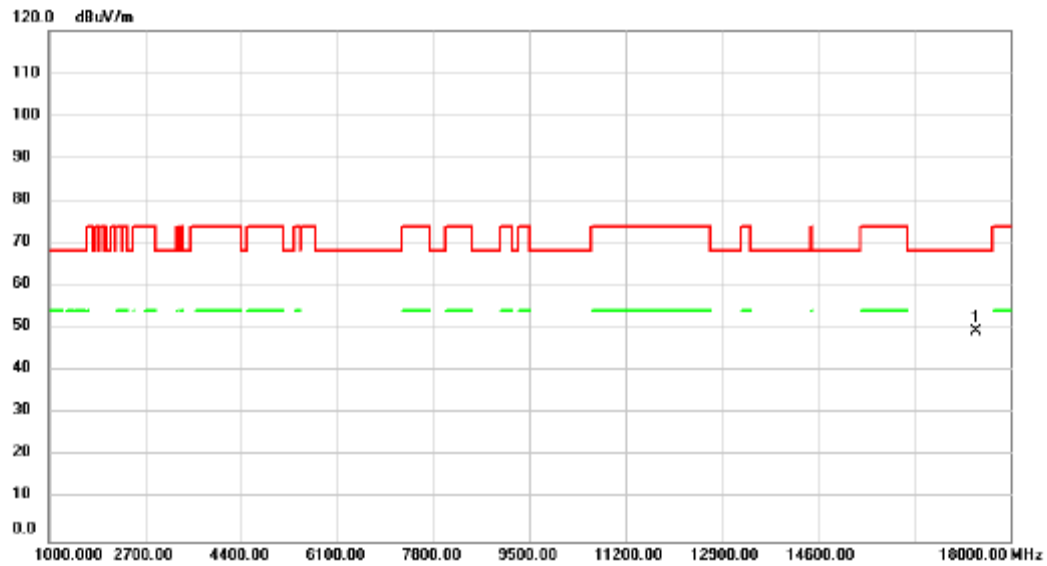


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17388.00	44.23	5.03	49.26	68.20	-18.94	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/6
Test Frequency	5795MHz	Polarization	Horizontal

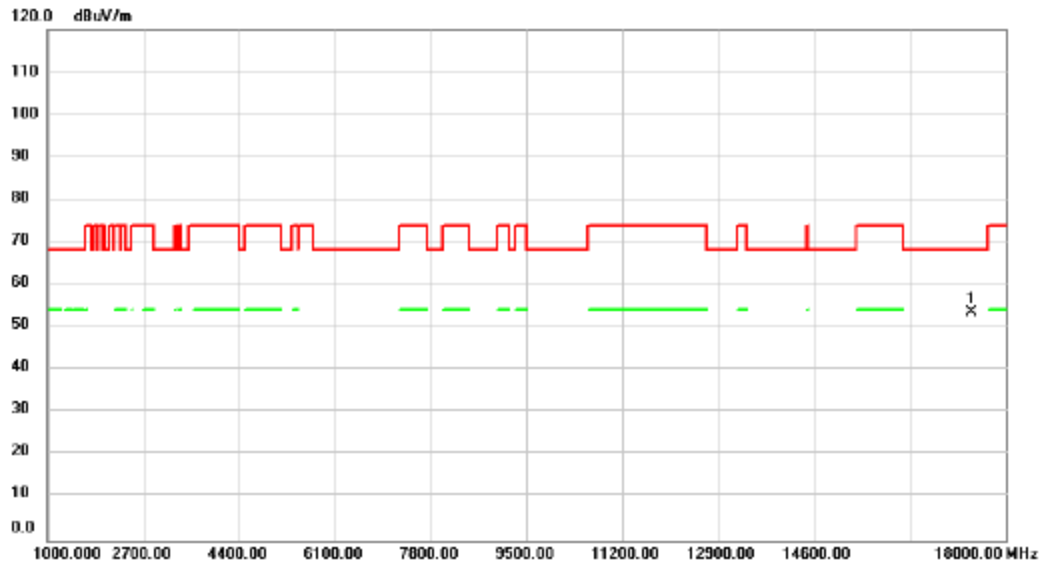


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	17388.00	48.46	5.03	53.49	68.20	-14.71	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/6
Test Frequency	5210MHz	Polarization	Vertical

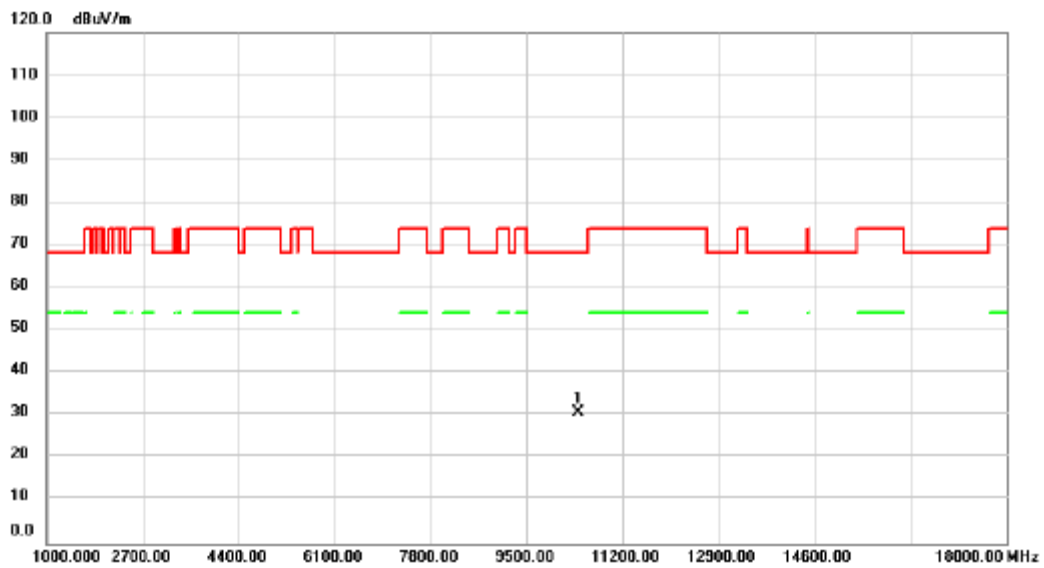


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10420.00	31.29	-0.54	30.75	68.20	-37.45	peak		Comment

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/6
Test Frequency	5210MHz	Polarization	Horizontal

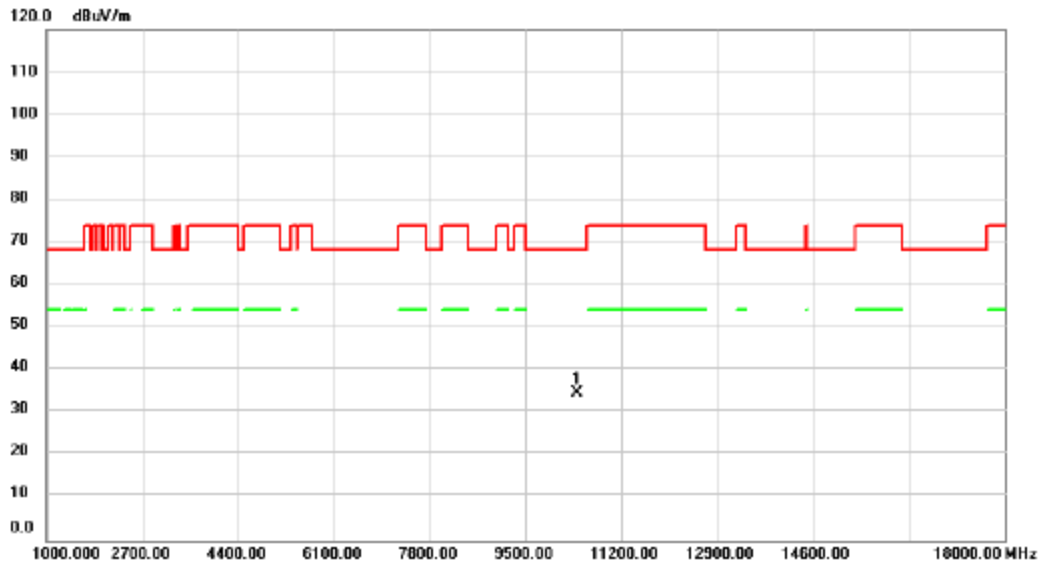


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10420.00	35.07	-0.54	34.53	68.20	-33.67	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/6
Test Frequency	5290MHz	Polarization	Vertical

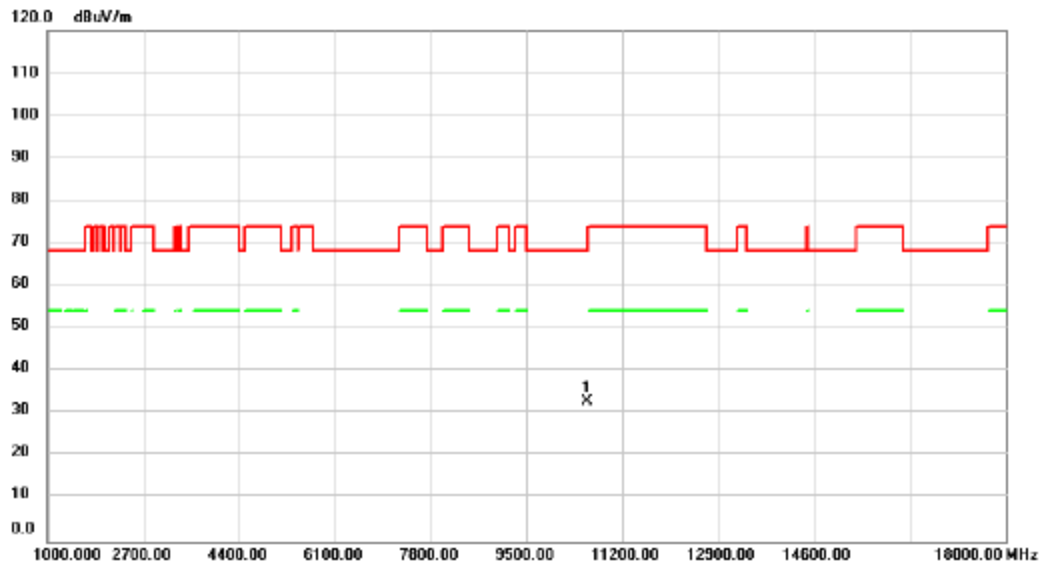


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10580.00	33.34	-0.42	32.92	68.20	-35.28	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/6
Test Frequency	5290MHz	Polarization	Horizontal

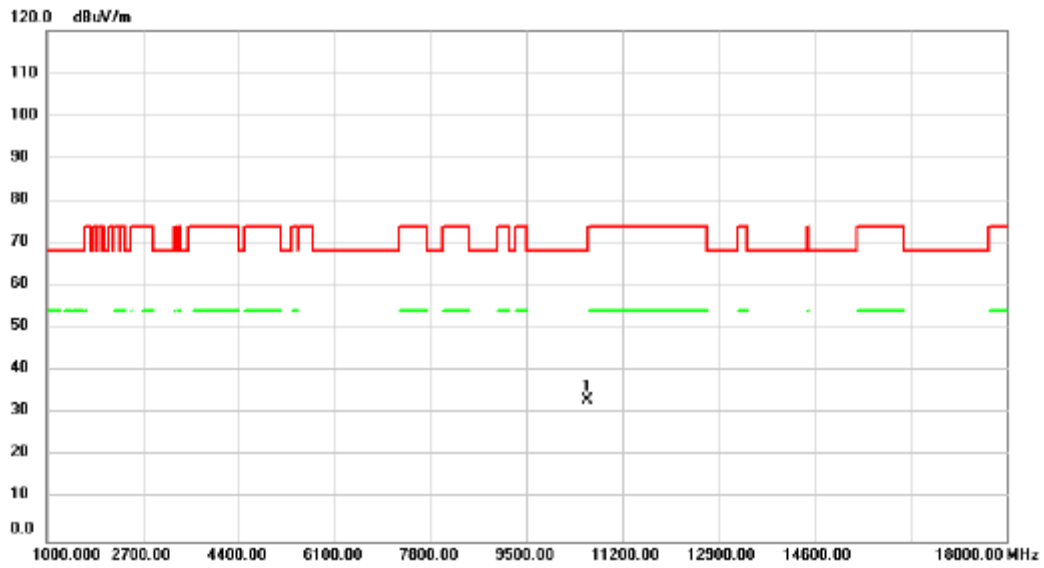


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10580.00	33.58	-0.42	33.16	68.20	-35.04	peak		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/6
Test Frequency	5530MHz	Polarization	Vertical

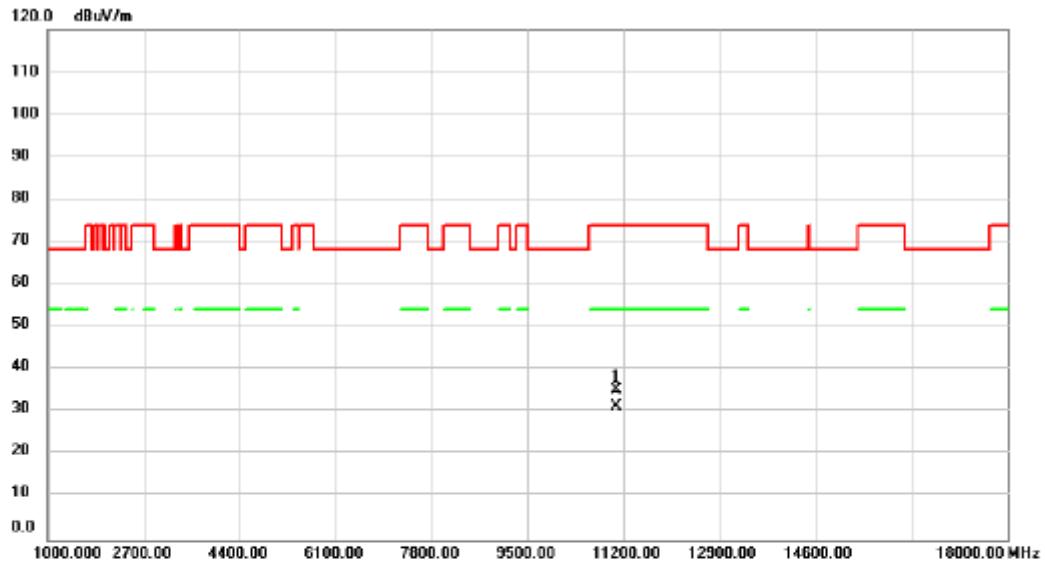


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11064.00	35.43	-0.12	35.31	74.00	-38.69			peak
2	*	11064.00	31.43	-0.12	31.31	54.00	-22.69			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/6
Test Frequency	5530MHz	Polarization	Horizontal

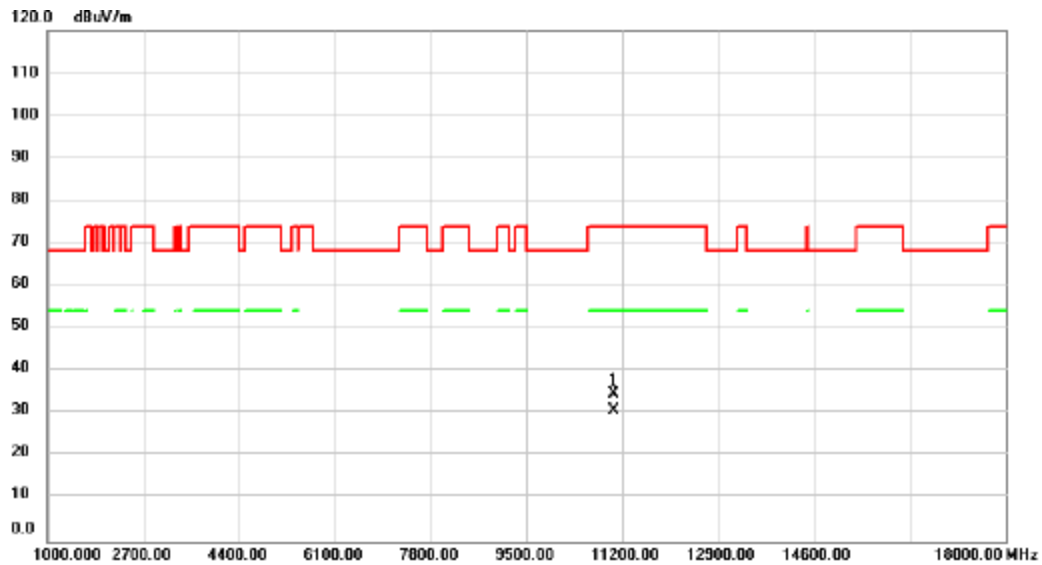


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11060.00	34.79	-0.13	34.66	74.00	-39.34	peak		
2	*	11060.00	30.75	-0.13	30.62	54.00	-23.38	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/6
Test Frequency	5610MHz	Polarization	Vertical

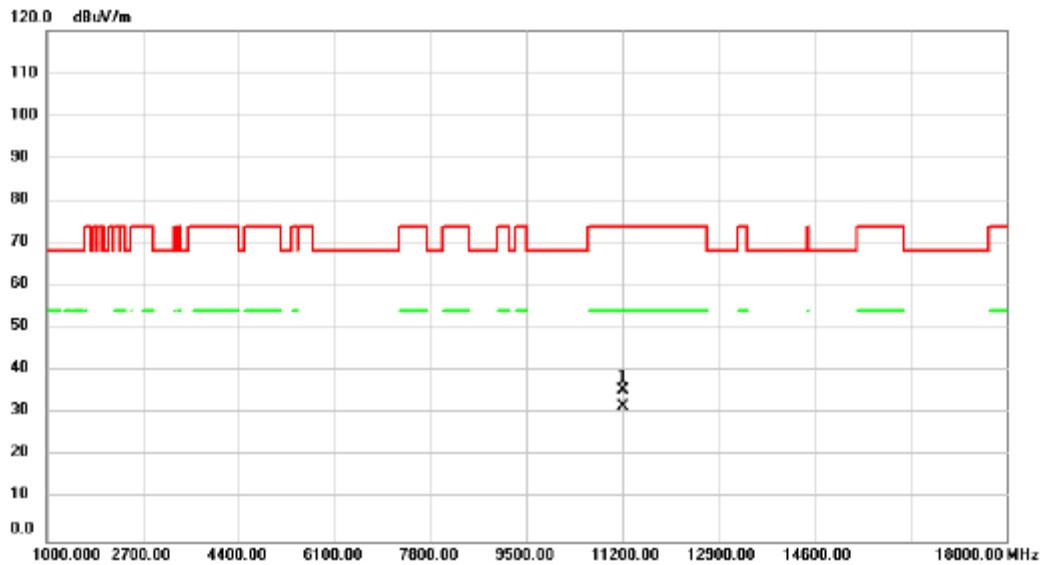


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11217.00	35.28	0.21	35.49	74.00	-38.51	peak		
2	*	11217.00	31.43	0.21	31.64	54.00	-22.36	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/6
Test Frequency	5610MHz	Polarization	Horizontal

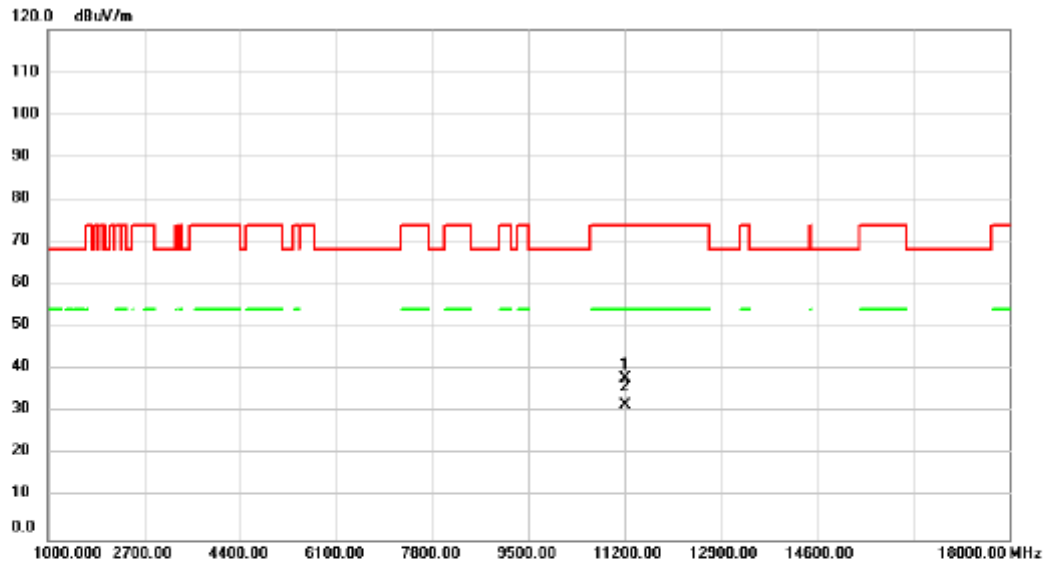


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11217.00	37.63	0.21	37.84	74.00	-36.16			peak
2	*	11217.00	31.52	0.21	31.73	54.00	-22.27			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/6
Test Frequency	5775MHz	Polarization	Vertical

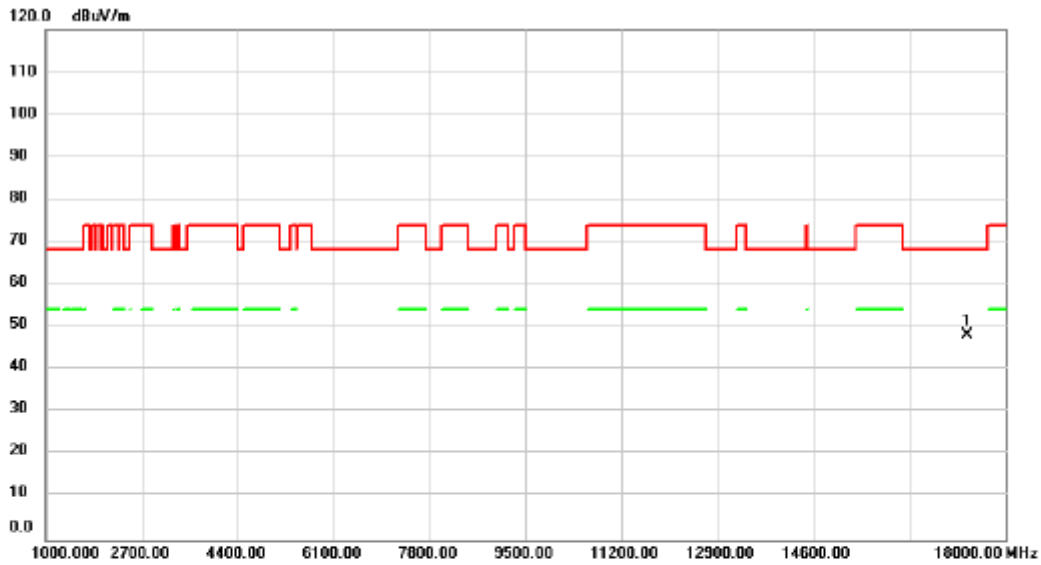


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	17337.00	43.13	4.96	48.09	68.20	-20.11	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/6
Test Frequency	5775MHz	Polarization	Horizontal

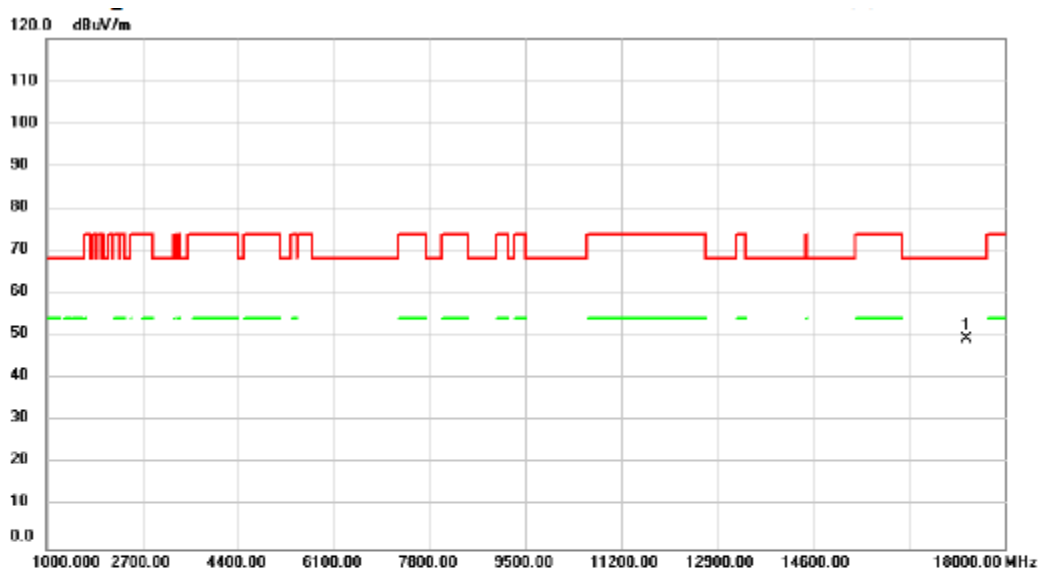


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1 *	17337.00	44.32	4.96	49.28	68.20	-18.92			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE160)	Test Date	2024/11/6
Test Frequency	5250MHz	Polarization	Vertical

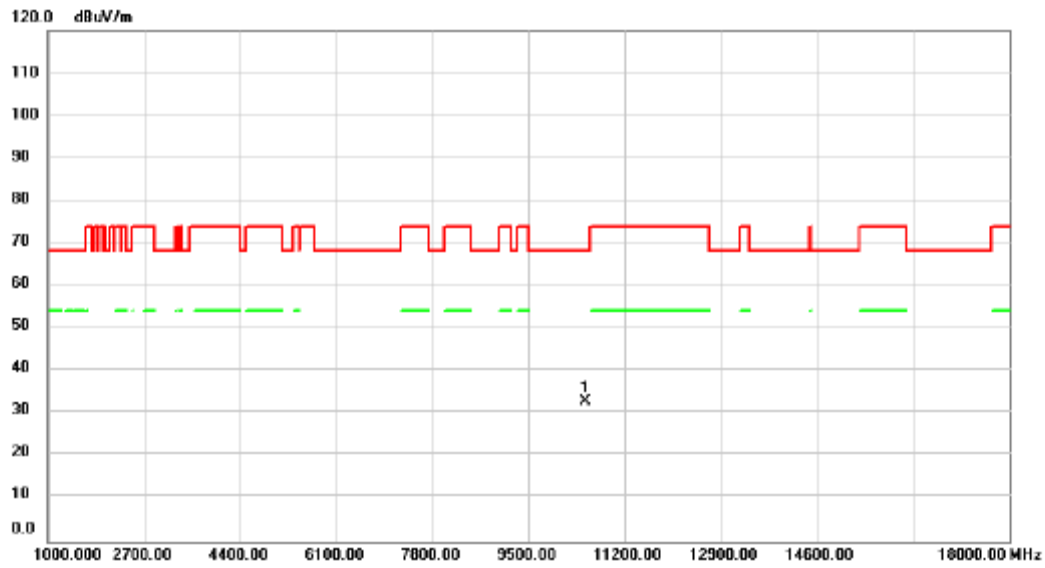


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10500.00	33.37	-0.45	32.92	68.20	-35.28	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE160)	Test Date	2024/11/6
Test Frequency	5250MHz	Polarization	Horizontal

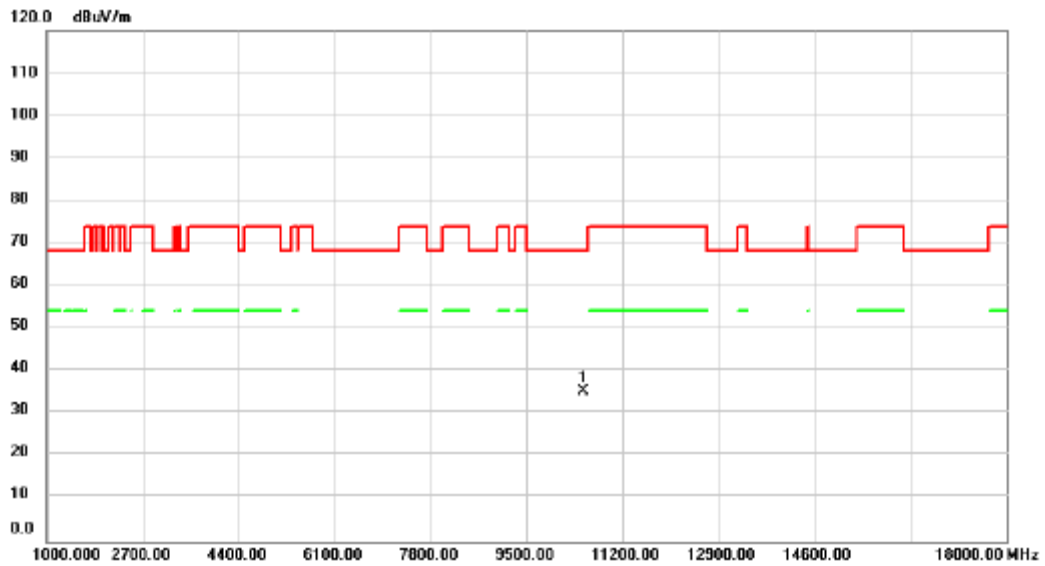


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	10500.00	35.70	-0.45	35.25	68.20	-32.95	peak		Comment

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE160)	Test Date	2024/11/6
Test Frequency	5570MHz	Polarization	Vertical

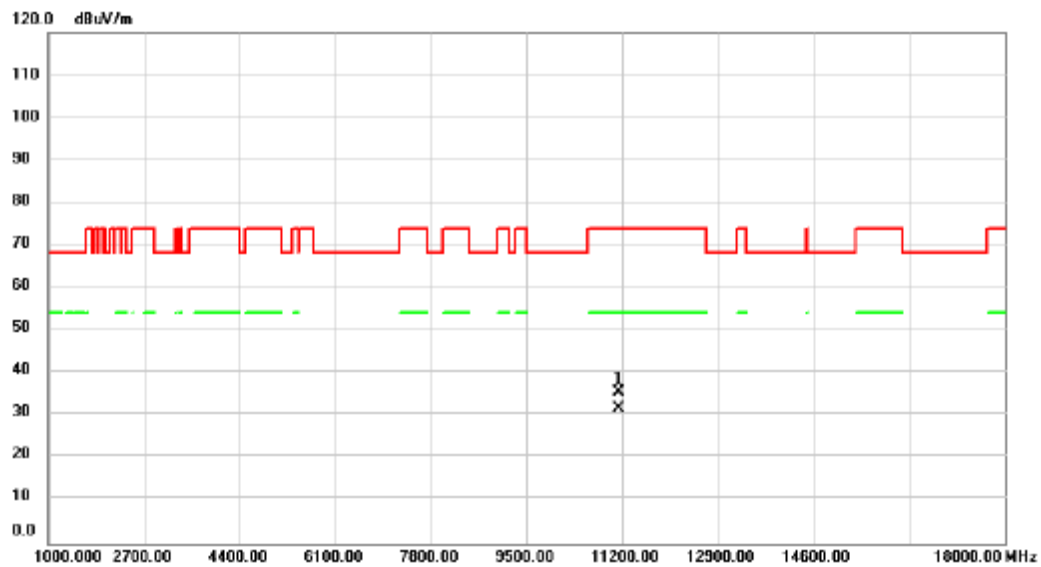


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11132.00	35.65	0.02	35.67	74.00	-38.33	peak		
2	*	11132.00	31.69	0.02	31.71	54.00	-22.29	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE160)	Test Date	2024/11/6
Test Frequency	5570MHz	Polarization	Horizontal

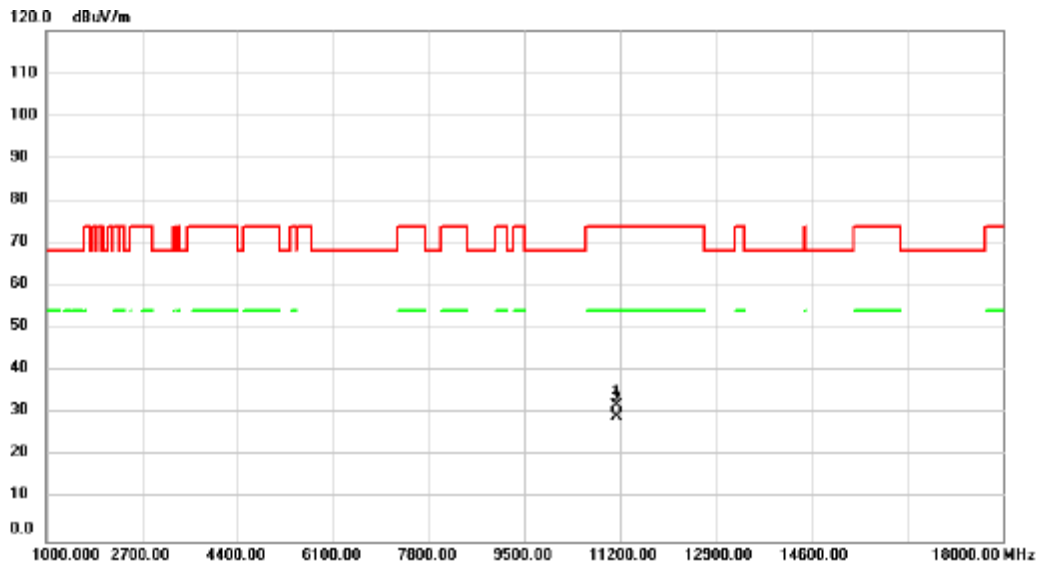


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		11140.00	32.06	0.03	32.09	74.00	-41.91	peak		
2	*	11140.00	29.27	0.03	29.30	54.00	-24.70	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/11/6
Test Frequency	5180MHz	Polarization	Vertical

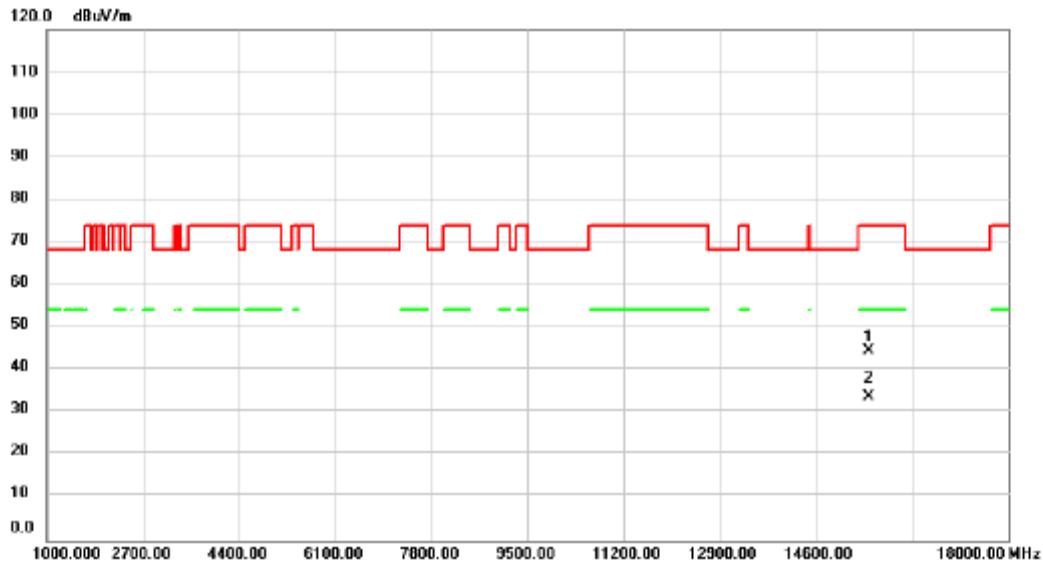


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15535.00	39.99	4.55	44.54	74.00	-29.46	peak		
2	*	15535.00	29.22	4.55	33.77	54.00	-20.23	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/11/6
Test Frequency	5180MHz	Polarization	Horizontal

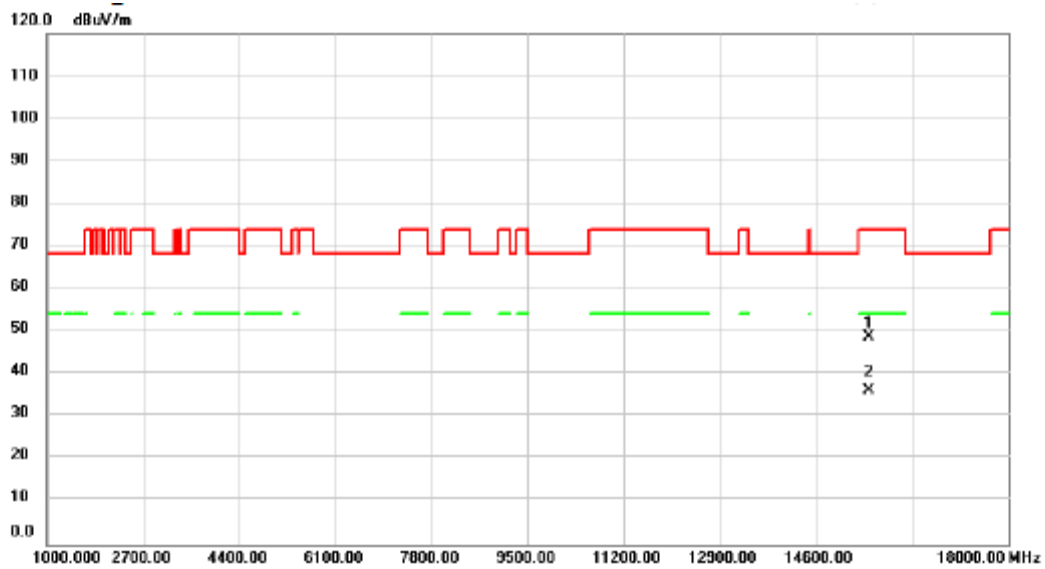


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15535.00	44.30	4.55	48.85	74.00	-25.15	peak		
2	*	15535.00	31.53	4.55	36.08	54.00	-17.92	AVG		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/11/6
Test Frequency	5200MHz	Polarization	Vertical

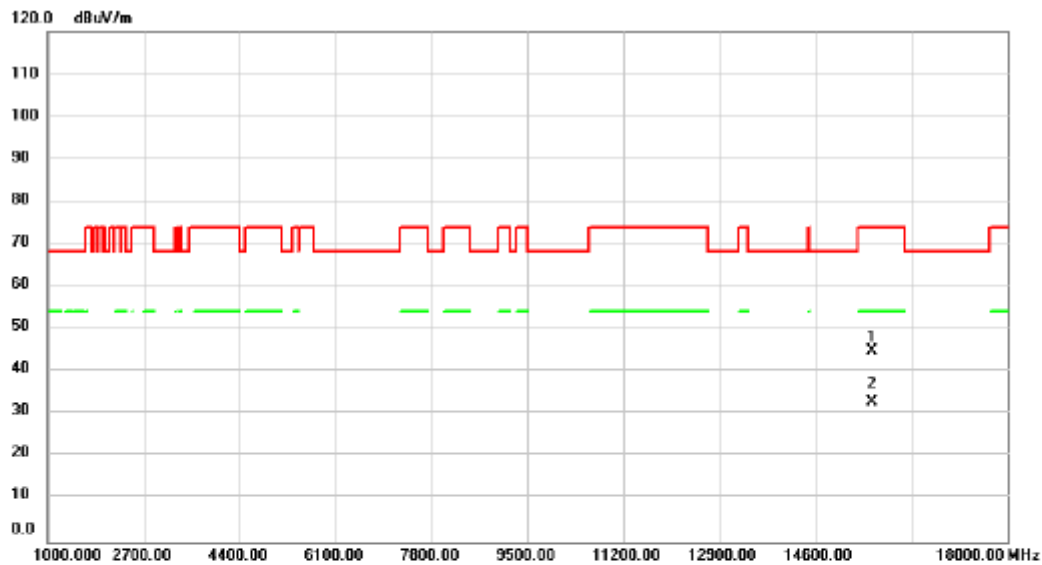

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15603.00	40.28	4.63	44.91	74.00	-29.09	peak		
2	*	15603.00	28.15	4.63	32.78	54.00	-21.22	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.