

FCC PART 22, 74, 80 and 90

TEST REPORT

For

Hytera Communications Corporation Limited

Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen,
518057 China

FCC ID: YAMRD62XIU1

Report Type: Original Report	Product Type: Digital Wall-mounted Repeater
Report Number: RDG171207017-00B	
Report Date: 2018-01-18	
Rocky Kang	
Reviewed By: RF Engineer	<i>Rocky Kang</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
TEST EQUIPMENT LIST	9
FCC §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	10
APPLICABLE STANDARD	10
RESULT	10
FCC §2.1046 & § 22.727 & §74.461 & §80.215 & §90.205 - RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST DATA	11
FCC §2.1047 - MODULATION CHARACTERISTIC	13
APPLICABLE STANDARD	13
TEST PROCEDURE	13
TEST DATA	13
FCC §2.1049 & §22.357 & § 22.731 & §74.462 & § 80.205 & § 80.207 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK.....	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA	24
FCC §2.1051 & §22.861 & §74.462 & § 80.211 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST DATA	45
FCC §2.1053 & §22.861 & §74.462 & § 80.211 & §90.210 - RADIATED SPURIOUS EMISSIONS.....	55
APPLICABLE STANDARD	55
TEST PROCEDURE	55
TEST DATA	55
FCC §2.1055 & § 22.355 & §74.464 & § 80.209 & §90.213 - FREQUENCY STABILITY	59
APPLICABLE STANDARD	59

TEST PROCEDURE59

TEST DATA59

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....69

APPLICABLE STANDARD69

TEST PROCEDURE69

TEST DATA69

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Hytera Communications Corporation Limited's product, model number: RD622i U(1) (FCC ID: YAMRD62XIU1) in this report is a Digital Wall-mounted Repeater, which was measured approximately: 345 mm (L) x 210mm (W) x 105 mm(H), rated with input voltage: AC 120V/60Hz or DC 13.6V.

Radio Specification

Frequency Range (MHz)	400-470
Modulation	FM/4FSK
Channel Spacing(kHz)	12.5/25(FM),12.5(4FSK)
Power (Watts)	1W (Low)/25W(High)

Notes: This series products model: RD625i U(1), RD626i U(1), RD628i U(1) and RD622i U(1) are identical schematics, and only are different for model number. Model RD622i U(1) was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.

* All measurement and test data in this report was gathered from production sample serial number: 171207017 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2017-12-07.

Objective

This test report is prepared on behalf of Hytera Communications Corporation Limited in accordance with Part 2, and Part 22,74,80,90 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 22 – Public Mobile Service

Part 74 – Experimental Radio, Auxiliary, Special Broadcast and other Program Distributonal Service

Part 80 – Stantions in the Maritme Service

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	uncertainty
Occupied Channel Bandwidth	±5%
RF output power, conducted	±1.5dB
Unwanted Emission, conducted	±1.5dB
All emissions, radiated	±4.88dB
Temperature	±1 °C
Supply voltages	±0.4%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 382179, the FCC Designation No. : CN5001.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

EUT Exercise Software

No exercise software was used.

Special Accessories

No special accessory was used.


Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
N/A	Load	100W/50Ohm	N/A
KIKUSUI	Power supply	PAS 60-18	ME001147

Block Diagram of Test Setup

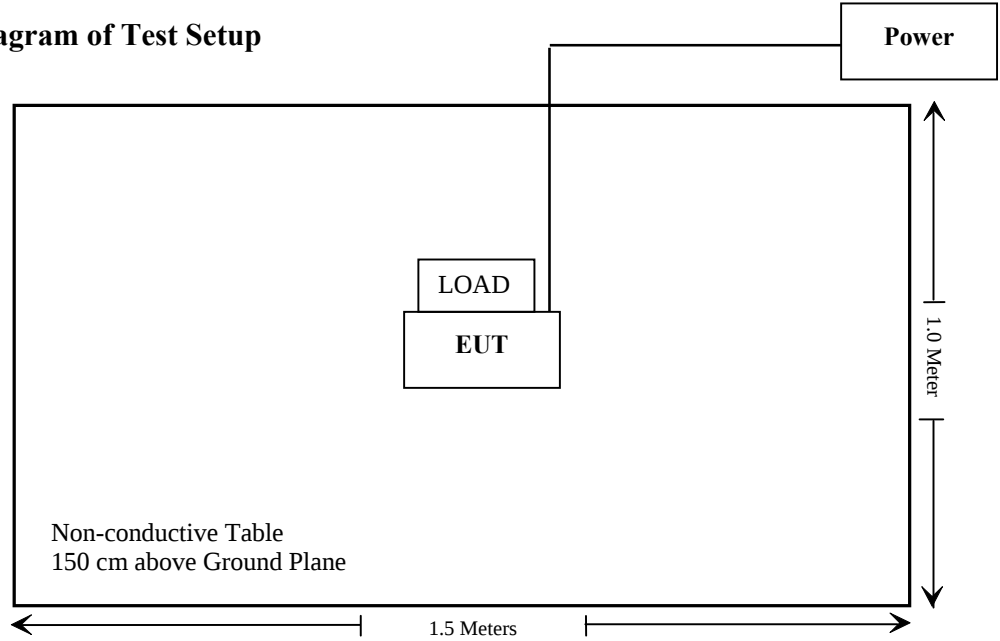

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
FCC §1.1307(b) & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliance
§2.1046; § 22.727; §74.461; § 80.215; §90.205	RF Output Power	Compliance
§2.1047	Modulation Characteristic	Compliance
§2.1049;§22.357;§ 22.731; §74.462; § 80.205; § 80.207;§90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
§2.1051; §22.861; §74.462; § 80.211;§90.210	Spurious Emission at Antenna Terminal	Compliance
§2.1053; §22.861; §74.462; § 80.211;§90.210	Spurious Radiated Emissions	Compliance
§2.1055; § 22.355; §74.464; § 80.209;§90.213	Frequency Stability	Compliance
§90.214	Transient Frequency Behavior	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-29	2020-12-28
Rohde & Schwarz	Signal Generator	FSIQ26	8386001028	2017-04-24	2018-04-24
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2017-12-17	2020-12-17
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-02-14	2018-02-14
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-21
Anritsu	Signal Generator	68369B	004114	2017-12-05	2018-12-05
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2017-12-07	2018-12-07
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSW13	103533	2017-06-15	2018-06-14
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2017-11-22	2018-11-22
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Rohde & Schwarz	Vector Signal Generator	SMW200A	102522	2017-06-15	2018-06-14
BEW	Coaxial Attenuator	TS300-6-40	N/A	2017-06-15	2018-06-14
MICABLE	RF Cable	D02	N/A	2017-06-15	2018-06-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for Occupational/Controlled Exposure

Limits for occupational/Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	6
1.34-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5.0	6

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Worst case as below:

Frequency (MHz)	Antenna Gain		Max average output power (mW)	Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)				
400-470	5.5	3.55	28184	80	1.24	1.33

Note: Max tune-up output power is 44.50dBm (28184 mW)

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 80cm from nearby persons.

Result: Compliance

FCC §2.1046 & § 22.727 & §74.461 & §80.215 & §90.205 - RF OUTPUT POWER

Applicable Standard

FCC §2.1046, § 22.727, §74.461, § 80.215 and §90.205

Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

R B/W	Video B/W
100 kHz	300 kHz

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Kong on 2018-01-13.

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table.

Mode	Frequency Spacing (kHz)	Frequency (MHz)	Power level	Output (dBm)	Output Power(W)	Note
Analog	12.5	400.0125	High	44.11	25.76	For Fedarel
			Low	30.28	1.07	
		450.0125	High	44.18	26.18	Part 74
			Low	30.63	1.16	
		454.025	High	44.19	26.24	Part 22
			Low	30.60	1.15	
		458.2125	High	44.18	26.18	Part 90
			Low	30.20	1.05	
		469.9875	High	44.02	25.23	Part 90
			Low	30.76	1.19	
	25	400.0125	High	44.12	25.82	For Fedarel
			Low	30.23	1.05	
		450.0125	High	44.17	26.12	Part 74
			Low	30.62	1.15	
		454.025	High	44.18	26.18	Part 22
			Low	30.58	1.14	
		463.0125	High	44.15	26.00	Part 80
			Low	30.46	1.11	
		469.9875	High	44.04	25.35	Part 80
			Low	30.73	1.18	

Mode	Frequency Spacing (kHz)	Frequency (MHz)	Power level	Output (dBm)	Output Power(W)	Note
Digital	12.5	400.0125	High	44.09	25.64	For Fedarel
			Low	30.29	1.07	
		450.0125	High	44.16	26.06	Part 74
			Low	30.63	1.16	
		454.0250	High	44.16	26.06	Part 22
			Low	30.58	1.14	
		458.2125	High	44.15	26.00	Part 90
			Low	30.15	1.04	
		469.9875	High	44.02	25.23	Part 90
			Low	30.75	1.19	

Rated power: High power is 25W (43.98dBm), Low power is 1W (30dBm)

FCC §2.1047 - MODULATION CHARACTERISTIC

Applicable Standard

FCC§2.1047:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Procedure

Test Method: TIA/EIA-603 2.2.3

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Kong on 2018-01-05.


Test Mode: Transmitting

Result: Compliance.

MODULATION LIMITING

Carrier Frequency: 458.2125 MHz, Channel Separation=12.5 kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	2.172	0.084	2.171	0.083	2.5
400	2.176	0.096	2.173	0.094	2.5
500	2.165	0.114	2.162	0.112	2.5
600	2.163	0.136	2.161	0.135	2.5
700	2.152	0.144	2.150	0.142	2.5
800	2.156	0.162	2.153	0.160	2.5
900	2.155	0.177	2.152	0.175	2.5
1000	2.158	0.181	2.154	0.178	2.5
1200	2.164	0.214	2.161	0.212	2.5
1400	2.169	0.253	2.166	0.251	2.5
1600	2.174	0.294	2.170	0.292	2.5
1800	2.183	0.305	2.180	0.302	2.5
2000	2.174	0.342	2.171	0.338	2.5
2100	2.158	0.352	2.153	0.347	2.5
2200	2.136	0.366	2.132	0.363	2.5
2300	2.127	0.392	2.121	0.390	2.5
2400	2.093	0.401	2.088	0.398	2.5
2500	2.074	0.412	2.070	0.409	2.5
2600	2.055	0.411	2.049	0.408	2.5
2700	2.029	0.427	2.024	0.425	2.5
2800	2.008	0.442	2.005	0.440	2.5
2900	1.968	0.445	1.964	0.442	2.5
3000	1.919	0.446	1.916	0.444	2.5

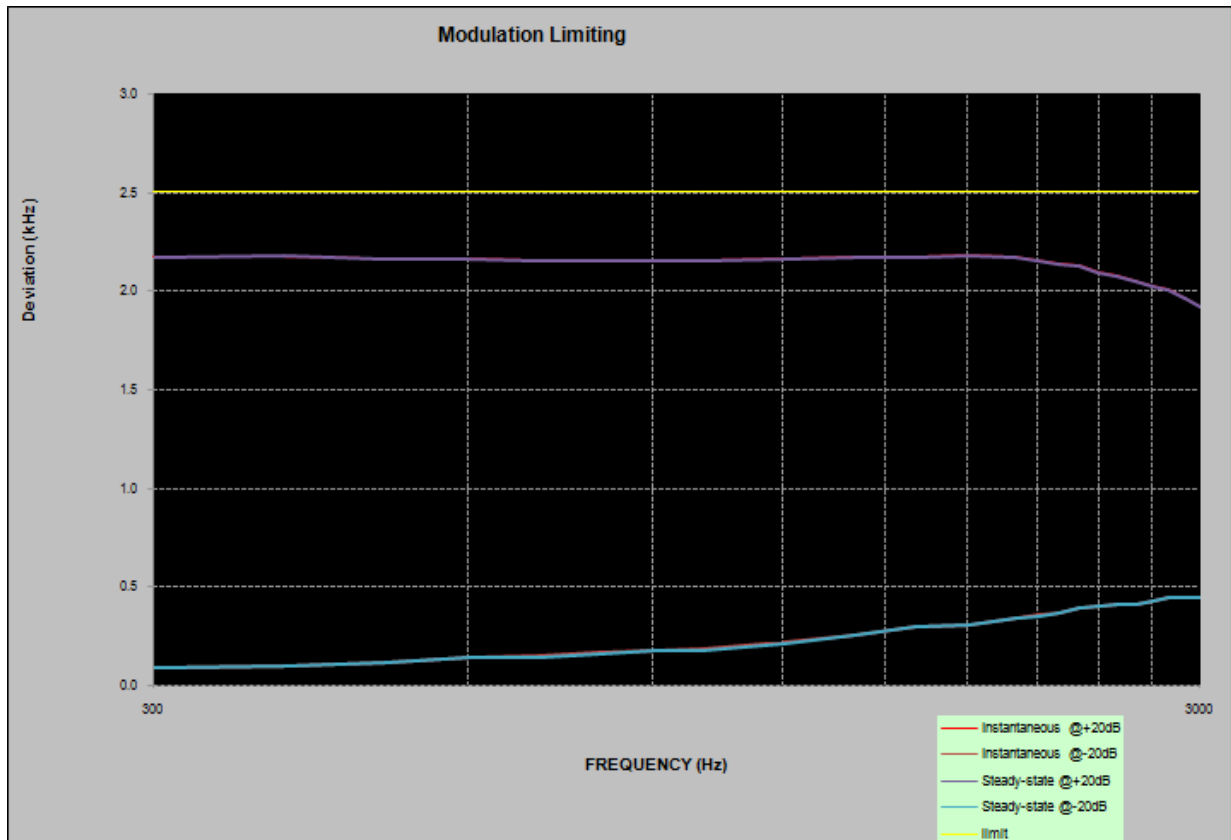

Audio Frequency Response

Carrier Frequency: 458.2125 MHz, Channel Separation=12.5 kHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-11.31
400	-7.74
500	-5.65
600	-4.10
700	-2.55
800	-1.43
900	-0.63
1000	0.00
1200	1.81
1400	2.97
1600	4.44
1800	5.12
2000	6.14
2100	6.46
2200	6.79
2300	7.26
2400	7.70
2500	7.81
2600	7.86
2700	7.51
2800	7.20
2900	6.81
3000	6.41

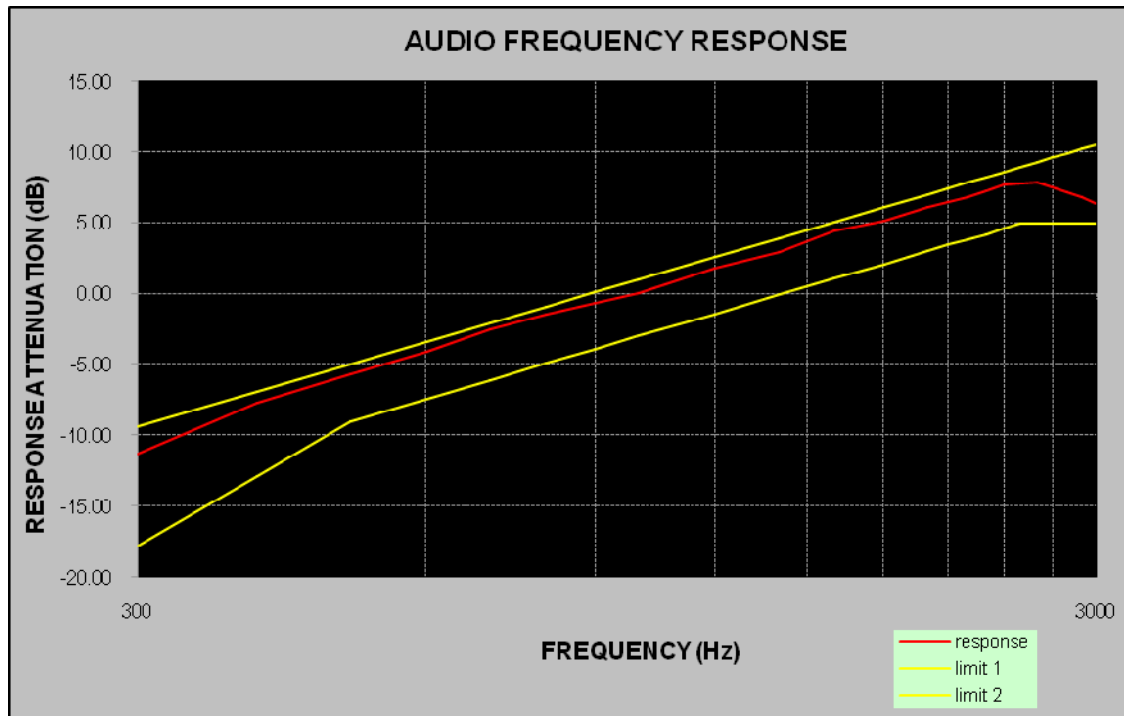

Audio frequency lows pass filter response

Carrier Frequency: 458.2125 MHz, Channel Separation=12.5 kHz


Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0.0	/
3.0	-36.10	0.0
4.0	-46.12	-12.5
5.0	-57.28	-22.2
6.0	-63.73	-30.1
7.0	-71.69	-36.8
8.0	-74.85	-42.6
9.0	-79.80	-47.7
10.0	-87.72	-52.3
12.0	-89.97	-60.2
14.0	-88.10	-66.9
16.0	-83.59	-72.7
18.0	-95.78	-77.8
20.0	-86.90	-82.5

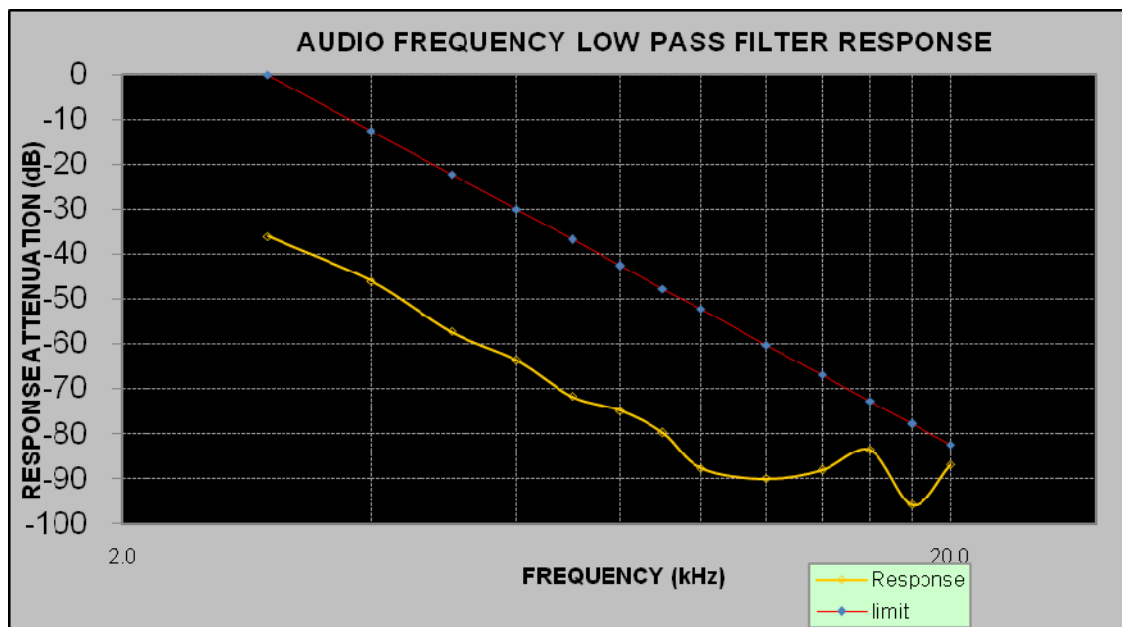

MODULATION LIMITING

Carrier Frequency: 463.0125 MHz, Channel Separation=25 kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	4.506	0.082	4.513	0.086	5
400	4.477	0.091	4.485	0.094	5
500	4.488	0.105	4.493	0.108	5
600	4.489	0.123	4.491	0.126	5
700	4.475	0.135	4.482	0.138	5
800	4.493	0.168	4.499	0.171	5
900	4.508	0.170	4.513	0.173	5
1000	4.506	0.184	4.512	0.186	5
1200	4.546	0.227	4.552	0.231	5
1400	4.570	0.250	4.576	0.254	5
1600	4.615	0.279	4.619	0.281	5
1800	4.799	0.306	4.806	0.309	5
2000	4.865	0.335	4.871	0.338	5
2100	4.842	0.356	4.847	0.361	5
2200	4.806	0.355	4.812	0.359	5
2300	4.727	0.373	4.734	0.377	5
2400	4.635	0.401	4.653	0.406	5
2500	4.475	0.402	4.479	0.407	5
2600	4.314	0.405	4.326	0.409	5
2700	4.152	0.418	4.159	0.422	5
2800	4.037	0.426	4.045	0.431	5
2900	3.906	0.429	3.915	0.435	5
3000	3.795	0.434	3.802	0.439	5

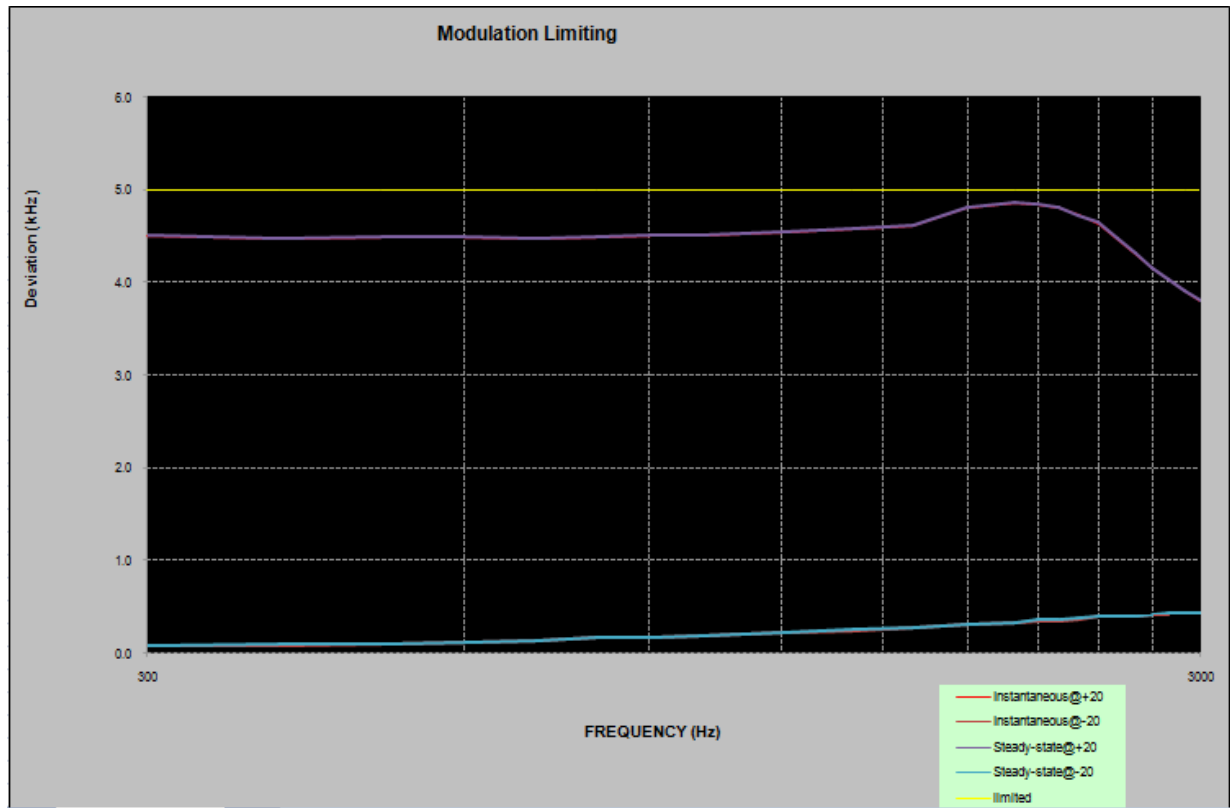

Audio Frequency Response

Carrier Frequency: 463.0125 MHz, Channel Separation=25 kHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-9.87
400	-7.31
500	-5.71
600	-4.03
700	-2.77
800	-1.61
900	-0.86
1000	0.00
1200	1.68
1400	2.95
1600	4.44
1800	5.16
2000	6.21
2100	6.53
2200	6.83
2300	7.24
2400	7.65
2500	7.69
2600	7.73
2700	7.98
2800	8.23
2900	8.28
3000	8.41

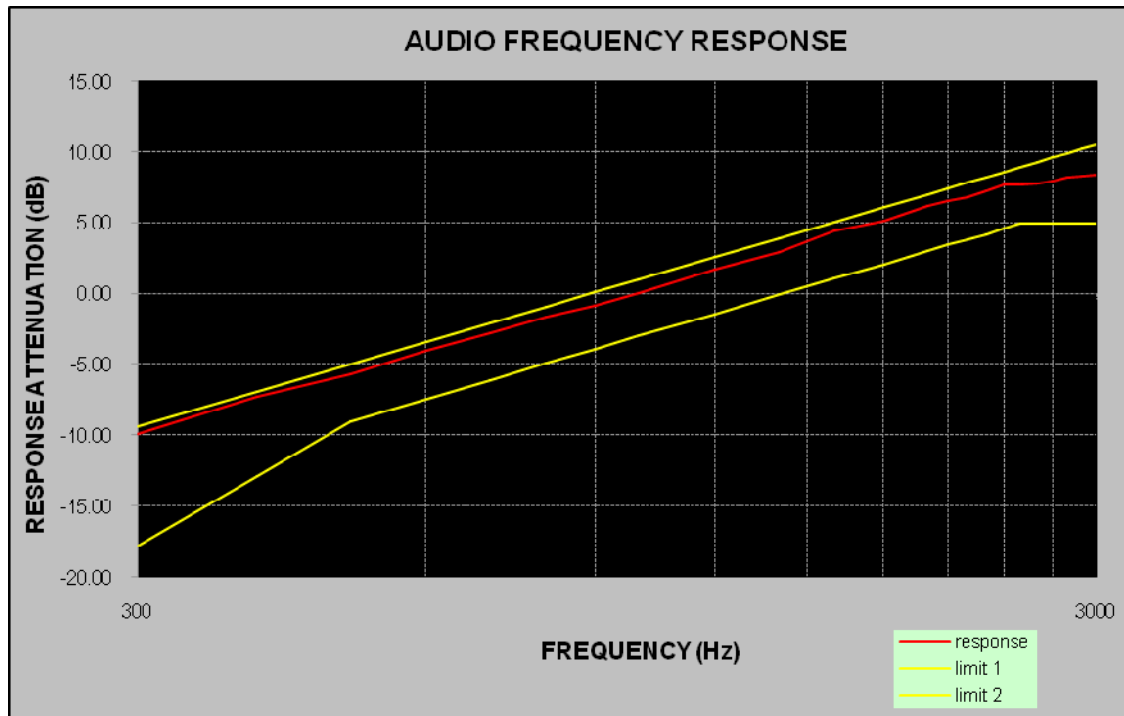

Audio frequency lows pass filter response

Carrier Frequency: 463.0125 MHz, Channel Separation=25 kHz

Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0.0	/
3.0	-43.11	0.0
4.0	-54.09	-7.5
5.0	-64.58	-13.3
6.0	-68.86	-18.1
7.0	-77.83	-22.1
8.0	-84.17	-25.6
9.0	-84.67	-28.6
10.0	-88.87	-31.4
15.0	-90.19	-41.9
20.0	-83.63	-50.0
30.0	-91.69	-50.0
40.0	-94.21	-50.0
50.0	-85.42	-50.0
60.0	-91.60	-50.0
70.0	-87.13	-50.0

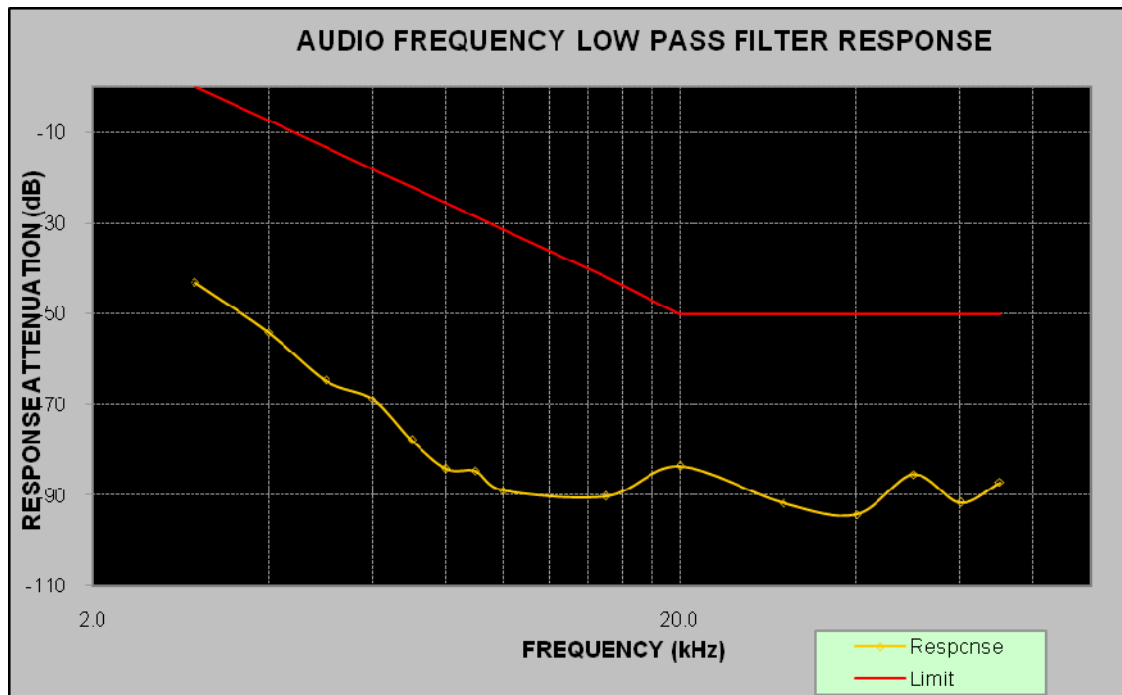

FCC §2.1049 & §22.357 & § 22.731 & §74.462 & § 80.205 & § 80.207 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK**Applicable Standard**

FCC §2.1049, §22.357, § 22.731, §74.462, § 80.205, § 80.207, §90.209 and §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0 dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least 7.27 ($f_d - 2.88$ kHz) dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz (12.5kHz Channel spacing) and 300 Hz (25 kHz Channel spacing).

Test Data**Environmental Conditions**

Temperature:	24~27 °C
Relative Humidity:	50~57 %
ATM Pressure:	100.9~101.0 kPa

The testing was performed by Jacob Kong from 2017-12-17 to 2018-01-16.

Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	99% Occupied Bandwidth (kHz)	26 dB Emissions Bandwidth (kHz)	Note
Analog	12.5	450.0125	High	9.936	10.337	Part 74
	12.5		Low	9.936	10.337	
	12.5	454.025	High	9.936	10.337	Part 22
	12.5		Low	9.936	10.337	
	12.5	458.2125	High	9.936	10.337	Part 90
	12.5		Low	9.936	10.337	
Digital	12.5	450.0125	High	7.853	9.615	Part 74
	12.5		Low	7.772	9.455	
	12.5	454.025	High	7.853	9.375	Part 22
	12.5		Low	7.772	9.936	
	12.5	458.2125	High	7.853	9.776	Part 90
	12.5		Low	7.853	8.974	

Emission Designator Per CFR 47 §2.201& §2.202&, $B_n = 2M + 2D$

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator 11K0F3E In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation. $BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} \rightarrow 11K0$

F3E portion of the designator represents an FM voice transmission Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator 7K60F1D and 7K60F1E


The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.6 kHz. The emission mask was obtained from 47CFR 90.210(d).

F1D and F1E portion of the designator indicates digital information.

Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.


Analog Modulation:

Frequency 450.0125 MHz: 99% Occupied & 26 dB Bandwidth, High Power

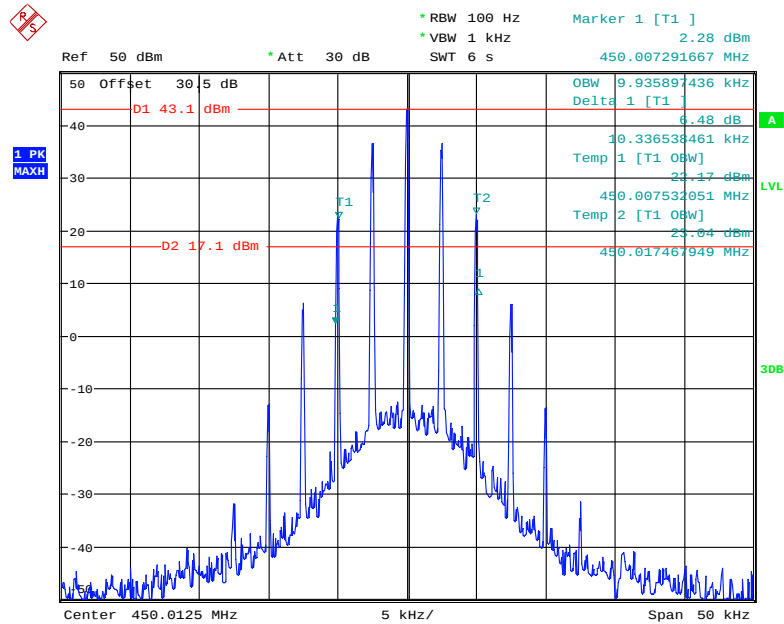


Date: 27.DEC.2017 00:06:12

Frequency 450.0125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

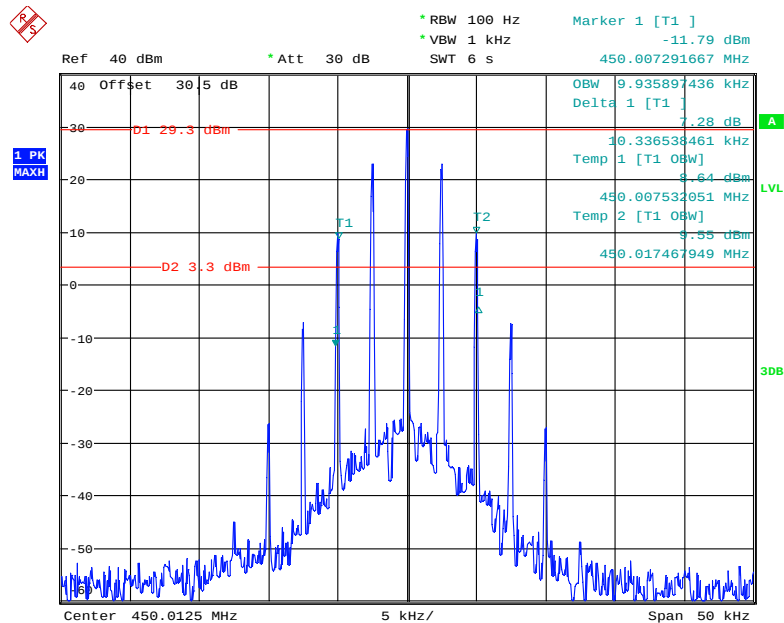


Date: 27.DEC.2017 00:04:43

Frequency 450.0125 MHz: Emission Mask D, High Power, FCC part 74.462

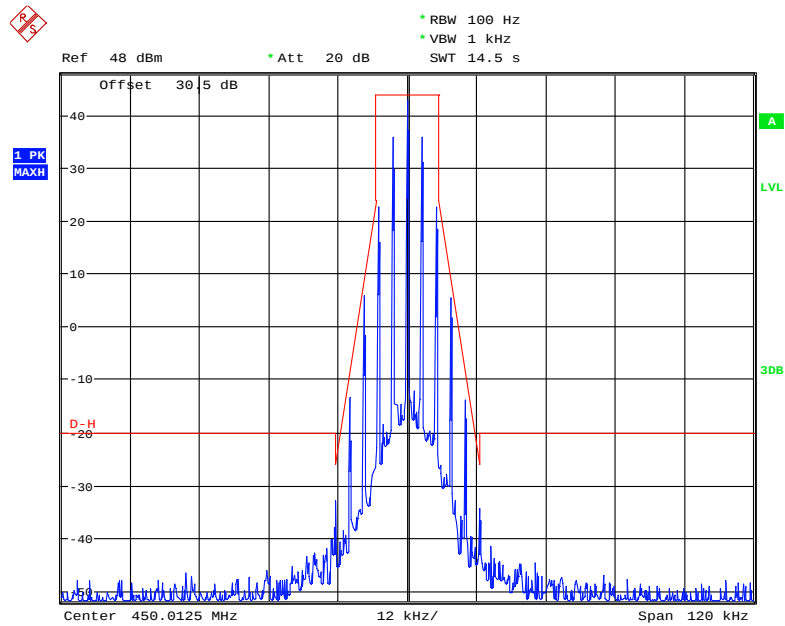


Date: 16.JAN.2018 00:21:41

Frequency 450.0125 MHz: Emission Mask D, Low Power, FCC part 74.462

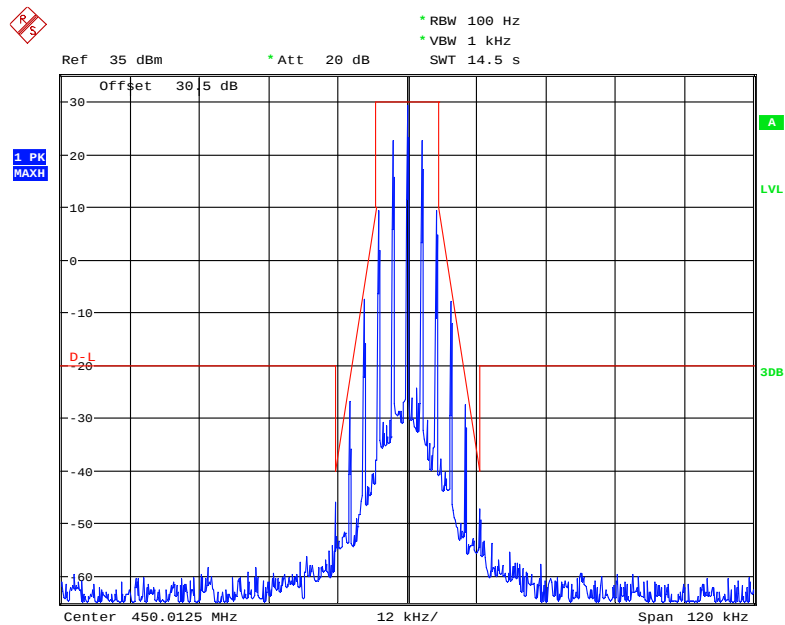


Date: 16.JAN.2018 00:24:49

Frequency 454.025 MHz: 99% Occupied & 26 dB Bandwidth, High Power

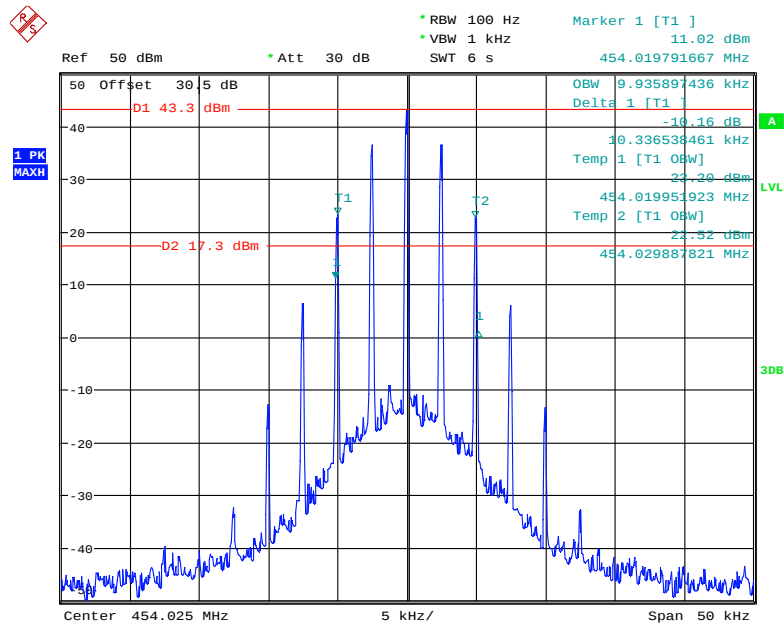


Date: 27.DEC.2017 00:10:07

Frequency 454.025 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

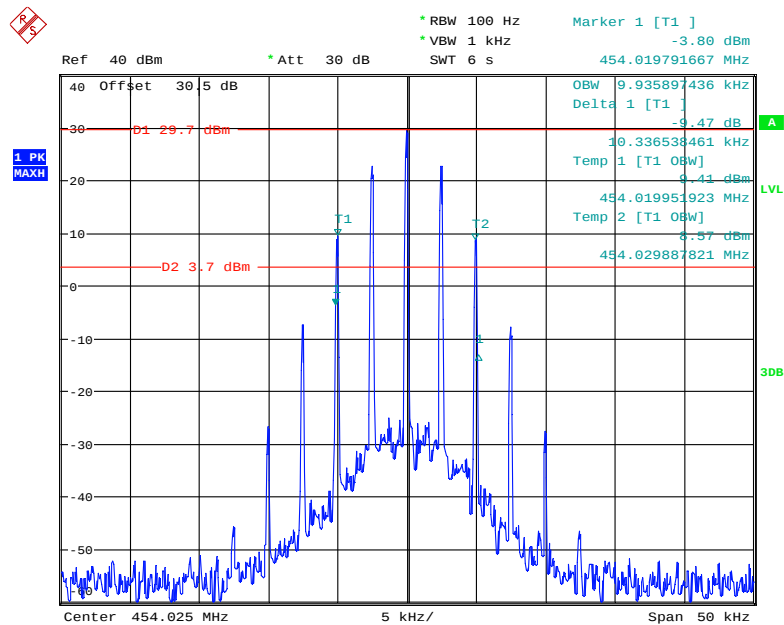


Date: 27.DEC.2017 00:12:06

Frequency 454.025 MHz: Emission Mask, High Power, FCC part 22.359

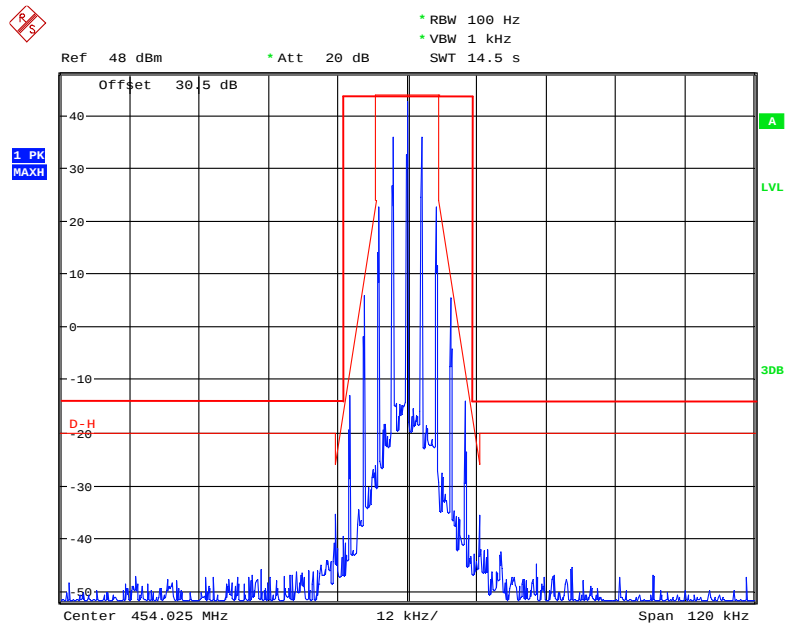


Date: 16.JAN.2018 00:28:56

Frequency 454.025 MHz: Emission Mask , Low Power, FCC part 22.359

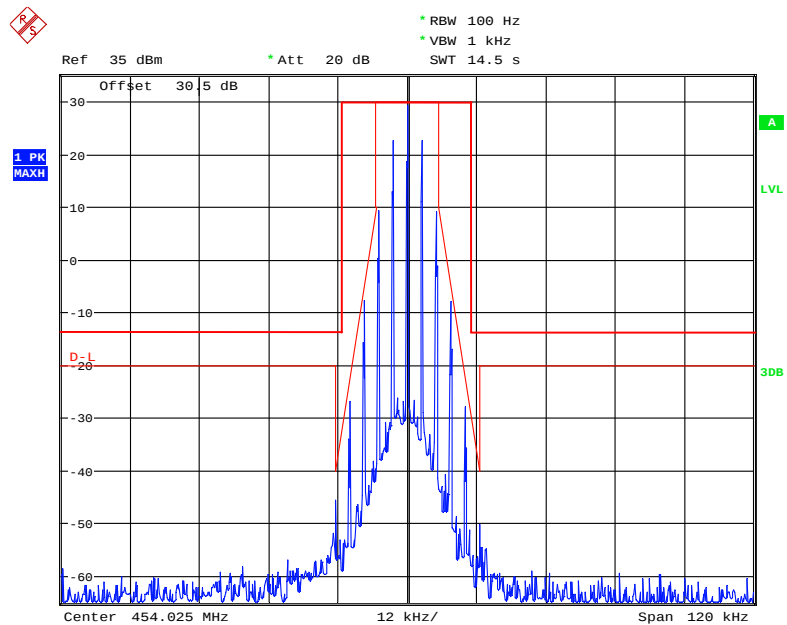


Date: 16.JAN.2018 00:26:27

Frequency 458.2125 MHz: 99% Occupied & 26 dB Bandwidth, High Power

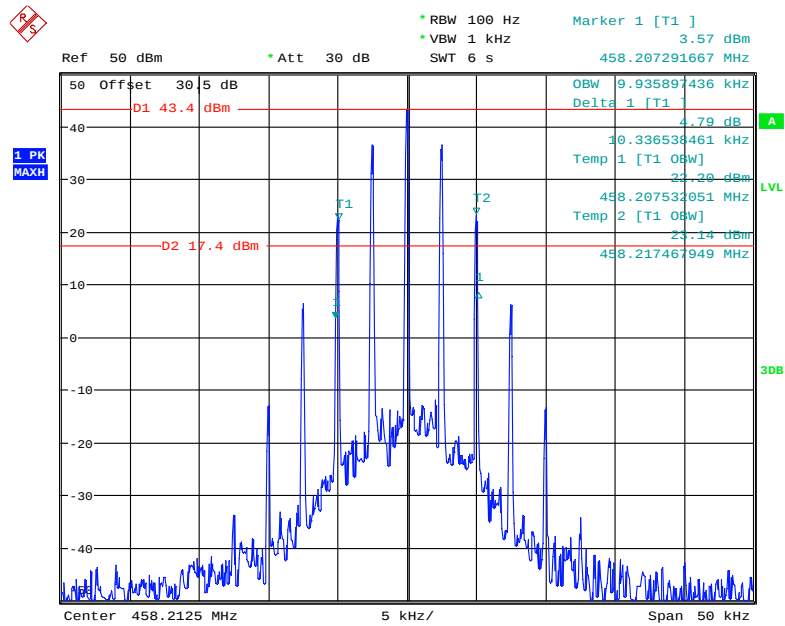


Date: 27.DEC.2017 00:16:02

Frequency 458.2125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

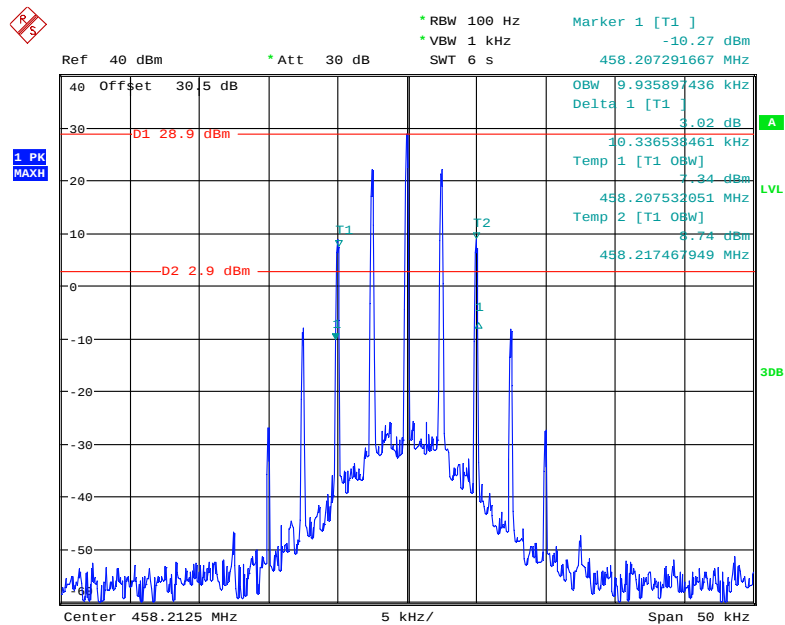


Date: 27.DEC.2017 00:13:12

Frequency 458.2125 MHz: Emission Mask D, High Power, FCC part 90.210

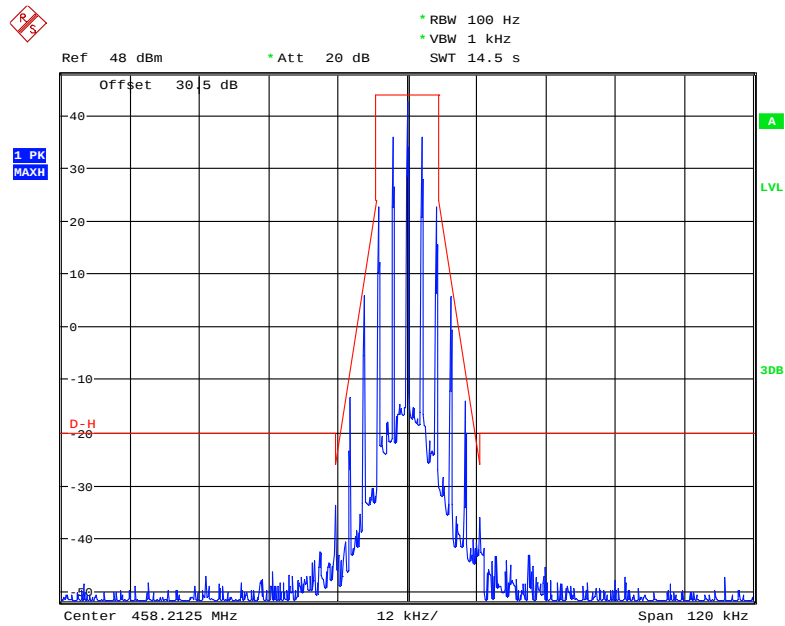

Date: 16.JAN.2018 00:31:05


Frequency 458.2125 MHz: Emission Mask D, Low Power, FCC part 90.210

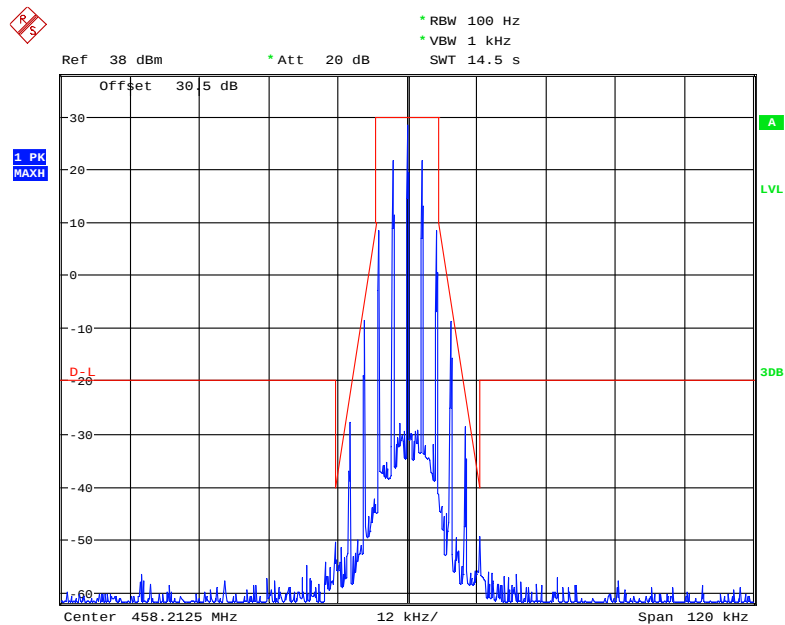

Date: 16.JAN.2018 00:33:01


Digital Modulation:

Frequency 450.0125 MHz: 99% Occupied & 26 dB Bandwidth, High Power

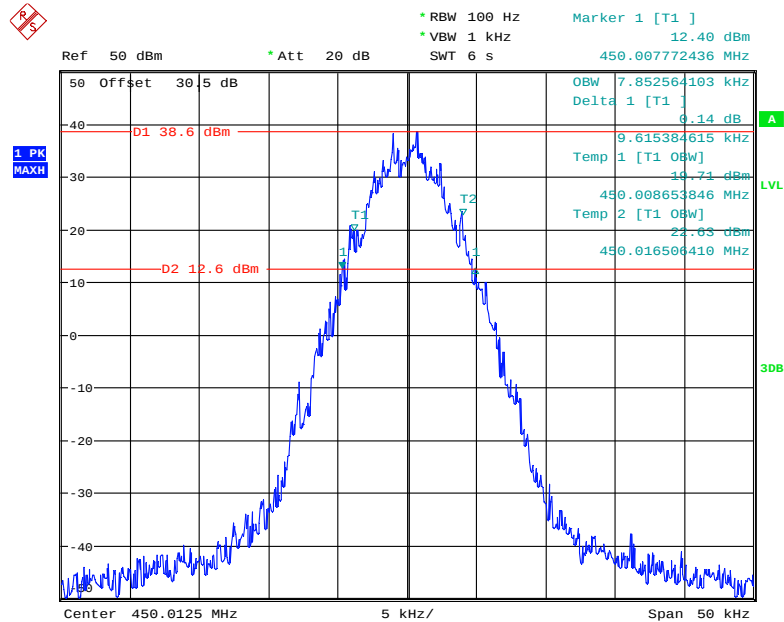


Date: 17.DEC.2017 17:24:20

Frequency 450.0125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

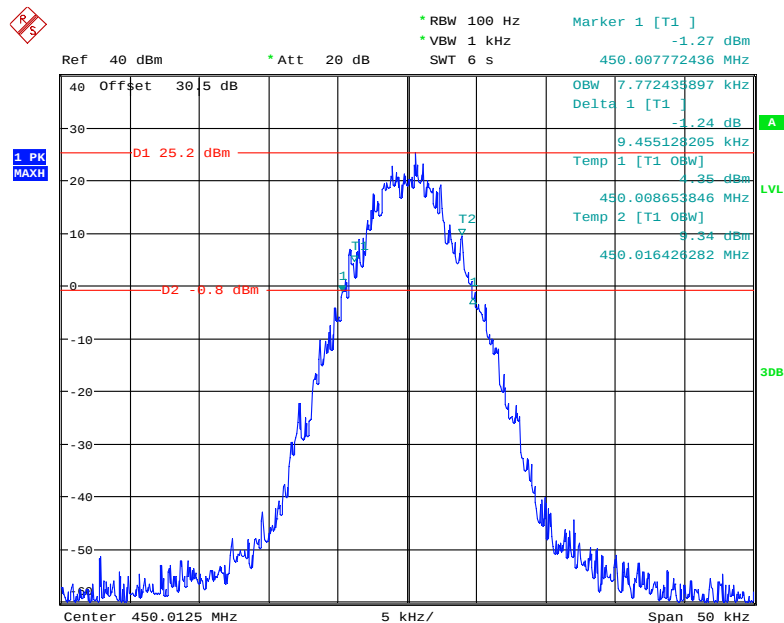


Date: 17.DEC.2017 17:22:12

Frequency 450.0125 MHz: Emission Mask D, High Power, FCC Part 74.462

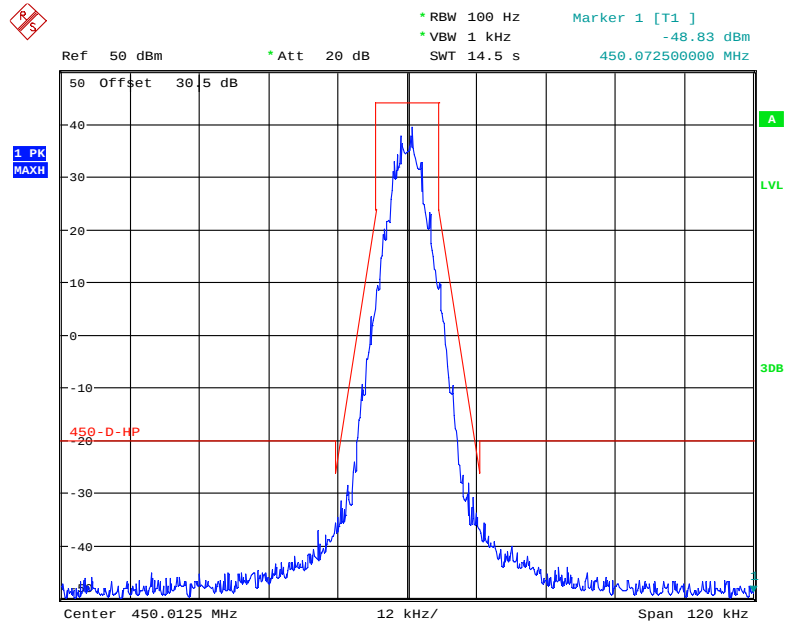


Date: 17.DEC.2017 19:11:03

Frequency 450.0125 MHz: Emission Mask D, Low Power, FCC Part 74.462

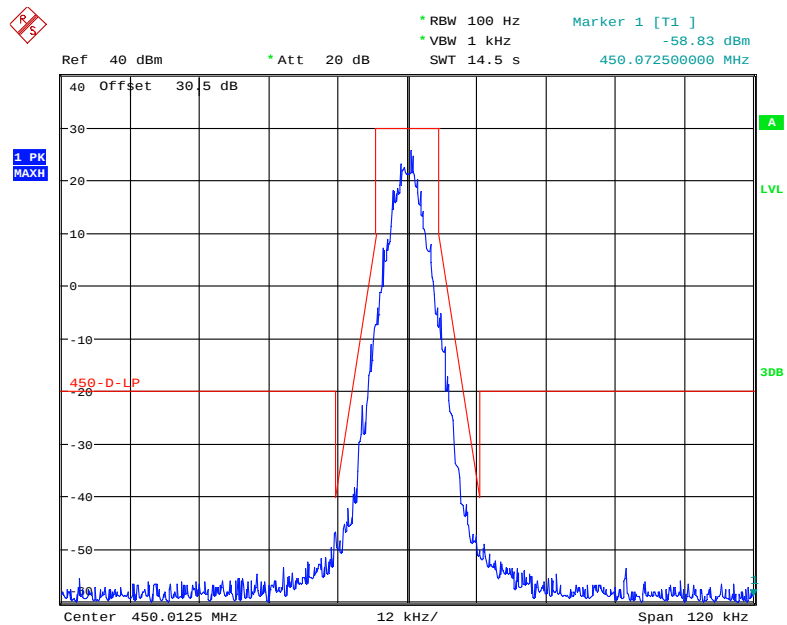


Date: 17.DEC.2017 19:13:56

Frequency 454.0250 MHz: 99% Occupied & 26 dB Bandwidth, High Power

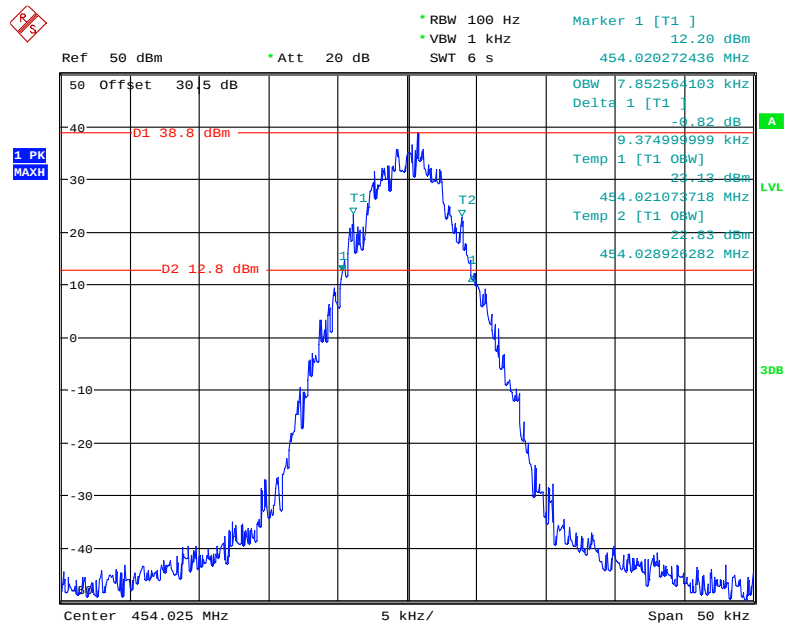


Date: 17.DEC.2017 18:32:56

Frequency 454.0250 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

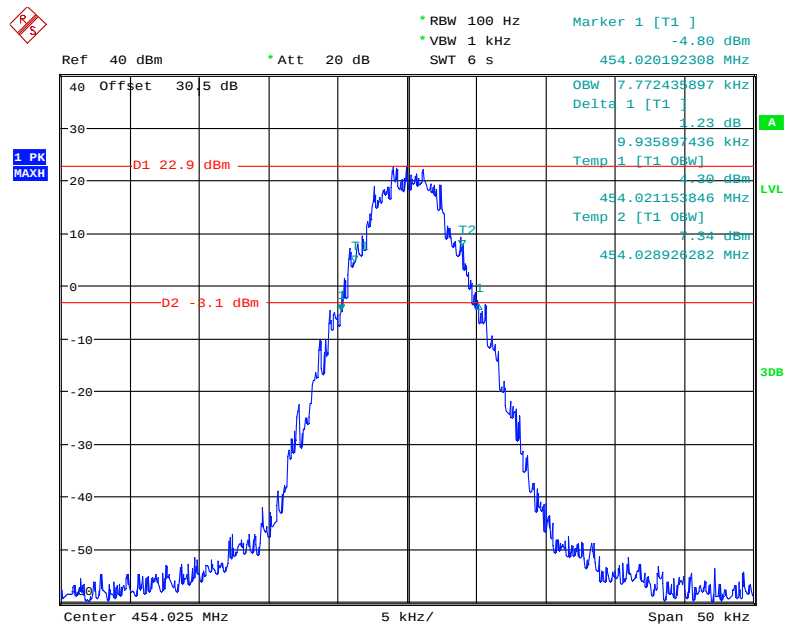


Date: 17.DEC.2017 18:35:18

Frequency 454.0250 MHz: Emission Mask , High Power,FCC part 22.359

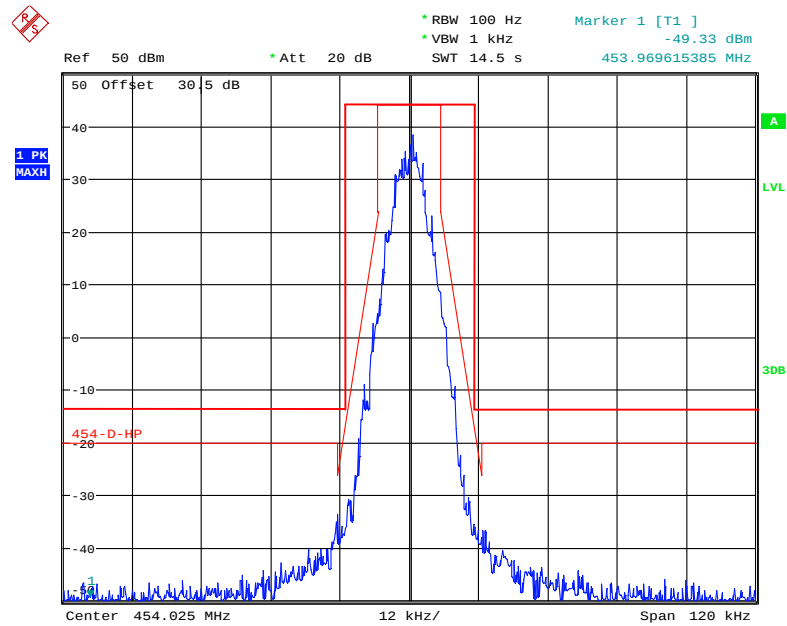

Date: 17.DEC.2017 19:06:57

Frequency 454.0250 MHz: Emission Mask, Low Power, FCC part 22.359

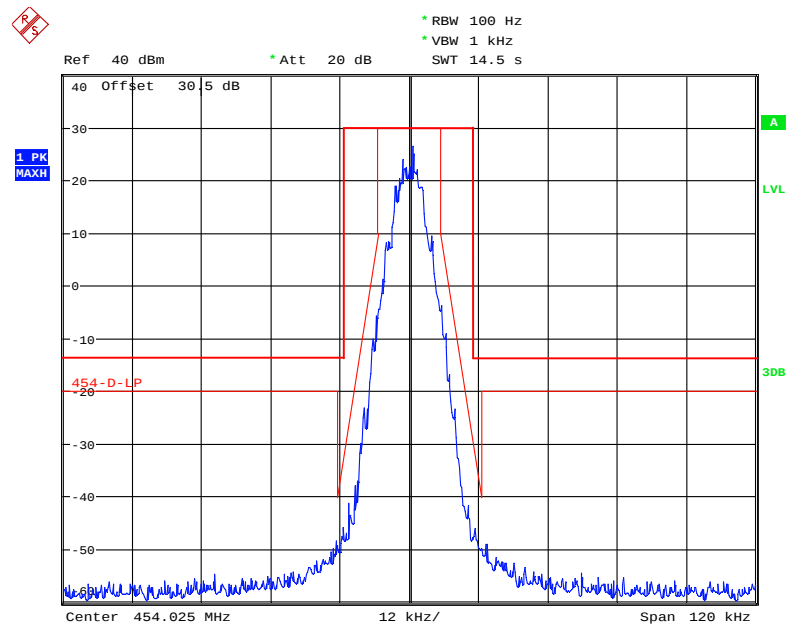

Date: 17.DEC.2017 19:04:49

1 PK
MAXH

Ref 50 dBm Att 20 dB SWT 6 s

Center 458.2125 MHz 5 kHz/ Span 50 kHz

Marker 1 [T1] 12.01 dBm
458.207692308 MHz


OBW 7.85256103 kHz
Delta 1 [T1] -2.08 dB
9.775641025 kHz
Temp 1 [T1 OBW] 23.77 dBm
458.208573718 MHz
Temp 2 [T1 OBW] 23.31 dBm
458.216426282 MHz

D1 38.3 dBm
D2 12.3 dBm

T1
T2


3DB

Frequency 458.2125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

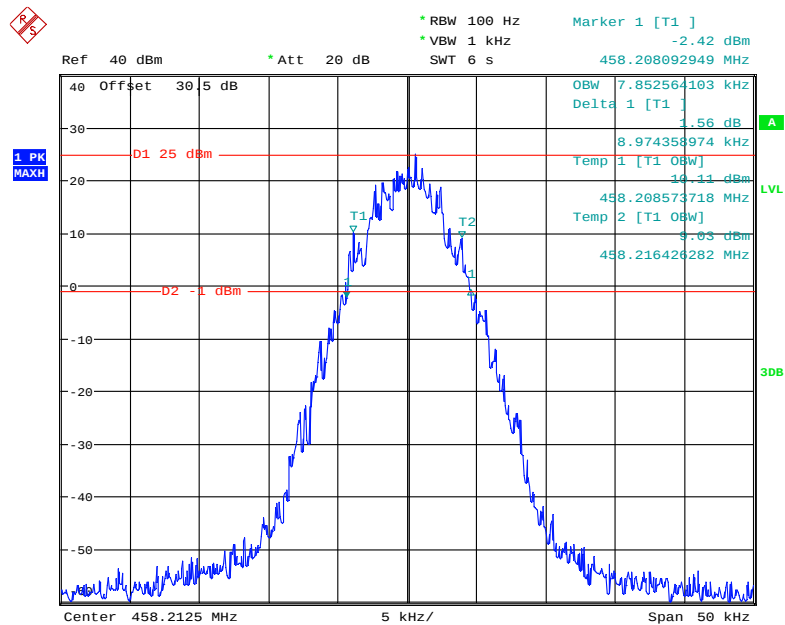


Page 36 of 71

Frequency 458.2125 MHz: Emission Mask D, High Power, FCC Part 90.210

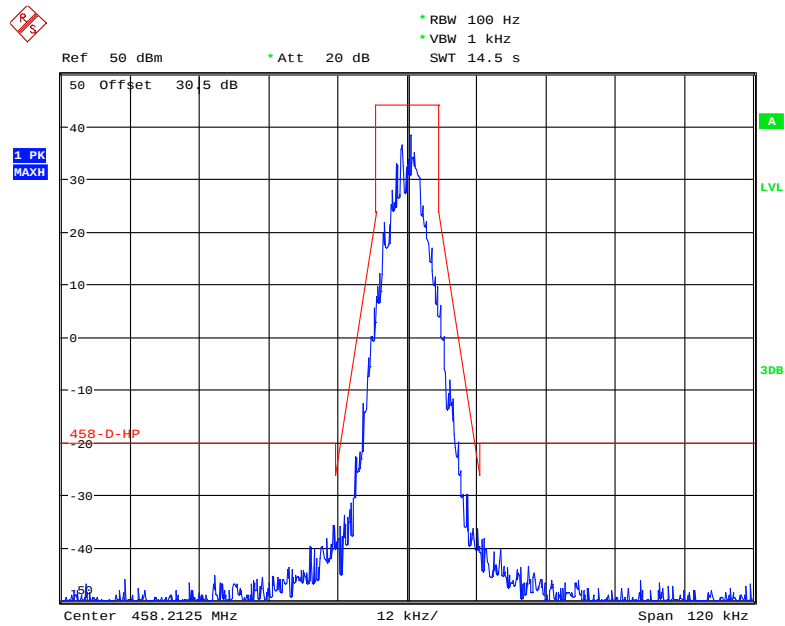

Date: 17.DEC.2017 18:56:38

Frequency 458.2125 MHz: Emission Mask D, Low Power, FCC Part 90.210

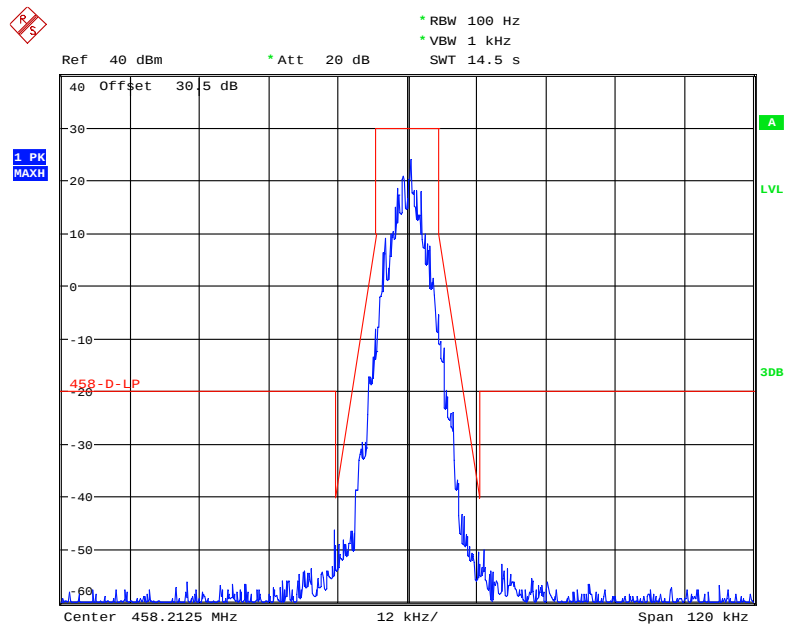

Date: 17.DEC.2017 18:59:13

Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	99% Occupied Bandwidth (kHz)	26 dB Emissions Bandwidth (kHz)	Note
Analog	25	454.025	High	15.064	15.705	Part 74
	25		Low	14.984	15.785	
	25	459.9875	High	14.984	15.705	Part 80
	25		Low	14.984	15.785	
	25	458.2125	High	14.984	15.785	Part 22
	25		Low	14.984	15.785	


Emission Designator Per CFR 47 §2.201& §2.202&, $B_n = 2M + 2D$

For FM Mode (Channel Spacing: 25 kHz)

Emission Designator 16K0F3E In this case, the maximum modulating frequency is 5.0 kHz with a 3 kHz deviation. $BW = 2(M+D) = 2(5 \text{ kHz} + 3 \text{ kHz}) = 16 \text{ kHz} \rightarrow 16K0$
F3E portion of the designator represents an FM voice transmission Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.*


Analog Modulation

Frequency 450.0125 MHz: 99% Occupied & 26 dB Bandwidth, High Power

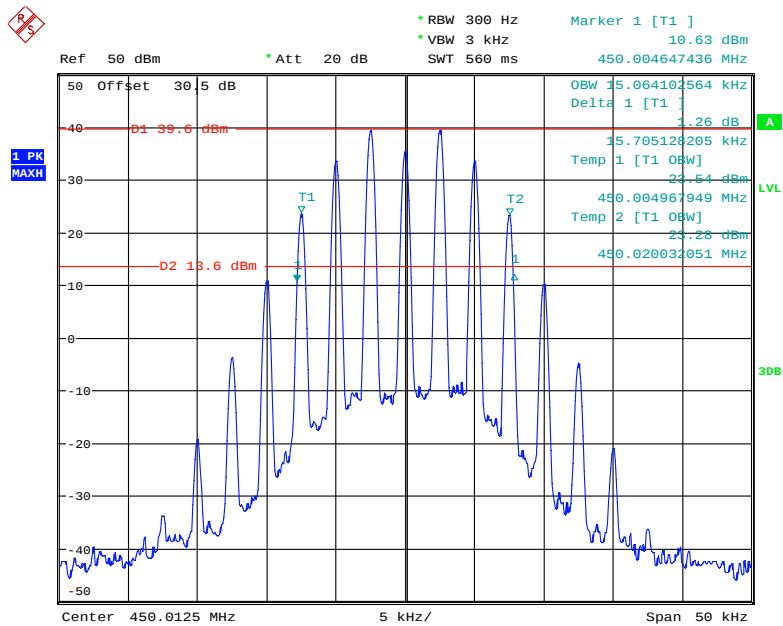


Date: 16.JAN.2018 00:59:17

Frequency 450.0125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

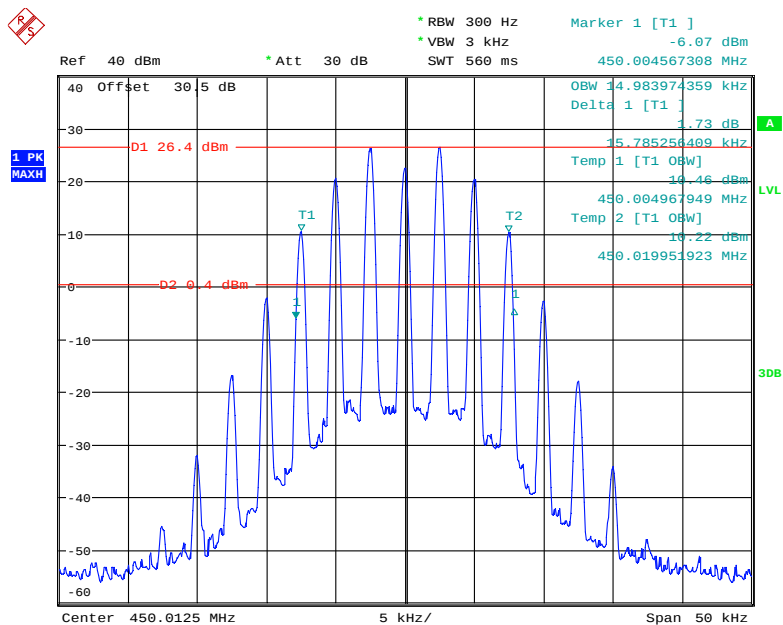


Date: 26.DEC.2017 23:52:25

Frequency 450.0125 MHz: Emission Mask B, High Power, For part 74.462

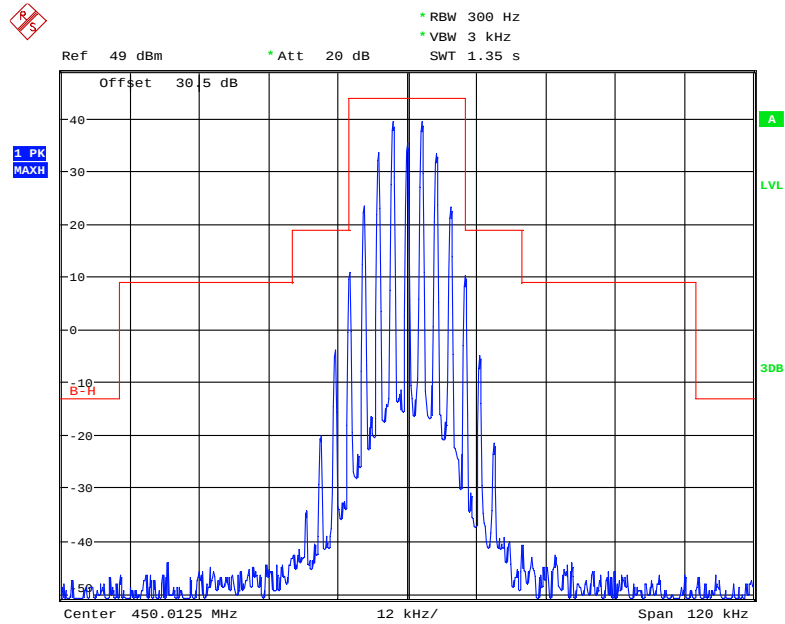


Date: 16.JAN.2018 00:34:59


Frequency 450.0125 MHz: Emission Mask B, Low Power, For part 74.462

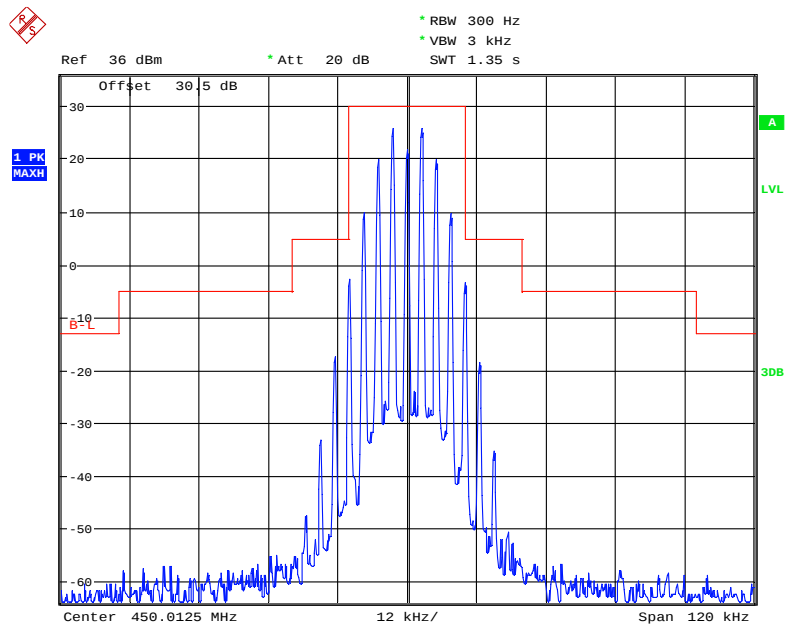

Date: 16.JAN.2018 00:36:35

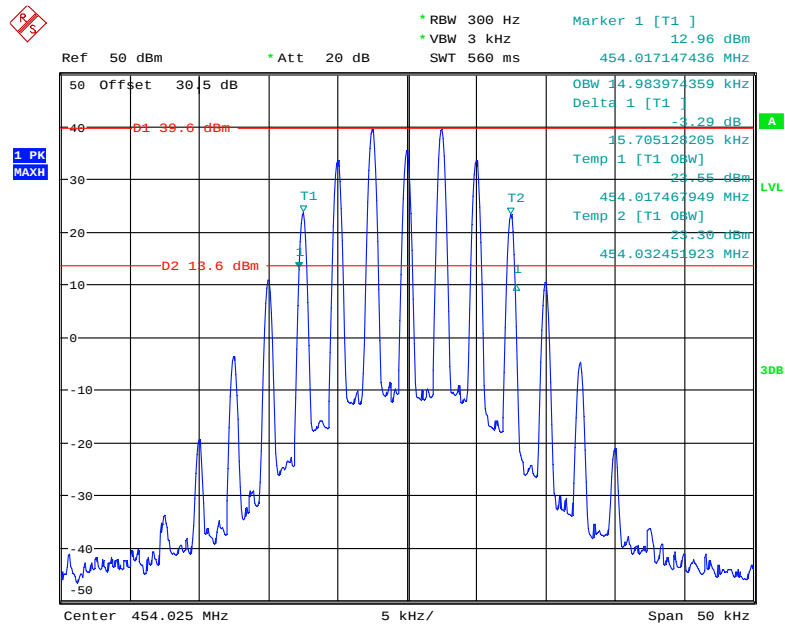
Frequency 454.025 MHz: 99% Occupied & 26 dB Bandwidth, High Power

Date: 16.JAN.2018 01:00:22

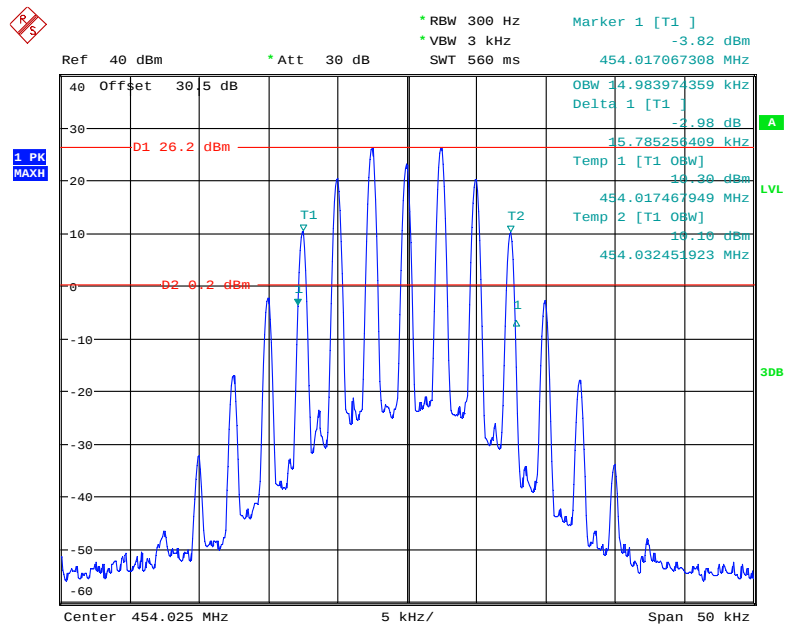Frequency 454.025 MHz: 99% Occupied & 26 dB Bandwidth, Low Power


Date: 26.DEC.2017 23:47:29

Frequency 454.025 MHz: Emission Mask B , High Power,For part22.359

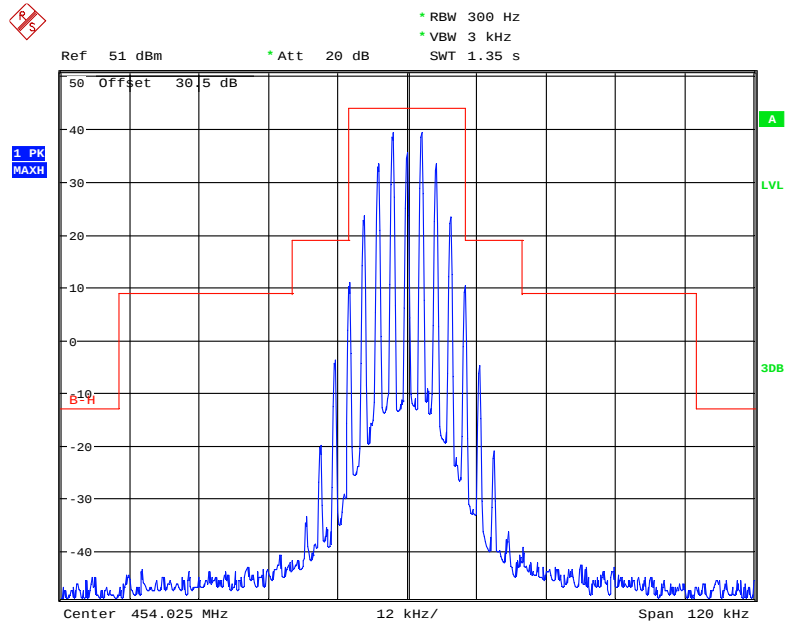


Date: 16.JAN.2018 00:47:55


Frequency 454.025 MHz: Emission Mask B, Low Power, For part22.359

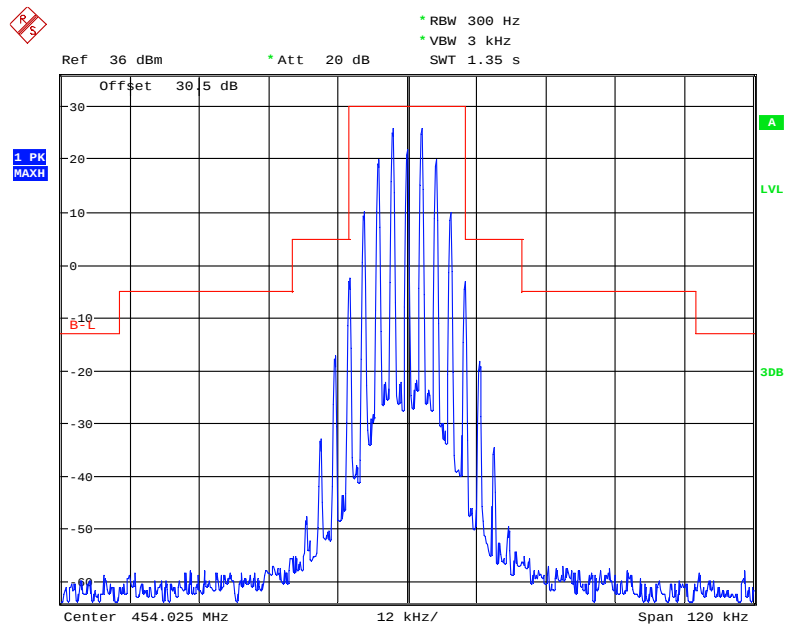

Date: 16.JAN.2018 00:45:07

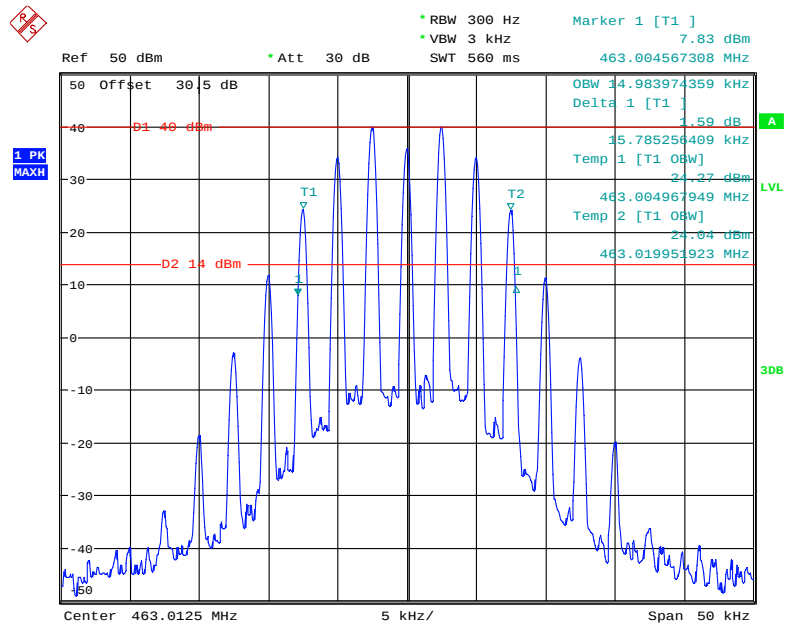
Frequency 463.0125 MHz: 99% Occupied & 26 dB Bandwidth, High Power

Date: 26.DEC.2017 23:43:02

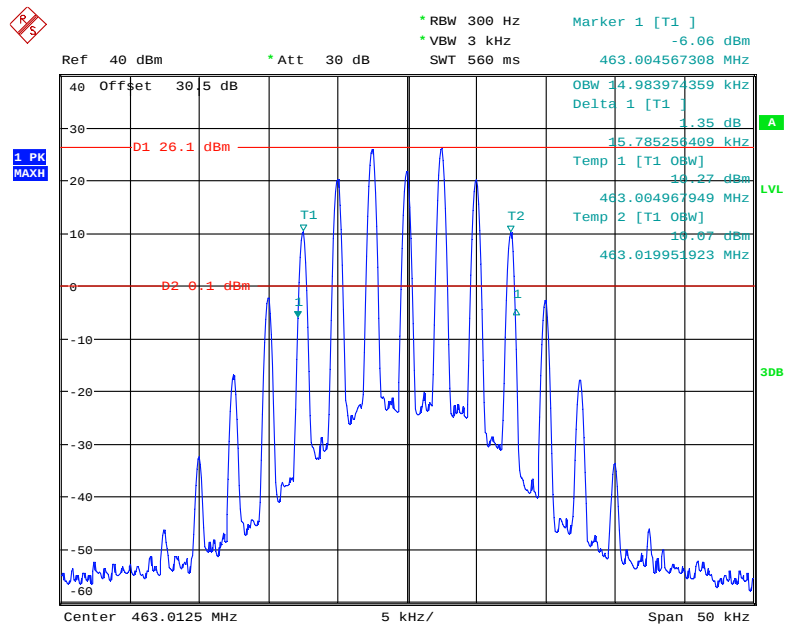Frequency 463.0125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power


Date: 26.DEC.2017 23:41:38

Frequency 463.0125 MHz: Emission Mask B, High Power, For 80.211

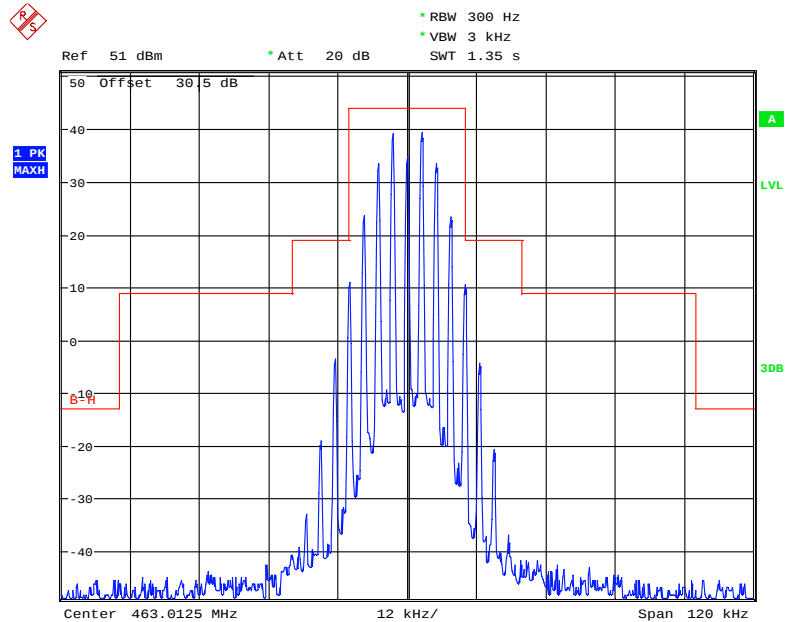

Date: 16.JAN.2018 00:50:24

Frequency 463.0125 MHz: Emission Mask B, Low Power, For 80.211

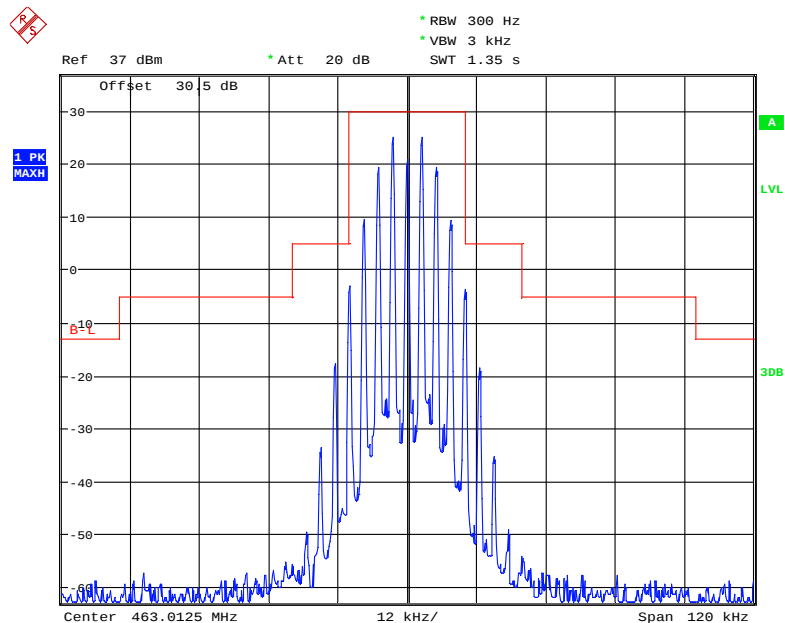

Date: 16.JAN.2018 00:56:30

FCC §2.1051 & §22.861 & §74.462 & § 80.211 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0 dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least $7.27 (f_d - 2.88 \text{ kHz})$ dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data

Environmental Conditions


Temperature:	24 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Kong on 2017-12-17.

Test Mode: Transmitting, please refer to the following plots.


Analog Modulation:

30MHz – 1 GHz, Channel Spacing 12.5 kHz, 450.0125 MHz, For FCC part 74

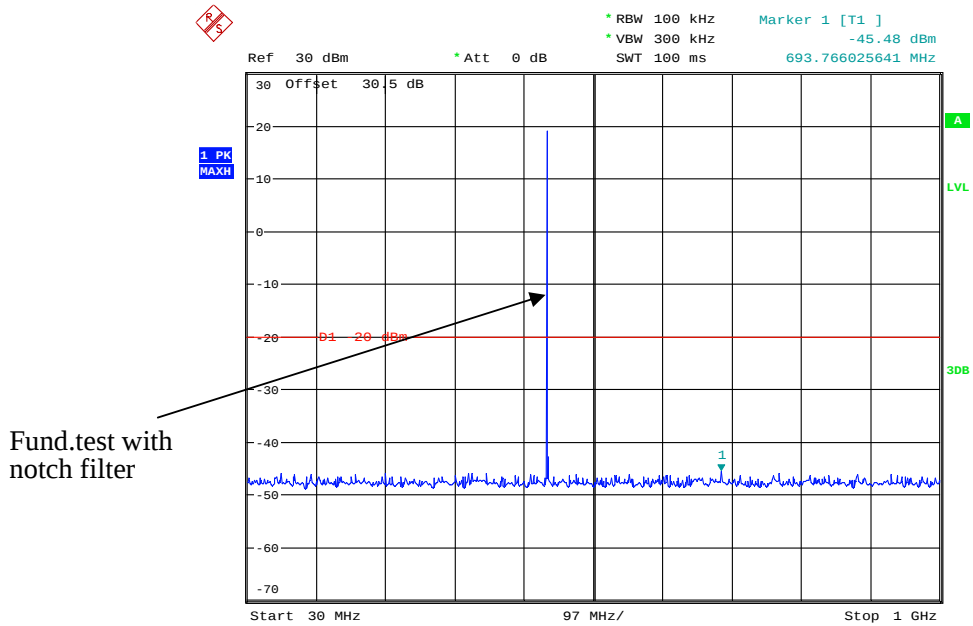


Date: 17.DEC.2017 16:32:10

1 GHz – 5 GHz, Channel Spacing 12.5 kHz, 450.0125 MHz, For FCC part 74

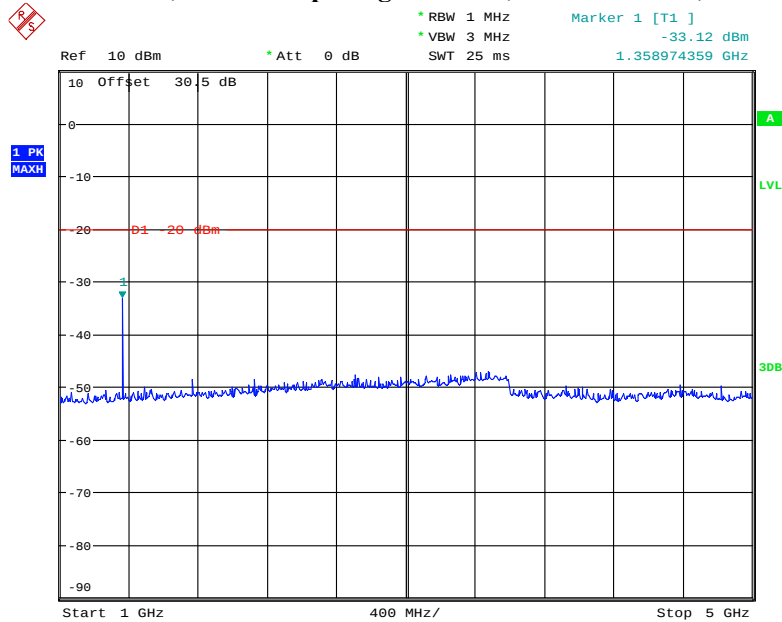


Date: 17.DEC.2017 16:58:49

Fund.test with notch filter




Date: 17.DEC.2017 16:58:13

30MHz – 1 GHz, Channel Spacing 12.5 kHz, 458.2125 MHz, For FCC part 90

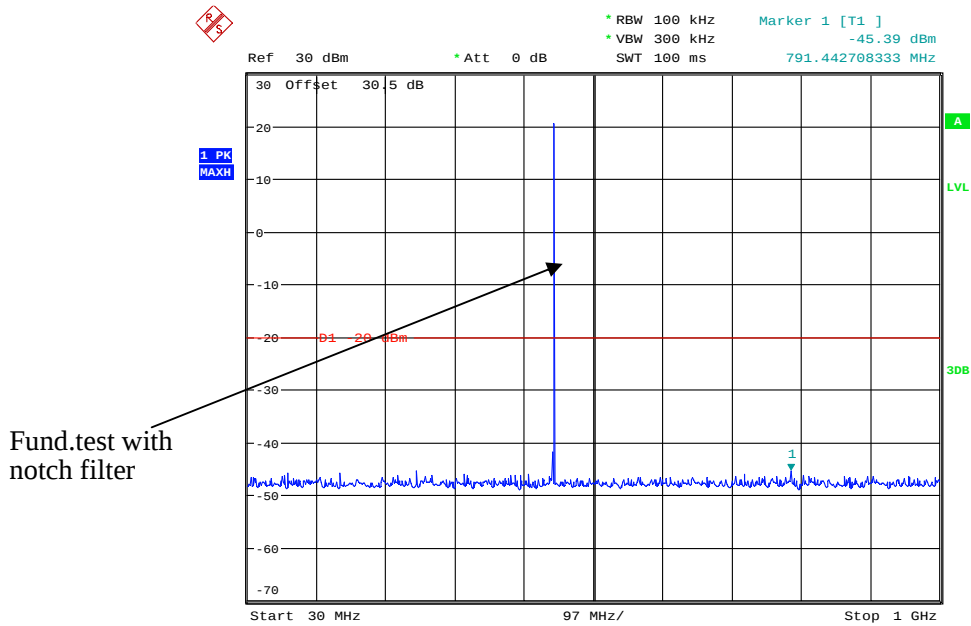


Date: 17.DEC.2017 16:36:12


1 GHz – 5 GHz, Channel Spacing 12.5 kHz, 458.2125 MHz, For FCC part 90

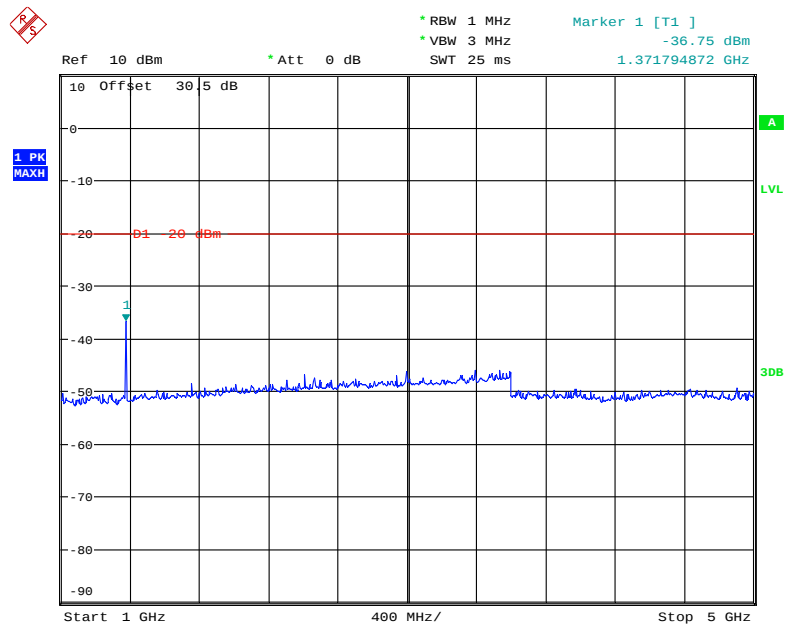

Date: 17.DEC.2017 16:57:21

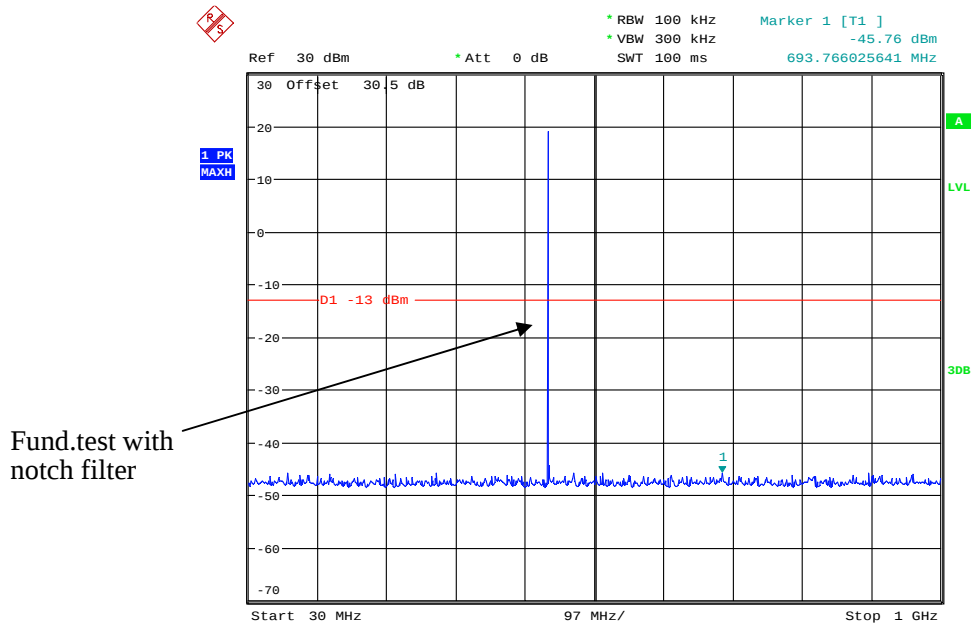
30MHz – 1 GHz, Channel Spacing 25 kHz, 450.0125 MHz, For FCC part 74

Date: 17.DEC.2017 16:40:17

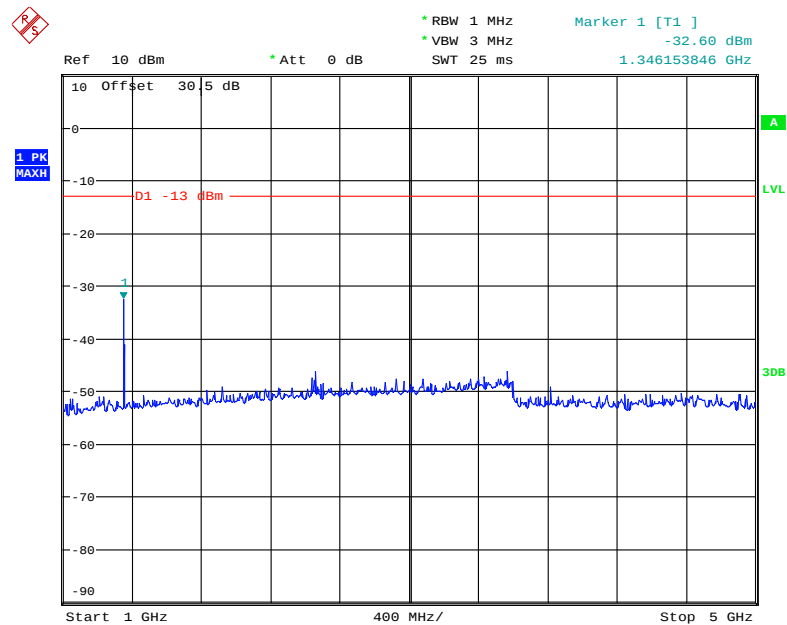1 GHz – 5 GHz, Channel Spacing 25 kHz, 450.0125 MHz, For FCC part 74


Date: 17.DEC.2017 16:49:20

30MHz – 1 GHz, Channel Spacing 25 kHz, 454.0250 MHz, For FCC part 22

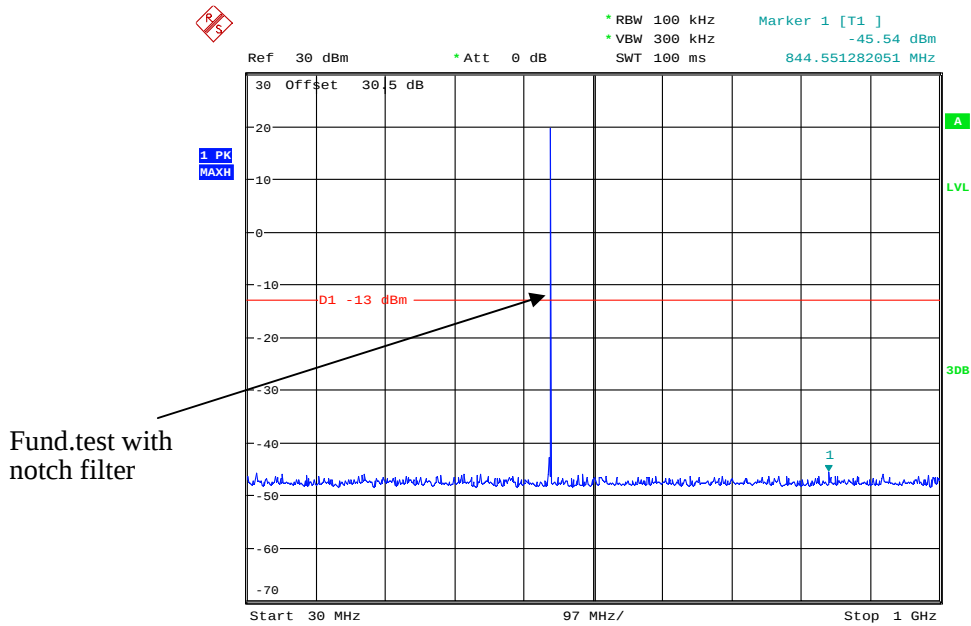


Date: 17.DEC.2017 16:42:23

1 GHz – 5 GHz, Channel Spacing 25 kHz, 454.0250 MHz, For FCC part 22

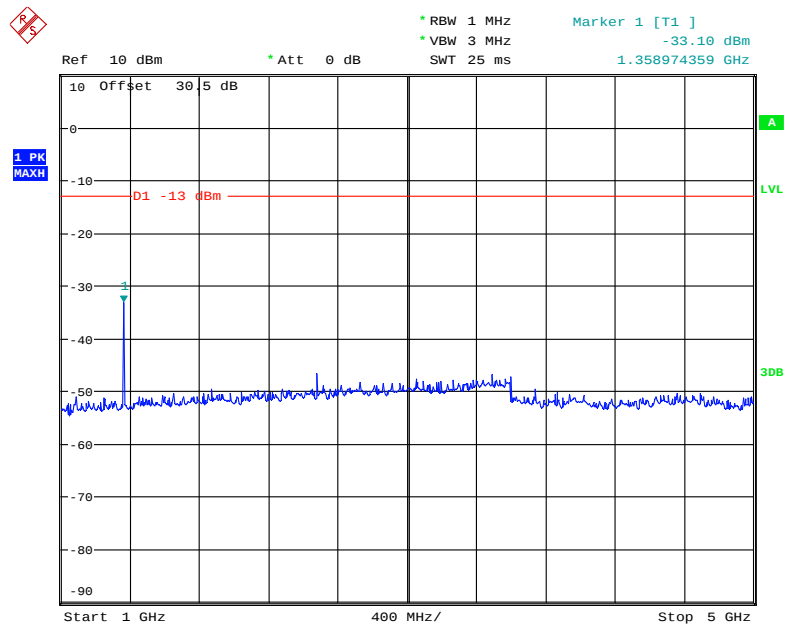


Date: 17.DEC.2017 16:48:09

30MHz – 1 GHz, Channel Spacing 25 kHz, 463.0125 MHz, For FCC part 80

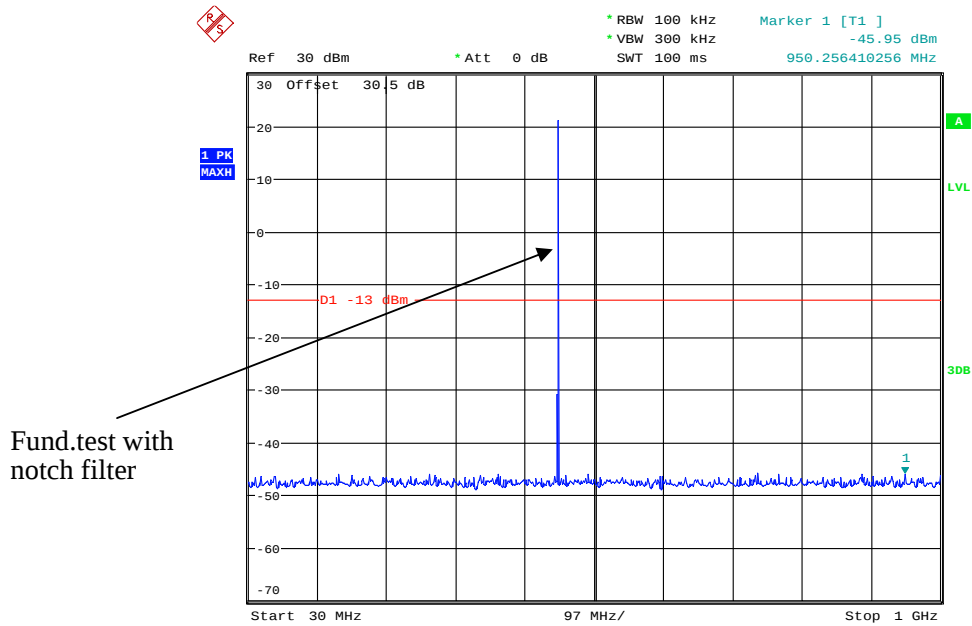

Date: 17.DEC.2017 16:45:05


1 GHz – 5 GHz, Channel Spacing 25 kHz, 463.0125 MHz, For FCC part 80

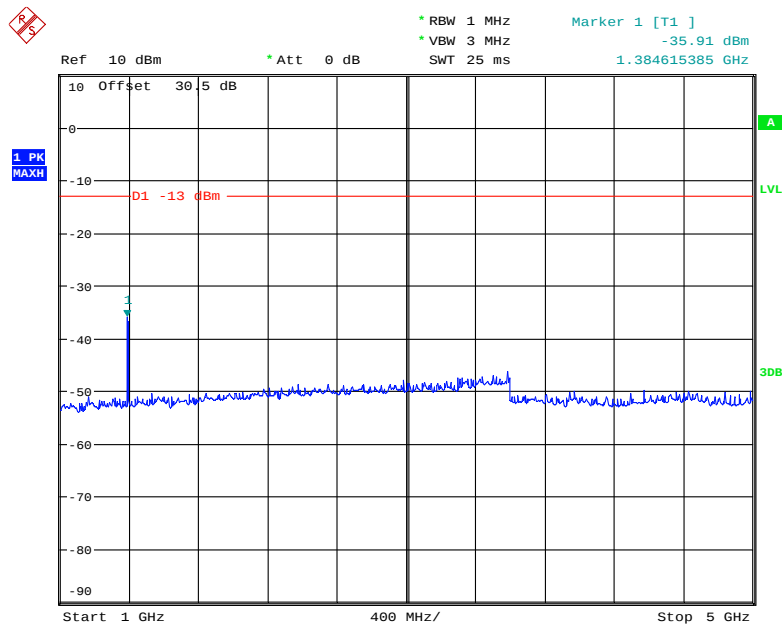

Date: 17.DEC.2017 16:46:15


Digital Modulation:

30MHz – 1 GHz, 450.0125 MHz, For FCC part 74

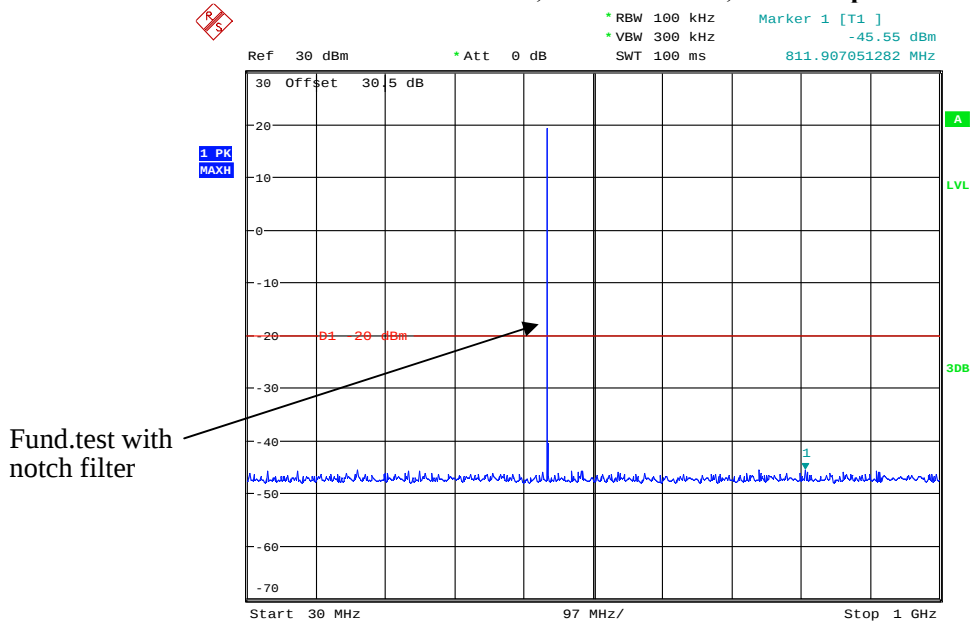


Date: 17.DEC.2017 16:23:05

1 GHz – 5 GHz, 450.0125 MHz, For FCC part 74

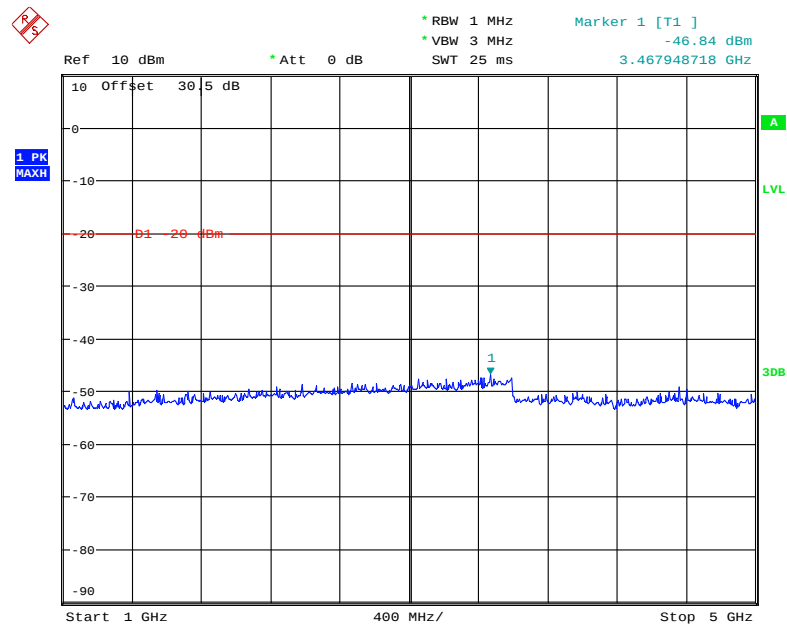


Date: 17.DEC.2017 17:05:54

30MHz – 1 GHz, 454.0250 MHz, For FCC part 22

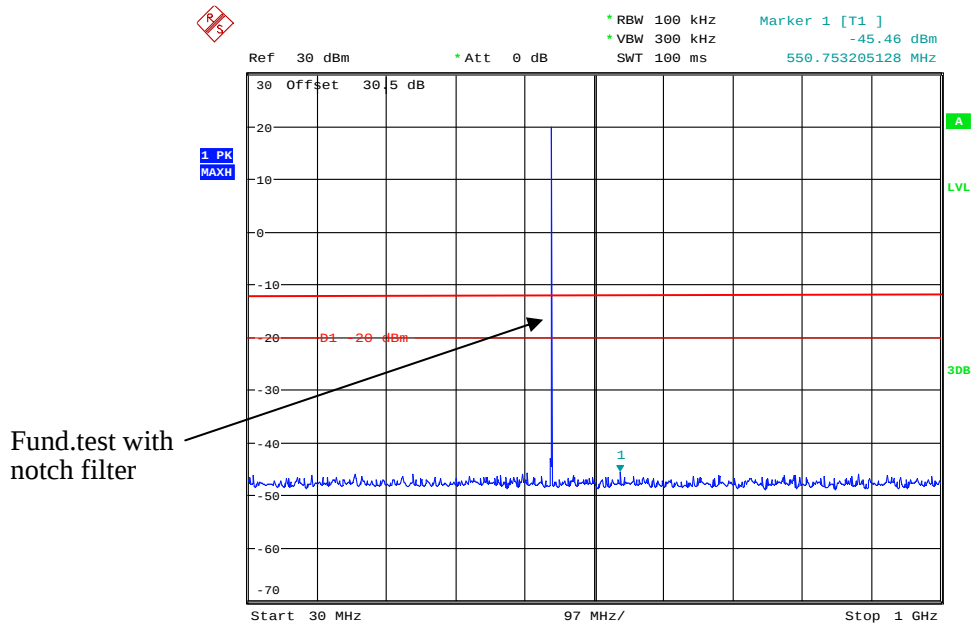


Date: 17.DEC.2017 16:24:03

1 GHz – 5 GHz, 454.0250 MHz, For FCC part 22

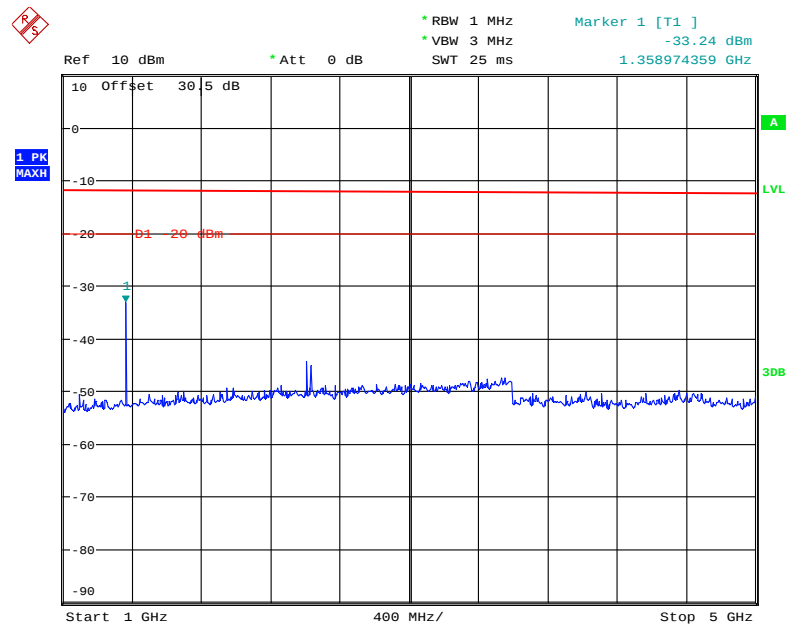


Date: 17.DEC.2017 17:06:40

30MHz – 1 GHz, 458.2125 MHz, For FCC part 90

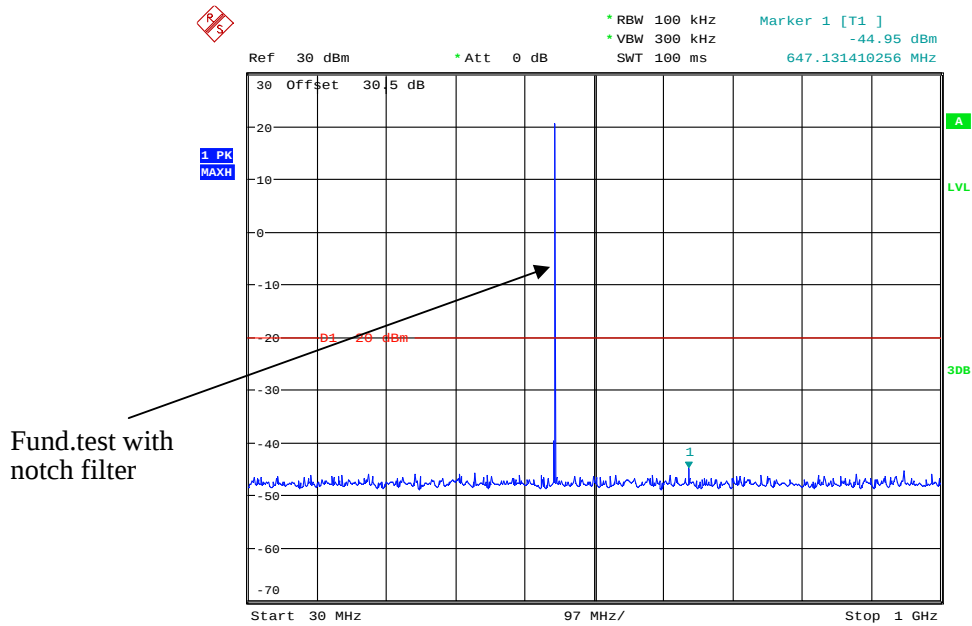

Date: 17.DEC.2017 16:25:16

1 GHz – 5 GHz, 458.2125 MHz, For FCC part 90

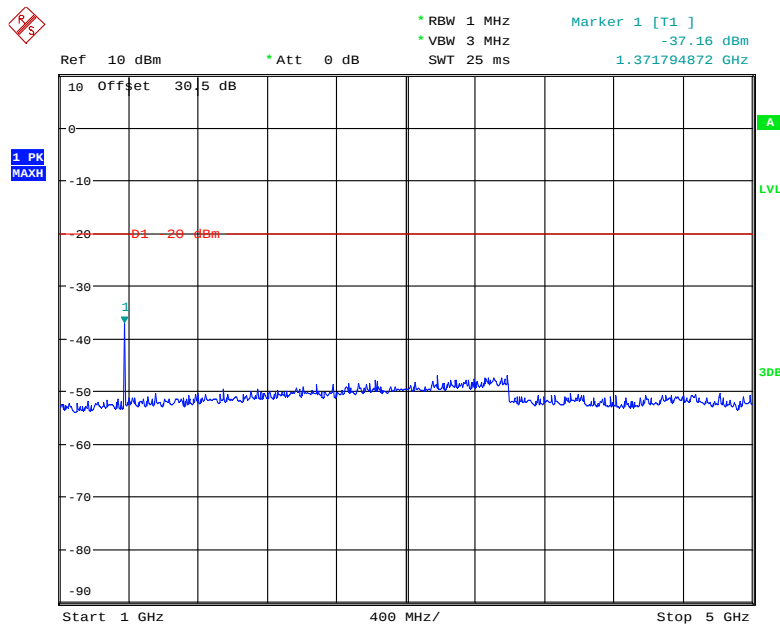

Date: 17.DEC.2017 17:07:24

FCC §2.1053 & §22.861 & §74.462 & § 80.211 & §90.210 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053, §22.861, §74.462, § 80.211 and §90.210

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 log (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 50 + 10 Log₁₀ (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

Spurious attenuation limit in dB = 43 + 10 Log₁₀ (power out in Watts) for EUT with a 25 kHz channel bandwidth.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Kong on 2018-01-13.

Test Mode: Transmitting

Pre-scan both EUT power supply AC and Power supply DC ,worst case data as below:

30MHz - 5GHz:

Frequency (MHz)	Receiver Reading (dBμV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Analog Modulation 450.0125MHz-12.5 kHz,For FCC part 74										
900.025	39.94	96	1.0	H	-55.8	0.70	0.0	-56.50	-20	36.50
900.025	40.28	90	1.4	V	-54.0	0.70	0.0	-54.70	-20	34.70
1350.04	53.41	358	2.1	H	-54.5	1.60	8.30	-47.80	-20	27.80
1350.04	52.84	78	2.1	V	-55.4	1.60	8.30	-48.70	-20	28.70
1800.05	45.22	88	1.7	H	-61.2	1.30	8.50	-54.00	-20	34.00
1800.05	43.68	353	2.1	V	-62.4	1.30	8.50	-55.20	-20	35.20
Digital Modulation 450.0125MHz-12.5 kHz,For FCC part 74										
900.025	40.25	281	1.2	H	-55.5	0.70	0.0	-56.20	-20	36.20
900.025	41.13	317	2.4	V	-53.1	0.70	0.0	-53.80	-20	33.80
1350.04	54.35	58	2.2	H	-53.6	1.60	8.30	-46.90	-20	26.90
1350.04	53.08	21	1.8	V	-55.1	1.60	8.30	-48.40	-20	28.40
1800.05	43.99	165	1.6	H	-62.4	1.30	8.50	-55.20	-20	35.20
1800.05	44.08	260	1.8	V	-62.0	1.30	8.50	-54.80	-20	34.80
Analog Modulation 454.025MHz-12.5 kHz,For FCC part 22										
908.05	41.52	234	1.4	H	-55.5	0.70	0	-56.20	-13	43.20
908.05	41.34	73	1.8	V	-55.7	0.70	0	-56.40	-13	43.40
1362.08	52.18	321	2.1	H	-55.8	1.60	8.30	-49.10	-13	36.10
1362.08	51.88	270	2.4	V	-56.3	1.60	8.30	-49.60	-13	36.60
1816.10	48.62	324	2.3	H	-57.8	1.30	8.50	-50.60	-13	37.60
1816.10	45.33	276	1.2	V	-60.7	1.30	8.50	-53.50	-13	40.50

Frequency (MHz)	Receiver Reading (dBμV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Digital Modulation 454.0250MHz-12.5 kHz,For FCC part 22										
908.05	40.69	85	1.2	H	-55.0	0.70	0.0	-55.70	-13	42.70
908.05	40.85	9	1.3	V	-53.4	0.70	0.0	-54.10	-13	41.10
1362.08	52.64	172	2.0	H	-55.3	1.60	8.30	-48.60	-13	35.60
1362.08	52.44	176	1.4	V	-55.8	1.60	8.30	-49.10	-13	36.10
1816.10	45.29	91	2.1	H	-61.1	1.30	8.50	-53.90	-13	40.90
1816.10	44.83	272	1.2	V	-61.2	1.30	8.50	-54.00	-13	41.00
Analog Modulation 458.2125MHz-12.5 kHz,For FCC part 90										
916.425	42.32	203	1.4	H	-53.1	0.70	0.0	-53.80	-20	33.80
916.425	40.83	201	2.3	V	-52.9	0.70	0.0	-53.60	-20	33.60
1374.64	56.05	201	1.2	H	-51.9	1.60	8.30	-45.20	-20	25.20
1374.64	54.93	24	2.1	V	-53.3	1.60	8.30	-46.60	-20	26.60
1832.85	46.33	60	2.5	H	-60.1	1.30	8.50	-52.90	-20	32.90
1832.85	42.55	258	2.5	V	-63.5	1.30	8.50	-56.30	-20	36.30
1374.64	56.05	201	1.2	H	-51.9	1.60	8.30	-45.20	-20	25.20
Digital Modulation 458.2125 MHz-12.5 kHz,For FCC part 90										
908.05	41.22	295	1.2	H	-54.5	0.70	0.0	-55.20	-20	35.20
908.05	40.81	52	1.1	V	-53.4	0.70	0.0	-54.10	-20	34.10
1374.64	55.04	50	2.1	H	-52.9	1.60	8.30	-46.20	-20	26.20
1374.64	53.56	95	1.8	V	-54.7	1.60	8.30	-48.00	-20	28.00
1832.85	46.29	58	2.1	H	-60.1	1.30	8.50	-52.90	-20	32.90
1832.85	44.35	168	1.6	V	-61.7	1.30	8.50	-54.50	-20	34.50
Analog Modulation 450.0125 MHz-25 kHz,For FCC part 74										
900.025	42.97	180	1.1	H	-52.8	0.70	0.0	-53.50	-13	40.50
900.025	43.28	312	2.0	V	-51.0	0.70	0.0	-51.70	-13	38.70
1350.38	55.92	241	1.9	H	-52.0	1.60	8.30	-45.30	-13	32.30
1350.38	54.36	318	1.6	V	-53.9	1.60	8.30	-47.20	-13	34.20
1800.50	48.31	249	1.1	H	-58.1	1.30	8.50	-50.90	-13	37.90
1800.50	46.25	316	2.0	V	-59.8	1.30	8.50	-52.60	-13	39.60

Frequency (MHz)	Receiver Reading (dBμV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Analog Modulation 454.0250MHz-25 kHz,For FCC part 22										
908.05	42.32	224	1.8	H	-53.4	0.70	0.0	-54.10	-13	41.10
908.05	41.96	86	1.4	V	-52.3	0.70	0.0	-53.00	-13	40.00
1362.08	52.63	43	1.8	H	-55.3	1.60	8.30	-48.60	-13	35.60
1362.08	51.52	209	1.3	V	-56.7	1.60	8.30	-50.00	-13	37.00
1816.10	46.32	56	1.4	H	-60.1	1.30	8.50	-52.90	-13	39.90
1816.10	44.11	243	2.1	V	-61.9	1.30	8.50	-54.70	-13	41.70
Analog Modulation 463.0125 MHz-25 kHz,For FCC part 80										
926.025	43.82	200	1.4	H	-51.6	0.74	0.0	-52.34	-13	39.34
926.025	41.96	345	1.8	V	-51.7	0.74	0.0	-52.44	-13	39.44
1389.04	53.58	345	2.2	H	-54.4	1.60	8.30	-47.70	-13	34.70
1389.04	56.57	330	2.2	V	-51.6	1.60	8.30	-44.90	-13	31.90
1852.05	44.32	95	1.9	H	-60.1	1.30	8.50	-52.90	-13	39.90
1852.05	46.77	236	1.3	V	-57.9	1.30	8.50	-50.70	-13	37.70

Note:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1055 & § 22.355 & §74.464 & § 80.209 & §90.213 - FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, § 22.355, §74.464, § 80.209 and §90.213

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Kong on 2018-01-13.

Test Mode: Transmitting

For 12.5 kHz:

Analog Modulation, Reference Frequency: 450.0125MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{AC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	120	450.012208	-0.6489
40	120	450.012272	-0.5067
30	120	450.012250	-0.5555
20	120	450.012241	-0.5755
10	120	450.012213	-0.6378
0	120	450.012236	-0.5867
-10	120	450.012246	-0.5644
-20	120	450.012250	-0.5555
-30	120	450.012246	-0.5644
Frequency Stability versus Input Voltage			
20	138	450.012215	-0.6333
20	102	450.012263	-0.5267

Analog Modulation, Reference Frequency: 450.0125MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	450.012215	-0.6333
40	13.6	450.012277	-0.4955
30	13.6	450.012258	-0.5378
20	13.6	450.012246	-0.5644
10	13.6	450.012218	-0.6266
0	13.6	450.012232	-0.5955
-10	13.6	450.012241	-0.5755
-20	13.6	450.012249	-0.5578
-30	13.6	450.012256	-0.5422
Frequency Stability versus Input Voltage			
20	15.8	450.012242	-0.5733
20	11.0	450.012276	-0.4978

Digital Modulation, Reference Frequency: 450.0125 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{AC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	120	450.012268	-0.5155
40	120	450.012200	-0.6666
30	120	450.012215	-0.6333
20	120	450.012227	-0.6066
10	120	450.012225	-0.6111
0	120	450.012248	-0.5600
-10	120	450.012222	-0.6178
-20	120	450.012205	-0.6555
-30	120	450.012274	-0.5022
Frequency Stability versus Input Voltage			
20	138	450.012198	-0.6711
20	102	450.012224	-0.6133

Digital Modulation, Reference Frequency: 450.0125 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	450.012299	-0.4467
40	13.6	450.012205	-0.6555
30	13.6	450.012217	-0.6289
20	13.6	450.012231	-0.5978
10	13.6	450.012229	-0.6022
0	13.6	450.012245	-0.5667
-10	13.6	450.012231	-0.5978
-20	13.6	450.012211	-0.6422
-30	13.6	450.012269	-0.5133
Frequency Stability versus Input Voltage			
20	15.8	450.012194	-0.6800
20	11.0	450.012228	-0.6044

Analog Modulation, Reference Frequency: 454.025MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{AC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	120	454.025040	0.0881
40	120	454.025007	0.0154
30	120	454.025031	0.0683
20	120	454.025029	0.0639
10	120	454.025033	0.0727
0	120	454.025020	0.0441
-10	120	454.024993	-0.0154
-20	120	454.025022	0.0485
-30	120	454.025043	0.0947
Frequency Stability versus Input Voltage			
20	138	454.025014	0.0308
20	102	454.024992	-0.0176

Analog Modulation, Reference Frequency: 454.025MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	454.025025	0.0551
40	13.6	454.025065	0.1432
30	13.6	454.025028	0.0617
20	13.6	454.025037	0.0815
10	13.6	454.025040	0.0881
0	13.6	454.025024	0.0529
-10	13.6	454.024989	-0.0242
-20	13.6	454.025027	0.0595
-30	13.6	454.025039	0.0859
Frequency Stability versus Input Voltage			
20	15.8	454.025019	0.0418
20	11.0	454.024990	-0.0220

Digital Modulation, Reference Frequency: 454.025 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{AC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	120	454.025078	0.1718
40	120	454.025018	0.0396
30	120	454.025072	0.1586
20	120	454.025033	0.0727
10	120	454.025000	0.0000
0	120	454.025013	0.0286
-10	120	454.025039	0.0859
-20	120	454.025060	0.1322
-30	120	454.025039	0.0859
Frequency Stability versus Input Voltage			
20	138	454.025063	0.1388
20	102	454.025021	0.0463

Digital Modulation, Reference Frequency: 454.025 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	454.025099	0.2180
40	13.6	454.025035	0.0771
30	13.6	454.025076	0.1674
20	13.6	454.025044	0.0969
10	13.6	454.025009	0.0198
0	13.6	454.025019	0.0418
-10	13.6	454.025040	0.0881
-20	13.6	454.025055	0.1211
-30	13.6	454.025074	0.1630
Frequency Stability versus Input Voltage			
20	15.8	454.025068	0.1498
20	11.0	454.025059	0.1299

Analog Modulation, Reference Frequency: 458.2125 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{AC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	120	458.212541	0.0895
40	120	458.212528	0.0611
30	120	458.212556	0.1222
20	120	458.212535	0.0764
10	120	458.212532	0.0698
0	120	458.212534	0.0742
-10	120	458.212542	0.0917
-20	120	458.212513	0.0284
-30	120	458.212548	0.1048
Frequency Stability versus Input Voltage			
20	138	458.212484	-0.0349
20	102	458.212544	0.0960

Analog Modulation, Reference Frequency: 458.2125 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	458.212535	0.0764
40	13.6	458.212551	0.1113
30	13.6	458.212576	0.1659
20	13.6	458.212541	0.0895
10	13.6	458.212528	0.0611
0	13.6	458.212579	0.1724
-10	13.6	458.212562	0.1353
-20	13.6	458.212525	0.0546
-30	13.6	458.212556	0.1222
Frequency Stability versus Input Voltage			
20	15.8	458.212474	-0.0567
20	11.0	458.212583	0.1811

Digital Modulation, Reference Frequency: 458.2125 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{AC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	120	458.212575	0.1637
40	120	458.212543	0.0938
30	120	458.212564	0.1397
20	120	458.212545	0.0982
10	120	458.212534	0.0742
0	120	458.212516	0.0349
-10	120	458.212554	0.1178
-20	120	458.212531	0.0677
-30	120	458.212558	0.1266
Frequency Stability versus Input Voltage			
20	138	458.212563	0.1375
20	102	458.212498	-0.0044

Digital Modulation, Reference Frequency: 458.2125 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	458.212582	0.1790
40	13.6	458.212536	0.0786
30	13.6	458.212568	0.1484
20	13.6	458.212552	0.1135
10	13.6	458.212560	0.1309
0	13.6	458.212519	0.0415
-10	13.6	458.212563	0.1375
-20	13.6	458.212572	0.1571
-30	13.6	458.212557	0.1244
Frequency Stability versus Input Voltage			
20	15.8	458.212540	0.0873
20	11.0	458.212485	-0.0327

For 25 kHz:

Analog Modulation, Reference Frequency: 450.0125 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{AC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	120	450.012240	-0.5778
40	120	450.012221	-0.6200
30	120	450.012263	-0.5267
20	120	450.012257	-0.5400
10	120	450.012299	-0.4467
0	120	450.012295	-0.4555
-10	120	450.012245	-0.5667
-20	120	450.012234	-0.5911
-30	120	450.012263	-0.5267
Frequency Stability versus Input Voltage			
20	138	450.012229	-0.6022
20	102	450.012282	-0.4844

Analog Modulation, Reference Frequency: 450.0125 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	450.012225	-0.6111
40	13.6	450.012247	-0.5622
30	13.6	450.012249	-0.5578
20	13.6	450.012252	-0.5511
10	13.6	450.012287	-0.4733
0	13.6	450.012293	-0.4600
-10	13.6	450.012275	-0.5000
-20	13.6	450.012262	-0.5289
-30	13.6	450.012268	-0.5155
Frequency Stability versus Input Voltage			
20	15.8	450.012234	-0.5911
20	11.0	450.012276	-0.4978

Analog Modulation, Reference Frequency: 454.0250MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{AC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	120	454.025030	0.0661
40	120	454.025046	0.1013
30	120	454.025050	0.1101
20	120	454.025035	0.0771
10	120	454.025010	0.0220
0	120	454.025023	0.0507
-10	120	454.025037	0.0815
-20	120	454.025005	0.0110
-30	120	454.025063	0.1388
Frequency Stability versus Input Voltage			
20	138	454.025016	0.0352
20	102	454.025041	0.0903

Analog Modulation, Reference Frequency: 454.0250MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	454.025024	0.0529
40	13.6	454.025057	0.1255
30	13.6	454.025056	0.1233
20	13.6	454.025044	0.0969
10	13.6	454.025031	0.0683
0	13.6	454.025042	0.0925
-10	13.6	454.025049	0.1079
-20	13.6	454.025019	0.0418
-30	13.6	454.025069	0.1520
Frequency Stability versus Input Voltage			
20	15.8	454.025022	0.0485
20	11.0	454.025059	0.1299

Analog Modulation, Reference Frequency: 463.0125 MHz, Limit: ± 5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{AC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	120	463.012511	0.0238
40	120	463.012501	0.0022
30	120	463.012547	0.1015
20	120	463.012527	0.0583
10	120	463.012492	-0.0173
0	120	463.012498	-0.0043
-10	120	463.012546	0.0993
-20	120	463.012531	0.0670
-30	120	463.012562	0.1339
Frequency Stability versus Input Voltage			
20	138	463.012555	0.1188
20	102	463.012515	0.0324

Analog Modulation, Reference Frequency: 463.0125 MHz, Limit: ± 5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	13.6	463.012563	0.1361
40	13.6	463.012575	0.1620
30	13.6	463.012558	0.1253
20	13.6	463.012566	0.1425
10	13.6	463.012484	-0.0346
0	13.6	463.012496	-0.0086
-10	13.6	463.012549	0.1058
-20	13.6	463.012537	0.0799
-30	13.6	463.012559	0.1274
Frequency Stability versus Input Voltage			
20	15.8	463.012571	0.1533
20	11.0	463.012548	0.1037

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR


Applicable Standard

Regulations: FCC §90.214

Test method: ANSI/TIA-603-D 2010, section 2.2.19.3

Test Procedure

- Connect the EUT and test equipment as shown on the following block diagram.
- Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- Turn on the transmitter.
- Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- Turn off the transmitter.
- Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .

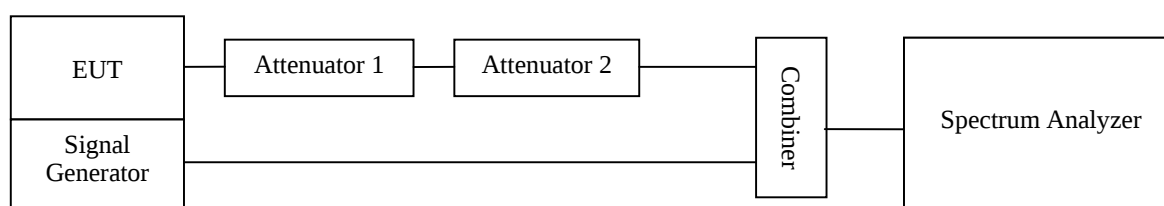

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Jacob Kong on 2017-12-27.

Channel Separation (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	10 (t1)	<+/-12.5 kHz	Pass
	25(t2)	<+/-6.25 kHz	
	10 (t3)	<+/-12.5 kHz	


Please refer to the following plots.

Channel: 458.2125 MHz

Turn on

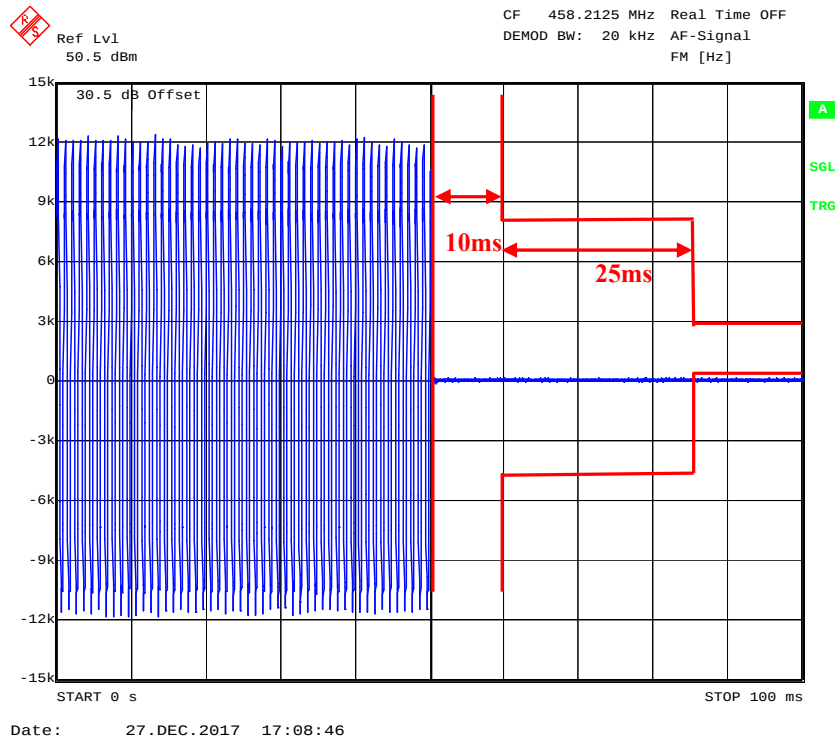

Turn off

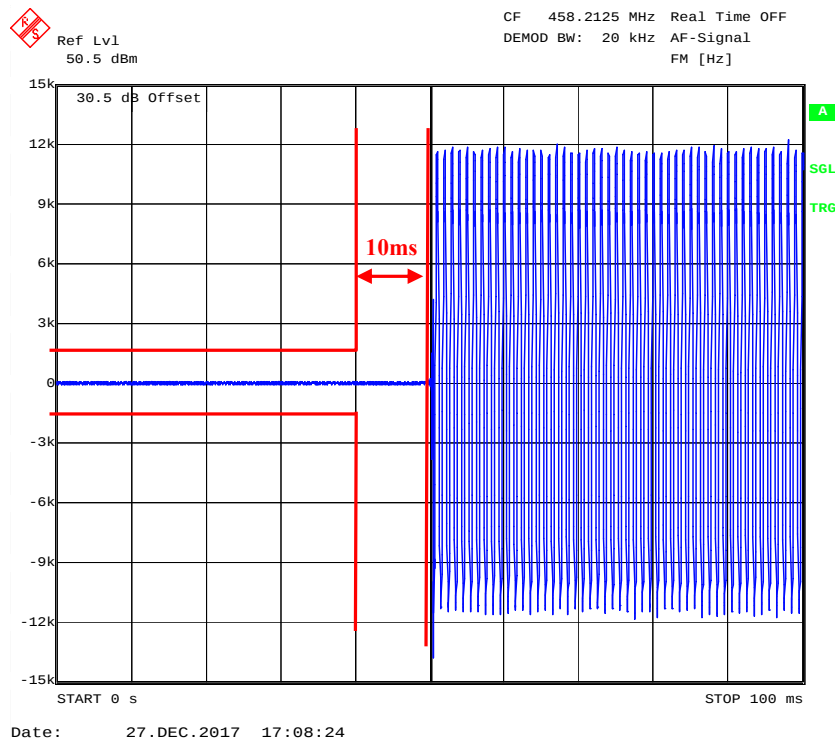

***** END OF REPORT *****