

FCC Test Report

Report No.: AGC07248180101FE03

FCC ID : TV7CPGI5ACD2ND

APPLICATION PURPOSE: Class II Equipment

PRODUCT DESIGNATION: RouterBOARD cAP Gi-5acD2nD

BRAND NAME : RouterBOARD

MODEL NAME : cAP ac

CLIENT : Mikrotikls SIA

DATE OF ISSUE : Jan. 24, 2018

FCC Part 15.407

STANDARD(S)

TEST PROCEDURE(S)

KDB 789033 D02

KDB 644545 D03

KDB 662911 D01

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

The results 300 With this year to full relief bing to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 84

REPORT REVISE RECORD


Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0		Jan. 24, 2018	Valid	Initial Release

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	
2.3. RELATED SUBMITTAL(S) / GRANT (S)	7
2.4. TEST METHODOLOGY	7
2.5. SPECIAL ACCESSORIES	7
2.6. EQUIPMENT MODIFICATIONS	7
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	E John de Coole
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2. EQUIPMENT USED IN EUT SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. MAXIMUM CONDUCTED OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP	
7.3. LIMITS AND MEASUREMENT RESULT	
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
8.3. LIMITS AND MEASUREMENT RESULTS	
9. MAXIMUM CONDUCTED OUTPUT PEAK POWER SPECTRAL DENSITY	
9.1 MEASUREMENT PROCEDURE	
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	33
9.3 MEASUREMENT EQUIPMENT USED	33
9.4 LIMITS AND MEASUREMENT RESULT	33
10. CONDUCTED SPURIOUS EMISSION AND BAND EDGE EMISSION	50





10.1. MEASUREMENT PROCEDURE	50
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
10.3. MEASUREMENT EQUIPMENT USED	
10.4. LIMITS AND MEASUREMENT RESULT	
11. RADIATED EMISSION	63
11.1. MEASUREMENT PROCEDURE	
11.2. TEST SETUP	64
11.3. LIMITS AND MEASUREMENT RESULT	
11.4. TEST RESULT	
12. FREQUENCY STABILITY	74
12.1. MEASUREMENT PROCEDURE	74
12.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	74
12.3. MEASUREMENT RESULTS	
13. FCC LINE CONDUCTED EMISSION TEST	79
13.1. LIMITS OF LINE CONDUCTED EMISSION TEST	
13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	
13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	
13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	80
13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	81
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	83

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document to confirmed at attp://www.agc.gett.com.



Report No.: AGC07248180101FE03 Page 5 of 84

1. VERIFICATION OF CONFORMITY

Applicant	Mikrotikls SIA	estation of
Address	Pernavas 46 Riga Latvia LV-1009	
Manufacturer	Mikrotikls SIA	ili III
Address	Pernavas 46 Riga Latvia LV-1009	
Product Designation	RouterBOARD cAP Gi-5acD2nD	30
Brand Name	RouterBOARD	
Test Model	cAP ac	- Th
Date of test	Jan. 15, 2018 to Jan. 24, 2018	(A)
Deviation	None	
Condition of Test Sample	Normal	
Test Result	Pass	
Report Template	AGCRT-US-BGN/RF	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Tested by

Max Zhang(Zhang Yi)

Jan. 24, 2018

Reviewed by

Bart Xie(Xie Xiaobin)

Jan. 24, 2018

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Report No.: AGC07248180101FE03 Page 6 of 84

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

It is designed by way of utilizing the OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

A major technical descri	ption of EOT is described as following
Operation Frequency	5.150 GHz~5.250GHz;5.725 GHz~5.825GHz
Output Power	5.150 GHz~5.250GHz: IEEE 802.11a20:14.25dBm IEEE 802.11n20:16.15dBm IEEE 802.11n(40):15.16dBm IEEE 802.11ac20:15.81dBm IEEE 802.11ac40:14.05dBm IEEE 802.11ac80:14.02dBm 5.725 GHz~5.825GHz: IEEE 802.11a20:10.78dBm IEEE 802.11n20:13.58dBm IEEE 802.11n(40):11.79dBm IEEE 802.11ac20:15.15dBm IEEE 802.11ac40:13.20dBm IEEE 802.11ac80:13.81dBm
Modulation	BPSK, QPSK, 16QAM, 64QAM, 128QAM, 256QAM,OFDM
Number of channels	13
Hardware Version	r3
Software Version	6.38.5
Antenna Designation	Internal Antenna
Number of transmit chain	2(802.11a20/n20/n40/ac20/ac40/ac80 used ant0+ant1, but only 802.11n20/n40/ac20/ac40/ac80 support MIMO)
Antenna Gain	2.5dBi
Power Supply	DC 24V

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	Frequency Band	Channel Number	Frequency
	36	5180 MHz	Minestation of Cloud	149	5745 MHz
of Colons Compilation (8) Artest	38	5190 MHz	5.725 GHz~ 5.850GHz	151	5755 MHz
NG C	40	5200 MHz		153	5765 MHz
5.150 GHz~ 5.250GHz	44	5220 MHz		157	5785 MHz
5.250GH2	46	5230 MHz		159	5795 MHz
	48	5240 MHz		161	5805 MHz
			不 Production ® 多	165	5825MHz

Note: For 20MHZ bandwidth system use Channel 36,40,44,48,149,153,157,161,165; For 40MHZ bandwidth system use Channel 38,46,151,159;

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Report No.: AGC07248180101FE03 Page 7 of 84

2.3. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: TV7CPGI5ACD2ND** filing to comply with the FCC Part 15 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

Others testing (listed at item 5.3) was performed according to the procedures in FCC Part 15.407 rules KDB 789033

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Report No.: AGC07248180101FE03 Page 8 of 84

3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (GC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gatt.com.



Page 9 of 84

4. DESCRIPTION OF TEST MODES

Mode	Available channel	Tested Modulation D		Date rate(Mbps)
802.11a/n20/ac20	149,153,157,161,165	149,157, 165	OFDM	6/6.5
802.11n40/ac40	151,159	151,159	OFDM	13.5
802.11ac80	155	155	OFDM	27

Note:

- 1. The EUT has been set to operate continuously on tested channel individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.




Page 10 of 84

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure:



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	RouterBOARD cAP	cAP ac	TV7CPGI5ACD2ND	EUT
2	Adapter	SAW30-240-1200U	DC24V/1.2A	Support

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT	
§15.407	6dB Bandwidth	Compliant	
§15.407	Maximum conducted output power	Compliant	
§15.407	Conducted Spurious Emission and Band edge Emission	Compliant	
§15.407	Maximum Conducted Output Power Density	Compliant	
§15.209	Radiated Emission	Compliant	
§15.407 Frequency Stability		Compliant	
§15.207 Line Conduction Emission		Compliant	

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 11 of 84

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP LAB CODE	600153-0
Designation Number	CN5028
FCC Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	M ESPI	101206	Jun.20, 2017	Jun.19, 2018
LISN	R&S	ESH2-Z5	100086	Aug.21, 2017	Aug.20, 2018

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Power sensor	Aglient	U2021XA	MY54110007	Sep.21, 2017	Sep.20, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Active loop antenna (9K-30MHz)	SCHWARZBECK	FMZB1519	1519-038	Sep.28, 2017	Sep.27, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May.18, 2017	May.17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 12 of 84

7. MAXIMUM CONDUCTED OUTPUT POWER

7.1. MEASUREMENT PROCEDURE


For average power test:

- 1. Connect EUT RF output port to power sensor through an RF attenuator.
- 2. Connect the power sensor to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

7.2. TEST SET-UP

AVERAGE POWER SETUP





Page 13 of 84

7.3. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT FOR 802.11A20 MODULATION						
Port	Frequency (MHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail		
	5745	10.71	30 June 1	Pass		
Ant0	5785	10.78	30	Pass		
CC "	5825	10.66	30	Pass		
The Manual Companies	5745	9.94	30	Pass		
Ant1	5785	10.01	30	Pass		
	5825	9.88	30	Pass		

LIMITS AND MEASUREMENT RESULT FOR 802.11N20 MODULATION					
Port	Frequency Average Power (MHz) (dBm)		Applicable Limits (dBm)	Pass or Fail	
The fill	5745	11.06	30	Pass	
Ant0	5785	11.14	30	Pass	
NO.	5825	11.02	30	Pass	
The Williams	5745	9.83	30	Pass	
Ant1	5785	9.92	30	Pass	
Co You	5825	9.84	30	Pass	
	5745	13.50	30	Pass	
SUM	2785	13.58	30	Pass	
NO.	5825	13.48	30	Pass	

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.





		MEASUREMENT RESU 2.11N40 MODULATION	ILT	
Port	Frequency (MHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail
3 And 0	5755	8.82	30	Pass
Ant0	5795	8.66	30	Pass
A m44	5755	8.74	30	Pass
Ant1	5795	8.84	30	Pass
SUM	5755	11.79	30	Pass
	5795	11.76	30	Pass

Port	Frequency (MHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or
10000000000000000000000000000000000000	5745	12.39	30	Pass
Ant0	5785	12.45	30	Pass
	5825	12.31	30	Pass
The Compliance	5745	11.74	30	Pass
Ant1	5785	11.81	30	Pass
	5825	11.67	30	Pass
	5745	15.09	30	Pass
SUM	5785	15.15	30	Pass
	5825	15.01	30	Pass

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.



Report No.: AGC07248180101FE03 Page 15 of 84

		MEASUREMENT RESU 2.11AC40 MODULATION	ILT	
Port	Frequency (MHz)	Average Power (dBm)	Applicable Limits (dBm)	Pass or Fail
® American de Ciclosia	5755	10.15	30	Pass
Ant0	5795	10.23	30	Pass
Ant1	5755	10.03	30	Pass
	5795	10.15	30	Pass
SUM	5755	13.10	30	Pass
	5795	13.20	30	Pass

LIMITS AND MEASUREMENT RESULT FOR 802.11AC80 MODULATION					
Port Frequency Average Power Applicable Limits P (MHz) (dBm) (dBm)					
Ant0	5775	10.8	30	Pass	
Ant1	5775	10.8	30	Pass	
SUM	5775	13.81	30	Pass	



Page 16 of 84


8. 6dB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on operation frequency individually.
- 3. Set RBW = 100kHz.
- 4. Set the VBW ≥3*RBW. Detector = Peak. Trace mode = max hold.
- 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

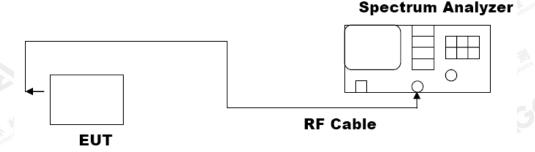




Page 17 of 84

8.3. LIMITS AND MEASUREMENT RESULTS

Port	Annliachla Limita		Applicable Limits	
	Applicable Limits	Test Data	ı (MHz)	Criteria
Ant0		5745MHz	13.22	PASS
	>500KHZ	5785 MHz	14.67	PASS
2C		5825MHz	13.85	PASS
Ant1		5745MHz	15.11	PASS
	>500KHZ	5785 MHz	14.99	PASS
	American of CO American	5825MHz	13.83	PASS

LIMITS AND MEASUREMENT RESULT FOR 802.11N20/40 MODULATION					
Port	Annliachta Limita	Applicable Limits			
	Applicable Limits	Test Da	ata (MHz)	Criteria	
Ant0	TK Complete © 集	5745MHz	15.12	PASS	
	station of Golden	5785 MHz	15.13	PASS	
	>500KHZ	5825MHz	15.13	PASS	
		5755MHz	35.11	PASS	
	® ## Jation of Global Con.	5795MHz	35.11	PASS	
Ant1	-10 · De	5745MHz	15.42	PASS	
		5785 MHz	15.12	PASS	
	>500KHZ	5825MHz	15.12	PASS	
		5755MHz	35.15	PASS	
		5795MHz	35.13	PASS	

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.





	MITS AND MEASUREMEI	NI RESULI FOR 602.	TTAC20/40 MODULAT	ION
Port	Applicable Limits		Applicable Limits	
	Applicable Lillits	Test Data	(MHz)	Criteria
Ant0		5745MHz	15.33	PASS
	11 No. 11	5785 MHz	14.99	PASS
	>500KHZ	5825MHz	15.04	PASS
		5755MHz	35.08	PASS
- W		5795MHz	35.09	PASS
Ant1	OF THE COMPANY S	5745MHz	15.14	PASS
	C Marine CC	5785 MHz	15.10	PASS
	>500KHZ	5825MHz	15.13	PASS
	The state of the s	5755MHz	35.11	PASS
	Vitespinou C.	5795MHz	35.06	PASS


L	LIMITS AND MEASUREMENT RESULT FOR 802.11AC80 MODULATION					
Port	Applicable Lillins					
	Applicable Limits	Test Data (MHz) Crite				
Ant0	>500KHZ	5775MHz	72.57	PASS		
Ant1	>500KHZ	5775MHz	72.59	PASS		

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.




802.11a20 TEST RESULT-ant0:

TEST PLOT OF BANDWIDTH FOR 5745MHz

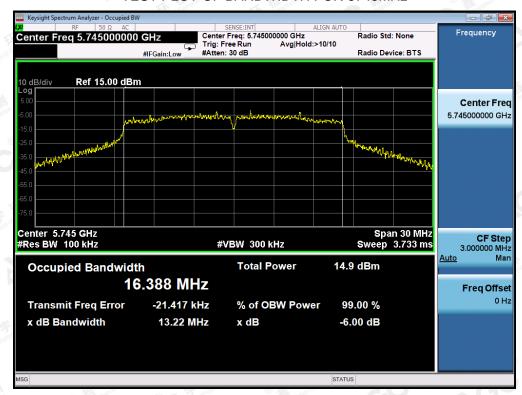

TEST PLOT OF BANDWIDTH FOR 5785MHz

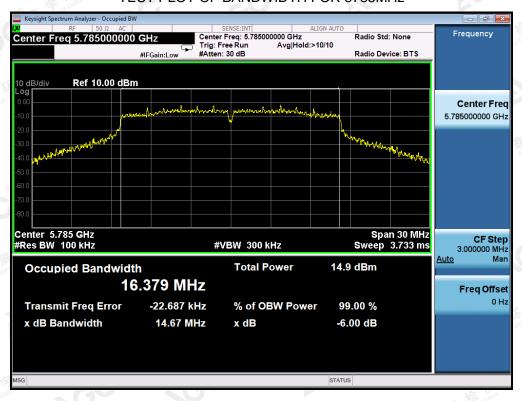



TEST PLOT OF BANDWIDTH FOR 5825MHz



802.11a20 TEST RESULT-ant1:

TEST PLOT OF BANDWIDTH FOR 5745MHz



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



TEST PLOT OF BANDWIDTH FOR 5785MHz



TEST PLOT OF BANDWIDTH FOR 5825MHz




The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.




802.11n20 TEST RESULT-ant0:

TEST PLOT OF BANDWIDTH FOR 5745MHz

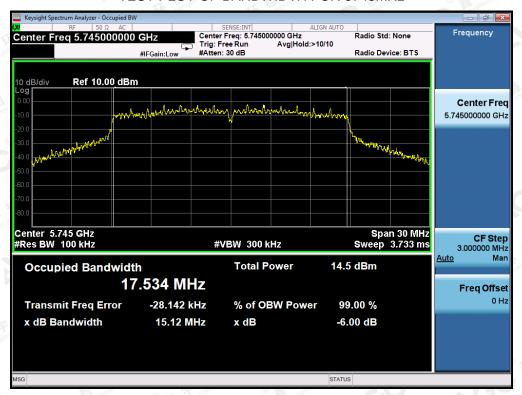

TEST PLOT OF BANDWIDTH FOR 5785MHz

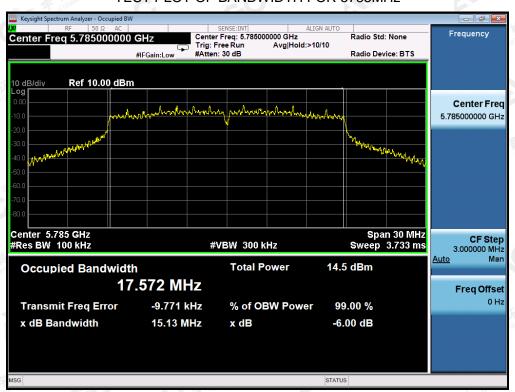

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.




TEST PLOT OF BANDWIDTH FOR 5825MHz



802.11n20 TEST RESULT-ant1:


TEST PLOT OF BANDWIDTH FOR 5745MHz

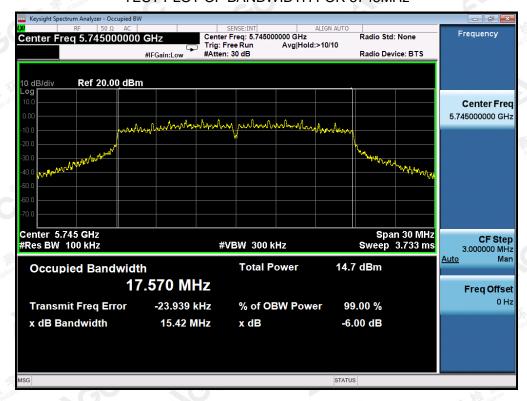

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



TEST PLOT OF BANDWIDTH FOR 5785MHz

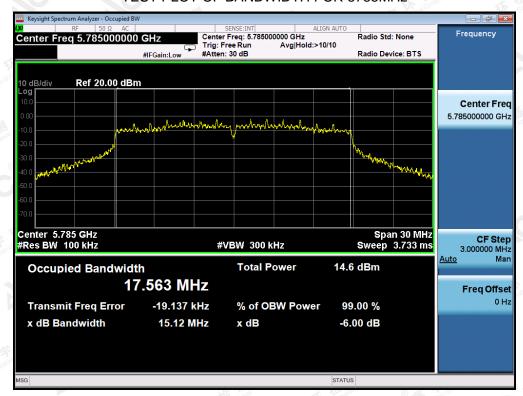

TEST PLOT OF BANDWIDTH FOR 5825MHz



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



802.11n40 TEST RESULT-ant0:

TEST PLOT OF BANDWIDTH FOR 5755MHz




TEST PLOT OF BANDWIDTH FOR 5795MHz






802.11n40 TEST RESULT-ant1:

TEST PLOT OF BANDWIDTH FOR 5755MHz

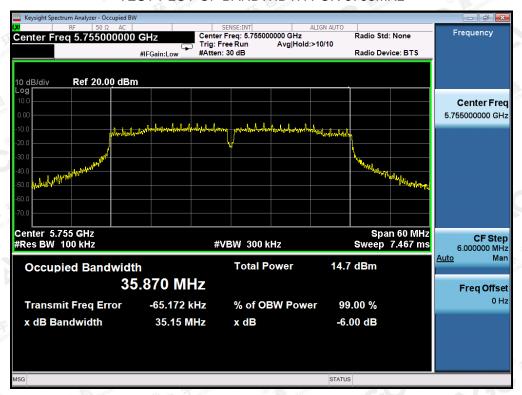

TEST PLOT OF BANDWIDTH FOR 5795MHz

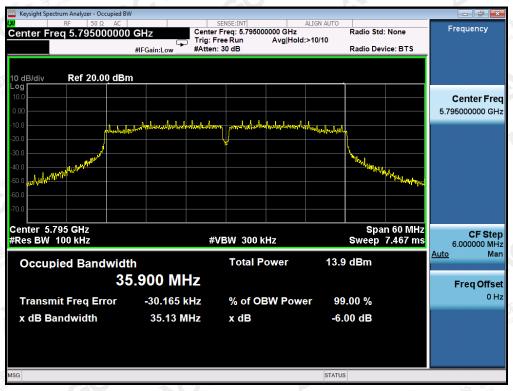




802.11ac20 TEST RESULT-ant0:

TEST PLOT OF BANDWIDTH FOR 5745MHz




TEST PLOT OF BANDWIDTH FOR 5785MHz

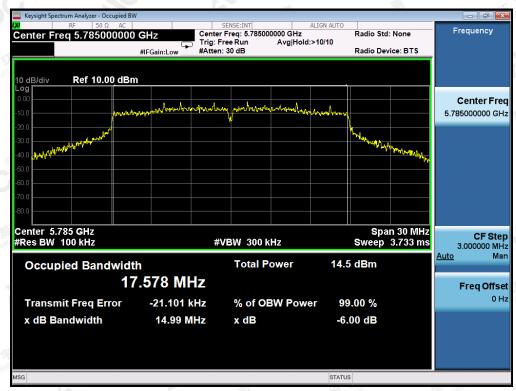



TEST PLOT OF BANDWIDTH FOR 5825MHz

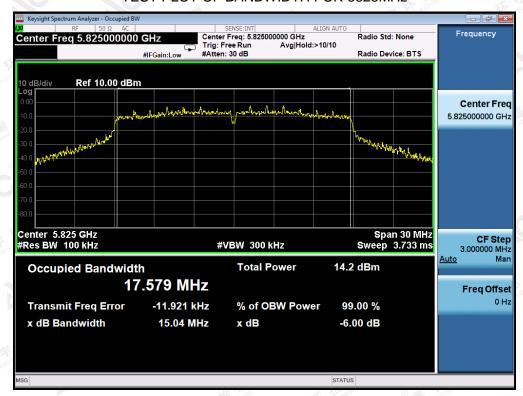

802.11ac20 TEST RESULT-ant1:

TEST PLOT OF BANDWIDTH FOR 5745MHz




The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



TEST PLOT OF BANDWIDTH FOR 5785MHz



TEST PLOT OF BANDWIDTH FOR 5825MHz

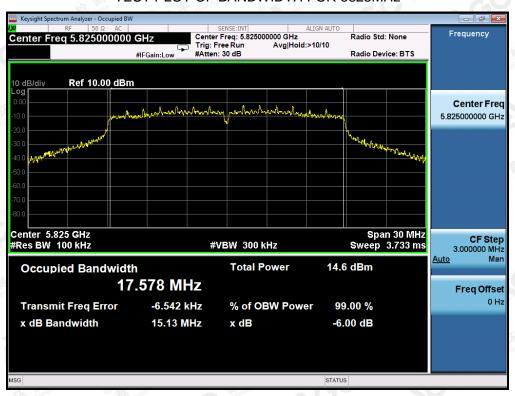

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




802.11ac40 TEST RESULT-ant0:

TEST PLOT OF BANDWIDTH FOR 5755MHz




TEST PLOT OF BANDWIDTH FOR 5795MHz

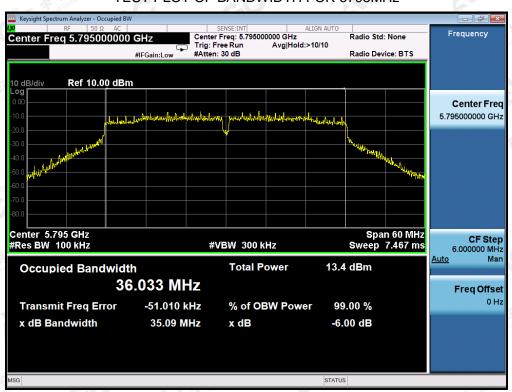




802.11ac40 TEST RESULT-ant1:

TEST PLOT OF BANDWIDTH FOR 5755MHz

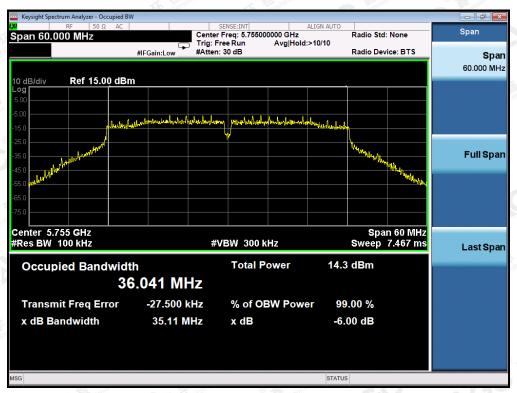


TEST PLOT OF BANDWIDTH FOR 5795MHz

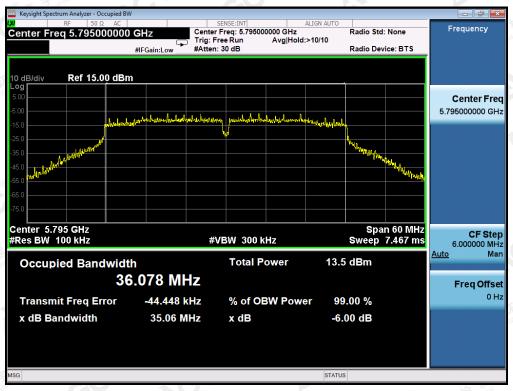




802.11ac80 TEST RESULT-ant0:

TEST PLOT OF BANDWIDTH FOR 5775MHz

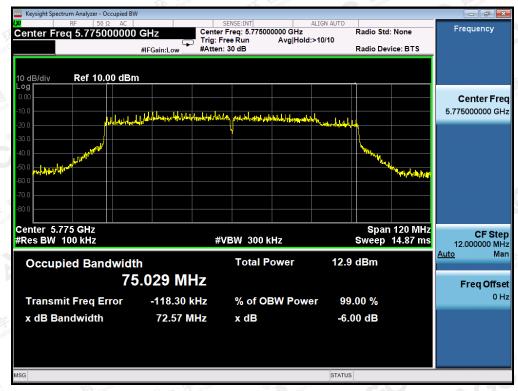

802.11ac80 TEST RESULT-ant1:

TEST PLOT OF BANDWIDTH FOR 5775MHz

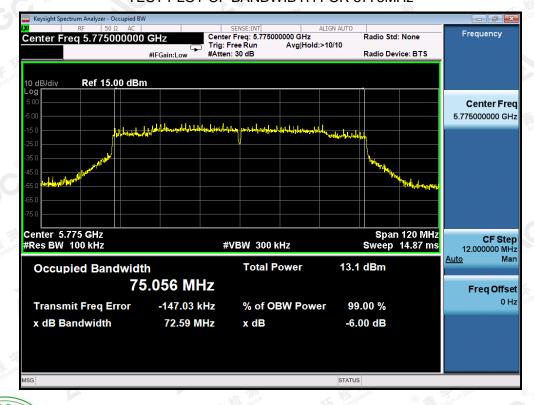



Page 33 of 84

9. MAXIMUM CONDUCTED OUTPUT PEAK POWER SPECTRAL DENSITY

9.1 MEASUREMENT PROCEDURE

Refer to KDB 789033 section F

9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


Refer To Section 8.2.

9.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.

9.4 LIMITS AND MEASUREMENT RESULT

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.





	Frequency (MHz)	Power density (dBm/500kHz)	Applicable Limits (dBm)	Pass or Fail
Ant0	5745	-4.134	30	Pass
CC Freedom	5785	-5.786	30	Pass
	5825	-6.692	30	Pass
Ant1	5745	-4.134	30	Pass
- GC	5785	-5.786	30	Pass
河	5825	-6.692	30	Pass

	Frequency (MHz)	Power density (dBm/500kHz)	Applicable Limits (dBm)	Pass or Fail
Ant0	5745	-5.501	30	Pass
	5785	-5.592	30	Pass
	5825	-6.233	30	Pass
	5755	-8.487	30	Pass
	5795	-8.017	30	Pass
Ant1	5745	-5.501	30	Pass
	5785	-5.592	30	Pass
	5825	-6.233	30	Pass
	5755	-8.487	30	Pass
	5795	-8.017	30	Pass
Sum	5745	-2.49	30	Pass
	5785	-2.58	30	Pass
	5825	-3.22	30	Pass
	5755	-5.48	30	Pass
	5795	-5.01	30	Pass



	Frequency (MHz)	Power density (dBm/500kHz)	Applicable Limits (dBm)	Pass or Fail
AntO	5745	-5.992	30	Pass
	5785	-5.857	30	Pass
	5825	-7.062	30	Pass
	5755	-9.375	30	Pass
	5795	-9.261	30	Pass
Ant1	5745	-5.992	30	Pass
	5785	-5.857	30	Pass
	5825	-7.062	30	Pass
	5755	-9.375	30	Pass
	5795	-9.261	30	Pass
Sum	5745	-2.98	30	Pass
	5785	-2.85	30	Pass
	5825	-4.05	30	Pass
	5755	-6.36	30	Pass
	5795	-6.25	30	Pass

	Frequency (MHz)	Power density (dBm/500kHz)	Applicable Limits (dBm)	Pass or Fail
Ant0	5775	-11.490	30	Pass
Ant1	5775	-11.649	30	Pass
Sum	5775	-8.56	30	Pass



802.11a20 TEST RESULT-ant0:

TEST PLOT FOR 5745MHz



TEST PLOT FOR 5785MHz



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



TEST PLOT FOR 5825MHz



802.11a20 TEST RESULT-ant1:


TEST PLOT FOR 5745MHz



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



TEST PLOT FOR 5785MHz

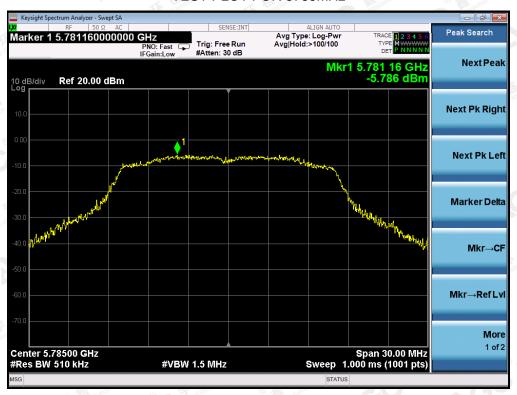

TEST PLOT FOR 5825MHz



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



802.11n20 TEST RESULT-ant0

TEST PLOT FOR 5745MHz



TEST PLOT FOR 5785MHz



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.




TEST PLOT FOR 5825MHz



802.11n20 TEST RESULT-ant1:


TEST PLOT FOR 5745MHz

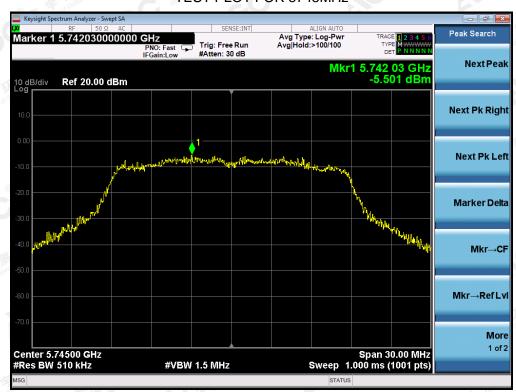


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



TEST PLOT FOR 5785MHz

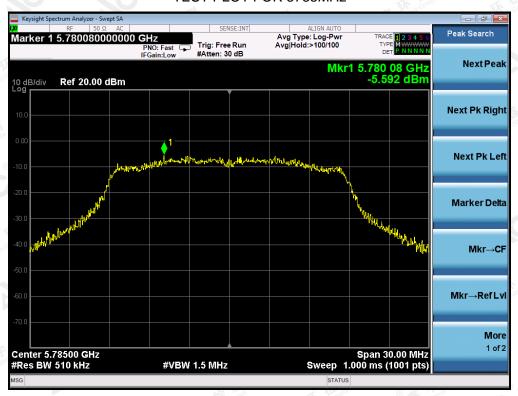

TEST PLOT FOR 5825MHz

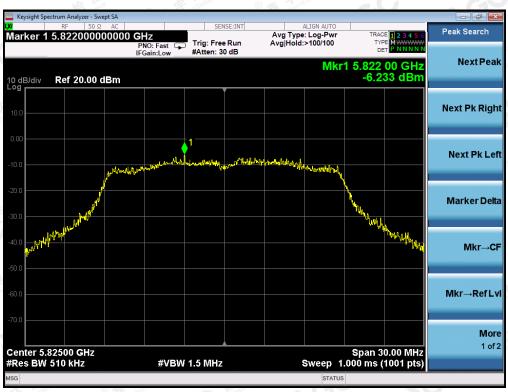

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



802.11n40 TEST RESULT-ant0:

TEST PLOT FOR 5755MHz



TEST PLOT FOR 5795MHz



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.




802.11n40 TEST RESULT-ant1:

TEST PLOT FOR 5755MHz



TEST PLOT FOR 5795MHz

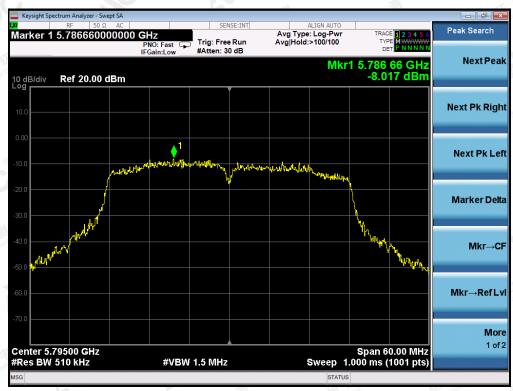

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.



802.11ac20 TEST RESULT-ant0

TEST PLOT FOR 5745MHz



TEST PLOT FOR 5785MHz



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



TEST PLOT FOR 5825MHz



802.11ac20 TEST RESULT-ant1:

TEST PLOT FOR 5745MHz




The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



TEST PLOT FOR 5785MHz




TEST PLOT FOR 5825MHz

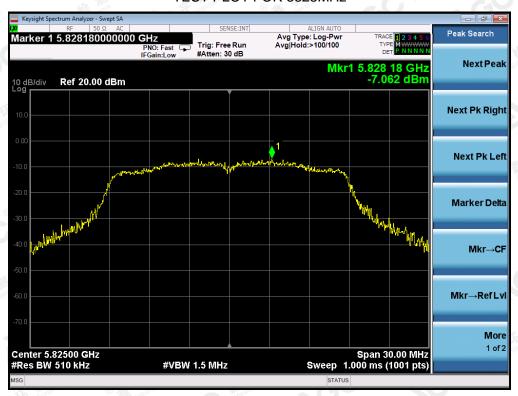



802.11ac40 TEST RESULT-ant0

TEST PLOT FOR 5755MHz

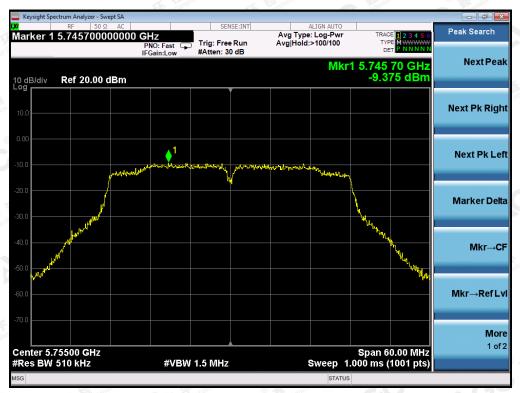

TEST PLOT FOR 5795MHz




The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



802.11ac40 TEST RESULT-ant1:

TEST PLOT FOR 5755MHz

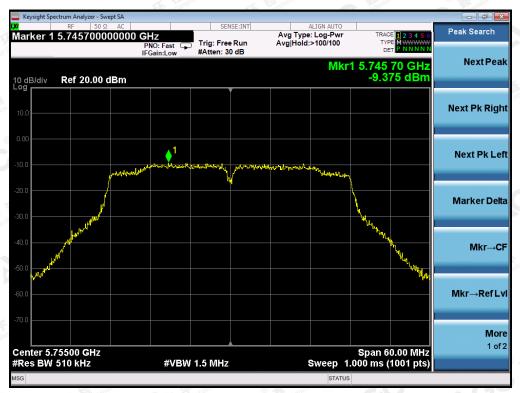

TEST PLOT FOR 5795MHz





802.11ac80 TEST RESULT-ant0:

TEST PLOT FOR 5775MHz



802.11ac80 TEST RESULT-ant1:

TEST PLOT FOR 5775MHz





Report No.: AGC07248180101FE03

Page 50 of 84

10. CONDUCTED SPURIOUS EMISSION AND BAND EDGE EMISSION

10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

10.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

10.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEA	SUREMENT RESULT				
Applicable Limite	Measurement Result				
Applicable Limits	Test channel	Criteria			
27dBm	5150MHz-5250MHz	PASS			
17dBm within 5715-5725MHz and 5850-5860MHz 27dBm outside 5715-5860MHz	5725MHz-5825MHz	PASS			


Note:

Two transmit chains had been tested, the chain 0 was the worst case and record in the test report. The spurious emission at chain 0 is more than 3dB below the limits, so the MIMO results for the spurious emissions are comply with the requirement.



FOR 802.11A20 MODULATION, ant0


TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5745MHz

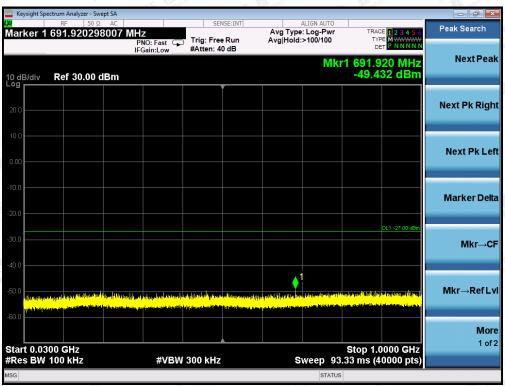




The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



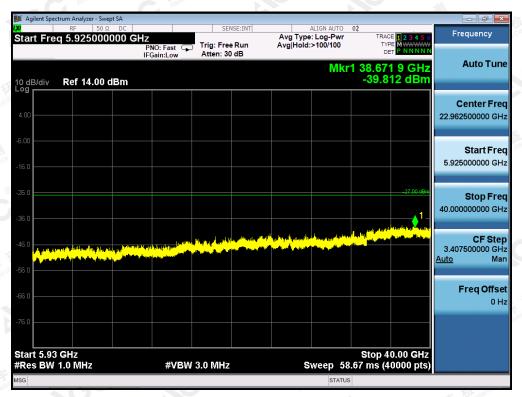


TEST PLOT OF BAND EDGE EMISSION

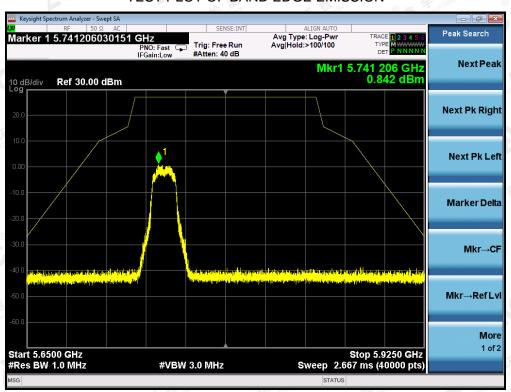


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5785MHz

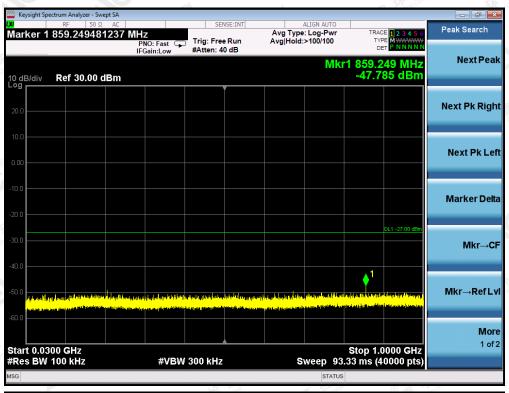


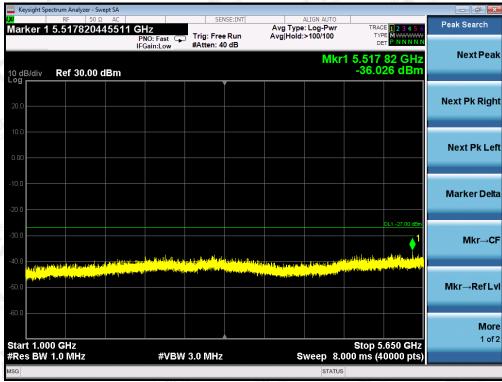






TEST PLOT OF BAND EDGE EMISSION

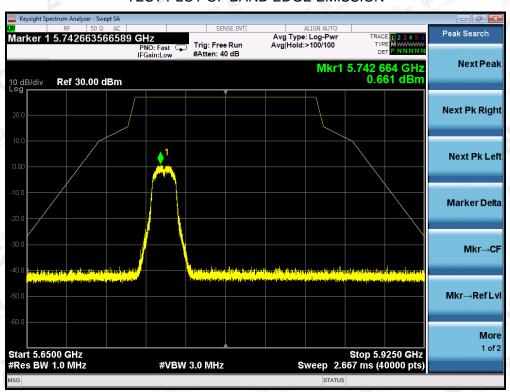


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5825MHz

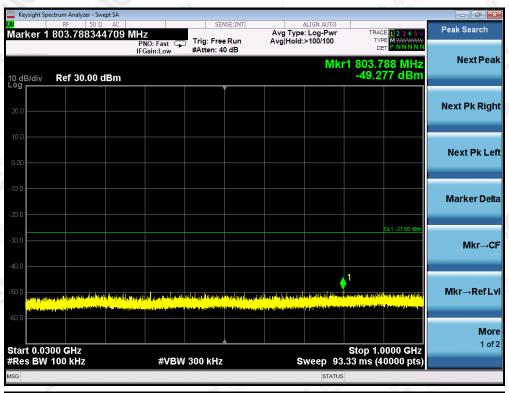


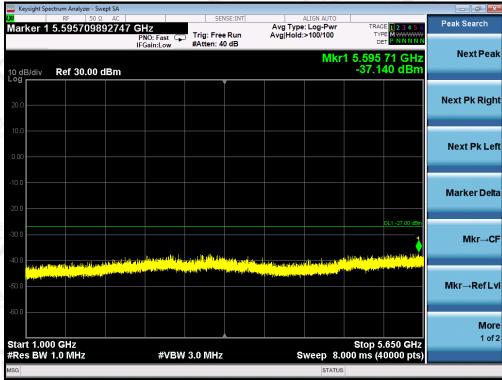



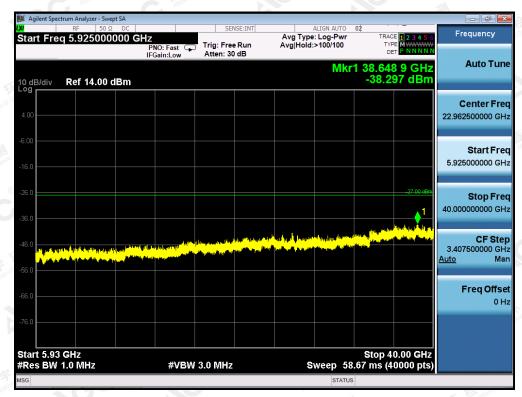

TEST PLOT OF BAND EDGE EMISSION

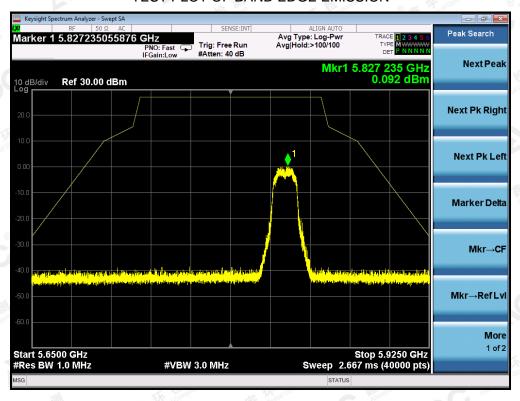

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.


Attestation of Global Compliance


Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



FOR 802.11N40 MODULATION, ant0


TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5755MHz

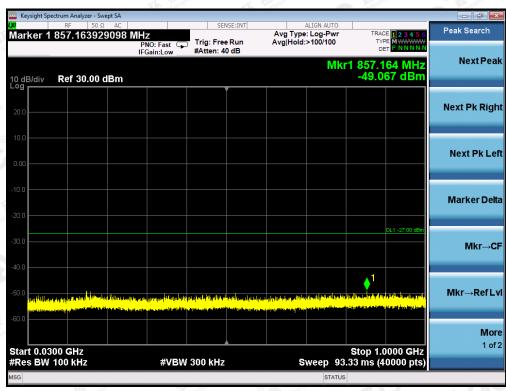

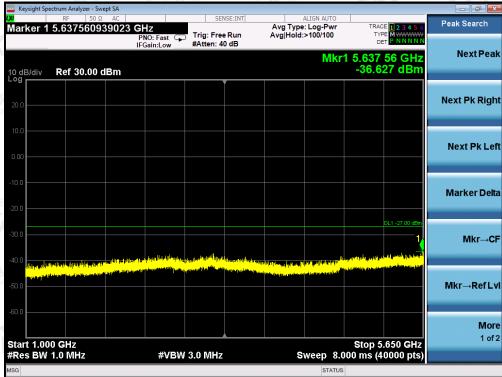


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



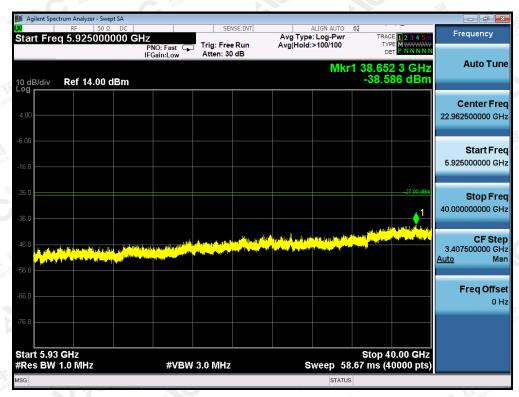


TEST PLOT OF BAND EDGE EMISSION

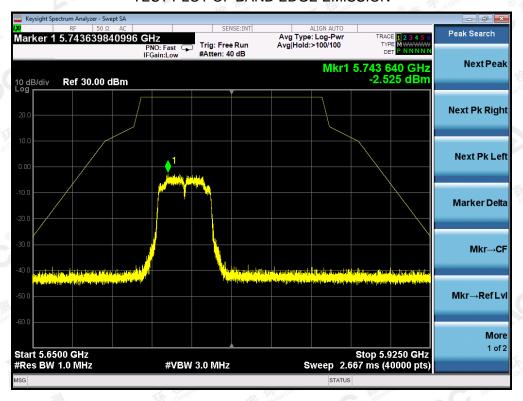


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5795MHz

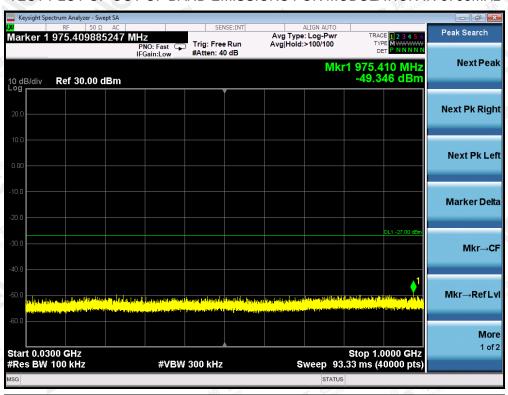


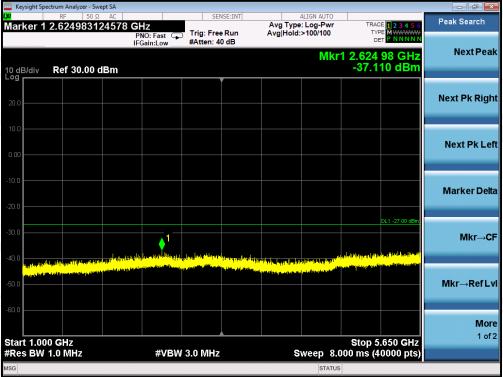



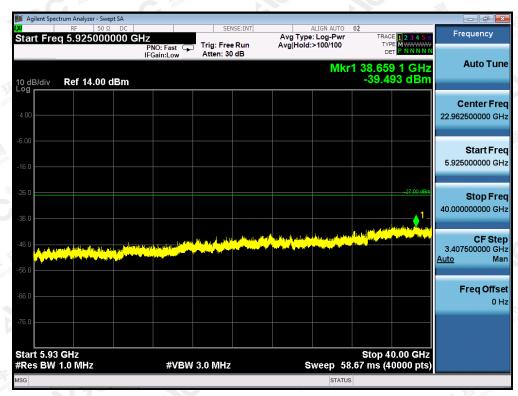

TEST PLOT OF BAND EDGE EMISSION

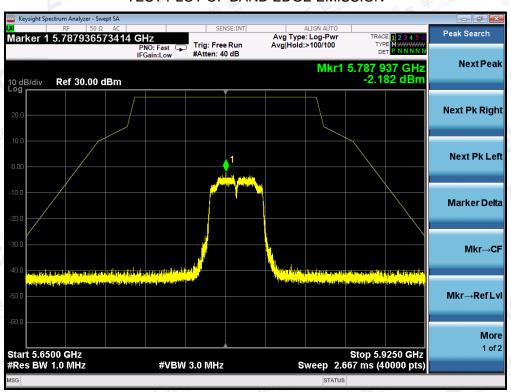

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.


Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China




FOR 802.11AC80 MODULATION, ant0

TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5775MHz

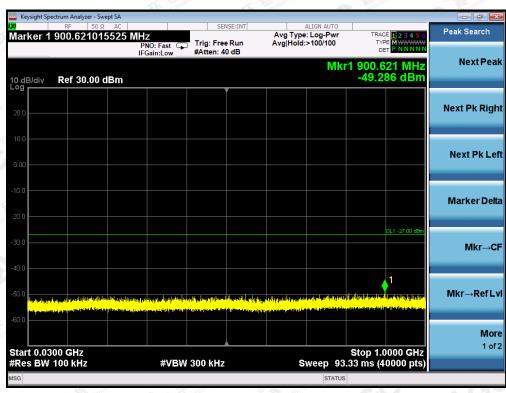






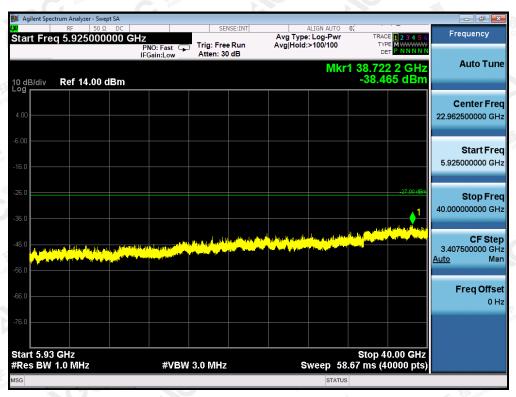

TEST PLOT OF BAND EDGE EMISSION

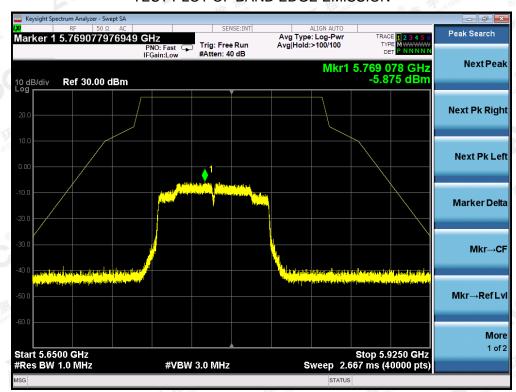

Note: All the 20MHz, 40MHz and 80MHz bandwidth modulation had been tested, the 802.11a20/n40/ac80 ant0 was the worst case and record in his test report.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Report No.: AGC07248180101FE03

Page 63 of 84

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3M VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

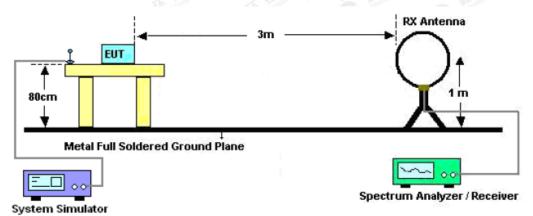

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

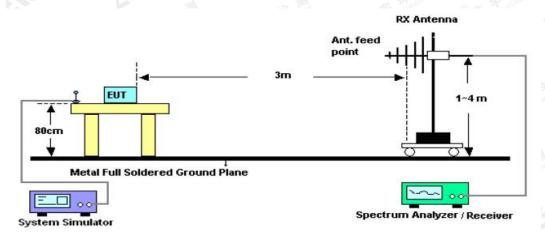

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

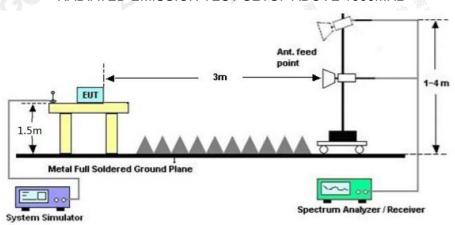



Report No.: AGC07248180101FE03

Page 65 of 84

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

\				
Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)		
0.009~0.490	2400/F(KHz)	300		
0.490~1.705	24000/F(KHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	The state of the s		
216~960	200	3		
Above 960	500	3		

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT


RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.



RADIATED EMISSION BELOW 1GHZ

EUT	RouterBOARD cAP	Model Name	cAP ac
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5745MHz,ant0	Antenna	Horizontal

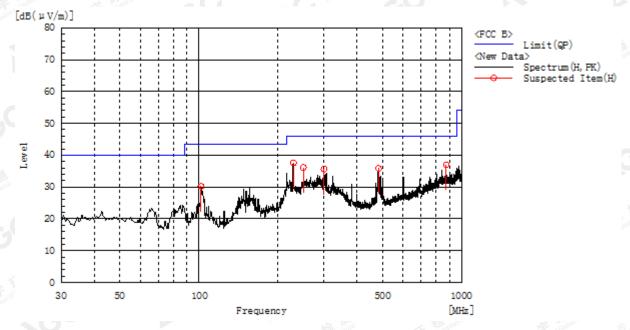


Frequency	Polarization	Reading	Factor dB	Level dB(uV/m)	Limit dB(uV/m)	Margin	Poor/Foil	Height	Angle
MHz	i dianzandii	dB(uV)	(1/m)	PK	QP	dB	Pass/Fail	cm	deg
101.780	Н	19.6	10.6	30.2	43.5	13.3	Pass	200.0	181.6
228.850	Н	25.0	12.6	37.6	46.0	8.4	Pass	100.0	78.8
249.705	H. Clopal Co.	23.0	13.1	36.1	46.0	9.9	Pass	100.0	195.8
299.175	Н	21.2	14.4	35.6	46.0	10.4	Pass	100.0	163.0
483.475	Н	16.2	19.6	35.8	46.0	10.2	Pass	100.0	157.5
875.355	MA H	10.1	26.9	37.0	46.0	9.0	Pass	100.0	71.6

RESULT: PASS



3,463		361/L (Co.	
EUT	RouterBOARD cAP	Model Name	cAP ac
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5745MHz,ant0	Antenna	Vertical

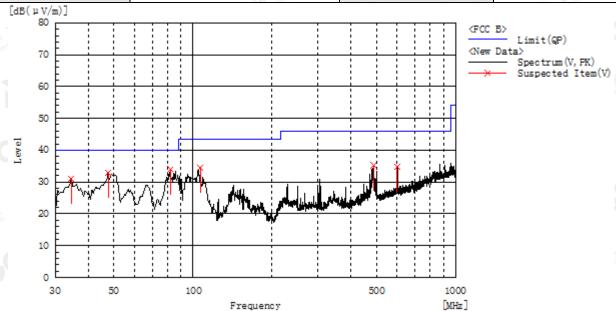

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
34.365	V	17.9	13.1	31.0	40.0	9.0	Pass	100.0	78.5
47.460	V ®	18.7	14.2	32.9	40.0	7.1	Pass	100.0	210.6
81.895	v	24.7	9.3	34.0	40.0	6.0	Pass	100.0	206.2
106.630	V	23.2	11.2	34.4	43.5	9.1	Pass	100.0	99.0
487.840	® W Clobal Co	15.5	19.7	35.2	46.0	10.8	Pass	100.0	233.1
600.360	V	12.8	21.9	34.7	46.0	11.3	Pass	100.0	50.2

RESULT: PASS

Note: All test channels had been tested. The 802.11a20 at 5745MHz is the worst case and recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.



Report No.: AGC07248180101FE03

Page 68 of 84

RADIATED EMISSION ABOVE 1GHZ

EUT	RouterBOARD cAP	Model Name	cAP ac
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5745MHz,ant0	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

(dB) 9.42	(dBµV/m) 51.82	(dBµV/m) 74	(dB) -22.18	Value Type
9.42	51.82	74	22.10	[Olan O
		The state of the s	-22.10	peak
9.42	46.1	54	· 7.9	AVG
10.51	49.35	74	-24.65	peak
10.51	44.64	54	-9.36	AVG
	10.51	10.51 49.35	10.51 49.35 74	10.51 49.35 74 -24.65

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	$(dB\mu V/m)$ $(dB\mu V/m)$		(dB)	Value Type	
11490.120	41.7	9.42	51.12	74	-22.88	peak	
11490.120	35.49	9.42	44.91	54	-9.09	AVG	
17235.180	38.56	10.51	49.07	od Com 74	-24.93	peak	
17235.180	33.85	10.51	44.36	54	-9.64	AVG	
Remark:	F (Global C	Attests	2.C				
actor = Ante	enna Factor + C	able Loss –	Pre-amplifier.			10	






EUT	RouterBOARD cAP	Model Name	cAP ac
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5785MHz,ant0	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
17570.120	42.83	9.42	52.25	74	-21.75	peak ©
17570.120	37.11	9.42	46.53	54	-7.47	AVG
26355.180	39.27	10.51	49.78	74	-24.22	peak
26355.180	34.56	10.51	45.07	54	-8.93	AVG
Remark:	Allestation	- C Alles				litte:
actor = Ante	enna Factor + C	able Loss –	Pre-amplifier.		AND SILVE	The Mariance

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	/m) (dB) Value	value Type
17570.120	42.13	9.42	51.55	74	-22.45	peak
17570.120	35.92	9.42	45.34	54	-8.66	AVG
26355.180	38.99	10.51	49.5	74	-24.5	peak
26355.180	34.28	10.51	44.79	54	-9.21	AVG
Remark:	A Slopal Com	Attestation	Attes			
actor = Ante	enna Factor + C	able Loss – I	Pre-amplifier.			litte:





EUT	RouterBOARD cAP	Model Name	cAP ac
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5825MHz,ant0	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

			VII.			
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11650.120	40.35	9.62	49.97	74	-24.03	peak ®
11650.120	35.01	9.62	44.63	54	-9.37	AVG
17475.180	38.89	10.75	49.64	74	-24.36	peak
17475.180	34.12	10.75	44.87	54	-9.13	AVG
Remark:	Allestation	Altes				lin:
actor = Ante	enna Factor + Ca	ble Loss -	Pre-amplifier.		431	The polarice

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
11650.120	40.27	9.62	49.89	74	-24.11	peak
11650.120	34.75	9.62	44.37	54	-9.63	AVG
17475.180	38.01	10.75	48.76	74	-25.24	peak
17475.180	33.54	10.75	44.29	54	-9.71	AVG
Remark:	A Suparconn	Attestation	Attes			
actor = Ante	enna Factor + C	able Loss – I	Pre-amplifier.			litte:



Report No.: AGC07248180101FE03

Page 71 of 84

	-6111		
EUT	RouterBOARD cAP	Model Name	cAP ac
Temperature	25°C % 400000000000000000000000000000000000	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20mimo 5745MHz,ant0+ant1	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11490.120	45.38	9.42	54.8	74	-19.2	peak
11490.120	38.52	9.42	47.94	54	-6.06	AVG
17235.180	41.94	10.51	52.45	74	-21.55	peak
17235.180	37.76	10.51	48.27	54	-5.73	AVG
Remark:	G AMO	O			LITT:	ALL THE
Factor = Ante	enna Factor + Ca	ble Loss – P	re-amplifier.	<1	Kil mplance	The domination

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11490.120	44.39	9.42	53.81	74	-20.19	peak
11490.120	38.21	9.42	47.63	54	-6.37	AVG
17235.180	41.32	10.51	51.83	74	-22.17	peak
17235.180	36.13	10.51	46.64	54	-7.36	AVG
Remark:	ion of Globs	J				-711
actor = Ante	enna Factor + Ca	ble Loss - I	Pre-amplifier.	ndl)		AST PAUCE
			-	-1111		



Report No.: AGC07248180101FE03 Page 72 of 84

		PLAC 1, CO	THE COUNTY
EUT	RouterBOARD cAP	Model Name	cAP ac
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20mimo 5785MHz,ant0+ant1	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
17570.120	45.07	9.42	54.49	74	-19.51	peak
17570.120	38.35	9.42	47.77	54	-6.23	AVG
26355.180	41.51	10.51	52.02	74	-21.98	peak
26355.180	35.8	10.51	46.31	54	-7.69	AVG
Remark:	Alleston	C			Mir	W 7.
actor = Ante	enna Factor + Ca	ble Loss – I	Pre-amplifier.		Ki jarce	The Compliant

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
17570.120	44.37	9.42	53.79	74	-20.21	peak
17570.120	37.16	9.42	46.58	54	-7.42	AVG
26355.180	41.23	10.51	51.74	74	-22.26	peak
26355.180	36.52	10.51	47.03	54	-6.97	AVG
Remark:	F of Global	Attes				
actor = Ante	enna Factor + Ca	able Loss -	Pre-amplifier.			Aller Aller
				-530		



Report No.: AGC07248180101FE03

Page 73 of 84

116		PLAC 1, CO	The control of the co
EUT	RouterBOARD cAP	Model Name	cAP ac
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20mimo 5825MHz,ant0+ant1	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Frequency Meter Reading		ncy Meter Reading Factor Emission Level Lin		Limits	Margin	Value Type	
(MHz)	(dBµV)	(dBμV) (dB) (dBμV/m) (dBμ		(dBµV/m)	(dB)			
11650.120	43.71	9.62	53.33	74	-20.67	peak		
11650.120	38.5	9.62	48.12	54	-5.88	AVG		
17475.180	40.81	40.81 10.75	51.56	74	-22.44	peak		
17475.180	38.53	10.75	49.28	54	-4.72	AVG		
Remark:	Allesto				litte	litte i		
actor = Ante	enna Factor + Ca	ble Loss –	Pre-amplifier.		KI milance	TK Nompliano		

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	T			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type			
11650.120	42.91	9.62	52.53	74	-21.47	peak			
11650.120	38.03	9.62	47.65	54	-6.35	AVG			
17475.180	40.32	10.75	10.75	10.75	10.75	51.07	² 74	-22.93	peak
17475.180	38.03	10.75	48.78	54	-5.22	AVG			
Remark:	F of Global C	Attesta	20						
Factor = Ante	enna Factor + Ca	ble Loss -	Pre-amplifier.			in and			

Note: All the case had been tested. The 802.11a modulation is the worst case and recorded in the test report. Other frequencies radiation emission from 1GHz to 40GHz at least have 20dB margin and not recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Report No.: AGC07248180101FE03


Page 74 of 84

12. FREQUENCY STABILITY


12.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the operation frequency.
- 3. Set SPA Centre Frequency = Operation Frequency. SPAN=enough to measure the emission is maintained within the band
- 4. Set SPA Trace 1 Max hold, then View.
- 5. Extreme temperature rule is -20°C~60°C.

12.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)



The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.





12.3. MEASUREMENT RESULTS

Test Mode	le Temperature Measurement Frequency (MHz)		Result	Conclusion	
ce Kindlence	- 10℃	5745	within the band	PASS	
@ # ForGlobal Com	0℃	5745	within the band	PASS	
Attestation,	10℃	5745	within the band	PASS	
	20℃	5745	within the band	PASS	
ALE SIM	30℃	5745	within the band	PASS	
FV Compiles	40℃	5745	within the band	PASS	
® Martinore	50℃	5745	within the band	PASS	
CC MILES	- 10℃	5785	within the band	PASS	
	0℃	5785	within the band	PASS	
TK Kilmular	10℃	5785	within the band	PASS	
802.11a	20℃	5785	within the band	PASS	
Attestall.	30℃	5785	within the band	PASS	
\G\ \	40 ℃	5785	within the band	PASS	
	50℃	5785	within the band	PASS	
30	- 10℃	5825	within the band	PASS	
次	0℃	5825	within the band	PASS	
® # Jajon of Globa	10℃	5825	within the band	PASS	
Allesto	20℃	5825	within the band	PASS	
	30℃	5825	within the band	PASS	
AME THE	40℃	5825	within the band	PASS	
The Compliance	50 ℃	5825	within the band	PASS	

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.

Attestation of Global Compliance



Test Mode	lode Temperature Measurement Frequency (MHz)		Result	Conclusion	
ance Hill	- 10℃	5745	within the band	PASS	
EN Global Compile	0°C	5745	within the band	PASS	
(R) Attestation of	10℃	5745	within the band	PASS	
	20 ℃	5745	within the band	PASS	
TILL -	30 ℃	5745	within the band	PASS	
The Compliance	40 ℃	5745	within the band	PASS	
n of Globa	50℃	5745	within the band	PASS	
Allostan	- 10℃	5785	within the band	PASS	
C WIN	0℃	5785	within the band	PASS	
	10℃	5785	within the band	PASS	
802.11n20	20 ℃	5785	within the band	PASS	
Allestation C.	30℃	5785	within the band	PASS	
	40 ℃	5785	within the band	PASS	
	50 ℃	5785	within the band	PASS	
40	- 10℃	5825	within the band	PASS	
不起	0 °C	5825	within the band	PASS	
(B) The standard Co.	10°C	5825	within the band	PASS	
Attestation	20℃	5825	within the band	PASS	
	30℃	5825	within the band	PASS	
4117:	40 ℃	5825	within the band	PASS	
The Compliance	50℃	5825	within the band	PASS	

Test Mode	Mode Temperature Measurement Frequency (MHz)		Result	Conclusion	
(B) All Clobal C	- 10℃	5755	within the band	PASS	
Autostation	0℃	5755	within the band	PASS	
	10℃	5755	within the band	PASS	
	20℃	5755	within the band	PASS	
300	30℃	5755	within the band	PASS	
Compliance (S)	40 ℃	5755	within the band	PASS	
000 11 - 10	50℃	5755	within the band	PASS	
802.11n40	- 10℃	5795	within the band	PASS	
	0℃	5795	within the band	PASS	
A July	10℃	5795	within the band	PASS	
F Global Comp	20℃	5795	within the band	PASS	
testation of	30℃	5795	within the band	PASS	
	40 ℃	5795	within the band	PASS	
	50℃	5795	within the band	PASS	

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.

Attestation of Global Compliance



Test Mode	Mode Temperature Measurement Frequency (MHz)		Result	Conclusion
The Time	- 10℃	5745	within the band	PASS
F. Global Comp.	0℃	5745	within the band	PASS
(C) Affestation of	10℃	5745	within the band	PASS
	20℃	5745	within the band	PASS
Mile -	30℃	5745	within the band	PASS
The Compliance	40℃	5745	within the band	PASS
(a) Clov	50℃	5745	within the band	PASS
Alloston	- 10℃	5785	within the band	PASS
C to Manual Control of the Control o	0℃	5785	within the band	PASS
	10℃	5785	within the band	PASS
802.11ac20	20℃	5785	within the band	PASS
Attestation	30℃	5785	within the band	PASS
2 - 60	40℃	5785	within the band	PASS
	50℃	5785	within the band	PASS
	- 10℃	5825	within the band	PASS
不起	0℃	5825	within the band	PASS
(B) The standard Co.	10℃	5825	within the band	PASS
Attestation	20℃	5825	within the band	PASS
	30℃	5825	within the band	PASS
litte:	40℃	5825	within the band	PASS
K Kinniance	50℃	5825	within the band	PASS

Test Mode	de Temperature Measurement Frequency (MHz)		Result	Conclusion	
(B) All Cloball	- 10℃	5755	within the band	PASS	
Autostation	0℃	5755	within the band	PASS	
	10℃	5755	within the band	PASS	
	20℃	5755	within the band	PASS	
300	30℃	5755	within the band	PASS	
compliance ®	40 ℃	5755	within the band	PASS	
000 44 40	50℃	5755	within the band	PASS	
802.11ac40	- 10℃	5795	within the band	PASS	
	0℃	5795	within the band	PASS	
AGE MANOS	10℃	5795	within the band	PASS	
F Clobal Comp.	20℃	5795	within the band	PASS	
de station o	30℃	5795	within the band	PASS	
	40 ℃	5795	within the band	PASS	
	50℃	5795	within the band	PASS	

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.

Attestation of Global Compliance





Test Mode	Temperature Measurement Frequency (MHz)		Result	Conclusion
Plance Hill	- 10℃	5775	within the band	PASS
The Global Compa	0℃	5775	within the band	PASS
(R) Attestation of	10℃	5775	within the band	PASS
802.11ac80	20℃	5775	within the band	PASS
THE STATE OF	30°C	5775	within the band	PASS
The acompliance	40℃	5775	within the band	PASS
tion of Colors	50℃	5775	within the band	PASS

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



13. FCC LINE CONDUCTED EMISSION TEST


13.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage					
Frequency	Q.P.(dBuV)	Average(dBuV)				
150kHz~500kHz	66-56	56-46				
500kHz~5MHz	■ 56 Final Control ■ ■	46				
5MHz~30MHz	60	50				

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

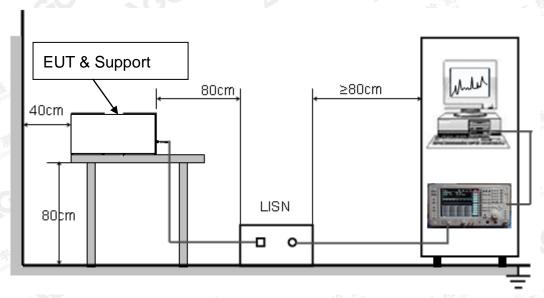

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Report No.: AGC07248180101FE03 Page 80 of 84

13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago-gent.com.



13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

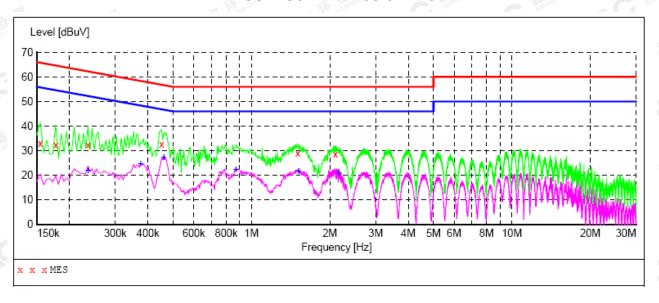

MEASUREMENT RESULT:

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.154500	33.00	11.4	66	32.8	QP	L1	FLO	ON
0.177000	32.40	11.4	65	32.2	QP	L1	FLO	ON
0.235500	32.40	11.3	62	29.9	QP	L1	FLO	ON
0.451500	32.70	11.4	57	24.1	QP	L1	FLO	ON
1.504500	29.00	11.3	56	27.0	QP	L1	FLO	ON
2.098500	28.70	11.3	56	27.3	QP	L1	FLO	ON

MEASUREMENT RESULT:


Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.235500	22.10	11.3	52	30.2	AV	L1	FLO	ON
0.375000	24.60	11.3	48	23.8	AV	L1	FLO	ON
0.460500	27.30	11.4	47	19.4	AV	L1	FLO	ON
0.870000	22.30	11.3	46	23.7	AV	L1	FLO	ON
1.518000	21.80	11.3	46	24.2	AV	L1	FLO	ON
2.166000	21.00	11.3	46	25.0	AV	L1	FLO	ON

RESULT: PASS

The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gent.com.



LINE CONDUCTED EMISSION TEST-N

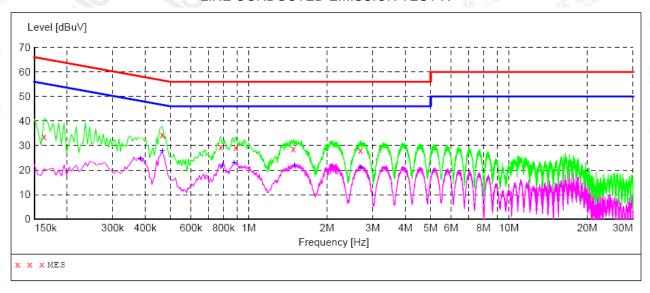

MEASUREMENT RESULT:

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.163500	33.50	11.4	65	31.8	QP	N	FLO	ON
0.465000	34.40	11.4	57	22.2	QP	N	FLO	ON
0.780000	29.50	11.4	56	26.5	QP	N	FLO	ON
0.892500	29.10	11.3	56	26.9	QP	N	FLO	ON
1.482000	28.50	11.3	56	27.5	QP	N	FLO	ON
2.683500	28.20	11.4	56	27.8	QP	N	FLO	ON

MEASUREMENT RESULT:

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHZ	dBuV	dB	dBuV	dB				
0.384000	24.80	11.4	48	23.4	AV	N	FLO	ON
0.465000	27.90	11.4	47	18.7	AV	N	FLO	ON
0.793500	22.00	11.4	46	24.0	AV	N	FLO	ON
0.879000	23.10	11.3	46	22.9	AV	N	FLO	ON
1.500000	22.00	11.3	46	24.0	AV	N	FLO	ON
2.697000	21.20	11.4	46	24.8	AV	N	FLO	ON

RESULT: PASS

The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by (SC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gent.com.




APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

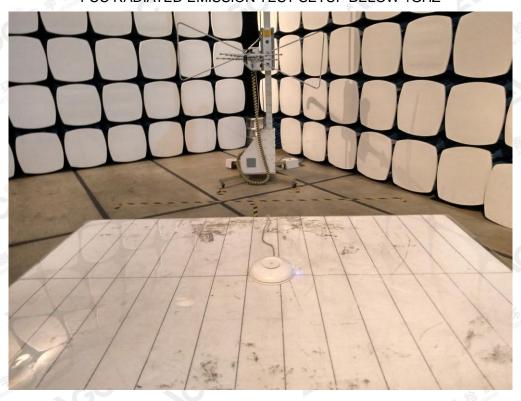


The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F. , Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ

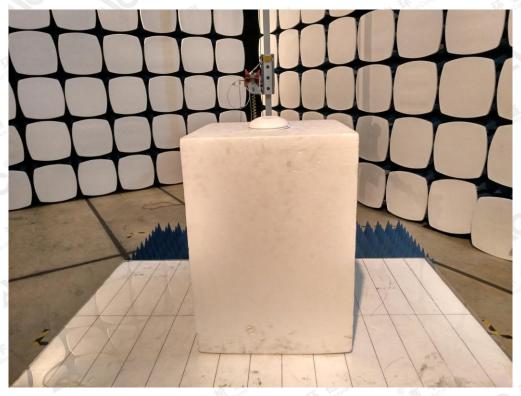

----END OF REPORT----

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (CE), this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China