





# **FCC Test Report**

FCC ID : MXF-Q9500WK

Equipment : Wi-Fi AP

Model No. : Q9500WK

Brand Name : Quantum FIBER

Applicant : Gemtek Technology Co., Ltd.

Address : No. 15-1 Zhonghua Road, Hsinchu Industrial

Park, Hukou, Hsinchu, Taiwan, 30352.

Standard : 47 CFR FCC Part 15.247

Received Date : Jun. 25, 2022

Tested Date : Jun. 29 ~ Jul. 15, 2022

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chen / Assistant Manager Gary Chang / Manager

Report No.: FR263001AE Page: 1 of 19



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	7
1.4	Test Equipment List and Calibration Data	8
1.5	Test Standards	
1.6	Reference Guidance	9
1.7	Deviation from Test Standard and Measurement Procedure	9
1.8	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Facility	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS	12
3.1	6dB and Occupied Bandwidth	12
3.2	Conducted Output Power	13
3.3	Power Spectral Density	14
3.4	Unwanted Emissions in Restricted Frequency Bands	15
3.5	Emissions in non-restricted Frequency Bands	17
3.6	AC Power Line Conducted Emissions	18
4	TEST LABORATORY INFORMATION	19

- Appendix A. 6dB and Occupied Bandwidth
- **Appendix B. Conducted Output Power**
- **Appendix C. Power Spectral Density**
- Appendix D. Unwanted Emissions into Restricted Frequency Bands
- Appendix E. Emissions in Non-Restricted Frequency Bands
- **Appendix F. AC Power Line Conducted Emissions**



# **Release Record**

Report No.	Version	Description	Issued Date
FR263001AE	Rev. 01	Initial issue	Aug. 19, 2022

Report No.: FR263001AE Page: 3 of 19



# **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.419MHz 47.60 (Margin -9.86dB) - QP	Pass
15.247(d)	Unwanted Emissions	[dBuV/m at 3m]: 48.54MHz	Pass
15.209	Onwanted Emissions	36.89 (Margin -3.11dB) - QP	Fd55
15.247(b)(3)	Conducted Output Power	Power [dBm]: 9.83	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

### **Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### **Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR263001AE Page: 4 of 19



# 1 General Description

## 1.1 Information

## 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information									
Frequency Range (MHz)	Data Rate								
	V5.1 LE		2402-2480 0-39 [40]	125 kbps					
2400-2483.5		2402 2490		500 kbps					
2400-2463.5		2402-2460		1 Mbps					
				2 Mbps					
Note: Bluetooth LE (L	ow energy) uses GFS	Note: Bluetooth LE (Low energy) uses GFSK modulation.							

### 1.1.2 Antenna Details

Ant. No.	Туре	Connector	Gain (dBi)
1	PIFA	UFL	2.83

## 1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type
-------------------

## 1.1.4 Source of Power Board

Source of Power Board	Description
1	Brand: Leader Model: SL36-3120300-3C I/P: 100~120Vac, 50-60Hz, 0.8A O/P: 12Vdc, 3A
2	Brand: LUCENT TRANS Model: 1A104-US1230 I/P: 100~120Vac, 50-60Hz, 1A O/P: 12Vdc, 3A

Report No.: FR263001AE Page: 5 of 19



## 1.1.5 Channel List

	Frequency	band (MHz)			2400~	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

## 1.1.6 Test Tool and Duty Cycle

Test Tool	BGTool, version: 2.13.7-347			
Modulation Mode	Duty Cycle Of Test Signal (%)	Duty Factor (dB)		
BT-LE(125kbps)	98.34%	0.07		
BT-LE(500kbps)	91.90%	0.37		
BT-LE(1Mbps)	87.49%	0.58		
BT-LE(2Mbps)	59.60%	2.25		

## 1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)			
Modulation Mode	2402	2440	2480	
BT-LE(125kbps)	100	100	100	
BT-LE(500kbps)	100	100	100	
BT-LE(1Mbps)	100	100	100	
BT-LE(2Mbps)	100	100	100	


Report No.: FR263001AE Page: 6 of 19



# 1.2 Local Support Equipment List

	Support Equipment List								
No.	No. Equipment Brand Model FCC ID Remarks								
1	Notebook	DELL	Latitude E5470	DoC					
2	USB 3.0 Flash	Transcend	JetFlash 700						
3	RJ45 Load	ICC	DTSE9						

# 1.3 Test Setup Chart

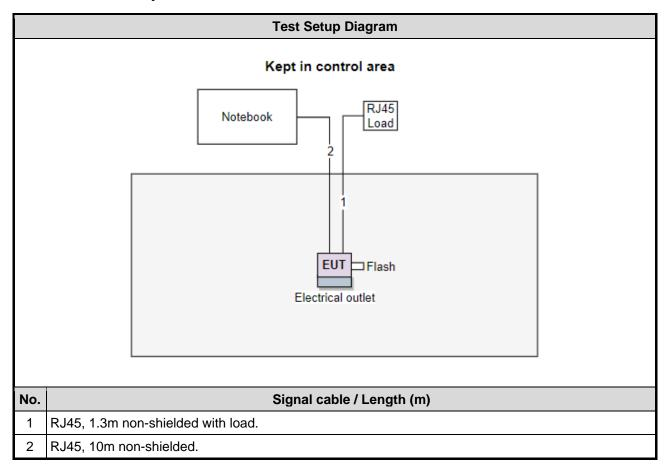

Report No.: FR263001AE Page: 7 of 19



# 1.4 Test Equipment List and Calibration Data

Test Item	Radiated Emission below 1GHz						
Test Site	Test Site 966 chamber1 / (03CH01-WS)  Tested Date Jul. 07, 2022  Instrument Brand Model No. Serial No. Calibration Date Calibration Until						
Tested Date							
Instrument							
Receiver	R&S	ESR3	101657	Mar. 15, 2022	Mar. 14, 2023		
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 08, 2021	Nov. 07, 2022		
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jun. 28, 2022	Jun. 27, 2023		
Preamplifier	EMC	EMC02325	980225	Jun. 28, 2022	Jun. 27, 2023		
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 05, 2021	Oct. 04, 2022		
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 05, 2021	Oct. 04, 2022		
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 05, 2021	Oct. 04, 2022		
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 05, 2021	Oct. 04, 2022		
Measurement Software	AUDIX	e3	6.120210g	NA	NA		

Test Item	Radiated Emission above 1GHz					
Test Site	966 chamber1 / (03Cl	966 chamber1 / (03CH01-WS)				
Tested Date	Jun. 29, 2022	Jun. 29, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until	
Spectrum Analyzer	R&S	FSV40	101498	Nov. 29, 2021	Nov. 28, 2022	
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 03, 2021	Dec. 02, 2022	
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Jan. 11, 2022	Jan. 10, 2023	
Preamplifier	Agilent	83017A	MY39501308	Sep. 28, 2021	Sep. 27, 2022	
Preamplifier	EMC	EMC184045B	980192	Jul. 14, 2021	Jul. 13, 2022	
RF Cable	EMC	EMC104-35M-35M- 8000	210920	Oct. 05, 2021	Oct. 04, 2022	
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 05, 2021	Oct. 04, 2022	
Measurement Software	AUDIX	e3	6.120210g	NA	NA	
Note: Calibration Inte	rval of instruments liste	d above is one year.				

Report No.: FR263001AE Page: 8 of 19



Conducted Emission				
Conduction room 1 / (CO01-WS)				
Jul. 12, 2022				
Brand	Model No.	Serial No.	Calibration Date	Calibration Until
R&S	ESR3	101658	Feb. 16, 2022	Feb. 15, 2023
R&S	ENV216	101579	Apr. 21, 2022	Apr. 20, 2023
SCHWARZBECK	NSLK 8127	8127667	Jan .07, 2022	Jan .06, 2023
Woken	CFD200-NL	CFD200-NL-001	Oct. 19, 2021	Oct. 18, 2022
NA	50	04	May 10, 2022	May 09, 2023
AUDIX	e3	6.120210k	NA	NA
	Conduction room 1 / (conduction room room 1 / (conduction room room 1 / (conduction room room room room room room room ro	Conduction room 1 / (CO01-WS)           Jul. 12, 2022         Brand         Model No.           R&S         ESR3           R&S         ENV216           SCHWARZBECK         NSLK 8127           Woken         CFD200-NL           NA         50	Conduction room 1 / (CO01-WS)           Jul. 12, 2022         Brand         Model No.         Serial No.           R&S         ESR3         101658           R&S         ENV216         101579           SCHWARZBECK         NSLK 8127         8127667           Woken         CFD200-NL         CFD200-NL-001           NA         50         04	Conduction room 1 / (CO01-WS)           Jul. 12, 2022         Brand         Model No.         Serial No.         Calibration Date           R&S         ESR3         101658         Feb. 16, 2022           R&S         ENV216         101579         Apr. 21, 2022           SCHWARZBECK         NSLK 8127         8127667         Jan .07, 2022           Woken         CFD200-NL         CFD200-NL-001         Oct. 19, 2021           NA         50         04         May 10, 2022

RF Conducted				
(TH01-WS)				
Jul. 15, 2022				
Brand	Model No.	Serial No.	Calibration Date	Calibration Until
R&S	FSV40	101910	Apr. 18, 2022	Apr. 17, 2023
Anritsu	ML2495A	1241002	Nov. 07, 2021	Nov. 06, 2022
Anritsu	MA2411B	1207366	Nov. 07, 2021	Nov. 06, 2022
Sporton	SENSE-15247_DTS	V5.10	NA	NA
	(TH01-WS) Jul. 15, 2022 Brand R&S Anritsu Anritsu	(TH01-WS)  Jul. 15, 2022  Brand Model No.  R&S FSV40  Anritsu ML2495A  Anritsu MA2411B	(TH01-WS)  Jul. 15, 2022  Brand Model No. Serial No.  R&S FSV40 101910  Anritsu ML2495A 1241002  Anritsu MA2411B 1207366	(TH01-WS)  Jul. 15, 2022  Brand Model No. Serial No. Calibration Date  R&S FSV40 101910 Apr. 18, 2022  Anritsu ML2495A 1241002 Nov. 07, 2021  Anritsu MA2411B 1207366 Nov. 07, 2021

## 1.5 Test Standards

47 CFR FCC Part 15.247 ANSI C63.10-2013

## 1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.7 Deviation from Test Standard and Measurement Procedure

None

Report No.: FR263001AE Page: 9 of 19



# 1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty			
Parameters	Uncertainty		
Bandwidth	±34.130 Hz		
Conducted power	±0.808 dB		
Power density	±0.583 dB		
Conducted emission	±2.715 dB		
AC conducted emission	±2.92 dB		
Unwanted Emission ≤ 1GHz	±3.41 dB		
Unwanted Emission > 1GHz	±4.59 dB		

Report No.: FR263001AE Page: 10 of 19



# 2 Test Configuration

## 2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

FCC Designation No.: TW2732FCC site registration No.: 181692

➤ ISED#: 10807A

➤ CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Test Configuration
AC Power Line Conducted Emissions	BT-LE(1Mbps)	2480	
Unwanted Emissions ≤ 1GHz	BT-LE(1Mbps)	2480	
Unwanted Emissions > 1GHz	BT-LE(1Mbps) BT-LE(2Mbps)	2402, 2440, 2480	
Conducted Output Power 6dB bandwidth Power spectral density	BT-LE(125kbps) BT-LE(500kbps) BT-LE(1Mbps) BT-LE(2Mbps)	2402, 2440, 2480	

#### NOTE:

- 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.
- Two power boards (Leader & LUCENT TRANS) had been covered during the pretest and found that Leader power board was the worst case and was selected for final test.
- 3. Non-beamforming and beamforming mode had been covered during the pretest. The worst mode is Non-beamforming thus Non-beamforming is tested for all test items.

Report No.: FR263001AE Page: 11 of 19



## 3 Transmitter Test Results

## 3.1 6dB and Occupied Bandwidth

#### 3.1.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.1.2 Test Procedures


#### 6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### **Occupied Bandwidth**

- 1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

#### 3.1.3 Test Setup



### 3.1.4 Test Results

<b>Ambient Condition</b>	23°C / 65%	Tested By	Roger Lu
--------------------------	------------	-----------	----------

Refer to Appendix A.

Report No.: FR263001AE Page: 12 of 19



## 3.2 Conducted Output Power

## 3.2.1 Limit of Conducted Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

#### 3.2.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

## 3.2.3 Test Setup



#### 3.2.4 Test Results

Ambient Condition 23°C / 65% Tested By Roger Lu
---

Refer to Appendix B.

Report No.: FR263001AE Page: 13 of 19



## 3.3 Power Spectral Density


## 3.3.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

#### 3.3.2 Test Procedures

- 1. Set the RBW = 3 kHz, VBW = 10 kHz.
- 2. Detector = Peak, Sweep time = auto couple.
- 3. Trace mode = max hold, allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

## 3.3.3 Test Setup



### 3.3.4 Test Results

Ambient Condition 23°C / 65%	Tested By	Roger Lu
------------------------------	-----------	----------

Refer to Appendix C.

Report No.: FR263001AE Page: 14 of 19



## 3.4 Unwanted Emissions in Restricted Frequency Bands

## 3.4.1 Limit of Unwanted Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit					
Frequency Range (MHz) Field Strength (uV/m) Field Strength (dB		Field Strength (dBuV/m)	Measure Distance (m)		
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300		
0.490~1.705	24000/F(kHz)	33.8 - 23	30		
1.705~30.0	30	29	30		
30~88	100	40	3		
88~216	150	43.5	3		
216~960	200	46	3		
Above 960	500	54	3		

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:** 

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.4.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


#### Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR263001AE Page: 15 of 19



## 3.4.3 Test Setup

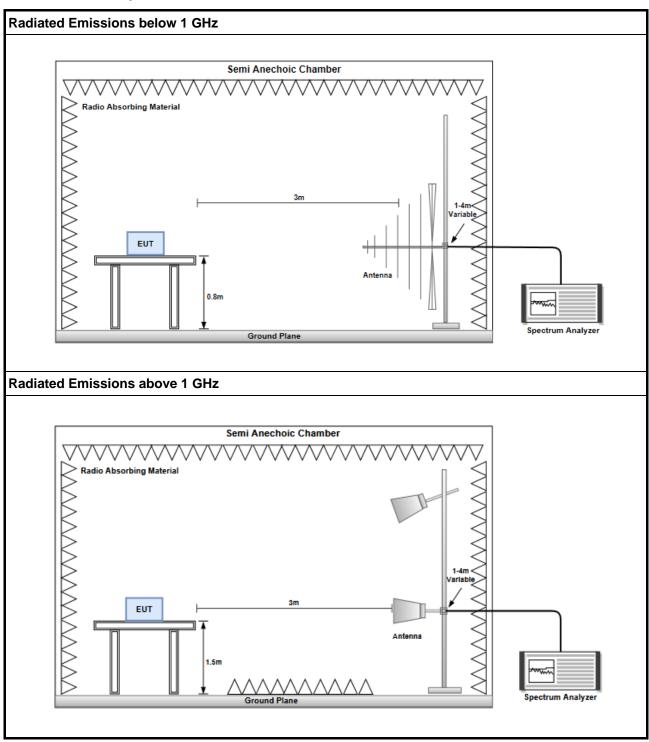

## 3.4.4 Test Results

Refer to Appendix D.

Report No.: FR263001AE Page : 16 of 19



## 3.5 Emissions in non-restricted Frequency Bands

### 3.5.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

#### 3.5.2 Test Procedures


#### Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

#### **Emission level measurement**

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level

### 3.5.3 Test Setup



#### 3.5.4 Test Results

Ambient Condition	23°C / 65%	Tested By	Roger Lu
-------------------	------------	-----------	----------

Refer to Appendix E.

Report No.: FR263001AE Page: 17 of 19



## 3.6 AC Power Line Conducted Emissions


### 3.6.1 Limit of AC Power Line Conducted Emissions

Conducted Emissions Limit				
Frequency Emission (MHz)	Quasi-Peak	Average		
0.15-0.5	66 - 56 *	56 - 46 *		
0.5-5 56 46				
5-30 60 50				
Note 1: * Decreases with the logarithm of the frequency.				

#### 3.6.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

### 3.6.3 Test Setup

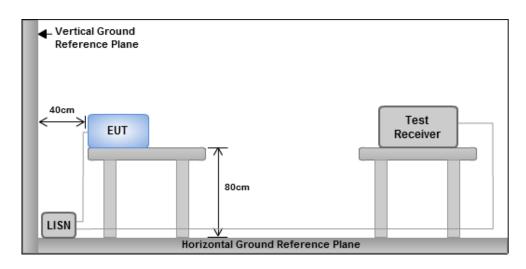

Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.6.4 Test Results

Refer to Appendix F.

Report No.: FR263001AE Page: 18 of 19



## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

#### Linkou

Tel: 886-2-2601-1640 No.30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan (R.O.C.)

#### Kwei Shan

Tel: 886-3-271-8666
No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

#### Kwei Shan Site II

Tel: 886-3-271-8640 No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC Service@icertifi.com.tw

==END==

Report No.: FR263001AE Page: 19 of 19



## 6dB and Occupied Bandwidth

Appendix A

Summary

Mode	Max-N dB	Max-OBW	ITU-Code	Min-N dB	Min-OBW
	(Hz)	(Hz)		(Hz)	(Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(125kbps)	750k	1.132M	1M13F1D	731.884k	1.125M
BT-LE(500kbps)	760.87k	1.085M	1M09F1D	750k	1.078M
BT-LE(1Mbps)	659.42k	1.035M	1M04F1D	637.681k	1.031M
BT-LE(2Mbps)	1.13M	2.091M	2M09F1D	1.109M	2.084M


 $\label{eq:max-obw} \begin{tabular}{ll} Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99\% occupied bandwidth; Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99\% occupied bandwidth \end{tabular}$ 


#### Result

Mode	Result	Limit	Port 1-N dB	Port 1-OBW
		(Hz)	(Hz)	(Hz)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	500k	750k	1.125M
2440MHz	Pass	500k	746.377k	1.132M
2480MHz	Pass	500k	731.884k	1.129M
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	500k	760.87k	1.082M
2440MHz	Pass	500k	753.623k	1.085M
2480MHz	Pass	500k	750k	1.078M
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	637.681k	1.031M
2440MHz	Pass	500k	659.42k	1.031M
2480MHz	Pass	500k	652.174k	1.035M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.123M	2.084M
2440MHz	Pass	500k	1.13M	2.091M
2480MHz	Pass	500k	1.109M	2.091M


Port X-N dB = Port X 6dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth




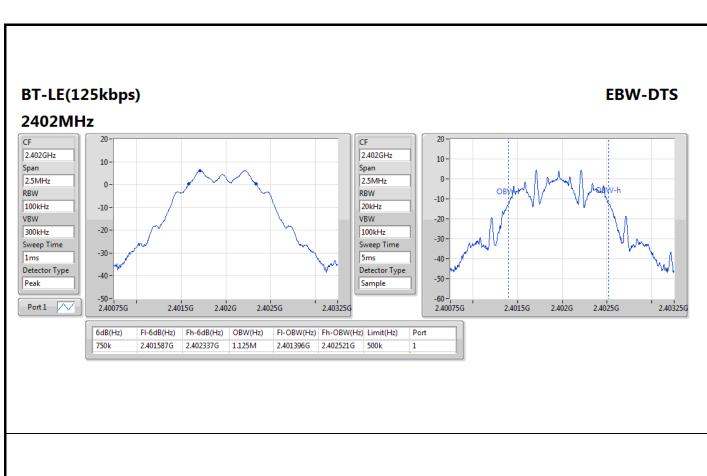

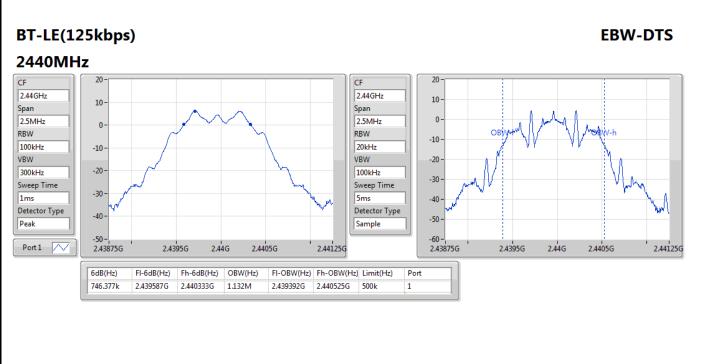





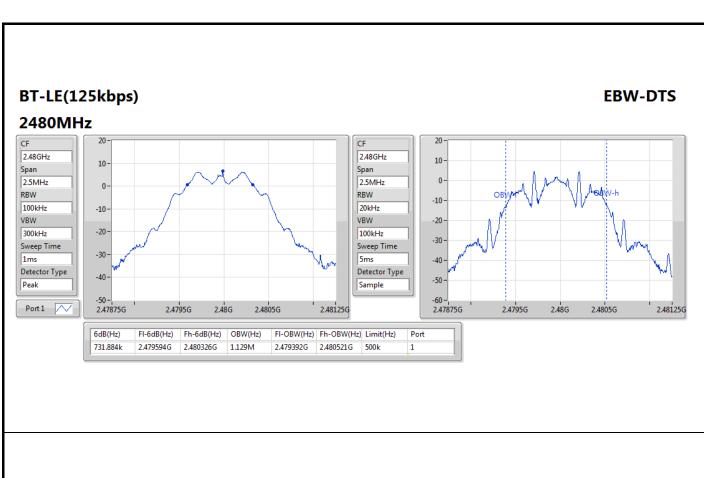

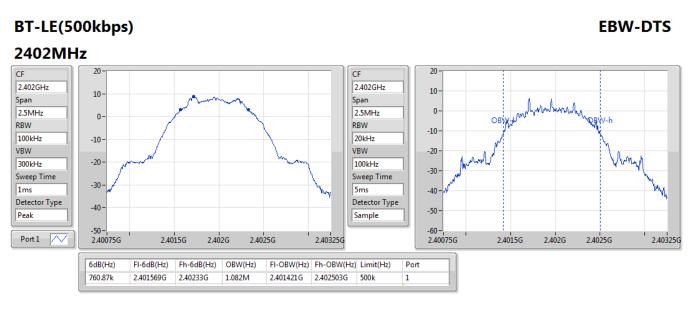





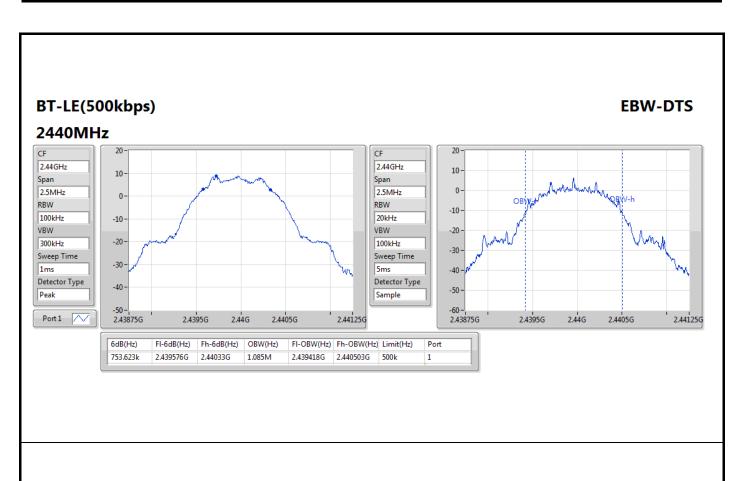

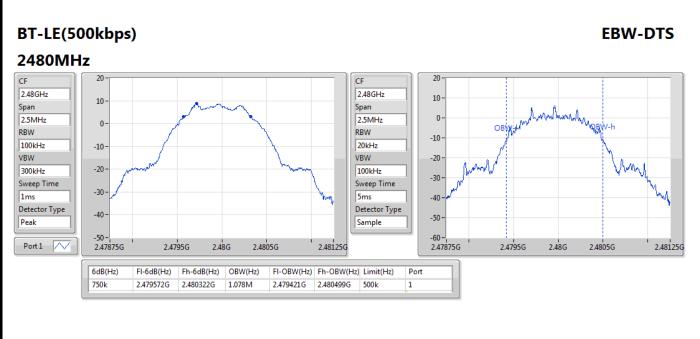





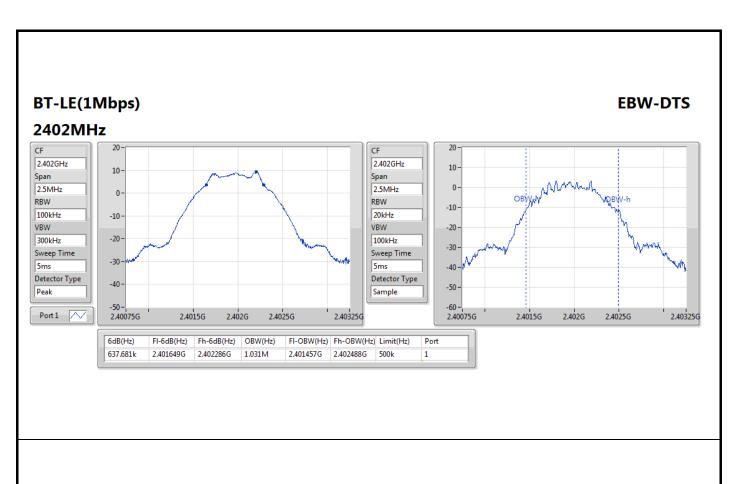

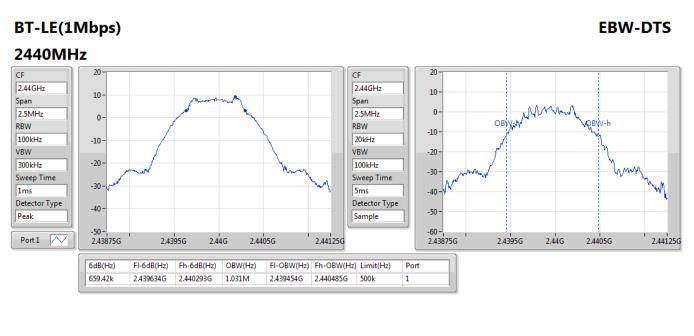



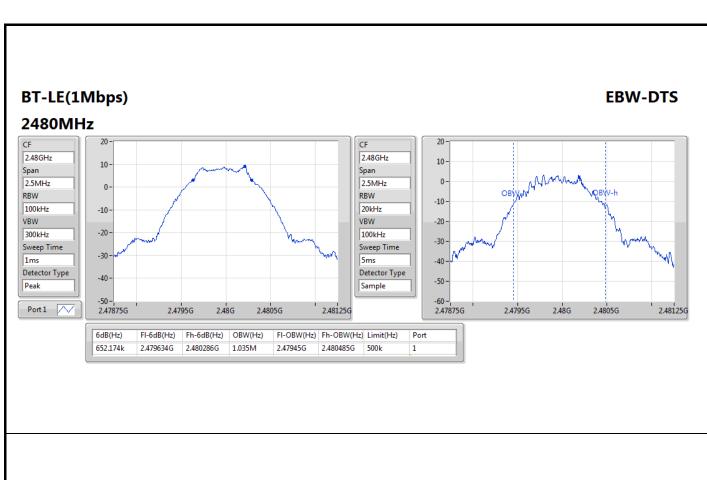

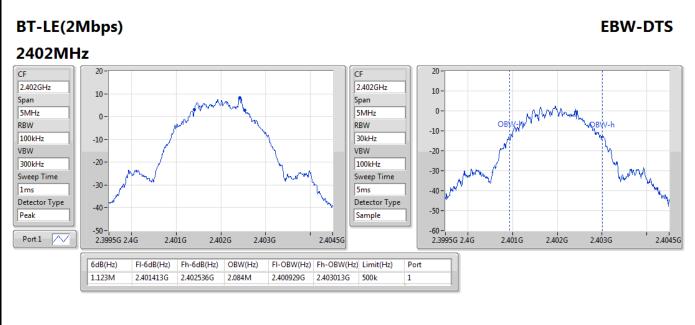



2.4775G


6dB(Hz) 1.109M

2.479G

2.48G

2.481G

FI-6dB(Hz) Fh-6dB(Hz) OBW(Hz) FI-OBW(Hz) Fh-OBW(Hz) Limit(Hz) 2.479413G 2.480522G 2.091M 2.478922G 2.481013G 500k

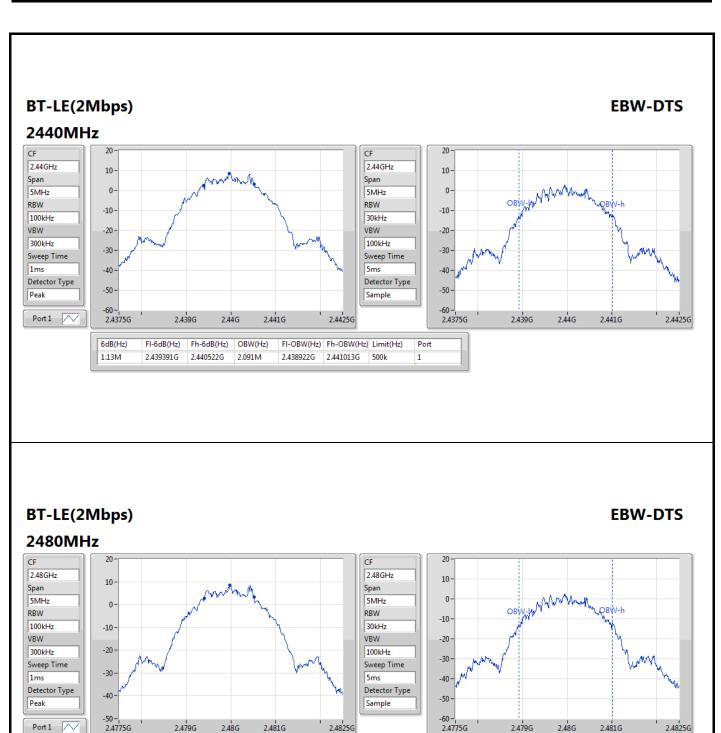

2.4825G

2.479G

2.4775G

2.48G

2.481G

2.4825G



# Conducted Output Power (Peak)

Appendix B.1

Summary

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-LE(125kbps)	9.81	0.00957
BT-LE(500kbps)	9.80	0.00955
BT-LE(1Mbps)	9.83	0.00962
BT-LE(2Mbps)	9.82	0.00959

#### Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	2.83	9.77	30.00
2440MHz	Pass	2.83	9.79	30.00
2480MHz	Pass	2.83	9.81	30.00
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	2.83	9.76	30.00
2440MHz	Pass	2.83	9.78	30.00
2480MHz	Pass	2.83	9.80	30.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.83	9.79	30.00
2440MHz	Pass	2.83	9.80	30.00
2480MHz	Pass	2.83	9.83	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.83	9.78	30.00
2440MHz	Pass	2.83	9.80	30.00
2480MHz	Pass	2.83	9.82	30.00



# Conducted Output Power (Average)

Appendix B.2

Summary

Mode	Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-LE(125kbps)	9.74	0.00942
BT-LE(500kbps)	9.74	0.00942
BT-LE(1Mbps)	9.76	0.00946
BT-LE(2Mbps)	9.75	0.00944

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	2.83	9.70	30.00
2440MHz	Pass	2.83	9.72	30.00
2480MHz	Pass	2.83	9.74	30.00
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	2.83	9.69	30.00
2440MHz	Pass	2.83	9.71	30.00
2480MHz	Pass	2.83	9.74	30.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.83	9.72	30.00
2440MHz	Pass	2.83	9.73	30.00
2480MHz	Pass	2.83	9.76	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.83	9.71	30.00
2440MHz	Pass	2.83	9.73	30.00
2480MHz	Pass	2.83	9.75	30.00

Note: Average power is for reference only.



Appendix C




Summary

Mode	PD
	(dBm/3kHz)
2.4-2.4835GHz	-
BT-LE(125kbps)	4.06
BT-LE(500kbps)	3.78
BT-LE(1Mbps)	-6.30
BT-LE(2Mbps)	-7.77


#### Result

Mode	Result	Antenna Gain (dBi)	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	2.83	4.06	8.00
2440MHz	Pass	2.83	4.02	8.00
2480MHz	Pass	2.83	4.05	8.00
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	2.83	3.69	8.00
2440MHz	Pass	2.83	3.78	8.00
2480MHz	Pass	2.83	3.78	8.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.83	-6.36	8.00
2440MHz	Pass	2.83	-6.33	8.00
2480MHz	Pass	2.83	-6.30	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	2.83	-7.87	8.00
2440MHz	Pass	2.83	-7.86	8.00
2480MHz	Pass	2.83	-7.77	8.00




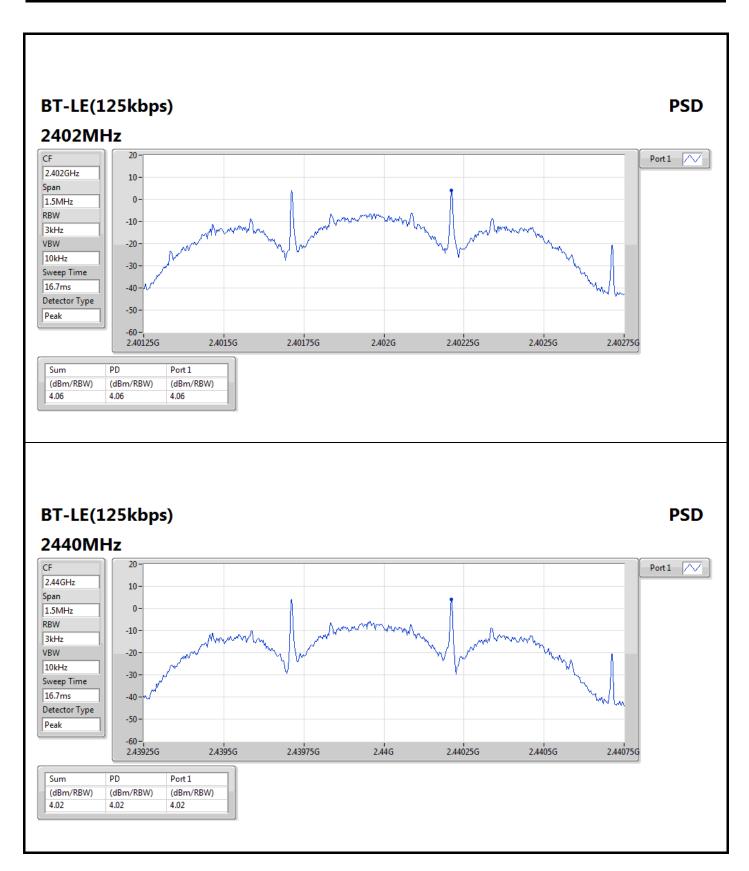




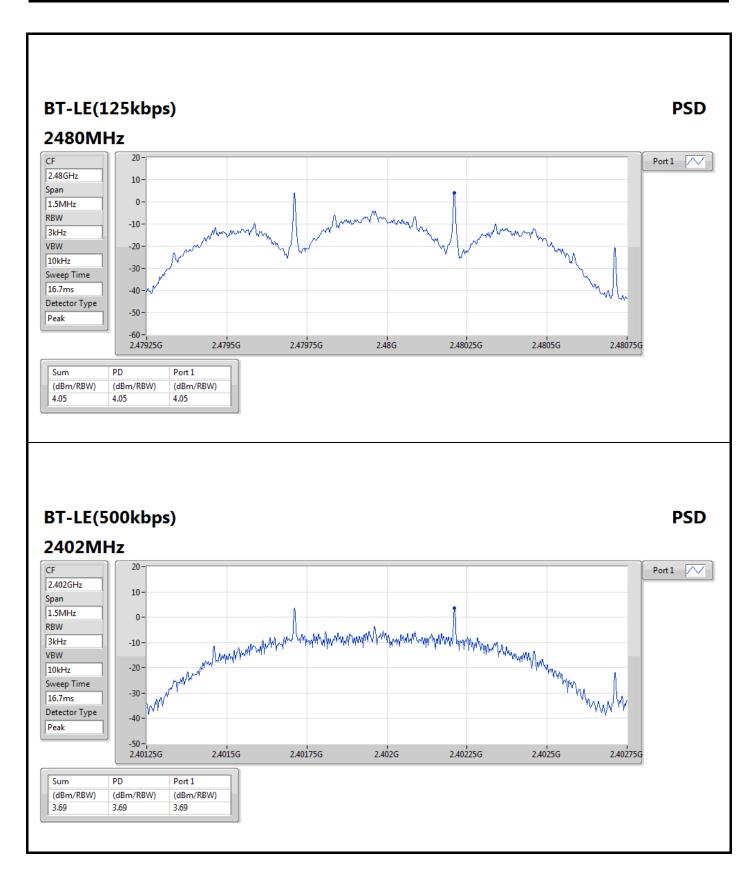




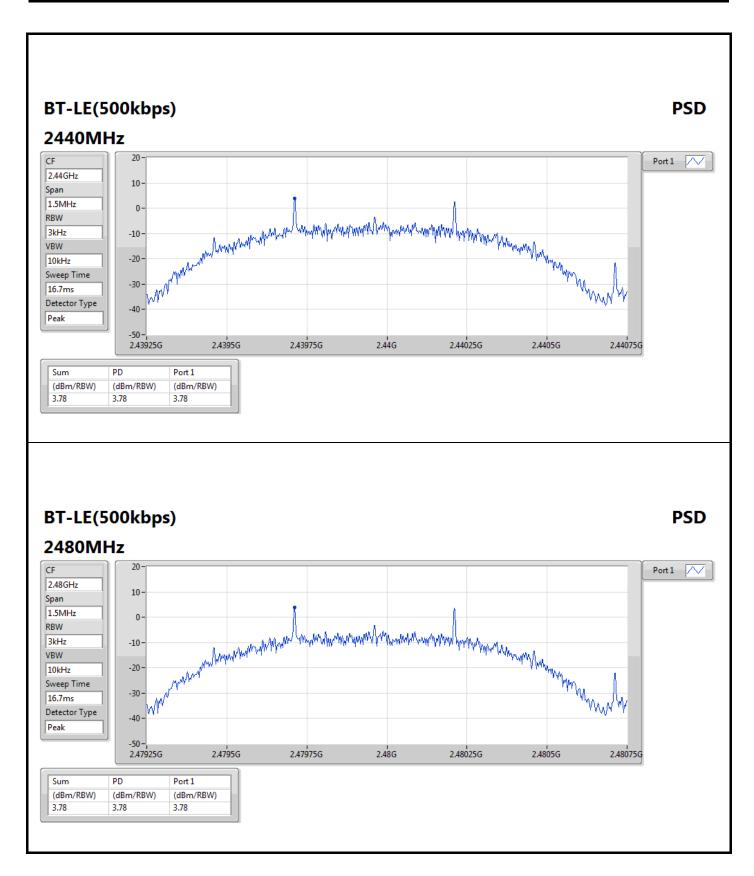




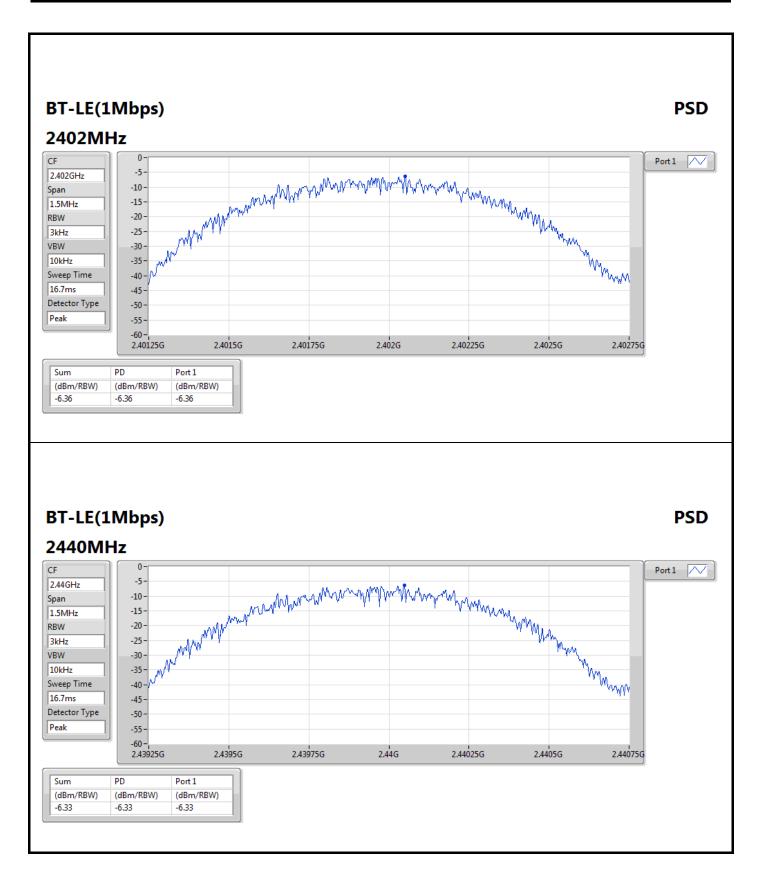



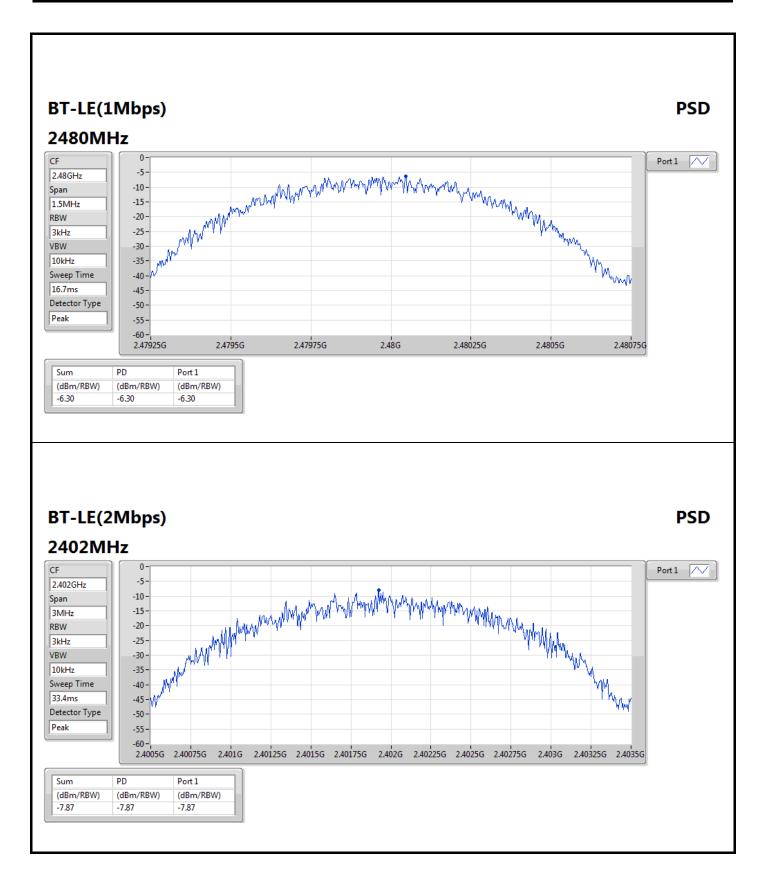




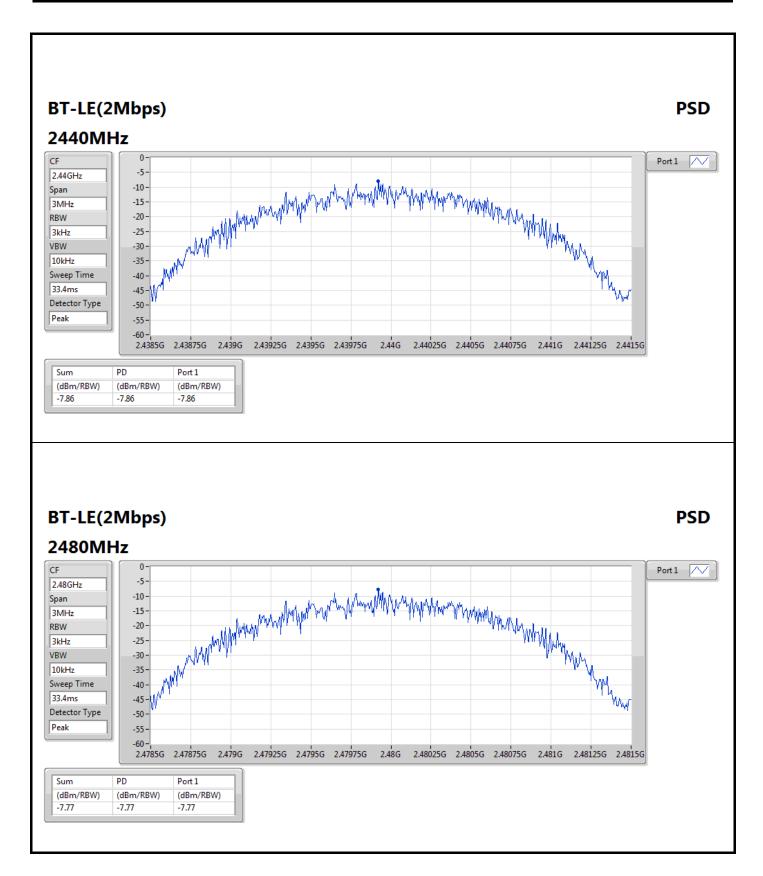



## **Unwanted Emissions (Below 1GHz)**

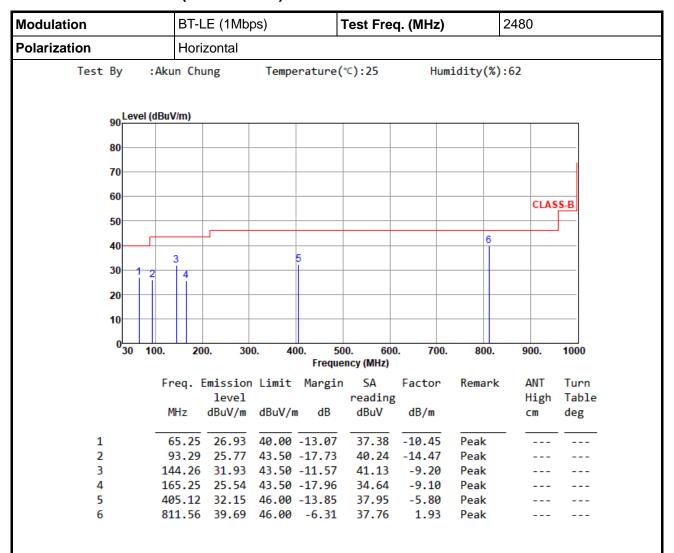

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Page No. : 1 of 14



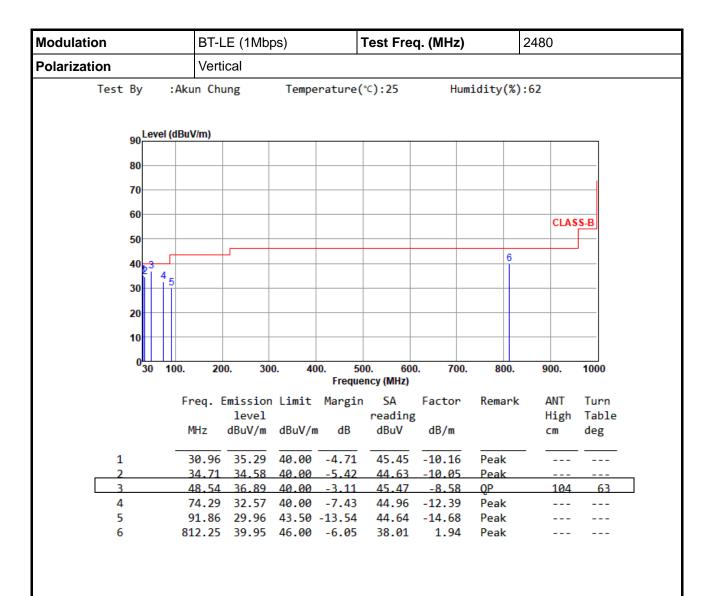


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.




## **Unwanted Emissions (Above 1GHz)**

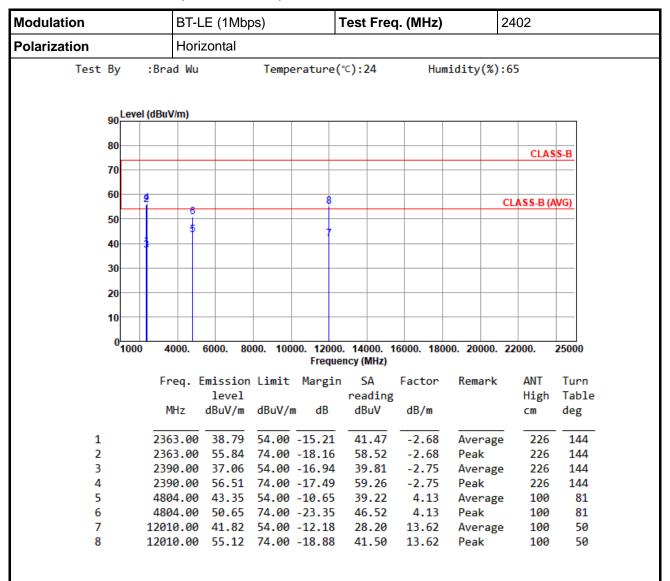

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor, cable loss and amplifier gain



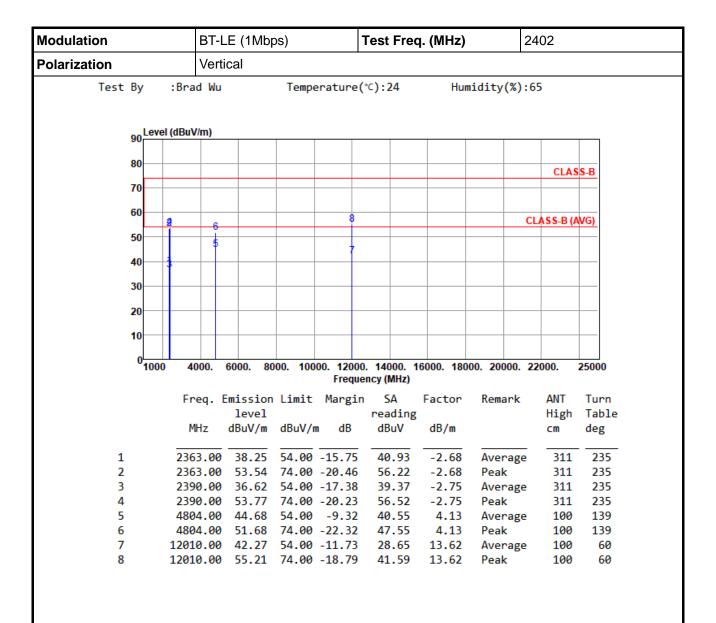


\*Factor includes antenna factor, cable loss and amplifier gain



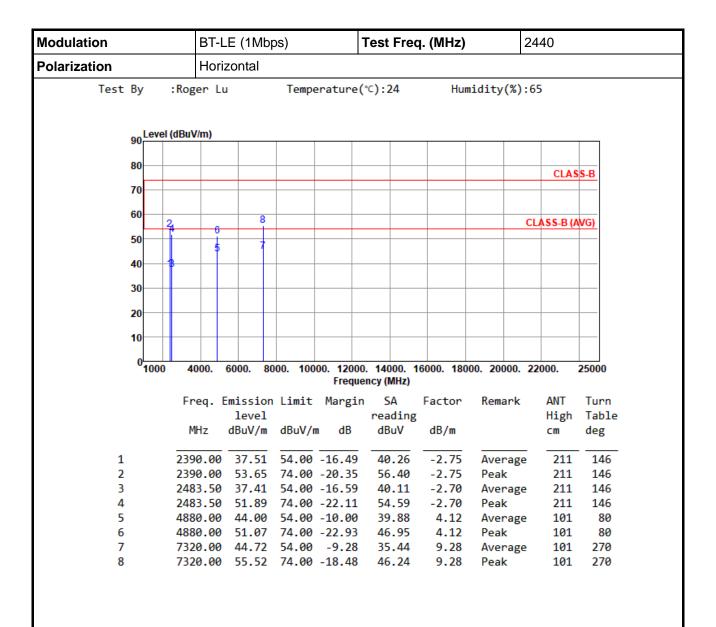


\*Factor includes antenna factor, cable loss and amplifier gain



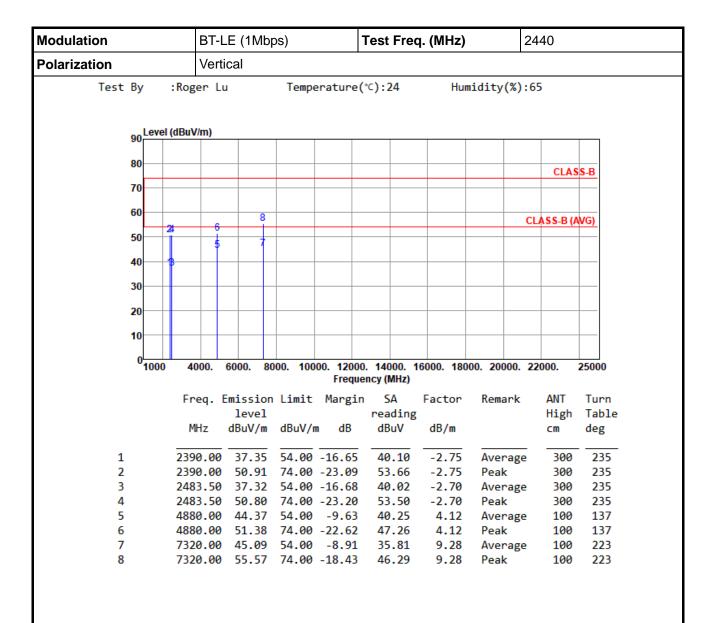


\*Factor includes antenna factor, cable loss and amplifier gain



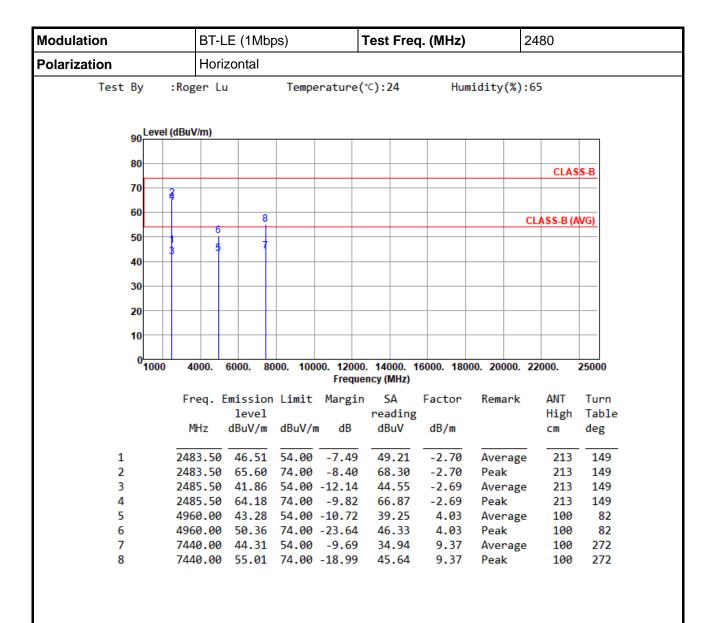


\*Factor includes antenna factor, cable loss and amplifier gain



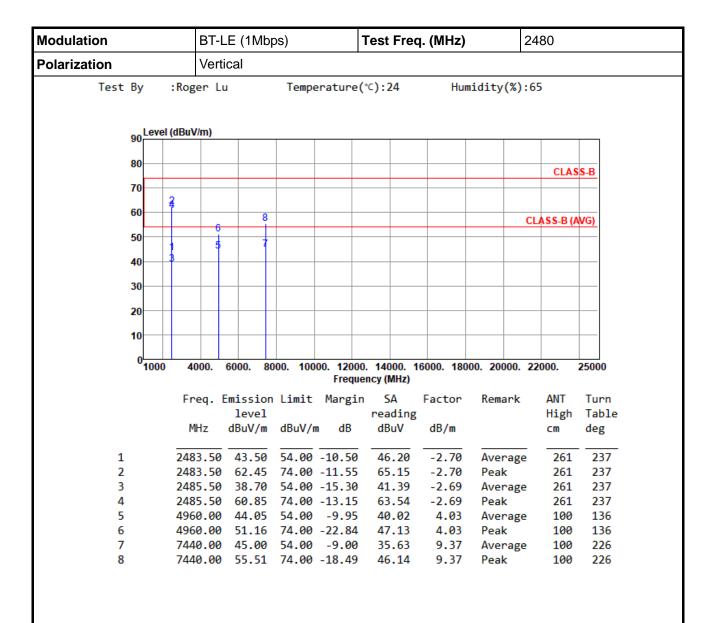


\*Factor includes antenna factor, cable loss and amplifier gain



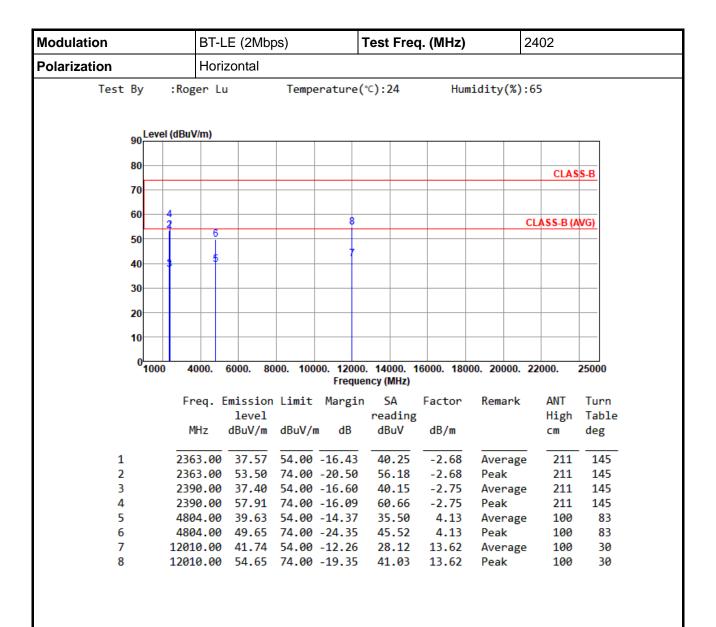


\*Factor includes antenna factor, cable loss and amplifier gain



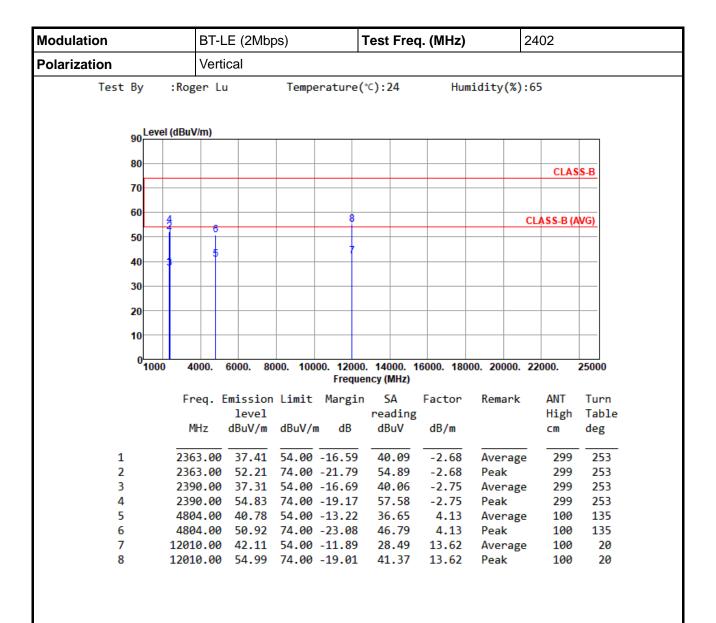


\*Factor includes antenna factor, cable loss and amplifier gain



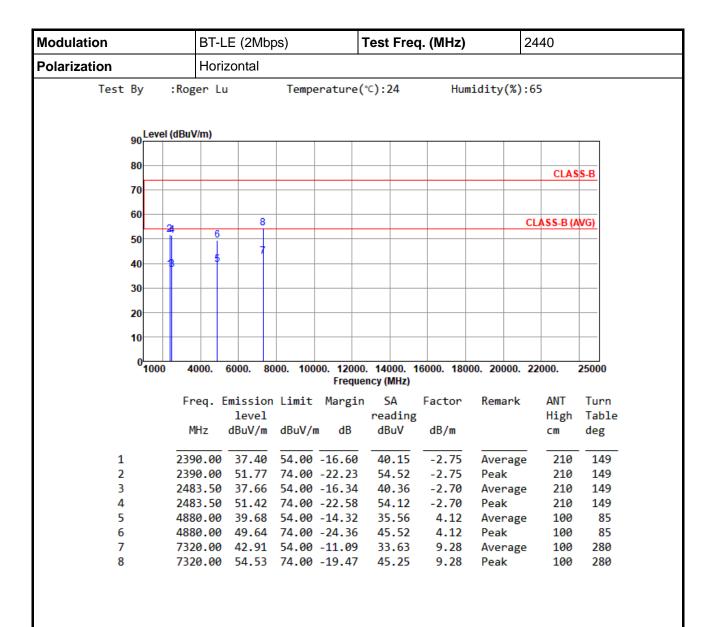


\*Factor includes antenna factor, cable loss and amplifier gain



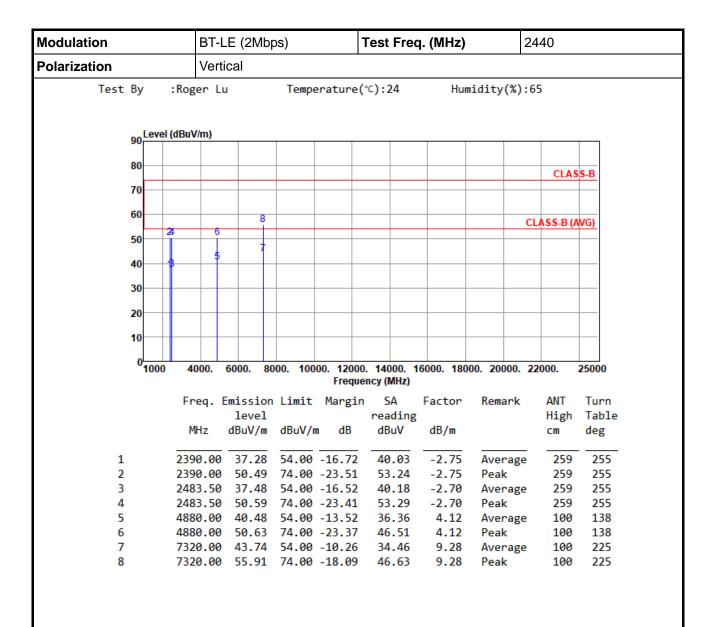


\*Factor includes antenna factor, cable loss and amplifier gain



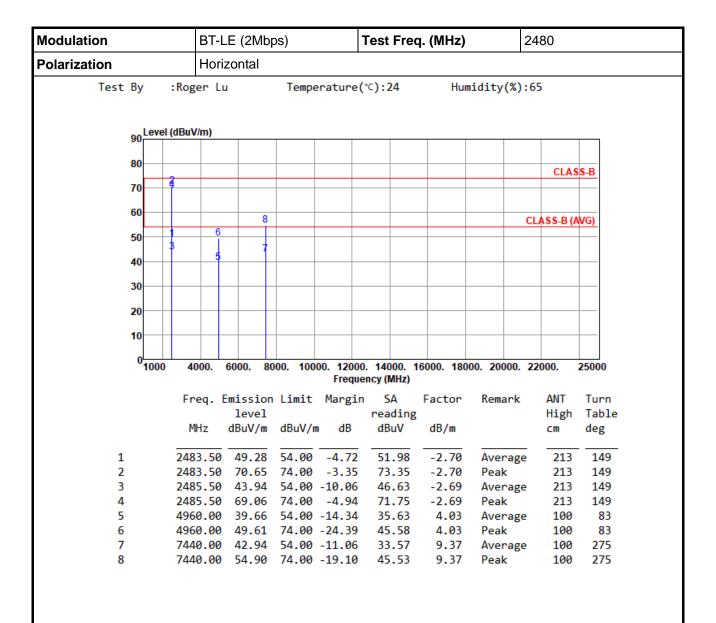


\*Factor includes antenna factor, cable loss and amplifier gain



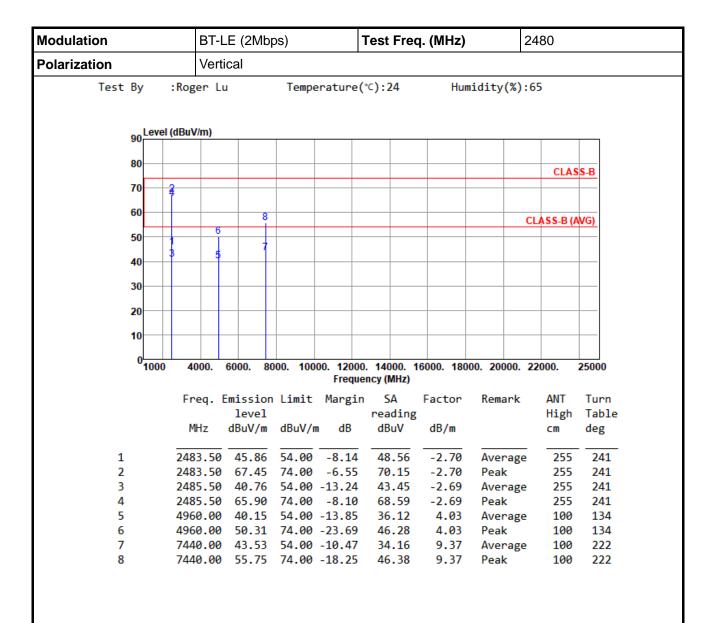

\*Factor includes antenna factor, cable loss and amplifier gain



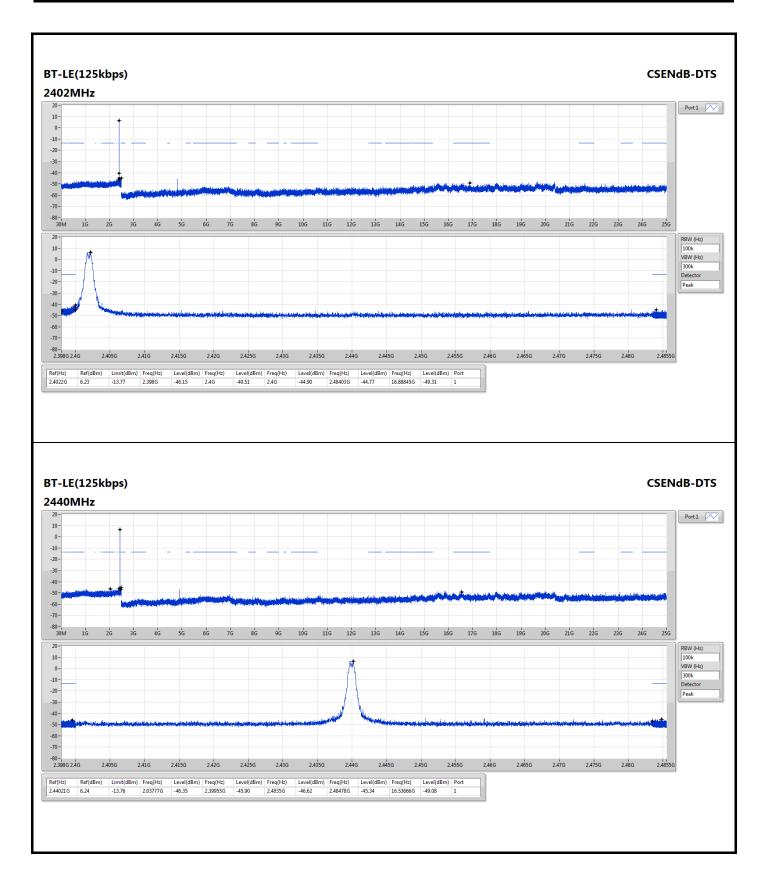



2.416

2.415G

2.42G

2.425G


2.43G

2.435G


2.44G

2.445G

2.45G

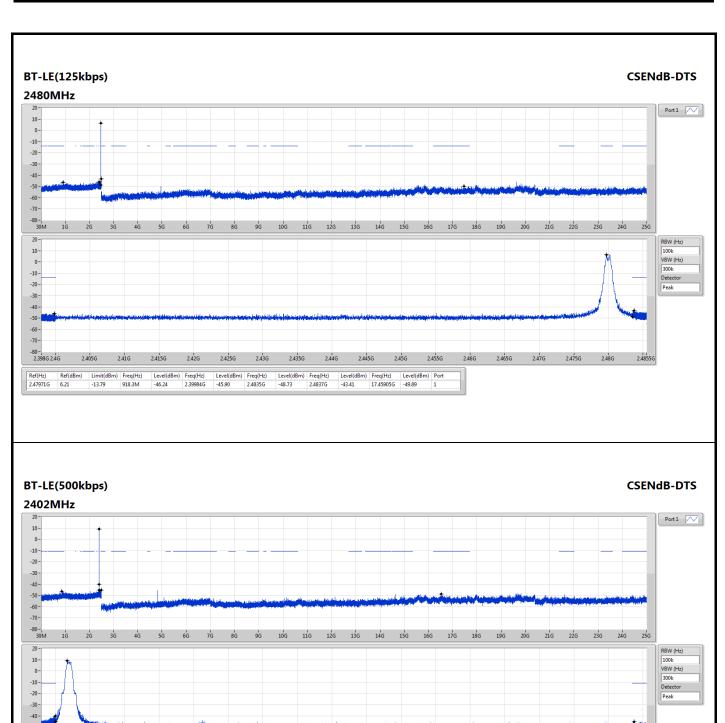



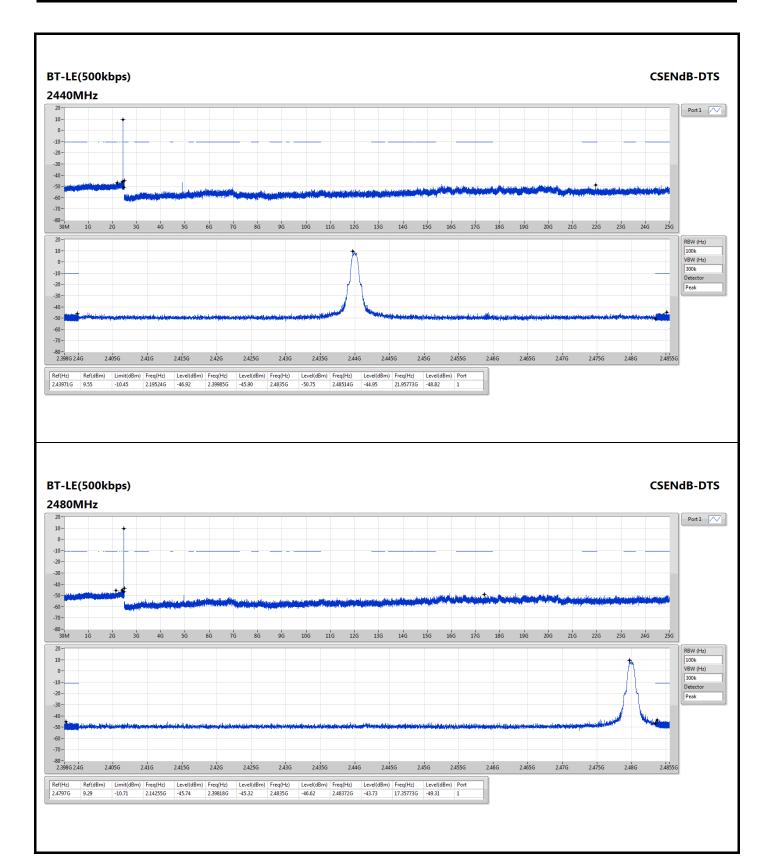



2.416

2.415G

2.42G

2.425G

2.43G


2.435G

2.44G

2.445G

2.45G

2.455G

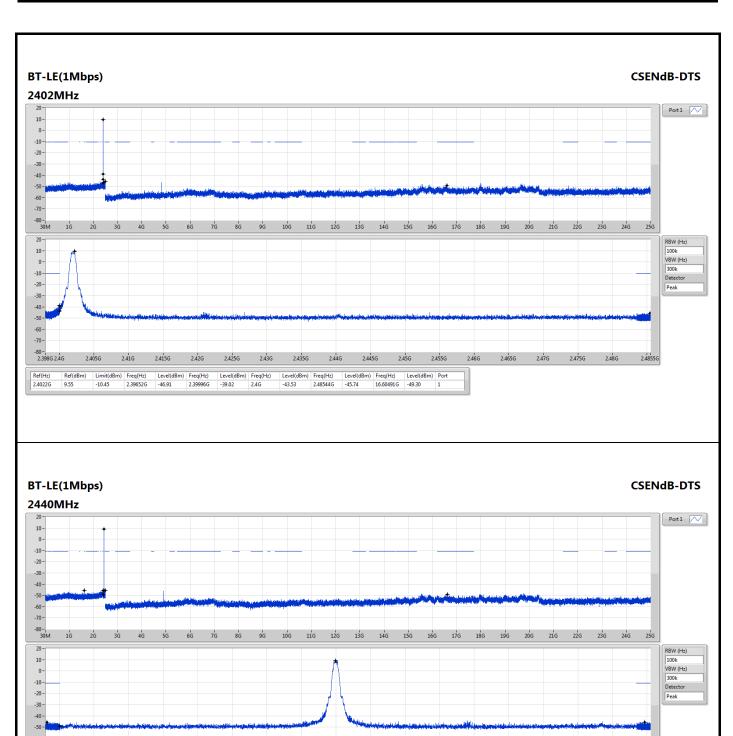



2.415G

2.41G

2.42G


2.425G

2.43G


2.435G 2.44G

2.445G 2.45G


2.455G 2.46G 2.465G 2.47G

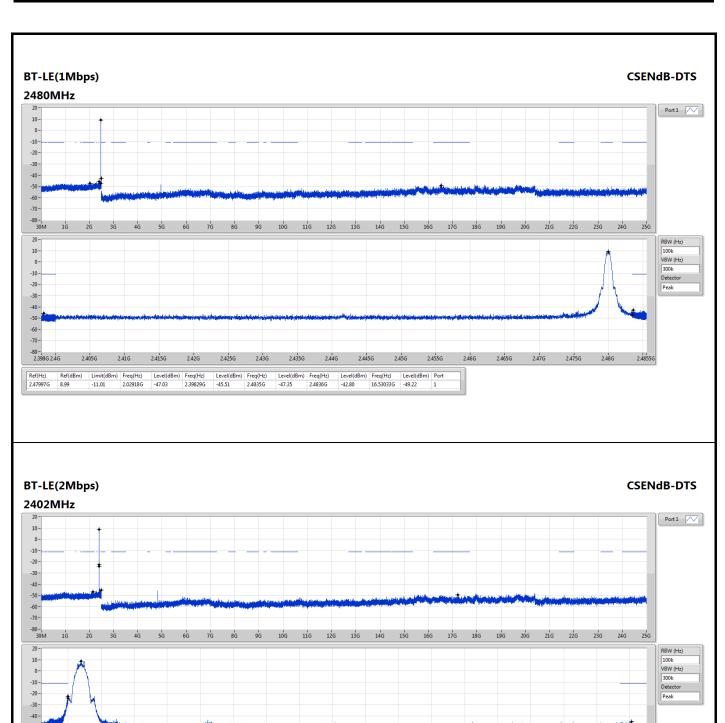



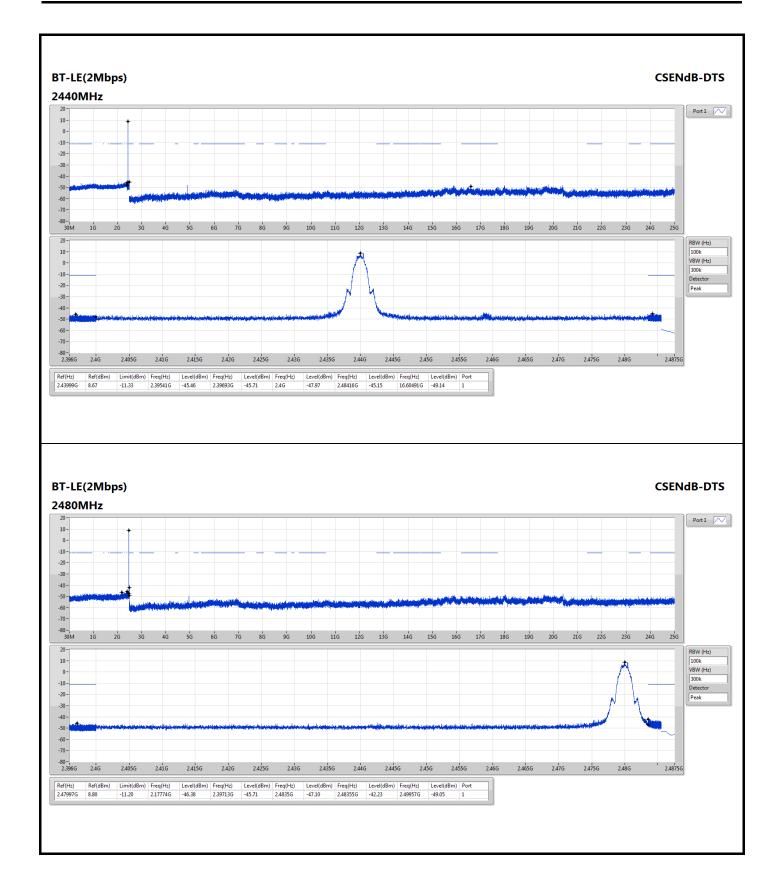




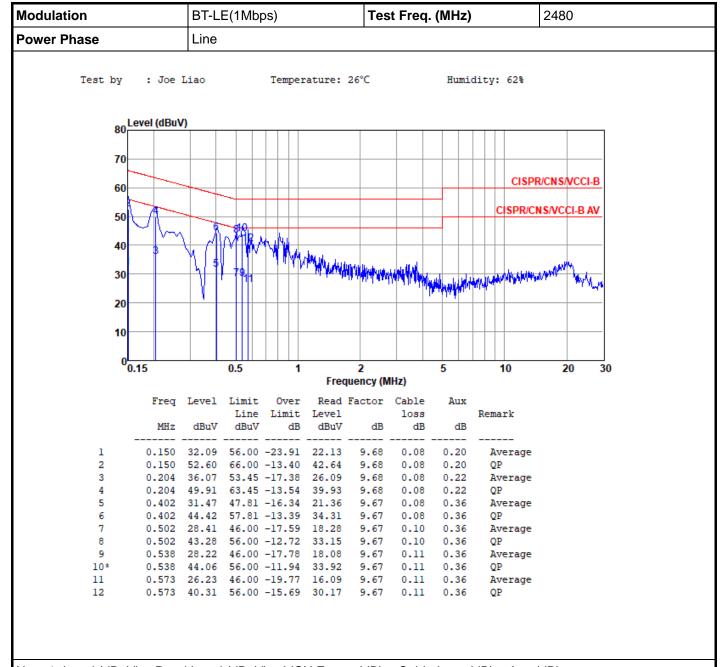

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



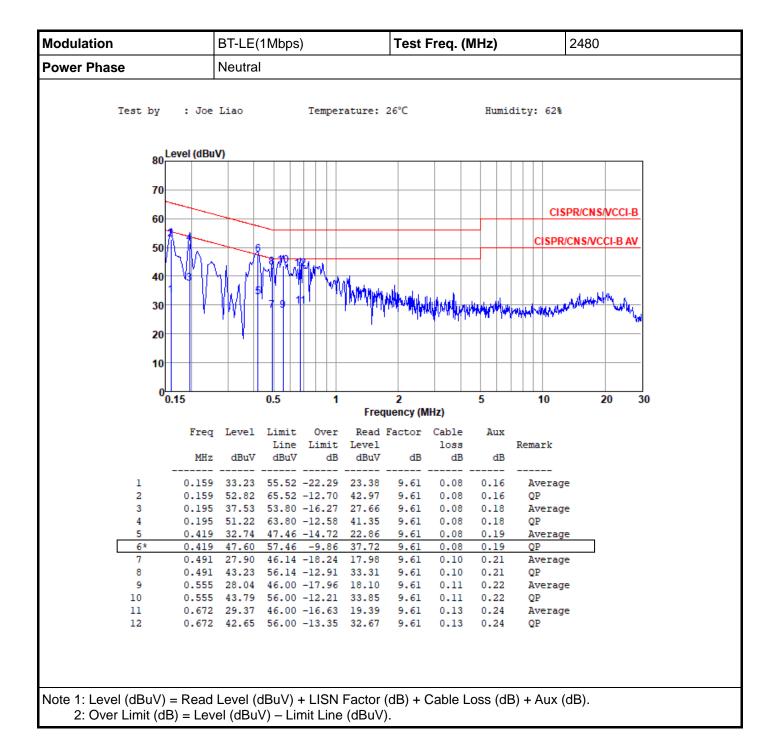

Page No. : 2 of