

**FCC PART 15 SUBPART B & C SECTION 15.247
&
RSS 247
TEST REPORT**

for

**MODULAR TRANSMITTER
Model: ATWILC1000-MR110UB**

Prepared for
**ATMEL CORPORATION
1 SPECTRUM POINTE DR., SUITE 225
LAKE FOREST, CA 92630**

Prepared by: _____

TOREY OLIVER

Approved by: _____

MATT HARRISON

**COMPATIBLE ELECTRONICS INC.
20621 PASCAL WAY
LAKE FOREST, CALIFORNIA 92630
(949) 587-0400**

DATE: OCTOBER 20, 2015

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	19	2	2	2	15	74	114

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



**Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500**

**Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600**

**Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700**

**Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400**

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description of Test Configuration	9
4.1.1 Photograph Test Configuration	9
4.1.2 Cable Construction and Termination	10
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	11
5.1 EUT and Accessory List	11
5.2 EMI Test Equipment	12
6. TEST SITE DESCRIPTION	13
6.1 Test Facility Description	13
6.2 EUT Mounting, Bonding and Grounding	13
6.3 Facility Environmental Characteristics	13
7. CHARACTERISTICS OF THE TRANSMITTER	14
7.1 Channel Number and Frequencies	14
7.2 Antenna	14
8. TEST PROCEDURES	15
8.1 RF Emissions	15
8.1.1 Conducted Emissions Test	15
8.1.2 Radiated Emissions (Spurious and Harmonics) Test	16
8.1.3 DTS Bandwidth	17
8.1.4 Maximum Peak Conducted Output Power	17
8.1.5 Maximum Peak Power Spectral Density Level In The Fundamental Emission	17
8.1.6 Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth)	18
8.1.7 Emissions in the Restricted Bands (Radiated)	18
8.1.8 Emissions Radiated Outside of the Fundamental Frequency Band	18
9. TEST PROCEDURE DEVIATIONS	19
10. CONCLUSIONS	19



LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Factors, Charts, and Photos • Test Setup Diagrams • Antenna and Amplifier Factors • Radiated and Conducted Emissions Photos
E	Radiated and Conducted Emissions Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of Test Site Below 1GHz
2	Plot Map And Layout of Test Site Above 1GHz
3	Conducted Emissions Test Setup



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.

Device Tested: Modular Transmitter
Model: ATWILC1000-MR110UB
S/N: None

Product Description: The EUT is an 802.11b, g, and n Wireless Shielded Module with an external PCB antenna.

Modifications: The EUT was not modified in order to comply with specifications.

Manufacturer: Atmel Corporation
1 Spectrum Pointe Dr., Suite 225
Lake Forest, CA 92630

Test Dates: October 13, 14, & 21-23, 2015

Test Specifications: EMI requirements
CFR Title 47, Part 15 Subpart B, Sections 15.107 and 15.109, Subpart C Sections 15.205, 15.207, 15.209, & 15.247.
RSS 247 & RSS GEN

Test Procedure: ANSI C63.4 & C63.10, and KDB 558074 D01 v03r03.



SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz	Complies with the limits of CFR Title 47 Part 15 Subpart B Section 15.107, C Section 15.207, and RSS GEN
2	Radiated RF Emissions & Harmonics, 9 kHz – 25,000 MHz	Complies with the limits of CFR Title 47 Part 15 Subpart B Section 15.109, Subpart C Sections 15.205, 15.209, and RSS GEN
3	DTS Bandwidth	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247
4	Maximum Peak Conducted Output Power	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247
5	Maximum Peak Power Spectral Density Level In The Fundamental Emission	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247
6	Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth)	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247
7	Emissions in the Restricted Bands	Complies with CFR Title 47 Part 15 Subpart C Section 15.247 and RSS 247



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Modular Transmitter Model: ATWILC1000-MR110UB. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 & C63.10. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT (equipment under test) hereafter, are within the specification limits defined by the Code of Federal Regulations Title 47, Part 15 Subpart B Sections 15.107 & 15.109, Subpart C sections 15.207, 15.205, 15.209, 15.247, RSS GEN, and RSS 247.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The tests described herein were performed at the test facility of Compatible Electronics, 20621 Pascal Way Lake Forest, California 92630.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Atmel Corporation

Mike Atia Module / SIP Designer

Compatible Electronics Inc.

Torey Oliver Test Technician
Matt Harrison Lab Manager

2.4 Date Test Sample was Received

The test sample was received on October 14, 2015.

2.5 Disposition of the Test Sample

The test sample remains at Compatible Electronics as of the date of this test report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
NVLAP	National Voluntary Laboratory Accreditation Program
CFR	Code of Federal Regulations
PCB	Printed Circuit Board
TX	Transmit
RX	Receive



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2014	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.
RSS 247	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS GEN	General Requirements for Compliance of Radio Apparatus
ANSI C63.10: 2013	American National Standard for Testing Unlicensed Wireless Devices
KDB 558074 D01 v03r03	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration

The Modular Transmitter Model: ATWILC1000-MR110UB (EUT) was setup in a tabletop configuration. The EUT was powered by a DC Supply (for Conducted Emissions the EUT was connected to a USB Power Adapter). The EUT was continuously transmitting a data stream. The EUT was checked in all axes and the Y-Axis was found to be the worst case.

The voltage was varied $\pm 15\%$ and the transmitting signal amplitude and frequency did not vary.

It was determined that the emissions were at their highest level when the EUT was transmitting in the configuration described above for Radiated Emissions. For the spurious emissions, all modes were checked and the worst case was taken in the above configuration. Please see Appendix E for the test data.

4.1.1 Photograph Test Configuration



4.1.2 Cable Construction and Termination

Cable 1-2

These are 2 meter, un-shielded, round cables that connect the EUT to the DC Power Supply. The cables were hardwired into the EUT and have banana connectors at the DC Supply end. The cables were not bundled.

Cable 3


This is a 10 centimeter, un-shielded, round cables that connect the EUT to the EUT Control Board. The cable is hardwired into both ends of the cable. The cable was not bundled.

Cable 4

This is a 1 meter, foil shielded, USB cable that connect the EUT to the USB Power Adapter. The cable is hardwired into both ends of the cable. The cable was not bundled. The shield of the cable was terminated at the connectors.

Cable 5

This is a 10 centimeter, braid shielded, round cable that connect the EUT to the external PCB antenna. The cable has a U.FL connector at the EUT end and is hardwired into the antenna end of the cable. The cable was not bundled.

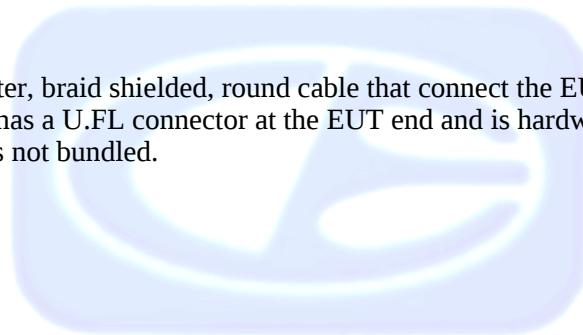

5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

#	EQUIPMENT TYPE	MANU-FACTURER	MODEL	SERIAL NUMBER
1	MODULAR TRANSMITTER(EUT)	ATMEL CORPORATION	ATWILC1000-MR110UB	None
2	DC SUPPLY	MPJA	0-30V / 0-5A	017687
3	EUT CONTROL BOARD	ATMEL CORPORATION	NONE	NONE
4	USB POWER ADAPTER (CONDUCTED EMISSIONS)	BELKIN	F8J052	NONE



5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Computer	Compatible Electronics	NONE	NONE	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100219	9/3/2015	9/3/2016
Antenna, Loop	Com Power	AL-130	121049	12/06/2013	12/06/2015
Antenna, CombiLog	Com Power	AC-220	25857	5/21/2014	5/21/2016
Antenna, Horn 1-18GHz	Com Power	AH-118	071250	7/1/2014	7/1/2016
Antenna, Horn 18-26 GHz	Com Power	AH-826	081033	NCR	NCR
Pre-Amp, 1-18GHz	Com Power	PAM-118A	551034	2/6/2015	2/6/2016
Pre-Amp, 18-40GHz	Com Power	PA-840	181289	6/16/2014	6/16/2016
LISN	Com Power	LI-215	191937	4/16/2015	4/16/2016
RF Peak Power Meter/Analyzer	Boonton	4500A	1282	12/2/2014	12/2/2015
Peak Power Sensor	Boonton	57318	3723	12/2/2014	12/2/2015
High Pass Filter	AMTI Microwave Circuits	H3G020G4	481230	6/4/2014	6/4/2016
Mast, Antenna Positioner	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Antenna Mast	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Turntable	Sunol Science Corporation	FM 2001	N/A	N/A	N/A
Mast and Turntable Controller	Sunol Science Corporation	SC104V	020808-1	N/A	N/A



6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and the figures in Appendix D of this report for test location.

6.2 EUT Mounting, Bonding and Grounding


The EUT was mounted on a 1.0 by 1.5 by 0.8 meter high non-conductive table, which was placed on the ground plane.

For testing above 1 GHz the EUT was mounted 1.5 meter above the ground plane.

The EUT was not grounded.

6.3 Facility Environmental Characteristics

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.

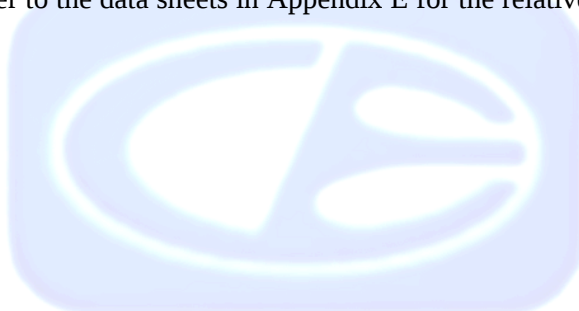

7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Number and Frequencies

There are a total of 11 channels. The low channel is at 2412.0 MHz and the high channel is at 2462.0 MHz. There is approximately 5 MHz separation between channels and the EUT uses DSSS modulation. Below are the channels and power settings:

	b Mode	g Mode	n Mode
1 == 2412 MHz	DigGain= DG= -5	DG= -10	DG= -11
2 == 2417 MHz	DigGain= DG= -5	DG= -7	DG= -7
3 == 2422 MHz	DigGain= DG= -5	DG= -5	DG= -5
4 == 2427 MHz	DigGain= DG= -5	DG= -2	DG= -2
5 == 2432 MHz	DigGain= DG= -5	DG= 0	DG= 0
6 == 2437 MHz	DigGain= DG= -5	DG= 2	DG= 2
7 == 2442 MHz	DigGain= DG= -5	DG= -0	DG= -0
8 == 2447 MHz	DigGain= DG= -5	DG= -2	DG= -2
9 == 2452 MHz	DigGain= DG= -5	DG= -5	DG= -4
10 == 2457 MHz	DigGain= DG= -5	DG= -6	DG= -6
11 == 2462 MHz	DigGain= DG= -5	DG= -9	DG= -9

7.2 Antenna

The antenna is an external PCB antenna, which is connected by a U.FL connector at the EUT end and a cable that is hardwired into the external PCB antenna.





8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test


The EMI receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. The LISN output was measured using the EMI receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT received its power through the LISN, which was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the computer software. The final qualification data is located in Appendix E.

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart B Section 15.107, Subpart C section 15.207 & RSS GEN.

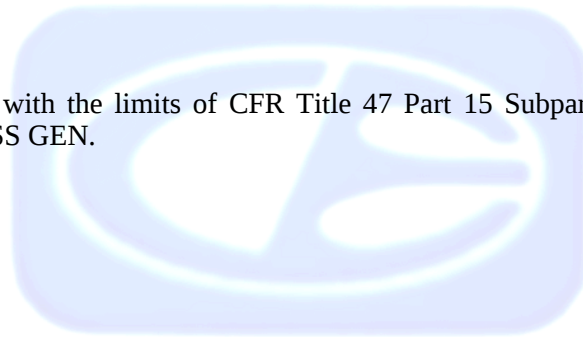

8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The R&S receiver was used as a measuring meter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps. Amplifiers were used to increase the sensitivity of the instrument. There were two Microwave Preamplifier used for frequencies above 1 GHz.

For spurious emissions the quasi-peak detector was used for frequencies below 1GHz and the average detector was used for frequencies above 1 GHz.

For the radiated Harmonic emissions and Band Edges a linear average detector was used.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE (MHz)	TRANSDUCER	EFFECTIVE MEASUREMENT BANDWIDTH
.009 to .150	Active Loop Antenna	200 Hz
.150 to 30	Active Loop Antenna	9 kHz
30 to 1000	Combilog Antenna	100 kHz
1000 to 25000	Horn Antenna	1 MHz

The TDK FAC-3 shielded test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4, EN 50147-2, and CISPR 22. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters in both vertical and horizontal polarizations (for E field radiated field strength).

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart B Section 15.109, Subpart C sections 15.205, 15.209, 15.247, and RSS GEN.



8.1.3 DTS Bandwidth

The DTS Bandwidth was measured directly connected to the EMI Receiver using a RBW of 100 kHz and a VBW of 300 kHz. A peak detector and a max hold trace were used with auto sweep time. The trace was allowed to fully maximize. We measured the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. The automatic bandwidth measurement capability of the EMI Receiver was employed using the n dB bandwidth mode with n set to 6 dB, or the display line function of the EMI Receiver was used. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.

8.1.4 Maximum Peak Conducted Output Power

The maximum peak conducted output power was measured using a Peak Power Meter. The Peak Power Meter used a resolution bandwidth that is greater than the DTS bandwidth and a video bandwidth greater than 3 x RBW. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.

8.1.5 Maximum Peak Power Spectral Density Level In The Fundamental Emission

The Maximum Peak Power Spectral Density Level in the Fundamental Emission was measured directly connected to the EMI Receiver. Tuned to the center frequency of the DTS channel and set the span to 1.5 times the DTS bandwidth. RBW was set to minimum 3 kHz but not > 100kHz and VBW 3 * RBW. A peak detector was used with the sweep time set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level within the RBW. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.



8.1.6 Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth)

The Emissions in Non-Restricted Frequency Bands (in 100kHz Bandwidth) measurements were performed using the EMI Receiver directly connected to the EUT. A reference level was established by setting the instrument center frequency to DTS channel center frequency. The span was set to ≥ 1.5 times the DTS bandwidth. The RBW was 100 kHz and VBW 300 kHz. A peak detector was used with a sweep time set to auto. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the level and 20dB below that was the reference level. For Emission Level Measurement the center frequency and span were set to encompass the frequency range to be measured. RBW was set to 100 kHz and VBW to 300 kHz. A peak detector was used with a sweep time set to auto. The number of measurement points were greater than span/RBW. A max hold trace was used and allowed to fully stabilize. The peak marker function was used to determine the maximum amplitude level. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.

8.1.7 Emissions in the Restricted Bands (Radiated)

The Emissions in the Restricted Bands measurement was performed using the EMI Receiver at a 3-meter test distance to obtain the final test data. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.205 and RSS GEN.

8.1.8 Emissions Radiated Outside of the Fundamental Frequency Band

The Band Edge measurement was performed using the EMI Receiver at a 3-meter test distance to obtain the final test data. The low and high channels were tuned to during the low and high band edge tests. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15, Subpart C, Section 15.247 and RSS 247.



9. TEST PROCEDURE DEVIATIONS

The test procedures were not deviated from throughout all tests.

10. CONCLUSIONS

The Modular Transmitter Model: ATWILC1000-MR110UB meets all of the relevant specification requirements defined in the Code of Federal Regulations Title 47, Part 15 Subpart B Sections 15.107 & 15.109, Subpart C sections 15.205, 15.207, 15.209, 15.247, RSS GEN & RSS 247.



APPENDIX A***LABORATORY ACCREDITATIONS AND
RECOGNITIONS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY ACCREDITATIONS AND RECOGNITIONS



NVLAP LAB CODES 200063-0,
200528-0, 200527-0

For US, Canada, Australia/New Zealand, Taiwan and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025 an ISO 9002 equivalent. Please follow the link to the NIST site for each of our facilities NVLAP certificate and scope of accreditation.

NVLAP listing links

Agoura Division - <http://ts.nist.gov/Standards/scopes/2000630.htm>

Brea Division - <http://ts.nist.gov/Standards/scopes/2005280.htm>

Silverado/Lake Forest Division - <http://ts.nist.gov/Standards/scopes/2005270.htm>



ANSI listing

[CETCB](#)

<https://www.ansica.org/wwwversion2/outside/ALLdirectoryDetails.asp?menuID=1&prgID=3&orgID=123&status=4>



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for EMC under the US/EU Mutual Recognition Agreement (MRA).



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for Taiwan/BSMI under the US/APEC (Asia-Pacific Economic Cooperation) Mutual Recognition Agreement (MRA).

We are also certified/listed for IT products by the following country/agency:



VCCI Listing, from VCCI site

[Enter "Compatible" in search form](http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html) http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html



FCC Listing, from FCC OET site

[FCC test lab search](https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm) <https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm>



Compatible Electronics IC listing can be found at:

<http://www.ic.gc.ca/eic/site/ic1.nsf/eng/home>



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



APPENDIX B

MODIFICATIONS TO THE EUT



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



MODIFICATIONS TO THE EUT

There were no modifications made during testing.





APPENDIX C

***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Modular Transmitter
Model: ATWILC1000-MR110UB
S/N: None

No additional models were tested.



APPENDIX D***DIAGRAMS, FACTORS, CHARTS, AND PHOTOS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

FIGURE 1: PLOT MAP AND LAYOUT OF TEST SITE BELOW 1GHZ

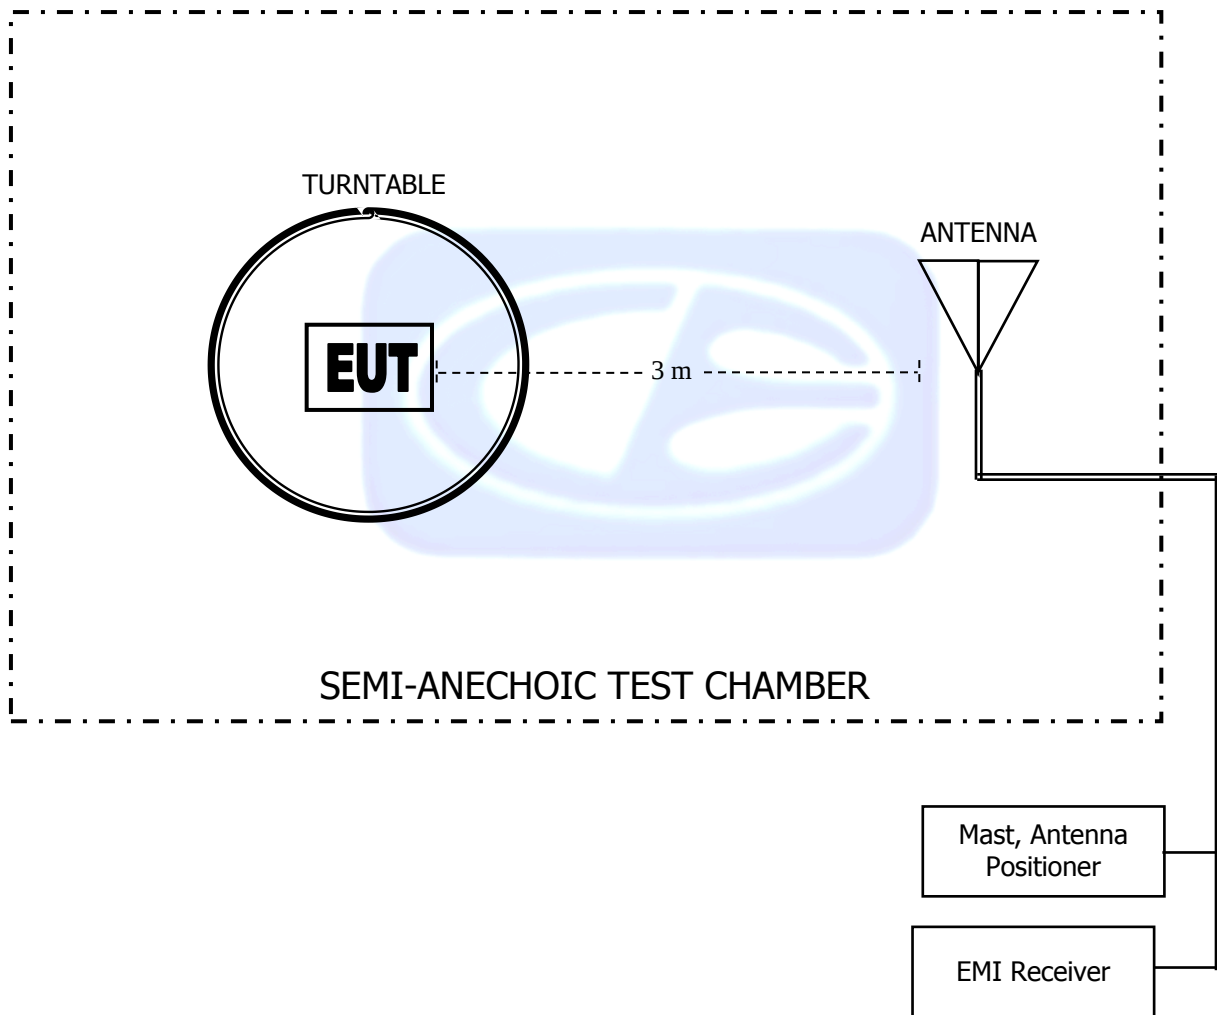


FIGURE 2: PLOT MAP AND LAYOUT OF TEST SITE ABOVE 1GHZ


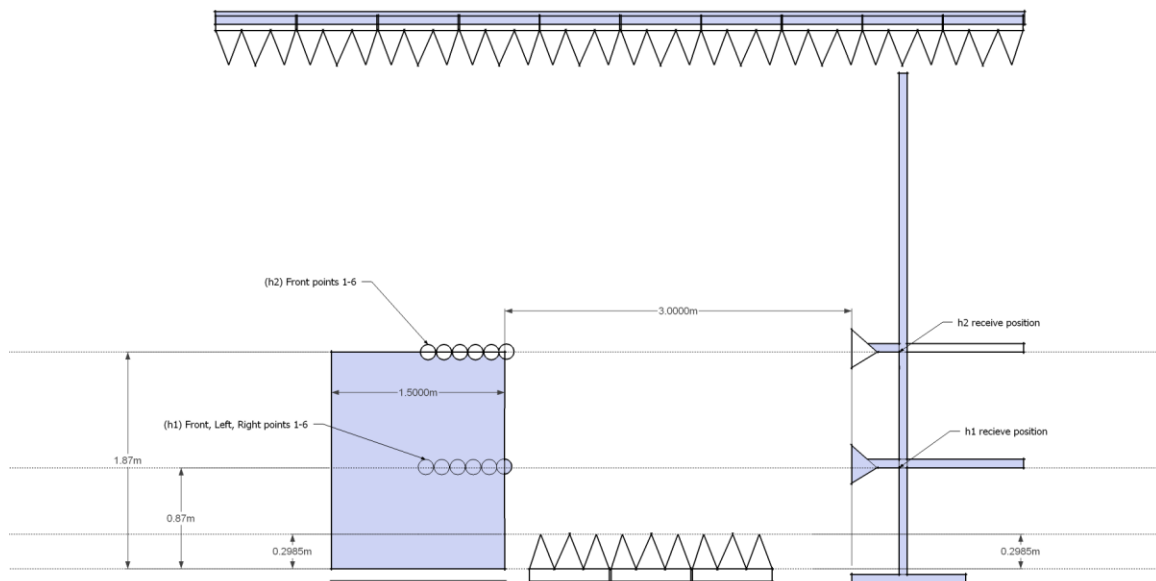


FIGURE 3: CONDUCTED EMISSIONS TEST SETUP

COM-POWER AL-130**LOOP ANTENNA****S/N: 121049****CALIBRATION DUE: DECEMBER 6, 2015**

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)	FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-34.64	16.86	0.8	-36.32	15.18
0.01	-34.78	16.72	0.9	-36.22	15.28
0.02	-35.91	15.59	1.0	-36.22	15.28
0.03	-35.48	16.02	2.0	-35.91	15.59
0.04	-35.82	15.68	3.0	-35.91	15.59
0.05	-36.49	15.01	4.0	-36.01	15.49
0.06	-36.30	15.20	5.0	-35.80	15.70
0.07	-36.43	15.07	6.0	-36.00	15.50
0.08	-36.30	15.20	7.0	-35.90	15.60
0.09	-36.39	15.11	8.0	-35.70	15.80
0.1	-36.41	15.09	9.0	-35.70	15.80
0.2	-36.61	14.89	10.0	-35.60	15.90
0.3	-36.63	14.87	15.0	-36.52	14.98
0.4	-36.52	14.99	20.0	-35.75	15.75
0.5	-36.63	14.87	25.0	-37.78	13.72
0.6	-36.62	14.88	30.0	-38.62	12.88
0.7	-36.53	14.97			

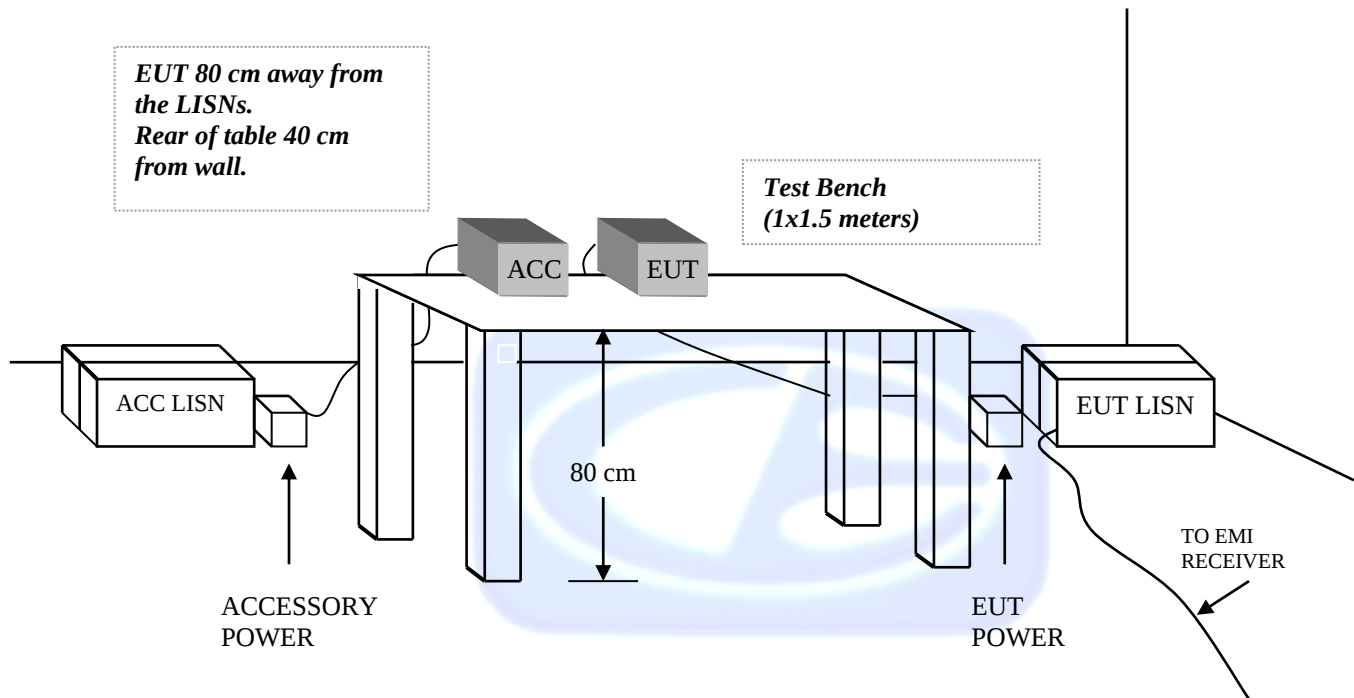

COM-POWER AC-220**LAB R - COMBILOG ANTENNA****S/N: 25857****CALIBRATION DUE: MAY 21, 2016**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.5	160	13.3
35	22.5	180	15.0
40	23.0	200	14.6
45	21.5	250	16.5
50	21.3	300	18.1
60	18.2	400	19.4
70	13.2	500	21.4
80	11.6	600	21.6
90	11.9	700	23.7
100	12.6	800	26.0
120	15.1	900	26.6
140	13.6	1000	28.5



COM-POWER AH-118**HORN ANTENNA****S/N: 071250****CALIBRATION DUE: JULY 1, 2016**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
1000	30.1	9500	44.2
1500	29.2	10000	43.4
2000	31.6	10500	44.6
2500	35.5	11000	45.1
3000	33.7	11500	45.7
3500	36.0	12000	46.2
4000	35.4	12500	45.4
4500	35.5	13000	44.8
5000	40.1	13500	46.7
5500	37.8	14000	47.8
6000	39.0	14500	46.4
6500	39.9	15000	47.2
7000	40.4	15500	45.5
7500	44.4	16000	45.0
8000	44.1	16500	44.5
8500	43.1	17000	47.0
9000	43.0	17500	47.8
		18000	44.2



COM-POWER PAM-118A**1-18GHz - PREAMPLIFIER****S/N: 551034****CALIBRATION DUE: FEBRUARY 6, 2016**


FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
500	36.77	5500	39.82
1000	38.63	6000	38.74
1100	38.72	6500	39.60
1200	38.97	7000	35.52
1300	38.59	7500	36.61
1400	39.18	8000	36.92
1500	38.71	8500	37.13
1600	39.28	9000	36.50
1700	39.25	9500	38.92
1800	39.06	10000	38.74
1900	40.34	11000	35.23
2000	40.07	12000	35.64
2500	39.69	13000	36.73
3000	40.94	14000	36.48
3500	40.41	15000	37.57
4000	40.44	16000	38.10
4500	41.20	17000	37.34
5000	39.35	18000	36.80



COM-POWER PA-840**18-40 GHz PREAMPLIFIER****S/N: 181289****CALIBRATION DUE: JUNE 16, 2016**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
18000	29.4	31500	28.2
19000	28.8	32000	28.6
20000	30.5	32500	28.8
21000	31.4	33000	28.2
22000	31.2	33500	27.7
23000	30.1	34000	27.2
24000	30.3	34500	28.2
25000	29.8	35000	27.3
26000	30.5	35500	27.2
26500	30.7	36000	27.2
27000	30.8	36500	27.5
27500	30.2	37000	27.0
28000	30.1	37500	26.7
28500	30.2	38000	26.2
29000	30.1	38500	26.5
29500	29.8	39000	26.3
30000	29.2	39500	26.9
30500	28.4	40000	27.6
31000	29.8		

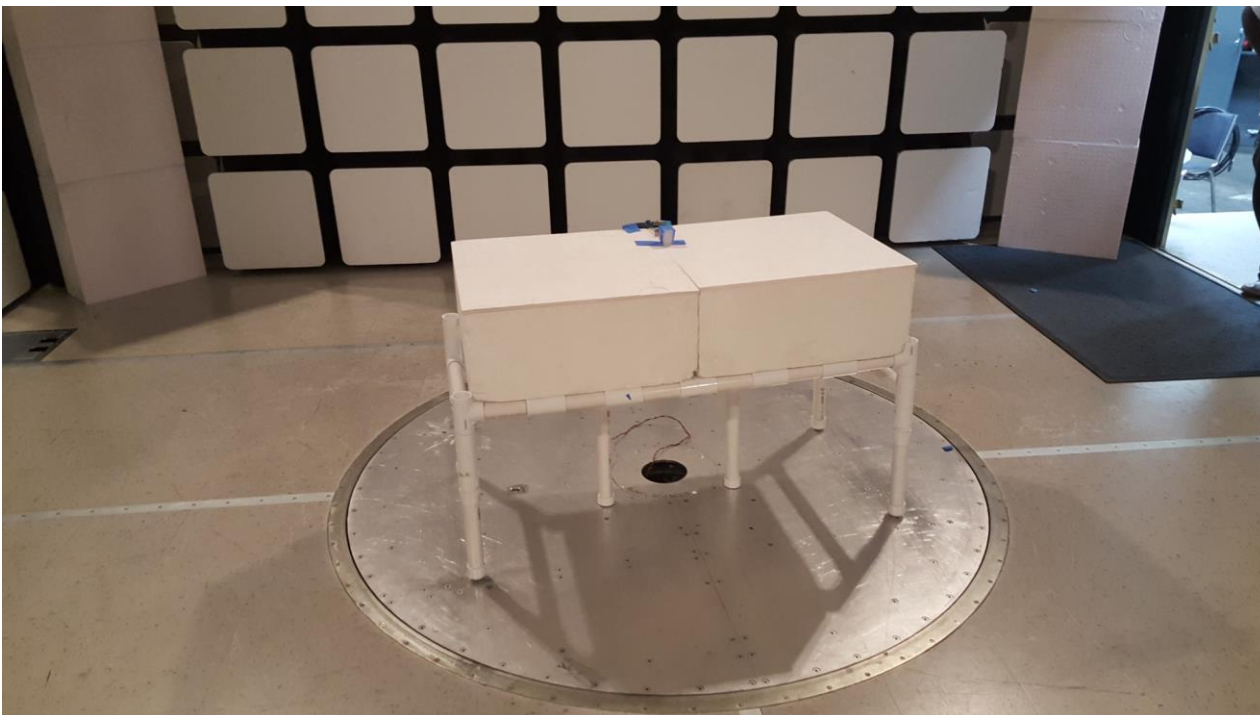

**FRONT VIEW**

ATMEL CORPORATION
MODULAR TRANSMITTER
Model: ATWILC1000-MR110UB
FCC SUBPART C - RADIATED EMISSIONS < 1GHz


**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

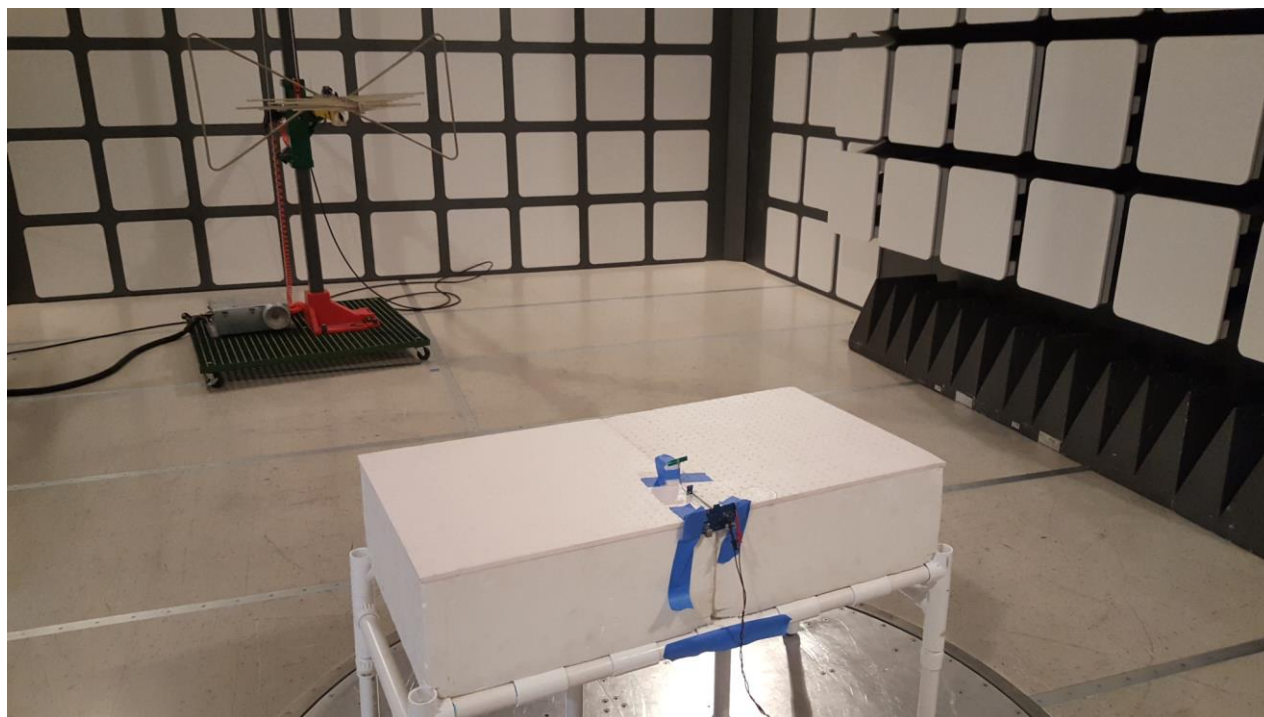**REAR VIEW**

ATMEL CORPORATION
MODULAR TRANSMITTER
Model: ATWILC1000-MR110UB
FCC SUBPART C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

**FRONT VIEW**

ATMEL CORPORATION
MODULAR TRANSMITTER
Model: ATWILC1000-MR110UB
FCC SUBPART C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600


Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

**REAR VIEW**

ATMEL CORPORATION
MODULAR TRANSMITTER
Model: ATWILC1000-MR110UB
FCC SUBPART C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

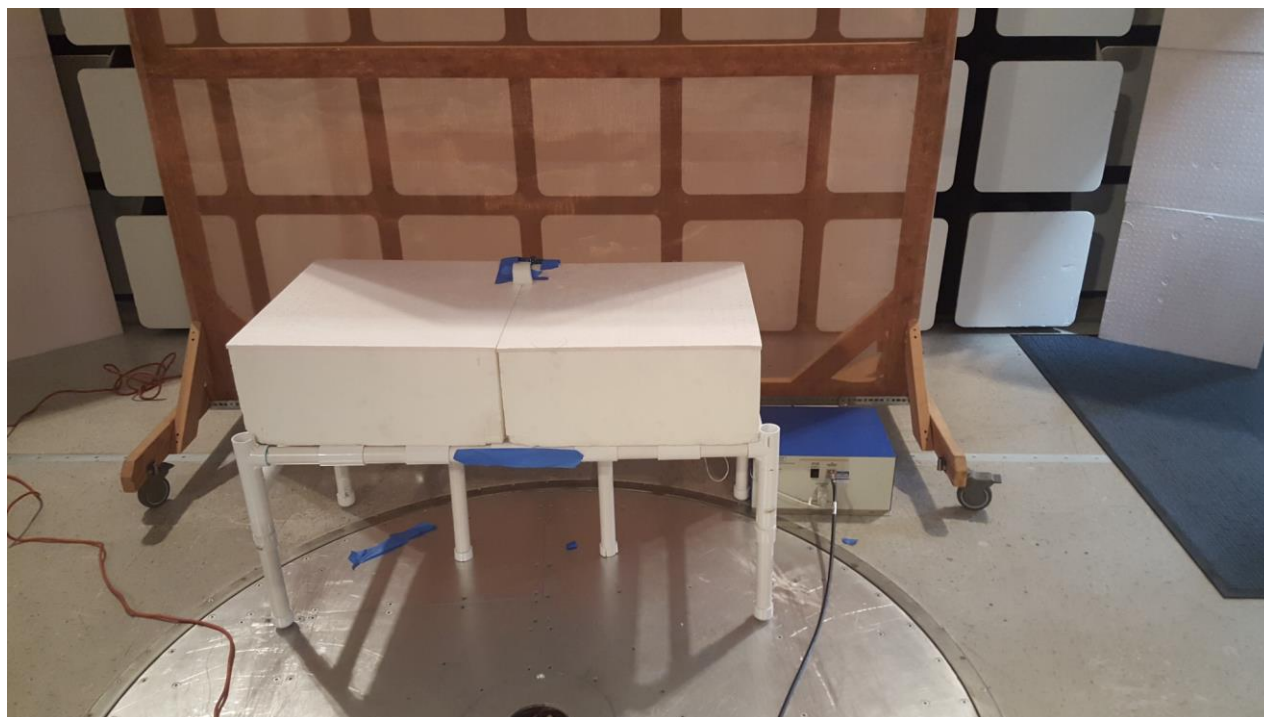**FRONT VIEW**

ATMEL CORPORATION
MODULAR TRANSMITTER
Model: ATWILC1000-MR110UB
FCC SUBPART C - CONDUCTED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

**REAR VIEW**

ATMEL CORPORATION
MODULAR TRANSMITTER
Model: ATWILC1000-MR110UB
FCC SUBPART C - CONDUCTED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX E***RADIATED EMISSIONS DATA SHEETS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700


Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.209 & 15.109
File: Radiated Pre-Scan 30-1000Mhz.set
Operator: Torey Oliver
EUT Type: Modular Transmitter / ATWILC1000-MR110UB
EUT Condition: The EUT is constantly transmitting.
Comments: Y Axis G mode 2437 MHz
Temp: 73f
Hum: 53%
5VDC

10/21/2015 12:02:27 PM
Sequence: Preliminary Scan

Compatible Electronics, Inc. FAC-3 (Lab R)

Electric Field Strength (dB μ V/m)

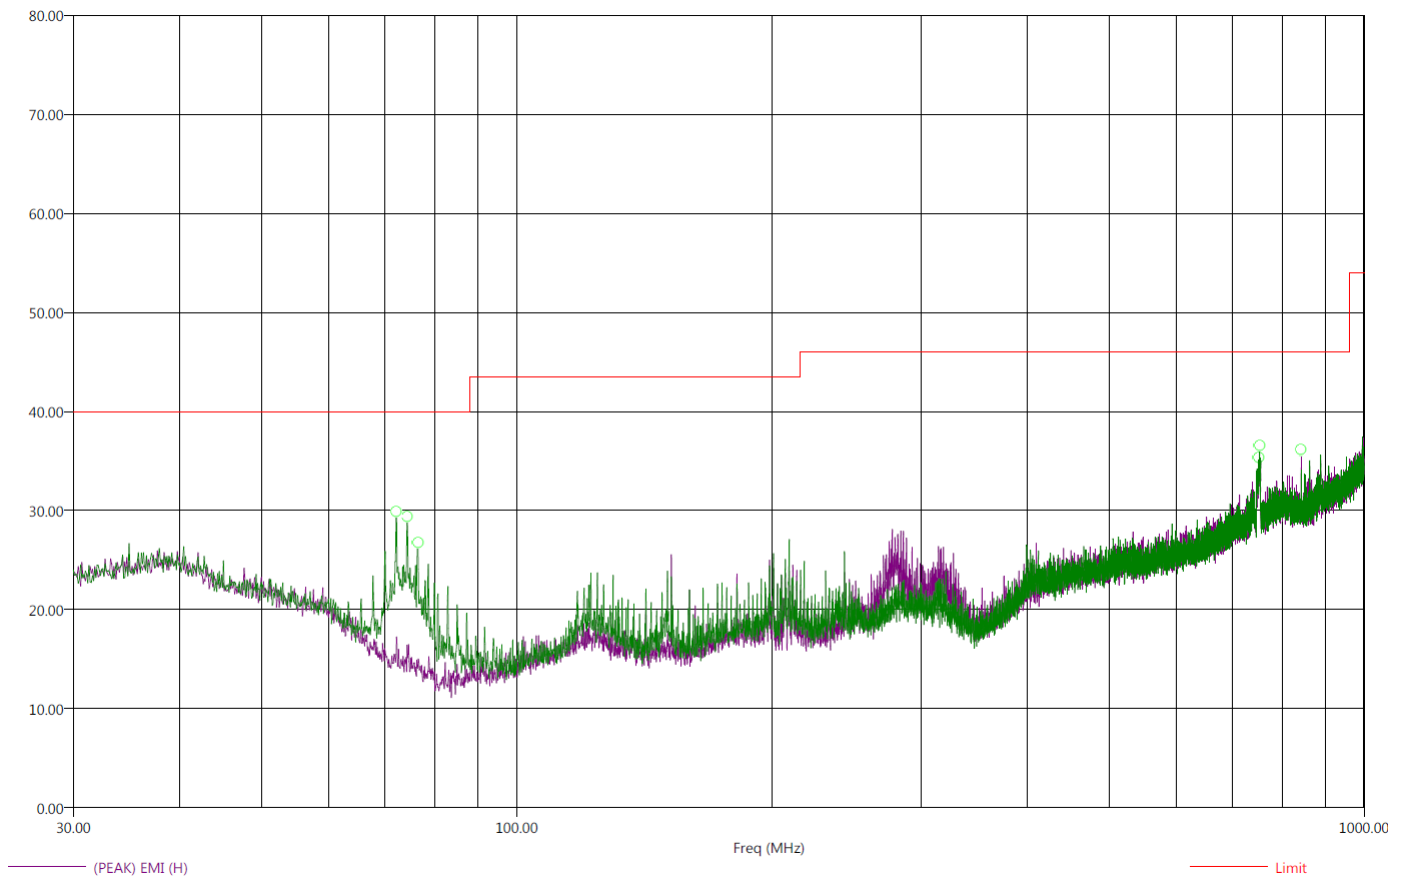

This was worst case for all modes and channels

There were no radiated emissions besides harmonics found between 9kHz-30 MHz or 1GHz-25GHz.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.209 & 15.109
File: Radiated Final 30-1000Mhz.set
Operator: Torey Oliver
EUT Type: Modular Transmitter / ATWILC1000-MR110UB
EUT Condition: The EUT is constantly transmitting.
Comments: Y Axis G mode 2437 MHz
Temp: 73f
Hum: 53%
5VDC

10/21/2015 1:47:52 PM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dB μ V/m)	(PEAK) EMI (dB μ V/m)	Limit (dB μ V/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)	Transducer(dB)	Cable(dB)
72.10	-12.34	27.66	31.42	40.00	V	171.50	135.32	12.85	0.63
74.30	-11.45	28.55	31.20	40.00	V	240.25	135.02	12.50	0.57
76.50	-15.34	24.66	28.34	40.00	V	360.00	113.17	12.15	0.50
750.70	-19.35	26.65	32.11	46.00	H	267.50	400.16	24.92	3.00
752.80	-19.23	26.77	32.46	46.00	V	25.50	399.74	24.97	3.02
842.80	-4.48	41.52	43.54	46.00	H	222.50	99.20	26.00	2.61

*This was worst case for all modes and channels
There were no radiated emissions besides harmonics found between 9kHz-30 MHz or 1GHz-25GHz.*



APPENDIX E***CONDUCTED EMISSIONS DATA SHEETS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207 & 15.107
File: Conducted Pre-Line.set
Operator: Torey Oliver
EUT Type: Modular Transmitter / ATWILC1000-MR110UB
EUT Condition: The EUT is constantly transmitting.
Comments: Y Axis G mode 2437 MHz
Temp: 73f
Hum: 53%
Host at 120V 60Hz

10/21/2015 11:11:43 AM
Sequence: Preliminary Scan

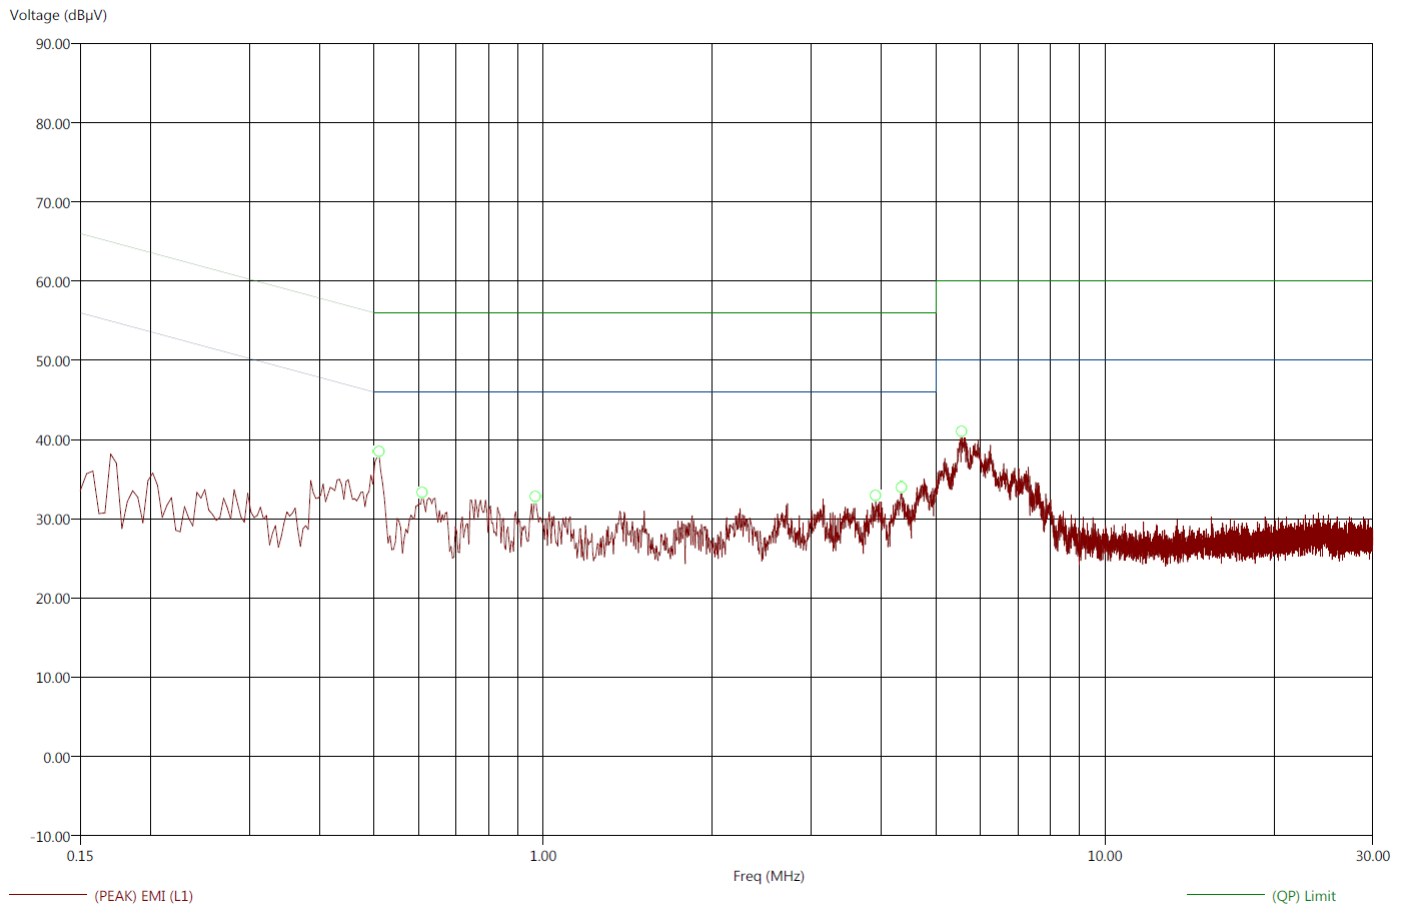Compatible Electronics, Inc. FAC-3 (LAB R)

This was worst case for all modes and channels



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207 & 15.107
File: Conducted Final-Line.set
Operator: Torey Oliver
EUT Type: Modular Transmitter / ATWILC1000-MR110UB
EUT Condition: The EUT is constantly transmitting.
Comments: Y Axis G mode 2437 MHz
Temp: 73f
Hum: 53%
Host at 120V 60Hz

10/21/2015 11:30:35 AM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (LAB R)


Freq (MHz)	(AVG) Margin AVL (dB)	(QP) Margin QPL (dB)	(AVG) EMI (dBμV)	(QP) EMI (dBμV)	(PEAK) EMI (dBμV)	(AVG) Limit (dBμV)	(QP) Limit (dBμV)	Transducer (dB)	Cable (dB)
0.51	-17.93	-21.01	28.07	34.99	38.91	46.00	56.00	0.02	0.00
0.61	-25.43	-29.26	20.57	26.74	30.44	46.00	56.00	0.03	0.00
0.97	-25.95	-28.86	20.05	27.14	31.07	46.00	56.00	0.03	0.00
3.91	-27.28	-31.07	18.72	24.93	29.19	46.00	56.00	0.03	0.23
4.35	-25.48	-29.00	20.52	27.00	31.21	46.00	56.00	0.03	0.22
5.56	-23.34	-24.30	26.66	35.70	40.16	50.00	60.00	0.03	0.28

This was worst case for all modes and channels



Title: FCC 15.207 & 15.107
File: Conducted Pre-Neutral.set
Operator: Torey Oliver
EUT Type: Modular Transmitter / ATWINC1000-MR210UB
EUT Condition: The EUT is constantly transmitting.
Comments: Y Axis G Mode 2437 MHz
Temp: 73f
Hum: 53%
Host at 120V 60Hz

10/21/2015 11:04:09 AM
Sequence: Preliminary Scan

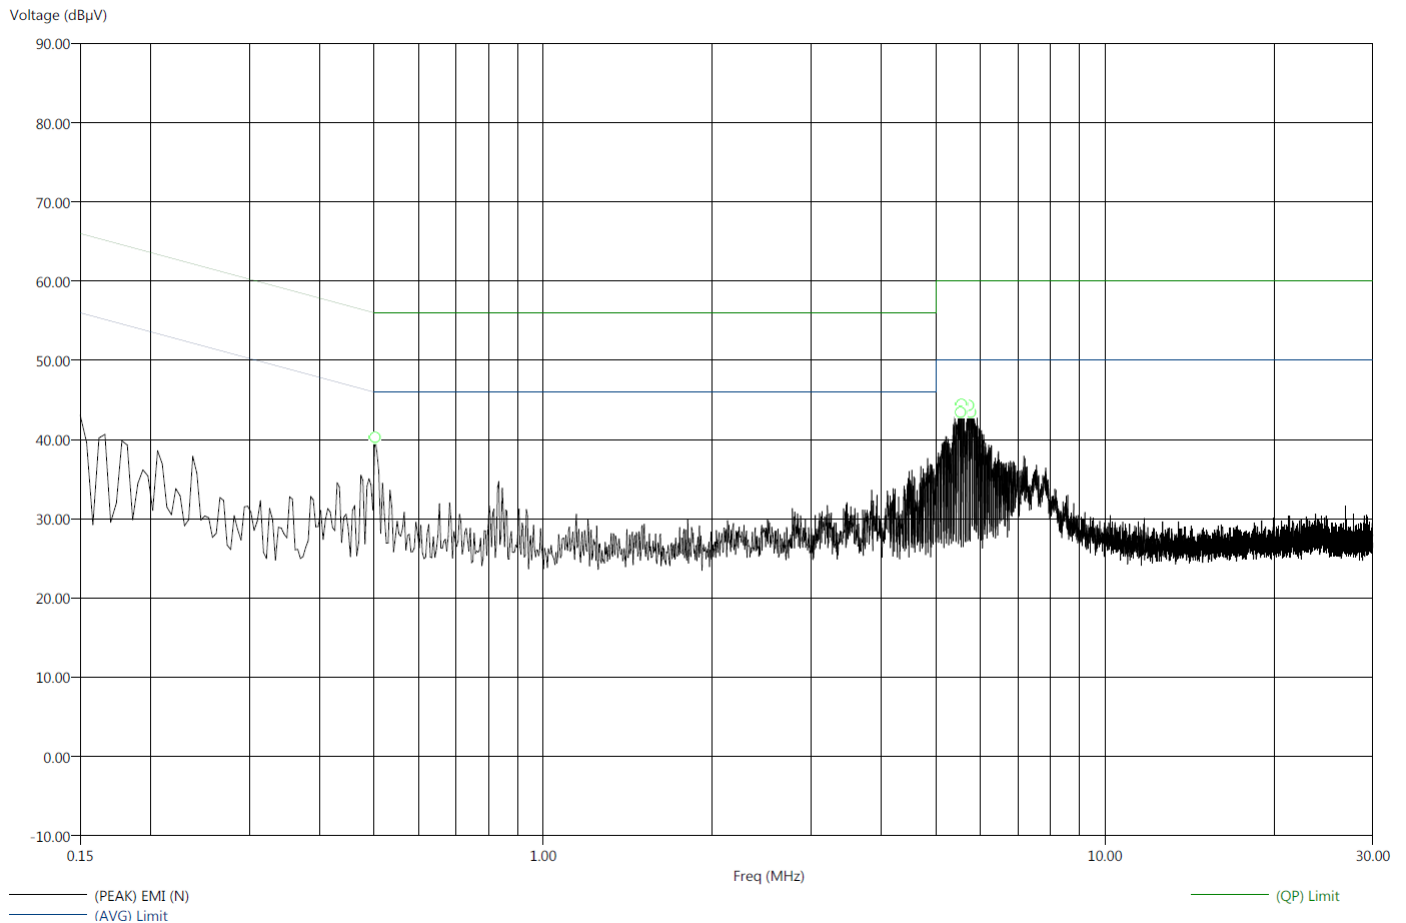Compatible Electronics, Inc. FAC-3 (LAB R)

This was worst case for all modes and channels



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207 & 15.107
File: Conducted Final-Neutral.set
Operator: Torey Oliver
EUT Type: Modular Transmitter / ATWILC1000-MR110UB
EUT Condition: The EUT is constantly transmitting.
Comments: Y Axis G Mode 2437 MHz
Temp: 73f
Hum: 53%
Host at 120V 60Hz

10/21/2015 11:07:28 AM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (LAB R)

Freq (MHz)	(AVG) Margin AVL (dB)	(QP) Margin QPL (dB)	(AVG) EMI (dBμV)	(QP) EMI (dBμV)	(PEAK) EMI (dBμV)	(AVG) Limit (dBμV)	(QP) Limit (dBμV)	Transducer (dB)	Cable (dB)
0.50	-24.18	-20.85	21.82	35.15	39.89	46.00	56.00	0.03	0.00
5.55	-29.31	-21.00	20.69	39.00	44.19	50.00	60.00	0.04	0.27
5.55	-29.07	-20.78	20.93	39.22	44.45	50.00	60.00	0.04	0.28
5.57	-29.37	-21.03	20.63	38.97	44.46	50.00	60.00	0.04	0.28
5.72	-29.46	-20.24	20.54	39.76	45.36	50.00	60.00	0.03	0.30
5.76	-28.68	-20.47	21.32	39.53	43.84	50.00	60.00	0.03	0.30

This was worst case for all modes and channels





DTS BANDWIDTH



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

802.11b MODE

DTS BANDWIDTH

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11b

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)


DTS Bandwidth

Freq. (MHz)	Measured BW (kHz)	Limit Min (kHz)	Margin (kHz)	Peak / QP / Avg	Comments
2412	11242.48	500.00	10742.48	Peak	
2437	11242.48	500.00	10742.48	Peak	
2462	11242.48	500.00	10742.48	Peak	





Marker 1 [T2 ndB] RBW 100 kHz RF Att 40 dB
Ref Lvl ndB 6.00 dB VBW 300 kHz
131 dBμV BW 11.24248497 MHz SWT 7.5 ms Unit dBμV

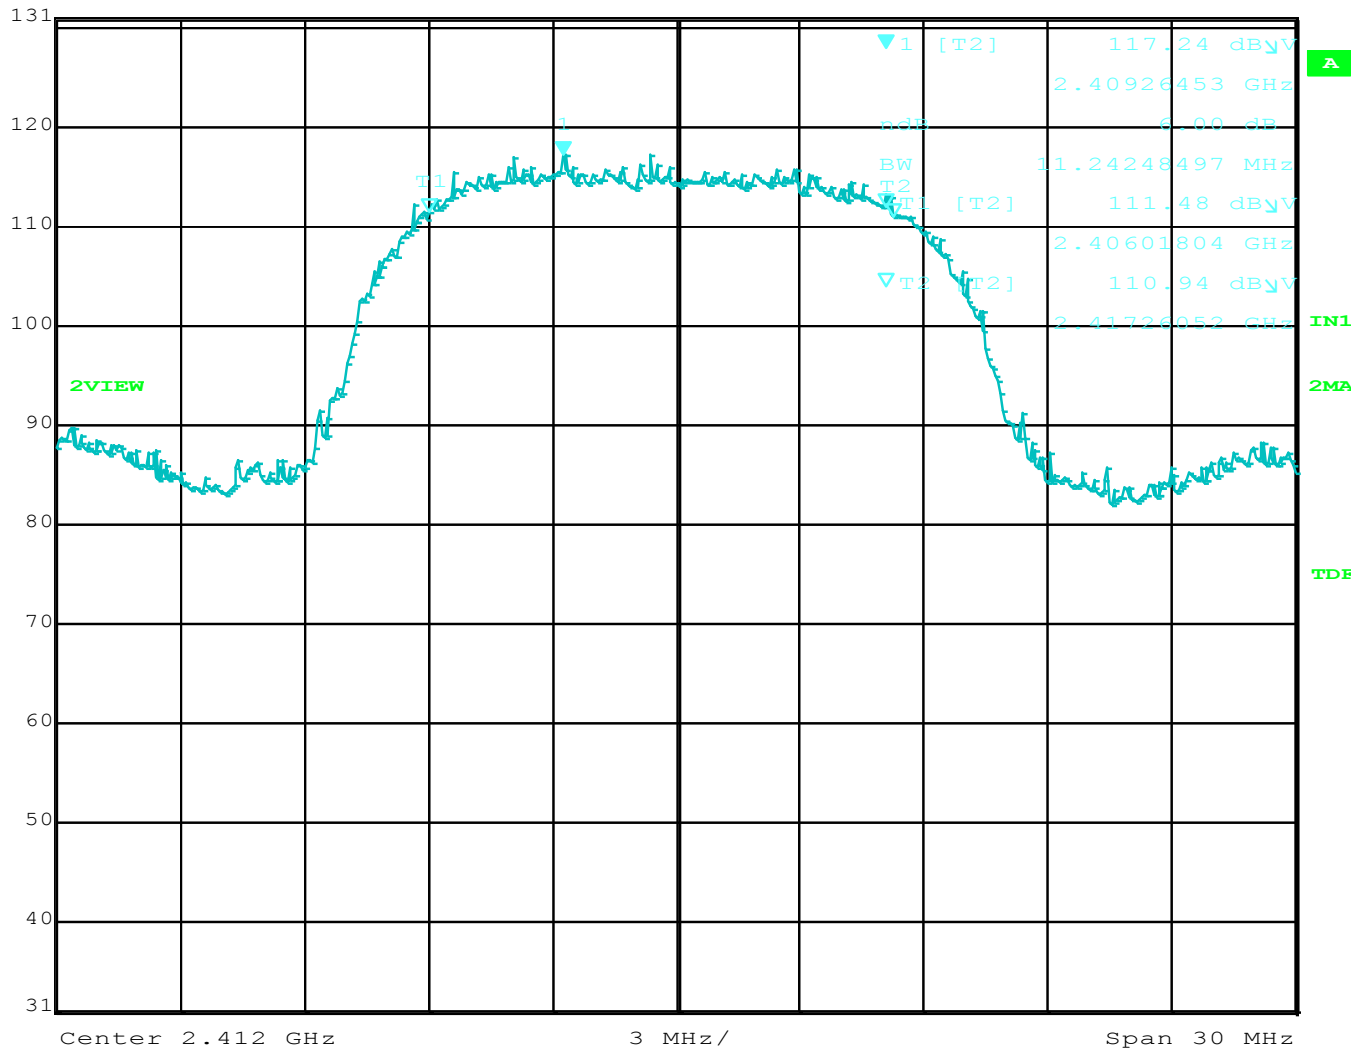

Comment A: DTS Bandwidth 2412 MHz B Mode

Date: 23.OCT.2015 14:34:26



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500



Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400




FCC Part 15 Subpart B & C Section 15.247 & RSS 247 Test Report



Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



Marker 1 [T2 ndB] RBW 100 kHz RF Att 40 dB
Ref Lvl ndB 6.00 dB VBW 300 kHz
131 dBμV BW 11.24248497 MHz SWT 7.5 ms Unit dBμV

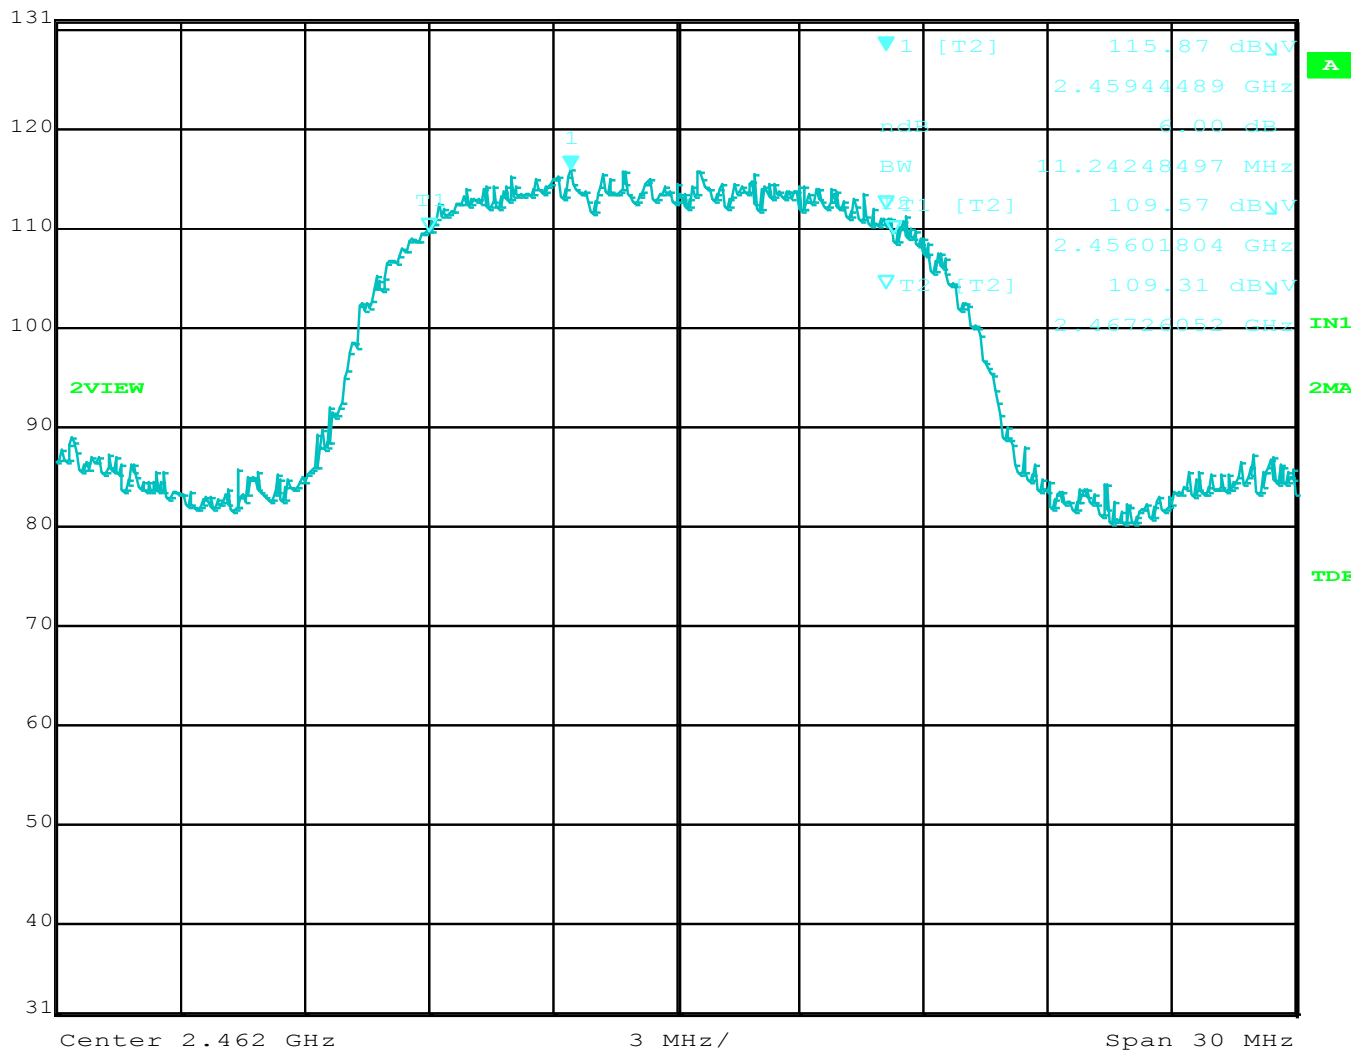

Comment A: DTS Bandwidth 2462 MHz B Mode
Date: 23.OCT.2015 14:36:32



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

802.11g MODE

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11g

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

DTS Bandwidth

Freq. (MHz)	Measured BW (kHz)	Limit Min (kHz)	Margin (kHz)	Peak / QP / Avg	Comments
2412	16412.83	500.00	15912.83	Peak	
2437	16412.83	500.00	15912.83	Peak	
2462	16412.83	500.00	15912.83	Peak	



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



FCC Part 15 Subpart B & C Section 15.247 & RSS 247 Test Report




Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



Delta 1 [T2] RBW 100 kHz RF Att 30 dB
Ref Lvl 1.13 dB VBW 300 kHz
127 dBμV 16.41282565 MHz SWT 7.5 ms Unit dBμV

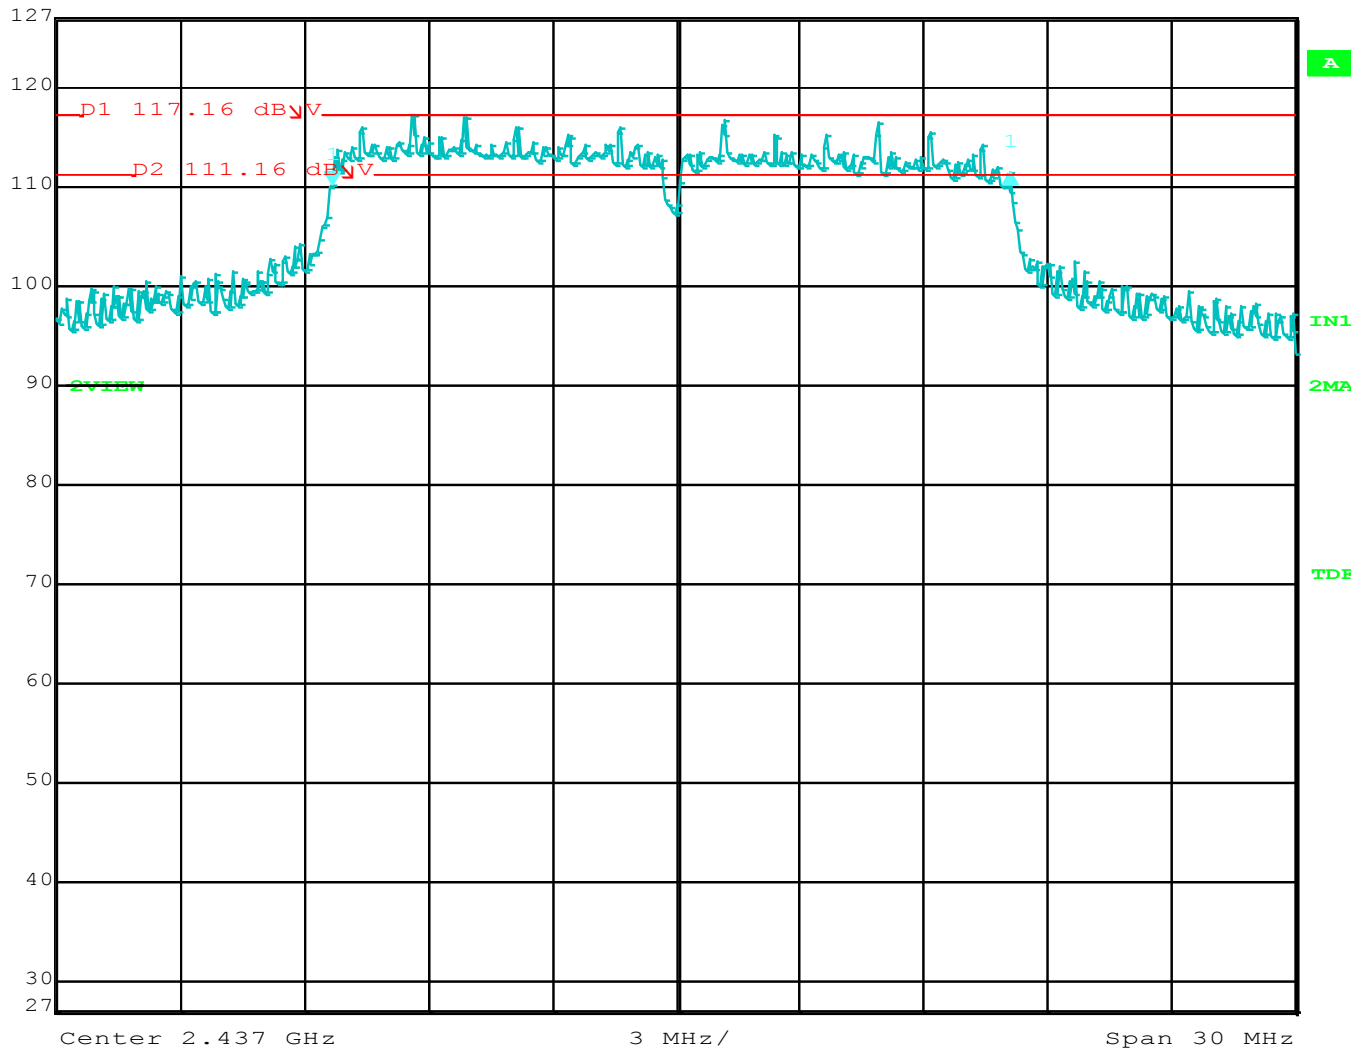

Comment A: DTS Bandwidth 2437 MHz G Mode

Date: 23.OCT.2015 09:18:25



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



Delta 1 [T2] RBW 100 kHz RF Att 30 dB
Ref Lvl 0.64 dB VBW 300 kHz
127 dBμV 16.41282565 MHz SWT 7.5 ms Unit dBμV

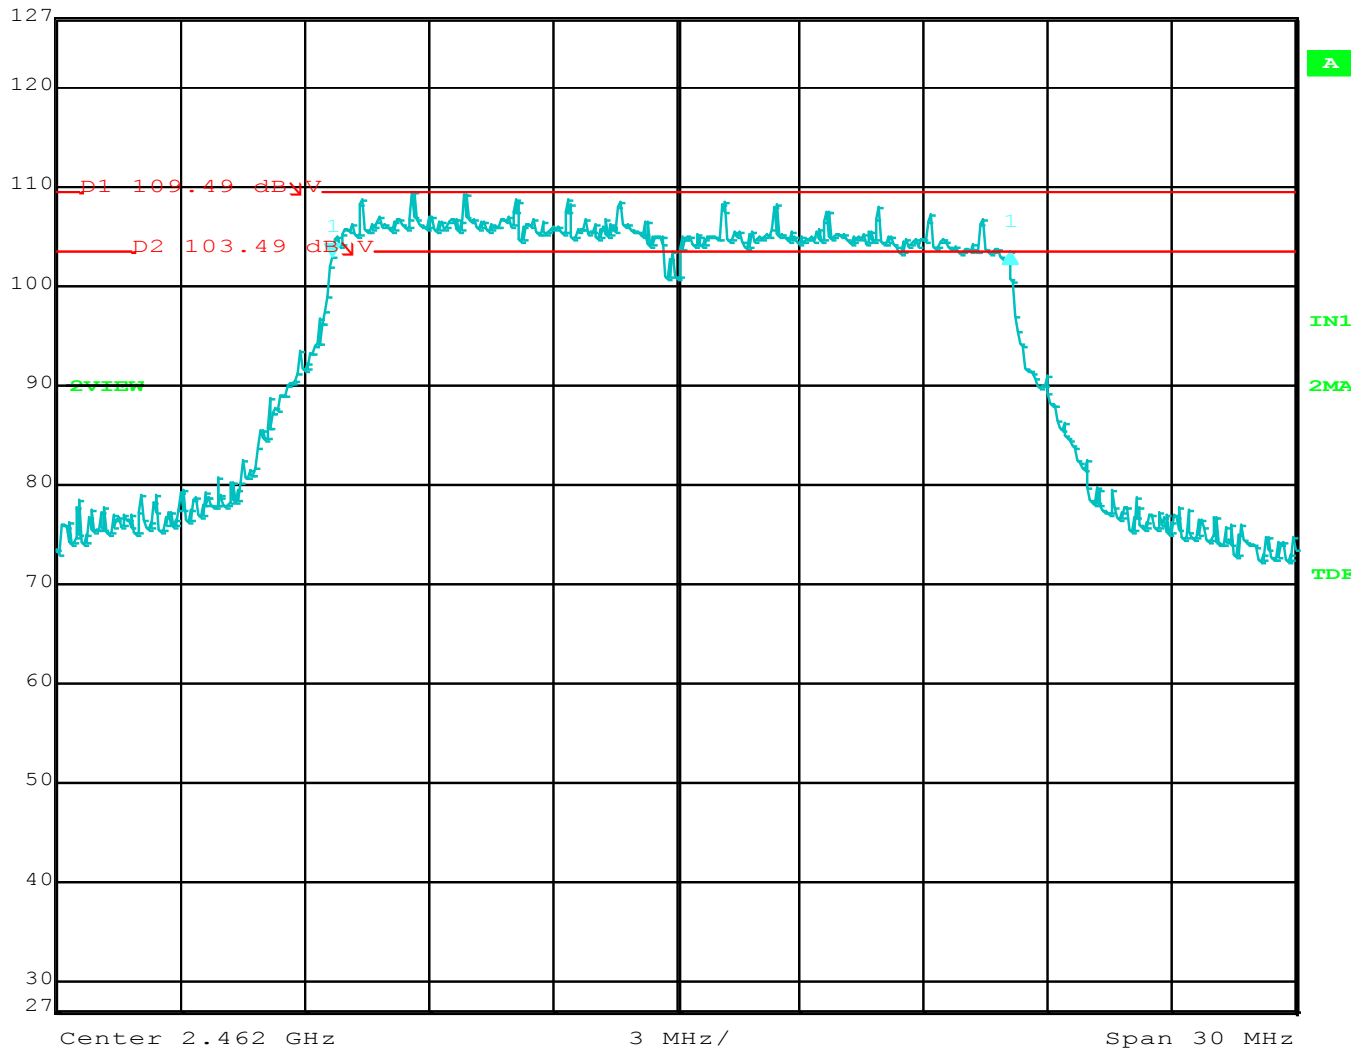

Comment A: DTS Bandwidth 2462 MHz G Mode

Date: 23.OCT.2015 09:23:25



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

802.11n MODE

FCC 15.247

Company

: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11n

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

DTS Bandwidth

Freq. (MHz)	Measured BW (kHz)	Limit (kHz)	Margin (kHz)	Peak / QP / Avg	Comments
2412	17474.95	500.00	16974.95	Peak	
2437	17565.13	500.00	17065.13	Peak	
2462	17474.95	500.00	16974.95	Peak	



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



Delta 1 [T2] RBW 100 kHz RF Att 30 dB
Ref Lvl -1.32 dB VBW 300 kHz
127 dBμV 17.47494990 MHz SWT 10 ms Unit dBμV

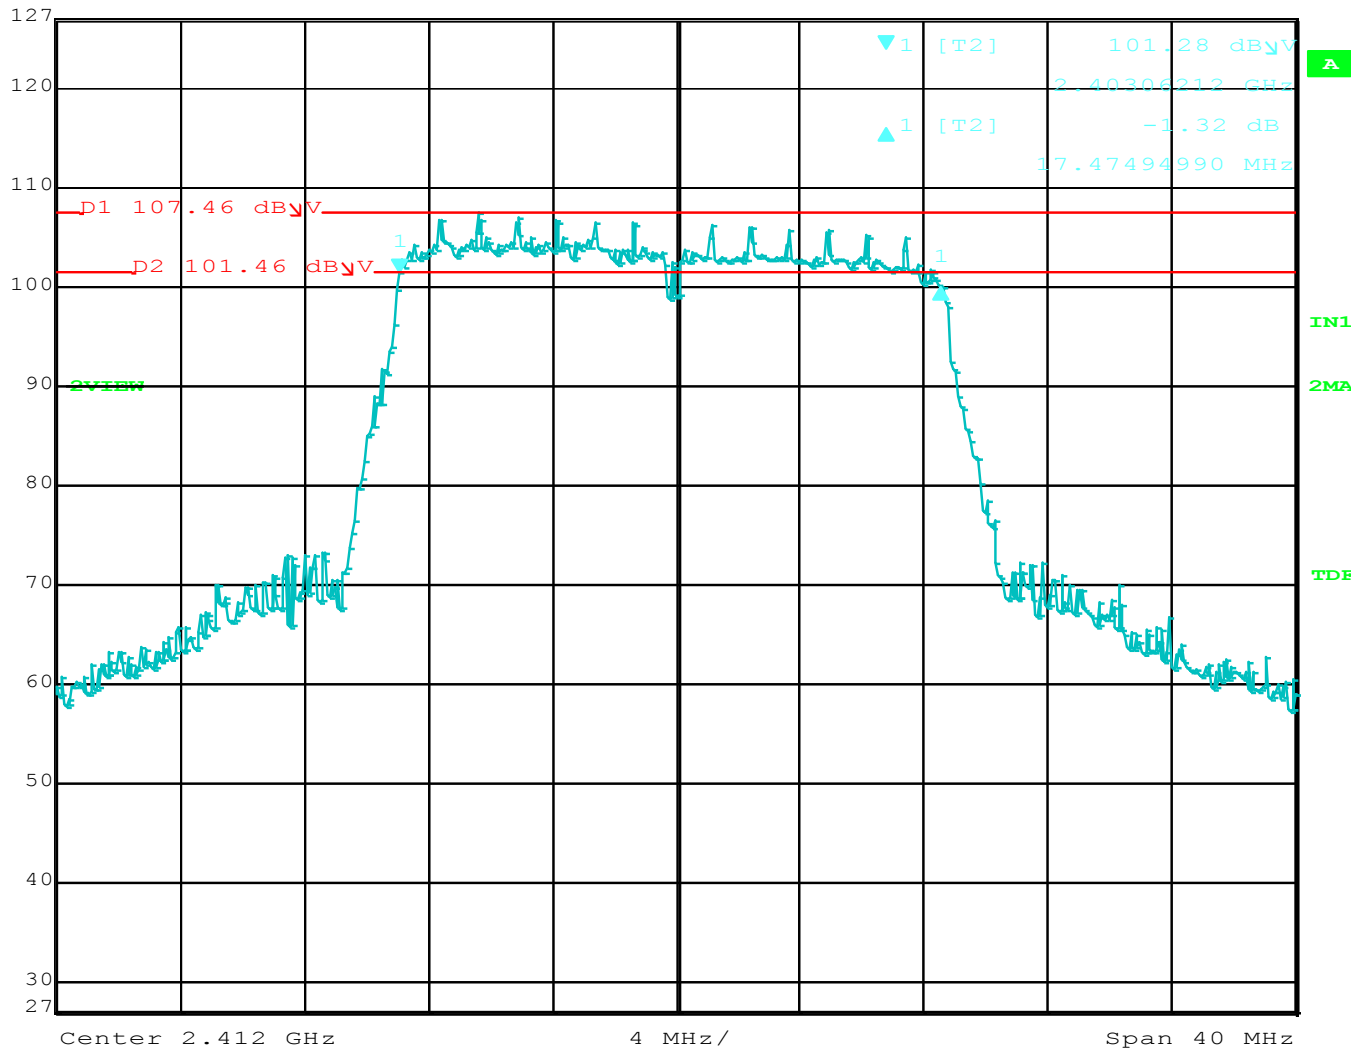

Comment A: DTS Bandwidth 2412 MHz N Mode
Date: 23.OCT.2015 13:58:09



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



Delta 1 [T2] RBW 100 kHz RF Att 30 dB
Ref Lvl 0.28 dB VBW 300 kHz
127 dBμV 17.56513026 MHz SWT 10 ms Unit dBμV

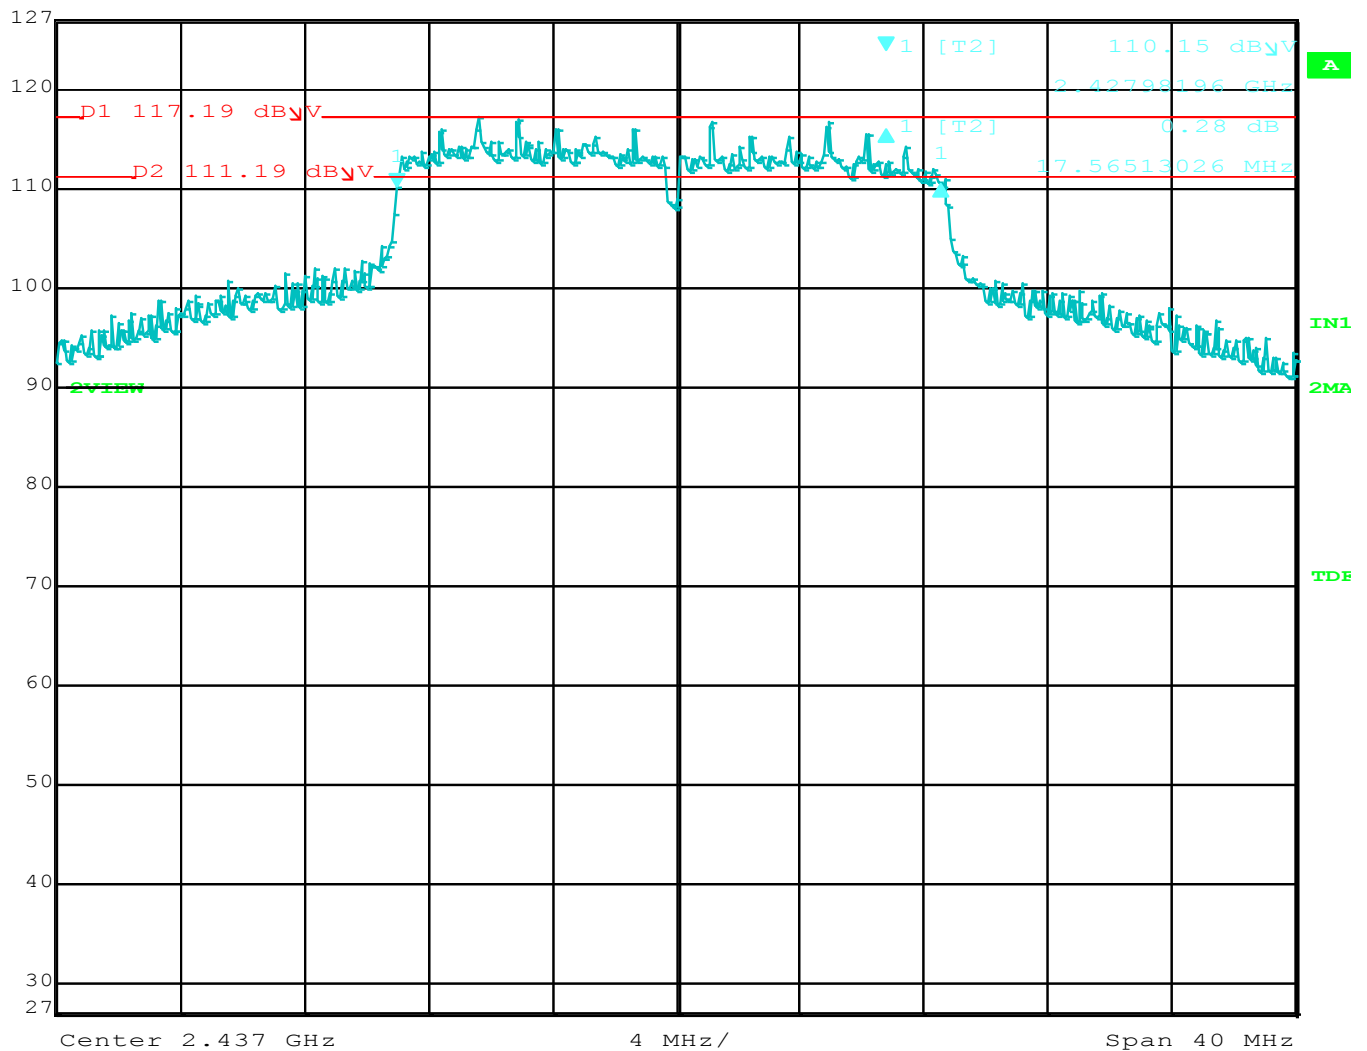

Comment A: DTS Bandwidth 2437 MHz N Mode
Date: 23.OCT.2015 14:02:30



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



Delta 1 [T2] RBW 100 kHz RF Att 30 dB
Ref Lvl 2.18 dB VBW 300 kHz
127 dBμV 17.47494990 MHz SWT 10 ms Unit dBμV

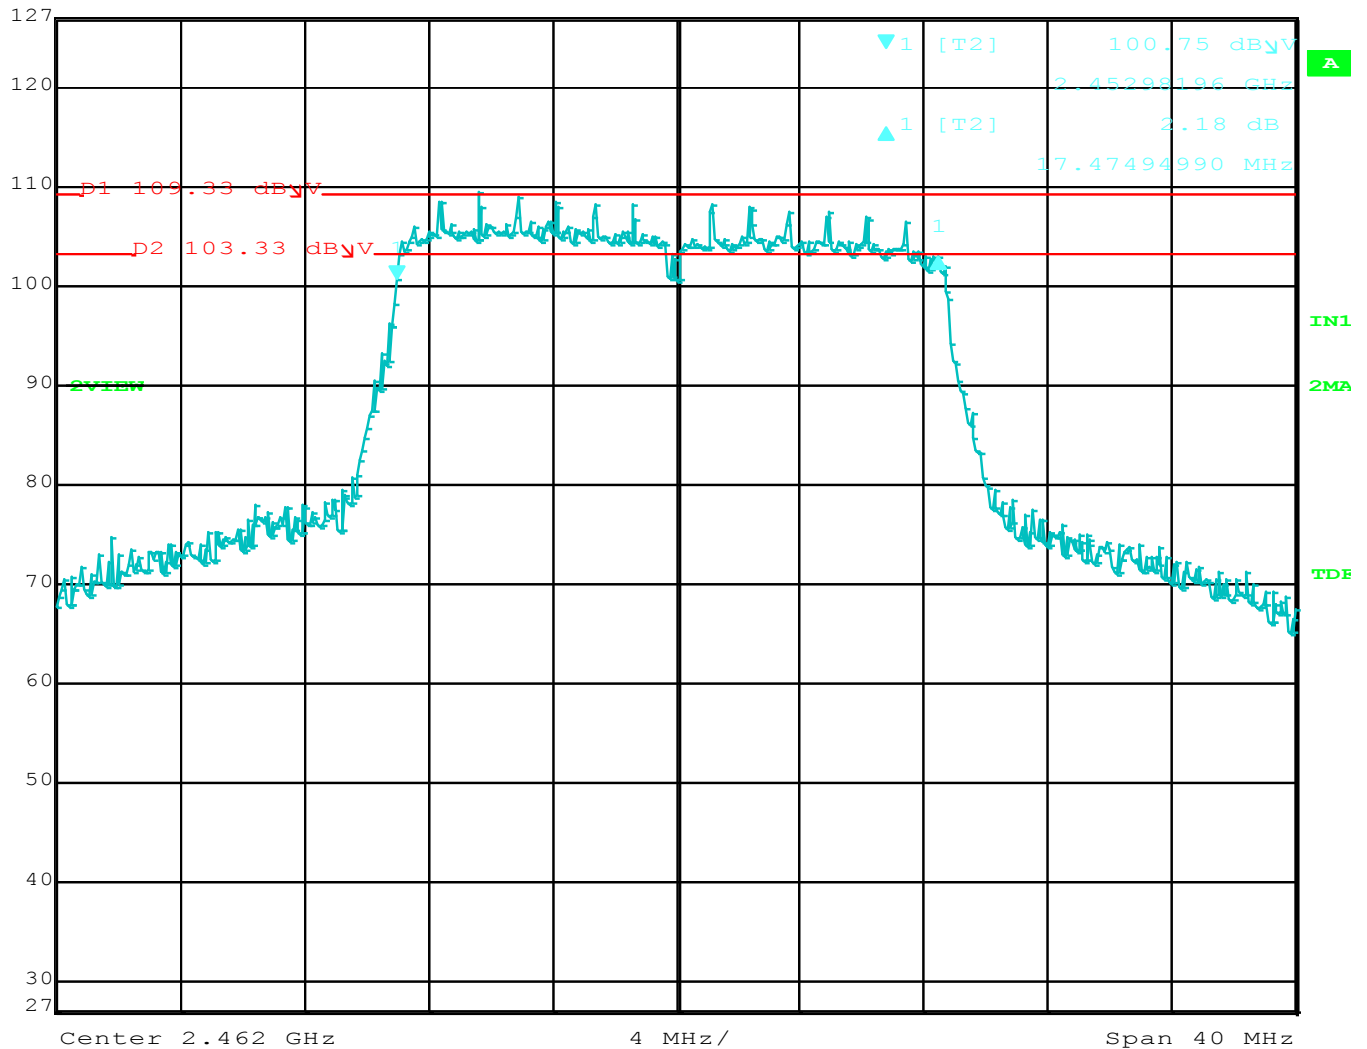

Comment A: DTS Bandwidth 2462 MHz N Mode

Date: 23.OCT.2015 14:04:29



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



MAXIMUM PEAK CONDUCTED OUTPUT POWER

DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

MAXIMUM PEAK CONDUCTED OUTPUT POWER

802.11b Mode

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11b

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
2412	21.58	30.00	-8.42	Peak	
2437	21.59	30.00	-8.41	Peak	
2462	21.64	30.00	-8.36	Peak	



MAXIMUM PEAK CONDUCTED OUTPUT POWER**802.11g Mode****FCC 15.247**

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11g

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
2412	20.78	30.00	-9.22	Peak	
2437	23.16	30.00	-6.84	Peak	
2462	21.31	30.00	-8.69	Peak	



MAXIMUM PEAK CONDUCTED OUTPUT POWER**802.11n Mode****FCC 15.247**

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11n

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
2412	20.34	30.00	-9.66	Peak	
2437	23.14	30.00	-6.86	Peak	
2462	21.30	30.00	-8.70	Peak	



MAXIMUM PEAK POWER SPECTRAL DENSITY LEVEL IN THE FUNDAMENTAL EMISSION

DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

PEAK POWER SPECTRAL DENSITY

802.11b Mode

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11b

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)


DTS Bandwidth

Freq. (MHz)	Peak (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
2412	7.55	8.00	-0.45	Peak	
2437	6.98	8.00	-1.02	Peak	
2462	7.42	8.00	-0.58	Peak	





Marker 1 [T2] RBW 50 kHz RF Att 40 dB
Ref Lvl 7.55 dBm VBW 200 kHz
24 dBm 2.40897534 GHz SWT 17 ms Unit dBm

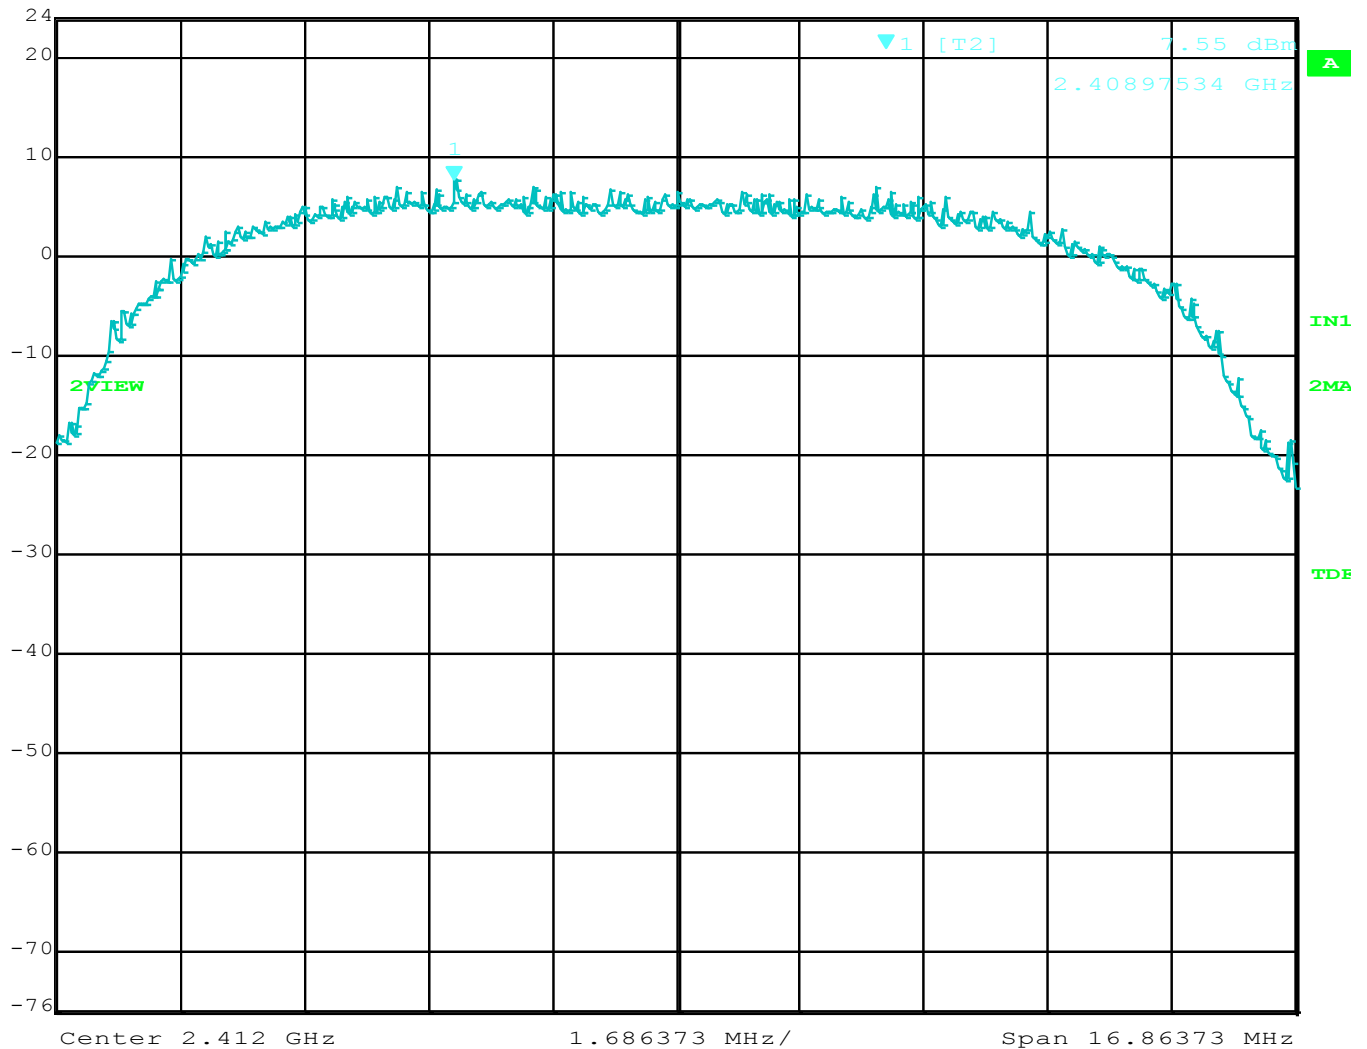

Comment A: Power Spectral Density 2412 MHz B Mode

Date: 23.OCT.2015 14:40:39



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



Marker 1 [T2] RBW 50 kHz RF Att 40 dB
Ref Lvl 6.98 dBm VBW 200 kHz
24 dBm 2.43732105 GHz SWT 17 ms Unit dBm

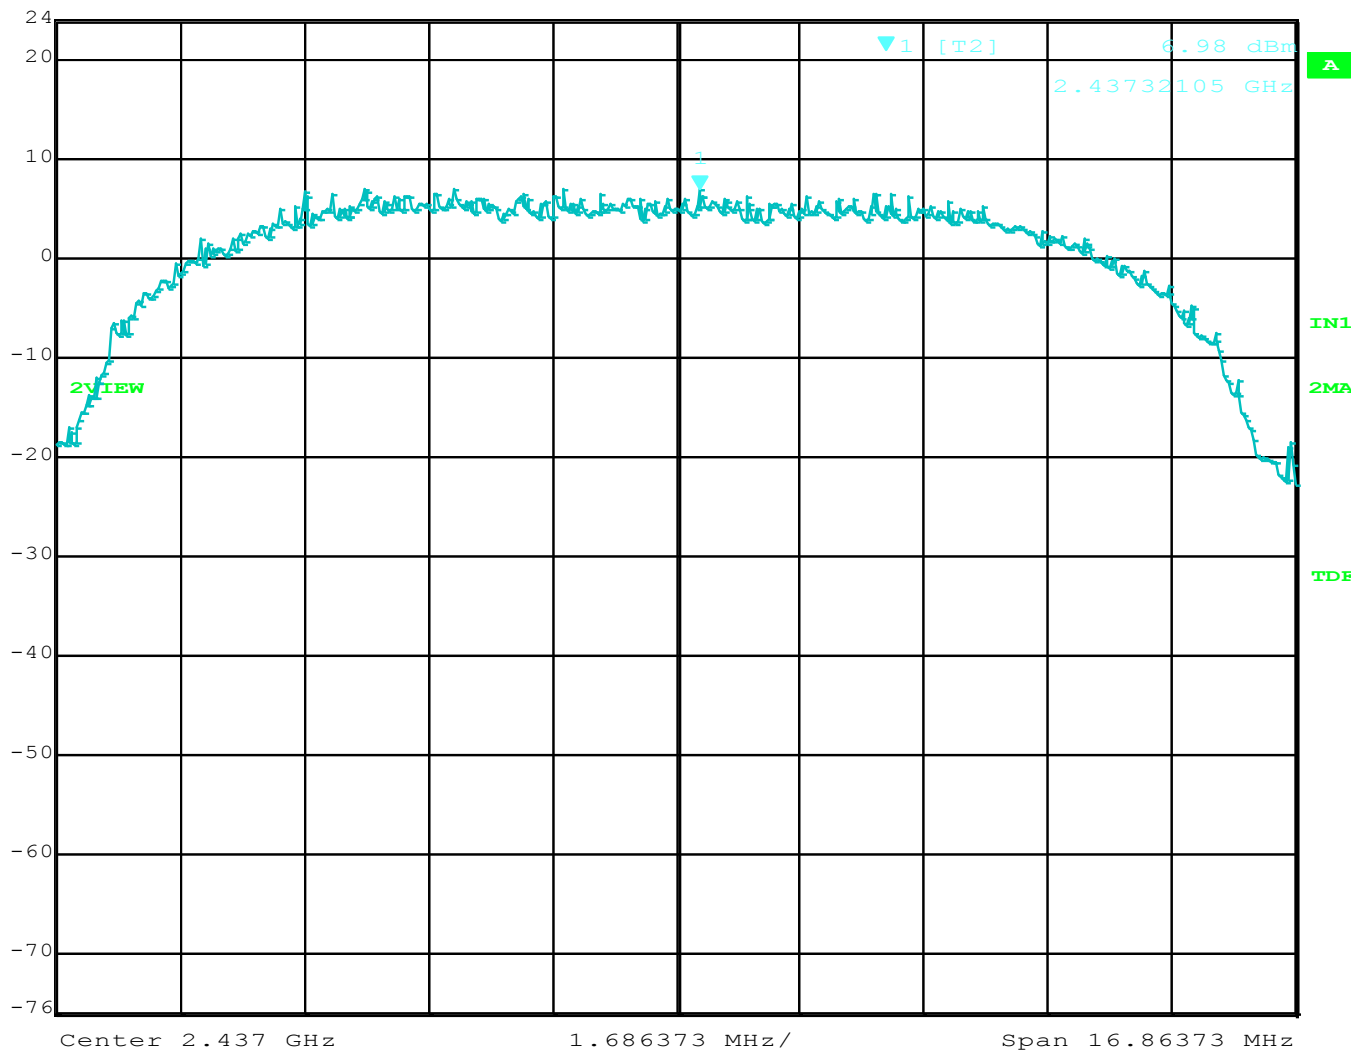

Comment A: Power Spectral Density 2437 MHz B Mode

Date: 23.OCT.2015 14:39:58



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



Marker 1 [T2] RBW 50 kHz RF Att 40 dB
Ref Lvl 7.42 dBm VBW 200 kHz
24 dBm 2.46198310 GHz SWT 17 ms Unit dBm

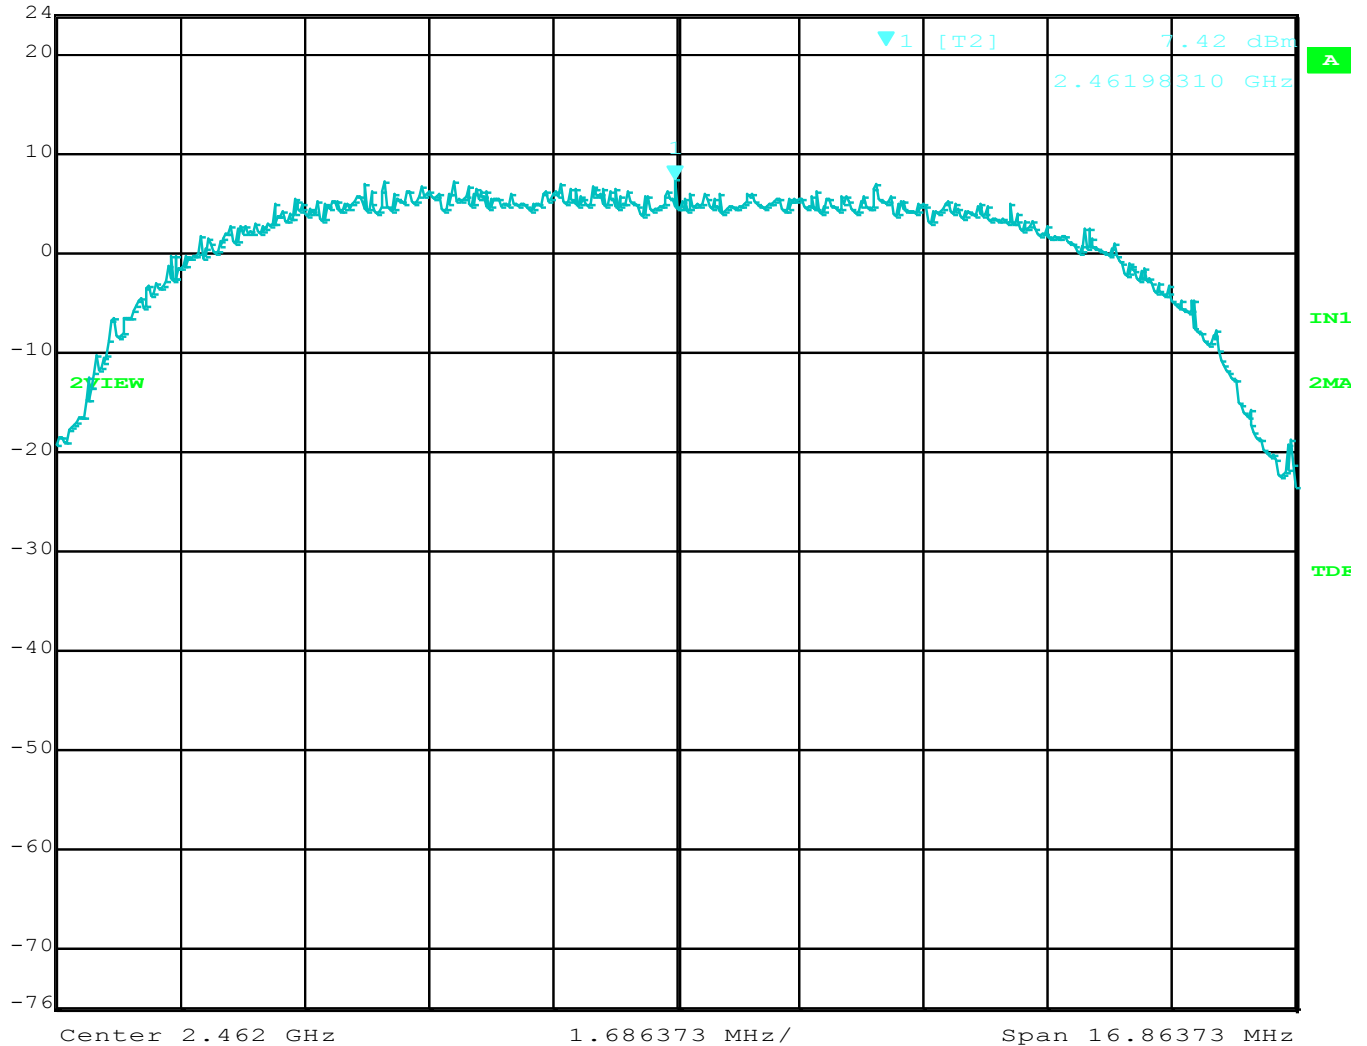

Comment A: Power Spectral Density 2462 MHz B Mode
Date: 23.OCT.2015 14:39:01



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

PEAK POWER SPECTRAL DENSITY

802.11g Mode

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11g

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)


DTS Bandwidth

Freq. (MHz)	Peak (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
2412	1.47	8.00	-6.53	Peak	
2442	4.85	8.00	-3.15	Peak	
2462	2.51	8.00	-5.49	Peak	





Ref Lvl	Marker 1 [T2]	RBW	100 kHz	RF Att	40 dB
24.9 dBm	1.47 dBm	VBW	300 kHz		
	2.40561084 GHz	SWT	6.5 ms	Unit	dBm

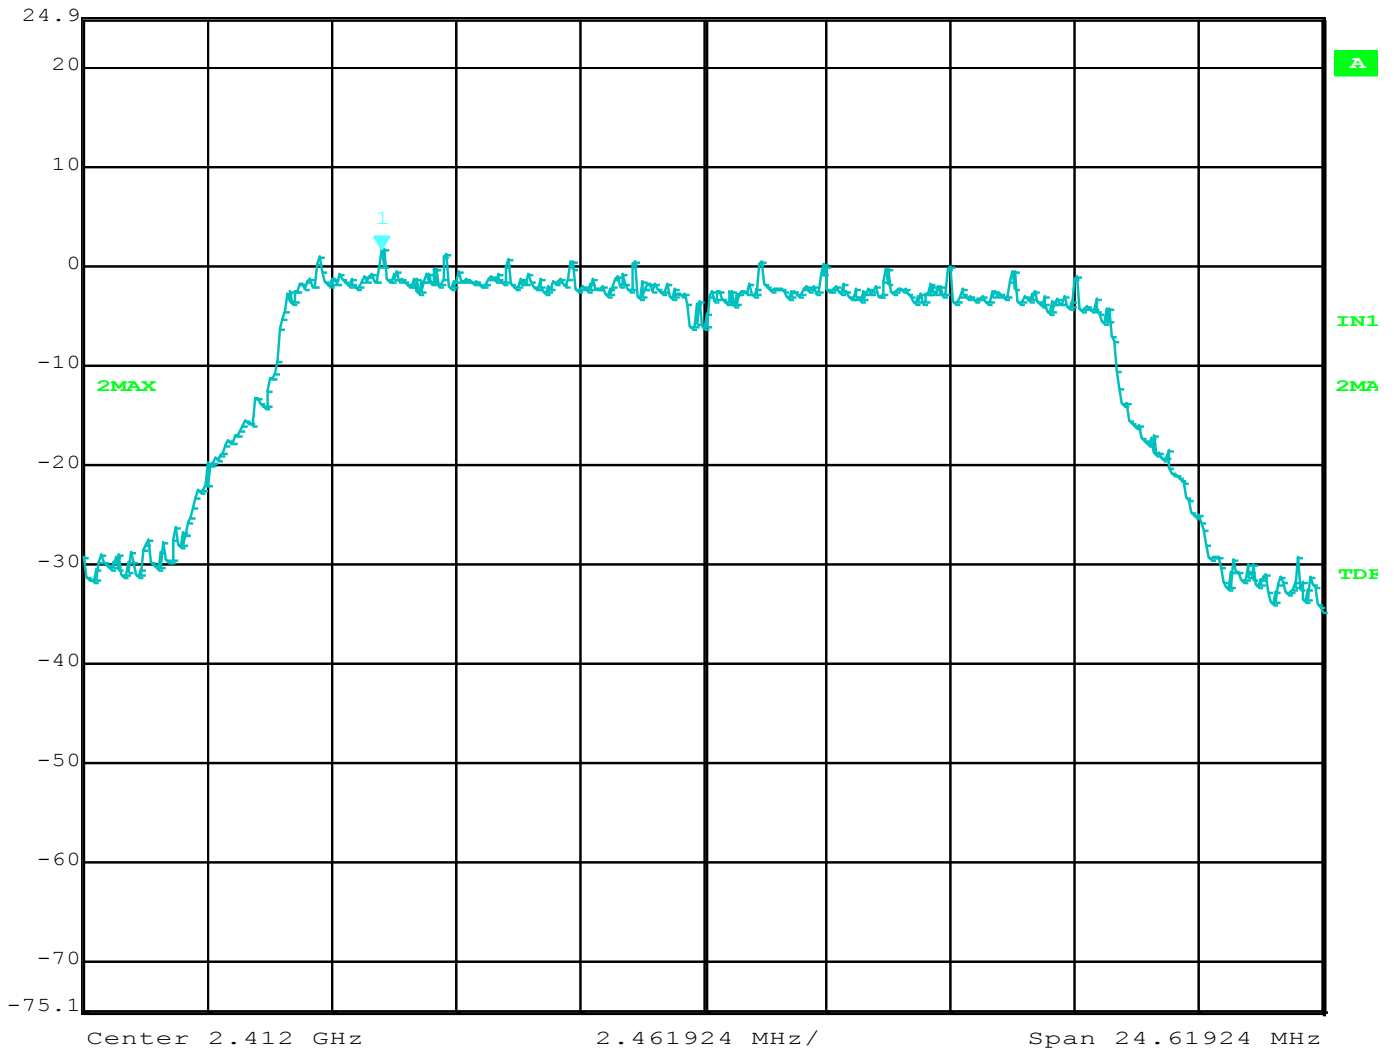

Comment A: Power Spectral Density 2412 MHz G Mode
Date: 23.OCT.2015 10:31:14



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



Marker 1 [T2] RBW 30 kHz RF Att 40 dB
Ref Lvl 4.85 dBm VBW 100 kHz
24.9 dBm 2.43189360 GHz SWT 70 ms Unit dBm

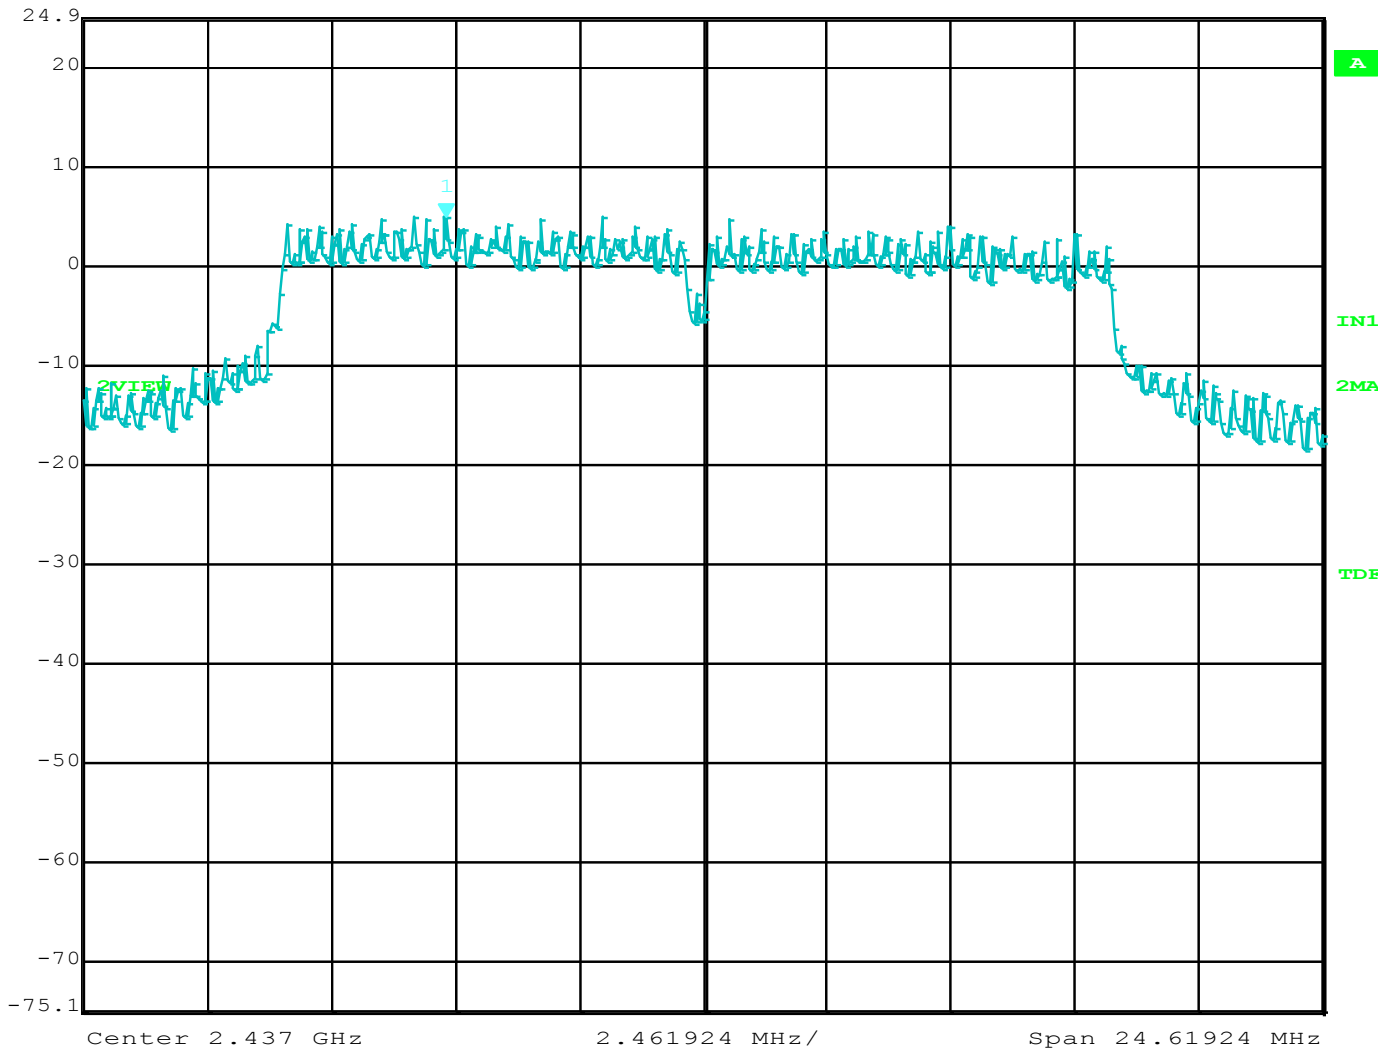

Comment A: Power Spectral Density 2437 MHz G Mode
Date: 23.OCT.2015 10:33:03



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



Marker 1 [T2]	RBW	100 kHz	RF Att	40 dB
Ref Lvl	2.51 dBm	VBW	300 kHz	
24.9 dBm	2.45561084 GHz	SWT	6.5 ms	Unit dBm

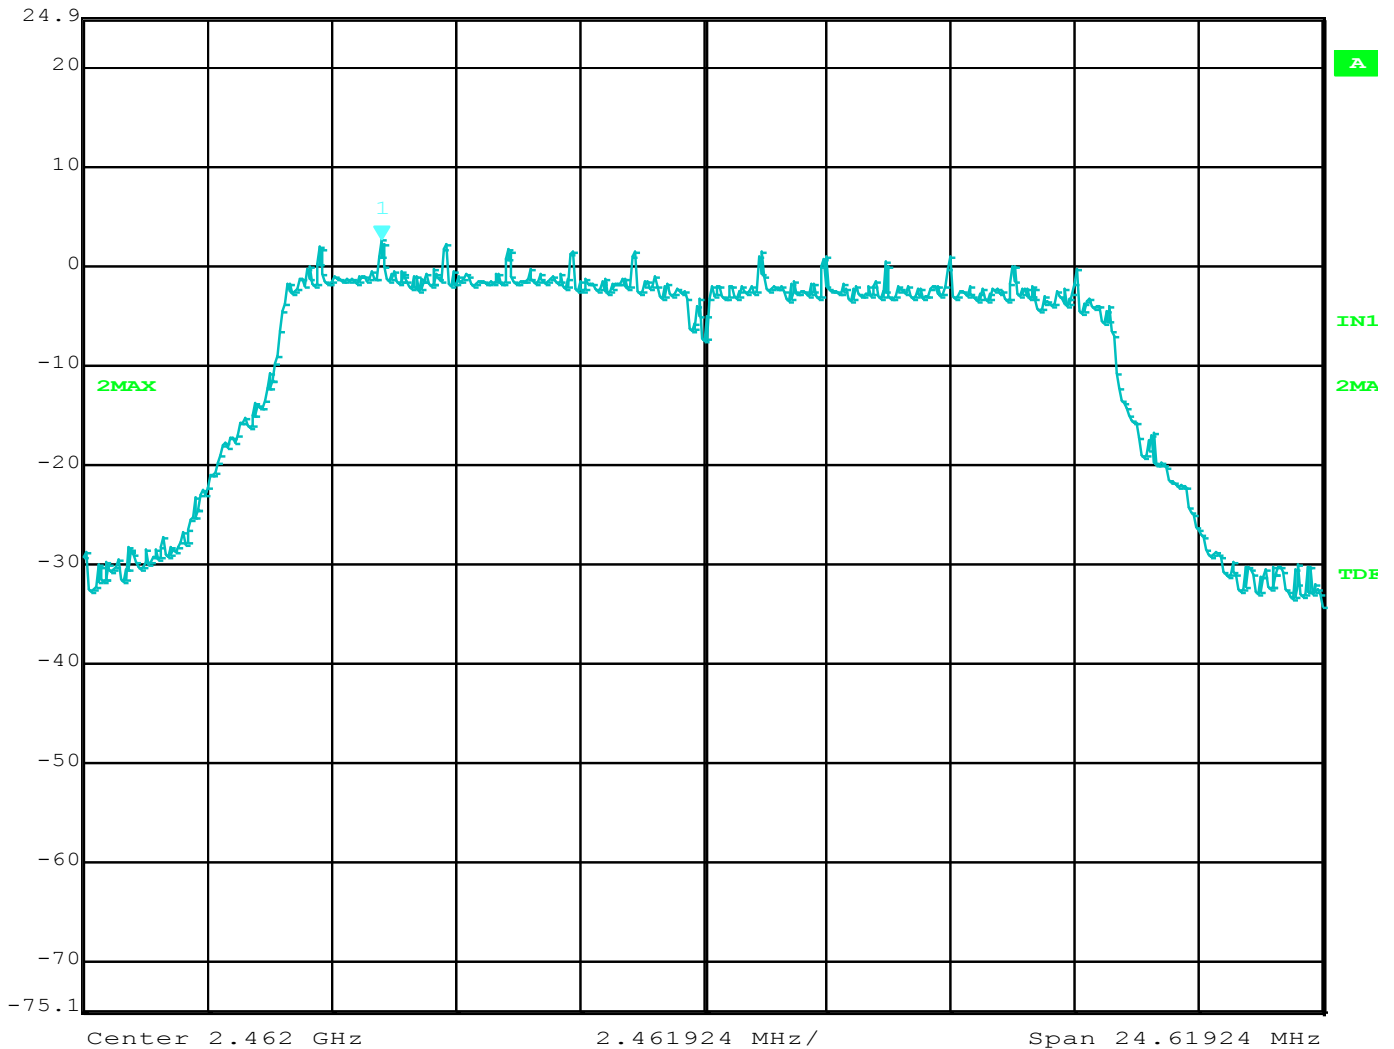

Comment A: Power Spectral Density 2462 MHz G Mode
Date: 23.OCT.2015 10:40:36



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

PEAK POWER SPECTRAL DENSITY

802.11n Mode

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11n

Date: 1/29/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)


DTS Bandwidth

Freq. (MHz)	Peak (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
2412	-1.92	8.00	-9.92	Peak	
2437	7.95	8.00	-0.05	Peak	
2462	0.09	8.00	-7.91	Peak	





Marker 1 [T2] RBW 50 kHz RF Att 30 dB
Ref Lvl -1.92 dBm VBW 200 kHz
20 dBm 2.40561762 GHz SWT 27 ms Unit dBm

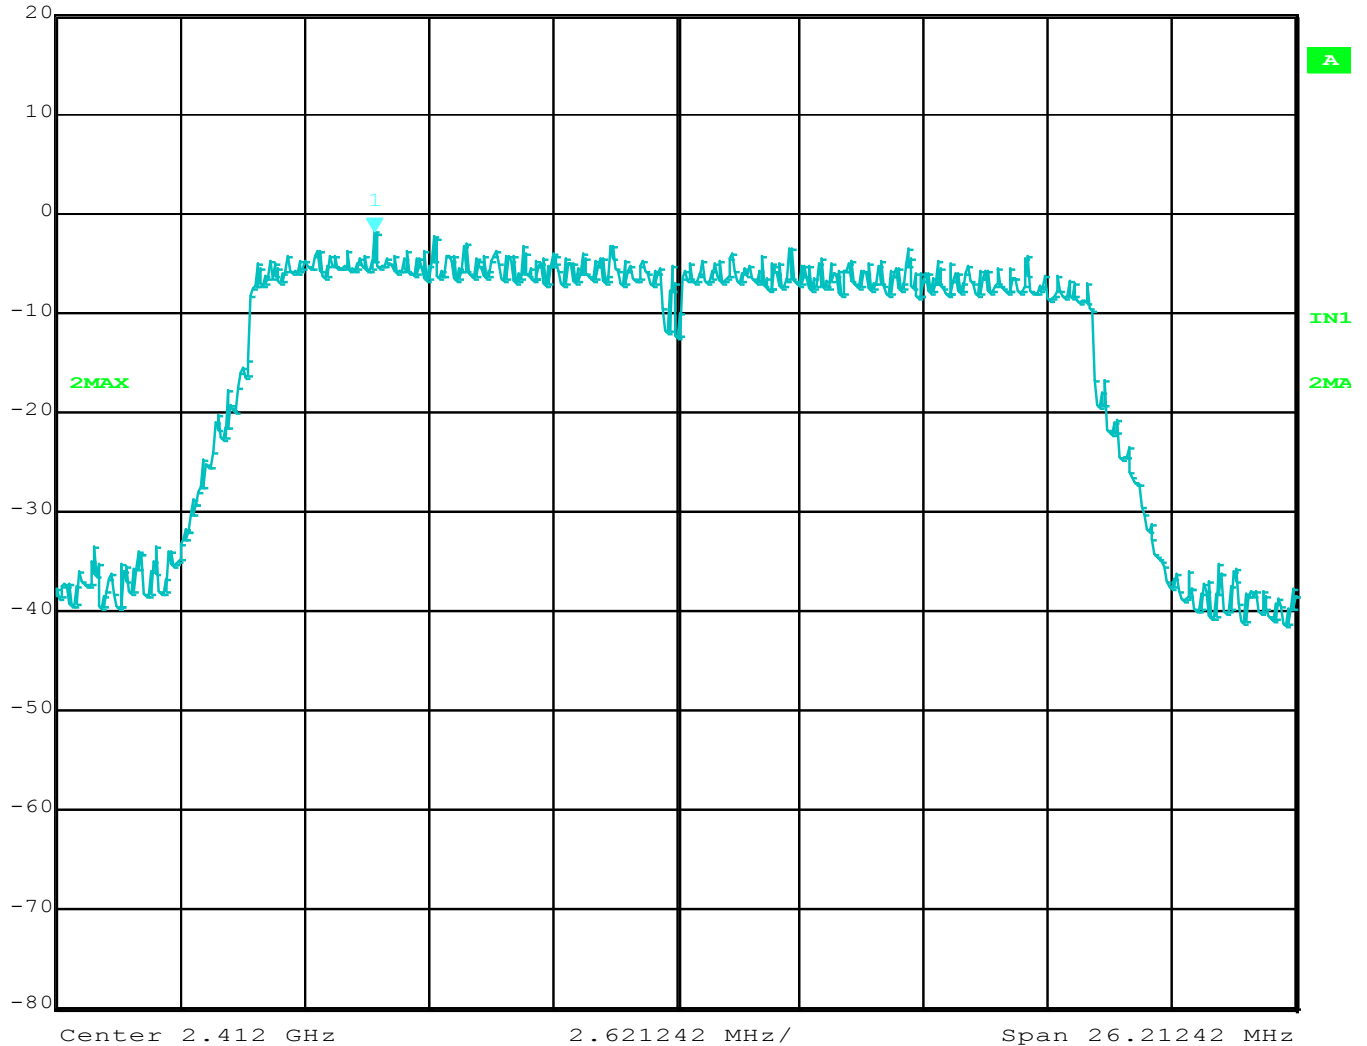

Comment A: Power Spectral Density 2402 MHz

Date: 29.JAN.2016 16:17:57



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



Marker 1 [T2] RBW 50 kHz RF Att 30 dB
 Ref Lvl 7.95 dBm VBW 200 kHz
 20 dBm 2.43063748 GHz SWT 27 ms Unit dBm

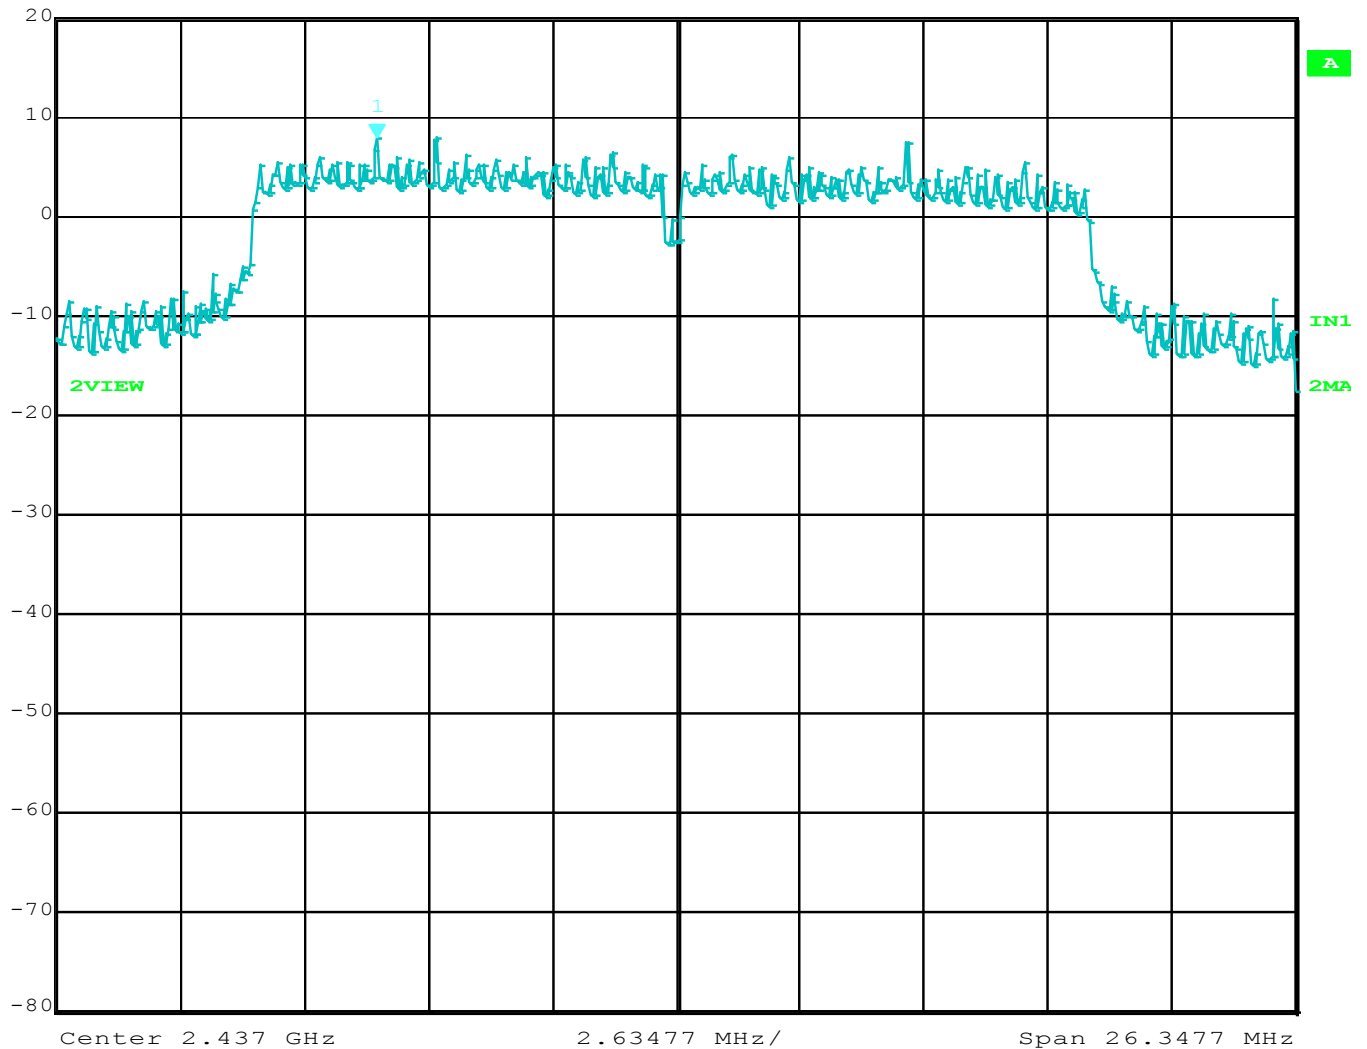

Comment A: Power Spectral Density 2437 MHz
 Date: 29.JAN.2016 16:21:18



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500


Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400



Marker 1 [T2] RBW 50 kHz RF Att 30 dB
Ref Lvl 0.09 dBm VBW 200 kHz
20 dBm 2.45561762 GHz SWT 27 ms Unit dBm

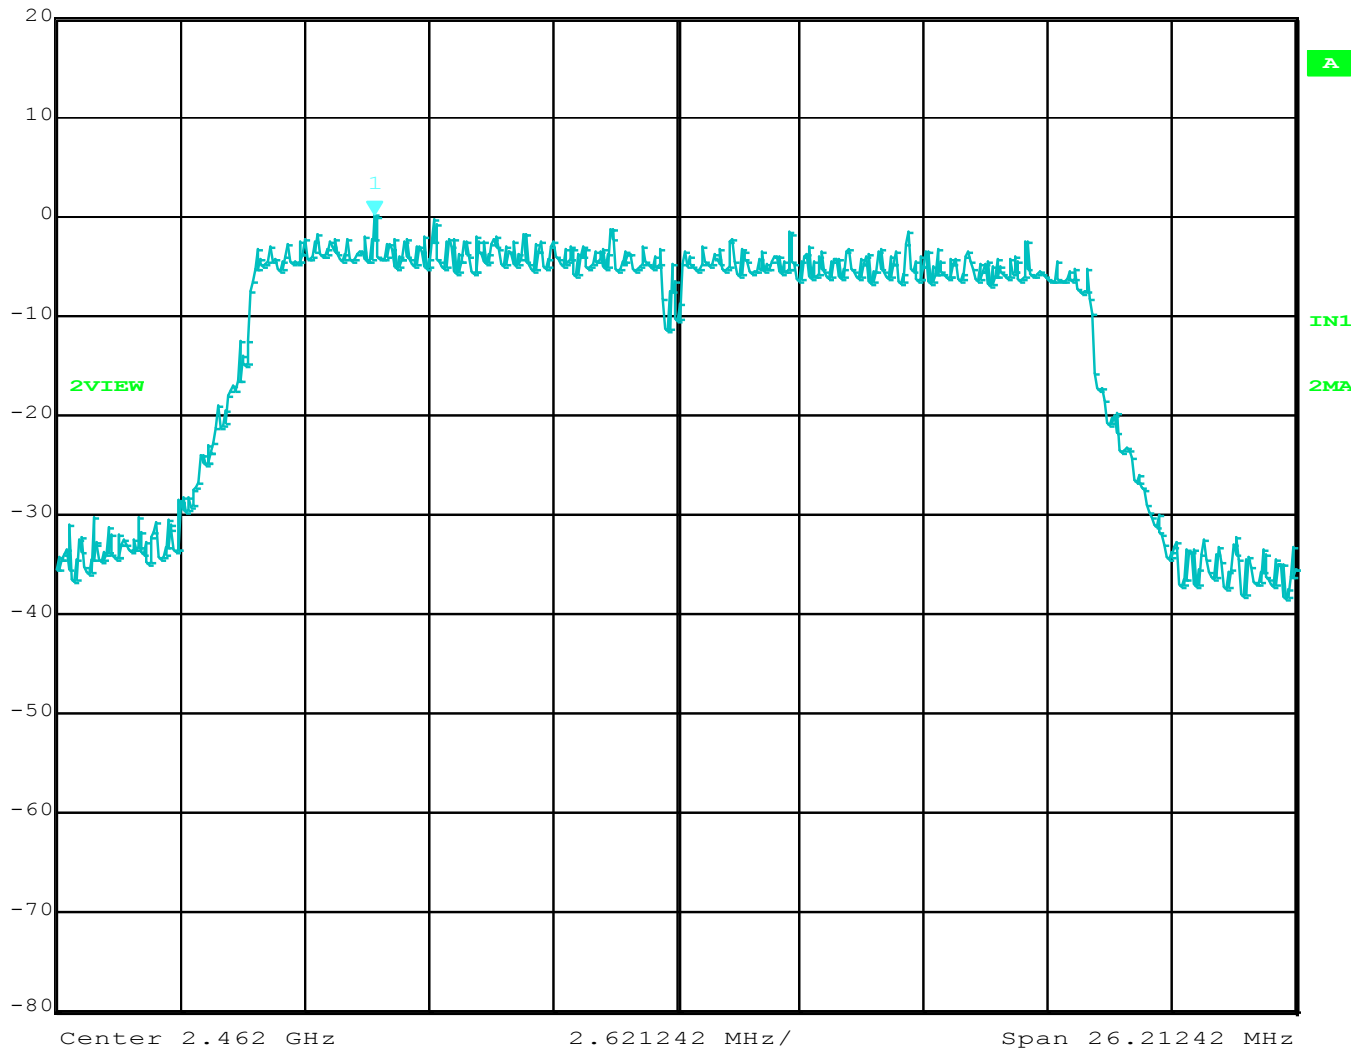

Comment A: Power Spectral Density 2462 MHz

Date: 29.JAN.2016 16:22:41



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS (IN 100KHZ BANDWIDTH) / CONDUCTED

DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

802.11b Mode

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11b

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)


Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
7993.99	59.70	96.24	-36.54	Peak	Low Channel
7993.99	59.35	96.25	-36.90	Peak	Mid Channel
7979.96	59.62	95.91	-36.29	Peak	High Channel

Worst case for all B mode measurements




802.11b Mode


Reference Level Measurements

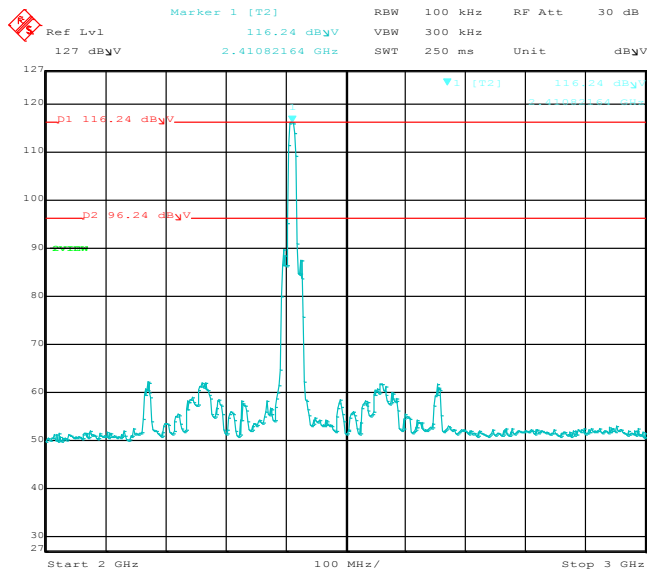

Comment A: Conducted Spurious 2412 MHz B Mode
Date: 23.OCT.2015 11:09:05

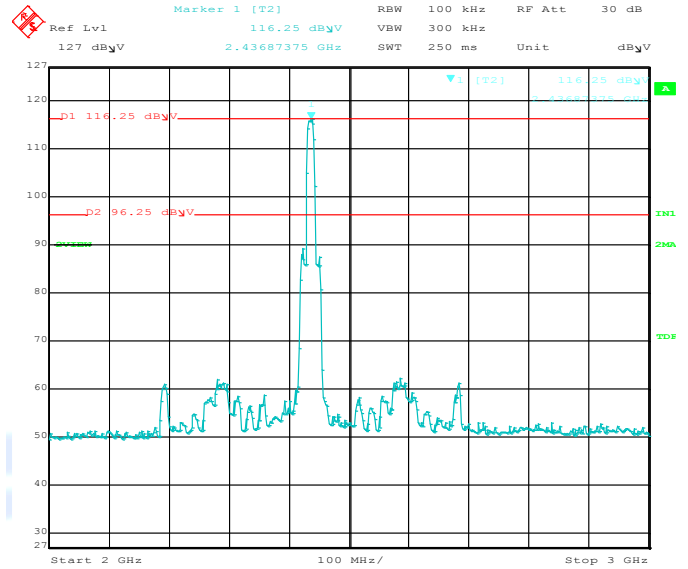

Comment A: Conducted Spurious 2437 MHz B Mode
Date: 23.OCT.2015 11:14:14

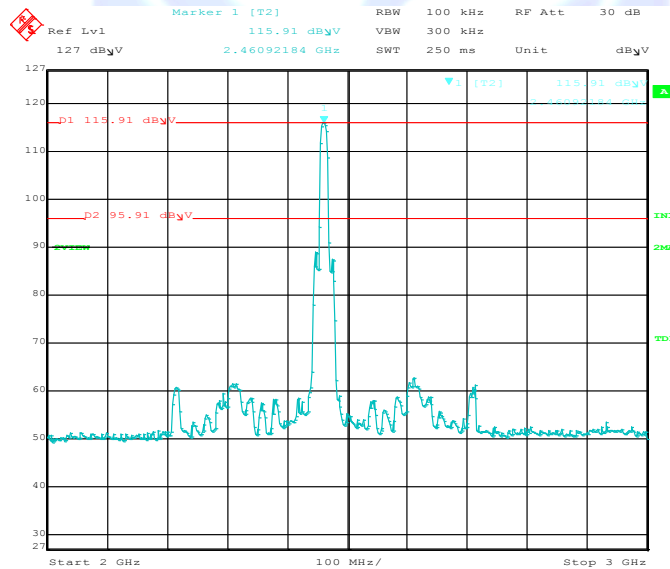

Comment A: Conducted Spurious 2462 MHz B Mode
Date: 23.OCT.2015 11:17:57



HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

802.11g Mode

FCC 15.247


Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11g

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)


Freq. (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Peak / QP / Avg	Comments
7979.96	58.56	88.39	-29.83	Peak	Low Channel
8008.02	59.17	97.12	-37.95	Peak	Mid Channel
7937.88	59.08	89.19	-30.11	Peak	High Channel

Worst case for all G mode measurements

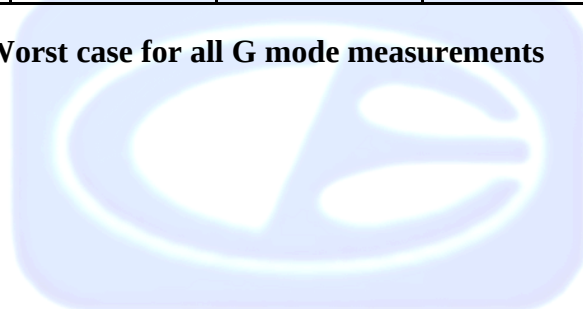


802.11g Mode


Reference Level Measurements

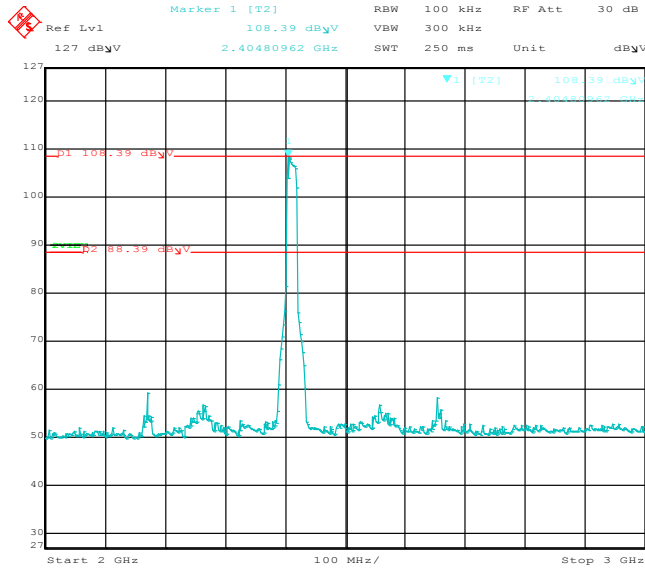

Comment A: Conducted Spurious 2412 MHz G Mode
Date: 23.OCT.2015 10:57:38

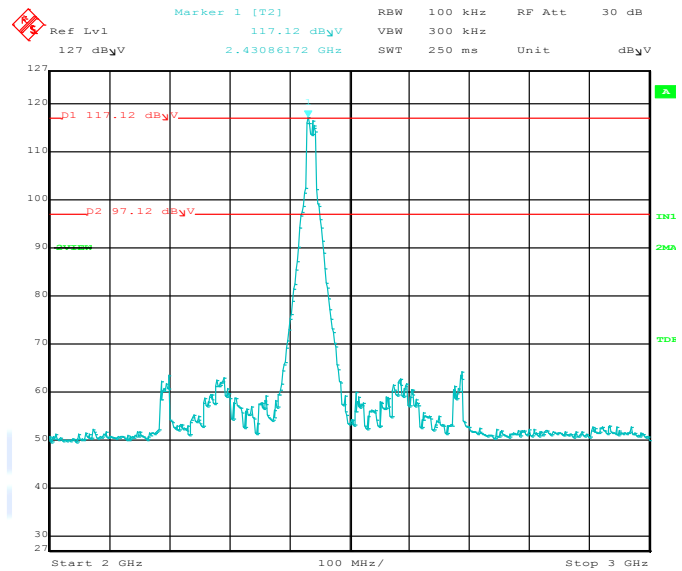

Comment A: Conducted Spurious 2437 MHz G Mode
Date: 23.OCT.2015 10:49:20

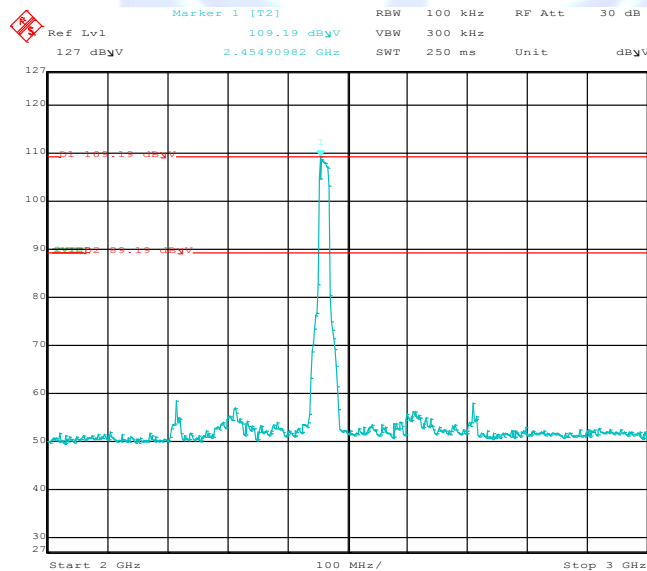

Comment A: Conducted Spurious 2462 MHz G Mode
Date: 23.OCT.2015 10:44:03



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

802.11n Mode

FCC 15.247


Company: Atmel
EUT: WIFI module
Model: ATWILC1000-MR110UB
Mode: 802.11n

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)


Freq. (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Peak / QP / Avg	Comments
7965.932	59.68	87.46	-27.78	Peak	Low Channel
7965.932	59.02	97.83	-38.81	Peak	Mid Channel
7951.904	60.44	89.42	-28.98	Peak	High Channel

Worst case for all N mode measurements

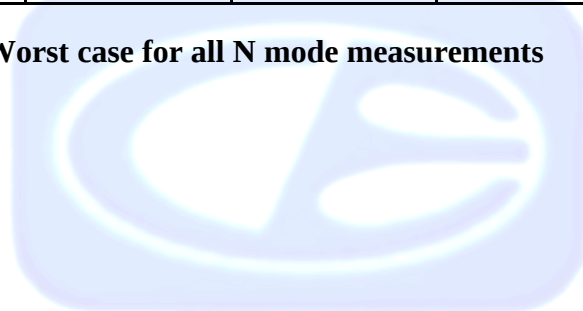


802.11n Mode


Reference Level Measurements

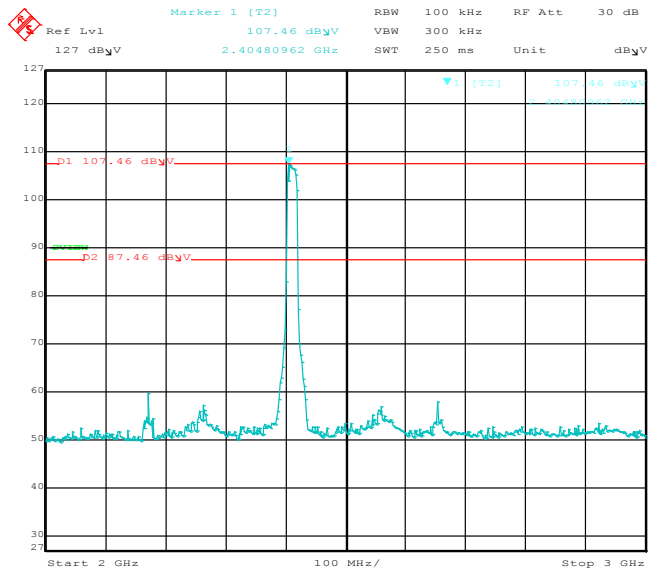

Comment A: Conducted Spurious 2412 MHz N Mode
Date: 23.OCT.2015 13:02:05

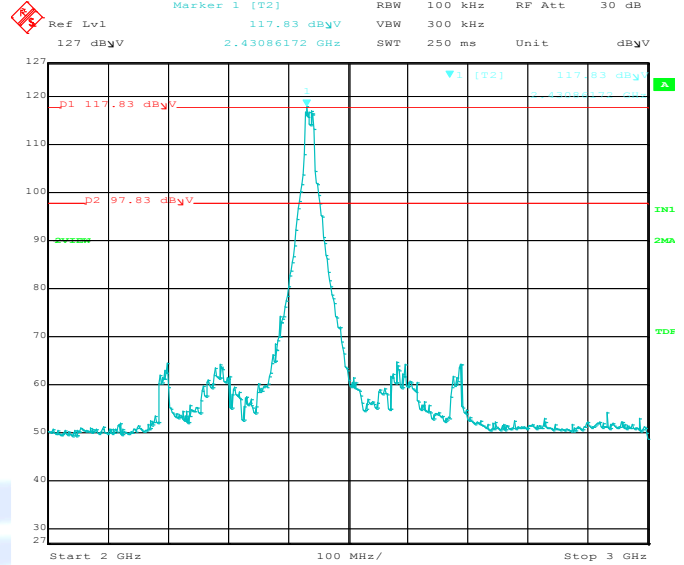

Comment A: Conducted Spurious 2437 MHz N Mode
Date: 23.OCT.2015 13:13:25

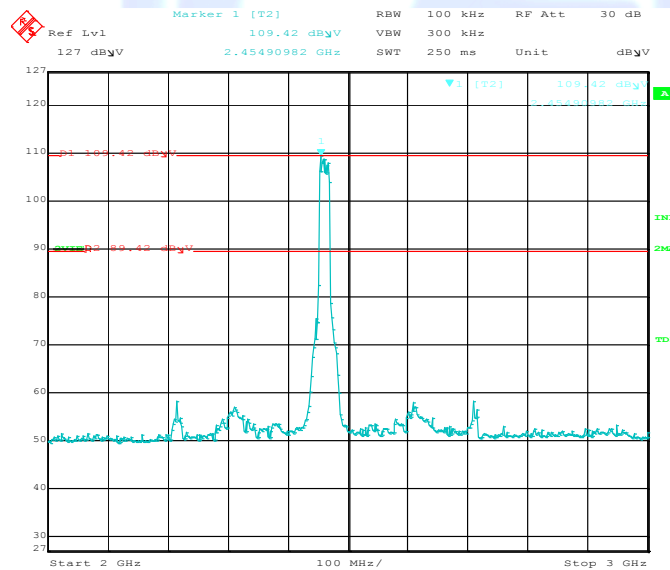

Comment A: Conducted Spurious 2462 MHz N Mode
Date: 23.OCT.2015 13:18:16



***EMISSIONS IN RESTRICTED FREQUENCY BANDS (RADIATED
FIELD STRENGTH)
DATA SHEETS***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11b Mode, Low Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11b

Date: 10/22/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4824.00	60.33	H	73.98	-13.65	Peak	1.16	346	In Restricted Band
4824.00	47.47	H	53.98	-6.51	Avg	1.16	346	
12060.00		H	73.98		Peak			In Restricted Band
12060.00		H	53.98		Avg			No Emissions Found
14472.00		H	73.98		Peak			In Restricted Band
14472.00		H	53.98		Avg			No Emissions Found
19296.00		H	73.98		Peak			In Restricted Band
19296.00		H	53.98		Avg			No Emissions Found
4824.00	58.96	V	73.98	-15.02	Peak	1.36	356	In Restricted Band
4824.00	46.81	V	53.98	-7.17	Avg	1.36	356	
12060.00		V	73.98		Peak			In Restricted Band
12060.00		V	53.98		Avg			No Emissions Found
14472.00		V	73.98		Peak			In Restricted Band
14472.00		V	53.98		Avg			No Emissions Found
19296.00		V	73.98		Peak			In Restricted Band
19296.00		V	53.98		Avg			No Emissions Found

Test distance
3 meter



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11b Mode, Mid Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11b

Date: 10/22/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4874.00	47.33	H	73.98	-26.65	Peak	1.53	24	In Restricted Band
4874.00	34.65	H	53.98	-19.33	Avg	1.53	24	
7311.00		H	73.98		Peak			In Restricted Band
7311.00		H	53.98		Avg			No Emissions Found
12185.00	56.61	H	73.98	-17.37	Peak	1.32	357	In Restricted Band
12185.00	44.23	H	53.98	-9.75	Avg	1.32	357	
19496.00		H	73.98		Peak			In Restricted Band
19496.00		H	53.98		Avg			No Emissions Found
4874.00	50.10	V	73.98	-23.88	Peak	1.11	319	In Restricted Band
4874.00	37.35	V	53.98	-16.63	Avg	1.11	319	
7311.00		V	73.98		Peak			In Restricted Band
7311.00		V	53.98		Avg			No Emissions Found
12185.00	59.17	V	73.98	-14.81	Peak	1.21	321	In Restricted Band
12185.00	46.81	V	53.98	-7.17	Avg	1.21	321	
19496.00		V	73.98		Peak			In Restricted Band
19496.00		V	53.98		Avg			No Emissions Found

Test distance
3 meter



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11b Mode, High Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11b

Date: 10/22/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4924.00	52.00	H	73.98	-21.98	Peak	1.97	26	In Restricted Band
4924.00	38.52	H	53.98	-15.46	Avg	1.97	26	
7386.00		H	73.98		Peak			In Restricted Band
7386.00		H	53.98		Avg			No Emission Found
12310.00	60.60	H	73.98	-13.38	Peak	1.3	358	In Restricted Band
12310.00	48.44	H	53.98	-5.54	Avg	1.3	358	
19696.00		H	73.98		Peak			In Restricted Band
19696.00		H	53.98		Avg			No Emissions Found
22158.00		H	73.98		Peak			In Restricted Band
22158.00		H	53.98		Avg			No Emissions Found
4924.00	51.07	V	73.98	-22.91	Peak	1.67	311	In Restricted Band
4924.00	37.44	V	53.98	-16.54	Avg	1.67	311	
7386.00		V	73.98		Peak			In Restricted Band
7386.00		V	53.98		Avg			No Emission Found
12310.00	57.61	V	73.98	-16.37	Peak	1	321	In Restricted Band
12310.00	44.85	V	53.98	-9.13	Avg	1	321	
19696.00		V	73.98		Peak			In Restricted Band
19696.00		V	53.98		Avg			No Emissions Found
22158.00		V	73.98		Peak			In Restricted Band
22158.00		V	53.98		Avg			No Emissions Found

Test distance
3 meter



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11g Mode, Low Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11g

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4824.00		H	73.98		Peak			In Restricted Band
4824.00		H	53.98		Avg			No emissions found
12060.00		H	73.98		Peak			In Restricted Band
12060.00		H	53.98		Avg			No emissions found
14472.00		H	73.98		Peak			In Restricted Band
14472.00		H	53.98		Avg			No emissions found
19296.00		H	73.98		Peak			In Restricted Band
19296.00		H	53.98		Avg			No Emissions Found
4824.00		V	73.98		Peak			In Restricted Band
4824.00		V	53.98		Avg			No emissions found
12060.00		V	73.98		Peak			In Restricted Band
12060.00		V	53.98		Avg			No emissions found
14472.00		V	73.98		Peak			In Restricted Band
14472.00		V	53.98		Avg			No emissions found
19296.00		V	73.98		Peak			In Restricted Band
19296.00		V	53.98		Avg			No Emissions Found

Test distance
3 meter



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11g Mode, Mid Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11g

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4874.00		H	73.98		Peak			In Restricted Band
4874.00		H	53.98		Avg			No Emissions Found
7311.00		H	73.98		Peak			In Restricted Band
7311.00		H	53.98		Avg			No Emissions Found
12185.00	67.45	H	73.98	-6.53	Peak	1.11	355	In Restricted Band
12185.00	52.25	H	53.98	-1.73	Avg	1.11	355	
19496.00		H	73.98		Peak			In Restricted Band
19496.00		H	53.98		Avg			No Emissions Found
4874.00		V	73.98		Peak			In Restricted Band
4874.00		V	53.98		Avg			No Emissions Found
7311.00		V	73.98		Peak			In Restricted Band
7311.00		V	53.98		Avg			No Emissions Found
12185.00	62.94	V	73.98	-11.04	Peak	1	325	In Restricted Band
12185.00	48.97	V	53.98	-5.01	Avg	1	325	
19496.00		V	73.98		Peak			In Restricted Band
19496.00		V	53.98		Avg			No Emissions Found

Test distance
3 meter



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11g Mode, High Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11g

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4924.00		H	73.98		Peak			In Restricted Band
4924.00		H	53.98		Avg			No emissions found
7386.00		H	73.98		Peak			In Restricted Band
7386.00		H	53.98		Avg			No Emissions Found
12310.00		H	73.98		Peak			In Restricted Band
12310.00		H	53.98		Avg			No emissions found
19696.00		H	73.98		Peak			In Restricted Band
19696.00		H	53.98		Avg			No Emissions Found
22158.00		H	73.98		Peak			In Restricted Band
22158.00		H	53.98		Avg			No Emissions Found
4924.00		V	73.98		Peak			In Restricted Band
4924.00		V	53.98		Avg			No Emissions Found
7386.00		V	73.98		Peak			In Restricted Band
7386.00		V	53.98		Avg			No Emissions Found
12310.00		V	73.98		Peak			In Restricted Band
12310.00		V	53.98		Avg			No emissions found
19696.00		V	73.98		Peak			In Restricted Band
19696.00		V	53.98		Avg			No Emissions Found
22158.00		V	73.98		Peak			In Restricted Band
22158.00		V	53.98		Avg			No Emissions Found

Test distance
3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11n Mode, Low Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11n

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4824.00		H	73.98		Peak			In Restricted Band
4824.00		H	53.98		Avg			No Emissions Found
12060.00	56.49	H	73.98	-17.49	Peak	2.24	222	In Restricted Band
12060.00	44.08	H	53.98	-9.90	Avg	2.24	222	
14472.00	60.03	H	73.98	-13.95	Peak	1.88	0	In Restricted Band
14472.00	46.74	H	53.98	-7.24	Avg	1.88	0	
19296.00		H	73.98		Peak			In Restricted Band
19296.00		H	53.98		Avg			No Emissions Found
4824.00		V	73.98		Peak			In Restricted Band
4824.00		V	53.98		Avg			No Emissions Found
12060.00	57.53	V	73.98	-16.45	Peak	2.25	61	In Restricted Band
12060.00	44.56	V	53.98	-9.42	Avg	2.25	61	
14472.00	59.27	V	73.98	-14.71	Peak	3.07	123	In Restricted Band
14472.00	46.55	V	53.98	-7.43	Avg	3.07	123	
19296.00		V	73.98		Peak			In Restricted Band
19296.00		V	53.98		Avg			No Emissions Found

Test distance
3 meter



HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS 802.11n Mode, Mid Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11n

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4874.00		H	73.98		Peak			In Restricted Band
4874.00		H	53.98		Avg			No emissions found
7311.00		H	73.98		Peak			In Restricted Band
7311.00		H	53.98		Avg			No emissions found
12185.00	68.34	H	73.98	-5.64	Peak	1.15	357	In Restricted Band
12185.00	53.19	H	53.98	-0.79	Avg	1.15	357	
19496.00		H	73.98		Peak			In Restricted Band
19496.00		H	53.98		Avg			No Emissions Found
4874.00		V	73.98		Peak			In Restricted Band
4874.00		V	53.98		Avg			No emissions found
7311.00		V	73.98		Peak			In Restricted Band
7311.00		V	53.98		Avg			No emissions found
12185.00	62.93	V	73.98	-11.05	Peak	1	321	In Restricted Band
12185.00	48.71	V	53.98	-5.27	Avg	1	321	
19496.00		V	73.98		Peak			In Restricted Band
19496.00		V	53.98		Avg			No emissions found

Test distance
3 meter



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS IN RESTRICTED FREQUENCY BANDS

802.11n Mode, High Channel, Horizontal & Vertical

FCC 15.247

Company: Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11n

Date: 10/23/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
4924.00		H	73.98		Peak			In Restricted Band
4924.00		H	53.98		Avg			No emissions found
7386.00		H	73.98		Peak			In Restricted Band
7386.00		H	53.98		Avg			No Emissions Found
12310.00	58.12	H	73.98	-15.86	Peak	1.07	1	In Restricted Band
12310.00	45.73	H	53.98	-8.25	Avg	1.07	1	
19696.00		H	73.98		Peak			In Restricted Band
19696.00		H	53.98		Avg			No Emissions Found
22158.00		H	73.98		Peak			In Restricted Band
22158.00		H	53.98		Avg			No Emissions Found
4924.00		V	73.98		Peak			In Restricted Band
4924.00		V	53.98		Avg			No emissions found
7386.00		V	73.98		Peak			In Restricted Band
7386.00		V	53.98		Avg			No Emissions Found
12310.00	56.84	V	73.98	-17.14	Peak	3.69	205	In Restricted Band
12310.00	44.19	V	53.98	-9.79	Avg	3.69	205	No emissions found
19696.00		V	73.98		Peak			In Restricted Band
19696.00		V	53.98		Avg			No Emissions Found
22158.00		V	73.98		Peak			In Restricted Band
22158.00		V	53.98		Avg			No Emissions Found

Test distance
3 meter



EMISSIONS RADIATED OUTSIDE OF THE FUNDAMENTAL FREQUENCY BAND AT BAND EDGES

DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

802.11b Mode

BAND EDGES- VERTICAL

FCC 15.247

Company Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11b

Date: 10/22/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBuV/m)	Pol	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2412.00	109.54	V	--	--	Peak	1.04	240	Fundamental of Low Channel
2396.17	84.28	V	89.54	-5.26	Delta	1.04	240	From Peak
2381.14	64.30	V	73.98	-9.68	Peak	1.04	240	
2381.14	47.77	V	53.98	-6.21	Avg	1.04	240	
2462.00	106.47	V	--	--	Peak	1.02	229	Fundamental of High Channel
2503.21	63.55	V	73.98	-10.43	Peak	1.02	229	
2503.21	48.07	V	53.98	-5.91	Avg	1.02	229	

Test distance
3 meter



BAND EDGES- HORIZONTAL

FCC 15.247

Company Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11b

Date: 10/22/2015
Lab: R
Test ENG: Torey Oliver


Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBUV/m)	Pol	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2412.00	118.65	H	--	--	Peak	1.5	0	Fundamental of Low Channel
2396.42	93.51	H	98.65	-5.14	Delta	1.5	0	From Peak
2385.15	69.06	H	73.98	-4.92	Peak	1.5	0	
2385.15	50.43	H	53.98	-3.55	Avg	1.5	0	
2462.00	117.54	H	--	--	Peak	1	0	Fundamental of High Channel
2485.50	64.61	H	73.98	-9.37	Peak	1	0	
2485.50	49.39	H	53.98	-4.59	Avg	1	0	

Test distance
3 meter



LOWER BAND EDGE (Horizontal)

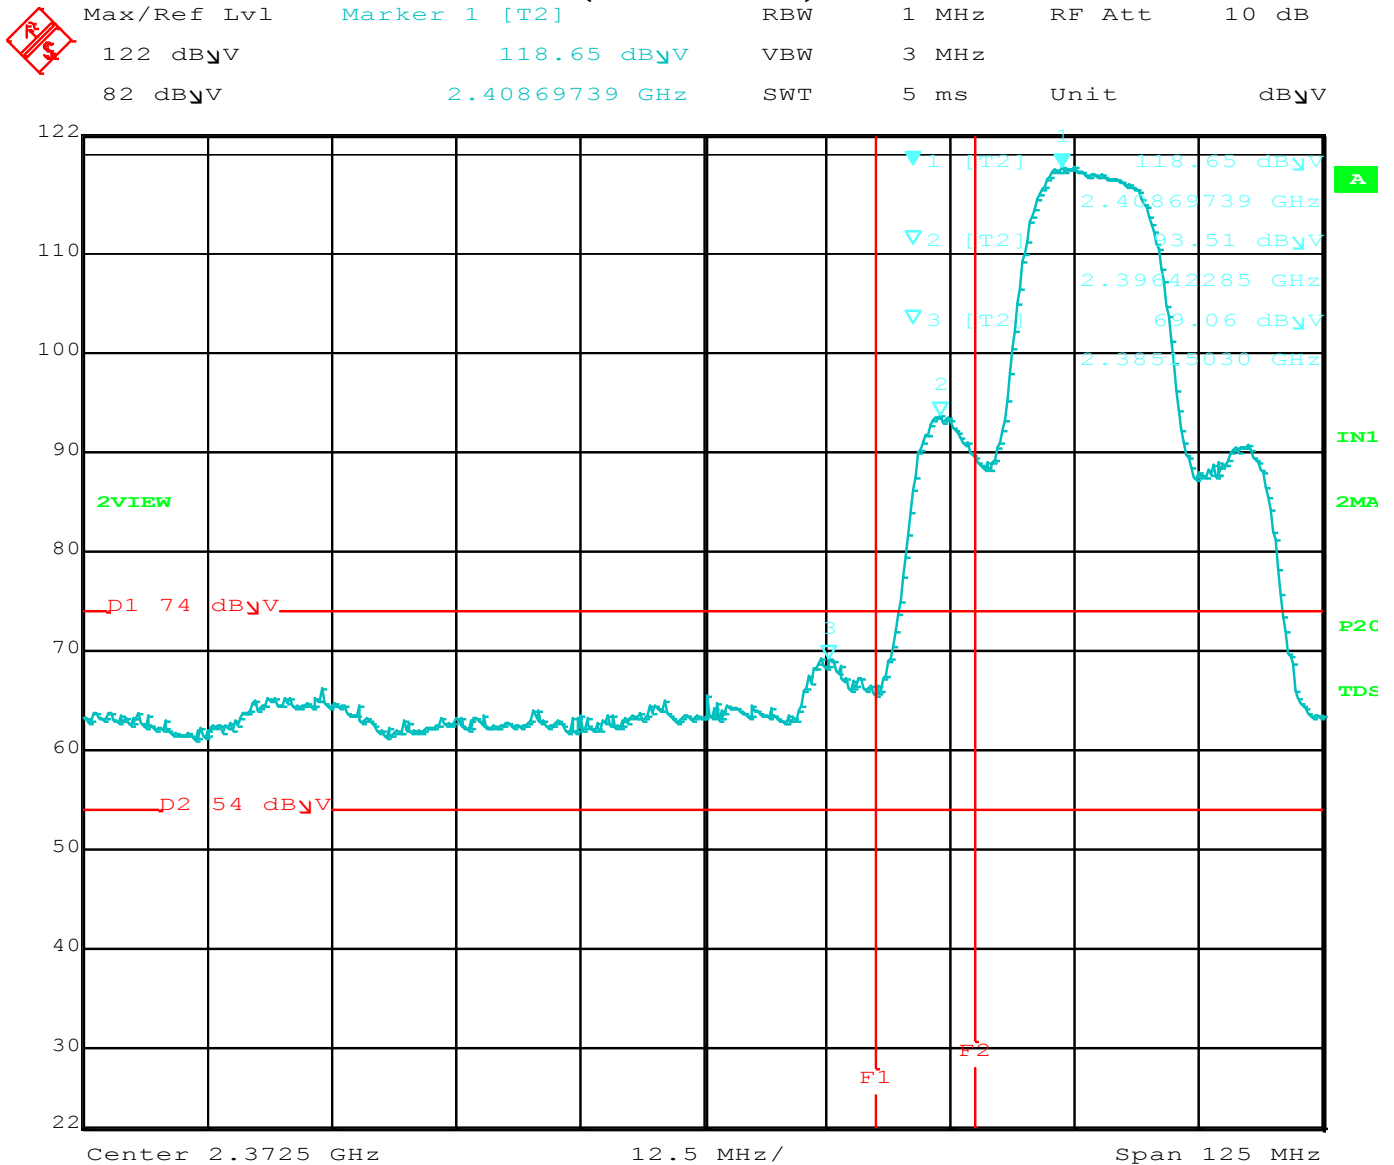

Comment A: Lower Band Edge B Mode Horizontal

Date: 22.OCT.2015 08:01:24




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LOWER BAND EDGE (Vertical)

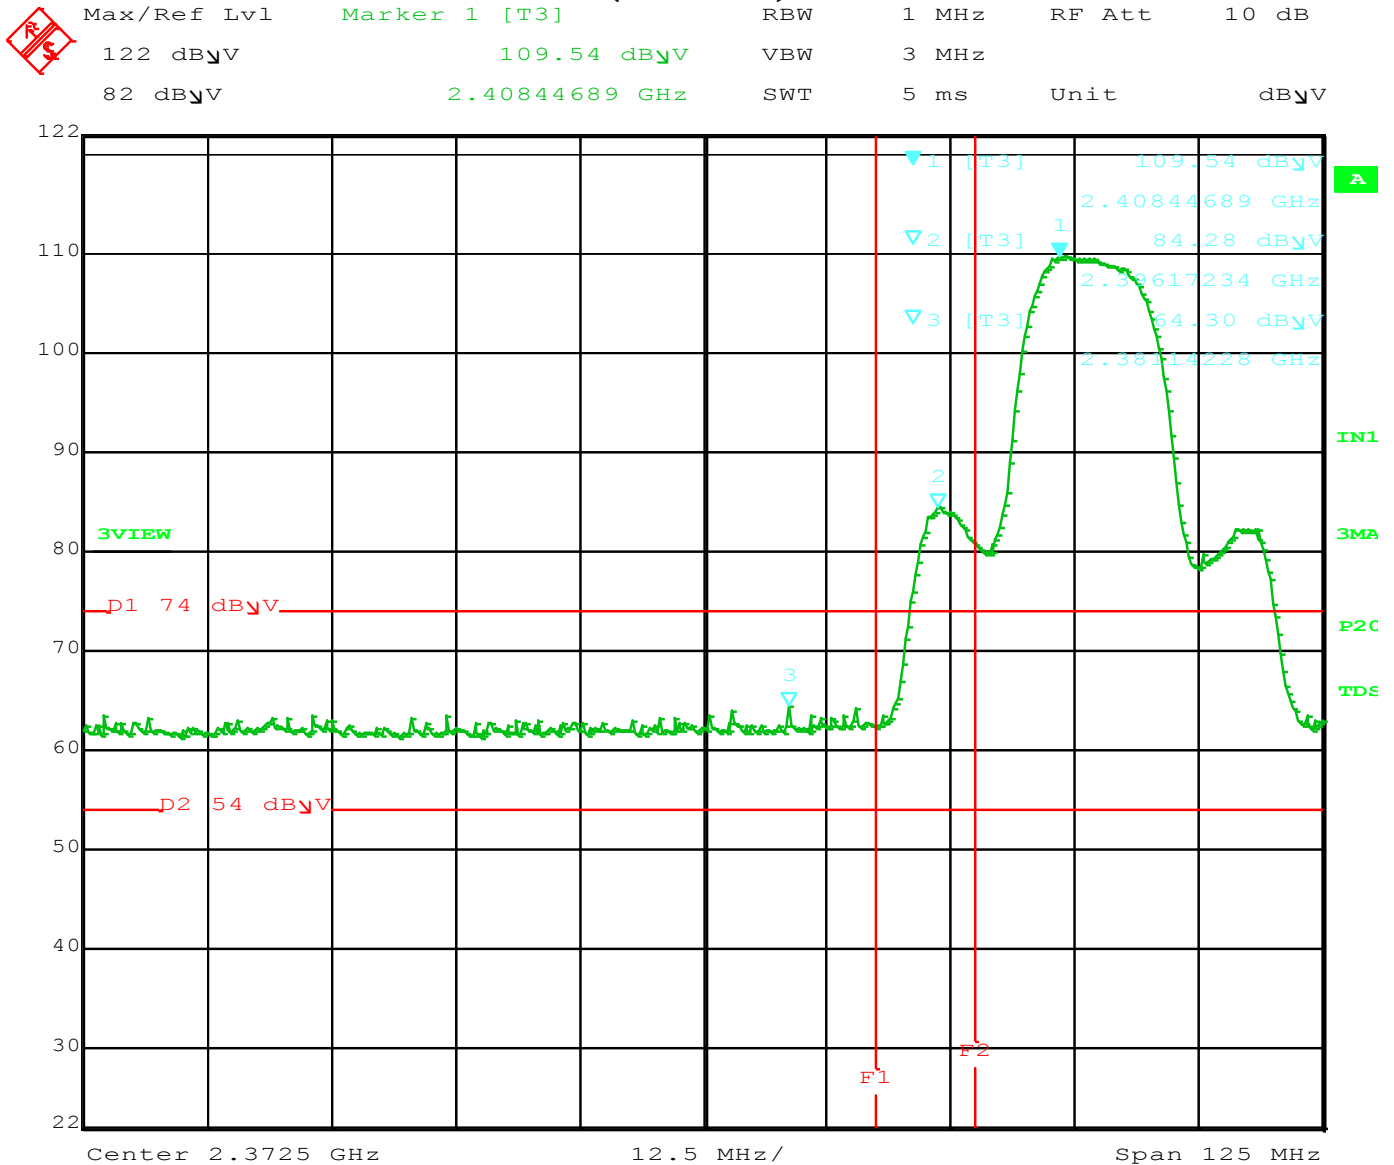

Comment A: Lower Band Edge B Mode Vertical

Date: 22.OCT.2015 08:07:58




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

UPPER BAND EDGE (Horizontal)

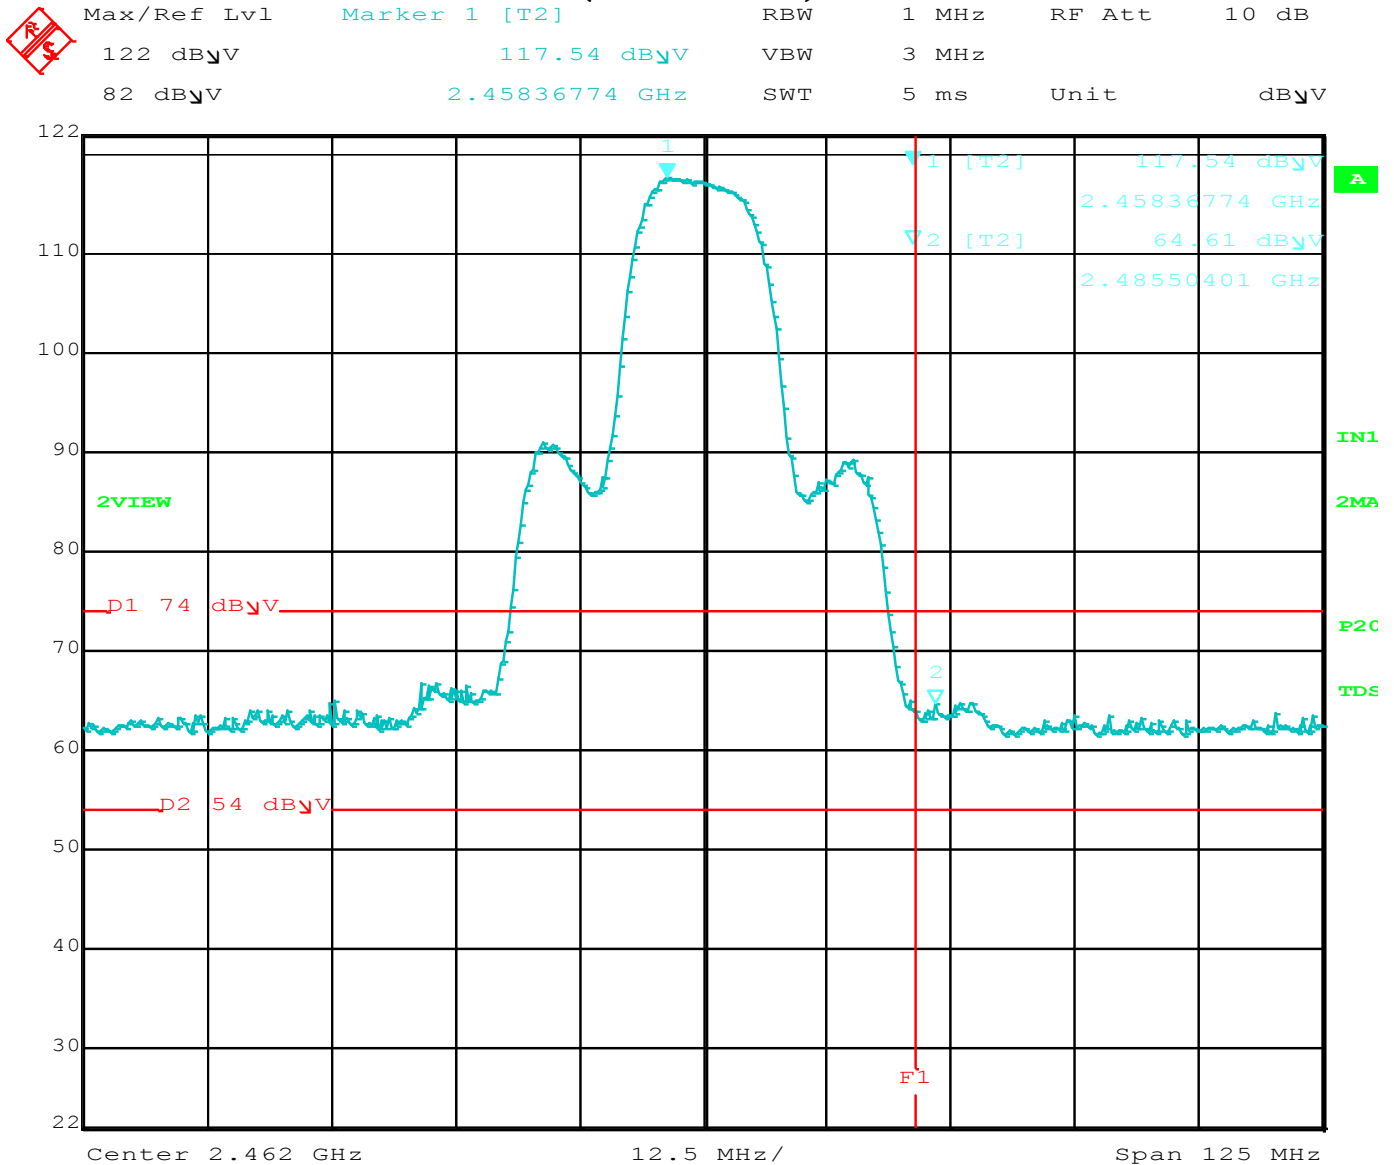

Comment A: Upper Band Edge B Mode Horizontal

Date: 22.OCT.2015 08:13:55




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

UPPER BAND EDGE
(Vertical)

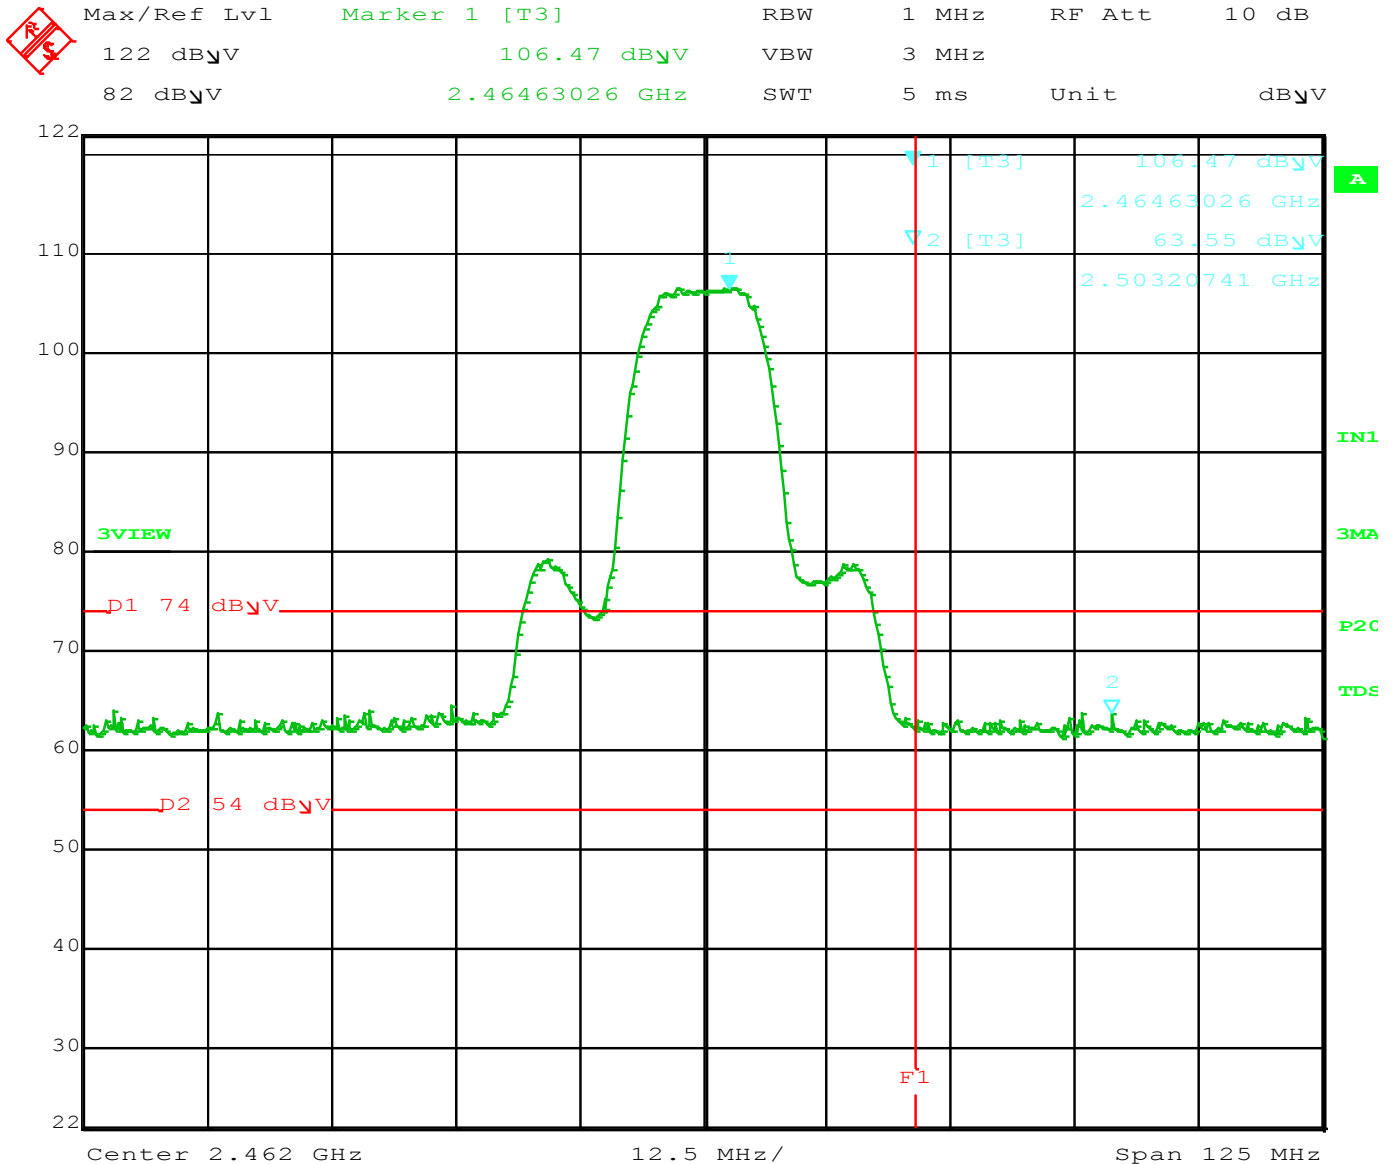

Comment A: Upper Band Edge B Mode Vertical

Date: 22.OCT.2015 08:23:01



802.11g Mode

BAND EDGES- VERTICAL

FCC 15.247

Company Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11g

Date: 10/13/2015
Lab: R
Test ENG: Matt Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBuV/m)	Pol	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2412.00	99.10	V	--	--	Peak	3.38	233	Fundamental of Low Channel
2399.00	73.17	V	79.10	-5.93	Delta	3.38	233	From Peak
2389.75	59.88	V	73.98	-14.10	Peak	3.38	233	
2389.75	48.01	V	53.98	-5.97	Avg	3.38	233	
2462.00	101.06	V	--	--	Peak	2.76	246	Fundamental of High Channel
2484.25	63.74	V	73.98	-10.24	Peak	2.76	246	
2484.25	48.00	V	53.98	-5.98	Avg	2.76	246	

Test distance
3 meter



BAND EDGES- HORIZONTAL

FCC 15.247

Company Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11g

Date: 9/10/2015
Lab: R
Test ENG: Matt Harrison

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBuV/m)	Pol	Limit (dBµV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2412.00	110.72	H	--	--	Peak			Fundamental of Low Channel
2400.00	85.53	H	90.72	-5.19	Delta	1.3	360	From Peak
2389.75	72.06	H	73.98	-1.92	Peak	1.3	360	
2389.75	52.31	H	53.98	-1.67	Avg	1.3	360	
2462.00	111.48	H	--	--	Peak	1.27	360	Fundamental of High Channel
2483.50	71.95	H	73.98	-2.03	Peak	1.27	360	
2483.50	51.01	H	53.98	-2.97	Avg	1.27	360	

Test distance
3 meter




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LOWER BAND EDGE (Horizontal)

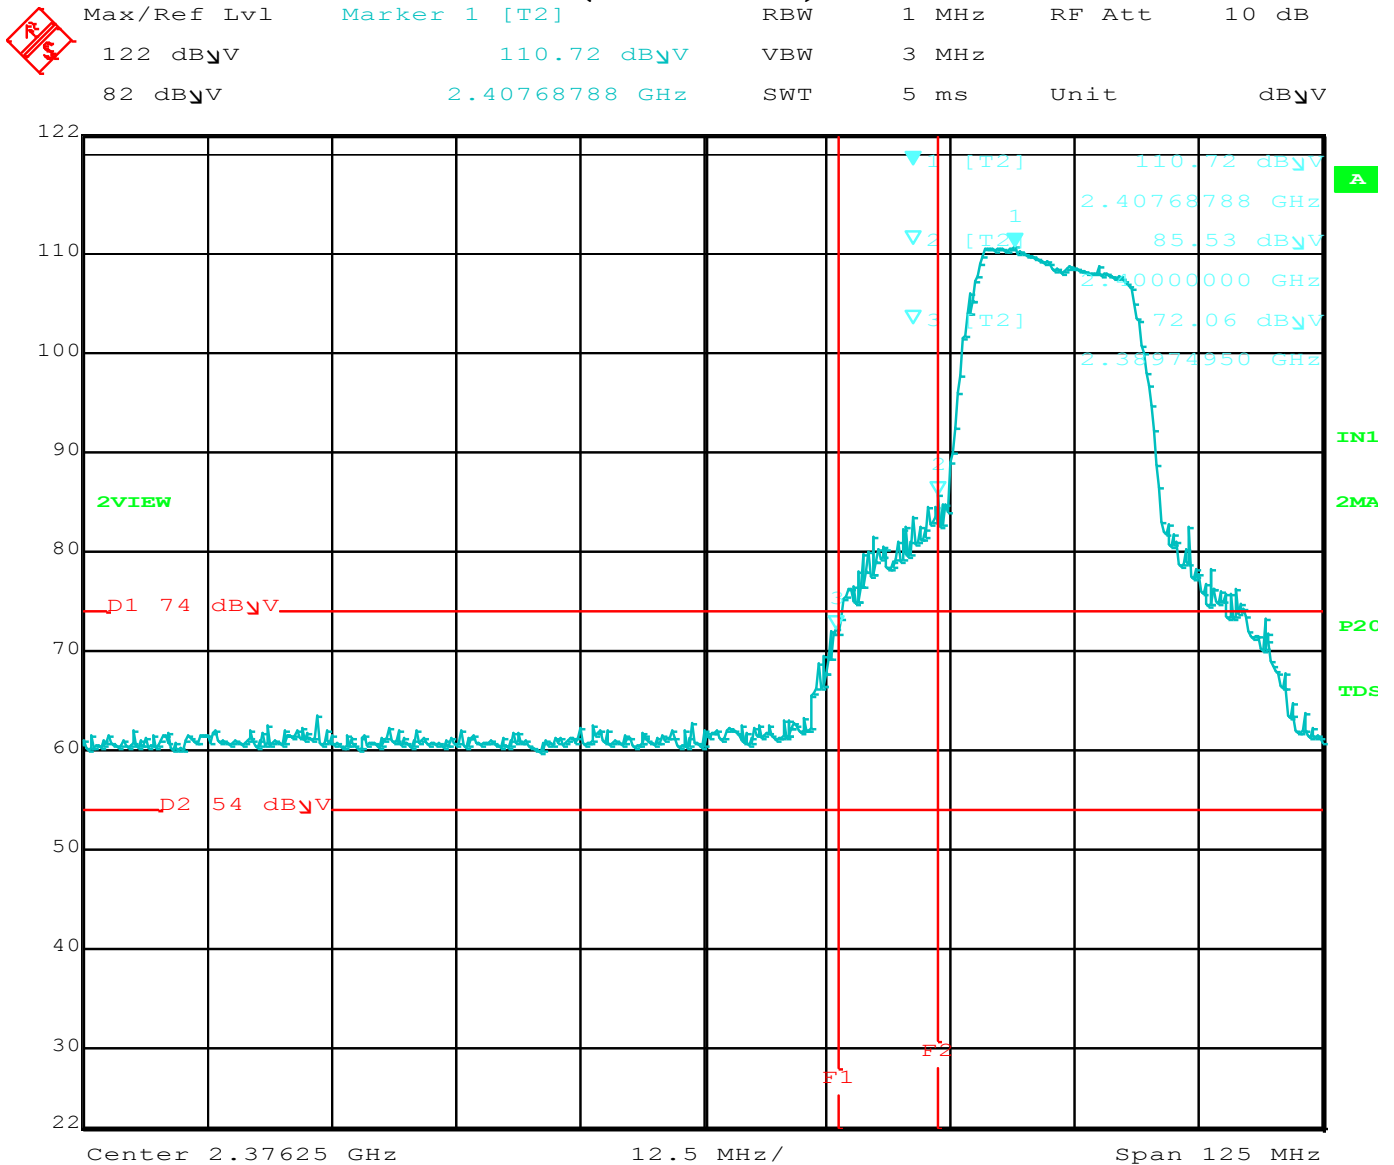

Title: ATWILC1000-MR110UB
Comment A: Lower Band Edge G Mode Horizontal
Date: 13.OCT.2015 13:10:04




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LOWER BAND EDGE (Vertical)

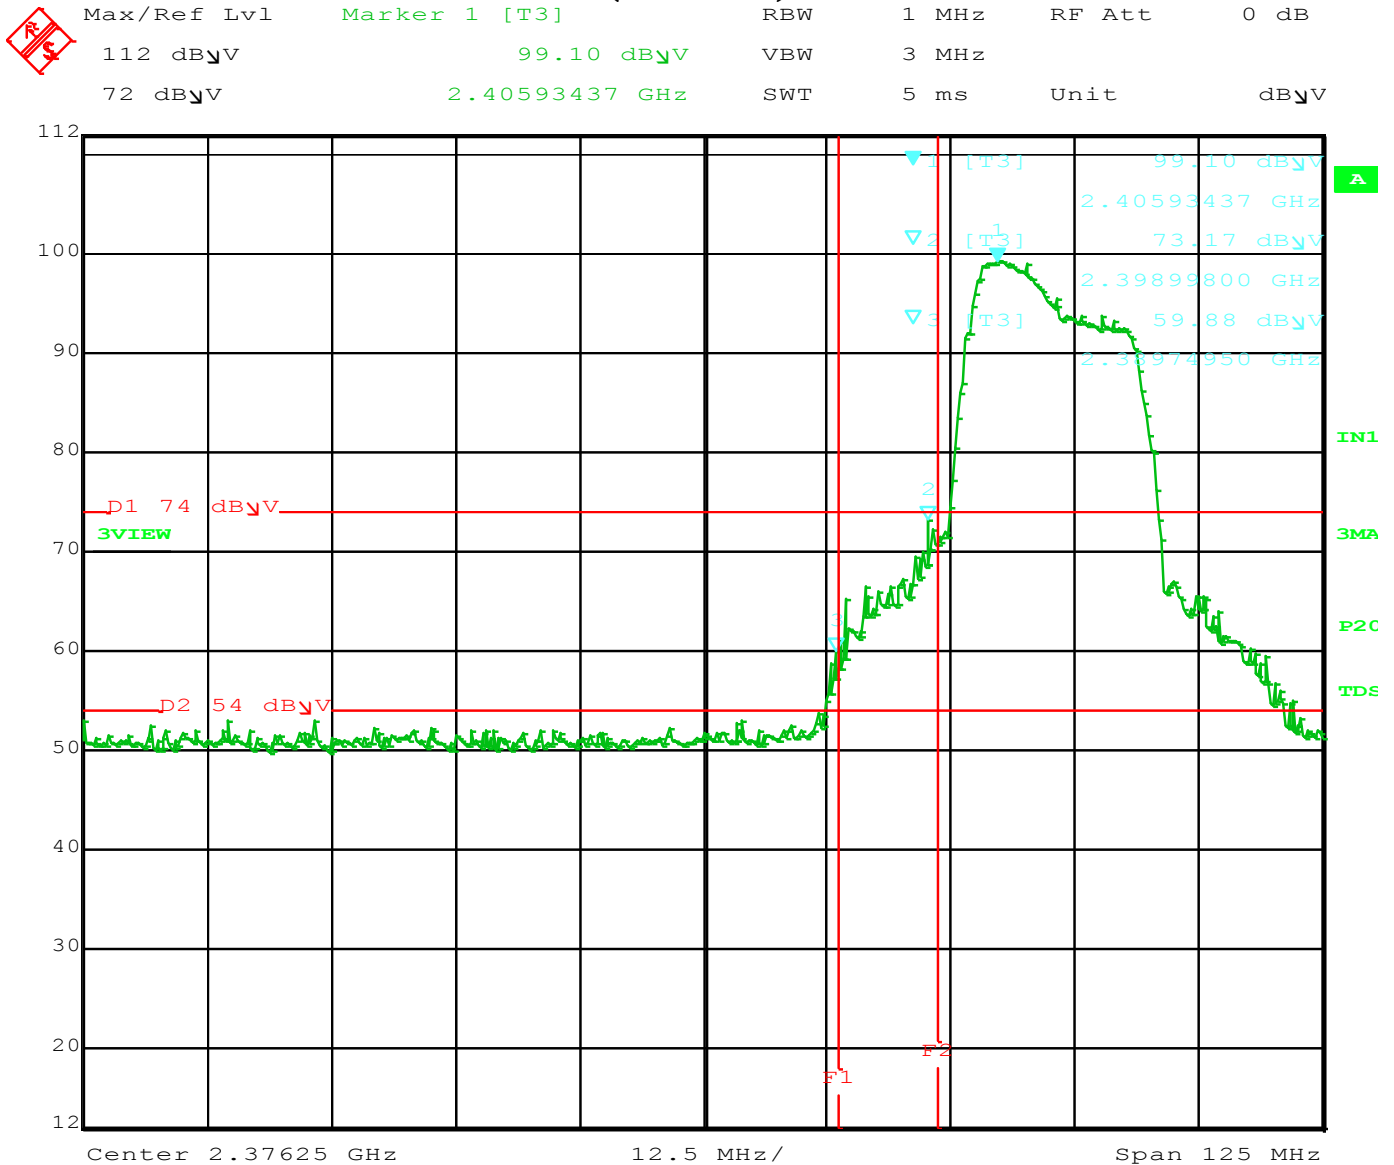

Title: ATWILC1000-MR110UB
Comment A: Lower Band Edge G Mode Vertical
Date: 13.OCT.2015 13:15:03




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400


UPPER BAND EDGE (Horizontal)

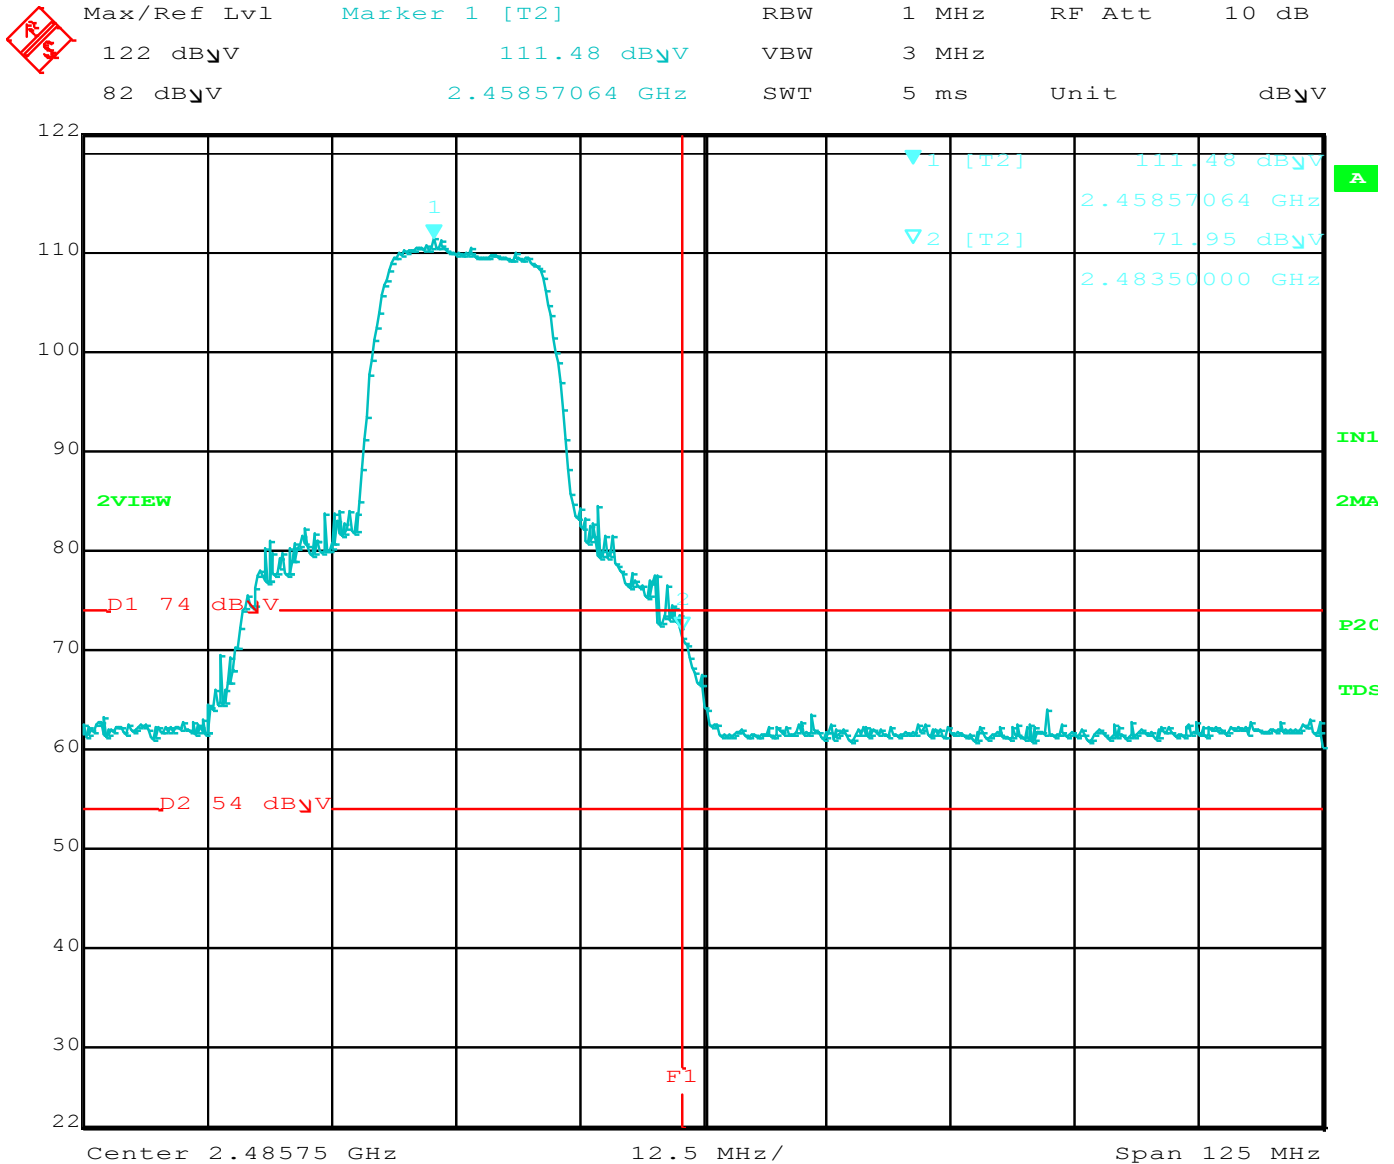

Title: ATWILC1000-MR110UB
Comment A: Upper Band Edge G Mode Horizontal
Date: 13.OCT.2015 13:22:14



UPPER BAND EDGE (Vertical)

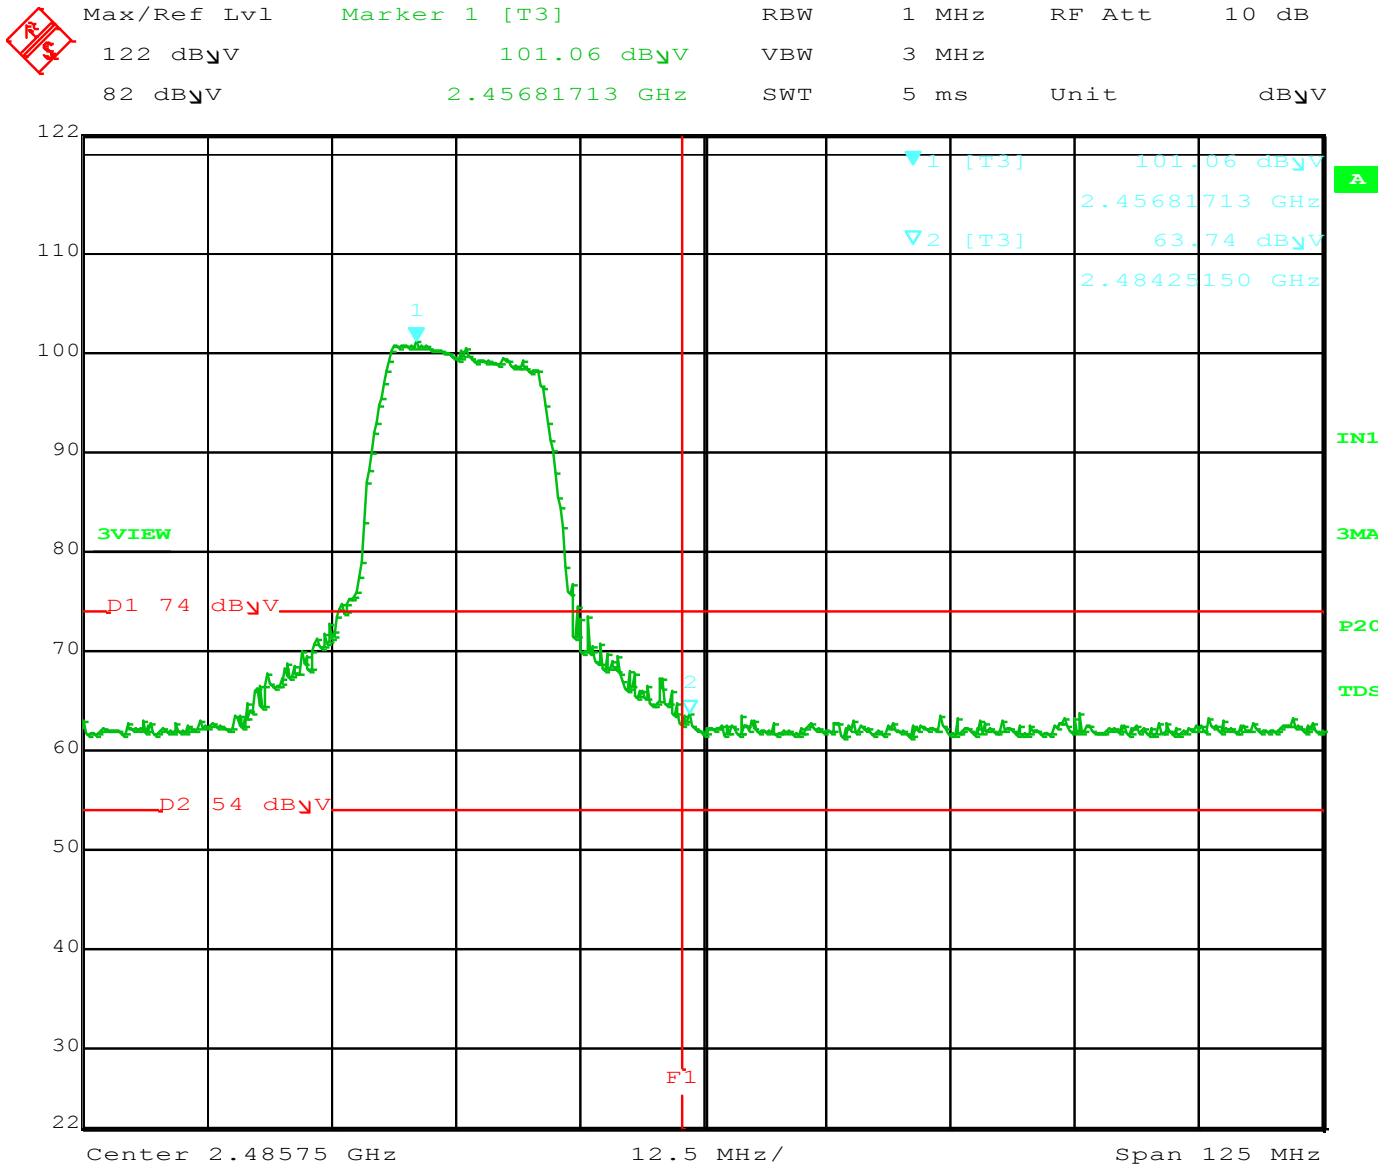

Title: ATWILC1000-MR110UB
Comment A: Upper Band Edge G Mode Vertical
Date: 13.OCT.2015 13:26:27



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

802.11n Mode

BAND EDGES- VERTICAL

FCC 15.247

Company Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11n

Date: 10/14/2015
Lab: R
Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBuV/m)	Pol	Limit (dBuV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2412.00	98.33	V	--	--	Peak	2.83	231	Fundamental of Low Channel
2399.25	73.37	V	78.23	-4.86	Delta	2.83	231	From Peak
2389.75	62.03	V	73.98	-11.95	Peak	2.83	231	
2389.75	48.36	V	53.98	-5.62	Avg	2.83	231	
2462.00	102.78	V	--	--	Peak	2.67	261	Fundamental of High Channel
2483.50	63.75	V	73.98	-10.23	Peak	2.67	261	
2483.50	49.01	V	53.98	-4.97	Avg	2.67	261	

Test distance
3 meter



BAND EDGES- HORIZONTAL

FCC 15.247

Company Atmel Corporation
EUT: Modular Transmitter
Model: ATWILC1000-MR110UB
Mode: 802.11n

Date: 10/14/2015
Lab: R
Test ENG: Torey Oliver


Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBuV/m)	Pol	Limit (dBμV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2412.00	111.82	H	--	--	Peak	1.8	37	Fundamental of High Channel
2399.00	85.85	H	91.82	-5.97	Delta	1.8	37	From Peak
2390.00	73.05	H	73.98	-0.93	Peak	1.8	37	
2390.00	52.94	H	53.98	-1.04	Avg	1.8	37	
2462.00	110.42	H	--	--	Peak	130	22	Fundamental of High Channel
2484.15	72.31	H	73.98	-1.67	Peak	130	22	
2484.15	52.28	H	53.98	-1.70	Avg	130	22	

Test distance
3 meter



LOWER BAND EDGE (Horizontal)

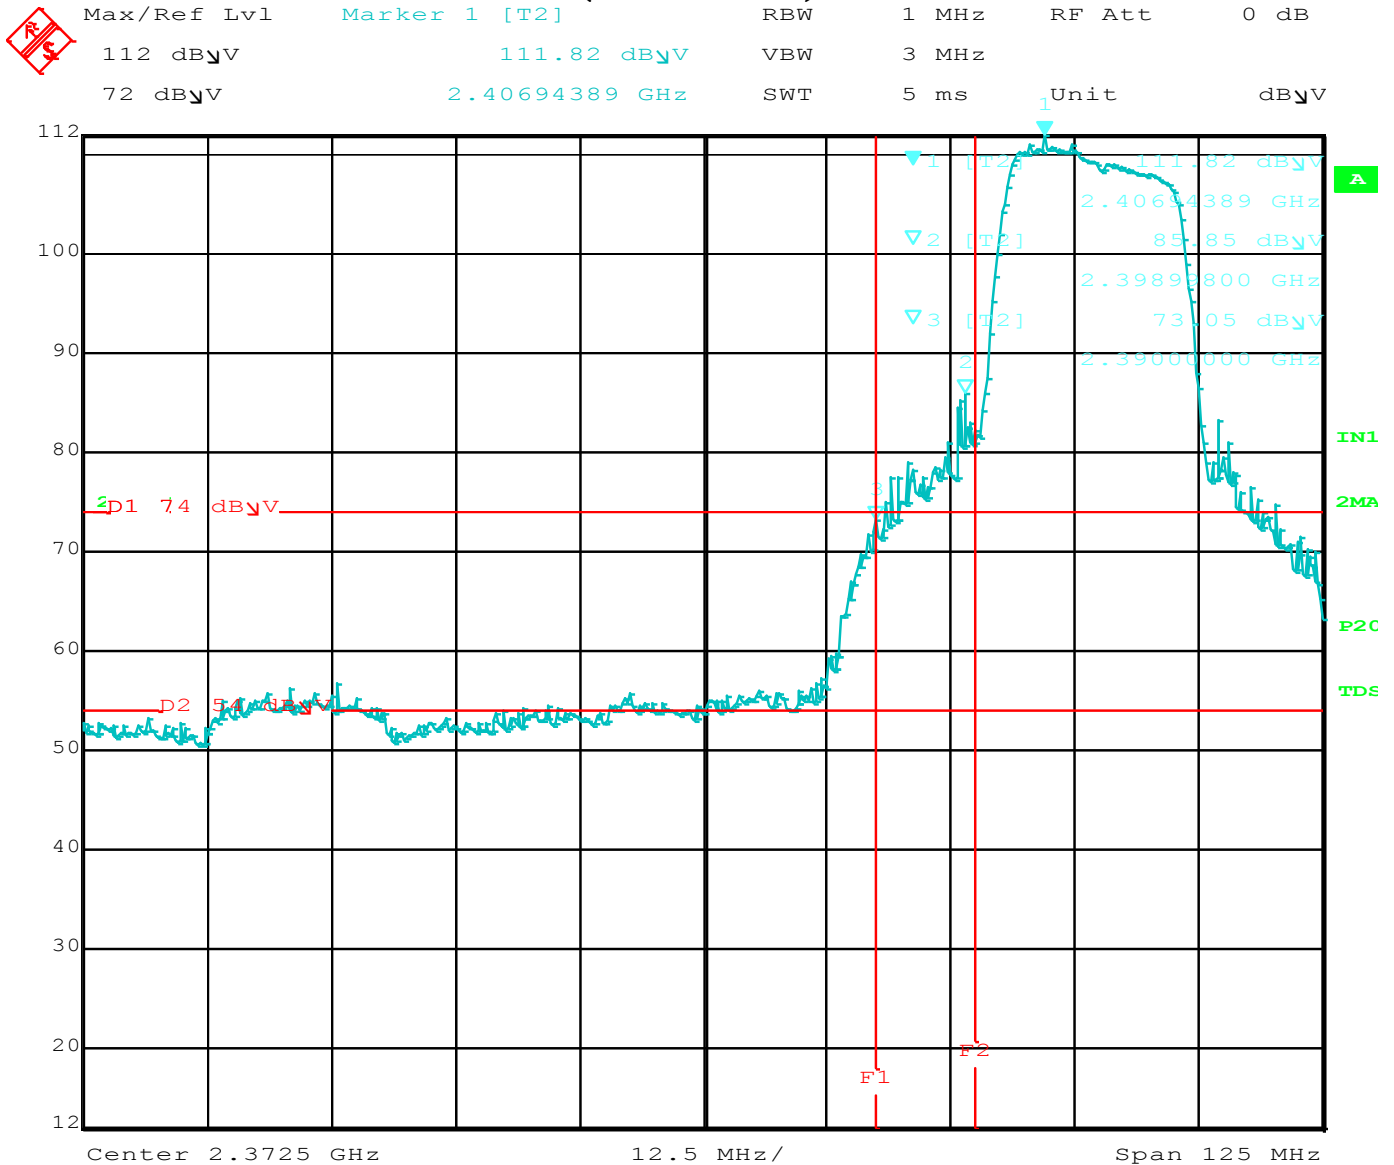

Title: ATWILC1000-MR110UB
Comment A: Lower Band Edge N Mode 2412 MHz
Date: 14.OCT.2015 10:58:08




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400


LOWER BAND EDGE
(Vertical)

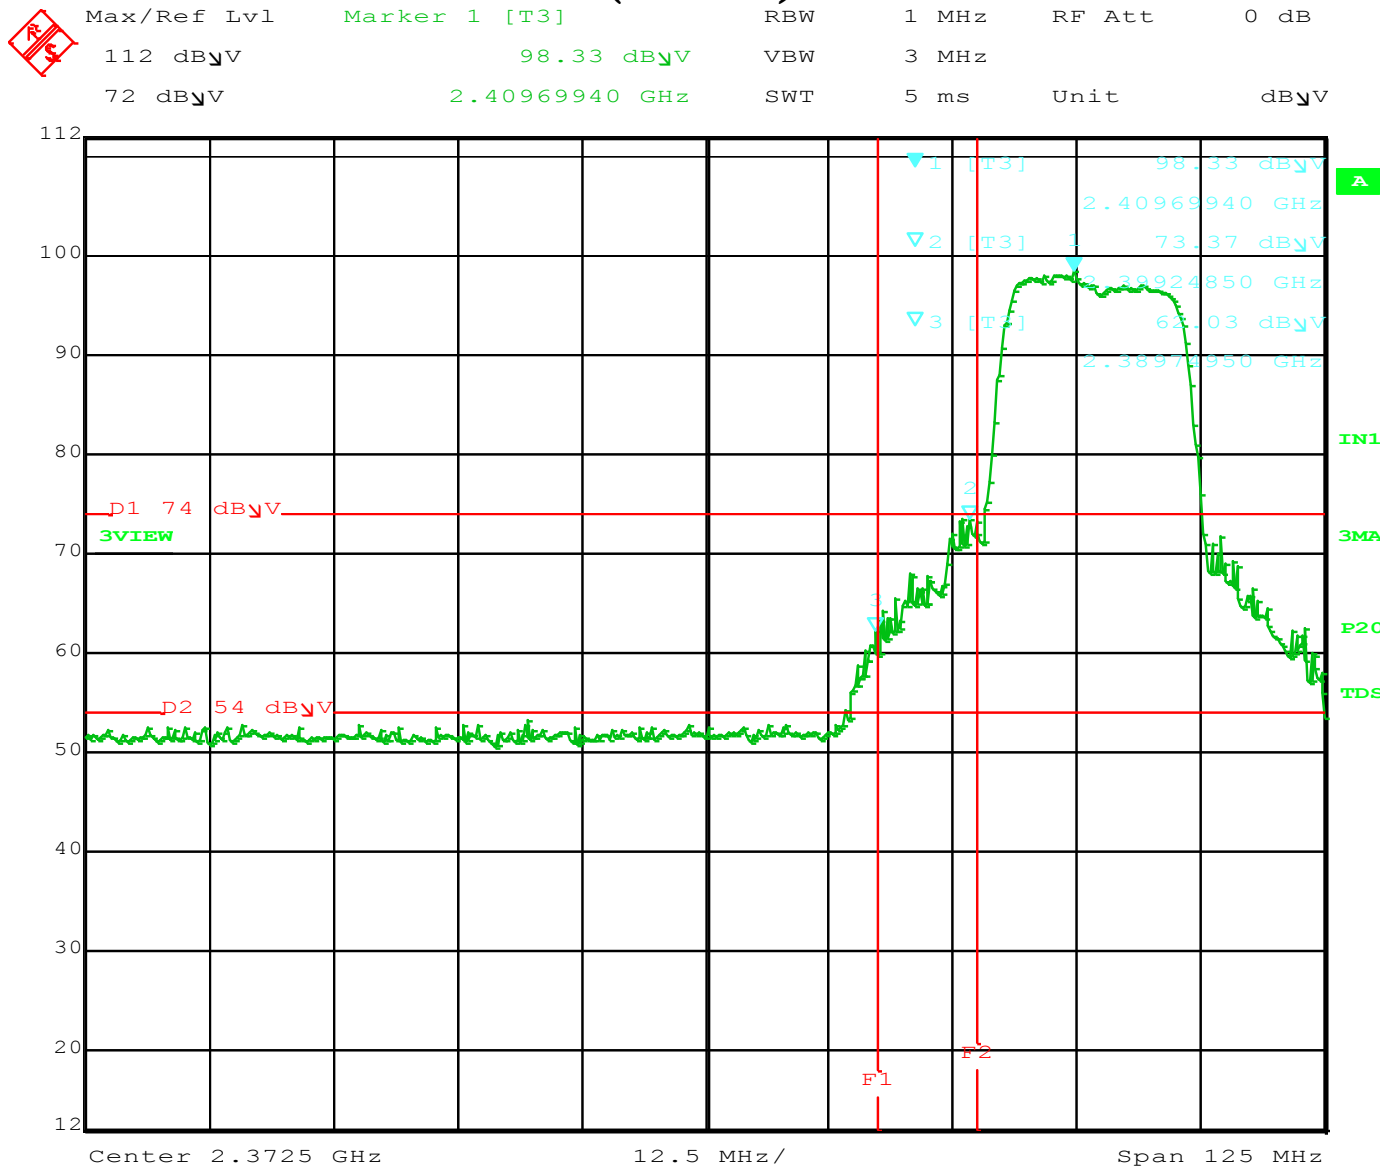

Title: ATWILC1000-MR110UB
Comment A: Lower Band Edge N Mode 2412 MHz Vertical
Date: 14.OCT.2015 11:14:42



UPPER BAND EDGE (Horizontal)

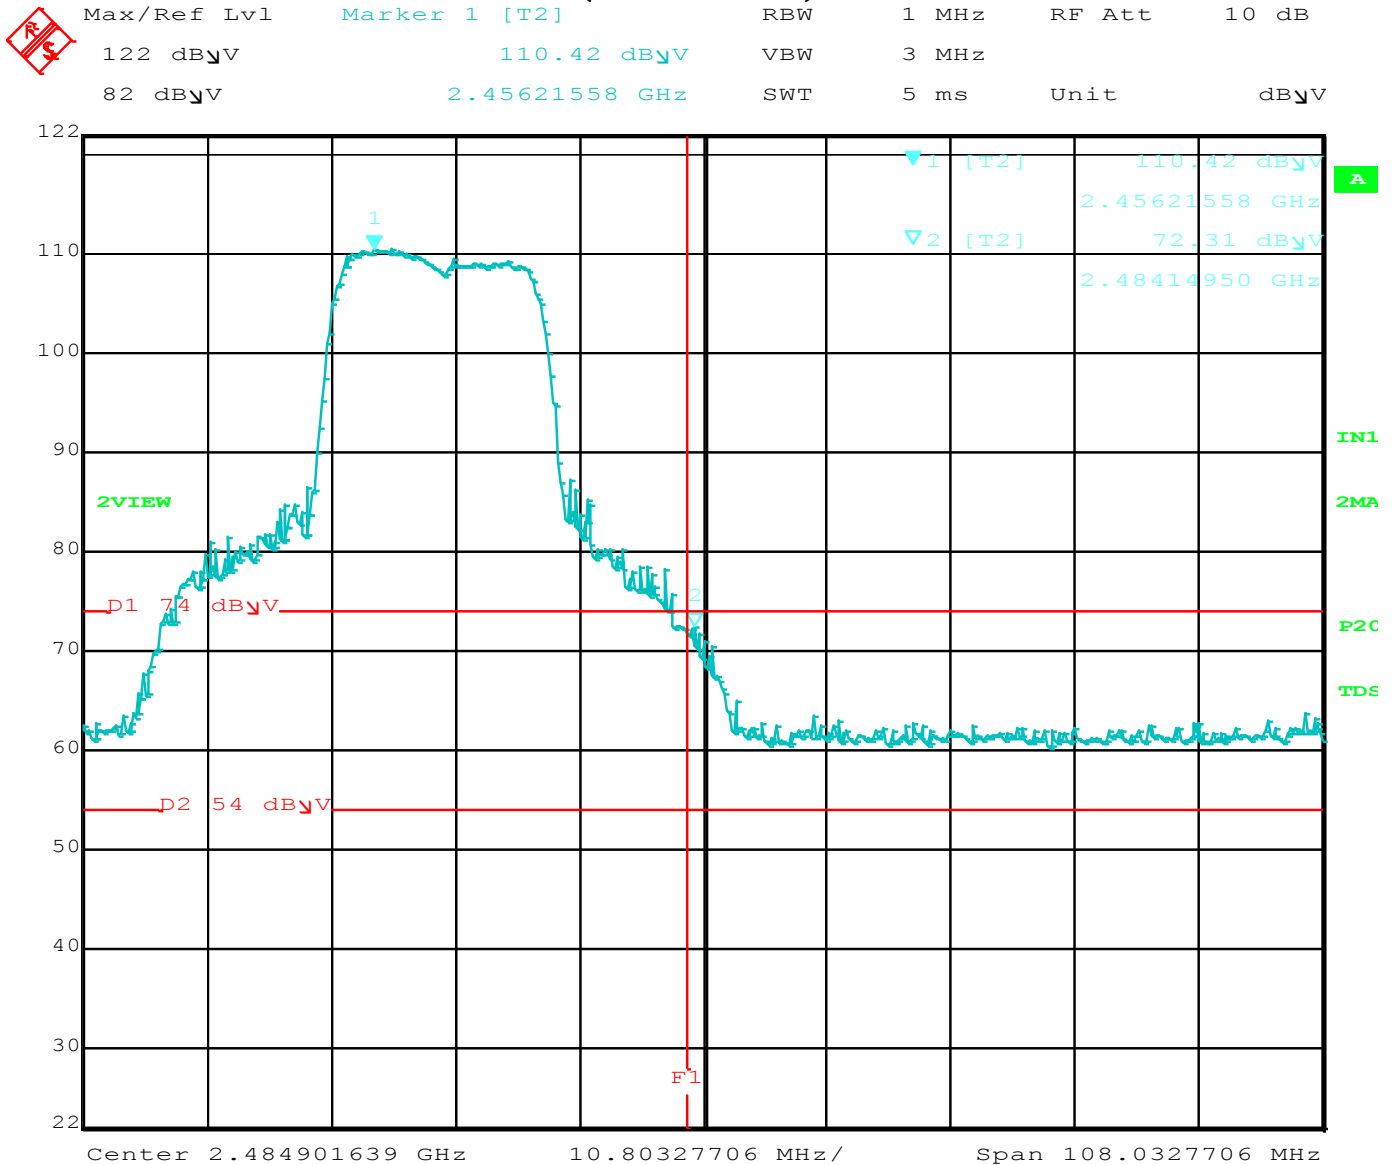

Title: ATWILC1000-MR110UB
Comment A: Upper Band Edge N Mode 2462 MHz Horizontal
Date: 14.OCT.2015 11:25:23




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

UPPER BAND EDGE (Vertical)

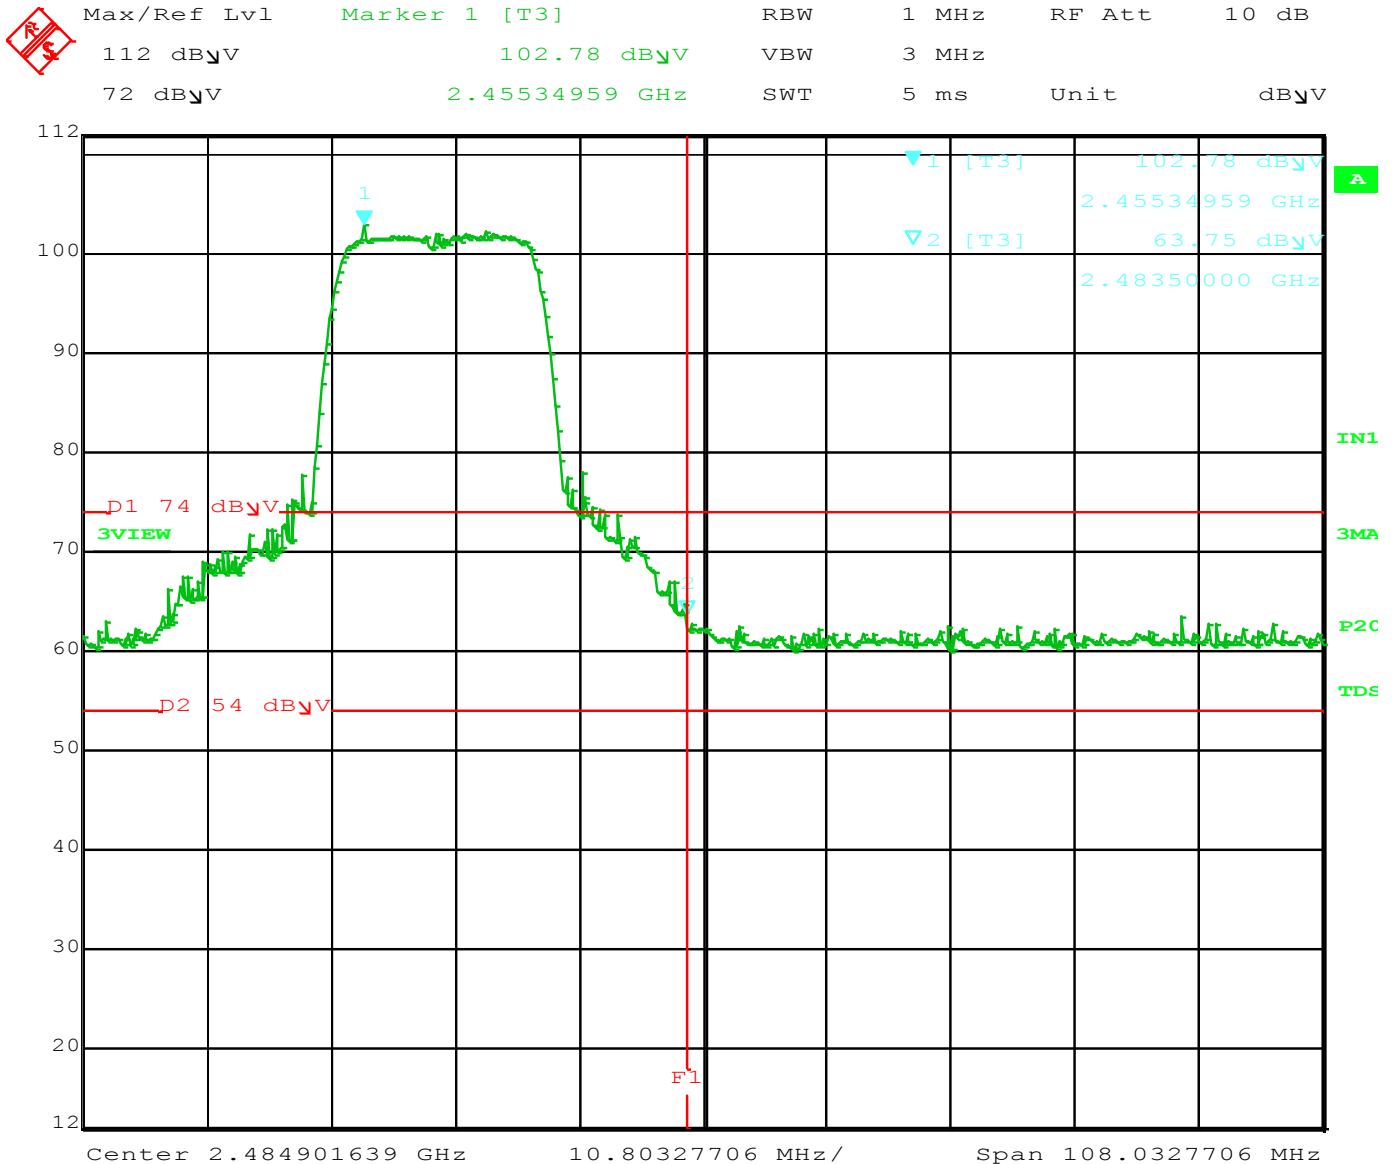

Title: ATWILC1000-MR110UB
Comment A: Upper Band Edge N Mode 2462 MHz Vertical
Date: 14.OCT.2015 11:30:06



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400