

#01_WLAN2.4GHz_802.11b 1Mbps_Edge 1_0mm_Ch6

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1.047

Medium: HSL_2450_210325 Medium parameters used : $f = 2437$ MHz; $\sigma = 1.816$ S/m; $\epsilon_r = 39.04$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN7346; ConvF(7.66, 7.66, 7.66) @ 2437 MHz; Calibrated: 2020/5/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2020/7/23
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.13 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.45 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.604 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

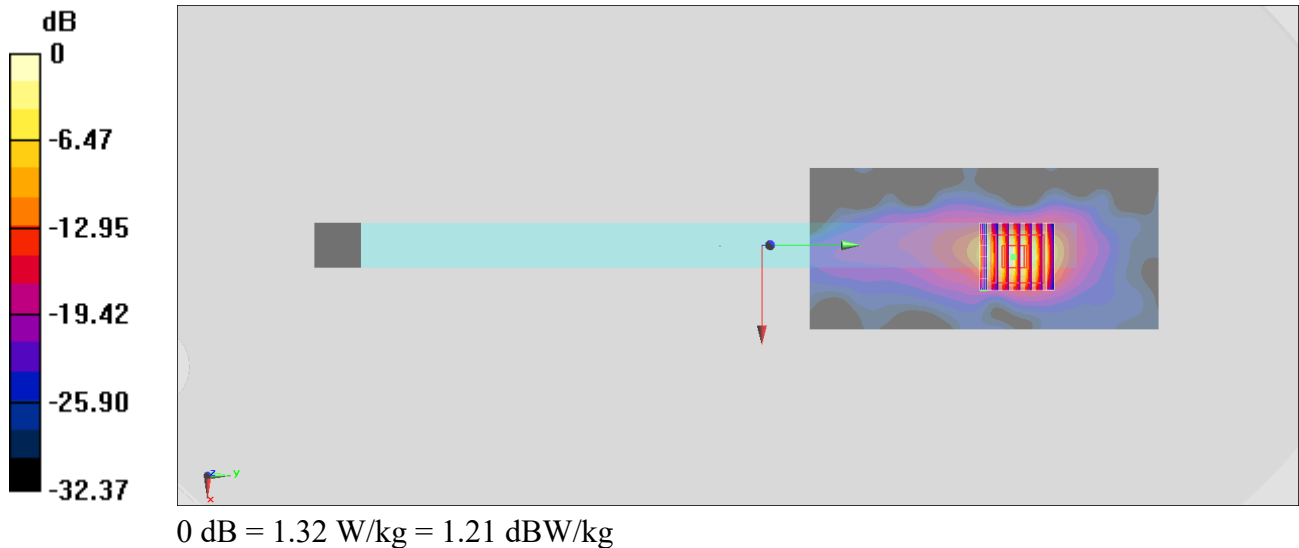

#02_WLAN5GHz_802.11n-HT40 MCS0_Edge 1_0mm_Ch46

Communication System: 802.11n; Frequency: 5230 MHz; Duty Cycle: 1:1.047

Medium: HSL_5G_210326 Medium parameters used: $f = 5230$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 35.877$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN7346; ConvF(5.38, 5.38, 5.38) @ 5230 MHz; Calibrated: 2020/5/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2020/7/23
- Phantom: ELI V4.0; Type: QDOVA001BB; Serial: 1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.12 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 25.30 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.57 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.310 W/kg

Maximum value of SAR (measured) = 2.59 W/kg

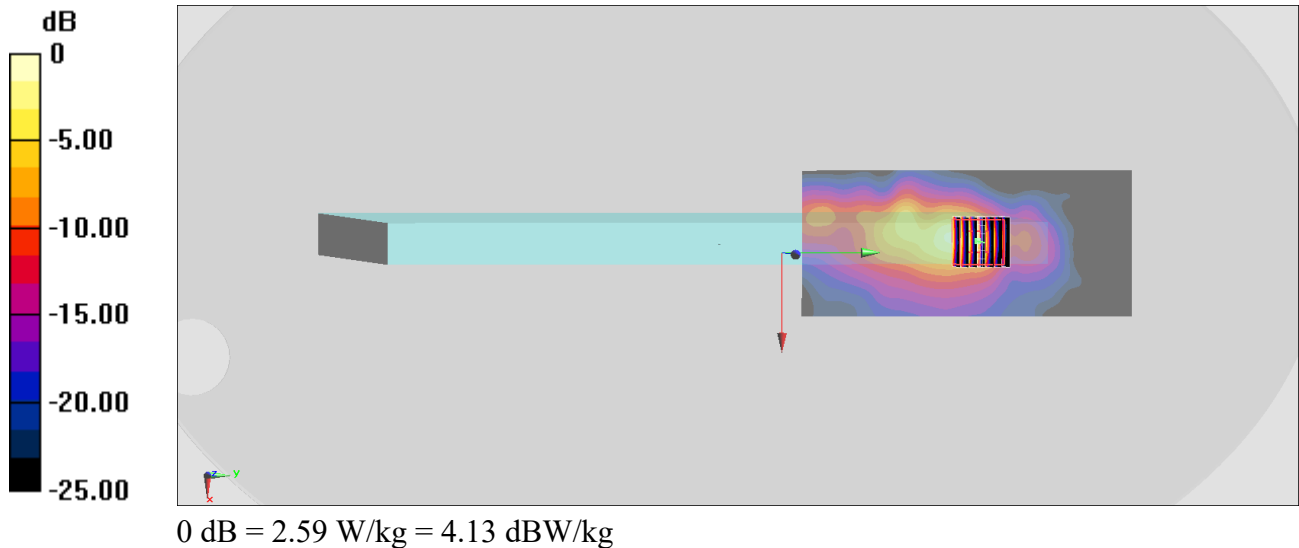

#03_WLAN5GHz_802.11n-HT40 MCS0_Edge 1_0mm_Ch54

Communication System: 802.11n; Frequency: 5270 MHz; Duty Cycle: 1:1.047

Medium: HSL_5G_210326 Medium parameters used: $f = 5270$ MHz; $\sigma = 4.617$ S/m; $\epsilon_r = 35.782$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN7346; ConvF(5.38, 5.38, 5.38) @ 5270 MHz; Calibrated: 2020/5/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2020/7/23
- Phantom: ELI V4.0; Type: QDOVA001BB; Serial: 1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x161x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.19 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 18.55 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.63 W/kg

SAR(1 g) = 0.570 W/kg; SAR(10 g) = 0.175 W/kg

Maximum value of SAR (measured) = 1.46 W/kg

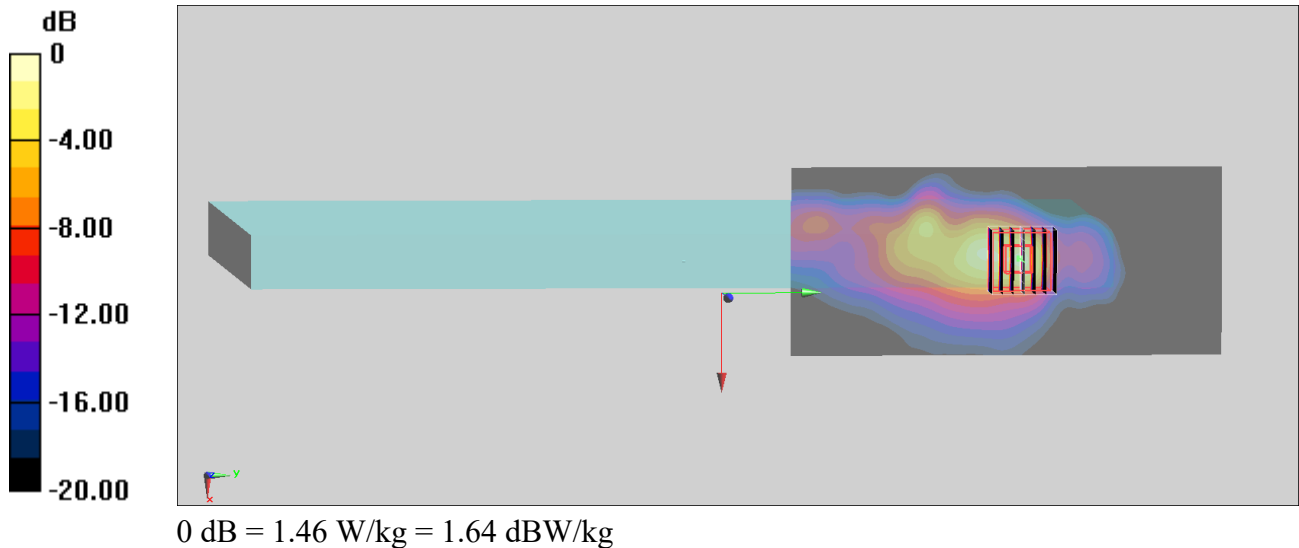

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Edge 1_0mm_Ch122

Communication System: 802.11ac; Frequency: 5610 MHz; Duty Cycle: 1:1.023

Medium: HSL_5G_210326 Medium parameters used : $f = 5610$ MHz; $\sigma = 4.958$ S/m; $\epsilon_r = 35.307$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN7346; ConvF(4.79, 4.79, 4.79) @ 5610 MHz; Calibrated: 2020/5/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2020/7/23
- Phantom: ELI V4.0; Type: QDOVA001BB; Serial: 1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.29 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 23.48 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 5.18 W/kg

SAR(1 g) = 0.938 W/kg; SAR(10 g) = 0.263 W/kg

Maximum value of SAR (measured) = 2.62 W/kg

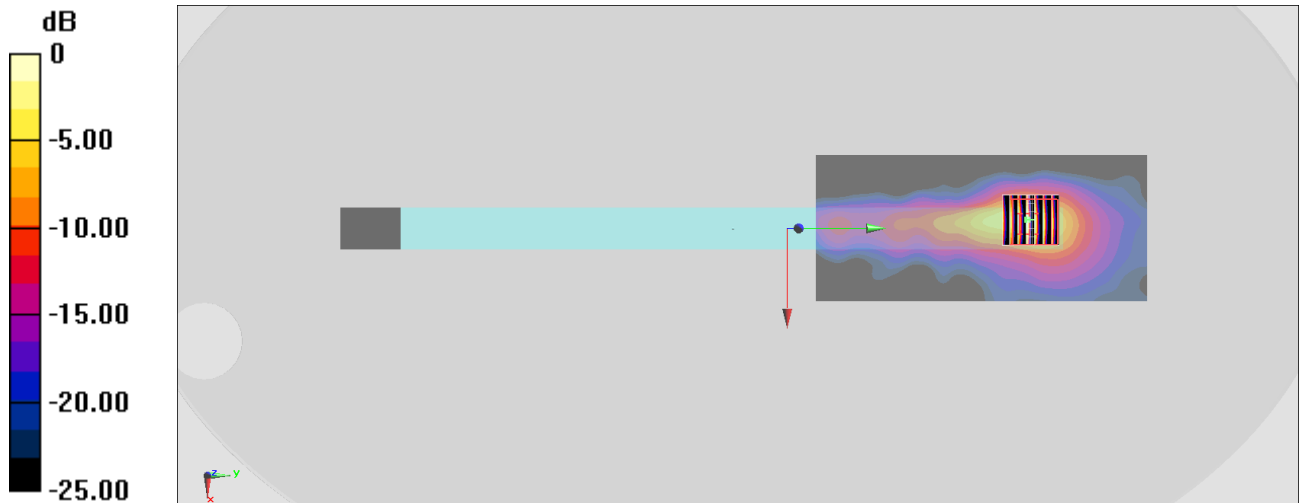

0 dB = 2.62 W/kg = 4.18 dBW/kg

#05_WLAN5GHz_802.11ac-VHT80 MCS0_Edge 1_0mm_Ch155

Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.047

Medium: HSL_5G_210326 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.131$ S/m; $\epsilon_r = 35.14$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN7346; ConvF(4.84, 4.84, 4.84) @ 5775 MHz; Calibrated: 2020/5/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2020/7/23
- Phantom: ELI V4.0; Type: QDOVA001BB; Serial: 1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x161x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.81 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 25.11 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 6.14 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.315 W/kg

Maximum value of SAR (measured) = 3.13 W/kg

