**CETECOM™****CETECOM ICT Services**
consulting - testing - certification >>>

TEST REPORT

Test report no.: 1-9947/15-01-05-C

Deutsche
Akkreditierungsstelle
D-PL-12076-01-01

Testing laboratory

CETECOM ICT Services GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>e-mail: ict@cetecom.com**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Applicant

Scheidt & Bachmann GmbH

Breite Str. 132

41238 Mönchengladbach / GERMANY

Phone: +49 216 626-60

Fax: +49 216 626-6699

Contact: Binia Kurth

e-mail: kurth.binia@scheidt-bachmann.de

Phone: +49 2166 266-236

Manufacturer

Scheidt & Bachmann GmbH

Breite Str. 132

41238 Mönchengladbach / GERMANY

Test standard/s

47 CFR Part 15

Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 247 Issue 1

Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and Licence - Exempt Local Area Network (LE-LAN) Devices

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Multifunctional Ticketing Handheld (Inspection device)**Model name:** FareGo Move MT60**FCC ID:** O5KMT60**IC:** 8312A-MT60**Frequency:** ISM band 2400 MHz to 2483.5 MHz
(lowest channel 01 – 2412 MHz, highest channel 11 – 2462 MHz)**Technology tested:** WLAN**Antenna:** Integrated antenna**Power supply:** 7.2 V DC by battery**Temperature range:** -10 °C to +40 °C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

p.o.

Marco Bertolino
Lab Manager
Radio Communications & EMC

Test performed:

Christoph Schneider
Testing Manager
Radio Communications & EMC

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
3	Test standard/s	3
3.1	Measurement guidance	3
4	Test environment	4
5	Test item	4
5.1	General description	4
5.2	Additional information	4
6	Test laboratories sub-contracted	4
7	Description of the test setup	5
7.1	Shielded semi anechoic chamber	6
7.2	Shielded fully anechoic chamber	7
7.3	Radiated measurements > 18 GHz	8
7.4	Conducted measurements	9
8	Measurement uncertainty	10
9	Sequence of testing	11
9.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	11
9.2	Sequence of testing radiated spurious 30 MHz to 1 GHz	12
9.3	Sequence of testing radiated spurious 1 GHz to 18 GHz	13
9.4	Sequence of testing radiated spurious above 18 GHz	14
10	Summary of measurement results	15
11	Additional comments	16
12	Measurement results	17
12.1	Identify worst case data rate	17
12.2	Module verification	18
12.3	Occupied bandwidth – 99% emission bandwidth	19
12.4	Band edge compliance radiated	29
12.5	Spurious emissions radiated below 30 MHz	35
12.6	Spurious emissions radiated 30 MHz to 1 GHz	44
12.7	Spurious emissions radiated above 1 GHz	57
Annex A	Document history	79
Annex B	Further information	79
Annex C	Accreditation Certificate	80

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-9947/15-01-05-B and dated 2016-07-04

2.2 Application details

Date of receipt of order:	2015-08-06
Date of receipt of test item:	2015-09-01
Start of test:	2015-09-09
End of test:	2015-11-27
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15		Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 1	May 2015	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices

3.1 Measurement guidance

Guidance	Version	Description
DTS: KDB 558074 D01	v03r03	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
ANSI C63.4-2014	-/-	American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz

4 Test environment

Temperature	:	T_{nom} T_{max} T_{min}	+22 °C during room temperature tests -/- °C during high temperature tests -/- °C during low temperature tests
Relative humidity content	:		55 %
Barometric pressure	:		not relevant for this kind of testing
Power supply	:	V_{nom} V_{max} V_{min}	7.2 V DC by Battery -/- V -/- V

5 Test item

5.1 General description

Kind of test item	:	Multifunctional Ticketing Handheld (Inspection device)
Type identification	:	FareGo Move MT60
PMN	:	FareGo Move MT60
HVIN	:	00330600
FVIN	:	07335350
HMN	:	-/-
S/N serial number	:	-/-
HW hardware status	:	00320600
SW software status	:	SW-storage MT60
Frequency band	:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 01 – 2412 MHz, highest channel 11 – 2462 MHz)
Type of radio transmission	:	DSSS, OFDM
Use of frequency spectrum	:	
Type of modulation	:	BPSK, QPSK, 16 – QAM, 64 – QAM
Number of channels	:	11
Antenna	:	Integrated antenna
Power supply	:	7.2 V DC by battery
Temperature range	:	-10 °C to +40 °C

5.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup- and EUT-photos are included in test report:

1-9947/15-01-01_AnnexA
1-9947/15-01-01_AnnexB
1-9947/15-01-01_AnnexD

6 Test laboratories sub-contracted

None

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

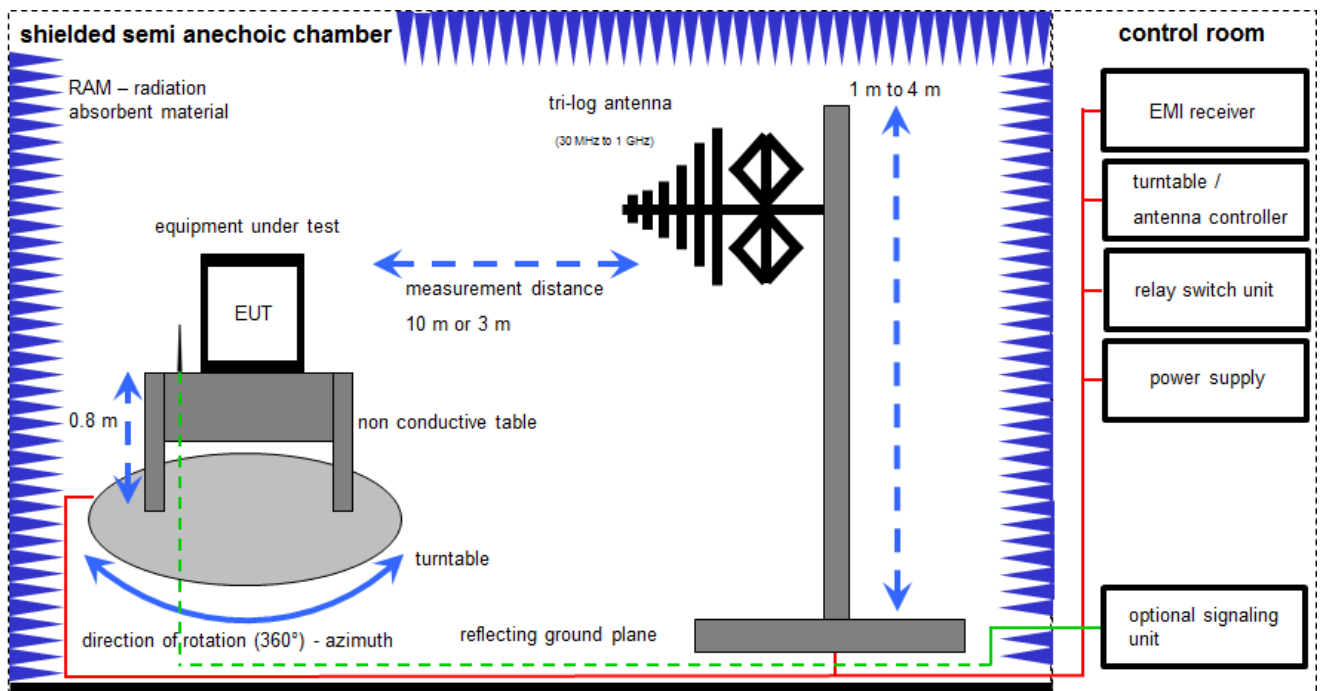
In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
v/k!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.



$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

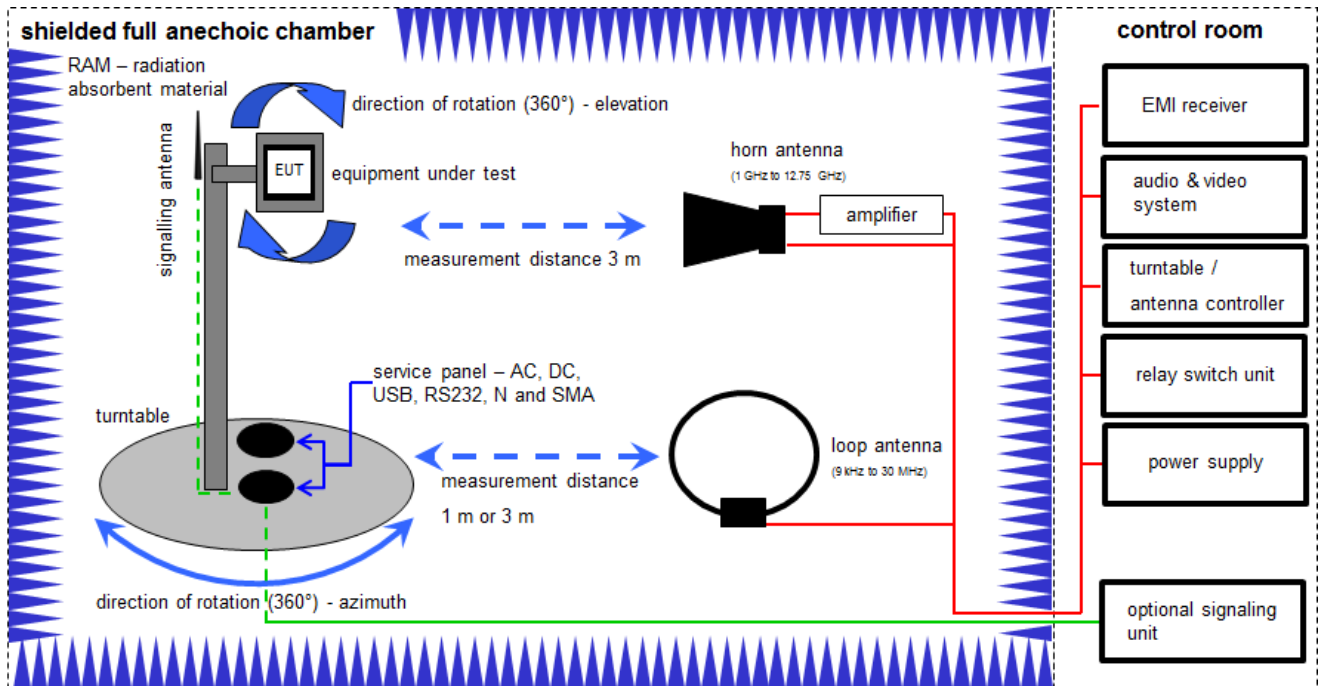
Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] \quad (35.69 \mu V/m)$$

Used equipment:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev		
2	A	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	26.01.2015	26.01.2016
3	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	30.01.2014	30.01.2016
4	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	29.01.2015	29.01.2017
5	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	26.08.2014	26.08.2016
6	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	22.04.2014	22.04.2016
7	A	Bluetooth Tester	CBT35	R&S	100635	300003907	ne signalling only	-/-	-/-

7.2 Shielded fully anechoic chamber



$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:

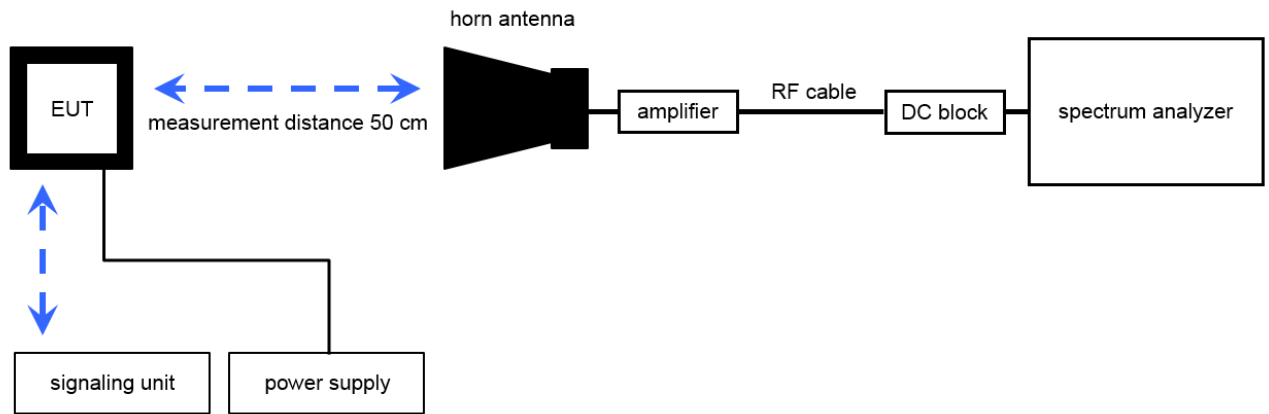
$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$

Used equipment:

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A,C	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9709-5290	300000212	k	23.07.2015	23.07.2017
2	A,B	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	22.01.2015	22.01.2016
3	A,C	Highpass Filter	WHK1.1/15G-10SS	Wainwright	37	400000148	ne	22.04.2014	22.04.2017
4	A	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne		
5	A	Band Reject Filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	26	300003792	ne		
6	A,C	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22050	300004482	ev		
7	A	Broadband Amplifier	CBLU5135235	CERNEX	22011	300004492	ev		
8	A,C	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne		
9	A,B,C	Messrechner und Monitor	Intel Core i3 3220/3,3 GHz, Prozessor	Agilent Technologies	2V2403033A54 21	300004591	ne		
10	A,B,C	NEXIO EMV-Software	BAT EMC	EMCO	2V2403033A54 21	300004682	ne		
11	B	Active Loop Antenna 10 kHz to 30 MHz	6502	Kontron Psychotech	8905-2342	300000256	k	24.06.2015	24.06.2017
12	A,B,C	Bluetooth Tester	CBT35	R&S	100635	300003907	ne signalling only	-/-	-/-

7.3 Radiated measurements > 18 GHz

Radiated measurements > 12.75 GHz



$$SS = U_R + CA + AF$$

(SS-signal strength; U_R -voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:

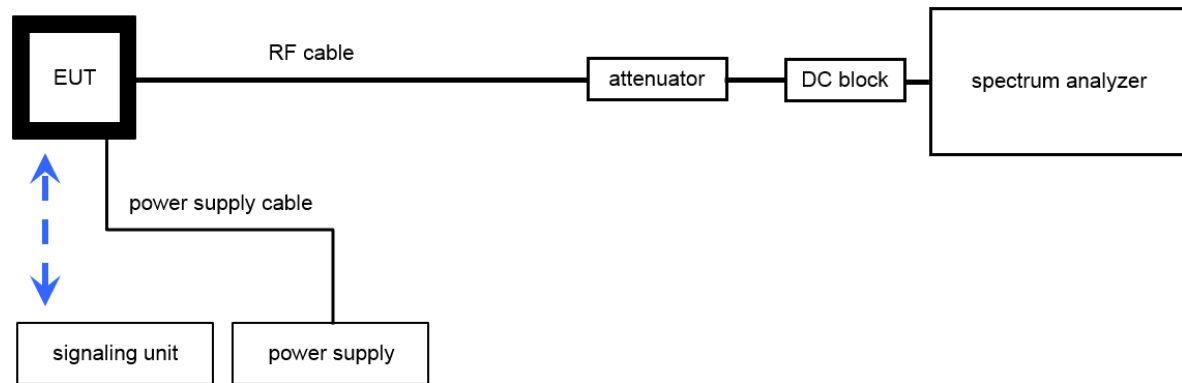
$$SS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-60.1) \text{ [dB]} + 36.74 \text{ [dB}\mu\text{V/m]} = 16.64 \text{ [dB}\mu\text{V/m]} \text{ (} 6.79 \text{ }\mu\text{V/m)}$$

Used equipment:

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda	8402	300000787	k	22.07.2015	22.07.2017
2	A	Horn Antenna 18,0-40,0 GHz	LHAF180	Microw.Devel	39180-103-022	300001748	k	22.05.2015	22.05.2018
3	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	22.01.2015	22.01.2016
4	A	Amplifier 2-40 GHz	JS32-02004000-57-5P	MITEQ	1777200	300004541	ev		
5	A	Bluetooth Tester	CBT35	R&S	100635	300003907	ne signalling only	-/-	-/-
6	A	RF-Cable	ST18/SMAM/SMAM/48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
7	A	RF-Cable	ST18/SMAM/SMm/48	Huber & Suhner	Batch no. 127377	400001183	ev	-/-	-/-
8	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	Batch no. 127377	400001185	ev	-/-	-/-

7.4 Conducted measurements

Conducted measurements normal conditions



$$OP = AV + CA$$

(OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

$$OP \text{ [dBm]} = 6.0 \text{ [dBm]} + 11.7 \text{ [dB]} = 17.7 \text{ [dBm]} \text{ (58.88 mW)}$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	21.01.2016	21.01.2017
2	A	PC-WLAN Tester	Intel Core i3 3220/3,3 GHz, Prozessor	R&S	2V2403033A45 23	300004589	ne	-/-	-/-
3	A	RF-Cable	ST18/SMAM/SMAM/60	Huber & Suhner	Batch no. 606844	400001181	ev	-/-	-/-
4	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	Batch no. 606844	400001185	ev	-/-	-/-
5	A	Coax Attenuator 10 dB 2W 0-40 GHz	MCL BW-K10-2W44+	Mini Circuits	Batch no. 606844	400001186	ev	-/-	-/-
6	A	NRP Power meter Display and control unit AC sup	NRP	R&S	100212	300003780	VIKI!	28.01.2016	28.01.2018
7	A	Wideband Power Sensor, 50 MHz to 18 GHz	NRP-Z81	R&S	102585	300004863	k	25.01.2016	25.01.2017

8 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Antenna gain	± 3 dB
Carrier frequency separation	± 21.5 kHz
Number of hopping channels	-/-
Time of occupancy	-/-
Spectrum bandwidth	± 21.5 kHz absolute; ± 15.0 kHz relative
Maximum output power	± 1 dB
Detailed conducted spurious emissions @ the band edge	± 1 dB
Band edge compliance radiated	± 3 dB
Spurious emissions conducted	± 3 dB
Spurious emissions radiated below 30 MHz	± 3 dB
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB
Spurious emissions radiated above 12.75 GHz	± 4.5 dB
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB

9 Sequence of testing

9.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the premeasurement are maximized by the software by rotating the turntable from 0° to 360°. In case of the 2-axis positioner is used the elevation axis is also rotated from 0° to 360°.
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

9.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

9.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

9.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

10 Summary of measurement results

☐	No deviations from the technical specifications were ascertained
☐	There were deviations from the technical specifications ascertained
☒	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 1	See table!	2016-07-25	Radiated measurements only according customer specification

Test specification clause	Test case	Guideline	Temperature conditions	Power source voltages	Mode	C	NC	NA	NP	Remark
§15.247(b)(4) RSS - 247 / 5.4 (4)	Antenna gain	-/-	Nominal	Nominal	DSSS	☐	☐	☐	☒	-/-
§15.247(e) RSS - 247 / 5.2 (2)	Power spectral density	KDB 558074 DTS clause: 10.6	Nominal	Nominal	DSSS OFDM	☐	☐	☐	☒	-/-
§15.247(a)(2) RSS - 247 / 5.2 (1)	DTS bandwidth	KDB 558074 DTS clause: 8.1	Nominal	Nominal	DSSS OFDM	☐	☐	☐	☒	-/-
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	Nominal	DSSS OFDM	☒	☐	☐	☐	-/-
§15.247(b)(3) RSS - 247 / 5.4 (4)	Maximum output power	KDB 558074 DTS clause: 9.2.2.5	Nominal	Nominal	DSSS OFDM	☐	☐	☐	☒	-/-
§15.247(d) RSS - 247 / 5.5	Detailed spurious emissions @ the band edge - conducted	-/-	Nominal	Nominal	DSSS OFDM	☐	☐	☐	☒	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance radiated	KDB 558074 DTS clause: 13.3.2	Nominal	Nominal	DSSS OFDM	☒	☐	☐	☐	-/-
§15.247(d) RSS - 247 / 5.5	TX spurious emissions conducted	KDB 558074 DTS clause: 11.1 & 11.2 11.3	Nominal	Nominal	DSSS OFDM	☐	☐	☐	☒	-/-
§15.209(a) RSS-Gen	TX spurious emissions radiated below 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	☒	☐	☐	☐	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions radiated 30 MHz to 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	☒	☐	☐	☐	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions radiated above 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	☒	☐	☐	☐	-/-
§15.109 RSS-Gen	RX spurious emissions radiated 30 MHz to 1 GHz	-/-	Nominal	Nominal	RX / idle	☐	☐	☐	☒	-/-
§15.109 RSS-Gen	RX spurious emissions radiated above 1 GHz	-/-	Nominal	Nominal	RX / idle	☐	☐	☐	☒	-/-
§15.107(a) §15.207	Conducted emissions < 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	☐	☐	☐	☒	-/-

Note: C = Complies; NC = Not complies; NA = Not applicable; NP = Not performed

11 Additional comments

Reference documents: Test Report MDE_UBLOX_1624_FCCc (DF1)

Special test descriptions: None

Configuration descriptions: None

Test mode: ☐ No test mode available.
Iperf was used to ping another device with the largest support packet size

☒ Special software is used.
EUT is transmitting pseudo random data by itself

Antennas and transmit operating modes: ☒ Operating mode 1 (single antenna)

- Equipment with 1 antenna,
- Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,
- Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)

☐ Operating mode 2 (multiple antennas, no beamforming)

- Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.

☐ Operating mode 3 (multiple antennas, with beamforming)

- Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

12 Measurement results

12.1 Identify worst case data rate

Measurement:

All modes of the module will be measured with an average power meter or spectrum analyzer to identify the maximum transmission power.

In further tests only the identified worst case modulation scheme or bandwidth will be measured and this mode is used as representative mode for all other modulation schemes.

Additional the band edge compliance test will be performed in the lowest and highest modulation scheme.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz
Video bandwidth:	3 MHz
Trace mode:	Max hold
Test setup:	See sub clause 7.4 A
Measurement uncertainty	-/-

Results:

Modulation	Modulation scheme / bandwidth
DSSS / b – mode	1 Mbit/s
OFDM / g – mode	6 Mbit/s
OFDM / n HT20 – mode	MCS0
OFDM / n HT40 – mode	MCS0

12.2 Module verification**Description:**

Measurement of the maximum conducted output power. To verify the testability of the used EUT compared to reference test report MDE_LESSW_1302_FCCa.

Measurement:

Measurement parameter	
According to DTS clause: 9.2.2.5	
Peak power meter	
Test setup:	See sub clause 7.4 – A
Measurement uncertainty	See sub clause 8

Limits:

FCC	IC
Conducted: 1.0 W – Antenna gain with max. 6 dBi	

Results:

Modulation	Channel	Reference report	Actual measured EUT
DSSS / b – mode	6	24.0	23.8
OFDM / g – mode	6	24.5	24.1
OFDM / n HT20 – mode	6	24.6	24.7
OFDM / n HT40 – mode	6	25.4	24.9

12.3 Occupied bandwidth – 99% emission bandwidth**Description:**

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

Measurement:

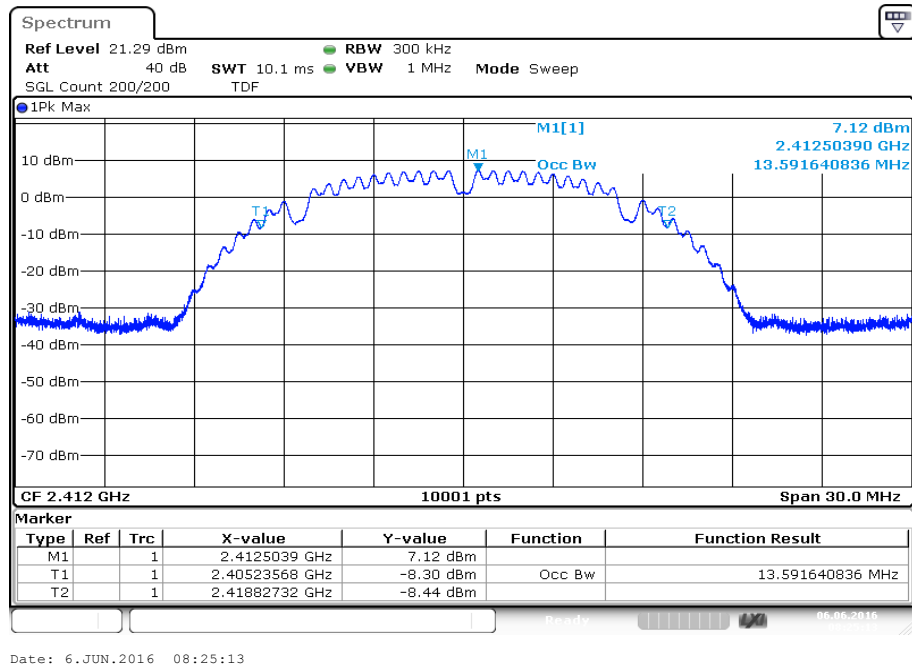
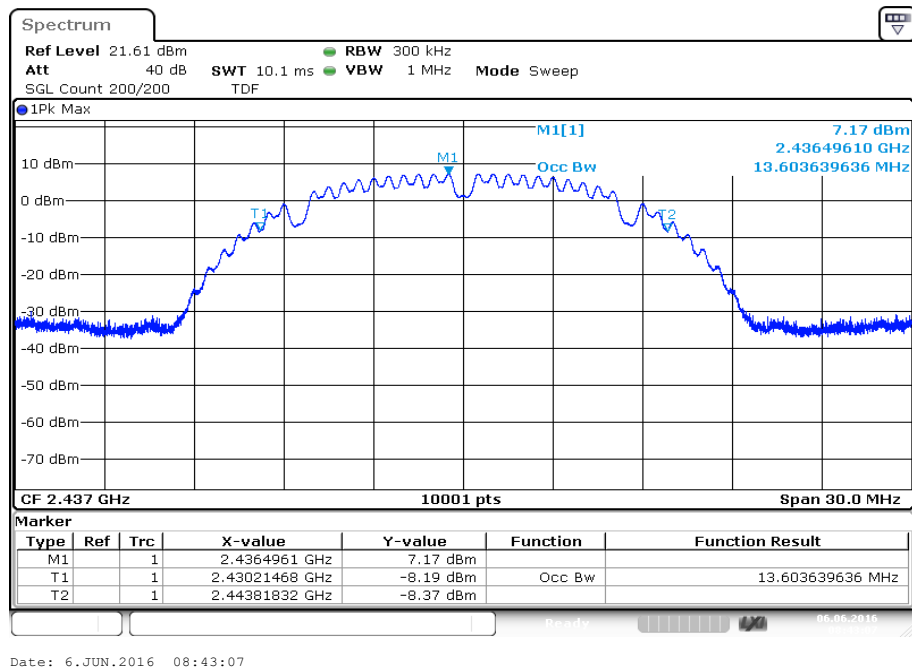
Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	300 kHz
Video bandwidth:	1 MHz
Span:	30 MHz / 50 MHz
Measurement procedure:	Measurement of the 99% bandwidth using the integration function of the analyzer
Trace mode:	Single count with 200 counts
Test setup:	See sub clause 7.4 A
Measurement uncertainty	See sub clause 8

Usage:

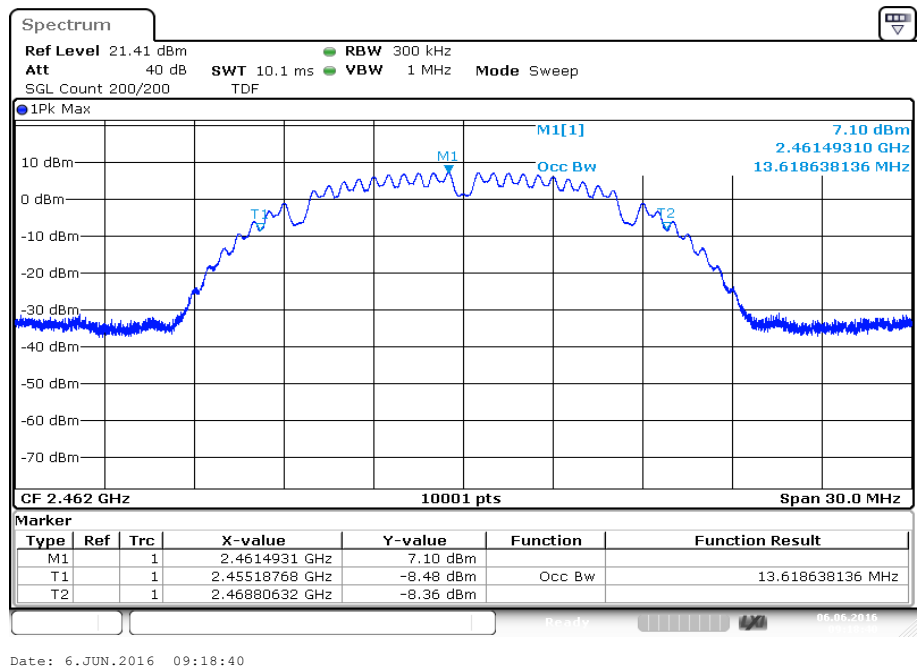
-/-	IC
OBW is necessary for Emission Designator	

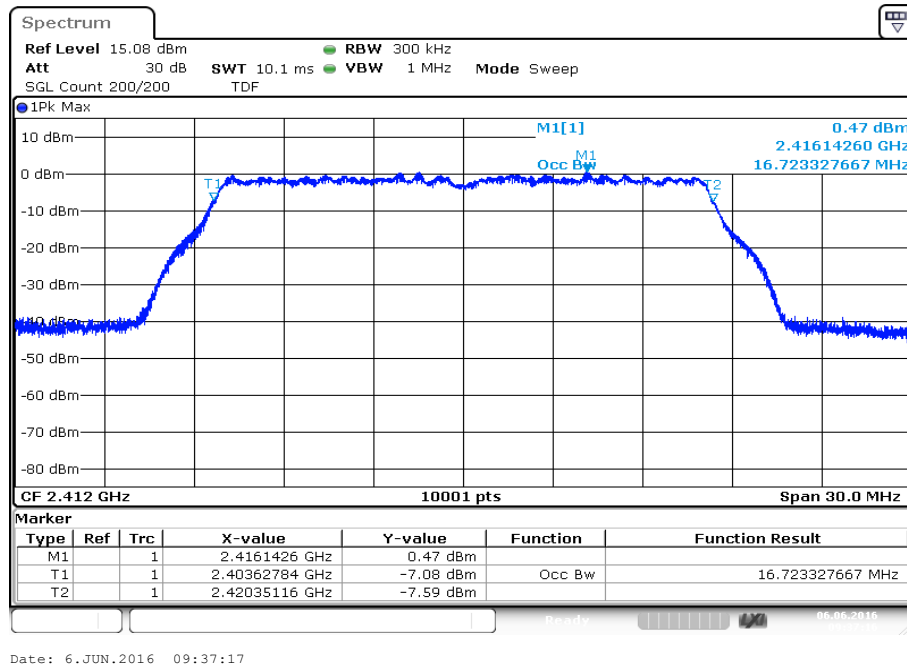
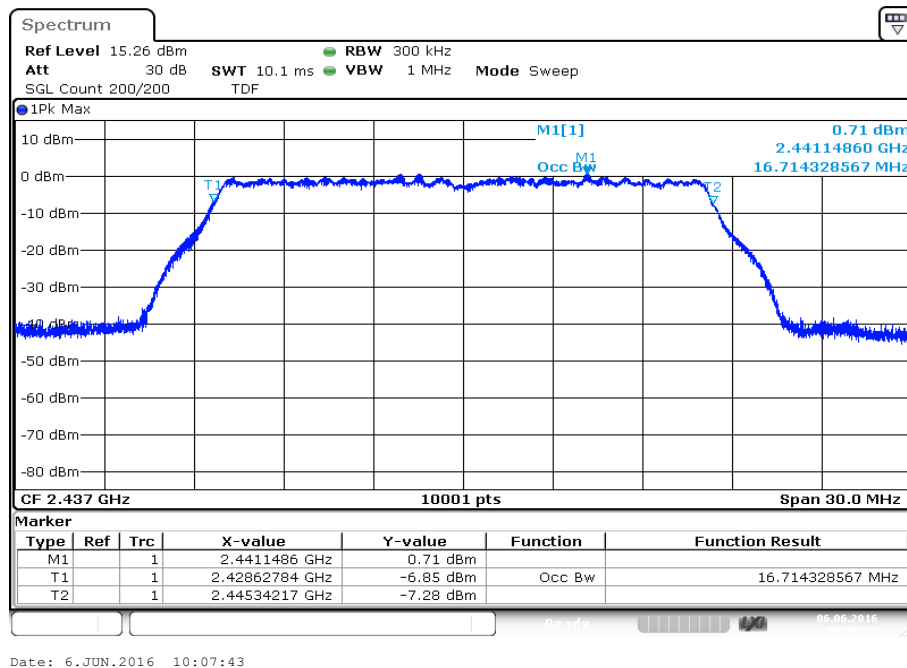
Results:

Modulation Frequency	99% bandwidth [kHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	13592	13604	13619
OFDM / g – mode	16723	16714	16720
OFDM / n HT20 – mode	17845	16774	17836
Frequency	2422 MHz	2437 MHz	2452 MHz
OFDM / n HT40 – mode	36740	36728	36746

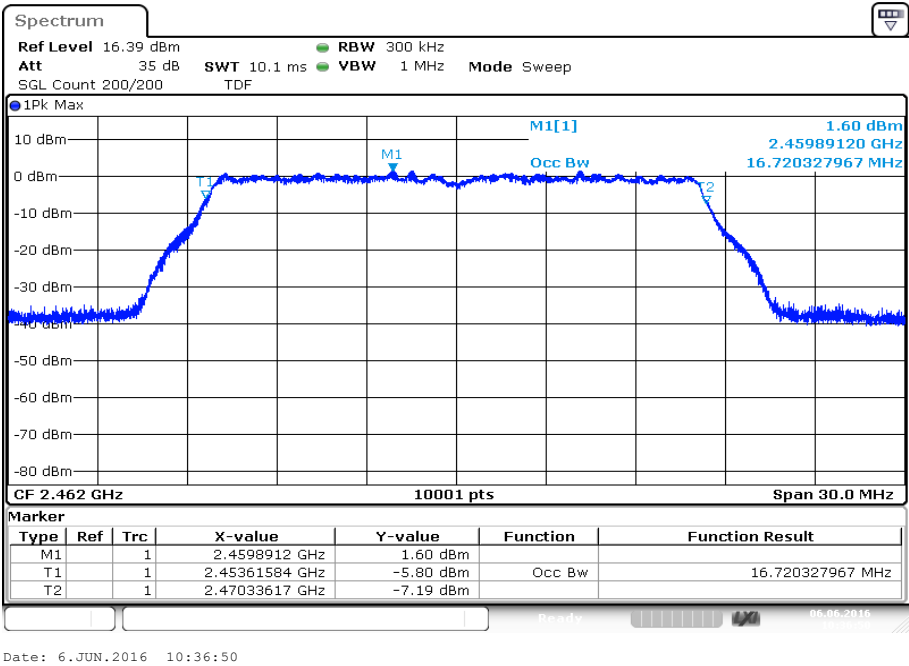
Plots: DSSS / b – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel

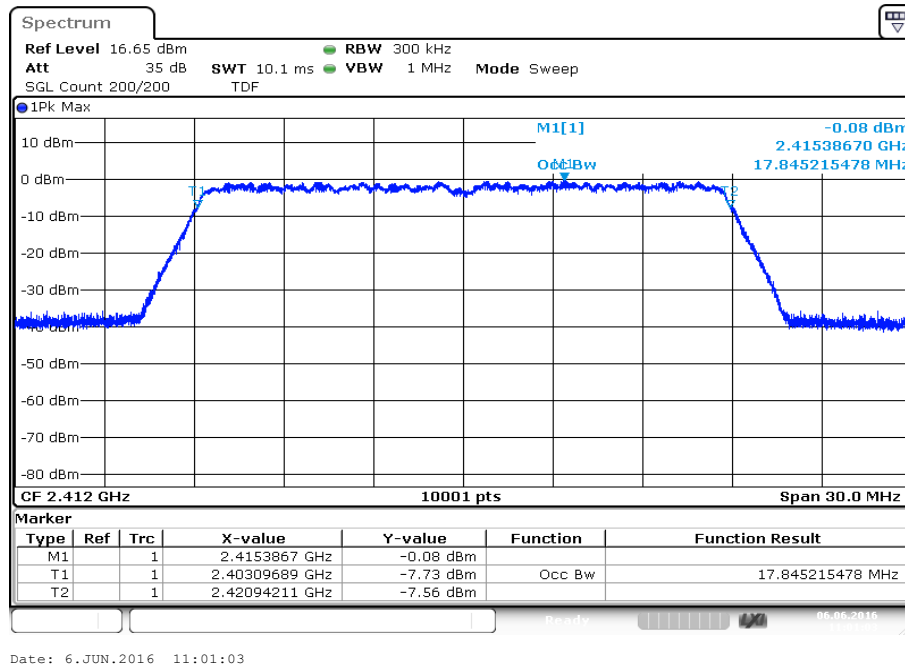
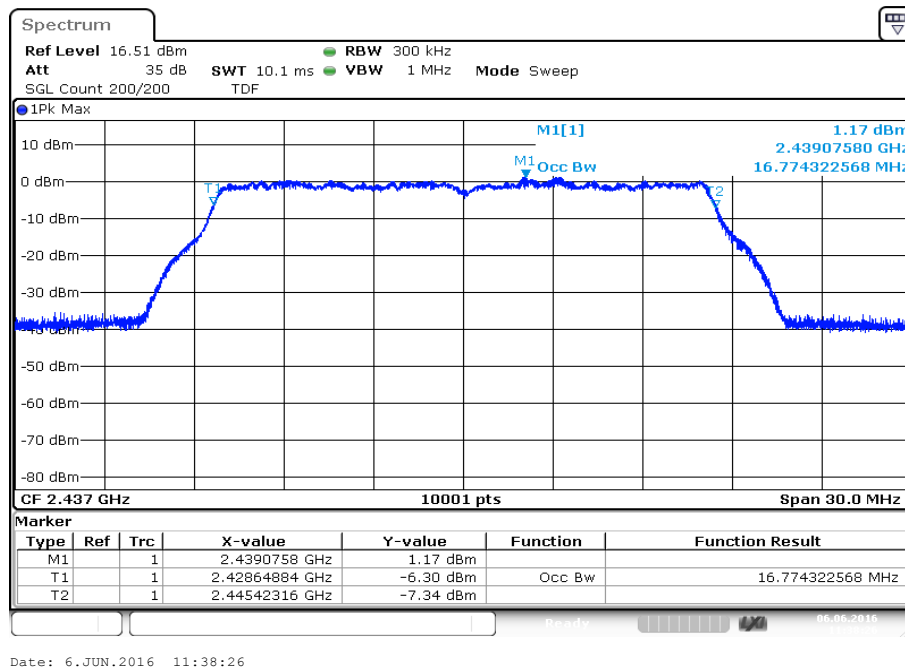


Plots: OFDM / g – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

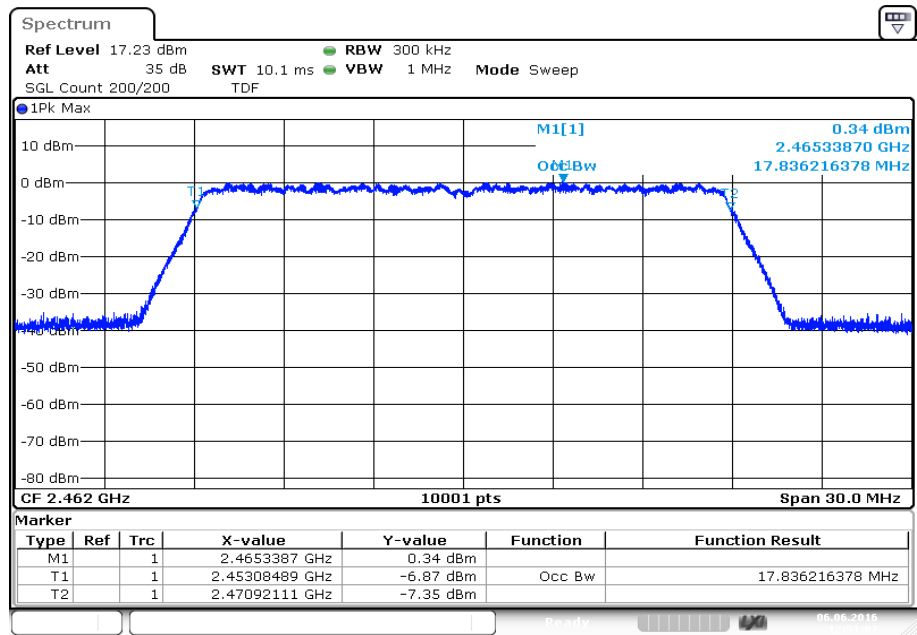
Plot 3: Highest channel



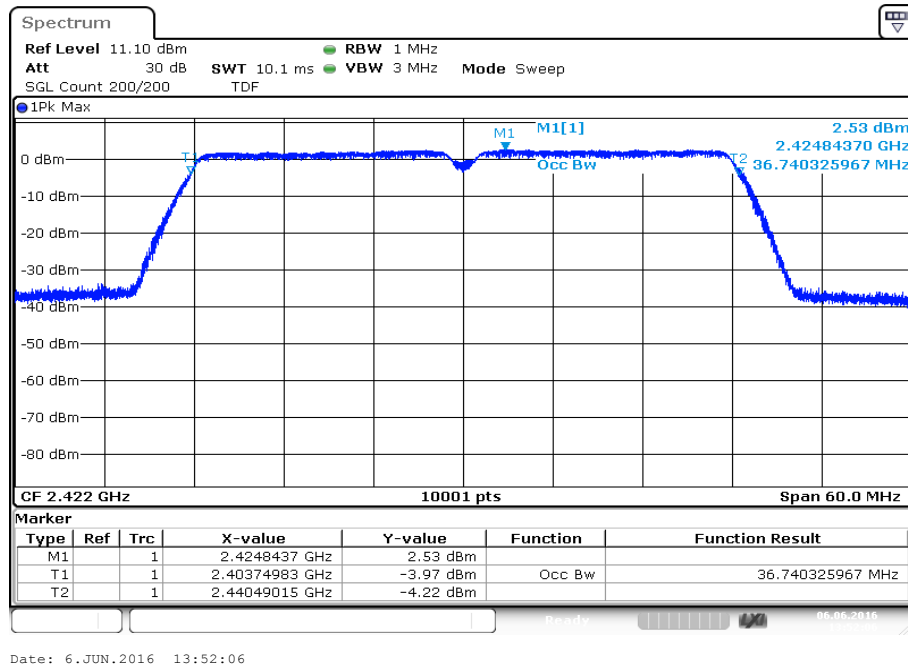
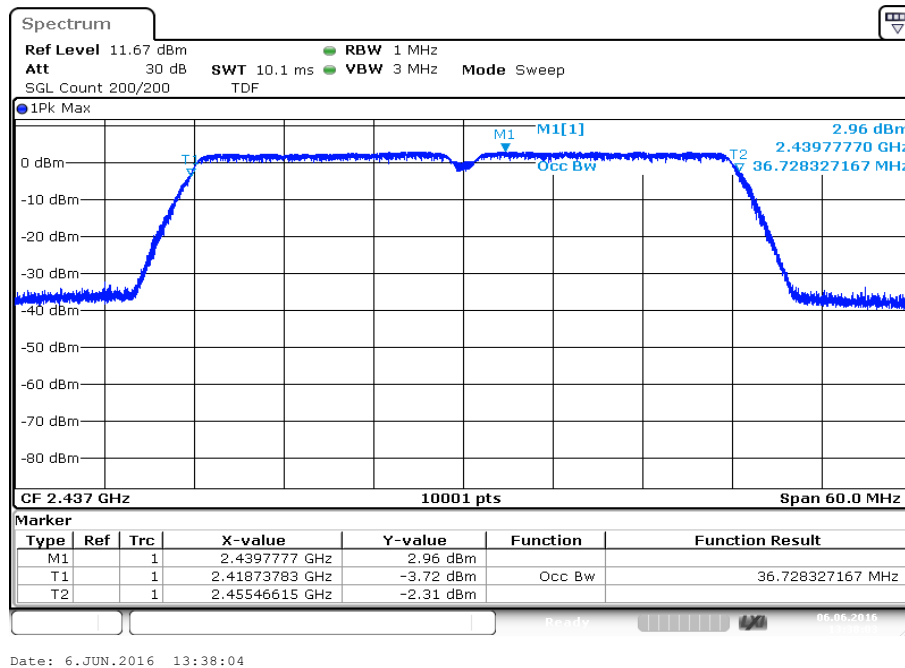
t

Plots: OFDM / n HT20 – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

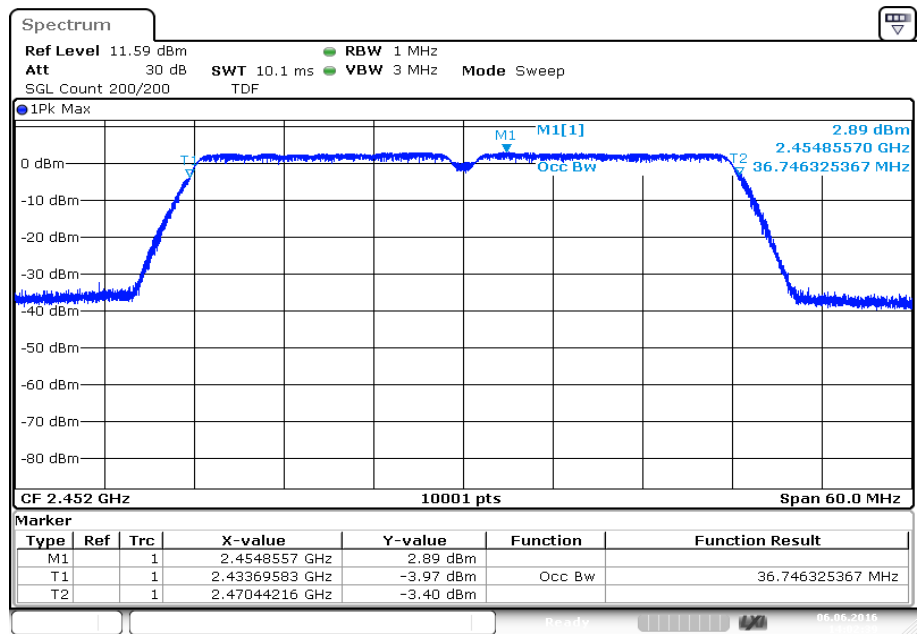
Plot 3: Highest channel



Date: 6.JUN.2016 12:51:07

Plots: OFDM / n HT40 – mode**Plot 1:** Lowest channel**Plot 2:** Middle channel

Plot 3: Highest channel



Date: 6.JUN.2016 14:02:39

12.4 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to channel 1 for the lower restricted band and to channel 11 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3 m.

Measurement:

Measurement parameter for peak measurements	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	1 MHz
Span:	See plot!
Trace mode:	Max Hold
Test setup:	See sub clause 7.2 A
Measurement uncertainty	See sub clause 8

Measurement parameter for average measurements	
According to DTS clause: 13.3.2	
Detector:	RMS
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Span:	2 MHz
Trace mode:	RMS Average over 101 sweeps
Test setup:	See sub clause 7.2 A
Measurement uncertainty	See sub clause 8

Limits:

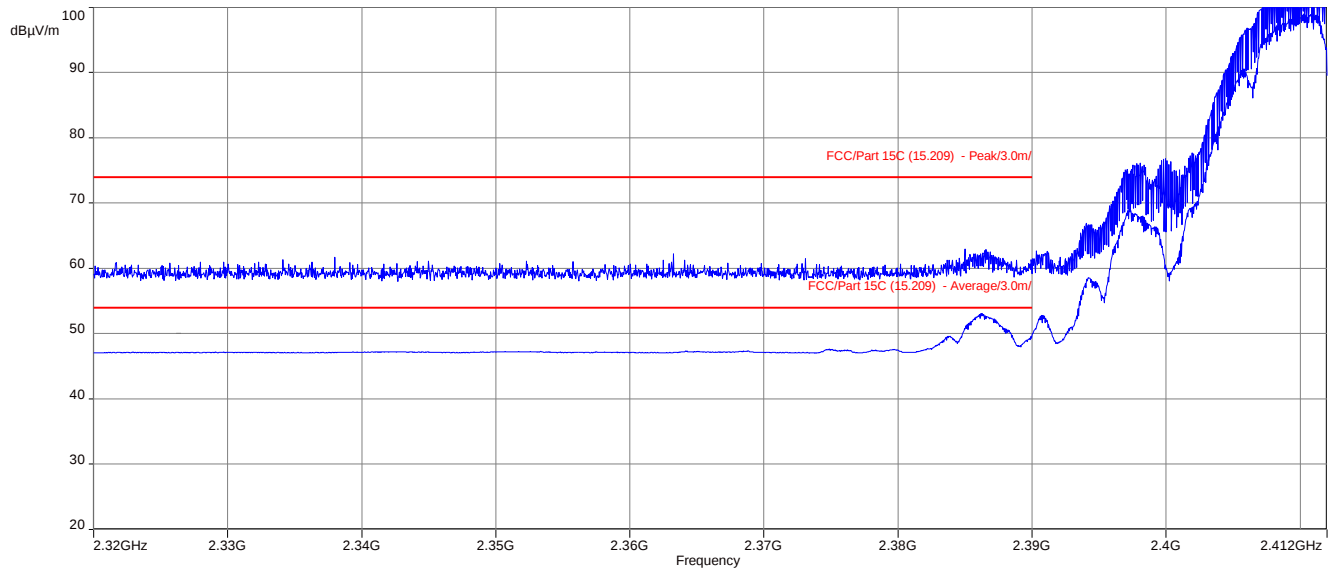
FCC	IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).	
74 dBµV/m Peak 54 dBµV/m AVG	

Results:

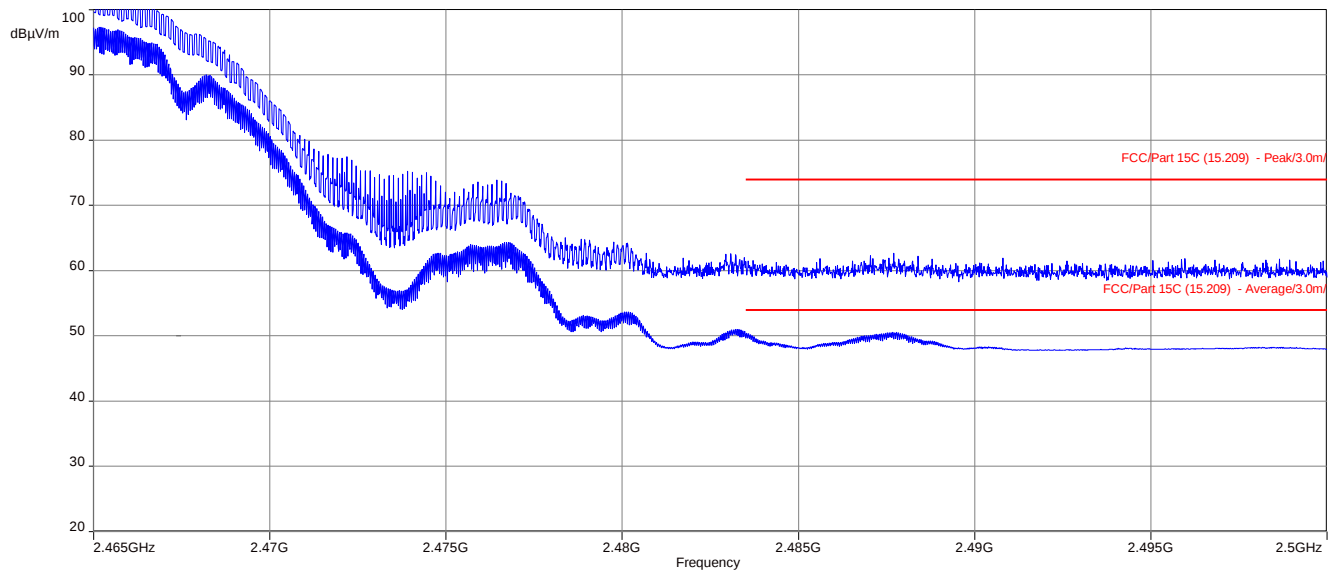
Scenario Modulation	Band edge compliance radiated [dB]			
	DSSS / b – mode	OFDM / g – mode	OFDM / n HT20 – mode	OFDM / n HT40 – mode
Lower band edge	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)
Upper band edge	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)

Plots: DSSS/ b – mode peak / average

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

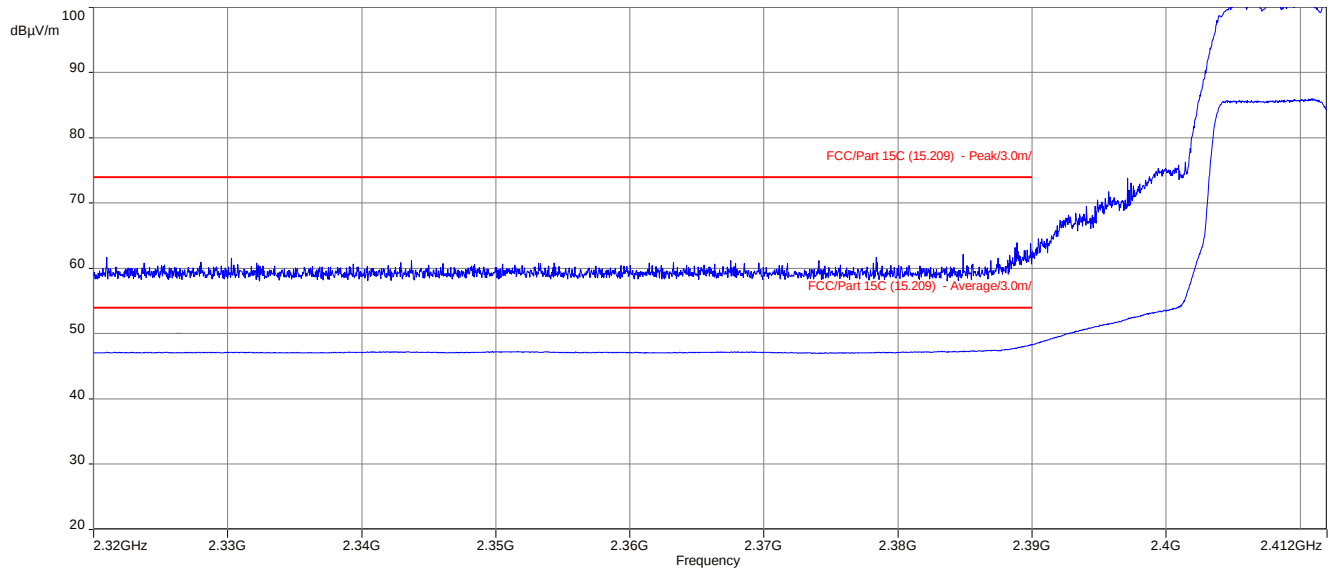


Plot 2: TX mode, upper band edge, vertical & horizontal polarization

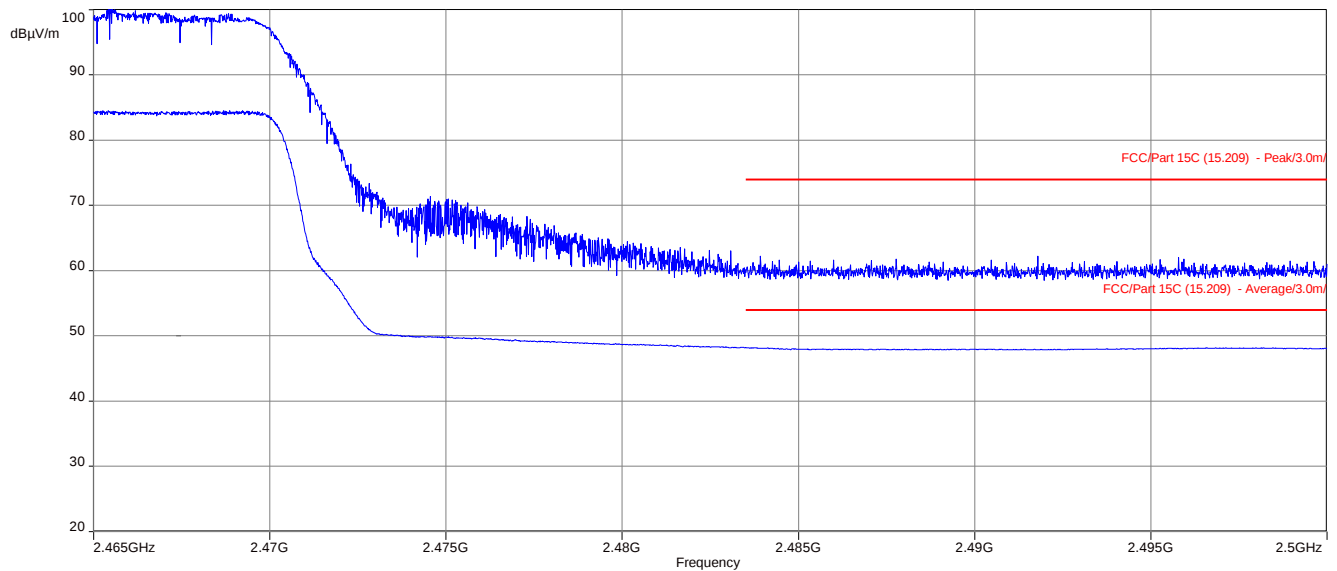


Plots: OFDM / g – mode peak / average

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

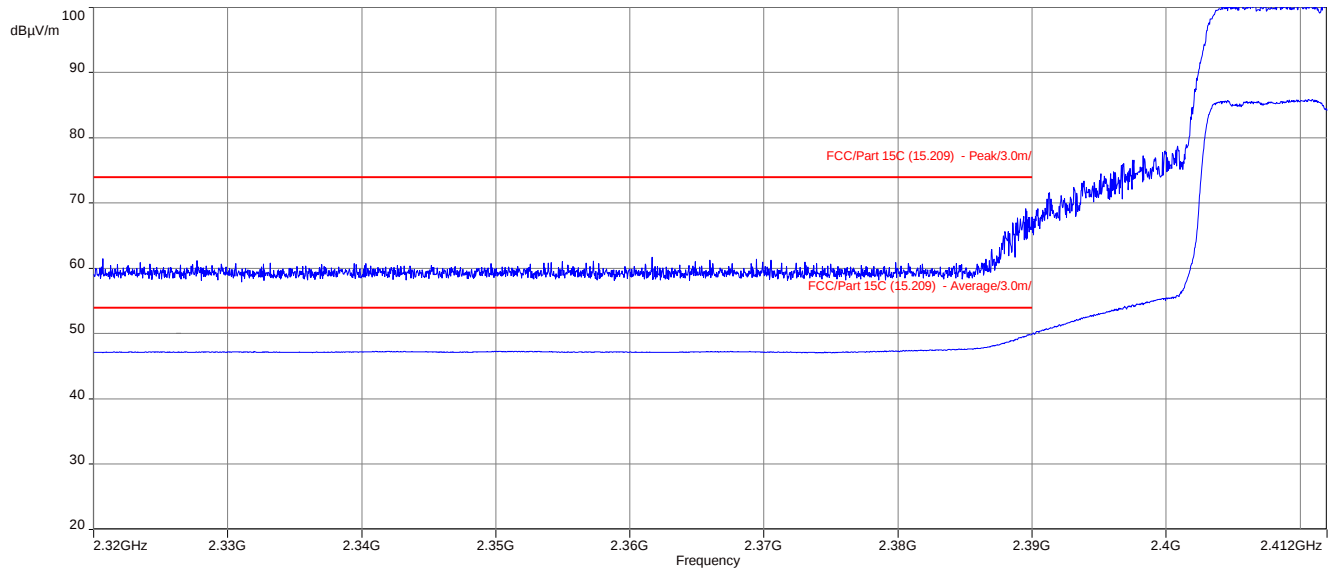


Plot 2: TX mode, upper band edge, vertical & horizontal polarization

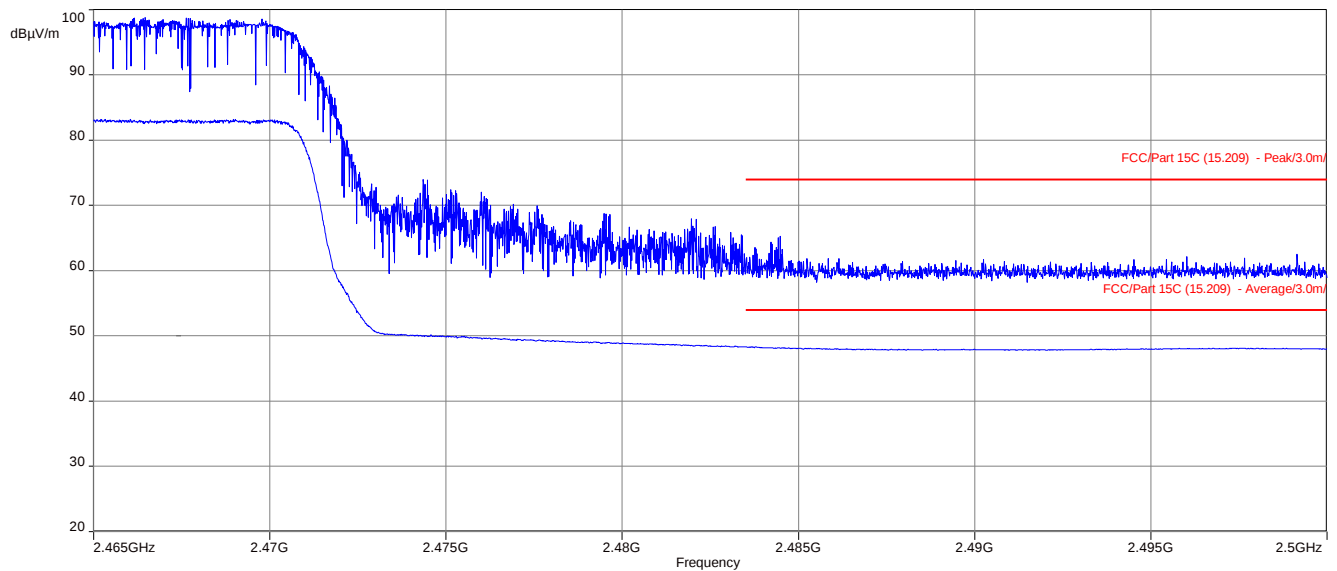


Plots: OFDM / n HT20 – mode peak / average

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

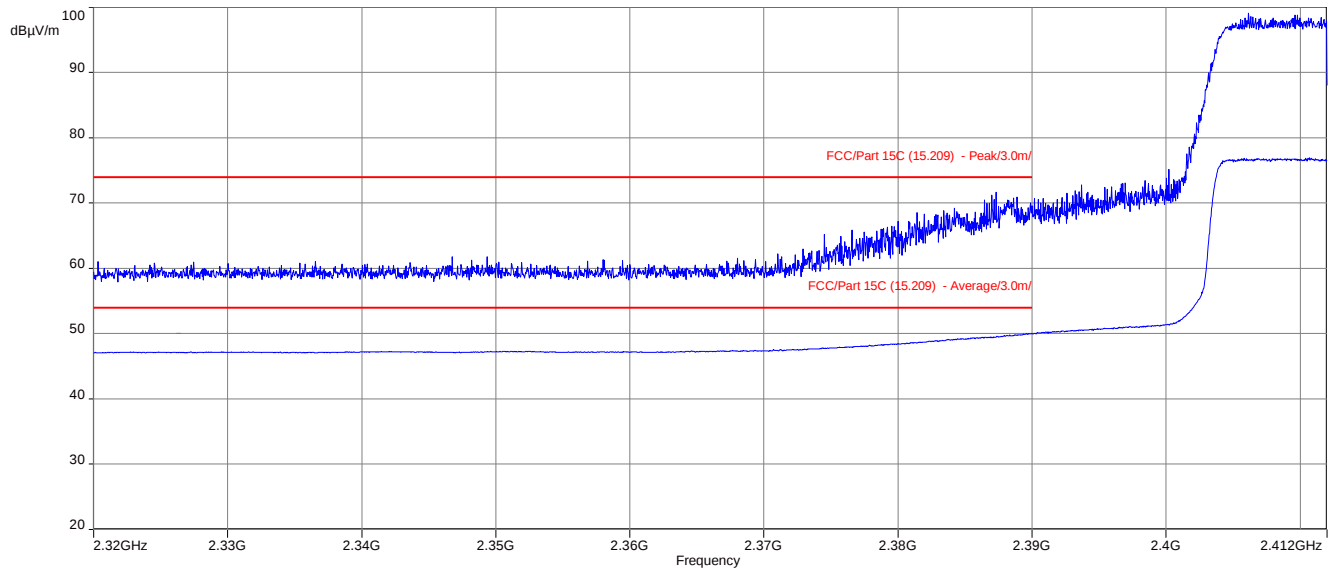


Plot 2: TX mode, upper band edge, vertical & horizontal polarization

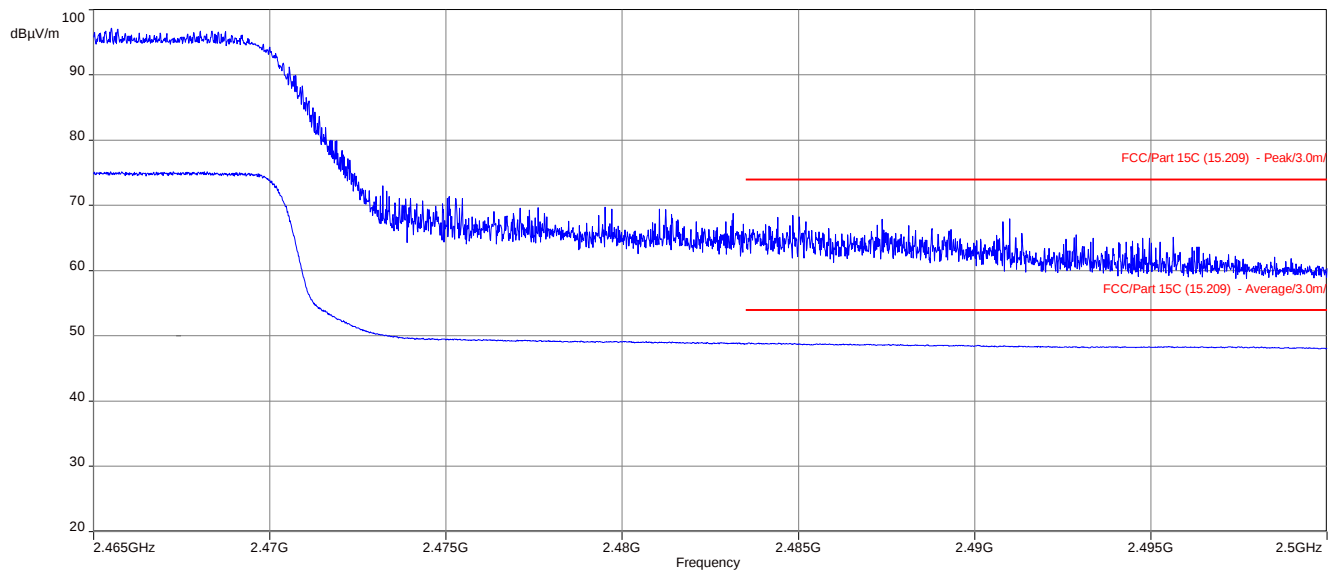


Plots: OFDM / n HT40 – mode peak / average

Plot 1: TX mode, lower band edge, vertical & horizontal polarization



Plot 2: TX mode, upper band edge, vertical & horizontal polarization



12.5 Spurious emissions radiated below 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is representative for all channels and modes. If peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

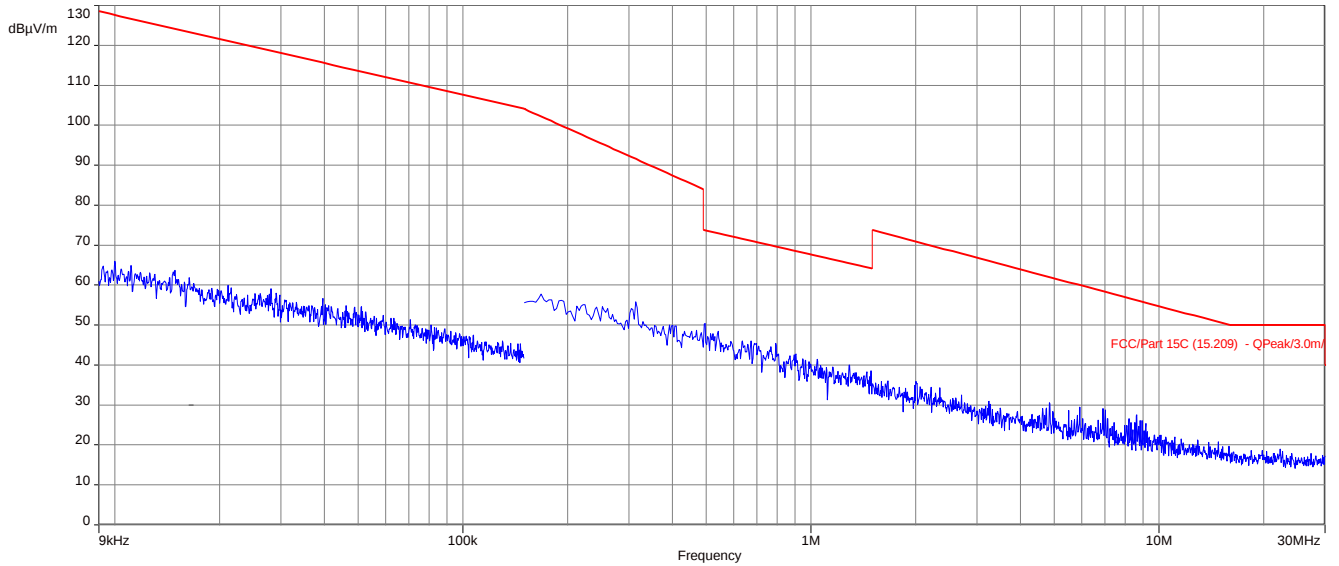
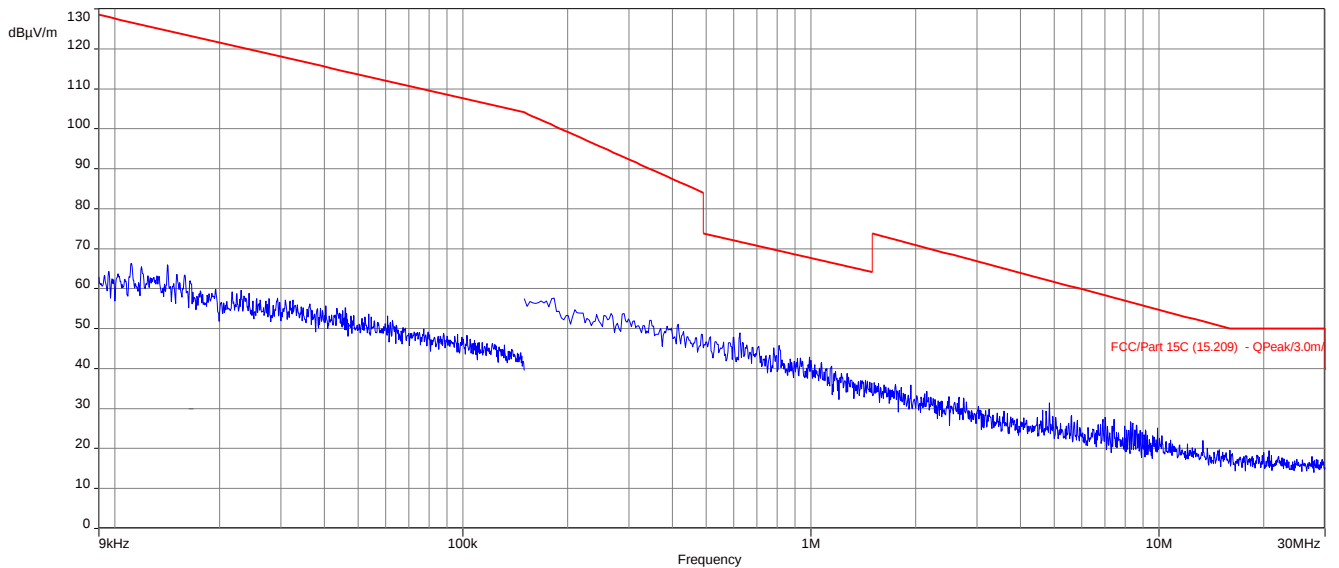
Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace mode:	Max Hold
Measured modulation	☒ DSSS b – mode ☒ OFDM g – mode ☒ OFDM n HT20 – mode ☒ OFDM n HT40 – mode
Test setup:	See sub clause 7.2 A
Measurement uncertainty	See sub clause 8

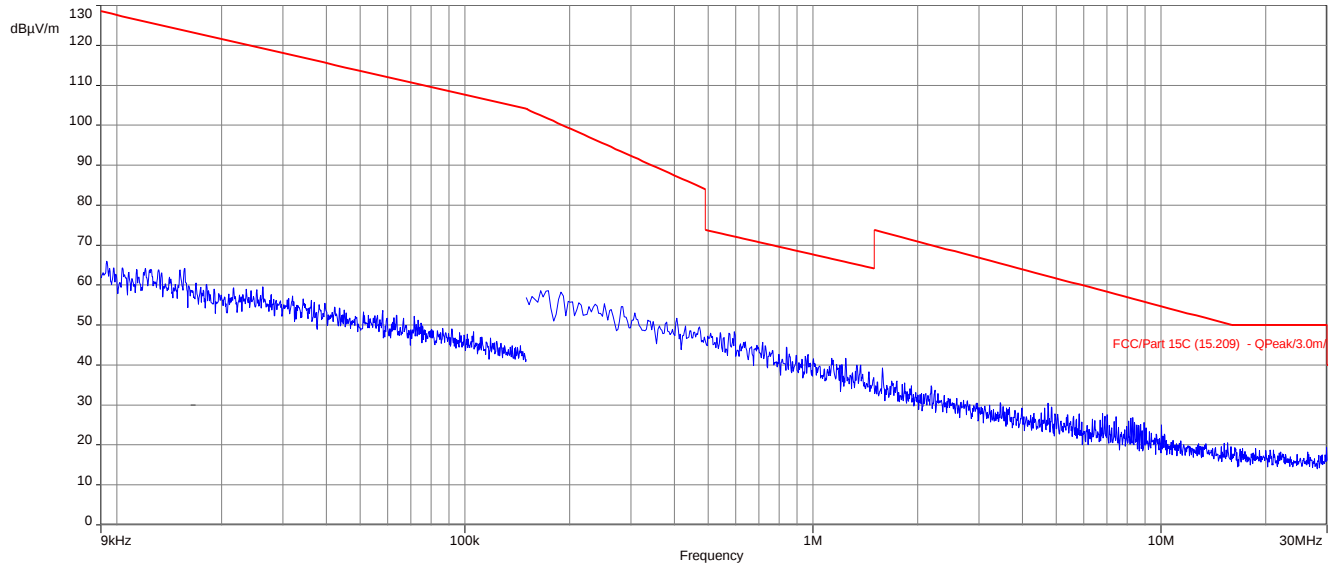
Limits:

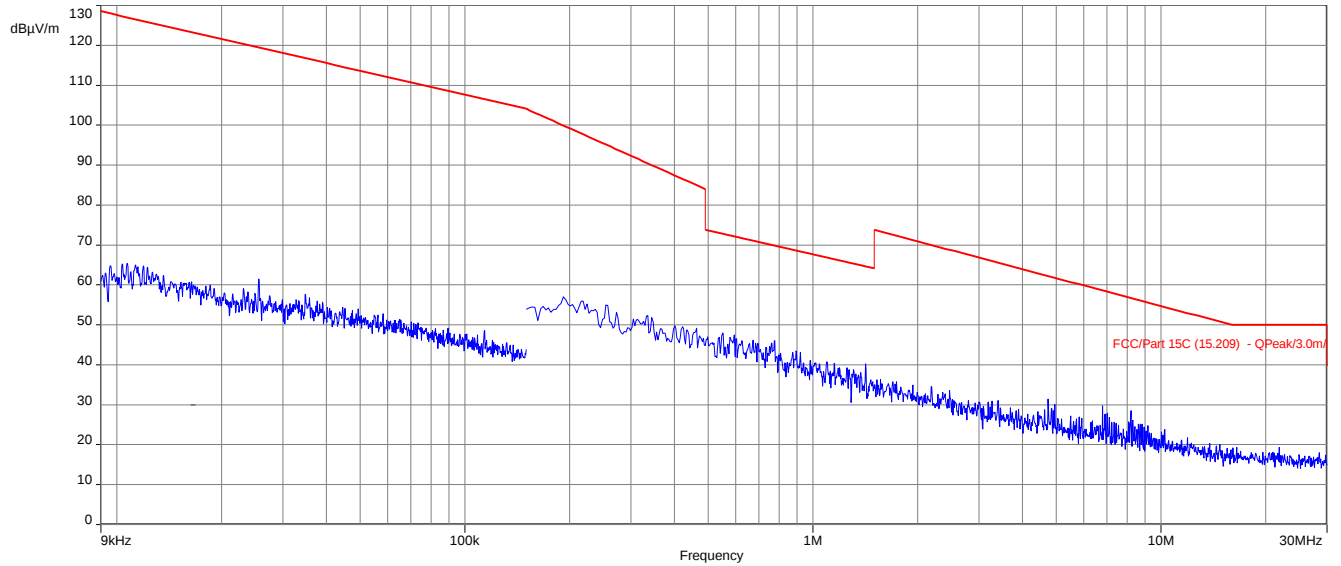
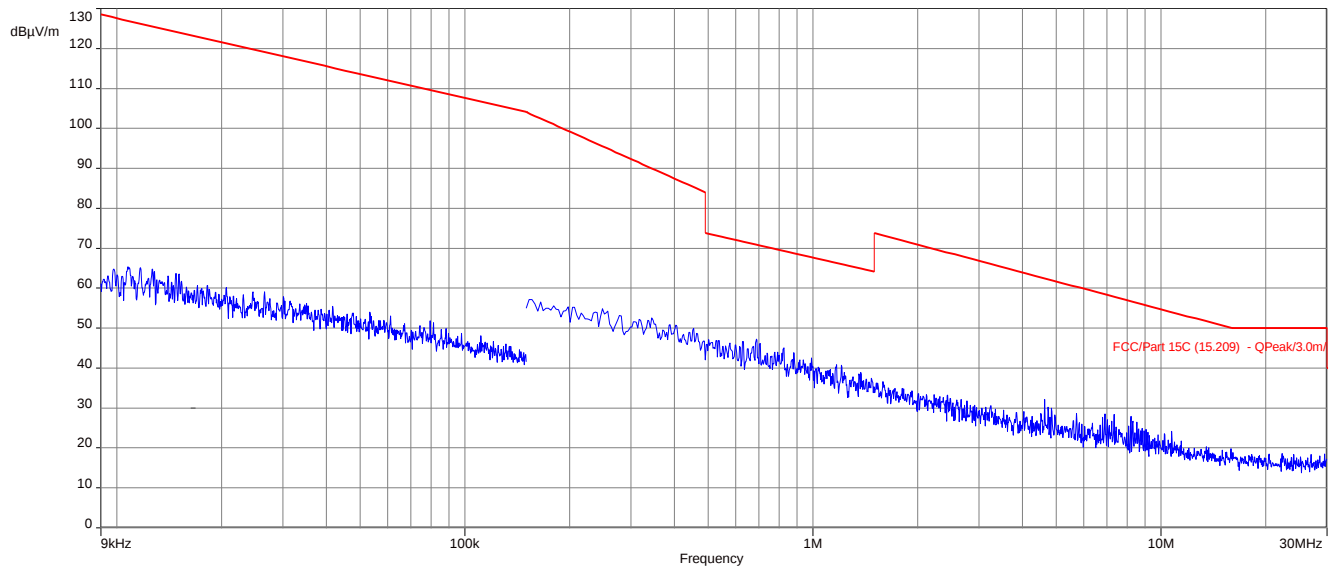
FCC		IC
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

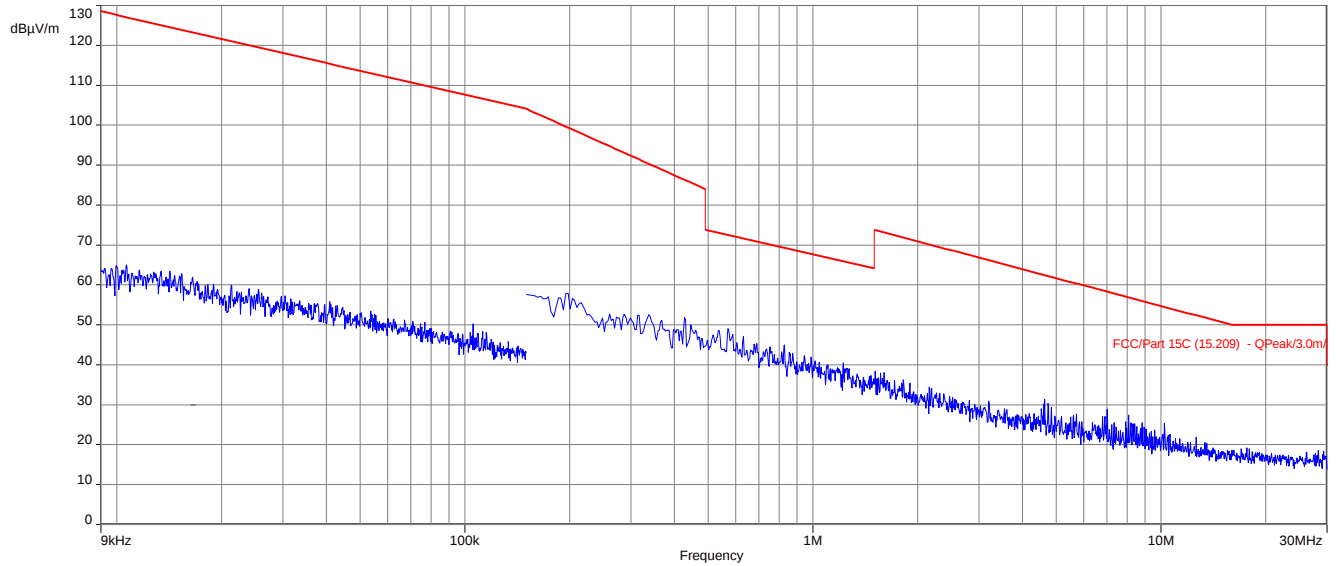
Results:

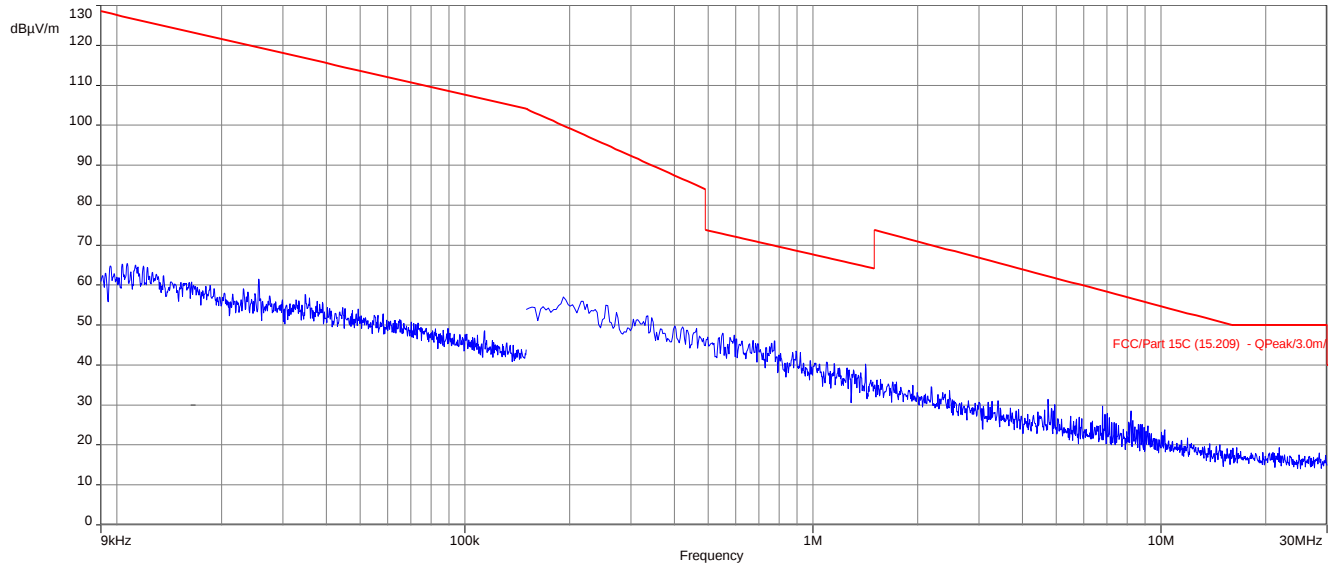
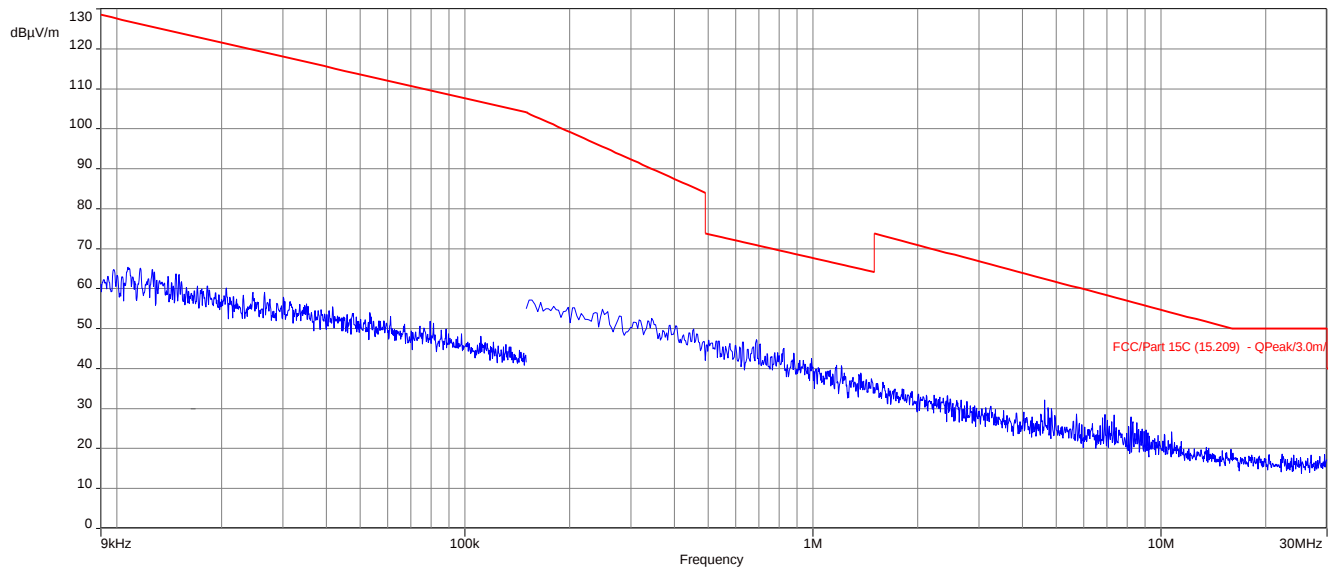
TX Spurious Emissions Radiated < 30 MHz [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
All detected peaks are more than 20 dB below the limit.		

Plots: DSSS, b-mode**Plot 1:** 9 kHz to 30 MHz, low channel**Plot 2:** 9 kHz to 30 MHz, mid channel

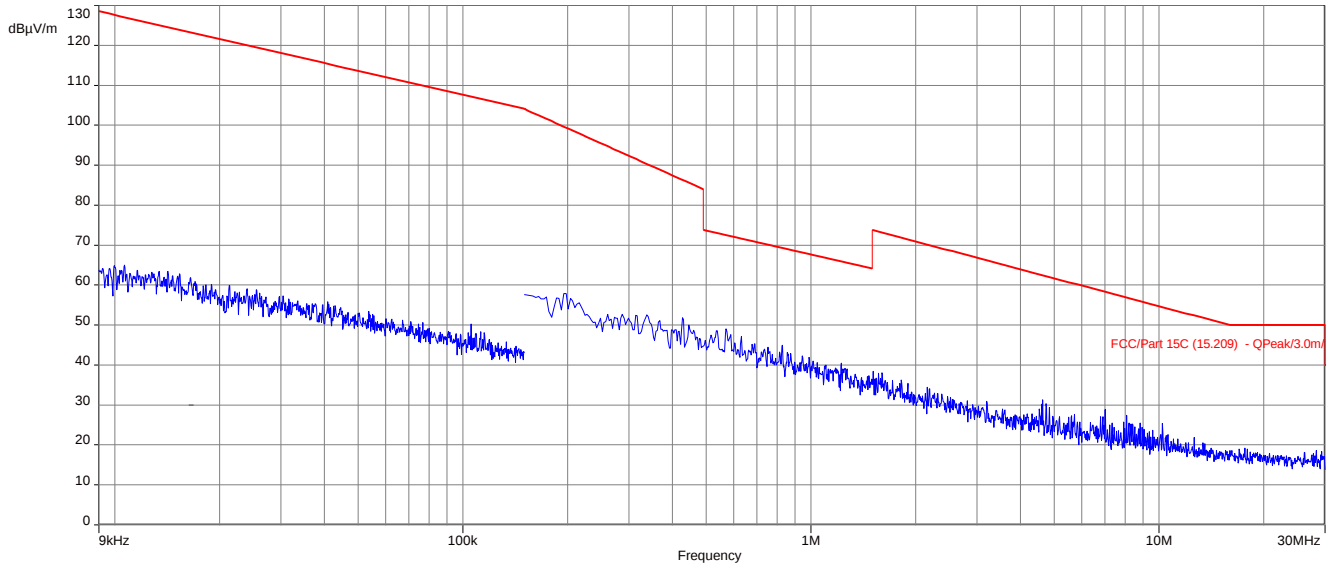
Plot 3: 9 kHz to 30 MHz, high channel

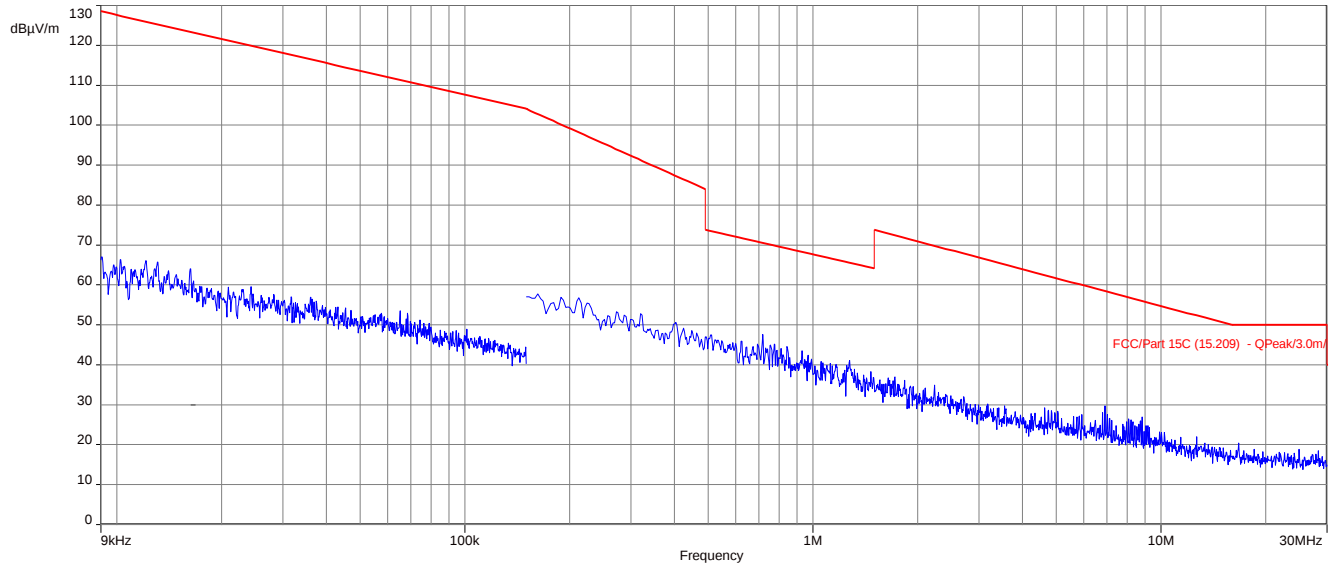
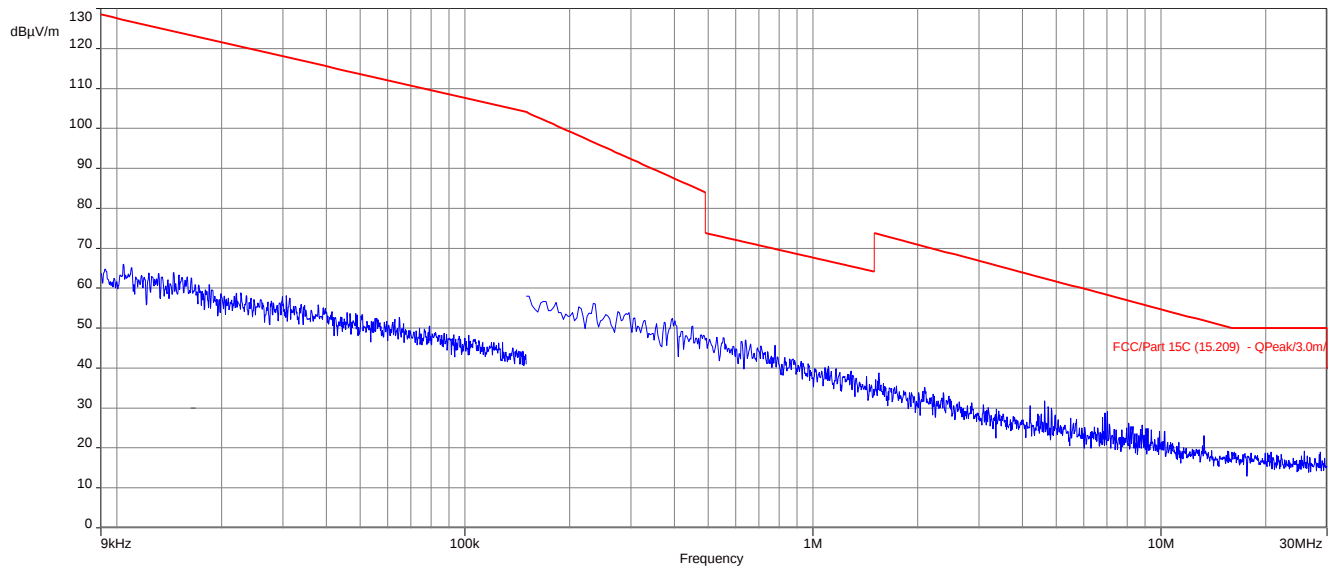
Plots: OFDM, g-mode**Plot 1:** 9 kHz to 30 MHz, low channel**Plot 2:** 9 kHz to 30 MHz, mid channel

Plot 3: 9 kHz to 30 MHz, high channel

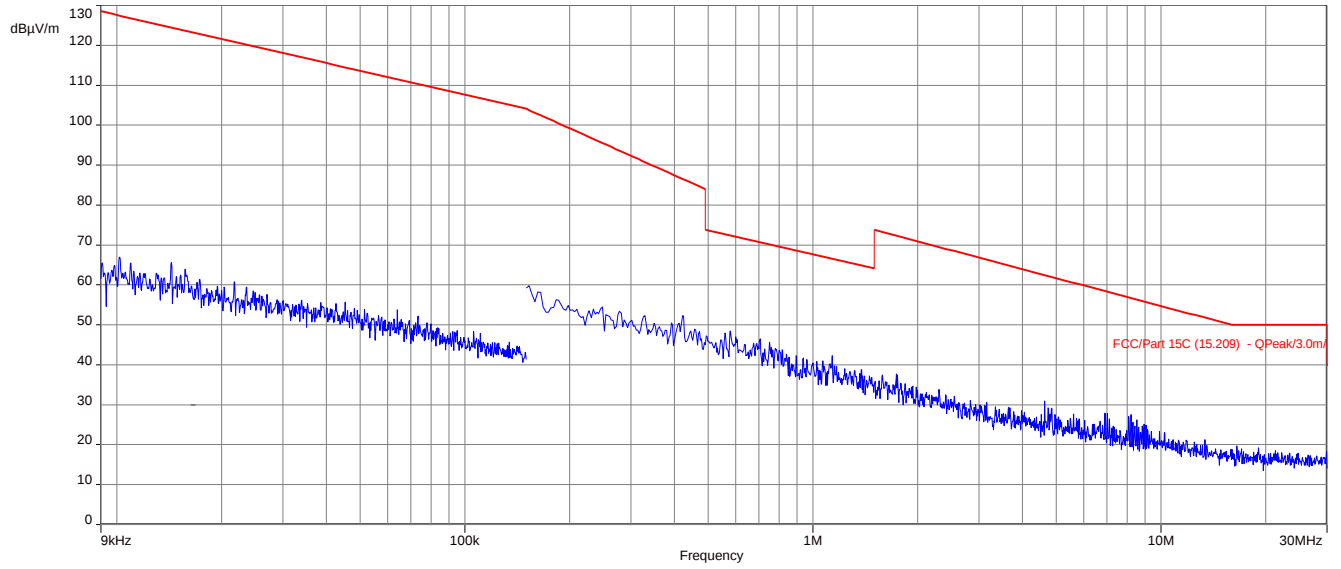
Plots: OFDM, n HT20 – mode**Plot 1:** 9 kHz to 30 MHz, low channel**Plot 2:** 9 kHz to 30 MHz, mid channel

Plot 3: 9 kHz to 30 MHz, high channel



Plots: OFDM, n HT40 – mode**Plot 1:** 9 kHz to 30 MHz, low channel**Plot 2:** 9 kHz to 30 MHz, mid channel

Plot 3: 9 kHz to 30 MHz, high channel



12.6 Spurious emissions radiated 30 MHz to 1 GHz

Description:

Measurement of the radiated spurious emissions and cabinet radiations below 1 GHz.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 120 kHz
Video bandwidth:	3 x RBW
Span:	30 MHz to 1 GHz
Trace mode:	Max Hold
Measured modulation	☒ DSSS b – mode ☒ OFDM g – mode ☒ OFDM n HT20 – mode ☒ OFDM n HT40 – mode
Test setup:	See sub clause 7.1 A
Measurement uncertainty	See sub clause 8

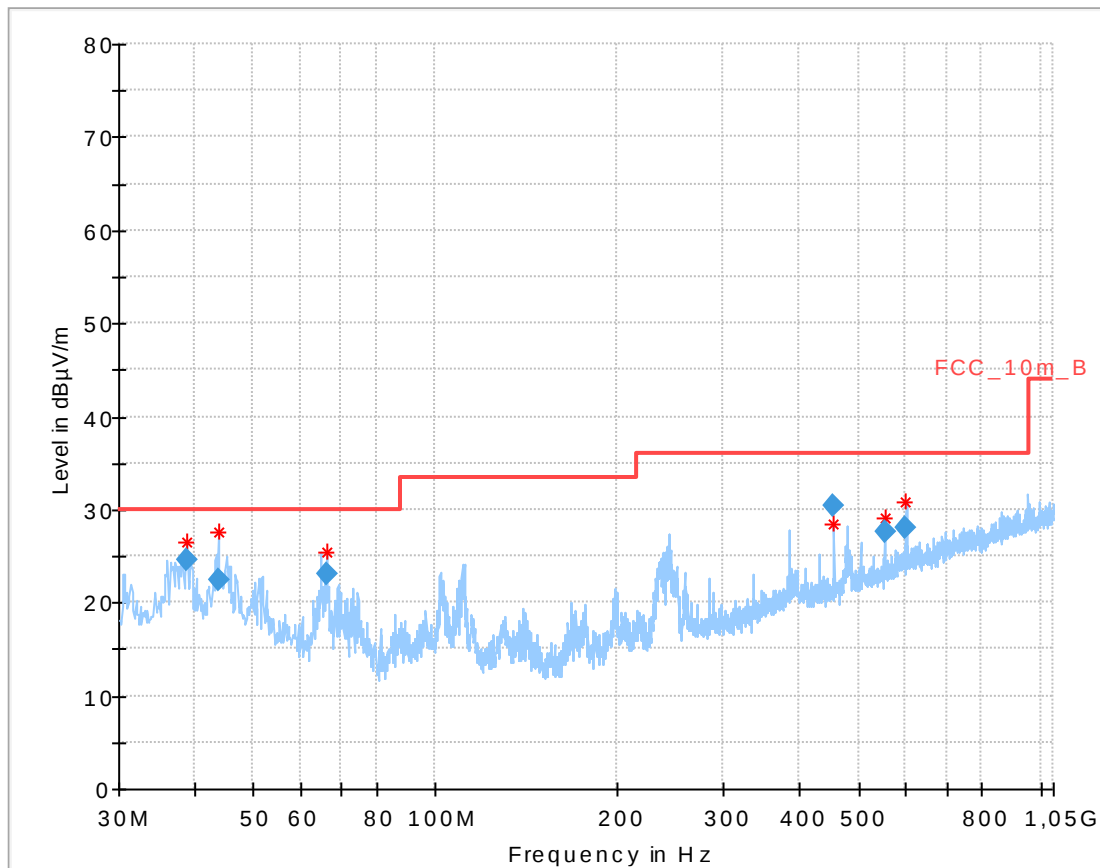
The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

Limits:

FCC		IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency (MHz)	Field Strength (dBμV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10

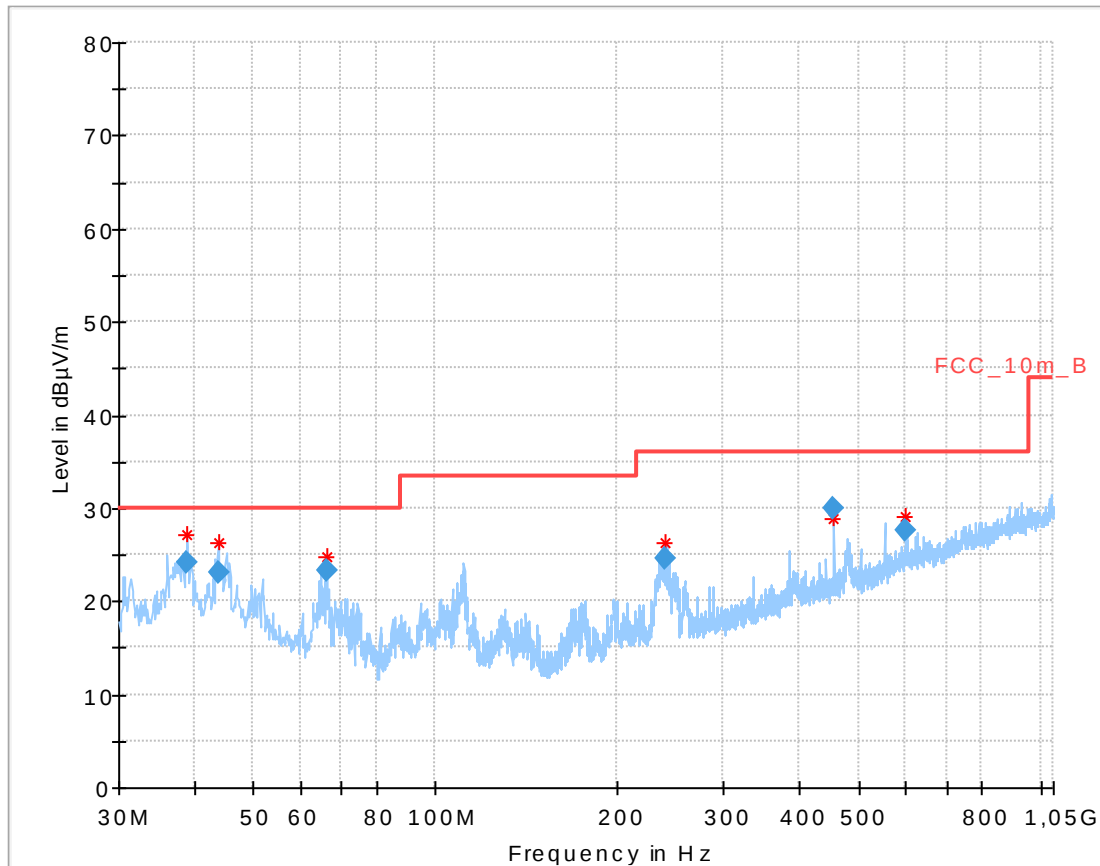
Plot: DSSS, b-mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, low channel

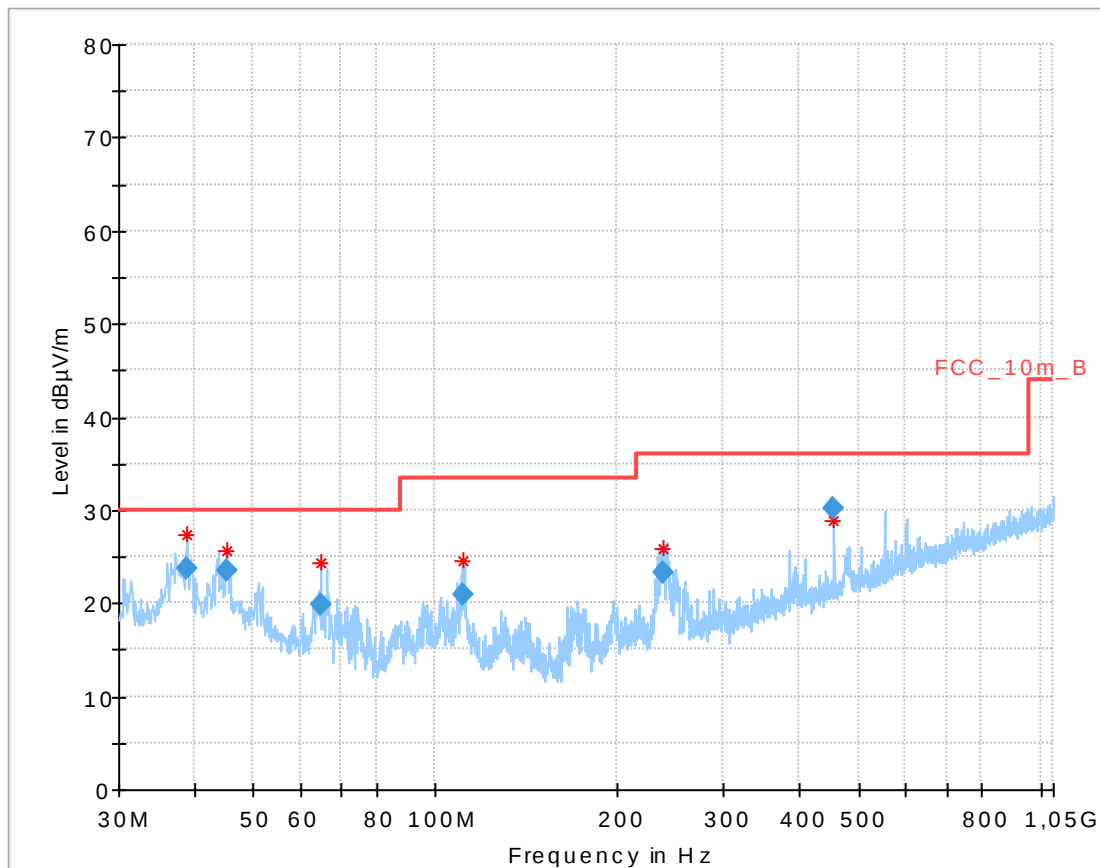


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
38.950650	24.65	30.00	5.35	1000.0	120.000	98.0	V	358	14.0
43.802100	22.51	30.00	7.49	1000.0	120.000	98.0	V	31	13.9
66.289350	23.04	30.00	6.96	1000.0	120.000	170.0	V	251	9.2
456.019050	30.45	36.00	5.55	1000.0	120.000	170.0	H	48	17.7
551.993700	27.53	36.00	8.47	1000.0	120.000	101.0	H	336	19.4
600.004800	28.02	36.00	7.98	1000.0	120.000	170.0	H	11	20.7

Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, mid channel**Final Result**

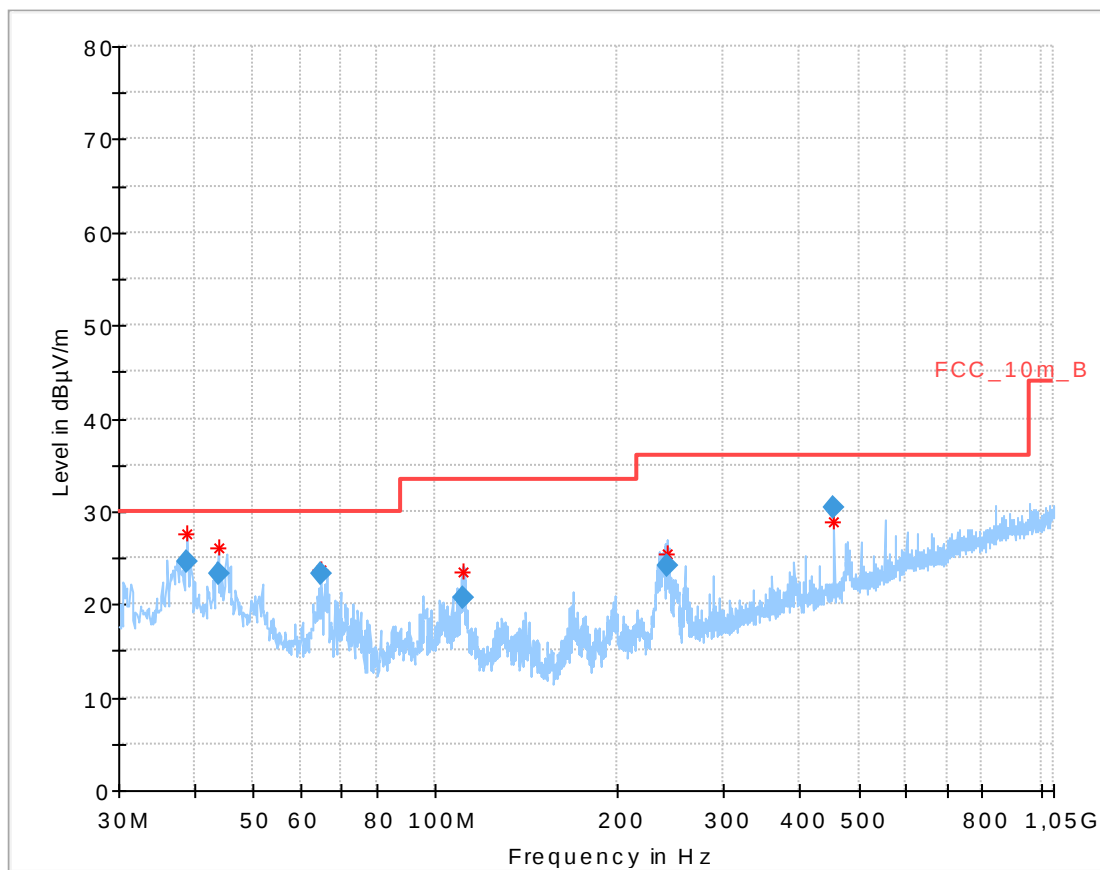
Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
38.975550	24.16	30.00	5.84	1000.0	120.000	101.0	V	349	14.0
43.787100	23.17	30.00	6.83	1000.0	120.000	98.0	V	13	13.9
66.270150	23.25	30.00	6.75	1000.0	120.000	170.0	V	315	9.2
239.599200	24.64	36.00	11.36	1000.0	120.000	98.0	V	114	13.0
456.018450	29.92	36.00	6.08	1000.0	120.000	170.0	H	57	17.7
600.010650	27.70	36.00	8.30	1000.0	120.000	170.0	H	272	20.7

Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, high channel**Final Result**

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
38.937450	23.67	30.00	6.33	1000.0	120.000	98.0	V	103	14.0
45.265950	23.41	30.00	6.59	1000.0	120.000	98.0	V	359	13.8
64.770450	19.90	30.00	10.10	1000.0	120.000	170.0	V	21	9.5
110.795700	20.92	33.50	12.58	1000.0	120.000	101.0	V	103	11.0
238.018350	23.36	36.00	12.64	1000.0	120.000	98.0	V	52	13.0
456.012300	30.27	36.00	5.73	1000.0	120.000	170.0	H	52	17.7

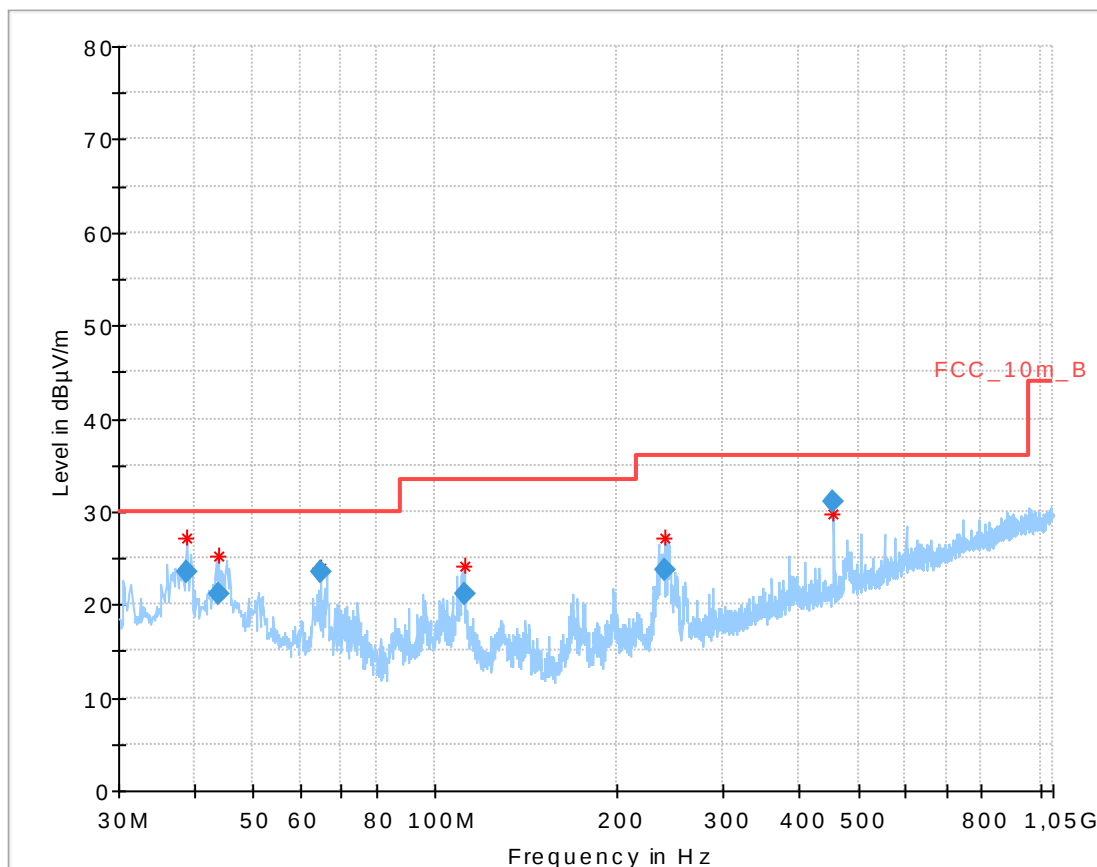
Plot: OFDM, g – mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, low channel

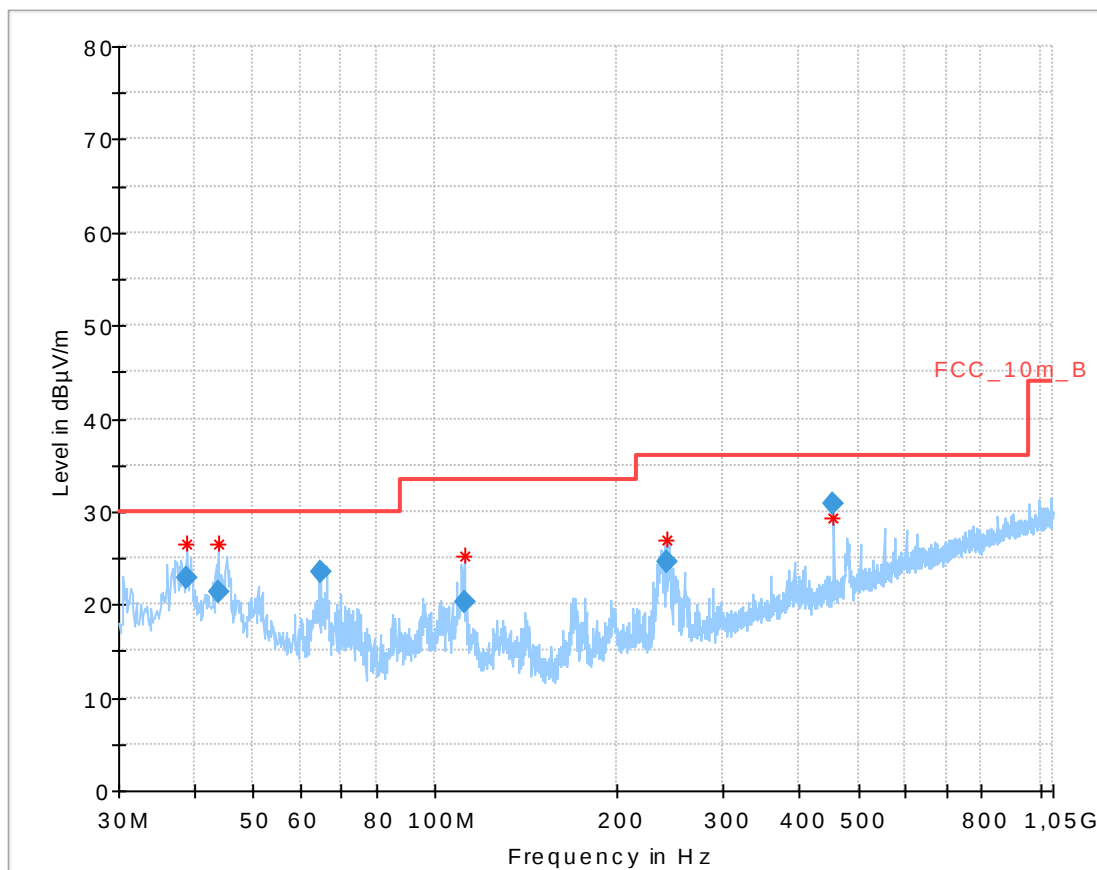


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
38.948100	24.69	30.00	5.31	1000.0	120.000	98.0	V	296	14.0
43.775250	23.19	30.00	6.81	1000.0	120.000	101.0	V	2	13.9
64.798650	23.31	30.00	6.69	1000.0	120.000	170.0	V	307	9.5
110.782200	20.67	33.50	12.83	1000.0	120.000	101.0	V	81	11.0
241.998000	24.25	36.00	11.75	1000.0	120.000	98.0	V	64	13.1
456.000300	30.47	36.00	5.53	1000.0	120.000	170.0	H	48	17.7

Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, mid channel**Final Result**

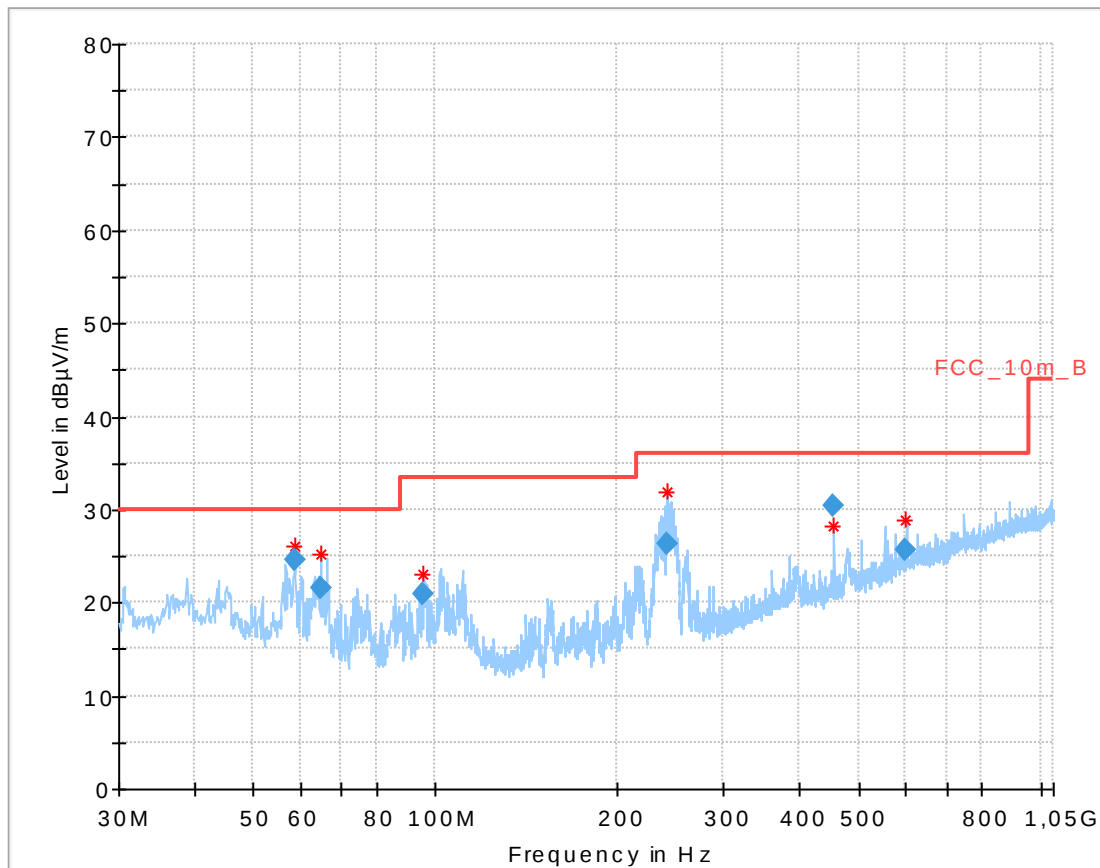
Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
38.976750	23.52	30.00	6.48	1000.0	120.000	98.0	V	221	14.0
43.783950	21.05	30.00	8.95	1000.0	120.000	170.0	V	27	13.9
64.783800	23.46	30.00	6.54	1000.0	120.000	170.0	V	292	9.5
111.601350	21.08	33.50	12.42	1000.0	120.000	98.0	V	78	11.0
239.628600	23.74	36.00	12.26	1000.0	120.000	170.0	V	70	13.0
456.008700	31.03	36.00	4.97	1000.0	120.000	170.0	H	40	17.7

Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, high channel**Final Result**

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
38.862600	22.91	30.00	7.09	1000.0	120.000	98.0	V	210	14.0
43.790250	21.27	30.00	8.73	1000.0	120.000	170.0	V	359	13.9
64.784100	23.44	30.00	6.56	1000.0	120.000	170.0	V	328	9.5
111.606450	20.17	33.50	13.33	1000.0	120.000	101.0	V	85	11.0
242.016000	24.61	36.00	11.39	1000.0	120.000	98.0	V	96	13.1
456.014550	30.93	36.00	5.07	1000.0	120.000	170.0	H	34	17.7

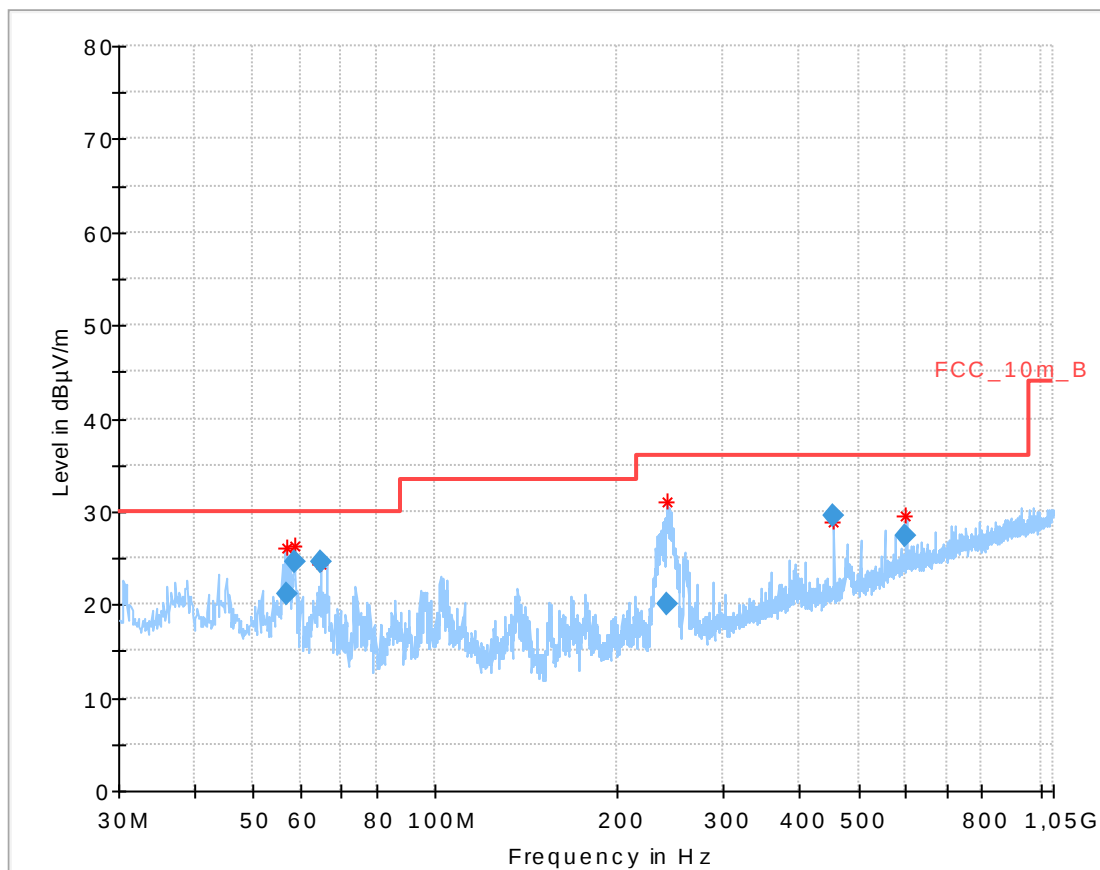
Plot: OFDM, n HT20 – mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, low channel

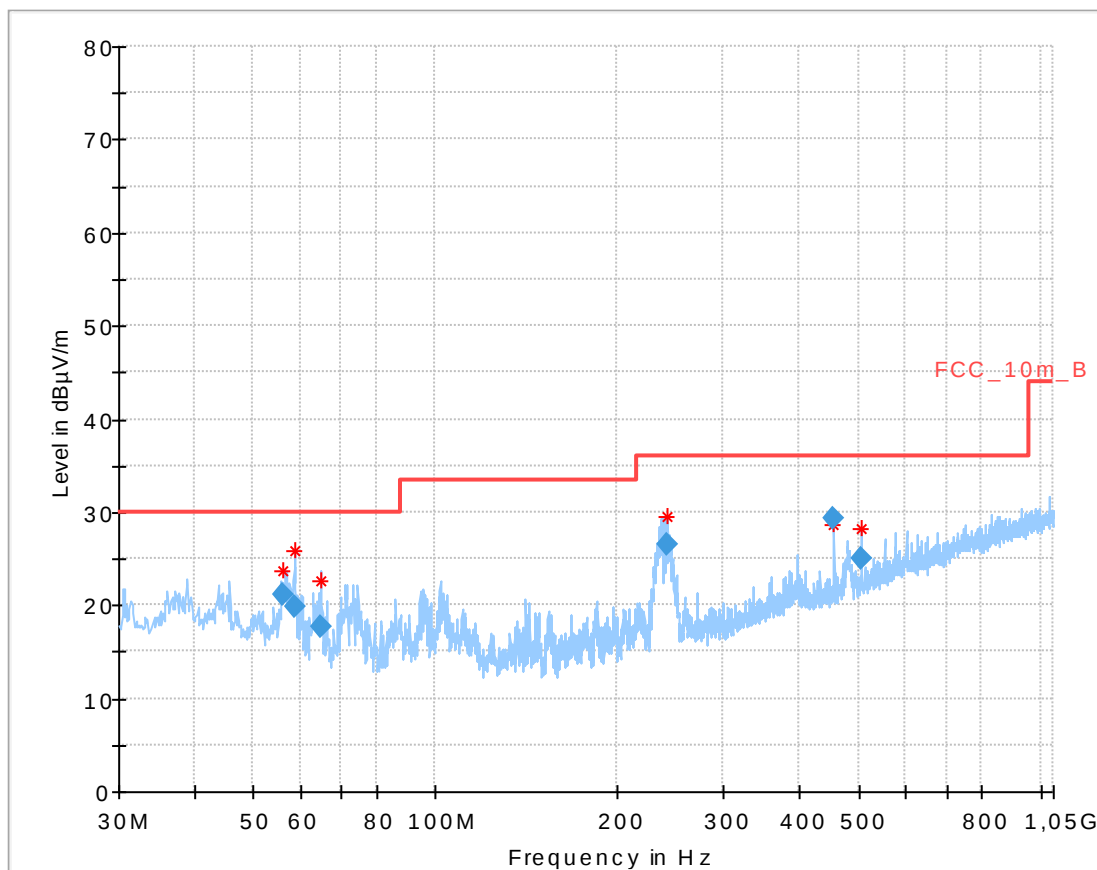


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
58.732200	24.57	30.00	5.43	1000.0	120.000	101.0	V	4	10.9
64.795950	21.64	30.00	8.36	1000.0	120.000	101.0	V	4	9.5
95.772000	20.98	33.50	12.52	1000.0	120.000	170.0	V	351	11.5
241.570050	26.28	36.00	9.72	1000.0	120.000	98.0	V	70	13.1
456.003600	30.33	36.00	5.67	1000.0	120.000	170.0	H	24	17.7
599.986200	25.56	36.00	10.44	1000.0	120.000	101.0	H	304	20.7

Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, mid channel**Final Result**

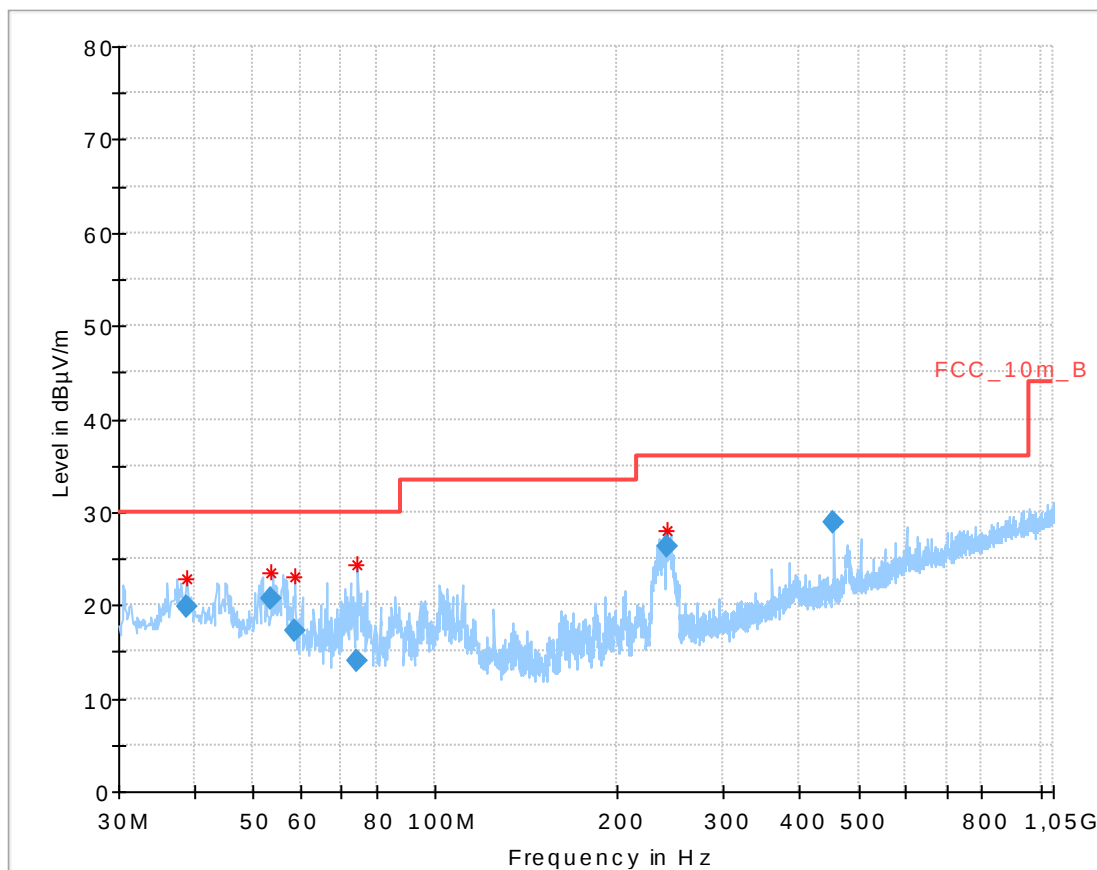
Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
56.762550	21.14	30.00	8.86	1000.0	120.000	170.0	V	79	11.4
58.719000	24.54	30.00	5.46	1000.0	120.000	170.0	V	0	10.9
64.782900	24.67	30.00	5.33	1000.0	120.000	170.0	V	278	9.5
241.986600	20.12	36.00	15.88	1000.0	120.000	98.0	V	60	13.1
456.018300	29.50	36.00	6.50	1000.0	120.000	170.0	H	67	17.7
600.014700	27.30	36.00	8.70	1000.0	120.000	170.0	H	338	20.7

Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, high channel**Final Result**

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
55.960050	21.18	30.00	8.82	1000.0	120.000	170.0	V	26	11.6
58.710750	19.79	30.00	10.21	1000.0	120.000	101.0	V	1	10.9
64.773600	17.66	30.00	12.34	1000.0	120.000	100.0	V	138	9.5
241.998600	26.54	36.00	9.46	1000.0	120.000	98.0	V	218	13.1
456.018000	29.32	36.00	6.68	1000.0	120.000	170.0	H	204	17.7
504.015900	25.10	36.00	10.90	1000.0	120.000	101.0	H	15	18.8

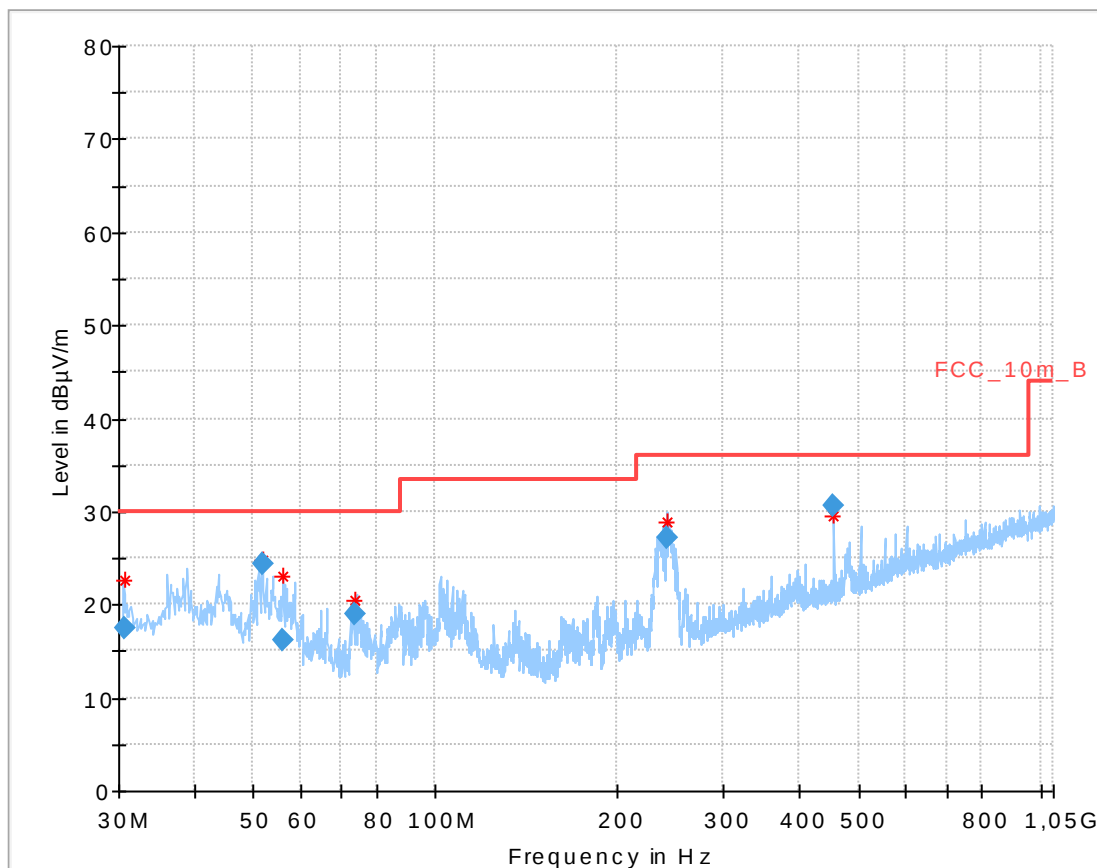
Plot: OFDM, n HT40 – mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, low channel

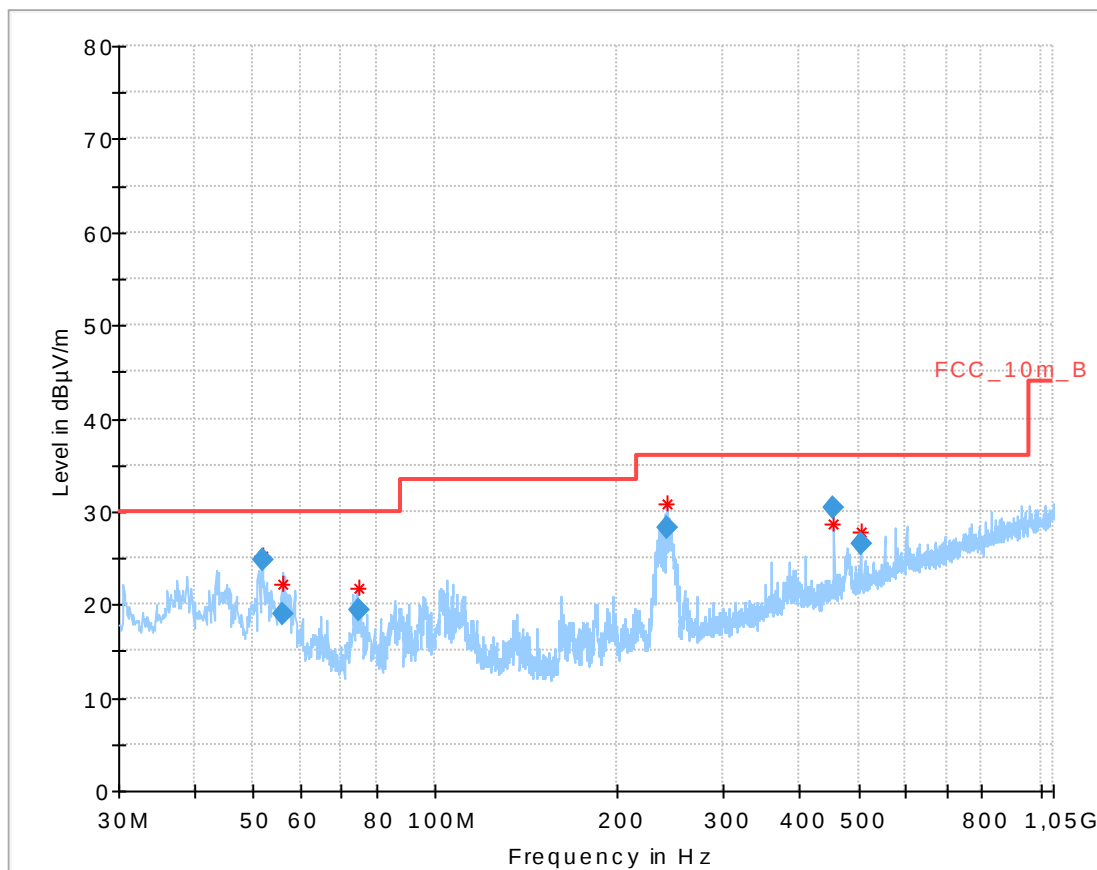


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
38.929950	19.93	30.00	10.07	1000.0	120.000	101.0	V	285	14.0
53.572650	20.68	30.00	9.32	1000.0	120.000	98.0	V	2	12.1
58.728000	17.30	30.00	12.70	1000.0	120.000	170.0	V	211	10.9
73.978800	14.11	30.00	15.89	1000.0	120.000	101.0	V	169	8.3
240.790650	26.21	36.00	9.79	1000.0	120.000	98.0	V	340	13.1
456.013050	28.93	36.00	7.07	1000.0	120.000	170.0	H	205	17.7

Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, mid channel**Final Result**

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.647546	17.44	30.00	12.56	1000.0	120.000	170.0	V	255	13.4
51.819150	24.37	30.00	5.63	1000.0	120.000	98.0	V	11	12.3
55.971750	16.12	30.00	13.88	1000.0	120.000	101.0	V	50	11.6
73.936500	19.02	30.00	10.98	1000.0	120.000	170.0	V	263	8.3
240.800250	27.18	36.00	8.82	1000.0	120.000	98.0	V	40	13.1
456.009600	30.54	36.00	5.46	1000.0	120.000	170.0	H	50	17.7

Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, high channel**Final Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
51.804000	24.84	30.00	5.16	1000.0	120.000	98.0	V	2	12.3
56.030550	18.98	30.00	11.02	1000.0	120.000	170.0	V	212	11.6
74.587650	19.32	30.00	10.68	1000.0	120.000	170.0	V	236	8.3
240.828150	28.25	36.00	7.75	1000.0	120.000	98.0	V	296	13.1
455.998050	30.35	36.00	5.65	1000.0	120.000	170.0	H	44	17.7
504.004950	26.49	36.00	9.51	1000.0	120.000	170.0	H	33	18.8

12.7 Spurious emissions radiated above 1 GHz

Description:

Measurement of the radiated spurious emissions above 1 GHz in transmit mode and receiver / idle mode.

Measurement:

Measurement parameter	
Detector:	Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	F > 1 GHz: 1 MHz
Video bandwidth:	3 x RBW
Span:	1 GHz to 26 GHz
Trace mode:	Max Hold
Measured modulation	☒ DSSS b – mode ☒ OFDM g – mode ☒ OFDM n HT20 – mode ☒ OFDM n HT40 – mode
Test setup:	See sub clause 7.2 / 7.3
Measurement uncertainty	See sub clause 8

Limits:

FCC		IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
Above 960	54.0	3

Results: DSSS

TX Spurious Emissions Radiated [dBμV/m]								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
4824	Peak	54.69	4874	Peak	59.82	4924	Peak	61.65
	AVG	49.43		AVG	46.96		AVG	51.97
-/-	Peak		7313	Peak	56.67	7388	Peak	55.78
	AVG			AVG	46.95		AVG	51.44

Results: OFDM g – mode

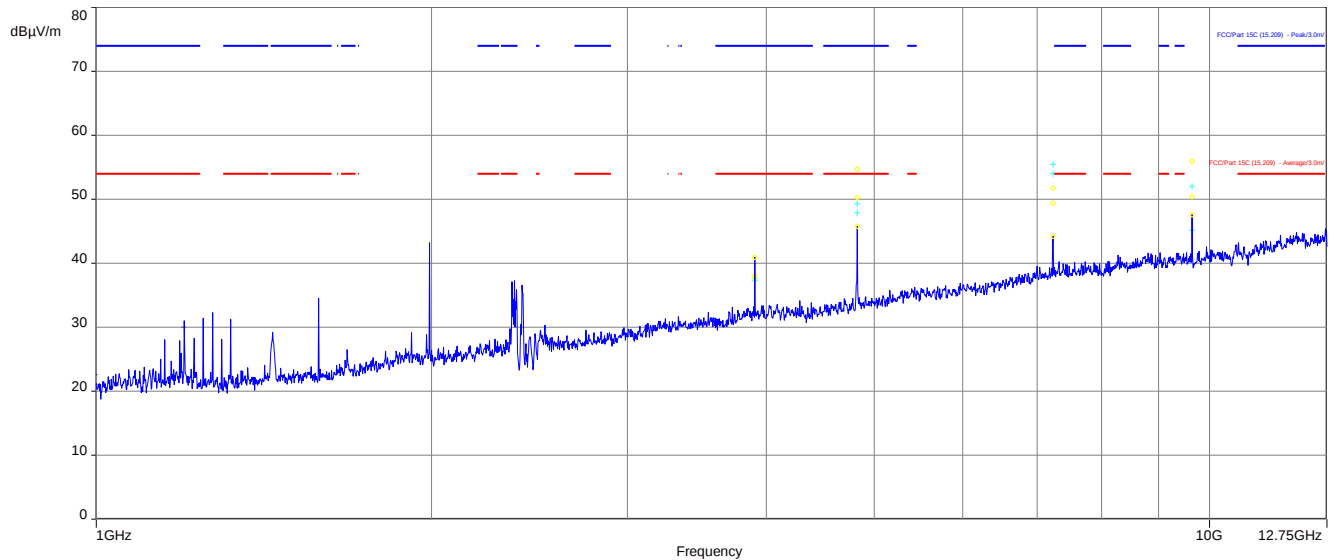
TX Spurious Emissions Radiated [dBμV/m]								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.		
	Peak			Peak			Peak	
	AVG			AVG			AVG	

Results: OFDM HT20

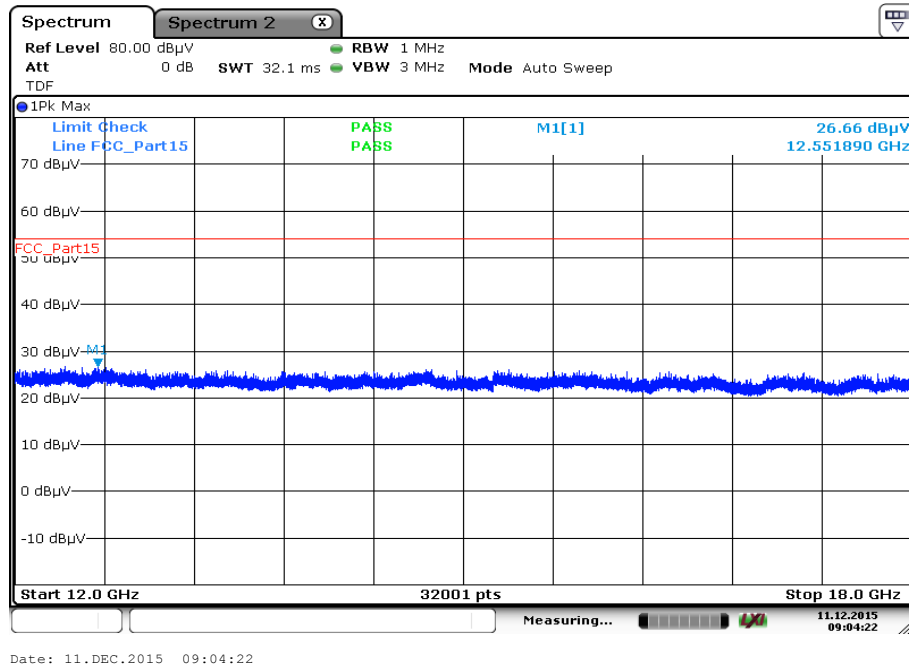
TX Spurious Emissions Radiated [dBμV/m]								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.		
	Peak			Peak			Peak	
	AVG			AVG			AVG	

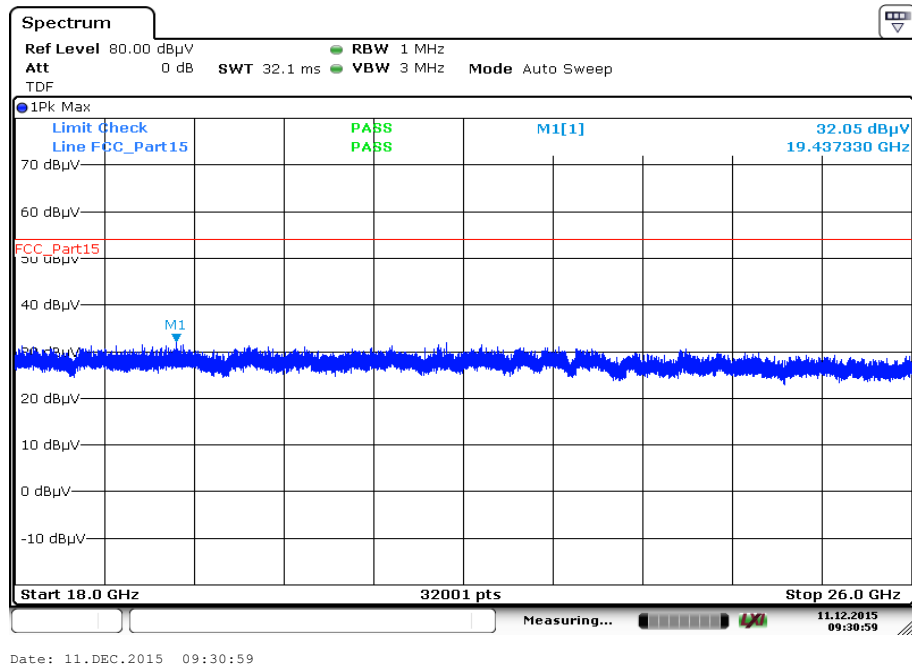
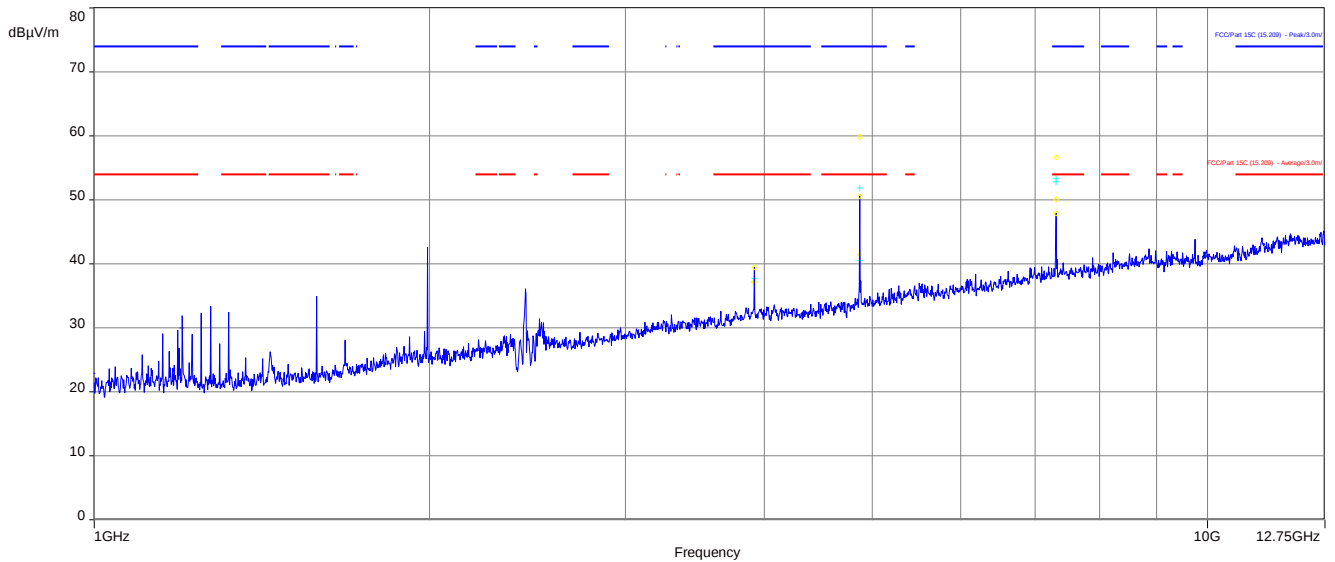
Results: OFDM HT40

TX Spurious Emissions Radiated [dBμV/m]								
2422 MHz			2437 MHz			2452 MHz		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.		
	Peak			Peak			Peak	
	AVG			AVG			AVG	

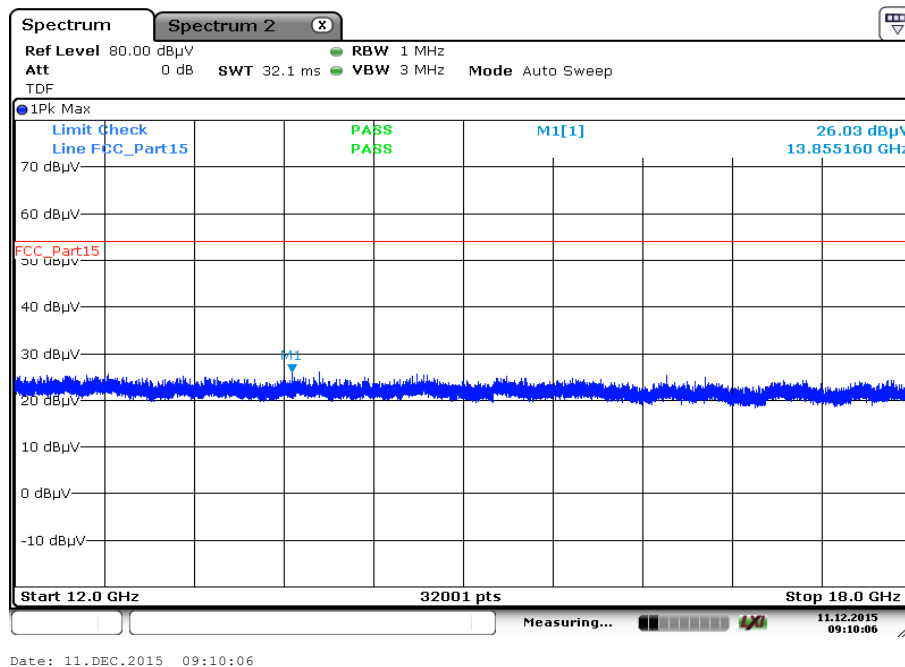
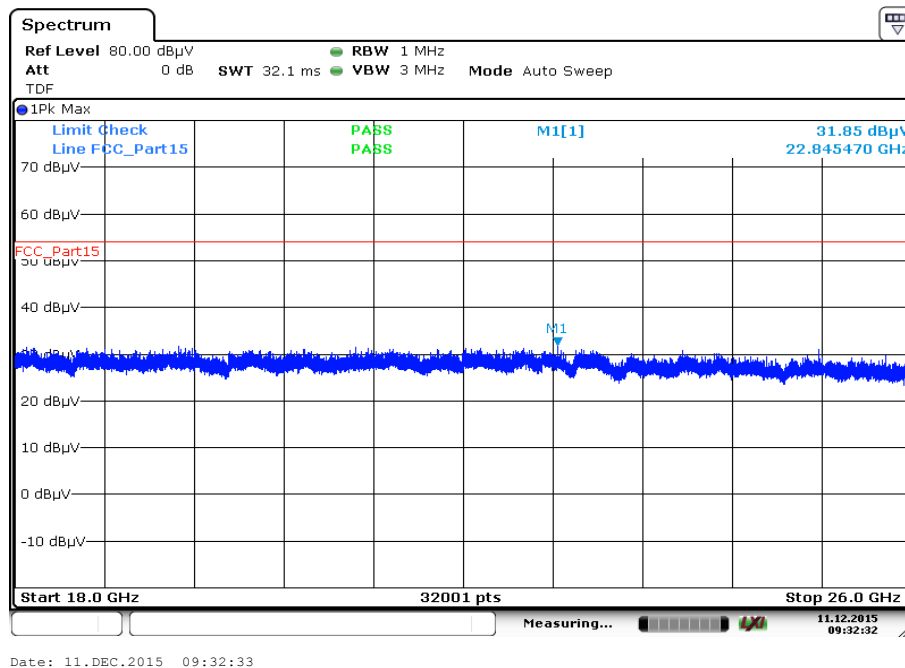
Plots: DSSS**Plot 1:** Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

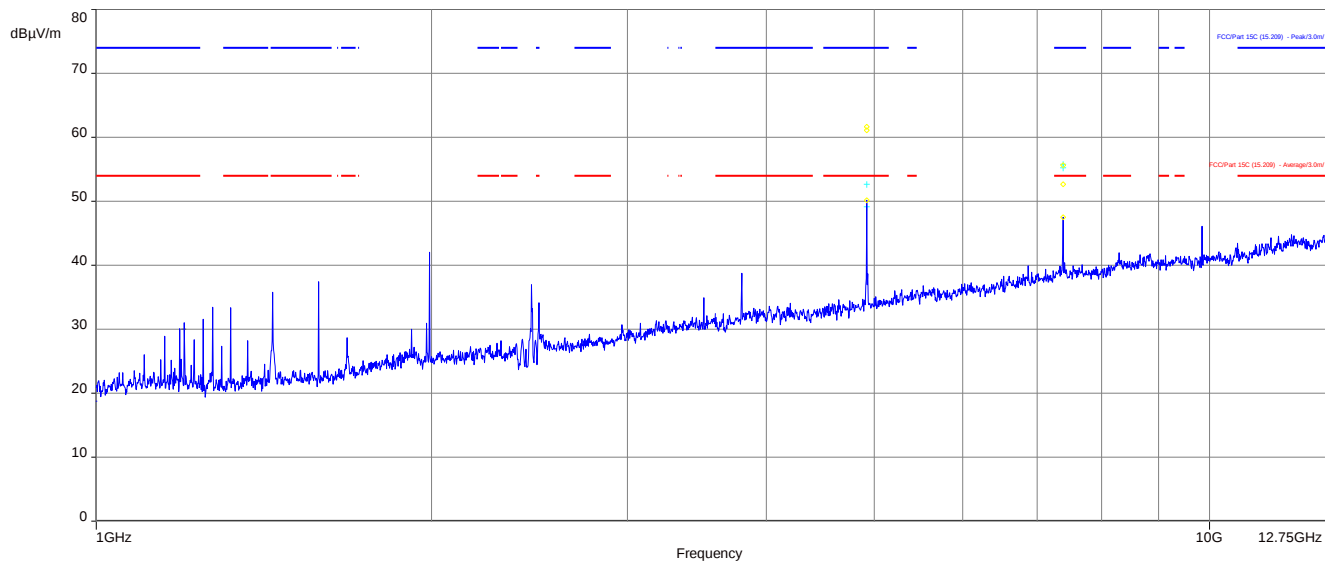
The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 2: Lowest channel, 12 GHz to 18 GHz, vertical & horizontal polarization

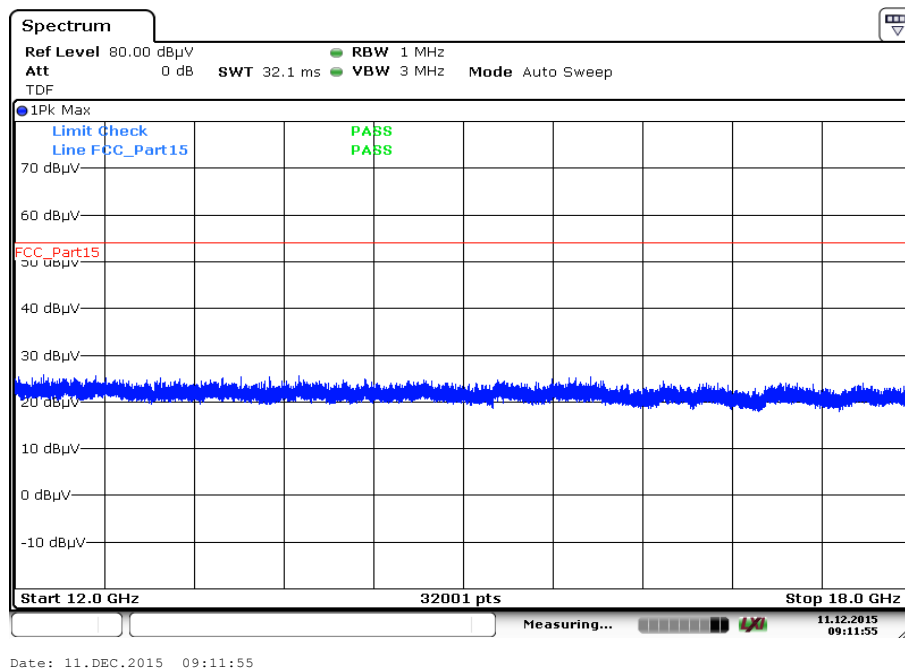
Plot 3: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization**Plot 4:** Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

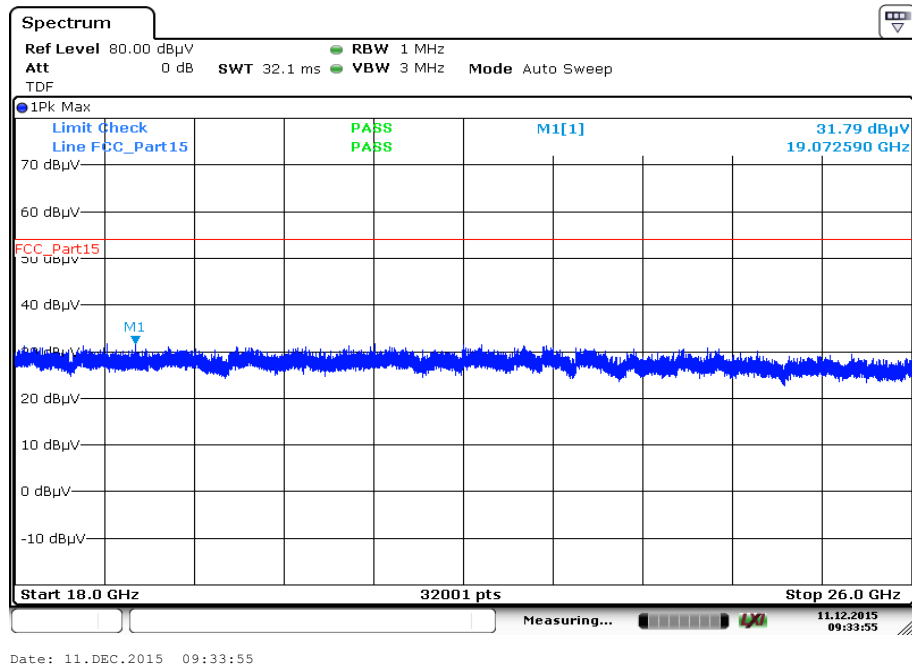
The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 5: Middle channel, 12 GHz to 18 GHz, vertical & horizontal polarization**Plot 6:** Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

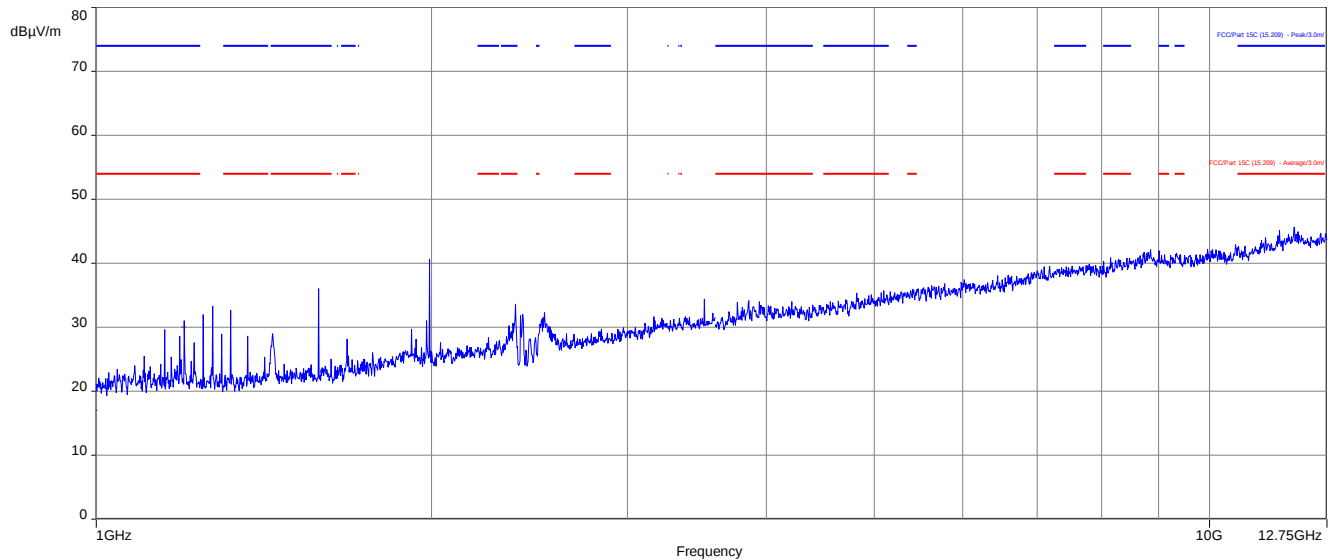
Plot 7: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

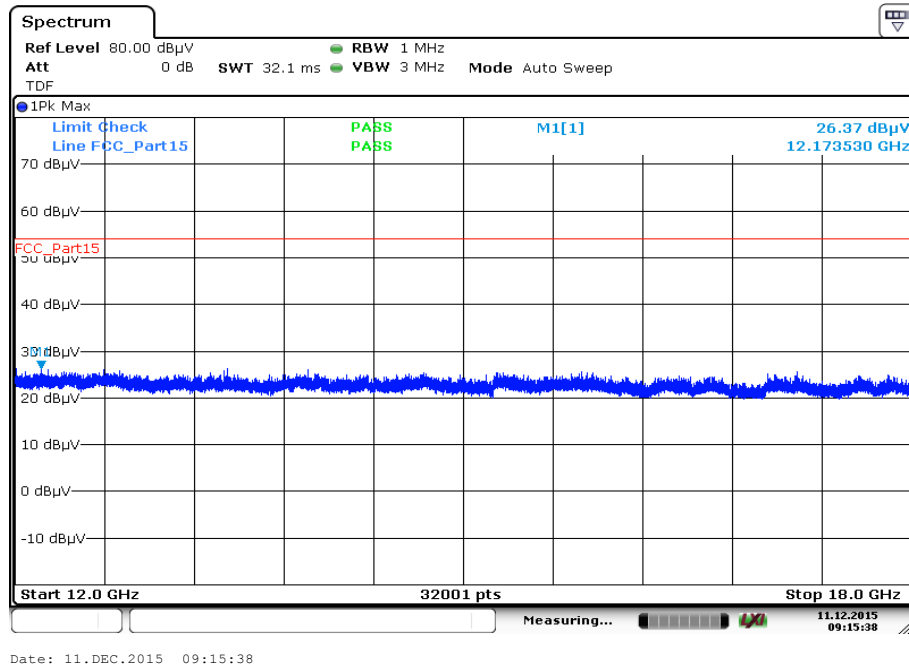
Plot 8: Highest channel, 12 GHz to 18 GHz, vertical & horizontal polarization

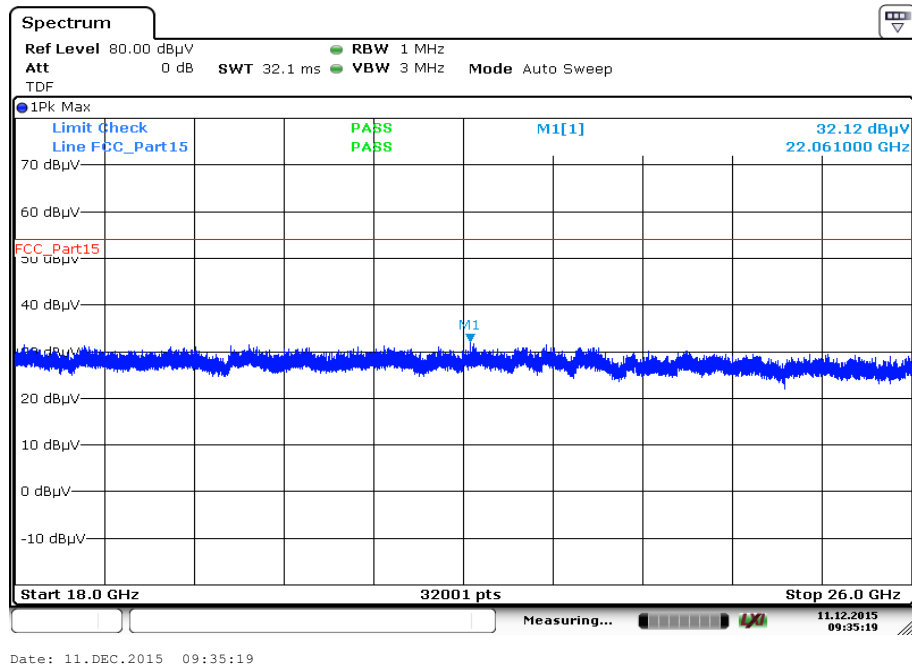
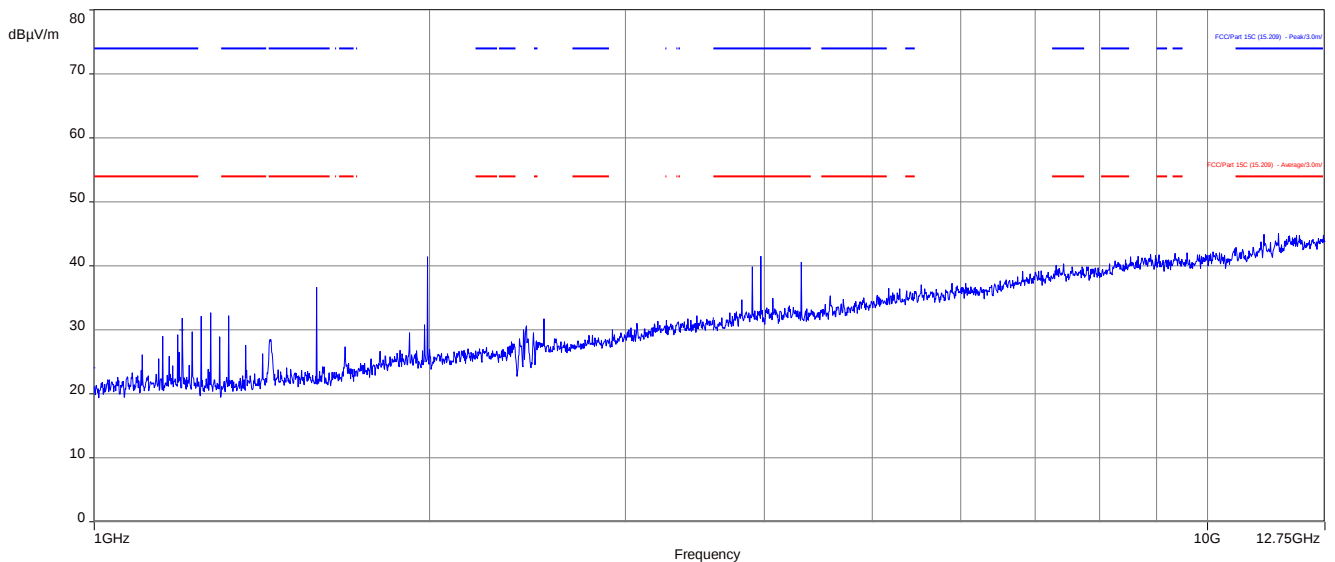
Plot 9: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

Plots: OFDM g – mode

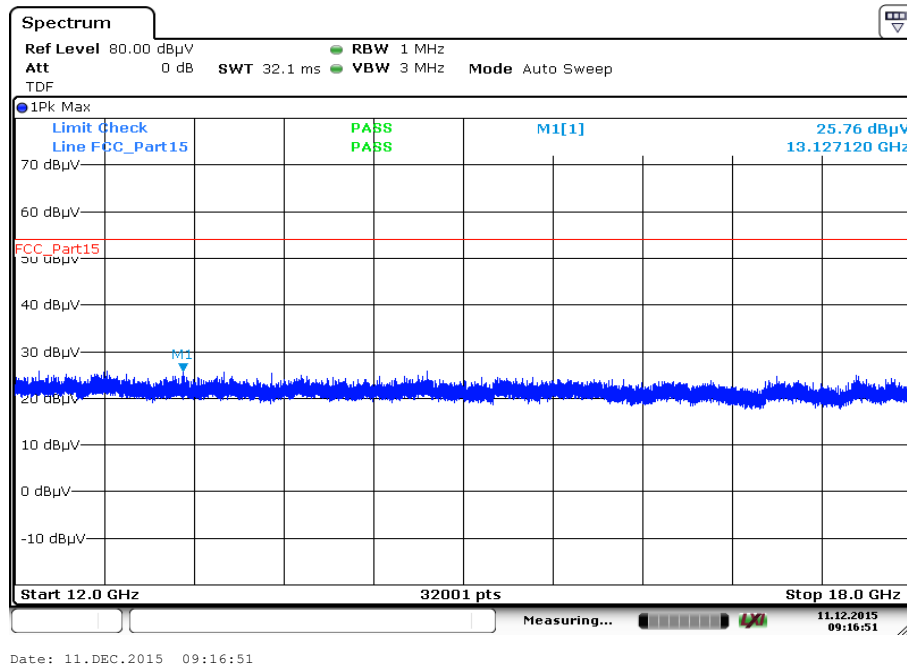
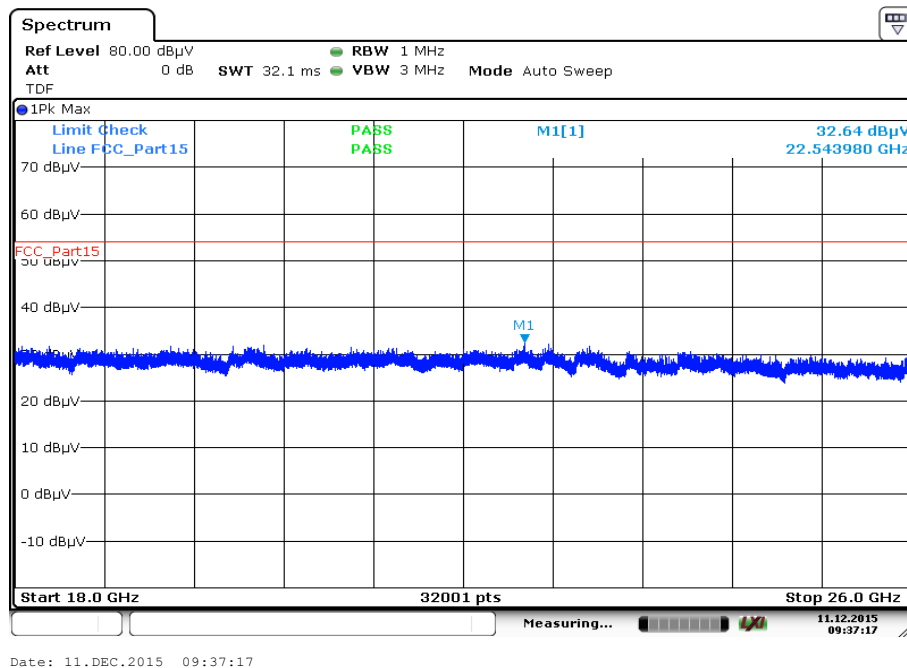
Plot 1: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization


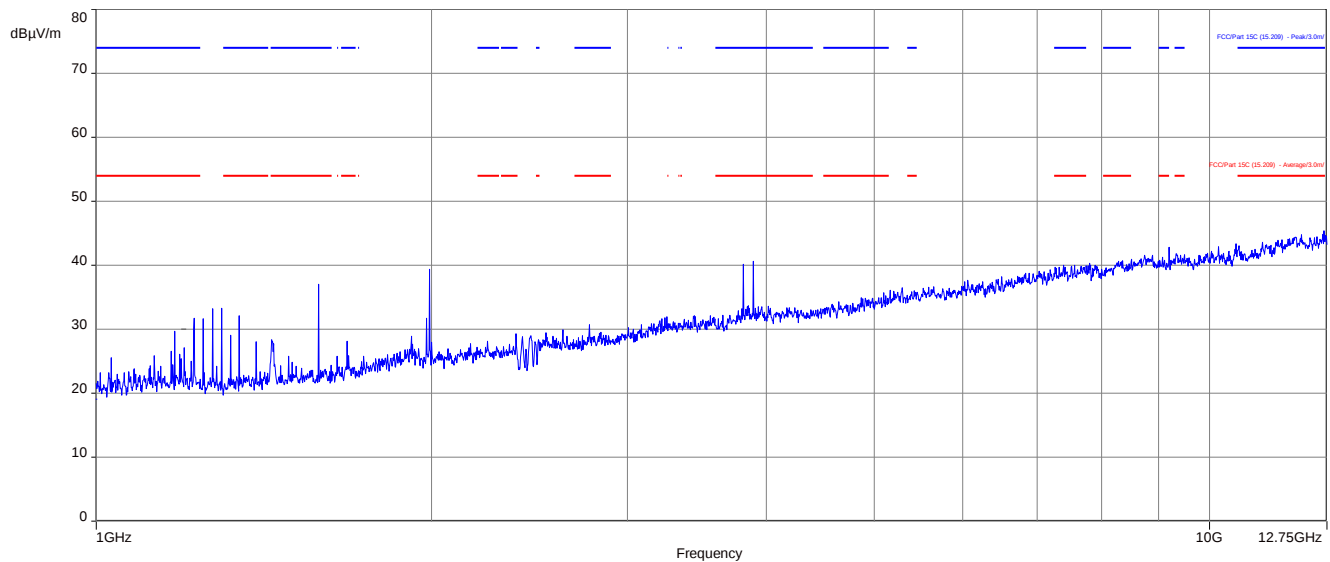
The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 2: Lowest channel, 12 GHz to 18 GHz, vertical & horizontal polarization


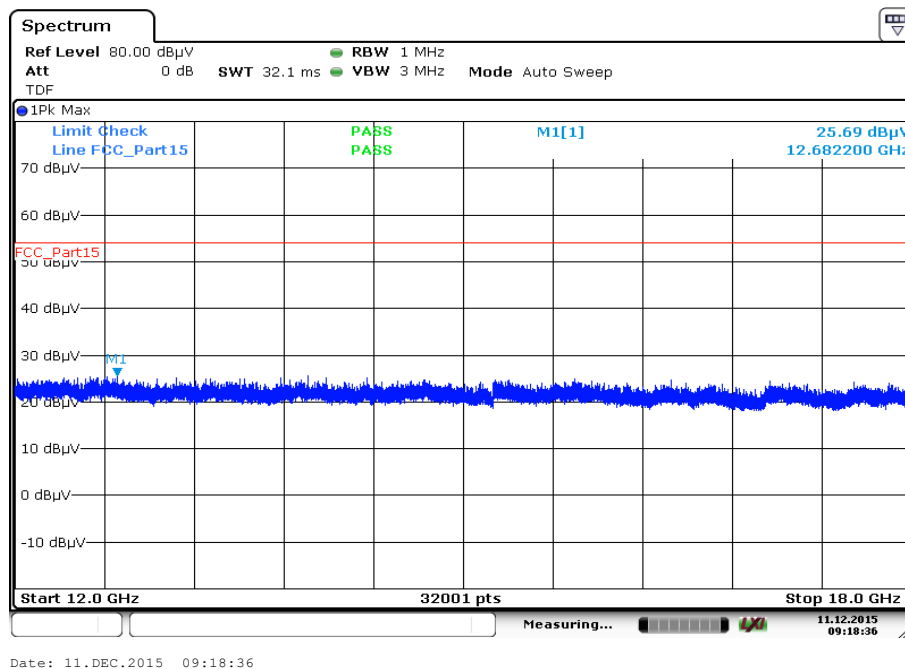
Plot 3: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization**Plot 4:** Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

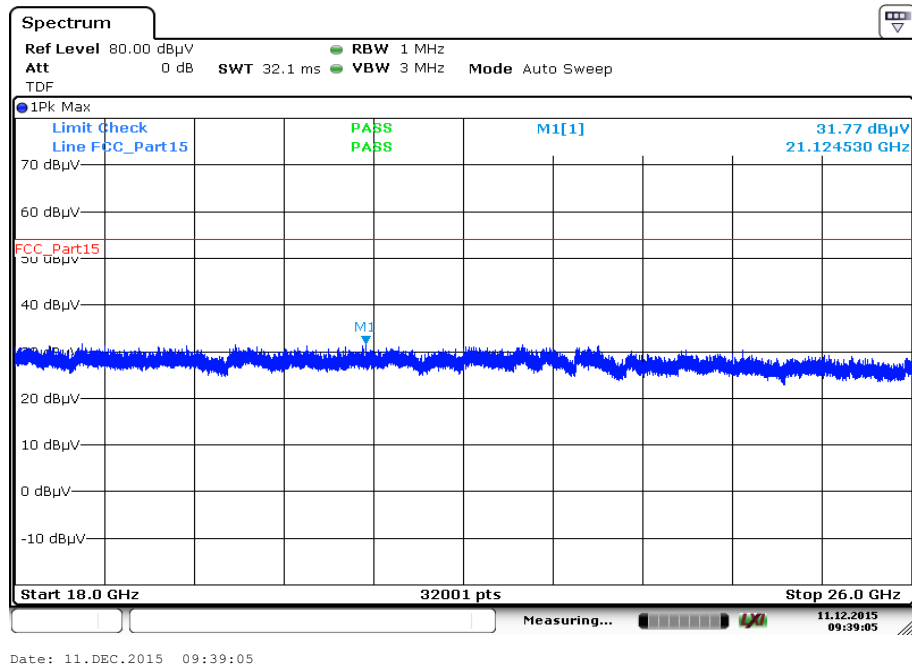
The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 5: Middle channel, 12 GHz to 18 GHz, vertical & horizontal polarization**Plot 6:** Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

Plot 7: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

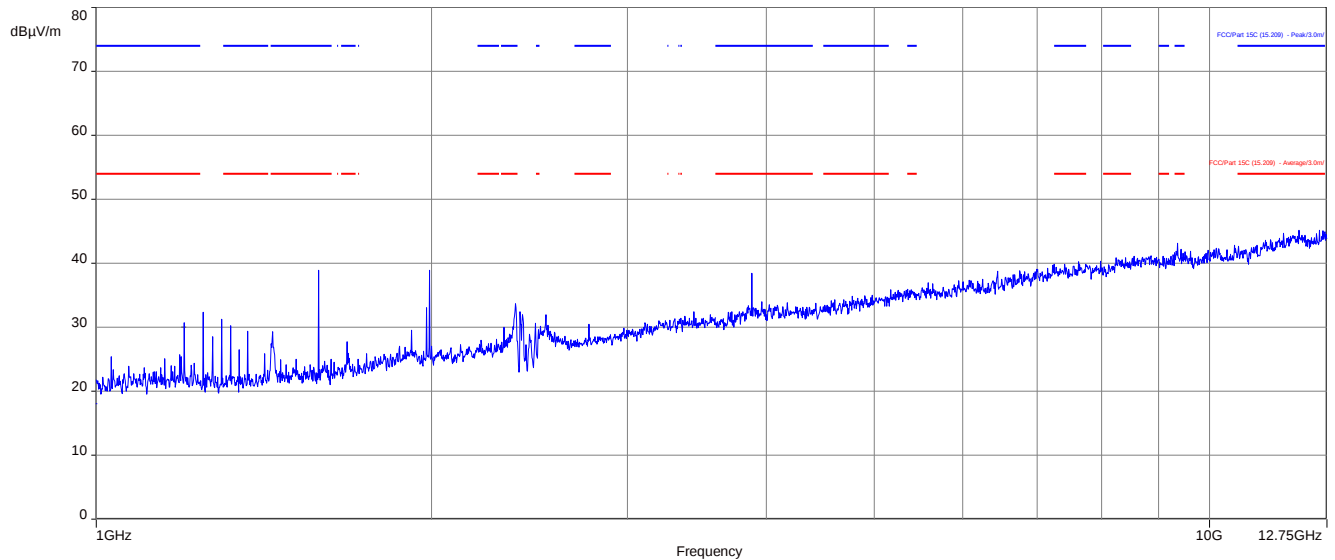
The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 8: Highest channel, 12 GHz to 18 GHz, vertical & horizontal polarization

Plot 9: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

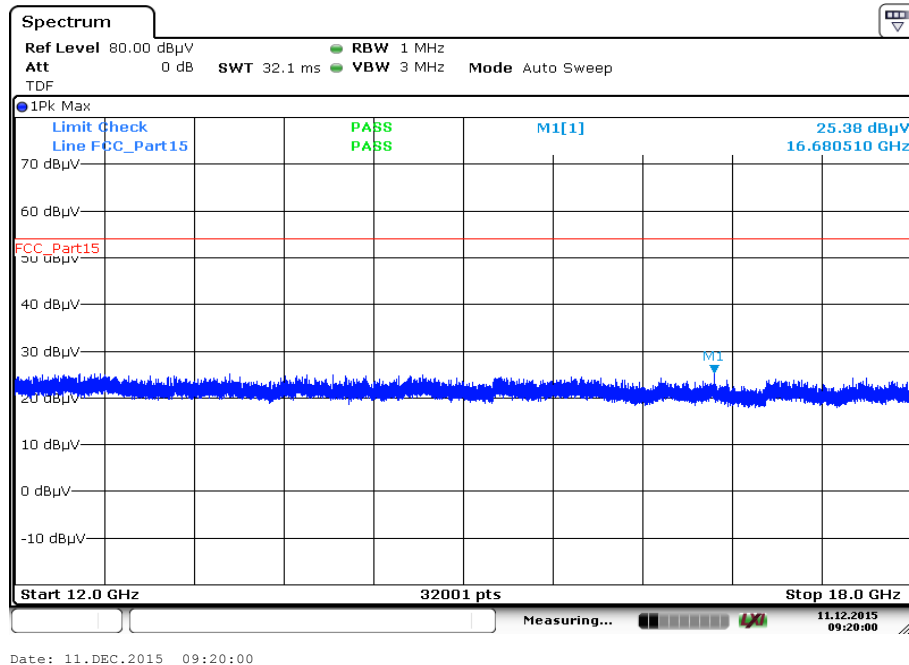
Plots: OFDM n HT20 – mode

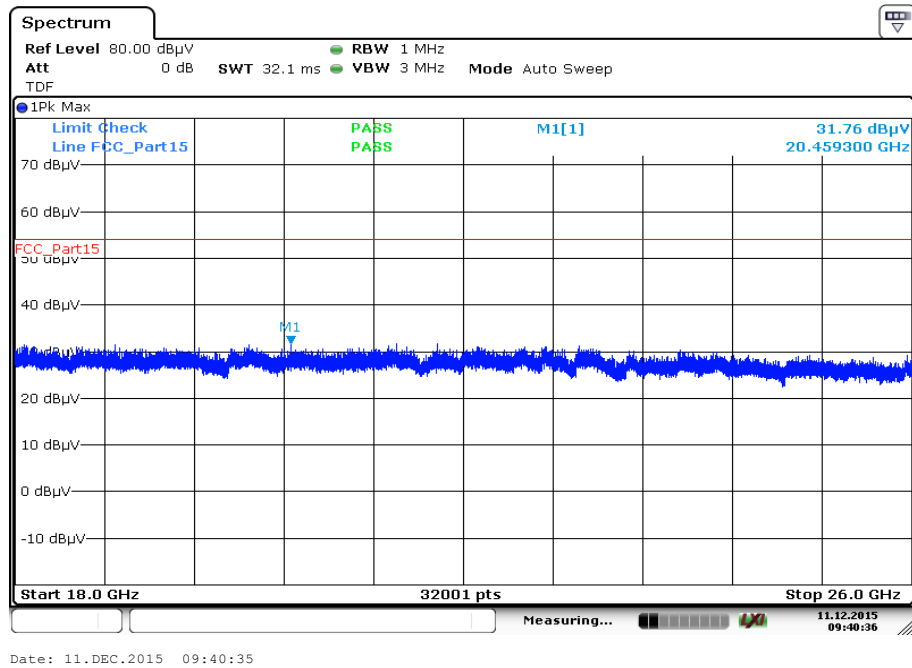
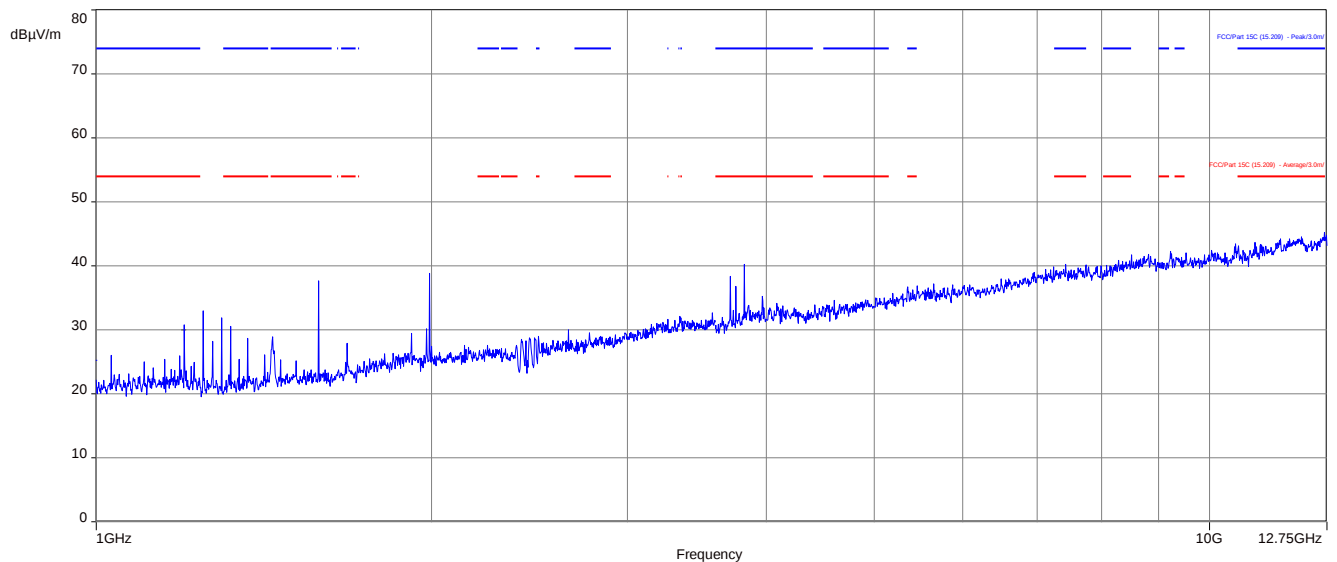
Plot 1: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization



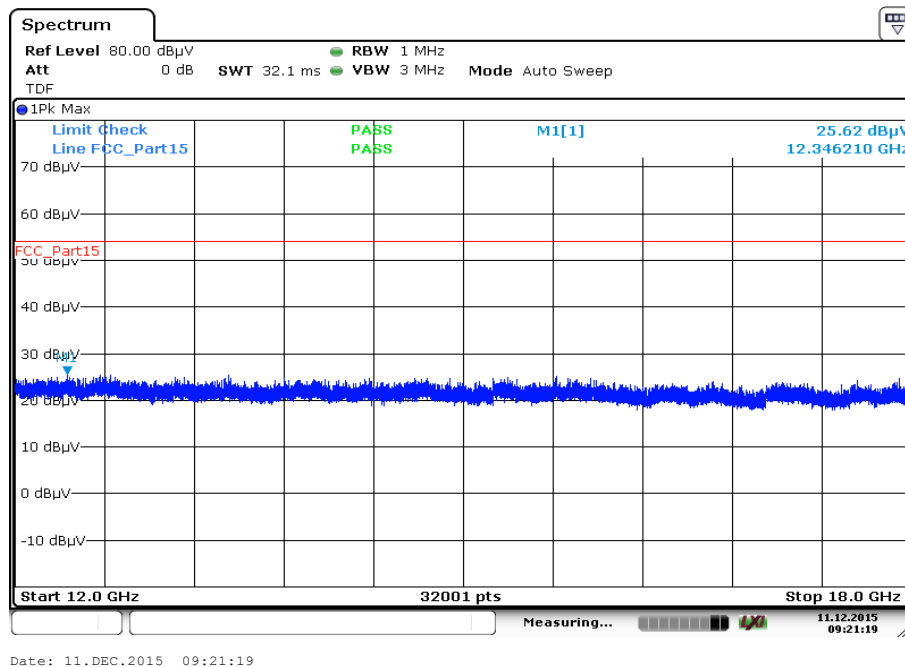
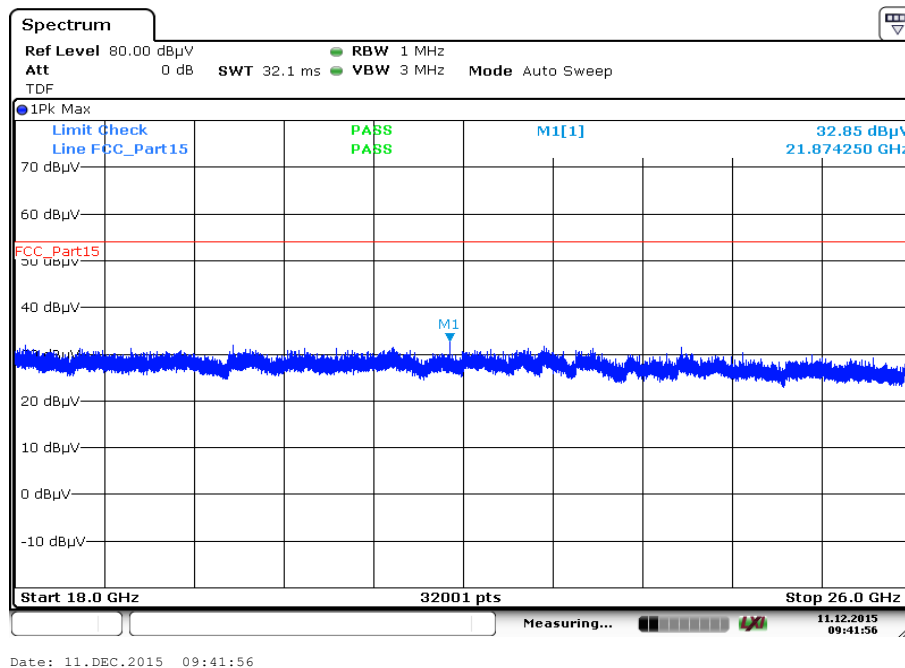
The carrier signal is notched with a 2.4 GHz band rejection filter.

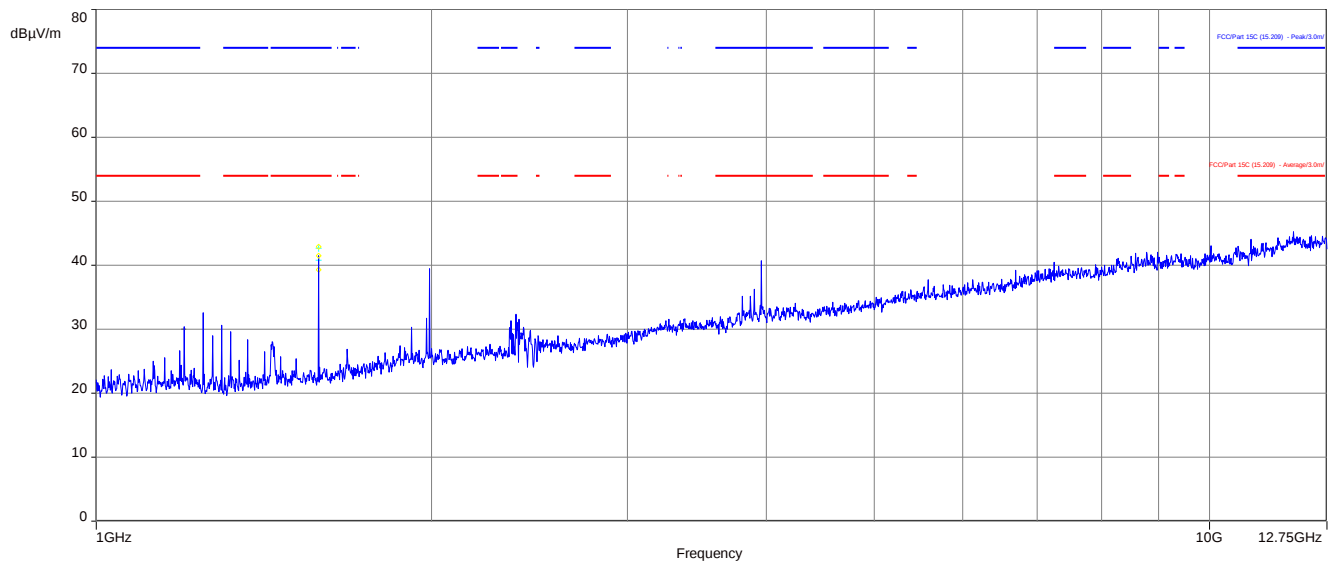
Plot 2: Lowest channel, 12 GHz to 18 GHz, vertical & horizontal polarization



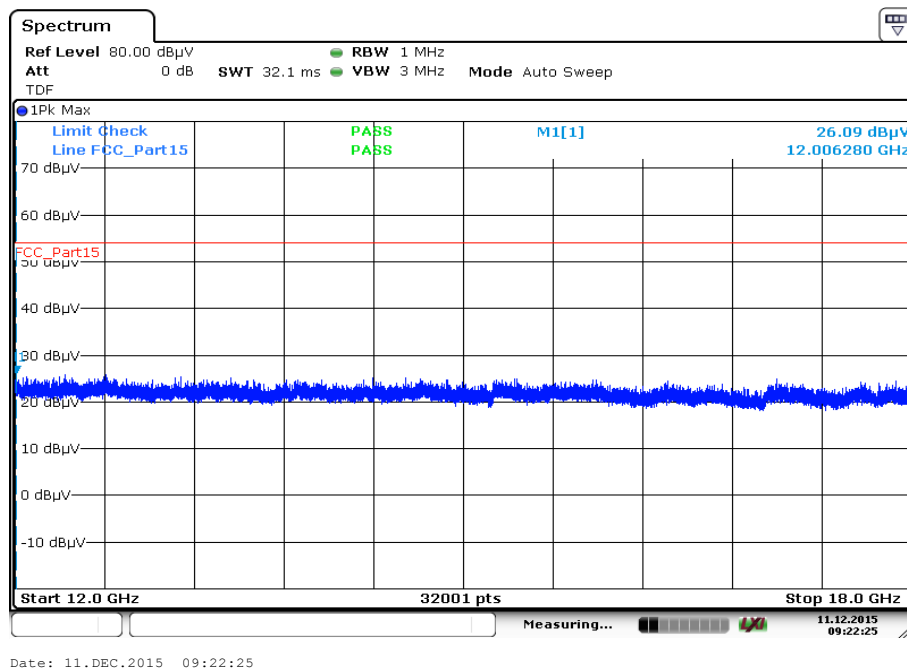
Plot 3: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization**Plot 4:** Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

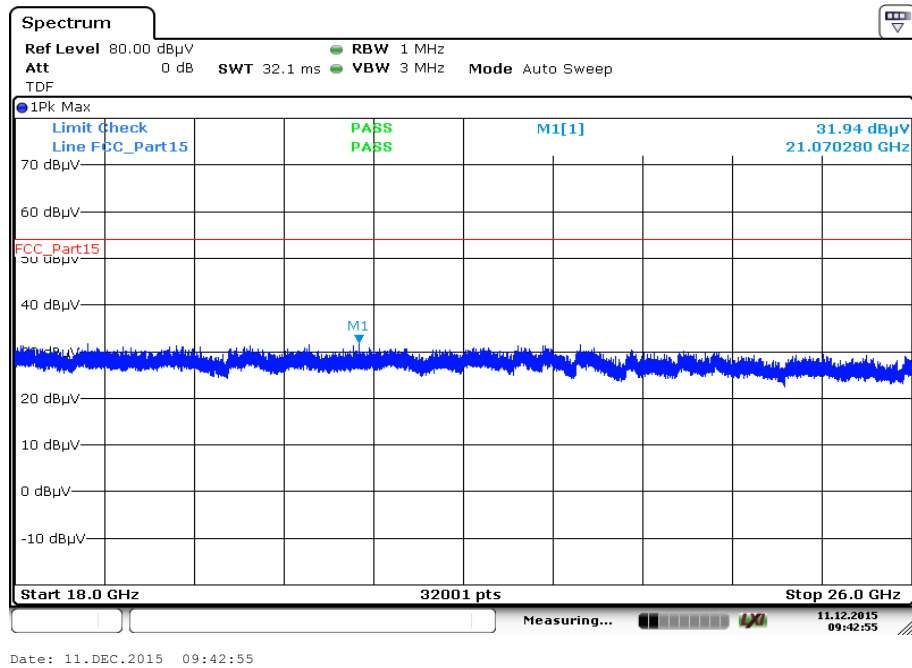
Plot 5: Middle channel, 12 GHz to 18 GHz, vertical & horizontal polarization**Plot 6:** Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

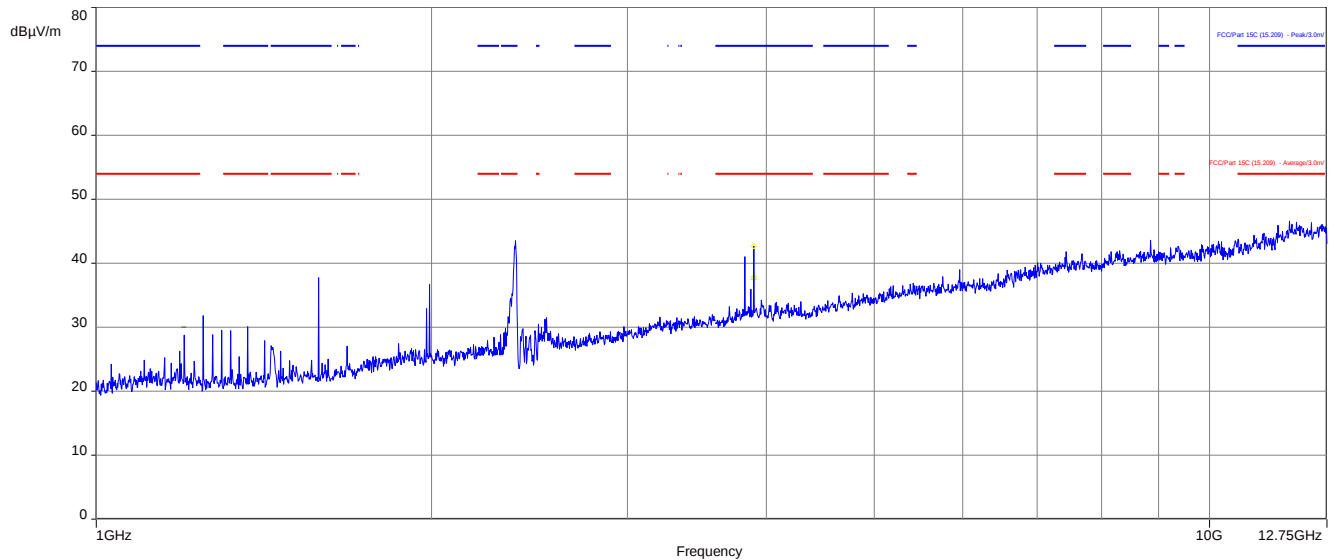
Plot 7: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

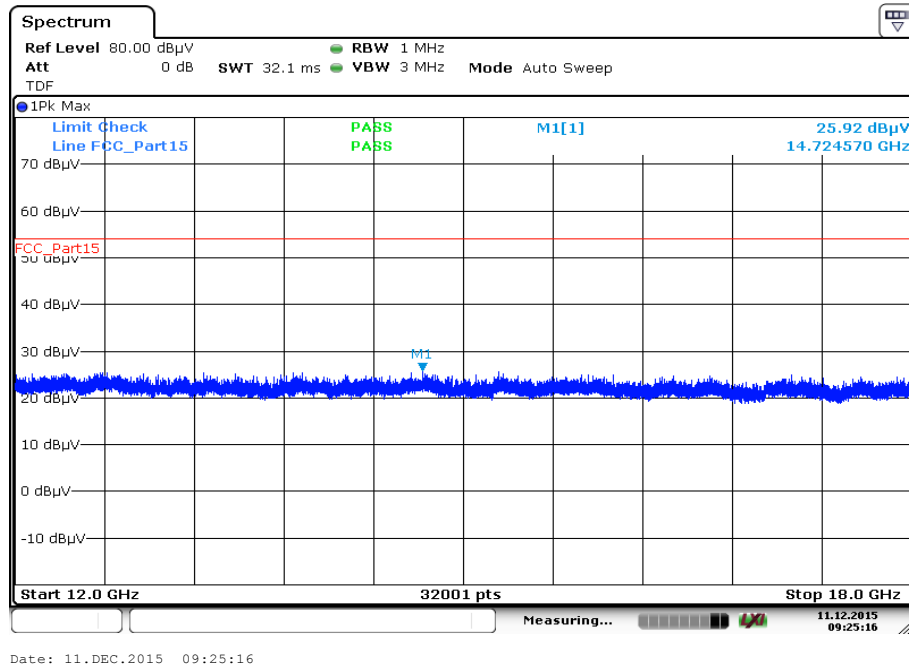
Plot 8: Highest channel, 12 GHz to 18 GHz, vertical & horizontal polarization

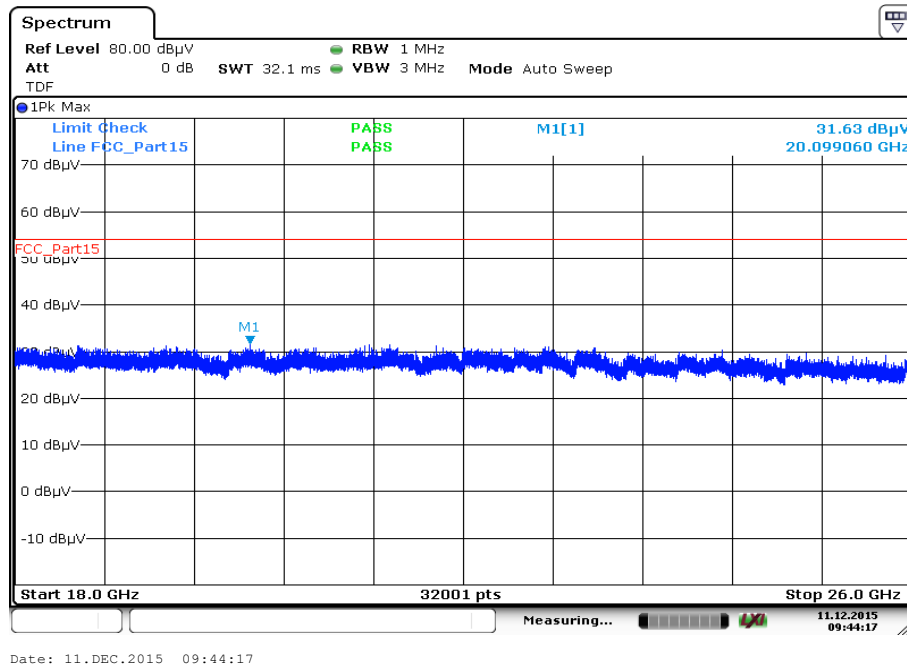
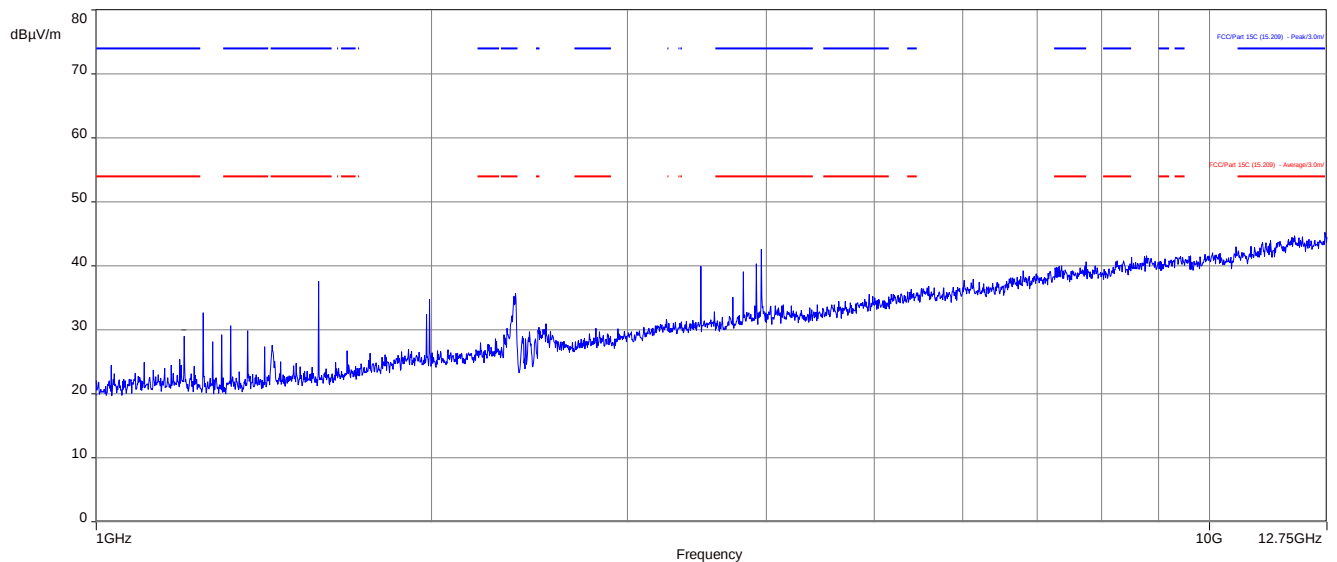
Date: 11.DEC.2015 09:22:25

Plot 9: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

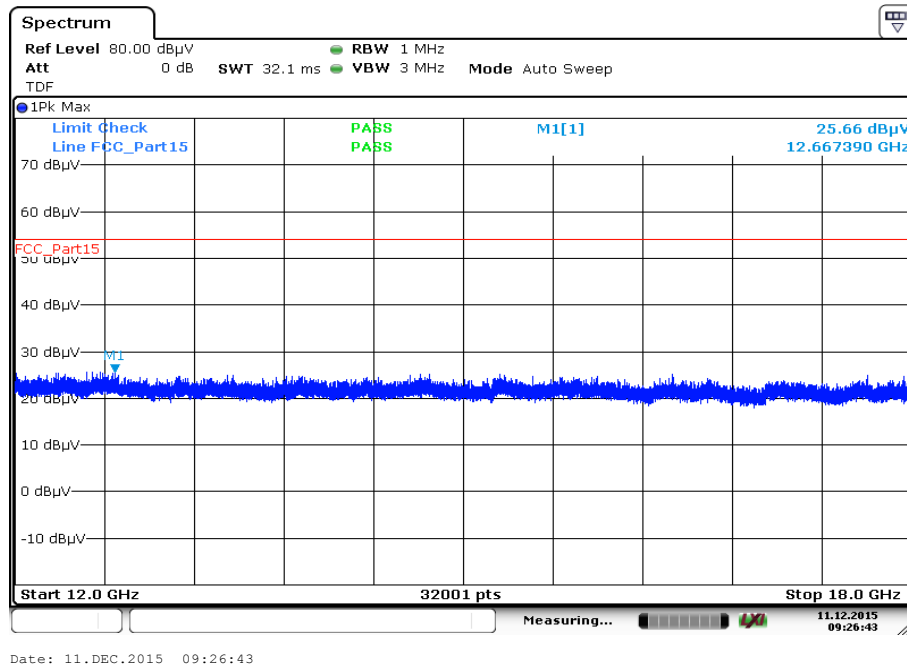
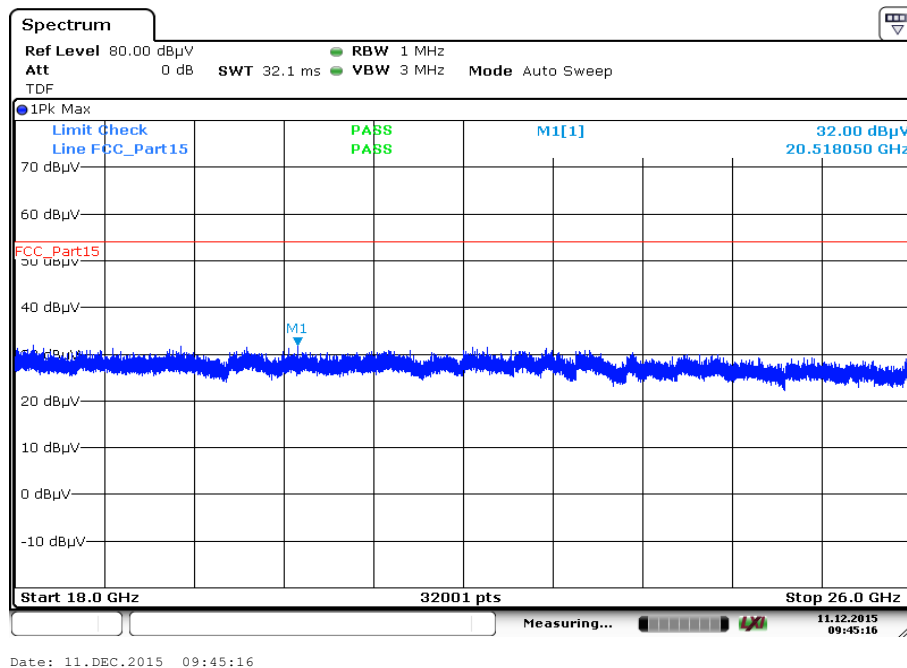
Plots: OFDM n HT40 – mode**Plot 1:** Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

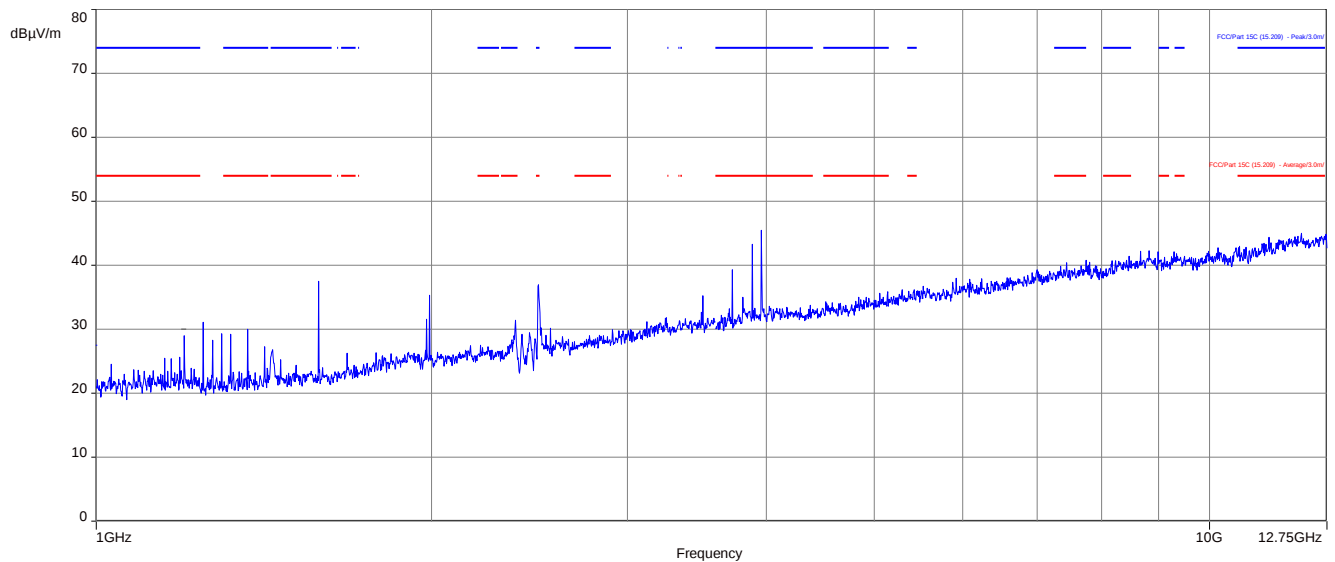
The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 2: Lowest channel, 12 GHz to 18 GHz, vertical & horizontal polarization

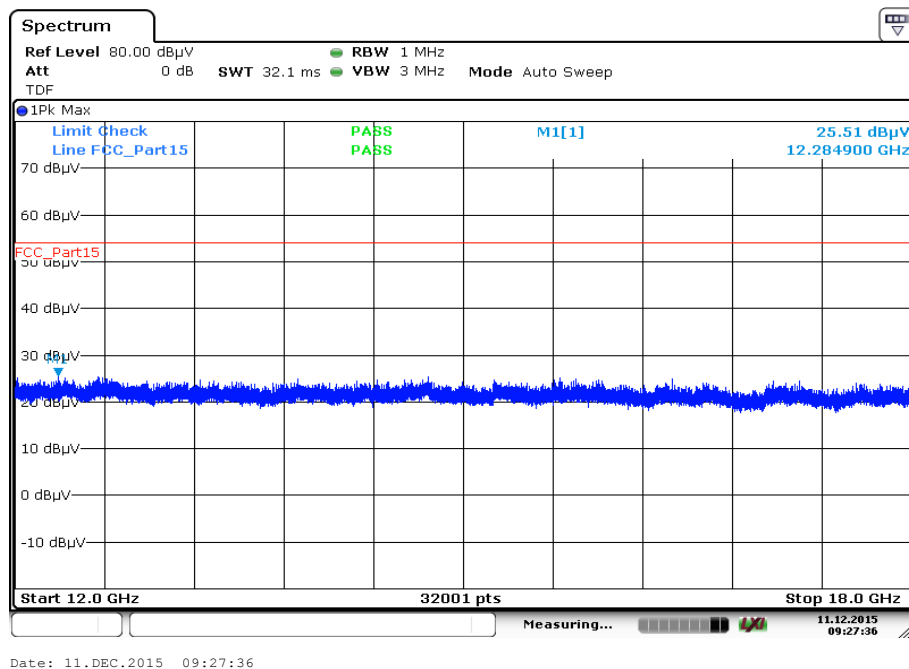
Plot 3: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization**Plot 4:** Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

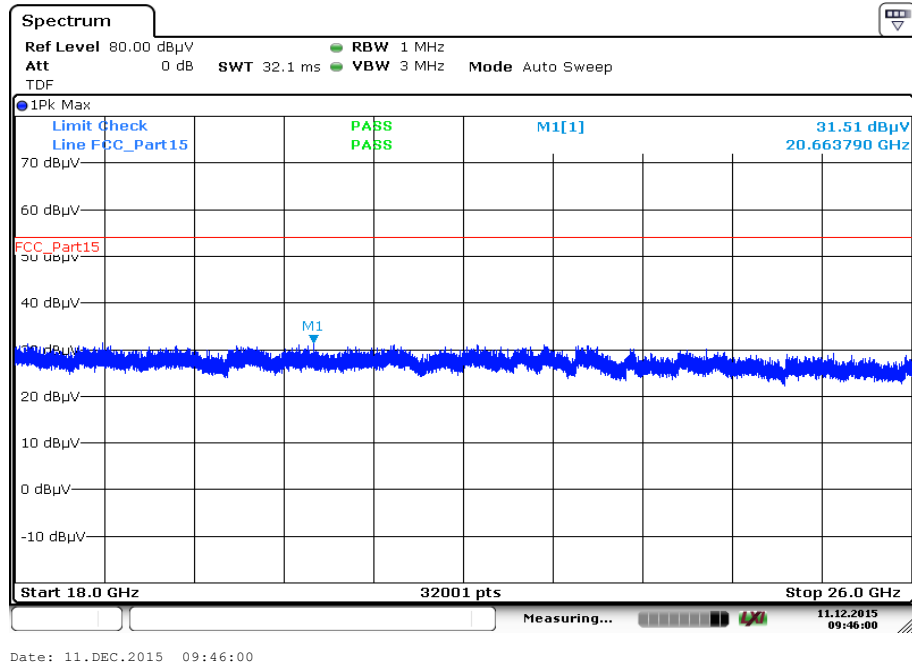
The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 5: Middle channel, 12 GHz to 18 GHz, vertical & horizontal polarization**Plot 6:** Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

Plot 7: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 8: Highest channel, 12 GHz to 18 GHz, vertical & horizontal polarization

Plot 9: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

Annex A Document history

Version	Applied changes	Date of release
	Initial release	2016-03-14
A	OBW measurements added	2016-06-21
B	Chapter 12.2 added	2016-07-04
C	Reference documents updated (chapter 11)	2016-07-25

Annex B Further information**Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software
PMN		Product marketing name
HMN		Host marketing name
HVIN		Hardware version identification number
FVIN		Firmware version identification number

Annex C Accreditation Certificate

Front side of certificate



Deutsche Akkreditierungsstelle GmbH

Befähigung gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV
Unterzeichnerin der Multilateralen Abkommen
von EA, ILAC und IAF zur gegenseitigen Anerkennung

Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

CETECOM ICT Services GmbH
Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

Funk
Mobilfunk (GSM / DCS) + OTA
Elektromagnetische Verträglichkeit (EMV)
Produktsicherheit
SAR / EMF
Umwelt
Smart Card Technology
Bluetooth®
Automotive
Wi-Fi-Services
Kanadische Anforderungen
US-Anforderungen
Akustik
Near Field Communication (NFC)

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 04.05.2016 mit der Akkreditierungsnummer D-PL-12076-01 und ist gültig bis 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 63 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-01

Frankfurt, 04.05.2016

Siehe Hinweise auf der Rückseite

Im Auftrag Dipl.-Ing. (FH) Ralf Egnier
Abteilungsleiter

Back side of certificate

Deutsche Akkreditierungsstelle GmbH

Standort Berlin
Spittelmarkt 10
10117 Berlin

Standort Frankfurt am Main
Europa-Allee 52
60327 Frankfurt am Main

Standort Braunschweig
Bundesallee 100
38116 Braunschweig

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen Zustimmung der Deutschen Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblatts durch die umseitig genannte Konformitätsbewertungsstelle in unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (Abt. L 218 vom 9. Juli 2008, S. 30). Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:

EA: www.european-accreditation.org
ILAC: www.ilac.org
IAF: www.iaf.nu

Note:

The current certificate including annex can be received from CETECOM ICT Services GmbH on request.