

TEST REPORT

Product : AM HATSU
Trade mark : Angry Miao
Model/Type reference : AM05
Serial Number : N/A
Report Number : EED32O81791701
FCC ID : 2A3FY-AM05
Date of Issue : Dec. 15, 2022
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Angry Miao Technology Co., Limited
2/F, No.5 of Nanteng Street, Qi'ao Industrial Zone, Tangjiawan
Town, Xiangzhou District, Zhuhai, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:



Martin Lee

Reviewed by:



Tom Chen

Approved by:



Aaron Ma

Date:

Dec. 15, 2022

Check No.: 2807111122



1 Content

1 CONTENT	2
2 VERSION	3
3 TEST SUMMARY	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST CONFIGURATION	6
4.4 TEST ENVIRONMENT	7
4.5 DESCRIPTION OF SUPPORT UNITS	7
4.6 TEST LOCATION	7
4.7 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	8
5 EQUIPMENT LIST	9
6 TEST RESULTS AND MEASUREMENT DATA	12
6.1 ANTENNA REQUIREMENT	12
6.2 AC POWER LINE CONDUCTED EMISSIONS	13
6.3 MAXIMUM CONDUCTED OUTPUT POWER	18
6.4 DTS BANDWIDTH	19
6.5 MAXIMUM POWER SPECTRAL DENSITY	20
6.6 BAND EDGE MEASUREMENTS AND CONDUCTED SPURIOUS EMISSION	21
6.7 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	22
7 APPENDIX BLE	51
8 PHOTOGRAPHS OF TEST SETUP	52
9 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	56

2 Version

Version No.	Date	Description
00	Dec. 15, 2022	Original

3 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	PASS
DTS Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	PASS
Band Edge Measurements	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Radiated Spurious Emission & Restricted bands	47 CFR Part 15 Subpart C Section 15.205/15.209	PASS

Remark:

Company Name and Address shown on Report, the sample(s) and sample Information were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

4 General Information

4.1 Client Information

Applicant:	Angry Miao Technology Co., Limited
Address of Applicant:	2/F, No.5 of Nanteng Street, Qi'ao Industrial Zone, Tangjiawan Town,Xiangzhou District, Zhuhai,China
Manufacturer:	Angry Miao Technology Co., Limited
Address of Manufacturer:	2/F, No.5 of Nanteng Street, Qi'ao Industrial Zone, Tangjiawan Town,Xiangzhou District, Zhuhai,China

4.2 General Description of EUT

Product Name:	AM HATSU	
Model No.:	AM05	
Hardware Version:	P1	
Software Version:	AM_HATSU.N40.r1.00.23	
Bluetooth Version:	V5.0	
Trade mark:	Angry Miao	
Device type:	Portable	
Operation Frequency:	2402MHz~2480MHz	
Modulation Type:	GFSK	
Transfer Rate:	☒ 1Mbps ☒ 2Mbps	
Number of Channel:	40	
Antenna Type:	PIFA Antenna	
Antenna Gain:	3.85dBi	
Power Supply:	USB port:	DC 5V
	Battery:	DC 3.8V
Test Voltage:	DC 3.8V	
Sample Received Date:	Nov. 11, 2022	
Sample tested Date:	Nov. 11, 2022 to Dec. 13, 2022	

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH0)	2402MHz
The middle channel (CH19)	2440MHz
The highest channel (CH39)	2480MHz

4.3 Test Configuration

EUT Test Software Settings:

Software:	DTM.exe			
EUT Power Grade:	Class2 (Power level is built-in set parameters and cannot be changed and selected)			
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.				
Test Mode	Modulation	Rate	Channel	Frequency(MHz)
Mode a	GFSK	1Mbps	CH0	2402
Mode b	GFSK	1Mbps	CH19	2440
Mode c	GFSK	1Mbps	CH39	2480
Mode d	GFSK	2Mbps	CH0	2402
Mode e	GFSK	2Mbps	CH19	2440
Mode f	GFSK	2Mbps	CH39	2480

4.4 Test Environment

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Conducted Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
RF Conducted:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar

4.5 Description of Support Units

The EUT has been tested independently.

4.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd
Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China
Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385
No tests were sub-contracted.
FCC Designation No.: CN1164

4.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9 x 10 ⁻⁸
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-40GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

5 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Communication test set	R&S	CMW500	107929	07-06-2022	07-05-2023
Signal Generator	R&S	SMBV100A	1407.6004K02- 262149-CV	09-09-2022	09-08-2023
Spectrum Analyzer	R&S	FSV40	101200	08-01-2022	07-31-2023
RF control unit(power unit)	MWRF-test	MW100-RFCB	MW220620CTI-42	07-06-2022	07-05-2023
high-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	12-24-2021	12-23-2022
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	06-16-2022	06-15-2023
BT&Wi-Fi Automatic test software	MWRF-test	MTS 8310	2.0.0.0	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-04-2022	05-05-2023
Temperature/ Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-01-2022	02-28-2023
Barometer	changchun	DYM3	1188	---	---

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Due Date
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-22-2022	05-21-2025
Receiver	R&S	ESCI7	100938-003	09-28-2022	09-27-2023
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05-22-2022	05-21-2023
Multi device Controller	maturo	NCD/070/10711112	---	---	---
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	04-15-2021	04-14-2024
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-17-2021	04-16-2024
Microwave Preamplifier	Agilent	8449B	3008A02425	06-20-2022	06-19-2023


3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-01-2022	02-28-2023
Spectrum Analyzer	Keysight	N9020B	MY57111112	02-23-2022	02-22-2023
Spectrum Analyzer	Keysight	N9030B	MY57140871	02-23-2022	02-22-2023
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-28-2021	04-27-2024
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-15-2021	04-14-2024
Horn Antenna	ETS-LINDGREN	3117	57407	07-04-2021	07-03-2024
Preamplifier	EMCI	EMC184055SE	980597	04-20-2022	04-19-2023
Preamplifier	EMCI	EMC001330	980563	04-01-2022	03-31-2023
Preamplifier	JS Tonscend	980380	EMC051845SE	12-24-2021	12-23-2022
Communication test set	R&S	CMW500	102898	12-24-2021	12-23-2022
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-11-2022	04-10-2023
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2021	01-08-2024
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	Please see Internal photos
The antenna is PIFA Antenna. The best case gain of the antenna is 3.85dBi.	


6.2 AC Power Line Conducted Emissions

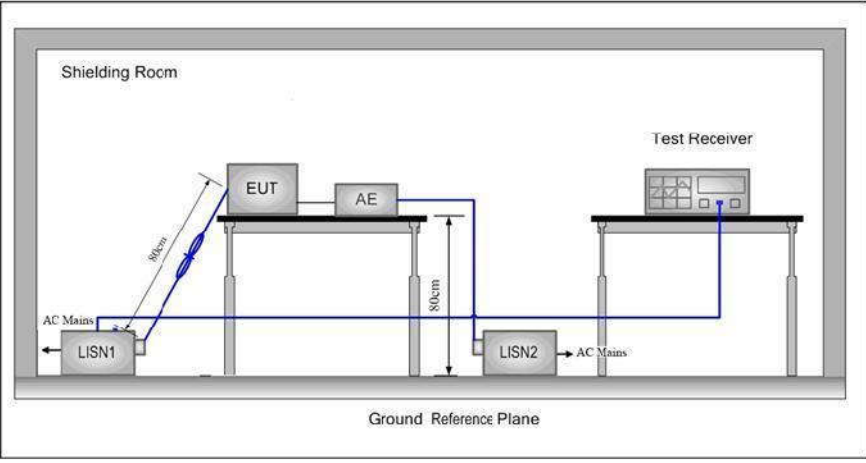Test Requirement:	47 CFR Part 15C Section 15.207															
Test Method:	ANSI C63.10: 2013															
Test Frequency Range:	150kHz to 30MHz															
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto															
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr> <tr> <th>Quasi-peak</th><th>Average</th></tr> </thead> <tbody> <tr> <td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td>0.5-5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table> * Decreases with the logarithm of the frequency.		Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)															
	Quasi-peak	Average														
0.15-0.5	66 to 56*	56 to 46*														
0.5-5	56	46														
5-30	60	50														
Test Setup:																
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.															
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.															
Final Test Mode:	Through Pre-scan, find the mode a is the worst case. Only the worst case is recorded in the report.															
Test Results:	Pass															

Measurement Data


Left hand keyboard:

Live line:

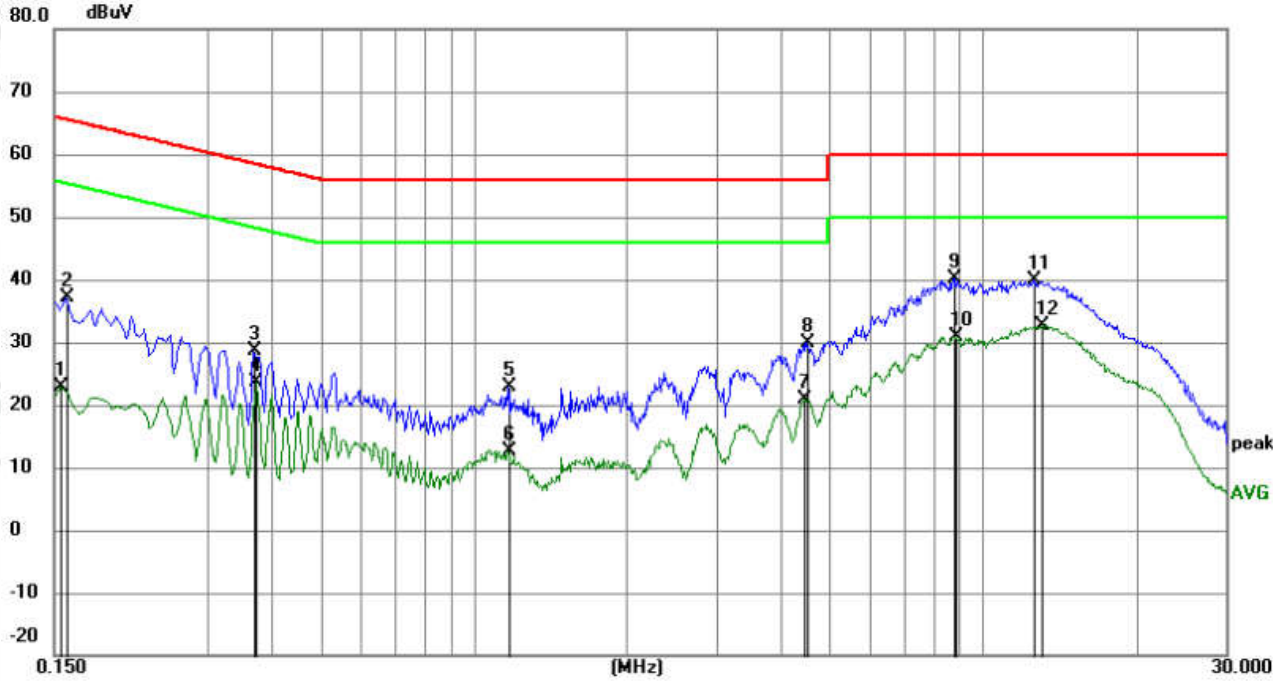

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1545	13.12	9.87	22.99	55.75	-32.76	AVG	
2		0.1590	27.19	9.87	37.06	65.52	-28.46	QP	
3		0.3704	18.73	10.00	28.73	58.49	-29.76	QP	
4		0.3750	13.62	9.99	23.61	48.39	-24.78	AVG	
5		1.1715	13.07	9.82	22.89	56.00	-33.11	QP	
6		1.1715	2.73	9.82	12.55	46.00	-33.45	AVG	
7		4.4699	11.15	9.78	20.93	46.00	-25.07	AVG	
8		4.5015	20.15	9.78	29.93	56.00	-26.07	QP	
9		8.8170	30.33	9.78	40.11	60.00	-19.89	QP	
10		8.8530	21.20	9.78	30.98	50.00	-19.02	AVG	
11		12.5385	30.11	9.86	39.97	60.00	-20.03	QP	
12	*	13.0245	22.64	9.87	32.51	50.00	-17.49	AVG	

Neutral line:
80.0 dBuV

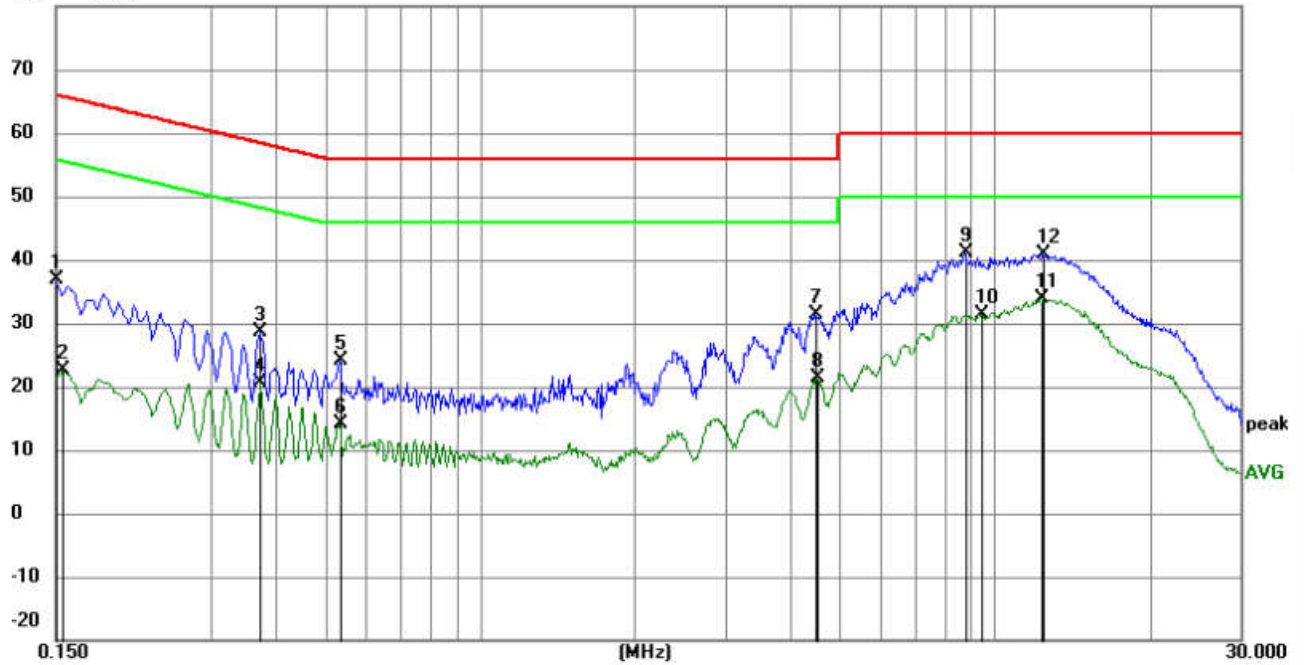


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	26.94	9.87	36.81	66.00	-29.19	QP	
2		0.1545	12.70	9.87	22.57	55.75	-33.18	AVG	
3		0.3750	18.62	9.99	28.61	58.39	-29.78	QP	
4		0.3750	10.58	9.99	20.57	48.39	-27.82	AVG	
5		0.5325	14.08	9.99	24.07	56.00	-31.93	QP	
6		0.5325	4.25	9.99	14.24	46.00	-31.76	AVG	
7		4.4925	21.69	9.78	31.47	56.00	-24.53	QP	
8		4.5195	11.57	9.78	21.35	46.00	-24.65	AVG	
9		8.7585	31.23	9.78	41.01	60.00	-18.99	QP	
10		9.4470	21.58	9.78	31.36	50.00	-18.64	AVG	
11	*	12.2910	24.03	9.85	33.88	50.00	-16.12	AVG	
12		12.4215	31.14	9.85	40.99	60.00	-19.01	QP	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


Right hand keyboard:

Live line:

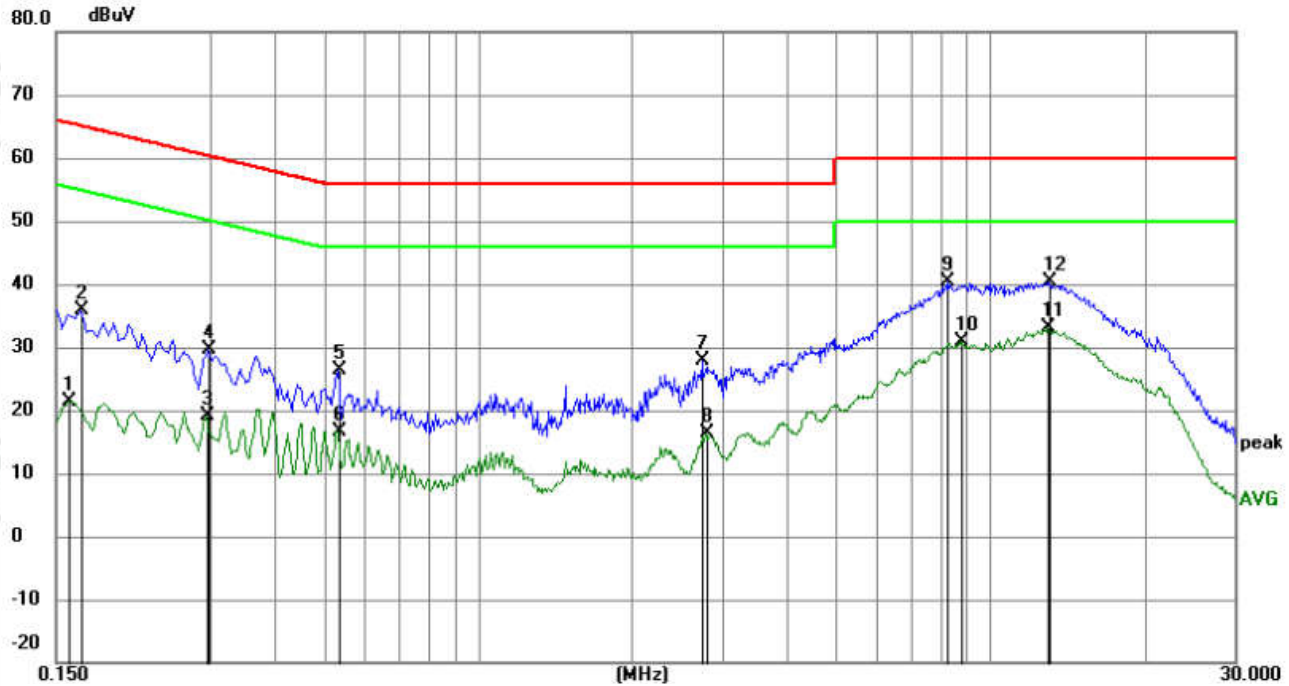

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment			Detector	Comment
1		0.1590	11.53	9.87	21.40	55.52	-34.12	AVG	
2		0.1680	25.93	9.87	35.80	65.06	-29.26	QP	
3		0.2940	9.00	10.06	19.06	50.41	-31.35	AVG	
4		0.2985	19.51	10.07	29.58	60.28	-30.70	QP	
5		0.5325	16.44	9.99	26.43	56.00	-29.57	QP	
6		0.5325	6.71	9.99	16.70	46.00	-29.30	AVG	
7		2.7420	18.04	9.79	27.83	56.00	-28.17	QP	
8		2.7915	6.51	9.79	16.30	46.00	-29.70	AVG	
9		8.2635	30.51	9.79	40.30	60.00	-19.70	QP	
10		8.7585	21.12	9.78	30.90	50.00	-19.10	AVG	
11	*	12.9705	23.29	9.87	33.16	50.00	-16.84	AVG	
12		13.0155	30.53	9.87	40.40	60.00	-19.60	QP	

Neutral line:

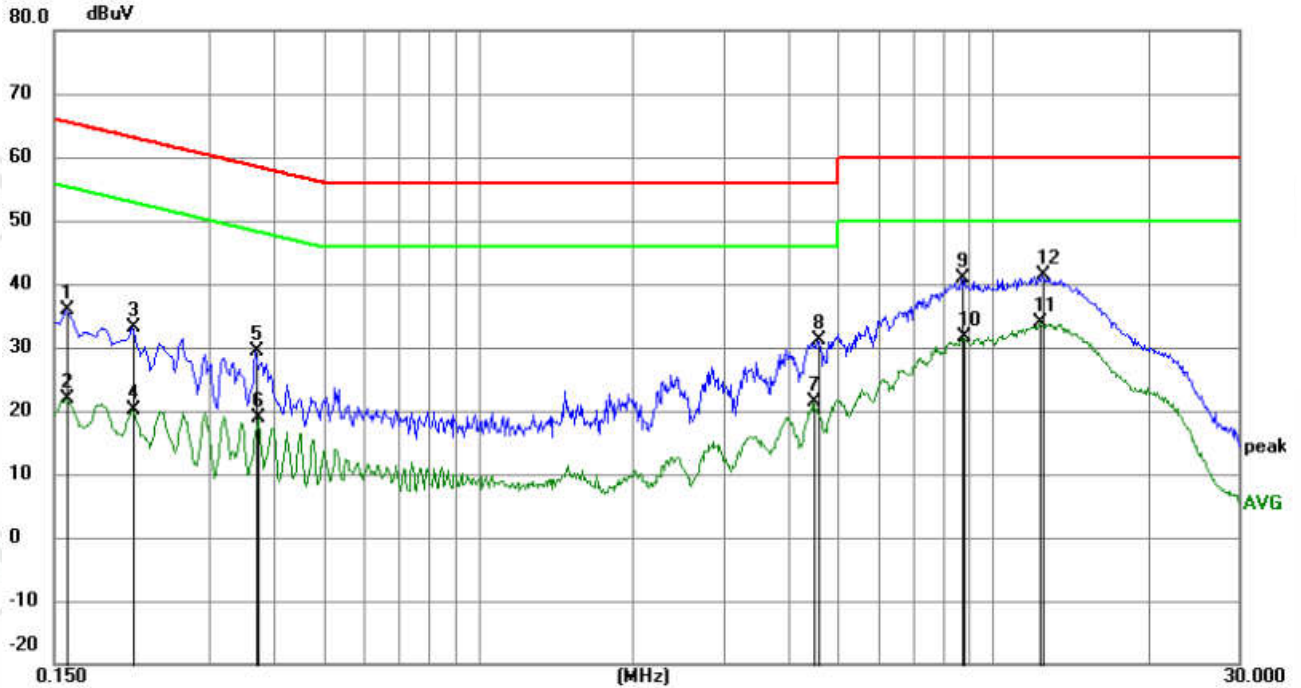


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1590	26.09	9.87	35.96	65.52	-29.56	QP	
2		0.1590	11.92	9.87	21.79	55.52	-33.73	AVG	
3		0.2130	23.20	9.90	33.10	63.09	-29.99	QP	
4		0.2130	10.30	9.90	20.20	53.09	-32.89	AVG	
5		0.3704	19.28	10.00	29.28	58.49	-29.21	QP	
6		0.3750	8.78	9.99	18.77	48.39	-29.62	AVG	
7		4.4925	11.49	9.78	21.27	46.00	-24.73	AVG	
8		4.5780	21.32	9.78	31.10	56.00	-24.90	QP	
9		8.7090	31.00	9.78	40.78	60.00	-19.22	QP	
10		8.7630	21.74	9.78	31.52	50.00	-18.48	AVG	
11	*	12.3810	24.08	9.85	33.93	50.00	-16.07	AVG	
12		12.5024	31.42	9.85	41.27	60.00	-18.73	QP	


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


6.3 Maximum Conducted Output Power

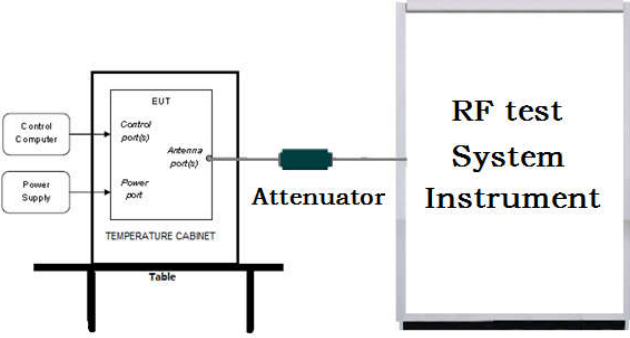Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set the RBW $\geq$ DTS bandwidth. b) Set VBW $\geq 3 \times$ RBW. c) Set span $\geq 3 \times$ RBW d) Sweep time = auto couple. e) Detector = peak. f) Trace mode = max hold. g) Allow trace to fully stabilize. h) Use peak marker function to determine the peak amplitude level.
Limit:	30dBm
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix BLE


6.4 DTS Bandwidth

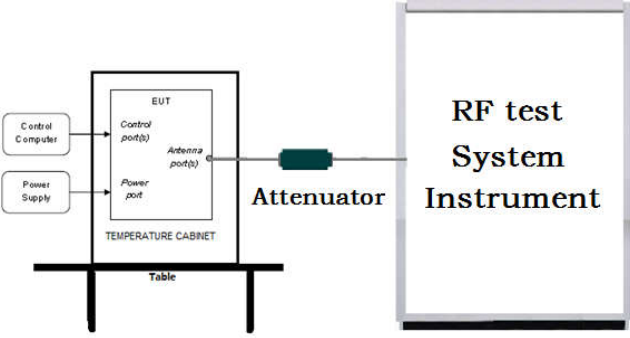Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10 2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Limit:	$\geq 500 \text{ kHz}$
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix BLE

6.5 Maximum Power Spectral Density



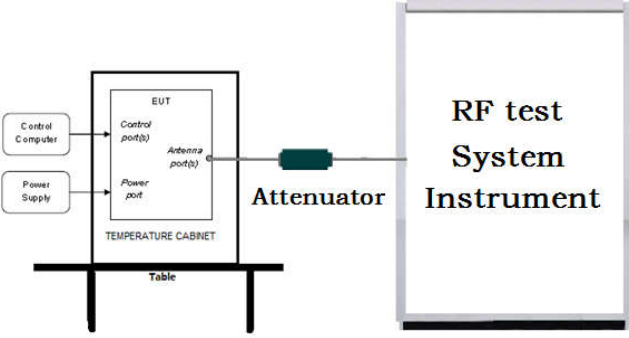
Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set analyzer center frequency to DTS channel center frequency. b) Set the span to 1.5 times the DTS bandwidth. c) Set the RBW to $3 \text{ kHz} < \text{RBW} < 100 \text{ kHz}$. d) Set the VBW $> [3 \times \text{RBW}]$. e) Detector = peak. f) Sweep time = auto couple. g) Trace mode = max hold. h) Allow trace to fully stabilize. i) Use the peak marker function to determine the maximum amplitude level within the RBW. j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
Limit:	$\leq 8.00 \text{ dBm}/3 \text{ kHz}$
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix BLE

6.6 Band Edge measurements and Conducted Spurious Emission

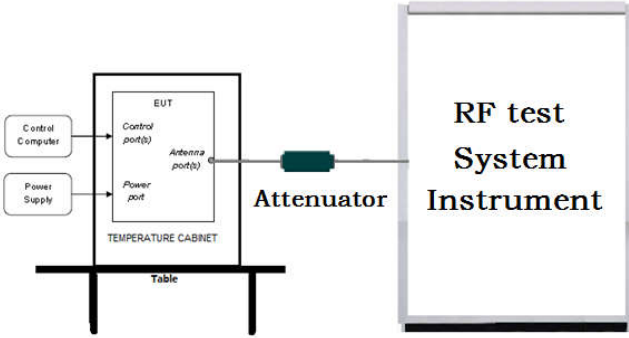Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set RBW =100KHz. b) Set VBW = 300KHz. c) Sweep time = auto couple. d) Detector = peak. e) Trace mode = max hold. f) Allow trace to fully stabilize. g) Use peak marker function to determine the peak amplitude level.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix BLE

6.7 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

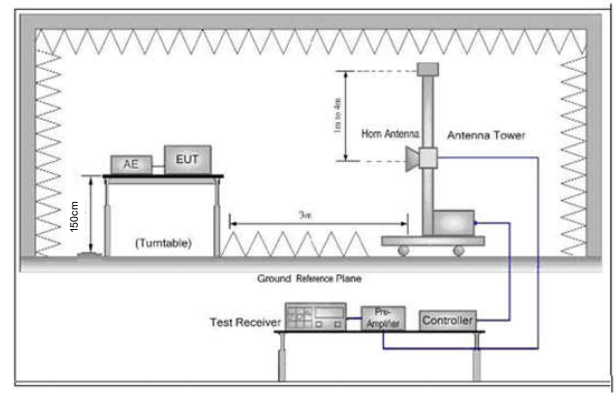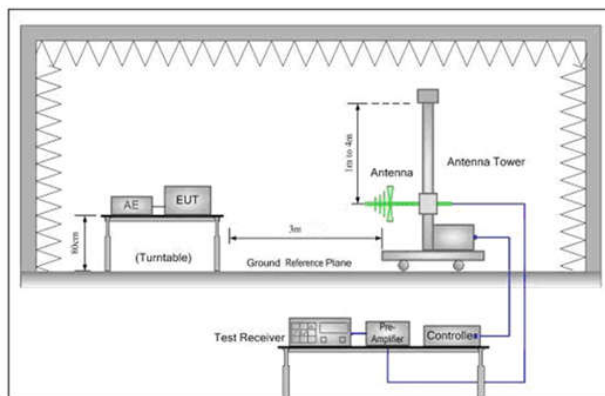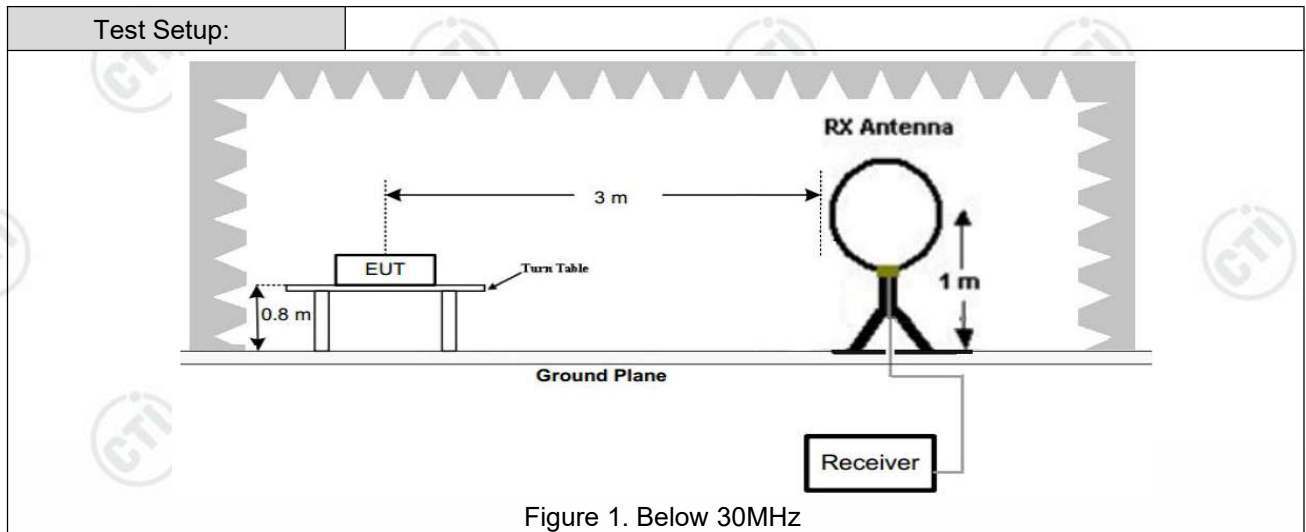

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both


	horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Refer to clause 5.3
Test Results:	Pass

Radiated Spurious Emission below 1GHz:

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case mode a was recorded in the report.

Left hand keyboard:
Horizontal:


Test Graph

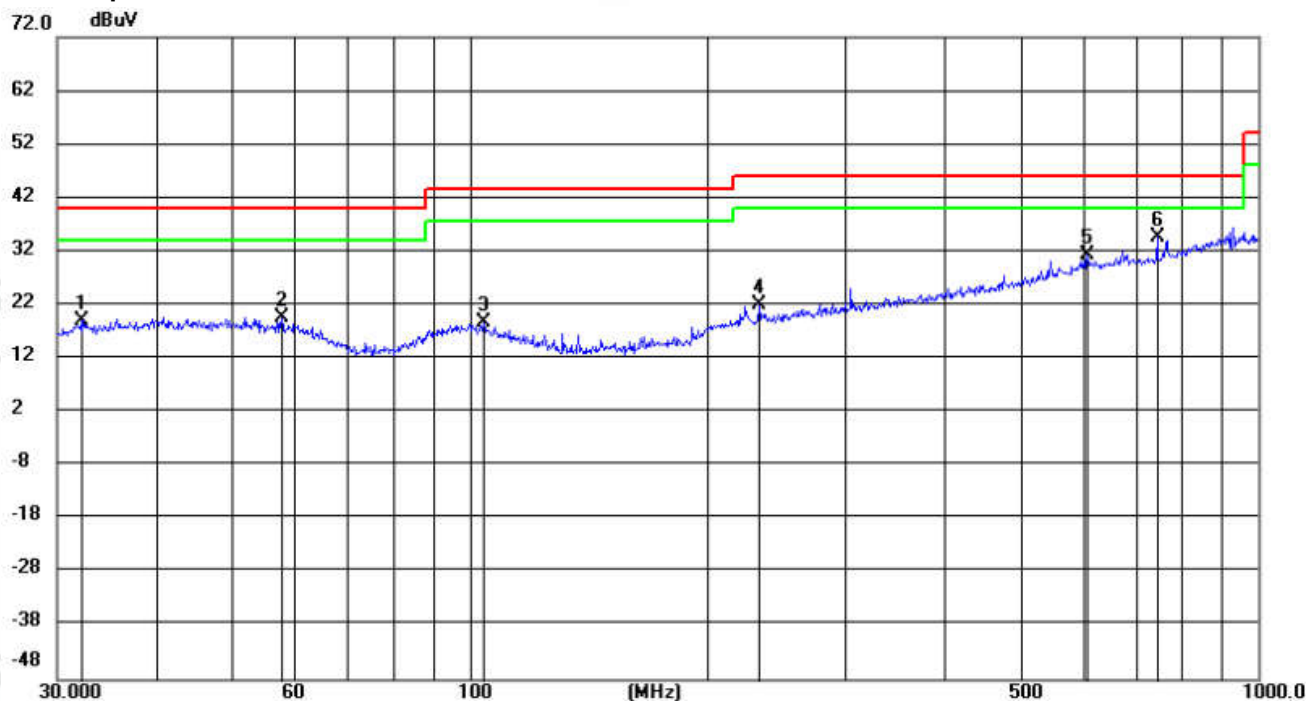

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV	dBuV	dB	cm	degree	
1		32.1794	6.00	13.15	19.15	40.00	-20.85	QP	100	169
2		57.7962	5.86	13.73	19.59	40.00	-20.41	QP	100	4
3		104.1701	5.29	13.46	18.75	43.50	-24.75	QP	200	230
4		233.3486	7.14	14.93	22.07	46.00	-23.93	QP	100	150
5		607.7867	7.30	24.08	31.38	46.00	-14.62	QP	200	356
6	*	744.8660	9.16	25.48	34.64	46.00	-11.36	QP	100	4

Vertical:


Test Graph

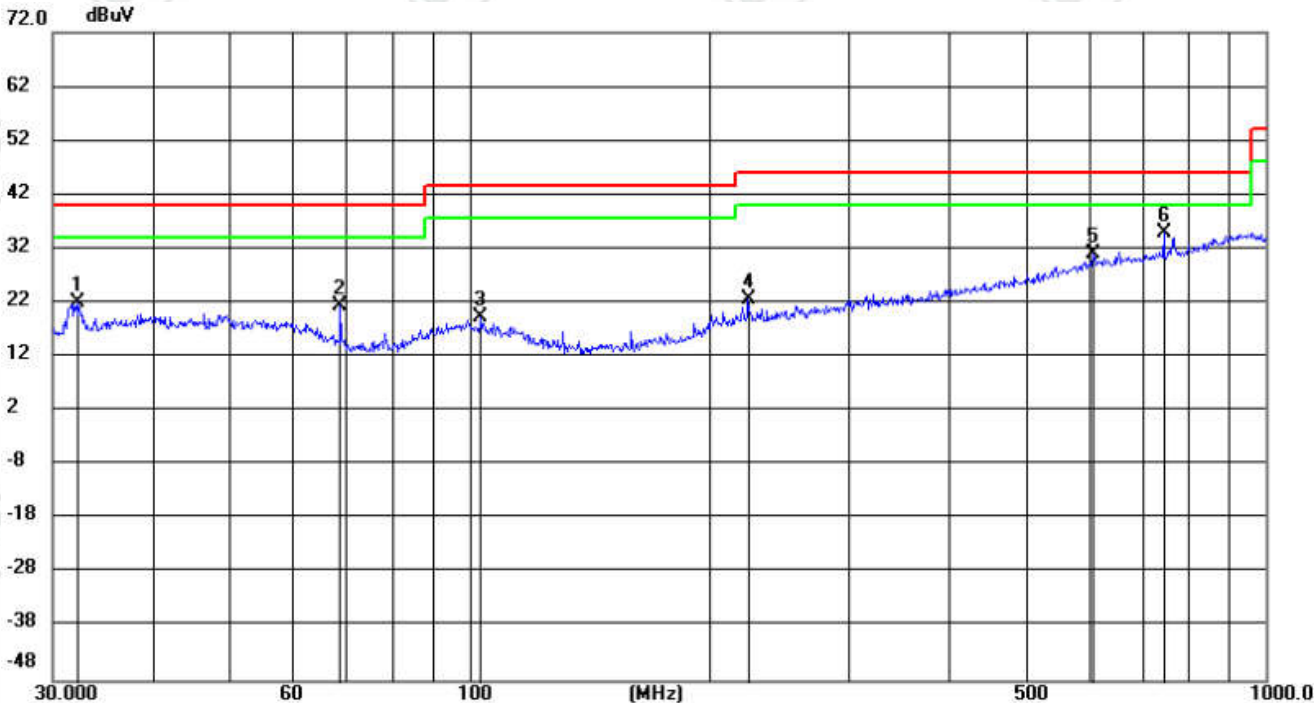

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1		32.1795	8.86	13.15	22.01	40.00	-17.99	QP	100	99
2		68.8721	11.04	10.46	21.50	40.00	-18.50	QP	100	356
3		103.4421	5.72	13.56	19.28	43.50	-24.22	QP	100	0
4		223.7334	8.19	14.60	22.79	46.00	-23.21	QP	100	311
5		607.7866	6.91	24.08	30.99	46.00	-15.01	QP	200	39
6	*	744.8661	9.56	25.48	35.04	46.00	-10.96	QP	200	70

Right hand keyboard:
Horizontal:


Test Graph

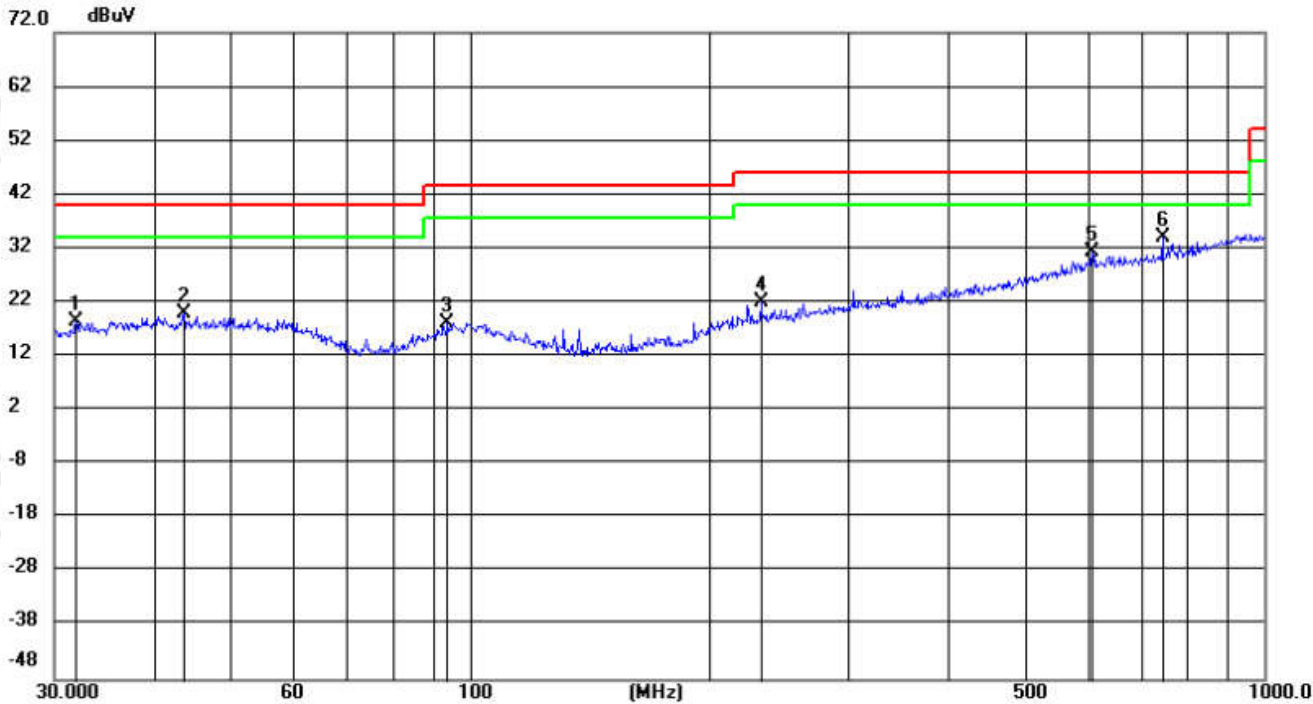

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV	dBuV	dB	cm	degree	
1		31.9545	5.39	13.10	18.49	40.00	-21.51	QP	200	350
2		43.6584	5.53	14.43	19.96	40.00	-20.04	QP	200	356
3		93.7684	5.04	13.19	18.23	43.50	-25.27	QP	100	171
4		232.5318	7.10	14.91	22.01	46.00	-23.99	QP	200	179
5		607.7867	7.32	24.08	31.40	46.00	-14.60	QP	100	4
6	*	744.8660	8.67	25.48	34.15	46.00	-11.85	QP	200	356

Vertical:

Test Graph

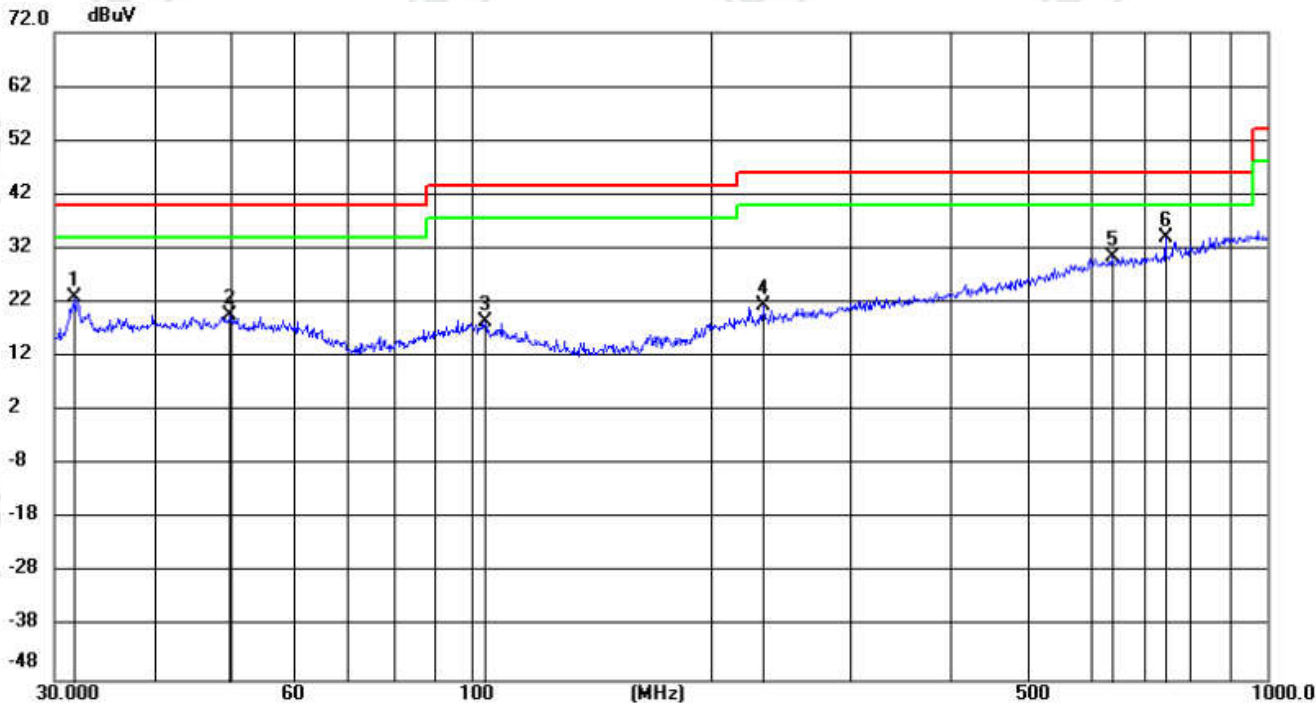

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1		31.8427	9.96	13.08	23.04	40.00	-16.96	QP	100	10
2		49.8814	5.45	14.27	19.72	40.00	-20.28	QP	200	190
3		104.1701	5.11	13.46	18.57	43.50	-24.93	QP	100	59
4		233.3486	6.39	14.93	21.32	46.00	-24.68	QP	100	356
5		638.3686	6.11	24.30	30.41	46.00	-15.59	QP	100	130
6	*	744.8660	8.65	25.48	34.13	46.00	-11.87	QP	200	350

Radiated Spurious Emission above 1GHz:

Left hand keyboard:

BLE_1M:

Mode:			BLE GFSK Transmitting			Channel:		2402 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1135.0135	0.84	40.10	40.94	74.00	33.06	Pass	H	PK
2	1823.0823	3.45	39.87	43.32	74.00	30.68	Pass	H	PK
3	5759.1839	-13.72	56.38	42.66	74.00	31.34	Pass	H	PK
4	7205.2804	-11.83	66.95	55.12	74.00	18.88	Pass	H	PK
5	7206.2804	-11.83	60.17	48.34	54.00	5.66	Pass	H	AV
6	10875.525	-6.33	50.20	43.87	74.00	30.13	Pass	H	PK
7	14782.7855	0.99	47.85	48.84	74.00	25.16	Pass	H	PK
8	1255.6256	0.95	40.17	41.12	74.00	32.88	Pass	V	PK
9	2040.504	4.69	39.68	44.37	74.00	29.63	Pass	V	PK
10	3531.0354	-20.13	54.39	34.26	74.00	39.74	Pass	V	PK
11	5760.184	-13.71	57.56	43.85	74.00	30.15	Pass	V	PK
12	7207.2805	-11.83	70.11	58.28	74.00	15.72	Pass	V	PK
13	7207.2805	-11.83	61.70	49.87	54.00	4.13	Pass	V	AV
14	11336.5558	-6.45	51.31	44.86	74.00	29.14	Pass	V	PK

Mode:			BLE GFSK Transmitting			Channel:		2440 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1286.6287	1.03	39.76	40.79	74.00	33.21	Pass	H	PK
2	1757.6758	3.14	39.68	42.82	74.00	31.18	Pass	H	PK
3	3854.0569	-19.17	55.73	36.56	74.00	37.44	Pass	H	PK
4	5760.184	-13.71	55.95	42.24	74.00	31.76	Pass	H	PK
5	7320.288	-11.65	64.11	52.46	74.00	21.54	Pass	H	PK
6	11970.598	-5.42	52.43	47.01	74.00	26.99	Pass	H	PK
7	1285.2285	1.03	39.97	41.00	74.00	33.00	Pass	V	PK
8	1998.0998	4.54	39.32	43.86	74.00	30.14	Pass	V	PK
9	3194.0129	-20.36	61.71	41.35	74.00	32.65	Pass	V	PK
10	5760.184	-13.71	56.30	42.59	74.00	31.41	Pass	V	PK
11	7320.288	-11.65	65.99	54.34	74.00	19.66	Pass	V	PK
12	7321.2881	-11.65	59.04	47.39	54.00	6.61	Pass	V	AV
13	9760.4507	-7.51	52.57	45.06	74.00	28.94	Pass	V	PK

Mode:			BLE GFSK Transmitting			Channel:		2480 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1269.0269	0.98	40.61	41.59	74.00	32.41	Pass	H	PK
2	1917.4917	4.13	39.48	43.61	74.00	30.39	Pass	H	PK
3	3326.0217	-19.90	56.79	36.89	74.00	37.11	Pass	H	PK
4	5760.184	-13.71	56.69	42.98	74.00	31.02	Pass	H	PK
5	7439.296	-11.34	59.83	48.49	74.00	25.51	Pass	H	PK
6	12560.6374	-4.39	50.25	45.86	74.00	28.14	Pass	H	PK
7	1281.8282	1.01	39.96	40.97	74.00	33.03	Pass	V	PK
8	1994.4994	4.52	40.19	44.71	74.00	29.29	Pass	V	PK
9	4185.079	-18.04	57.43	39.39	74.00	34.61	Pass	V	PK
10	5760.184	-13.71	55.21	41.50	74.00	32.50	Pass	V	PK
11	7440.296	-11.34	62.19	50.85	74.00	23.15	Pass	V	PK
12	9921.4614	-7.10	53.00	45.90	74.00	28.10	Pass	V	PK

BLE_2M:

Mode:			BLE GFSK Transmitting			Channel:		2402 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1369.4369	1.29	40.15	41.44	74.00	32.56	Pass	H	PK
2	1880.088	3.88	39.08	42.96	74.00	31.04	Pass	H	PK
3	3855.057	-19.17	56.23	37.06	74.00	36.94	Pass	H	PK
4	5760.184	-13.71	56.59	42.88	74.00	31.12	Pass	H	PK
5	7207.2805	-11.83	62.67	50.84	74.00	23.16	Pass	H	PK
6	12504.6336	-4.80	51.28	46.48	74.00	27.52	Pass	H	PK
7	1282.4282	1.01	40.10	41.11	74.00	32.89	Pass	V	PK
8	2042.3042	4.69	38.73	43.42	74.00	30.58	Pass	V	PK
9	3529.0353	-20.12	55.38	35.26	74.00	38.74	Pass	V	PK
10	5760.184	-13.71	57.80	44.09	74.00	29.91	Pass	V	PK
11	7204.2803	-11.84	70.31	58.47	74.00	15.53	Pass	V	PK
12	7205.2804	-11.83	61.18	49.35	54.00	4.65	Pass	V	AV
13	10297.4865	-6.47	50.59	44.12	74.00	29.88	Pass	V	PK

Mode:			BLE GFSK Transmitting			Channel:		2440 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1330.433	1.16	39.84	41.00	74.00	33.00	Pass	H	PK
2	1787.4787	3.24	40.07	43.31	74.00	30.69	Pass	H	PK
3	4177.0785	-18.06	54.14	36.08	74.00	37.92	Pass	H	PK
4	5760.184	-13.71	54.76	41.05	74.00	32.95	Pass	H	PK
5	7321.2881	-11.65	63.60	51.95	74.00	22.05	Pass	H	PK
6	11688.5792	-6.25	51.24	44.99	74.00	29.01	Pass	H	PK
7	1328.0328	1.15	39.66	40.81	74.00	33.19	Pass	V	PK
8	1972.6973	4.41	39.17	43.58	74.00	30.42	Pass	V	PK
9	3198.0132	-20.35	58.90	38.55	74.00	35.45	Pass	V	PK
10	5760.184	-13.71	54.97	41.26	74.00	32.74	Pass	V	PK
11	7320.288	-11.65	66.52	54.87	74.00	19.13	Pass	V	PK
12	7322.2882	-11.65	58.32	46.67	54.00	7.33	Pass	V	AV
13	9758.4506	-7.52	52.91	45.39	74.00	28.61	Pass	V	PK

Mode:			BLE GFSK Transmitting			Channel:		2480 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1222.6223	0.86	40.99	41.85	74.00	32.15	Pass	H	PK
2	1827.8828	3.49	39.14	42.63	74.00	31.37	Pass	H	PK
3	4248.0832	-17.64	54.04	36.40	74.00	37.60	Pass	H	PK
4	5760.184	-13.71	54.96	41.25	74.00	32.75	Pass	H	PK
5	7440.296	-11.34	61.36	50.02	74.00	23.98	Pass	H	PK
6	12579.6386	-4.26	50.95	46.69	74.00	27.31	Pass	H	PK
7	1348.4348	1.22	40.06	41.28	74.00	32.72	Pass	V	PK
8	1901.8902	4.04	39.25	43.29	74.00	30.71	Pass	V	PK
9	4284.0856	-17.35	53.19	35.84	74.00	38.16	Pass	V	PK
10	5760.184	-13.71	55.22	41.51	74.00	32.49	Pass	V	PK
11	7441.2961	-11.34	59.99	48.65	74.00	25.35	Pass	V	PK
12	10398.4932	-6.28	51.54	45.26	74.00	28.74	Pass	V	PK

Right hand keyboard:

BLE_1M:

Mode:			BLE GFSK Transmitting			Channel:		2402 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1263.2263	0.96	40.38	41.34	74.00	32.66	Pass	H	PK
2	1758.0758	3.13	39.44	42.57	74.00	31.43	Pass	H	PK
3	3896.0597	-19.10	55.68	36.58	74.00	37.42	Pass	H	PK
4	5760.184	-13.71	56.21	42.50	74.00	31.50	Pass	H	PK
5	7205.2804	-11.83	63.22	51.39	74.00	22.61	Pass	H	PK
6	11211.5474	-6.45	51.23	44.78	74.00	29.22	Pass	H	PK
7	1258.6259	0.95	40.39	41.34	74.00	32.66	Pass	V	PK
8	1844.0844	3.61	39.57	43.18	74.00	30.82	Pass	V	PK
9	3197.0131	-20.36	60.47	40.11	74.00	33.89	Pass	V	PK
10	5760.184	-13.71	55.39	41.68	74.00	32.32	Pass	V	PK
11	7207.2805	-11.83	69.44	57.61	74.00	16.39	Pass	V	PK
12	7207.2805	-11.83	60.50	48.67	54.00	5.33	Pass	V	AV
13	11872.5915	-5.90	51.31	45.41	74.00	28.59	Pass	V	PK

Mode:			BLE GFSK Transmitting			Channel:		2440 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1259.2259	0.95	40.42	41.37	74.00	32.63	Pass	H	PK
2	1904.8905	4.05	39.27	43.32	74.00	30.68	Pass	H	PK
3	3474.0316	-20.07	57.04	36.97	74.00	37.03	Pass	H	PK
4	5760.184	-13.71	55.33	41.62	74.00	32.38	Pass	H	PK
5	7321.2881	-11.65	62.30	50.65	74.00	23.35	Pass	H	PK
6	10793.5196	-6.24	51.46	45.22	74.00	28.78	Pass	H	PK
7	1260.6261	0.96	39.99	40.95	74.00	33.05	Pass	V	PK
8	1825.2825	3.47	39.30	42.77	74.00	31.23	Pass	V	PK
9	3193.0129	-20.37	60.62	40.25	74.00	33.75	Pass	V	PK
10	5760.184	-13.71	57.34	43.63	74.00	30.37	Pass	V	PK
11	7320.288	-11.65	66.66	55.01	74.00	18.99	Pass	V	PK
12	7320.288	-11.65	59.42	47.77	54.00	6.23	Pass	V	AV
13	13683.7122	-1.75	50.78	49.03	74.00	24.97	Pass	V	PK

Mode:			BLE GFSK Transmitting			Channel:		2480 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1244.0244	0.91	40.06	40.97	74.00	33.03	Pass	H	PK
2	1841.6842	3.60	39.10	42.70	74.00	31.30	Pass	H	PK
3	3324.0216	-19.90	57.57	37.67	74.00	36.33	Pass	H	PK
4	5760.184	-13.71	55.56	41.85	74.00	32.15	Pass	H	PK
5	7440.296	-11.34	58.43	47.09	74.00	26.91	Pass	H	PK
6	13694.713	-1.76	49.54	47.78	74.00	26.22	Pass	H	PK
7	1204.4204	0.81	40.45	41.26	74.00	32.74	Pass	V	PK
8	1915.2915	4.11	38.64	42.75	74.00	31.25	Pass	V	PK
9	3736.0491	-19.67	54.93	35.26	74.00	38.74	Pass	V	PK
10	5760.184	-13.71	55.39	41.68	74.00	32.32	Pass	V	PK
11	7439.296	-11.34	61.57	50.23	74.00	23.77	Pass	V	PK
12	13118.6746	-3.58	49.41	45.83	74.00	28.17	Pass	V	PK

BLE_2M:

Mode:			BLE GFSK Transmitting			Channel:		2402 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1203.0203	0.80	41.04	41.84	74.00	32.16	Pass	H	PK
2	1786.6787	3.23	39.78	43.01	74.00	30.99	Pass	H	PK
3	3894.0596	-19.10	56.05	36.95	74.00	37.05	Pass	H	PK
4	5760.184	-13.71	55.82	42.11	74.00	31.89	Pass	H	PK
5	7206.2804	-11.83	63.90	52.07	74.00	21.93	Pass	H	PK
6	12393.6262	-4.75	51.35	46.60	74.00	27.40	Pass	H	PK
7	1261.6262	0.96	40.43	41.39	74.00	32.61	Pass	V	PK
8	1779.0779	3.21	40.53	43.74	74.00	30.26	Pass	V	PK
9	3291.0194	-19.85	54.87	35.02	74.00	38.98	Pass	V	PK
10	5760.184	-13.71	55.95	42.24	74.00	31.76	Pass	V	PK
11	7204.2803	-11.84	66.95	55.11	74.00	18.89	Pass	V	PK
12	7206.2804	-11.83	57.64	45.81	54.00	8.19	Pass	V	AV
13	12411.6274	-4.70	50.75	46.05	74.00	27.95	Pass	V	PK

Mode:			BLE GFSK Transmitting			Channel:		2440 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1189.619	0.81	41.51	42.32	74.00	31.68	Pass	H	PK
2	1811.4811	3.37	39.25	42.62	74.00	31.38	Pass	H	PK
3	3858.0572	-19.16	55.70	36.54	74.00	37.46	Pass	H	PK
4	5759.1839	-13.72	55.32	41.60	74.00	32.40	Pass	H	PK
5	7320.288	-11.65	64.80	53.15	74.00	20.85	Pass	H	PK
6	11409.5606	-6.13	51.26	45.13	74.00	28.87	Pass	H	PK
7	1260.6261	0.96	40.72	41.68	74.00	32.32	Pass	V	PK
8	1834.8835	3.54	39.62	43.16	74.00	30.84	Pass	V	PK
9	3200.0133	-20.35	60.99	40.64	74.00	33.36	Pass	V	PK
10	5760.184	-13.71	57.11	43.40	74.00	30.60	Pass	V	PK
11	7321.2881	-11.65	65.93	54.28	74.00	19.72	Pass	V	PK
12	7322.2882	-11.65	56.60	44.95	54.00	9.05	Pass	V	AV
13	11270.5514	-6.57	51.35	44.78	74.00	29.22	Pass	V	PK

Mode:			BLE GFSK Transmitting			Channel:		2480 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1293.2293	1.04	40.25	41.29	74.00	32.71	Pass	H	PK
2	1827.0827	3.48	39.16	42.64	74.00	31.36	Pass	H	PK
3	4263.0842	-17.52	54.56	37.04	74.00	36.96	Pass	H	PK
4	5760.184	-13.71	55.70	41.99	74.00	32.01	Pass	H	PK
5	7438.2959	-11.35	60.56	49.21	74.00	24.79	Pass	H	PK
6	11927.5952	-5.67	51.95	46.28	74.00	27.72	Pass	H	PK
7	1324.2324	1.14	39.91	41.05	74.00	32.95	Pass	V	PK
8	1986.4986	4.48	39.14	43.62	74.00	30.38	Pass	V	PK
9	4185.079	-18.04	54.36	36.32	74.00	37.68	Pass	V	PK
10	5760.184	-13.71	56.39	42.68	74.00	31.32	Pass	V	PK
11	7441.2961	-11.34	60.52	49.18	74.00	24.82	Pass	V	PK
12	11239.5493	-6.51	51.37	44.86	74.00	29.14	Pass	V	PK

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.


Restricted bands:

Left hand keyboard:

Test plot as follows:

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	1Mbps		


Test Graph

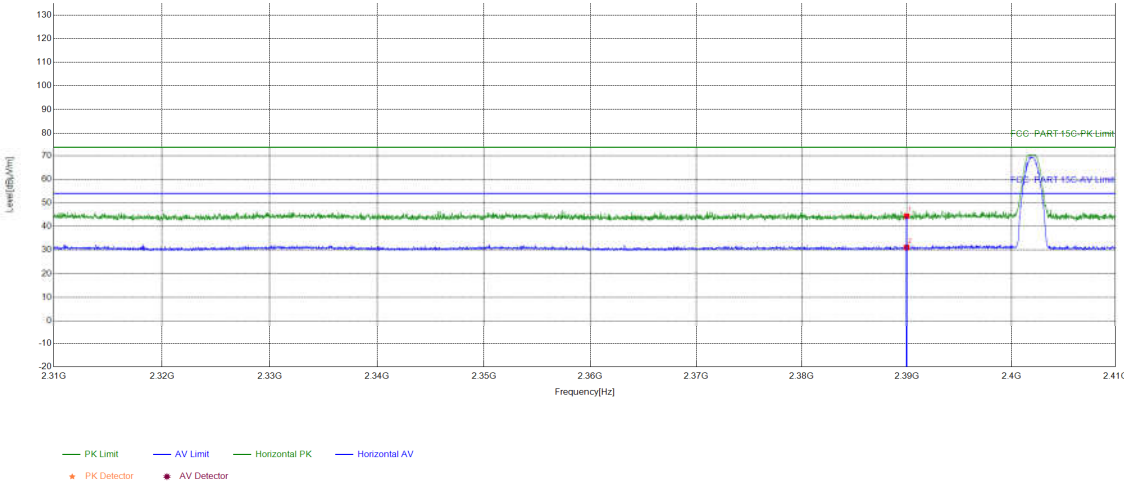

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	5.77	38.62	44.39	74.00	29.61	PASS	Horizontal	PK
2	2390	5.77	25.32	31.09	54.00	22.91	PASS	Horizontal	AV

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	1Mbps		


Test Graph

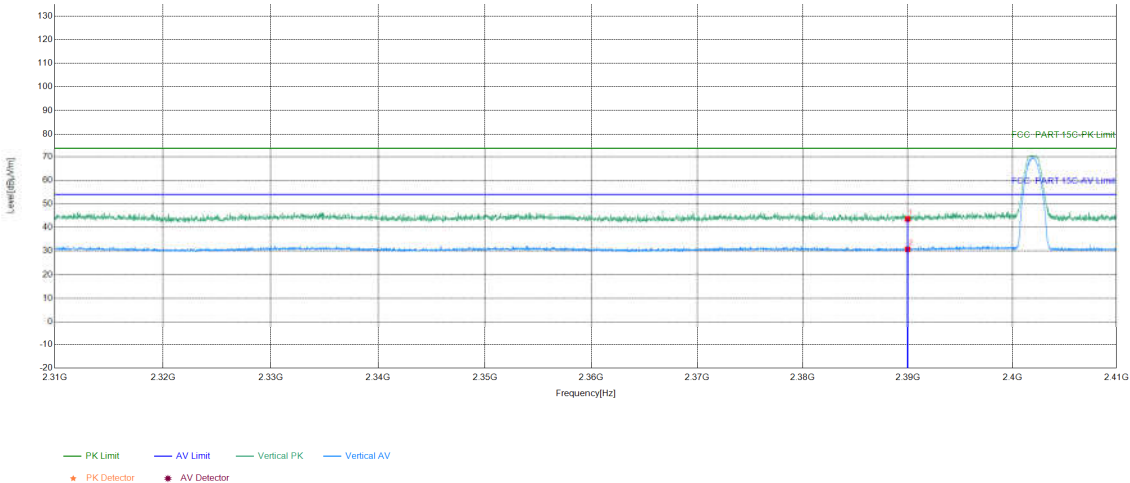

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	5.77	37.79	43.56	74.00	30.44	PASS	Vertical	PK
2	2390	5.77	24.95	30.72	54.00	23.28	PASS	Vertical	AV

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	1Mbps		


Test Graph

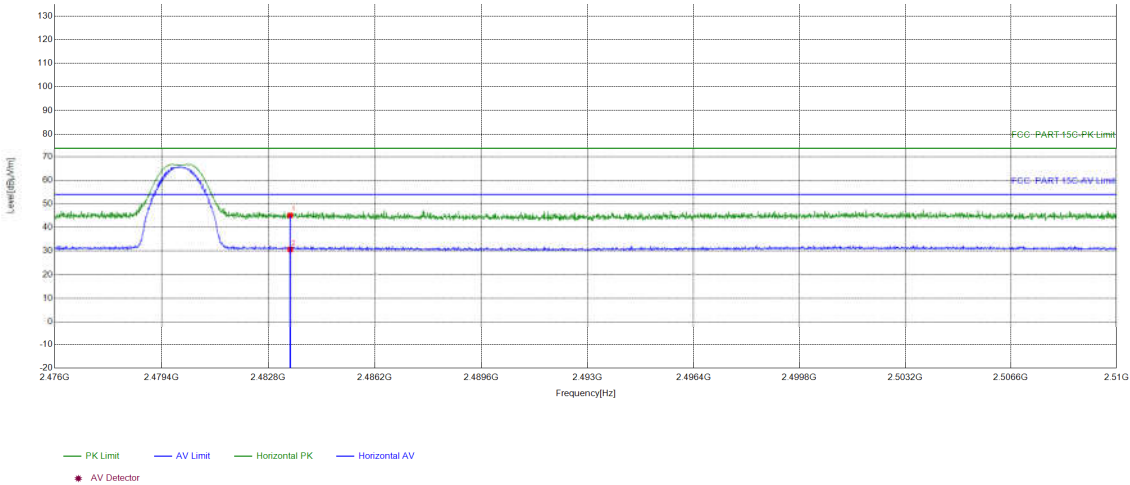

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	6.57	38.56	45.13	74.00	28.87	PASS	Horizontal	PK
2	2483.5	6.57	24.11	30.68	54.00	23.32	PASS	Horizontal	AV

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	1Mbps		


Test Graph

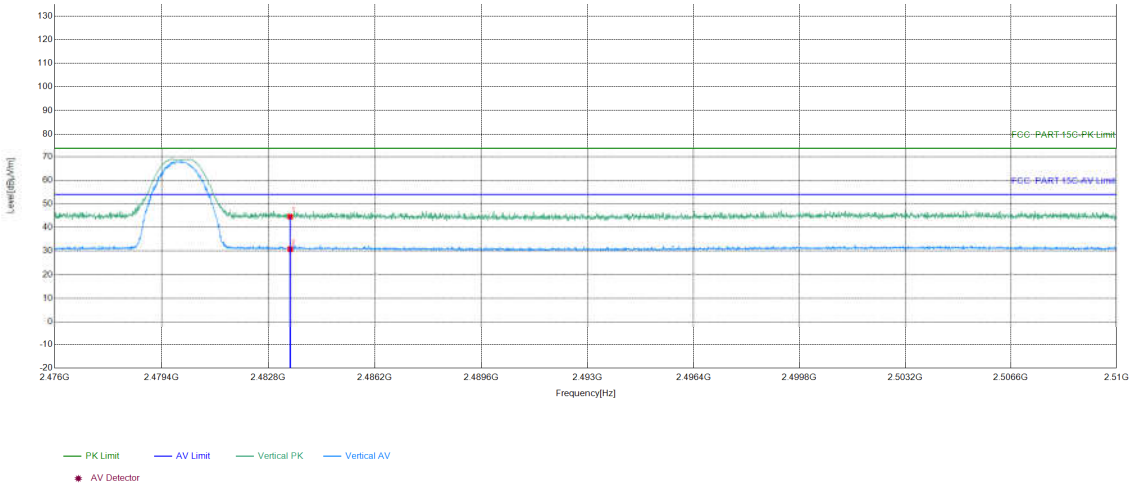

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	6.57	37.96	44.53	74.00	29.47	PASS	Vertical	PK
2	2483.5	6.57	24.22	30.79	54.00	23.21	PASS	Vertical	AV

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	2Mbps		


Test Graph

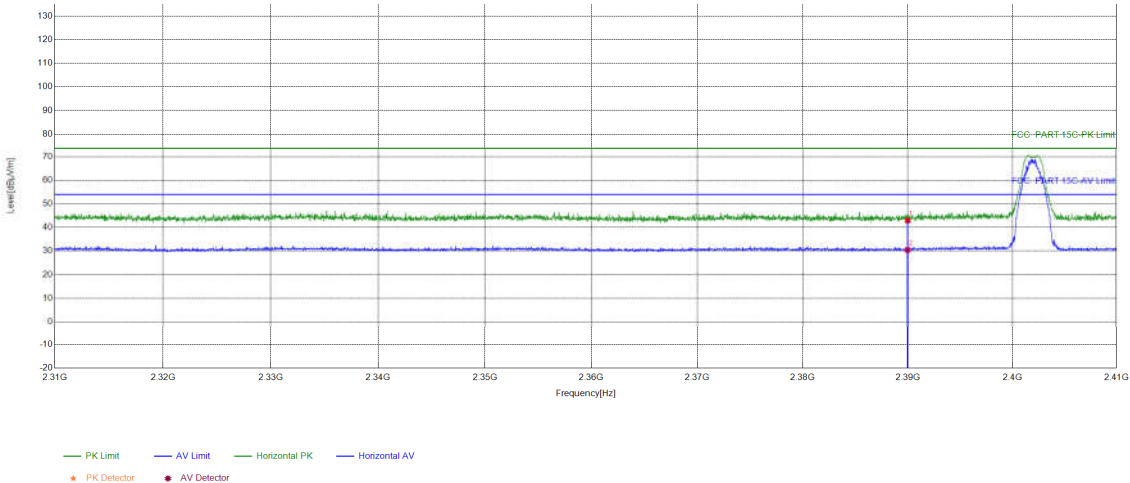

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	5.77	37.21	42.98	74.00	31.02	PASS	Horizontal	PK
2	2390	5.77	24.69	30.46	54.00	23.54	PASS	Horizontal	AV

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	2Mbps		


Test Graph

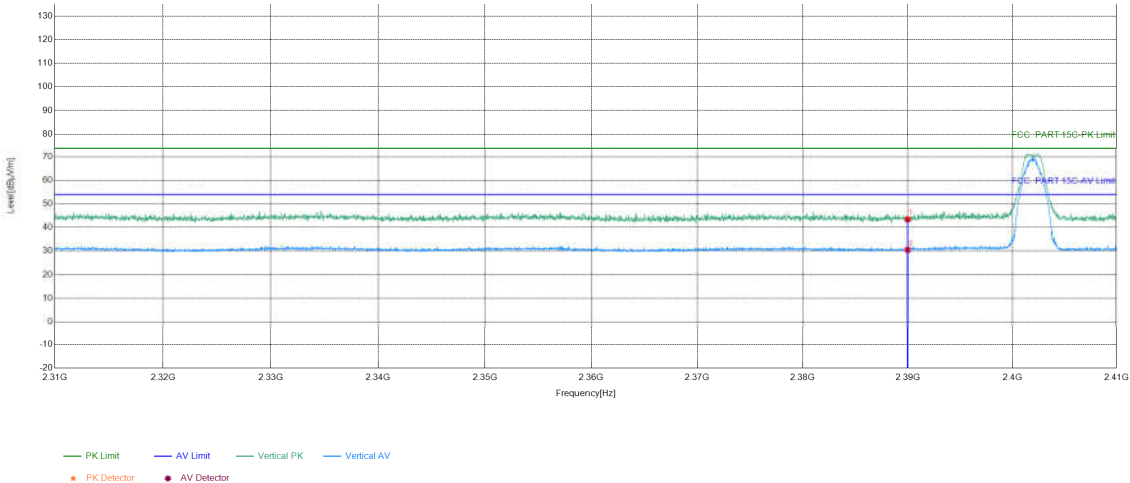

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	5.77	37.67	43.44	74.00	30.56	PASS	Vertical	PK
2	2390	5.77	24.73	30.50	54.00	23.50	PASS	Vertical	AV

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	2Mbps		


Test Graph

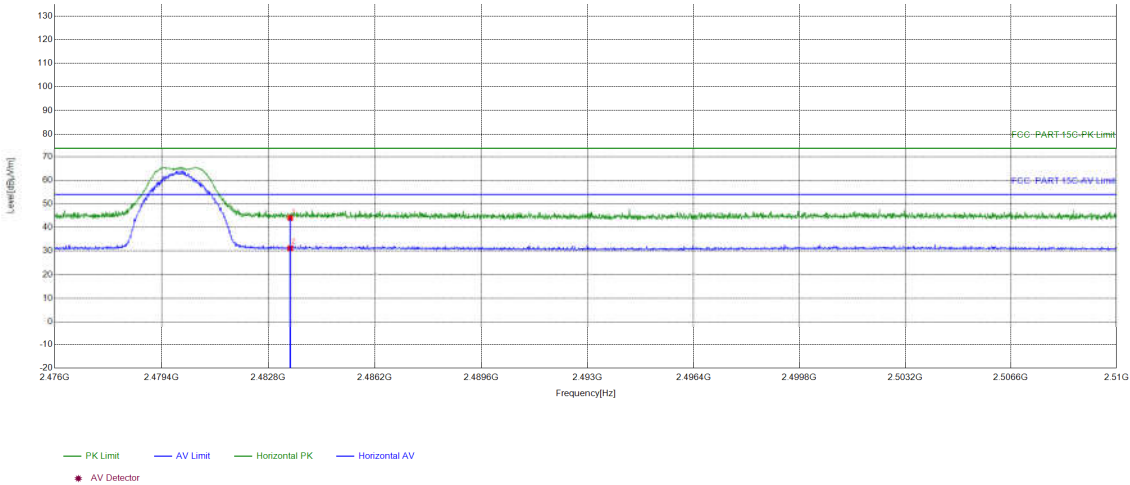

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	6.57	37.44	44.01	74.00	29.99	PASS	Horizontal	PK
2	2483.5	6.57	24.60	31.17	54.00	22.83	PASS	Horizontal	AV

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	2Mbps		

Test Graph

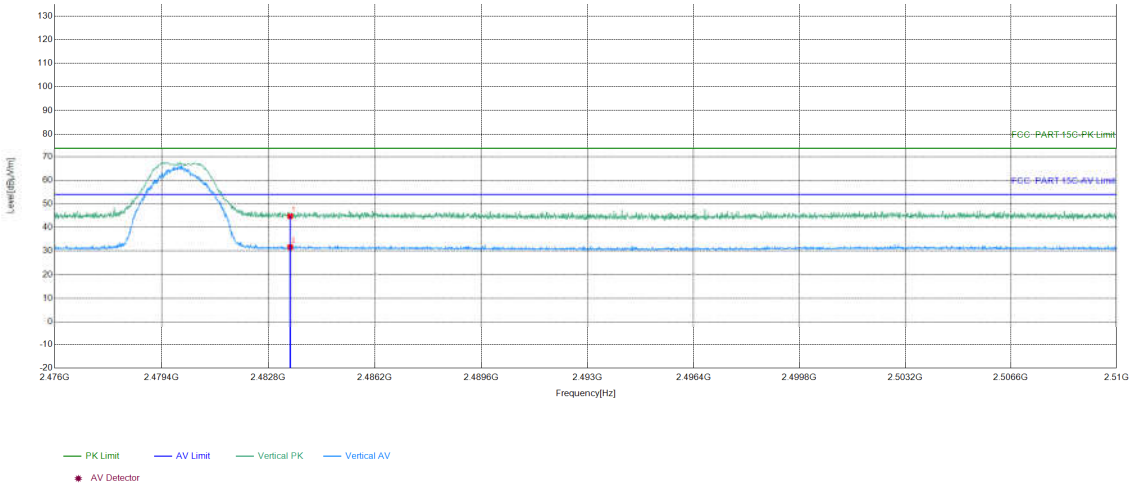


Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	6.57	38.17	44.74	74.00	29.26	PASS	Vertical	PK
2	2483.5	6.57	25.11	31.68	54.00	22.32	PASS	Vertical	AV

Right hand keyboard:
Test plot as follows:

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	1Mbps		


Test Graph

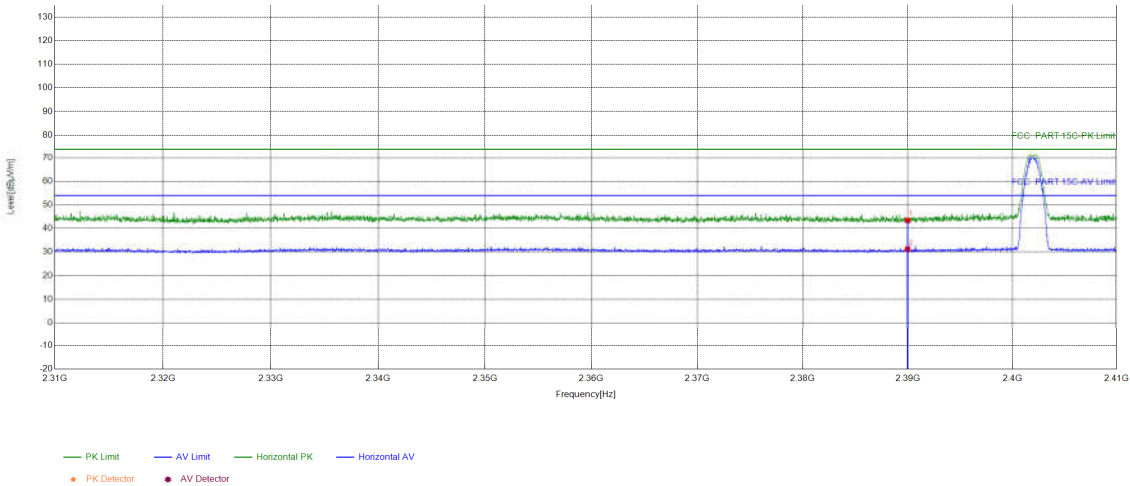

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	5.77	37.66	43.43	74.00	30.57	PASS	Horizontal	PK
2	2390	5.77	25.48	31.25	54.00	22.75	PASS	Horizontal	AV

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	1Mbps		


Test Graph

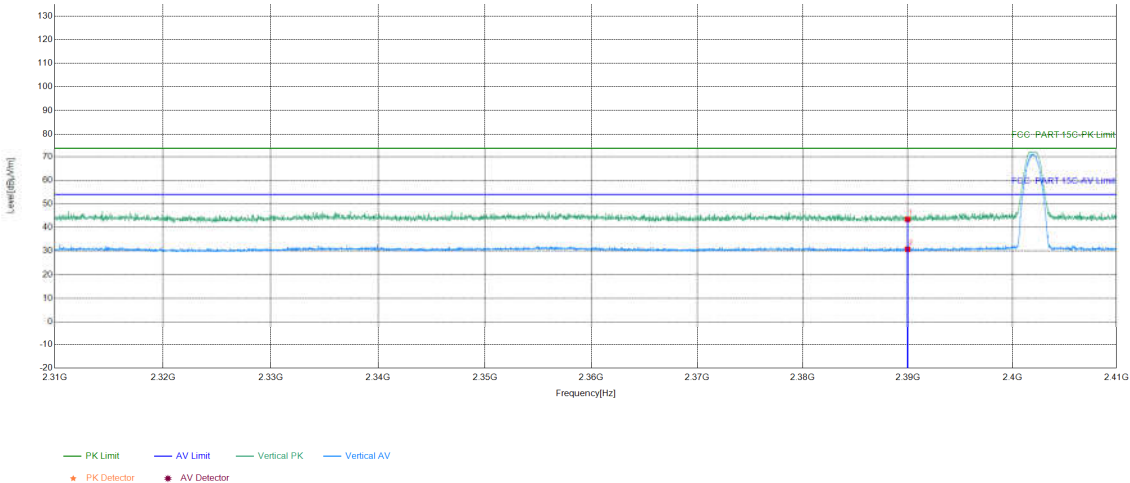

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	5.77	37.67	43.44	74.00	30.56	PASS	Vertical	PK
2	2390	5.77	24.98	30.75	54.00	23.25	PASS	Vertical	AV

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	1Mbps		


Test Graph

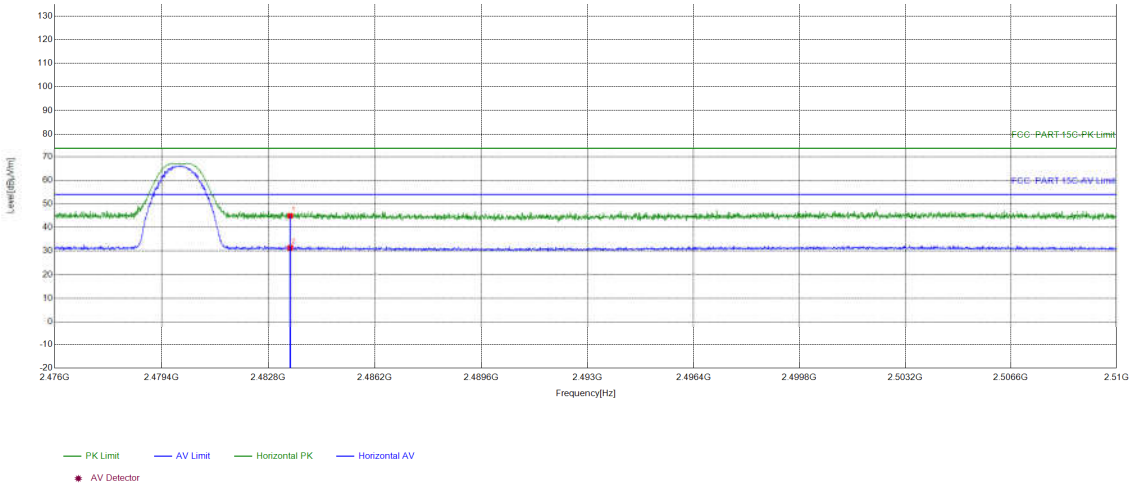

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	6.57	38.37	44.94	74.00	29.06	PASS	Horizontal	PK
2	2483.5	6.57	24.77	31.34	54.00	22.66	PASS	Horizontal	AV

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	1Mbps		


Test Graph

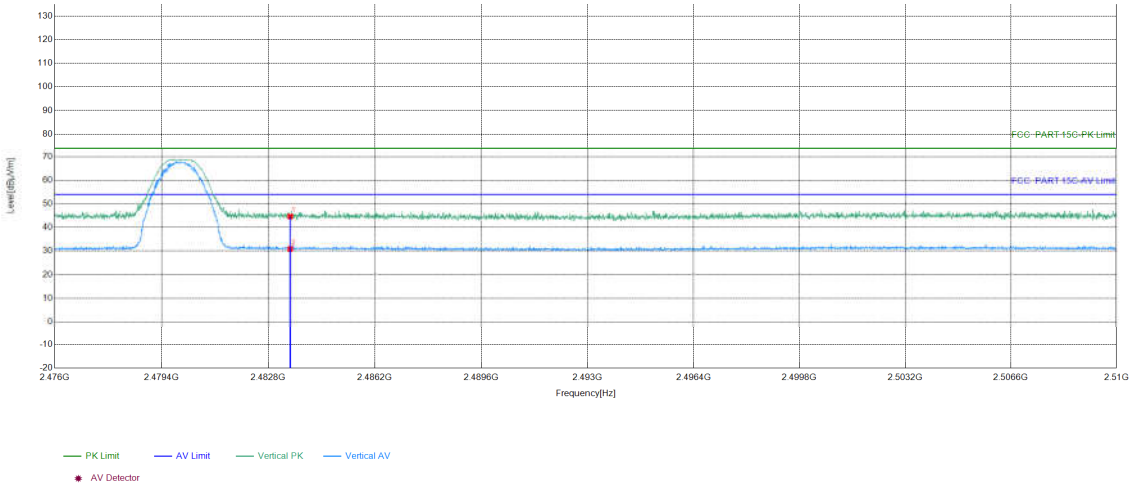

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	6.57	38.05	44.62	74.00	29.38	PASS	Vertical	PK
2	2483.5	6.57	24.29	30.86	54.00	23.14	PASS	Vertical	AV

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	2Mbps		


Test Graph

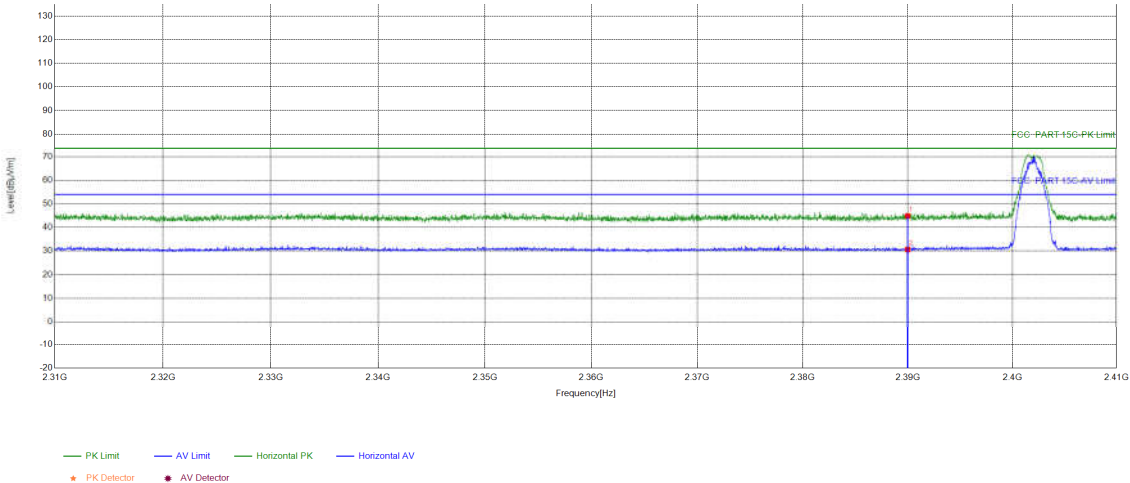

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	5.77	39.11	44.88	74.00	29.12	PASS	Horizontal	PK
2	2390	5.77	24.85	30.62	54.00	23.38	PASS	Horizontal	AV

Mode:	BLE GFSK Transmitting	Channel:	2402
Remark:	2Mbps		


Test Graph

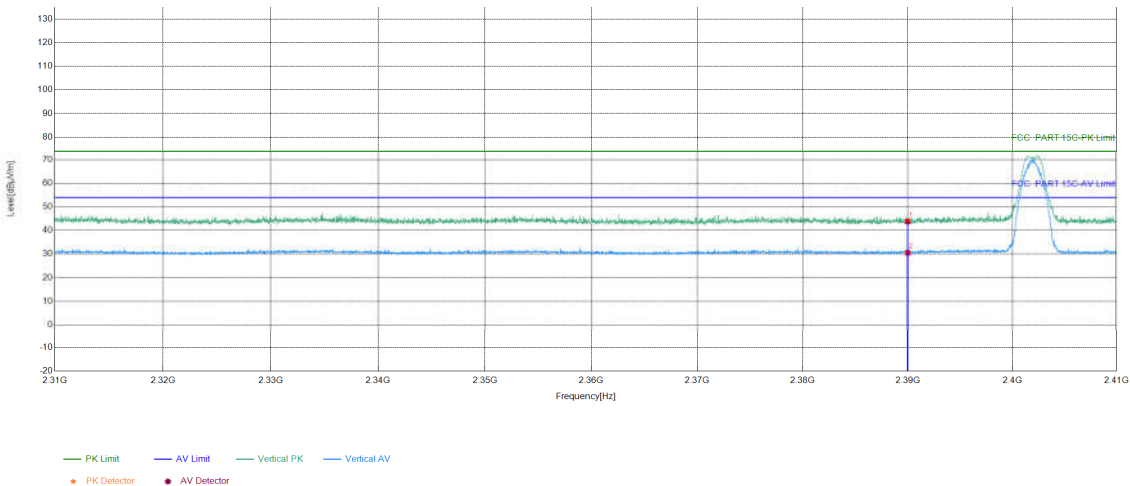

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	5.77	38.04	43.81	74.00	30.19	PASS	Vertical	PK
2	2390	5.77	24.77	30.54	54.00	23.46	PASS	Vertical	AV

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	2Mbps		


Test Graph

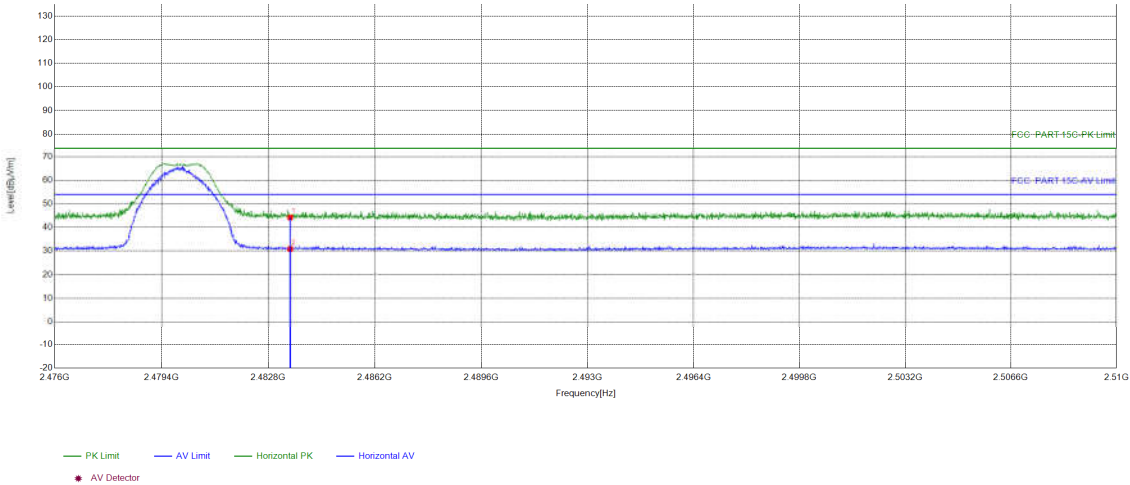

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	6.57	37.65	44.22	74.00	29.78	PASS	Horizontal	PK
2	2483.5	6.57	24.29	30.86	54.00	23.14	PASS	Horizontal	AV

Mode:	BLE GFSK Transmitting	Channel:	2480
Remark:	2Mbps		

Test Graph

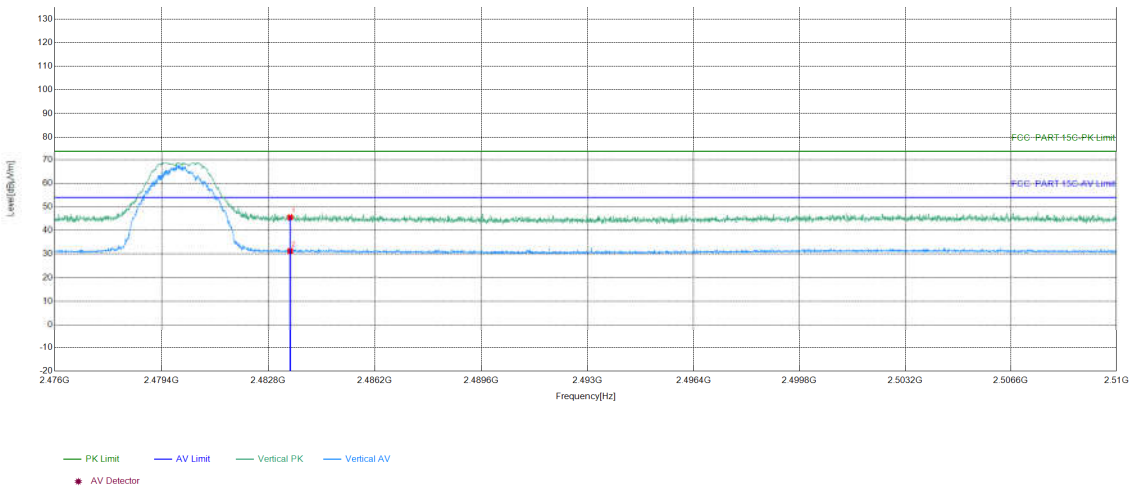

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	6.57	39.01	45.58	74.00	28.42	PASS	Vertical	PK
2	2483.5	6.57	24.70	31.27	54.00	22.73	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading -Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

7 Appendix BLE

Refer to Appendix: Bluetooth LE of EED32O81791701.