



GENERAL TOLERANCE					
	G	H	J	K	L
~ 8	±0.1	±0.1	±0.2	±0.2	±0.4
8up ~ 25	±0.15	±0.15	±0.3	±0.3	±0.6
25up ~ 80	±0.2	±0.25	±0.4	±0.5	±0.8
80up ~ 250	±0.3	±0.4	±0.6	±0.8	±1.2
250over	±0.6	±0.8	±1.0	±1.5	±2.0

DO NOT SCALE DRAWING

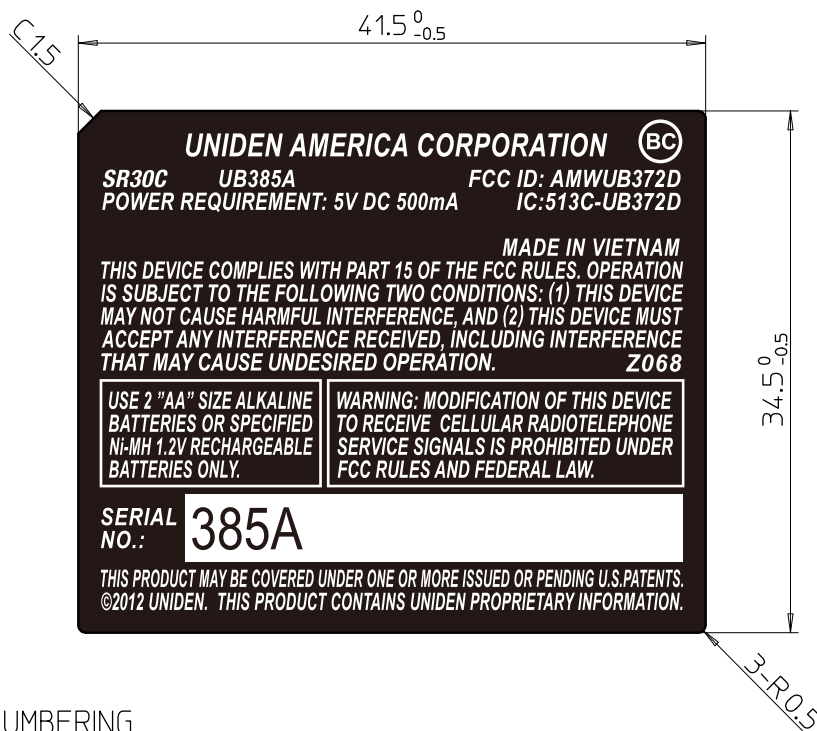

DETAIL OF NUMBERING

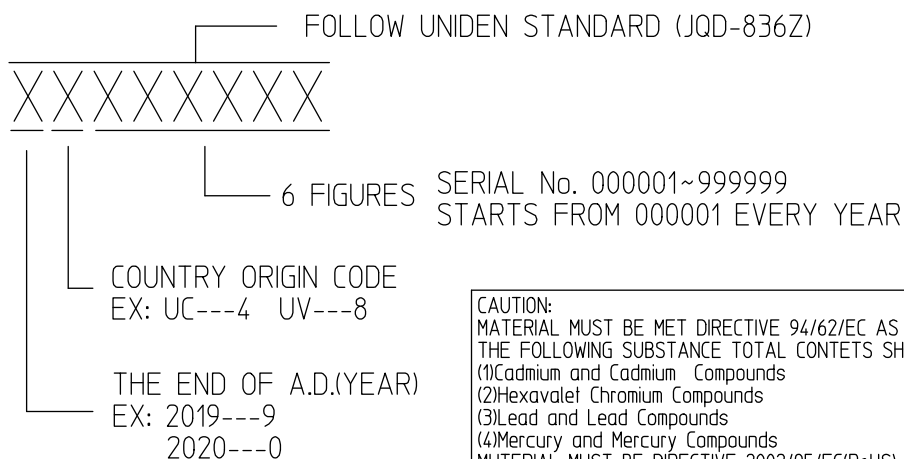

CAUTION:
MATERIAL MUST BE MET DIRECTIVE 94/62/EC AS FOLLOWS;
THE FOLLOWING SUBSTANCE TOTAL CONTENTS SHOULD BE LESS THAN 100ppm
(1)Cadmium and Cadmium Compounds
(2)Hexavalent Chromium Compounds
(3)Lead and Lead Compounds
(4)Mercury and Mercury Compounds
MATERIAL MUST BE DIRECTIVE 2002/95/EC(RoHS) AS FOLLOWS
THE FOLLOWING SUBSTANCE EACH CONTENT SHOULD BE LESS THAN 1000ppm
(5)Polybrominated Biphenyls(PBBs)
(6)Polybrominated Diphenyl ethers(PBDEs)
At the time of parts approval request you have to prove and guarantee
that the material comply with the above requirement by attaching SAMPLE and
'GREEN PROCUREMENT BASIC INFORMATION SURVEY (CHEMICAL SUBSTANCES) TABLE'
When material is changed after parts approval, it is necessary to do same thing again

NOTE

1. MATERIAL : POLYESTER TACK FORM SILVER t=0.1
2. PRINT COLOR : BACKGROUND : BLACK
LETTER : SILVER (OFF PRINT)
3. ARTWORK : D37221
4. LAMINATE : POLYPROPYLENE(GROSS) or PET(GROSS) CLEAR t=0.025mm
5. ADHESIVE STRENGTH : MORE THAN 1000g/25mm (180° PEEL OFF TEST)

△					CAUTION: Approval sample must be submitted for Uniden(ENG) approval. Using any materials in this drawing before Uniden(ENG) approval is prohibited.			
△								
△								
REV.MARK	CONTENS	REVISED	CHECKED	APPV'D	APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY
DRAWING ISSUE STAMP		ENG'G. DIM. REQMT. FOR UNIDEN IQC INSP		YES NO	EBASHI Oct.08'19		KURIH Oct.08'19	KURIH Oct.08'19
ANGLE		UNITS	TOLERANCE	SCALE	MODEL	PARTS NAME		
MOLD CAVITIES		TOOL CODE			UB385A	LABEL ID		
ISSUE DATE :		pcs			BASIC MODEL	BASIC PARTS CODE	PARTS CODE PLD111454ZZ	