

Appendix B:SAR Measurement results Plots

Table of contents
Wi-Fi 2.4G- Body
Wi-Fi 5.2G- Body
Wi-Fi 5.8G- Body

Test Laboratory: CTI SAR Lab

WiFi 802.11b 11CH Front Side 0mm

DUT: ReMarkable 2; Type: NA; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi; Frequency: 2462 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 40.483$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.69, 7.69, 7.69) @ 2462 MHz; Calibrated: 4/18/2024
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.53 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.00 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.403 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 71.6%

Maximum value of SAR (measured) = 2.10 W/kg

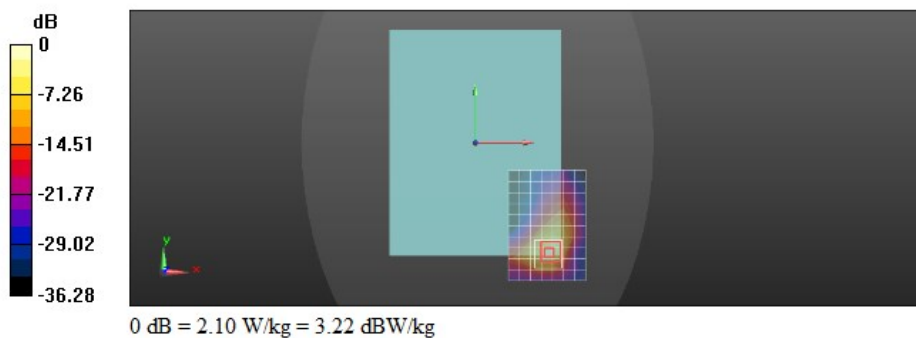

Test Laboratory: CTI SAR Lab

WiFi 802.11b 11CH Front Side 0mm-Repeated**DUT: ReMarkable 2; Type: NA; Serial: NA**

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi; Frequency: 2462 MHz; Communication System PAR: 0 dB; PMF: 1
 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 40.483$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(7.69, 7.69, 7.69) @ 2462 MHz; Calibrated: 4/18/2024
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (8x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.52 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.5$ mm

Reference Value = 0.1090 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.00 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.402 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 71.6%

Maximum value of SAR (measured) = 2.11 W/kg

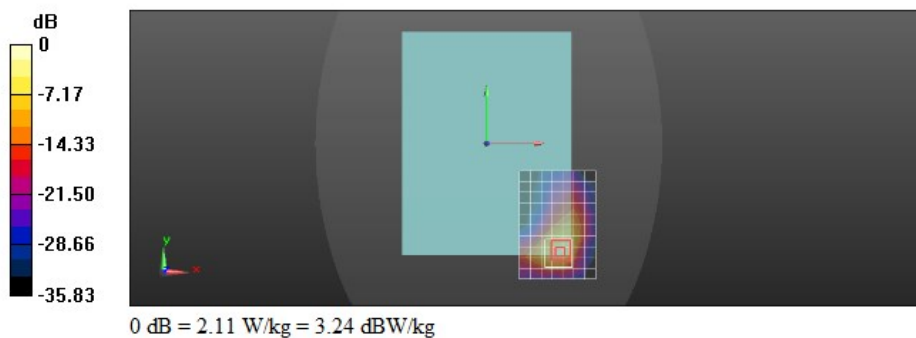

Test Laboratory: CTI SAR Lab

WiFi 802.11a 44CH Back Side 0mm

DUT: ReMarkable 2; Type: NA; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.2G; Frequency: 5220 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 4.738 \text{ S/m}$; $\epsilon_r = 36.137$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(5.4, 5.4, 5.4) @ 5220 MHz; Calibrated: 4/18/2024
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.880 W/kg

Configuration/Body/Zoom Scan (9x9x6)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 2.24 W/kg

SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.125 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 50.1%

Maximum value of SAR (measured) = 1.23 W/kg

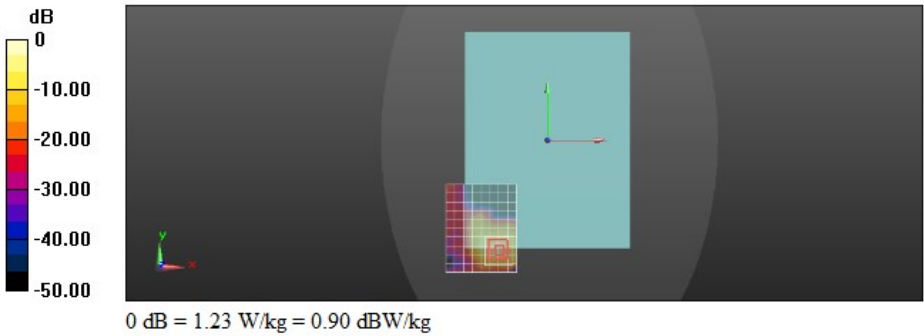

Test Laboratory: CTI SAR Lab

WiFi 802.11a 149CH Front Side 0mm

DUT: ReMarkable 2; Type: NA; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.8G; Frequency: 5745 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.401 \text{ S/m}$; $\epsilon_r = 34.925$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(4.95, 4.95, 4.95) @ 5745 MHz; Calibrated: 4/18/2024
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.87 W/kg

Configuration/Body/Zoom Scan (9x9x6)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 7.06 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.268 W/kg

Smallest distance from peaks to all points 3 dB below = 4 mm

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 3.34 W/kg

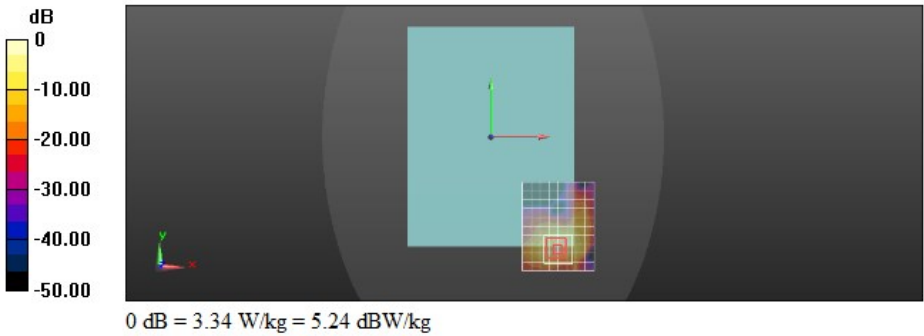

Test Laboratory: CTI SAR Lab

WiFi 802.11a 149CH Front Side 0mm-Repeated

DUT: ReMarkable 2; Type: NA; Serial: NA

Communication System: UID 0, WiFi 802.11 a/b/g/n/ac (0); Communication System Band: WiFi 5.8G; Frequency: 5745 MHz;Communication System PAR: 0 dB; PMF: 1

Medium parameters used: f = 5745 MHz; σ = 5.401 S/m; ϵ_r = 34.925; ρ = 1000 kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN7328; ConvF(4.95, 4.95, 4.95) @ 5745 MHz; Calibrated: 4/18/2024
 - Modulation Compensation:
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 23.0
- Electronics: DAE4 Sn1458; Calibrated: 1/20/2025
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: 2024
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.87 W/kg

Configuration/Body/Zoom Scan (9x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 6.88 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.264 W/kg

Smallest distance from peaks to all points 3 dB below = 4 mm

Ratio of SAR at M2 to SAR at M1 = 45.2%

Maximum value of SAR (measured) = 3.22 W/kg

