

FCC TEST REPORT

REPORT NO.: RF950125L07

MODEL NO.: GN-BT06T

RECEIVED: Dec. 08, 2005

TESTED: Dec. 08, 2005 ~ Feb. 22, 2006

ISSUED: Feb. 24, 2006

APPLICANT: GIGA-BYTE TECHNOLOGY CO., LTD.

ADDRESS: No. 6, Bau Chiang Road, Hsin-Tien, Taipei Hsien,
Taiwan R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 71 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



NO. 2177-01



TABLE OF CONTENTS

| | |
|--|----|
| 1. CERTIFICATION | 5 |
| 2. SUMMARY OF TEST RESULTS | 6 |
| 2.1 MEASUREMENT UNCERTAINTY..... | 7 |
| 3. GENERAL INFORMATION | 8 |
| 3.1 GENERAL DESCRIPTION OF EUT..... | 8 |
| 3.2 DESCRIPTION OF TEST MODES..... | 9 |
| 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST | 10 |
| 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... | 11 |
| 3.3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS | 13 |
| 3.3.4 DESCRIPTION OF SUPPORT UNITS..... | 13 |
| 4. TEST TYPES AND RESULTS | 14 |
| 4.1 CONDUCTED EMISSION MEASUREMENT | 14 |
| 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT | 14 |
| 4.1.2 TEST INSTRUMENTS..... | 14 |
| 4.1.3 TEST PROCEDURES | 15 |
| 4.1.4 DEVIATION FROM TEST STANDARD | 15 |
| 4.1.5 TEST SETUP | 16 |
| 4.1.6 EUT OPERATING CONDITIONS..... | 17 |
| 4.1.7 TEST RESULTS | 18 |
| 4.2 RADIATED EMISSION MEASUREMENT | 30 |
| 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT | 30 |
| 4.2.2 TEST INSTRUMENTS..... | 31 |
| 4.2.3 TEST PROCEDURES | 32 |
| 4.2.4 DEVIATION FROM TEST STANDARD | 32 |
| 4.2.5 TEST SETUP | 33 |
| 4.2.6 EUT OPERATING CONDITIONS..... | 33 |
| 4.2.7 TEST RESULTS | 34 |
| 4.3 NUMBER OF HOPPING FREQUENCY USED | 41 |
| 4.3.1 LIMIT OF HOPPING FREQUENCY USED | 41 |
| 4.3.2 TEST INSTRUMENTS..... | 41 |
| 4.3.3 TEST PROCEDURES | 41 |
| 4.3.4 DEVIATION FROM TEST STANDARD | 42 |
| 4.3.5 TEST SETUP..... | 42 |

| | | |
|-------|---|----|
| 4.3.6 | TEST RESULTS | 42 |
| 4.4 | DWELL TIME ON EACH CHANNEL | 44 |
| 4.4.1 | LIMIT OF DWELL TIME USED | 44 |
| 4.4.2 | TEST INSTRUMENTS | 44 |
| 4.4.3 | TEST PROCEDURES | 44 |
| 4.4.4 | DEVIATION FROM TEST STANDARD | 44 |
| 4.4.5 | TEST SETUP | 45 |
| 4.4.6 | TEST RESULTS | 45 |
| 4.5 | CHANNEL BANDWIDTH | 49 |
| 4.5.1 | LIMITS OF CHANNEL BANDWIDTH | 49 |
| 4.5.2 | TEST INSTRUMENTS | 49 |
| 4.5.3 | TEST PROCEDURE | 49 |
| 4.5.4 | DEVIATION FROM TEST STANDARD | 50 |
| 4.5.5 | TEST SETUP | 50 |
| 4.5.6 | EUT OPERATING CONDITION | 50 |
| 4.5.7 | TEST RESULTS | 50 |
| 4.6 | HOPPING CHANNEL SEPARATION | 53 |
| 4.6.1 | LIMIT OF HOPPING CHANNEL SEPARATION | 53 |
| 4.6.2 | TEST INSTRUMENTS | 53 |
| 4.6.3 | TEST PROCEDURES | 53 |
| 4.6.4 | DEVIATION FROM TEST STANDARD | 54 |
| 4.6.5 | TEST SETUP | 54 |
| 4.6.6 | TEST RESULTS | 54 |
| 4.7 | MAXIMUM PEAK OUTPUT POWER | 57 |
| 4.7.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT | 57 |
| 4.7.2 | TEST INSTRUMENTS | 57 |
| 4.7.3 | TEST PROCEDURES | 57 |
| 4.7.4 | DEVIATION FROM TEST STANDARD | 57 |
| 4.7.5 | TEST SETUP | 58 |
| 4.7.6 | EUT OPERATING CONDITION | 58 |
| 4.7.7 | TEST RESULTS | 58 |
| 4.8 | BAND EDGES MEASUREMENT | 61 |
| 4.8.1 | LIMITS OF BAND EDGES MEASUREMENT | 61 |
| 4.8.2 | TEST INSTRUMENTS | 61 |
| 4.8.3 | TEST PROCEDURE | 61 |

| | | |
|------------|--|-----|
| 4.8.4 | DEVIATION FROM TEST STANDARD | 61 |
| 4.8.5 | EUT OPERATING CONDITION | 61 |
| 4.8.6 | TEST RESULTS | 62 |
| 4.9 | ANTENNA REQUIREMENT | 65 |
| 4.9.1 | STANDARD APPLICABLE..... | 65 |
| 4.9.2 | ANTENNA CONNECTED CONSTRUCTION..... | 65 |
| 5. | PHOTOGRAPHS OF THE TEST CONFIGURATION | 66 |
| 6. | INFORMATION ON THE TESTING LABORATORIES..... | 70 |
| APPENDIX-A | | A-1 |

1. CERTIFICATION

PRODUCT: Bluetooth Media Adapter
MODEL NO.: GN-BT06T
BRAND NAME: GIGABYTE
APPLICANT: GIGA-BYTE TECHNOLOGY CO., LTD.
TESTED: Dec. 08, 2005 ~ Feb. 22, 2006
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Wendy Liao , **DATE:** Feb. 24, 2006
Wendy Liao

TECHNICAL
ACCEPTANCE : Long Chen , **DATE:** Feb. 24, 2006
Responsible for RF Long Chen

APPROVED BY : Gary Chang , **DATE:** Feb. 24, 2006
Gary Chang / Supervisor

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 15, Subpart C | | | |
|--|---|--------|---|
| STANDARD SECTION | TEST TYPE AND LIMIT | RESULT | REMARK |
| 15.207 | AC Power Conducted Emission | PASS | Meet the requirement of limit. Minimum passing margin is -5.69dB at 0.349MHz. |
| 15.247(a)(1)(iii) | Number of Hopping Frequency Used Spec.: At least 15 channels | PASS | Meet the requirement of limit. |
| 15.247(a)(1)(iii) | Dwell Time on Each Channel Spec. : Max. 0.4 second within 31.6 second | PASS | Meet the requirement of limit. |
| 15.247(a)(1) | 1. Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, whichever is greater (see Note 1) 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System | PASS | Meet the requirement of limit. |
| 15.247(b) | Maximum Peak Output Power Spec.: max. 30dBm (see Note 1) | PASS | Meet the requirement of limit. |
| 15.247(d) | Transmitter Radiated Emissions Spec.: Table 15.209 | PASS | Meet the requirement of limit. Minimum passing margin is -1.92 dB at 4804.00MHz. |
| 15.247(d) | Band Edge Measurement | PASS | Meet the requirement of limit. |

NOTE: If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

| MEASUREMENT | FREQUENCY | UNCERTAINTY |
|---------------------|------------------|-------------|
| Conducted emissions | 9kHz ~ 30MHz | 2.44 dB |
| Radiated emissions | 30MHz ~ 200MHz | 3.73 dB |
| | 200MHz ~ 1000MHz | 3.74 dB |
| | 1GHz ~ 18GHz | 2.20 dB |
| | 18GHz ~ 40GHz | 1.88 dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|---------------------------|--|
| PRODUCT | Bluetooth Media Adapter |
| MODEL NO. | GN-BT06T |
| FCC ID | JCK-GN-BT06T |
| POWER SUPPLY | 5Vdc from host equipment and AC Adapter |
| MODULATION TYPE | GFSK |
| RADIO TECHNOLOGY | FHSS |
| TRANSFER RATE | 723.2Kbps |
| FREQUENCY RANGE | 2402 ~ 2480 MHz |
| NUMBER OF CHANNEL | 79 |
| OUTPUT POWER | 31.989mW |
| ANTENNA TYPE | Dipole antenna with 2dBi gain |
| DATA CABLE | 1.8m non-shielded Audio cable without core 1.8m non-shielded RCA cable without core 1.8m shielded USB cable without core |
| I/O PORTS | Audio, USB |
| ASSOCIATED DEVICES | NA |

NOTE:

1. Bluetooth technology is used in this EUT.
2. The EUT was operated with following power adapter:

| | |
|--------------------|---|
| BRAND: | DVE |
| MODEL: | DSA-5P-05FUS 050100 |
| INPUT: | 100-240Vac, 50Hz, 0.2A |
| OUTPUT: | 5Vdc, 1.0A |
| POWER LINE: | AC 1.8m non-shielded cable without core |

3. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.


3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:


| CHANNEL | FREQ. (MHz) | CHANNEL | FREQ. (MHz) | CHANNEL | FREQ. (MHz) | CHANNEL | FREQ. (MHz) |
|---------|----------------|---------|----------------|---------|----------------|---------|----------------|
| 0 | 2402 | 20 | 2422 | 40 | 2442 | 60 | 2462 |
| 1 | 2403 | 21 | 2423 | 41 | 2443 | 61 | 2463 |
| 2 | 2404 | 22 | 2424 | 42 | 2444 | 62 | 2464 |
| 3 | 2405 | 23 | 2425 | 43 | 2445 | 63 | 2465 |
| 4 | 2406 | 24 | 2426 | 44 | 2446 | 64 | 2466 |
| 5 | 2407 | 25 | 2427 | 45 | 2447 | 65 | 2467 |
| 6 | 2408 | 26 | 2428 | 46 | 2448 | 66 | 2468 |
| 7 | 2409 | 27 | 2429 | 47 | 2449 | 67 | 2469 |
| 8 | 2410 | 28 | 2430 | 48 | 2450 | 68 | 2470 |
| 9 | 2411 | 29 | 2431 | 49 | 2451 | 69 | 2471 |
| 10 | 2412 | 30 | 2431 | 50 | 2452 | 70 | 2472 |
| 11 | 2413 | 31 | 2433 | 51 | 2453 | 71 | 2473 |
| 12 | 2414 | 32 | 2434 | 52 | 2454 | 72 | 2474 |
| 13 | 2415 | 33 | 2435 | 53 | 2455 | 73 | 2475 |
| 14 | 2416 | 34 | 2436 | 54 | 2456 | 74 | 2476 |
| 15 | 2417 | 35 | 2437 | 55 | 2457 | 75 | 2477 |
| 16 | 2418 | 36 | 2438 | 56 | 2458 | 76 | 2478 |
| 17 | 2419 | 37 | 2439 | 57 | 2459 | 77 | 2479 |
| 18 | 2420 | 38 | 2440 | 58 | 2460 | 78 | 2480 |
| 19 | 2421 | 39 | 2441 | 59 | 2461 | | |

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

MODE A

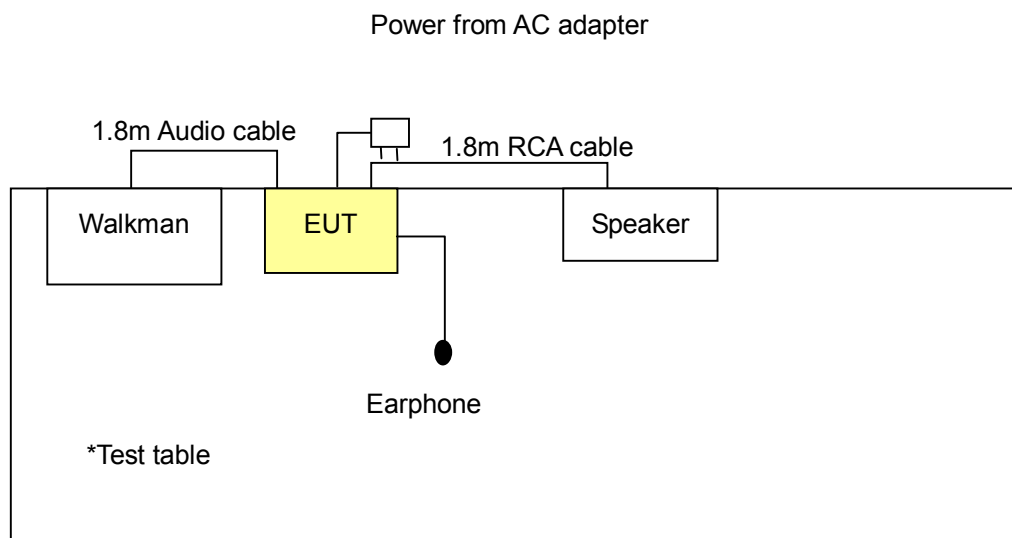

MODE B

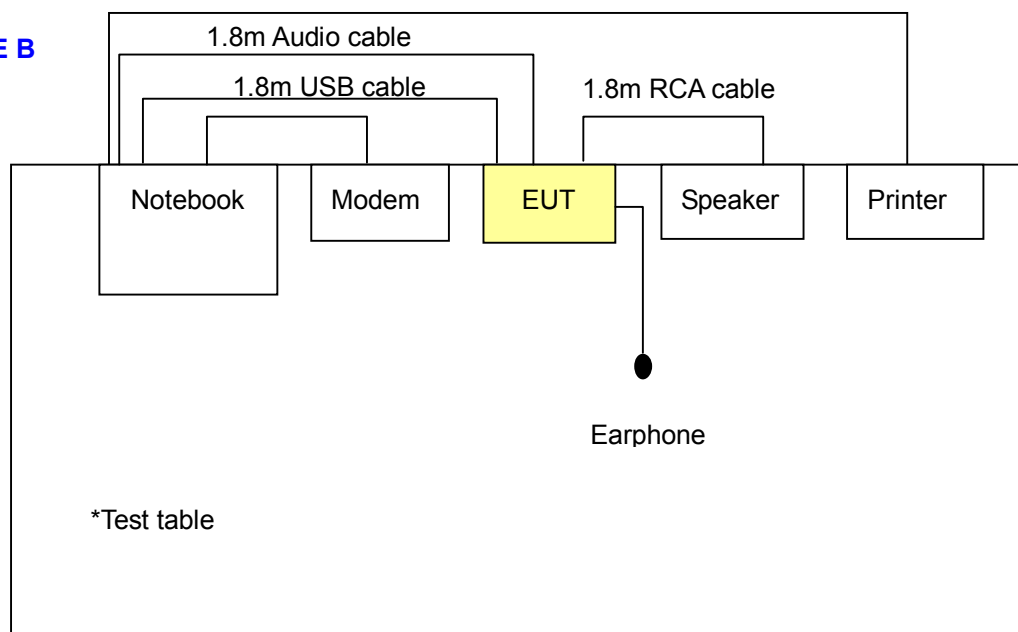

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

| EUT CONFIGURE MODE | Applicable to | | | | Description |
|--------------------------|---------------|-------|-------|------|---|
| | PLC | RE<1G | RE≥1G | APCM | |
| A | √ | √ | - | - | Powered by AC adapter |
| B | √ | √ | √ | √ | Powered by host equipment via USB cable |

Where **PLC**: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

NOTE: “-“ means no effect

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations XYZ Axis and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE |
|--------------------------|----------------------|-------------------|--------------------------|--------------------|-------------|
| A | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |
| B | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations XYZ Axis and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE |
|--------------------------|----------------------|-------------------|--------------------------|--------------------|-------------|
| A | 0 to 78 | 78 | FHSS | GFSK | DH5 |
| B | 0 to 78 | 78 | FHSS | GFSK | DH5 |

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations XYZ Axis and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|
| B | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|
| B | 0 to 78 | 0, 78 | FHSS | GFSK | DH5 |

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|
| B | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |

3.3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4- 2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|------------------------|-----------|-----------|------------------|------------------|
| 1 | PRINTER | EPSON | LQ-300+ | DCGY047265 | FCC DoC Approved |
| 2 | MODEM | ACEEX | 1414V/3 | 0401008248 | IFAXDM1414 |
| 3 | SPEAKER | SANYO | SYSP-802 | SP07500040300858 | N/A |
| 4 | MINE CASSETTE RECORDER | PANASONIC | RQ-L11 | C1-010053 | N/A |
| 5 | NOTEBOOK COMPUTER | DELL | PP05L | 12130898320 | E2K24CLNS |
| 6 | EARPHONE | PHILIPS | HL145 | H2-010107 | N/A |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | NA |
| 2 | 1.2m shielded cable. |
| 3 | 1.8m shielded cable. |
| 4 | 1.8m shielded cable. |
| 5 | NA |
| 6 | 1.2m shielded cable. |

NOTE: 1. All power cords of the above support units are non shielded (1.8m).

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dBV) | |
|-----------------------------|-----------------------|----------|
| | Quasi-peak | Average |
| 0.15 ~ 0.5 | 66 to 56 | 56 to 46 |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------------|-------------|----------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESCS30 | 100291 | Nov. 11, 2006 |
| RF signal cable Woken | 5D-FB | Cable-HYC01-01 | Jan. 06, 2007 |
| LISN ROHDE & SCHWARZ | ESH3-Z5 | 100312 | Feb. 15, 2007 |
| LISN ROHDE & SCHWARZ | ESH2-Z5 | 100104 | Feb. 07, 2007 |
| Software ADT | ADT_Cond_V3 | NA | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

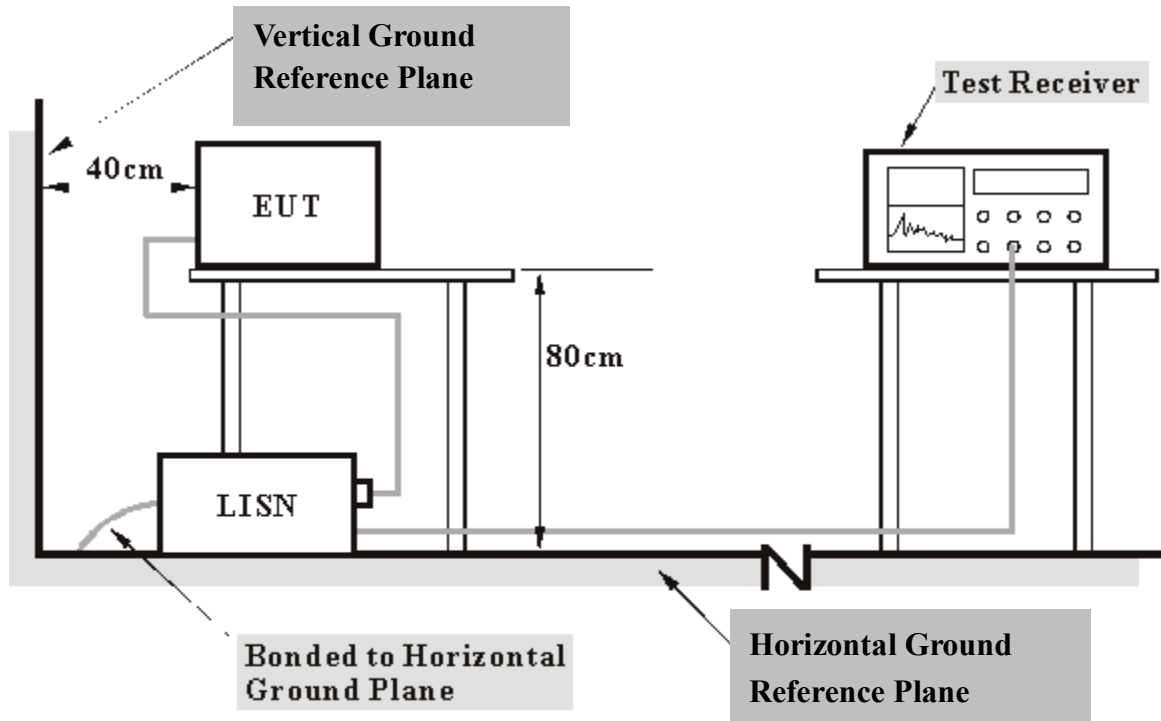

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

Mode A

Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.

Mode B:

- a. Connected the EUT to the Notebook system via USB cable and powered by battery.
- b. The Notebook system ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- c. The notebook system sent "H" messages to its screen.
- d. The notebook sent "H" messages to the modem.
- e. The notebook system sent "H" messages to printer and the printer printed them on paper.
- f. Steps c ~ e were repeated.


4.1.7 TEST RESULTS

CONDUCTED WORST CASE DATA:

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|-----------|--------------------------|-------------------------|
| CHANNEL | Channel 0 | PHASE | Line 1 |
| MODULATION TYPE | GFSK | 6dB BANDWIDTH | 9 kHz |
| TEST MODE | A | ENVIRONMENTAL CONDITIONS | 20deg. C, 65%RH, 991hPa |
| TESTED BY | Lori Chiu | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.279 | 0.10 | 50.99 | 35.56 | 51.09 | 35.66 | 60.85 | 50.85 | -9.76 | -15.19 |
| 2 | 0.349 | 0.10 | 53.19 | 37.13 | 53.29 | 37.23 | 58.98 | 48.98 | -5.69 | -11.75 |
| 3 | 0.486 | 0.11 | 45.94 | - | 46.05 | - | 56.24 | 46.24 | -10.18 | - |
| 4 | 0.630 | 0.14 | 46.53 | 26.40 | 46.67 | 26.54 | 56.00 | 46.00 | -9.33 | -19.46 |
| 5 | 0.978 | 0.20 | 43.69 | - | 43.89 | - | 56.00 | 46.00 | -12.11 | - |
| 6 | 1.188 | 0.20 | 41.19 | - | 41.39 | - | 56.00 | 46.00 | -14.61 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

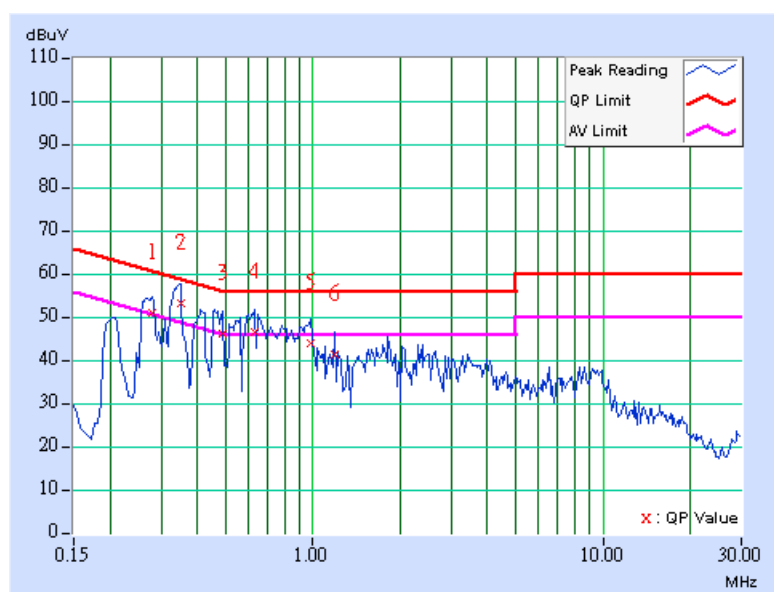

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|-----------|--------------------------|-------------------------|
| CHANNEL | Channel 0 | PHASE | Line 2 |
| MODULATION TYPE | GFSK | 6dB BANDWIDTH | 9 kHz |
| TEST MODE | A | ENVIRONMENTAL CONDITIONS | 20deg. C, 65%RH, 991hPa |
| TESTED BY | Lori Chiu | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | | | | | | | | |
| 1 | 0.279 | 0.10 | 43.34 | - | 43.44 | - | 60.85 | 50.85 | -17.41 | - |
| 2 | 0.338 | 0.10 | 43.99 | - | 44.09 | - | 59.26 | 49.26 | -15.17 | - |
| 3 | 0.486 | 0.11 | 38.08 | - | 38.19 | - | 56.24 | 46.24 | -18.04 | - |
| 4 | 0.623 | 0.14 | 35.81 | - | 35.95 | - | 56.00 | 46.00 | -20.05 | - |
| 5 | 0.982 | 0.20 | 35.38 | - | 35.58 | - | 56.00 | 46.00 | -20.42 | - |
| 6 | 2.383 | 0.25 | 30.32 | - | 30.57 | - | 56.00 | 46.00 | -25.43 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

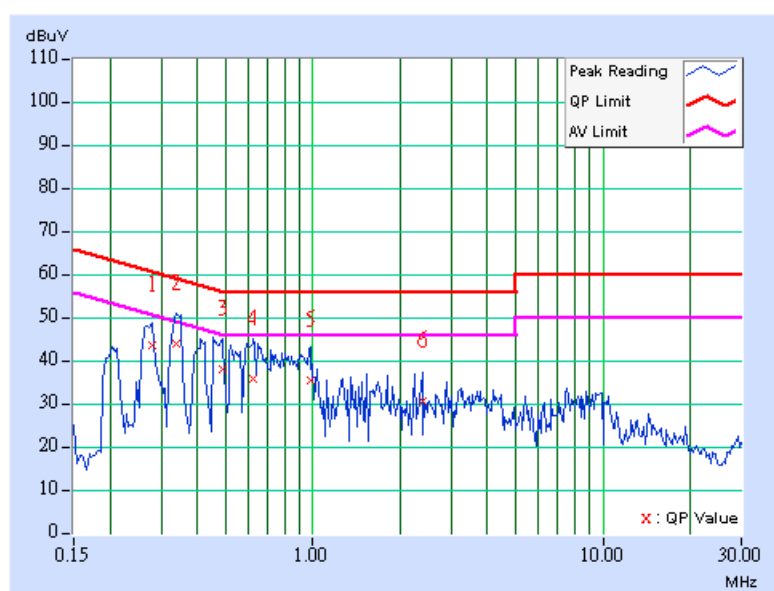

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|------------|--------------------------|-------------------------|
| CHANNEL | Channel 39 | PHASE | Line 1 |
| MODULATION TYPE | GFSK | 6dB BANDWIDTH | 9 kHz |
| TEST MODE | A | ENVIRONMENTAL CONDITIONS | 20deg. C, 65%RH, 991hPa |
| TESTED BY | Lori Chiu | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.279 | 0.10 | 51.10 | 35.65 | 51.20 | 35.75 | 60.85 | 50.85 | -9.65 | -15.10 |
| 2 | 0.345 | 0.10 | 52.39 | 38.12 | 52.49 | 38.22 | 59.07 | 49.07 | -6.58 | -10.85 |
| 3 | 0.486 | 0.11 | 45.67 | - | 45.78 | - | 56.24 | 46.24 | -10.45 | - |
| 4 | 0.646 | 0.14 | 44.80 | - | 44.94 | - | 56.00 | 46.00 | -11.06 | - |
| 5 | 0.908 | 0.18 | 43.32 | - | 43.50 | - | 56.00 | 46.00 | -12.50 | - |
| 6 | 1.680 | 0.20 | 39.26 | - | 39.46 | - | 56.00 | 46.00 | -16.54 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

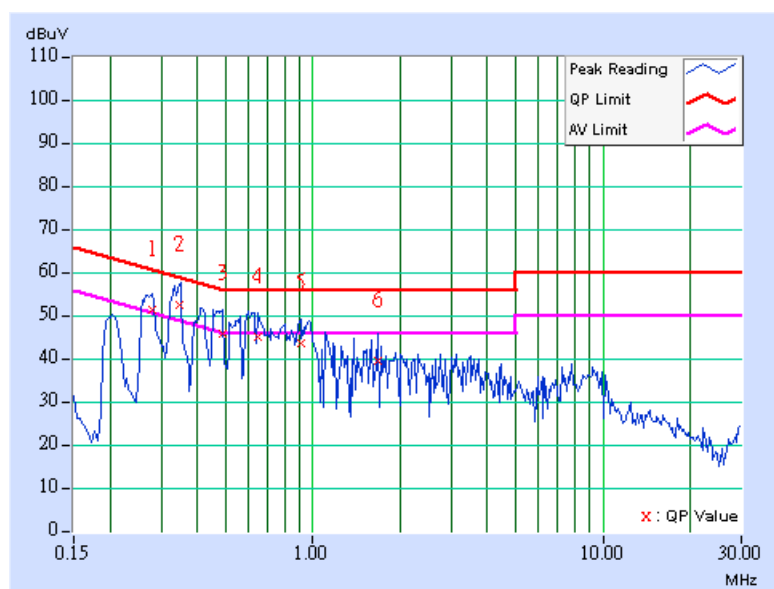

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|------------|--------------------------|-------------------------|
| CHANNEL | Channel 39 | PHASE | Line 2 |
| MODULATION TYPE | GFSK | 6dB BANDWIDTH | 9 kHz |
| TEST MODE | A | ENVIRONMENTAL CONDITIONS | 20deg. C, 65%RH, 991hPa |
| TESTED BY | Lori Chiu | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.267 | 0.10 | 43.77 | - | 43.87 | - | 61.20 | 51.20 | -17.33 | - |
| 2 | 0.349 | 0.10 | 45.80 | - | 45.90 | - | 58.98 | 48.98 | -13.08 | - |
| 3 | 0.420 | 0.10 | 40.86 | - | 40.96 | - | 57.46 | 47.46 | -16.49 | - |
| 4 | 0.466 | 0.11 | 39.53 | - | 39.64 | - | 56.58 | 46.58 | -16.94 | - |
| 5 | 0.603 | 0.13 | 36.13 | - | 36.26 | - | 56.00 | 46.00 | -19.74 | - |
| 6 | 0.974 | 0.20 | 34.75 | - | 34.95 | - | 56.00 | 46.00 | -21.05 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

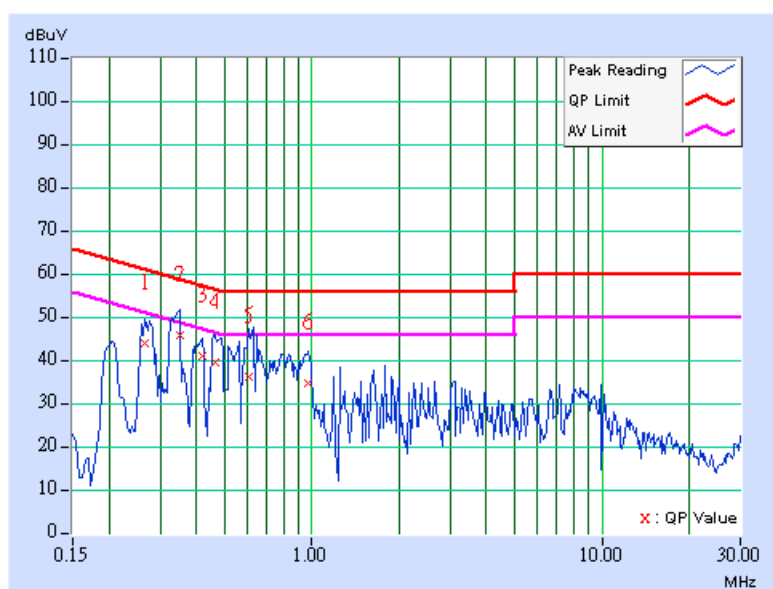

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|------------|--------------------------|-------------------------|
| CHANNEL | Channel 78 | PHASE | Line 1 |
| MODULATION TYPE | GFSK | 6dB BANDWIDTH | 9 kHz |
| TEST MODE | A | ENVIRONMENTAL CONDITIONS | 20deg. C, 65%RH, 991hPa |
| TESTED BY | Lori Chiu | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.271 | 0.10 | 51.06 | 38.43 | 51.16 | 38.53 | 61.08 | 51.08 | -9.92 | -12.55 |
| 2 | 0.349 | 0.10 | 53.15 | 36.52 | 53.25 | 36.62 | 58.98 | 48.98 | -5.73 | -12.36 |
| 3 | 0.423 | 0.10 | 45.27 | - | 45.37 | - | 57.38 | 47.38 | -12.01 | - |
| 4 | 0.478 | 0.11 | 45.71 | - | 45.82 | - | 56.37 | 46.37 | -10.55 | - |
| 5 | 0.630 | 0.14 | 46.20 | 25.21 | 46.34 | 25.35 | 56.00 | 46.00 | -9.66 | -20.65 |
| 6 | 0.908 | 0.18 | 42.61 | - | 42.79 | - | 56.00 | 46.00 | -13.21 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

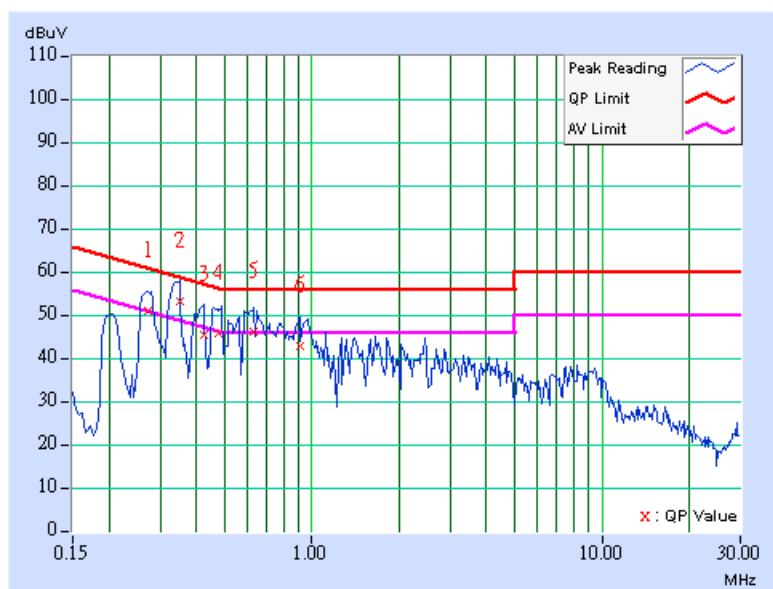

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|------------|--------------------------|-------------------------|
| CHANNEL | Channel 78 | PHASE | Line 2 |
| MODULATION TYPE | GFSK | 6dB BANDWIDTH | 9 kHz |
| TEST MODE | A | ENVIRONMENTAL CONDITIONS | 20deg. C, 65%RH, 991hPa |
| TESTED BY | Lori Chiu | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.271 | 0.10 | 43.48 | - | 43.58 | - | 61.08 | 51.08 | -17.50 | - |
| 2 | 0.349 | 0.10 | 45.78 | - | 45.88 | - | 58.98 | 48.98 | -13.10 | - |
| 3 | 0.420 | 0.10 | 41.29 | - | 41.39 | - | 57.46 | 47.46 | -16.06 | - |
| 4 | 0.474 | 0.11 | 37.87 | - | 37.98 | - | 56.44 | 46.44 | -18.46 | - |
| 5 | 0.615 | 0.14 | 37.19 | - | 37.33 | - | 56.00 | 46.00 | -18.67 | - |
| 6 | 0.908 | 0.18 | 35.07 | - | 35.25 | - | 56.00 | 46.00 | -20.75 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

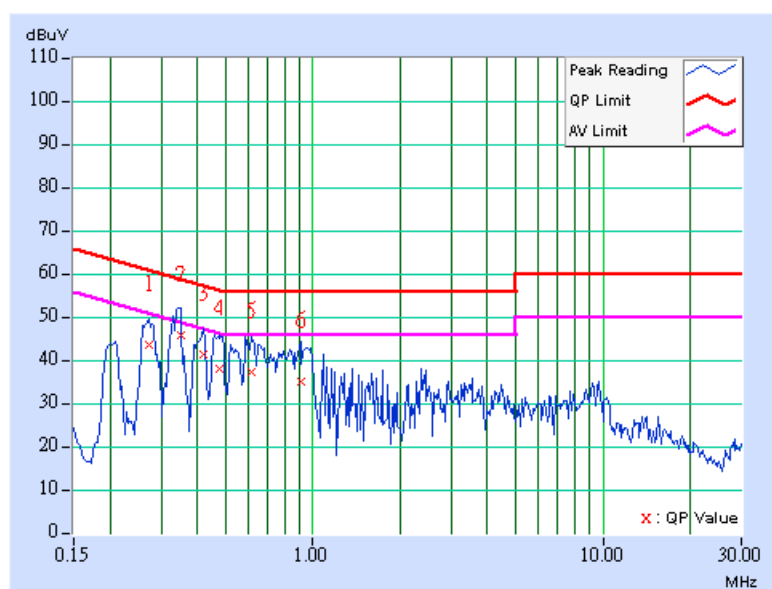

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|-----------|--------------------------|-------------------------|
| CHANNEL | Channel 0 | PHASE | Line 1 |
| MODULATION TYPE | GFSK | 6dB BANDWIDTH | 9 kHz |
| TEST MODE | B | ENVIRONMENTAL CONDITIONS | 20deg. C, 65%RH, 991hPa |
| TESTED BY | Lori Chiu | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.158 | 0.10 | 42.72 | - | 42.82 | - | 65.58 | 55.58 | -22.76 | - |
| 2 | 0.201 | 0.10 | 36.21 | - | 36.31 | - | 63.58 | 53.58 | -27.27 | - |
| 3 | 0.267 | 0.10 | 29.10 | - | 29.20 | - | 61.20 | 51.20 | -32.00 | - |
| 4 | 1.793 | 0.20 | 27.19 | - | 27.39 | - | 56.00 | 46.00 | -28.61 | - |
| 5 | 10.492 | 0.58 | 32.27 | - | 32.85 | - | 60.00 | 50.00 | -27.15 | - |
| 6 | 15.219 | 0.75 | 31.98 | - | 32.73 | - | 60.00 | 50.00 | -27.27 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

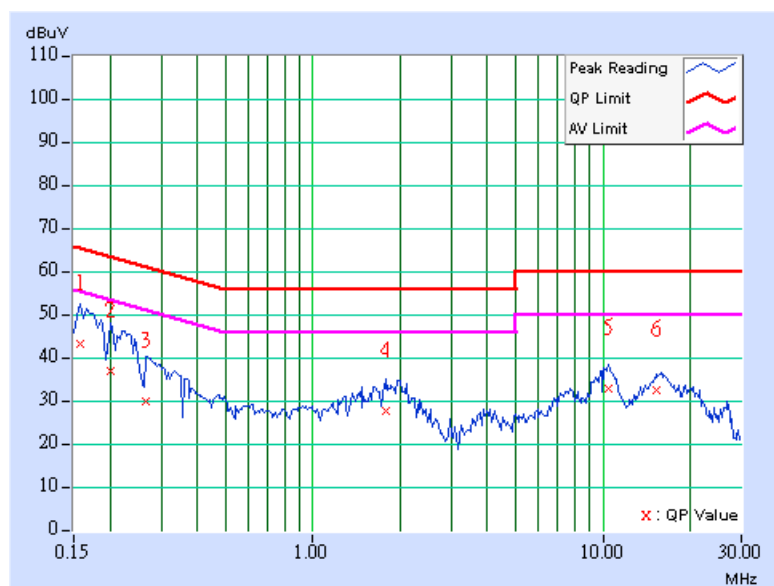

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|-----------|--------------------------|-------------------------|
| CHANNEL | Channel 0 | PHASE | Line 2 |
| MODULATION TYPE | GFSK | 6dB BANDWIDTH | 9 kHz |
| TEST MODE | B | ENVIRONMENTAL CONDITIONS | 20deg. C, 65%RH, 991hPa |
| TESTED BY | Lori Chiu | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | | | | | | | | |
| 1 | 0.177 | 0.10 | 41.76 | - | 41.86 | - | 64.61 | 54.61 | -22.75 | - |
| 2 | 0.216 | 0.10 | 39.93 | - | 40.03 | - | 62.96 | 52.96 | -22.93 | - |
| 3 | 0.283 | 0.10 | 27.80 | - | 27.90 | - | 60.73 | 50.73 | -32.83 | - |
| 4 | 1.691 | 0.20 | 25.91 | - | 26.11 | - | 56.00 | 46.00 | -29.89 | - |
| 5 | 10.211 | 0.47 | 32.23 | - | 32.70 | - | 60.00 | 50.00 | -27.30 | - |
| 6 | 16.262 | 0.68 | 31.61 | - | 32.29 | - | 60.00 | 50.00 | -27.71 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

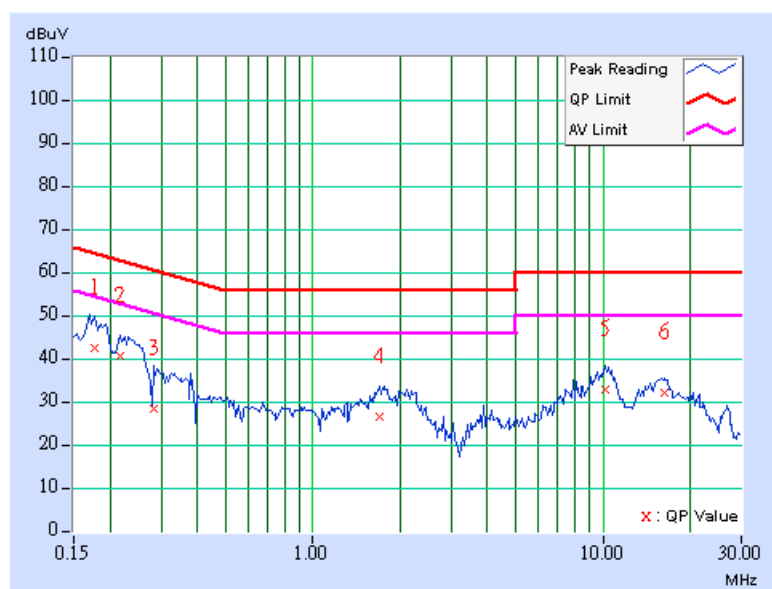

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|------------|--------------------------|-------------------------|
| CHANNEL | Channel 39 | PHASE | Line 1 |
| MODULATION TYPE | GFSK | 6dB BANDWIDTH | 9 kHz |
| TEST MODE | B | ENVIRONMENTAL CONDITIONS | 20deg. C, 65%RH, 991hPa |
| TESTED BY | Lori Chiu | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.158 | 0.10 | 46.19 | - | 46.29 | - | 65.58 | 55.58 | -19.29 | - |
| 2 | 0.197 | 0.10 | 37.79 | - | 37.89 | - | 63.74 | 53.74 | -25.85 | - |
| 3 | 0.271 | 0.10 | 31.54 | - | 31.64 | - | 61.08 | 51.08 | -29.44 | - |
| 4 | 1.883 | 0.20 | 28.18 | - | 28.38 | - | 56.00 | 46.00 | -27.62 | - |
| 5 | 10.551 | 0.58 | 31.68 | - | 32.26 | - | 60.00 | 50.00 | -27.74 | - |
| 6 | 16.523 | 0.85 | 32.05 | - | 32.90 | - | 60.00 | 50.00 | -27.10 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

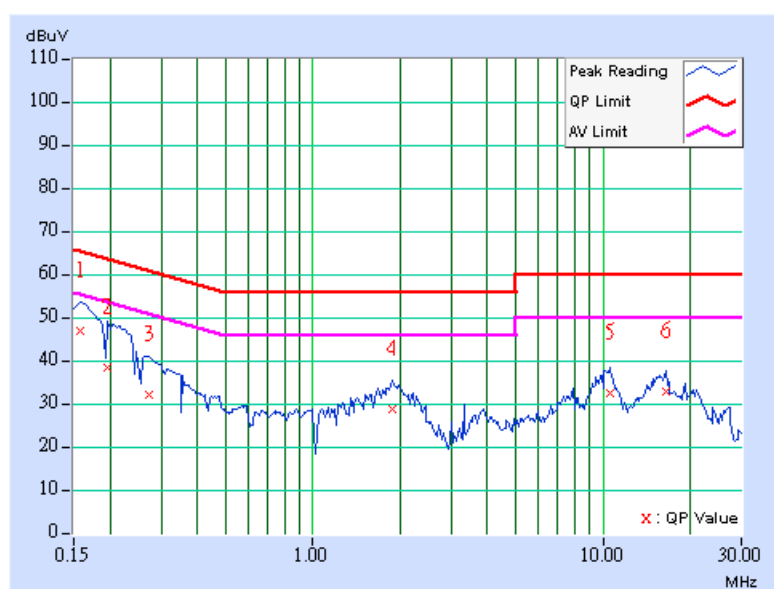

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|------------|--------------------------|-------------------------|
| CHANNEL | Channel 39 | PHASE | Line 2 |
| MODULATION TYPE | GFSK | 6dB BANDWIDTH | 9 kHz |
| TEST MODE | B | ENVIRONMENTAL CONDITIONS | 20deg. C, 65%RH, 991hPa |
| TESTED BY | Lori Chiu | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.177 | 0.10 | 45.07 | - | 45.17 | - | 64.61 | 54.61 | -19.44 | - |
| 2 | 0.216 | 0.10 | 42.75 | - | 42.85 | - | 62.96 | 52.96 | -20.11 | - |
| 3 | 0.263 | 0.10 | 33.16 | - | 33.26 | - | 61.33 | 51.33 | -28.07 | - |
| 4 | 1.574 | 0.20 | 25.62 | - | 25.82 | - | 56.00 | 46.00 | -30.18 | - |
| 5 | 10.074 | 0.46 | 31.51 | - | 31.97 | - | 60.00 | 50.00 | -28.03 | - |
| 6 | 15.348 | 0.64 | 33.13 | - | 33.77 | - | 60.00 | 50.00 | -26.23 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

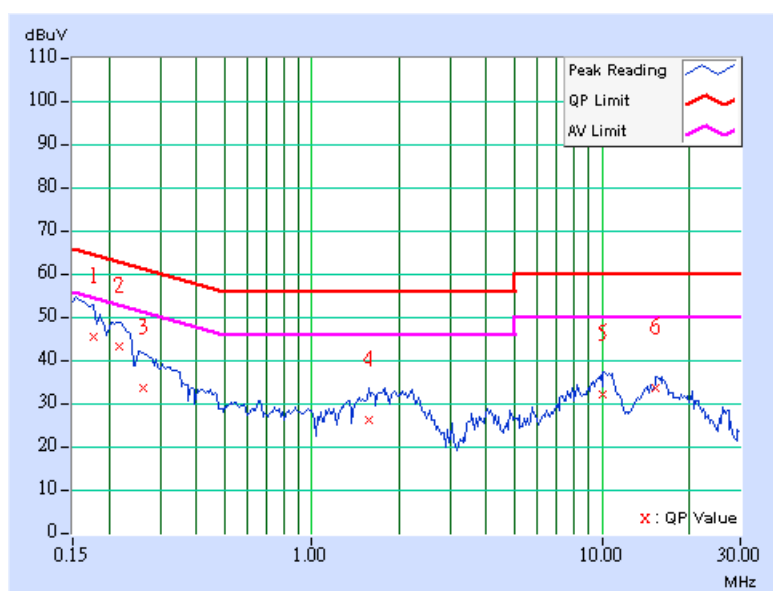

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|------------|--------------------------|-------------------------|
| CHANNEL | Channel 78 | PHASE | Line 1 |
| MODULATION TYPE | GFSK | 6dB BANDWIDTH | 9 kHz |
| TEST MODE | B | ENVIRONMENTAL CONDITIONS | 20deg. C, 65%RH, 991hPa |
| TESTED BY | Lori Chiu | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.173 | 0.10 | 47.24 | - | 47.34 | - | 64.79 | 54.79 | -17.45 | - |
| 2 | 0.197 | 0.10 | 39.76 | - | 39.86 | - | 63.74 | 53.74 | -23.88 | - |
| 3 | 0.252 | 0.10 | 34.92 | - | 35.02 | - | 61.71 | 51.71 | -26.69 | - |
| 4 | 2.063 | 0.21 | 28.63 | - | 28.84 | - | 56.00 | 46.00 | -27.16 | - |
| 5 | 10.219 | 0.57 | 31.66 | - | 32.23 | - | 60.00 | 50.00 | -27.77 | - |
| 6 | 15.480 | 0.77 | 32.07 | - | 32.84 | - | 60.00 | 50.00 | -27.16 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

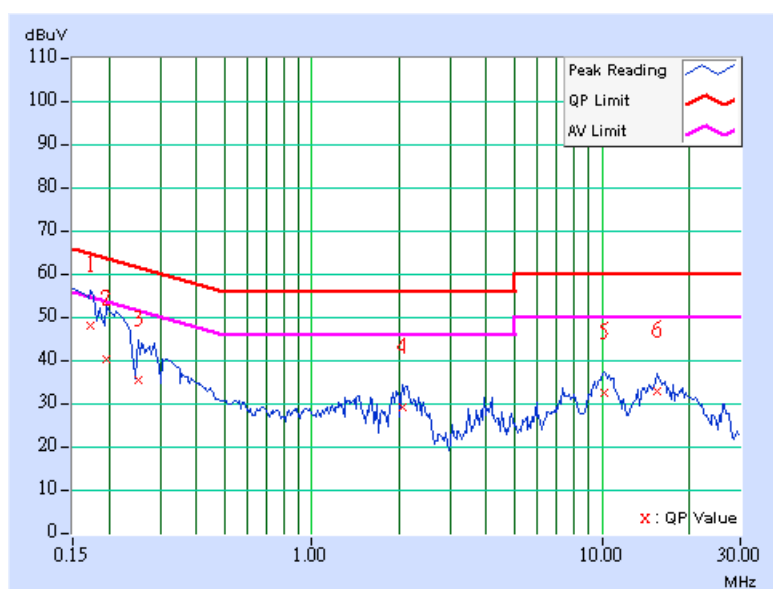

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|------------|--------------------------|-------------------------|
| CHANNEL | Channel 78 | PHASE | Line 2 |
| MODULATION TYPE | GFSK | 6dB BANDWIDTH | 9 kHz |
| TEST MODE | B | ENVIRONMENTAL CONDITIONS | 20deg. C, 65%RH, 991hPa |
| TESTED BY | Lori Chiu | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.181 | 0.10 | 43.16 | - | 43.26 | - | 64.43 | 54.43 | -21.17 | - |
| 2 | 0.213 | 0.10 | 43.95 | - | 44.05 | - | 63.11 | 53.11 | -19.06 | - |
| 3 | 0.295 | 0.10 | 33.42 | - | 33.52 | - | 60.40 | 50.40 | -26.88 | - |
| 4 | 1.855 | 0.20 | 27.34 | - | 27.54 | - | 56.00 | 46.00 | -28.46 | - |
| 5 | 10.008 | 0.46 | 31.58 | - | 32.04 | - | 60.00 | 50.00 | -27.96 | - |
| 6 | 15.871 | 0.66 | 33.00 | - | 33.66 | - | 60.00 | 50.00 | -26.34 | - |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

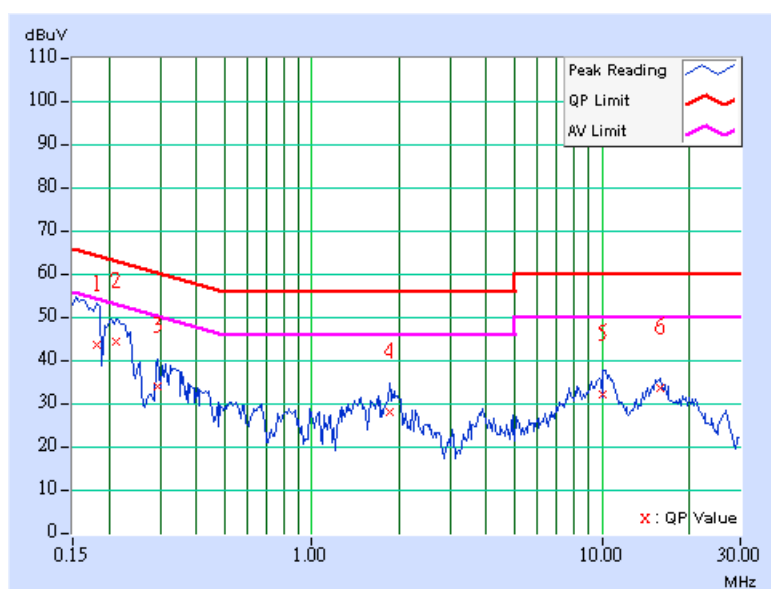

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|---|--------------------|-------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESI7 | 100033 | May. 19, 2006 |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100025 | Dec. 05, 2006 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-160 | Jun. 01, 2006 |
| HORN Antenna SCHWARZBECK | 9120D | 9120D-408 | Jan. 08, 2007 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA9170243 | Jan. 19, 2007 |
| Preamplifier Agilent | 8447D | 2944A10633 | Nov. 04, 2006 |
| Preamplifier Agilent | 8449B | 3008A01964 | Oct. 30, 2006 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 214377/4 | Dec. 13, 2006 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 219272/4 | Dec. 13, 2006 |
| Software ADT. | ADT_Radiated_V5.14 | NA | NA |
| Antenna Tower inn-co GmbH | MA 4000 | 013303 | NA |
| Antenna Tower Controller inn-co GmbH | CO2000 | 017303 | NA |
| Turn Table ADT. | TT100. | TT93021703 | NA |
| Turn Table Controller ADT. | SC100. | SC93021703 | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

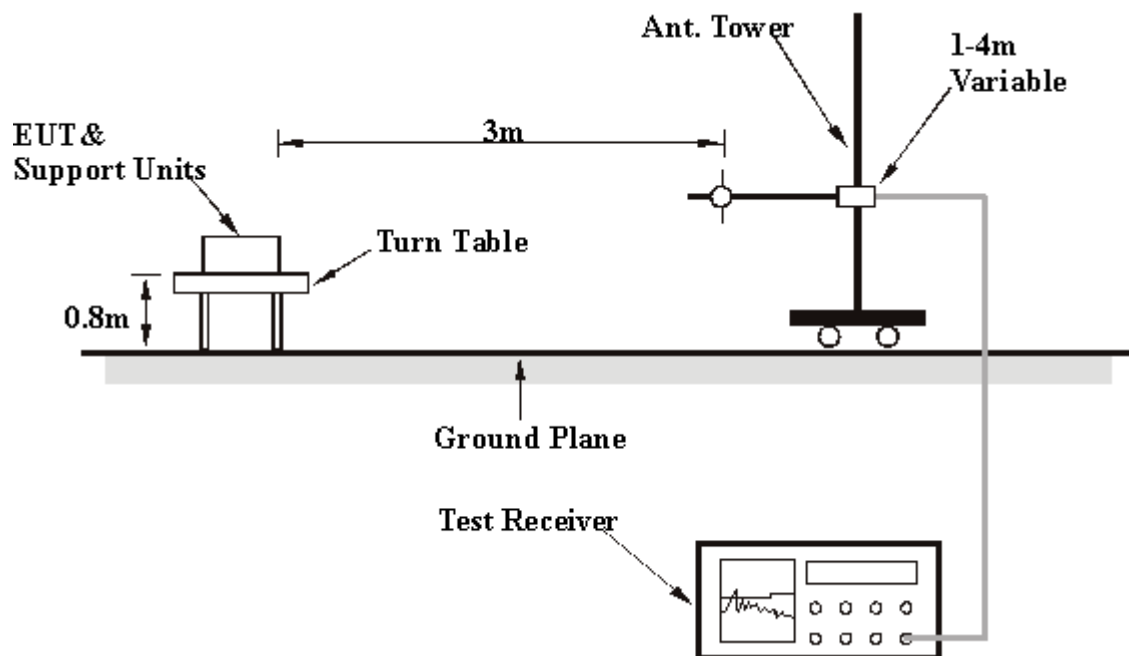

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

RADIATED WORST CASE DATA: BELOW 1GHz

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|-------------|--------------------------|-------------------------|
| CHANNEL | Channel 78 | FREQUENCY RANGE | Below 1000MHz |
| MODULATION TYPE | GFSK | DETECTOR FUNCTION | Quasi-Peak |
| TEST MODE | A | ENVIRONMENTAL CONDITIONS | 24deg. C, 67%RH, 991hPa |
| TESTED BY | Morgan Chen | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 74.71 | 21.14 QP | 40.00 | -18.86 | 1.00 H | 232 | 9.71 | 11.44 |
| 2 | 179.68 | 28.06 QP | 43.50 | -15.44 | 1.25 H | 274 | 15.88 | 12.18 |
| 3 | 251.60 | 26.89 QP | 46.00 | -19.11 | 1.00 H | 244 | 14.23 | 12.66 |
| 4 | 286.59 | 29.34 QP | 46.00 | -16.66 | 1.25 H | 331 | 14.14 | 15.20 |
| 5 | 335.19 | 26.38 QP | 46.00 | -19.62 | 1.25 H | 175 | 9.93 | 16.45 |
| 6 | 360.46 | 29.11 QP | 46.00 | -16.89 | 1.00 H | 52 | 12.09 | 17.02 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 35.83 | 30.14 QP | 40.00 | -9.86 | 1.00 V | 91 | 16.74 | 13.40 |
| 2 | 74.71 | 22.40 QP | 40.00 | -17.60 | 1.00 V | 76 | 10.97 | 11.44 |
| 3 | 131.08 | 25.93 QP | 43.50 | -17.57 | 1.00 V | 271 | 13.61 | 12.32 |
| 4 | 288.54 | 25.10 QP | 46.00 | -20.90 | 1.00 V | 34 | 9.79 | 15.30 |
| 5 | 360.46 | 25.43 QP | 46.00 | -20.57 | 1.25 V | 88 | 8.41 | 17.02 |
| 6 | 383.79 | 25.85 QP | 46.00 | -20.15 | 1.25 V | 103 | 8.08 | 17.77 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|------------------------|-------------|---------------------------------|-------------------------|
| CHANNEL | Channel 78 | FREQUENCY RANGE | Below 1000MHz |
| MODULATION TYPE | GFSK | DETECTOR FUNCTION | Quasi-Peak |
| TEST MODE | B | ENVIRONMENTAL CONDITIONS | 25deg. C, 68%RH, 991hPa |
| TESTED BY | Morgan Chen | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 131.10 | 31.23 QP | 43.50 | -12.27 | 1.50 H | 22 | 18.89 | 12.34 |
| 2 | 142.75 | 29.23 QP | 43.50 | -14.27 | 2.00 H | 94 | 15.88 | 13.35 |
| 3 | 179.68 | 30.94 QP | 43.50 | -12.56 | 1.25 H | 223 | 18.73 | 12.21 |
| 4 | 239.96 | 31.23 QP | 46.00 | -14.77 | 1.25 H | 318 | 18.89 | 12.34 |
| 5 | 263.27 | 33.47 QP | 46.00 | -12.53 | 1.75 H | 13 | 20.39 | 13.09 |
| 6 | 399.37 | 31.45 QP | 46.00 | -14.55 | 1.25 H | 236 | 13.39 | 18.06 |
| 7 | 900.84 | 36.03 QP | 46.00 | -9.97 | 1.00 H | 63 | 8.87 | 27.16 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 113.57 | 34.62 QP | 43.50 | -8.88 | 1.25 V | 236 | 24.03 | 10.59 |
| 2 | 129.12 | 31.86 QP | 43.50 | -11.64 | 1.50 V | 85 | 19.73 | 12.13 |
| 3 | 166.09 | 32.03 QP | 43.50 | -11.47 | 1.25 V | 77 | 18.72 | 13.31 |
| 4 | 199.12 | 33.18 QP | 43.50 | -10.32 | 1.00 V | 67 | 21.90 | 11.28 |
| 5 | 249.66 | 39.25 QP | 46.00 | -6.75 | 1.00 V | 232 | 26.64 | 12.61 |
| 6 | 399.34 | 31.38 QP | 46.00 | -14.62 | 2.50 V | 223 | 13.32 | 18.06 |
| 7 | 663.71 | 31.62 QP | 46.00 | -14.38 | 1.25 V | 250 | 8.21 | 23.41 |
| 8 | 797.84 | 31.10 QP | 46.00 | -14.90 | 1.25 V | 169 | 4.84 | 26.26 |
| 9 | 881.42 | 34.14 QP | 46.00 | -11.86 | 2.50 V | 328 | 7.14 | 26.99 |
| 10 | 902.79 | 39.29 QP | 46.00 | -6.71 | 1.00 V | 211 | 12.11 | 27.18 |

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

RADIATED WORST CASE DATA: ABOVE 1GHZ

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|-------------|--------------------------|----------------------------|
| CHANNEL | Channel 0 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | GFSK | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| TEST MODE | B | ENVIRONMENTAL CONDITIONS | 24deg. C, 67%RH, 991hPa |
| TESTED BY | Morgan Chen | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1601.00 | 52.98 PK | 74.00 | -21.02 | 1.22 H | 278 | 23.50 | 29.48 |
| 1 | 1601.00 | 50.03 AV | 54.00 | -3.97 | 1.22 H | 278 | 20.55 | 29.48 |
| 2 | 2390.00 | 49.97 PK | 74.00 | -24.03 | 1.04 H | 258 | 17.62 | 32.35 |
| 2 | 2390.00 | 40.57 AV | 54.00 | -13.43 | 1.04 H | 258 | 8.22 | 32.35 |
| 3 | *2402.00 | 104.01 PK | | | 1.04 H | 258 | 71.59 | 32.42 |
| 3 | *2402.00 | 74.01 AV | | | 1.04 H | 258 | 41.59 | 32.42 |
| 4 | 3202.00 | 47.85 PK | 74.00 | -26.15 | 1.25 H | 264 | 13.63 | 34.22 |
| 4 | 3202.00 | 40.29 AV | 54.00 | -13.71 | 1.25 H | 264 | 6.07 | 34.22 |
| 5 | 4804.00 | 72.08 PK | 74.00 | -1.92 | 1.02 H | 332 | 33.84 | 38.24 |
| 5 | 4804.00 | 42.38 AV | 54.00 | -11.62 | 1.02 H | 332 | 4.14 | 38.24 |
| 6 | 7206.00 | 69.11 PK | 74.00 | -4.89 | 1.05 H | 325 | 24.25 | 44.86 |
| 6 | 7206.00 | 39.11 AV | 54.00 | -14.89 | 1.05 H | 325 | -5.75 | 44.86 |
| 7 | 9608.00 | 63.11 PK | 74.00 | -10.89 | 1.08 H | 3 | 14.10 | 49.01 |
| 7 | 9608.00 | 33.11 AV | 54.00 | -20.89 | 1.08 H | 3 | -15.90 | 49.01 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30$ dB.
 6. Average value = peak reading $-20\log(\text{duty cycle})$.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|------------------------|-------------|---------------------------------|----------------------------|
| CHANNEL | Channel 0 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | GFSK | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| TEST MODE | B | ENVIRONMENTAL CONDITIONS | 24deg. C, 67%RH, 991hPa |
| TESTED BY | Morgan Chen | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1601.00 | 53.15 PK | 74.00 | -20.85 | 1.05 V | 262 | 23.67 | 29.48 |
| 1 | 1601.00 | 50.35 AV | 54.00 | -3.65 | 1.05 V | 262 | 20.87 | 29.48 |
| 2 | 2390.00 | 59.90 PK | 74.00 | -14.10 | 1.05 V | 21 | 27.55 | 32.35 |
| 2 | 2390.00 | 50.50 AV | 54.00 | -3.50 | 1.05 V | 21 | 18.15 | 32.35 |
| 3 | *2402.00 | 115.92 PK | | | 1.02 V | 21 | 83.50 | 32.42 |
| 3 | *2402.00 | 85.92 AV | | | 1.02 V | 21 | 53.50 | 32.42 |
| 4 | 3202.00 | 48.55 PK | 74.00 | -25.45 | 1.06 V | 321 | 14.33 | 34.22 |
| 4 | 3202.00 | 40.81 AV | 54.00 | -13.19 | 1.06 V | 321 | 6.59 | 34.22 |
| 5 | 4804.00 | 71.96 PK | 74.00 | -2.04 | 1.00 V | 4 | 33.72 | 38.24 |
| 5 | 4804.00 | 41.96 AV | 54.00 | -12.04 | 1.00 V | 4 | 3.72 | 38.24 |
| 6 | 7206.00 | 69.56 PK | 74.00 | -4.44 | 1.43 V | 14 | 24.70 | 44.86 |
| 6 | 7206.00 | 39.56 AV | 54.00 | -14.44 | 1.43 V | 14 | -5.30 | 44.86 |
| 7 | 9608.00 | 65.62 PK | 74.00 | -8.38 | 1.22 V | 8 | 16.61 | 49.01 |
| 7 | 9608.00 | 35.62 AV | 54.00 | -18.38 | 1.22 V | 8 | -13.39 | 49.01 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30$ dB.
 6. Average value = peak reading $-20\log(\text{duty cycle})$.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|-------------|--------------------------|----------------------------|
| CHANNEL | Channel 39 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | GFSK | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| TEST MODE | B | ENVIRONMENTAL CONDITIONS | 24deg. C, 67%RH, 991hPa |
| TESTED BY | Morgan Chen | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1627.00 | 52.30 PK | 74.00 | -21.70 | 1.25 H | 291 | 22.78 | 29.52 |
| 1 | 1627.00 | 49.39 AV | 54.00 | -4.61 | 1.25 H | 291 | 19.87 | 29.52 |
| 2 | *2441.00 | 104.21 PK | | | 1.17 H | 321 | 71.53 | 32.68 |
| 2 | *2441.00 | 74.21 AV | | | 1.17 H | 321 | 41.53 | 32.68 |
| 3 | 3254.00 | 47.98 PK | 74.00 | -26.02 | 1.24 H | 311 | 13.66 | 34.32 |
| 3 | 3254.00 | 40.39 AV | 54.00 | -13.61 | 1.24 H | 311 | 6.07 | 34.32 |
| 4 | 4882.00 | 71.80 PK | 74.00 | -2.20 | 1.28 H | 20 | 33.52 | 38.27 |
| 4 | 4882.00 | 41.80 AV | 54.00 | -12.20 | 1.28 H | 20 | 3.52 | 38.27 |
| 5 | 7323.00 | 68.96 PK | 74.00 | -5.04 | 1.00 H | 9 | 24.02 | 44.94 |
| 5 | 7323.00 | 38.96 AV | 54.00 | -15.04 | 1.00 H | 9 | -5.98 | 44.94 |
| 6 | 9764.00 | 61.77 PK | 74.00 | -12.23 | 1.09 H | 0 | 12.45 | 49.32 |
| 6 | 9764.00 | 31.77 AV | 54.00 | -22.23 | 1.09 H | 0 | -17.55 | 49.32 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1627.00 | 52.80 PK | 74.00 | -21.20 | 1.02 V | 258 | 23.28 | 29.52 |
| 1 | 1627.00 | 50.10 AV | 54.00 | -3.90 | 1.02 V | 258 | 20.58 | 29.52 |
| 2 | *2441.00 | 116.18 PK | | | 1.12 V | 12 | 83.50 | 32.68 |
| 2 | *2441.00 | 86.18 AV | | | 42.18 | 12 | 53.50 | 32.68 |
| 3 | 3254.00 | 48.02 PK | 74.00 | -25.98 | 1.04 V | 7 | 13.70 | 34.32 |
| 3 | 3254.00 | 40.42 AV | 54.00 | -13.58 | 1.04 V | 7 | 6.10 | 34.32 |
| 4 | 4882.00 | 71.90 PK | 74.00 | -2.10 | 1.09 V | 6 | 33.62 | 38.27 |
| 4 | 4882.00 | 41.90 AV | 54.00 | -12.10 | 1.09 V | 6 | 3.62 | 38.27 |
| 5 | 7323.00 | 71.28 PK | 74.00 | -2.72 | 1.48 V | 10 | 26.34 | 44.94 |
| 5 | 7323.00 | 41.28 AV | 54.00 | -12.72 | 1.48 V | 10 | -3.66 | 44.94 |
| 6 | 9764.00 | 65.05 PK | 74.00 | -8.95 | 1.54 V | 4 | 15.73 | 49.32 |
| 6 | 9764.00 | 35.05 AV | 54.00 | -18.95 | 1.54 V | 4 | -14.27 | 49.32 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30$ dB.
 6. Average value = peak reading $-20\log(\text{duty cycle})$.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|-------------|--------------------------|----------------------------|
| CHANNEL | Channel 78 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | GFSK | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| TEST MODE | B | ENVIRONMENTAL CONDITIONS | 24deg. C, 67%RH, 991hPa |
| TESTED BY | Morgan Chen | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1653.00 | 52.88 PK | 74.00 | -21.12 | 1.22 H | 247 | 23.33 | 29.55 |
| 1 | 1653.00 | 50.11 AV | 54.00 | -3.89 | 1.22 H | 247 | 20.56 | 29.55 |
| 2 | *2480.00 | 104.42 PK | | | 1.00 H | 14 | 71.49 | 32.93 |
| 2 | *2480.00 | 74.42 AV | | | 1.00 H | 14 | 41.49 | 32.93 |
| 3 | 2483.50 | 50.55 PK | 74.00 | -23.45 | 1.00 H | 14 | 17.60 | 32.95 |
| 3 | 2483.50 | 39.05 AV | 54.00 | -14.95 | 1.00 H | 14 | 6.10 | 32.95 |
| 4 | 3306.00 | 47.88 PK | 74.00 | -26.12 | 1.10 H | 215 | 13.46 | 34.42 |
| 4 | 3306.00 | 39.85 AV | 54.00 | -14.15 | 1.10 H | 215 | 5.43 | 34.42 |
| 5 | 4960.00 | 69.98 PK | 74.00 | -4.02 | 1.22 H | 315 | 31.65 | 38.33 |
| 5 | 4960.00 | 39.98 AV | 54.00 | -14.02 | 1.22 H | 315 | 1.65 | 38.33 |
| 6 | 7440.00 | 61.88 PK | 74.00 | -12.12 | 1.08 H | 231 | 16.87 | 45.01 |
| 6 | 7440.00 | 31.88 AV | 54.00 | -22.12 | 1.08 H | 231 | -13.13 | 45.01 |
| 7 | 9920.00 | 61.01 PK | 74.00 | -12.99 | 1.02 H | 319 | 11.32 | 49.69 |
| 7 | 9920.00 | 31.01 AV | 54.00 | -22.99 | 1.02 H | 319 | -18.68 | 49.69 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30$ dB.
 6. Average value = peak reading $-20\log(\text{duty cycle})$.

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|-------------|--------------------------|----------------------------|
| CHANNEL | Channel 78 | FREQUENCY RANGE | 1 ~ 25GHz |
| MODULATION TYPE | GFSK | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| TEST MODE | B | ENVIRONMENTAL CONDITIONS | 24deg. C, 67%RH, 991hPa |
| TESTED BY | Morgan Chen | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 1653.00 | 53.35 PK | 74.00 | -20.65 | 1.09 V | 245 | 23.80 | 29.55 |
| 1 | 1653.00 | 50.47 AV | 54.00 | -3.53 | 1.09 V | 245 | 20.92 | 29.55 |
| 2 | *2480.00 | 116.72 PK | | | 1.22 V | 18 | 83.79 | 32.93 |
| 2 | *2480.00 | 86.72 AV | | | 1.22 V | 18 | 53.79 | 32.93 |
| 3 | 2483.50 | 60.86 PK | 74.00 | -13.14 | 1.22 V | 8 | 27.91 | 32.95 |
| 3 | 2483.50 | 49.36 AV | 54.00 | -4.64 | 1.22 V | 8 | 16.41 | 32.95 |
| 4 | 3306.00 | 48.57 PK | 74.00 | -25.43 | 1.05 V | 341 | 14.14 | 34.42 |
| 4 | 3306.00 | 40.93 AV | 54.00 | -13.07 | 1.05 V | 341 | 6.50 | 34.42 |
| 5 | 4960.00 | 70.19 PK | 74.00 | -3.81 | 1.09 V | 157 | 31.85 | 38.33 |
| 5 | 4960.00 | 40.19 AV | 54.00 | -13.81 | 1.09 V | 157 | 1.85 | 38.33 |
| 6 | 7440.00 | 63.41 PK | 74.00 | -10.59 | 1.31 V | 152 | 18.40 | 45.01 |
| 6 | 7440.00 | 33.41 AV | 54.00 | -20.59 | 1.31 V | 152 | -11.60 | 45.01 |
| 7 | 9920.00 | 63.25 PK | 74.00 | -10.75 | 1.32 V | 15 | 13.56 | 49.69 |
| 7 | 9920.00 | 33.25 AV | 54.00 | -20.75 | 1.32 V | 15 | -16.44 | 49.69 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30$ dB.
 6. Average value = peak reading $-20\log(\text{duty cycle})$.

4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER | FSEK30 | 100049 | Aug. 14, 2006 |

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURES

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD



No deviation.

4.3.5 TEST SETUP



4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

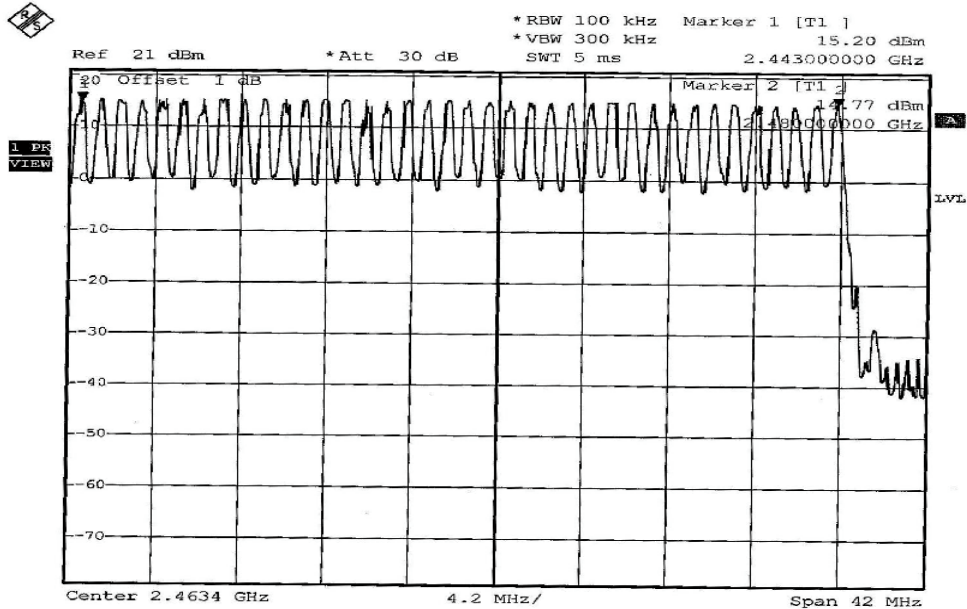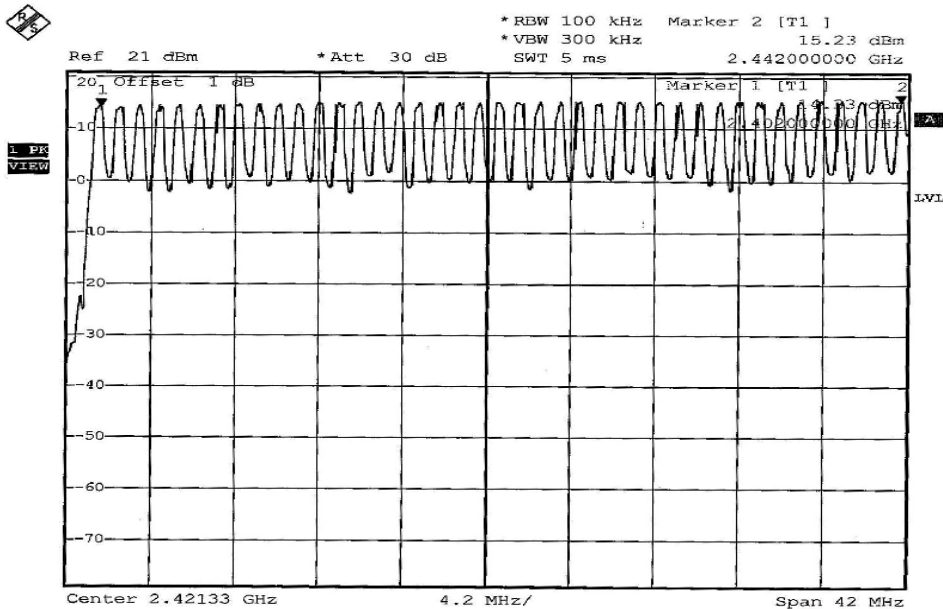

4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER | FSEK30 | 100049 | Aug. 14, 2006 |

NOTES: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP





4.4.6 TEST RESULTS



| MODE | NUMBER OF TRANSMISSION IN A 31.6 (79HOPPING * 0.4) | LENGTH OF TRANSMISSION TIME (msec) | RESULT (msec) | LIMIT (msec) |
|------|---|--|------------------|-----------------|
| DH1 | 50 (times / 5 sec) * 6.32 = 316.00 times | 0.480 | 151.680 | 400 |
| DH3 | 25 (times / 5 sec) * 6.32 = 158.00times | 1.754 | 277.132 | 400 |
| DH5 | 16 (times / 5 sec) * 6.32 = 101.12 times | 2.990 | 302.349 | 400 |

NOTE: Test plots of the transmitting time slot are shown on next 3 pages.



DH1

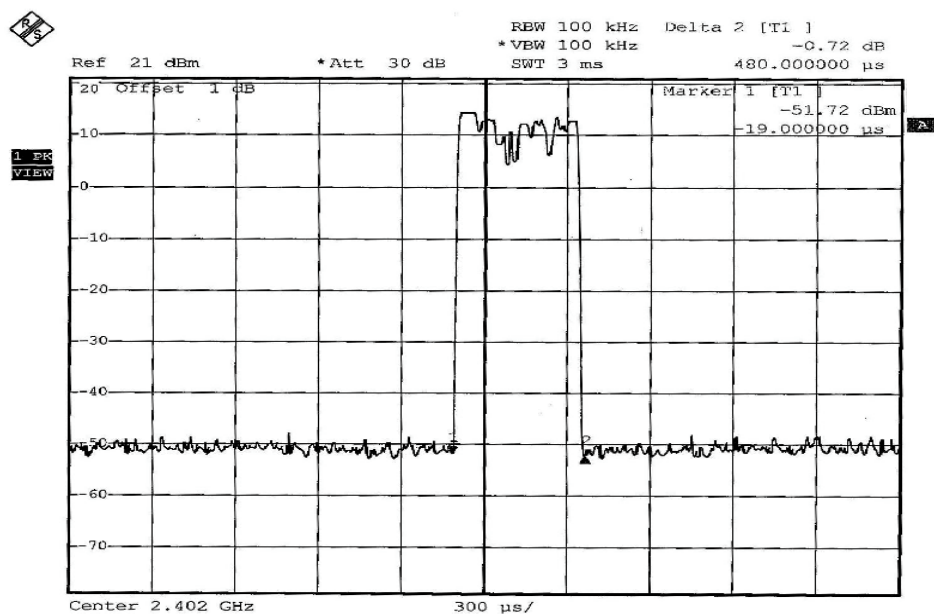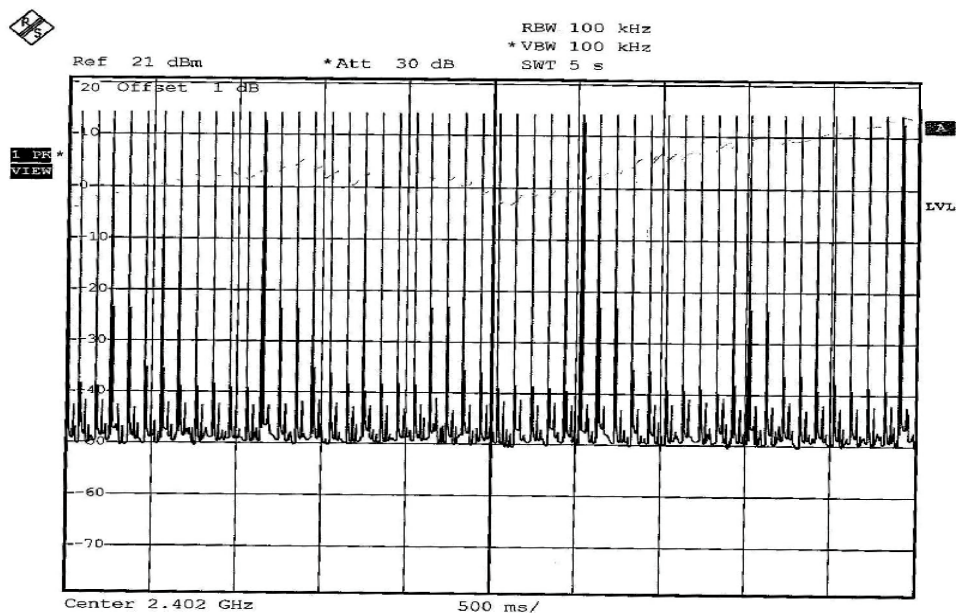

DH3

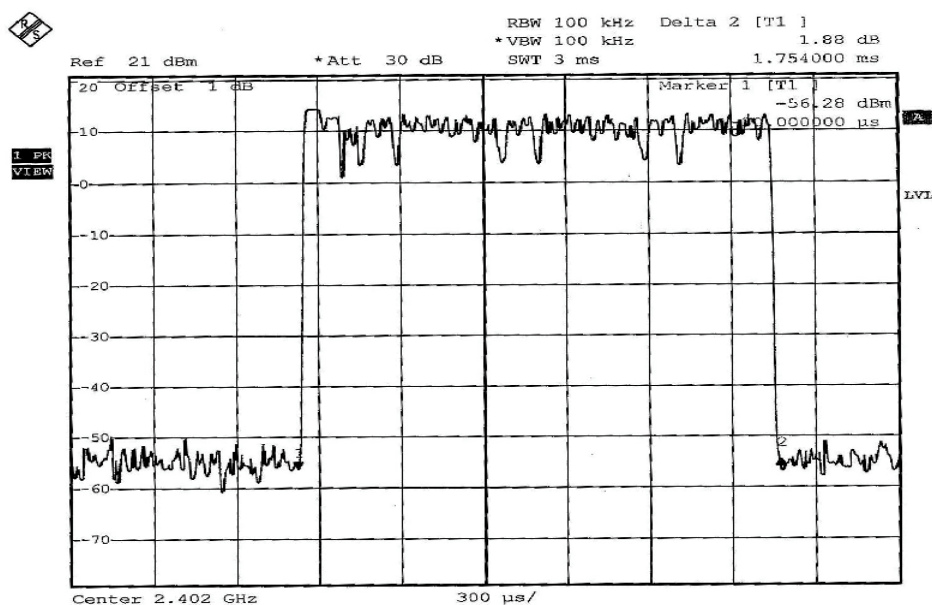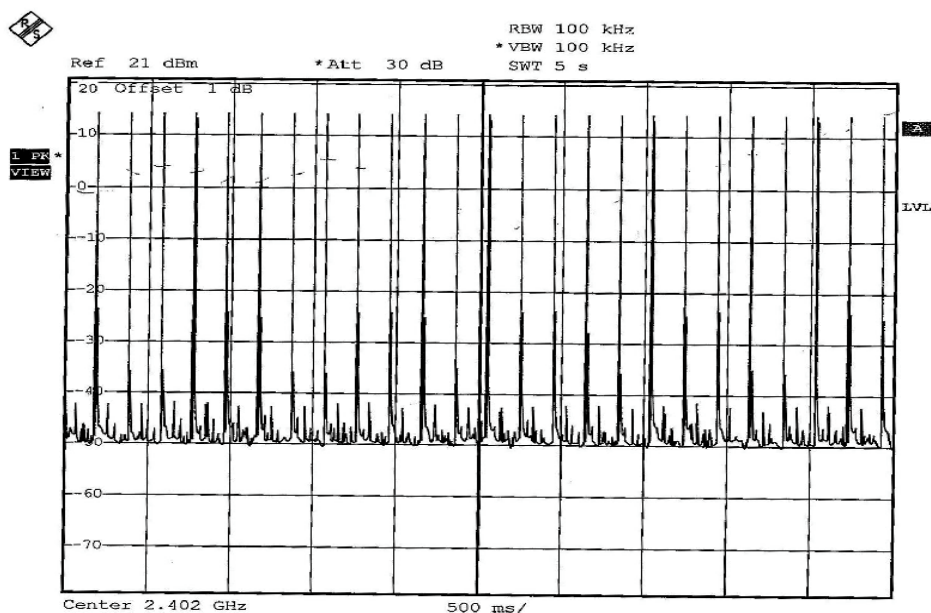

DH5

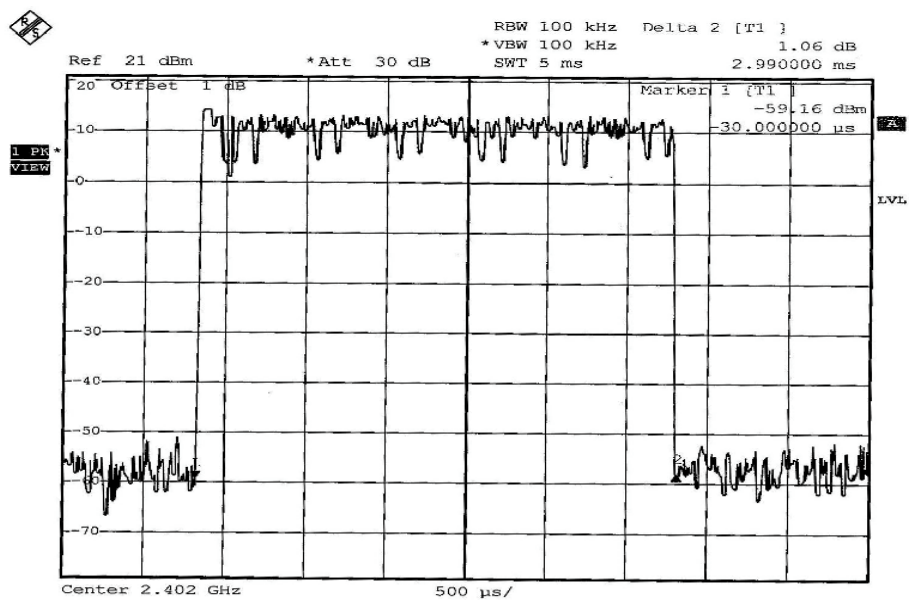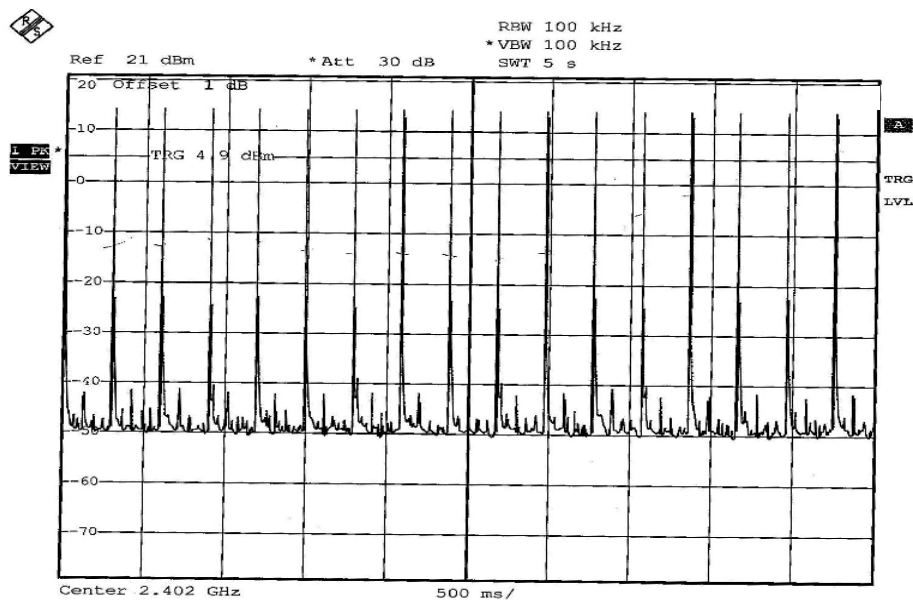

4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, the 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER | FSEK30 | 100049 | Aug. 14, 2006 |

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.5.7 TEST RESULTS


| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|-------------|--------------------------|-------------------------|
| MODULATION TYPE | GFSK | ENVIRONMENTAL CONDITIONS | 23deg. C, 54%RH, 991hPa |
| TESTED BY | Morgan Chen | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 20dB BANDWIDTH (MHz) |
|---------|-------------------------|----------------------|
| 0 | 2402 | 0.828 |
| 39 | 2441 | 0.879 |
| 78 | 2480 | 0.867 |


CH 0

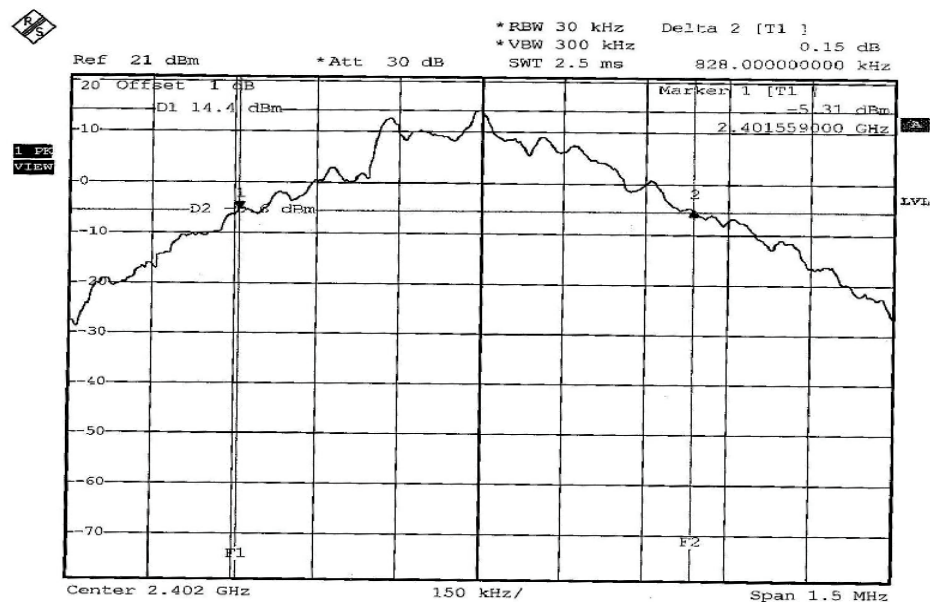

CH 39

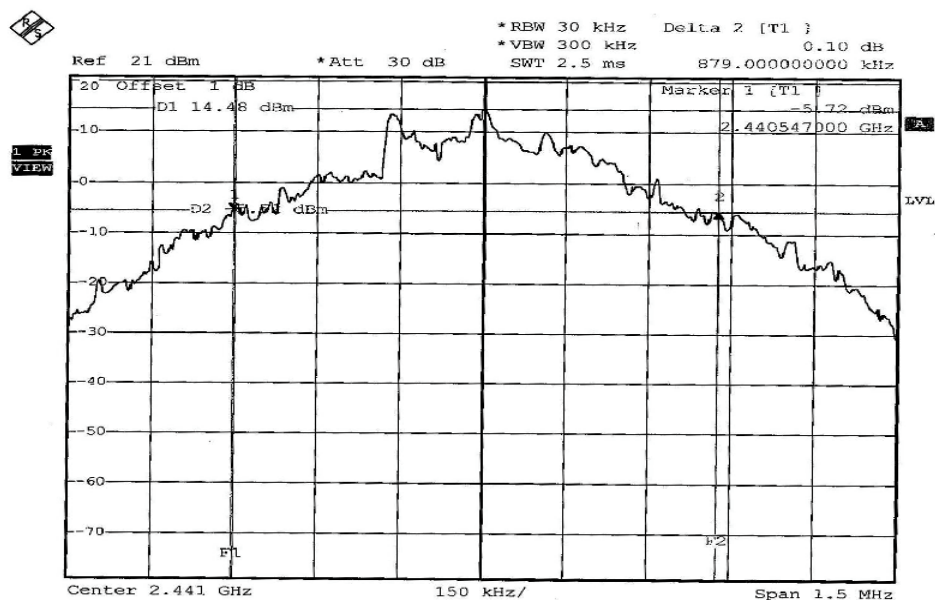

CH 78

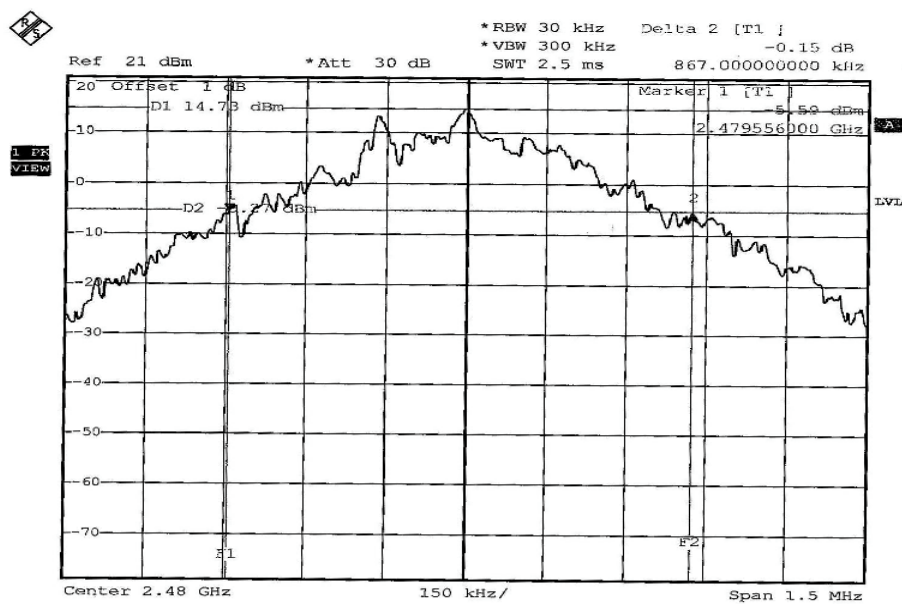

4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER | FSEK30 | 100049 | Aug. 14, 2006 |

NOTES: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 TEST SETUP




4.6.6 TEST RESULTS

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|-------------|--------------------------|-------------------------|
| MODULATION TYPE | GFSK | ENVIRONMENTAL CONDITIONS | 23deg. C, 54%RH, 991hPa |
| TESTED BY | Morgan Chen | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |


| CHANNEL | FREQUENCY (MHz) | ADJACENT CHANNEL SEPARATION (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-----------------|-----------------------------------|---------------------|-------------|
| 0 | 2402 | 1.005 | 0.828 | PASS |
| 39 | 2441 | 1.005 | 0.879 | PASS |
| 78 | 2480 | 1.005 | 0.867 | PASS |

NOTE: The minimum limit is 20dB bandwidth. Test results please refer to next two pages.


CH 0

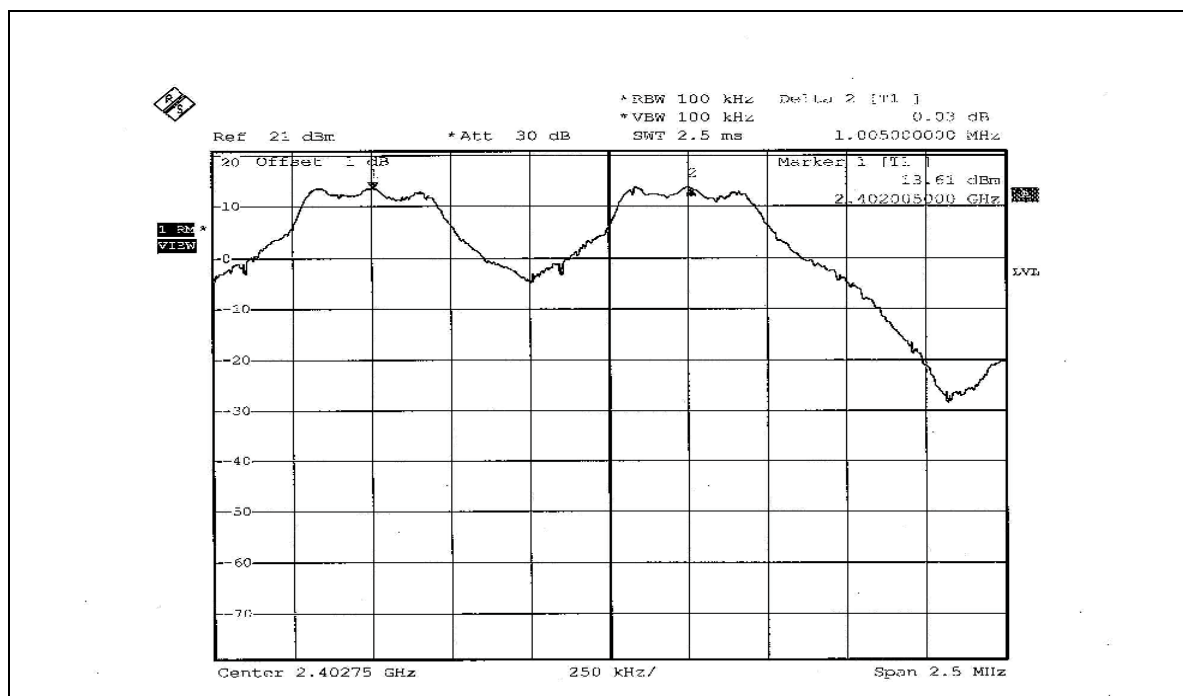

CH 39

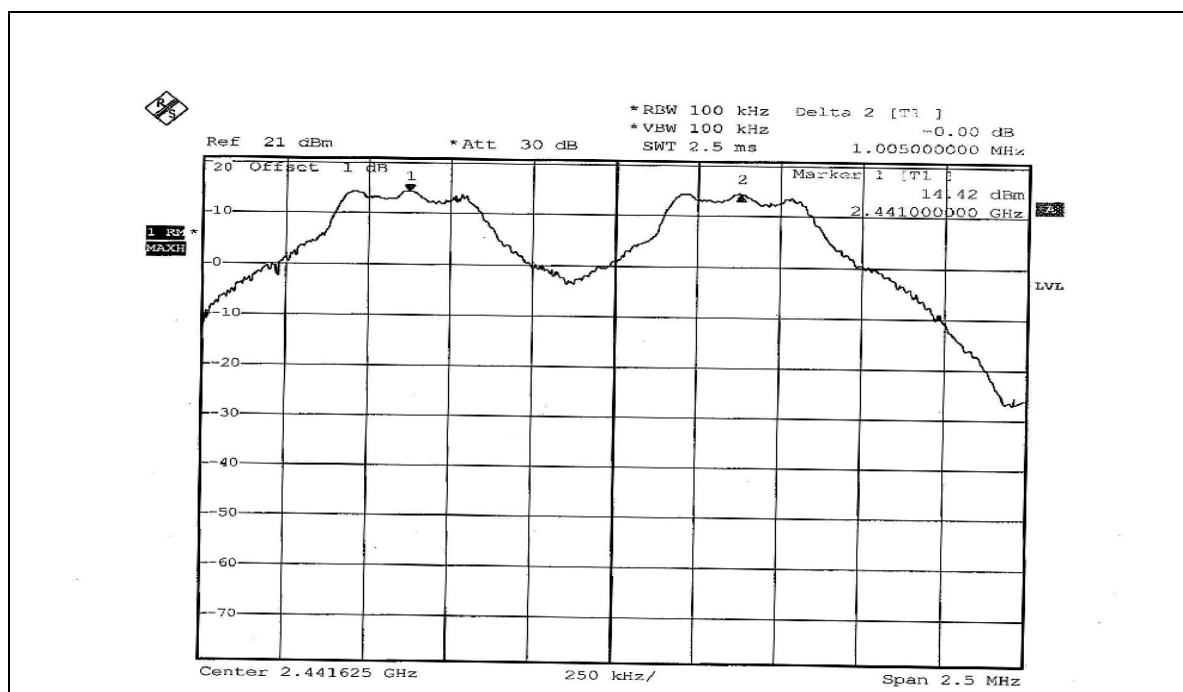

CH 78

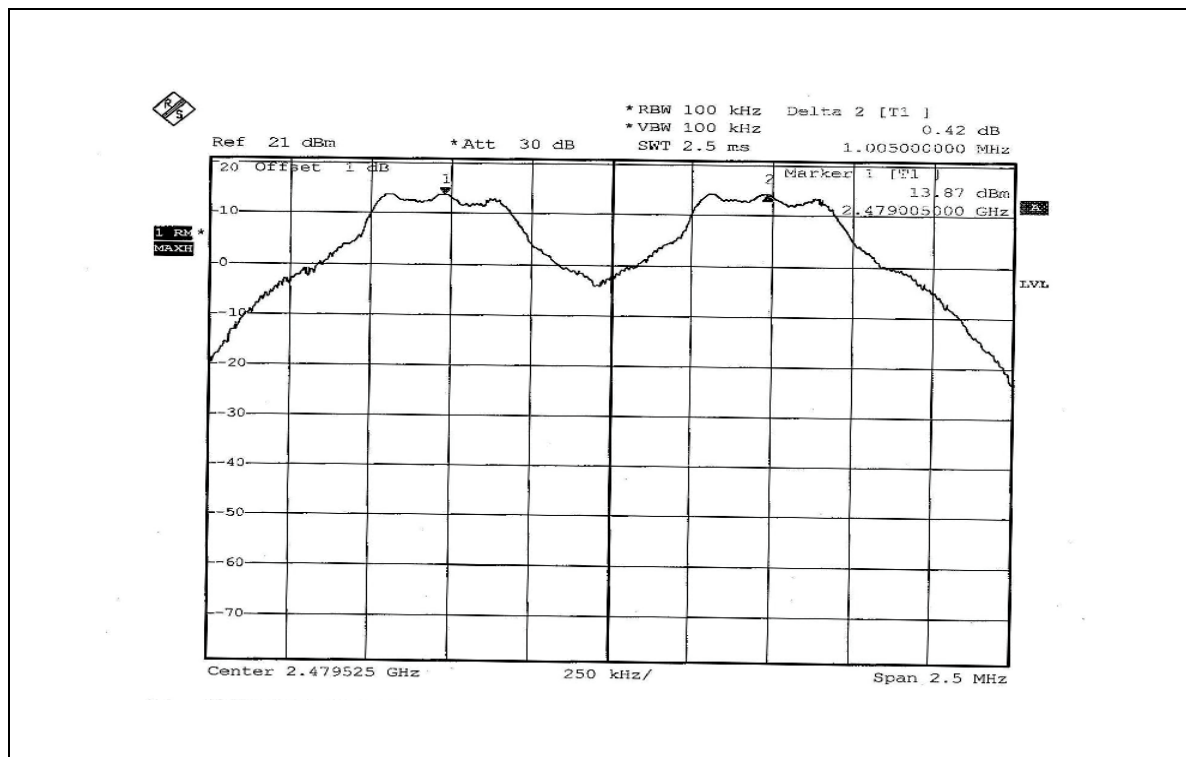

4.7 MAXIMUM PEAK OUTPUT POWER

4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.7.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER | FSEK30 | 100049 | Aug. 14, 2006 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.7.3 TEST PROCEDURES

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1 MHz RBW and 3 MHz VBW.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

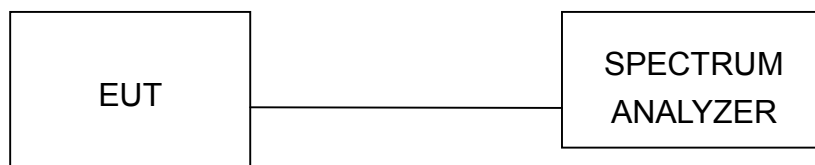

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.7.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.7 TEST RESULTS

| EUT TEST CONDITION | | MEASUREMENT DETAIL | |
|--------------------|-------------|--------------------------|-------------------------|
| MODULATION TYPE | GFSK | ENVIRONMENTAL CONDITIONS | 23deg. C, 54%RH, 991hPa |
| TESTED BY | Morgan Chen | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS/FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-----------|
| 0 | 2402 | 31.769 | 15.02 | 30 | PASS |
| 39 | 2441 | 31.623 | 15.00 | 30 | PASS |
| 78 | 2480 | 31.989 | 15.05 | 30 | PASS |

CH 78

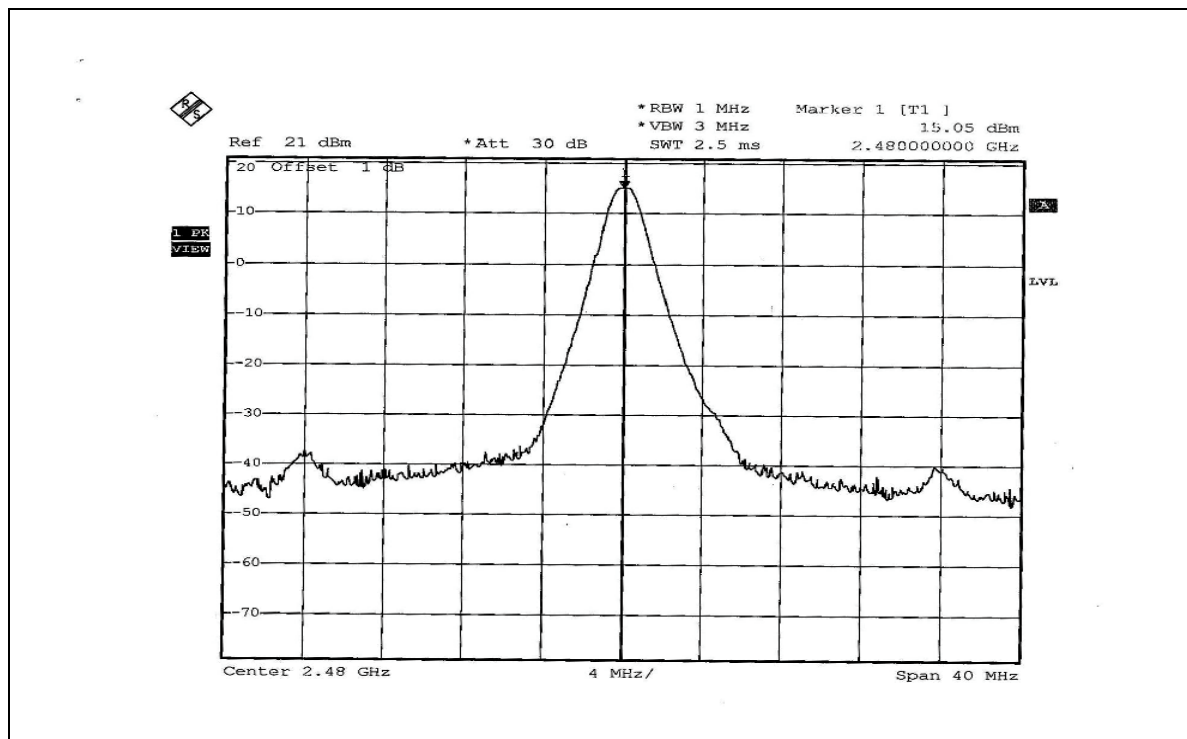

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER | FSEK30 | 100049 | Aug. 14, 2006 |

NOTES: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 EUT OPERATING CONDITION

The controlled method provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS

The spectrum plots are attached on the following 4 images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

NOTE 1:



The band edge emission plot on the next page shows 56.27dBc between carrier maximum power and local maximum emission in restrict band (2.38628GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 115.92dBuV/m (Peak), so the maximum field strength in restrict band is $115.92 - 56.27 = 59.65$ dBuV/m, which is under 74 dBuV/m limit.



The band edge emission plot on the next page shows 56.27dBc between carrier maximum power and local maximum emission in restrict band (2.38628GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 85.92dBuV/m (Average), so the maximum field strength in restrict band is $85.92 - 56.27 = 29.65$ dBuV/m, which is under 54 dBuV/m limit.

NOTE 2:

The band edge emission plot on the next second page shows 48.11dBc between carrier maximum power and local maximum emission in restrict band (2.48400GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2.7 is 116.72dBuV/m (Peak), so the maximum field strength in restrict band is $116.72 - 48.11 = 68.61$ dBuV/m, which is under 74 dBuV/m limit.

The band edge emission plot on the next second shows 48.11dBc between carrier maximum power and local maximum emission in restrict band (2.484400GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2.7 is 86.72dBuV/m (Average), so the maximum field strength in restrict band is $86.72 - 48.11 = 38.61$ dBuV/m, which is under 54 dBuV/m limit.

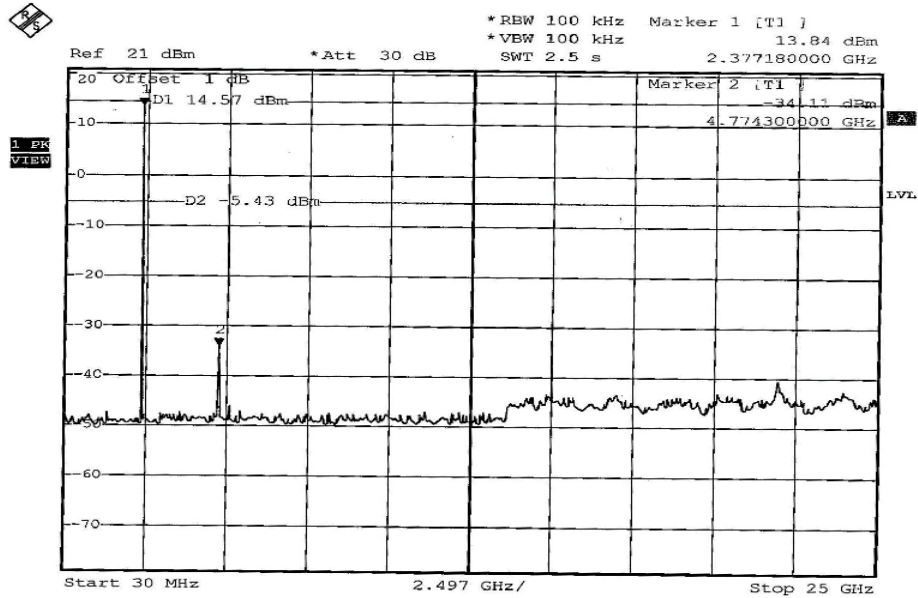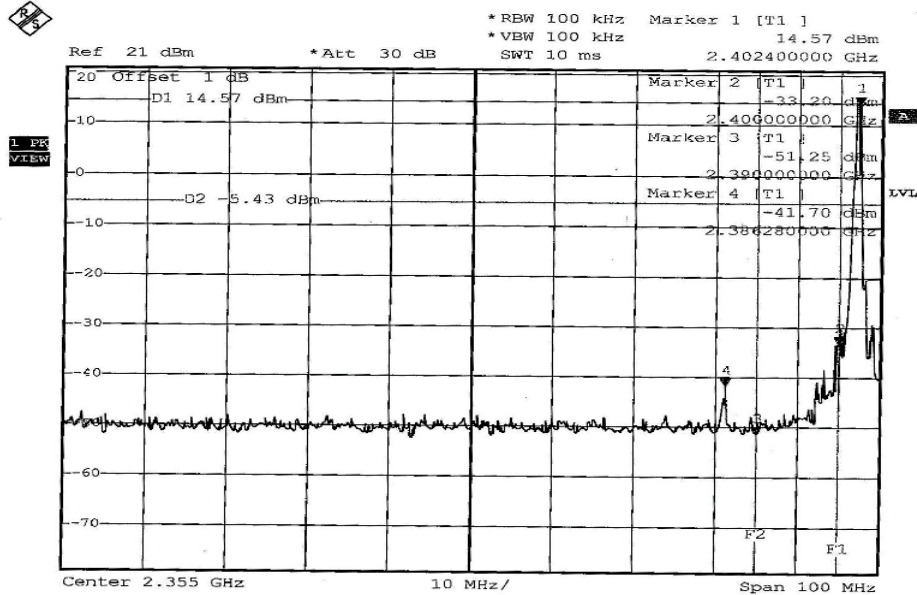

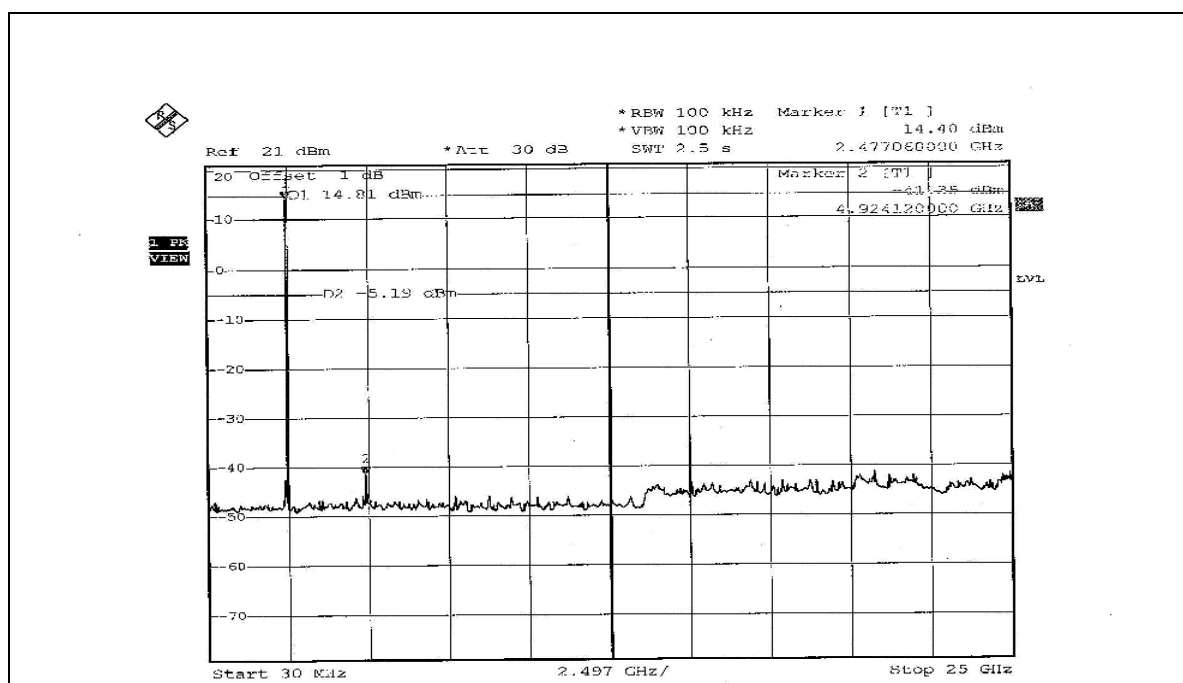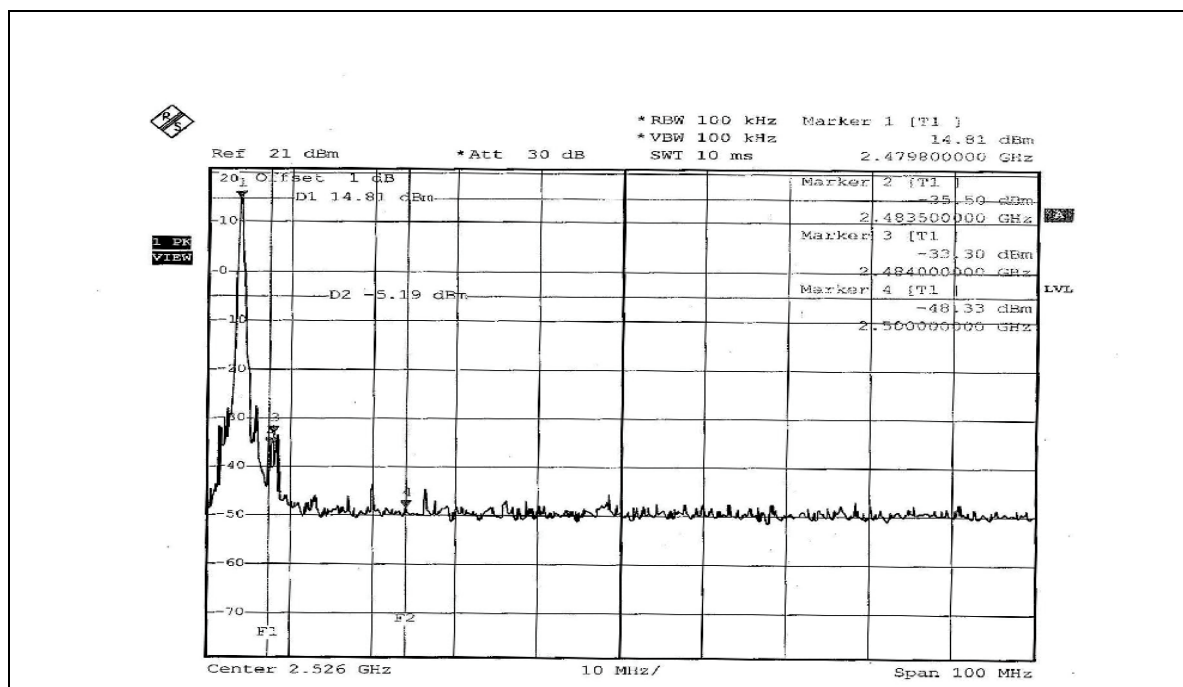

4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with Reverse SMA antenna connector. The maximum gain of this antenna is 2dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST MODE A




MODE B



RADIATED EMISSION TEST MODE A



MODE B

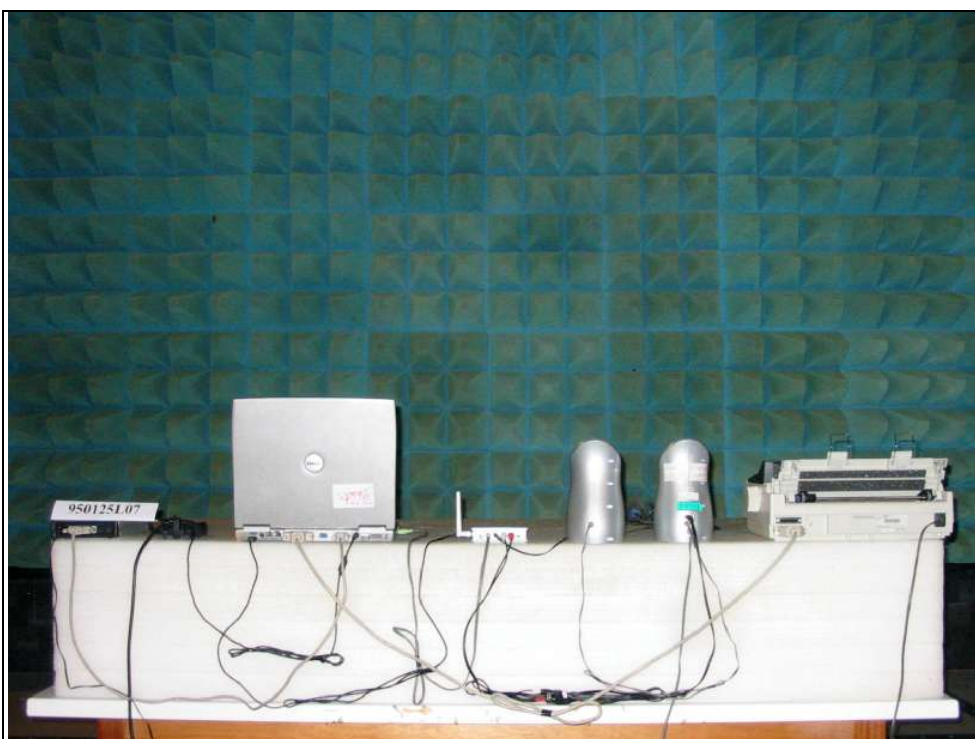

6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

| | |
|--------------------|-----------------------|
| USA | FCC, UL, A2LA |
| Germany | TUV Rheinland |
| Japan | VCCI |
| Norway | NEMKO |
| Canada | INDUSTRY CANADA , CSA |
| R.O.C. | CNLA, BSMI, DGT |
| Netherlands | Telefication |
| Singapore | PSB , GOST-ASIA(MOU) |
| Russia | CERTIS(MOU) |

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.