



# TEST REPORT

Applicant Name : Quanzhou longtuo electronic technology co.,Ltd  
Address : No.17-20, building 16, chenghui international, zone B, xiamei, quanzhou  
Fujian, China  
Report Number : RA221103-51377E-RF-00A  
FCC ID: 2AWL3-TDH8

**Test Standard (s)**  
FCC PART 15.247

## Sample Description

Product Type: Radio  
Model No.: TD-H8, TD-H9, TD-H10, TD-H11, TD-UV9R, TD-UV13,  
TD-UV68, TD-UV78, TD-UV88, TD-V738, TD-V730  
Trade Name: TIDRADIO, TID  
Date Received: 2022-11-03  
Date of Test: 2022-11-08 to 2022-11-19  
Report Date: 2023-01-09

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

*Roger.Ling*

Roger.Ling  
EMC Engineer

## Approved By:

*Candy.Li*

Candy Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '\*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

## **TABLE OF CONTENTS**

<b>DOCUMENT REVISION HISTORY .....</b>	<b>3</b>
<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES .....	6
EQUIPMENT MODIFICATIONS .....	6
DUTY CYCLE .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	8
BLOCK DIAGRAM OF TEST SETUP .....	9
<b>SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>11</b>
<b>FCC §1.1307 (b) &amp; §2.1093 – RF EXPOSURE .....</b>	<b>12</b>
TEST RESULT .....	12
<b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
ANTENNA CONNECTOR CONSTRUCTION .....	13
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
EUT SETUP.....	14
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	15
TEST PROCEDURE .....	15
FACTOR & MARGIN CALCULATION .....	15
TEST DATA .....	15
<b>FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH &amp; OCCUPIED BANDWIDTH.....</b>	<b>21</b>
APPLICABLE STANDARD .....	21
TEST PROCEDURE .....	21
TEST DATA .....	21
<b>FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>25</b>
APPLICABLE STANDARD .....	25
TEST PROCEDURE .....	25
TEST DATA .....	25
<b>FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST DATA .....	28
<b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>	<b>30</b>
APPLICABLE STANDARD .....	30
TEST PROCEDURE .....	30
TEST DATA .....	30

**DOCUMENT REVISION HISTORY**

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA221103-51377E-RF-00A	Original Report	2023-01-09

**GENERAL INFORMATION****Product Description for Equipment under Test (EUT)**

Product	Radio
Tested Model	TD-H8
Multiple Model	TD-H9, TD-H10, TD-H11, TD-UV9R, TD-UV13, TD-UV68, TD-UV78, TD-UV88, TD-V738, TD-V730
Model Differences	Please refer to the DoS letter
Frequency Range	BLE 1M: 2402~2480MHz
Maximum conducted Peak output power	0.07dBm
Modulation Technique	GFSK
Antenna Specification*	Internal Antenna: 2.0dBi(provided by the applicant)
Voltage Range	DC 7.4V from battery DC 8.4V from Charger Base (Note: Only Charging Base charging mode.) DC 12V from adapter for Charger base
Sample number	RA221103-51377E-RF-RF-S1 (RF Radiated Test) RA221103-51377E-RF-RF-S2 (RF Conducted Test) (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: RSF-DY077B-1200500US Input: 100~240V-50/60Hz 0.5A Output: 12V = 0.5A

**Objective**

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules.

**Test Methodology**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		$0.082 \times 10^{-7}$
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor  $K$  with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
...	...	...	...
...	...	...	...
...	...	...	...
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

### EUT Exercise Software

Software “EMI\_TEST\_1.9”\* was used during testing and the power level was 0.6\*.

### Special Accessories

No special accessory.


### Equipment Modifications

No modification was made to the EUT tested.


### Duty Cycle

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
BLE_1M	Ant1	2402	50.00	50.00	100.00
		2440	50.00	50.00	100.00
		2480	50.00	50.00	100.00


Low Channel

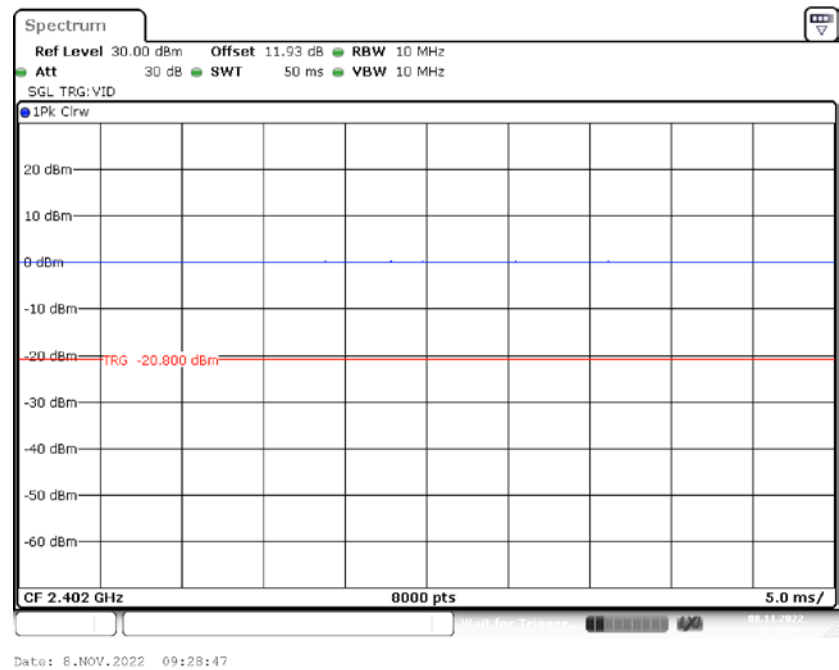

Middle Channel

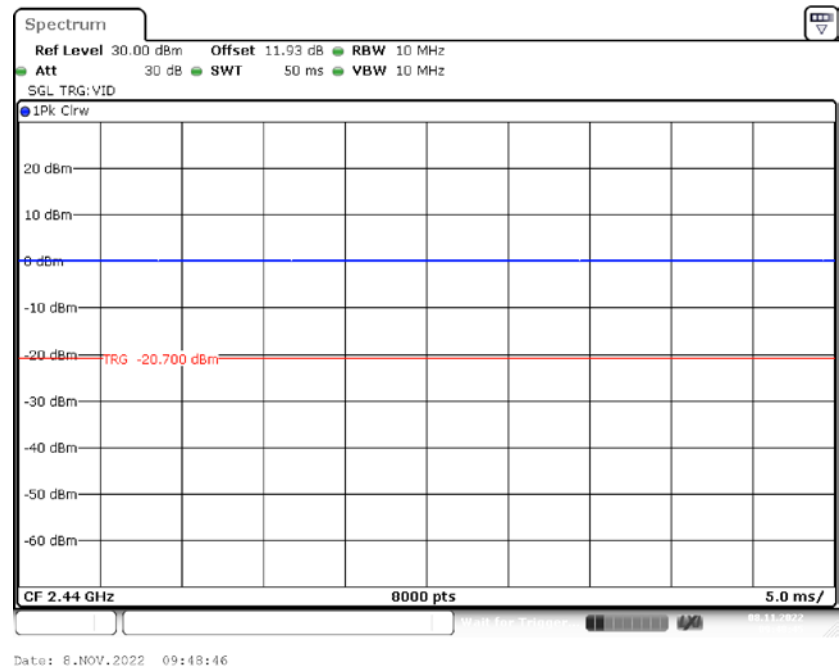

High Channel

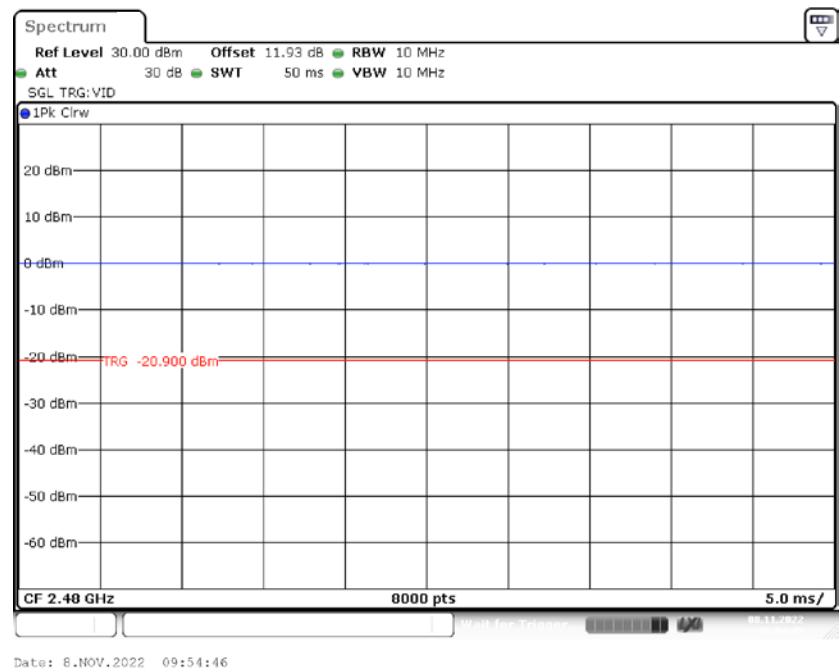

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/


External I/O Cable

Cable Description	Length (m)	From/Port	To
/	/	/	/



**Block Diagram of Test Setup**

For Radiated Emissions:

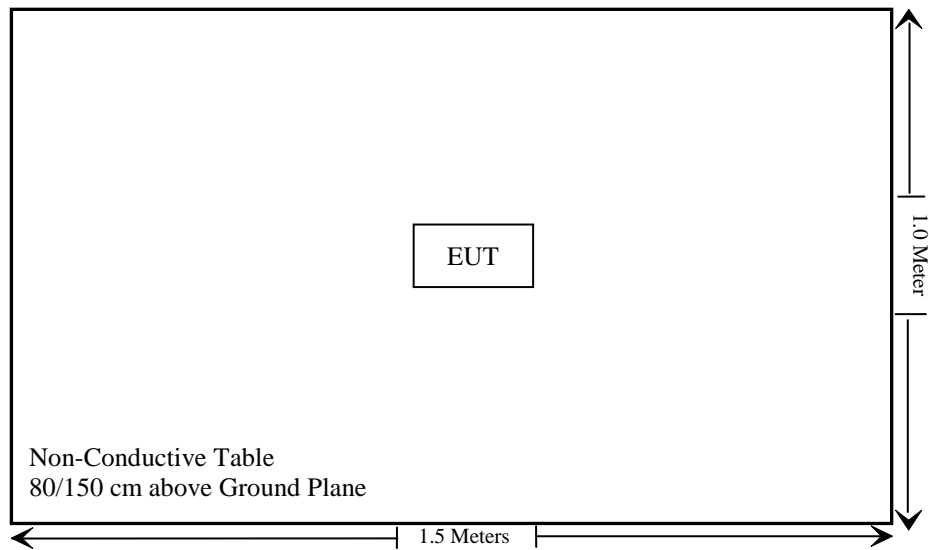

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§1.1307(b) §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

Not Applicable: The device was powered by battery when use Bluetooth function.

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2021/12/13	2022/12/12
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2021/12/13	2022/12/12
WEINSCHL	10dB Attenuator	5324	AU 3842	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.33	RF-03	Each time	

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §1.1307 (b) & §2.1093 – RF EXPOSURE

### Applicable Standard

According to FCC §2.1093 and §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.3.1-SAR-Based Exemption:

A more comprehensive exemption, considering a variable power threshold that depends on both the separation distance and power, is provided in § 1.1307(b)(3)(i)(B). This exemption is applicable to the frequency range between 300 MHz and 6 GHz, with test separation distances between 0.5 cm and 40 cm, and for all RF sources in fixed, mobile, and portable device exposure conditions.

Accordingly, a RF source is considered an RF exempt device if its available maximum time-averaged (matched conducted) power or its effective radiated power (ERP), whichever is greater, are below a specified threshold. This exemption threshold was derived based on general population 1-g SAR requirements and is detailed in Appendix C.

### Test Result

For worst case:

Mode	Frequency	Maximum Tune-up Conducted Power	Antenna Gain		ERP	Distance	SAR-Based Exclusion Threshold		SAR-Based Exclusion
	(MHz)	(dBm)	(dBi)	(dBd)	(dBm)	(mm)	(mW)	(dBm)	
BLE	2402-2480	1	2	-0.15	0.85	5	2.72	4.34	Yes

Note 1: The tune-up power was declared by the applicant.

Note 2: 0dBd=2.15dBi.

**Result:** Compliant.

---

**FCC §15.203 – ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



**Antenna Connector Construction**

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 2.0dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliant.

**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS****Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

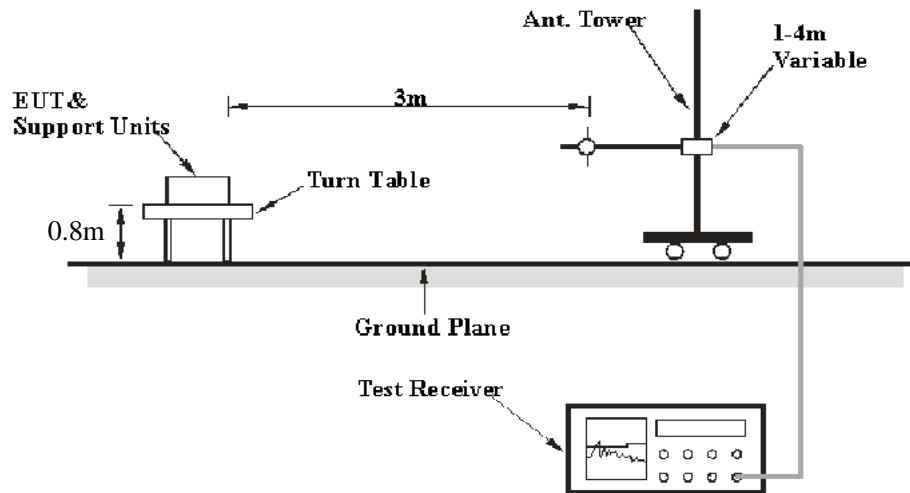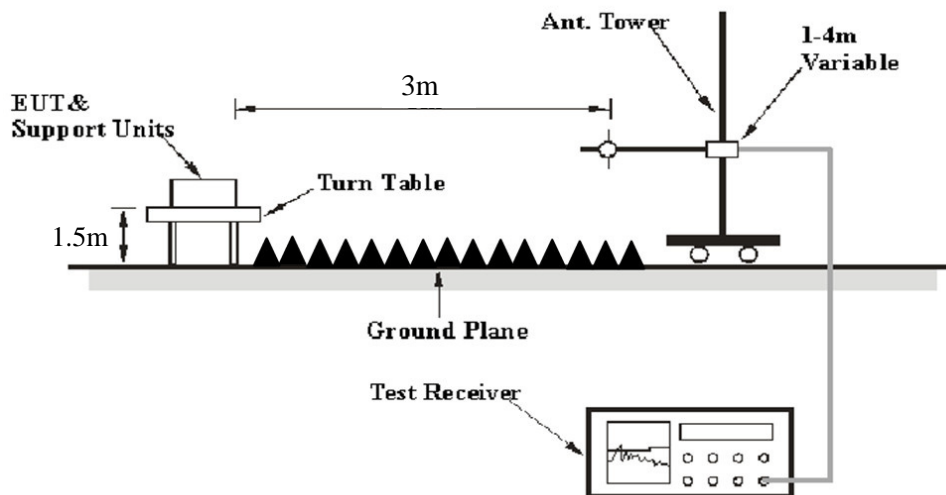**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10Hz*	/	Ave.
	1 MHz	1/T**	/	Ave.

Note: \* for duty cycle  $\geq 98\%$

\*\*for duty cycle  $< 98\%$ , and T is maximum transmission duration.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP/Average measurement

## Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$


## Test Data

### Environmental Conditions

Temperature:	24°C
Relative Humidity:	58%
ATM Pressure:	101.0kPa

The testing was performed by Jimi Zheng on 2022-11-19.


EUT operation mode: Transmitting (Scan with BLE 1M mode at X axis, Y axis, Z axis, the worst case is at X axis)

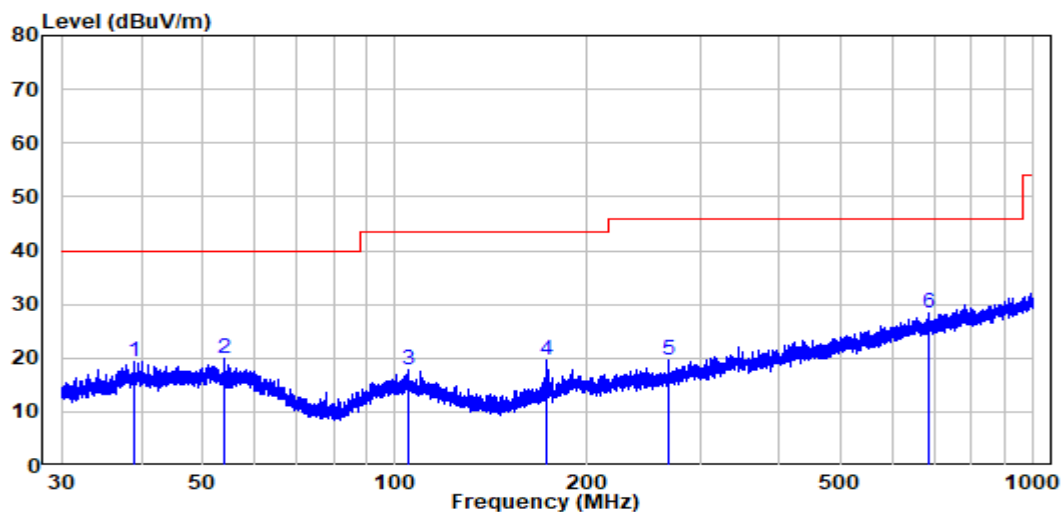**Below 1GHz: (worst case High Channel)****Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : RA221103-51377E-RF  
Test Mode: BLE Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	39.110	-10.56	29.88	19.32	40.00	-20.68	Peak
2	53.882	-10.33	30.12	19.79	40.00	-20.21	Peak
3	104.765	-11.81	29.61	17.80	43.50	-25.70	Peak
4	172.978	-13.28	32.79	19.51	43.50	-23.99	Peak
5	267.428	-10.34	29.85	19.51	46.00	-26.49	Peak
6	683.546	-1.50	29.95	28.45	46.00	-17.55	Peak

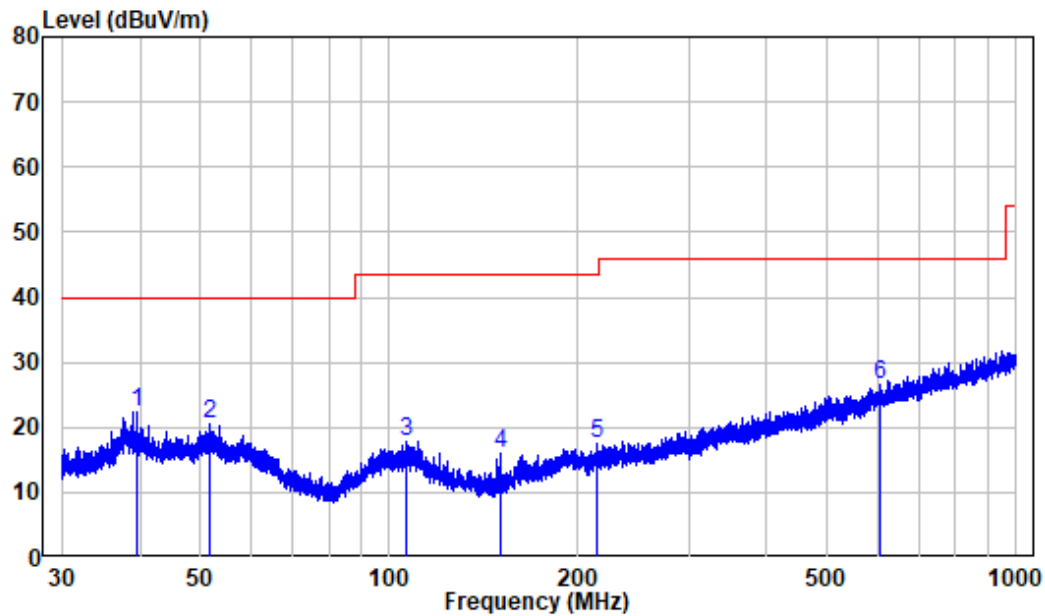

**Vertical**

Site : chamber  
Condition: 3m VERTICAL  
Job No. : RA221103-51377E-RF  
Test Mode: BLE Transmitting

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	39.506	-10.46	32.94	22.48	40.00	-17.52	Peak
2	51.752	-9.97	30.57	20.60	40.00	-19.40	Peak
3	106.665	-11.94	29.79	17.85	43.50	-25.65	Peak
4	150.011	-15.27	31.35	16.08	43.50	-27.42	Peak
5	215.079	-11.68	29.23	17.55	43.50	-25.95	Peak
6	608.053	-2.35	28.85	26.50	46.00	-19.50	Peak

**Above 1GHz:**

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
BLE 1M, Low Channel									
2310	45.03	PK	242	1.5	H	-7.23	37.8	74	-36.2
2310	47.55	PK	306	1.8	V	-7.23	40.32	74	-33.68
2390	47.64	PK	163	1.2	H	-7.21	40.43	74	-33.57
2390	46.86	PK	245	1.1	V	-7.21	39.65	74	-34.35
4804	52.4	PK	163	1.2	H	-3.52	48.88	74	-25.12
4804	49.5	PK	245	1.1	V	-3.52	45.98	74	-28.02
7206	53.08	PK	163	1.2	H	2.71	55.79	74	-18.21
7206	45.98	AV	163	1.2	H	2.71	48.69	54	-5.31
7206	55.73	PK	279	1.4	V	2.71	58.44	74	-15.56
7206	48.61	AV	279	1.4	V	2.71	51.32	54	-2.68
BLE 1M, Middle Channel									
4880	51.76	PK	128	1.3	H	-3.38	48.38	74	-25.62
4880	50.51	PK	358	1.2	V	-3.38	47.13	74	-26.87
7320	49.94	PK	310	2.1	H	3.31	53.25	74	-20.75
7320	49.04	PK	303	1.1	V	3.31	52.35	74	-21.65
BLE 1M, High Channel									
2483.5	44.69	PK	150	1.5	H	-7.2	37.49	74	-36.51
2483.5	45.94	PK	158	2.2	V	-7.2	38.74	74	-35.26
2500	45.29	PK	112	1.3	H	-7.18	38.11	74	-35.89
2500	46.81	PK	304	2.1	V	-7.18	39.63	74	-34.37
4960	52.85	PK	112	1.3	H	-3.01	49.84	74	-24.16
4960	50.44	PK	304	2.1	V	-3.01	47.43	74	-26.57
7440	49.76	PK	115	2.1	H	3.52	53.28	74	-20.72
7440	47.63	PK	233	1.9	V	3.52	51.15	74	-22.85

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Factor + Reading

Margin = Absolute Level - Limit


The other spurious emission which is in the noise floor level was not recorded.

For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.


1 GHz - 18 GHz: (Pre-Scan plots)



Worst case Low Channel

Horizontal

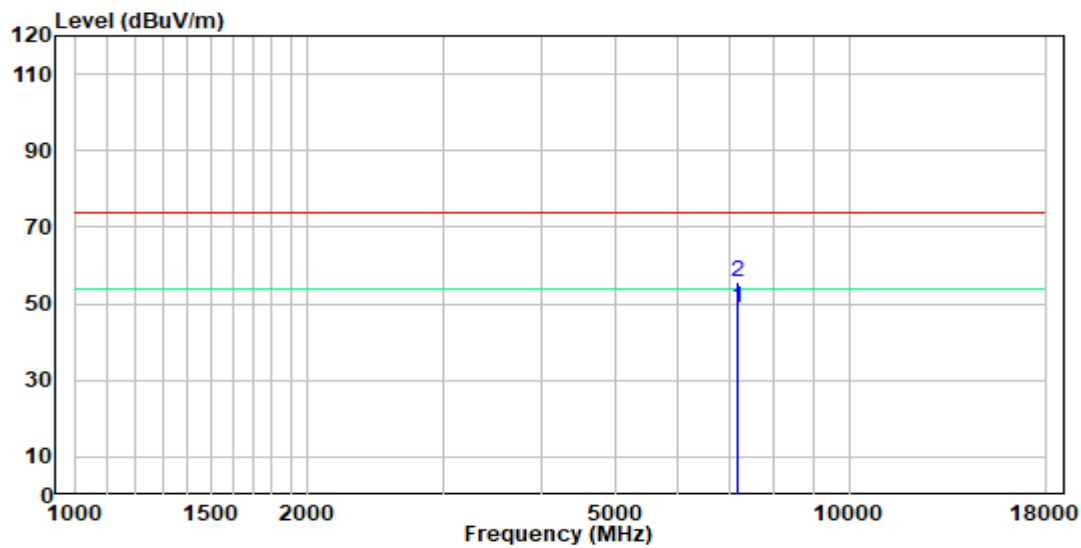

Vertical

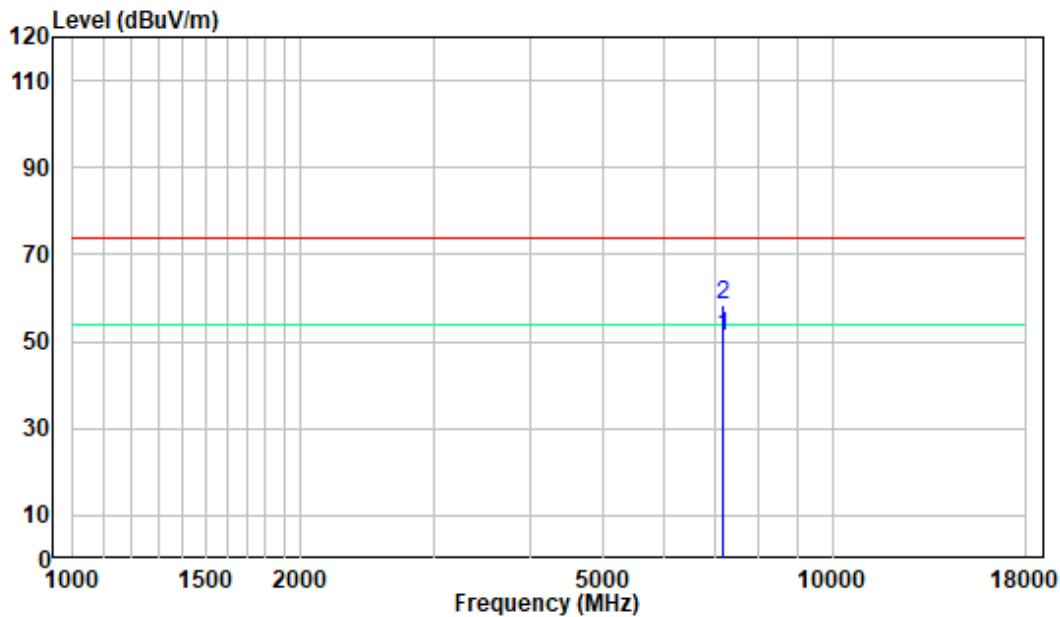

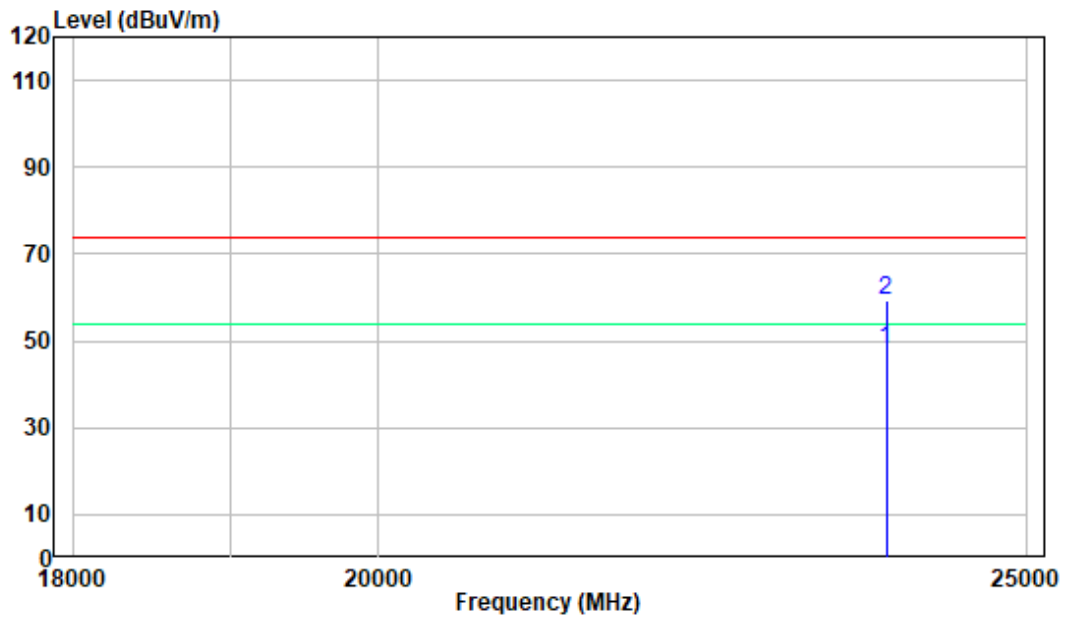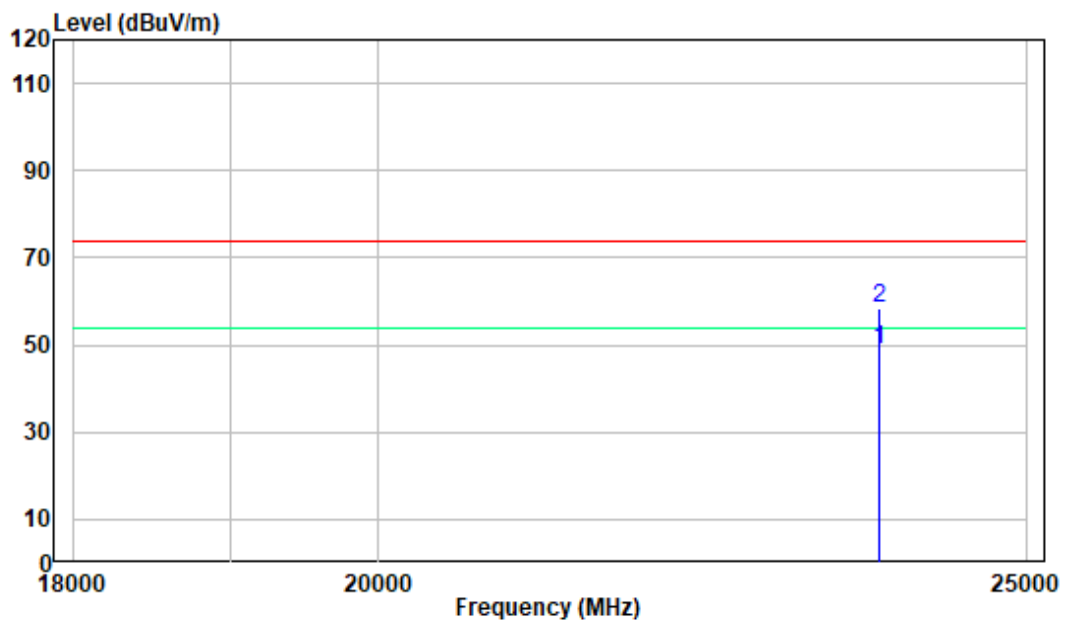**18-25GHz: (Pre-Scan plots)****Worst case Low Channel****Horizontal****Vertical**


## FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH

### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



### Test Data

#### Environmental Conditions

Temperature:	25°C
Relative Humidity:	48%
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2022-11-08.

EUT operation mode: Transmitting

### Test Result


Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.700	0.5	PASS
		2440	0.720	0.5	PASS
		2480	0.712	0.5	PASS

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.039	2401.497	2402.535	---	PASS
		2440	1.051	2439.489	2440.539	---	PASS
		2480	1.047	2479.493	2480.539	---	PASS


Please refer to the below plots:

## 6 dB EMISSION BANDWIDTH:


## Low Channel

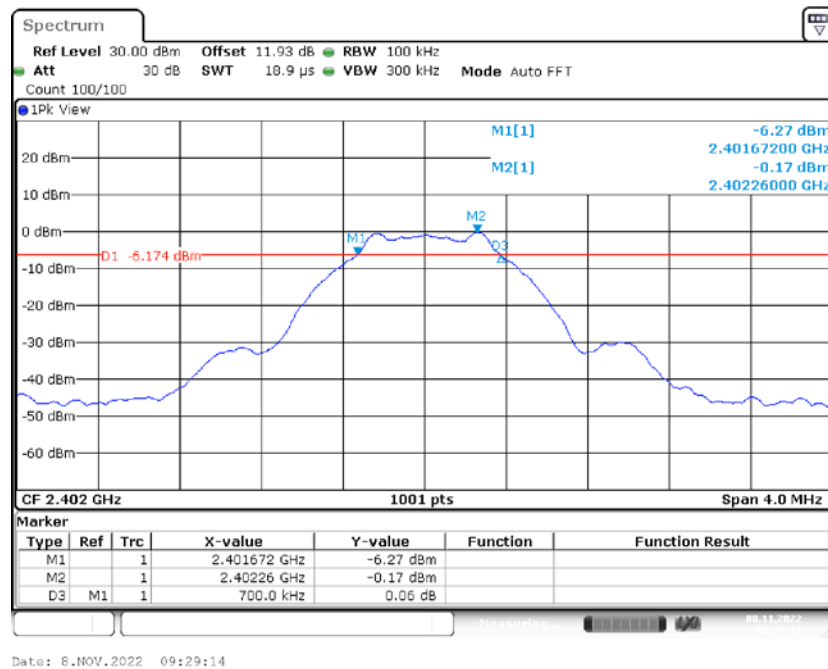

## Middle Channel

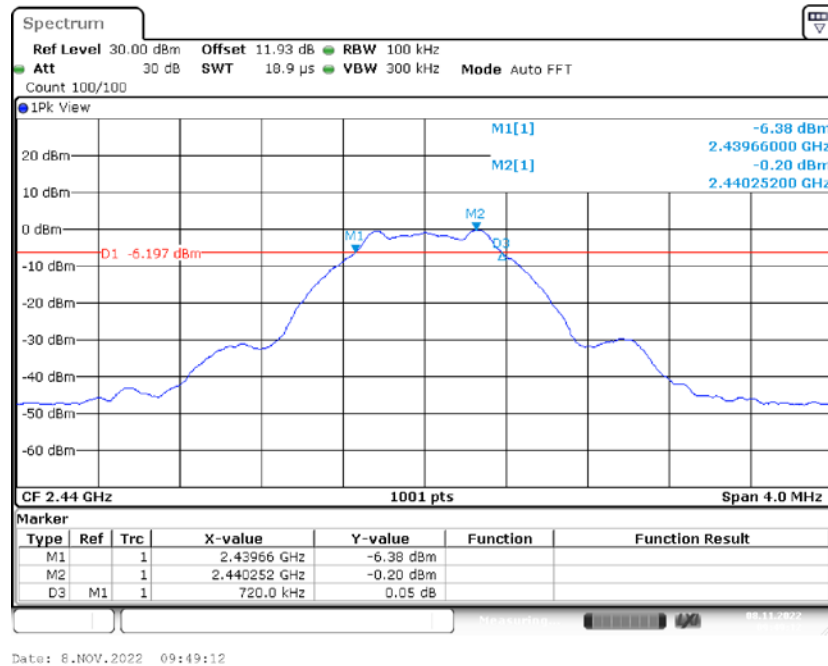


### High Channel

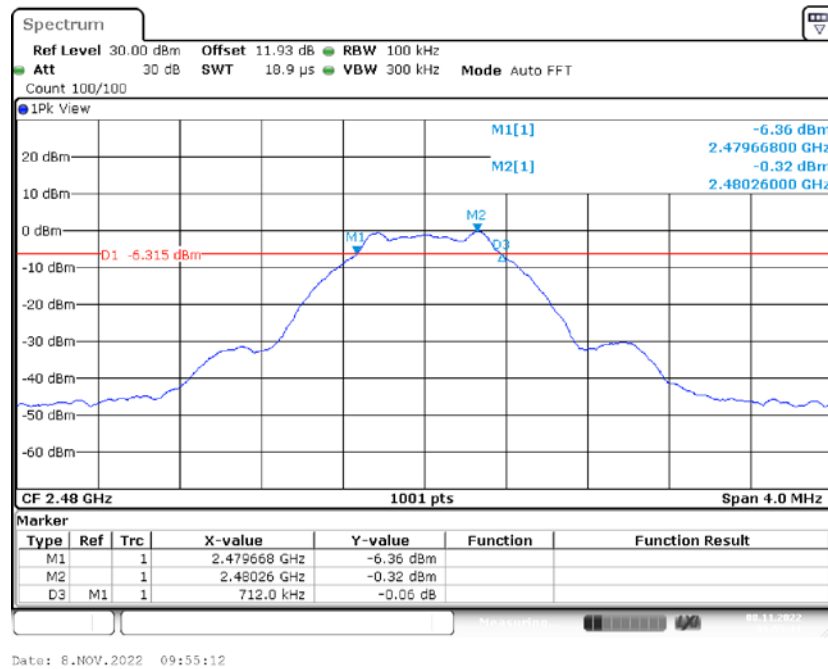


99% OCCUPIED BANDWIDTH:


### Low Channel

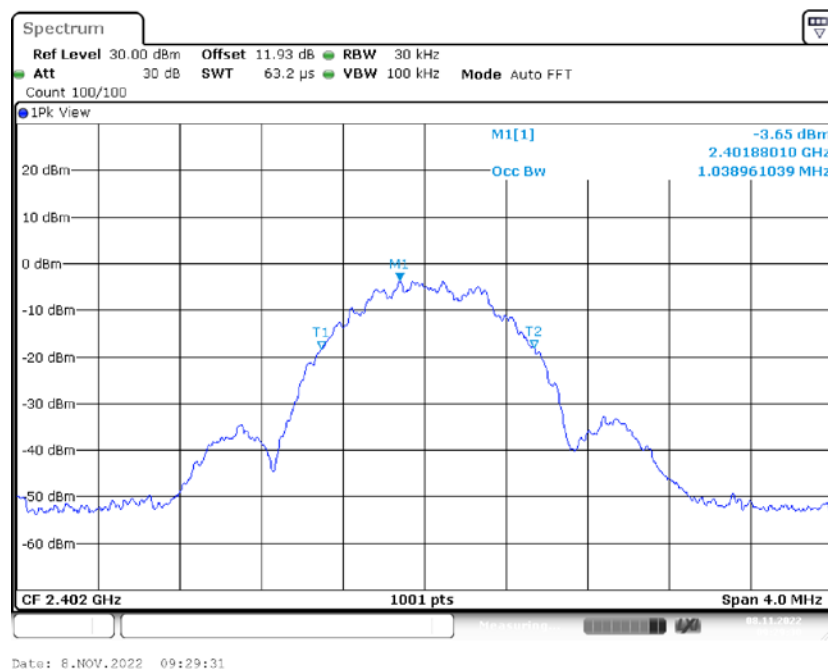

## Middle Channel

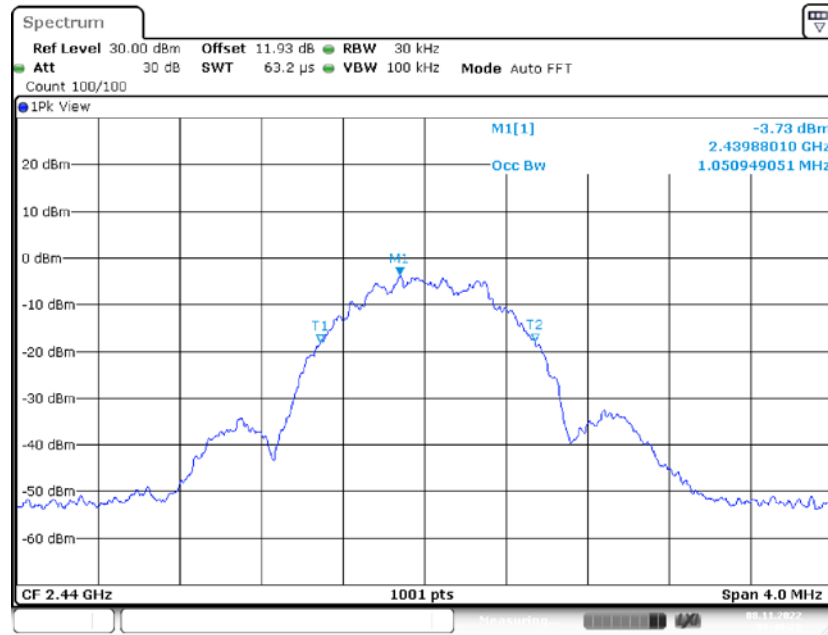

## High Channel

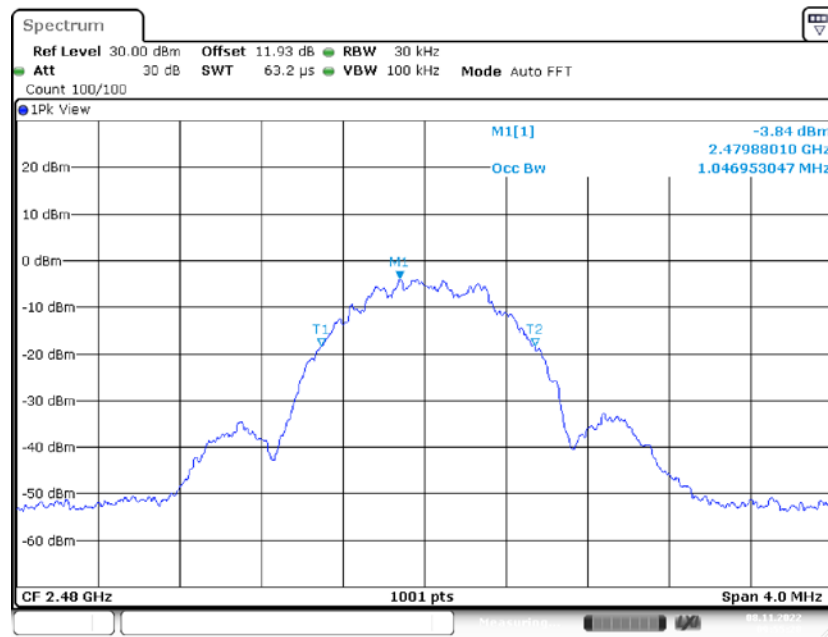




## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



### Test Data

#### Environmental Conditions

Temperature:	24°C
Relative Humidity:	48%
ATM Pressure:	101.0 kPa



The testing was performed by Glenn Jiang on 2022-11-08.

EUT operation mode: Transmitting


### Test Result

Test Mode	Antenna	Channel	Conducted peak output power[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	0.05	<=30	PASS
		2440	<b>0.07</b>	<=30	PASS
		2480	-0.06	<=30	PASS

Please refer to the below plots:

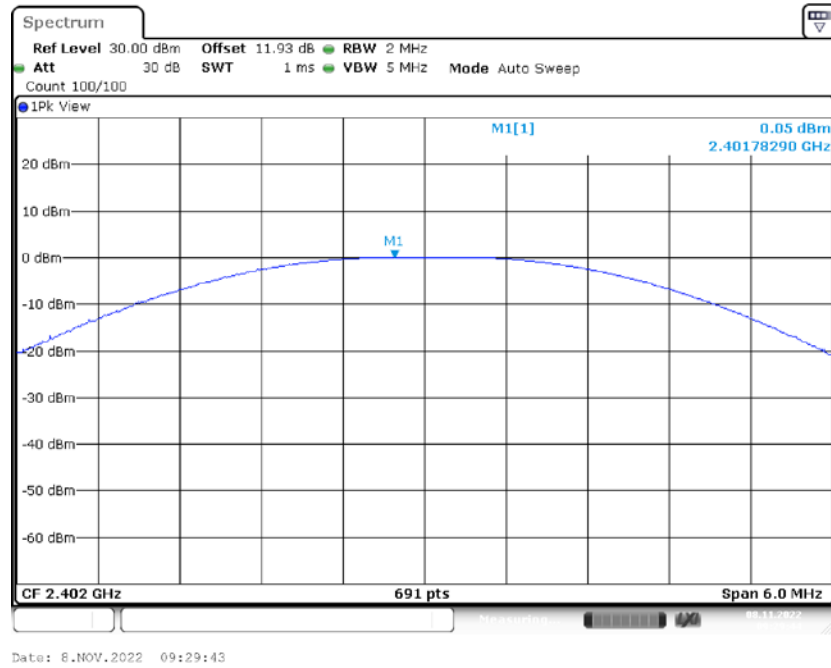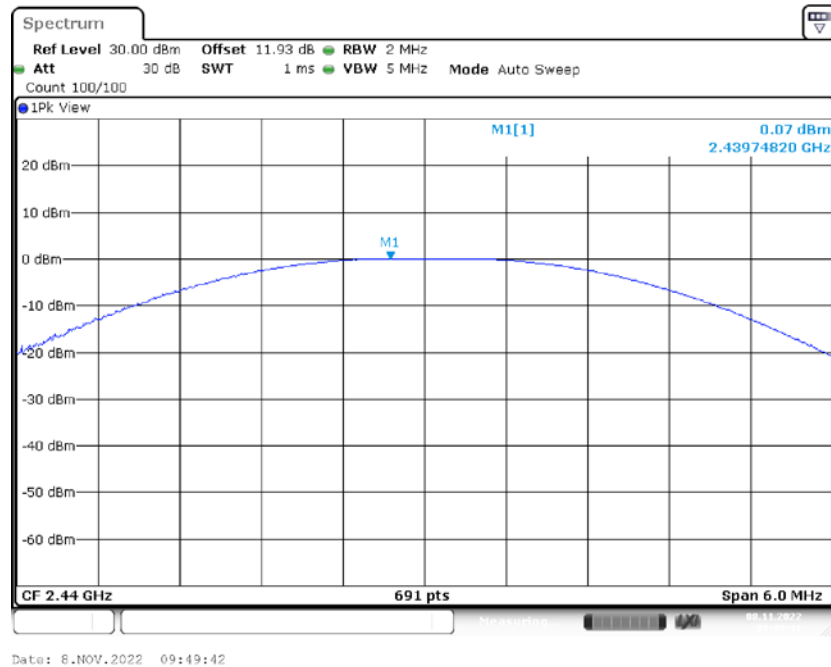**Maximum conducted output power****Low Channel****Middle Channel**

## High Channel

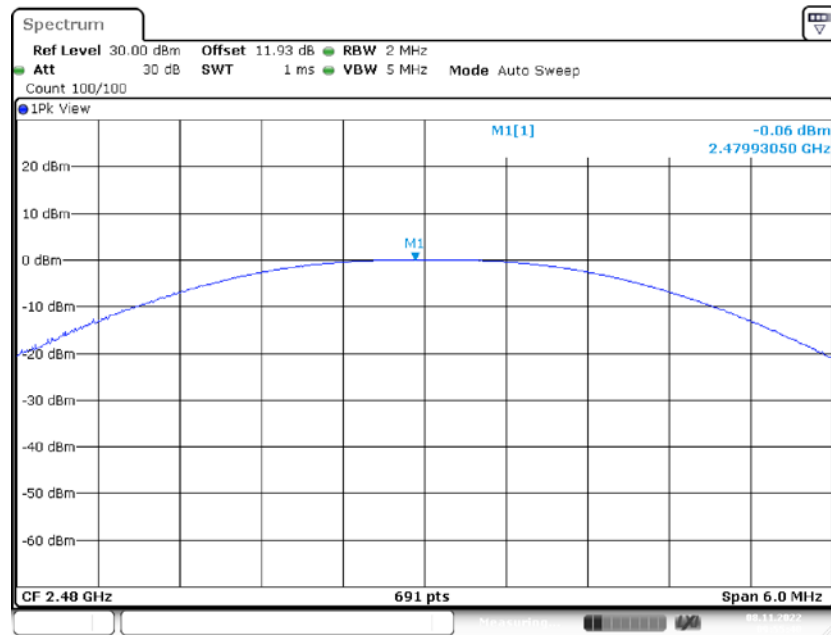

Date: 8.NOV.2022 09:55:41


## FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



### Test Data

#### Environmental Conditions

<b>Temperature:</b>	24°C
<b>Relative Humidity:</b>	48%
<b>ATM Pressure:</b>	101.0 kPa


*The testing was performed by Glenn Jiang on 2022-11-08.*

*EUT operation mode: Transmitting*

Test Result: Compliant.


Please refer to the below plots:

Low Channel

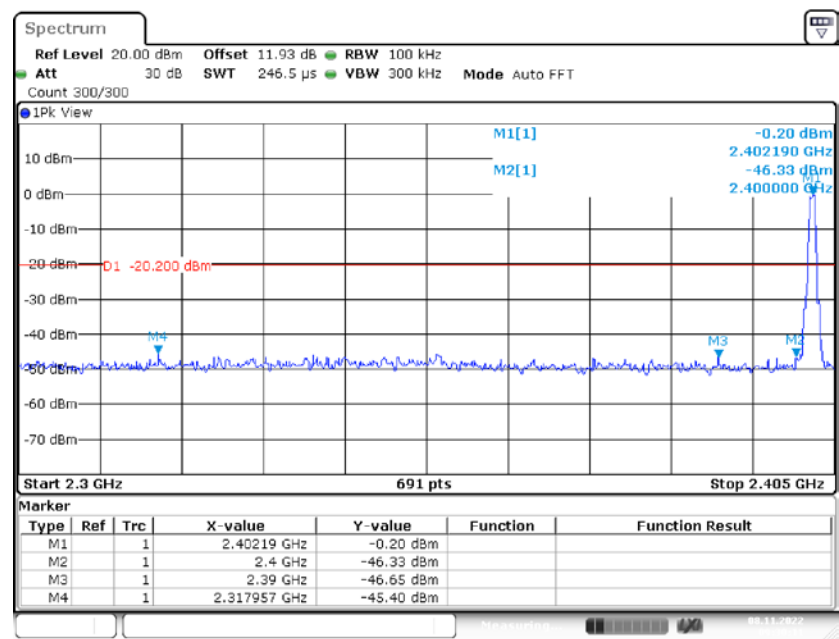

Date: 8.NOV.2022 09:30:10

High Channel

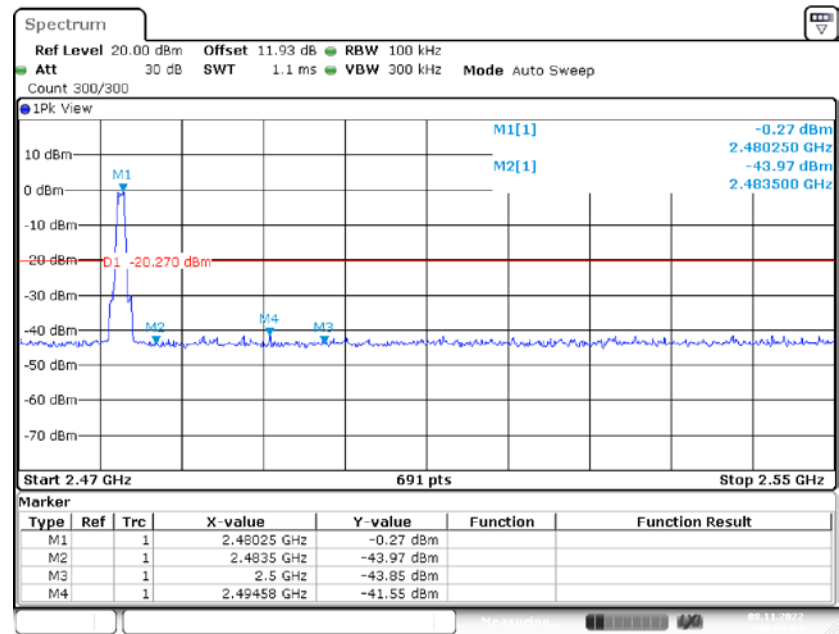

Date: 8.NOV.2022 09:56:08


## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



### Test Data

#### Environmental Conditions

Temperature:	24°C
Relative Humidity:	48%
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2022-11-08.


EUT operation mode: Transmitting

### Test Result


Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-12.23	$\leq 8$	PASS
		2440	-12.14	$\leq 8$	PASS
		2480	-13.27	$\leq 8$	PASS


Please refer to the below plots:

## Low Channel

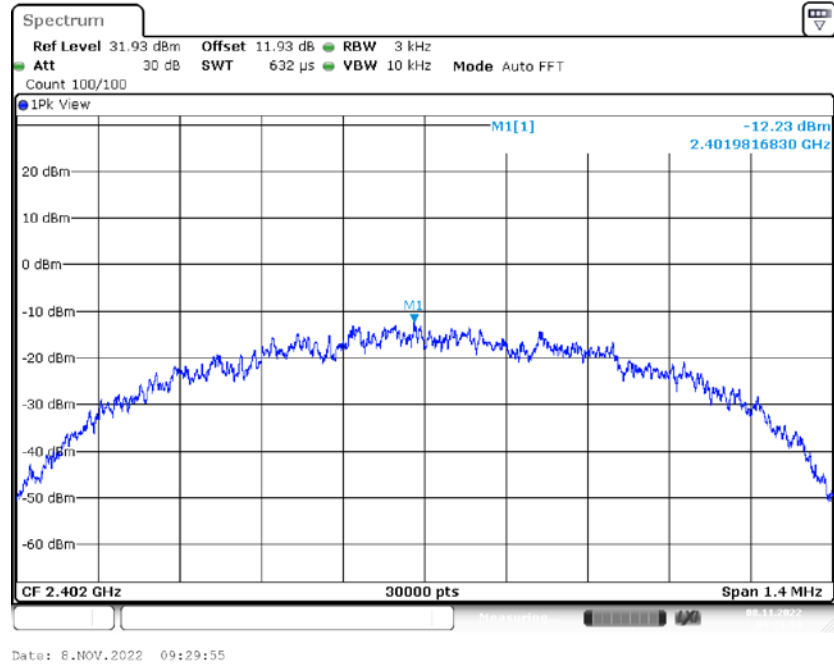

## Middle Channel

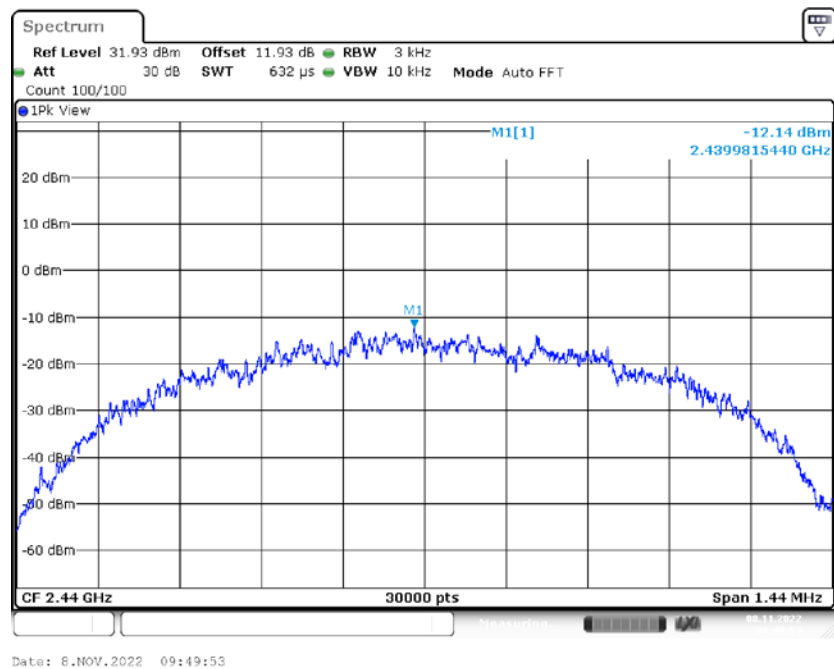

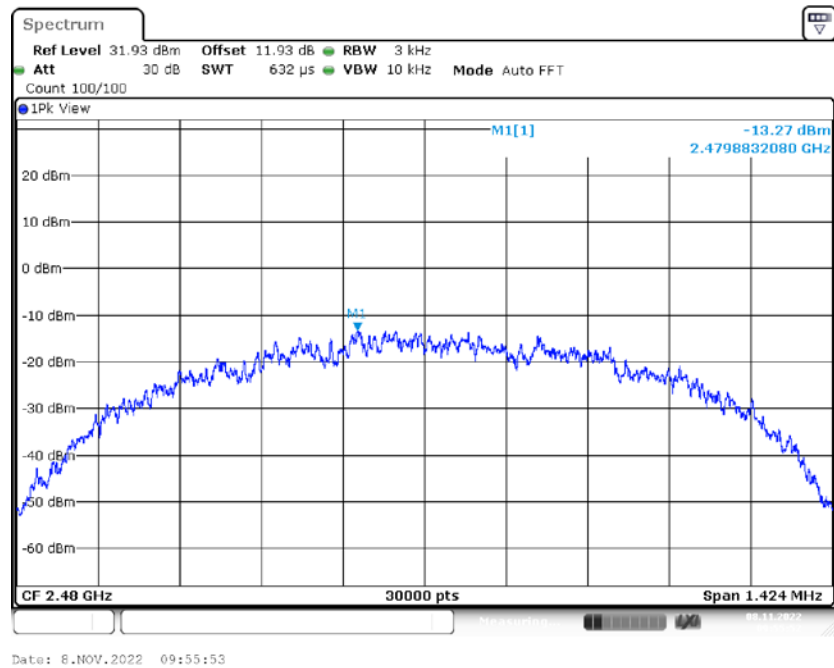**High Channel**

\*\*\*\*\* END OF REPORT \*\*\*\*\*