

FCC TEST REPORT

For

SUNVALLEYTEK INTERNATIONAL, INC.

FileHub

Model No.: RP-WD009

Prepared For : SUNVALLEYTEK INTERNATIONAL, INC.
Address : 46724 Lakeview Blvd, Fremont, California, United States 94538-6529

Prepared By : Shenzhen Anbotech Compliance Laboratory Limited
Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei
community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,
China.518102
Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW181207003-02
Date of Receipt : Dec. 07, 2018
Date of Test : Dec. 07~24, 2018
Date of Report : Dec. 24, 2018

Contents

1. General Information	4
1.1. Client Information	4
1.2. Description of Device (EUT)	4
1.3. Auxiliary Equipment Used During Test	4
1.4. Description of Test Modes	5
1.5. List of channels	6
1.6. Description Of Test Setup	7
1.7. Test Equipment List	8
1.8. Measurement Uncertainty	9
1.9. Description of Test Facility	9
2. Summary of Test Results	10
3. Conducted Emission Test	11
3.1. Test Standard and Limit	11
3.2. Test Setup	11
3.3. Test Procedure	11
3.4. Test Data	11
4. Radiation Spurious Emission and Band Edge	14
4.1. Test Standard and Limit	14
4.2. Test Setup	14
4.3. Test Procedure	15
4.4. Test Data	16
5. Maximum Peak Output Power Test	35
5.1. Test Standard and Limit	35
5.2. Test Setup	35
5.3. Test Procedure	35
5.4. Test Data	35
6. Occupy Bandwidth Test	37
6.1. Test Standard	37
6.2. Test Setup	37
6.3. Test Procedure	37
6.4. Test Data	37
7. Power Spectral Density Test	53
7.1. Test Standard and Limit	53
7.2. Test Setup	53
7.3. Test Procedure	53
7.4. Test Data	53
8. Antenna Requirement	62
8.1. Test Standard and Requirement	62
8.2. Antenna Connected Construction	63
APPENDIX I -- TEST SETUP PHOTOGRAPH	64
APPENDIX II -- EXTERNAL PHOTOGRAPH	66
APPENDIX III -- INTERNAL PHOTOGRAPH	70

TEST REPORT

Applicant : SUNVALLEYTEK INTERNATIONAL, INC.

Manufacturer : Shenzhen NearbyExpress Technology Development Company Limited

Product Name : FileHub

Model No. : RP-WD009

Trade Mark : RAVPOWER

Rating(s) : Input: DC 5V, 2A
Output: DC 5V, 1A
(with DC 3.6V, 6700mAh Battery inside)

Test Standard(s) : FCC Part15 Subpart E 2017, Paragraph 15.407

Test Method(s) : ANSI C63.10: 2013,
KDB 789033 D02 General UNII Test Procedures New Rules v02r01

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart E requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Test

Dec. 07~24, 2018

Prepared by



Oliang Yang

(Engineer / Oliang Yang)

Reviewer

Snowy Meng

(Supervisor / Snowy Meng)

Approved & Authorized Signer

Sally Zhang

(Manager / Sally Zhang)

1. General Information

1.1. Client Information

Applicant	:	SUNVALLEYTEK INTERNATIONAL, INC.
Address	:	46724 Lakeview Blvd, Fremont, California, United States 94538-6529
Manufacturer	:	Shenzhen NearbyExpress Technology Development Company Limited
Address	:	333 Bulong Road, Jialianda Industrial Park, Building 1, Bantian, Longgang District, Shenzhen, China
Factory	:	Shenzhen NearbyExpress Technology Development Company Limited
Address	:	333 Bulong Road, Jialianda Industrial Park, Building 1, Bantian, Longgang District, Shenzhen, China

1.2. Description of Device (EUT)

Product Name	:	FileHub
Model No.	:	RP-WD009
Trade Mark	:	RAVPOWER
Test Power Supply	:	AC 120V 60Hz/ DC 3.6V battery inside
Product Description	Operation Frequency:	5180MHz~5240MHz
	Number of Channel:	4 Channels for 802.11a 4 Channels for 802.11n(HT20) 4 Channels for 802.11ac(HT20) 2 Channels for 802.11n(HT40) 2 Channels for 802.11ac(HT40) 1 Channels for 802.11ac(HT80)
	Modulation Type:	OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n; OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11ac
	Antenna Type:	PCB Antenna
	Antenna Gain(Peak):	2 dBi

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2) This report is for Wifi 5.1G.

1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: Samsung M/N: ETA-U90CBC S/N: RT6FB17ZS/B-E Input: 100-240V~ 50-60Hz, 0.35A Output: DC 5V, 2A
---------	---	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Mode	Test channel	Frequency (MHz)
OFDM(802.11a/n20/ac20)	CH 36	5180MHz
	CH 40	5200MHz
	CH 48	5240MHz
OFDM(802.11n40/ac40)	CH 38	5190MHz
	CH 46	5230MHz
OFDM(802.11ac80)	CH 42	5210MHz

Note:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50 Ω , Cable Loss: 1.0 dB
4. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is more than 98%

1.5. List of channels

802.11a/n20/ac20

Channel	Freq. (MHz)	Channel	Freq. (MHz)
36	5180	44	5220
40	5200	48	5240

802.11n40/ac40


Channel	Freq. (MHz)	Channel	Freq. (MHz)
38	5190	46	5230

802.11ac80


Channel	Freq. (MHz)
42	5210

1.6. Description Of Test Setup

CE

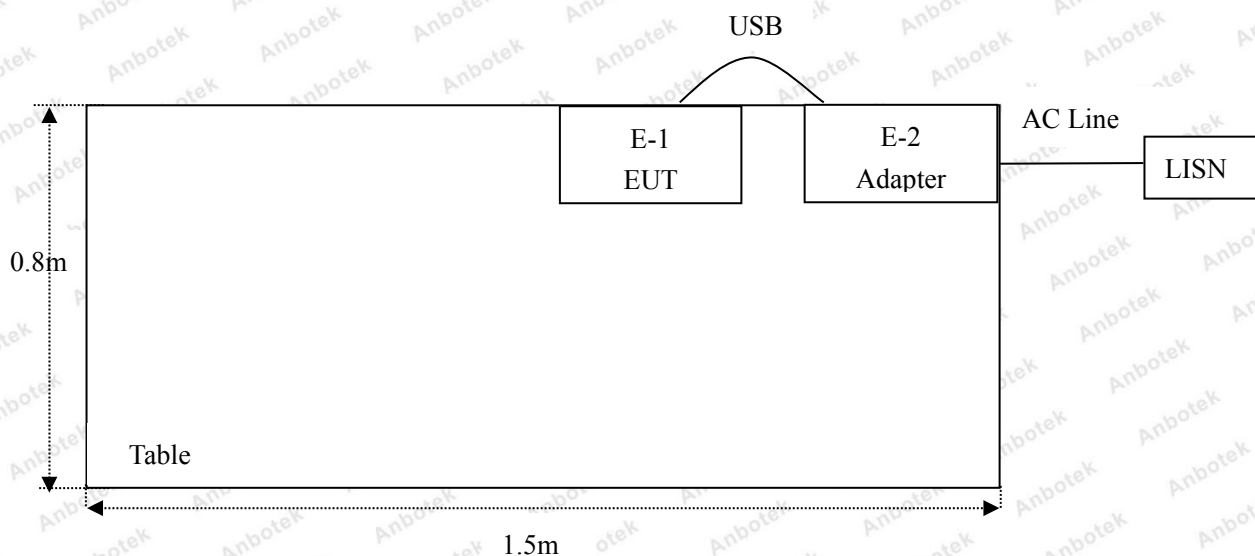

RE

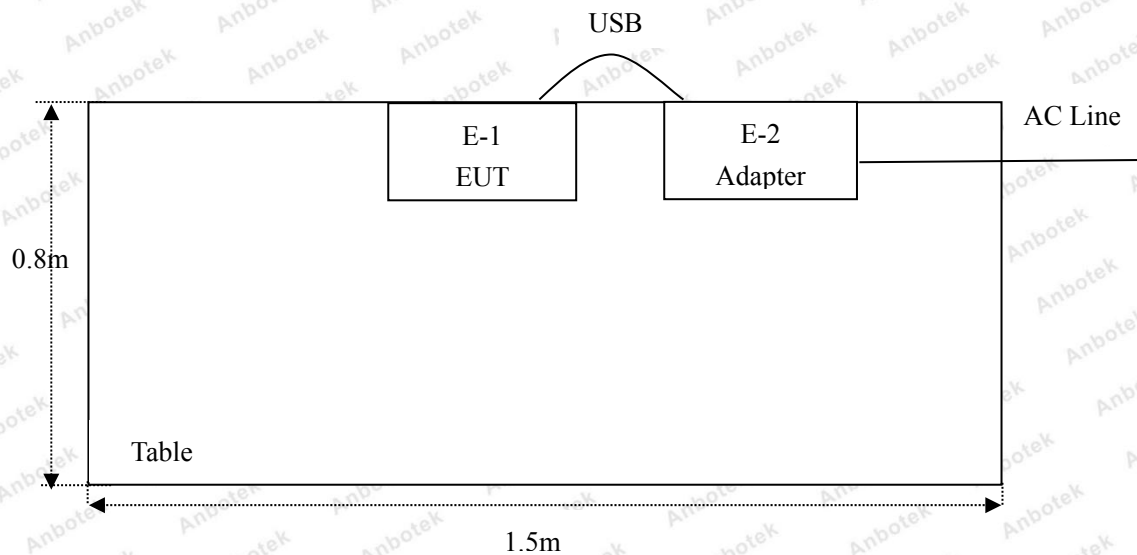

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 05, 2018	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 05, 2018	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 05, 2018	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 05, 2018	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Nov. 05, 2018	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 20, 2018	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 19, 2018	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 20, 2018	1 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	Nov. 20, 2018	1 Year
11.	Pre-amplifier	SONOMA	310N	186860	Nov. 05, 2018	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 05, 2018	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 05, 2018	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 05, 2018	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 05, 2018	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 05, 2018	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Apr. 02, 2018	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Nov. 01, 2018	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard	Test Type	Result
15.207 & 15.407	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.407(b)	Band Edge	PASS
15.407(a)(5)	Occupy Bandwidth	PASS
15.407(a)(1)(3)	Maximum Conducted Output Power	PASS
15.407(a)(1)(3)	Peak Power Spectral Density	PASS
15.203/15.407g	Antenna Requirement	PASS


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207&15.407		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

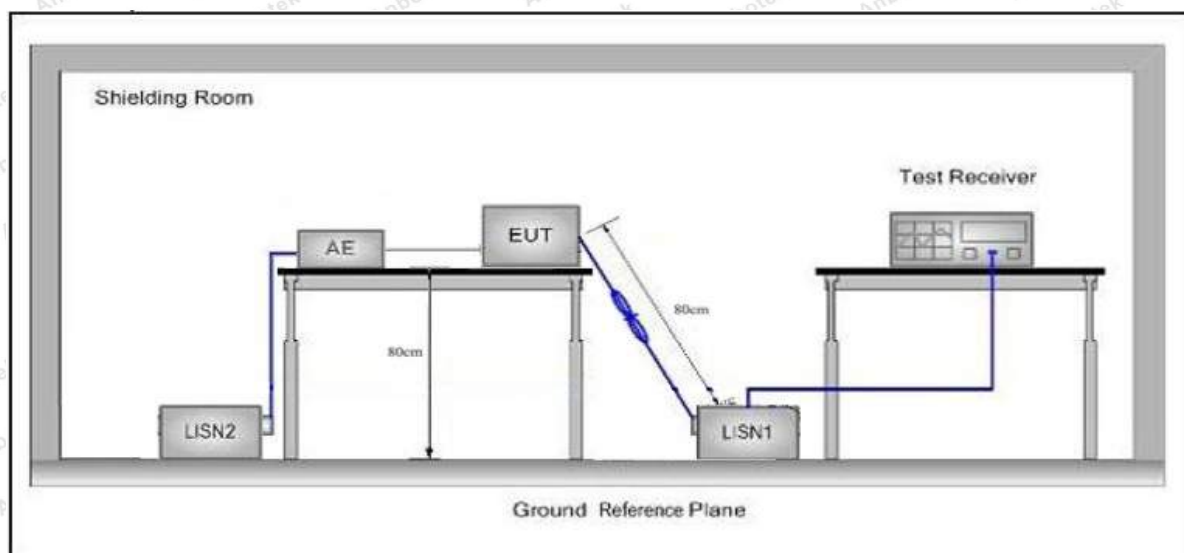

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages
worst case: 802.11ac20

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX Mode (802.11ac20)
Test Specification: AC 120V 60Hz
Comment: Live Line
Tem.: 23.8°C Hum.: 48%

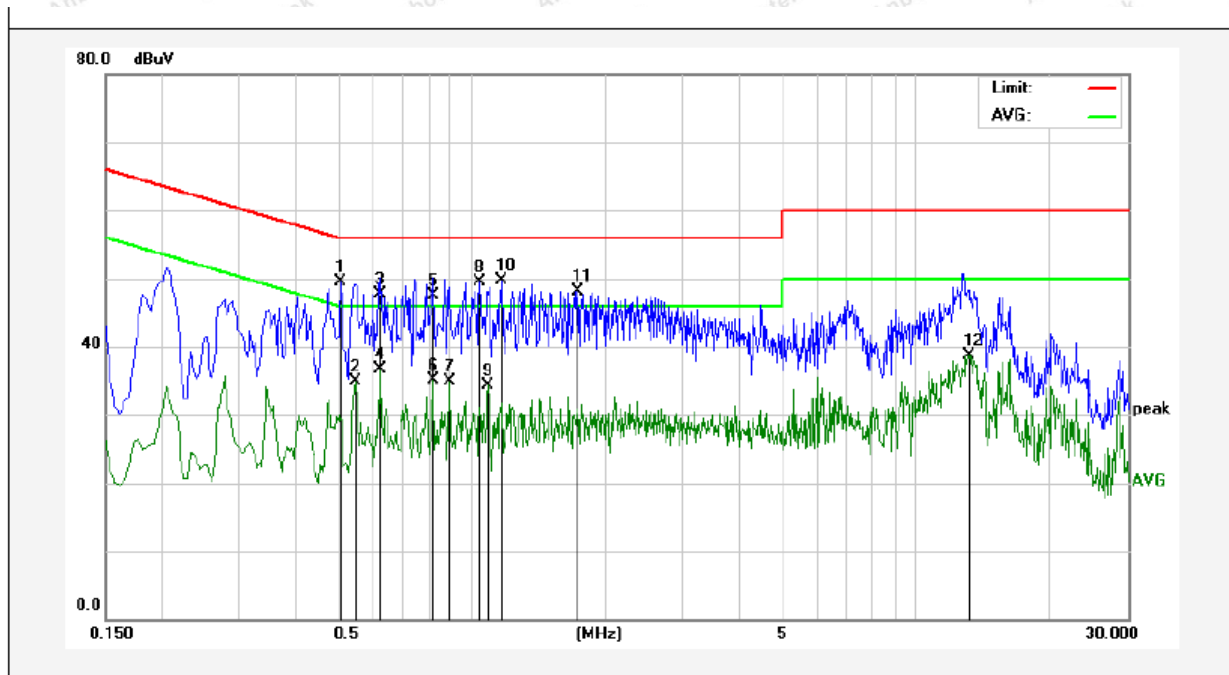

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.5100	40.00	9.51	49.51	56.00	-6.49	QP	
2	0.5500	25.40	9.51	34.91	46.00	-11.09	AVG	
3	0.6260	38.17	9.51	47.68	56.00	-8.32	QP	
4	0.6260	27.13	9.51	36.64	46.00	-9.36	AVG	
5	0.8180	38.01	9.51	47.52	56.00	-8.48	QP	
6	0.8180	25.51	9.51	35.02	46.00	-10.98	AVG	
7	0.8980	25.30	9.51	34.81	46.00	-11.19	AVG	
8	1.0460	39.98	9.51	49.49	56.00	-6.51	QP	
9	1.0900	24.83	9.51	34.34	46.00	-11.66	AVG	
10	1.1700	40.20	9.51	49.71	56.00	-6.29	QP	
11	1.7380	38.68	9.51	48.19	56.00	-7.81	QP	
12	13.1900	29.23	9.55	38.78	50.00	-11.22	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Keeping TX Mode (802.11ac20)
Test Specification: AC 120V 60Hz
Comment: Neutral Line
Tem.: 23.8°C Hum.: 48%

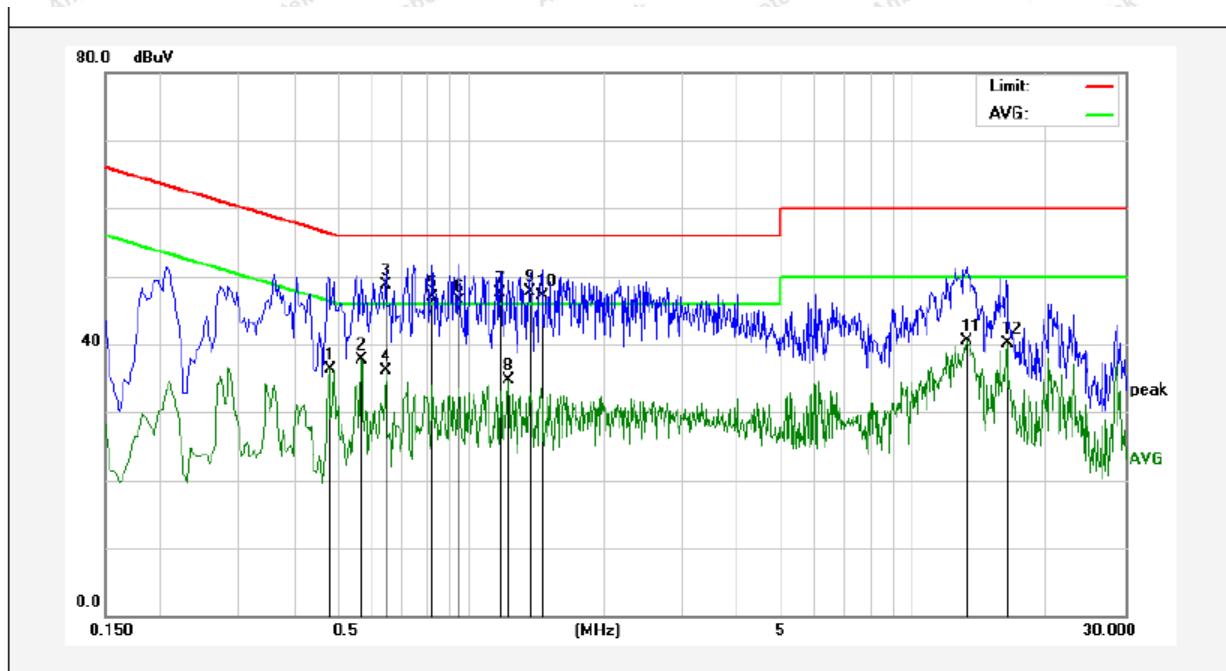

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.4820	26.86	9.51	36.37	46.30	-9.93	AVG	
2	0.5700	28.10	9.51	37.61	46.00	-8.39	AVG	
3	0.6460	39.11	9.51	48.62	56.00	-7.38	QP	
4	0.6460	26.66	9.51	36.17	46.00	-9.83	AVG	
5	0.8260	37.49	9.51	47.00	56.00	-9.00	QP	
6	0.9460	36.70	9.51	46.21	56.00	-9.79	QP	
7	1.1700	38.04	9.51	47.55	56.00	-8.45	QP	
8	1.2220	25.16	9.51	34.67	46.00	-11.33	AVG	
9	1.3660	38.16	9.51	47.67	56.00	-8.33	QP	
10	1.4540	37.62	9.51	47.13	56.00	-8.87	QP	
11	13.1340	30.90	9.55	40.45	50.00	-9.55	AVG	
12	16.2300	30.54	9.57	40.11	50.00	-9.89	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.407				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	68.2	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

(3)Above 1GHz Unwanted Emissions in the Restricted Bands limit: $E[dBuV/m] = EIRP[dBm] + 95.2 = 68.2 dBuV/m$, for $EIPR[dBm] = -27dBm$

(4) Unwanted Emissions that fall Outside of the Restricted Bands limits of § 15.209

According to the above different limit requirements, we have adopted strict limits and the data can meet the two limit requirements.

4.2. Test Setup

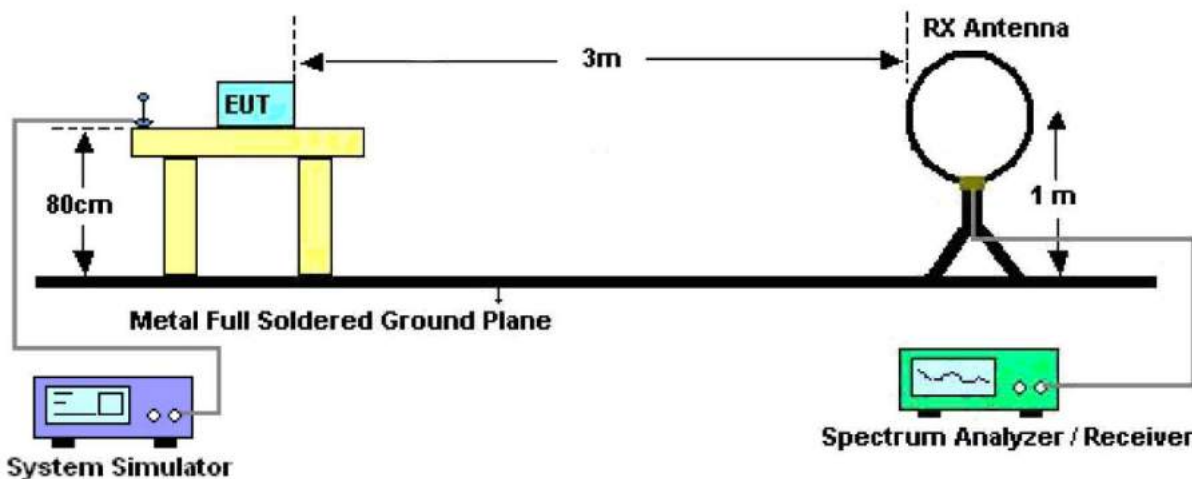


Figure 1. Below 30MHz

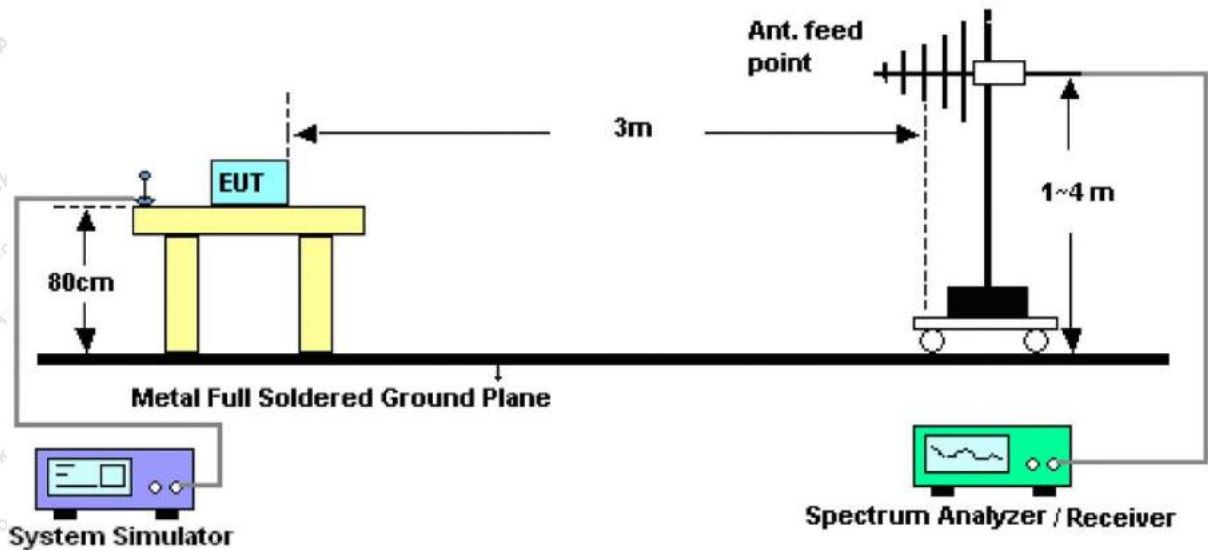


Figure 2. 30MHz to 1GHz

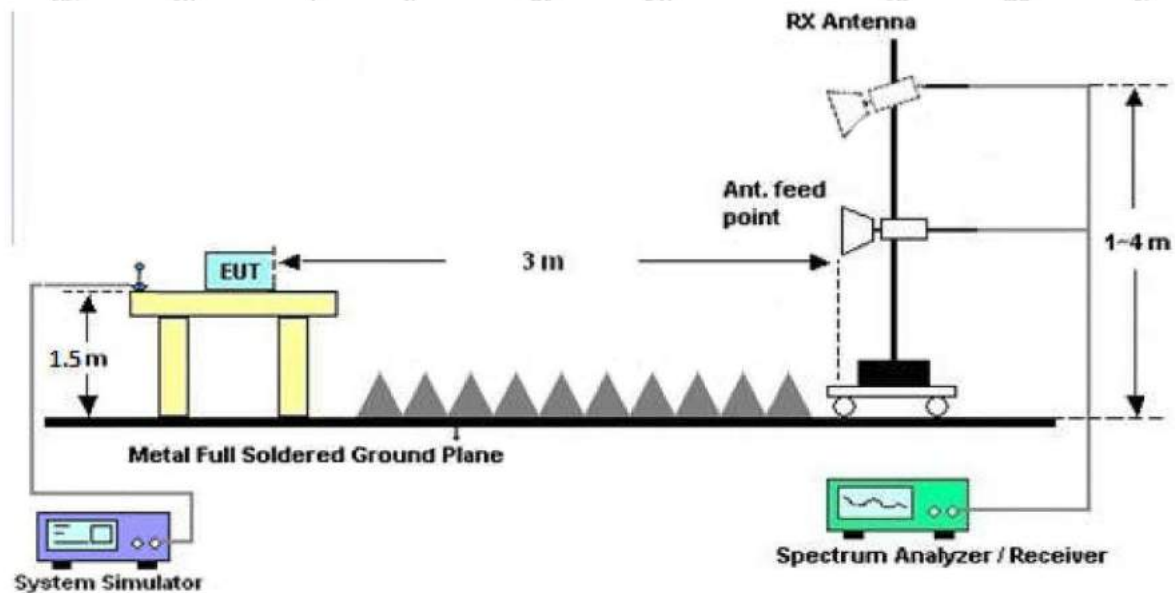


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying

aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector = Peak, Trace mode = Max hold, Sweep = auto couple.

RBW = 1MHz, VBW = 10Hz, Detector = Average, Trace mode = Max hold, Sweep = auto couple.

4.4. Test Data

PASS

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

worst case: 802.11ac20 (CH36)

Test Results (30~1000MHz)

Job No.: SZAWW181207003-02


Temp.(°C)/Hum.(%RH): 16.2°C/52%RH

Standard: FCC PART 15C

Power Source: DC 3.6V battery inside

Test Mode: 802.11ac20 (CH36)

Polarization: Horizontal

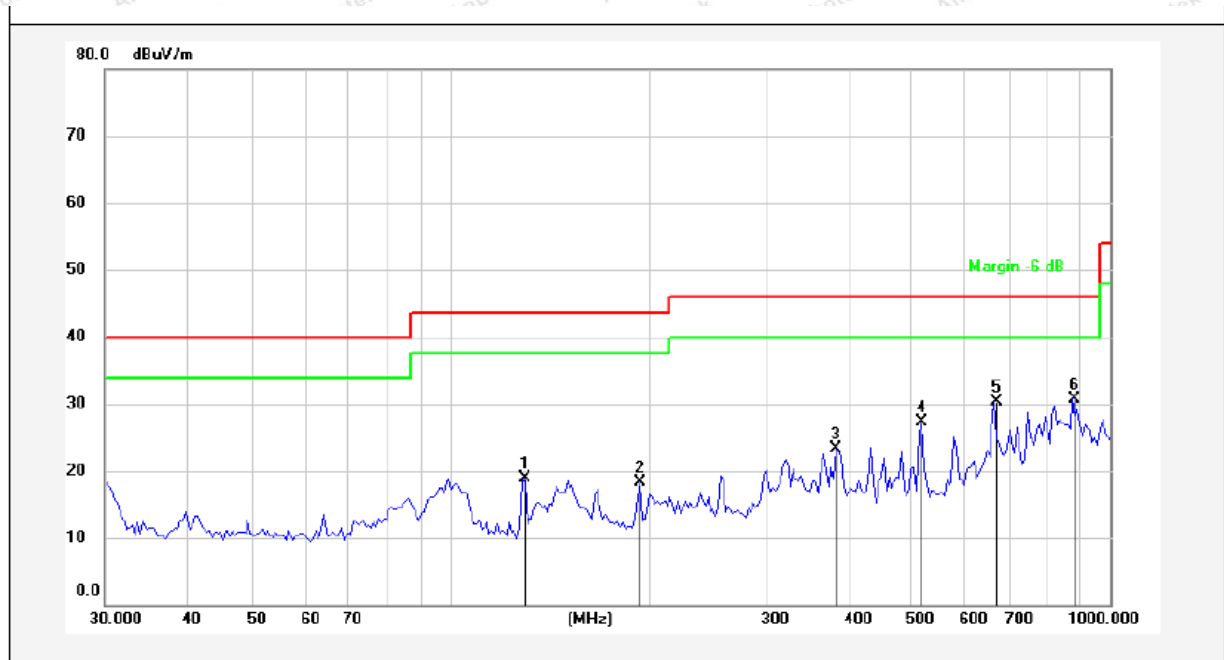

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	128.5630	42.33	-23.38	18.95	43.50	-24.55	QP	300	45	
2	194.1128	39.33	-21.12	18.21	43.50	-25.29	QP	300	112	
3	384.6055	38.20	-14.90	23.30	46.00	-22.70	QP	300	71	
4	518.1556	40.32	-13.00	27.32	46.00	-18.68	QP	300	321	
5	668.1423	41.55	-11.22	30.33	46.00	-15.67	QP	300	222	
6	876.7829	38.46	-7.66	30.80	46.00	-15.20	QP	300	82	

Test Results (30~1000MHz)

Job No.: SZAWW181207003-02


Temp.(°C)/Hum.(%RH): 16.2°C/52%RH

Standard: FCC PART 15C

Power Source: DC 3.6V battery inside

Test Mode: 802.11ac20 (CH36)

Polarization: Vertical

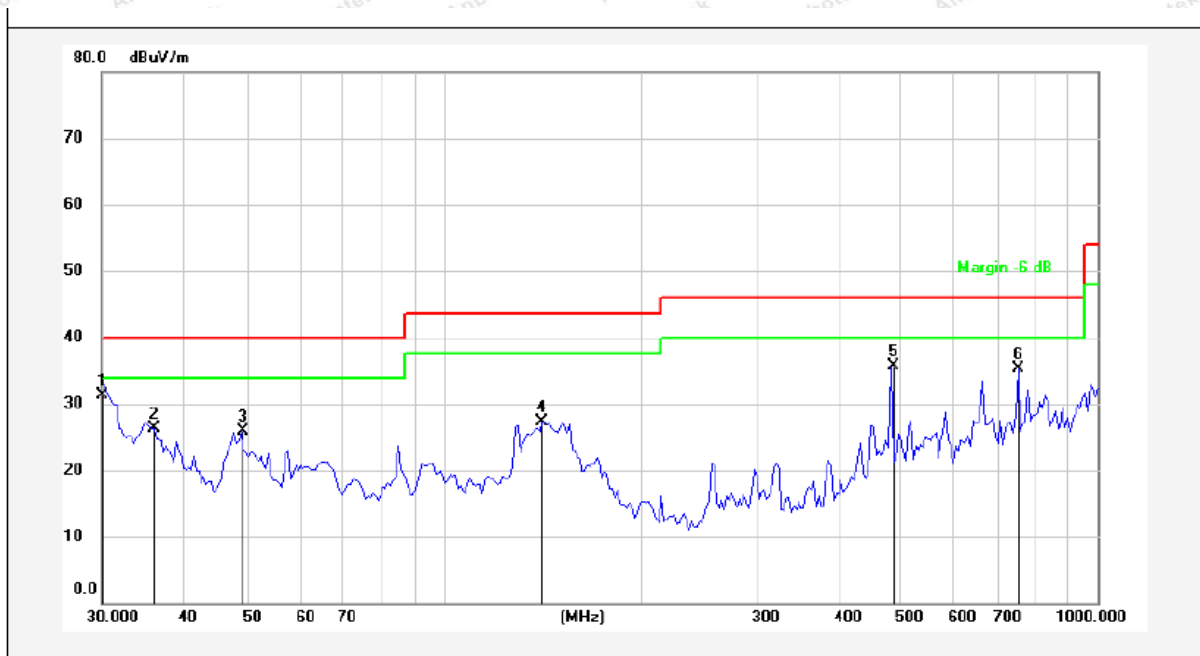

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.0000	47.47	-16.07	31.40	40.00	-8.60	QP	300	46	
2	36.0638	41.96	-15.64	26.32	40.00	-13.68	QP	300	152	
3	49.0145	40.70	-14.81	25.89	40.00	-14.11	QP	300	274	
4	141.5777	46.54	-19.20	27.34	43.50	-16.16	QP	300	352	
5	483.0618	49.18	-13.52	35.66	46.00	-10.34	QP	300	142	
6	755.3873	44.21	-8.86	35.35	46.00	-10.65	QP	300	310	

Test Results (Above 1000MHz)

Test mode:	IEEE 802.11a	Test channel:	Low CH
------------	--------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10360.00	42.32	31.98	17.08	33.91	56.87	68.20	-11.33	V
15540.00	35.02	32.65	20.03	34.85	51.69	68.20	-16.51	V
10360.00	37.65	31.98	17.08	33.91	51.99	68.20	-16.21	H
15540.00	35.78	32.65	20.03	34.85	52.13	68.20	-16.07	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10360.00	31.32	31.98	17.08	33.91	46.01	54.00	-7.99	V
15540.00	28.35	32.65	20.03	34.85	45.22	54.00	-8.78	V
10360.00	28.31	31.98	17.08	33.91	44.01	54.00	-9.99	H
15540.00	27.36	32.65	20.03	34.85	46.12	54.00	-7.88	H

Test mode:	IEEE 802.11a	Test channel:	Mid CH
------------	--------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10400.00	40.06	32.44	17.18	33.91	56.65	68.20	-11.55	V
15600.00	36.45	32.78	20.12	34.86	55.21	68.20	-12.99	V
10400.00	38.53	32.44	17.18	33.91	53.65	68.20	-14.55	H
15600.00	35.96	32.78	20.12	34.86	53.98	68.20	-14.22	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10400.00	30.02	32.44	17.18	33.91	44.98	54.00	-9.02	V
15600.00	28.36	32.78	20.12	34.86	46.98	54.00	-7.02	V
10400.00	30.01	32.44	17.18	33.91	44.11	54.00	-9.89	H
15600.00	29.34	32.78	20.12	34.86	46.53	54.00	-7.47	H

Test mode:	IEEE 802.11a	Test channel:	High CH
------------	--------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10480.00	40.06	32.59	18.02	33.92	55.32	68.20	-12.88	V
15720.00	39.25	32.87	20.15	34.88	56.98	68.20	-11.22	V
10480.00	41.32	32.59	18.02	33.92	57.64	68.20	-10.56	H
15720.00	40.21	32.87	20.15	34.88	57.98	68.20	-10.22	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10480.00	30.21	32.59	18.02	33.92	47.89	54.00	-6.11	V
15720.00	30.11	32.87	20.15	34.88	48.00	54.00	-6.00	V
10480.00	29.65	32.59	18.02	33.92	45.89	54.00	-8.11	H
15720.00	29.35	32.87	20.15	34.88	46.87	54.00	-7.13	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10360.00	39.81	31.98	17.08	33.91	54.21	68.20	-13.99	V
15540.00	36.21	32.65	20.03	34.85	53.65	68.20	-14.55	V
10360.00	37.15	31.98	17.08	33.91	50.98	68.20	-17.22	H
15540.00	36.25	32.65	20.03	34.85	52.14	68.20	-16.06	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10360.00	31.12	31.98	17.08	33.91	46.74	54.00	-7.26	V
15540.00	28.32	32.65	20.03	34.85	46.81	54.00	-7.19	V
10360.00	30.57	31.98	17.08	33.91	44.75	54.00	-9.25	H
15540.00	28.35	32.65	20.03	34.85	46.32	54.00	-7.68	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Mid CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
11570.00	40.35	32.44	17.18	33.91	56.06	68.20	-12.14	V
17355.00	39.12	32.78	20.12	34.86	57.16	68.20	-11.04	V
11570.00	38.35	32.44	17.18	33.91	54.06	68.20	-12.14	H
17355.00	36.12	32.78	20.12	34.86	54.16	68.20	-14.04	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10400.00	29.13	32.44	17.18	33.91	45.62	54.00	-8.38	V
15600.00	27.32	32.78	20.12	34.86	44.51	54.00	-9.49	V
10400.00	29.03	32.44	17.18	33.91	45.32	54.00	-8.68	H
15600.00	28.36	32.78	20.12	34.86	45.89	54.00	-8.11	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10480.00	41.21	32.59	18.02	33.92	56.87	68.20	-11.33	V
15720.00	38.35	32.87	20.15	34.88	55.41	68.20	-12.79	V
10480.00	36.23	32.59	18.02	33.92	50.32	68.20	-17.88	H
15720.00	38.13	32.87	20.15	34.88	52.00	68.20	-16.20	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10480.00	31.25	32.59	18.02	33.92	48.95	54.00	-5.05	V
15720.00	32.41	32.87	20.15	34.88	51.23	54.00	-2.77	V
10480.00	29.32	32.59	18.02	33.92	45.21	54.00	-8.79	H
15720.00	28.74	32.87	20.15	34.88	44.97	54.00	-9.03	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10360.00	41.87	31.98	17.08	33.91	56.32	68.20	-11.88	V
15540.00	35.23	32.65	20.03	34.85	54.33	68.20	-13.87	V
10360.00	38.46	31.98	17.08	33.91	51.32	68.20	-16.88	H
15540.00	35.05	32.65	20.03	34.85	50.96	68.20	-17.24	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10360.00	32.16	31.98	17.08	33.91	44.98	54.00	-9.02	V
15540.00	29.34	32.65	20.03	34.85	43.65	54.00	-10.35	V
10360.00	30.25	31.98	17.08	33.91	45.01	54.00	-8.99	H
15540.00	27.22	32.65	20.03	34.85	44.21	54.00	-9.79	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Mid CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10400.00	40.73	32.44	17.18	33.91	54.13	68.20	-14.07	V
15600.00	37.41	32.78	20.12	34.86	55.00	68.20	-13.20	V
10400.00	39.22	32.44	17.18	33.91	53.62	68.20	-14.58	H
15600.00	36.10	32.78	20.12	34.86	55.32	68.20	-12.88	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10400.00	30.35	32.44	17.18	33.91	44.96	54.00	-9.04	V
15600.00	27.49	32.78	20.12	34.86	46.88	54.00	-7.12	V
10400.00	29.42	32.44	17.18	33.91	46.32	54.00	-7.68	H
15600.00	27.15	32.78	20.12	34.86	44.95	54.00	-9.05	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10480.00	40.34	32.59	18.02	33.92	58.01	68.20	-10.19	V
15720.00	38.56	32.87	20.15	34.88	57.21	68.20	-10.99	V
10480.00	39.22	32.59	18.02	33.92	56.32	68.20	-11.88	H
15720.00	37.25	32.87	20.15	34.88	56.32	68.20	-11.88	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10480.00	30.17	32.59	18.02	33.92	47.84	54.00	-6.16	V
15720.00	28.14	32.87	20.15	34.88	47.00	54.00	-7.00	V
10480.00	28.85	32.59	18.02	33.92	46.22	54.00	-7.78	H
15720.00	27.42	32.87	20.15	34.88	45.32	54.00	-8.68	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	37.76	31.98	17.08	33.91	53.65	68.20	-14.55	V
15570.00	35.87	32.65	20.03	34.85	52.10	68.20	-16.10	V
10380.00	37.63	31.98	17.08	33.91	51.99	68.20	-16.21	H
15570.00	35.74	32.65	20.03	34.85	52.63	68.20	-15.57	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	30.11	31.98	17.08	33.91	46.44	54.00	-7.56	V
15570.00	28.83	32.65	20.03	34.85	47.23	54.00	-6.77	V
10380.00	30.11	31.98	17.08	33.91	46.32	54.00	-7.68	H
15570.00	27.34	32.65	20.03	34.85	45.95	54.00	-8.05	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10460.00	42.25	32.59	18.02	33.92	57.98	68.20	-10.22	V
15690.00	39.12	32.87	20.15	34.88	56.98	68.20	-11.22	V
10460.00	37.41	32.59	18.02	33.92	55.32	68.20	-12.88	H
15690.00	38.53	32.87	20.15	34.88	57.01	68.20	-11.19	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10460.00	32.13	32.59	18.02	33.92	47.56	54.00	-6.44	V
15690.00	29.49	32.87	20.15	34.88	46.87	54.00	-7.13	V
10460.00	31.47	32.59	18.02	33.92	45.62	54.00	-8.38	H
15690.00	28.41	32.78	20.12	34.86	44.98	54.00	-9.02	H

Test mode:	IEEE 802.11ac(HT40)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	37.48	31.98	17.08	33.91	53.22	68.20	-14.98	V
15570.00	35.27	32.65	20.03	34.85	53.10	68.20	-15.10	V
10380.00	37.21	31.98	17.08	33.91	52.36	68.20	-15.84	H
15570.00	35.53	32.65	20.03	34.85	53.36	68.20	-14.84	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.24	31.98	17.08	33.91	46.39	54.00	-7.61	V
15570.00	28.35	32.65	20.03	34.85	46.18	54.00	-7.82	V
10380.00	30.34	31.98	17.08	33.91	45.49	54.00	-8.51	H
15570.00	27.69	32.65	20.03	34.85	45.52	54.00	-8.48	H

Test mode:	IEEE 802.11ac(HT40)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10460.00	41.78	32.59	18.02	33.92	58.47	68.20	-9.73	V
15690.00	38.47	32.87	20.15	34.88	56.61	68.20	-11.59	V
10460.00	39.27	32.59	18.02	33.92	55.96	68.20	-12.24	H
15690.00	37.42	32.87	20.15	34.88	55.56	68.20	-12.64	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10460.00	31.78	32.59	18.02	33.92	48.47	54.00	-5.53	V
15690.00	28.89	32.87	20.15	34.88	47.03	54.00	-6.97	V
10460.00	30.27	32.59	18.02	33.92	46.96	54.00	-7.04	H
15690.00	28.35	32.78	20.12	34.86	46.39	54.00	-7.61	H

Test mode:	IEEE 802.11ac(HT80)	Test channel:	
------------	---------------------	---------------	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10420.00	41.29	32.44	17.18	33.91	57.00	68.20	-11.20	V
15630.00	36.49	32.78	20.12	34.86	54.53	68.20	-13.67	V
10420.00	38.73	32.44	17.18	33.91	54.44	68.20	-13.76	H
15630.00	35.47	32.78	20.12	34.86	53.51	68.20	-14.69	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10420.00	30.19	32.44	17.18	33.91	45.90	54.00	-8.10	V
15630.00	28.25	32.78	20.12	34.86	46.29	54.00	-7.71	V
10420.00	30.04	32.44	17.18	33.91	45.75	54.00	-8.25	H
15630.00	27.93	32.78	20.12	34.86	45.97	54.00	-8.03	H

Note:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11a								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	41.35	28.65	13.58	31.04	50.12	68.20	-18.08	H
5350.00	42.32	29.16	14.68	31.96	53.65	68.20	-14.55	H
5150.00	42.31	28.65	13.58	31.04	54.00	68.20	-14.20	V
5350.00	43.25	29.16	14.68	31.96	53.22	68.20	-14.98	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	34.72	28.65	13.58	31.04	46.32	54.00	-7.68	H
5350.00	35.48	29.16	14.68	31.96	47.21	54.00	-6.79	H
5150.00	35.14	28.65	13.58	31.04	47.99	54.00	-6.01	V
5350.00	36.21	29.16	14.68	31.96	49.33	54.00	-4.67	V

Test Mode: 802.11n20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	41.67	28.65	13.58	31.04	50.96	68.20	-17.24	H
5350.00	42.15	29.16	14.68	31.96	52.41	68.20	-15.79	H
5150.00	42.35	28.65	13.58	31.04	54.22	68.20	-13.98	V
5350.00	43.07	29.16	14.68	31.96	55.62	68.20	-12.58	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	34.25	28.65	13.58	31.04	46.98	54.00	-7.02	H
5350.00	35.78	29.16	14.68	31.96	47.21	54.00	-6.79	H
5150.00	34.74	28.65	13.58	31.04	46.33	54.00	-7.67	V
5350.00	36.05	29.16	14.68	31.96	48.32	54.00	-5.68	V

Test Mode: 802.11ac20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	41.29	28.65	13.58	31.04	54.32	68.20	-13.88	H
5350.00	42.64	29.16	14.68	31.96	54.52	68.20	-13.68	H
5150.00	43.31	28.65	13.58	31.04	54.50	68.20	-13.70	V
5350.00	42.77	29.16	14.68	31.96	54.65	68.20	-13.55	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	33.78	28.65	13.58	31.04	44.97	54.00	-9.03	H
5350.00	34.64	29.16	14.68	31.96	46.52	54.00	-7.48	H
5150.00	34.12	28.65	13.58	31.04	45.31	54.00	-8.69	V
5350.00	35.44	29.16	14.68	31.96	47.32	54.00	-6.68	V

Test Mode: 802.11n40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	41.47	28.65	13.58	31.04	52.66	68.20	-15.54	H
5350.00	42.61	29.16	14.68	31.96	54.49	68.20	-13.71	H
5150.00	41.77	28.65	13.58	31.04	52.96	68.20	-15.24	V
5350.00	43.81	29.16	14.68	31.96	55.69	68.20	-12.51	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	33.53	28.65	13.58	31.04	44.72	54.00	-9.28	H
5350.00	34.25	29.16	14.68	31.96	46.13	54.00	-7.87	H
5150.00	33.78	28.65	13.58	31.04	44.97	54.00	-9.03	V
5350.00	35.13	29.16	14.68	31.96	47.01	54.00	-6.99	V

Test Mode: 802.11ac40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	41.25	28.65	13.58	31.04	52.44	68.20	-15.76	H
5350.00	42.37	29.16	14.68	31.96	54.25	68.20	-13.95	H
5150.00	41.54	28.65	13.58	31.04	52.73	68.20	-15.47	V
5350.00	43.41	29.16	14.68	31.96	55.29	68.20	-12.91	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	33.47	28.65	13.58	31.04	44.66	54.00	-9.34	H
5350.00	34.61	29.16	14.68	31.96	46.49	54.00	-7.51	H
5150.00	33.62	28.65	13.58	31.04	44.81	54.00	-9.19	V
5350.00	35.01	29.16	14.68	31.96	46.89	54.00	-7.11	V

Test Mode: 802.11ac80								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	41.63	28.65	13.58	31.04	52.82	68.20	-15.38	H
5350.00	42.49	29.16	14.68	31.96	54.37	68.20	-13.83	H
5150.00	41.21	28.65	13.58	31.04	52.40	68.20	-15.80	V
5350.00	43.82	29.16	14.68	31.96	55.70	68.20	-12.50	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	33.65	28.65	13.58	31.04	44.84	54.00	-9.16	H
5350.00	34.45	29.16	14.68	31.96	46.33	54.00	-7.67	H
5150.00	33.72	28.65	13.58	31.04	44.91	54.00	-9.09	V
5350.00	35.31	29.16	14.68	31.96	47.19	54.00	-6.81	V

Agilent Spectrum Analyzer - Swept SA

Start Freq 5.12000000 GHz

PNO: Fast IF Gain: Low

Trig: Free Run #Atten: 30 dB

Avg Type: Log-Pwr Avg/Hold: >100/100

03:09:41 AM Dec 19, 2018

TRACE 1 2 3 4 5

TYPE M N N N N

DET P N N N N

PASS

Mkr2 5.150 00 GHz
-42.397 dBm

10 dB/div Ref 20.00 dBm

Log

Trace 1 Pass

Start 5.12000 GHz

#Res BW 1.0 MHz

#VBW 3.0 MHz

Stop 5.19000 GHz

Sweep 1.000 ms (1001 pts)

MSG STATUS

Agilent Spectrum Analyzer - Swept SA

Start Freq 5.20000000 GHz

PNO: Fast IF Gain: Low

Trig: Free Run #Atten: 30 dB

Avg Type: Log-Pwr Avg/Hold: 100/100

03:08:44 AM Dec 19, 2018

TRACE 1 2 3 4 5
TYPE M M M M M
DET P N N N N

10 dB/div Ref 20.00 dBm

Log

Trace 1 Pass

Mkr2 5.350 00 GHz
-50.839 dBm

Start 5.2000 GHz
#Res BW 1.0 MHz

#VBW 3.0 MHz

Stop 5.4500 GHz
Sweep 1.000 ms (1001 pts)

MSG STATUS

The figure is a screenshot of an Agilent Spectrum Analyzer. The main display shows a frequency spectrum with a yellow trace. A prominent peak is visible at 5.2000 GHz, reaching a level of approximately 10 dBm. The signal is labeled 'Trace 1 Pass'. A second marker, 'Mkr2', is placed at 5.3500 GHz, indicating a noise floor level of -50.839 dBm. The x-axis represents frequency, ranging from 5.2000 GHz to 5.4500 GHz. The y-axis represents power, ranging from -70.0 dBm to 10 dBm. The display includes various control parameters such as 'Start Freq 5.20000000 GHz', 'PNO: Fast IF Gain: Low', 'Trig: Free Run #Atten: 30 dB', 'Avg Type: Log-Pwr Avg/Hold: 100/100', and '10 dB/div Ref 20.00 dBm'. The bottom of the screen shows the sweep range 'Start 5.2000 GHz Stop 5.4500 GHz' and the resolution bandwidth '#Res BW 1.0 MHz'.

Shenzhen Anbotek Compliance Laboratory Limited
Tel:(86)755-26066440 Fax:(86)755-26014772 www.anbotek.com Code:AB-RF-05-a



802.11n(20): Band Edge, Left Side



802.11n(20): Band Edge, Right Side





802.11n(40): Band Edge, Left Side



802.11n(40): Band Edge, Right Side






802.11ac(80): Band Edge

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a)(1) (3)
Test Limit	24dBm

5.2. Test Setup



5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

5.4. Test Data

Test Item	: Max. peak output power	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.6V battery inside	Temperature	: 24℃
Test Result	: PASS	Humidity	: 55%RH


Mode	Channel Frequency (MHz)	Peak Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5180	16.98	30	PASS
	5200	17.04	30	PASS
	5240	16.70	30	PASS
802.11n20	5180	17.14	30	PASS
	5200	16.82	30	PASS
	5240	16.67	30	PASS
802.11ac20	5180	17.18	30	PASS
	5200	16.36	30	PASS
	5240	17.03	30	PASS
802.11n40	5190	16.87	30	PASS
	5230	16.47	30	PASS
802.11ac40	5190	16.69	30	PASS
	5230	16.71	30	PASS
802.11ac80	5210	16.58	30	PASS

6. Occupy Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.407 (a)(5)
---------------	------------------------------------

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

3. Set the spectrum analyzer as:

26 dB & 99% bandwidth

RBW = approximately 1% of the emission bandwidth;
Set the VBW > RBW;
Detector = Peak
Trace mode = Max hold.
Sweep - auto couple.

6 dB bandwidth

RBW = 100kHz;
Set the video bandwidth (VBW) ≥ 3 RBW;
Detector = Peak
Trace mode = Max hold.
Sweep - auto couple.

4. Measure the maximum width of the emission that is 26dB /6dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.
5. Repeat until all the rest channels are investigated.

6.4. Test Data


Test Item : 6dB & 26dB BW
Test Voltage : DC 3.6V battery inside
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24°C
Humidity : 55%RH


Mode	Channel Frequency (MHz)	6dB BW(MHz)	Limit	Results
802.11a	5180	16.41	>0.5MHz	PASS
	5200	16.39		PASS
	5240	16.39		PASS
802.11n20	5180	17.65		PASS
	5200	17.64		PASS
	5240	17.64		PASS
802.11ac20	5180	17.62		PASS
	5200	17.62		PASS
	5240	17.63		PASS
802.11n40	5190	36.40		PASS
	5230	36.36		PASS
802.11ac40	5190	36.41		PASS
	5230	36.38		PASS
802.11ac80	5210	75.61		PASS

Mode	Channel Frequency (MHz)	26dB BW(MHz)	99% Bandwidth (MHz)
802.11a	5180	21.39	16.882
	5200	21.51	16.882
	5240	21.75	16.882
802.11n20	5180	21.82	18.034
	5200	21.57	17.977
	5240	21.60	17.941
802.11ac20	5180	22.02	18.124
	5200	21.66	17.975
	5240	21.53	17.939
802.11n40	5190	40.30	36.369
	5230	40.03	36.329
802.11ac40	5190	39.98	36.346
	5230	39.80	36.319
802.11ac80	5210	81.01	75.600


6dB Bandwidth

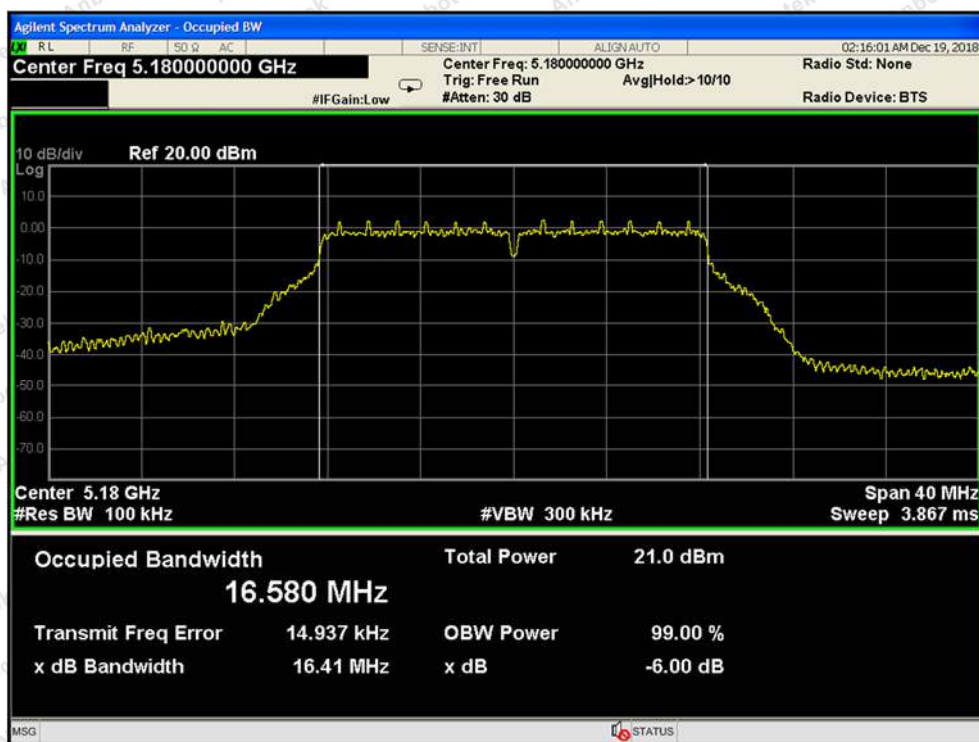


Test Mode: 802.11a--Low

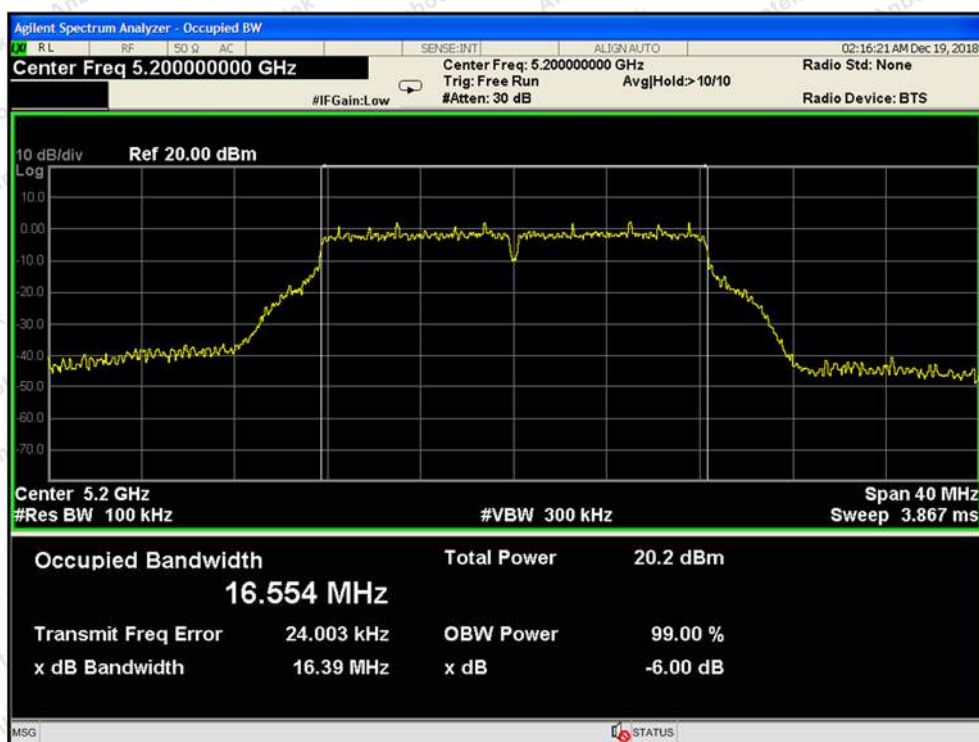


Test Mode: 802.11a---Middle

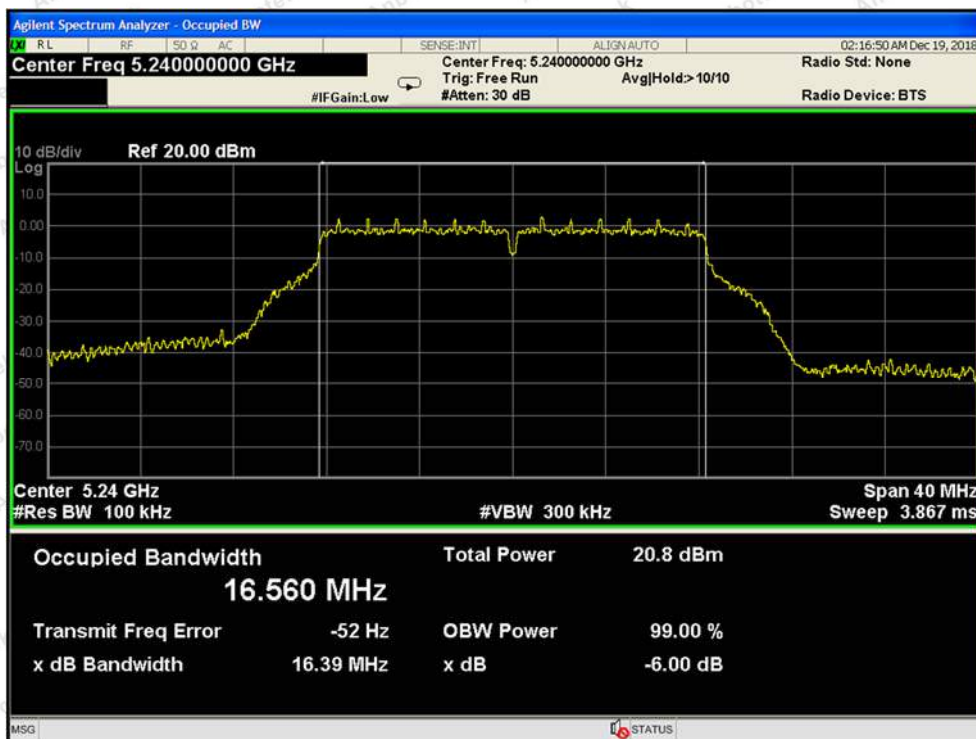


Test Mode: 802.11a---High

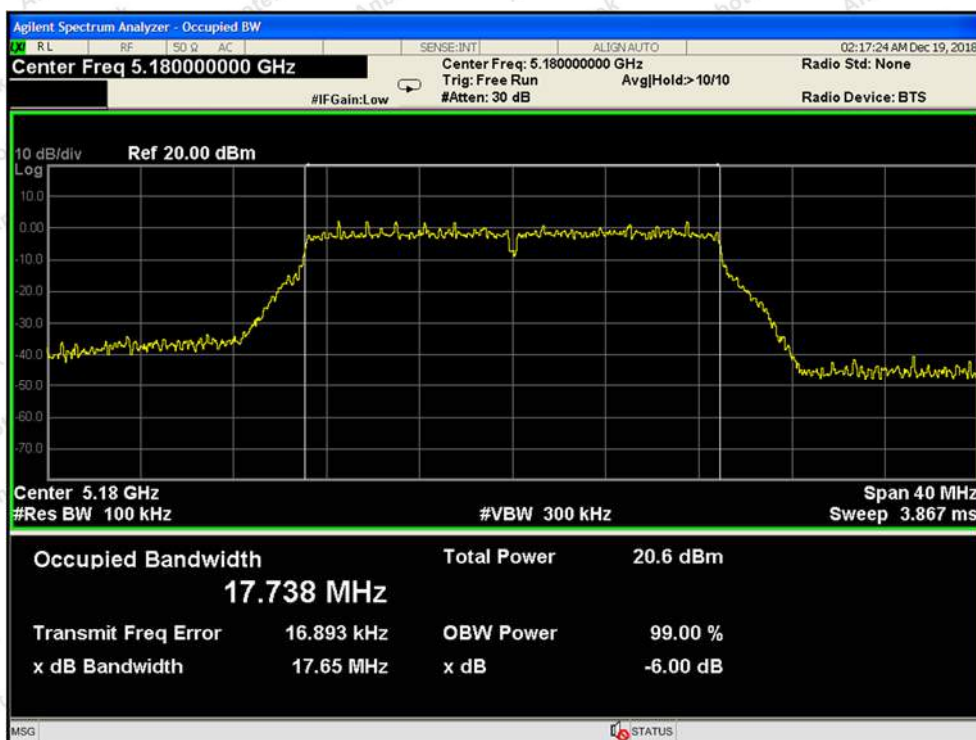


Test Mode: 802.11n20---Low

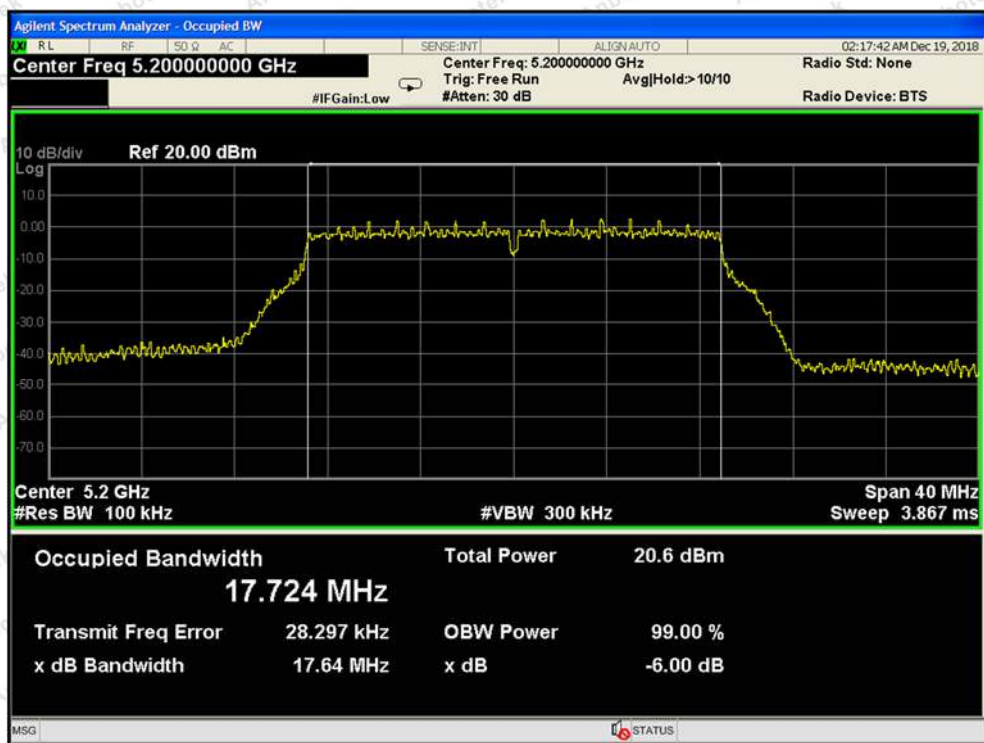


Test Mode: 802.11n20---Middle

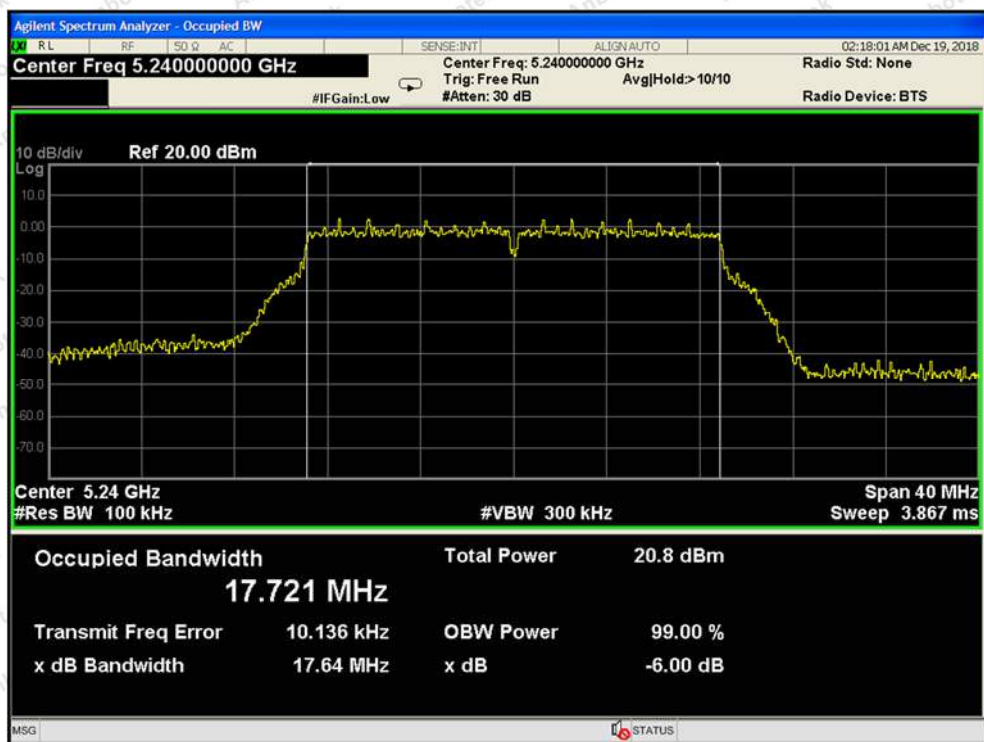


Test Mode: 802.11n20---High

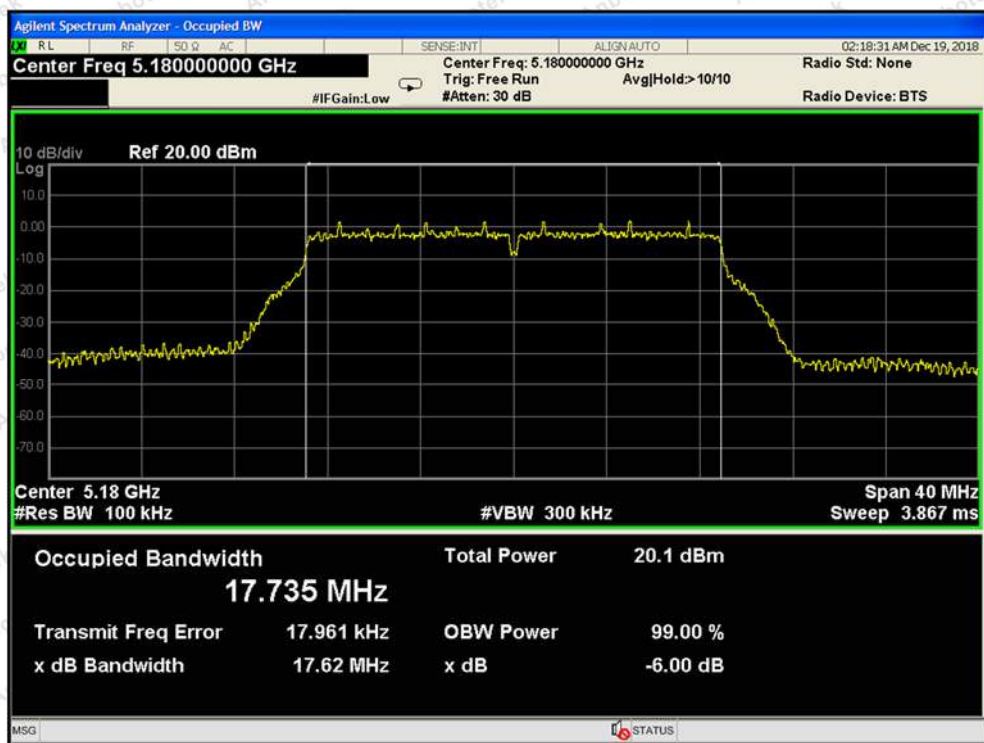


Test Mode: 802.11ac20--Low

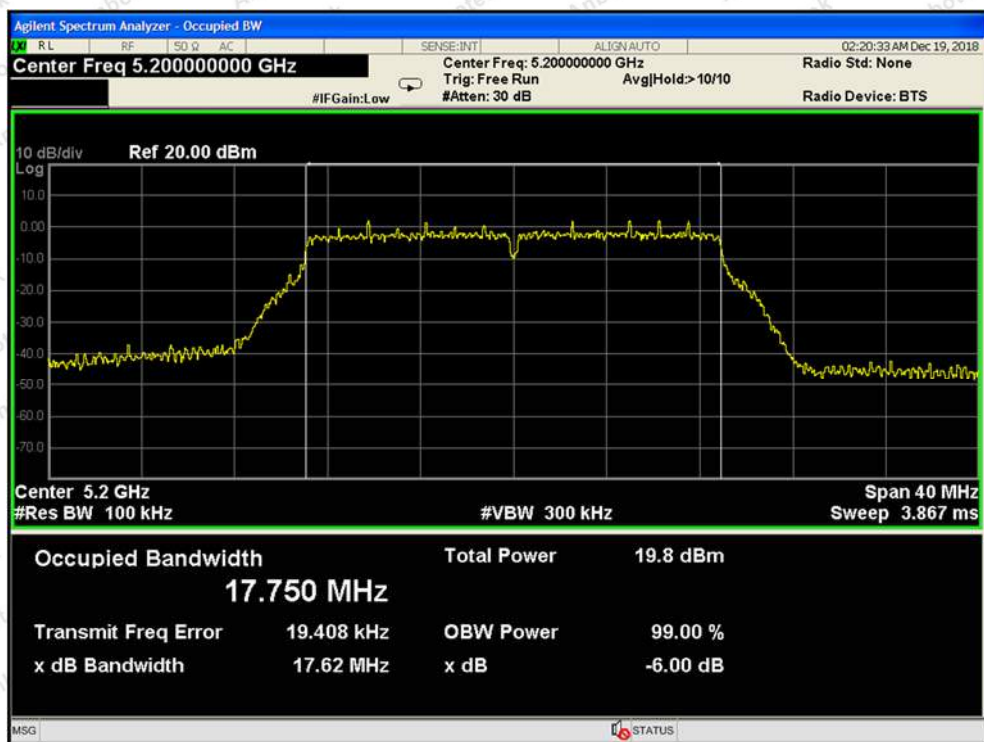


Test Mode: 802.11ac20---Middle

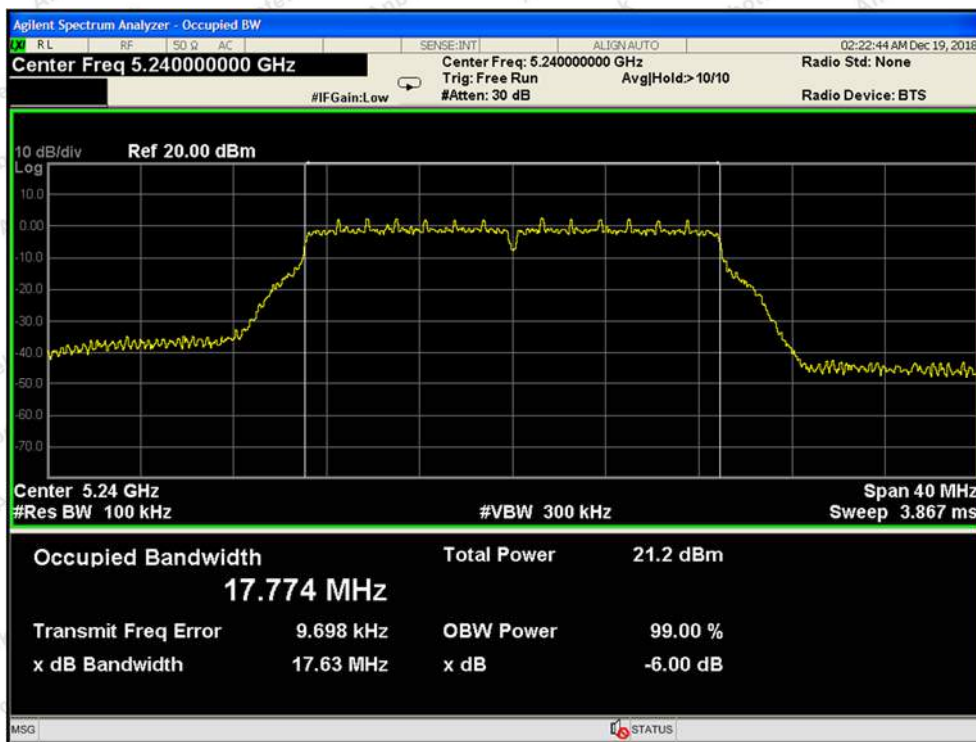


Test Mode: 802.11ac20---High

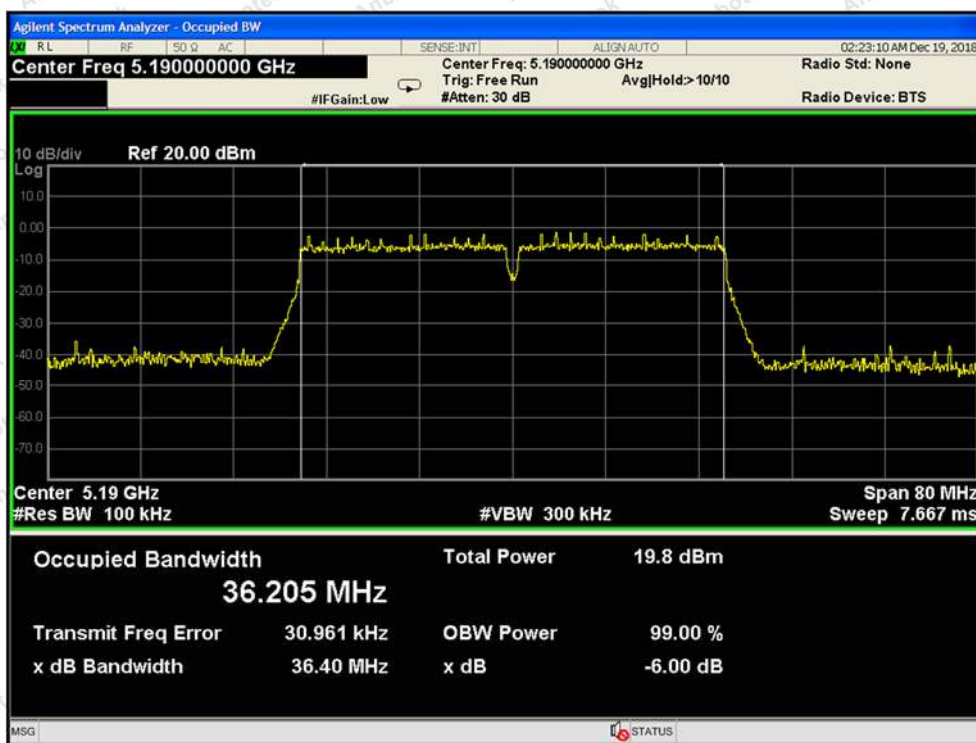


Test Mode: 802.11n40---Low

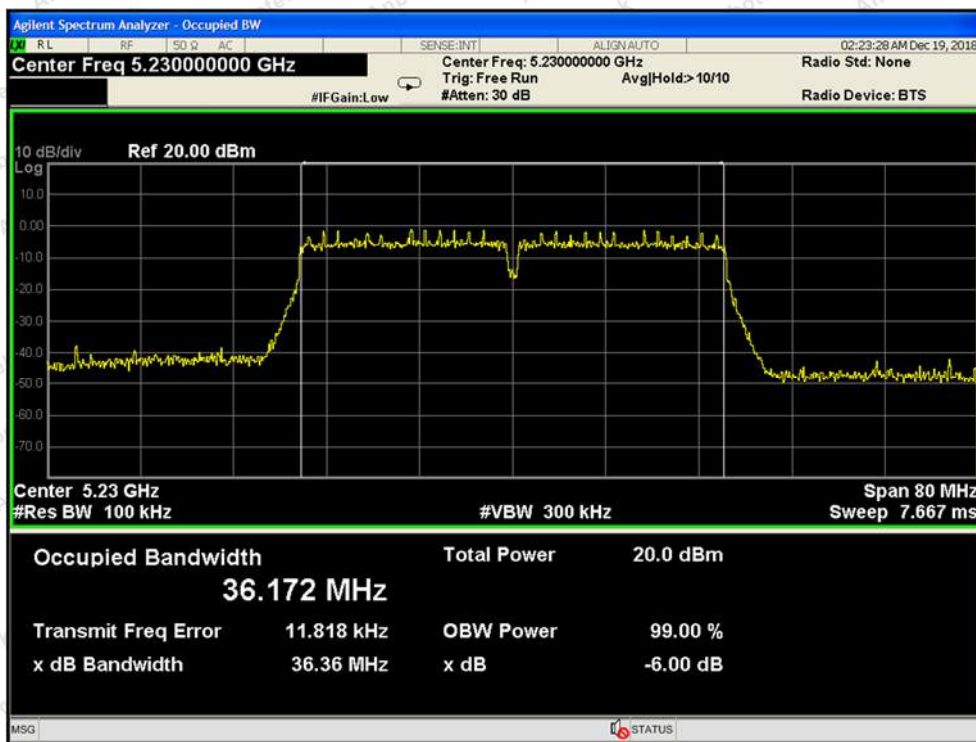


Test Mode: 802.11n40---High

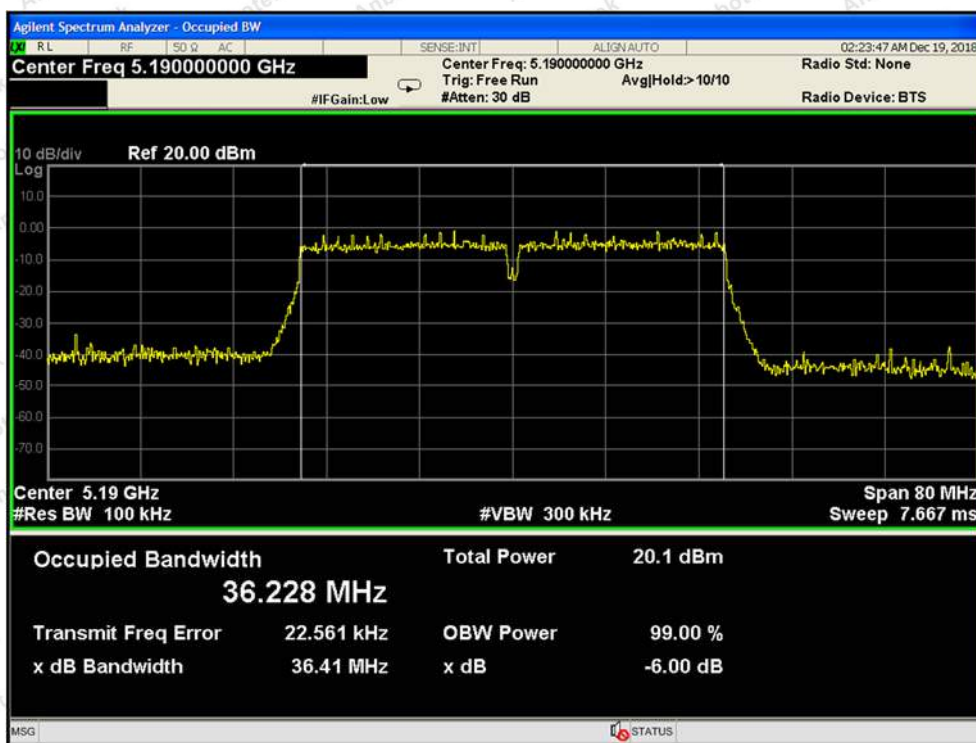

Test Mode: 802.11ac40---Low

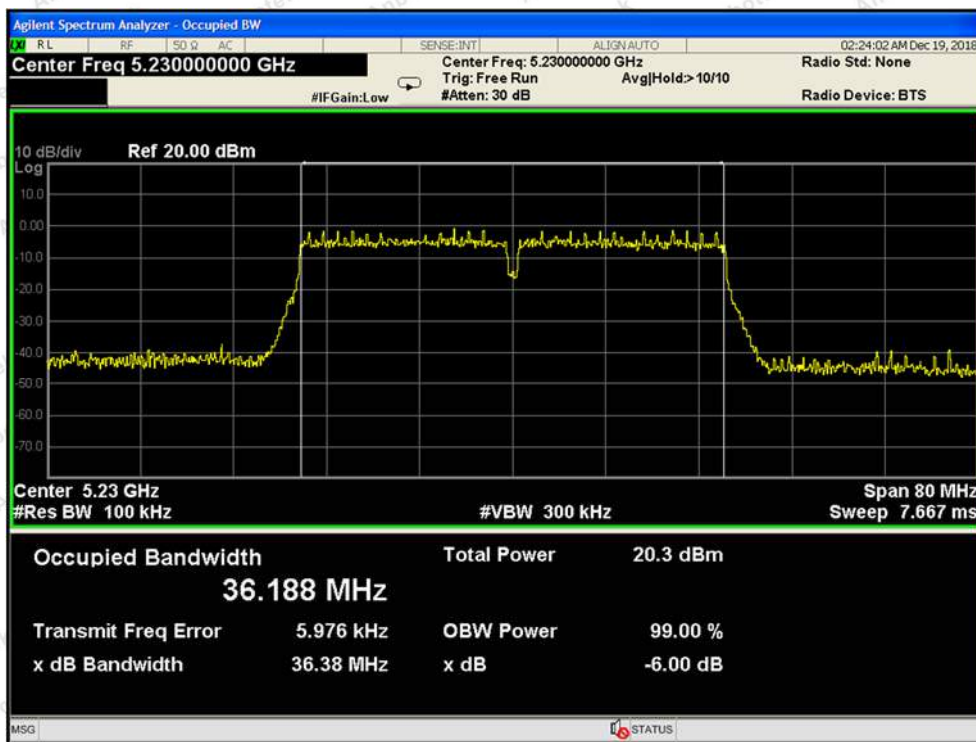


Test Mode: 802.11ac40---High

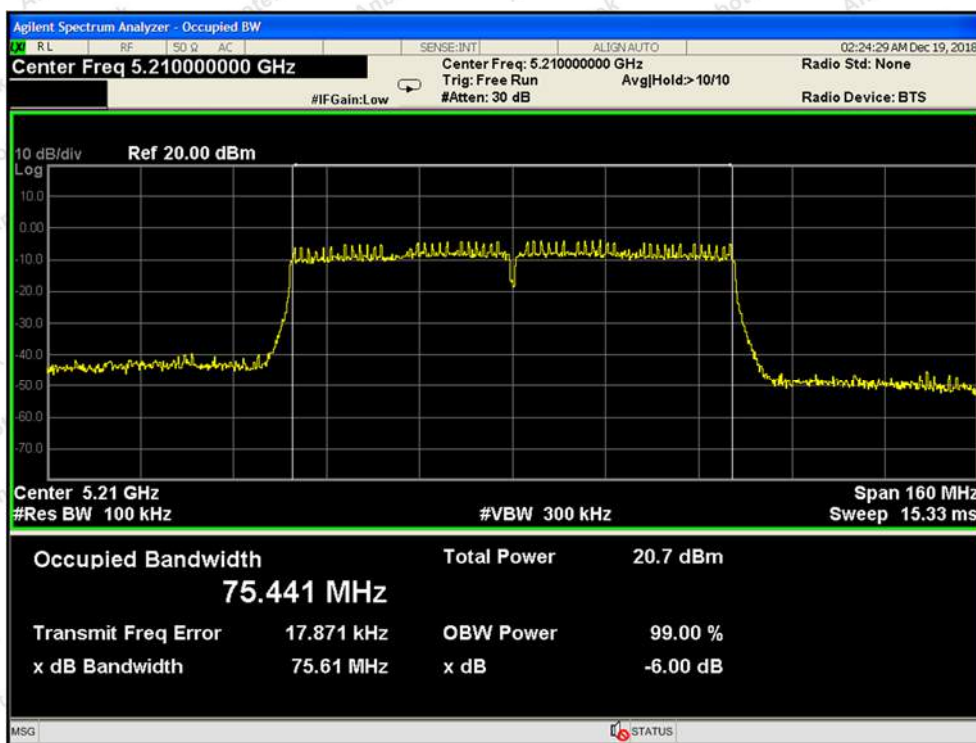


Test Mode: 802.11ac80


26dB & 99% Bandwidth

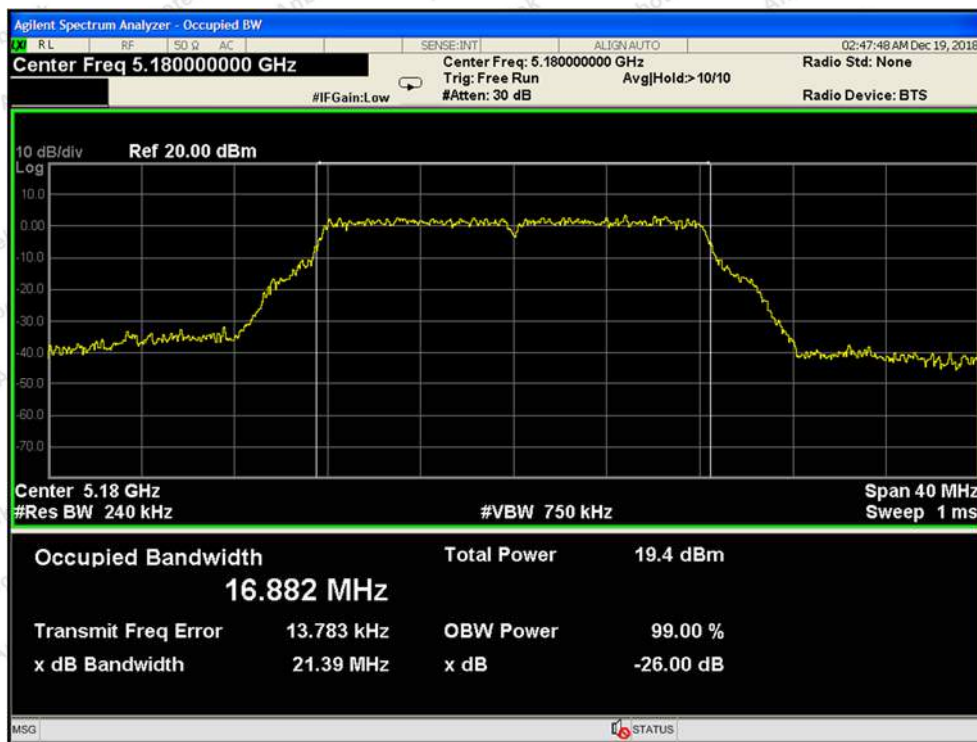


Test Mode: 802.11a--Low

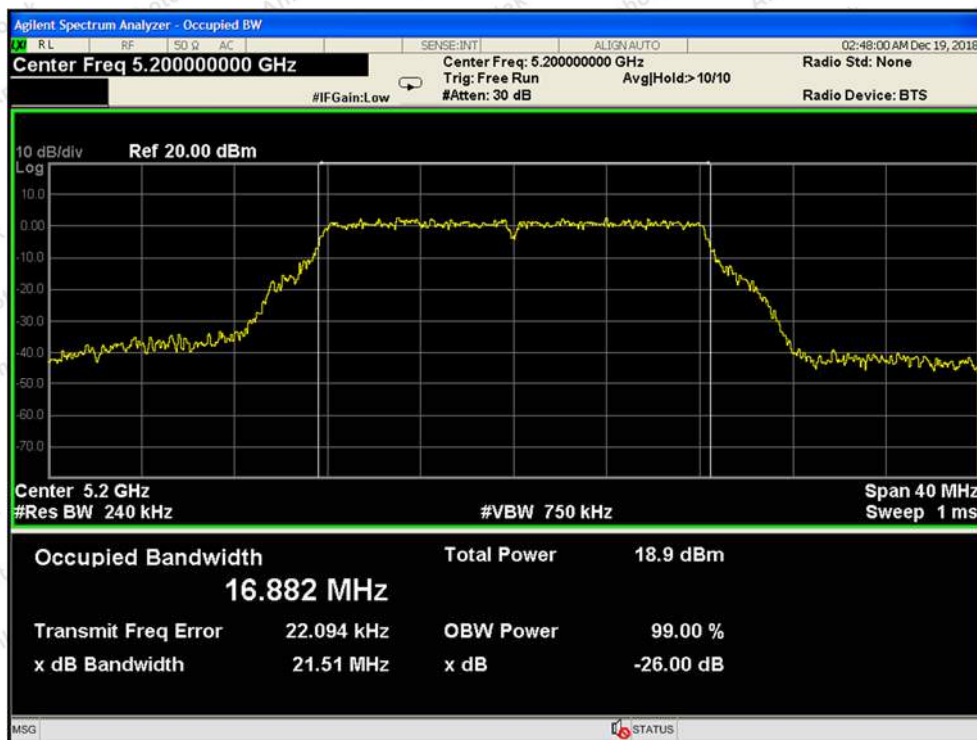


Test Mode: 802.11a---Middle

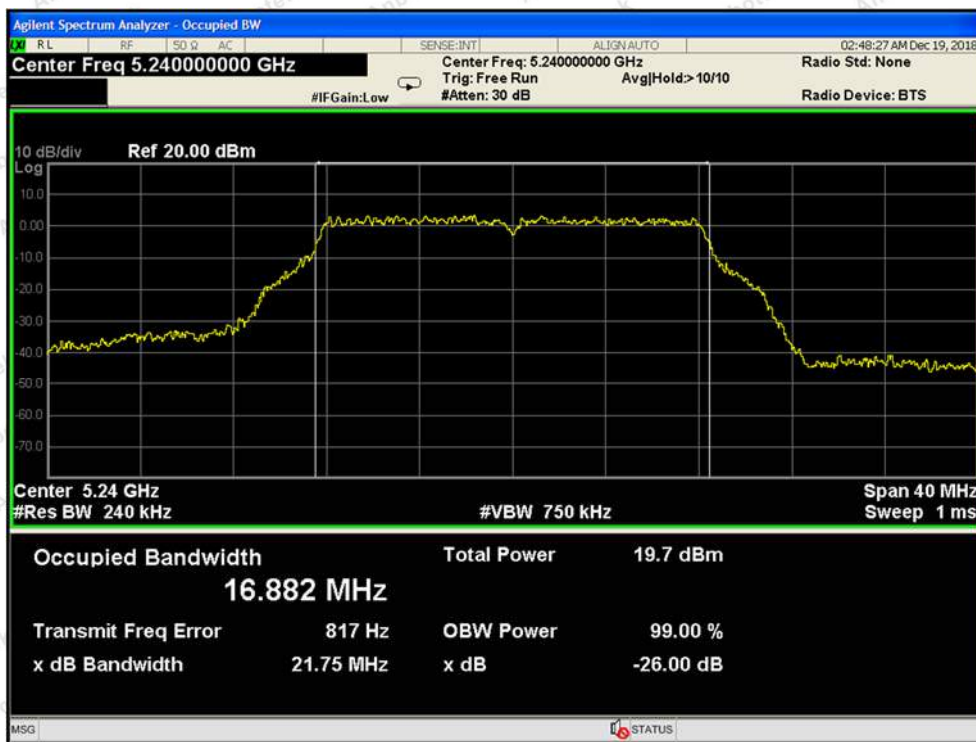


Test Mode: 802.11a---High

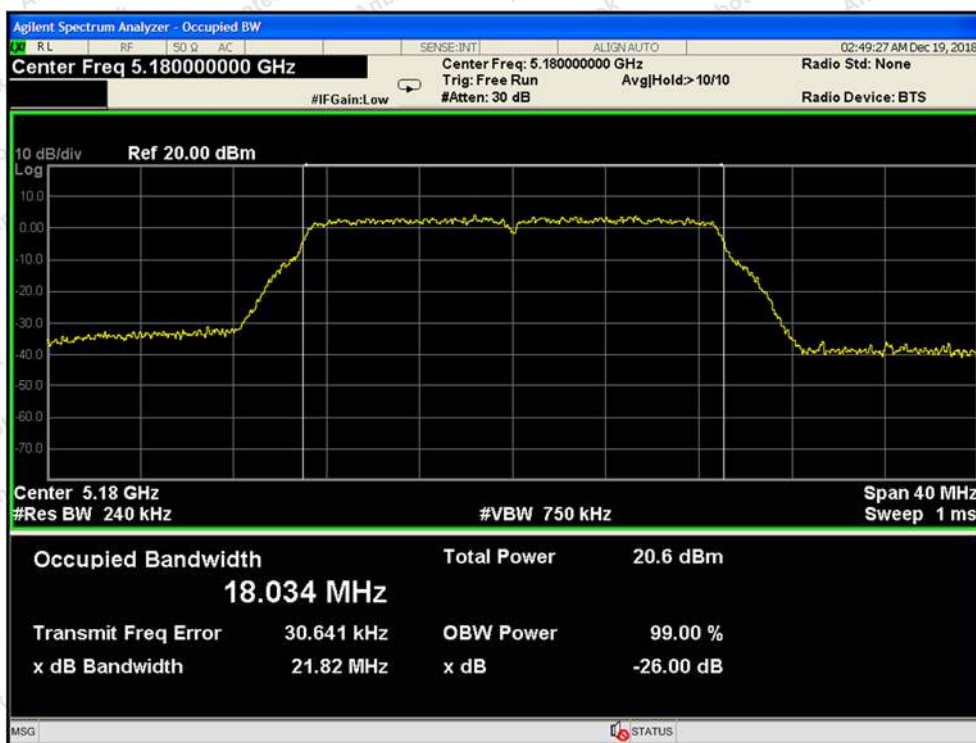


Test Mode: 802.11n20---Low

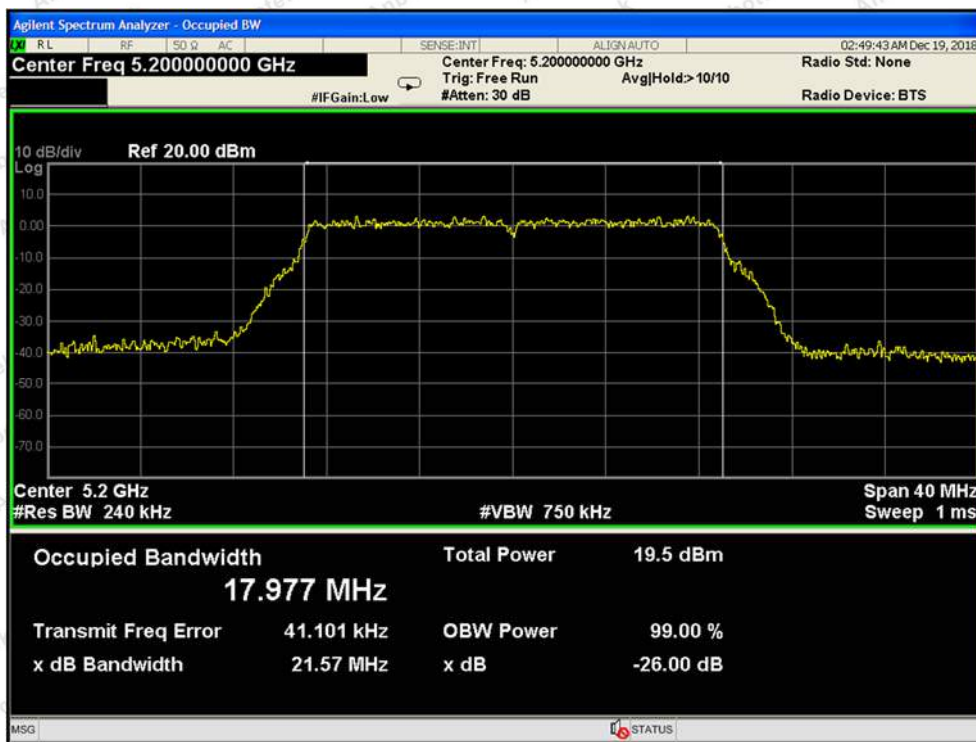


Test Mode: 802.11n20---Middle

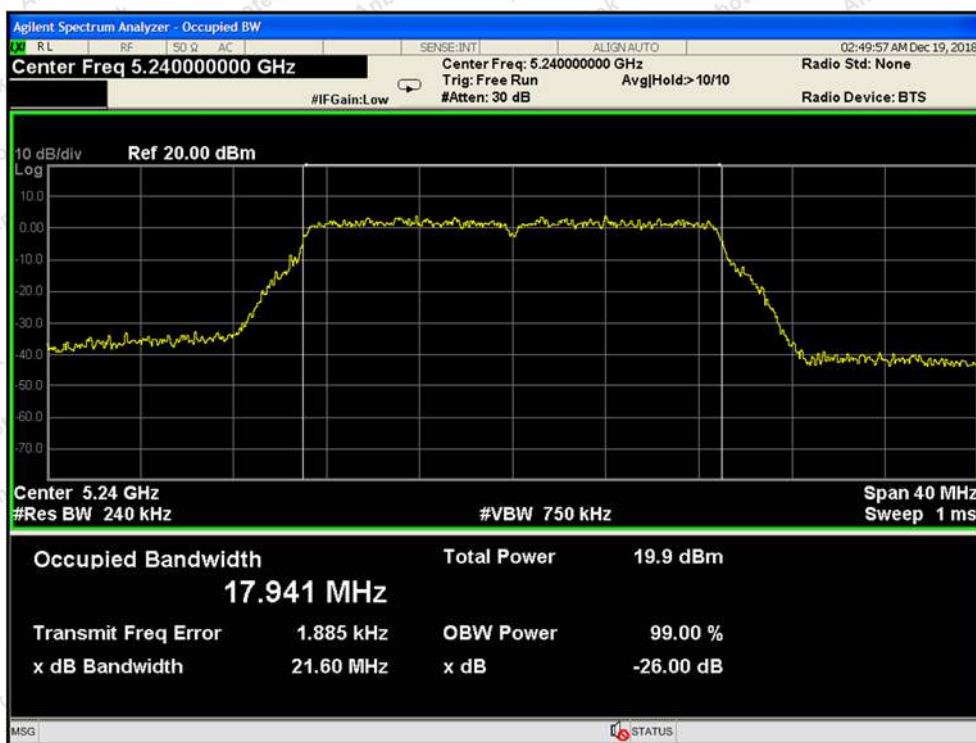


Test Mode: 802.11n20---High

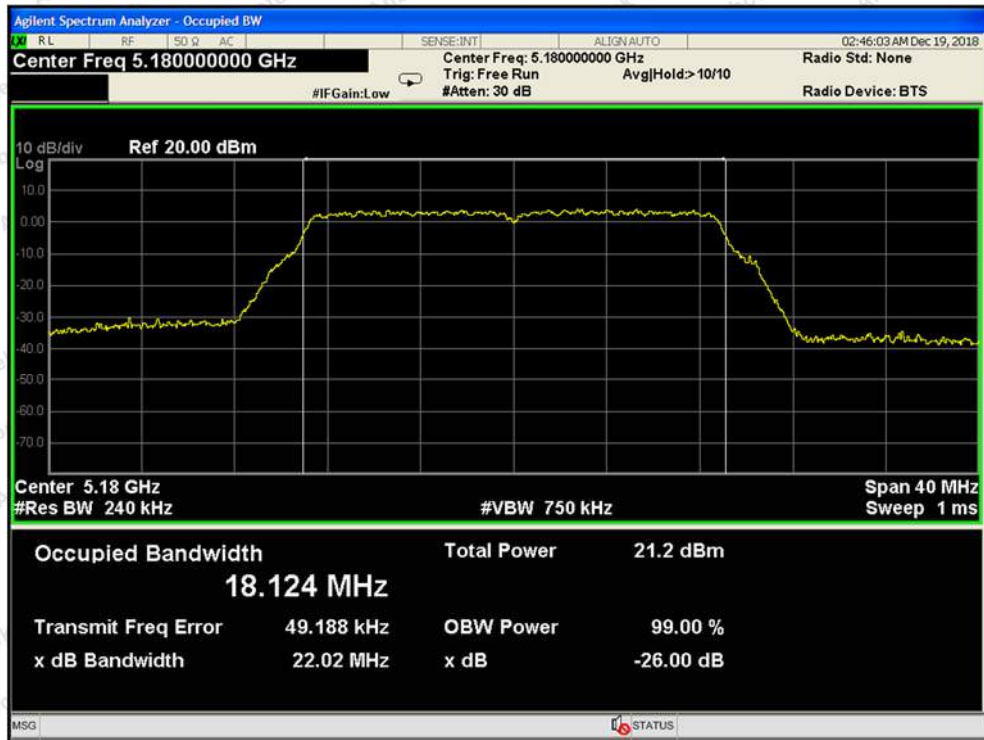


Test Mode: 802.11ac20--Low

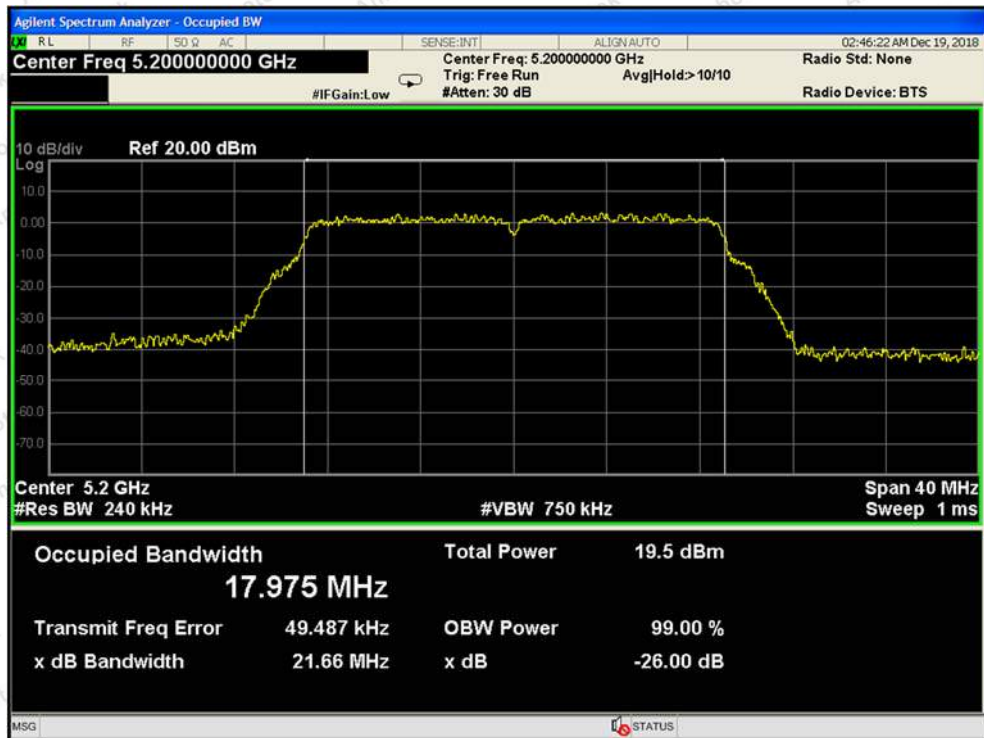


Test Mode: 802.11ac20---Middle

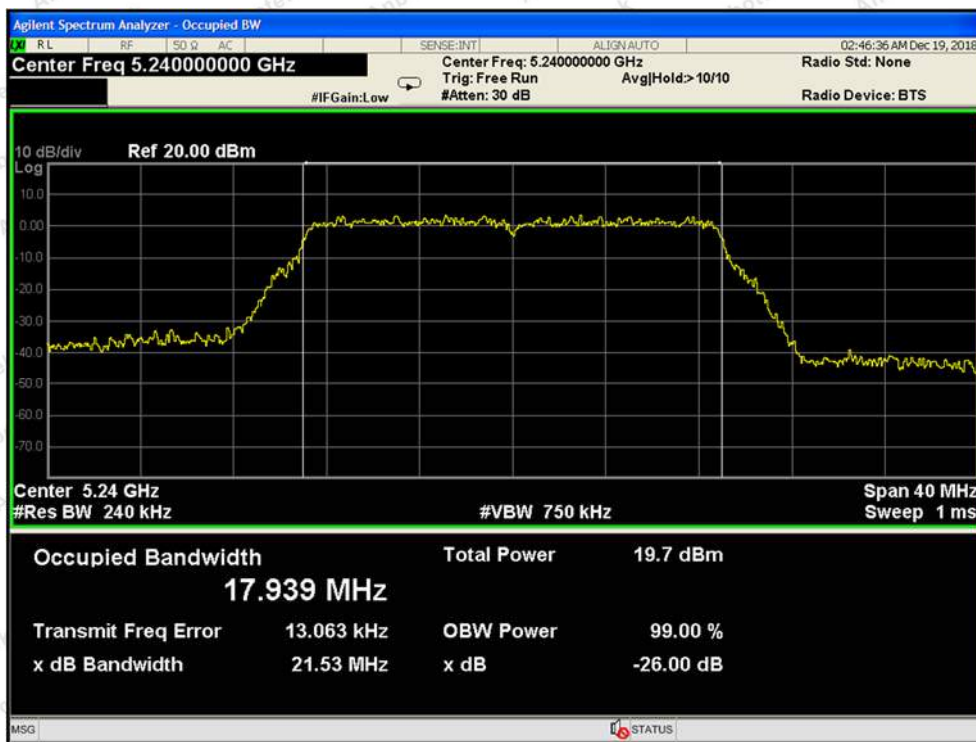


Test Mode: 802.11ac20---High

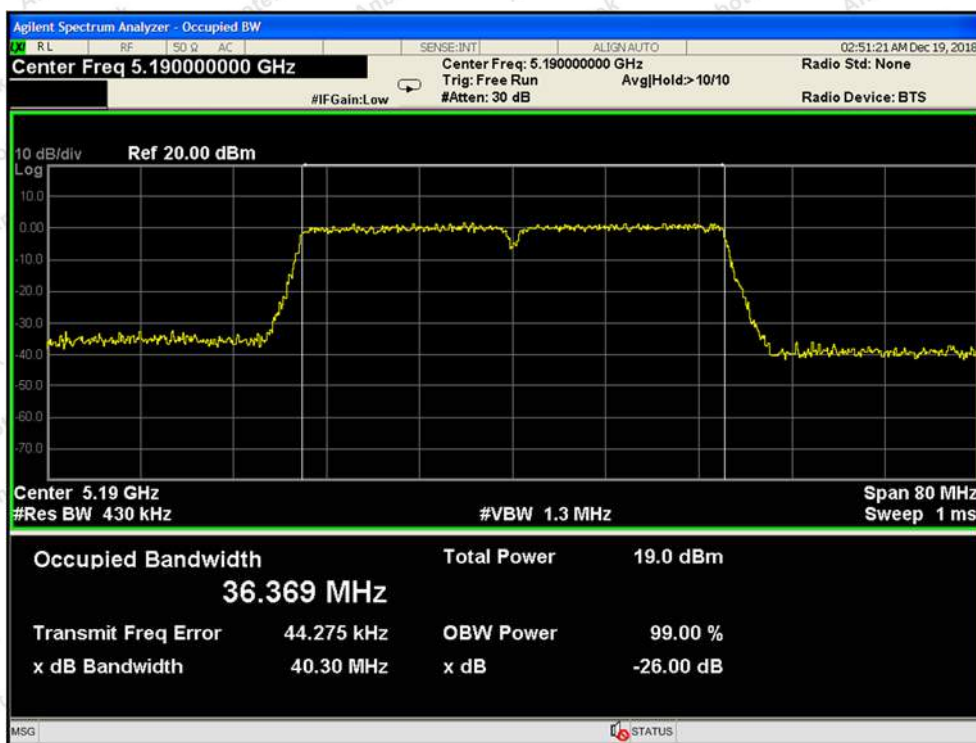


Test Mode: 802.11n40---Low

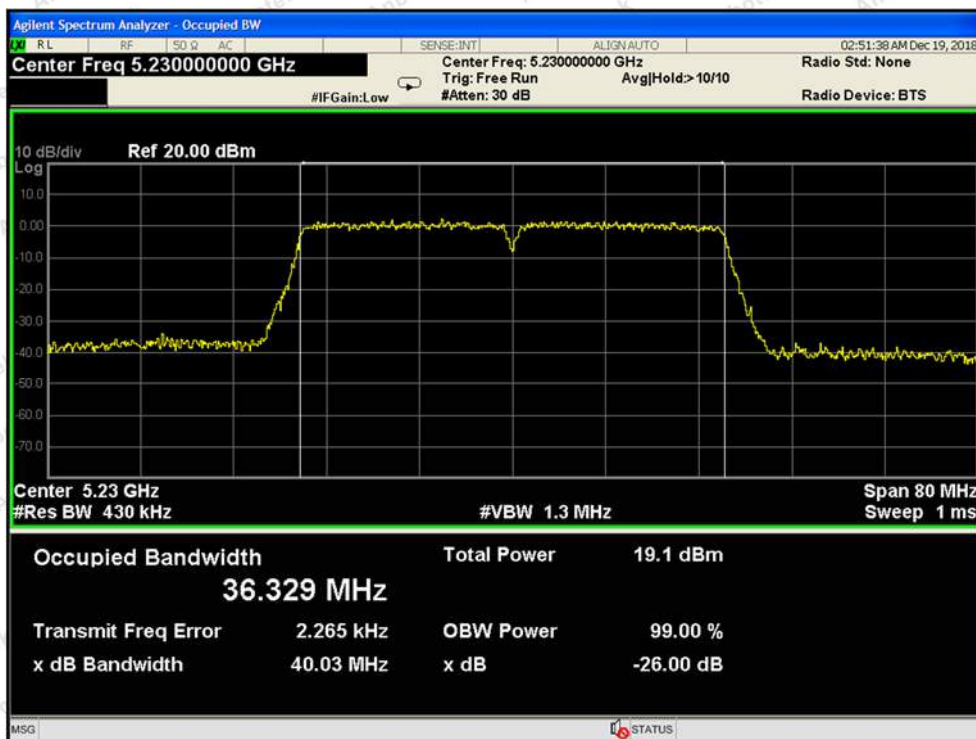


Test Mode: 802.11n40---High

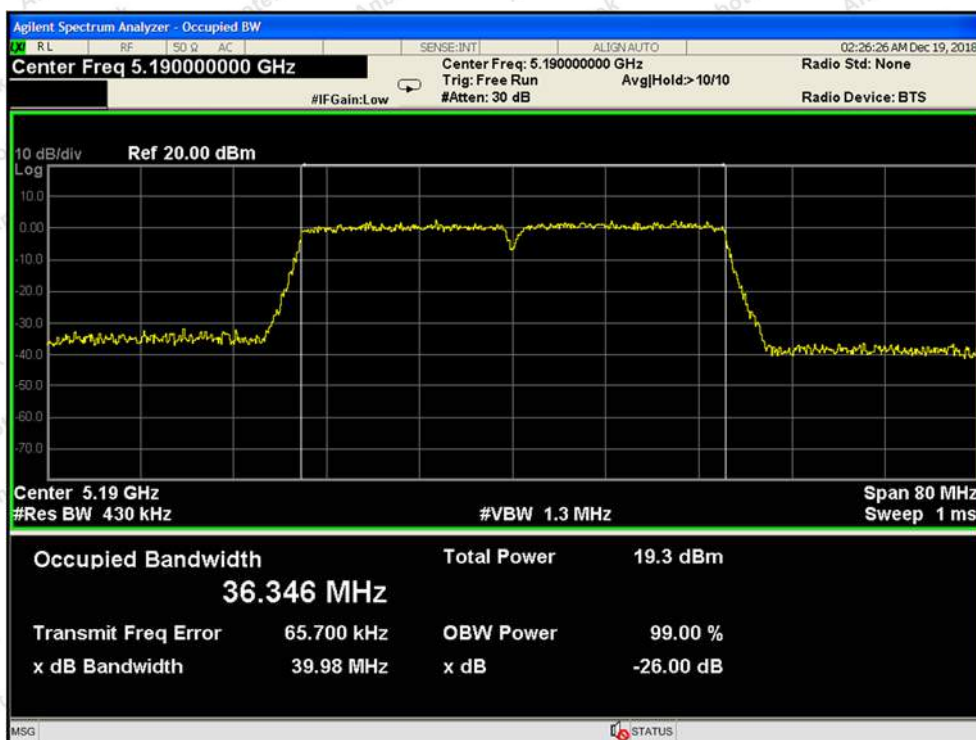

Test Mode: 802.11ac40---Low

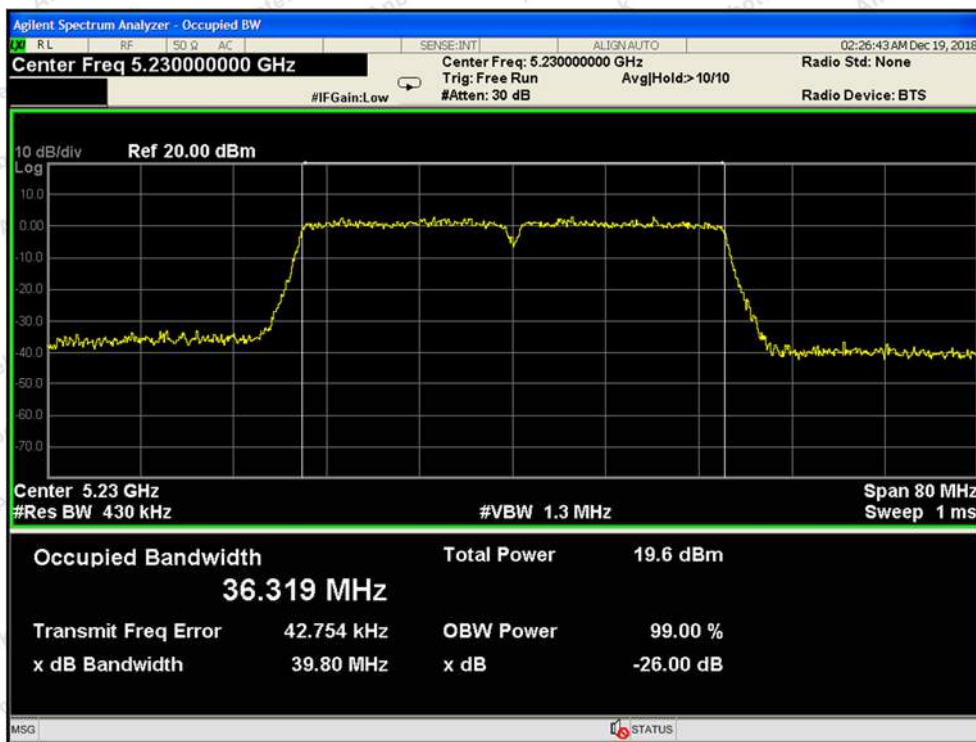

Test Mode: 802.11ac40---High

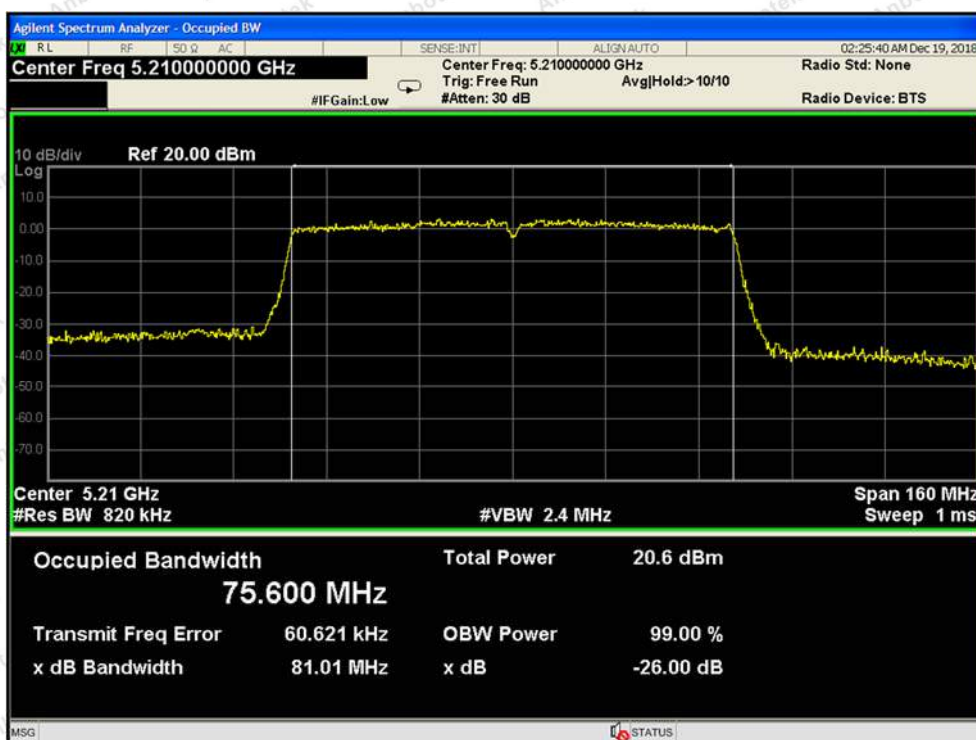


Test Mode: 802.11ac80

7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a) (1) (2) (3)
Test Limit	17dBm/MHz

7.2. Test Setup



7.3. Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =1MHz;
3. Set VBW $\geq$ 3 RBW=3MHz;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;
5. Detector=RMS;
6. Sweep time= auto couple;
7. Trace mode=max. hold;

7.4. Test Data

Test Item : Power Spectral Density
Test Voltage : DC 3.6V battery inside
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24°C
Humidity : 55%RH


Test Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm/MHz)	Correctional Limit (dBm/MHz)	Results
802.11a	5180	4.152	17	PASS
	5200	4.032	17	PASS
	5240	4.902	17	PASS
802.11n20	5180	4.393	17	PASS
	5200	3.750	17	PASS
	5240	3.372	17	PASS
802.11ac20	5180	3.719	17	PASS
	5200	3.616	17	PASS
	5240	3.667	17	PASS
802.11n40	5190	0.802	17	PASS
	5230	1.083	17	PASS
802.11ac40	5190	0.391	17	PASS
	5230	0.023	17	PASS
802.11ac80	5210	-2.396	17	PASS




Test Mode: 802.11a--Low




Test Mode: 802.11a---Middle

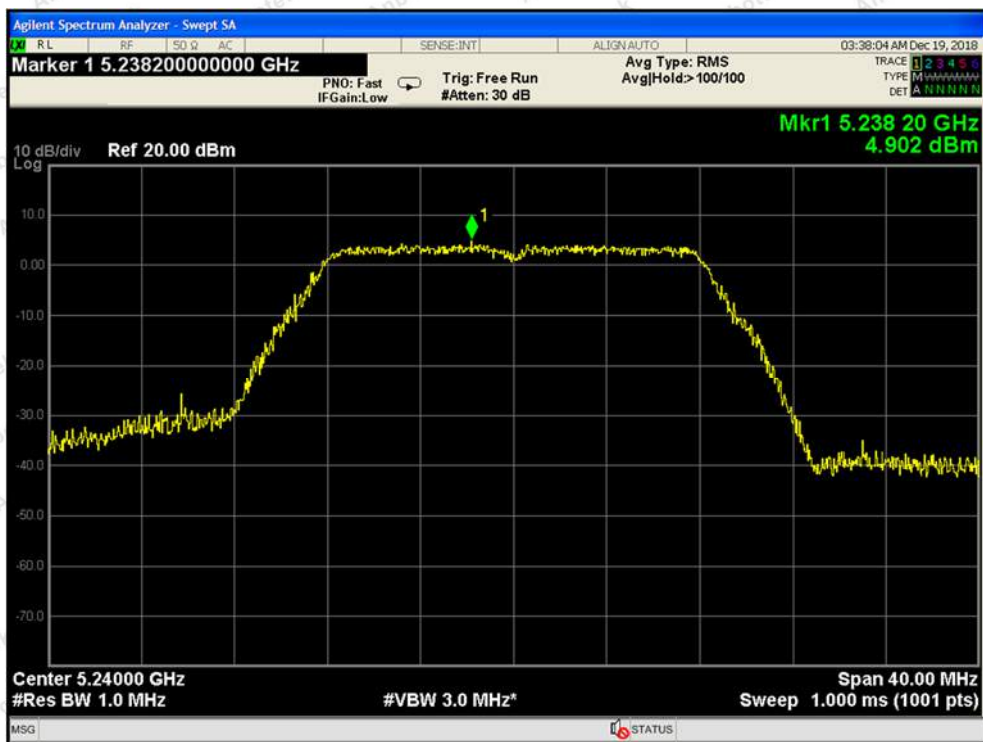

Test Mode: 802.11a---High

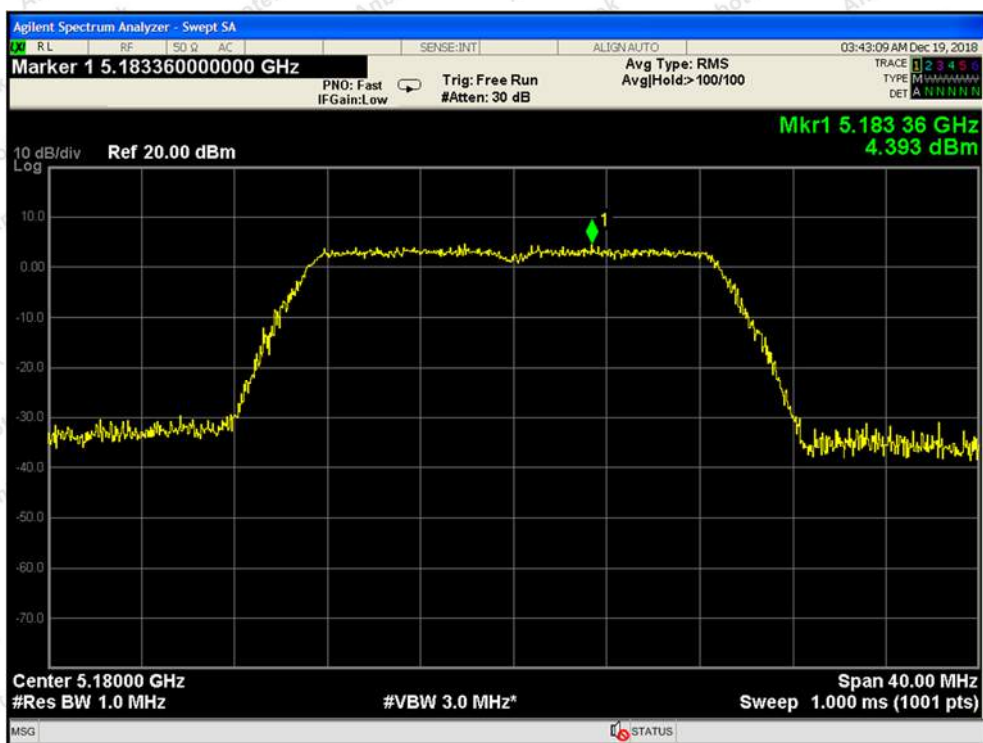

Test Mode: 802.11n20---Low

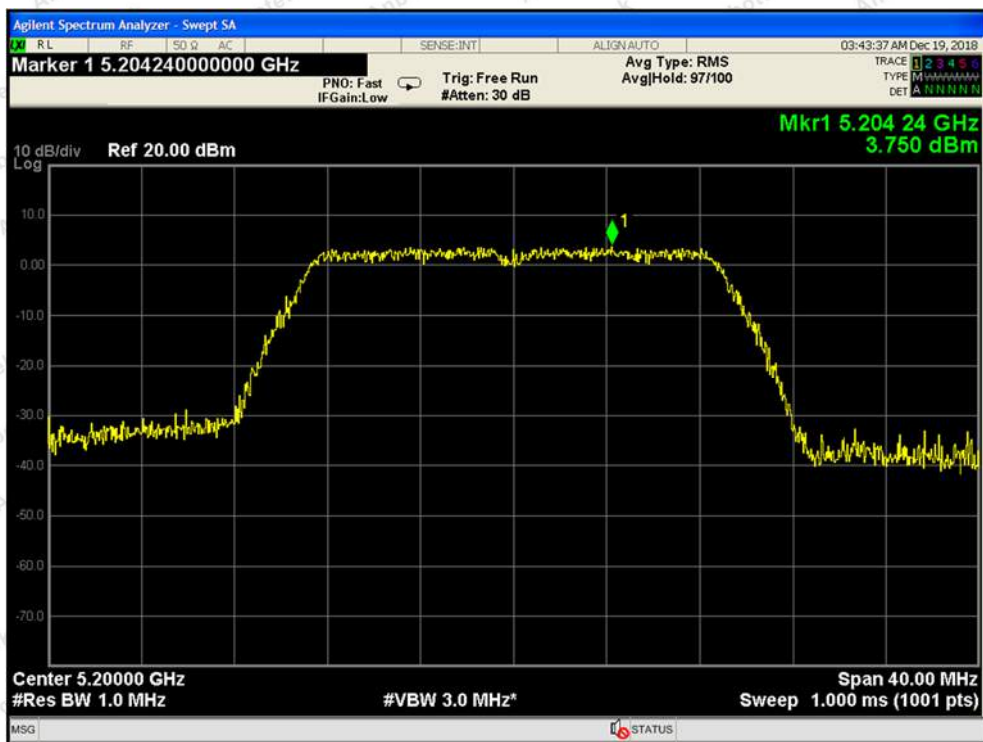

Test Mode: 802.11n20---Middle



Test Mode: 802.11n20---High




Test Mode: 802.11ac20--Low




Test Mode: 802.11ac20---Middle




Test Mode: 802.11ac20---High

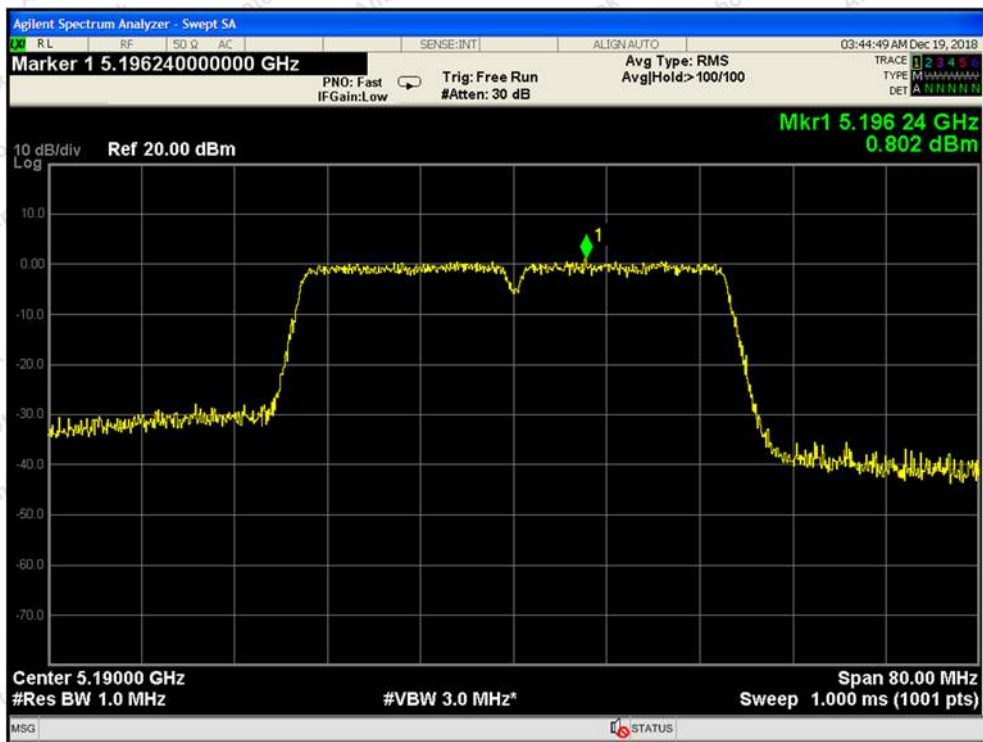


Test Mode: 802.11n40---Low

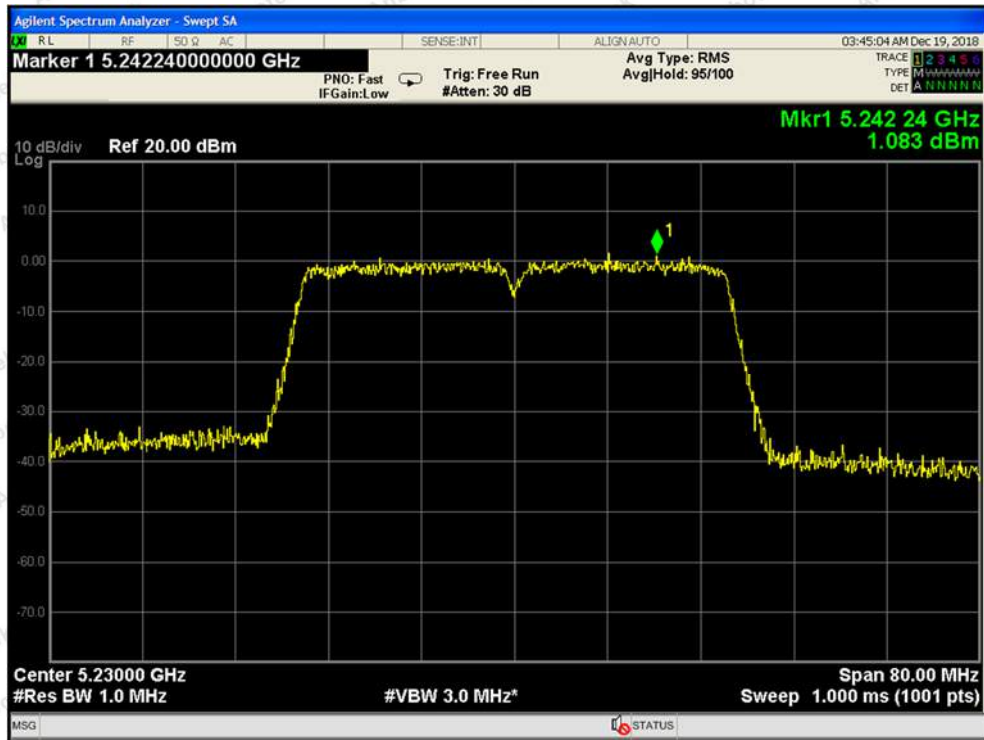

Test Mode: 802.11n40---High

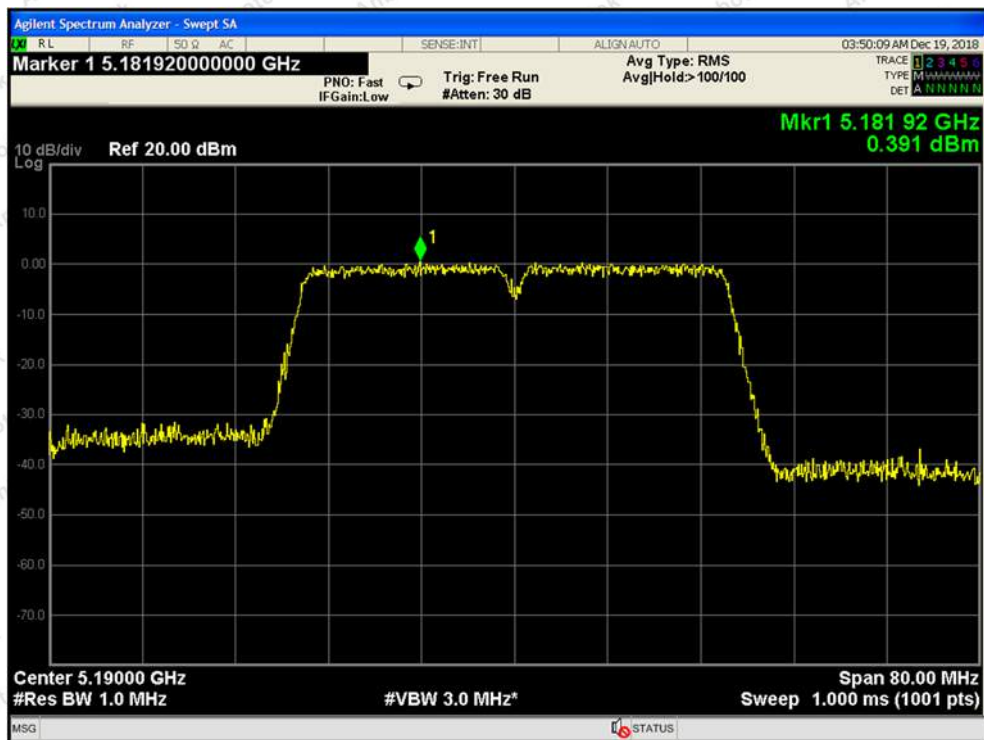

Test Mode: 802.11ac40---Low

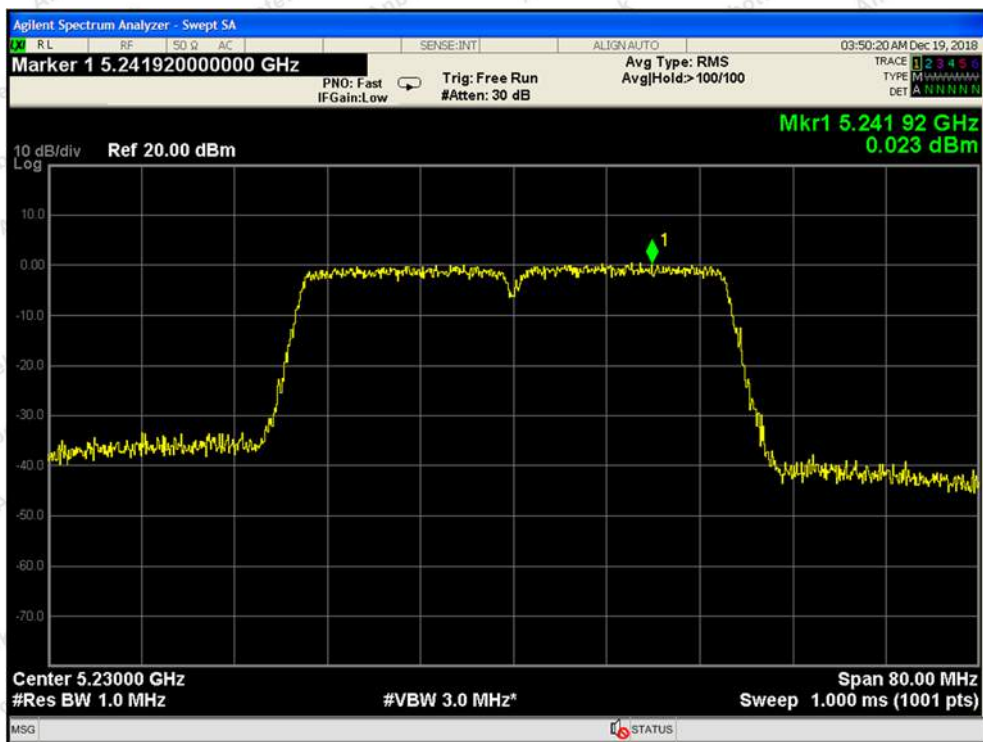

Test Mode: 802.11ac40---High



Test Mode: 802.11ac80

8. Antenna Requirement


8.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /15.407
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.407 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

8.2. Antenna Connected Construction

The antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is 2 dBi. It complies with the standard requirement.

5.1G WIFI Antenna

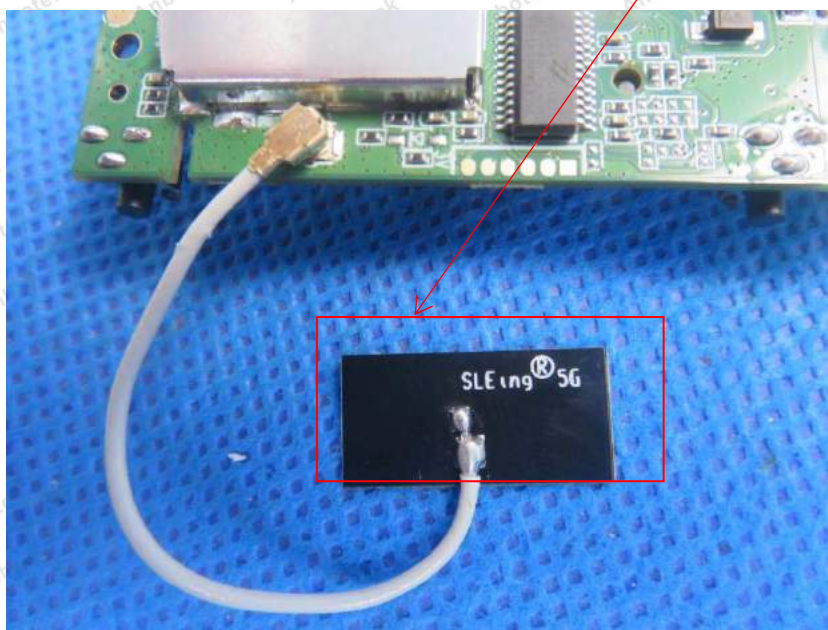


APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Power Line Conducted Emission Test



Photo of Radiation Emission Test

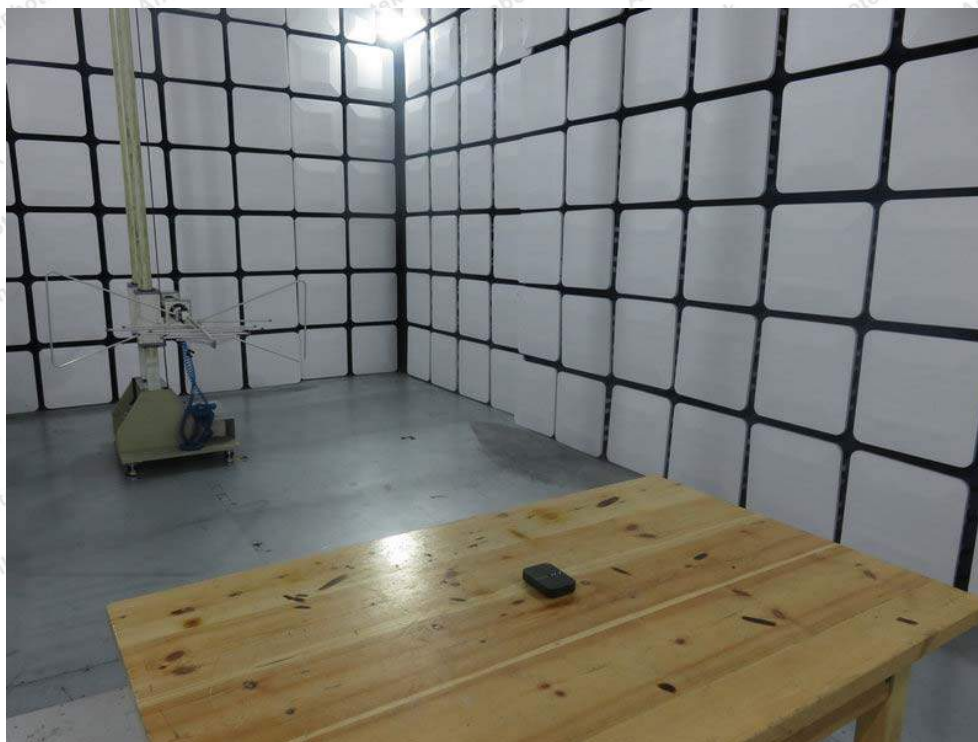



APPENDIX II -- EXTERNAL PHOTOGRAPH














APPENDIX III -- INTERNAL PHOTOGRAPH





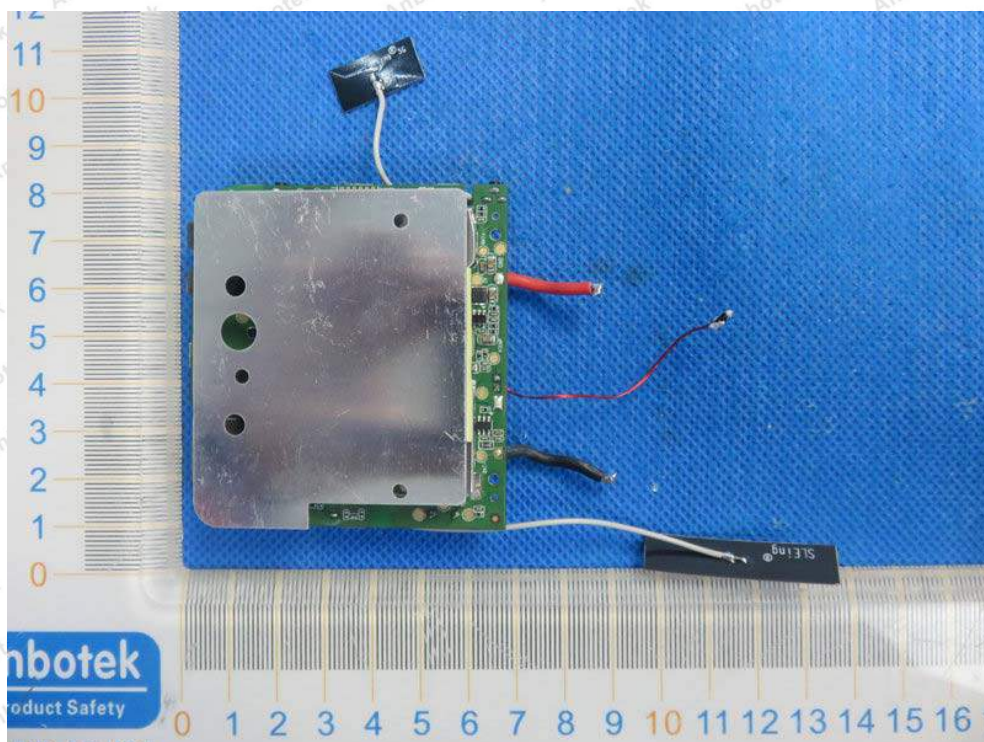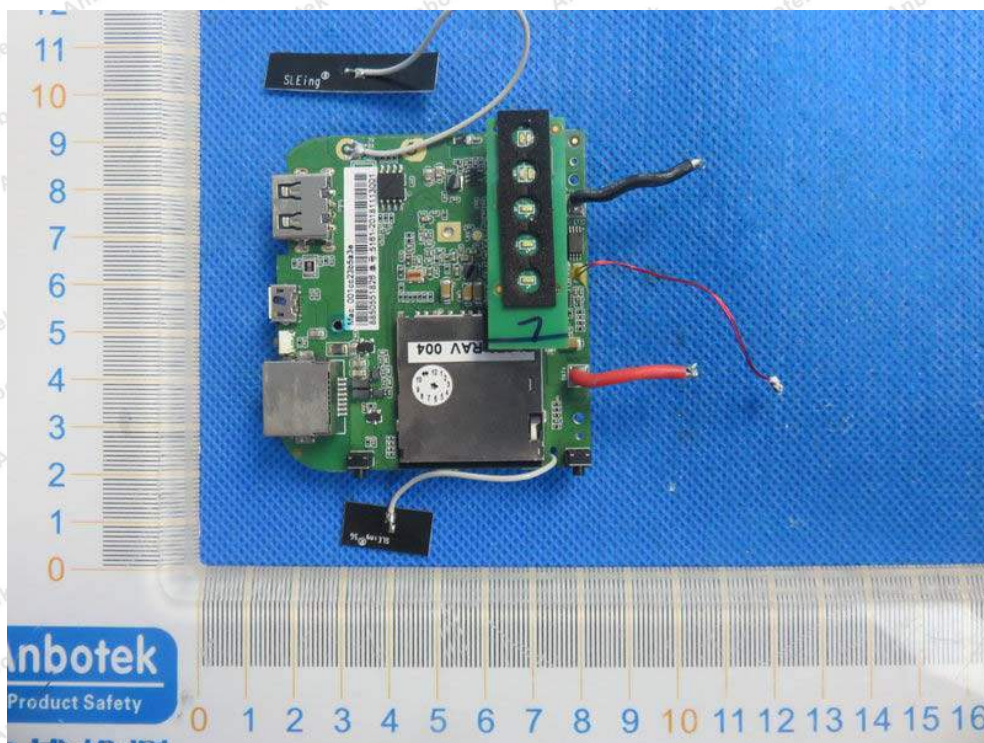


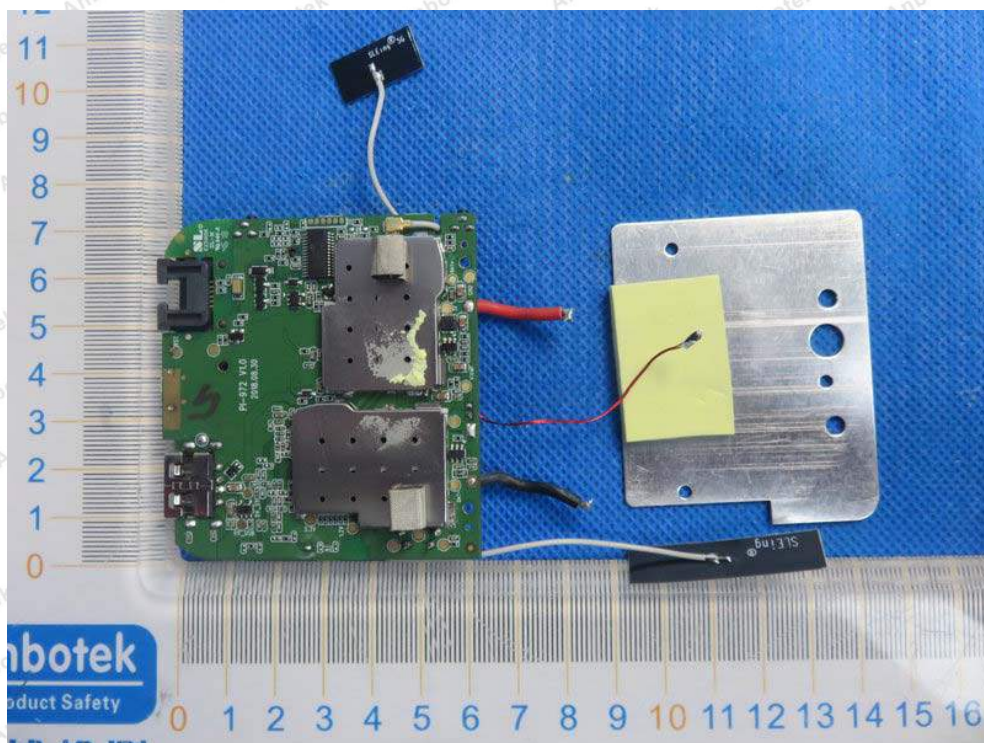



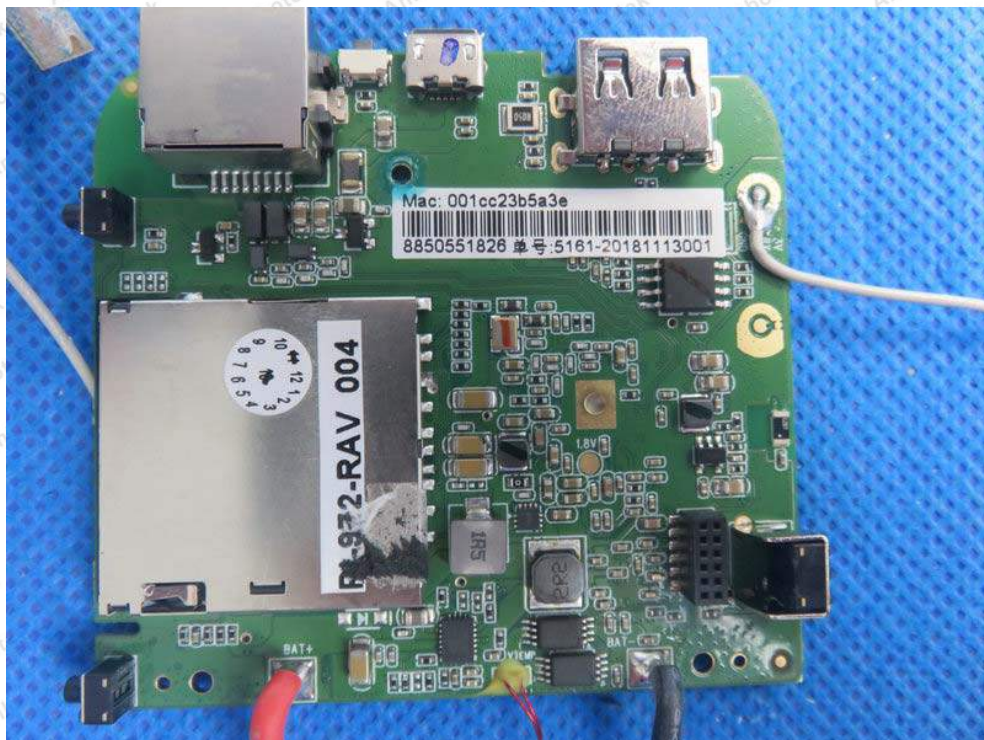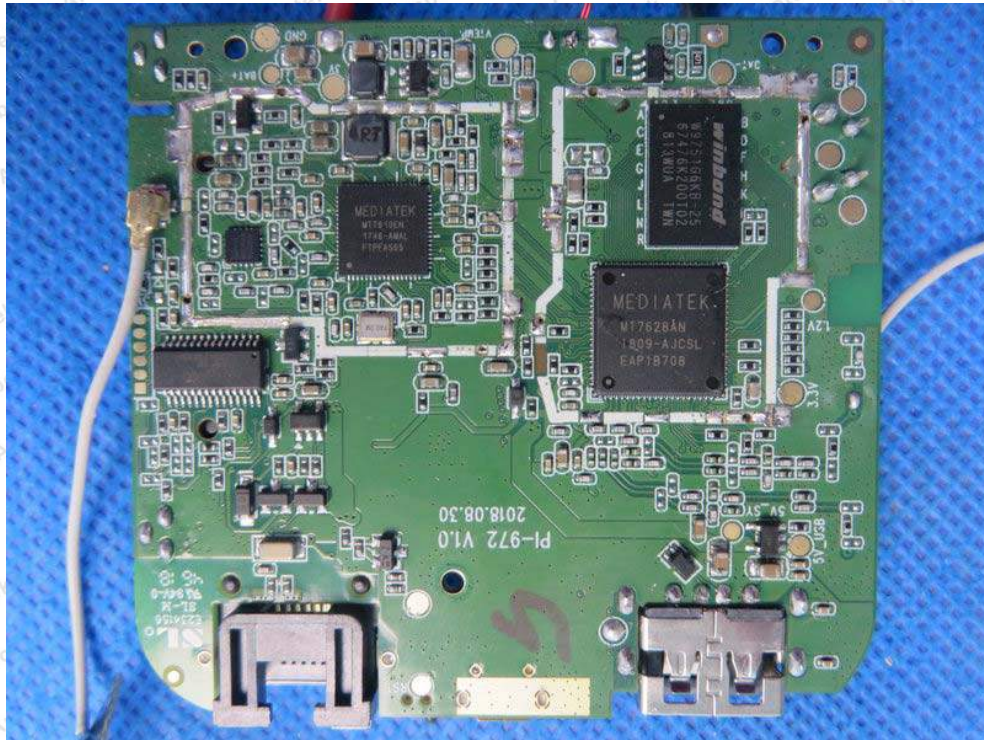

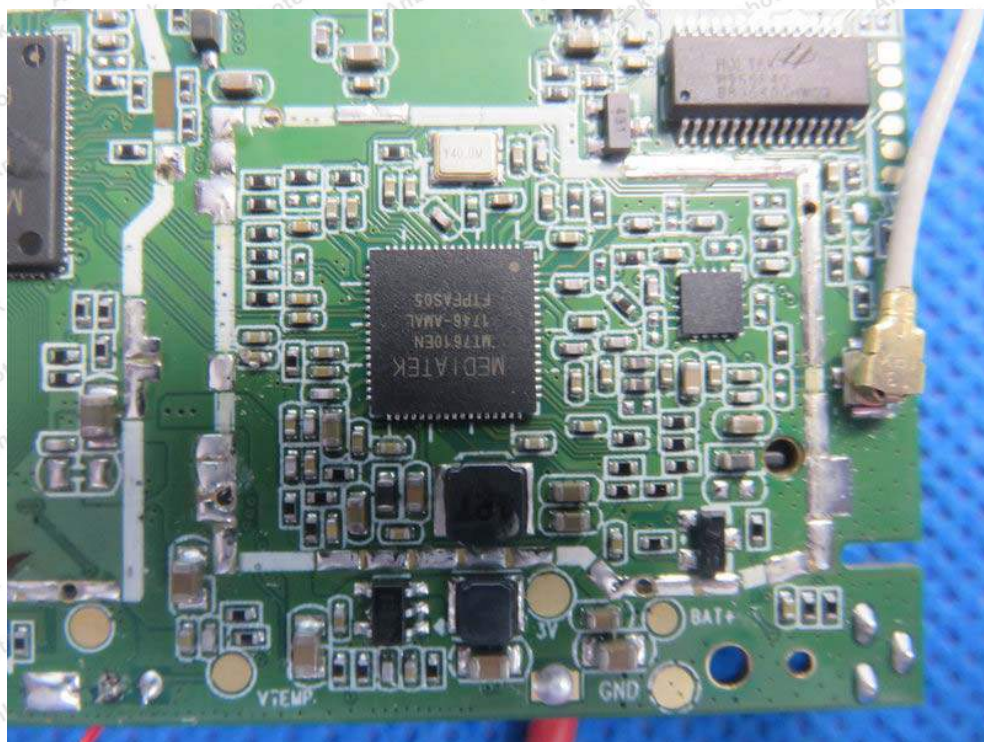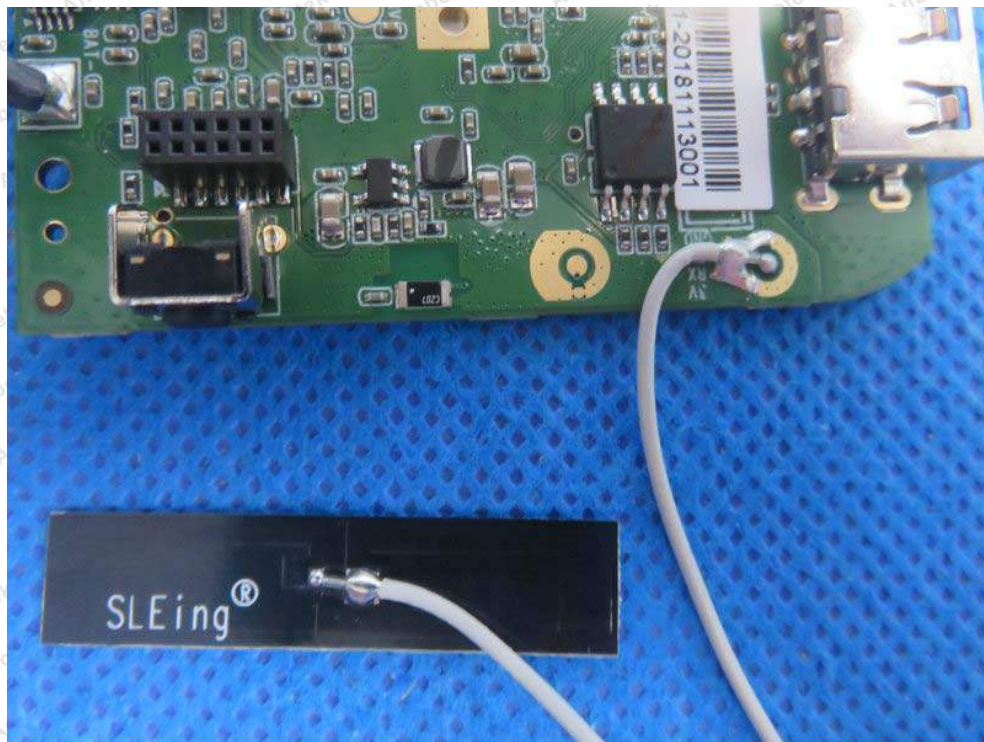

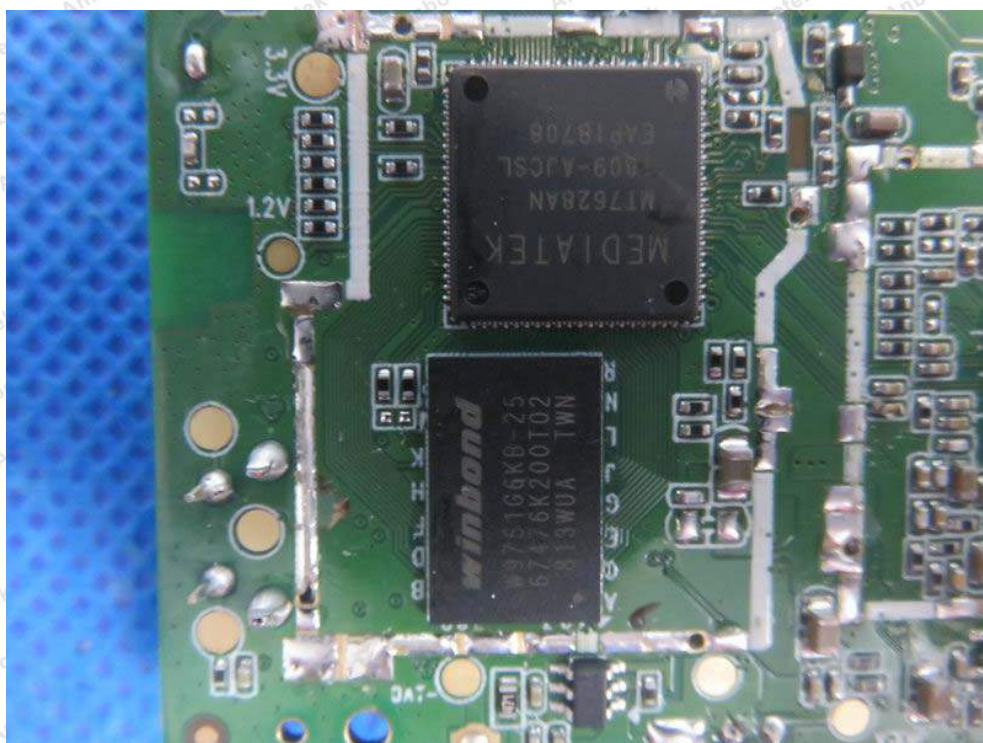

----- End of Report -----