	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>



**dB Technology**

( Cambridge Ltd. )

EMC  
Testing

EMC  
Consultancy

EMC  
Training

23, Headington Drive,  
Cambridge.  
CB1 9HE  
Tel : 01954 251974 (test site)  
or : 01223 241140 (accounts)  
Fax : 01954 251907  
web : www.dbtechnology.co.uk  
email: mail@dbtechnology.co.uk

## REPORT ON ELECTROMAGNETIC COMPATIBILITY TESTS

Performed at:  
**TWENTY PENCE TEST SITE**

Twenty Pence Road,  
Cottenham,  
Cambridge  
U.K.  
CB24 8PS

on

**Sepura PLC**

**SRG3900XN**

dated


**30th October 2014**

### Document History

Issue	Date	Affected page(s)	Description of modifications	Revised by	Approved by
1	04/11/14		Initial release		

Based on report template:  
v090319

*This report shall not be reproduced except in full, without the written approval of:  
dB Technology (Cambridge) Ltd.*

	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: 2 of 88

Equipment Under Test (EUT): SRG3900XN

Test Commissioned by: Sepura PLC  
Radio House  
St Andrews Road  
Cambridge  
Cambridgeshire  
CB4 1GR

Representative: Steve Wood

Test Started: 27th August 2014

Test Completed: 16th November 2014

Test Engineer: Dave Smith

Date of Report: 30th October 2014

Written by: Dave Smith Checked by: Derek Barlow


Signature: D. A. Smith Signature: D. Barlow

Date: 30th October 2014 Date: 4th November 2014

**dB Technology can only report on the specific unit(s) tested at its site. The responsibility for extrapolating this data to a product line lies solely with the manufacturer.**

## Test Standards Applied

<b>Part 90 of CFR47</b>	<i>Private Land Mobile Radio Services</i>
<b>CFR 47 Class B</b>	<i>Code of Federal Regulations: Pt 15 Subpart B- Radio Frequency Devices - Unintentional Radiators</i>

	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

## Emissions Test Results Summary

### Part 90

**PASS**

Test	Port	Method	Limit	PASS/FAIL	Notes
Output Power Radiated		90.205	90.205(h)	No Limit	#1
Output Power Conducted	antenna	90.205 2.1046	90.205(h)	No Limit	#1
Types of Emissions	antenna	90.207 2.1047	Specified by manufacturer		
Bandwidth	antenna	90.209 2.1049	90.209(b)(5)	PASS	#2
Emissions Masks Radiated		90.210 2.1051	90.221(d)	PASS	#3
Emissions Masks Conducted	antenna	90.210 2.1051	90.221(d)	PASS	#3
Frequency Stability	antenna	90.213 2.1055	90.213	PASS	
Frequency Transient Behaviour	antenna	90.214	90.214	N/A	#4
Adjacent Channel Power		90.221	90.221(b)	PASS	

specs\_canadav111211

### CFR 47

**PASS**


Test	Port	Method	Limit	PASS/FAIL	Notes
Conducted Emissions	ac power	ANSI C63.4:2003	FCC(B)	N/A	#5
Radiated Emissions		ANSI C63.4:2003	FCC(B)	PASS	

specs\_fccv100412

- #1 There is no specific limit on output power.
- #2 The additional note 6 was applied which allows a bandwidth of up to 22kHz providing the additional Adjacent Channel Power requirements are met.
- #3 The additional note 5 was applied which only stipulates limits 75kHz from the carrier providing the additional Adjacent Channel Power requirements are met.
- #4 Not applicable for devices operating in the 809MHz to 824MHz and 854MHz to 869MHz bands.


**This Report shows that the EUT met all of the requirements for the tests performed - as shown above.**

*This report shall not be reproduced except in full, without the written approval of:  
dB Technology (Cambridge) Ltd.*


	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		
<b>Test Report</b>			Page: 4 of 88

## Contents

<b>1 EUT Details</b>	<b>6</b>
1.1 General	6
1.2 Modifications to EUT and Peripherals	7
1.3 EUT Operating Modes	7
<i>Figure 1 Configuration 1: EUT and Peripherals</i>	8
<i>Figure 2 Configuration 2 - DMU: EUT and Peripherals</i>	9
<i>Photograph 1 Connected to Analyser</i>	10
<i>Photograph 2 Radiated Emissions - Config 1 - Front</i>	11
<i>Photograph 3 Radiated Emissions - Config 1 - back</i>	11
<i>Photograph 4 Radiated Emissions - DMU - Front</i>	12
<i>Photograph 5 Radiated Emissions - DMU - Back</i>	12
<i>Photograph 6 Conducted Emissions - DMU - Front</i>	13
<i>Photograph 7 Conducted Emission - DMU - Back</i>	13
<b>2 Test Equipment</b>	<b>14</b>
<b>3 Test Methods</b>	<b>15</b>
3.1 Antenna Conducted Carrier Power	15
3.2 Antenna Conducted Transmitter Unwanted Emissions	15
3.3 Antenna Conducted Occupied Bandwidth	15
3.4 Frequency Stability	15
3.5 Radiated Transmitter Emissions (Substitution Method)	16
3.6 Receiver Radiated Emissions	16
3.7 Conducted Emissions - ac power	17
<b>4 Test Results</b>	<b>17</b>
4.1 Conducted Antenna Output Power	18
4.2 Conducted Antenna Occupied Bandwidth	19
4.3 Frequency Stability - DMO Mode - Absolute Frequency Measurements	20
4.4 Frequency Stability - DMO Mode - Deviations from Nominal Volt/Temp - ppm	21
4.5 Frequency Stability - TMO Mode - Frequency Error Hz	22
4.6 Frequency Stability - TMO Mode - Deviation from nominal volt/temp - ppm	23
4.7 Conducted Emission Antenna Close to Carrier - Mask Y	24
4.8 Conducted Emission Antenna Spurious Emissions	25
4.9 Radiated Emissions - Transmit Carrier ERP - Config 1	26
4.10 Radiated Emissions - Transmit Carrier ERP - DMU	27
4.11 Radiated Emissions - Transmit Spurious Config 1 - Low Band	28
4.12 Radiated Emissions - Transmit Spurious Config 1 - High Band	29
4.13 Radiated Emissions - Transmit Spur - DMU	30
4.14 Radiated Emissions - Receive Mode - Below 1GHz	31
4.15 Radiated Emissions - Receive Mode - Above 1GHz - DMU	32
4.16 Radiated Emissions - Receive Mode - Above 1GHz - Config 1	33
4.17 Conducted Emissions (Power) - Results	34
<i>PLOT 1 Conducted Antenna Power - 809MHz</i>	35
<i>PLOT 2 Conducted Antenna Power - 816.5MHz</i>	36
<i>PLOT 3 Conducted Antenna Power - 824MHz</i>	37
<i>PLOT 4 Conducted Antenna Power - 854MHz</i>	38
<i>PLOT 5 Conducted Antenna Power - 861.5MHz</i>	39
<i>PLOT 6 Conducted Antenna Power - 869MHz</i>	40
<i>PLOT 7 Occupied Bandwidth - 809MHz</i>	41
<i>PLOT 8 Occupied Bandwidth - 816.5MHz</i>	42
<i>PLOT 9 Occupied Bandwidth - 824MHz</i>	43
<i>PLOT 10 Occupied Bandwidth - 854MHz</i>	44
<i>PLOT 11 Occupied Bandwidth - 861.5MHz</i>	45
<i>PLOT 12 Occupied Bandwidth - 869MHz</i>	46
<i>PLOT 13 Adjacent Channel Power 809MHz - as an alternative to Masks of 90.210</i>	47
<i>PLOT 14 Adjacent Channel Power 816.5MHz - as an alternative to Masks of 90.210</i>	48
<i>PLOT 15 Adjacent Channel Power 824MHz - as an alternative to Masks of 90.210</i>	49
<i>PLOT 16 Adjacent Channel Power 854MHz - as an alternative to Masks of 90.210</i>	50

	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: 5 of 88

PLOT 17	Adjacent Channel Power 861.5MHz - as an alternative to Masks of 90.210	51
PLOT 18	Adjacent Channel Power 869MHz - as an alternative to Masks of 90.210	52
PLOT 19	Antenna Conducted Spurious - LF Band - 9kHz to 500MHz - Mask of 90.221(d)	53
PLOT 20	Antenna Conducted Spurious - LF Band - 500MHz to 1GHz - Mask of 90.221(d)	54
PLOT 21	Antenna Conducted Spurious - LF Band - 1GHz to 2GHz - Mask of 90.221(d)	55
PLOT 22	Antenna Conducted Spurious - LF Band - 2GHz to 10GHz - Mask of 90.221(d)	56
PLOT 23	Antenna Conducted Spurious - HF Band - 9kHz to 500MHz - Mask of 90.221(d)	57
PLOT 24	Antenna Conducted Spurious - HF Band - 500MHz to 1GHz - Mask of 90.221(d)	58
PLOT 25	Antenna Conducted Spurious - HF Band - 1GHz to 2GHz - Mask of 90.221(d)	59
PLOT 26	Antenna Conducted Spurious - HF Band - 2GHz to 10GHz - Mask of 90.221(d)	60
PLOT 27	Radiated Emissions - Config 1 - LF band - Tx - 1GHz to 2GHz - Mask of 90.221(d)	61
PLOT 28	Radiated Emissions - Config 1 - LF band - Tx - 1GHz to 2GHz - Mask of 90.221(d)	62
PLOT 29	Radiated Emissions - Config 1 - LF band - Tx - 2GHz to 5GHz - Mask of 90.221(d)	63
PLOT 30	Radiated Emissions - Config 1 - LF band - Tx - 5GHz to 10GHz - Mask of 90.221(d)	64
PLOT 31	Radiated Emissions - Config 1 - HF band - Tx - 25MHz to 1GHz - Mask of 90.221(d)	65
PLOT 32	Radiated Emissions - Config 1 - HF band - Tx - 1GHz to 2GHz - Mask of 90.221(d)	66
PLOT 33	Radiated Emissions - Config 1 - HF band - Tx - 2GHz to 6GHz - Mask of 90.221(d)	67
PLOT 34	Radiated Emissions - Config 1 - HF band - Tx - 5GHz to 10GHz - Mask of 90.221(d)	68
PLOT 35	Radiated Emissions - DMU - LF band - Tx - 25MHz to 1GHz - Mask of 90.221(d)	69
PLOT 36	Radiated Emissions - DMU - LF band - Tx - 1GHz to 2GHz - Mask of 90.221(d)	70
PLOT 37	Radiated Emissions - DMU - LF - Tx - 2GHz to 5GHz - Mask of 90.221(d)	71
PLOT 38	Radiated Emissions - DMU - LF band - Tx - 5GHz to 10GHz - Mask of 90.221(d)	72
PLOT 39	Radiated Emissions - DMU - LF band - Tx - 25MHz to 1GHz - Mask of 90.221(d)	73
PLOT 40	Radiated Emissions - DMU - HF band - Tx - 1GHz to 2GHz - Mask of 90.221(d)	74
PLOT 41	Radiated Emissions - DMU - HF band - Tx - 2GHz to 5GHz - Mask of 90.221(d)	75
PLOT 42	Radiated Emissions - DMU - HF - Tx - 5GHz to 10GHz - Mask of 90.221(d)	76
PLOT 43	Radiated Emissions - Config1 - Rx - 25MHz to 1GHz	77
PLOT 44	Radiated Emissions - Config 1 - Rx - 1GHz to 2GHz	78
PLOT 45	Radiated Emissions - Config 1 - Rx - 2GHz to 6GHz	79
PLOT 46	Radiated Emissions - Config 1 - Rx - 5GHz to 10GHz	80
PLOT 47	Radiated Emissions - DMU - Rx - 25MHz to 1GHz	81
PLOT 48	Radiated Emissions - DMU - Rx - 1GHz to 2GHz	82
PLOT 49	Radiated Emissions - DMU - Rx - 2GHz to 6GHz	83
PLOT 50	Radiated Emissions - DMU - Rx - 5GHz to 10GHz	84
PLOT 51	Conducted Emissions - Tx @816.5MHz - Live Line	85
PLOT 52	Conducted Emissions - Tx @816.5MHz - Neutral Line	86
PLOT 53	Conducted Emissions - Tx @861.5MHz - Neutral Line	87
PLOT 54	Conducted Emissions - Tx @861.5MHz - Live Line	88

	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

## 1 EUT Details

### 1.1 General

The EUT was a TETRA Voice + Data Mobile Station. The transmitter can operate over the following frequency bands:

809MHz to 824MHz - in Trunked-Mode Operation (TMO)

854MHz to 869MHz - in Direct-Mode Operation (DMO)

The receiver can operate over the following frequency bands:

854MHz to 869MHz

Measurements were made at the top, near middle and bottom of the appropriate frequency ranges:

Bottom: 809 MHz  
Middle: 816.5 MHz  
Top: 824 MHz

and

Bottom: 854 MHz  
Middle: 861.5 MHz  
Top: 869 MHz

The nominal output power is 40dBm (10W).

Unless otherwise stated, tests were performed with nominal power supply voltage.

The device can be used with a variety of peripherals and therefore radiated tests were performed in two separate configurations. Details of the configurations are given in the tables below.

	Description	P/N	Gain
Configuration 1	Tetra		
Configuration 2/DMU	Tetra for DMU		

The product is intended to comply with the FCC part 90 requirements - specifically the sections applicable to Tetra devices.


Radiated field strength tests were performed at the dB Technology Test Site Registered with the FCC: Registration number: 90528.

#### Output Stage Settings:

With reference to the requirements of **2.1046(a)** and **2.1033(c)(8)**, the DC voltages and currents in the elements of the final radio are regulated within the product and not user variable.

#### Modulation Characteristics:

With reference to the requirements of **2.1047**, the device uses digital modulation which is not proportional in any way to the level or frequency of the audio signal. We consider that compliance with the relevant Mask of Part 90 using pseudo random digital data is sufficient to adequately demonstrate the Modulation Characteristics as per Section 2.1047.

	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		
<b>Test Report</b>			Page: <b>7 of 88</b>

## 1.2 Modifications to EUT and Peripherals

Details of any modifications that were required to achieve compliance are listed below. The modification numbers are referred to in the results sections as appropriate.

Mod No:	Details	Implemented for
0	Original sample as supplied.	

## 1.3 EUT Operating Modes


The EUT was tested in the following operating mode or modes. Generally, operating modes are chosen that will exercise the functions of the EUT as fully as possible and in a manner likely to produce maximum emission levels or susceptibility. Individual test result sheets reference the operating mode of the EUT.

Operating Mode	Details
1	Transmitting on selected channel.
2	Receiving on selected channel.

### List of Equipment for Configuration 1:

Item	Manufacturer	Model	Description	Serial No:	Notes
1	Sepura	SRG3900 XN	TETRA Mobile Station	566	
2	Sepura	300-00390	Antenna TETRA		
3	Sepura	300 00668	Handset Based Console		
4	Sepura	300 00295	Hands Free Kit Switch		
5	Sepura	300 00294	Hands Free Kit Mic		
6	Sepura	300 00217	Apps Interface Unit		
7	Sepura	300 00061	Handset		
8	Sepura	300 00062	Fist Mic		
9	Sepura	300 00719	Speaker		
10	Kingshill	18V10CA	Bench Power Supply		

**Figure 1 Configuration 1: EUT and Peripherals**

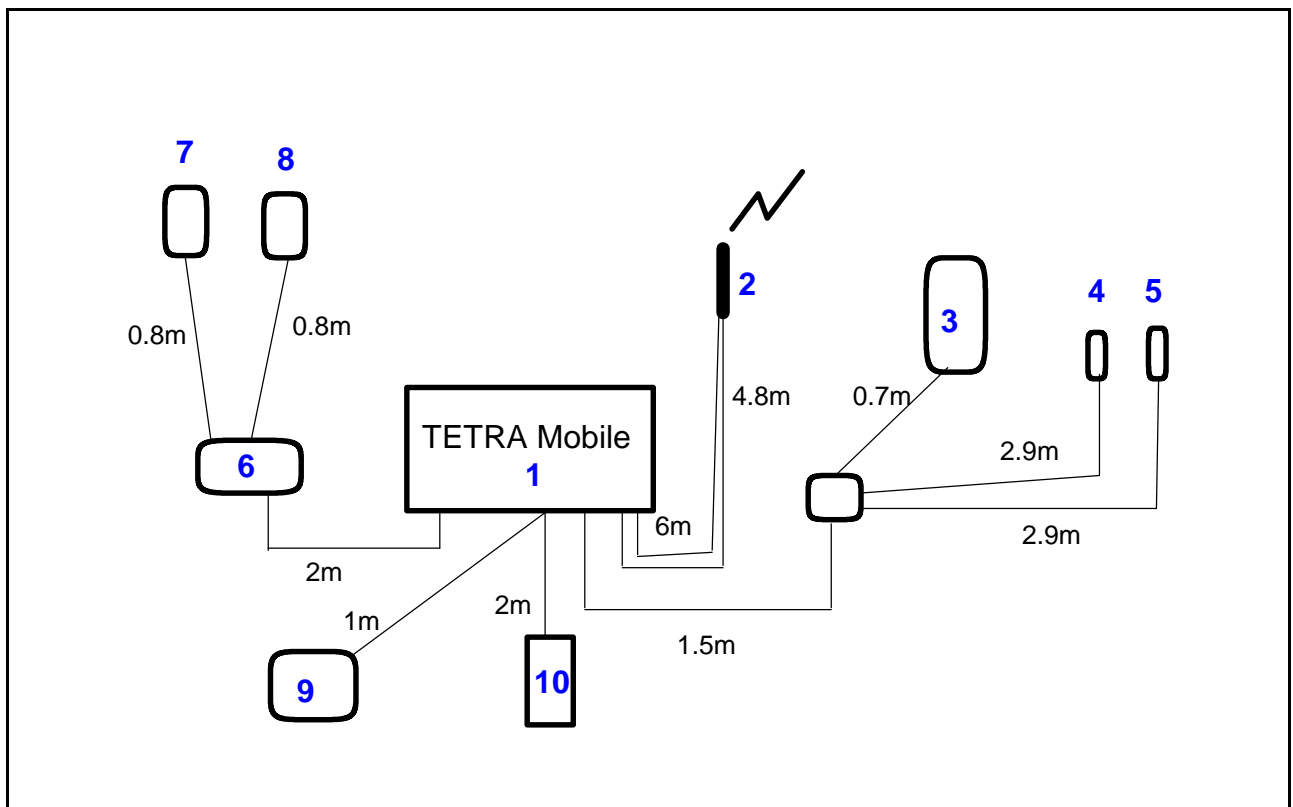





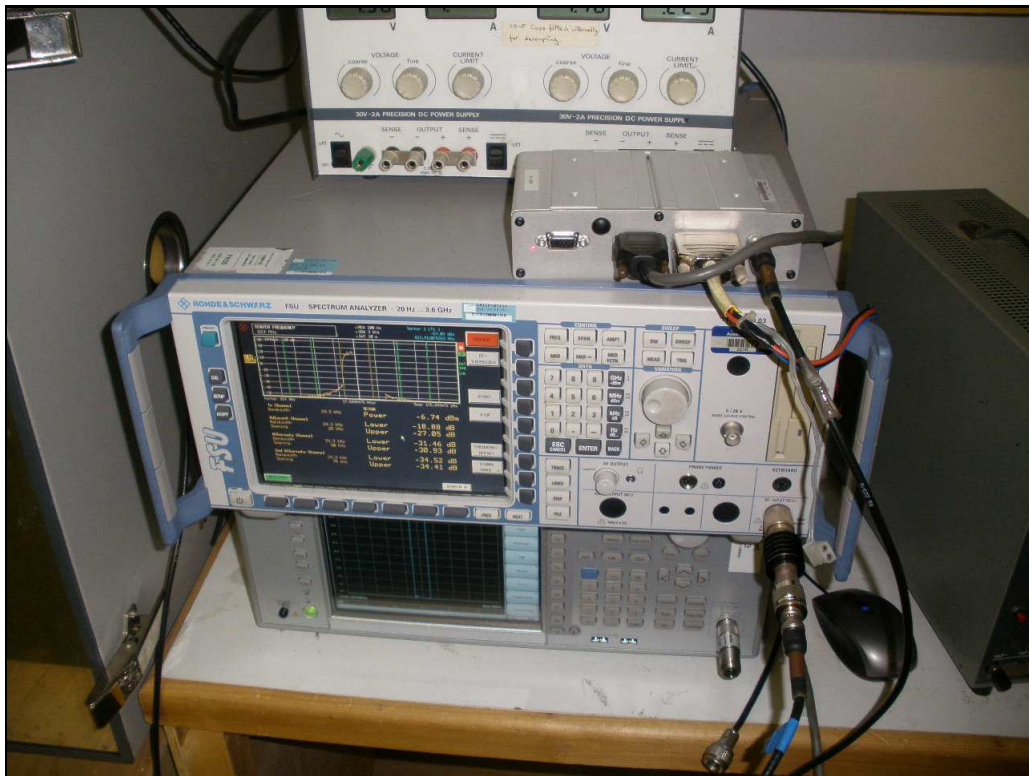
### List of Equipment for Configuration 2 - Desk Mount Unit (DMU) :

Item	Manufacturer	Model	Description	Serial No:	Notes
1	Sepura	SRG3900 XN	TETRA Mobile Station	2PN00031060	
2	Sepura	300-00993	Antenna		
3	Sepura	300 00073	DMU		
4	Sepura	300 00074	Gooseneck Mic		
5	Sepura	300 00771	IP 54 Colour Console		
6	Sepura	300 00076	Foot Switch		
7	Sepura	300 00061	Handset		
8	PowerSolve	PSE65-12/SEY	AC-DC supply		
9	Sepura	300 00588	Virtual Console cable		


**Figure 2 Configuration 2 - DMU: EUT and Peripherals**

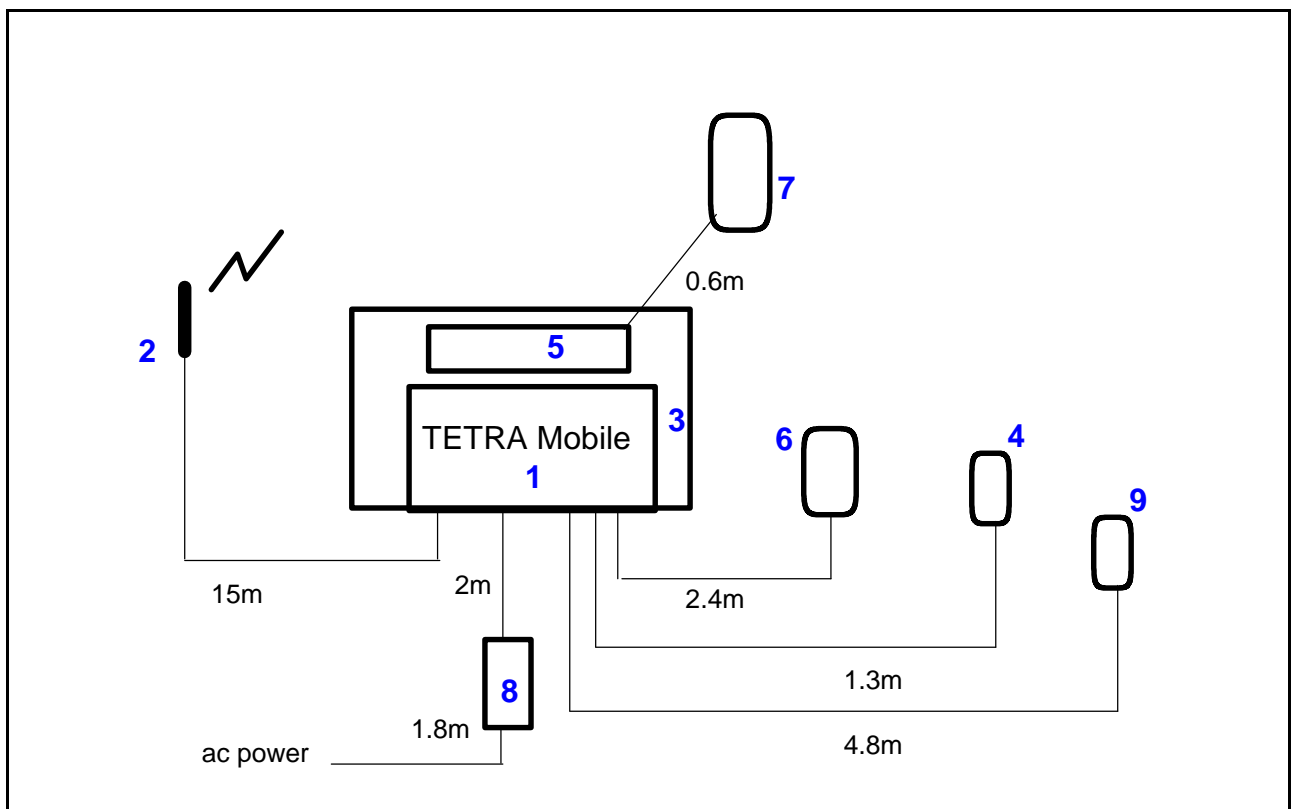


	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: 10 of 88



**Photograph 1 Connected to Analyser**

	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
Test No: <b>T5507</b>	<b>Test Report</b>		Page: 11 of 88

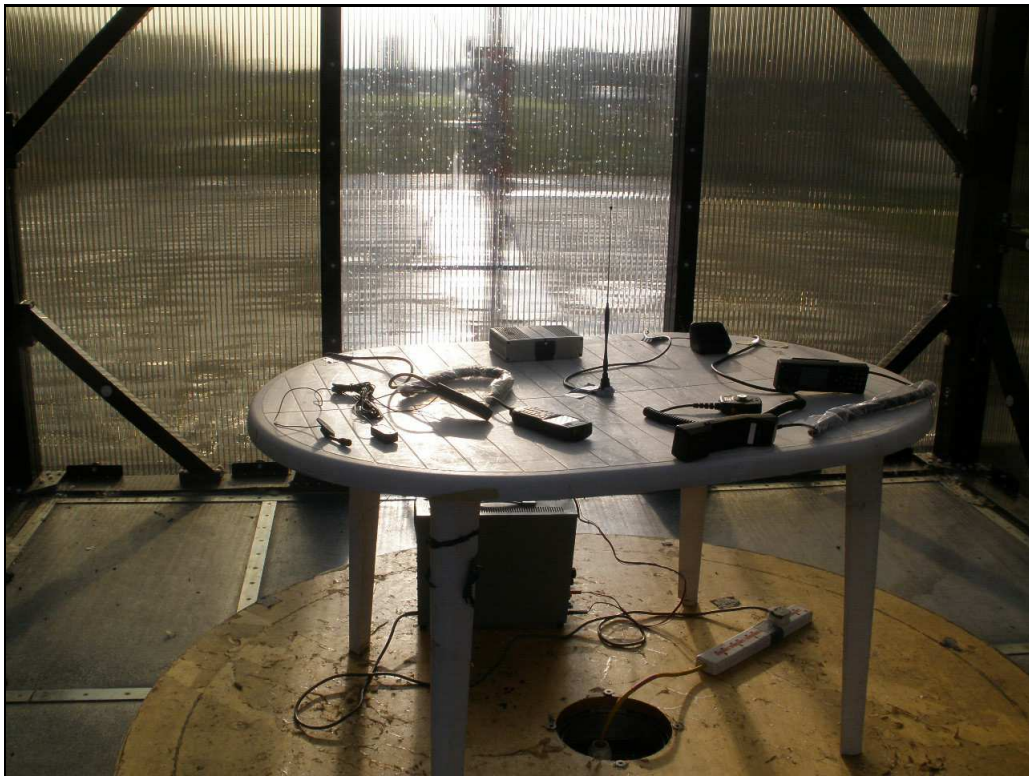


**Photograph 2 Radiated Emissions - Config 1 - Front**



**Photograph 3 Radiated Emissions - Config 1 - back**




	Report No: <b>R3413</b> Issue No: <b>1</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		Page: 12 of 88



**Photograph 4 Radiated Emissions - DMU - Front**



**Photograph 5 Radiated Emissions - DMU - Back**

	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		
<b>Test Report</b>			Page: 13 of 88




**Photograph 6 Conducted Emissions - DMU - Front**



**Photograph 7 Conducted Emission - DMU - Back**




	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

## 2 Test Equipment

The test equipment used during the tests was one or more of the items listed below. Individual test result sheets indicate which items were used.

Ref No:	Details	Serial Number	Cal Date	Cal Interval
A19	EMCO 3115 DR Guide (1-18GHz)	2431	06/02/2014	1 year
A24	Chase X-wing Bilog CBL6144 26MHz-3GHz	27590	28/10/2013	1 year
A30	Schwarzbeck MiniBicon (30MHz to 1GHz)	9115-180	21/01/2013	3 years
A5	Chase Bilog CBL6111A	1760	03/03/2014	1 year
A8	EMCO 3115 DR Guide	6070	11/03/2014	1 year
L1	EMCO 3825/2 LISN	1358	21/02/2014	1 year
PM6	Marconi 6960B RF Power Meter	236923/003	17/12/2013	1 year
PRE10	LUCIX 100M-20G pre-amp	10	19/08/2014	1 year
PS10	Marconi 6910 RF Power Sensor (-30dBm / +20dBm) 10MHz to 20GHz	5009	17/12/2013	1 year
PS9	Marconi 6912 RF Power Sensor (-30dBm / +20dBm) 30kHz to 4.2 GHz	973	17/12/2013	1 year
R10	Narda PMM 9010 Receiver (10Hz-30MHz)	595WX11003	12/02/2014	1 year
R13	Anritsu MS2830A	6201180830	30/01/2014	1 year
R4	R&S ESVS10	843744/002	13/12/2013	1 year
R8	Agilent E7405A Spectrum Analyser	MY44212494	22/05/2014	1 year
R9	Agilent E7405A Spectrum Analyser	MY45110758	19/11/2013	1 year
RFF15	Band Pass Filter 1GHz to 2GHz	15	13/08/2014	1 year
RFF17	Low Pass RF Filter 550MHz	17	13/08/2014	1 year
RFF22	High Pass Filter - 1.35GHz (10GHz) MicroTronics HPM13017	33	13/08/2014	1 year
SG13	HP 8648C 150kHz-3.2GHz Signal Generator	3426A01238	01/07/2014	1 year
SG16	Marconi 6203 Microwave Test Set (10MHz - 26.5GHz)	236252/25	01/08/2013	2 years
FSU	R&S FSU Spectrum Analyser	200088	14/06/2012	3 years
TTS	IFR 2968 Tetra Test Set	296501/061	19/12/2013	2 years

The Tetra Test Set is owned by Sepura.

	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

### 3 Test Methods

#### 3.1 Antenna Conducted Carrier Power

The antenna output is connected to a spectrum analyser via a suitable PAD. The bandwidth on the spectrum analyser is set to greater than the EUT occupied bandwidth. A peak measurement is recorded. Additional measurements are made with antenna output connected to a power meter providing average measurements.

#### 3.2 Antenna Conducted Transmitter Unwanted Emissions

Measurements are made with the antenna output connected to a spectrum analyser via a suitable PAD. Sweeps are made over the specified frequency ranges. The limit is set relative to the measured carrier power. A peak detector is used.

#### 3.3 Antenna Conducted Occupied Bandwidth

Measurements are made with the antenna output connected to a spectrum analyser via a suitable PAD. Sweeps are made with a 300Hz Resolution Bandwidth and a 1kHz Video Bandwidth. A peak detector is used. Markers are used to determine the 99% power bandwidth.


#### 3.4 Frequency Stability

The EUT is placed in an environmental chamber. The temperature inside the chamber is set to the required level and allowed to stabilise.

For DMO mode the antenna output is connected to a spectrum analyser via a suitable PAD. The EUT is set to transmit with constant carrier (at a frequency 2.25kHz above channel centre frequency). The frequency is measured using the frequency counter function of the spectrum analyser.

For TMO mode the antenna output is connected to a Tetra Test Set. The EUT is set to transmit using normal burst operation. the frequency error, as indicated by the Tetra Test Set, is recorded.

Measurements are made at the specified temperature and over the required voltage supply range of the EUT.

	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

### 3.5 Radiated Transmitter Emissions (Substitution Method)

Initial scans are performed in a semi-anechoic screened room at a distance of 3m. Scans are performed over the frequency range specified in the test standard with the antenna both horizontally and vertically polarised. During these scans the EUT and peripherals are rotated through 360°. Bench top EUTs are placed on a non-conducting bench at a height of 0.8m above the ground plane. Floor standing EUTs are placed 0.1m above the ground plane. The EUT cables were manipulated in an attempt to produce maximum emissions. The results of the scans are shown in the plots included at the end of the report.

Significant emissions identified by the scans are measured using a substitution method. Maximised emission readings are obtained by rotating the EUT through 360° and adjusting the height of the antenna from 1m to 4m. Measurements are made with the antenna both horizontally and vertically polarised and the results tabulated.

The EUT is then replaced with a calibrated reference antenna fed from a signal generator. The level fed into the reference antenna is measured with a power meter. Measurements are made to determine the power output of the signal generator required to give the same emission levels as were observed from the EUT.

The radiated power from the EUT is calculated as:

Signal Level fed into Reference Antenna	+ Gain of Reference Antenna	+ Radiated Level From EUT	- Radiated Level From Reference Antenna
---	-----------------------------------	------------------------------	---

For example, assuming following measurements:

Signal Level fed into Reference Antenna	= -14.3dBm
Gain of Reference Antenna	= 7.1 dBi
Radiated Level from EUT (i.e. Level at Measuring Receiver)	= 37 dBuV
Radiated Level from Reference Antenna (i.e. Level at Measuring Receiver)	= 61.5 dBuV

Then the Radiated Power from the EUT = -14.3 + 7.1 + 37 - 61.5 dBm (isotropic)  
= -31.7 dBm (isotropic)

### 3.6 Receiver Radiated Emissions

Initial scans are performed in a semi-anechoic screened room at a distance of 3m. Scans are performed over the frequency range specified in the test standard with the antenna both horizontally and vertically polarised. During these scans the EUT and peripherals are rotated through 360°. Bench top EUTs are placed on a non-conducting bench at a height of 0.8m above the ground plane. Floor standing EUTs are placed 0.1m above the ground plane. The EUT cables were manipulated in an attempt to produce maximum emissions. The results of the scans are shown in the plots included at the end of the report.

Significant emissions identified by the scans are measured on an open area test site at the appropriate test distance using a CISPR16 quasi-peak receiver. Maximised readings are obtained by rotating the EUT through 360° and adjusting the height of the antenna from 1m to 4m. Measurements are made with the antenna both horizontally and vertically polarised and the results tabulated.

Tabulated results show levels based on the following calculation:

Field Strength (dBuV) = receiver reading (dBuV) + CF (dB/m)


CF is the correction factor for the antenna and cable.

For example:

at 114MHz receiver reading was 17.9 dBuV, combined correction factor = 13.1 (dB/m).

Total field strength = 17.9 + 13.1 = 31.0 dBuV/m.



	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: 17 of 88

### 3.7 Conducted Emissions - ac power

This section describes the general method of performing this test. The specific method used and any deviations from this general method are listed in the appropriate results section.

Bench top EUTs and peripheral equipment are normally placed on a 0.8m high non-conducting bench, positioned 0.4m from one of the metallic walls of a screened room. Floor standing EUTs are normally placed 0.1m above the metallic floor of the screened room. Mains leads are bundled so as not to exceed 1m.

The EUT is powered using a 50ohm/50uH Line Impedance Stabilisation Network (LISN). Peripherals are powered using a second a 50ohm/50uH LISN. These LISNs are bonded to the screened room floor.

With the correct supply voltage applied to the EUT scans are performed on both the live and neutral line outputs of the LISN using quasi-peak detection over the specified frequency range. The results of these scans are shown in the plots section at the end of the report.

Significant emissions identified by the scans are measured and the results tabulated. The table of results is shown in the conducted emissions results section.


Final Level (dBuV) = Receiver Reading (dBuV) + Combined Cable & Attenuator Correction Factor (dB)

Example:

@ 191kHz Final Level = 45.8 + 10.0 = 55.8 dBuV

## 4 Test Results

The following sections contain tabulated test results. Plots of various scans are included at the back of this section.


	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

## 4.1 Conducted Antenna Output Power

Factor Set 1:  
Factor Set 2:  
Factor Set 3:  
Test Equipment: R13 PS10 PM6

### Conducted Emissions (Signal)

Company: Sepura PLC		Product: SRG3900XN	
Date: 24/09/2014		Test Eng: Dave Smith	
Ports:	antenna		
Test:	90.205	using limits of	90.205(h)
Ports:			
Test:	using limits of		
Notes	Comments and Observations		
	Spectrum anlayser results using a peak detector are shown in plots 1 to 6.		
	Measurements were also made using a power meter with an average detector.		
	Measurements were made with continuous modulation.		
	Taking into account the loss of the cable and attenuators the following measurements were made:		
	Channel	Peak dBm	Average dBm
	809 MHz	43.3	40.3
	816.5 MHz	43.3	40.3
	824 MHz	43.3	40.3
	854 MHz	43.2	40.3
	861.5 MHz	43.1	40.2
869 MHz	43.1	40.2	


	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		
<b>Test Report</b>			Page: 19 of 88

## 4.2 Conducted Antenna Occupied Bandwidth

Factor Set 1:  
Factor Set 2: - - -  
Factor Set 3: - - -  
Test Equipment: R9

### Conducted Emissions (Signal)

Company: Sepura PLC		Product: SRG3900XN																			
Date: 24/09/2014		Test Eng: Dave Smith																			
Ports:	antenna																				
Test:	90.209	using limits of	90.209(b)(5)																		
Ports:																					
Test:	using limits of																				
Notes	Comments and Observations																				
	<p>Measurements were made with continuous modulation applied. Spectrum analyser results are shown in plots 7 to 12.</p> <p>Using the 99% Bandpower function of the spectrum analyser, the following measurements were recorded:</p> <table><tr><td>809 MHz</td><td>20.96</td><td>kHz</td></tr><tr><td>816.5 MHz</td><td>20.96</td><td>kHz</td></tr><tr><td>824 MHz</td><td>20.96</td><td>kHz</td></tr><tr><td>854 MHz</td><td>21.00</td><td>kHz</td></tr><tr><td>861.5 MHz</td><td>21.00</td><td>kHz</td></tr><tr><td>869 MHz</td><td>20.96</td><td>kHz</td></tr></table> <p>Limit:</p> <p>Using note 6 of Part 90.209, the limit is 22kHz (providing Adjacent Channel Power requirements are met).</p> <p><b>PASS</b></p>			809 MHz	20.96	kHz	816.5 MHz	20.96	kHz	824 MHz	20.96	kHz	854 MHz	21.00	kHz	861.5 MHz	21.00	kHz	869 MHz	20.96	kHz
809 MHz	20.96	kHz																			
816.5 MHz	20.96	kHz																			
824 MHz	20.96	kHz																			
854 MHz	21.00	kHz																			
861.5 MHz	21.00	kHz																			
869 MHz	20.96	kHz																			

	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

### 4.3 Frequency Stability - DMO Mode - Absolute Frequency Measurements

Factor Set 1:  
Factor Set 2: - - -  
Factor Set 3: - - -  
Test Equipment: R13


#### Frequency Stability

Frequency stability

Company:	Sepura PLC		Product:	SRG3900XN	
Date:	22/09/2014		Test Eng:	Dave Smith	
Ports:	antenna				
Test:	90.213	using limits of	90.213		
Ports:					
Test:	using limits of				

Notes	Comments and Observations				
	<b>DMO Frequency (as recorded from Spectrum Analyser Frequency Counter)</b>				
			854MHz Channel	861.5MHz Channel	869MHz Channel
	-30.0°C	10.8V	854.001976	861.501975	869.001976
		13.2V	854.001984	861.501980	869.001976
		15.6V	854.001986	861.501984	869.001983
	-20.0°C	10.8V	854.001985	861.501981	869.001979
		13.2V	854.001984	861.501981	869.001977
		15.6V	854.001983	861.501982	869.001974
	-10.0°C	10.8V	854.002014	861.502011	869.002004
		13.2V	854.002013	861.502011	869.002002
		15.6V	854.002014	861.502012	869.002004
	0.0°C	10.8V	854.002077	861.502077	869.002080
		13.2V	854.002075	861.502080	869.002083
		15.6V	854.002074	861.502082	869.002083
	10.0°C	10.8V	854.002093	861.502097	869.002098
		13.2V	854.002093	861.502095	869.002100
		15.6V	854.002094	861.502094	869.002100
	20.0°C	10.8V	854.002168	861.502144	869.002135
		13.2V	854.002167	861.502151	869.002125
		15.6V	854.002161	861.502154	869.002104
	30.0°C	10.8V	854.002120	861.502089	869.002089
		13.2V	854.002098	861.502088	869.002090
		15.6V	854.002089	861.502085	869.002092
	40.0°C	10.8V	854.002160	861.502210	869.002184
		13.2V	854.002162	861.502230	869.002185
		15.6V	854.002166	861.502211	869.002190
	50.0°C	10.8V	854.002309	861.502320	869.002354
		13.2V	854.002238	861.502328	869.002353
		15.6V	854.002279	861.502334	869.002350
	55.0°C	10.8V	854.002210	861.502221	869.002214
		13.2V	854.002206	861.502206	869.002178
		15.6V	854.002198	861.502213	869.002166

See next page for deviation from nominal voltage/temperature.

	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

#### 4.4 Frequency Stability - DMO Mode - Deviations from Nominal Volt/Temp - ppm


Factor Set 1:  
Factor Set 2: - - -  
Factor Set 3: - - -  
Test Equipment: R13

##### Frequency Stability

Frequency Stability

Company:	Sepura PLC		Product:	SRG3900XN	
Date:	22/09/2014		Test Eng:	Dave Smith	
Ports:	antenna				
Test:	90.213	using limits of	90.213		
Ports:					
Test:	using limits of				
Notes	Comments and Observations				
	DMO Frequency deviation from nominal voltage/temperature - ppm				
			854MHz Channel	861.5MHz Channel	869MHz Channel
	-30.0°C	6.4V	-0.224	-0.204	-0.171
		7.4V	-0.214	-0.198	-0.171
	-20.0°C	6.4V	-0.213	-0.197	-0.168
		7.4V	-0.214	-0.197	-0.170
	-10.0°C	6.4V	-0.179	-0.163	-0.139
		7.4V	-0.180	-0.163	-0.142
	0.0°C	6.4V	-0.105	-0.086	-0.052
		7.4V	-0.108	-0.082	-0.048
	10.0°C	6.4V	-0.087	-0.063	-0.031
		7.4V	-0.087	-0.065	-0.029
	20.0°C	6.4V	0.001	-0.008	0.012
		7.4V	0.000	0.000	0.000
	30.0°C	6.4V	-0.055	-0.072	-0.041
		7.4V	-0.081	-0.073	-0.040
	40.0°C	6.4V	-0.008	0.068	0.068
		7.4V	-0.006	0.092	0.069
	50.0°C	6.4V	0.166	0.196	0.264
		7.4V	0.083	0.205	0.262
	55.0°C	6.4V	0.050	0.081	0.102
		7.4V	0.046	0.064	0.061
The part 90 Limit for the 854MHz to 869MHz band mobiles is 2.5ppm					
PASS					

Factor Set 1:  
Factor Set 2:  
Factor Set 3:  
Test Equipment: TTS

	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>


#### 4.6 Frequency Stability - TMO Mode - Deviation from nominal volt/temp - ppm

Factor Set 1:  
Factor Set 2:  
Factor Set 3:  
Test Equipment: TTS

##### Frequency Stability

Frequency stability

Company: Sepura PLC		Product: SRG3900XN																																																																																																
Date: 22/09/2014		Test Eng: Dave Smith																																																																																																
Ports:	antenna																																																																																																	
Test:	90.213	using limits of	90.213																																																																																															
Ports:																																																																																																		
Test:	using limits of																																																																																																	
Notes	Comments and Observations																																																																																																	
	<div><div>TMO Frequency deviation - ppm</div><table><tr><td></td><td></td><td>809MHz Channel</td><td>816.5MHz Channel</td><td>824MHz Channel</td></tr><tr><td rowspan="2">-30.0°C</td><td>6.4V</td><td>0.001</td><td>-0.004</td><td>0.006</td></tr><tr><td>7.4V</td><td>-0.001</td><td>-0.006</td><td>0.005</td></tr><tr><td rowspan="2">-20.0°C</td><td>6.4V</td><td>0.010</td><td>0.003</td><td>0.004</td></tr><tr><td>7.4V</td><td>0.009</td><td>0.002</td><td>0.005</td></tr><tr><td rowspan="2">-10.0°C</td><td>6.4V</td><td>0.010</td><td>-0.002</td><td>0.013</td></tr><tr><td>7.4V</td><td>0.010</td><td>-0.011</td><td>0.012</td></tr><tr><td rowspan="2">0.0°C</td><td>6.4V</td><td>-0.007</td><td>0.009</td><td>0.004</td></tr><tr><td>7.4V</td><td>-0.008</td><td>-0.014</td><td>0.003</td></tr><tr><td rowspan="2">10.0°C</td><td>6.4V</td><td>-0.005</td><td>-0.011</td><td>0.005</td></tr><tr><td>7.4V</td><td>-0.005</td><td>-0.012</td><td>0.008</td></tr><tr><td rowspan="2">20.0°C</td><td>6.4V</td><td>0.000</td><td>-0.000</td><td>-0.005</td></tr><tr><td>7.4V</td><td>0.000</td><td>0.000</td><td>0.000</td></tr><tr><td rowspan="2">30.0°C</td><td>6.4V</td><td>0.008</td><td>-0.009</td><td>-0.013</td></tr><tr><td>7.4V</td><td>0.010</td><td>-0.005</td><td>0.009</td></tr><tr><td rowspan="2">40.0°C</td><td>6.4V</td><td>0.004</td><td>-0.006</td><td>-0.002</td></tr><tr><td>7.4V</td><td>0.007</td><td>0.003</td><td>0.015</td></tr><tr><td rowspan="2">50.0°C</td><td>6.4V</td><td>-0.007</td><td>0.009</td><td>0.013</td></tr><tr><td>7.4V</td><td>0.013</td><td>0.006</td><td>0.015</td></tr><tr><td rowspan="2">55.0°C</td><td>6.4V</td><td>0.002</td><td>-0.005</td><td>0.000</td></tr><tr><td>7.4V</td><td>-0.001</td><td>-0.002</td><td>0.002</td></tr></table></div>					809MHz Channel	816.5MHz Channel	824MHz Channel	-30.0°C	6.4V	0.001	-0.004	0.006	7.4V	-0.001	-0.006	0.005	-20.0°C	6.4V	0.010	0.003	0.004	7.4V	0.009	0.002	0.005	-10.0°C	6.4V	0.010	-0.002	0.013	7.4V	0.010	-0.011	0.012	0.0°C	6.4V	-0.007	0.009	0.004	7.4V	-0.008	-0.014	0.003	10.0°C	6.4V	-0.005	-0.011	0.005	7.4V	-0.005	-0.012	0.008	20.0°C	6.4V	0.000	-0.000	-0.005	7.4V	0.000	0.000	0.000	30.0°C	6.4V	0.008	-0.009	-0.013	7.4V	0.010	-0.005	0.009	40.0°C	6.4V	0.004	-0.006	-0.002	7.4V	0.007	0.003	0.015	50.0°C	6.4V	-0.007	0.009	0.013	7.4V	0.013	0.006	0.015	55.0°C	6.4V	0.002	-0.005	0.000	7.4V	-0.001	-0.002	0.002
		809MHz Channel	816.5MHz Channel	824MHz Channel																																																																																														
-30.0°C	6.4V	0.001	-0.004	0.006																																																																																														
	7.4V	-0.001	-0.006	0.005																																																																																														
-20.0°C	6.4V	0.010	0.003	0.004																																																																																														
	7.4V	0.009	0.002	0.005																																																																																														
-10.0°C	6.4V	0.010	-0.002	0.013																																																																																														
	7.4V	0.010	-0.011	0.012																																																																																														
0.0°C	6.4V	-0.007	0.009	0.004																																																																																														
	7.4V	-0.008	-0.014	0.003																																																																																														
10.0°C	6.4V	-0.005	-0.011	0.005																																																																																														
	7.4V	-0.005	-0.012	0.008																																																																																														
20.0°C	6.4V	0.000	-0.000	-0.005																																																																																														
	7.4V	0.000	0.000	0.000																																																																																														
30.0°C	6.4V	0.008	-0.009	-0.013																																																																																														
	7.4V	0.010	-0.005	0.009																																																																																														
40.0°C	6.4V	0.004	-0.006	-0.002																																																																																														
	7.4V	0.007	0.003	0.015																																																																																														
50.0°C	6.4V	-0.007	0.009	0.013																																																																																														
	7.4V	0.013	0.006	0.015																																																																																														
55.0°C	6.4V	0.002	-0.005	0.000																																																																																														
	7.4V	-0.001	-0.002	0.002																																																																																														
The part 90 Limit for the 809MHz to 824MHz band mobiles is 2.5ppm <b>PASS</b>																																																																																																		

	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>


## 4.7 Conducted Emission Antenna Close to Carrier - Mask Y

Factor Set 1:  
Factor Set 2: - - - -  
Factor Set 3: - - - -  
Test Equipment: FSU

### Conducted Emissions (Signal)

Company: Sepura PLC		Product: SRG3900XN																																																																
Date: 14/10/2014		Test Eng: Dave Smith																																																																
Ports:																																																																		
Test: 90.221		using limits of 90.221(b)																																																																
Ports:																																																																		
Test:		using limits of																																																																
Notes	Comments and Observations																																																																	
	<p>Using a spectrum analyser with the appropriate Tetra adjacent channel power settings. Captured results are shown in plots 13 to 18.</p> <p>Readings in dBc</p> <table><thead><tr><th></th><th>-75kHz</th><th>-50kHz</th><th>-25kHz</th><th>+ 25kHz</th><th>+ 50kHz</th><th>+ 75kHz</th></tr></thead><tbody><tr><td>809MHz</td><td>-80.82</td><td>-77.17</td><td>-64.64</td><td>-62.16</td><td>-76.84</td><td>-80.71</td></tr><tr><td>816.5MHz</td><td>-80.47</td><td>-77.05</td><td>-63.06</td><td>-61.62</td><td>-76.88</td><td>-80.79</td></tr><tr><td>824MHz</td><td>-80.06</td><td>-76.15</td><td>-62.73</td><td>-61.39</td><td>-76.06</td><td>-79.58</td></tr><tr><td>854MHz</td><td>-79.85</td><td>-76.640</td><td>-62.84</td><td>-61.33</td><td>-76.63</td><td>-80.01</td></tr><tr><td>861.5MHz</td><td>-79.72</td><td>-75.990</td><td>-62.57</td><td>-61.2</td><td>-76</td><td>-79.35</td></tr><tr><td>869MHz</td><td>-79.68</td><td>-75.730</td><td>-62.14</td><td>-61.16</td><td>-75.86</td><td>-79.32</td></tr><tr><td>Limit (dBc)</td><td>-65</td><td>-65</td><td>-55</td><td>-55</td><td>-65</td><td>-65</td></tr><tr><td></td><td>PASS</td><td>PASS</td><td>PASS</td><td>PASS</td><td>PASS</td><td>PASS</td></tr></tbody></table> <p>Limit shown is the maximum allowed level (dBc) for a product with output power less than 15 W and operating in the 809MHz to 869MHz bands (Part 90.221(c))</p> <p>PASS</p>				-75kHz	-50kHz	-25kHz	+ 25kHz	+ 50kHz	+ 75kHz	809MHz	-80.82	-77.17	-64.64	-62.16	-76.84	-80.71	816.5MHz	-80.47	-77.05	-63.06	-61.62	-76.88	-80.79	824MHz	-80.06	-76.15	-62.73	-61.39	-76.06	-79.58	854MHz	-79.85	-76.640	-62.84	-61.33	-76.63	-80.01	861.5MHz	-79.72	-75.990	-62.57	-61.2	-76	-79.35	869MHz	-79.68	-75.730	-62.14	-61.16	-75.86	-79.32	Limit (dBc)	-65	-65	-55	-55	-65	-65		PASS	PASS	PASS	PASS	PASS	PASS
	-75kHz	-50kHz	-25kHz	+ 25kHz	+ 50kHz	+ 75kHz																																																												
809MHz	-80.82	-77.17	-64.64	-62.16	-76.84	-80.71																																																												
816.5MHz	-80.47	-77.05	-63.06	-61.62	-76.88	-80.79																																																												
824MHz	-80.06	-76.15	-62.73	-61.39	-76.06	-79.58																																																												
854MHz	-79.85	-76.640	-62.84	-61.33	-76.63	-80.01																																																												
861.5MHz	-79.72	-75.990	-62.57	-61.2	-76	-79.35																																																												
869MHz	-79.68	-75.730	-62.14	-61.16	-75.86	-79.32																																																												
Limit (dBc)	-65	-65	-55	-55	-65	-65																																																												
	PASS	PASS	PASS	PASS	PASS	PASS																																																												




	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

## 4.8 Conducted Emission Antenna Spurious Emissions

Factor Set 1:  
Factor Set 2: - - - -  
Factor Set 3: - - - -  
Test Equipment: R13 RFF17 RFF15 RFF22

### Conducted Emissions (Signal)

Company: Sepura PLC		Product: SRG3900XN	
Date: 24/09/2014		Test Eng: Dave Smith	
Ports:	antenna		
Test:	90.210	using limits of	90.221(d)
Ports:			
Test:	using limits of		
Notes	Comments and Observations		
	<p>Results of scans shown in plots 19 to 26.</p> <p>The limit line shown on the plots is at -13dBm.</p> <p>All spurious emissions were below this limit.</p> <p>The limit of -13dBm was derived as follows:</p> <p><b>The applicable Mask is taken from part 90.221(d) which specifies an attenuation of:</b></p> $43 + 10 \log (P)$ <p>If the output is P Watts, the absolute limit is given by:</p> $10 \log (P) - (43 + 10 \log (P)) = -43\text{dBW}$ <p>converting to dBm:</p> $-43\text{dBW} = -13 \text{ dBm}$ <p>This absolute limit is therefore the same ( -13dBm) regardless of the actual measured output power P.</p> <p><b>PASS</b></p>		


	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

#### 4.9 Radiated Emissions - Transmit Carrier ERP - Config 1

Factor Set 1: A30\_dBi\_14A - - -  
Factor Set 2: - - - -  
Factor Set 3: - - - -  
Test Equipment: R8 A24 A30 SG13 PM6 PRE10 PS9 RFF22

##### Substitution Emissions

Company: Sepura PLC						Product: SRG3900XN								
Date: 13/10/2014						Test Eng: Dave Smith								
Ports:														
Test: 90.205						using limits of			90.205(h)					
Ports:														
Test:						using limits of								
Op Mode	Mod State	CF Set	Freq. MHz	Cable Loss		Ant Pol	Rec'vr Level EUT	Sig Gen Level Sub'n Ant	Rec'vr Level Sub'n Ant	Sub'n Ant Gain	ERP	Limit	Margin	Note
				Sig Gen Level Cable	Rec'vr Level Cable									
				dBm	dBm									
1	0	1	809.000	10.0	10.0	V	9.3	-6.4	-45.8	-6.2	42.6			
1	0	1	816.500	10.0	10.0	V	9.3	-6.5	-46.1	-6.5	42.5			
1	0	1	824.000	10.0	10.0	V	9.7	-6.6	-46.1	-6.4	42.8			
1	0	1	809.000	10.0	10.0	H	4.6	-6.4	-43.3	-6.2	35.3			
1	0	1	816.500	10.0	10.0	H	2.6	-6.5	-43.7	-6.5	33.3			
1	0	1	824.000	10.0	10.0	H	3.4	-6.6	-43.8	-6.4	34.3			
1	0	1	854.000	10.0	10.0	V	8.5	-6.6	-46.1	-5.9	42.1			
1	0	1	861.500	10.0	10.0	V	8.2	-6.6	-46.7	-5.9	42.3			
1	0	1	869.000	10.0	10.0	V	7.8	-6.7	-47.4	-6.3	42.2			
1	0	1	854.000	10.0	10.0	H	2.0	-6.6	-44.6	-5.9	34.1			
1	0	1	861.500	10.0	10.0	H	1.5	-6.6	-44.9	-5.9	33.8			
1	0	1	869.000	10.0	10.0	H	2.4	-6.7	-44.7	-6.3	34.1			
Results				Minimum Margin				N/A						
				PASS/FAIL										
Notes														
Configuration 1. The results above are radiated measurements using the substitution method. There are no specific limits in the standard for this test.														


	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: 27 of 88

#### 4.10 Radiated Emissions - Transmit Carrier ERP - DMU

Factor Set 1: A30\_dBi\_14A - - -  
Factor Set 2: - - - -  
Factor Set 3: - - - -  
Test Equipment: R8 A24 A30 SG13 PM6 PRE10 PS9 RFF22

##### Substitution Emissions

Company: Sepura PLC				Product: SRG3900XN										
Date: 13/10/2014				Test Eng: Dave Smith										
Ports:														
Test: 90.205				using limits of					90.205(h)					
Ports:														
Test:				using limits of										
Op Mode	Mod State	CF Set	Freq. MHz	Sig Gen Level Cable	Rec'vr Level Cable	Ant Pol	Rec'vr Level EUT	Sig Gen Level Sub'n Ant	Rec'vr Level Sub'n Ant	Sub'n Ant Gain	ERP dBm	Limit dBm	Margin dB	Note
1	0	1	809.000	0.0	0.0	V	12.1	-6.4	-45.8	-6.2	45.4			
1	0	1	816.500	0.0	0.0	V	11.8	-6.5	-46.1	-6.5	45.0			
1	0	1	824.000	0.0	0.0	V	11.8	-6.6	-46.1	-6.4	44.9			
1	0	1	809.000	0.0	0.0	H	4.2	-6.4	-43.3	-6.2	35.0			
1	0	1	816.500	0.0	0.0	H	3.0	-6.5	-43.7	-6.5	33.7			
1	0	1	824.000	0.0	0.0	H	3.7	-6.6	-43.8	-6.4	34.5			
1	0	1	854.000	0.0	0.0	V	11.2	-6.6	-46.1	-5.9	44.8			
1	0	1	861.500	0.0	0.0	V	10.5	-6.6	-46.7	-5.9	44.7			
1	0	1	869.000	0.0	0.0	V	11.0	-6.7	-47.4	-6.3	45.4			
1	0	1	854.000	0.0	0.0	H	-1.0	-6.6	-44.6	-5.9	31.1			
1	0	1	861.500	0.0	0.0	H	-1.9	-6.6	-44.9	-5.9	30.4			
1	0	1	869.000	0.0	0.0	H	-2.2	-6.7	-44.7	-6.3	29.6			
Results				Minimum Margin PASS/FAIL					N/A					
Notes														
DMU. The results above are radiated measurements using the substitution method. There are no specific limits in the standard for this test.														


	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

#### 4.11 Radiated Emissions - Transmit Spurious Config 1 - Low Band

Factor Set 1: A19\_dBi\_14A - - -  
Factor Set 2: - - -  
Factor Set 3: - - -  
Test Equipment: R8 A8 A19 SG16 PM6 PRE10 PS10 RFF22

##### Substitution Emissions

Company: Sepura PLC							Product: SRG3900XN								
Date: 10/10/2014							Test Eng: Dave Smith								
Ports:															
Test: 90.210							using limits of				90.221(d)				
Ports:															
Test:							using limits of								
Op Mode	Mod State	CF Set	Freq. MHz	Sig Gen Level Cable	Rec'vr Level Cable	Ant Pol	Rec'vr Level EUT	Sig Gen Level Sub'n Ant	Rec'vr Level Sub'n Ant	Sub'n Ant Gain	ERP dBm	Limit dBm	Margin dB	Note	
806MHz to 824MHz band															
1	0	1	1618.000	0.0	0.0	V	-45.3	-12.5	-9.8	8.9	-39.1	-13.0	26.1	Lo	
1	0	1	1633.000	0.0	0.0	V	-42.0	-12.5	-10.1	8.9	-35.5	-13.0	22.5	Mid	
1	0	1	1648.000	0.0	0.0	V	-40.5	-12.5	-9.7	8.9	-34.4	-13.0	21.4	Hi	
1	0	1	1618.000	0.0	0.0	H	-46.3	-12.5	-8.4	8.9	-41.5	-13.0	28.5	Lo	
1	0	1	1633.000	0.0	0.0	H	-44.8	-12.5	-8.6	8.9	-39.8	-13.0	26.8	Mid	
1	0	1	1648.000	0.0	0.0	H	-41.2	-12.5	-8.5	8.9	-36.2	-13.0	23.2	Hi	
												-13.0			
												-13.0			
1	0	1	2427.000	0.0	0.0	V	-38.7	-13.1	-12.1	9.7	-30.0	-13.0	17.0	Lo	
1	0	1	2449.500	0.0	0.0	V	-39.6	-13.1	-11.2	9.8	-31.7	-13.0	18.7	Mid	
1	0	1	2472.000	0.0	0.0	V	-41.2	-13.1	-12.4	9.8	-32.1	-13.0	19.1	Hi	
1	0	1	2427.000	0.0	0.0	H	-38.9	-13.1	-11.0	9.7	-31.3	-13.0	18.3	Lo	
1	0	1	2449.500	0.0	0.0	H	-39.2	-13.1	-10.8	9.8	-31.7	-13.0	18.7	Mid	
1	0	1	2472.000	0.0	0.0	H	-40.5	-13.1	-11.2	9.8	-32.6	-13.0	19.6	Hi	
Results								Minimum Margin			17.0 dB				
								PASS/FAIL			PASS				
Notes															
Config 1. Maximum rotation and height. Measured with 1MHz RBW detector. Limit set at -13dBm. Results of prescans shown in plots 27 to 30.															


	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

## 4.12 Radiated Emissions - Transmit Spurious Config 1 - High Band

Factor Set 1: A19\_dBi\_14A - - -  
Factor Set 2: - - - -  
Factor Set 3: - - - -  
Test Equipment: R8 A8 A19 SG16 PM6 PS10 PRE10 RFF22

### Substitution Emissions

Company: Sepura PLC						Product: SRG3900XN									
Date: 10/10/2014						Test Eng: Dave Smith									
Ports:															
Test: 90.210						using limits of 90.221(d)									
Ports:															
Test:						using limits of									
Op Mode	Mod State	CF Set	Freq. MHz	Sig Gen Level Cable	Rec'vr Level Cable	Ant Pol	Rec'vr Level EUT	Sig Gen Level Sub'n Ant	Rec'vr Level Sub'n Ant	Sub'n Ant Gain	ERP dBm	Limit dBm	Margin dB	Notes	
851MHz to 869MHz band															
1	0	1	1708.000	0.0	0.0	V	-38.6	-12.5	-10.1	8.9	-32.1	-13.0	19.1	Low	
1	0	1	1723.000	0.0	0.0	V	-37.5	-12.6	-10.9	8.9	-30.3	-13.0	17.3	Mid	
1	0	1	1738.000	0.0	0.0	V	-34.4	-12.5	-11.3	8.9	-26.7	-13.0	13.7	High	
1	0	1	1708.000	0.0	0.0	H	-39.9	-12.5	-9.4	8.9	-34.0	-13.0	21.0	Low	
1	0	1	1723.000	0.0	0.0	H	-38.7	-12.6	-10.4	8.9	-32.0	-13.0	19.0	Mid	
1	0	1	1738.000	0.0	0.0	H	-34.5	-12.5	-10.4	8.9	-27.7	-13.0	14.7	High	
1	0	1	2562.000	0.0	0.0	V	-49.4	-13.2	-13.3	9.8	-39.4	-13.0	26.4	Low	
1	0	1	2584.500	0.0	0.0	V	-49.9	-13.2	-12.5	9.9	-40.7	-13.0	27.7	Mid	
1	0	1	2607.000	0.0	0.0	V	-51.8	-13.2	-13.1	9.9	-42.1	-13.0	29.1	High	
1	0	1	2562.000	0.0	0.0	H	-50.1	-13.2	-11.5	9.8	-42.0	-13.0	29.0	Low	
1	0	1	2584.500	0.0	0.0	H	-52.0	-13.2	-11.6	9.9	-43.7	-13.0	30.7	Mid	
1	0	1	2607.000	0.0	0.0	H	-51.3	-13.2	-11.8	9.9	-42.8	-13.0	29.8	High	
1	0	1	4270.000	0.0	0.0	V	-50.0	-14.3	-18.6	10.6	-35.2	-13.0	22.2	Low	
1	0	1	4308.000	0.0	0.0	V	-55.7	-14.3	-18.0	10.7	-41.3	-13.0	28.3	Mid	
1	0	1	4345.000	0.0	0.0	V	-51.1	-14.3	-18.1	10.7	-36.6	-13.0	23.6	High	
1	0	1	4270.000	0.0	0.0	H	-55.8	-14.3	-17.3	10.6	-42.2	-13.0	29.2	Low	
1	0	1	4308.000	0.0	0.0	H	-58.8	-14.3	-17.2	10.7	-45.3	-13.0	32.3	Mid	
1	0	1	4345.000	0.0	0.0	H	-54.2	-14.3	-16.8	10.7	-41.0	-13.0	28.0	High	
Results								Minimum Margin			13.7 dB				
								PASS/FAIL			PASS				
Notes															
Config 1. Maximum of upright and flat. Maximum rotation and height. Measured with 1MHz RBW detector. Limit set at -13dBm. Results of prescans shown in plots 31 to 34.															


	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

#### 4.13 Radiated Emissions - Transmit Spur - DMU

Factor Set 1: A19\_dBi\_14A - - -  
Factor Set 2: - - -  
Factor Set 3: - - -  
Test Equipment: R8 A8 A19 SG16 PM6 PS10 PRE10 RFF22

##### Substitution Emissions

Company: Sepura PLC						Product: SRG3900XN									
Date: 10/10/2014						Test Eng: Dave Smith									
Ports:															
Test: 90.210						using limits of 90.221(d)									
Ports:															
Test:						using limits of									
Op Mode	Mod State	CF Set	Freq. MHz	Sig Gen Level Cable	Rec'vr Level Cable	Ant Pol	Rec'vr Level EUT	Sig Gen Level Sub'n Ant	Rec'vr Level Sub'n Ant	Sub'n Ant Gain	ERP dBm	Limit dBm	Margin dB	Notes	
Mid Channel (806MHz to 824MHz band)															
1	0	1	1633.000	0.0	0.0	V	-45.1	-12.5	-10.1	8.9	-38.6	-13.0	25.6		
1	0	1	1633.000	0.0	0.0	H	-44.9	-12.5	-8.6	8.9	-39.9	-13.0	26.9		
1	0	1	2449.500	0.0	0.0	V	-44.6	-13.1	-11.2	9.8	-36.7	-13.0	23.7		
1	0	1	2449.500	0.0	0.0	H	-43.4	-13.1	-10.8	9.8	-36.0	-13.0	23.0		
Mid Channel (851MHz to 869MHz band)															
1	0	1	1723.000	0.0	0.0	V	-41.1	-12.6	-10.9	8.9	-33.8	-13.0	20.8		
1	0	1	1723.000	0.0	0.0	H	-42.2	-12.6	-10.4	8.9	-35.4	-13.0	22.4		
1	0	1	2584.500	0.0	0.0	V	-45.6	-13.2	-12.5	9.9	-36.4	-13.0	23.4		
1	0	1	2584.500	0.0	0.0	H	-45.7	-13.2	-11.6	9.9	-37.4	-13.0	24.4		
1	0	1	4308.000	0.0	0.0	V	-47.9	-14.3	-18.0	10.7	-33.5	-13.0	20.5		
1	0	1	4308.000	0.0	0.0	H	-50.2	-14.3	-17.2	10.7	-36.7	-13.0	23.7		
Results								Minimum Margin			20.5 dB				
								PASS/FAIL			PASS				
Notes															
DMU. Maximum rotation and height. Measured with 1MHz RBW detector. Limit set at -13dBm. Results of prescans are shown in plots 35 to 42.															


	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

#### 4.14 Radiated Emissions - Receive Mode - Below 1GHz

Factor Set 1:	A5_14A - - CBL015_11A	1 m cable
Factor Set 2:	- - - -	
Factor Set 3:	- - - -	
Test Equipment:	R4 A5 R8 A24 PRE10	

##### Radiated Emissions

Company: Sepura PLC											Product: SRG3900XN			
Date: 30/10/2014											Test Eng: Dave Smith			
Ports:														
Test: ANSI C63.4:2003											using limits of FCC(B)			
Ports:														
Test:											using limits of			
Plot	Op Mode	Mod State	Dist m	Fact Set	Freq. MHz	Ant Pol	Rec. Level dBuV	Corr'n Factor dB/m	Corr'n Factor dB	Total Level dBuV/m	Limit RSS_GEN dBuV/m	Margin RSS_GEN dB	Notes	
	Config 1													
43	2	0	3	1	923.250	V	7.9	30.9	1.0	39.8	46.0	6.2	#1	
43	2	0	3	1	923.250	H	7.8	30.9	1.0	39.7	46.0	6.3	#1	
43	2	0	3	1	930.750	V	7.0	31.5	1.0	39.5	46.0	6.5	#1	
43	2	0	3	1	930.750	H	7.2	31.5	1.0	39.6	46.0	6.4	#1	
43	2	0	3	1	938.250	V	8.9	32.0	1.0	41.9	46.0	4.1	#1	
43	2	0	3	1	938.250	H	7.0	32.0	1.0	40.0	46.0	6.0	#1	
	DMU													
47	2	0	3	1	923.250	V	2.5	30.9	1.0	34.4	46.0	11.6	#1	
47	2	0	3	1	923.250	H	1.9	30.9	1.0	33.8	46.0	12.2	#1	
47	2	0	3	1	930.750	V	2.4	31.5	1.0	34.9	46.0	11.1	#1	
47	2	0	3	1	930.750	H	8.4	31.5	1.0	40.9	46.0	5.1	#1	
47	2	0	3	1	938.250	V	9.5	32.0	1.0	42.5	46.0	3.5	#1	
47	2	0	3	1	938.250	H	9.4	32.0	1.0	42.4	46.0	3.6	#1	
Results											Minimum Margin			
											PASS/FAIL			
											3.5 dB			
											PASS			
Notes		Comments and Observations												
#1		Results of scans shown in plots 43 and 47. During prescans in screened room these emissions were identified as narrow band. Measurements with a 30Hz RBW/30Hz VBW peak detector were no more than 1 dB lower than a measurement with a 120kHz QP detector. Because of ambients/noise floor, a 30Hz RBW/30Hz VBW peak detector was used on the open area test site and an additional 1dB added to the correction factor.												

	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

#### 4.15 Radiated Emissions - Receive Mode - Above 1GHz - DMU

Factor Set 1:	A19_14A RFF22_14A PRE10_14B BlueCables_14B	1 m cable
Factor Set 2:	- - -	
Factor Set 3:	- - -	
Test Equipment:	R8 A19 PRE10	

##### Radiated Emissions

Company:	Sepura PLC	Product:	SRG3900XN
Date:	18/09/2014	Test Eng:	Dave Smith
Ports:			
Test:	ANSI C63.4:2003	using limits of	FCC(B) =FCC B
Ports:			
Test:	using limits of		


Plot	Op Mode	Mod State	Dist m	Fact Set	Freq. MHz	Ant Pol	Det. Type	Rec. Level dBuV	Corr'n Factor dB	Total Level dBuV/m	Limit RSS_GEN dBuV/m	Margin RSS_GEN dB	Notes
50	2	0	3	1	5521.500	V	Pk	43.4	6.0	49.4	74.0	24.6	Lo
50	2	0	3	1	5521.500	V	Avg	37.2	6.0	43.1	54.0	10.9	Lo
50	2	0	3	1	5521.500	H	Pk	42.8	6.0	48.8	74.0	25.2	Lo
50	2	0	3	1	5521.500	H	Avg	36.5	6.0	42.5	54.0	11.5	Lo
50	2	0	3	1	6441.750	V	Pk	47.0	6.0	53.0	74.0	21.0	Lo
50	2	0	3	1	6441.750	V	Avg	43.3	6.0	49.3	54.0	4.7	Lo
50	2	0	3	1	6441.750	H	Pk	46.7	6.0	52.7	74.0	21.3	Lo
50	2	0	3	1	6441.750	H	Avg	43.2	6.0	49.2	54.0	4.8	Lo
50	2	0	3	1	5584.500	V	Pk	42.9	6.0	48.9	74.0	25.1	Mid
50	2	0	3	1	5584.500	V	Avg	35.8	6.0	41.8	54.0	12.2	Mid
50	2	0	3	1	5584.500	H	Pk	42.4	6.0	48.4	74.0	25.6	Mid
50	2	0	3	1	5584.500	H	Avg	34.5	6.0	40.5	54.0	13.5	Mid
50	2	0	3	1	6515.250	V	Pk	46.5	6.1	52.5	74.0	21.5	Mid
50	2	0	3	1	6515.250	V	Avg	42.7	6.1	48.7	54.0	5.3	Mid
50	2	0	3	1	6515.250	H	Pk	46.8	6.1	52.9	74.0	21.1	Mid
50	2	0	3	1	6515.250	H	Avg	42.8	6.1	48.9	54.0	5.1	Mid
50	2	0	3	1	5629.500	V	Pk	41.0	6.0	47.0	74.0	27.0	Hi
50	2	0	3	1	5629.500	V	Avg	32.3	6.0	38.4	54.0	15.6	Hi
50	2	0	3	1	5629.500	H	Pk	41.9	6.0	47.9	74.0	26.1	Hi
50	2	0	3	1	5629.500	H	Avg	32.3	6.0	38.3	54.0	15.7	Hi
50	2	0	3	1	6567.750	V	Pk	47.0	6.2	53.2	74.0	20.8	Hi
50	2	0	3	1	6567.750	V	Avg	43.4	6.2	49.6	54.0	4.4	Hi
50	2	0	3	1	6567.750	H	Pk	45.5	6.2	51.7	74.0	22.3	Hi
50	2	0	3	1	6567.750	H	Avg	40.7	6.2	46.8	54.0	7.2	Hi

<b>Results</b>	<b>Minimum Margin</b> <b>PASS/FAIL</b>	<b>4.4 dB</b> <b>PASS</b>
----------------	---	------------------------------

Notes	Comments and Observations
-------	---------------------------

Key:	Results of scans are shown in plots 48 to 50. DMU. Upright and flat. Measured with 1MHz RBW detector. qp - quasi-peak, av - average, pk - peak
------	---



	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

#### 4.16 Radiated Emissions - Receive Mode - Above 1GHz - Config 1

Factor Set 1:	A19_14A RFF22_14A PRE10_14B BlueCables_14B	1 m cable
Factor Set 2:	- - - -	
Factor Set 3:	- - - -	
Test Equipment:	R8 A19 PRE10	

##### Radiated Emissions


Company:	Sepura PLC	Product:	SRG3900XN
Date:	23/09/2014	Test Eng:	Dave Smith
Ports:			
Test:	ANSI C63.4:2003	using limits of	FCC(B) =FCC B
Ports:			
Test:	using limits of		

Plot	Op Mode	Mod State	Dist m	Fact Set	Freq. MHz	Ant Pol	Det. Type	Rec. Level dBuV	Corr'n Factor dB	Total Level dBuV/m	Limit RSS_GEN dBuV/m	Margin RSS_GEN dB	Notes
46	2	0	3	1	5539.500	V	Pk	44.4	6.0	50.4	74.0	23.6	Lo
46	2	0	3	1	5539.500	V	Avg	38.7	6.0	44.7	54.0	9.3	Lo
46	2	0	3	1	5539.500	H	Pk	39.6	6.0	45.6	74.0	28.4	Lo
46	2	0	3	1	5539.500	H	Avg	27.9	6.0	33.9	54.0	20.1	Lo
46	2	0	3	1	6462.750	V	Pk	48.6	6.0	54.7	74.0	19.3	Lo
46	2	0	3	1	6462.750	V	Avg	46.1	6.0	52.1	54.0	1.9	Lo
46	2	0	3	1	6462.750	H	Pk	47.7	6.0	53.7	74.0	20.3	Lo
46	2	0	3	1	6462.750	H	Avg	44.6	6.0	50.6	54.0	3.4	Lo
46	2	0	3	1	5584.500	V	Pk	43.5	6.0	49.5	74.0	24.5	Mid
46	2	0	3	1	5584.500	V	Avg	37.3	6.0	43.3	54.0	10.7	Mid
46	2	0	3	1	5584.500	H	Pk	40.1	6.0	46.1	74.0	27.9	Mid
46	2	0	3	1	5584.500	H	Avg	29.4	6.0	35.4	54.0	18.6	Mid
46	2	0	3	1	6515.250	V	Pk	47.4	6.1	53.4	74.0	20.6	Mid
46	2	0	3	1	6515.250	V	Avg	43.6	6.1	49.6	54.0	4.4	Mid
46	2	0	3	1	6515.250	H	Pk	47.6	6.1	53.7	74.0	20.3	Mid
46	2	0	3	1	6515.250	H	Avg	44.4	6.1	50.5	54.0	3.5	Mid
46	2	0	3	1	5629.500	V	Pk	45.8	6.0	51.8	74.0	22.2	Hi
46	2	0	3	1	5629.500	V	Avg	41.0	6.0	47.0	54.0	7.0	Hi
46	2	0	3	1	5629.500	H	Pk	40.1	6.0	46.1	74.0	27.9	Hi
46	2	0	3	1	5629.500	H	Avg	30.2	6.0	36.2	54.0	17.8	Hi
46	2	0	3	1	6567.750	V	Pk	47.9	6.2	54.1	74.0	19.9	Hi
46	2	0	3	1	6567.750	V	Avg	44.8	6.2	51.0	54.0	3.0	Hi
46	2	0	3	1	6567.750	H	Pk	47.5	6.2	53.7	74.0	20.3	Hi
46	2	0	3	1	6567.750	H	Avg	44.0	6.2	50.2	54.0	3.8	Hi

<b>Results</b>	<b>Minimum Margin</b> <b>PASS/FAIL</b>	<b>1.9 dB</b> <b>PASS</b>
----------------	---	------------------------------

Notes	Comments and Observations
-------	---------------------------

Key:	Results of scans are shown in plots 44 to 46. Config 1. Measured with 1MHz RBW detector. qp - quasi-peak, av - average, pk - peak
------	--


	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>


## 4.17 Conducted Emissions (Power) - Results

Factor Set 1: L1\_14A AB002\_CBL005\_CBL039\_14A - -  
Factor Set 2: - - - -  
Factor Set 3: - - - -  
Test Equipment: R10 L1

### Conducted Emissions (Power)

Company: Sepura PLC					Product: SRG3900 XN								
Date: 29/10/2014					Test Eng: Dave Smith								
Ports: ac power													
Test: CISPR22					using limits of				CISPR22(B)				
Ports:													
Test:					using limits of								
Plot	Op Mode	Mod State	Line (L/N)	Fact Set	Freq. MHz	Det qp/av	Rec. Level dBuV	Corr'n Factor dB	Total Level dBuV	Limit CISPR22(B) dBuV	Margin CISPR22(B) dB	Notes	
54	1	0	L	1	0.190	qp	38.6	10.0	48.6	64.0	15.4	Tx @ 861.5MHz	
54	1	0	L	1	0.190	av	24.1	10.0	34.1	54.0	19.9	Tx @ 861.5MHz	
54	1	0	L	1	0.251	qp	31.9	10.1	41.9	61.7	19.8	Tx @ 861.5MHz	
54	1	0	L	1	0.251	av	16.8	10.1	26.9	51.7	24.8	Tx @ 861.5MHz	
54	1	0	L	1	0.315	qp	25.1	10.0	35.1	59.8	24.7	Tx @ 861.5MHz	
54	1	0	L	1	0.315	av	11.3	10.0	21.3	49.8	28.5	Tx @ 861.5MHz	
53	1	0	N	1	0.190	qp	38.3	10.0	48.4	64.0	15.7	Tx @ 861.5MHz	
53	1	0	N	1	0.190	av	24.0	10.0	34.0	54.0	20.0	Tx @ 861.5MHz	
53	1	0	N	1	0.251	qp	31.8	10.1	41.8	61.7	19.9	Tx @ 861.5MHz	
53	1	0	N	1	0.251	av	15.7	10.1	25.7	51.7	26.0	Tx @ 861.5MHz	
53	1	0	N	1	0.315	qp	25.8	10.0	35.9	59.8	24.0	Tx @ 861.5MHz	
53	1	0	N	1	0.315	av	10.3	10.0	20.3	49.8	29.5	Tx @ 861.5MHz	
Results										Minimum Margin PASS/FAIL		15.4 dB PASS	
Notes		Comments and Observations											
Results of scans are shown in plots 51 to 54..													


	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>35 of 88</b>

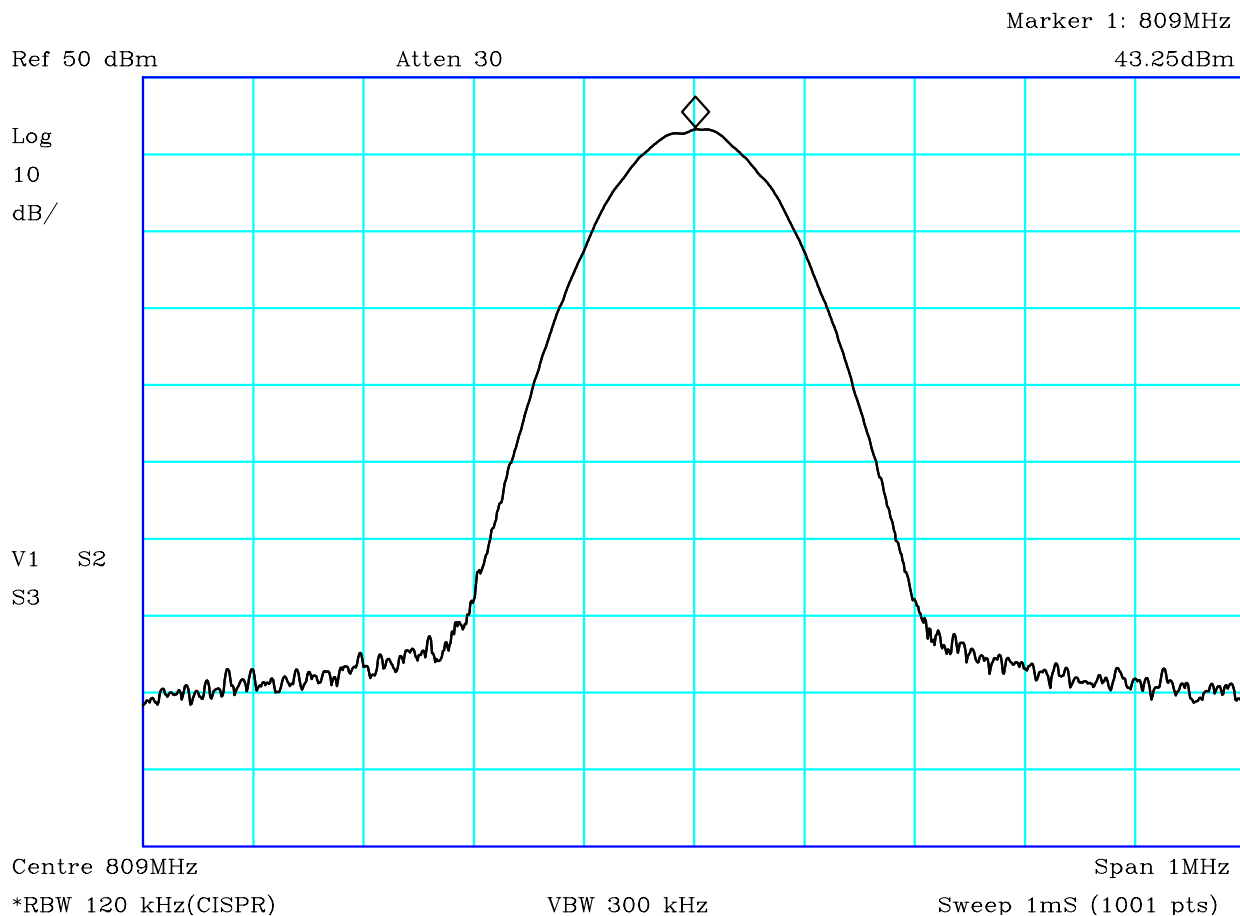


CF1:30dB PAD

## PLOT 1 Conducted Antenna Power - 809MHz

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	
Tx on 809MHz Peak = 43.25 dBm Average (measured with power meter) =40.27 dBm			
Facility:	Env. Chamber	Height	Mode: Tx
Distance		Polarisation	Modification State: 0
Angle		File: H4824723.txt	Analyser: R13


	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>36 of 88</b>

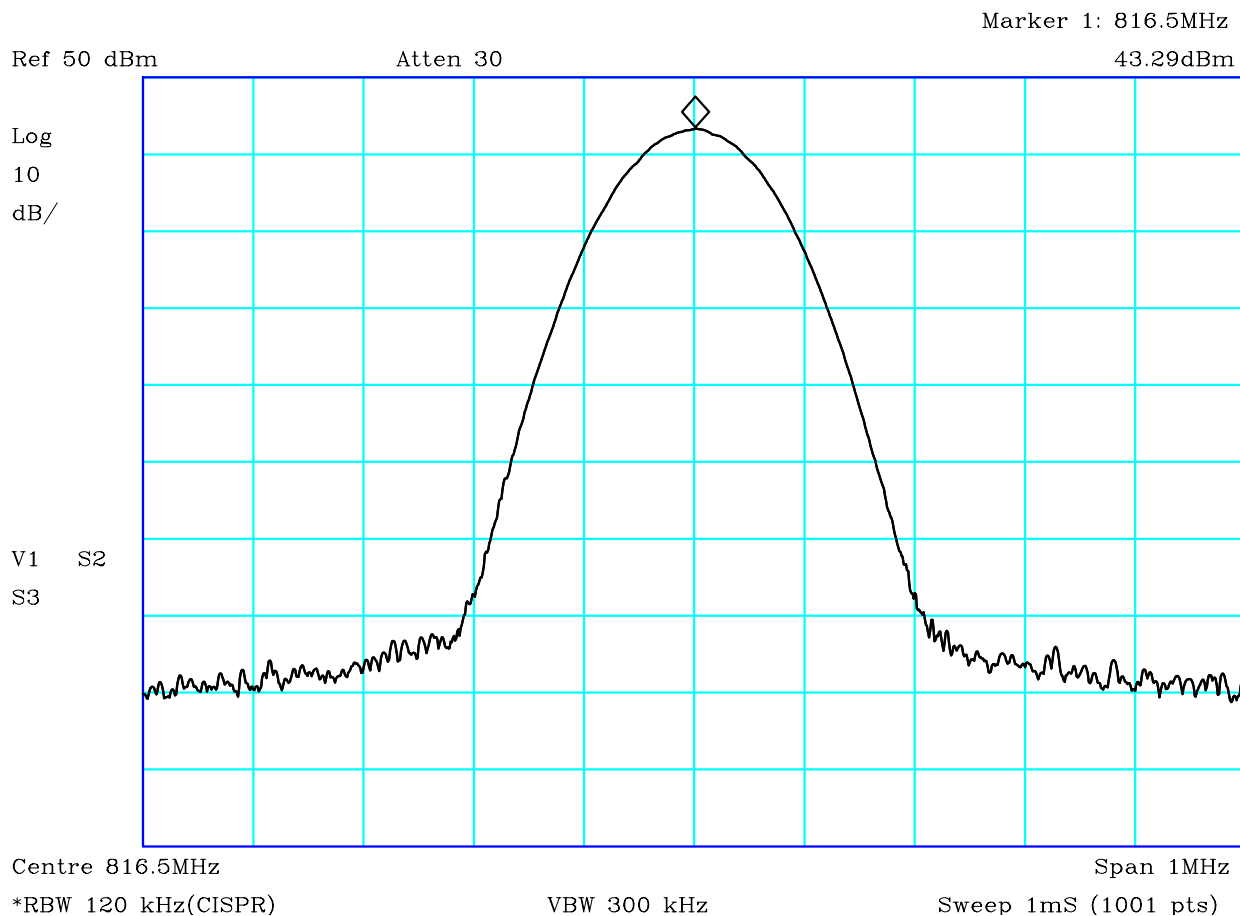


CF1:30dB PAD

## PLOT 2 Conducted Antenna Power - 816.5MHz

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	
Tx on 816.5MHz Peak = 43.29 dBm Average (measured with power meter) =40.26 dBm			
Facility:	Env. Chamber	Height	Mode: Tx
Distance		Polarisation	Modification State: 0
Angle		File: H4824725.txt	Analyser: R13


	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
Test No: <b>T5507</b>	Test Report		Page: 37 of 88

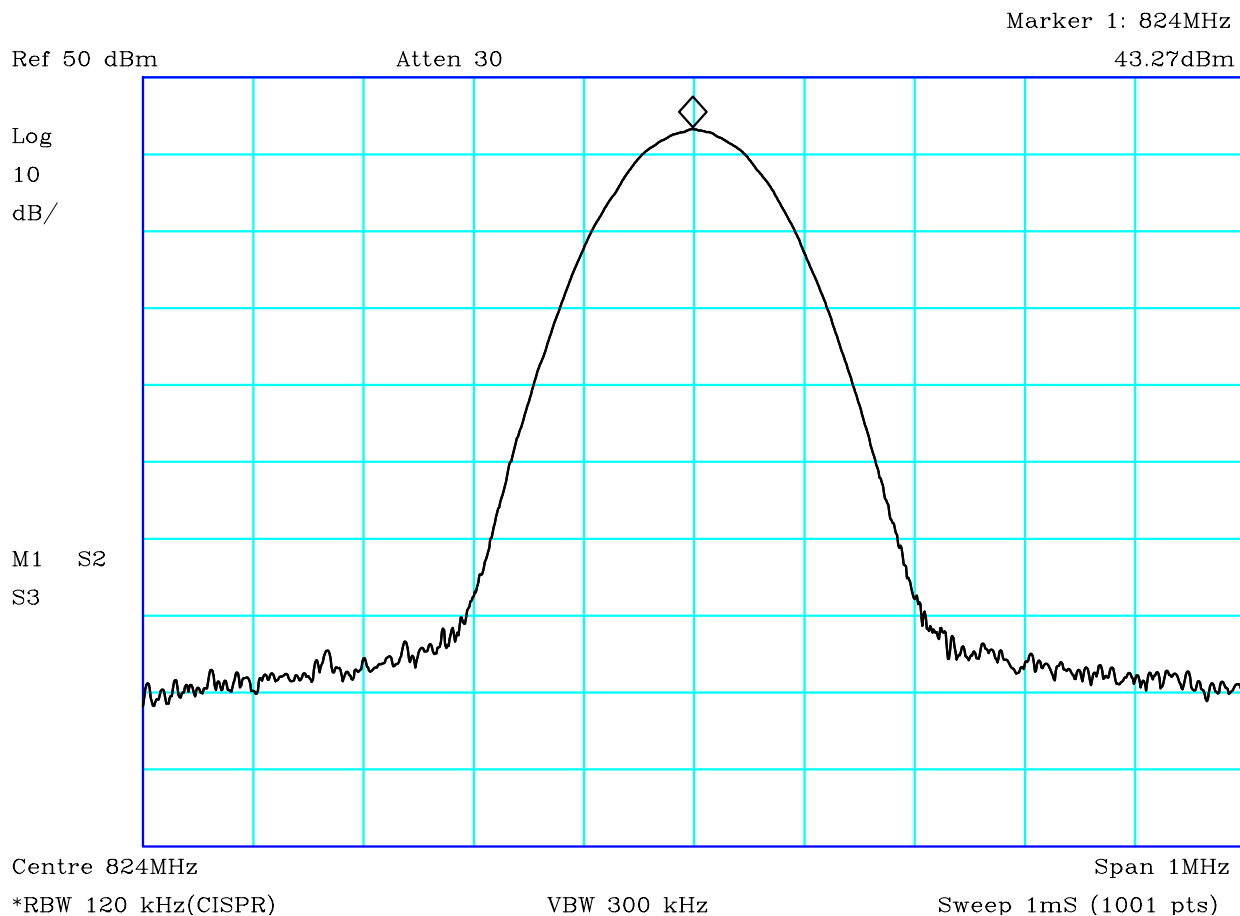


CF1:30dB PAD

### PLOT 3 Conducted Antenna Power - 824MHz

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	
Tx on 824MHz Peak = 43.27 dBm Average (measured with power meter) =40.27 dBm			
Facility:	Env. Chamber	Height	Mode: Tx
Distance		Polarisation	Modification State: 0
Angle		File: H4824727.txt	Analyser: R13

	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
Test No: <b>T5507</b>	Test Report		Page: 38 of 88

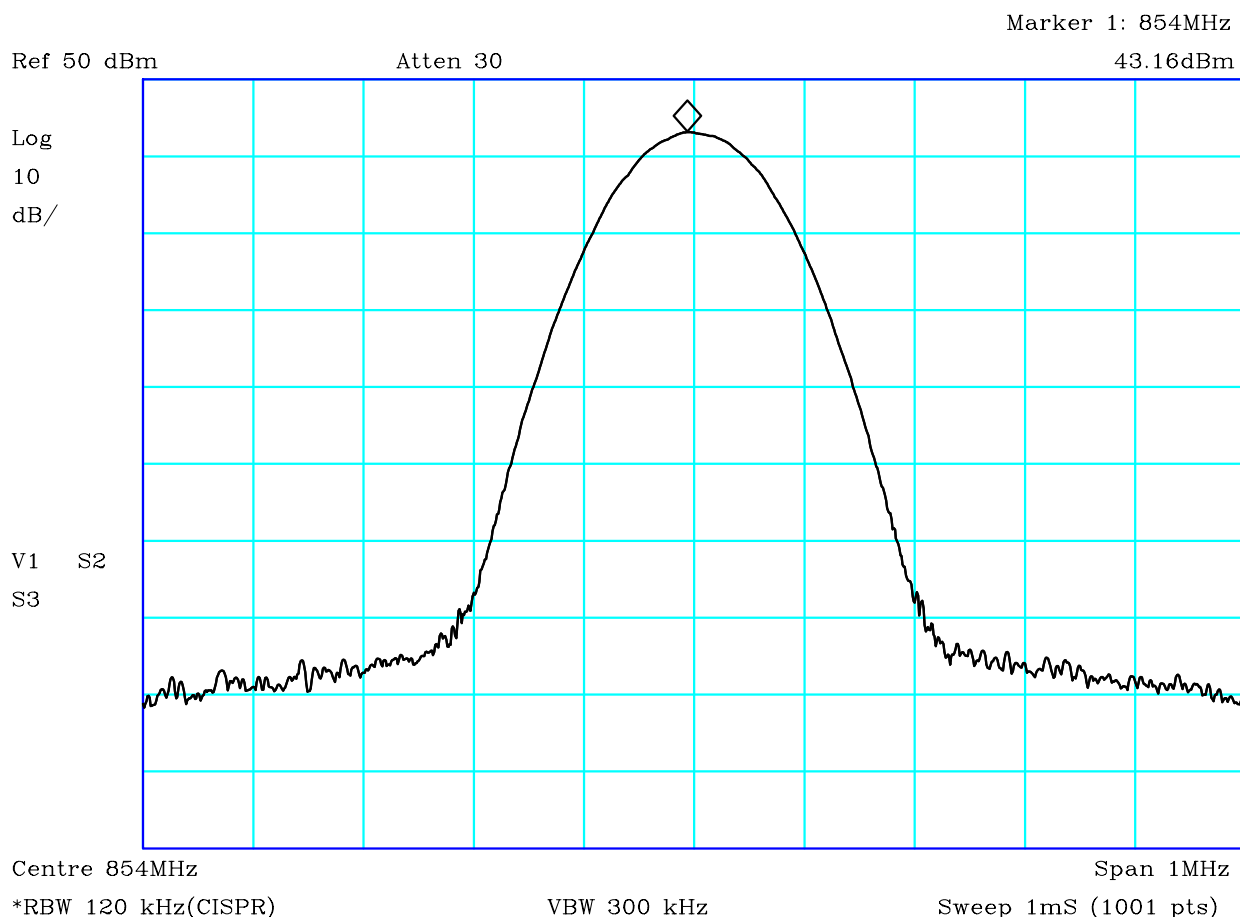


CF1:30dB PAD


#### PLOT 4 Conducted Antenna Power - 854MHz

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	

Tx on 854MHz  
Peak = 43.16 dBm  
Average (measured with power meter) =40.32 dBm

Facility:	Env. Chamber	Height	Mode:	Tx
Distance		Polarisation	Modification State:	0
Angle		File:	H482472B.txt	Analysers:
				R13


	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 39 of 88

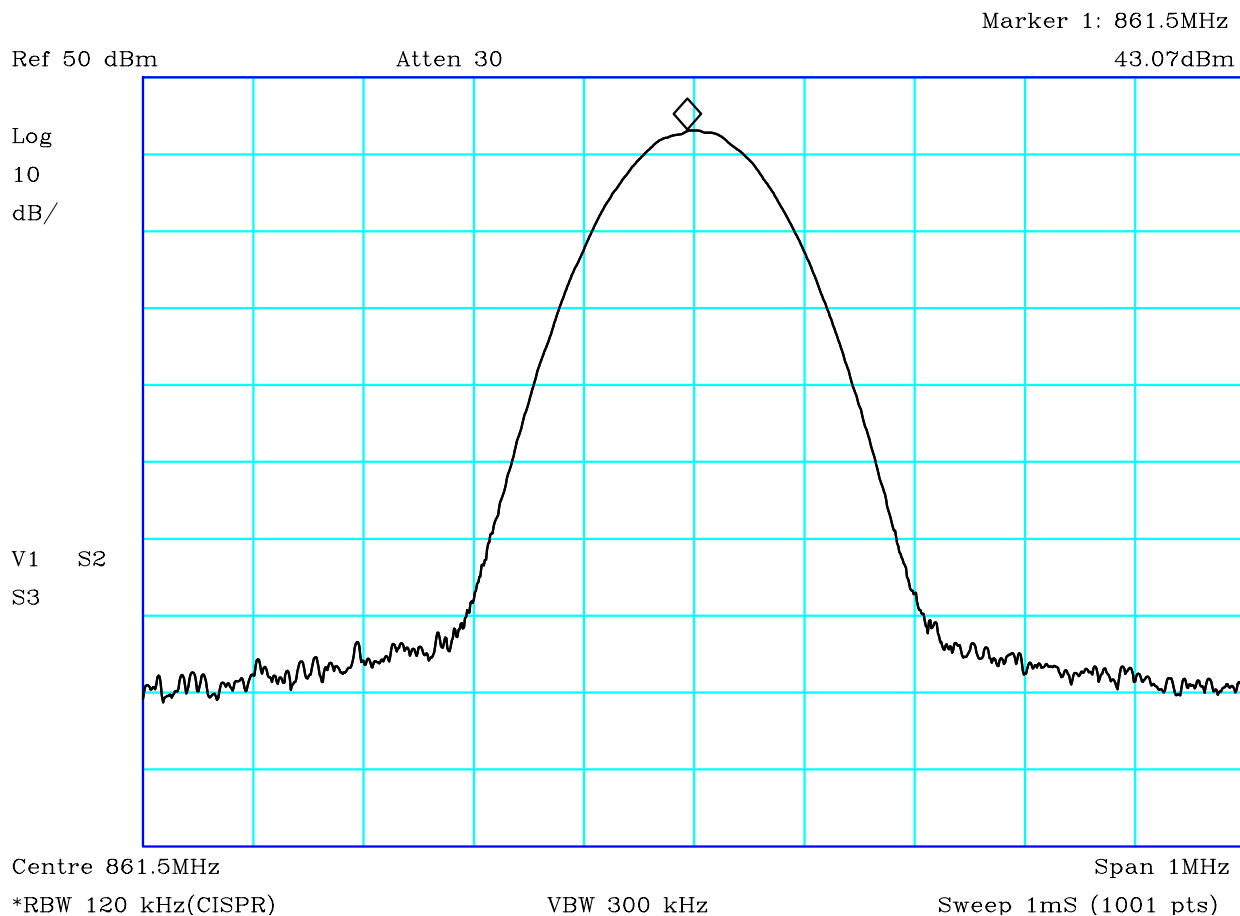


CF1:30dB PAD

## PLOT 5 Conducted Antenna Power - 861.5MHz

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	
Tx on 861.5MHz Peak = 43.07 dBm Average (measured with power meter) =40.18 dBm			
Facility:	Env. Chamber	Height	Mode: Tx
Distance		Polarisation	Modification State: 0
Angle		File: H482472E.txt	Analyser: R13

	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 40 of 88

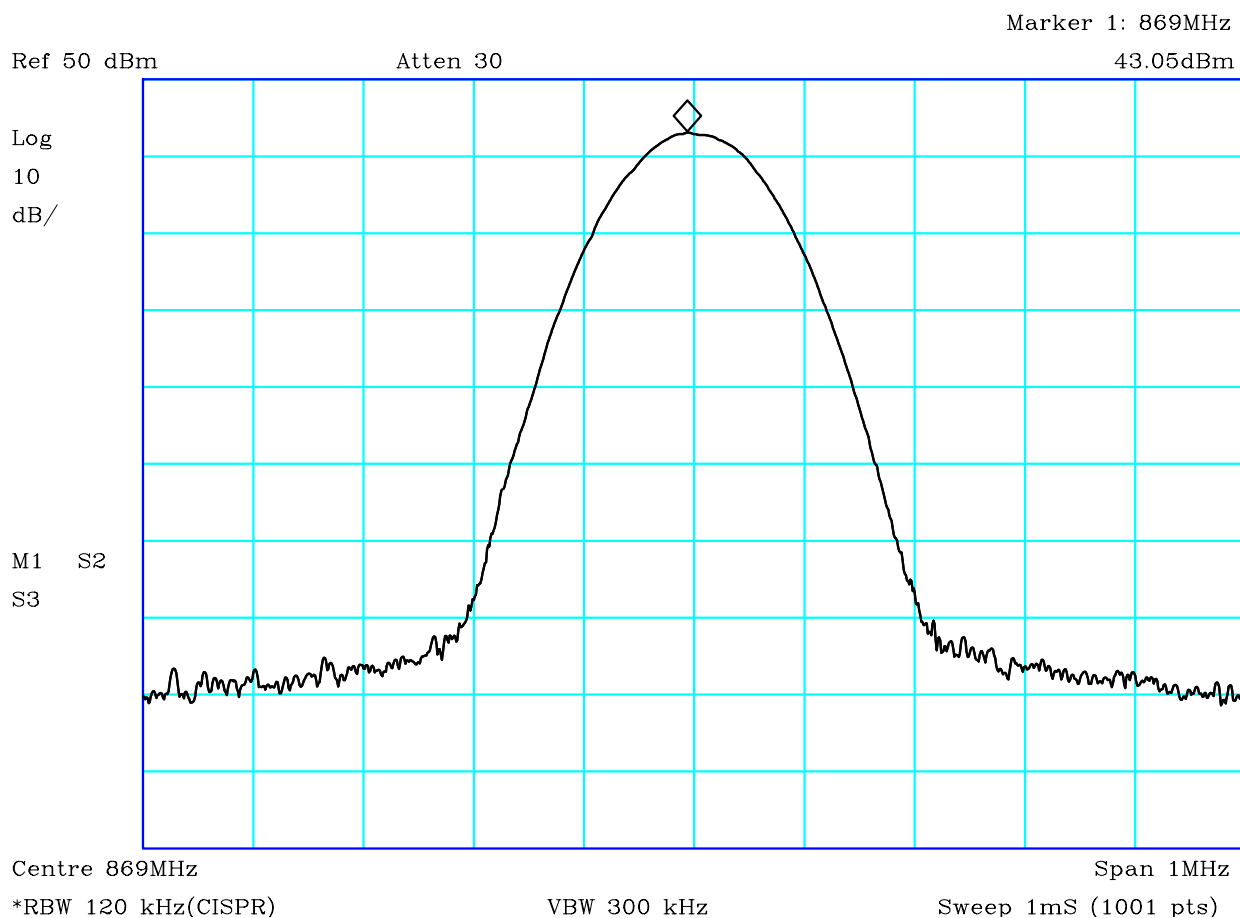

CF1:30dB PAD


## PLOT 6 Conducted Antenna Power - 869MHz


Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	

Tx on 869MHz  
Peak = 43.05 dBm  
Average (measured with power meter) =40.21 dBm

Facility:	Env. Chamber	Height	Mode:	Tx
Distance		Polarisation	Modification State:	0
Angle		File:	H4824730.txt	Analysers:
				R13



	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 41 of 88

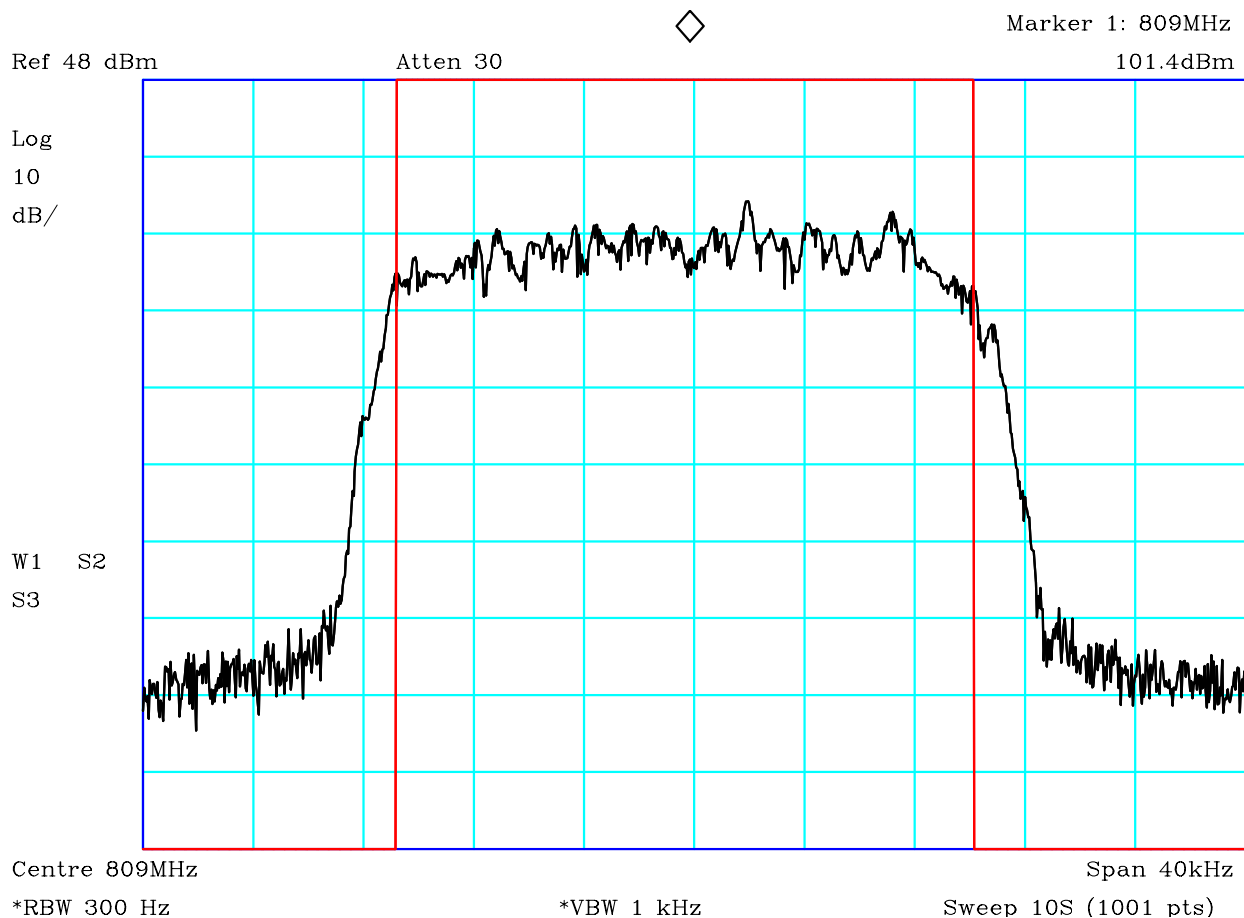


CF1:30dB PAD


## PLOT 7 Occupied Bandwidth - 809MHz

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	

Tx on 809MHz  
99% Occupied Bandwidth Measurement = 20.96kHz

Facility:	Env. Chamber	Height	Mode:	Tx
Distance		Polarisation	Modification State:	0
Angle		File:	H48247CA.txt	Analysers:
				R13


	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
Test No: <b>T5507</b>	Test Report		Page: 42 of 88

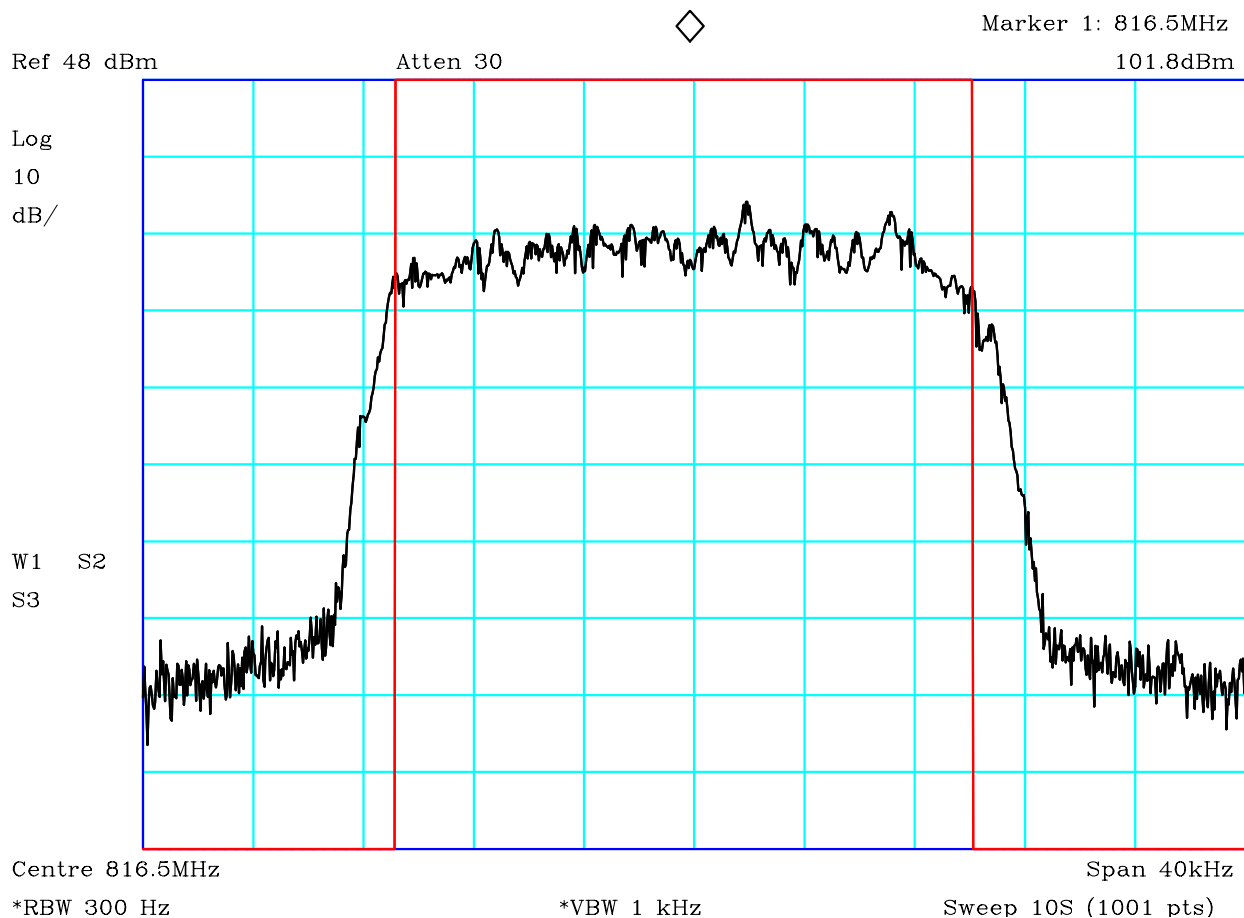


CF1:30dB PAD

## PLOT 8 Occupied Bandwidth - 816.5MHz

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	
Tx on 816.5MHz 99% Occupied Bandwidth Measurement = 20.96kHz			
Facility:	Env. Chamber	Height	Mode: Tx
Distance		Polarisation	Modification State: 0
Angle		File: H48247CB.txt	Analyser: R13


	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 43 of 88

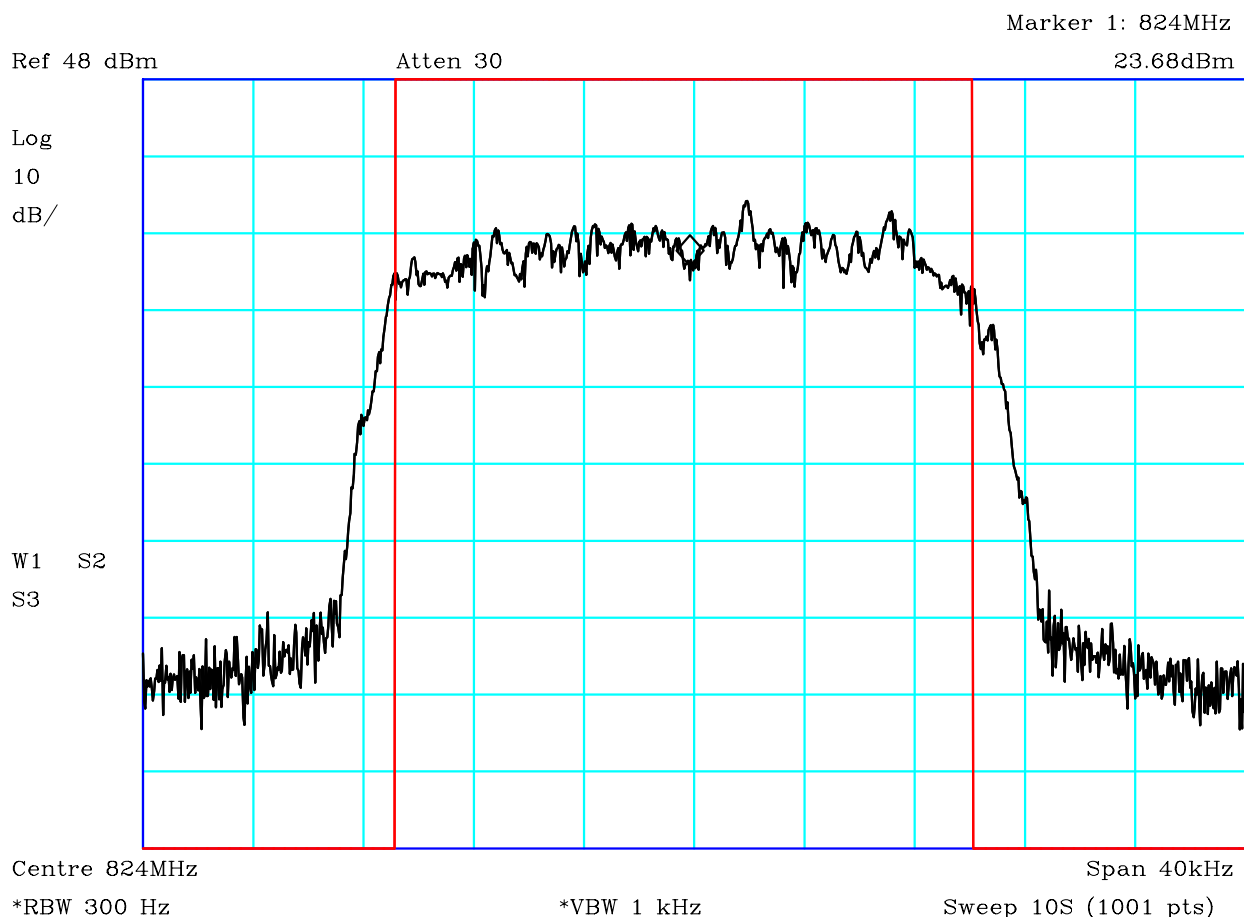


CF1:30dB PAD

## PLOT 9 Occupied Bandwidth - 824MHz

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	
Tx on 824MHz 99% Occupied Bandwidth Measurement = 20.96kHz			
Facility:	Env. Chamber	Height	Mode: Tx
Distance		Polarisation	Modification State: 0
Angle		File: H48247C6.txt	Analyser: R13

	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 44 of 88

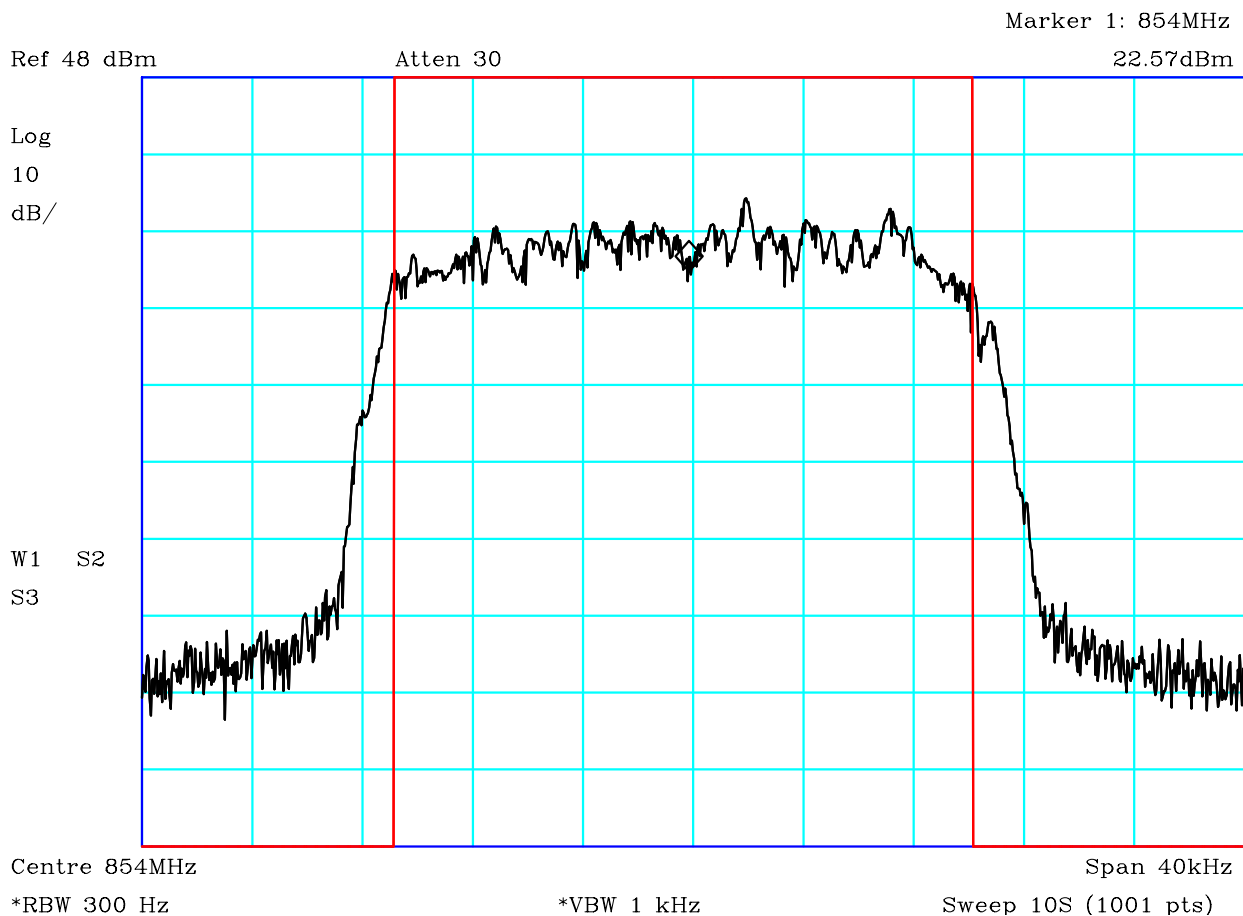


CF1:30dB PAD


## PLOT 10 Occupied Bandwidth - 854MHz

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	

Tx on 854MHz  
99% Occupied Bandwidth Measurement = 21kHz

Facility:	Env. Chamber	Height	Mode:	Tx
Distance		Polarisation	Modification State:	0
Angle		File:	H48247D4.txt	Analysers:
				R13

	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 45 of 88

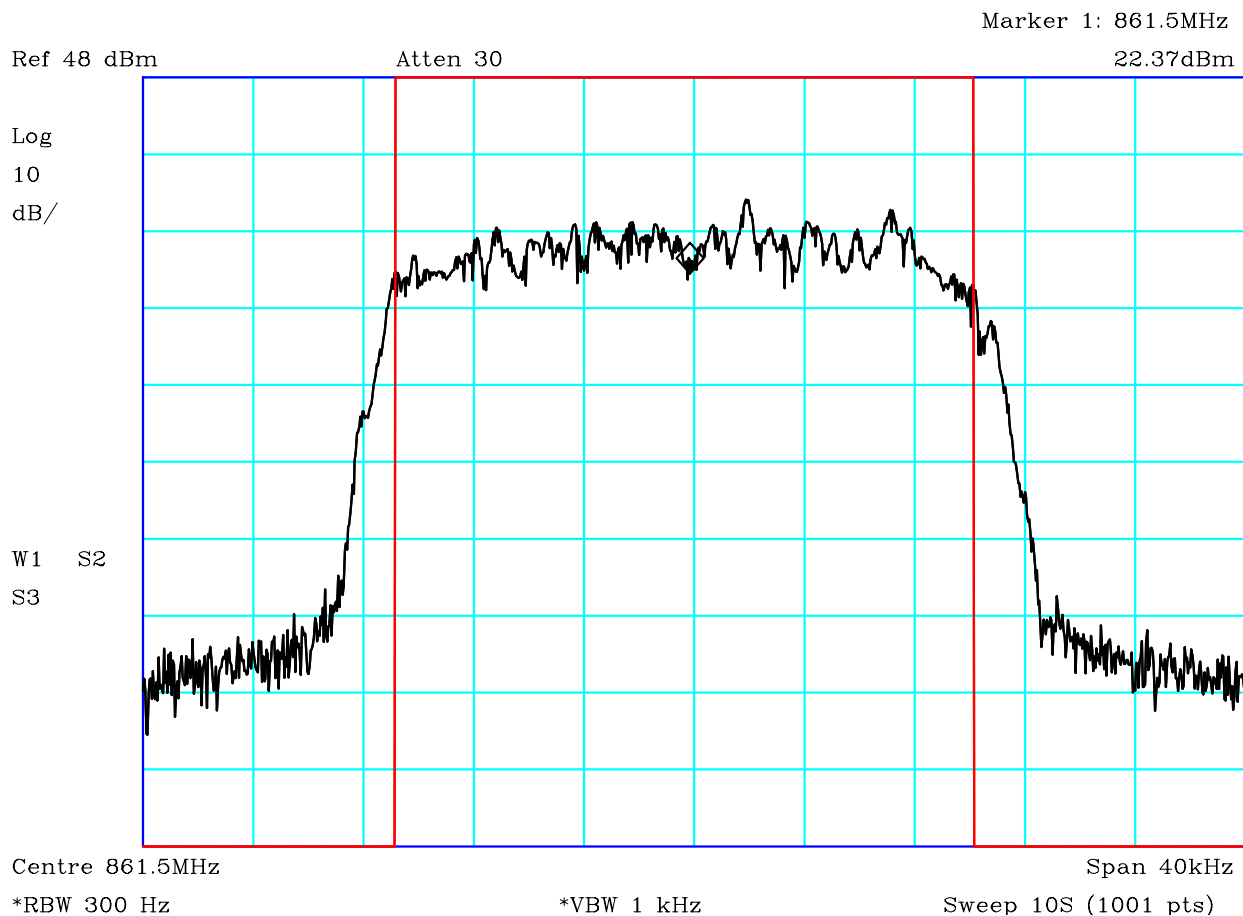


CF1:30dB PAD


## PLOT 11 Occupied Bandwidth - 861.5MHz

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	

Tx on 861.5MHz  
99% Occupied Bandwidth Measurement = 21kHz

Facility:	Env. Chamber	Height	Mode:	Tx
Distance		Polarisation	Modification State:	0
Angle		File:	H48247D8.txt	Analysers:
				R13


	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 46 of 88

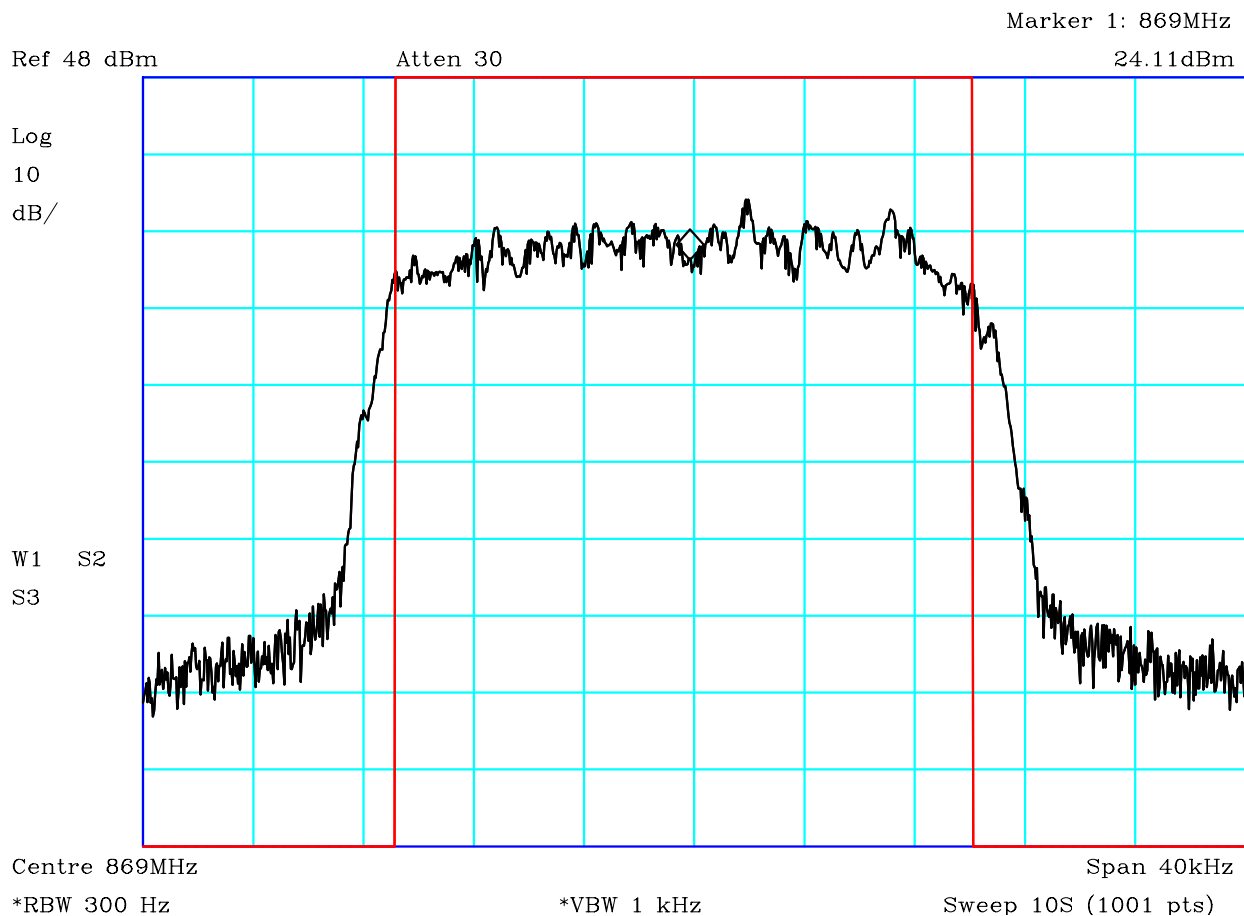


CF1:30dB PAD

## PLOT 12 Occupied Bandwidth - 869MHz

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	
Tx on 869MHz 99% Occupied Bandwidth Measurement = 20.96kHz			
Facility:	Env. Chamber	Height	Mode: Tx
Distance		Polarisation	Modification State: 0
Angle		File: H48247DC.txt	Analyser: R13


	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 47 of 88

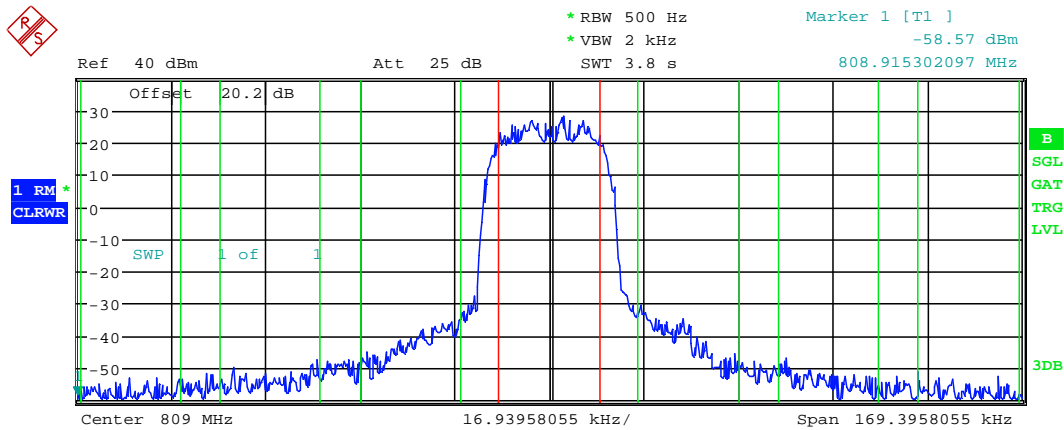


<b>Tx Channel</b>			
Bandwidth	18 kHz	Power	39.00 dBm
<b>Adjacent Channel</b>			
Bandwidth	18 kHz	Lower	-64.54 dB
Spacing	25 kHz	Upper	-62.18 dB
<b>Alternate Channel</b>			
Bandwidth	18 kHz	Lower	-77.17 dB
Spacing	50 kHz	Upper	-76.84 dB
<b>2nd Alternate Channel</b>			
Bandwidth	18 kHz	Lower	-80.82 dB
Spacing	75 kHz	Upper	-80.71 dB

Date: 14.OCT.2014 11:48:03

## PLOT 13 Adjacent Channel Power 809MHz - as an alternative to Masks of 90.210

	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 48 of 88

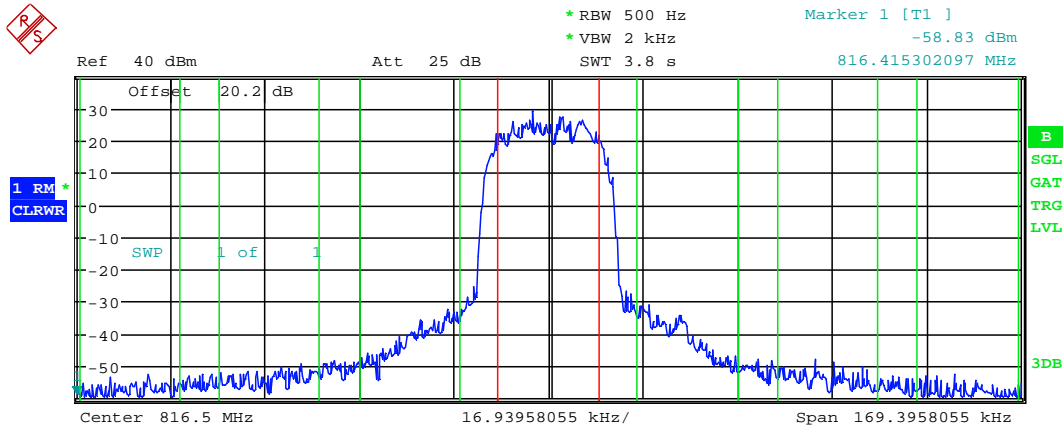


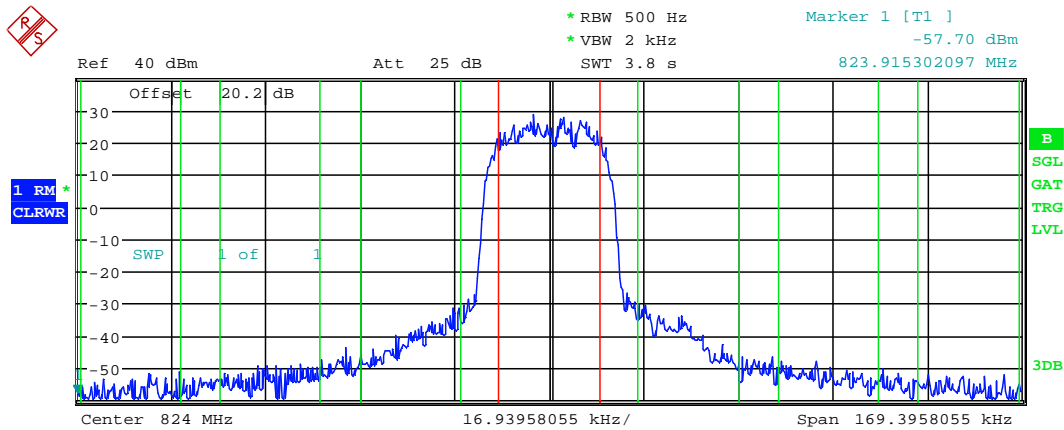
<b>Tx Channel</b>			
Bandwidth	18 kHz	Power	39.05 dBm
<b>Adjacent Channel</b>			
Bandwidth	18 kHz	Lower	-63.06 dB
Spacing	25 kHz	Upper	-61.62 dB
<b>Alternate Channel</b>			
Bandwidth	18 kHz	Lower	-77.05 dB
Spacing	50 kHz	Upper	-76.88 dB
<b>2nd Alternate Channel</b>			
Bandwidth	18 kHz	Lower	-80.47 dB
Spacing	75 kHz	Upper	-80.79 dB

Date: 14.OCT.2014 11:48:46

## PLOT 14 Adjacent Channel Power 816.5MHz - as an alternative to Masks of 90.210




	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
Test No: <b>T5507</b>	Test Report		Page: 49 of 88




Tx Channel			
Bandwidth	18 kHz	Power	39.04 dBm
Adjacent Channel			
Bandwidth	18 kHz	Lower	-62.73 dB
Spacing	25 kHz	Upper	-61.39 dB
Alternate Channel			
Bandwidth	18 kHz	Lower	-76.15 dB
Spacing	50 kHz	Upper	-76.06 dB
2nd Alternate Channel			
Bandwidth	18 kHz	Lower	-80.06 dB
Spacing	75 kHz	Upper	-79.58 dB

Date: 14.OCT.2014 11:49:25

## PLOT 15 Adjacent Channel Power 824MHz - as an alternative to Masks of 90.210


	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
Test No: <b>T5507</b>	Test Report		Page: 50 of 88

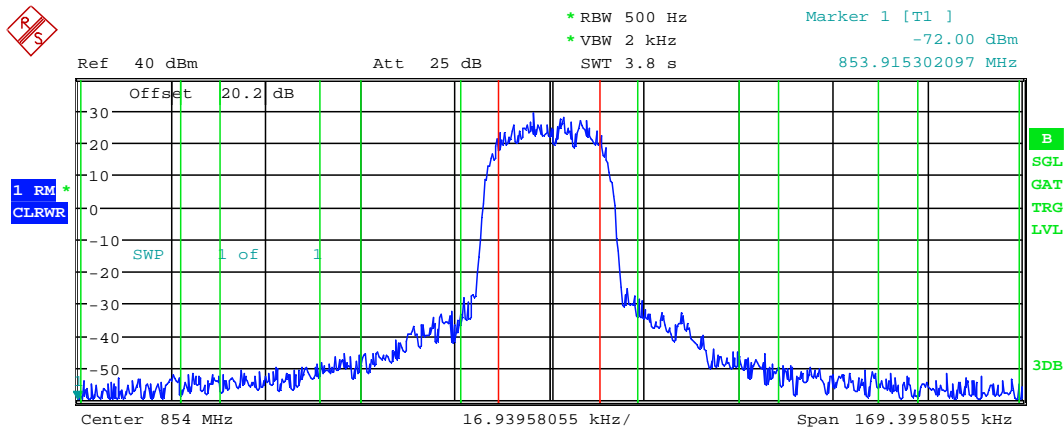


Tx Channel			
Bandwidth	18 kHz	Power	39.02 dBm
Adjacent Channel			
Bandwidth	18 kHz	Lower	-62.84 dB
Spacing	25 kHz	Upper	-61.33 dB
Alternate Channel			
Bandwidth	18 kHz	Lower	-76.64 dB
Spacing	50 kHz	Upper	-76.63 dB
2nd Alternate Channel			
Bandwidth	18 kHz	Lower	-79.85 dB
Spacing	75 kHz	Upper	-80.01 dB

Date: 14.OCT.2014 11:51:02

## PLOT 16 Adjacent Channel Power 854MHz - as an alternative to Masks of 90.210


	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 51 of 88

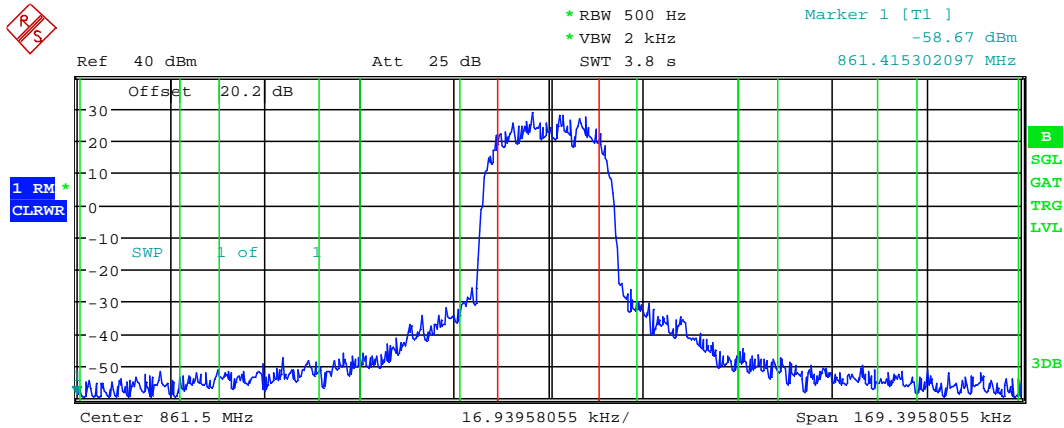


<b>Tx Channel</b>			
Bandwidth	18 kHz	Power	38.88 dBm
<b>Adjacent Channel</b>			
Bandwidth	18 kHz	Lower	-62.57 dB
Spacing	25 kHz	Upper	-61.20 dB
<b>Alternate Channel</b>			
Bandwidth	18 kHz	Lower	-75.99 dB
Spacing	50 kHz	Upper	-76.00 dB
<b>2nd Alternate Channel</b>			
Bandwidth	18 kHz	Lower	-79.72 dB
Spacing	75 kHz	Upper	-79.35 dB

Date: 14.OCT.2014 11:51:36


## PLOT 17 Adjacent Channel Power 861.5MHz - as an alternative to Masks of 90.210


	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 52 of 88

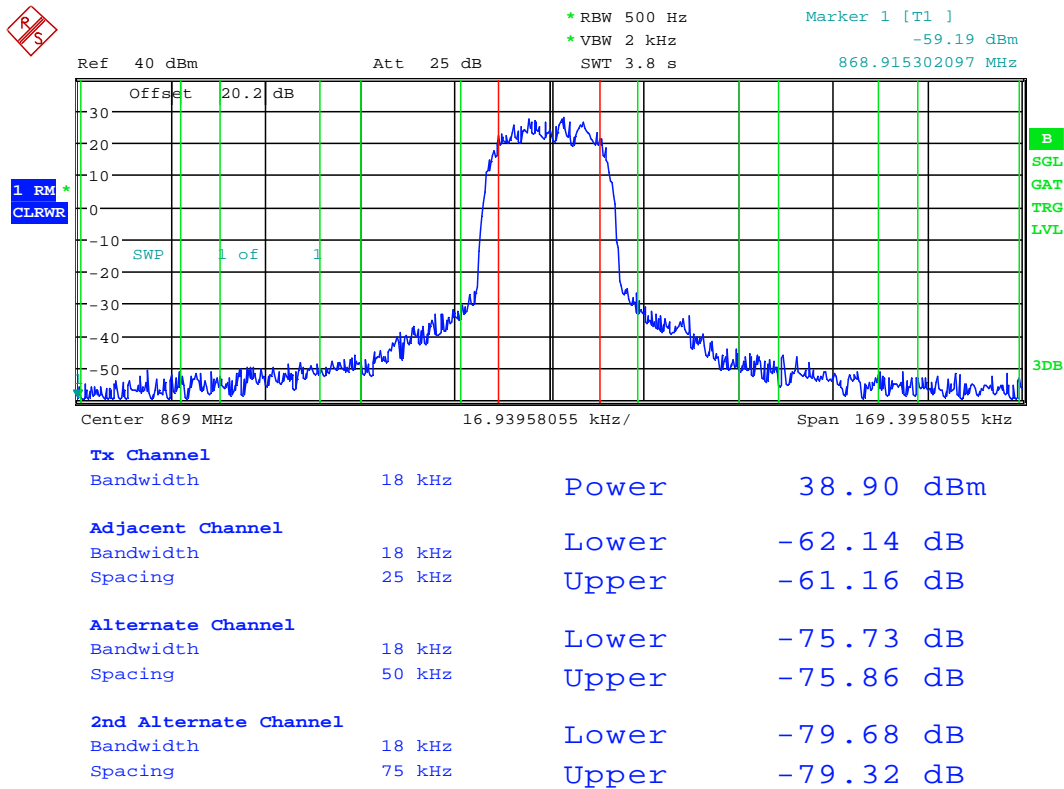

Date: 14.OCT.2014 11:52:08

## PLOT 18 Adjacent Channel Power 869MHz - as an alternative to Masks of 90.210


	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>53 of 88</b>

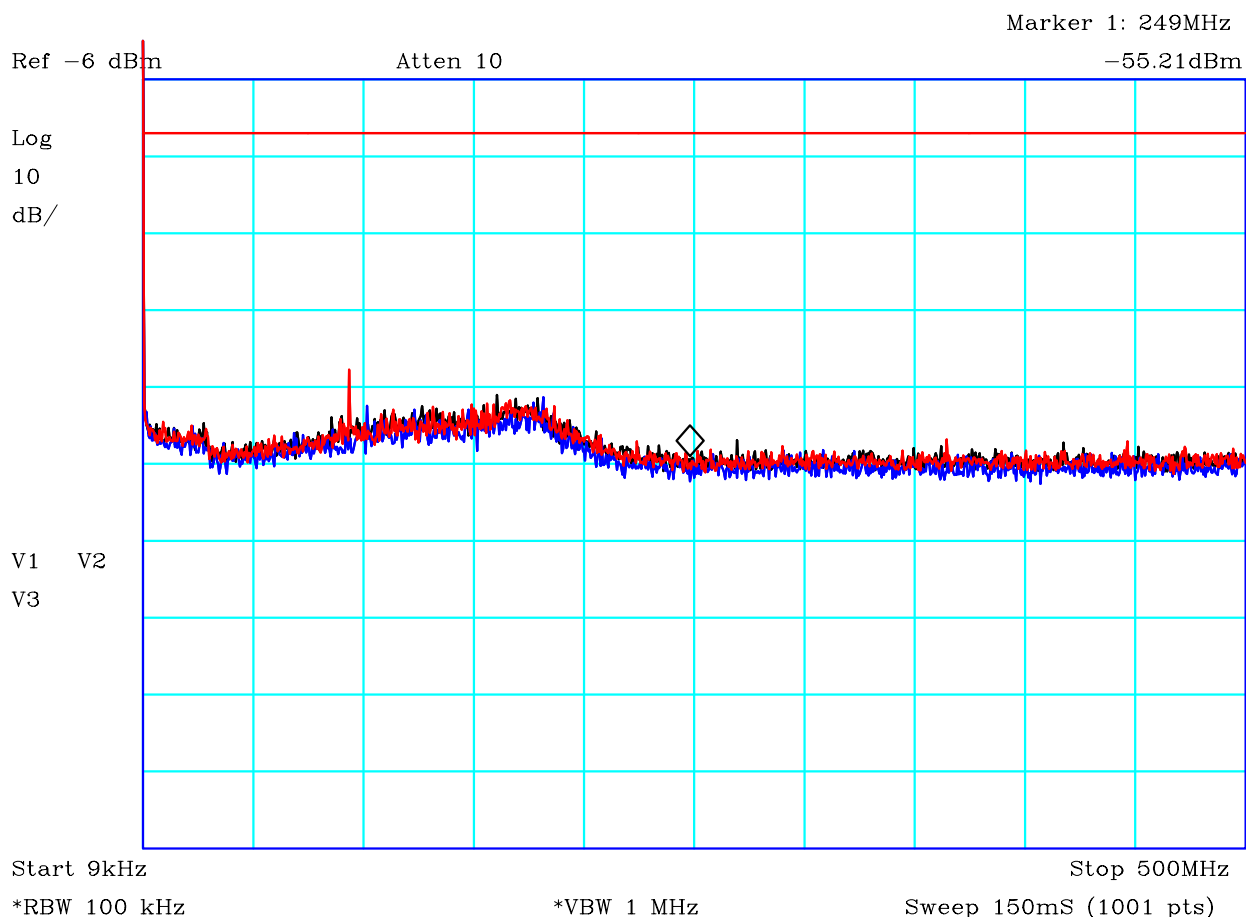


CF1:30dB PAD CF2:RFF17\_140528

### PLOT 19 Antenna Conducted Spurious - LF Band - 9kHz to 500MHz - Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:	-13dBm	Limit2:	
Limit3:		Limit4:	
Black: Tx 809MHz Blue: Tx 816.5MHz Red: Tx 824MHz Limit = -13dBm. Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Env. Chamber	Height	Mode: Tx
Distance		Polarisation	Modification State: 0
Angle		File: H4824757.txt	Analysers: R13


	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>54 of 88</b>

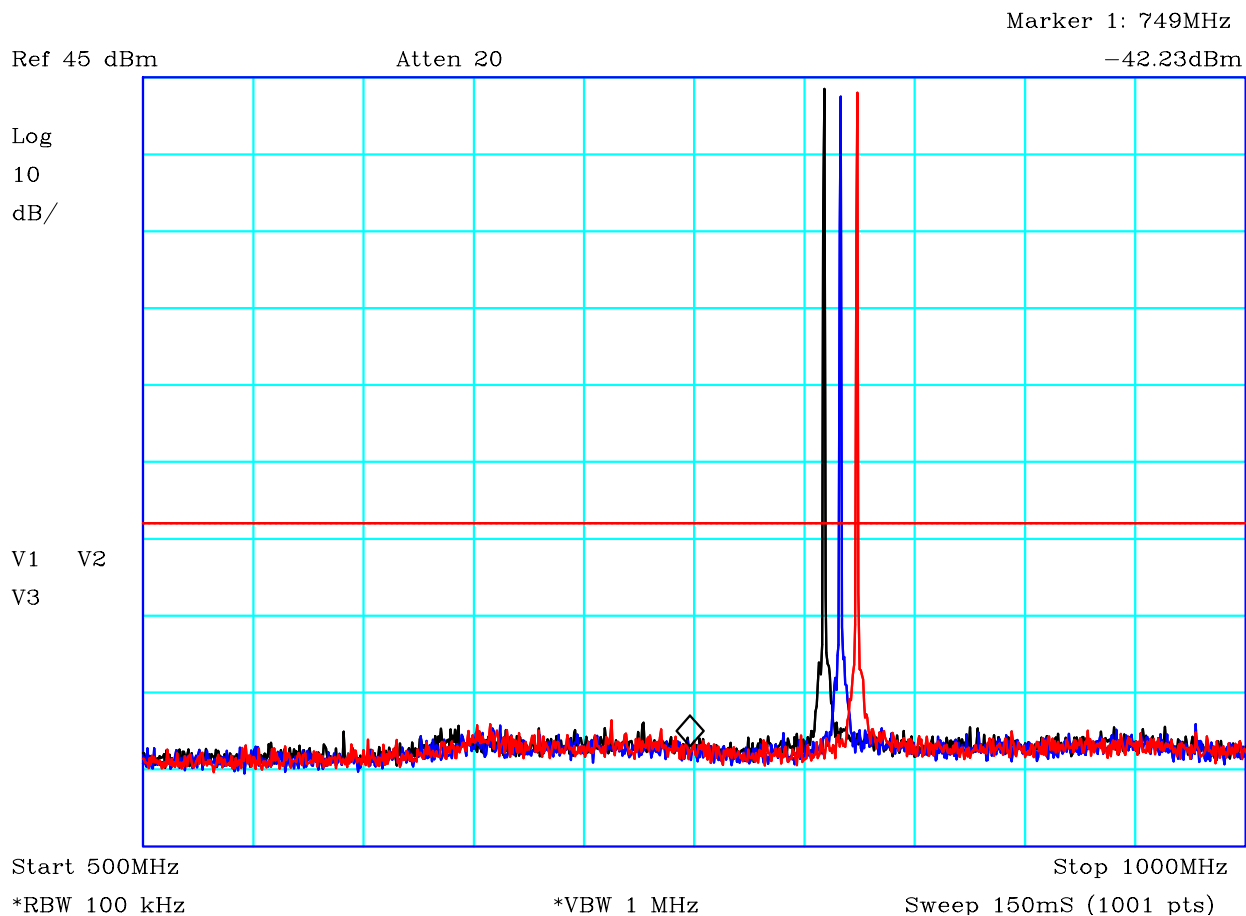


CF1:30dB PAD

**PLOT 20    Antenna Conducted Spurious - LF Band - 500MHz to 1GHz - Mask of 90.221(d)**

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:	-13dBm	Limit2:	
Limit3:		Limit4:	
Black: Tx 809MHz Blue: Tx 816.5MHz Red: Tx 824MHz Limit = -13dBm. Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Env. Chamber	Height	Mode: Tx
Distance		Polarisation	Modification State: 0
Angle		File: H482475F.txt	Analyser: R13


	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

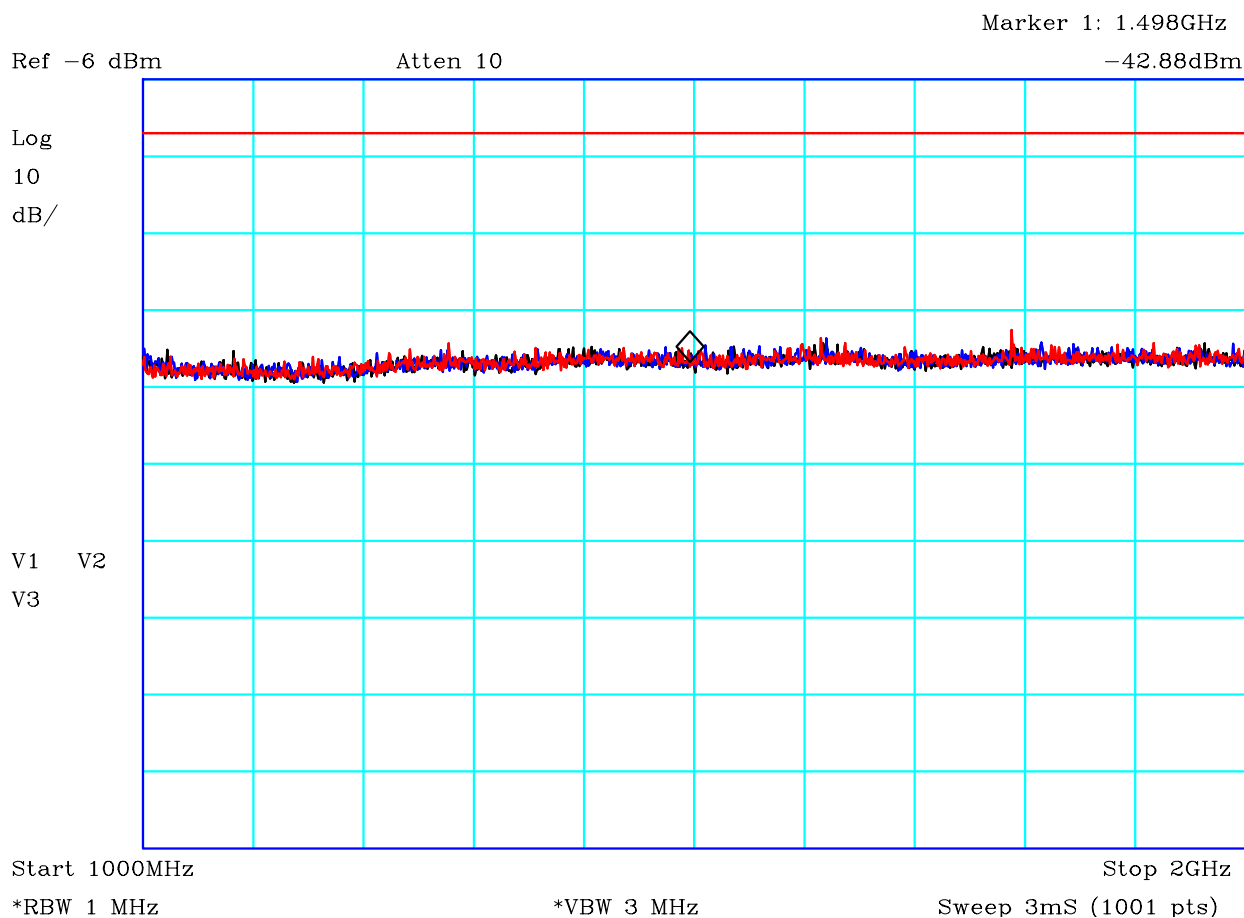


CF1:30dB PAD   CF2:RFF15\_140528

## PLOT 21   Antenna Conducted Spurious - LF Band - 1GHz to 2GHz - Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:	-13dBm	Limit2:	
Limit3:		Limit4:	
Black: Tx 809MHz Blue: Tx 816.5MHz Red: Tx 824MHz Limit = -13dBm. Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Env. Chamber	Height	Mode: Tx
Distance		Polarisation	Modification State: 0
Angle		File: H4824770.txt	Analysers: R13

	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>56 of 88</b>

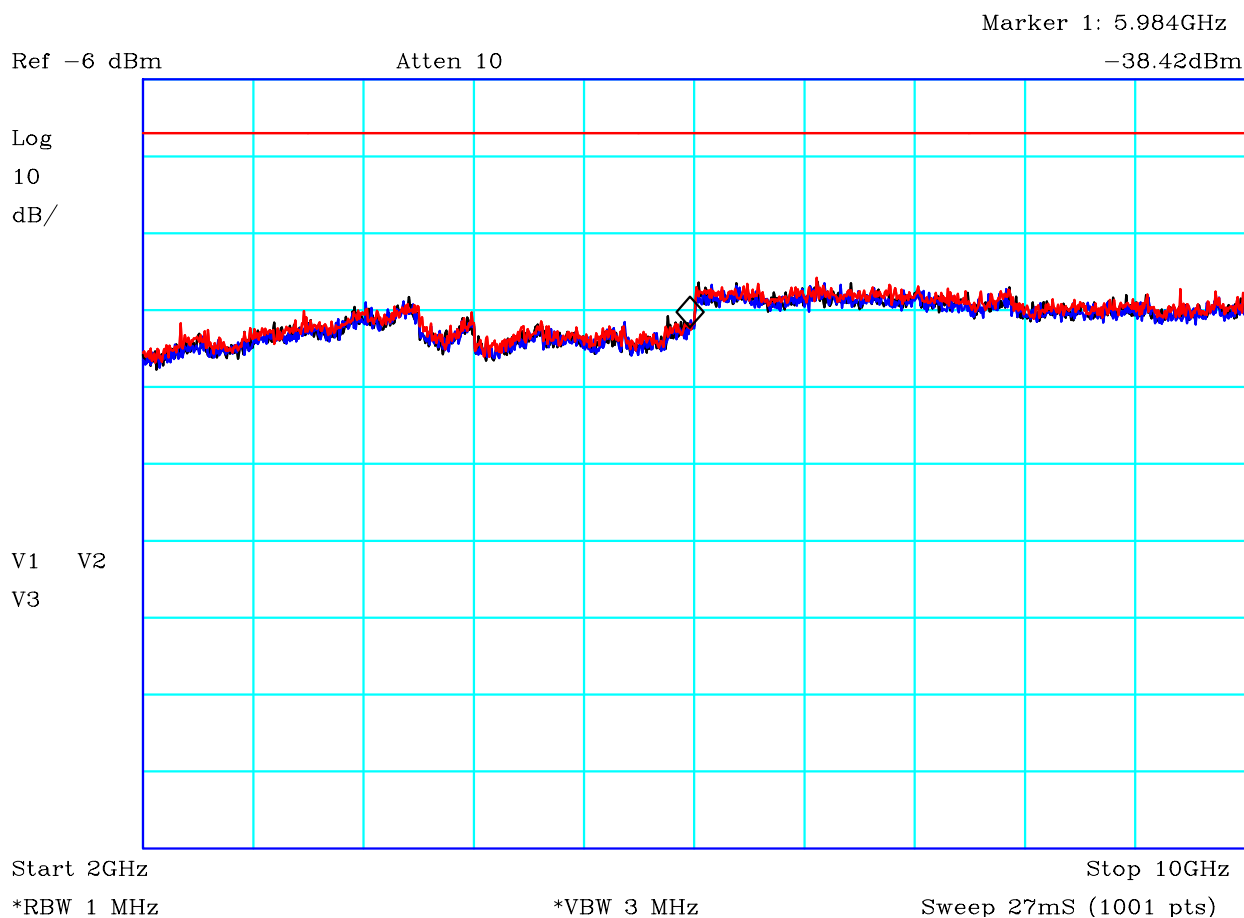


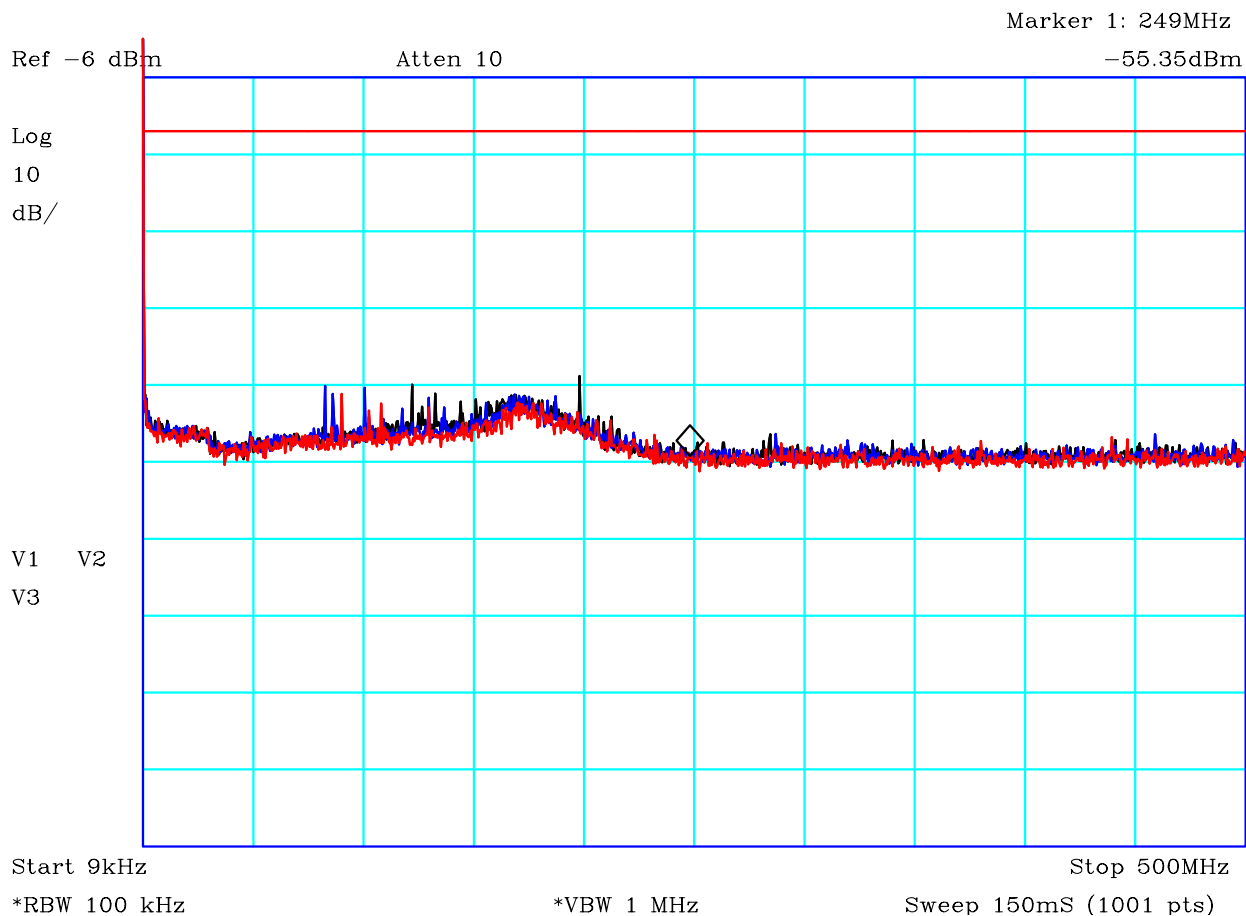
CF1:30dB PAD CF2:RFF22\_140528

## PLOT 22 Antenna Conducted Spurious - LF Band - 2GHz to 10GHz - Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:	-13dBm	Limit2:	
Limit3:		Limit4:	
Black: Tx 809MHz Blue: Tx 816.5MHz Red: Tx 824MHz Limit = -13dBm. Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Env. Chamber	Height	Mode: Tx
Distance		Polarisation	Modification State: 0
Angle		File: H4824779.txt	Analysers: R13




	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>57 of 88</b>




CF1:30dB PAD   CF2:RFF17\_140528

### PLOT 23   Antenna Conducted Spurious - HF Band - 9kHz to 500MHz - Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:	-13dBm	Limit2:	
Limit3:		Limit4:	
Black: Tx 854MHz Blue: Tx 861.5MHz Red: Tx 869MHz Limit = -13dBm. Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Env. Chamber	Height	Mode: Tx
Distance		Polarisation	Modification State: 0
Angle		File: H4824752.txt	Analyser: R13


	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

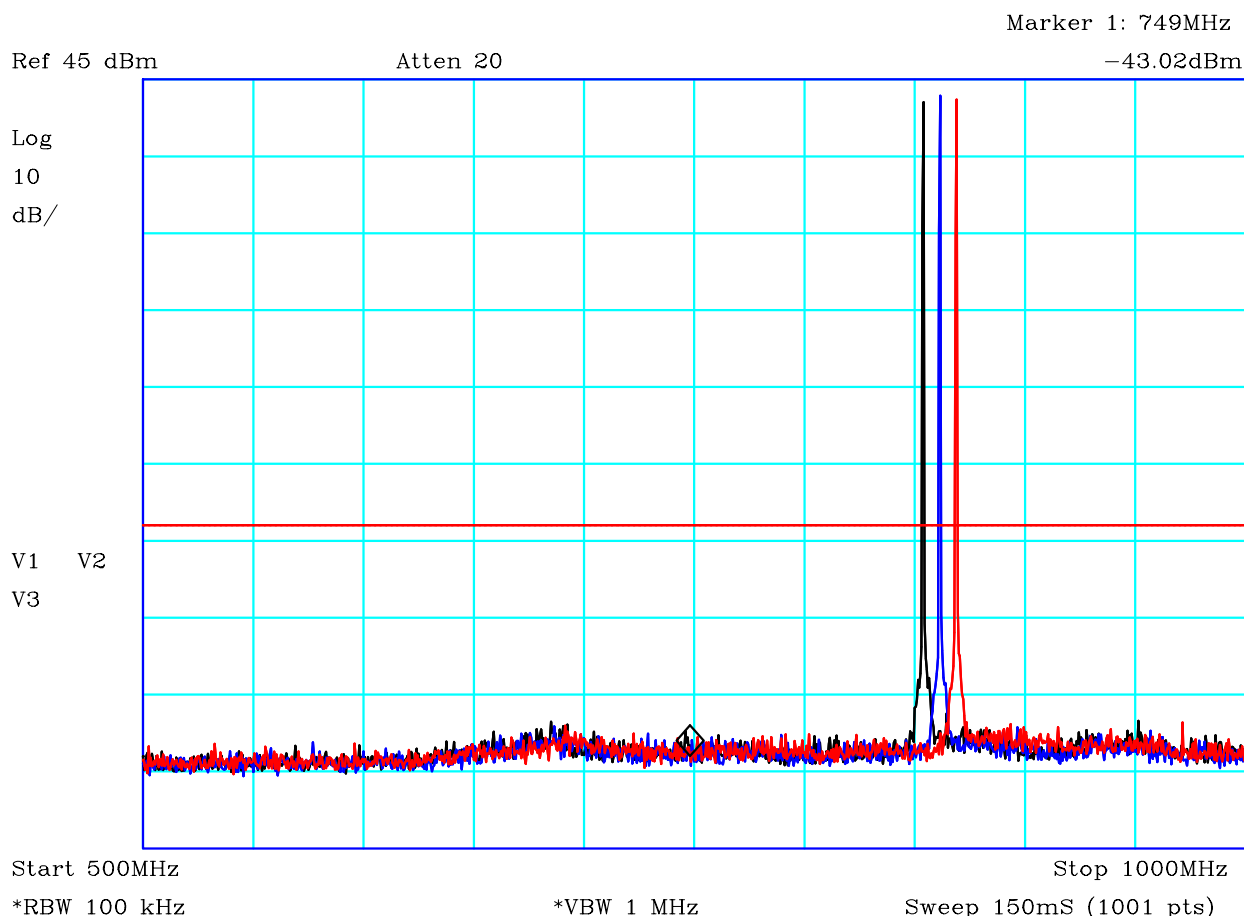


CF1:30dB PAD

# **PLOT 24    Antenna Conducted Spurious - HF Band - 500MHz to 1GHz - Mask of 90.221(d)**

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:	-13dBm	Limit2:	
Limit3:		Limit4:	
Black: Tx 854MHz Blue: Tx 861.5MHz Red: Tx 869MHz Limit = -13dBm. Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Env. Chamber	Height	Mode: Tx
Distance		Polarisation	Modification State: 0
Angle		File: H4824764.txt	Analysers: R13

	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 59 of 88

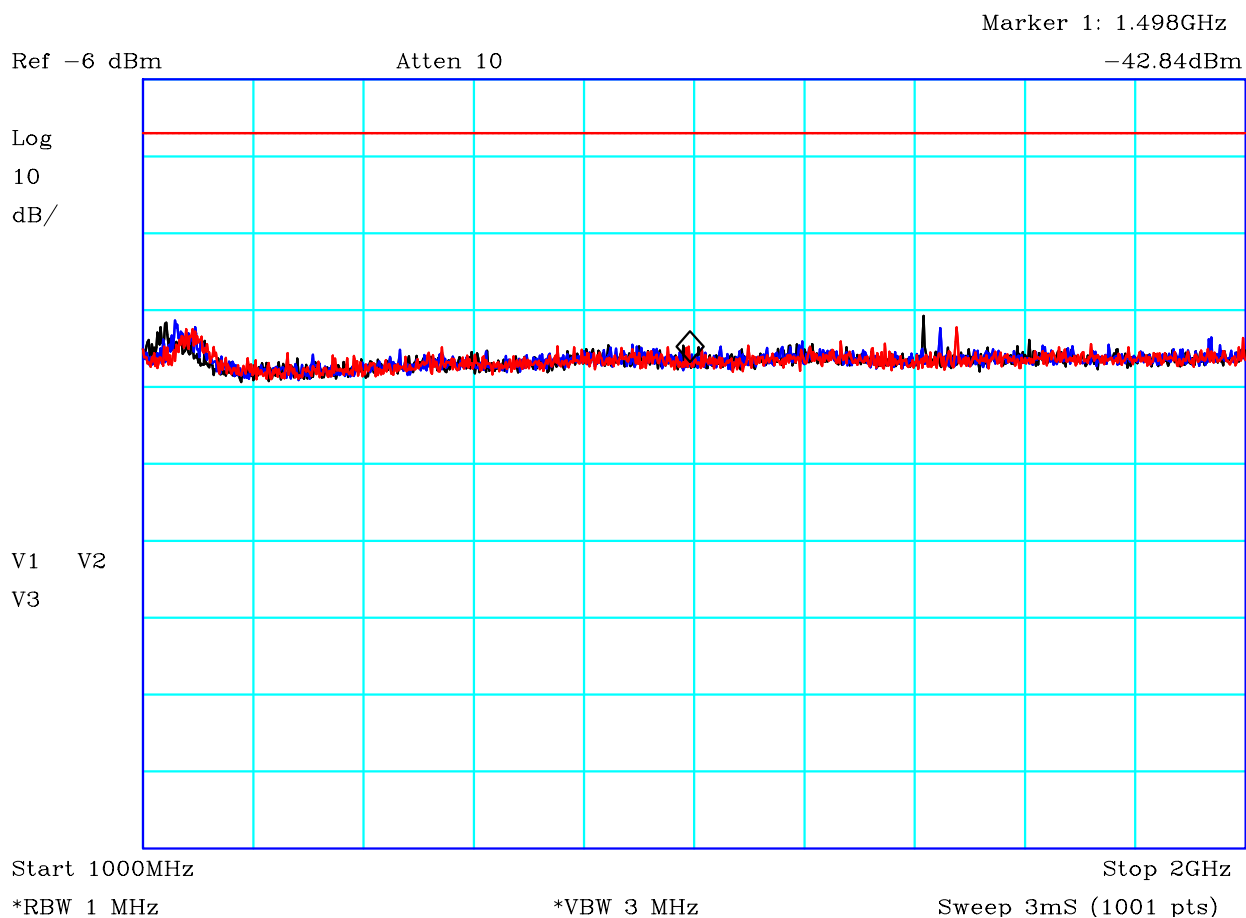

CF1:30dB PAD CF2:RFF15\_140528

## PLOT 25 Antenna Conducted Spurious - HF Band - 1GHz to 2GHz - Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:	-13dBm	Limit2:	
Limit3:		Limit4:	

Black: Tx 854MHz  
 Blue: Tx 861.5MHz  
 Red: Tx 869MHz  
 Limit = -13dBm.  
 Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.

Facility:	Env. Chamber	Height	Mode:	Tx
Distance		Polarisation	Modification State:	0
Angle		File:	H482476D.txt	Analysar:
				R13

Ref -6 dBm

Atten 10

-39.24dBm

Log

10

dB/

V1      V2

V3

Start 2GHz

\*RBW 1 MHz


\*VBW 3 MHz


Stop 10GHz

Sweep 27mS (1001 pts)

CF1:30dB PAD CF2:RFF22\_140528

Company:	Sepura	Product:	SRG3900 XN
Date:	24/09/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:	-13dBm	Limit2:	
Limit3:		Limit4:	
Black: Tx 854MHz Blue: Tx 861.5MHz Red: Tx 869MHz Limit = -13dBm. Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Env. Chamber	Height	Mode: Tx
Distance		Polarisation	Modification State: 0
Angle		File: H482477C.txt	Analyser: R13

	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>61 of 88</b>

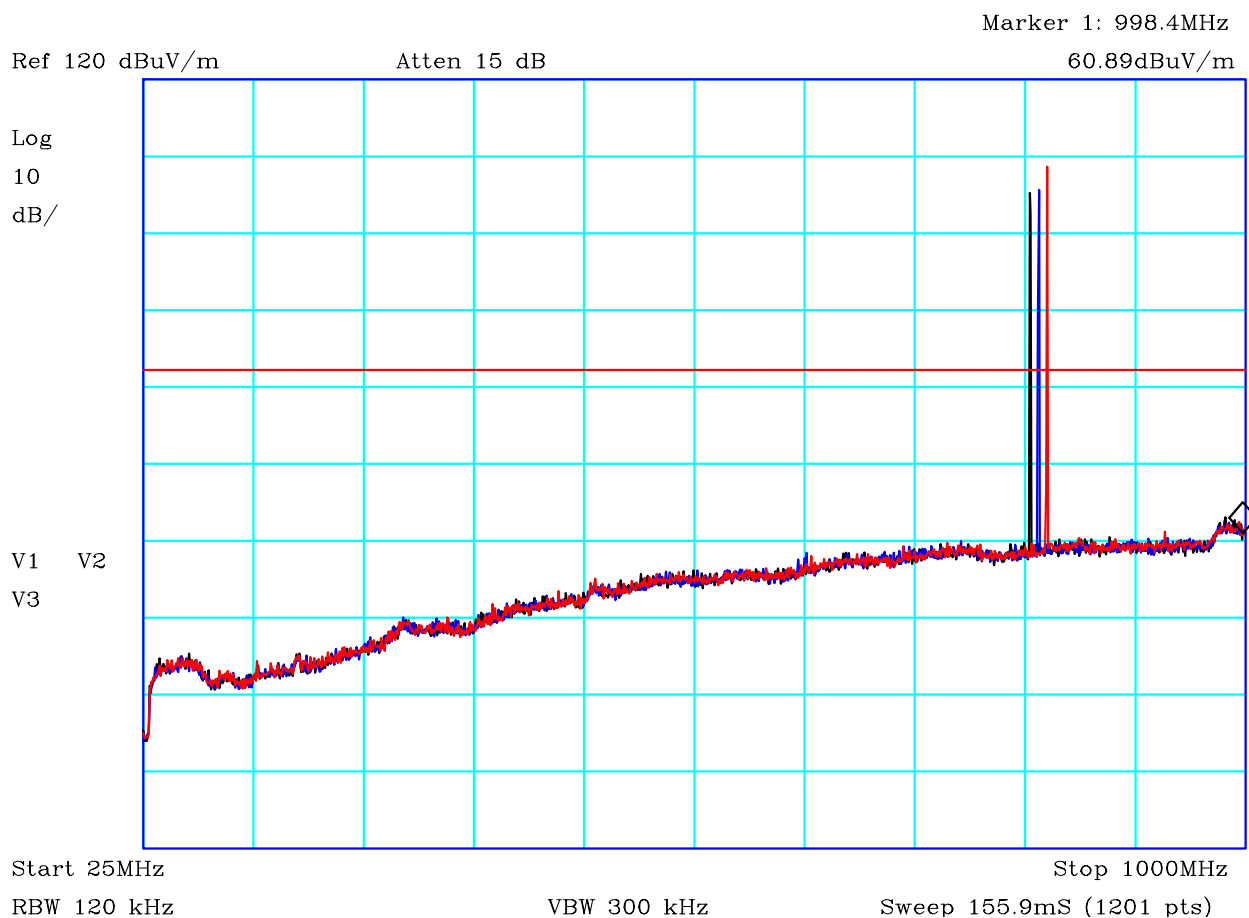


CF1:A24\_140528   CF2:CBL059\_CBL018\_CBL065\_CBL060\_140528

# **PLOT 27 Radiated Emissions - Config 1 - LF band - Tx - 1GHz to 2GHz - Mask of 90.221(d)**

Company:	Sepura	Product:	SRG3900 XN
Date:	13/10/2014/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	43+10log(P)@3m	Limit2:	
Limit3:		Limit4:	
Config 1 Black: Tx 809MHz Blue: Tx 816.5MHz Red: Tx 824MHz Transmit mode. Limit = approximate field strength @ 3m for a -13dBm transmitter (43+10log(P)). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Anech_2	Height	1m,1.5m,2m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H4928522
		Mode:	1
		Modification State:	0
		Analysers:	R8



	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>63 of 88</b>

Marker 1: 4.995GHz

Ref 90 dBuV/m

Atten 15 dB

47.35dBuV/m


Log

10

dB/

V1 V2

V3

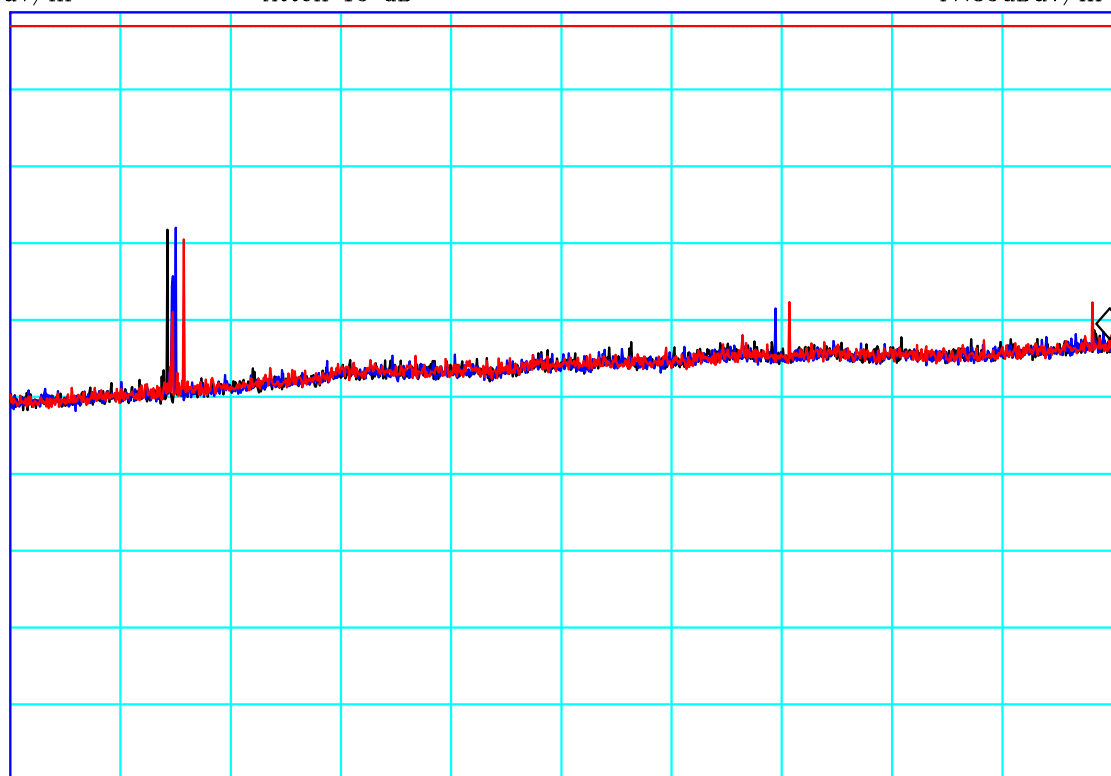

Start 2GHz

Stop 5GHz

RBW 1 MHz


VBW 3 MHz


Sweep 12mS (1201 pts)

CF1:A19\_140528 CF2:BlueCables\_140918 CF3:RFF22\_140528 CF4:PRE10\_140918

## PLOT 29 Radiated Emissions - Config 1 - LF band - Tx - 2GHz to 5GHz - Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	18/09/2014/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	43+10log(P)@1.5m	Limit2:	
Limit3:		Limit4:	
Config 1 Black: Tx 809MHz Blue: Tx 816.5MHz Red: Tx 824MHz Transmit mode. Limit = approximate field strength @ 1.5m for a -13dBm transmitter (43+10log(P)). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H48186B8
		Mode:	1
		Modification State:	0
		Analysar:	R8

	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>64 of 88</b>

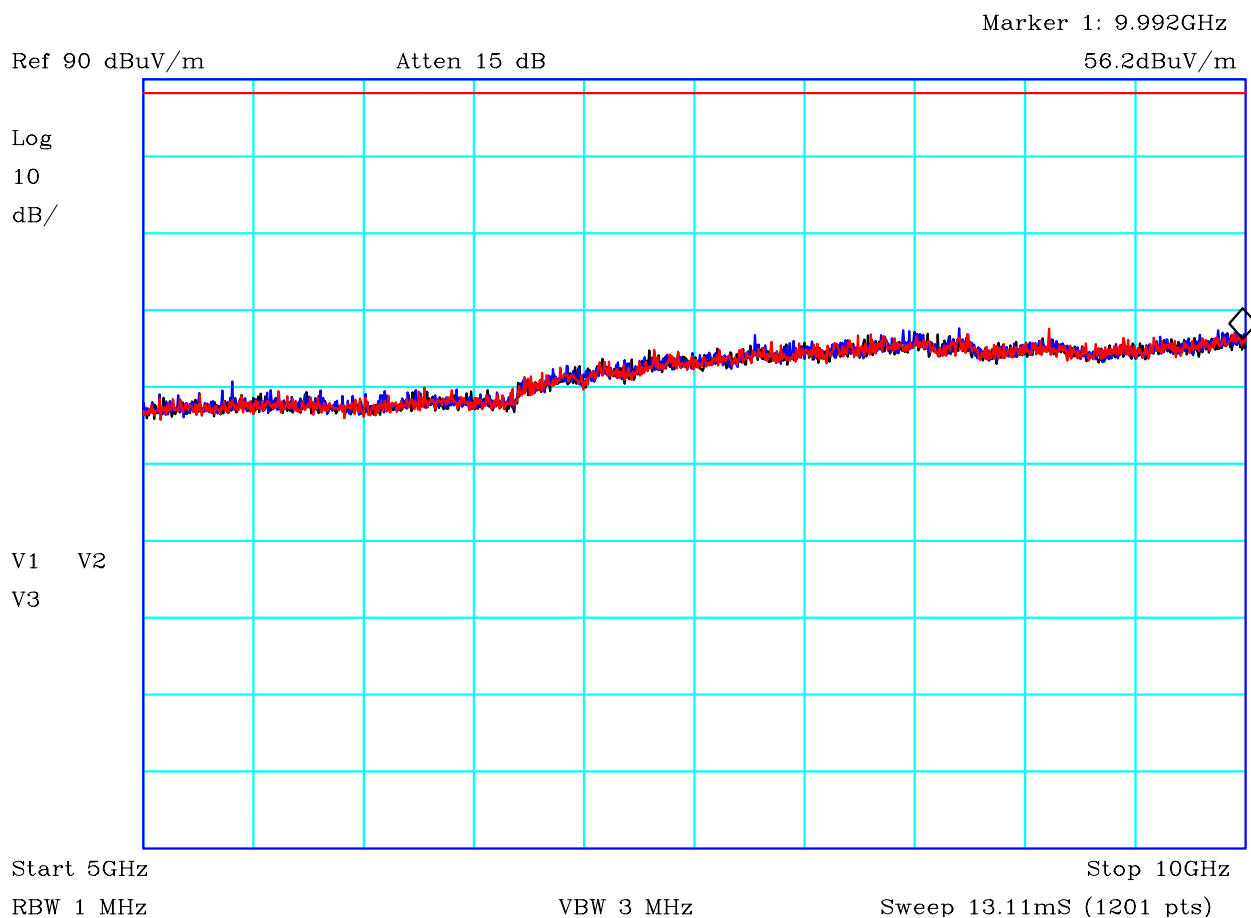


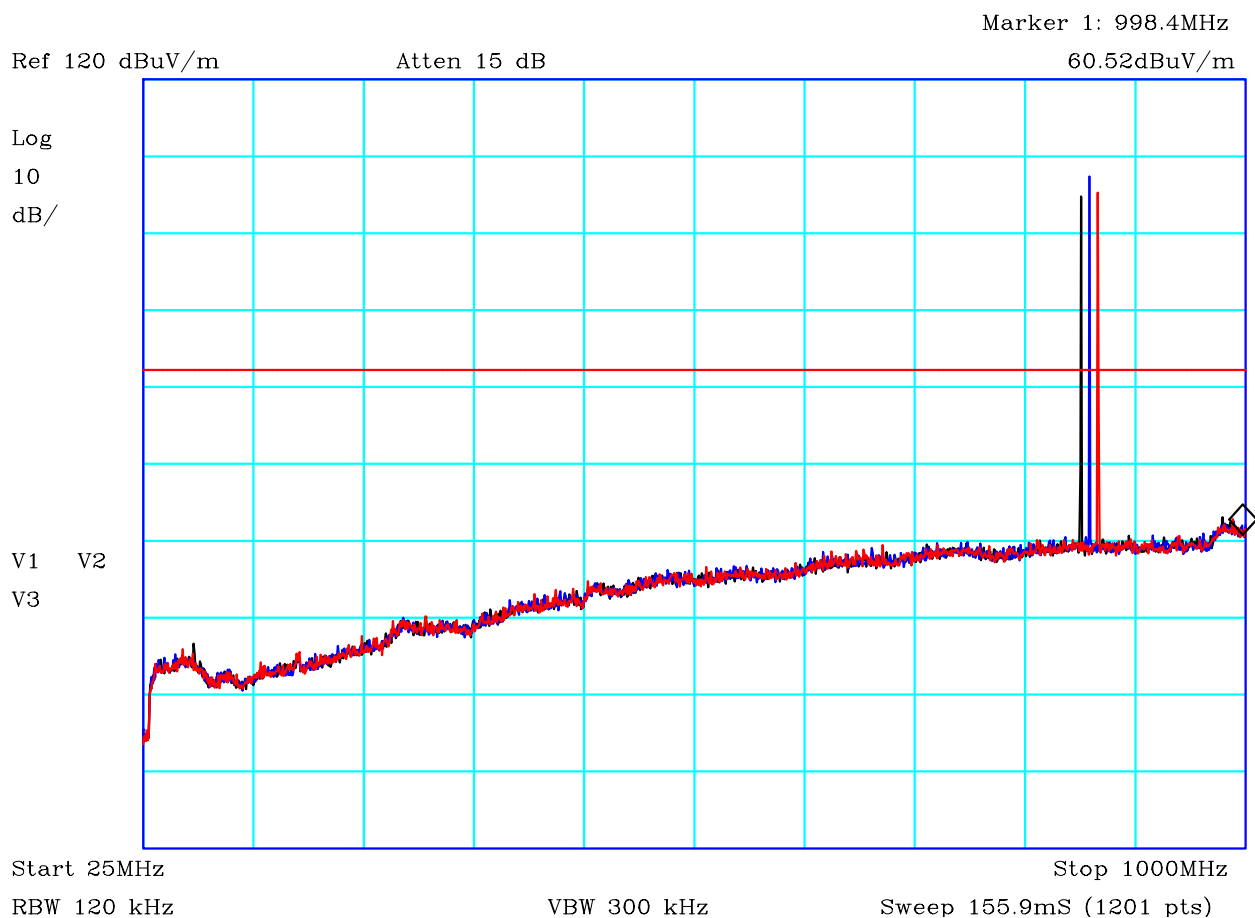
CF1:A19\_140528 CF2:BlueCables\_140918 CF3:RFF22\_140528 CF4:PRE10\_140918

### PLOT 30 Radiated Emissions - Config 1 - LF band - Tx - 5GHz to 10GHz - Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	18/09/2014/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	43+10log(P)@1.5m	Limit2:	
Limit3:		Limit4:	
<b>Config 1</b> Black: Tx 809MHz Blue: Tx 816.5MHz Red: Tx 824MHz Transmit mode. Limit = approximate field strength @ 1.5m for a -13dBm transmitter 43+10log(P)). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H48186C2
		Mode:	1
		Modification State:	0
		Analysers:	R8




	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>65 of 88</b>




CF1:A24\_140528 CF2:CBL059\_CBL018\_CBL065\_CBL060\_140528

### PLOT 31 Radiated Emissions - Config 1 - HF band - Tx - 25MHz to 1GHz - Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	13/10/2014/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	43+10log(P)@3m	Limit2:	
Limit3:		Limit4:	
Config 1 Black: Tx 854MHz Blue: Tx 861.5MHz Red: Tx 869MHz Transmit mode. Limit = approximate field strength @ 3m for a -13dBm transmitter (43+10log(P)). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Anech_2	Height	1m,1.5m,2m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H49284FD
		Mode:	1
		Modification State:	0
		Analysers:	R8


	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>66 of 88</b>

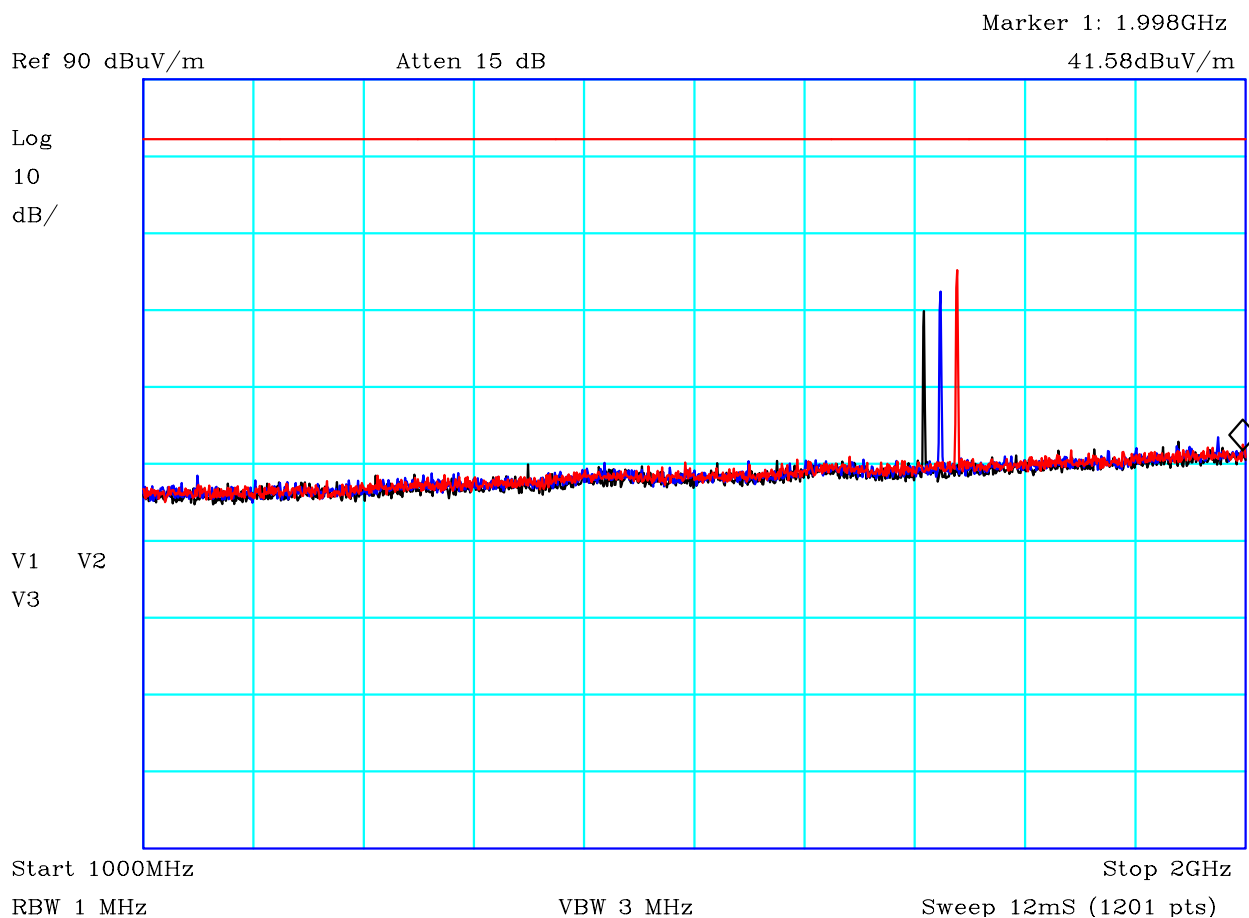

CF1:A19\_140528 CF2:CBL059\_CBL018\_CBL065\_CBL060\_140528 CF3:RFF15\_140528 CF4:PRE10\_140918

### PLOT 32 Radiated Emissions - Config 1 - HF band - Tx - 1GHz to 2GHz - Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	18/09/2014/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	43+10log(P)@3m	Limit2:	
Limit3:		Limit4:	
<b>Config 1</b> Black: Tx 854MHz Blue: Tx 861.5MHz Red: Tx 869MHz Transmit mode. Limit = approximate field strength @ 1.5m for a -13dBm transmitter (43+10log(P)). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H48195DF
		Mode:	1
		Modification State:	0
		Analysers:	R8

	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>67 of 88</b>

Marker 1: 5.993GHz


Ref 90 dBuV/m

Atten 15 dB

47.4dBuV/m

Log  
10  
dB/

V1 V2  
V3

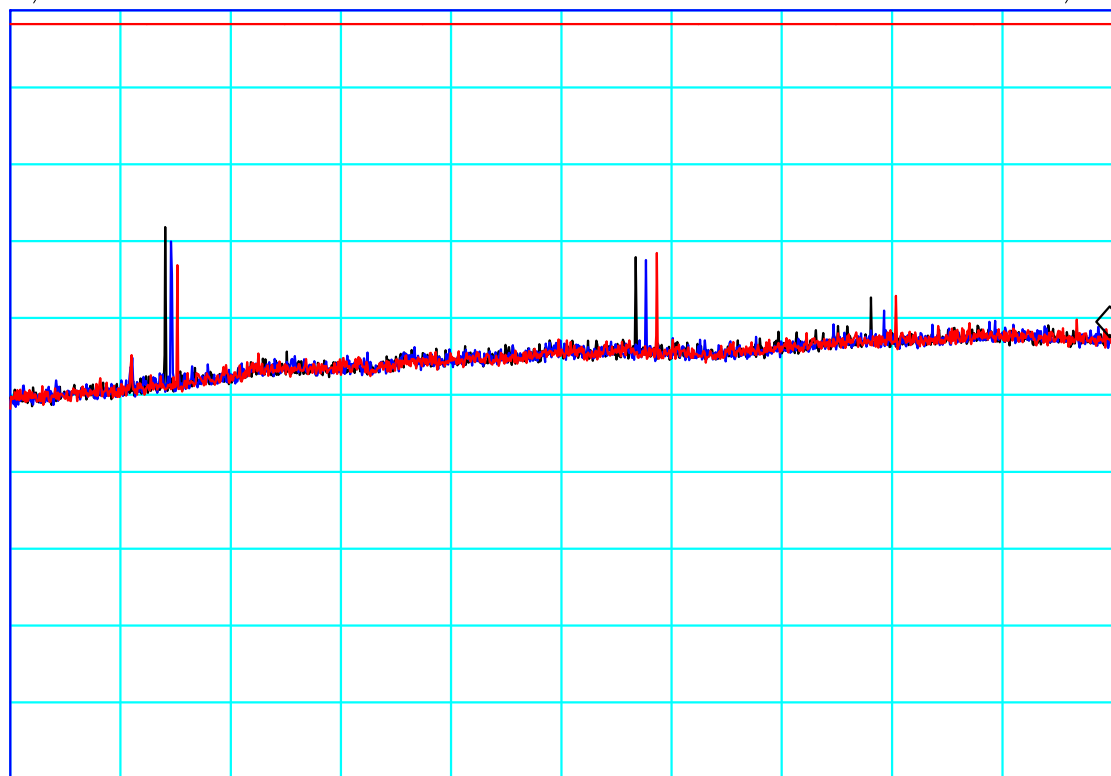

Start 2GHz

Stop 6GHz

RBW 1 MHz


VBW 3 MHz


Sweep 12mS (1201 pts)

CF1:A19\_140528 CF2:BlueCables\_140918 CF3:RFF22\_140528 CF4:PRE10\_140918

### PLOT 33 Radiated Emissions - Config 1 - HF band - Tx - 2GHz to 6GHz - Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	18/09/2014/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	43+10log(P)@1.5m	Limit2:	
Limit3:		Limit4:	
Config 1 Black: Tx 854MHz Blue: Tx 861.5MHz Red: Tx 869MHz Transmit mode. Limit = approximate field strength @ 1.5m for a -13dBm transmitter (43+10log(P)). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H48186D3
		Mode:	1
		Modification State:	0
		Analyser:	R8


	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>68 of 88</b>

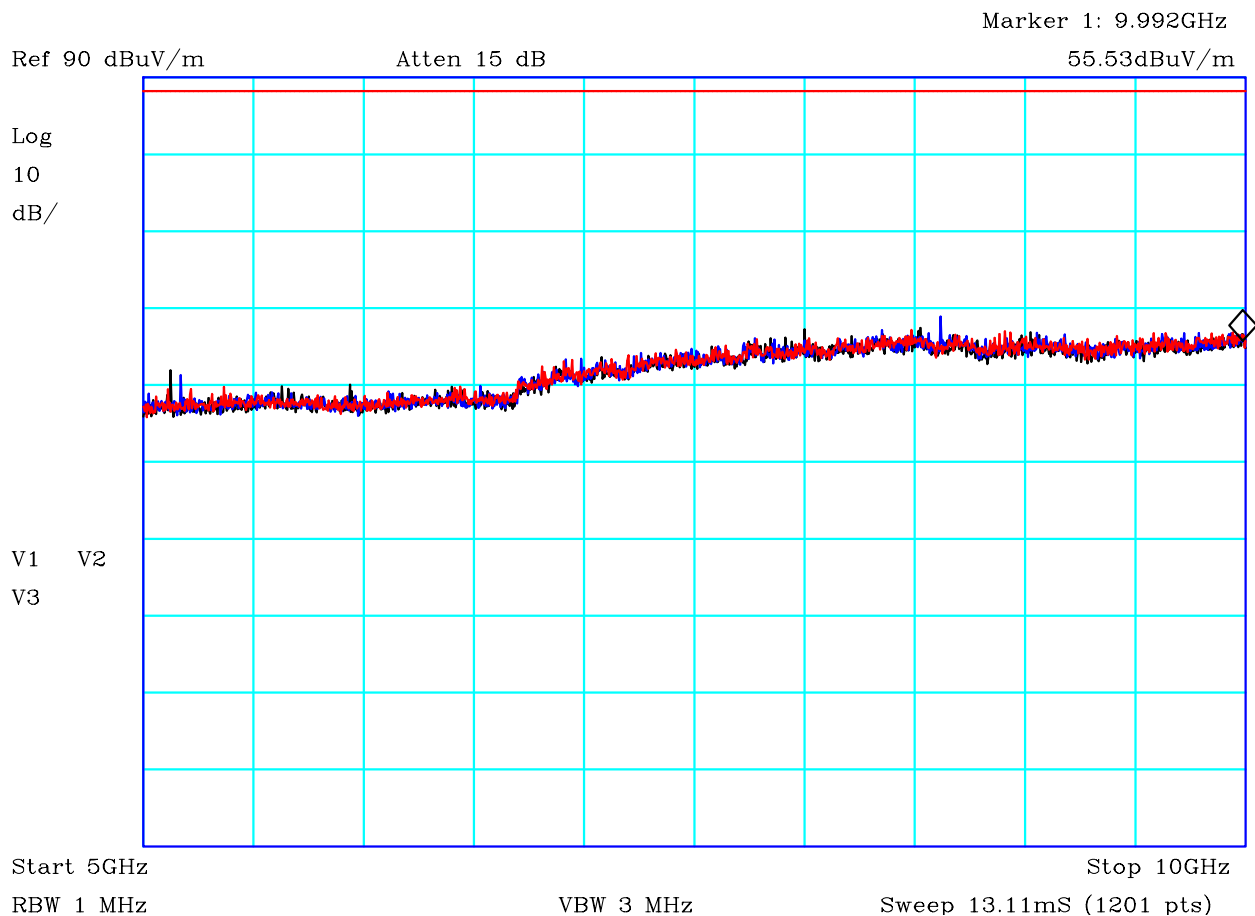


CF1:A19\_140528   CF2:BlueCables\_140918   CF3:RFF22\_140528   CF4:PRE10\_140918

### PLOT 34 Radiated Emissions - Config 1 - HF band - Tx - 5GHz to 10GHz - Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	18/09/2014/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	43+10log(P)@1.5m	Limit2:	
Limit3:		Limit4:	
<b>Config 1</b> Black: Tx 854MHz Blue: Tx 861.5MHz Red: Tx 869MHz Transmit mode. Limit = approximate field strength @ 1.5m for a -13dBm transmitter (43+10log(P)). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H48186DA
		Mode:	1
		Modification State:	0
		Analysers:	R8


	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

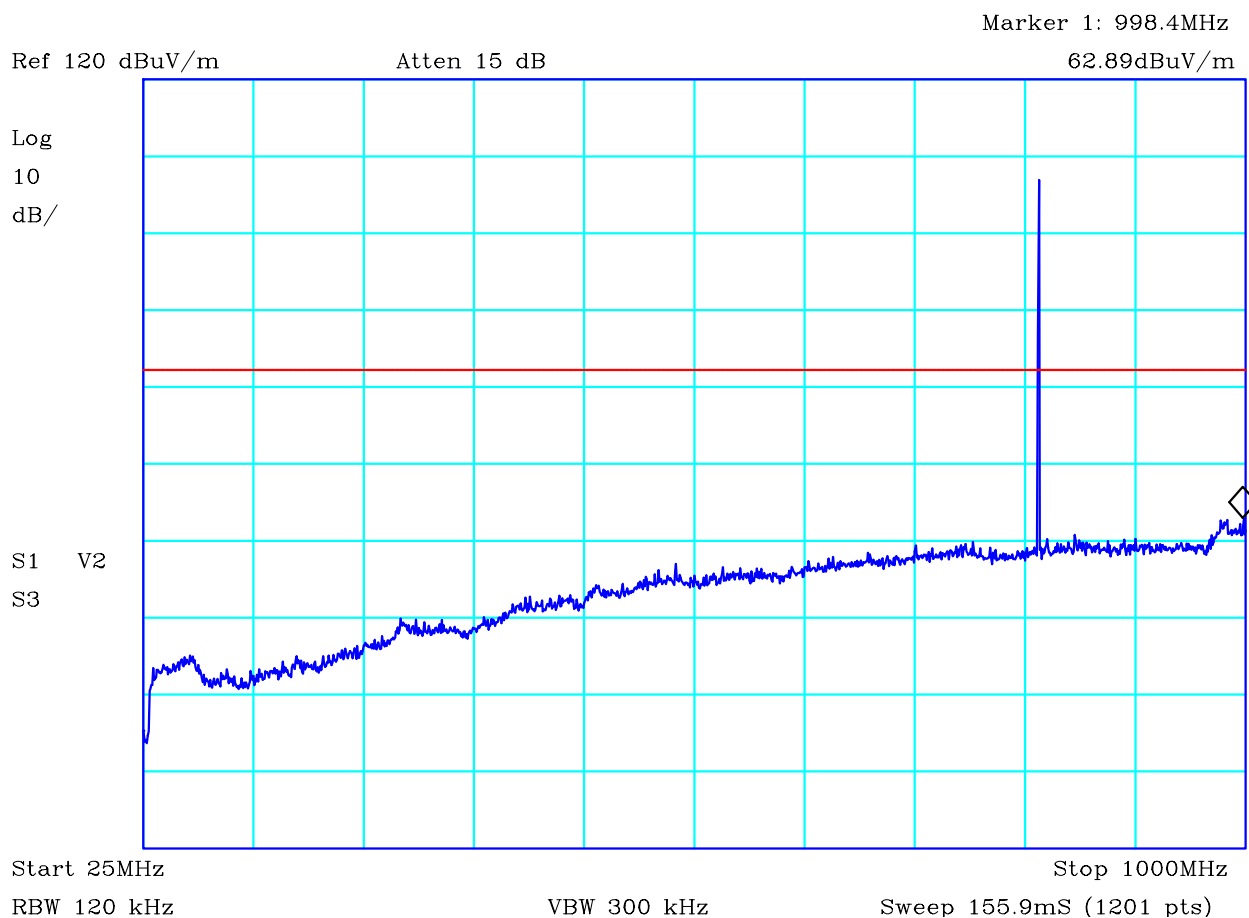


CF1:A24\_140528 CF2:CBL059\_CBL018\_CBL065\_CBL060\_140528

### PLOT 35 Radiated Emissions - DMU - LF band - Tx - 25MHz to 1GHz- Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	13/10/2014/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	43+10log(P)@3m	Limit2:	
Limit3:		Limit4:	
DMU Blue: Tx 816.5MHz Limit = approximate field strength @ 3m for a -13dBm transmitter (43+10log(P)). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Anech_2	Height	1m,1.5m,2m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H49134D2
		Mode:	1
		Modification State:	0
		Analysers:	R8


	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>70 of 88</b>

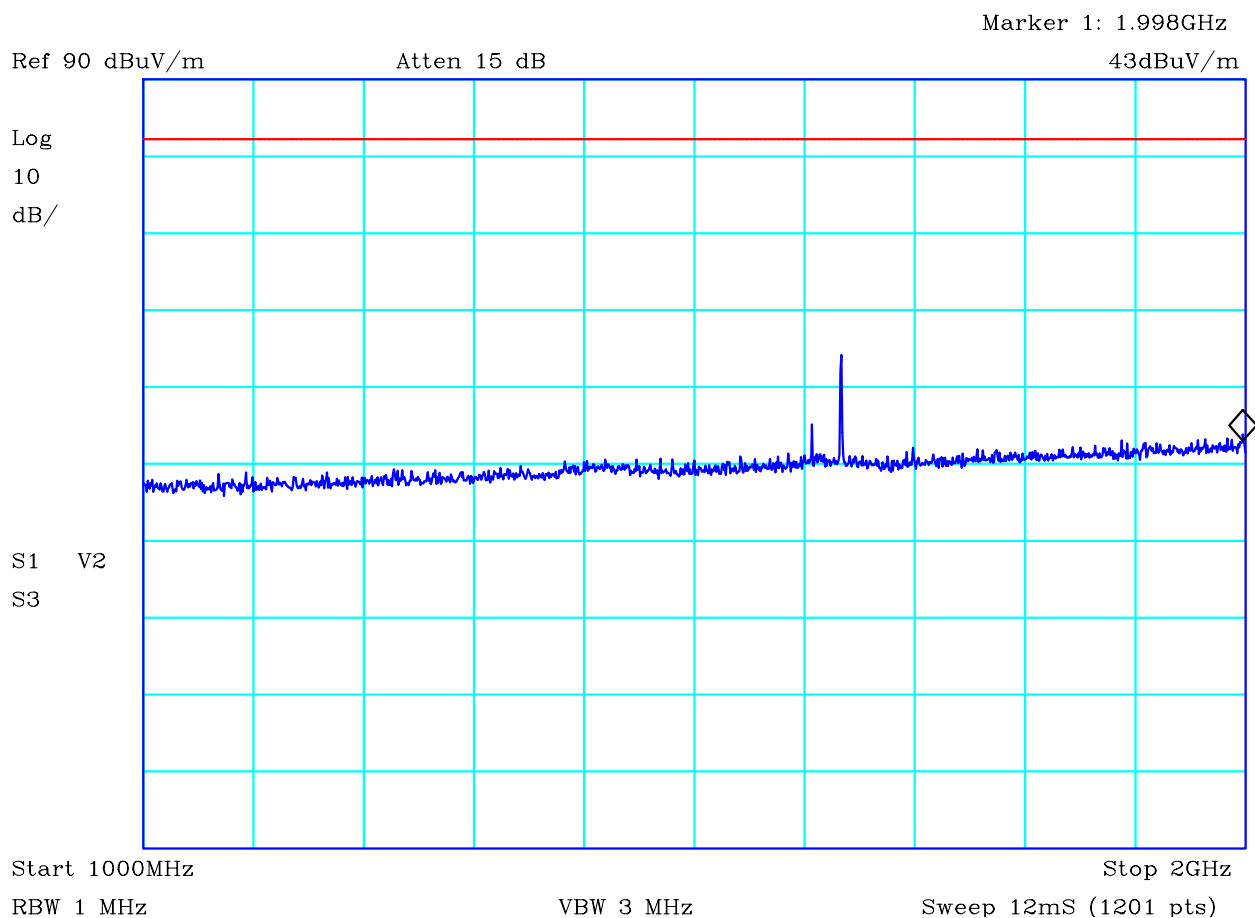


CF1:A19\_140528 CF2:CBL059\_CBL018\_CBL065\_CBL060\_140528 CF3:RFF15\_140528 CF4:PRE10\_140918

**PLOT 36 Radiated Emissions - DMU - LF band - Tx - 1GHz to 2GHz- Mask of 90.221(d)**

Company:	Sepura	Product:	SRG3900 XN
Date:	10/10/2014/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	43+10log(P)@3m	Limit2:	
Limit3:		Limit4:	
DMU Blue: Tx 816.5MHz Limit = approximate field strength @ 3m for a -13dBm transmitter (43+10log(P)). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H49107EE
		Mode:	1
		Modification State:	0
		Analysers:	R8

	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 71 of 88

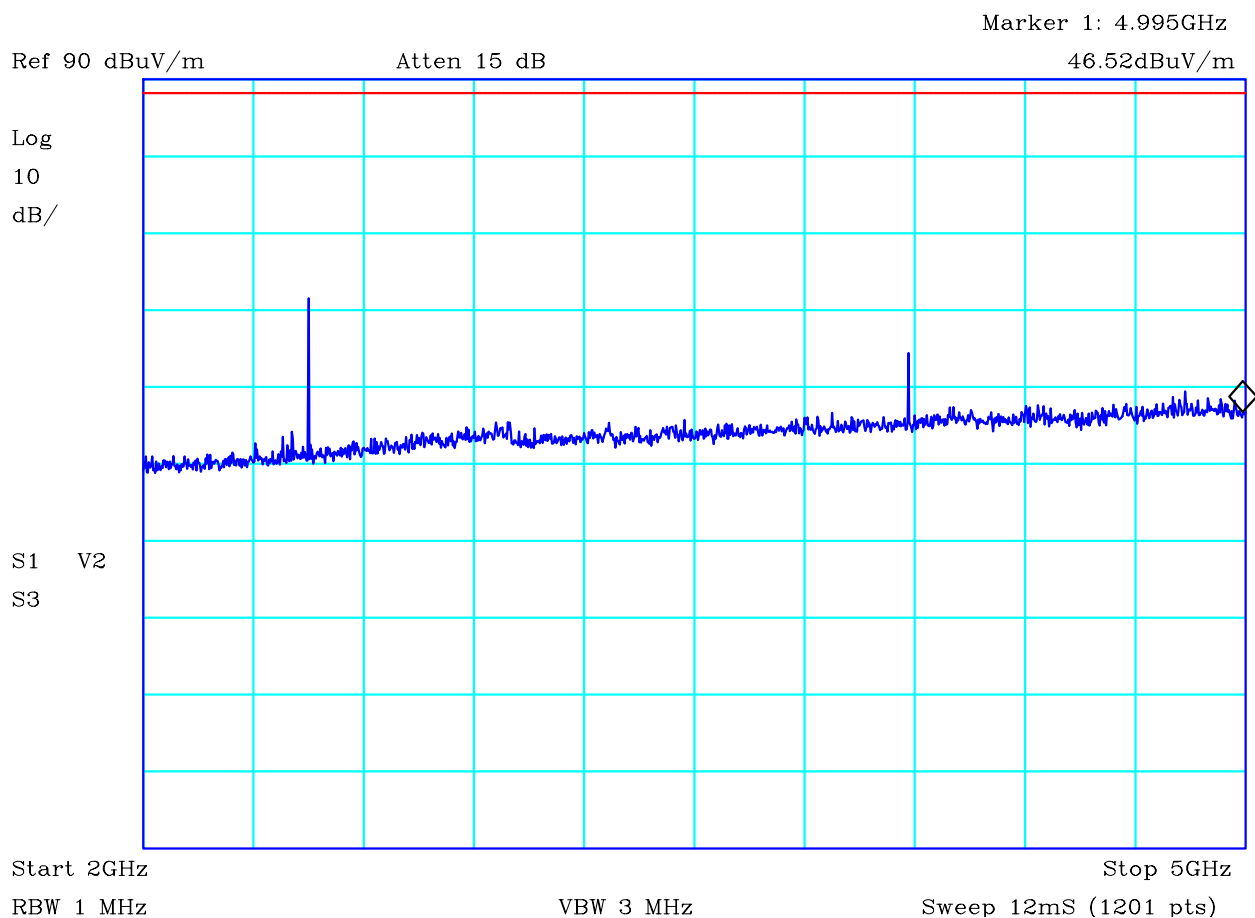


CF1:A19\_140528 CF2:BlueCables\_140918 CF3:RFF22\_140528 CF4:PRE10\_140918


### PLOT 37 Radiated Emissions - DMU - LF - Tx - 2GHz to 5GHz- Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	10/10/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	43+10log(P)@1.5m	Limit2:	
Limit3:		Limit4:	

DMU  
Blue: Tx 816.5MHz  
Limit = approximate field strength @ 3m for a -13dBm transmitter (43+10log(P)). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.

Facility:	Anech_2	Height	1.1m,1.3m,1.6m	Mode:	1
Distance	1.5m	Polarisation	V+H	Modification State:	0
Angle	0-360	File:	H49104AD	Analyser:	R8

	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>72 of 88</b>

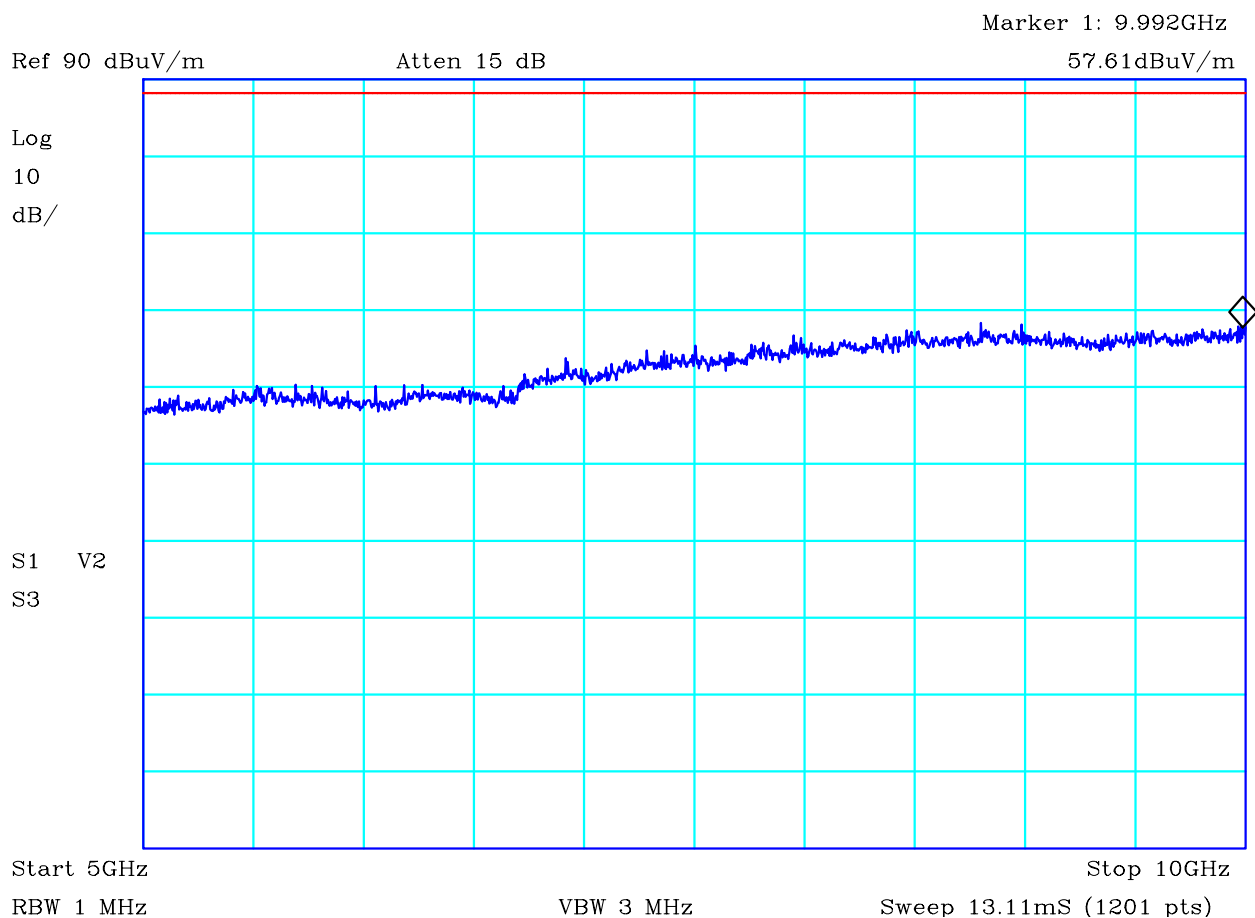


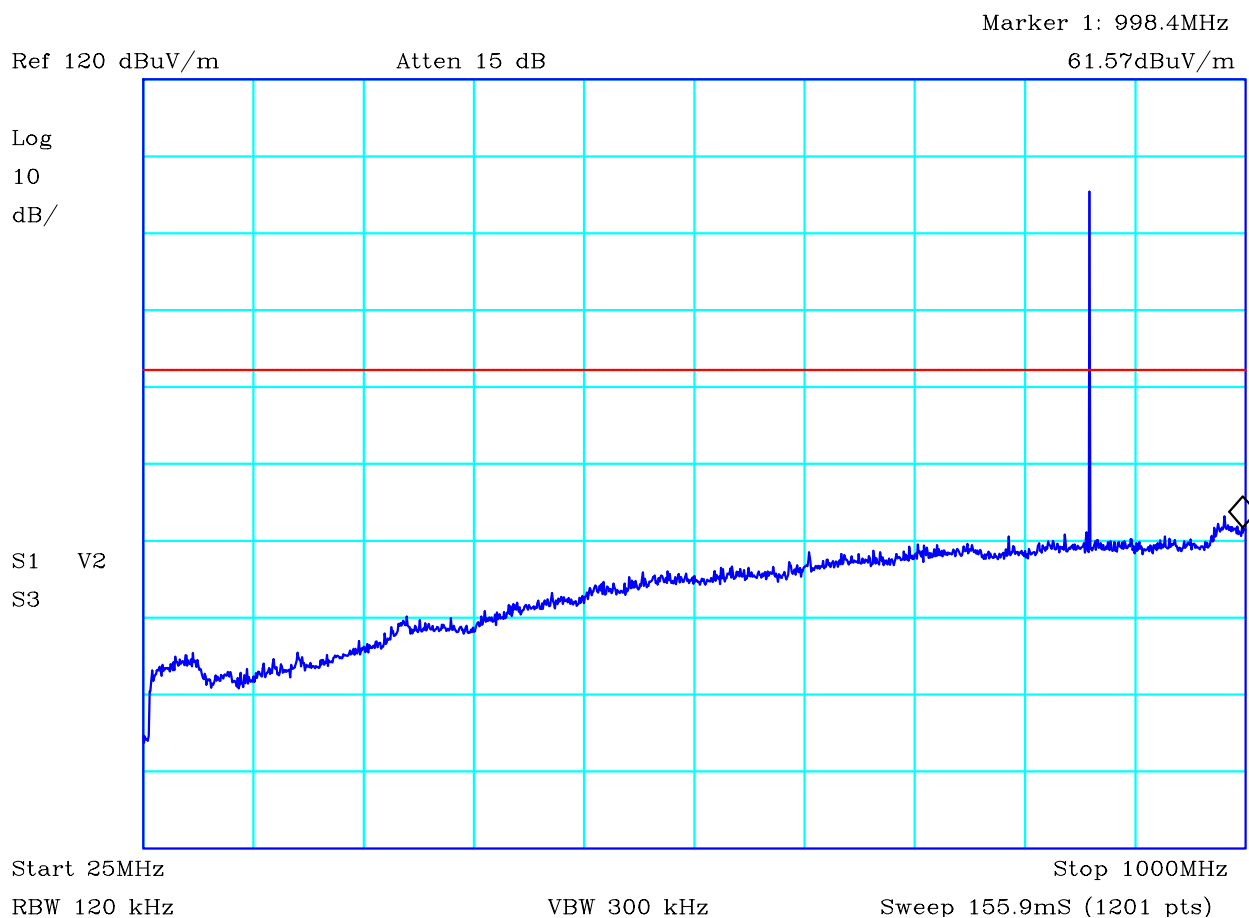
CF1:A19\_140528 CF2:BlueCables\_140918 CF3:RFF22\_140528 CF4:PRE10\_140918

### PLOT 38 Radiated Emissions - DMU - LF band - Tx - 5GHz to 10GHz- Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	10/10/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	43+10log(P)@1.5m	Limit2:	
Limit3:		Limit4:	
DMU Blue: Tx 816.5MHz Limit = approximate field strength @ 3m for a -13dBm transmitter (43+10log(P)). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H49104BB
		Mode:	1
		Modification State:	0
		Analysers:	R8




	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>




CF1:A24\_140528 CF2:CBL059\_CBL018\_CBL065\_CBL060\_140528

### PLOT 39 Radiated Emissions - DMU - LF band - Tx - 25MHz to 1GHz- Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	13/10/2014/2014	Test Eng:	Dave Smith
Method:	Ansi C63.4	Method:	
Method:	FCC Part 90	Limit2:	
Limit3:		Limit4:	
DMU Blue: Tx 861.5MHz Limit = approximate field strength @ 3m for a -13dBm transmitter ( $43+10\log(P)$ ). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Anech_2	Height	1m,1.5m,2m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H49134F0
		Mode:	1
		Modification State:	0
		Analysers:	R8

	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 74 of 88

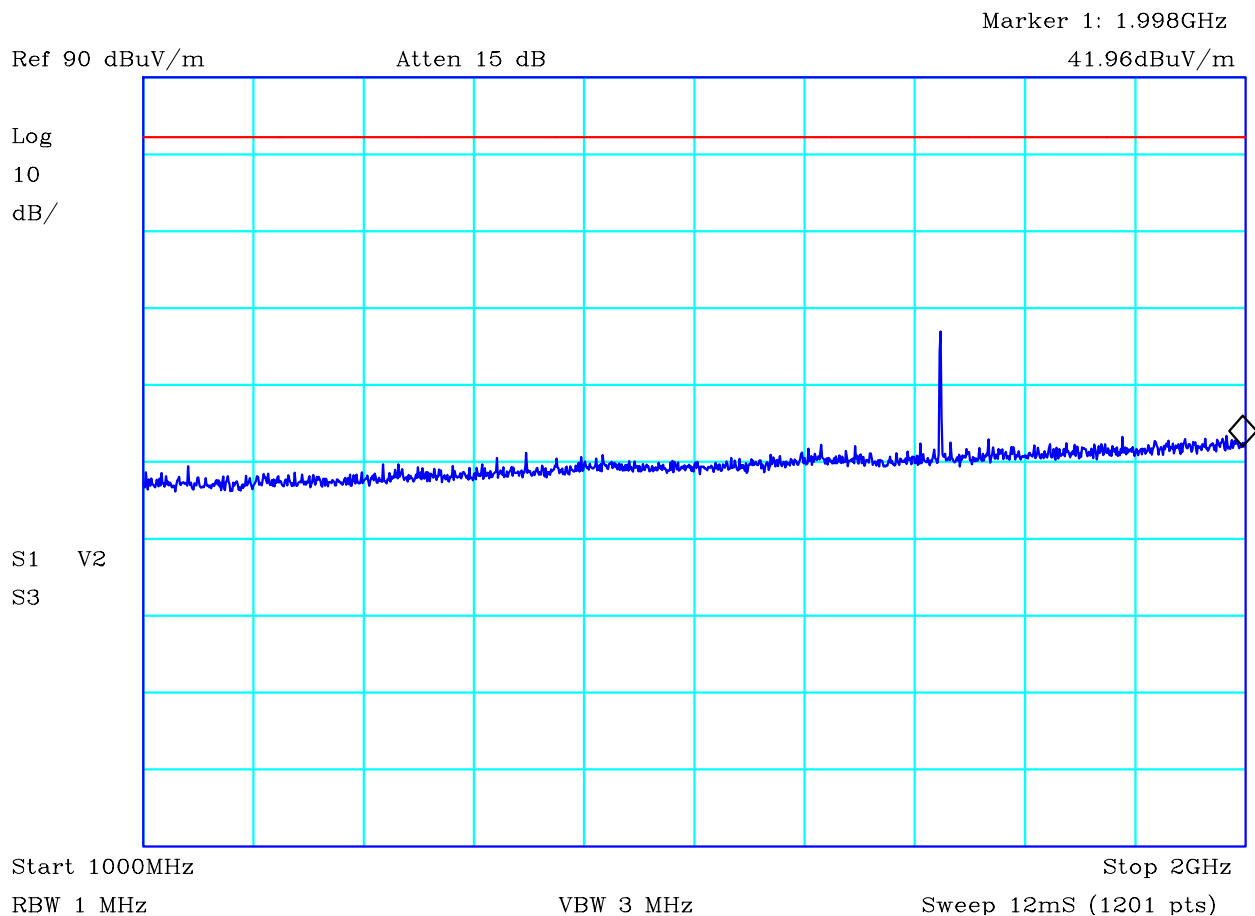


CF1:A19\_140528 CF2:CBL059\_CBL018\_CBL065\_CBL060\_140528 CF3:RFF15\_140528 CF4:PRE10\_140918


**PLOT 40 Radiated Emissions - DMU - HF band - Tx - 1GHz to 2GHz- Mask of 90.221(d)**

Company:	Sepura	Product:	SRG3900 XN
Date:	10/10/2014/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	43+10log(P)@3m	Limit2:	
Limit3:		Limit4:	

DMU  
 Blue: Tx 861.5MHz  
 Limit = approximate field strength @ 3m for a -13dBm transmitter (43+10log(P)). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.

Facility:	Anech_2	Height	1.1m,1.3m,1.6m	Mode:	1
Distance	3m	Polarisation	V+H	Modification State:	0
Angle	0-360	File:	H49107F9	Analyser:	R8


	Report No: <b>R3413</b> Issue No: <b>1</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Test No: <b>T5507</b>		<b>Test Report</b>

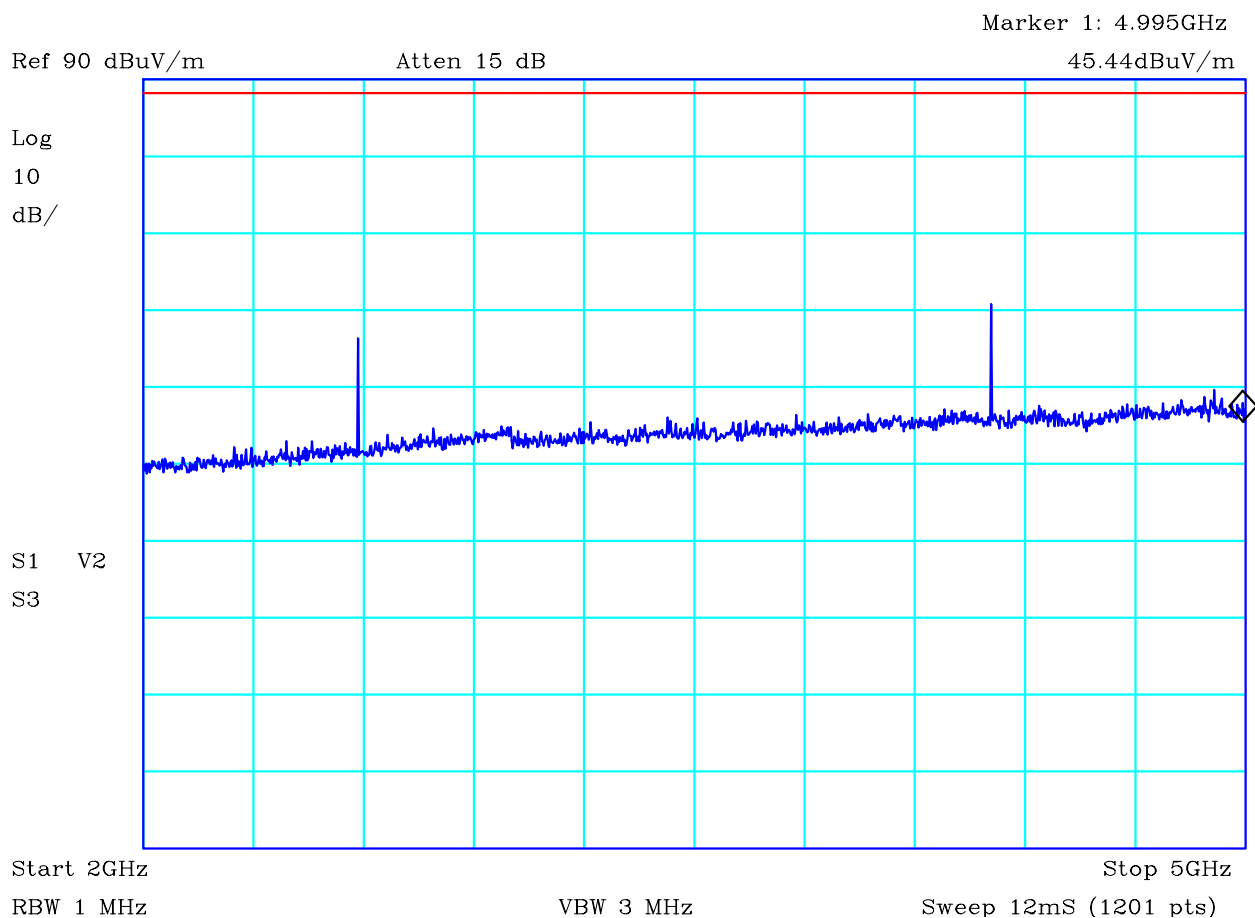


CF1:A19\_140528 CF2:BlueCables\_140918 CF3:RFF22\_140528 CF4:PRE10\_140918

**PLOT 41 Radiated Emissions - DMU - HF band - Tx - 2GHz to 5GHz- Mask of 90.221(d)**

Company:	Sepura	Product:	SRG3900 XN
Date:	10/10/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	43+10log(P)@1.5m	Limit2:	
Limit3:		Limit4:	
DMU Blue: Tx 861.5MHz Limit = approximate field strength @ 3m for a -13dBm transmitter (43+10log(P)). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H49104C7
		Mode:	1
		Modification State:	0
		Analysers:	R8


	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>76 of 88</b>

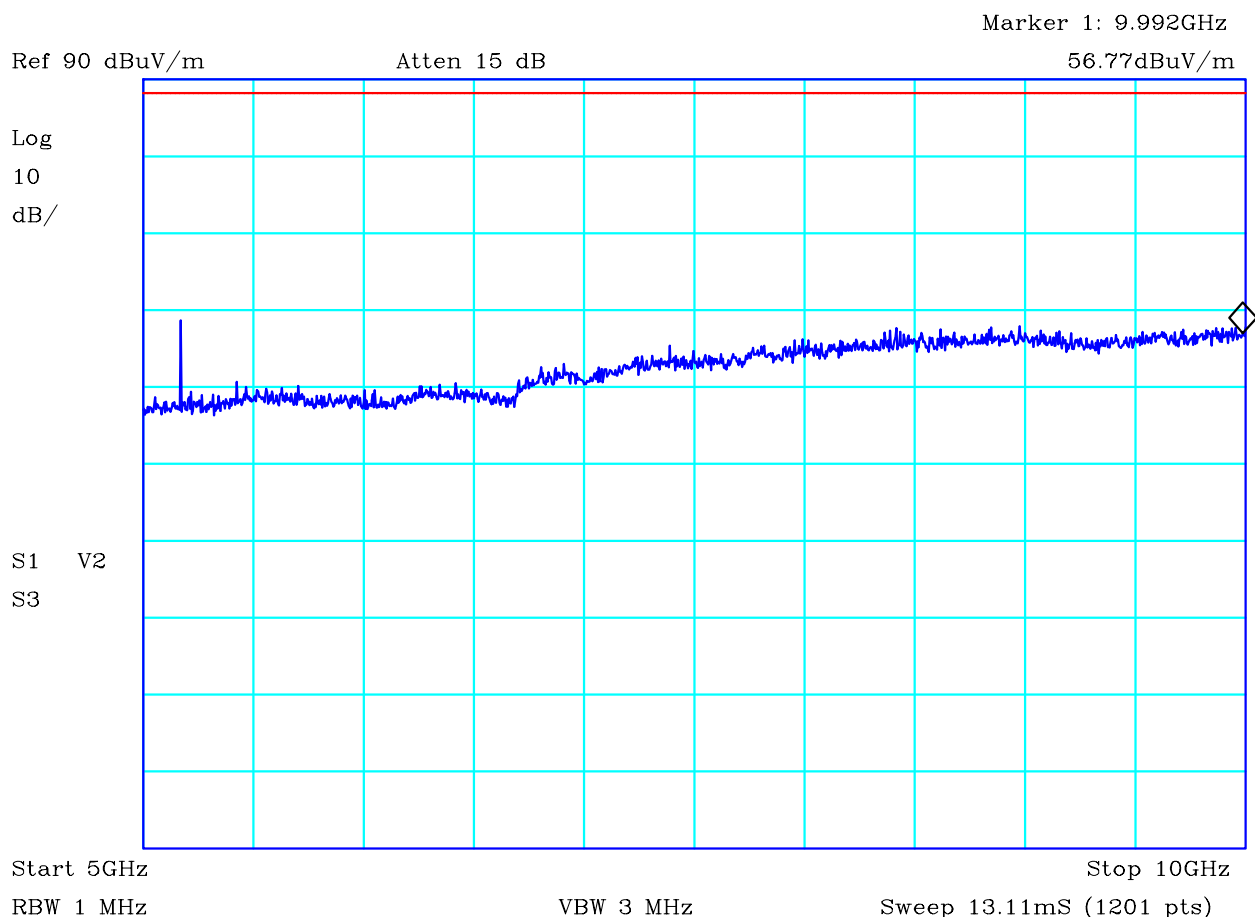


CF1:A19\_140528 CF2:BlueCables\_140918 CF3:RFF22\_140528 CF4:PRE10\_140918

## PLOT 42 Radiated Emissions - DMU - HF - Tx - 5GHz to 10GHz- Mask of 90.221(d)

Company:	Sepura	Product:	SRG3900 XN
Date:	10/10/2014	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	43+10log(P)@1.5m	Limit2:	
Limit3:		Limit4:	
DMU Blue: Tx 861.5MHz Limit = approximate field strength @ 3m for a -13dBm transmitter (43+10log(P)). Calculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H49104D0
		Mode:	1
		Modification State:	0
		Analysers:	R8


	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>77 of 88</b>

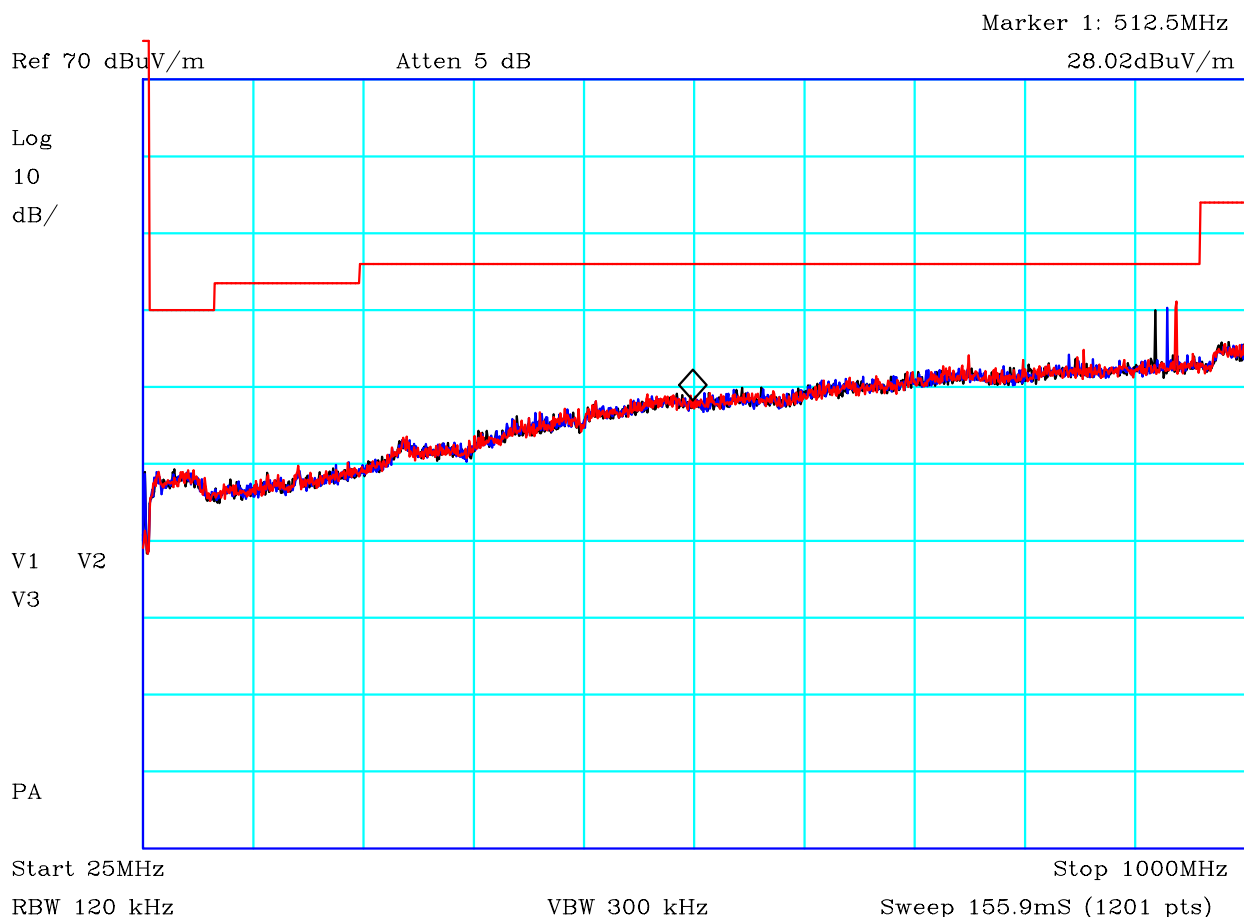


CF1:A24\_140528 CF2:CBL059\_CBL018\_CBL065\_CBL060\_140528 CF3:PRE5\_140528 CF4:10dB PAD

### PLOT 43 Radiated Emissions - Config1 - Rx - 25MHz to 1GHz


Company:	Sepura	Product:	SRG3900 XN
Date:	28/10/2014	Test Eng:	Dave Smith
Method:	Ansi C63.4	Method:	
Limit1:(RED)	FCC(B)@3m	Limit2:	
Limit3:		Limit4:	
Config 1 Black: Rx 851MHz Blue: Rx 861.5MHz Red: Rx 869MHz Receive Mode. Antenna fitted.			
Facility:	Anech_2	Height	1m,1.5m,2m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H49284C5
		Mode:	1
		Modification State:	0
		Analysers:	R8

	Report No: <b>R3413</b>	FCC ID: <b>XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	Test Report	Page: 78 of 88

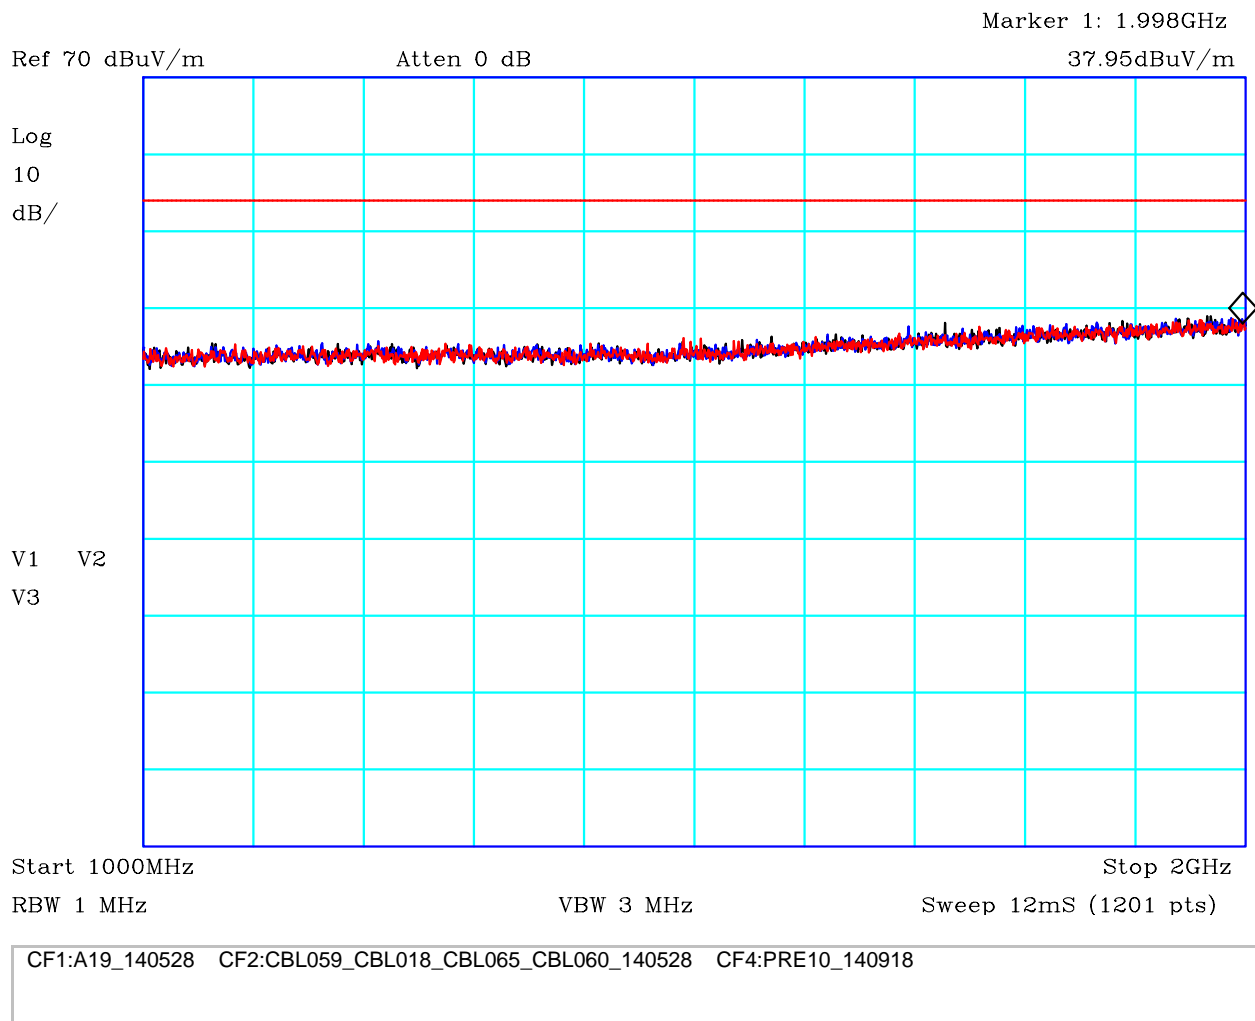

#### PLOT 44 Radiated Emissions - Config 1 - Rx - 1GHz to 2GHz

Company:	Sepura	Product:	SRG3900 XN
Date:	18/09/2014	Test Eng:	Dave Smith
Method:	Ansi C63.4	Method:	
Limit1:(RED)	FCC(B)@3m	Limit2:	
Limit3:		Limit4:	
<b>Config 1</b> Black: Rx 851MHz Blue: Rx 861.5MHz Red: Rx 869MHz Receive Mode. Antenna fitted.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H48195AD
		Mode:	1
		Modification State:	0
		Analysar:	R8

	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>79 of 88</b>

Marker 1: 5.993GHz

Ref 70 dBuV/m

Atten 0 dB

43.2dBuV/m


Log

10

dB/

V1 V2

V3

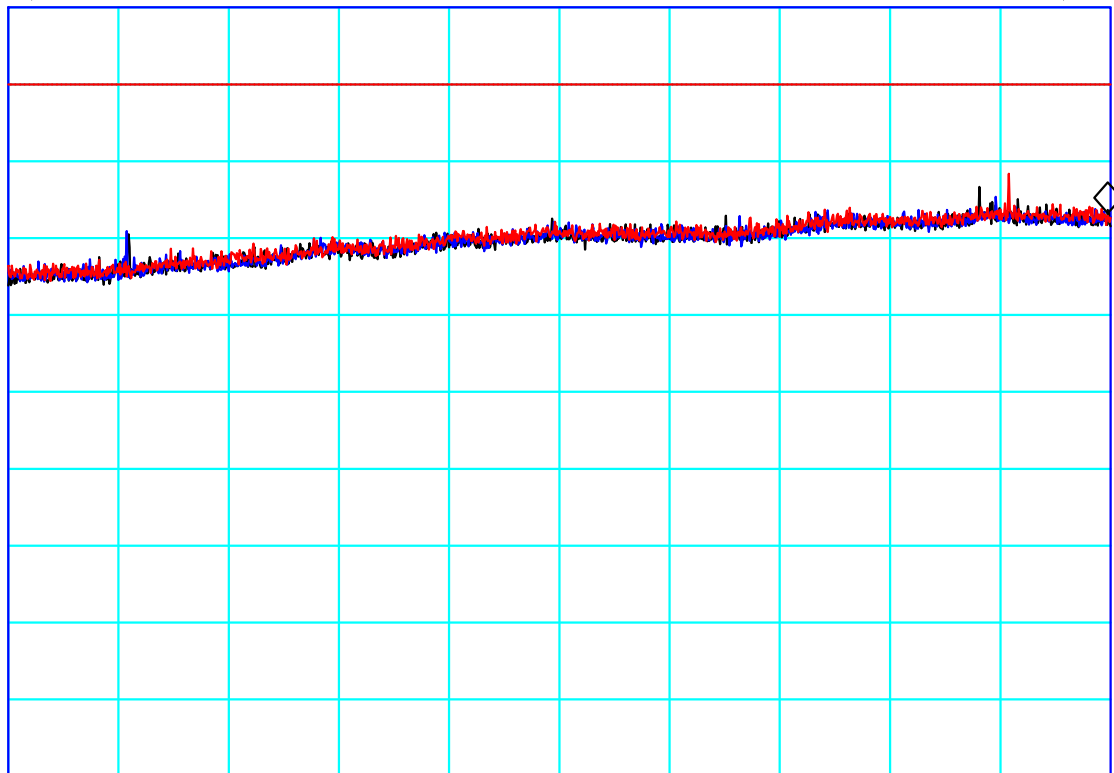

Start 2GHz

Stop 6GHz

RBW 1 MHz


VBW 3 MHz


Sweep 12mS (1201 pts)

CF1:A19\_140528 CF2:BlueCables\_140918 CF3:RFF22\_140528 CF4:PRE10\_140918

## PLOT 45 Radiated Emissions - Config 1 - Rx - 2GHz to 6GHz

Company:	Sepura	Product:	SRG3900 XN
Date:	18/09/2014	Test Eng:	Dave Smith
Method:	Ansi C63.4	Method:	
Limit1:(RED)	FCC(B)@1.5m	Limit2:	
Limit3:		Limit4:	
Config 1 Black: Rx 851MHz Blue: Rx 861.5MHz Red: Rx 869MHz Receive Mode. Antenna fitted.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H4818773
		Mode:	1
		Modification State:	0
		Analyser:	R8

	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>80 of 88</b>

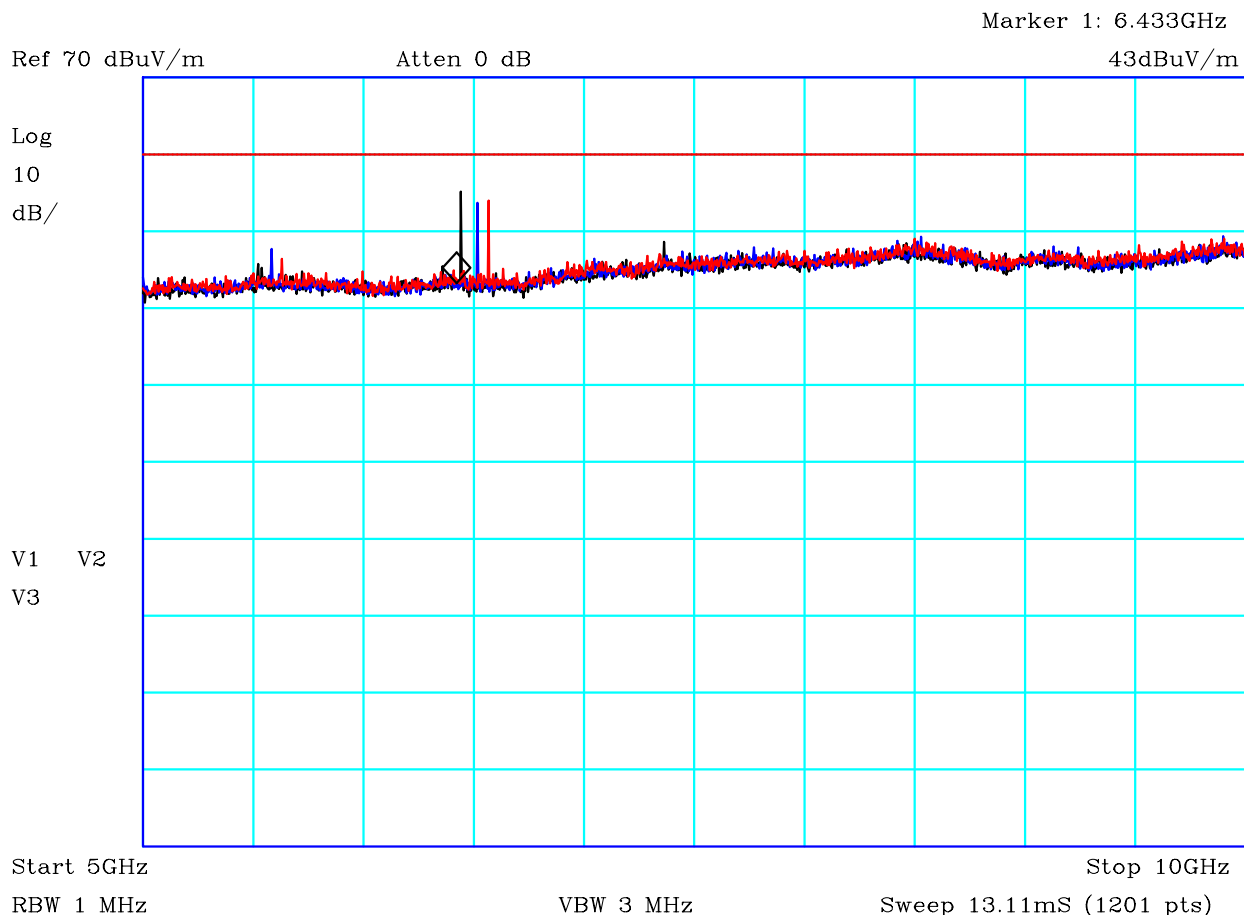


CF1:A19\_140528   CF2:BlueCables\_140918   CF3:RFF22\_140528   CF4:PRE10\_140918

#### PLOT 46 Radiated Emissions - Config 1 - Rx - 5GHz to 10GHz

Company:	Sepura	Product:	SRG3900 XN
Date:	18/09/2014	Test Eng:	Dave Smith
Method:	Ansi C63.4	Method:	
Limit1:(RED)	FCC(B)@1.5m	Limit2:	
Limit3:		Limit4:	
Config 1 Black: Rx 851MHz Blue: Rx 861.5MHz Red: Rx 869MHz Receive Mode. Antenna fitted.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H4818769
		Mode:	1
		Modification State:	0
		Analysers:	R8



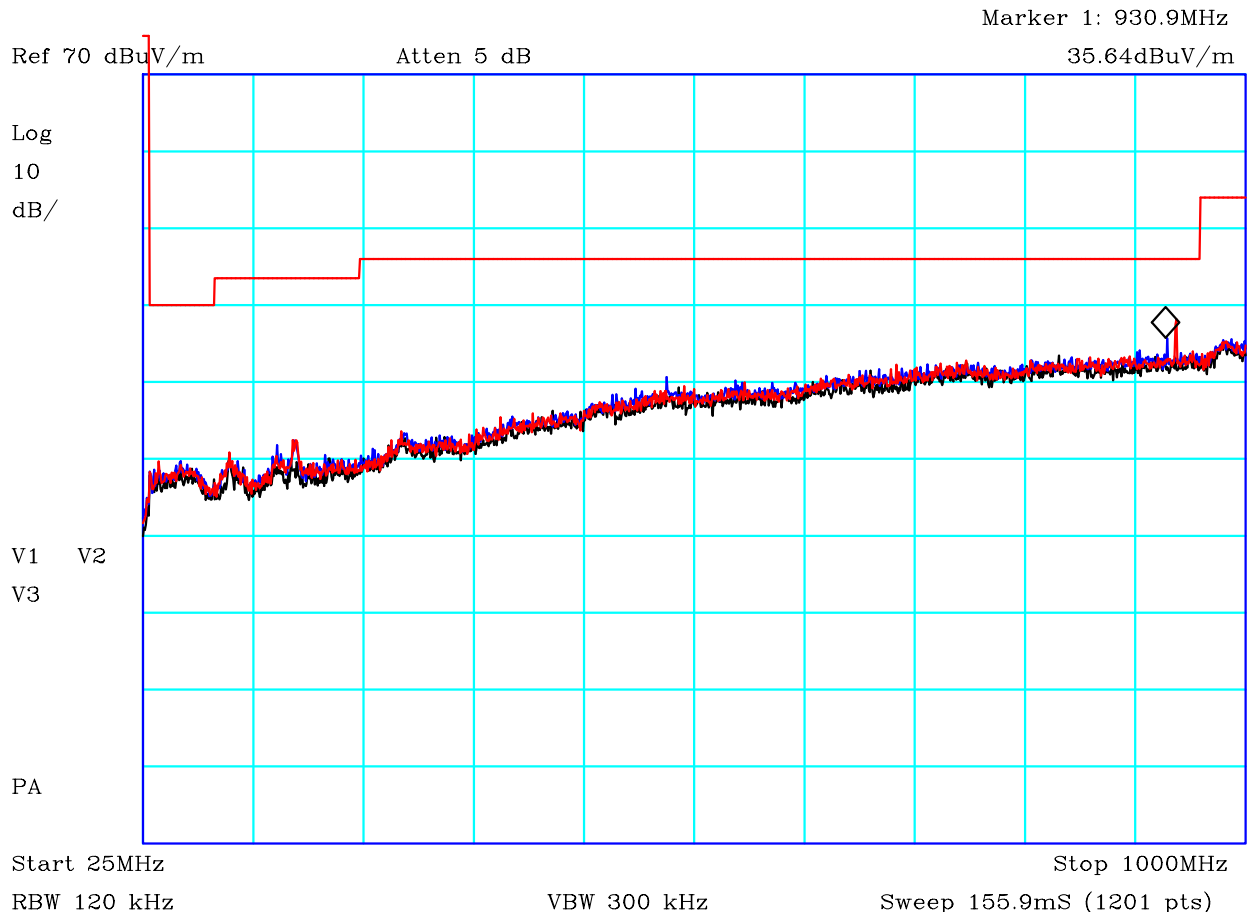


CF1:A24\_140528 CF2:CBL059\_CBL018\_CBL065\_CBL060\_140528 CF3:PRE5\_140528 CF4:10dB

#### PLOT 47 Radiated Emissions - DMU - Rx - 25MHz to 1GHz

Company:	Sepura	Product:	SRG3900 XN
Date:	13/10/2014	Test Eng:	Dave Smith
Method:	Ansi C63.4	Method:	
Limit1:(RED)	FCC(B)@3m	Limit2:	
Limit3:		Limit4:	
DMU Black: Rx 851MHz Blue: Rx 861.5MHz Red: Rx 869MHz Receive Mode. Antenna fitted.			
Facility:	Anech_2	Height	1m,1.5m,2m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H4931813
		Mode:	1
		Modification State:	0
		Analysers:	R8

	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>82 of 88</b>

Marker 1: 1.998GHz

Ref 70 dBuV/m

Atten 5 dB

40.37dBuV/m

Log

10

dB/

V1 V2

V3

PA

Start 1000MHz

Stop 2GHz

RBW 1 MHz


VBW 3 MHz


Sweep 12mS (1201 pts)

CF1:A24\_140528 CF2:CBL059\_CBL018\_CBL065\_CBL060\_140528 CF4:PRE10\_140918

## PLOT 48 Radiated Emissions - DMU - Rx - 1GHz to 2GHz

Company:	Sepura	Product:	SRG3900 XN
Date:	13/10/2014	Test Eng:	Dave Smith
Method:	Ansi C63.4	Method:	
Limit1:(RED)	FCC(B)@3m	Limit2:	
Limit3:		Limit4:	
DMU Black: Rx 851MHz Blue: Rx 861.5MHz Red: Rx 869MHz Receive Mode. Antenna fitted.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H491345C
		Mode:	1
		Modification State:	0
		Analysers:	R8


	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>83 of 88</b>

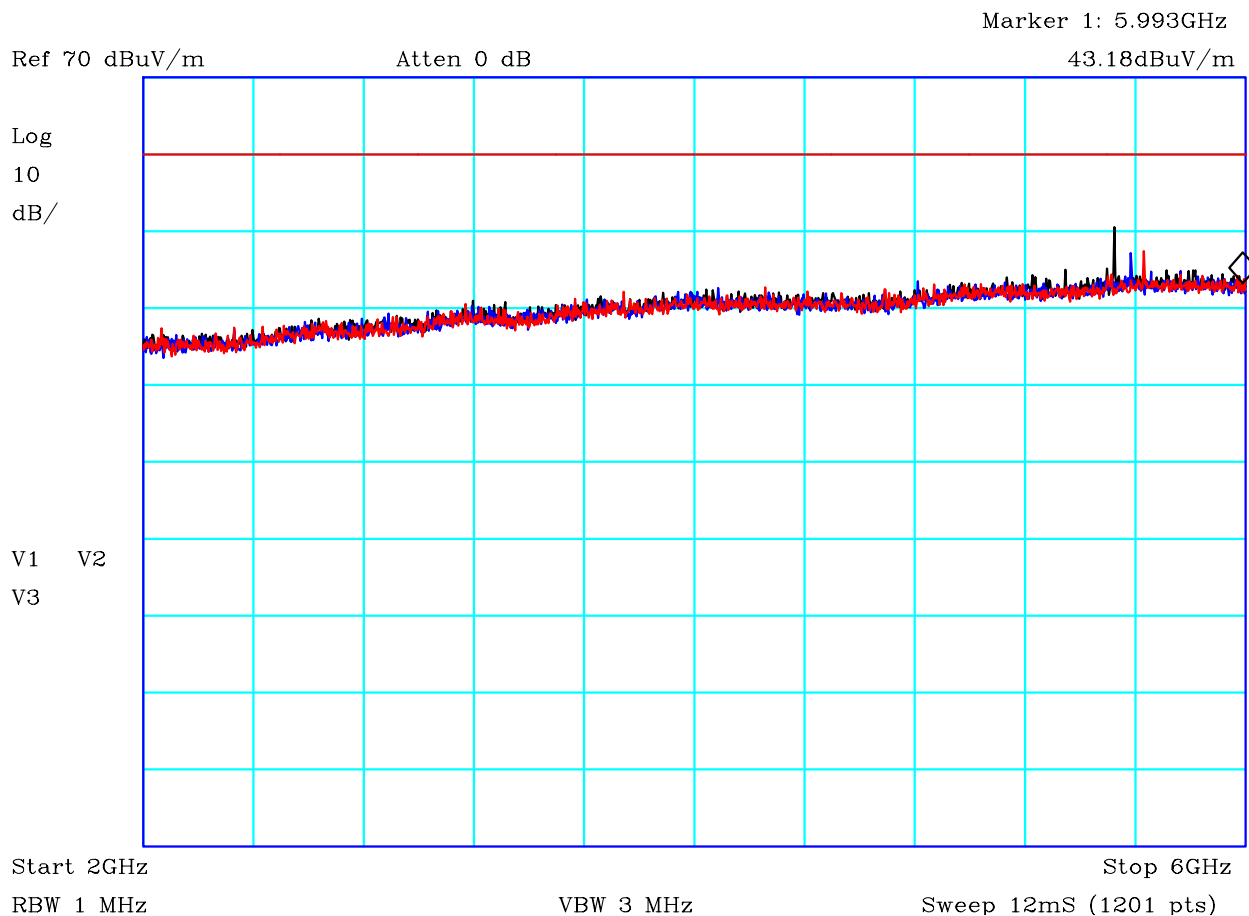


CF1:A19\_140528   CF2:BlueCables\_140918   CF3:RFF22\_140528   CF4:PRE10\_140918

#### PLOT 49 Radiated Emissions - DMU - Rx - 2GHz to 6GHz

Company:	Sepura	Product:	SRG3900 XN
Date:	23/09/2014	Test Eng:	Dave Smith
Method:	Ansi C63.4	Method:	
Limit1:(RED)	FCC(B)@1.5m	Limit2:	
Limit3:		Limit4:	
DMU Black: Rx 851MHz Blue: Rx 861.5MHz Red: Rx 869MHz Receive Mode. Antenna fitted.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H48235E7
		Mode:	1
		Modification State:	0
		Analysers:	R8


	Report No: <b>R3413</b>	<b>FCC ID: XX6SRG3900XN</b>	
	Issue No: <b>1</b>		
	Test No: <b>T5507</b>	<b>Test Report</b>	Page: <b>84 of 88</b>

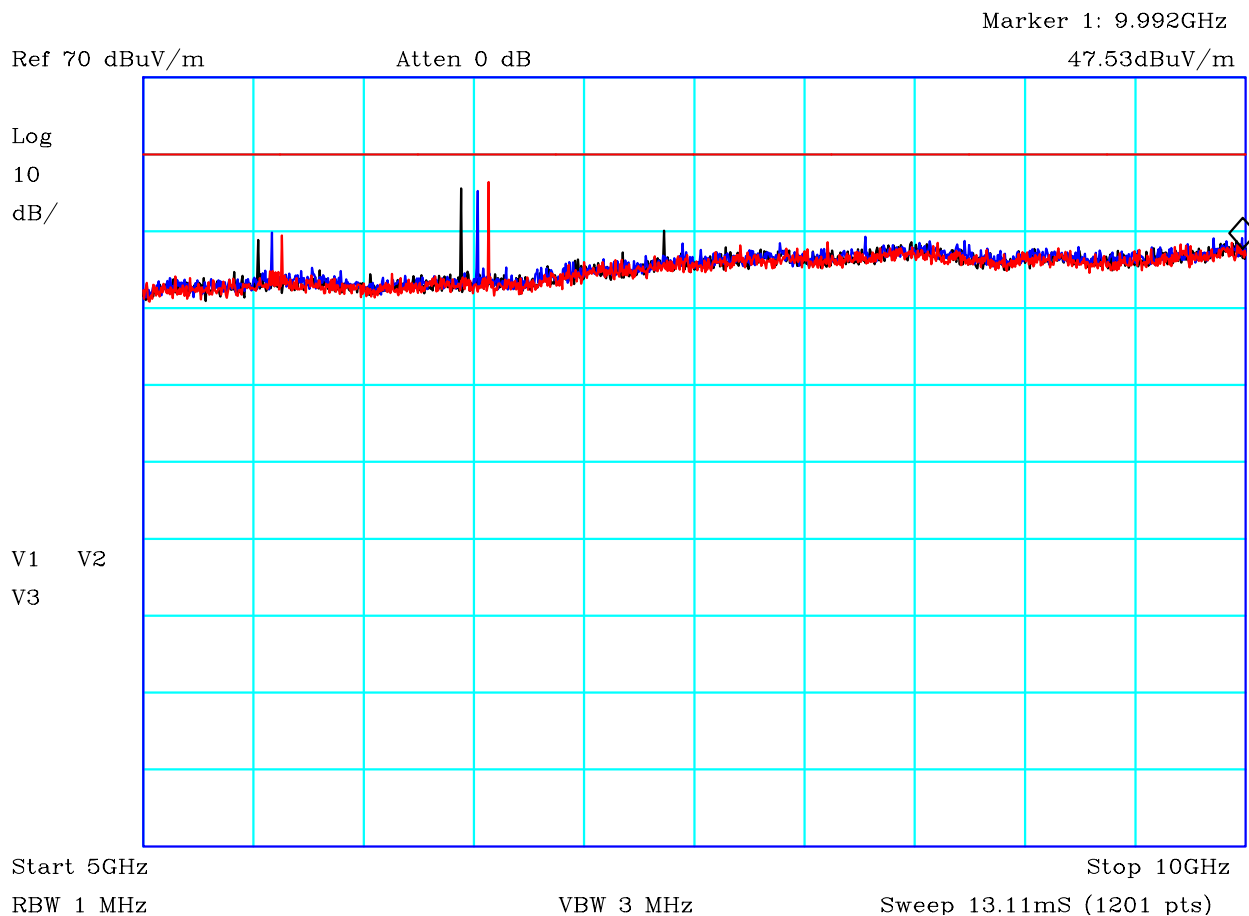

CF1:A19\_140528   CF2:BlueCables\_140918   CF3:RFF22\_140528   CF4:PRE10\_140918

## PLOT 50 Radiated Emissions - DMU - Rx - 5GHz to 10GHz

Company:	Sepura	Product:	SRG3900 XN
Date:	23/09/2014	Test Eng:	Dave Smith
Method:	Ansi C63.4	Method:	
Limit1:(RED)	FCC(B)@1.5m	Limit2:	
Limit3:		Limit4:	
DMU Black: Rx 851MHz Blue: Rx 861.5MHz Red: Rx 869MHz Receive Mode. Antenna fitted.			
Facility:	Anech_2	Height	1.1m,1.3m,1.6m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H48235ED
		Mode:	1
		Modification State:	0
		Analysers:	R8

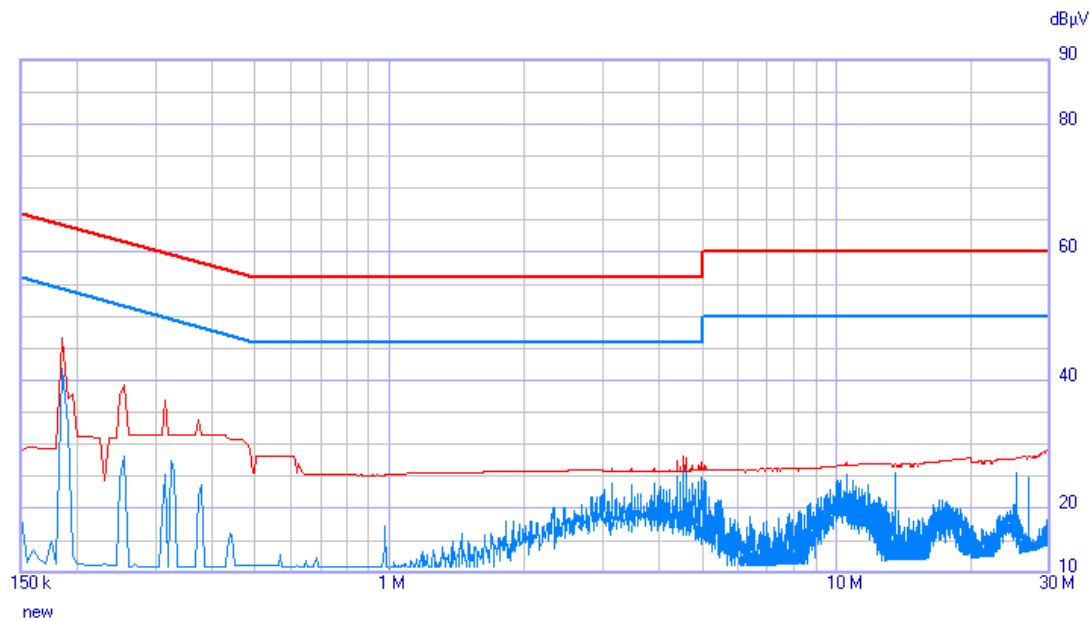

	Start [MHz]	Stop [MHz]	Step	Detector	Hold Time	RBW	Min Att	Pre Amp	Pre Sel	Prompt start	Ancillary
1	0.15	30	AUTO (5 kHz)	P Q A pwr_B_QP Margin 5 dB	20 ms	9 kHz	10	OFF	ON	...	...
2	0.15	0.151	500 Hz	P pwr_B_Avg Margin 0 dB	1.9 ms	9 kHz	10	OFF	ON	...	...

Ancillary = General

Limits:

pwr\_B\_QP  
pwr\_B\_Avg


Factors:

L1  
AB002\_CBL005\_CBL039

QPeak —  
Avg —

## PLOT 51 Conducted Emissions - Tx @816.5MHz - Live Line

Company:	Sepura	Product:	SRG3900 XN
Date:	29 Oct 14	Test Engineer:	Dave Smith
Test:	ANSI C63.4	Limit:	FCC (B) QP + AV
Notes:			
Transmitting at 816.5MHz.			
Line:	Live	Attenuator:	10dB PAD
Detector:	QP + Avg	Operating Mode:	Tx
LISN:	EMCO	Mod. State:	0
		Filename:	C4A294EF.png

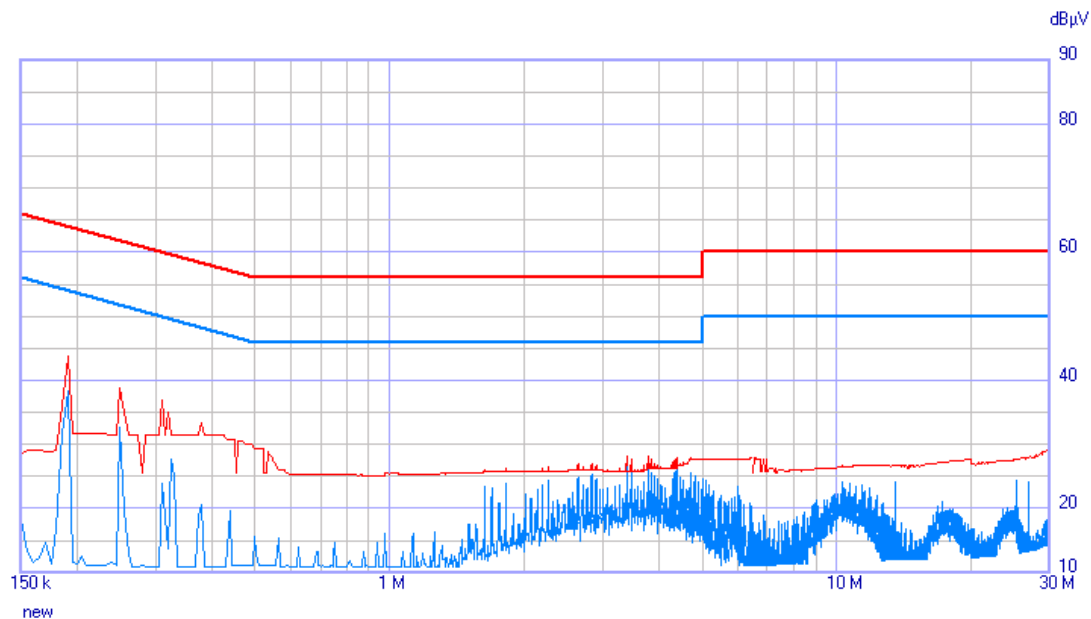

	Start [MHz]	Stop [MHz]	Step	Detector	Hold Time	RBW	Min Att	Pre Amp	Pre Sel	Prompt start	Ancillary
1	0.15	30	AUTO (5 kHz)	P Q A pwr_B_QP Margin 5 dB	20 ms	9 kHz	10	OFF	ON	...	...
2	0.15	0.151	500 Hz	P pwr_B_Avg Margin 0 dB	1.9 ms	9 kHz	10	OFF	ON	...	...

Ancillary = General

Limits:

pwr\_B\_QP  
pwr\_B\_Avg


Factors:

L1  
AB002\_CBL005\_CBL039

QPeak —  
Avg —

## PLOT 52 Conducted Emissions - Tx @816.5MHz - Neutral Line

Company:	Sepura	Product:	SRG3900 XN
Date:	29 Oct 14	Test Engineer:	Dave Smith
Test:	ANSI C63.4	Limit:	FCC (B) QP + AV
Notes:			
Transmitting at 816.5MHz.			
Line:	Neutral	Attenuator:	10dB PAD
Detector:	QP + Avg	Operating Mode:	Tx
LISN:	EMCO	Mod. State:	0
		Filename:	C4A29503.png

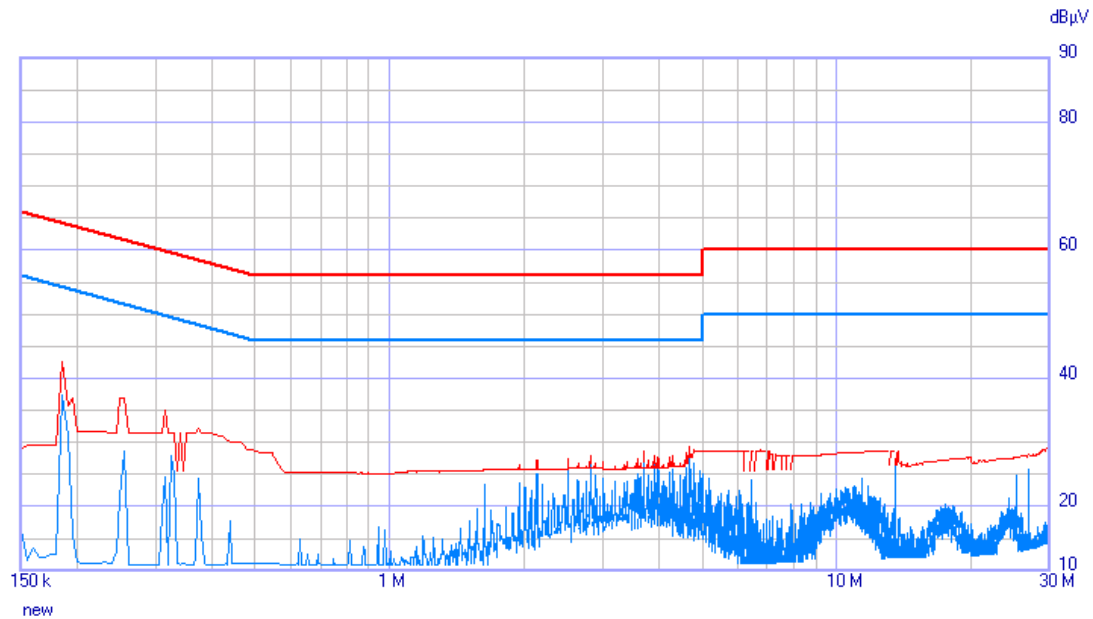

	Start [MHz]	Stop [MHz]	Step	Detector	Hold Time	RBW	Min Att	Pre Amp	Pre Sel	Prompt start	Ancillary
1	0.15	30	AUTO (5 kHz)	P Q A pwr_B_QP Margin 5 dB	20 ms	9 kHz	10	OFF	ON	...	...
2	0.15	0.151	500 Hz	P pwr_B_Avg Margin 0 dB	1.9 ms	9 kHz	10	OFF	ON	...	...

Ancillary = General


Limits:  
pwr\_B\_QP  
pwr\_B\_Avg

Factors:  
L1  
AB002\_CBL005\_CBL039

QPeak —  
Avg —

### PLOT 53 Conducted Emissions - Tx @861.5MHz - Neutral Line

Company:	Sepura	Product:	SRG3900 XN
Date:	29 Oct 14	Test Engineer:	Dave Smith
Test:	ANSI C63.4	Limit:	FCC (B) QP + AV
Notes:			
Transmitting at 861.5MHz.			
Line:	Neutral	Attenuator:	10dB PAD
Detector:	QP + Avg	Operating Mode:	Tx
LISN:	EMCO	Mod. State:	0
		Filename:	C4A29511.png

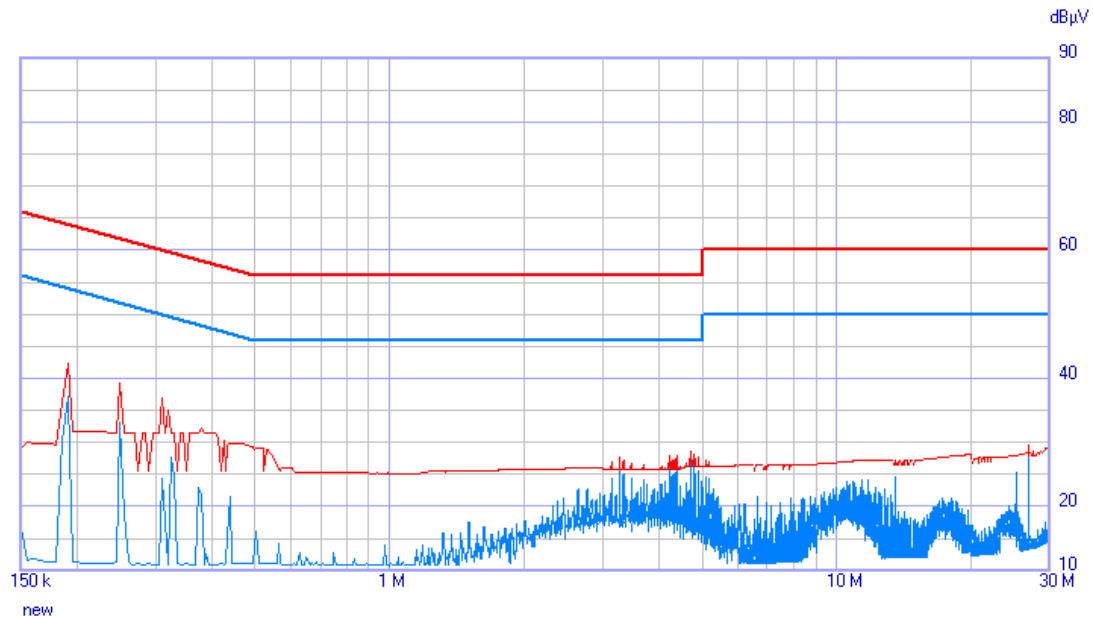

	Start [MHz]	Stop [MHz]	Step	Detector	Hold Time	RBW	Min Att	Pre Amp	Pre Sel	Prompt start	Ancillary
1	0.15	30	AUTO (5 kHz)	P Q A pwr_B_QP Margin 5 dB	20 ms	9 kHz	10	OFF	ON	...	...
2	0.15	0.151	500 Hz	P pwr_B_Avg Margin 0 dB	1.9 ms	9 kHz	10	OFF	ON	...	...

Ancillary = General

Limits:  
pwr\_B\_QP  
pwr\_B\_Avg

Factors:  
L1  
AB002\_CBL005\_CBL039

QPeak —  
Avg —

## PLOT 54 Conducted Emissions - Tx @861.5MHz - Live Line

Company:	Sepura	Product:	SRG3900 XN
Date:	29 Oct 14	Test Engineer:	Dave Smith
Test:	ANSI C63.4	Limit:	FCC (B) QP + AV
Notes:			
Transmitting at 861.5MHz.			
Line:	Live	Attenuator:	10dB PAD
Detector:	QP + Avg	Operating Mode:	Tx
LISN:	EMCO	Mod. State:	0
		Filename:	C4A2951F.png