

FCC Test Report

Report No.: AGC01110200738FE02A

FCC ID	:	2AOKB-A3117
APPLICATION PURPOSE	:	Class II Permissive Change
PRODUCT DESIGNATION	:	Soundcore 3
BRAND NAME	:	soundcore
MODEL NAME	:	A3117
APPLICANT	:	Anker Innovations Limited
DATE OF ISSUE	:	Apr. 10, 2025
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 10, 2025	Valid	Initial Release

Note: The original test report AGC01110200738FE02 (dated Aug. 11, 2020 and tested from July 24, 2020 to Aug. 11, 2020) was modified on Apr. 10, 2025, including the following changes and additions:

-Update applicant address, manufacturer address and factory and factory address.

-A resistor and capacitor is cancelled, and two magnetic beads are changed into 0 ohm resistors in the charging circuit part.

-A magnetic ring is added to that flat cable between the interface board and the motherboard.

Based on the above changes, updated Radiated Spurious Emission and AC Power Line Conducted Emission.



Table of Contents

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Test Frequency List	5
2.3 Related Submittal(S) / Grant (S)	6
2.4 Test Methodology	6
2.5 Special Accessories	6
2.6 Equipment Modifications	6
2.7 Antenna Requirement	6
3. Test Environment	7
3.1 Address of the Test Laboratory	7
3.2 Test Facility	7
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	
3.5 List of Equipment Use	9
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	11
5. Description of Test Modes	
6. Radiated Spurious Emission	
6.1 Measurement Limit	
6.2 Measurement Procedure	
6.3 Measurement Setup (Block Diagram of Configuration)	
6.4 Measurement Result	
7. AC Power Line Conducted Emission Test	
7.1 Measurement Limit	
7.2 Measurement Setup (Block Diagram of Configuration)	
7.3 Preliminary Procedure of Line Conducted Emission Test	
7.4 Final Procedure of Line Conducted Emission Test	
7.5 Measurement Results	
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of Test EUT	



1. General Information

Anker Innovations Limited			
Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong			
Anker Innovations Limited			
Jnit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong			
N/A			
N/A			
Soundcore 3			
soundcore			
A3117			
N/A			
N/A			
Jan. 17, 2025			
Jan. 17, 2025~Feb. 10, 2025			
No any deviation from the test method			
Normal			
Pass			
AGCER-FCC-BLE-V1			

Note: The test results of this report relate only to the tested sample identified in this report.

Bibo zhang Prepared By Bibo Zhang Apr. 10, 2025 (Project Engineer) Calvin Lin Reviewed By Calvin Liu Apr. 10, 2025 (Reviewer) Approved By 10h

Angela Li (Authorized Officer)

Apr. 10, 2025



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.0
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 Data channels + 3 advertising channels)
Channel Separation	2 MHz
Hardware Version	V1.0
Software Version	V0.1.6
Antenna Designation	FPC Antenna
Antenna Gain	2.62dBi
Power Supply	DC 7.2V 3350mAh by battery or DC 5V from adapter

2.2 Test Frequency List

Frequency Band	Channel Number	Test Frequency		
	0	2402 MHz		
	1	2404 MHz		
	:	:		
2400~2483.5MHz	19	2440MHz		
	:	:		
	38	2478 MHz		
	39	2480 MHz		
Note: f = 2402 + 2*k MHz, k = 0,, 39 f is the operating frequency (MHz); k is the operating channel.				



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2AOKB-A3117**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 2.62dBi.



3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 7.2V

3.4 Measurement Uncertainty

The reported uncertainty of measurement y $\pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF Power, Conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF Power Density, Conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of Spurious Emissions, Conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %
Uncertainty of Dwell Time	U _c = ±2 %



3.5 List of Equipment Use

• F	Radiated Spurious Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2025-01-14	2026-01-13
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30
\square	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08

• A	AC Power Line Conducted Emission						
Used	Used Lequipment No. L. Lest Equipment L. Manufacturer L. Model No. L. Serial No. L. Serial No. L.						Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08
\square	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27

Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A		
	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6		
	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		



4.System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

No	Equipment	Manufacture r	Model No.	Specification Information	Cable
1	Phone	Xiaomi	MI 10	N/A	1m, unshielded
2	Adapter	Huawei	HW-200440C00	Input(AC):100V-240V 50/60Hz 2.4A Output(DC):USB-C(5V/3A;9V/3A;10V/4A; 11V/6A;12V/3A;15V/3A;20V4.4A) USB-A(5V/2A;10V/4A;11V/6A;20V/4.4A)	
3	Control Box	USB-TTL	N/A	N/A	
			The Menute stures		

☑ Test Accessories Come From The Laboratory

Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Battery	Guangdong Pow-Tech New Power Co.,Ltd.	PA19	DC 7.2V, 3350mAh	



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.209	Radiated Emission	Pass
2	§15.207	AC Power Line Conducted Emission	Pass



5. Description of Test Modes

	Summary Table of Test Cases
Test Item	Data Rate / Modulation
lest tielli	Bluetooth–LE(1Mbps)/GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered or AC/DC adapter)
Radiated & Conducted Test Cases	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered or AC/DC adapter)
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered or AC/DC adapter)
AC Conducted Emission	Mode 1: Bluetooth Link + Battery + USB Cable (Charging from AC Adapter)

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. 3. The battery is full-charged during the test.
- For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

Software Setting Diagram

Ctions BT FCC Too	o1 V2. 23	?	×
SOLUTION ATS283X - COM COM2	▼ 115200 ▼	BQB Mo	de
RF Channel 39 🗸	Hopping Mode 📕 Normal_F	/ 👻 fixed	
Packet Type BLE_2M 🔍	Payload Type	PRBS9	~
TX Gain Index 2	RX Gain Index	0	•
Access Code Ox 88888888	AGC Mode	•	
Continue TX Single Ton	e Stop Packet RX H	opping TX	
1结束ContinueTX测试,持续75.1秒 1开始ContinueTX测试(Chan: 39 Packe 1结束ContinueTX测试,持续84.7秒 1开始ContinueTX测试(Chan: 0 Packet 1结束ContinueTX测试,持续72.4秒	et:BLE_1M Payload:PRBS9 TxGain:2) et:BLE_1M Payload:PRBS9 TxGain:2) t:BLE_2M Payload:PRBS9 TxGain:2) et:BLE_2M Payload:PRBS9 TxGain:2)		



6. Radiated Spurious Emission

6.1 Measurement Limit

• FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

6.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.





- 8. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 9. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 10. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 11. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum ParameterSettingStart ~Stop Frequency9kHz~150kHz/RB 200Hz for QPStart ~Stop Frequency150kHz~30MHz/RB 9kHz for QPStart ~Stop Frequency30MHz~1000MHz/RB 120kHz for QPStart ~Stop Frequency1GHz~26.5GHzStart ~Stop Frequency1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

• Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

• Average Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. $VBW \ge [3 \times RBW]$
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




6.3 Measurement Setup (Block Diagram of Configuration)

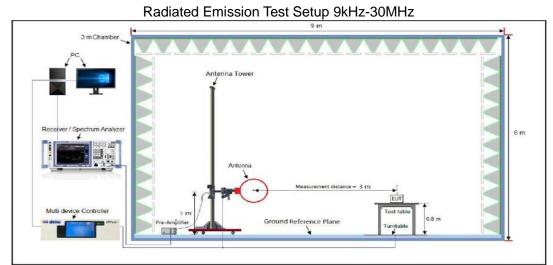

Radiated Emission Test Setup 30MHz-1000MHz

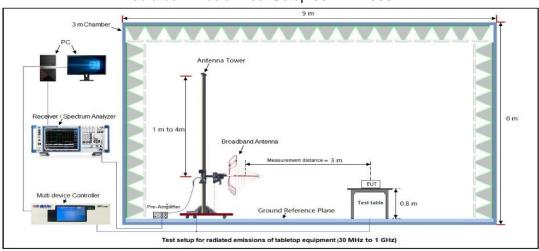

Radiated Emission Test Setup Above 1000MHz

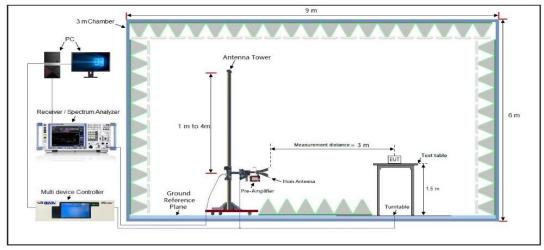



6.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

				Rad	iated E	miss	ion Test Re	sults a	t 30MH:	z-1GH	lz			
EUT N	lame	Sou	Indcore	3				M	odel Na	ime		A31	17	
Tempe	erature	18.	5℃					Re	elative l	Humio	dity	57.8	3%	
Press	ure	960	hPa					Те	st Volta	age		DC	7.2V b	y battery
Test N	lode	Мо	de 3					А	ntenna	Polar	ity	Hor	izontal	
	72.0	dBuV/n	n											
	32	nedinkelen	nulmay Andrea	ka hatara		1 Marine Marine	Mar Market		*	~^^		Limit: Margin:		
	-8 30.00)0 4	10 50	60 7	0 80		(MHz)		300	400	500 60	0 700	1000.0	00
Final I	Data List													
NO.	Freq [MHz		Lev [dBµ\	-		ctor B]	Limit [dBµV/m]		argin dB]		eight cm]		ngle [°]	Polarity
1	109.79	60	30.	16	16	.30	43.50	1:	3.34	1	00		60	Horizontal
2	232.53	18	35.3	39	15	.03	46.00	1().61	1	00	1	10	Horizontal
3	309.99	77	34.	69	16	.50	46.00	11	.31	1	00	1	50	Horizontal
4	440.19	63	36.	56	25	.09	46.00	9	.44	1	00	1	70	Horizontal
5	716.68	20	32.3	37	24	.68	46.00	1:	3.63	1	00	2	200	Horizontal
6	903.30	94	37.	13	31	.34	46.00	8	.87	1	00	2	20	Horizontal



			Radia	ted Emiss	ion Test Res	ults	at 30MHz	z-1GHz		
EUT N	lame	Sound	core 3				Model Na	me	A3117	
Tempe	erature	18.5 ℃					Relative H	Humidity	57.8%	
Press	ure	960hPa	a				Test Volta	age	DC 7.2V b	y battery
Test N	lode	Mode 3	3				Antenna	Polarity	Vertical	
	72.0 d	lBuV/m								
									Limit: — Margin: —	
									f	
				3	h			5	×.	
	32	Å	2	"My My "	han donath m	Ň	Month	Ways Mun when when when when when when when whe	Martin Martin	
	Mar.	Myread W	my human	www.	"hake book for	~~V	Horney			
	1 ₂ 4									
	-8									
	30.000	40	50 60 70	80	(MHz)		300	400 500 60	0 700 1000.0	00
Final I	Data List									
NO.	Freq. [MHz]		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	I	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.201 ⁻	7	31.30	16.93	40.00		8.7	100	200	Vertical
2	54.071 [°]	1	30.03	17.04	40.00		9.97	100	240	Vertical
3	116.132	1	39.00	17.02	43.50		4.5	100	150	Vertical
4	214.514	3	32.70	16.81	43.50		10.8	100	160	Vertical
5	435.589	8	34.64	25.39	46.00		11.36	100	180	Vertical
6	945.439	9	36.90	30.78	46.00		9.1	100	110	Vertical

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 3 is the worst case and recorded in the report.



Radiated Emissions Test Results for Above 1GHz

EUT Name		Soundcore 3		Model Name	A3117	
Temperature	•	18.5℃		Relative Humidity	57.8%	
Pressure		960hPa		Test Voltage	DC 7.2V b	y battery
Test Mode		Mode 1		Antenna Polarity	Horizontal	
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4804.000	50.25	0.08	50.33	74.00	-23.67	peak
4804.000	41.22	0.08	41.3	54.00	-12.70	AVG
7206.000	49.36	2.21	51.57	74.00	-22.43	peak
7206.000	41.15	2.21	43.36	54.00	-10.64	AVG
Factor = Ant	enna Facto	or + Cable Loss – P	re-amplifier.			
L						
EUT Name		Soundcore 3		Model Name	A3117	
		Soundcore 3 18.5℃		Model Name Relative Humidity	A3117 57.8%	
EUT Name	•					y battery
EUT Name Temperature	•	18.5℃		Relative Humidity	57.8%	y battery
EUT Name Temperature Pressure	•	18.5℃ 960hPa Mode 1	Emission Level	Relative Humidity Test Voltage	57.8% DC 7.2V b	Value
EUT Name Temperature Pressure Test Mode	Meter	18.5℃ 960hPa Mode 1		Relative Humidity Test Voltage Antenna Polarity	57.8% DC 7.2V b Vertical	
EUT Name Temperature Pressure Test Mode Frequency	Meter	18.5°C 960hPa Mode 1 Factor	Level	Relative Humidity Test Voltage Antenna Polarity Limits	57.8% DC 7.2V b Vertical Ma gin	Value
EUT Name Temperature Pressure Test Mode Frequency (MHz)	Meter Reading (dBµV)	18.5℃ 960hPa Mode 1 Factor (dB)	Level (dBµV/m)	Relative Humidity Test Voltage Antenna Polarity Limits (dBµV/m)	57.8% DC 7.2V b Vertical Ma gin (dB)	Value Type
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000	Meter Reading (dBµV) 49.85	18.5°C 960hPa Mode 1 Factor (dB) 0.08	Level (dBµV/m) 49.93	Relative Humidity Test Voltage Antenna Polarity Limits (dBµV/m) 74.00 [57.8% DC 7.2V b Vertical Ma gin (dB) -24.07	Value Type peak
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	Meter Reading (dBµV) 49.85 40.17	18.5°C 960hPa Mode 1 Factor (dB) 0.08 0.08	Level (dBµV/m) 49.93 40.25	Relative Humidity Test Voltage Antenna Polarity Limits (dBµV/m) 74.00 54.00	57.8% DC 7.2V b Vertical Ma gin (dB) -24.07 -13.75	Value Type peak AVG
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000 7206.000 Remark:	Meter Reading (dBµV) 49.85 40.17 49.31 40.15	18.5°C 960hPa Mode 1 Factor (dB) 0.08 0.08 2.21	Level (dBµV/m) 49.93 40.25 51.52 42.36	Relative Humidity Test Voltage Antenna Polarity Limits (dBµV/m) 74.00 54.00 74.00	57.8% DC 7.2V b Vertical Ma gin (dB) -24.07 -13.75 -22.48	Value Type peak AVG peak

RESULT: Pass



Radiated Emissions Test Results for Above 1GHz

EUT Name		Soundco	ore 3		Model Nar	me	A3117	
Temperature		18.5 ℃			Relative H	lumidity	57.8%	
Pressure		960hPa			Test Volta	ge	DC 7.2V by	battery
Test Mode		Mode 2			Antenna F	Polarity	Horizontal	
	L. L							
Frequency	Mete Readii		Factor	Emission Level	Limi	its	Margin	Value Type
(MHz)	(dBµ∖	/)	(dB)	(dBµV/m)	(dBµ∖	//m)	(dB)	Туре
4880.000	49.4	1	0.14	49.55	74.0	00	-24.45	peak
4880.000	40.2	5	0.14	40.39	54.0	00	-13.61	AVG
7320.000	48.74	4	2.36	51.10	74.(00	-22.90	peak
7320.000	40.3	3	2.36	42.69	54.0	00	-11.31	AVG
Remark:								
Factor = Ante	enna Fac	ctor + Cab	le Loss – P	re-amplifier.				
Factor = Ante	enna Fac	ctor + Cab Soundco		re-amplifier.	Model Nar	me	A3117	
				re-amplifier.	Model Nar Relative H	-	A3117 57.8%	
EUT Name		Soundco		re-amplifier.		lumidity		battery
EUT Name Temperature		Soundco 18.5℃		re-amplifier.	Relative H	lumidity ge	57.8%	battery
EUT Name Temperature Pressure		Soundco 18.5℃ 960hPa Mode 2 r		re-amplifier.	Relative H Test Volta	lumidity ge Polarity	57.8% DC 7.2V by	Value
EUT Name Temperature Pressure Test Mode	Mete	Soundco 18.5°C 960hPa Mode 2 r	ore 3	Emission	Relative H Test Volta Antenna F	Iumidity ge Polarity its	57.8% DC 7.2V by Vertical	
EUT Name Temperature Pressure Test Mode Frequency	Mete	Soundco 18.5°C 960hPa Mode 2 r ng /)	ore 3 Factor	Emission Level	Relative H Test Volta Antenna F	Iumidity ge Polarity its	57.8% DC 7.2V by Vertical Margin	Value
EUT Name Temperature Pressure Test Mode Frequency (MHz)	Mete Readii (dBµ\	Soundco 18.5°C 960hPa Mode 2 r ng /) 2	Factor (dB)	Emission Level (dBµV/m)	Relative H Test Volta Antenna F Limi	Iumidity ge Polarity its //m)	57.8% DC 7.2V by Vertical Margin (dB)	Value Type
EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4880.000	Mete Readii (dBµ\ 50.22	Soundco 18.5°C 960hPa Mode 2 r ng /) 2 7	Factor (dB) 0.14	Emission Level (dBµV/m) 50.36	Relative H Test Volta Antenna F Limi (dBµV 74.0	Iumidity ge Polarity its //m) 00	57.8% DC 7.2V by Vertical Margin (dB) -23.64	Value Type peak
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000 4880.000	Mete Readii (dBµ\ 50.2 39.8	Soundco 18.5°C 960hPa Mode 2 r ng /) 2 7 1	Factor (dB) 0.14 0.14	Emission Level (dBµV/m) 50.36 40.01	Relative H Test Volta Antenna F Limi (dBµV 74.0 54.0	Iumidity ge Polarity its //m) D0 D0	57.8% DC 7.2V by Vertical Margin (dB) -23.64 -13.99	Value Type peak AVG
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000 4880.000 7320.000	Mete Readin (dBµ\ 50.2 39.8 49.3	Soundco 18.5°C 960hPa Mode 2 r ng /) 2 7 1	Factor (dB) 0.14 2.36	Emission Level (dBµV/m) 50.36 40.01 51.67	Relative H Test Volta Antenna F Limi (dBµV 74.0 54.0	Iumidity ge Polarity its //m) D0 D0	57.8% DC 7.2V by Vertical Margin (dB) -23.64 -13.99 -22.33	Value Type peak AVG peak

RESULT: Pass

Radiated Emissions Test Results for Above 1GHz

EUT Name		Sour	ndcore 3		Model Name	A3117	
Temperature		18.5°	$^{\circ}$		Relative Humidit	y 57.8%	
Pressure		960h	Pa		Test Voltage	DC 7.2V by b	attery
Test Mode		Mode	e 3		Antenna Polarity	Horizontal	
Frequency	Mete Readi		Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµ'	V)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
4960.000	49.8	9	0.22	50.11	74.00	-23.89	peak
4960.000	40.1	5	0.22	40.37	54.00	-13.63	AVG
7440.000	49.6	3	2.64	52.27	74.00	-21.73	peak
7440.000	39.7	7	2.64	42.41	54.00	-11.59	AVG
1 1101000							
Remark: Factor = Ante	enna Fa	ctor +	Cable Loss – P	re-amplifier.			
Remark: Factor = Ante EUT Name		ctor +	Cable Loss – Pr ndcore 3	re-amplifier.	Model Name Relative Humidit	A3117 y 57.8%	
Remark:		ctor + Sour	Cable Loss – Pr ndcore 3 °C	re-amplifier.			attery
Remark: Factor = Ante EUT Name Temperature		ctor + Sour 18.5°	Cable Loss – Pi ndcore 3 °C iPa	re-amplifier.	Relative Humidit	y 57.8% DC 7.2V by b	attery
Remark: Factor = Ante EUT Name Temperature Pressure		ctor + Sour 18.5° 960h Mode	Cable Loss – Pi ndcore 3 °C iPa	Emission Level	Relative Humidit Test Voltage	y 57.8% DC 7.2V by b	Value
Remark: Factor = Ante EUT Name Temperature Pressure Test Mode	Mete Readi (dBµ)	sour 18.5° 960h Mode er ing V)	Cable Loss – Pr ndcore 3 °C nPa e 3 Factor (dB)	Emission Level (dBµV/m)	Relative Humidit Test Voltage Antenna Polarity	y 57.8% DC 7.2V by b Vertical Margin (dB)	
Remark: Factor = Ante EUT Name Temperature Pressure Test Mode Frequency	Mete	sour 18.5° 960h Mode er ing V)	Cable Loss – Pi ndcore 3 °C iPa e 3 Factor	Emission	Relative Humidit Test Voltage Antenna Polarity Limits	y 57.8% DC 7.2V by b Vertical Margin	Value
Remark: Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz)	Mete Readi (dBµ)	ctor + Sour 18.5° 960h Mode er ng V) 7	Cable Loss – Pr ndcore 3 °C nPa e 3 Factor (dB)	Emission Level (dBµV/m)	Relative Humidit Test Voltage Antenna Polarity Limits (dBµV/m)	y 57.8% DC 7.2V by b Vertical Margin (dB)	Value Type
Remark: Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	Mete Readi (dBµ) 50.1	ctor + Sour 18.5° 960h Mode er ing V) 7 7	Cable Loss – Pi ndcore 3 °C IPa e 3 Factor (dB) 0.22	Emission Level (dBµV/m) 50.39	Relative Humidit Test Voltage Antenna Polarity Limits (dBµV/m) 74.00	y 57.8% DC 7.2V by b Vertical Margin (dB) -23.61	Value Type peak
Remark: Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	Mete Readi (dBµ' 50.1 39.7	ctor + Sour 18.5° 960h Mode er ng V) 7 6	Cable Loss – Pi ndcore 3 °C iPa e 3 Factor (dB) 0.22 0.22	Emission Level (dBµV/m) 50.39 39.99	Relative Humidit Test Voltage Antenna Polarity Limits (dBµV/m) 74.00 54.00	y 57.8% DC 7.2V by b Vertical Margin (dB) -23.61 -14.01	Value Type peak AVG
Remark: Factor = Ante EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	Mete Readi (dBµ) 50.1 39.7 48.9	ctor + Sour 18.5° 960h Mode er ng V) 7 6	Cable Loss – Pi ndcore 3 °C IPa e 3 Factor (dB) 0.22 0.22 2.64	Emission Level (dBµV/m) 50.39 39.99 51.60	Relative Humidit Test Voltage Antenna Polarity Limits (dBµV/m) (dBµV/m) 74.00 54.00 74.00	y 57.8% DC 7.2V by b Vertical Margin (dB) -23.61 -14.01 -22.40	Value Type peak AVG peak

<u>RESULT: Pass</u>

Note:

- 1. The amplitude of other spurious emissions from 1G to 40 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.



7. AC Power Line Conducted Emission Test


7.1 Measurement Limit

Frequency	Maximum RF Line Voltage	
	Q.P. (dBµV)	Average (dBµV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

7.2 Measurement Setup (Block Diagram of Configuration)

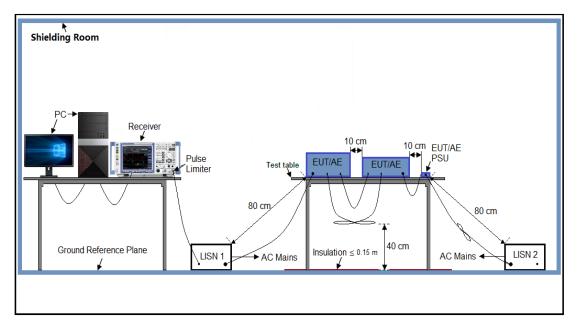



7.3 Preliminary Procedure of Line Conducted Emission Test


- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


7.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.


7.5 Measurement Results






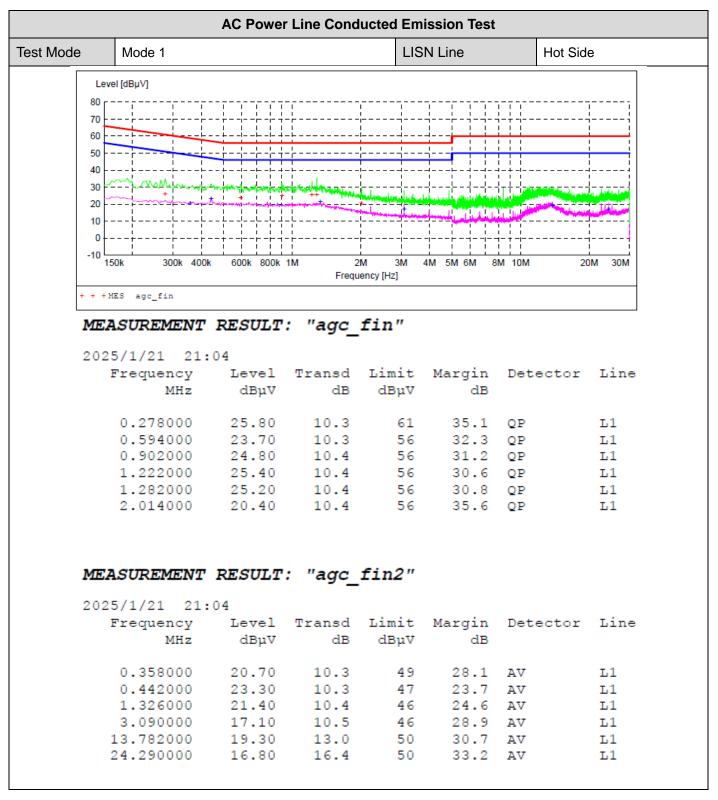

RESULT: Pass





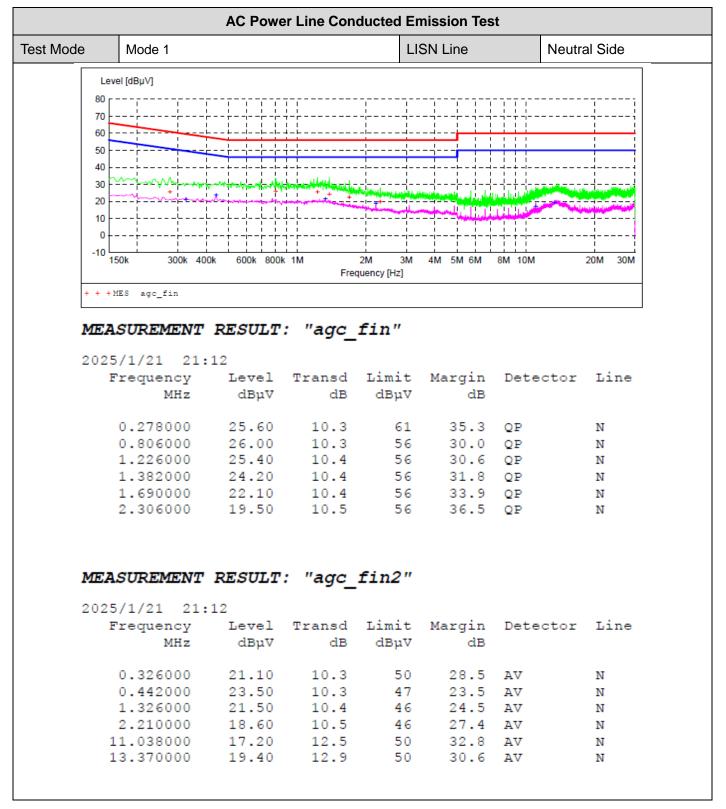

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

Report No.: AGC01110200738FE02A Page 26 of 26



Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC01110200738AP01A

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC01110200738AP02A

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.