


TEST REPORT

Applicant: Honor Device Co., Ltd.
Address: Suite 3401, Unit A, Building 6, Shum Yip Sky Park,
No. 8089, Hongli West Road, Xiangmihu Street,
Futian District, Shenzhen, Guangdong 518040,
People's Republic of China
Equipment Type: Wireless Bluetooth headset
Model Name: THO-T10
Brand Name: HONOR
FCC ID: 2AYGCTHO-T10L
Test Standard: 47 CFR Part 15 Subpart C
(refer section 3.1)
Sample Arrival Date: Nov. 25, 2022
Test Date: Nov. 30, 2022 - Dec. 27, 2022
Date of Issue: Feb. 21, 2023

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie Zhu**Checked by:** Ye Hongji**Approved by:** Liao Jianming
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Feb. 21, 2023</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	Factory Information	5
2.4	General Description for Equipment under Test (EUT)	5
2.5	Technical Information	6
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Test Verdict	8
4	GENERAL TEST CONFIGURATIONS	9
4.1	Test Environments	9
4.2	Test Equipment List	9
4.3	Test Software List	10
4.4	Measurement Uncertainty	10
4.5	Description of Test Setup	11
4.6	Measurement Results Explanation Example	14
5	TEST ITEMS	15
5.1	Antenna Requirements	15
5.2	Frequency Hopping Systems	16
5.3	Number of Hopping Frequencies	18
5.4	Peak Output Power	19

5.5	Occupied Bandwidth	20
5.6	Carrier Frequency Separation	21
5.7	Time of Occupancy (Dwell time)	22
5.8	Conducted Spurious Emission & Authorized-band band-edge	24
5.9	Conducted Emission	25
5.10	Radiated Spurious Emission	26
5.11	Band Edge (Restricted-band band-edge).....	28
ANNEX A	TEST RESULT	29
A.1	Number of Hopping Frequency	29
A.2	Peak Output Power	30
A.3	20 dB and 99% bandwidth	33
A.4	Hopping Frequency Separation.....	38
A.5	Average Time of Occupancy	39
A.6	Conducted Spurious Emissions & Authorized-band band-edge	42
A.7	Conducted Emissions.....	49
A.8	Radiated Spurious Emission	51
A.9	Band Edge (Restricted-band band-edge).....	65
ANNEX B	TEST SETUP PHOTOS	69
ANNEX C	EUT EXTERNAL PHOTOS	69
ANNEX D	EUT INTERNAL PHOTOS	69

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Honor Device Co., Ltd.
Address	Suite 3401, Unit A, Building 6, Shum Yip Sky Park, No. 8089, Hongli West Road, Xiangmihu Street, Futian District, Shenzhen, Guangdong 518040, People's Republic of China

2.2 Manufacturer Information

Manufacturer	Honor Device Co., Ltd.
Address	Suite 3401, Unit A, Building 6, Shum Yip Sky Park, No. 8089, Hongli West Road, Xiangmihu Street, Futian District, Shenzhen, Guangdong 518040, People's Republic of China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	Wireless Bluetooth headset
Model Name Under Test	THO-T10
Series Model Name	N/A
Description of Model name differentiation	N/A
Serial Number	N/A
Hardware Version	50108_30
Software Version	Thor-T10 7.1.0.10
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE)
-----------------------------------	------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	PIFA Antenna
Antenna Gain	-3.6 dBi
Antenna Impedance	50 Ω
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Test Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power	15.247(b)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Hopping Mode; Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Low/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	--	--	N/A	Note ³

Note ¹: Please refer to section 5.1

Note ²: $\pi/4$ -DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in $\pi/4$ -DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	47% to 59%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+21.3°C to +24.9°C
Working Voltage of the EUT	NV (Normal Voltage)	3.8 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY46471071	2022.07.26	2023.07.25
Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2022.05.19	2023.05.18
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2022.01.04	2023.01.03
Spectrum Analyzer	KEYSIGHT	N9020A	MY50531259	2022.09.06	2023.09.05
Signaling Unit	ROHDE&SCHWARZ	CMW500	171150	2022.06.29	2023.06.28
Test Antenna-Horn (1-18 GHz)	SCHWARZBECK	BBHA 9120D	02460	2021.05.19	2024.05.08
Test Antenna-Horn (18-40 GHz)	A-INFO	LB- 180400KF	J211060273	2021.07.02	2024.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2021.08.16	2024.08.15
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2022.09.09	2023.09.08
Test Antenna-Bi-Log (30 MHz-1 GHz)	SCHWARZBECK	VULB 9168	00883	2022.04.01	2025.03.31
Test Antenna-Loop (9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2021.04.16	2024.04.15
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2021.08.15	2024.08.14
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2022.09.09	2023.09.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2022.06.01	2023.05.31
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m* 2.8m	N/A	2022.02.19	2025.02.18
Amplifier (1-12GHz)	COM-MV	LSCX_LNA 1-12G-01	180602	2020.09.08	2023.09.07
Amplifier (7-18GHz)	COM-MV	XKu_LNA7- 18G-01	180601	2020.09.08	2023.09.07
Amplifier (18-40GHz)	COM-MV	KA_LNA18- 40G-01	18050001	2020.09.08	2023.09.07

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V19.8.28.435	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.82°C
Humidity	4.1%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

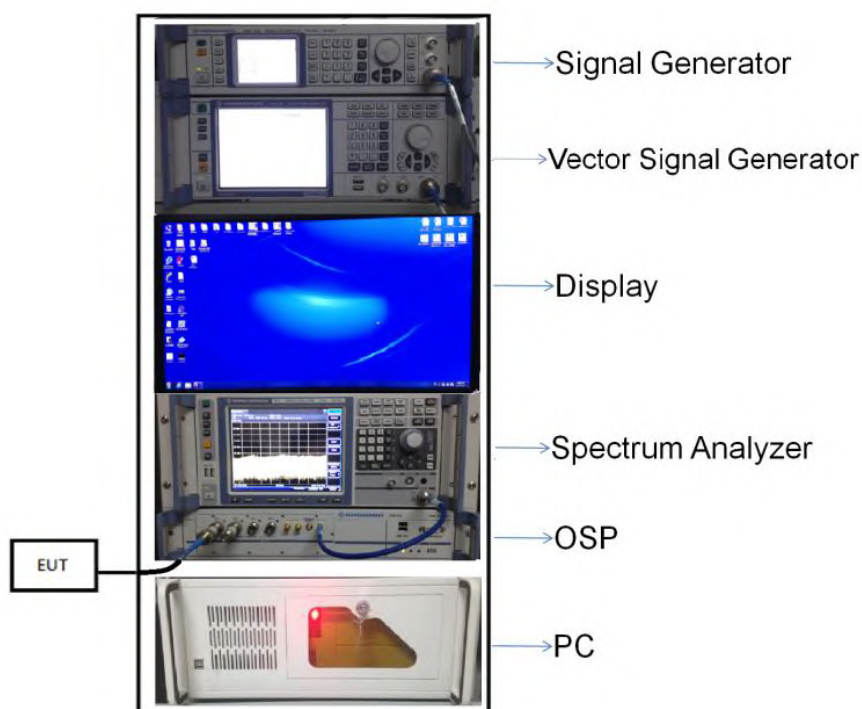


(Diagram 1)

4.5.2 For AC Power Supply Port Test

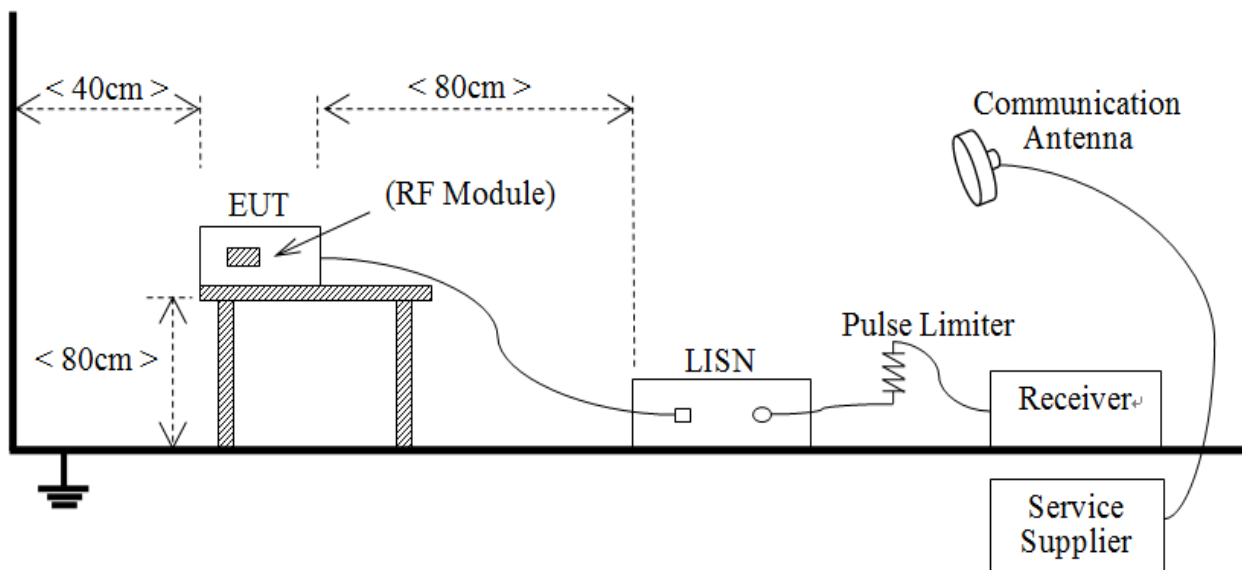


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

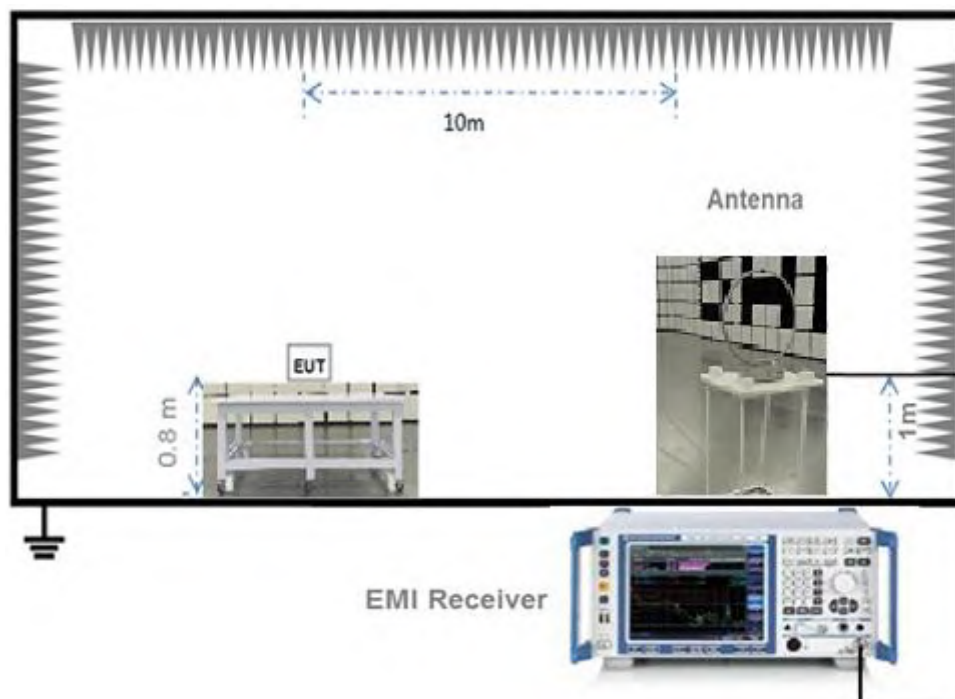


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

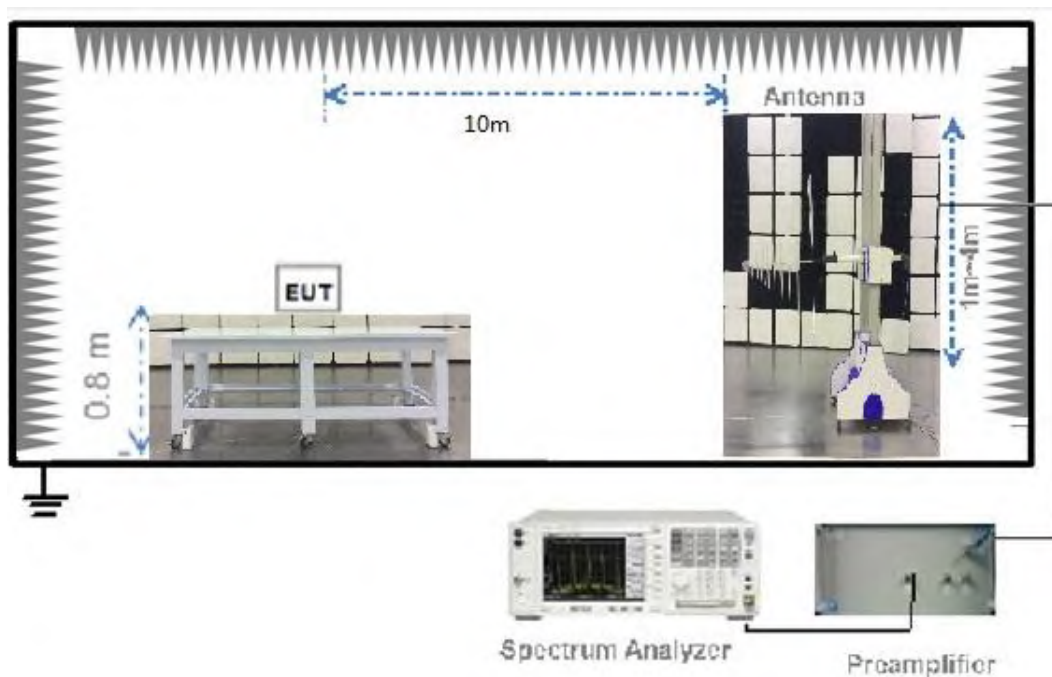

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

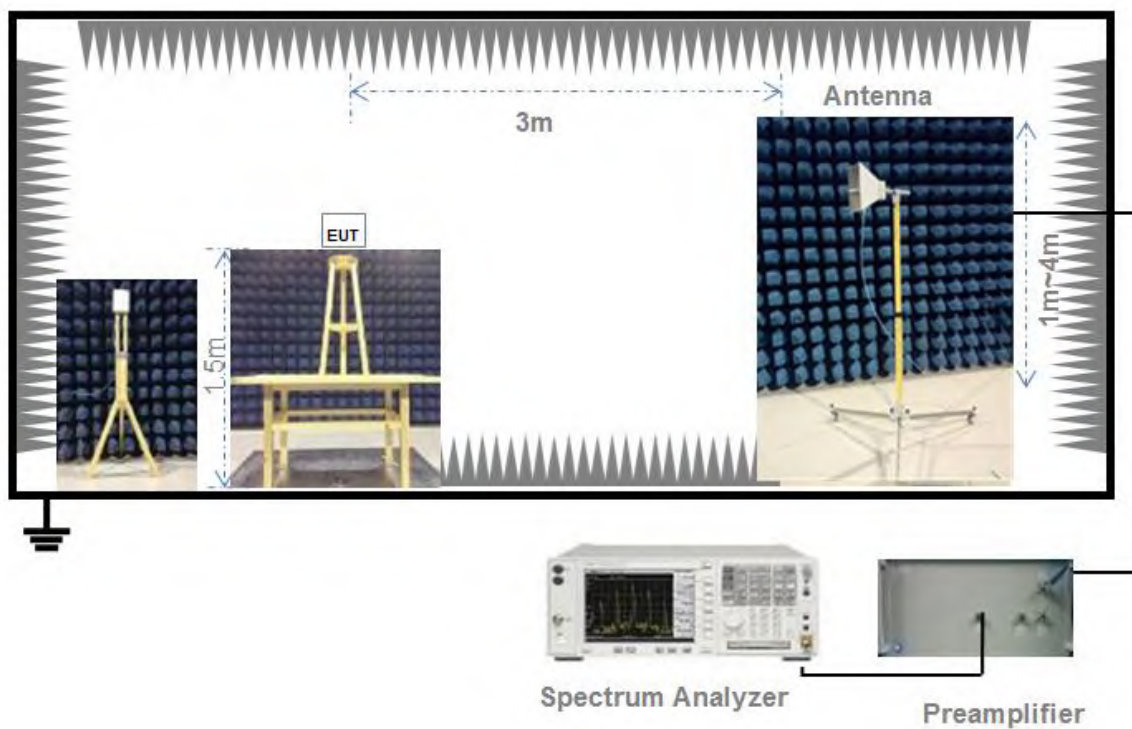

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.

Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.


For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Reference Documents

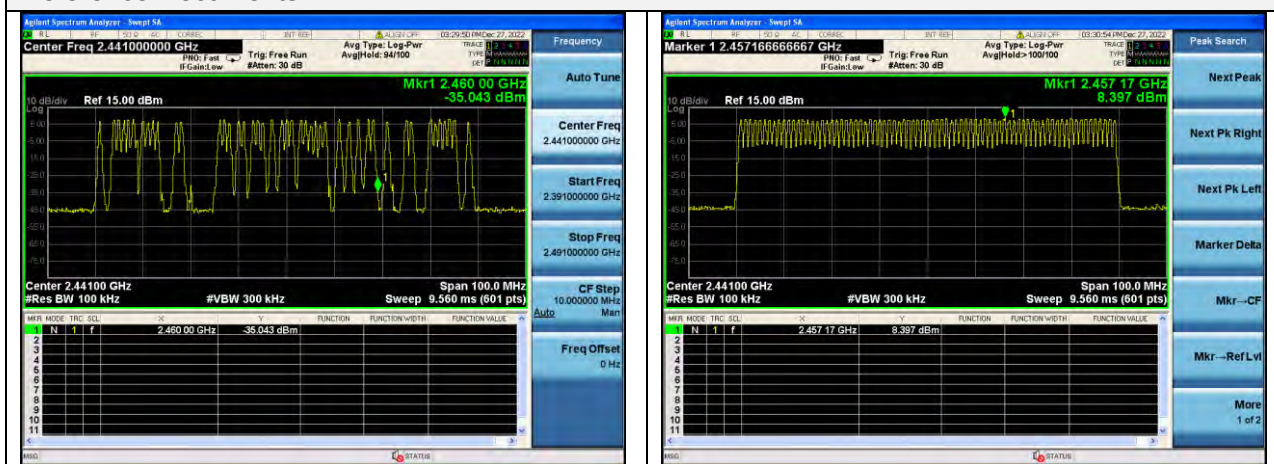

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.6.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For AFH Mode:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$

For DH3 package type

$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$

$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$

For DH5 package type

$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$

$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5.

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = 20*log[Field Strength (μV/m)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.10.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

Test Plots

GFSK 2.4 GHz ~ 2.4415 GHz

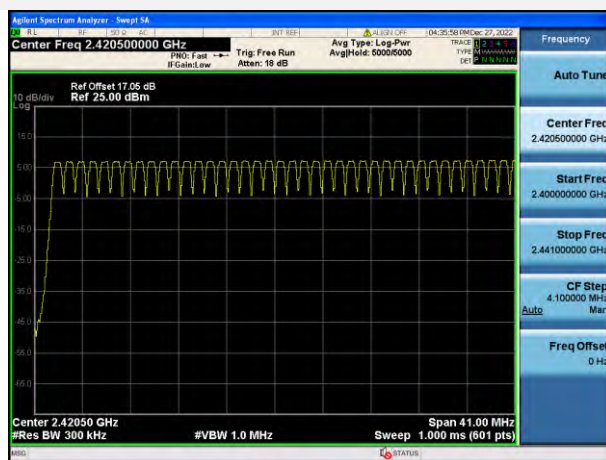

GFSK 2.4415 GHz ~ 2.4835 GHz



8-DPSK 2.4 GHz ~ 2.4415 GHz



8-DPSK 2.4415 GHz ~ 2.4835 GHz




A.2 Peak Output Power

Peak Power Test Data

Channel	Measured Output Peak Power						Limit		Verdict
	GFSK		π/4-DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	7.17	5.21	9.86	9.68	10.40	10.97	21	125	Pass
Middle	7.59	5.74	10.23	10.54	10.76	11.92			Pass
High	8.02	6.34	10.66	11.63	11.17	13.09			Pass

Test Plots

GFSK LOW CHANNEL

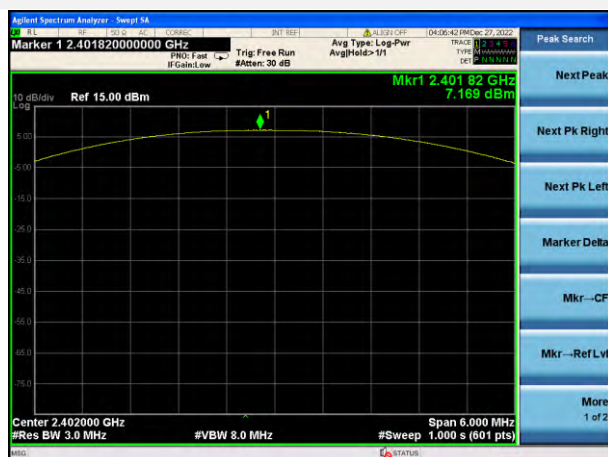

GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL




$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL



$\pi/4$ -DQPSK HIGH CHANNEL

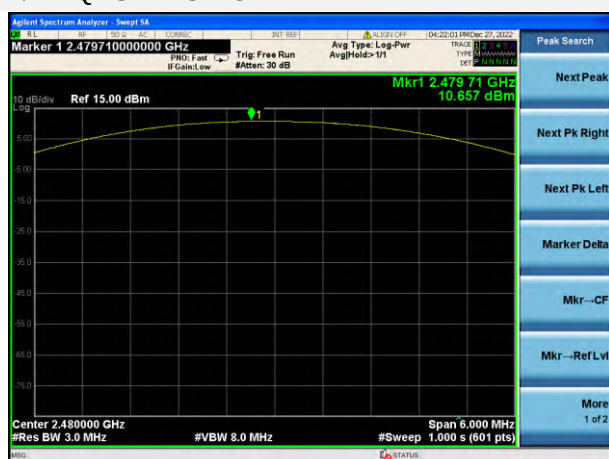

8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



A.3 20 dB and 99% bandwidth

Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.950000	0.844650
Middle	0.955000	0.844220
High	0.955000	0.842990
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.330000	1.172700
Middle	1.330000	1.177200
High	1.330000	1.173600
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.305000	1.171100
Middle	1.310000	1.171800
High	1.305000	1.173700

Test Plots

20 dB Bandwidth

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



π/4-DQPSK LOW CHANNEL



π/4-DQPSK MIDDLE CHANNEL



Agilent Spectrum Analyzer - Setup #4

Center Freq 2.480000000 GHz

Span 3.000 MHz

Ref Offset 17.07 dB

Ref 15.00 dBm

PRO: Wide

Trig Free Run

IF Gain: 1.0e

Atten: 3.0 dB

Mag Type: Log-Pwr

Mag Hold: 2020

Trace 1

Trace 2

Trace 3

Trace 4

Trace 5

Trace 6

Trace 7

Trace 8

Trace 9

Trace 10

Trace 11

Trace 12

Trace 13

Trace 14

Trace 15

Trace 16

Trace 17

Trace 18

Trace 19

Trace 20

Trace 21

Trace 22

Trace 23

Trace 24

Trace 25

Trace 26

Trace 27

Trace 28

Trace 29

Trace 30

Trace 31

Trace 32

Trace 33

Trace 34

Trace 35

Trace 36

Trace 37

Trace 38

Trace 39

Trace 40

Trace 41

Trace 42

Trace 43

Trace 44

Trace 45

Trace 46

Trace 47

Trace 48

Trace 49

Trace 50

Trace 51

Trace 52

Trace 53

Trace 54

Trace 55

Trace 56

Trace 57

Trace 58

Trace 59

Trace 60

Trace 61

Trace 62

Trace 63

Trace 64

Trace 65

Trace 66

Trace 67

Trace 68

Trace 69

Trace 70

Trace 71

Trace 72

Trace 73

Trace 74

Trace 75

Trace 76

Trace 77

Trace 78

Trace 79

Trace 80

Trace 81

Trace 82

Trace 83

Trace 84

Trace 85

Trace 86

Trace 87

Trace 88

Trace 89

Trace 90

Trace 91

Trace 92

Trace 93

Trace 94

Trace 95

Trace 96

Trace 97

Trace 98

Trace 99

Trace 100

Trace 101

Trace 102

Trace 103

Trace 104

Trace 105

Trace 106

Trace 107

Trace 108

Trace 109

Trace 110

Trace 111

Trace 112

Trace 113

Trace 114

Trace 115

Trace 116

Trace 117

Trace 118

Trace 119

Trace 120

Trace 121

Trace 122

Trace 123

Trace 124

Trace 125

Trace 126

Trace 127

Trace 128

Trace 129

Trace 130

Trace 131

Trace 132

Trace 133

Trace 134

Trace 135

Trace 136

Trace 137

Trace 138

Trace 139

Trace 140

Trace 141

Trace 142

Trace 143

Trace 144

Trace 145

Trace 146

Trace 147

Trace 148

Trace 149

Trace 150

Trace 151

Trace 152

Trace 153

Trace 154

Trace 155

Trace 156

Trace 157

Trace 158

Trace 159

Trace 160

Trace 161

Trace 162

Trace 163

Trace 164

Trace 165

Trace 166

Trace 167

Trace 168

Trace 169

Trace 170

Trace 171

Trace 172

Trace 173

Trace 174

Trace 175

Trace 176

Trace 177

Trace 178

Trace 179

Trace 180

Trace 181

Trace 182

Trace 183

Trace 184

Trace 185

Trace 186

Trace 187

Trace 188

Trace 189

Trace 190

Trace 191

Trace 192

Trace 193

Trace 194

Trace 195

Trace 196

Trace 197

Trace 198

Trace 199

Trace 200

Trace 201

Trace 202

Trace 203

Trace 204

Trace 205

Trace 206

Trace 207

Trace 208

Trace 209

Trace 210

Trace 211

Trace 212

Trace 213

Trace 214

Trace 215

Trace 216

Trace 217

Trace 218

Trace 219

Trace 220

Trace 221

Trace 222

Trace 223

Trace 224

Trace 225

Trace 226

Trace 227

Trace 228

Trace 229

Trace 230

Trace 231

Trace 232

Trace 233

Trace 234

Trace 235

Trace 236

Trace 237

Trace 238

Trace 239

Trace 240

Trace 241

Trace 242

Trace 243

Trace 244

Trace 245

Trace 246

Trace 247

Trace 248

Trace 249

Trace 250

Trace 251

Trace 252

Trace 253

Trace 254

Trace 255

Trace 256

Trace 257

Trace 258

Trace 259

Trace 260

Trace 261

Trace 262

Trace 263

Trace 264

Trace 265

Trace 266

Trace 267

Trace 268

Trace 269

Trace 270

Trace 271

Trace 272

Trace 273

Trace 274

Trace 275

Trace 276

Trace 277

Trace 278

Trace 279

Trace 280

Trace 281

Trace 282

Trace 283

Trace 284

Trace 285

Trace 286

Trace 287

Trace 288

Trace 289

Trace 290

Trace 291

Trace 292

Trace 293

Trace 294

Trace 295

Trace 296

Trace 297

Trace 298

Trace 299

Trace 300

Trace 301

Trace 302

Trace 303

Trace 304

Trace 305

Trace 306

Trace 307

Trace 308

Trace 309

Trace 310

Trace 311

Trace 312

Trace 313

Trace 314

Trace 315

Trace 316

Trace 317

Trace 318

Trace 319

Trace 320

Trace 321

Trace 322

Trace 323

Trace 324

Trace 325

Trace 326

Trace 327

Trace 328

Trace 329

Trace 330

Trace 331

Trace 332

Trace 333

Trace 334

Trace 335

Trace 336

Trace 337

Trace 338

Trace 339

Trace 340

Trace 341

Trace 342

Trace 343

Trace 344

Trace 345

Trace 346

Trace 347

Trace 348

Trace 349

Trace 350

Trace 351

Trace 352

Trace 353

Trace 354

Trace 355

Trace 356

Agilent Spectrum Analyzer - Setup FA

Center Freq 2.402000000 GHz

Ref Offset 17.13 dB
Ref 15.00 dBm

ΔMkr2 1.305 MHz
-0.570 dB

Span 3.000 MHz
#Sweep 500.0 ms (601 pts)

VBW 91 kHz

MNR	MODE	TRC	SCN	F	ΔF	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N			2.401990 GHz	4.120 dBm			
2	AS			1.305 MHz (Δ)	-0.570 dB			
3	F			2.401350 GHz	-15.881 dBm			

Agilent Spectrum Analyzer - Sweep NA

Center Freq 2.441000000 GHz

PWR: Wide + Trig: Free Run Avg Type: Log-Pwr
@ Gain-Low Attenu: 0 dB Avg/Hold: 20/20

Ref Offset 17.03 dB
Ref 15.00 dBm

DMkr2 1.310 MHz
0.183 dB

Center 2.441000 GHz Span 3.000 MHz
#BW 30 kHz VBW 91 kHz #Sweep 500.0 ms (601 pts)

MNR	MODE	TRC	SCL	F	ΔF	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	f		2.440 980 GHz	-	4.639 dBm		
2	AS	f	(A)	1.310 MHz (A)	-	0.183 dB		
3	F	f		2.440 346 GHz	-	-16.322 dBm		

Agilent Spectrum Analyzer - Sweep RA

Center Freq 2.480000000 GHz

Ref Offset 17.07 dB

Ref 15.00 dBm

Span 3.000 MHz

RBW 91 kHz

Sweep 500.0 ms (601 pts)

Frequency

Auto Tune

Center Freq 2.480000000 GHz

Start Freq 2.479500000 GHz

Stop Freq 2.481500000 GHz

CF Stop 300.000 MHz

Auto

Freq Offset 0 Hz

STATUS

99% Bandwidth

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL

 $\pi/4$ -DQPSK LOW CHANNEL $\pi/4$ -DQPSK MIDDLE CHANNEL

$\pi/4$ -DQPSK HIGH CHANNEL



8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL



A.4 Hopping Frequency Separation

Test Data


Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	0.985	0.637	Pass
8-DPSK	1.010	0.873	Pass

Test Plots

GFSK



8-DPSK

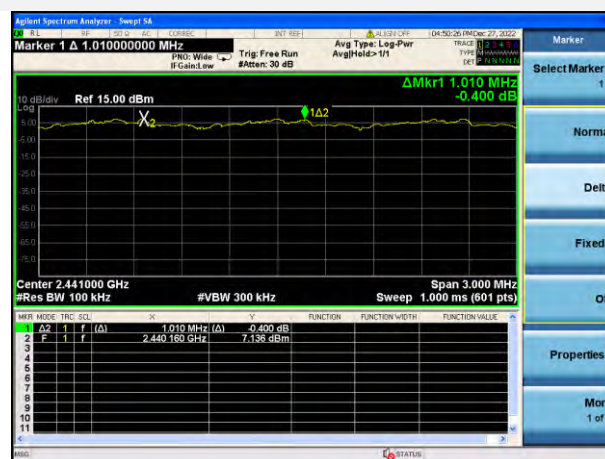


A.5 Average Time of Occupancy

Test Data


GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38240	122.368	0.4	Pass
DH 3	1.64100	262.560	0.4	Pass
DH 5	2.88800	308.053	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.39360	125.952	0.4	Pass
DH 3	1.64100	262.560	0.4	Pass
DH 5	2.88800	308.053	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38400	61.440	0.4	Pass
DH 3	1.64100	131.280	0.4	Pass
DH 5	2.88800	154.027	0.4	Pass

Test Plots


GFSK DH1

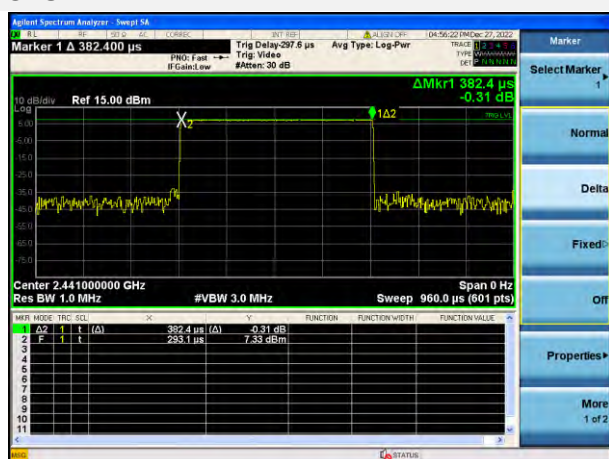


GFSK DH3

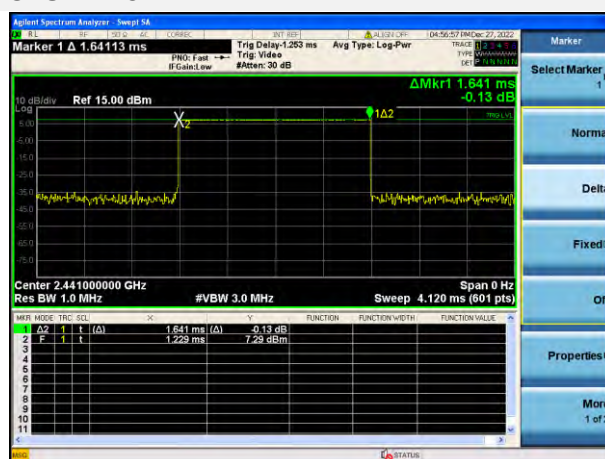


GFSK DH5

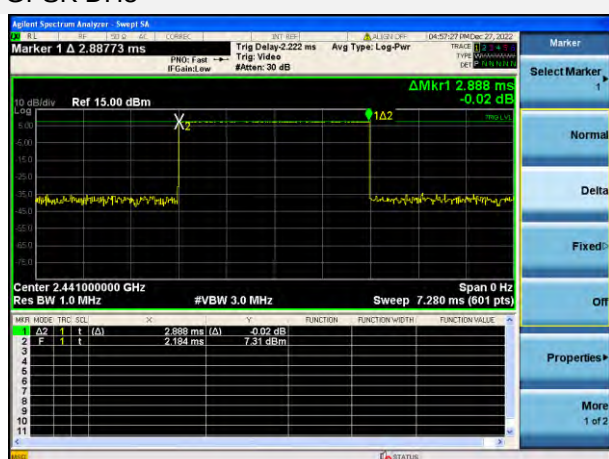


8-DPSK DH1

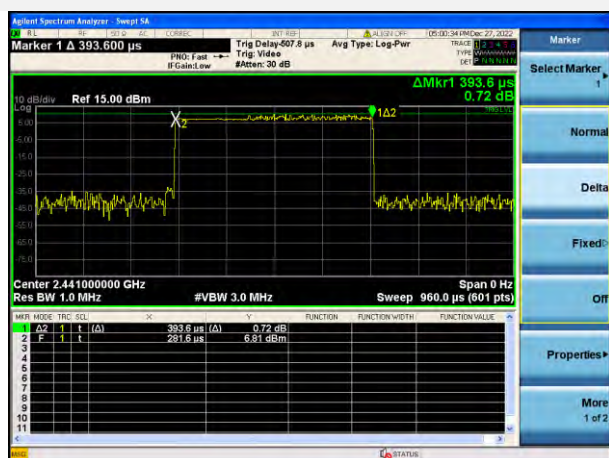


8-DPSK DH3

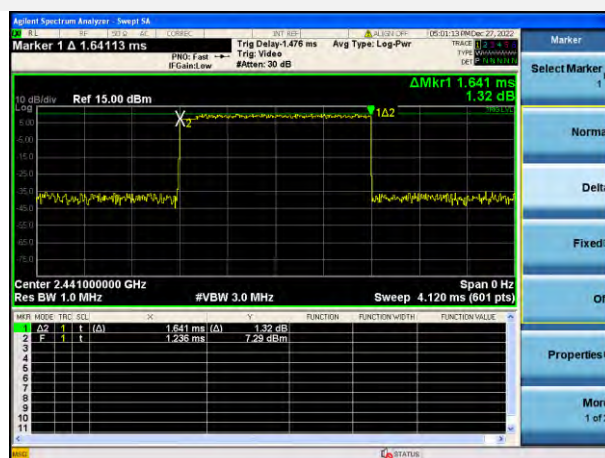


8-DPSK DH5

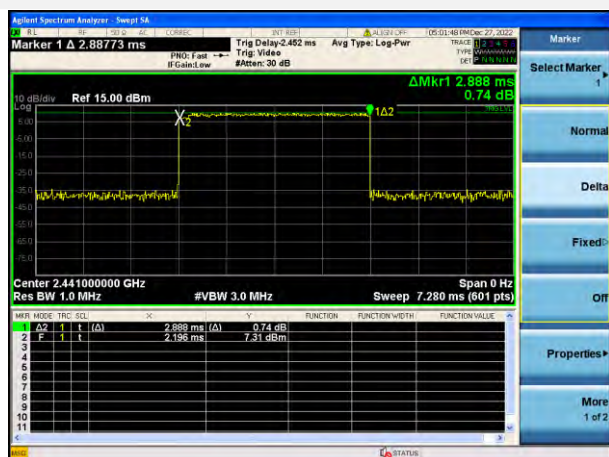


AFH Mode DH1

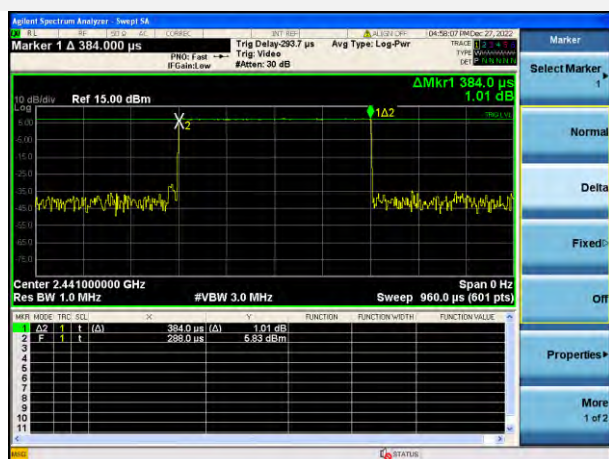

AFH Mode DH3

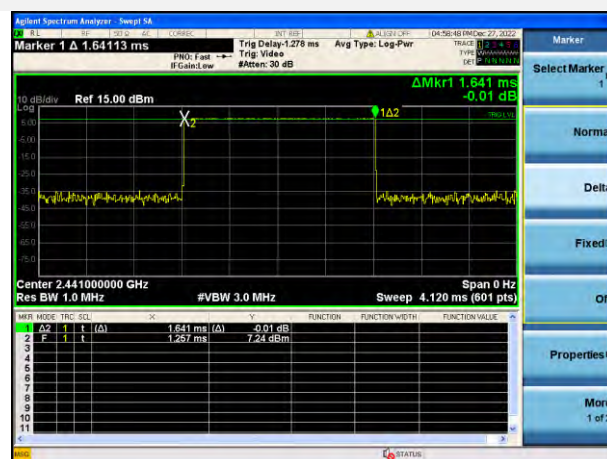

AFH Mode DH5

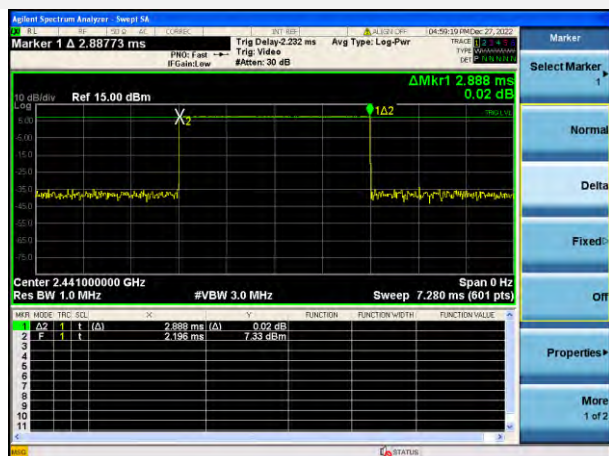

A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-30.18	6.85	-13.16	Pass
Middle	-29.57	7.26	-12.74	Pass
High	-29.40	7.63	-12.37	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-28.94	6.80	-13.20	Pass
Middle	-29.99	6.92	-13.08	Pass
High	-29.79	7.58	-12.42	Pass
Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-29.60	7.63	-12.37	Pass
8-DPSK	-28.82	7.63	-12.38	Pass

Test Plots

GFSK LOW CHANNEL, CARRIER LEVEL




GFSK LOW CHANNEL, BAND EDGE




GFSK LOW CHANNEL, SPURIOUS

30 MHz ~ 3 GHz

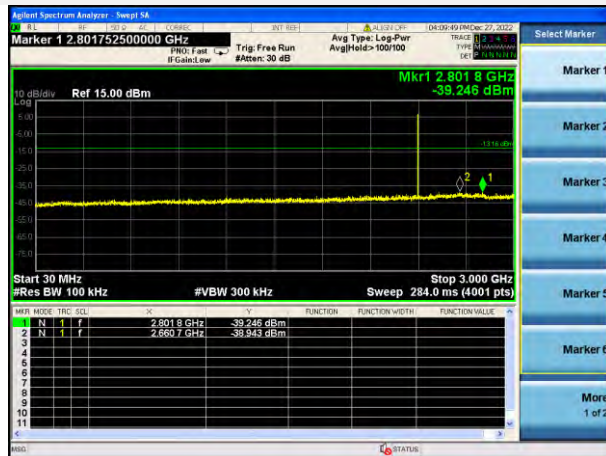

GFSK LOW CHANNEL, SPURIOUS

3 GHz ~ 25 GHz

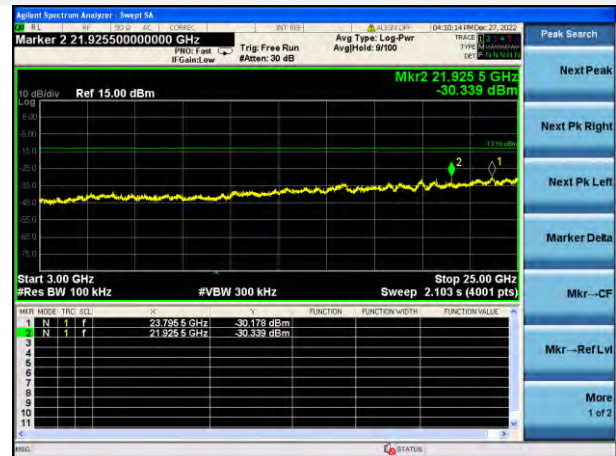


GFSK MIDDLE CHANNEL, CARRIER LEVEL



GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz



GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

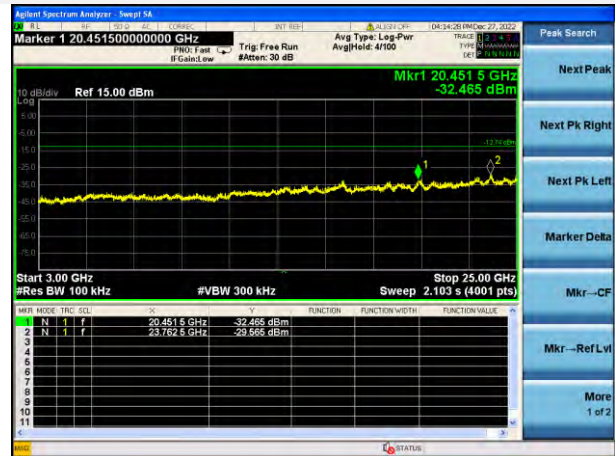


GFSK HIGH CHANNEL, CARRIER LEVEL




GFSK HIGH CHANNEL, BAND EDGE



GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

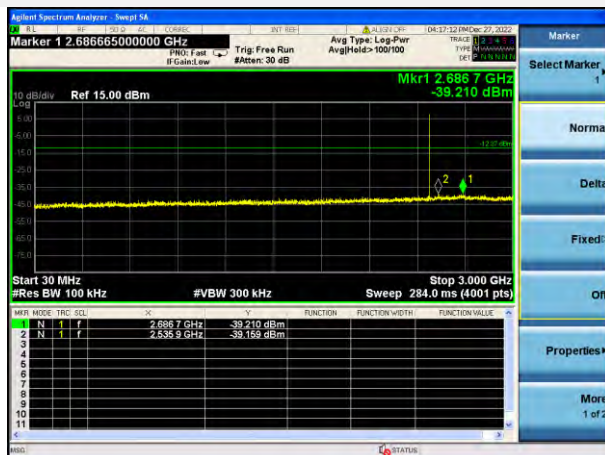



GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

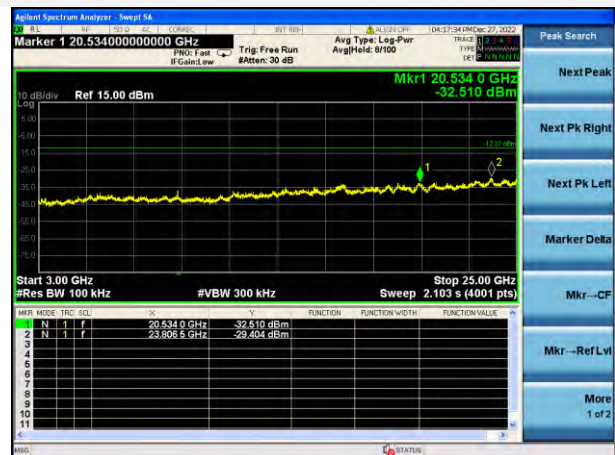

8-DPSK LOW CHANNEL, CARRIER LEVEL




8-DPSK LOW CHANNEL, BAND EDGE

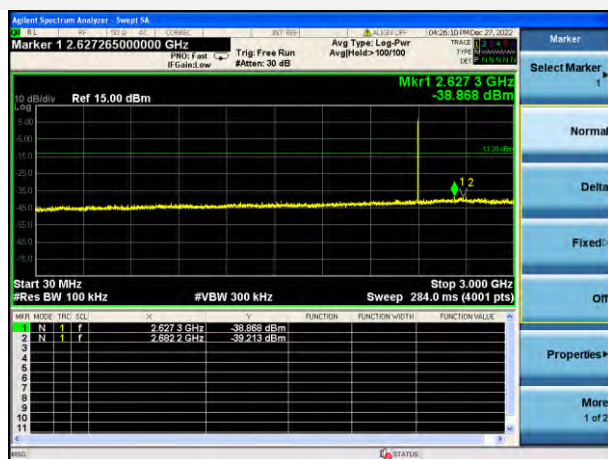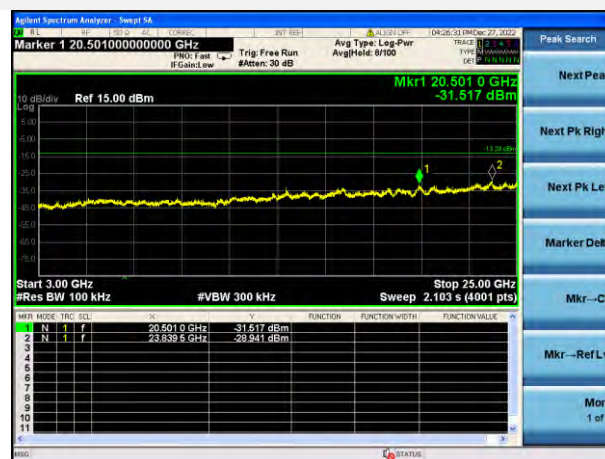8-DPSK LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz8-DPSK LOW CHANNEL, SPURIOUS
3 GHz ~ 25 GHz


8-DPSK MIDDLE CHANNEL, CARRIER LEVEL



8-DPSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

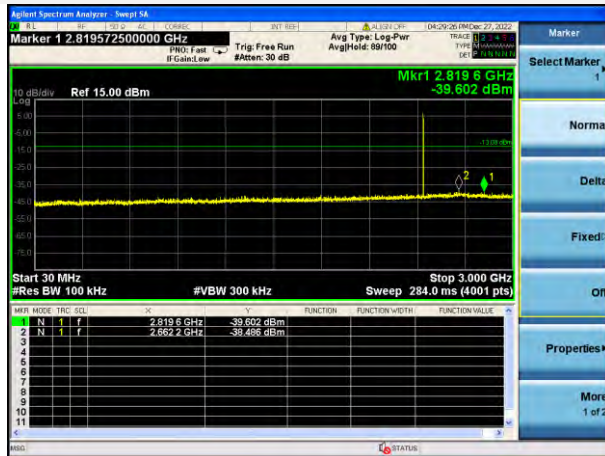

8-DPSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

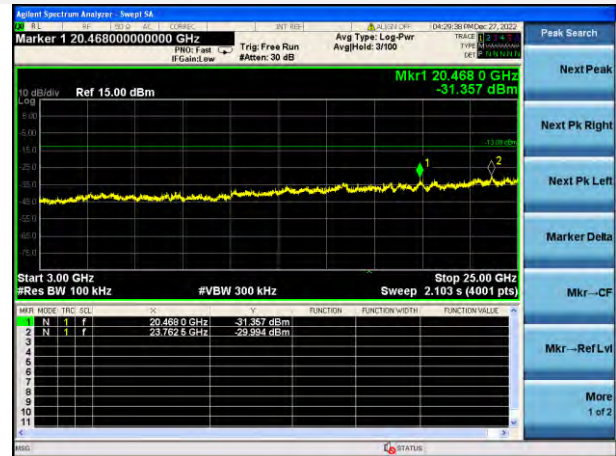


8-DPSK HIGH CHANNEL, CARRIER LEVEL




8-DPSK HIGH CHANNEL, BAND EDGE




8-DPSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

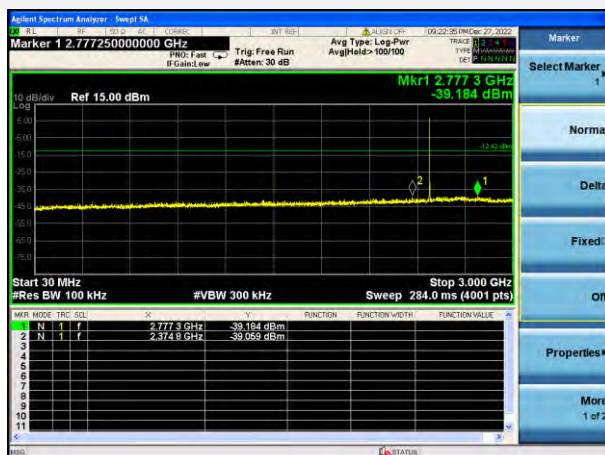

8-DPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

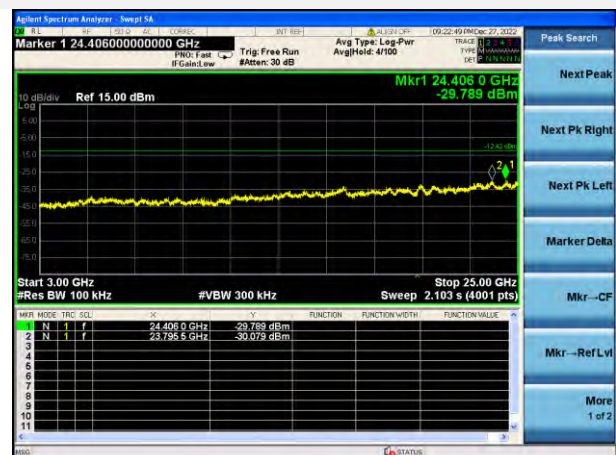



GFSK HOPPING, CARRIER LEVEL

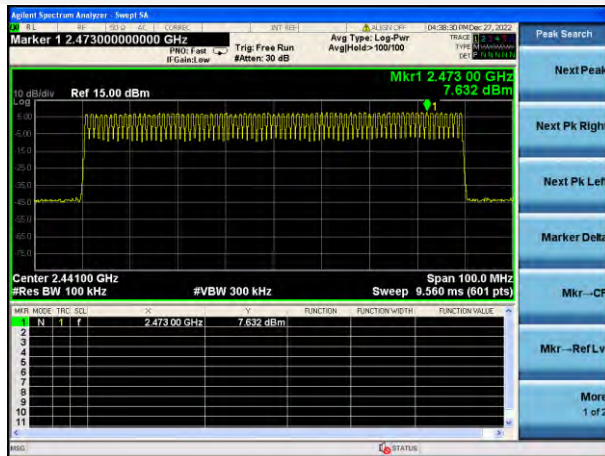


GFSK HOPPING BAND EDGE (LOW)



GFSK HOPPING BAND EDGE (HIGH)

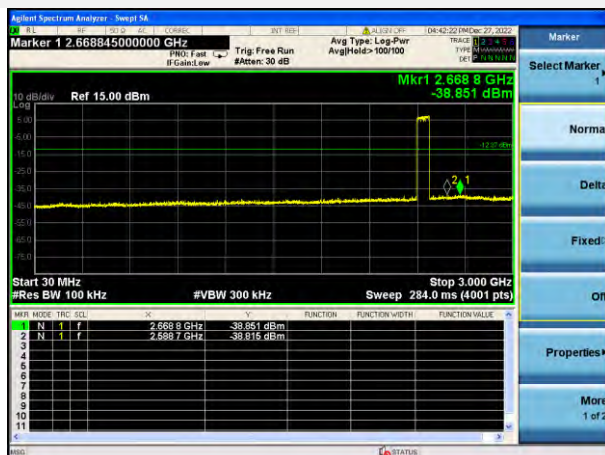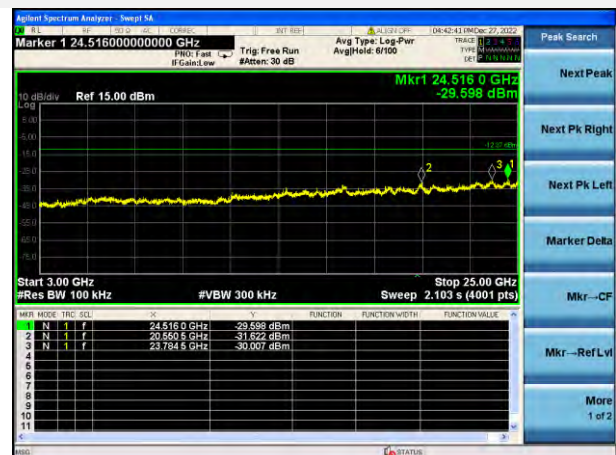GFSK Hopping Mode, SPURIOUS
30 MHz ~ 3 GHzGFSK Hopping Mode, SPURIOUS
3GHz ~ 25 GHz



8-DPSK HOPPING, CARRIER LEVEL

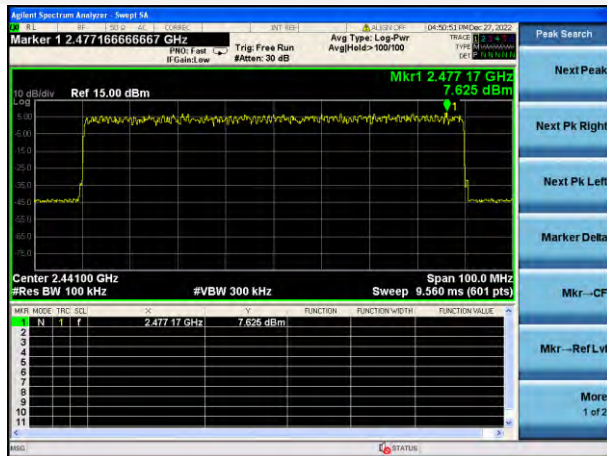

8-DPSK Hopping BAND EDGE (LOW)



8-DPSK Hopping BAND EDGE (HIGH)

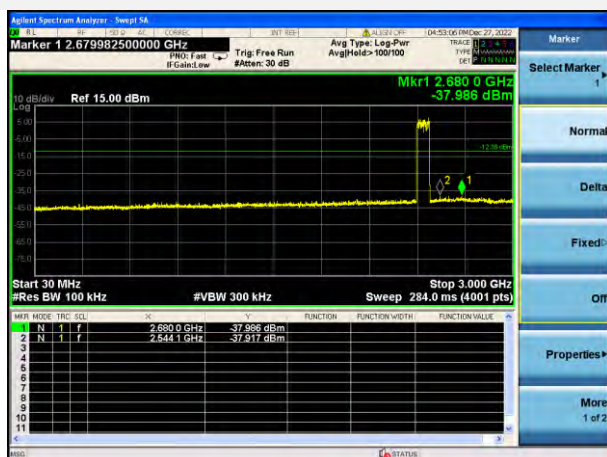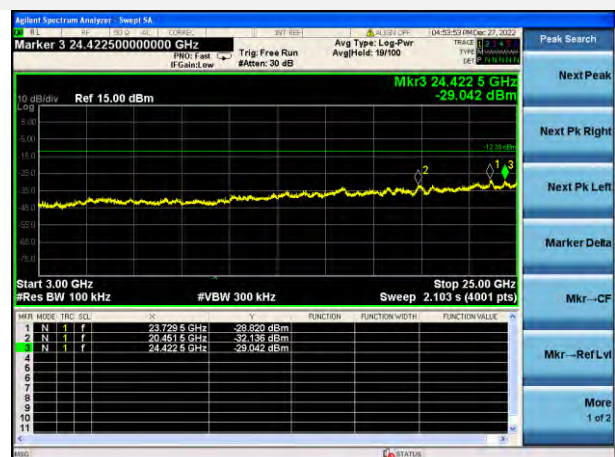8-DPSK Hopping Mode, SPURIOUS
30 MHz ~ 3 GHz8-DPSK Hopping Mode, SPURIOUS
3GHz ~ 25 GHz

A.7 Conducted Emissions

Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

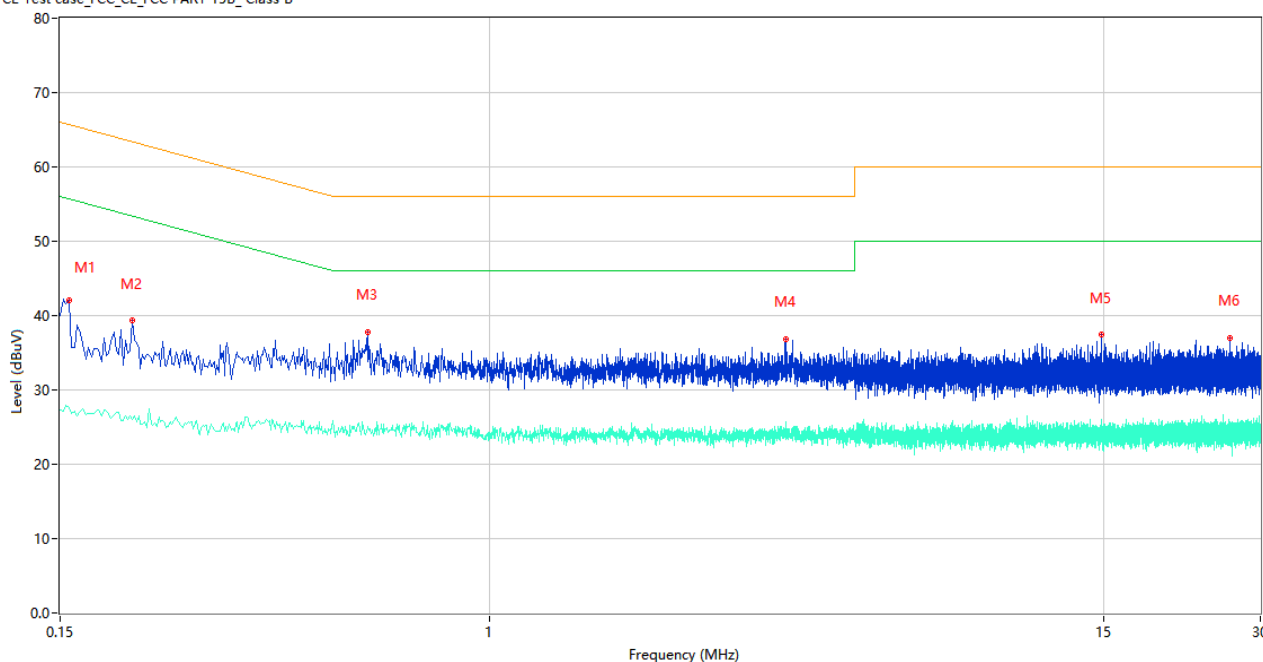

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.156	42.12	10.09	65.67	23.55	Peak	L	Pass
1**	0.156	27.66	10.09	55.67	28.01	AV	L	Pass
2	0.206	39.30	10.05	63.37	24.07	Peak	L	Pass
2**	0.206	25.96	10.05	53.37	27.41	AV	L	Pass
3	0.584	37.85	10.30	56.00	18.15	Peak	L	Pass
3**	0.584	25.01	10.30	46.00	20.99	AV	L	Pass
4	3.702	36.83	10.34	56.00	19.17	Peak	L	Pass
4**	3.702	24.00	10.34	46.00	22.00	AV	L	Pass
5	14.890	37.42	10.47	60.00	22.58	Peak	L	Pass
5**	14.890	24.40	10.47	50.00	25.60	AV	L	Pass
6	26.204	37.01	10.45	60.00	22.99	Peak	L	Pass
6**	26.204	24.90	10.45	50.00	25.10	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

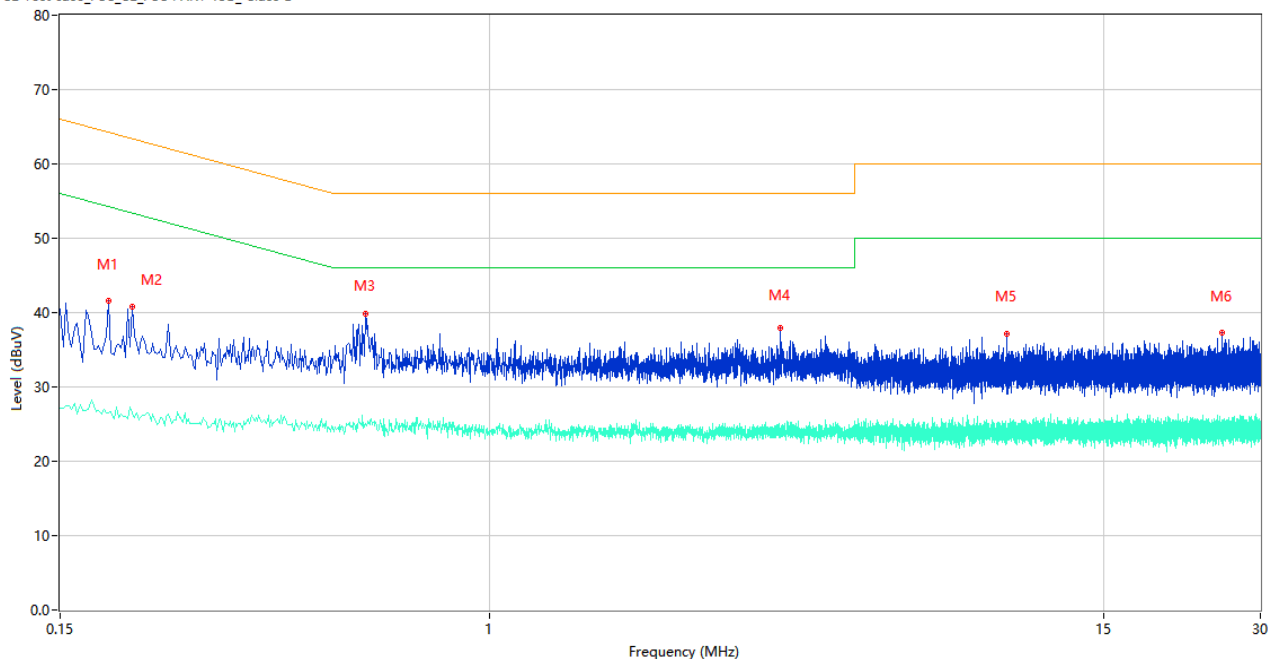

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.186	41.55	10.06	64.21	22.66	Peak	N	Pass
1**	0.186	26.53	10.06	54.21	27.68	AV	N	Pass
2	0.206	40.87	10.05	63.37	22.50	Peak	N	Pass
2**	0.206	26.48	10.05	53.37	26.89	AV	N	Pass
3	0.578	39.91	10.28	56.00	16.09	Peak	N	Pass
3**	0.578	25.07	10.28	46.00	20.93	AV	N	Pass
4	3.612	37.97	10.44	56.00	18.03	Peak	N	Pass
4**	3.612	23.82	10.44	46.00	22.18	AV	N	Pass
5	9.780	37.20	10.11	60.00	22.80	Peak	N	Pass
5**	9.780	24.35	10.11	50.00	25.65	AV	N	Pass
6	25.394	37.25	10.55	60.00	22.75	Peak	N	Pass
6**	25.394	25.57	10.55	50.00	24.43	AV	N	Pass

A.8 Radiated Spurious Emission

Note ¹: The symbol of "--" in the table which means not application.

Note ²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note ³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.

Note ⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Test Data and Plots


30 MHz to 1 GHz, ANT H

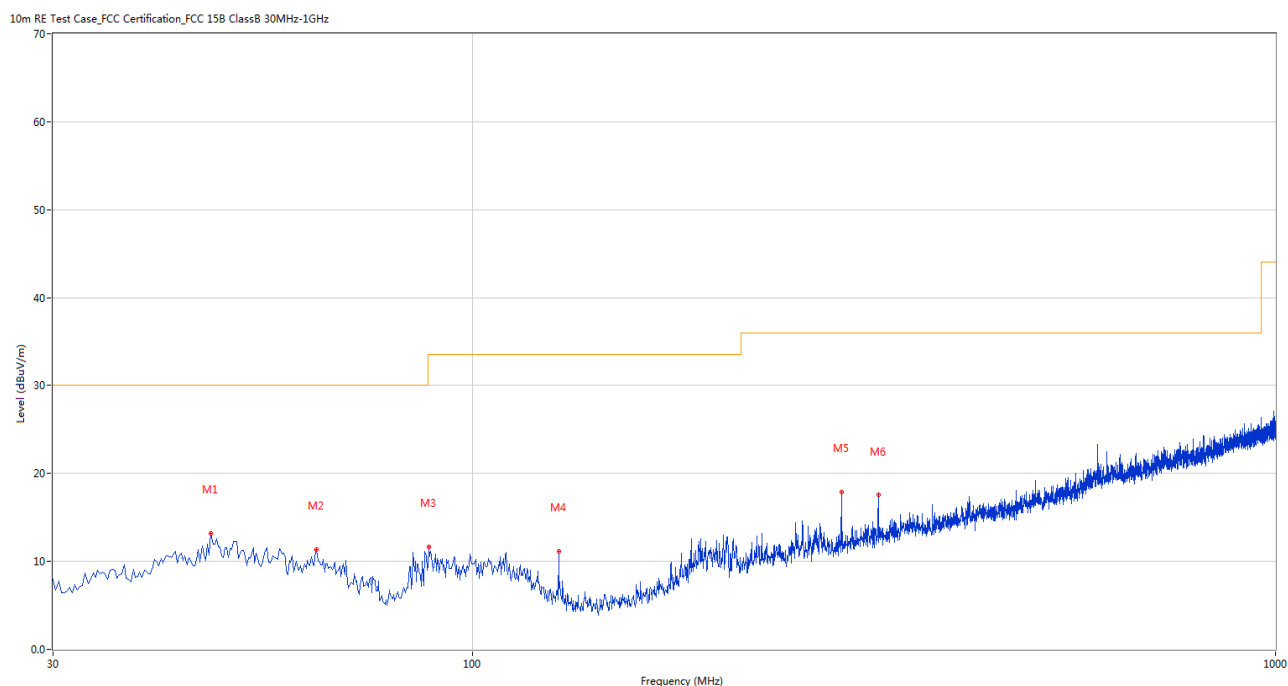

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.213	13.19	-26.38	30.0	16.81	Peak	291.00	200	Horizontal	Pass
2	63.942	11.38	-28.13	30.0	18.62	Peak	146.00	200	Horizontal	Pass
3	88.185	11.63	-30.19	33.5	21.87	Peak	50.00	200	Horizontal	Pass
4	127.946	11.13	-31.06	33.5	22.37	Peak	174.00	100	Horizontal	Pass
5	287.956	17.92	-25.19	36.0	18.08	Peak	360.00	200	Horizontal	Pass
6	319.958	17.53	-24.53	36.0	18.47	Peak	360.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

10m RE Test Case_FCC Certification_FCC 15B ClassB 30MHz-1GHz

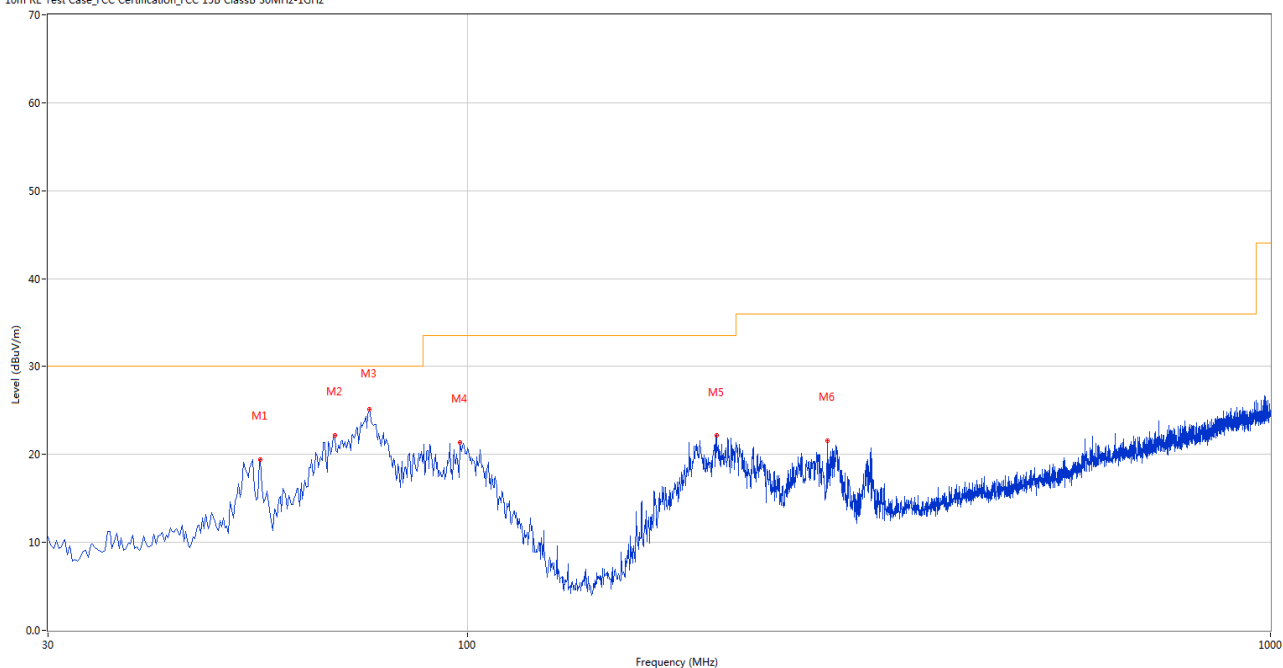


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	55.214	19.40	-26.63	30.0	10.60	Peak	146.00	100	Vertical	Pass
2	68.305	22.20	-29.40	30.0	7.80	Peak	103.00	100	Vertical	Pass
3	75.336	25.13	-31.89	30.0	4.87	Peak	171.00	200	Vertical	Pass
4	97.883	21.40	-28.24	33.5	12.10	Peak	78.00	200	Vertical	Pass
5	204.071	22.22	-27.87	33.5	11.28	Peak	192.00	100	Vertical	Pass
6	280.925	21.58	-25.69	36.0	14.42	Peak	177.00	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

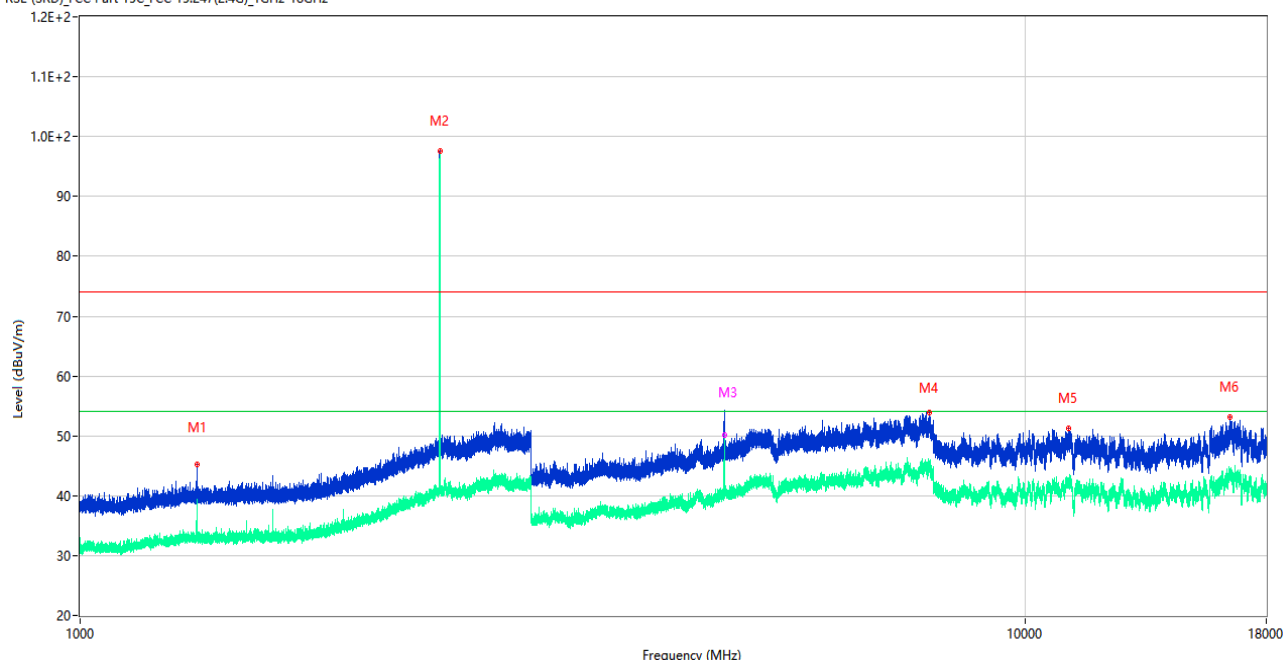

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.200	45.29	-16.68	74.0	28.71	Peak	251.00	400	Horizontal	Pass
1**	1331.200	32.96	-16.68	54.0	21.04	AV	251.00	400	Horizontal	Pass
2	2402.100	97.64	-10.10	--	--	Peak	177.00	100	Horizontal	N/A
2**	2402.100	97.37	-10.10	--	--	AV	177.00	100	Horizontal	N/A
3	4804.250	53.20	-2.74	74.0	20.80	Peak	186.00	150	Horizontal	Pass
3**	4804.250	50.20	-2.74	54.0	3.80	AV	186.00	150	Horizontal	Pass
4	7915.500	53.93	1.95	74.0	20.07	Peak	296.00	100	Horizontal	Pass
4**	7915.500	44.70	1.95	54.0	9.30	AV	296.00	100	Horizontal	Pass
5	11111.250	51.35	-1.00	74.0	22.65	Peak	149.00	300	Horizontal	Pass
5**	11111.250	41.79	-1.00	54.0	12.21	AV	149.00	300	Horizontal	Pass
6	16486.426	53.16	0.40	74.0	20.84	Peak	19.00	400	Horizontal	Pass
6**	16486.426	43.95	0.40	54.0	10.05	AV	19.00	400	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

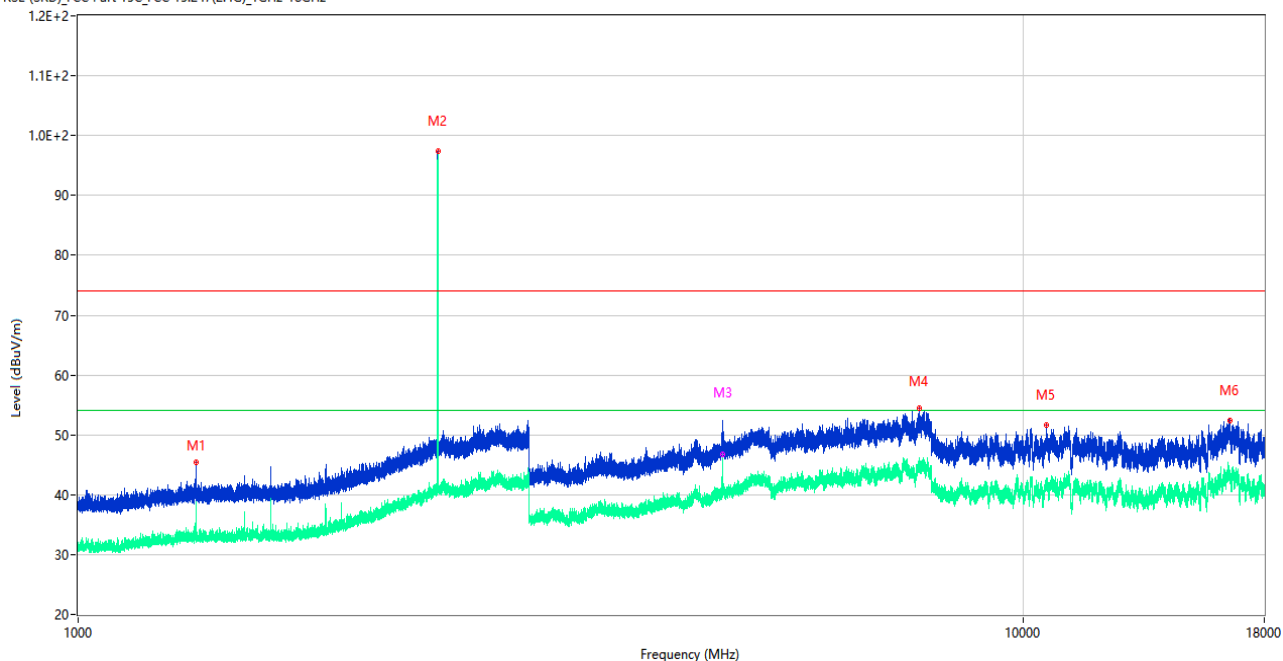

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.900	45.45	-16.70	74.0	28.55	Peak	234.00	300	Vertical	Pass
1**	1331.900	37.61	-16.70	54.0	16.39	AV	234.00	300	Vertical	Pass
2	2402.000	97.41	-10.11	--	--	Peak	234.00	100	Vertical	N/A
2**	2402.000	97.11	-10.11	--	--	AV	234.00	100	Vertical	N/A
3	4804.250	52.23	-2.74	74.0	21.77	Peak	159.00	150	Vertical	Pass
3**	4804.250	46.66	-2.74	54.0	7.34	AV	159.00	150	Vertical	Pass
4	7764.250	54.52	1.68	74.0	19.48	Peak	127.00	200	Vertical	Pass
4**	7764.250	43.80	1.68	54.0	10.20	AV	127.00	200	Vertical	Pass
5	10578.537	51.71	-1.74	74.0	22.29	Peak	6.00	300	Vertical	Pass
5**	10578.537	42.03	-1.74	54.0	11.97	AV	6.00	300	Vertical	Pass
6	16569.375	52.48	0.03	74.0	21.52	Peak	341.00	100	Vertical	Pass
6**	16569.375	41.28	0.03	54.0	12.72	AV	341.00	100	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

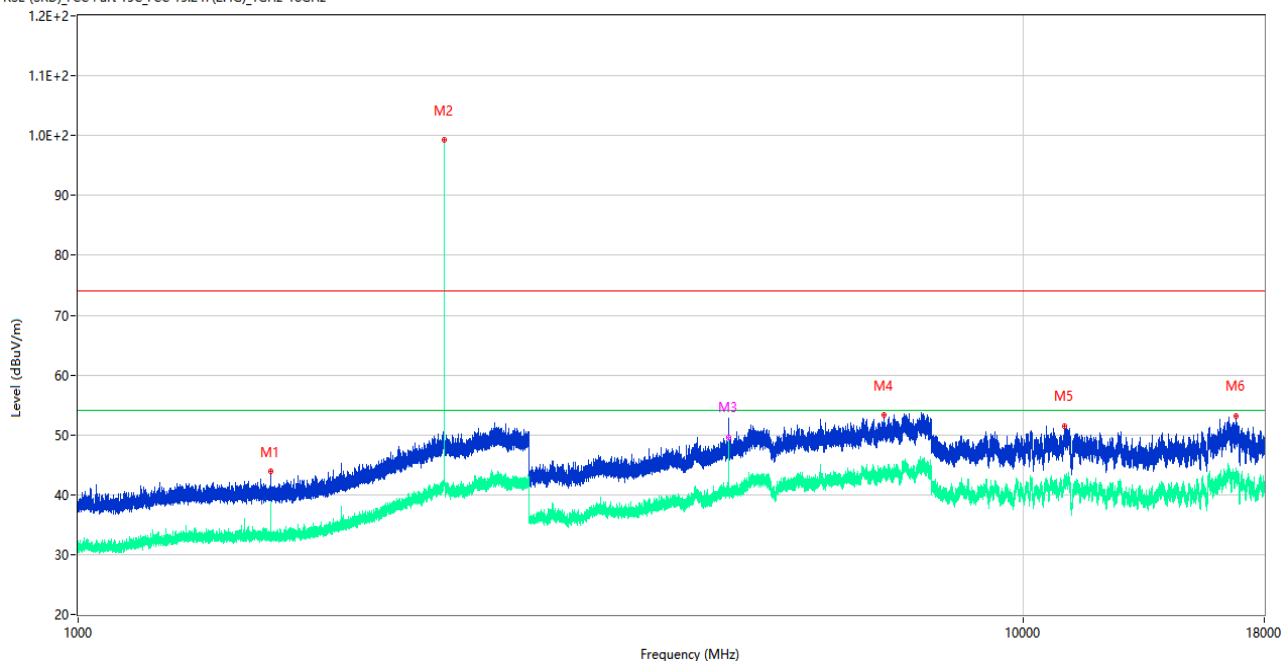

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1600.000	43.87	-16.86	74.0	30.13	Peak	0.00	150	Horizontal	Pass
1**	1600.000	38.22	-16.86	54.0	15.78	AV	0.00	150	Horizontal	Pass
2	2440.900	99.27	-9.40	--	--	Peak	164.00	150	Horizontal	N/A
2**	2440.900	98.47	-9.40	--	--	AV	164.00	150	Horizontal	N/A
3	4882.000	52.45	-2.32	74.0	21.55	Peak	193.00	150	Horizontal	Pass
3**	4882.000	49.54	-2.32	54.0	4.46	AV	193.00	150	Horizontal	Pass
4	7132.000	53.40	1.61	74.0	20.60	Peak	261.00	150	Horizontal	Pass
4**	7132.000	44.81	1.61	54.0	9.19	AV	261.00	150	Horizontal	Pass
5	11072.062	51.49	-1.53	74.0	22.51	Peak	128.00	200	Horizontal	Pass
5**	11072.062	41.86	-1.53	54.0	12.14	AV	128.00	200	Horizontal	Pass
6	16809.562	53.22	1.08	74.0	20.78	Peak	34.00	200	Horizontal	Pass
6**	16809.562	42.69	1.08	54.0	11.31	AV	34.00	200	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD), FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

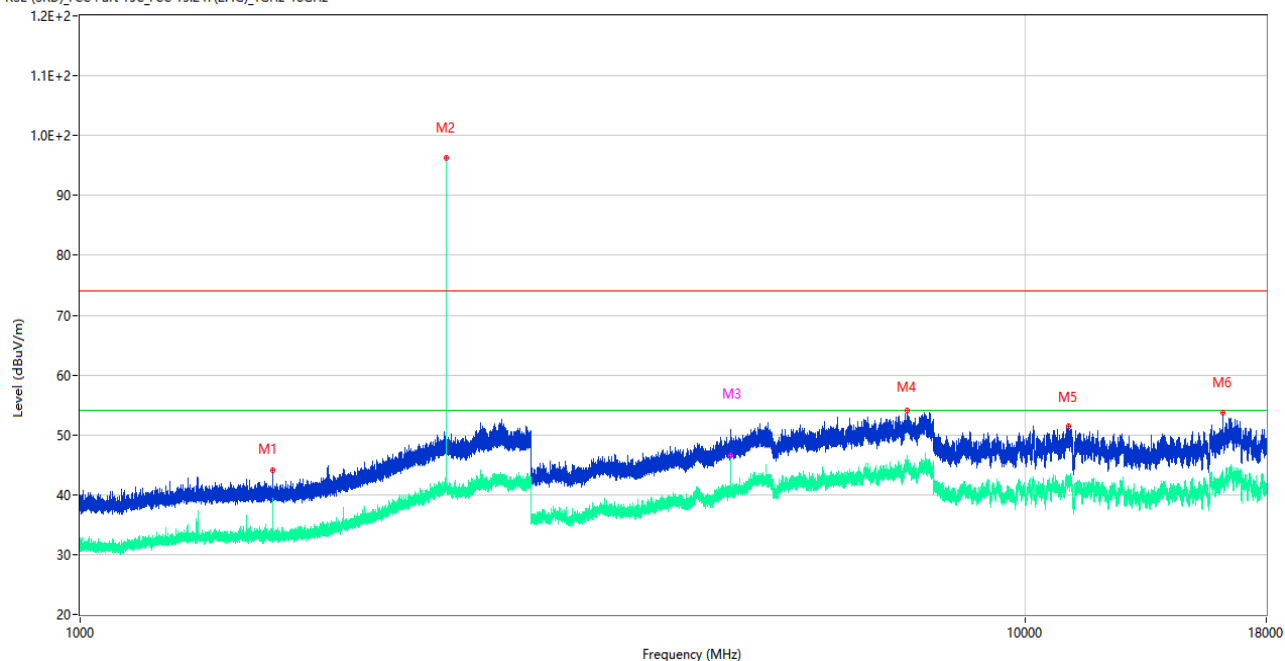

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.900	44.05	-16.85	74.0	29.95	Peak	234.00	100	Vertical	Pass
1**	1599.900	39.45	-16.85	54.0	14.55	AV	234.00	100	Vertical	Pass
2	2441.100	96.27	-9.40	--	--	Peak	234.00	200	Vertical	N/A
2**	2441.100	96.03	-9.40	--	--	AV	234.00	200	Vertical	N/A
3	4882.000	49.99	-2.32	74.0	24.01	Peak	102.00	150	Vertical	Pass
3**	4882.000	46.55	-2.32	54.0	7.45	AV	102.00	150	Vertical	Pass
4	7508.750	54.07	1.57	74.0	19.93	Peak	322.00	200	Vertical	Pass
4**	7508.750	44.91	1.57	54.0	9.09	AV	322.00	200	Vertical	Pass
5	11125.500	51.42	-0.98	74.0	22.58	Peak	55.00	400	Vertical	Pass
5**	11125.500	41.98	-0.98	54.0	12.02	AV	55.00	400	Vertical	Pass
6	16193.738	53.70	0.25	74.0	20.30	Peak	136.00	100	Vertical	Pass
6**	16193.738	43.60	0.25	54.0	10.40	AV	136.00	100	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

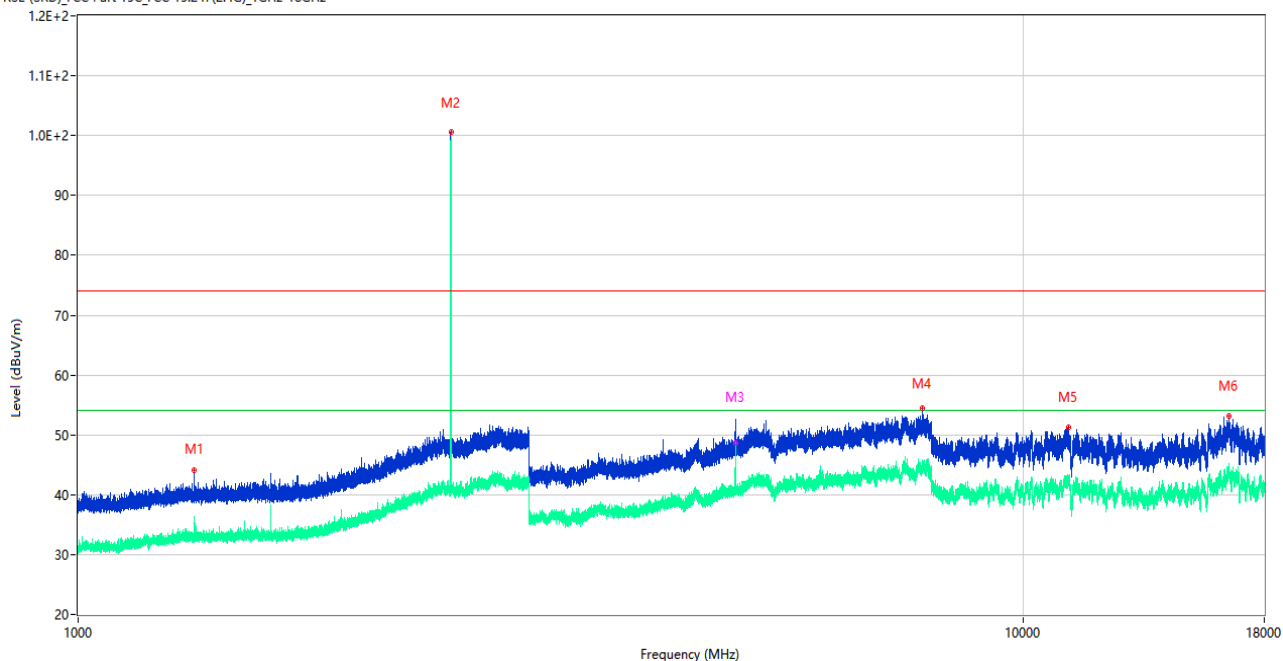

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.700	44.11	-16.72	74.0	29.89	Peak	251.00	300	Horizontal	Pass
1**	1327.700	33.56	-16.72	54.0	20.44	AV	251.00	300	Horizontal	Pass
2	2479.800	100.53	-10.55	--	--	Peak	164.00	100	Horizontal	N/A
2**	2479.800	99.76	-10.55	--	--	AV	164.00	100	Horizontal	N/A
3	4960.500	51.85	-2.64	74.0	22.15	Peak	178.00	200	Horizontal	Pass
3**	4960.500	48.68	-2.64	54.0	5.32	AV	178.00	200	Horizontal	Pass
4	7831.500	54.38	3.26	74.0	19.62	Peak	331.00	300	Horizontal	Pass
4**	7831.500	45.10	3.26	54.0	8.90	AV	331.00	300	Horizontal	Pass
5	11178.700	51.30	-1.44	74.0	22.70	Peak	104.00	400	Horizontal	Pass
5**	11178.700	41.41	-1.44	54.0	12.59	AV	104.00	400	Horizontal	Pass
6	16497.449	53.14	0.36	74.0	20.86	Peak	341.00	300	Horizontal	Pass
6**	16497.449	43.03	0.36	54.0	10.97	AV	341.00	300	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

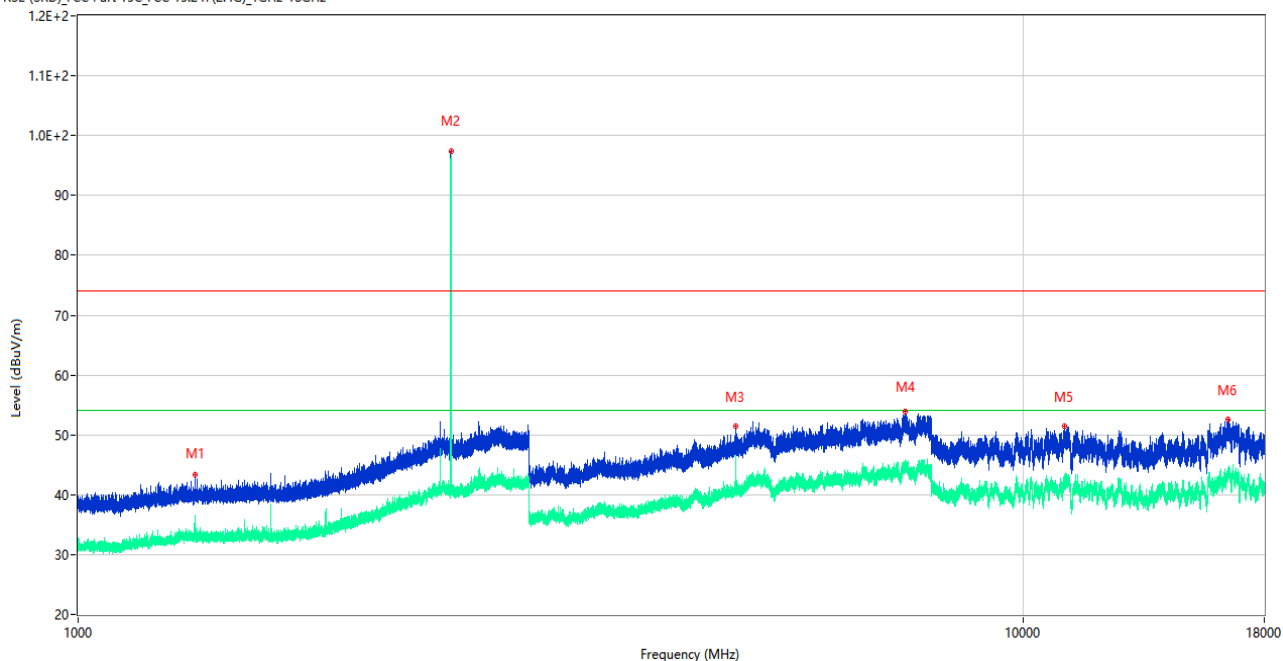

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.700	43.38	-16.67	74.0	30.62	Peak	288.00	400	Vertical	Pass
1**	1330.700	34.75	-16.67	54.0	19.25	AV	288.00	400	Vertical	Pass
2	2480.100	97.48	-10.55	--	--	Peak	237.00	200	Vertical	N/A
2**	2480.100	97.21	-10.55	--	--	AV	237.00	200	Vertical	N/A
3	4960.250	51.43	-2.64	74.0	22.57	Peak	96.00	150	Vertical	Pass
3**	4960.250	46.47	-2.64	54.0	7.53	AV	96.00	150	Vertical	Pass
4	7506.750	53.84	1.19	74.0	20.16	Peak	0.00	200	Vertical	Pass
4**	7506.750	44.89	1.19	54.0	9.11	AV	0.00	200	Vertical	Pass
5	11070.401	51.41	-1.56	74.0	22.59	Peak	55.00	400	Vertical	Pass
5**	11070.401	42.58	-1.56	54.0	11.42	AV	55.00	400	Vertical	Pass
6	16495.875	52.56	0.36	74.0	21.44	Peak	54.00	400	Vertical	Pass
6**	16495.875	43.54	0.36	54.0	10.46	AV	54.00	400	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

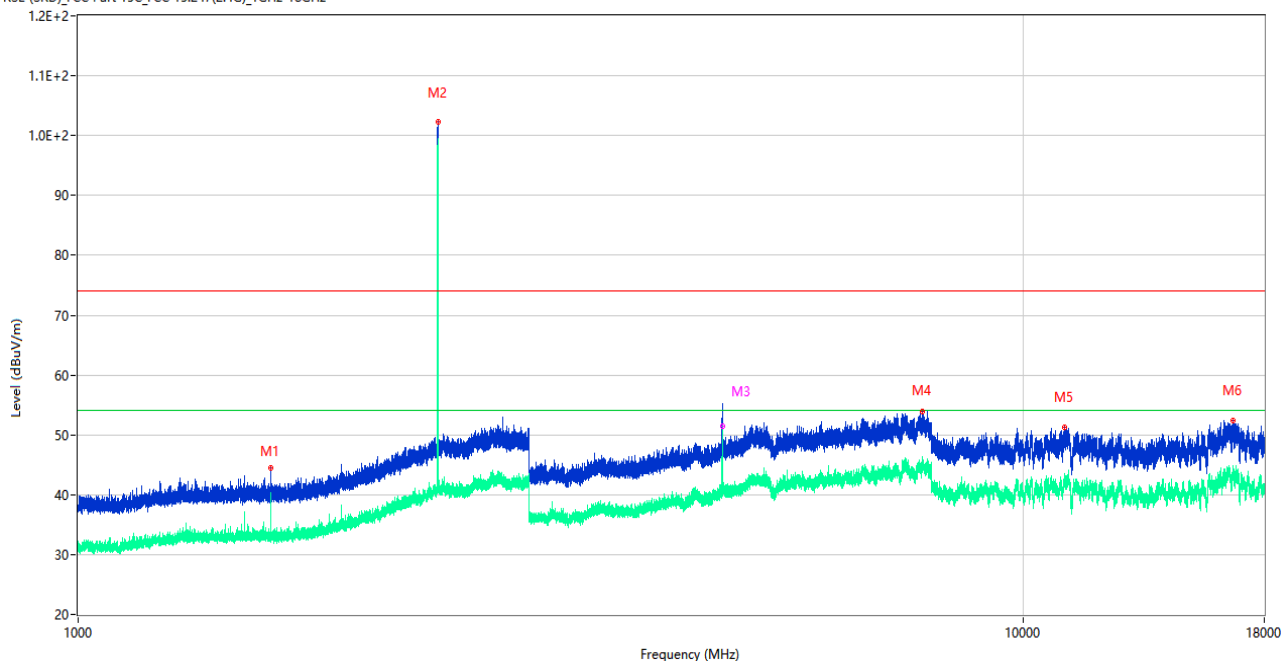

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1600.000	44.40	-16.86	74.0	29.60	Peak	262.00	300	Horizontal	Pass
1**	1600.000	40.08	-16.86	54.0	13.92	AV	262.00	300	Horizontal	Pass
2	2402.000	102.25	-10.11	--	--	Peak	300.00	100	Horizontal	N/A
2**	2402.000	99.48	-10.11	--	--	AV	300.00	100	Horizontal	N/A
3	4804.000	53.81	-2.76	74.0	20.19	Peak	245.00	200	Horizontal	Pass
3***	4804.000	50.68	-2.76	54.0	3.32	AV	245.00	200	Horizontal	Pass
4	7828.750	53.84	3.16	74.0	20.16	Peak	315.00	400	Horizontal	Pass
4**	7828.750	44.43	3.16	54.0	9.57	AV	315.00	400	Horizontal	Pass
5	11058.288	51.35	-1.79	74.0	22.65	Peak	28.00	200	Horizontal	Pass
5**	11058.288	42.04	-1.79	54.0	11.96	AV	28.00	200	Horizontal	Pass
6	16687.500	52.45	0.93	74.0	21.55	Peak	335.00	100	Horizontal	Pass
6**	16687.500	43.89	0.93	54.0	10.11	AV	335.00	100	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD) FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

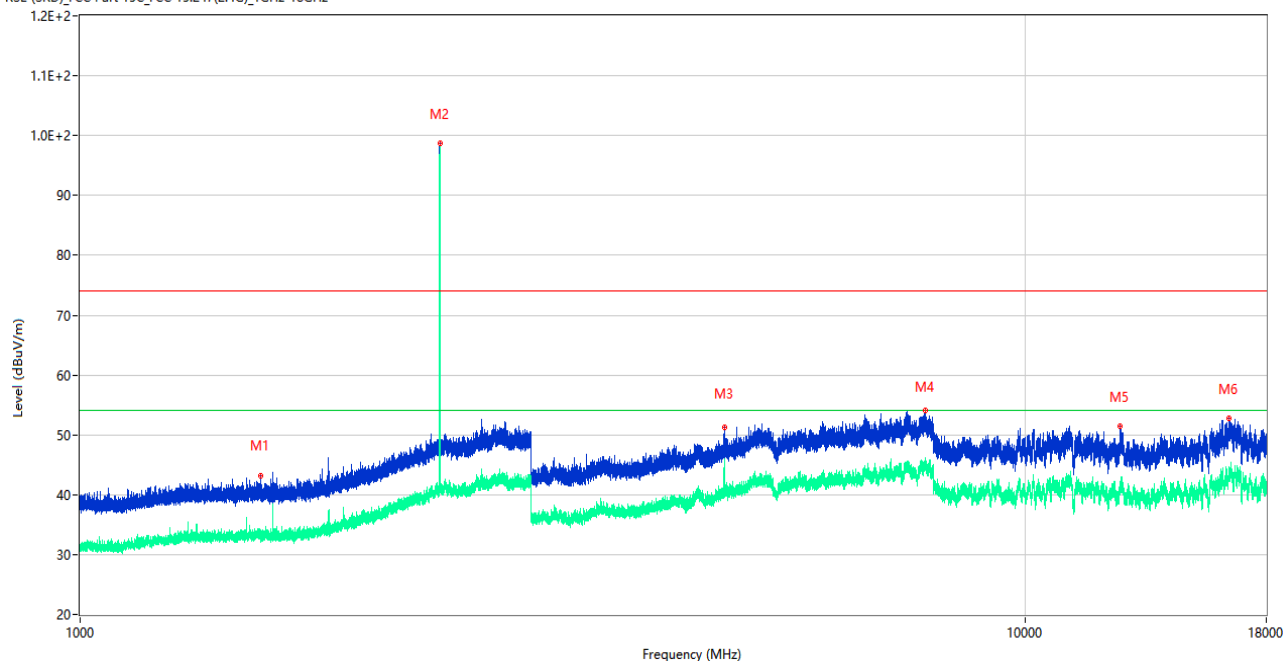

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1554.100	43.23	-16.91	74.0	30.77	Peak	162.00	100	Vertical	Pass
1**	1554.100	32.81	-16.91	54.0	21.19	AV	162.00	100	Vertical	Pass
2	2401.900	98.63	-10.12	--	--	Peak	162.00	100	Vertical	N/A
2**	2401.900	98.14	-10.12	--	--	AV	162.00	100	Vertical	N/A
3	4804.000	51.22	-2.76	74.0	22.78	Peak	29.00	200	Vertical	Pass
3**	4804.000	45.96	-2.76	54.0	8.04	AV	29.00	200	Vertical	Pass
4	7837.250	54.06	3.60	74.0	19.94	Peak	217.00	400	Vertical	Pass
4**	7837.250	45.41	3.60	54.0	8.59	AV	217.00	400	Vertical	Pass
5	12617.238	51.40	-0.86	74.0	22.60	Peak	212.00	100	Vertical	Pass
5**	12617.238	41.12	-0.86	54.0	12.88	AV	212.00	100	Vertical	Pass
6	16443.900	52.71	0.44	74.0	21.29	Peak	226.00	100	Vertical	Pass
6**	16443.900	44.58	0.44	54.0	9.42	AV	226.00	100	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD), FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

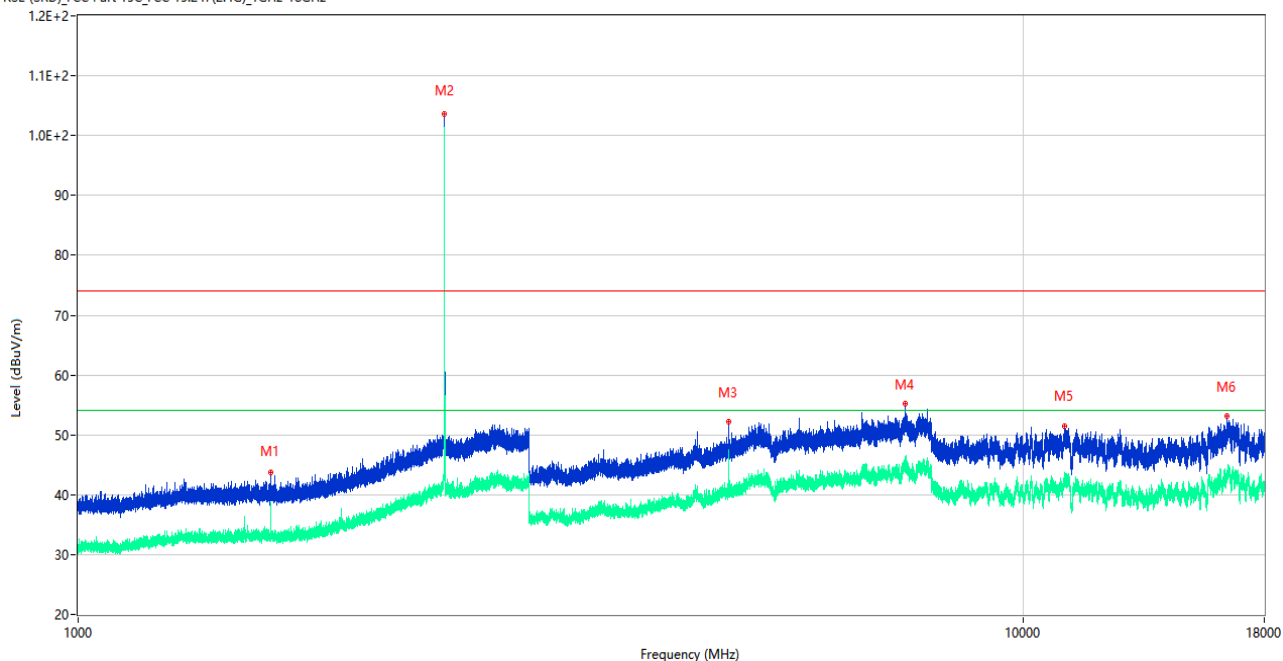

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.800	43.73	-16.85	74.0	30.27	Peak	360.00	200	Horizontal	Pass
1**	1599.800	37.66	-16.85	54.0	16.34	AV	360.00	200	Horizontal	Pass
2	2440.800	103.63	-9.40	--	--	Peak	313.00	150	Horizontal	N/A
2**	2440.800	99.85	-9.40	--	--	AV	313.00	150	Horizontal	N/A
3	4882.500	52.13	-2.32	74.0	21.87	Peak	296.00	200	Horizontal	Pass
3**	4882.500	46.67	-2.32	54.0	7.33	AV	296.00	200	Horizontal	Pass
4	7502.250	55.13	1.00	74.0	18.87	Peak	0.00	100	Horizontal	Pass
4**	7502.250	44.35	1.00	54.0	9.65	AV	0.00	100	Horizontal	Pass
5	11063.750	51.50	-1.68	74.0	22.50	Peak	360.00	100	Horizontal	Pass
5**	11063.750	42.04	-1.68	54.0	11.96	AV	360.00	100	Horizontal	Pass
6	16447.838	53.07	0.50	74.0	20.93	Peak	66.00	300	Horizontal	Pass
6**	16447.838	43.10	0.50	54.0	10.90	AV	66.00	300	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RSE (SRD), FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

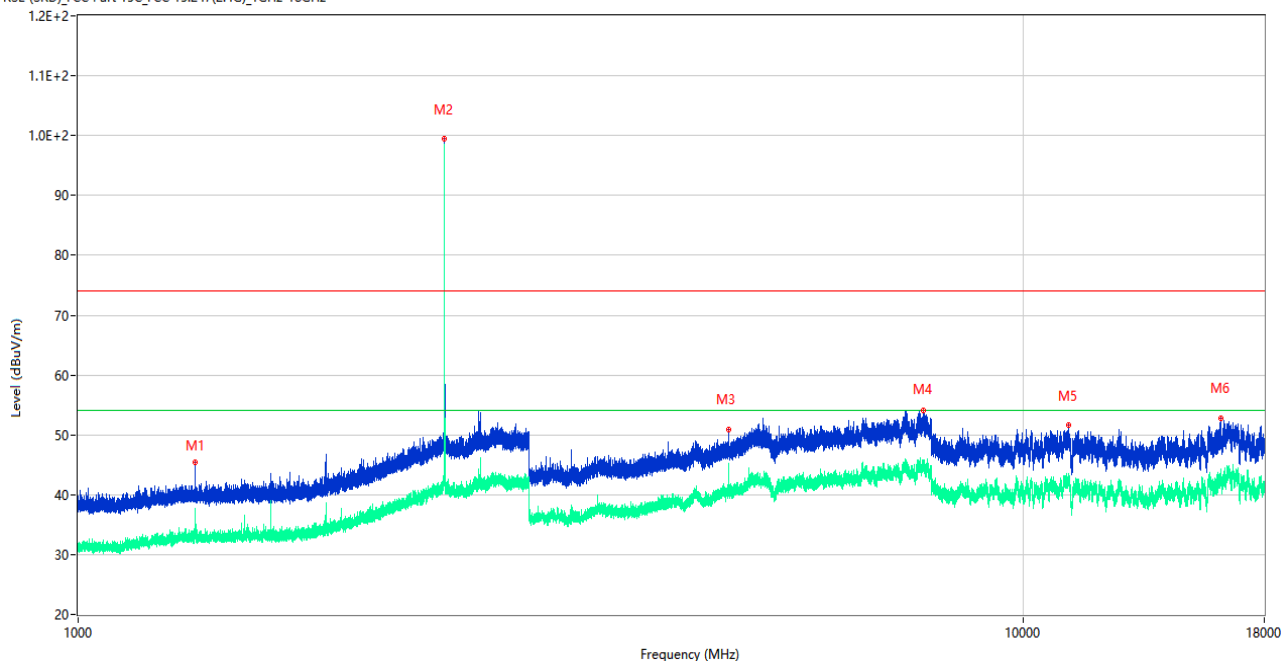

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.500	45.44	-16.67	74.0	28.56	Peak	125.00	200	Vertical	Pass
1**	1328.500	33.76	-16.67	54.0	20.24	AV	125.00	200	Vertical	Pass
2	2440.700	99.39	-9.40	--	--	Peak	167.00	150	Vertical	N/A
2**	2440.700	97.32	-9.40	--	--	AV	167.00	150	Vertical	N/A
3	4882.000	50.83	-2.32	74.0	23.17	Peak	172.00	150	Vertical	Pass
3**	4882.000	45.25	-2.32	54.0	8.75	AV	172.00	150	Vertical	Pass
4	7837.750	54.08	3.53	74.0	19.92	Peak	98.00	200	Vertical	Pass
4**	7837.750	45.30	3.53	54.0	8.70	AV	98.00	200	Vertical	Pass
5	11169.200	51.59	-1.27	74.0	22.41	Peak	308.00	100	Vertical	Pass
5**	11169.200	42.72	-1.27	54.0	11.28	AV	308.00	100	Vertical	Pass
6	16206.075	52.79	0.23	74.0	21.21	Peak	285.00	100	Vertical	Pass
6**	16206.075	43.22	0.23	54.0	10.78	AV	285.00	100	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

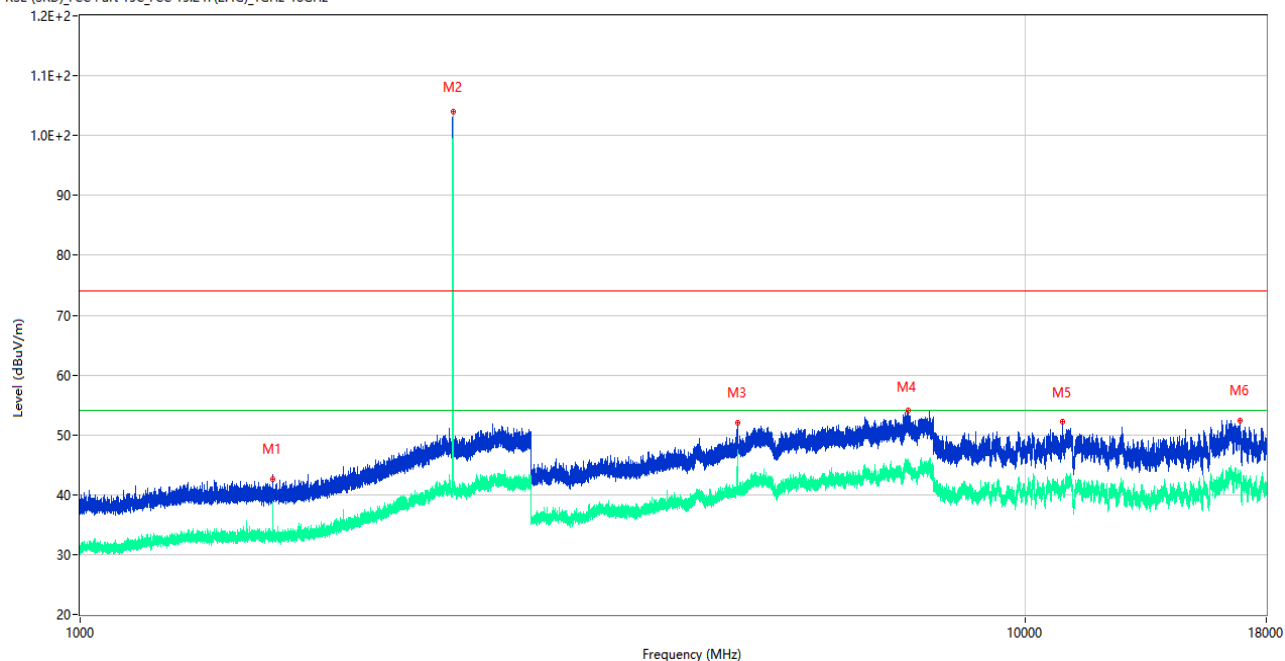

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.900	42.69	-16.85	74.0	31.31	Peak	347.00	300	Horizontal	Pass
1**	1599.900	37.79	-16.85	54.0	16.21	AV	347.00	300	Horizontal	Pass
2	2480.100	104.05	-10.55	--	--	Peak	309.00	100	Horizontal	N/A
2**	2480.100	100.82	-10.55	--	--	AV	309.00	100	Horizontal	N/A
3	4960.500	52.05	-2.64	74.0	21.95	Peak	294.00	150	Horizontal	Pass
3**	4960.500	46.05	-2.64	54.0	7.95	AV	294.00	150	Horizontal	Pass
4	7513.500	54.05	1.84	74.0	19.95	Peak	152.00	400	Horizontal	Pass
4**	7513.500	44.70	1.84	54.0	9.30	AV	152.00	400	Horizontal	Pass
5	10955.924	52.14	-2.41	74.0	21.86	Peak	360.00	400	Horizontal	Pass
5**	10955.924	41.51	-2.41	54.0	12.49	AV	360.00	400	Horizontal	Pass
6	16894.614	52.39	0.74	74.0	21.61	Peak	295.00	300	Horizontal	Pass
6**	16894.614	42.58	0.74	54.0	11.42	AV	295.00	300	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RSE (SRD)_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

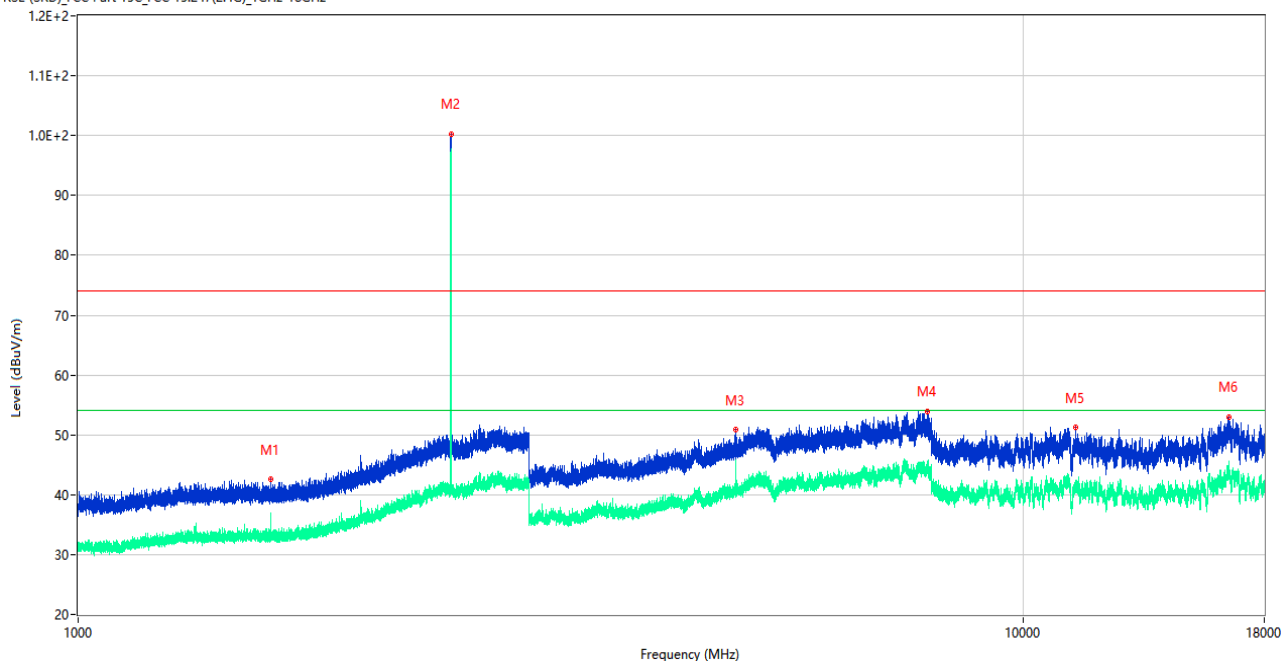

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.500	42.58	-16.84	74.0	31.42	Peak	121.00	300	Vertical	Pass
1**	1599.500	34.26	-16.84	54.0	19.74	AV	121.00	300	Vertical	Pass
2	2480.000	100.24	-10.56	--	--	Peak	360.00	100	Vertical	N/A
2**	2480.000	97.87	-10.56	--	--	AV	360.00	100	Vertical	N/A
3	4960.500	50.83	-2.64	74.0	23.17	Peak	225.00	200	Vertical	Pass
3**	4960.500	45.80	-2.64	54.0	8.20	AV	225.00	200	Vertical	Pass
4	7927.000	53.90	2.28	74.0	20.10	Peak	337.00	200	Vertical	Pass
4**	7927.000	44.52	2.28	54.0	9.48	AV	337.00	200	Vertical	Pass
5	11379.387	51.24	-1.74	74.0	22.76	Peak	298.00	200	Vertical	Pass
5**	11379.387	41.72	-1.74	54.0	12.28	AV	298.00	200	Vertical	Pass
6	16502.176	53.01	0.34	74.0	20.99	Peak	193.00	100	Vertical	Pass
6**	16502.176	44.40	0.34	54.0	9.60	AV	193.00	100	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: The Level (dBuV/m) has been corrected by factor.


Test Data and Plots

GFSK LOW CHANNEL

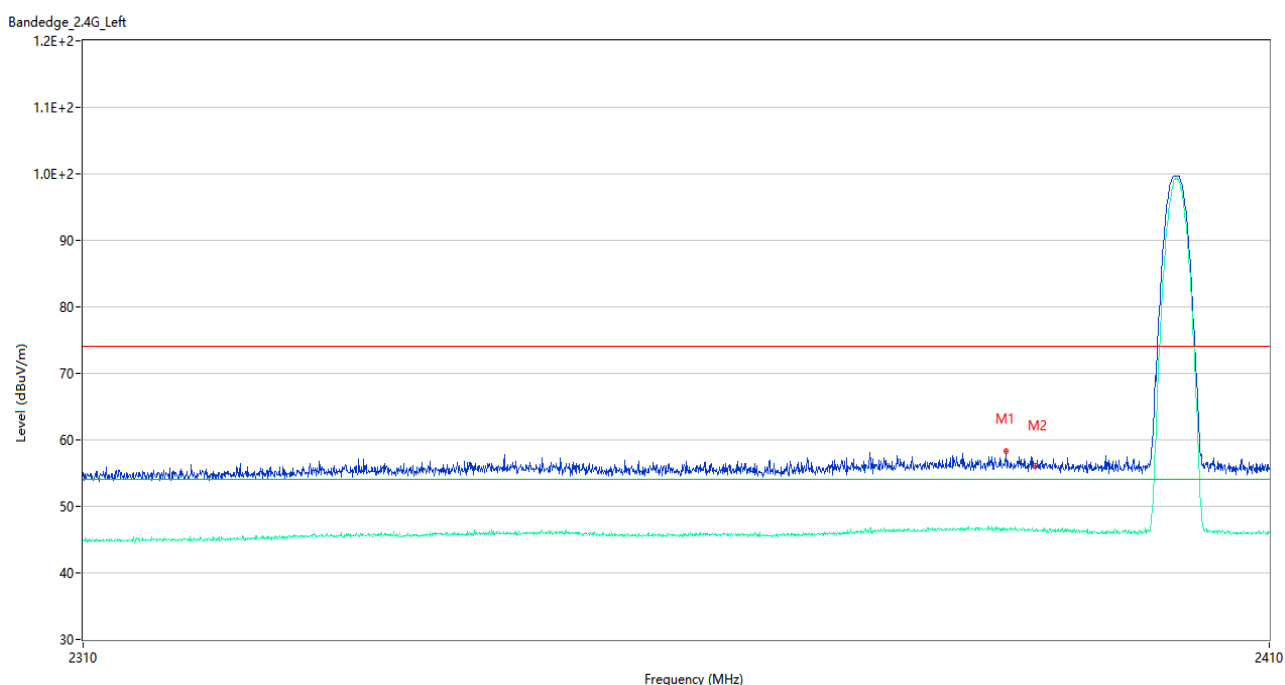


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2387.400	58.24	2.01	74.0	15.76	Peak	22.00	200	Horizontal	Pass
1**	2387.400	46.52	2.01	54.0	7.48	AV	22.00	200	Horizontal	Pass
2	2389.950	56.18	1.86	74.0	17.82	Peak	252.00	200	Horizontal	Pass
2**	2389.950	46.26	1.86	54.0	7.74	AV	252.00	200	Horizontal	Pass

GFSK HIGH CHANNEL

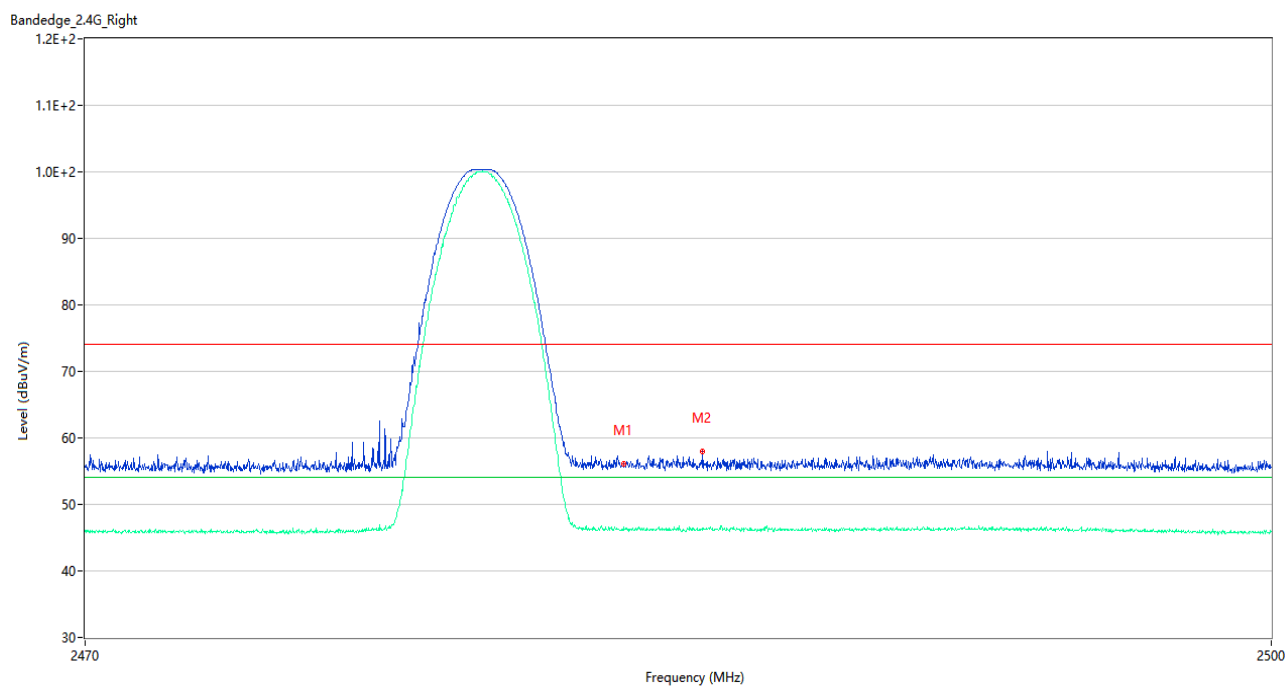


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.590	56.14	1.77	74.0	17.86	Peak	34.00	200	Horizontal	Pass
1**	2483.590	46.64	1.77	54.0	7.36	AV	34.00	200	Horizontal	Pass
2	2485.570	58.04	1.72	74.0	15.96	Peak	46.00	150	Horizontal	Pass
2**	2485.570	46.05	1.72	54.0	7.95	AV	46.00	150	Horizontal	Pass

8-DPSK LOW CHANNEL

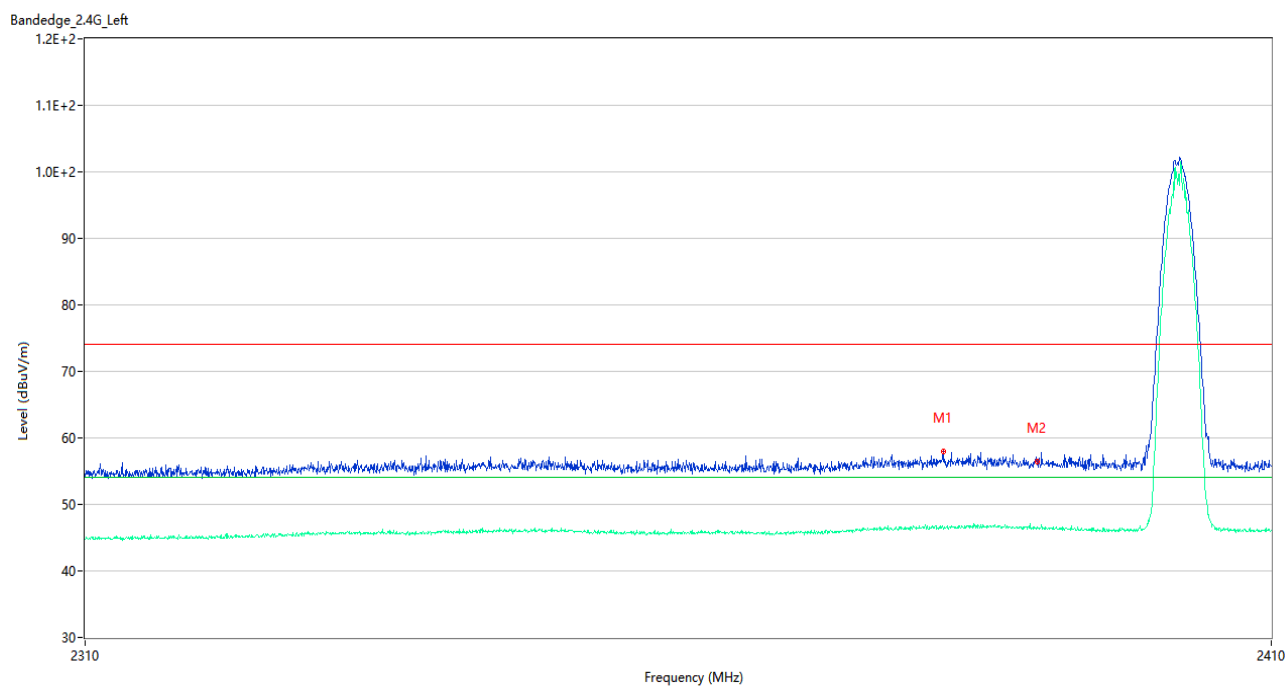

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2381.900	58.02	1.99	74.0	15.98	Peak	261.00	200	Horizontal	Pass
1**	2381.900	46.41	1.99	54.0	7.59	AV	261.00	200	Horizontal	Pass
2	2389.950	56.48	1.86	74.0	17.52	Peak	69.00	200	Horizontal	Pass
2**	2389.950	46.52	1.86	54.0	7.48	AV	69.00	200	Horizontal	Pass

8-DPSK HIGH CHANNEL

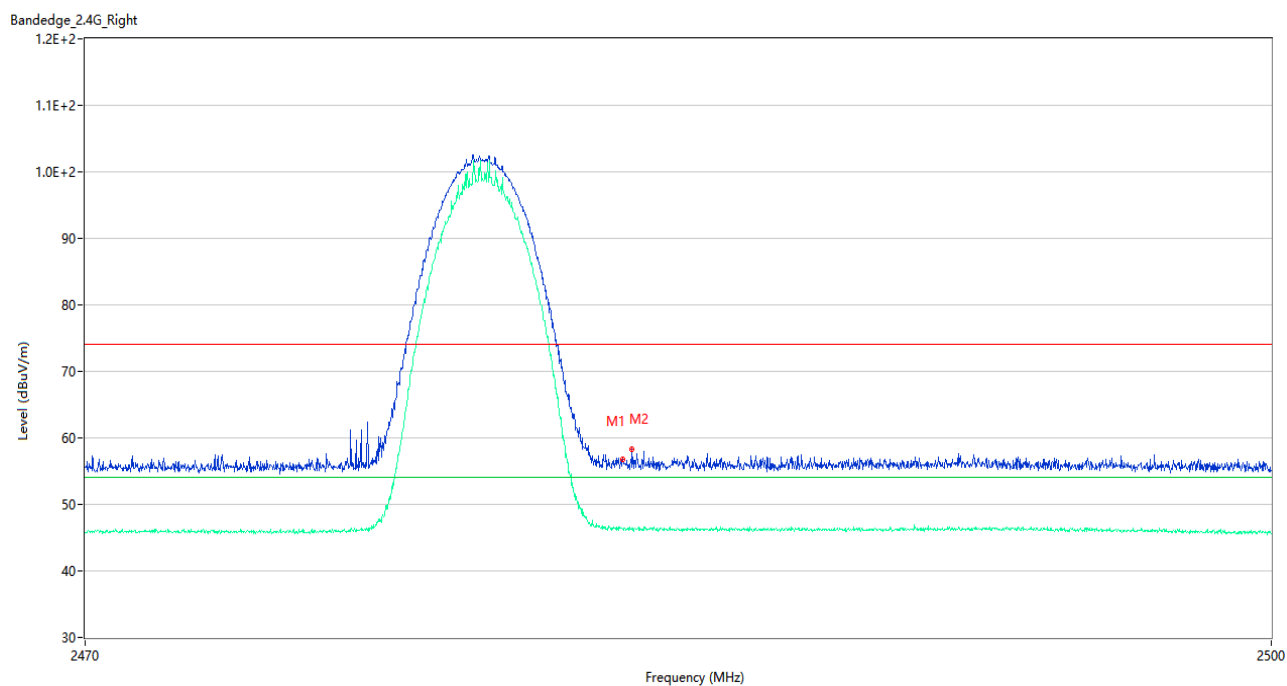

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.545	56.76	1.77	74.0	17.24	Peak	276.00	100	Horizontal	Pass
1**	2483.545	46.30	1.77	54.0	7.70	AV	276.00	100	Horizontal	Pass
2	2483.785	58.22	1.77	74.0	15.78	Peak	105.00	150	Horizontal	Pass
2**	2483.785	46.42	1.77	54.0	7.58	AV	105.00	150	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-EC22B1006-AR-2.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-EC22B1006-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-EC22B1006-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--