

Report No.: TW2411236-02E

Applicant: Eastern Times Technology Co.,Ltd

Product: GAMING HEADSET

Model No.: H888W, H888, ET-9185

Trademark: REDRGAON

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 &FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Terry lang

Terry Tang

Manager

Dated: November 28, 2024

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2411236-02E Page 2 of 34

Date: 2024-11-28



Special Statement:

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Report No.: TW2411236-02E

Date: 2024-11-28



Test Report Conclusion

Content 1.0 General Details 1.1 Test Lab Details.... 4 1.2 Applicant Details. 4 1.3 Description of EUT 1.4 Submitted Sample.... 4 Test Duration. 1.5 5 1.6 Test Uncertainty. 1.7 Test By..... 5 List of Measurement Equipment..... 2.0 3.0 7 Technical Details..... 3.1 Summary of Test Results.... 7 3.2 7 Test Standards.... 4.0 EUT Modification.... 7 Power Line Conducted Emission Test.... 5.0 8 Schematics of the Test..... 5.1 8 5.2 Test Method and Test Procedure. Configuration of the EUT..... 5.3 8 5.4 EUT Operating Condition. Conducted Emission Limit. 9 5.5 5.6 Test Result. 6.0 Radiated Emission test.... 12 Test Method and Test Procedure. 6.1 12 6.2 Configuration of the EUT.... 13 6.3 EUT Operation Condition. 13 Radiated Emission Limit. 14 6.4 6.5 Test Result. 15 7.0 Band Edge 23 7.1 Test Method and Test Procedure. 23 7.2 Radiated Test Setup. 23 7.3 Configuration of the EUT..... 23 7.4 EUT Operating Condition. 23 7.5 Band Edge Limit..... 23 7.6 Band Edge Test Result. 24 8.0 Antenna Requirement..... 28 20dB bandwidth measurement.... 9.0 29 FCC ID Label..... 10.0 38

The report refers only to the sample tested and does not apply to the bulk.

11.0

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Photo of Test Setup and EUT View....

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2024-11-28



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Eastern Times Technology Co.,Ltd

Address: Building D, Nan An Industrial Area, Youganpu Village, Fenggang Town, Dongguan City,

Guangdong, China.

1.3 Description of EUT

Product: GAMING HEADSET

Manufacturer: Eastern Times Technology Co.,Ltd

Address: Building D, Nan An Industrial Area, Youganpu Village, Fenggang Town,

Dongguan City, Guangdong, China.

Trademark: REDRGAON

Additional Trademark: N/A

Model Number: H888W

Additional Model Name H888, ET-9185

Hardware Version: V2.0

Software Version: G915(H888)_V142_EDFC-9CF7151E_earphone_20240906_绑定 RX-定制版

本 B

Serial No.: RDH888W2024112500001
Rating: DC5V, 100mA; DC3V, 35mA
Battery: DC3.7V, 500mAh Li-ion battery
Modulation Type: GFSK (Bluetooth Low Energy)

Operation Frequency: 2402-2480MHz

Channel Separate: 2MHz Channel Number: 40

Antenna Designation PCB antenna with gain -0.58dBi Max (Get from the antenna specification)

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2411236-02E Page 5 of 34

Date: 2024-11-28



1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2024-11-23 to 2024-11-28

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 34

Report No.: TW2411236-02E

Date: 2024-11-28



2.0 Test Equipment	2.0 Test Equipment							
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date			
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11			
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11			
LISN	R&S	EZH3-Z5	100253	2024-07-12	2025-07-11			
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2024-07-12	2025-07-11			
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17			
Spectrum	R&S	FSIQ26	100292	2024-07-12	2025-07-11			
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17			
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2025-07-17			
Power meter	Anritsu	ML2487A	6K00003613	2024-07-12	2025-07-11			
Power sensor	Anritsu	MA2491A	32263	2024-07-12	2025-07-11			
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17			
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25			
EMI Test Receiver	RS	ESVB	826156/011	2024-07-12	2025-07-11			
EMI Test Receiver	RS	ESCS 30	834115/006	2024-07-12	2025-07-11			
Spectrum	HP/Agilent	E4407B	MY50441392	2024-07-12	2025-07-11			
Spectrum	RS	FSP	1164.4391.38	2024-07-12	2025-07-11			
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA	-	2024-07-12	2025-07-11			
RF Cable	Zhengdi	7m		2024-07-12	2025-07-11			
Pre-Amplifier	Schwarebeck	BBV9743	#218	2024-07-12	2025-07-11			
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2024-07-12	2025-07-11			
LISN	SCHAFFNER	NNB42	00012	2024-07-12	2025-07-11			
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11			
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11			

2.2 Automation Test Software

For Conducted Emission Test

Name	Version		
EZ-EMC	Ver.EMC-CON 3A1.1		

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 34

Report No.: TW2411236-02E

Date: 2024-11-28



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES


Report No.: TW2411236-02E

Date: 2024-11-28



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

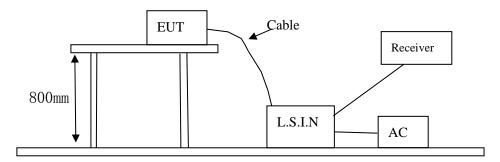

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

A. EUT

Device	Device Manufacturer		FCC ID	
GAMING HEADSET	Eastern Times	H888W, H888, ET-9185	TUVET-9185	
GAMING HEADSET	Technology Co.,Ltd	11000 W, 11000, E1-9103	10 VE1-9163	

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 9 of 34

Report No.: TW2411236-02E

Date: 2024-11-28



NT/A		
N/A		

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	KEYU	KA23-0502000DEU	Input: 100-240V~, 50/60Hz, 0.35A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition
- 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)			
(MHz)	Quasi-peak Level	Average Level		
0.15 ~ 0.50	66.0~56.0*	56.0~46.0*		
0.50 ~ 5.00	56.0	46.0		
5.00 ~ 30.00	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results:

Pass

Date: 2024-11-28



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Communication by BT

Results: Pass

Please refer to following diagram for individual

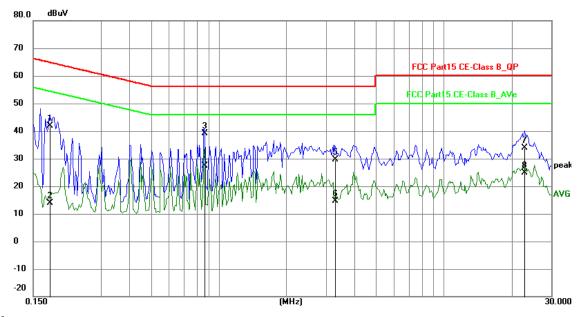

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1777	31.49	10.33	41.82	64.59	-22.77	QP	Р
2	0.1777	3.53	10.33	13.86	54.59	-40.73	AVG	Р
3	0.8637	28.55	10.48	39.03	56.00	-16.97	QP	Р
4	0.8637	16.94	10.48	27.42	46.00	-18.58	AVG	Р
5	3.2847	17.73	11.78	29.51	56.00	-26.49	QP	П
6	3.2847	2.97	11.78	14.75	46.00	-31.25	AVG	Р
7	22.8354	18.07	15.82	33.89	60.00	-26.11	QP	Р
8	22.8354	9.12	15.82	24.94	50.00	-25.06	AVG	Р

Date: 2024-11-28



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Communication by BT

Results: Pass

Please refer to following diagram for individual

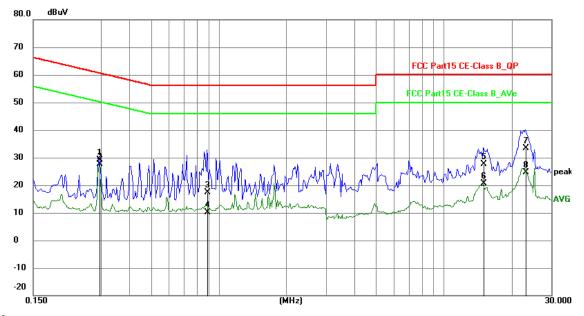

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2943	18.77	10.35	29.12	60.40	-31.28	QP	Р
2	0.2943	17.19	10.35	27.54	50.40	-22.86	AVG	Р
3	0.8871	7.01	10.48	17.49	56.00	-38.51	QP	Р
4	0.8871	-0.37	10.48	10.11	46.00	-35.89	AVG	Р
5	15.0393	12.52	15.14	27.66	60.00	-32.34	QP	Р
6	15.0393	5.37	15.14	20.51	50.00	-29.49	AVG	Р
7	23.0694	17.72	15.77	33.49	60.00	-26.51	QP	Р
8	23.0694	8.78	15.77	24.55	50.00	-25.45	AVG	Р

Report No.: TW2411236-02E Page 12 of 34

Date: 2024-11-28




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

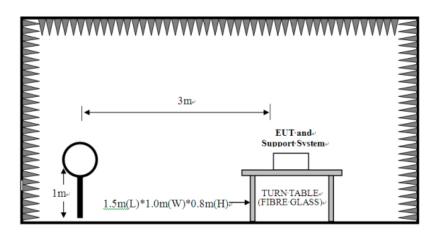


Page 13 of 34

Report No.: TW2411236-02E


Date: 2024-11-28



For radiated emissions from 30MHz to1GHz

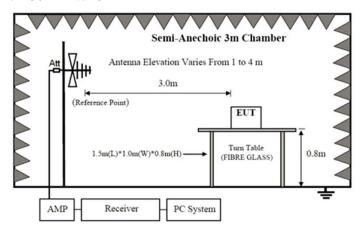

For radiated emissions above 1GHz

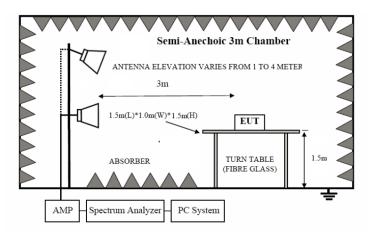

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.

Report No.: TW2411236-02E Page 14 of 34

Date: 2024-11-28



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Strength of Fundamental (3m)			Field Strength of Harmonics (3m)		
(MHz)	mV/m	dBuV/m		uV/m	dBuV/m	
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
0.009-0.490	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.70	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. For radiated emissions from 9kHz to 30MHz, the emission level is much less than the limit for more than 20dB. No necessary to take down the record.
- 6. Battery full charged during tests.

Report No.: TW2411236-02E Page 15 of 34

Date: 2024-11-28




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

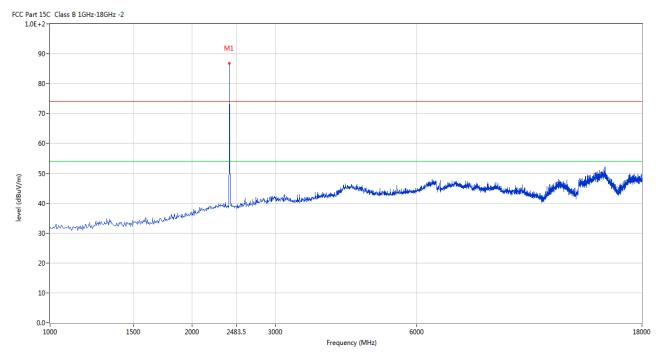


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	86.83	-3.57	114.0	-27.17	Peak	276.00	100	Horizontal	Pass

Report No.: TW2411236-02E Page 16 of 34

Date: 2024-11-28



Vertical

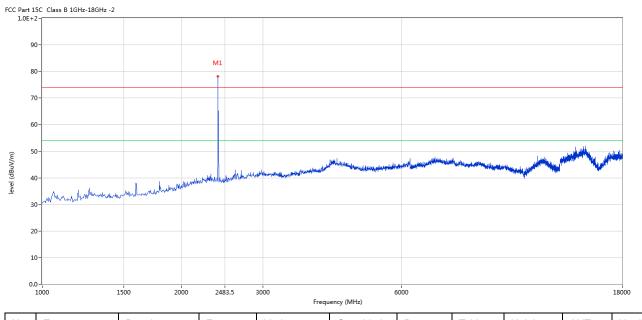

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	78.18	-3.57	114.0	-35.82	Peak	329.00	100	Vertical	Pass


Report No.: TW2411236-02E Page 17 of 34

Date: 2024-11-28



Please refer to the following test plots for details: Middle Channel-2440MHz

Horizontal

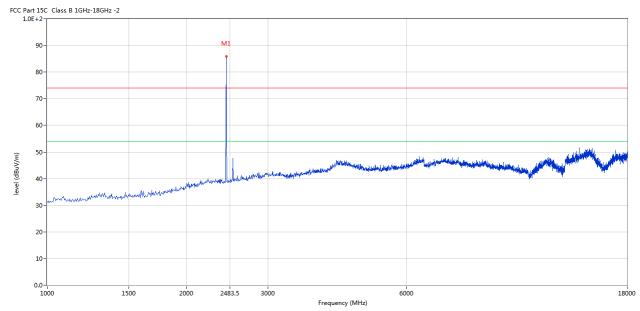


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440	85.82	-3.57	114.0	-28.18	Peak	174.00	100	Horizontal	Pass

Report No.: TW2411236-02E Page 18 of 34

Date: 2024-11-28



Vertical

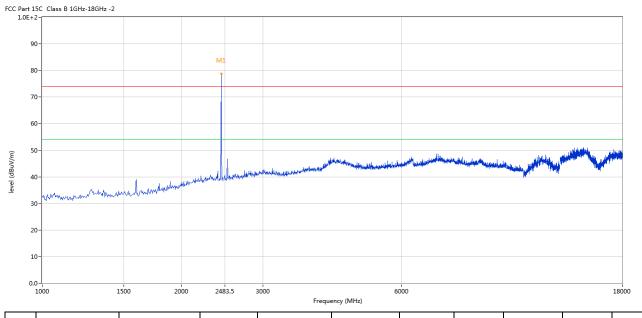

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440	78.66	-3.57	114.0	-35.34	Peak	62.00	100	Vertical	Pass


Report No.: TW2411236-02E Page 19 of 34

Date: 2024-11-28



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

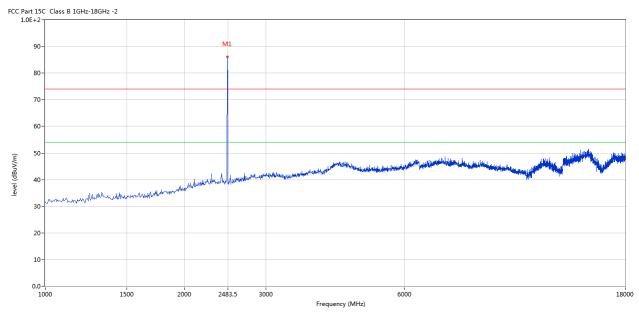


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2480	86.04	-3.57	114.0	-27.96	Peak	267.00	100	Horizontal	Pass

Report No.: TW2411236-02E Page 20 of 34

Date: 2024-11-28



Vertical

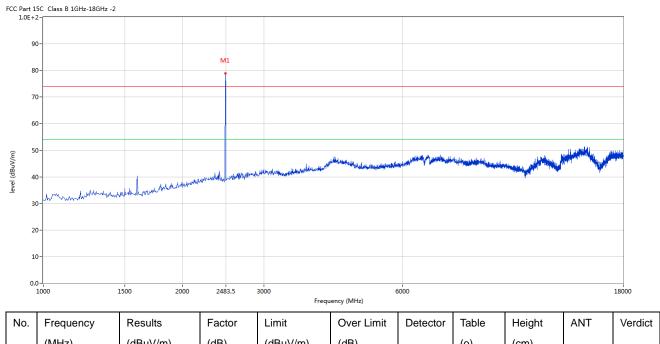

(MHz) (dBuV/m) (dB) (dBuV/m) (dB) (o) (cm) 121.00 2480 78.84 -3.57 114.0 -35.16 Peak 100 Vertical Pass

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3) Margin=Emission-Limits
- (4) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2411236-02E Page 21 of 34

Date: 2024-11-28




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

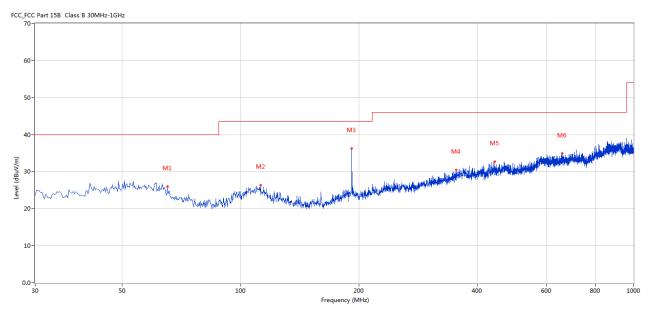

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	65.154	26.01	-6.49	40.0	13.99	Peak	323.00	100	Horizontal	Pass
2	112.429	26.37	-6.23	43.5	17.13	Peak	309.00	100	Horizontal	Pass
3	191.950	36.22	-7.38	43.5	7.28	Peak	29.00	100	Horizontal	Pass
4	354.141	30.46	-2.27	46.0	15.54	Peak	44.00	100	Horizontal	Pass
5	443.359	32.71	-0.85	46.0	13.29	Peak	76.00	100	Horizontal	Pass
6	657.676	34.88	2.11	46.0	11.12	Peak	330.00	100	Horizontal	Pass

Report No.: TW2411236-02E Page 22 of 34

Date: 2024-11-28




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

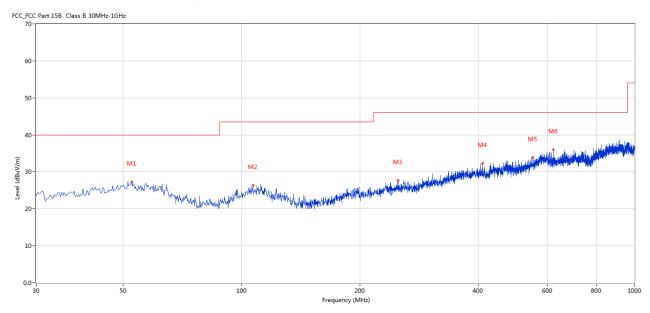

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	52.547	27.30	-4.94	40.0	12.70	Peak	8.00	100	Vertical	Pass
2	106.853	26.34	-6.12	43.5	17.16	Peak	190.00	100	Vertical	Pass
3	249.893	27.71	-5.05	46.0	18.29	Peak	100.00	100	Vertical	Pass
4	410.145	32.30	-1.12	46.0	13.70	Peak	229.00	100	Vertical	Pass
5	551.730	33.92	-0.36	46.0	12.08	Peak	152.00	100	Vertical	Pass
6	622.037	35.95	1.50	46.0	10.05	Peak	152.00	100	Vertical	Pass

Report No.: TW2411236-02E

Date: 2024-11-28




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

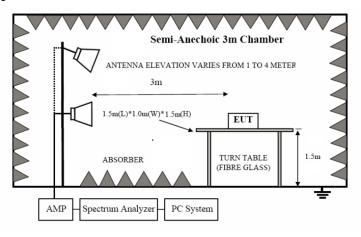

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of the EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Report No.: TW2411236-02E Page 24 of 34

Date: 2024-11-28



7.6 Test Result

Product:	GAMING HEADSET	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

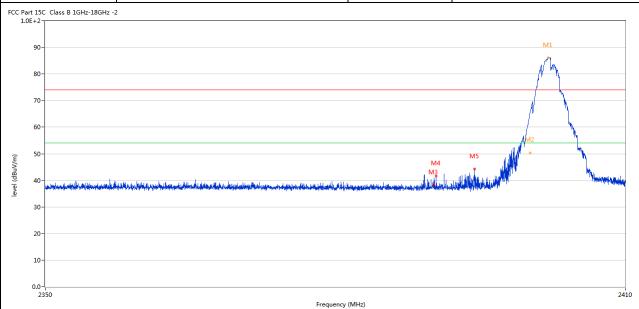


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2401.917	86.11	-3.57	74.0	12.11	Peak	261.00	100	Horizontal	N/A
2	2400.042	65.54	-3.57	74.0	-8.46	Peak	261.00	100	Horizontal	Pass
2**	2400.042	50.21	-3.57	54.0	-3.79	AV	261.00	100	Horizontal	Pass
3	2390.010	38.30	-3.53	74.0	-35.70	Peak	257.00	100	Horizontal	Pass
4	2390.280	41.53	-3.53	74.0	-32.47	Peak	50.00	100	Horizontal	Pass
5	2394.269	44.18	-3.55	74.0	-29.82	Peak	328.00	100	Horizontal	Pass

Report No.: TW2411236-02E Page 25 of 34

Date: 2024-11-28



Product:	GAMING HEADSET	Detector	Vertical					
Mode	Keeping Transmitting	Test Voltage	DC3.7V					
Temperature	24 deg. C,	Humidity	56% RH					
Test Result:	Pass							
FCC Part 15C Class B 1GHz-18GHz -2 1.0E+2-								

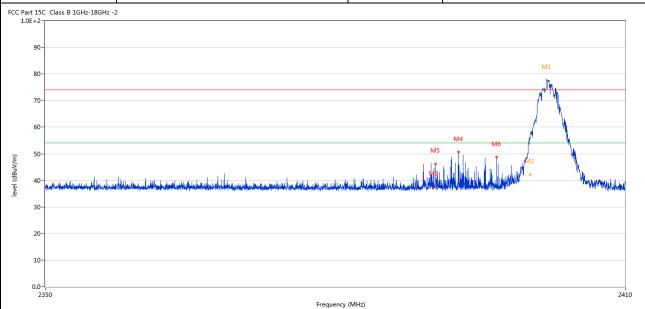

				***	squency (IIII2)					
No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2401.782	77.73	-3.57	74.0	3.73	Peak	61.00	100	Vertical	N/A
2	2400.057	57.23	-3.57	74.0	-16.77	Peak	61.00	100	Vertical	Pass
2**	2400.057	42.20	-3.57	54.0	-11.80	AV	61.00	100	Vertical	Pass
3	2390.055	37.74	-3.53	74.0	-36.26	Peak	65.00	100	Vertical	Pass
4	2392.619	50.59	-3.54	74.0	-23.41	Peak	107.00	100	Vertical	Pass
5	2390.205	46.23	-3.53	74.0	-27.77	Peak	91.00	100	Vertical	Pass
6	2396.563	48.70	-3.56	74.0	-25.30	Peak	116.00	100	Vertical	Pass

Report No.: TW2411236-02E Page 26 of 34

Date: 2024-11-28



	Produ	ot:	C	A MING H	EADCET		Polarity		П	orizontal	
Mode		GAMING HEADSET Keeping Transmitting			Т	Test Voltage		DC3.7V			
		IX				Humidity					
	Temperature Test Result:		24 deg. C, Pass			Humany		56% RH			
	art 15C Class I		-2	ras	8						
1. (m/ngp) janal	90 - 80 - 70 - 60 - 50 - 40 - 20 -			M1	The state of the s	mymmulacette	interview distributed his interview distributed and a single distribute	illiter inches result selection	hinnarian-pasikidah-mhassah	مادرون المراجعة المر	and promised a
	0.0-				2483.5	; Frequency (MHz)					2500
_	o. Freq	uency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdi
No					1	1	1		1		
No	(MH	<u>z</u>)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		

No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	2479.718	85.37	-3.57	74.0	11.37	Peak	261.00	100	Horizontal	N/A
2	2483.500	47.02	-3.57	74.0	-26.98	Peak	228.43	100	Horizontal	Pass

Page 27 of 34

Report No.: TW2411236-02E

Date: 2024-11-28



Product:		ct: GAMING HEADSET		EADSET	Detector		Vertical			
Mode		e Keeping Transmitting			Test Voltage		DC3.7V			
Temperature		24 deg. C,			Hu	ımidity		56% RH		
Test Result:			Pass							
CC Part 1	15C Class B 1GHz-18GHz -	-2								
q	90-									
			M1							
8	30-		AMA.	4						
7	70-		W	M						
	50 -		W.	'\n\h						
6			0.1							
	50-		W.	Wh						
	50-	The second shift of the second	p ^r	hyby hyby 2 hybors si	ability and a discount of	ed skudinskets ikus		sale to deduce a delicano di	Leater de Anglein de intra car	l sides ditt
5	50- 10- <u></u>	and the second s	p ^r	bylo bylo bylog 2	of blick profit at the above the sta	Balanda kadillarda og bandlindar.	steriotecolological	anders and servery	and the state of t	Laddwy Liddl
5	10- mark of his hard before the model of the second of the	Marie de la company de la comp	yv	hph hph hph ₂₂ hph ₁₄₃	والمستوارة المتعارض المتعارض المتعارض	همار واستراب فالإراب والإراب	ورويالل مؤدرانا والمراجع والم	ار بنام عامل بروا <mark>ند</mark> ار مار <mark>فان</mark> ید	a salaha data karaka salaman	Lady Lile
5	50- 10- <u></u>	te den en de la propriée de la d	W.	hip hip hip hip hip hip hip hip hip hip	irt blied med elizade i Venda	المعاد والعادية أنام والمعاددة	nite philosophia de la seconda de la sec	ويرفقون والعالية والمخاورة	بالمنافع فأواد أوالما المنافع والمنافع	Laid us bills
3	10- mark of his hard before the model of the second of the	udanikanikanikalikalikalika	W	hyby hyby hybyta hybans	it bled metric it besides theme	شداديرا المخالفة الم	ide d'altre distribution di lege, de	البرياطية بالطائد فرياطية	neibleden de die der de colonie	tulo, liit
3 2 2 1 0.	10-aket dibbo, the library limitely	a che anni en a de propriét de la del de	W ^r	4 A A A A A A A A A A A A A A A A A A A	et deine med in die kende vollen d	kolugbiski u krobustki a	isin periodikan dikan di	المستواطرية العالمة والمستواطرية	nadhinin disabinish silasida	2500
3 2 1	10	ti dan santu antak kepanah sahih dibidah di ^{YY}	,	2483.5	quency (MHz)	antagbiologica Aspanella a	ete tribucilible etre ellege, in	anda, h. shelira, i, shela Assopl	, a standarda de la composito	
5 5 4 3 2 1	50	Results	Factor	2483.5 Fre	quency (MHz) Over Limit	Detector	Table	Height	ANT	2500
3 2 1 0.	Frequency (MHz)	Results (dBuV/m)	(dB)	2483.5 Fre Limit (dBuV/m)	oquency (MHz) Over Limit (dB)		Table (o)		ANT	2500 Verdic
(W/nngp) javai 3 2 2 1	50	Results		2483.5 Fre	quency (MHz) Over Limit		Table	Height		

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

Report No.: TW2411236-02E

Date: 2024-11-28



Page 28 of 34

8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna with gain -0.58dBi maximum. It fulfills the requirement of this section.

Test Result: Pass

Page 29 of 34

Report No.: TW2411236-02E

Date: 2024-11-28



9.0 20dB Bandwidth Measurement					
Product:	GAMING HEADSET	Test Mode:	Keep transmitting		
Mode	Keeping Transmitting	Test Voltage	DC3.7V		
Temperature	24 deg. C,	Humidity	56% RH		
Test Result:	Pass	Detector	PK		
20dB Bandwidth	1.224MHz				



Date: 27.NOV.2024 16:27:14


Page 30 of 34

Report No.: TW2411236-02E

Date: 2024-11-28



Product:	GAMING HEADSET	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	1.224MHz		

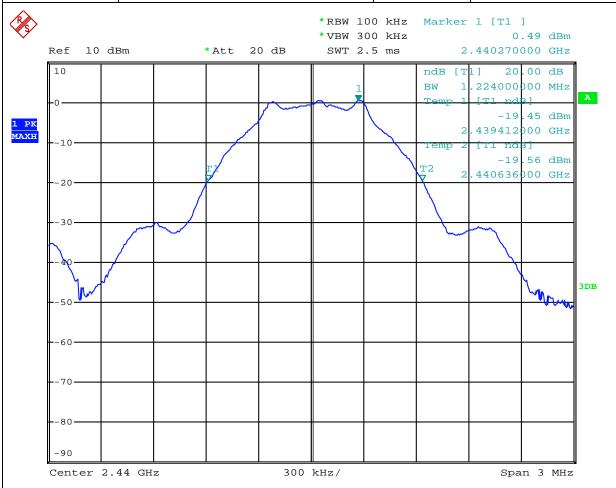

Date: 27.NOV.2024 16:28:00

Page 31 of 34

Report No.: TW2411236-02E

Date: 2024-11-28



Product:	GAMING HEADSET	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	1.224MHz		



Date: 27.NOV.2024 16:28:37

Report No.: TW2411236-02E Page 32 of 34

Date: 2024-11-28



10.0 FCC ID Label

FCC ID: TUVET-9185

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 33 of 34 Report No.: TW2411236-02E

Date: 2024-11-28



11.0 Photo of testing

11.1 Conducted test View--



Report No.: TW2411236-02E

Date: 2024-11-28



Radiated emission test view





Photographs - EUT

Please refer test report TW2411236-01E

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.