

FCC Radio Test Report

FCC ID: 2AIMRRN09

Report No. : BTL-FCCP-3-2410C004
Equipment : Xiaomi Mesh System BE3600 Pro
Model Name : RN09
Brand Name : Xiaomi
Applicant : Beijing Xiaomi Electronics Co., Ltd.
Address : Room 802, Floor 8, Building 5, No.15 KeChuang 10th Road, Beijing Economic and Technological Development Zone, Beijing City, China.
Manufacturer : Beijing Xiaomi Electronics Co., Ltd.
Address : Room 802, Floor 8, Building 5, No.15 KeChuang 10th Road, Beijing Economic and Technological Development Zone, Beijing City, China.
Factory : AZROAD (Zhongshan) Technology Company Limited
Address : (Factory Building 2), No.39 Jinchang Industrial Road, West District, Zhongshan City, Guangdong Province, China
Radio Function : RLAN 5 GHz (U-NII 1, U-NII 2A, U-NII 2C, U-NII 3)
FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart E (15.407)
Measurement : ANSI C63.10-2013
Procedure(s)
Date of Receipt : 2024/12/11
Date of Test : 2024/12/11 ~ 2025/1/17
Issued Date : 2025/1/23

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Poken Huang

Prepared by : _____
Poken Huang, Engineer

Approved by : _____
Peter Chen, Manager

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

REVISION HISTORY	5
1 SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
1.4 DUTY CYCLE	8
2 GENERAL INFORMATION	11
2.1 DESCRIPTION OF EUT	11
2.2 TEST MODES	15
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	17
2.4 SUPPORT UNITS	17
3 AC POWER LINE CONDUCTED EMISSIONS TEST	18
3.1 LIMIT	18
3.2 TEST PROCEDURE	18
3.3 DEVIATION FROM TEST STANDARD	18
3.4 TEST SETUP	19
3.5 TEST RESULT	19
4 RADIATED EMISSIONS TEST	20
4.1 LIMIT	20
4.2 TEST PROCEDURE	21
4.3 DEVIATION FROM TEST STANDARD	21
4.4 TEST SETUP	22
4.5 EUT OPERATING CONDITIONS	23
4.6 TEST RESULT – BELOW 30 MHZ	23
4.7 TEST RESULT – 30 MHZ TO 1 GHZ	23
4.8 TEST RESULT – ABOVE 1 GHZ	23
5 BANDWIDTH TEST	24
5.1 LIMIT	24
5.2 TEST PROCEDURE	24
5.3 DEVIATION FROM TEST STANDARD	24
5.4 TEST SETUP	24
5.5 EUT OPERATING CONDITIONS	24
5.6 TEST RESULT	24
6 OUTPUT POWER TEST	25
6.1 LIMIT	25
6.2 TEST PROCEDURE	25
6.3 DEVIATION FROM TEST STANDARD	25
6.4 TEST SETUP	25
6.5 EUT OPERATING CONDITIONS	25
6.6 TEST RESULT	25
7 POWER SPECTRAL DENSITY	26
7.1 LIMIT	26
7.2 TEST PROCEDURE	26
7.3 DEVIATION FROM TEST STANDARD	26
7.4 TEST SETUP	26
7.5 EUT OPERATING CONDITIONS	26
7.6 TEST RESULT	26

8	LIST OF MEASURING EQUIPMENTS	27
9	EUT TEST PHOTO	30
10	EUT PHOTOS	30
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	31
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	36
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	39
APPENDIX D	BANDWIDTH	341
APPENDIX E	OUTPUT POWER	388
APPENDIX F	POWER SPECTRAL DENSITY	408

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-3-2410C004	R00	Original Report.	2025/1/23	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.209 15.407(b)	Radiated Emissions	APPENDIX B APPENDIX C	Pass	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX D	Pass	-----
15.407(a)	Output Power	APPENDIX E	Pass	-----
15.407(a)	Power Spectral Density	APPENDIX F	Pass	-----
15.203	Antenna Requirement	-----	Pass	NOTE (4)
15.407(c)	Automatically Discontinue Transmission	-----	Pass	NOTE (3)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) The device what use replaceable antennas with non-standard interfaces are considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

(FCC DN: TW0659)

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

☒ CB20 ☒ TR01 ☒ C01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C20	CISPR	150 kHz ~ 30MHz	2.4498

B. Radiated emissions test:

Test Site	Measurement Frequency Range	U,(dB)
CB20	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test:

Test Item	U
Occupied Bandwidth	0.83 %
Output power	0.8909 dB
Power Spectral Density	0.8903 dB
Conducted Spurious emissions	1.8304 dB
Conducted Band edges	1.8338 dB
Frequency Stability	166.77 Hz

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS


Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	25°C, 45%	AC 120V	Benny Cao
Radiated emissions below 1 GHz	25°C, 65%	AC 120V	Benny Cao
Radiated emissions above 1 GHz	25°C, 65%	AC 120V	Benny Cao
Bandwidth	25°C, 55%	AC 120V	Cheng Tsai
Output Power	25°C, 55%	AC 120V	Cheng Tsai
Power Spectral Density	25°C, 55%	AC 120V	Cheng Tsai

1.4 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)
IEEE 802.11a	1.432	1	1.432	1.624	88.18%	0.55
IEEE 802.11ac (VHT20)	5.446	1	5.446	5.502	98.98%	0.00
IEEE 802.11ac (VHT40)	5.412	1	5.412	5.560	97.34%	0.12
IEEE 802.11ac (VHT80)	5.414	1	5.414	5.645	95.91%	0.18
IEEE 802.11ac (VHT160)	5.432	1	5.432	5.600	97.00%	0.13
IEEE 802.11ax (HE20)	5.456	1	5.456	5.594	97.53%	0.11
IEEE 802.11ax (HE40)	5.426	1	5.426	5.617	96.60%	0.15
IEEE 802.11ax (HE80)	5.423	1	5.423	5.557	97.59%	0.11
IEEE 802.11ax (HE160)	5.456	1	5.456	5.680	96.06%	0.17
IEEE 802.11be(EHT20)	5.429	1	5.429	5.558	97.68%	0.00
IEEE 802.11be(EHT40)	5.429	1	5.429	5.602	96.91%	0.14
IEEE 802.11be(EHT80)	5.426	1	5.426	5.559	97.61%	0.11
IEEE 802.11be(EHT160)	5.460	1	5.460	5.628	97.01%	0.13

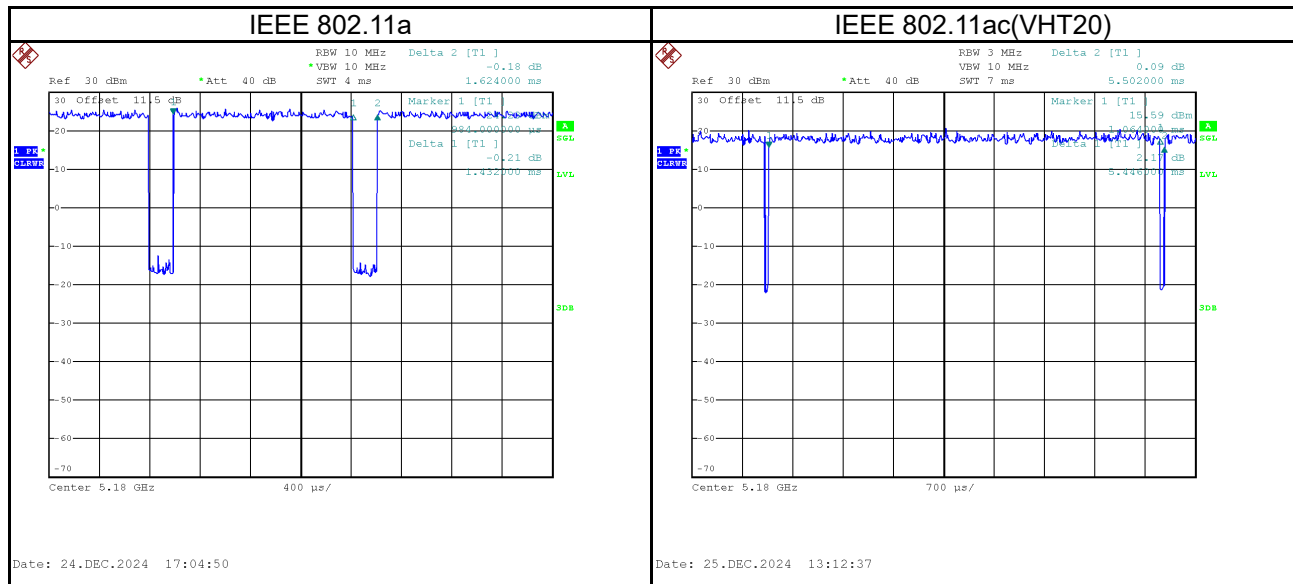


IEEE 802.11ac(VHT40)

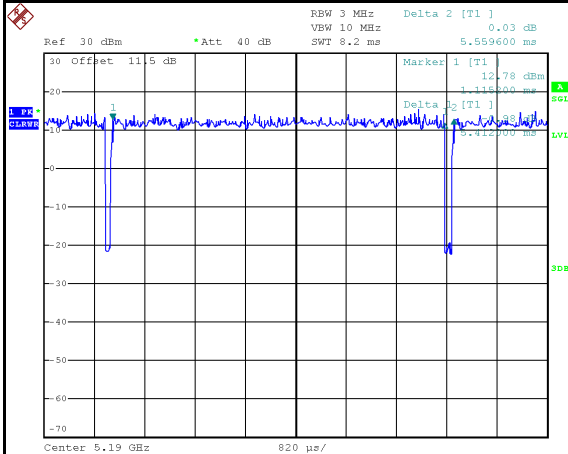


Date: 25.DEC.2024 13:35:21

IEEE 802.11ac (VHT80)

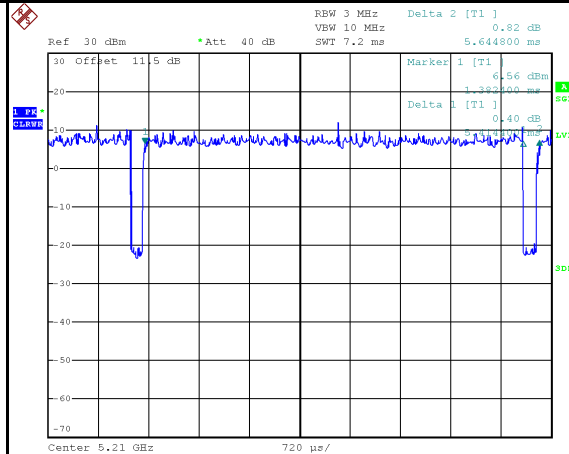


Date: 25.DEC.2024 14:32:06

IEEE 802.11ac (VHT160)

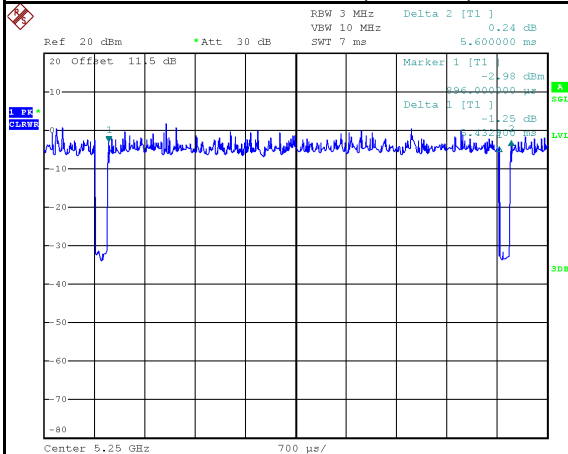


Date: 25.DEC.2024 15:13:25

IEEE 802.11ax (HE20)

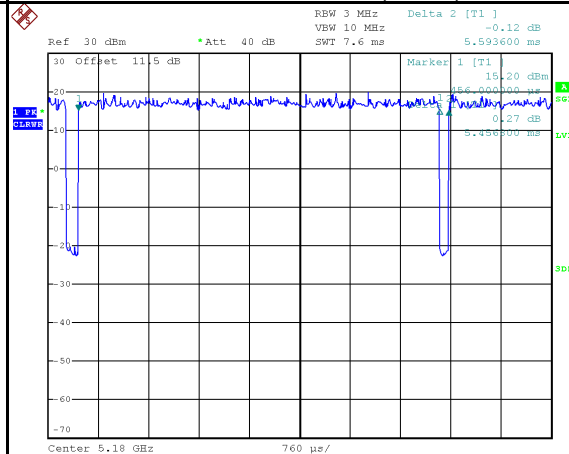


Date: 25.DEC.2024 15:22:29

IEEE 802.11ax (HE40)

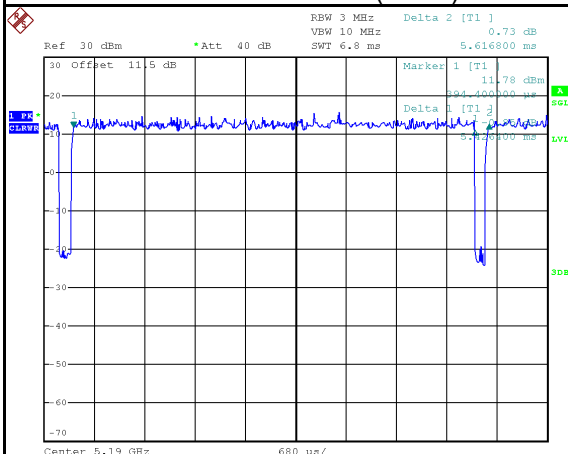


Date: 25.DEC.2024 16:27:14

IEEE 802.11ax (HE80)

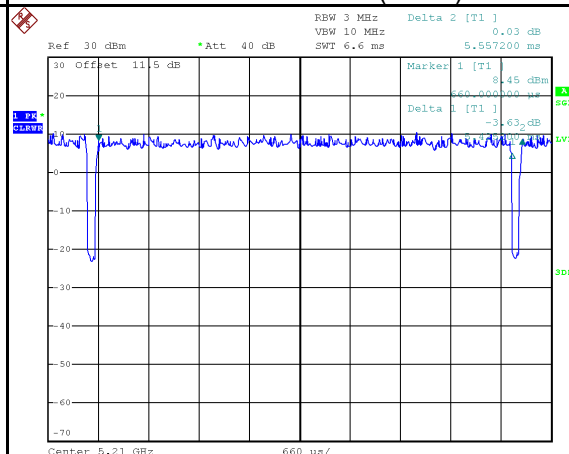


Date: 25.DEC.2024 17:17:57

IEEE 802.11ax (HE160)

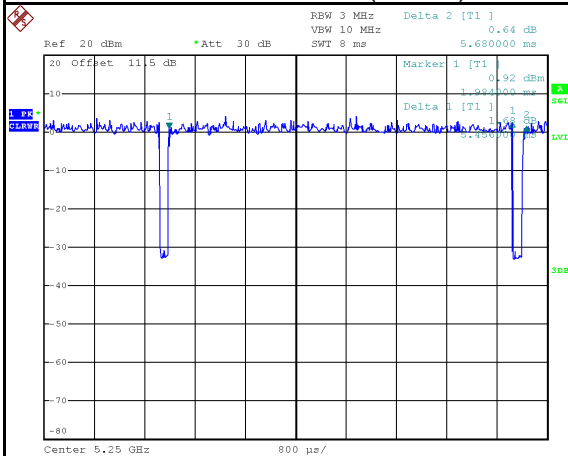


Date: 27.DEC.2024 15:44:26

IEEE 802.11be (EHT20)

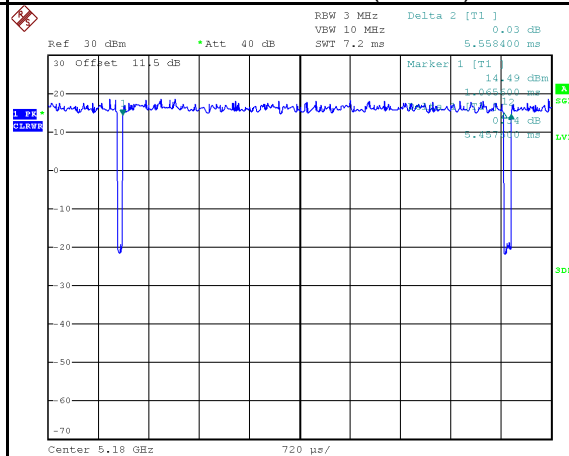


Date: 26.DEC.2024 09:45:17

IEEE 802.11be (EHT40)

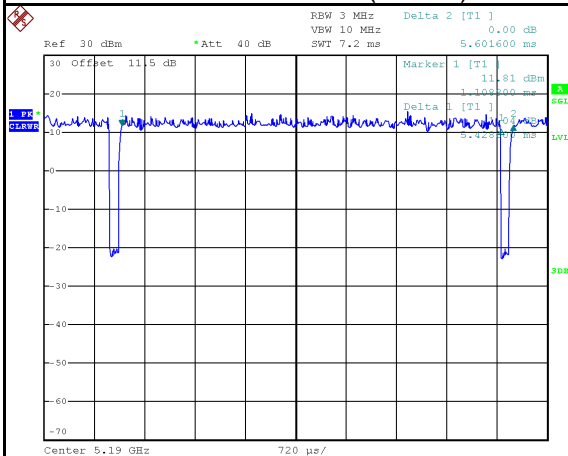


Date: 26.DEC.2024 10:41:16

IEEE 802.11be (EHT80)

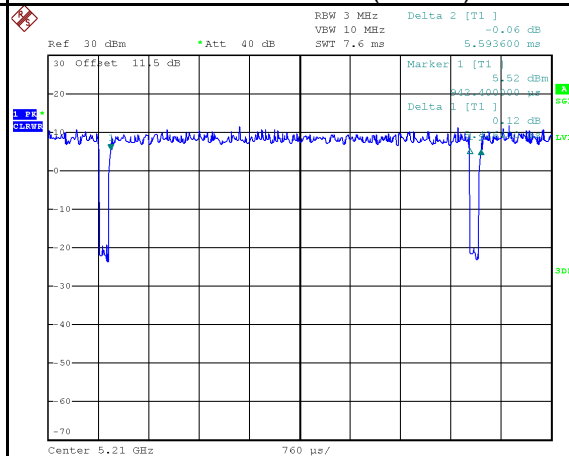

Date: 26.DEC.2024 11:22:43

IEEE 802.11be (EHT160)

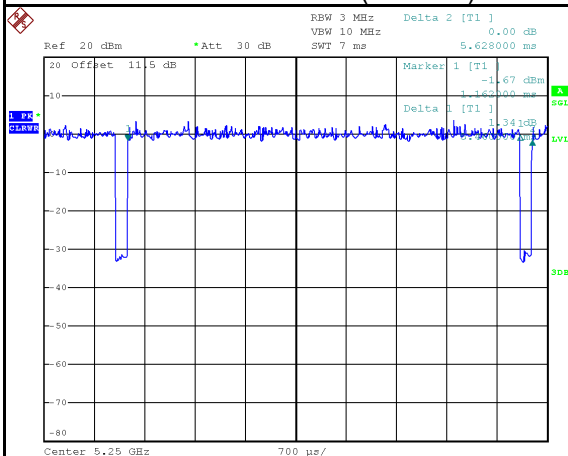

Date: 26.DEC.2024 11:41:03

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	Xiaomi Mesh System BE3600 Pro
Brand Name	Xiaomi
Model Name	RN09
Model Difference	N/A
Hardware Version	1.0
Software Version	1.0.1
Power Source	DC Voltage supplied from AC adapter. Model: ADS-18MC-1212018EPCU
Power Rating	I/P:100-240V ~ 50/60Hz 0.6A O/P:12.0V --- 1.5A
Operation Bands	UNII-1: 5150 MHz to 5250 MHz UNII-2A: 5250 MHz to 5350 MHz UNII-2C: 5470 MHz to 5725 MHz UNII-3: 5725 MHz to 5850 MHz
Operation Frequency	UNII-1: 5180 MHz to 5250 MHz UNII-2A: 5250 MHz to 5320 MHz UNII-2C: 5500 MHz to 5700 MHz UNII-3: 5745 MHz to 5825 MHz
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6 Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7 Mbps 802.11ax: up to 2402 Mbps 802.11be: up to 2882 Mbps
Output Power Max. for UNII-1	IEEE 802.11ax(HE40): 26.98 dBm (0.4989 W)
Output Power Max. for UNII-2A	IEEE 802.11ax(HE40): 22.30 dBm (0.1698 W)
Output Power Max. for UNII-2C	IEEE 802.11be(EHT40): 22.34 dBm (0.1714W)
Output Power Max. for UNII-3	IEEE 802.11a: 26.99 dBm (0.5000 W)
Test Model	RN09
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

- (1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

IEEE 802.11ac(VHT160) IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)
50	5250
114	5570

(3) Table for Filed Antenna:

Ant.	Brand Name	Model Name	Type	Connector	Gain (dBi)
1	South star	NR01	PCB	IPEX	7.18
2	South star	NR01	PCB	IPEX	7.62

Note:

a) The EUT incorporates a CDD function(except the IEEE 802.11a mode). and all antenna gains are not equal, Directional gain = $G_{ANT} + \text{Array Gain}$. For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=7.62. Then, the UNII-1 and UNII-3 power limit is $30 - (7.62 - 6) = 28.38$, UNII-2A and UNII-2C power limit is $23.98 - (7.62 - 6) = 22.36$.

For power spectral density measurements, $N_{ANT} = 2$, $N_{SS} = 1$.

So the Directional gain = $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 7.62 + 10\log(2/1)\text{dBi} = 10.63$.

Then, the UNII-1 power spectral density limit is $17 - (10.63 - 6) = 12.37$, UNII-2A and UNII-2C power spectral density limit is $11 - (10.63 - 6) = 6.37$, the UNII-3 power spectral density limit is $30 - (10.63 - 6) = 25.37$.

b) Beamforming gain: 3 dB. The the Directional gain = $7.63 + 3 = 9.63$ dB.

(4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

(5) Operating Mode and Antenna Configuration

TX Mode \ Operating Mode	1TX	2TX
IEEE 802.11a	V (Ant. 1)	-
IEEE 802.11ac (VHT20)	-	V (Ant. 1+Ant. 2)
IEEE 802.11ac (VHT40)	-	V (Ant. 1+Ant. 2)
IEEE 802.11ac (VHT80)	-	V (Ant. 1+Ant. 2)
IEEE 802.11ac (VHT160)	-	V (Ant. 1+Ant. 2)
IEEE 802.11ax (HE20)	-	V (Ant. 1+Ant. 2)
IEEE 802.11ax (HE40)	-	V (Ant. 1+Ant. 2)
IEEE 802.11ax (HE80)	-	V (Ant. 1+Ant. 2)
IEEE 802.11ax (HE160)	-	V (Ant. 1+Ant. 2)
IEEE 802.11be (EHT20)	-	V (Ant. 1+Ant. 2)
IEEE 802.11be (EHT40)	-	V (Ant. 1+Ant. 2)
IEEE 802.11be (EHT80)	-	V (Ant. 1+Ant. 2)
IEEE 802.11be (EHT160)	-	V (Ant. 1+Ant. 2)

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	TX Mode_ IEEE 802.11a	149	-
Transmitter Radiated Emissions (above 1GHz)	TX Mode_ IEEE 802.11a	36/48, 52/64 100/140, 149/165	Bandedge
	TX Mode_ IEEE 802.11ac (VHT20) TX Mode_ IEEE 802.11ax (HE20) TX Mode_ IEEE 802.11be (EHT20)		
	TX Mode_ IEEE 802.11ac (VHT40) TX Mode_ IEEE 802.11ax (HE40) TX Mode_ IEEE 802.11be (EHT40)		
	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HE80) TX Mode_ IEEE 802.11be (EHT80)	38/46, 54/62 102/134, 151/159	
	TX Mode_ IEEE 802.11ac (VHT160) TX Mode_ IEEE 802.11ax (HE160) TX Mode_ IEEE 802.11be (EHT160)	42, 58 106, 122, 155	
	TX Mode_ IEEE 802.11ac (VHT160) TX Mode_ IEEE 802.11ax (HE160) TX Mode_ IEEE 802.11be (EHT160)	50 114	
	TX Mode_ IEEE 802.11a	36/40/48 52/60/64 100/116/140 149/157/165	Harmonic
	TX Mode_ IEEE 802.11ac (VHT20) TX Mode_ IEEE 802.11ax (HE20) TX Mode_ IEEE 802.11be (EHT20)	36/40/48 52/60/64 100/116/140/144 149/157/165	
	TX Mode_ IEEE 802.11ac (VHT40) TX Mode_ IEEE 802.11ax (HE40) TX Mode_ IEEE 802.11be (EHT40)	38/46, 54/62 102/110/134/142 151/159	
	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HE80) TX Mode_ IEEE 802.11be (EHT80)	42, 58 106/122/138, 155	
	TX Mode_ IEEE 802.11ac (VHT160) TX Mode_ IEEE 802.11ax (HE160) TX Mode_ IEEE 802.11be (EHT160)	50 114	
	TX Mode_ IEEE 802.11a	36/40/48 52/60/64 100/116/140 149/157/165	-
Bandwidth	TX Mode_ IEEE 802.11ac (VHT20) TX Mode_ IEEE 802.11ax (HE20) TX Mode_ IEEE 802.11be (EHT20)	36/40/48 52/60/64 100/116/140 149/157/165	
	TX Mode_ IEEE 802.11ac (VHT40) TX Mode_ IEEE 802.11ax (HE40) TX Mode_ IEEE 802.11be (EHT40)	38/46, 54/62 102/110/134 151/159	
	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HE80) TX Mode_ IEEE 802.11be (EHT80)	42, 58 106/122/138, 155	
	TX Mode_ IEEE 802.11ac (VHT160) TX Mode_ IEEE 802.11ax (HE160) TX Mode_ IEEE 802.11be (EHT160)	50 114	
	TX Mode_ IEEE 802.11a	36/40/48 52/60/64 100/116/140 149/157/165	


Power Spectral Density & Output Power	TX Mode_ IEEE 802.11a	36/40/48 52/60/64 100/116/140 149/157/165	-
	TX Mode_ IEEE 802.11ac (VHT20) TX Mode_ IEEE 802.11ax (HE20) TX Mode_ IEEE 802.11be (EHT20)	36/40/48 52/60/64 100/116/140/144 149/157/165	
	TX Mode_ IEEE 802.11ac (VHT40) TX Mode_ IEEE 802.11ax (HE40) TX Mode_ IEEE 802.11be (EHT40)	38/46, 54/62 102/110/134/142 151/159	
	TX Mode_ IEEE 802.11ac (VHT80) TX Mode_ IEEE 802.11ax (HE80) TX Mode_ IEEE 802.11be (EHT80)	42, 58 106/122/138, 155	
	TX Mode_ IEEE 802.11ac (VHT160) TX Mode_ IEEE 802.11ax (HE160) TX Mode_ IEEE 802.11be (EHT160)	50 114	

NOTE:

- (1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (2) HT20/HT40 covers VHT20/VHT40, due to same modulation. The power setting for 802.11ac VHT20 and VHT40 are the same or lower than 802.11n HT20 and HT40.
- (3) For radiated emission above 18GHz test, only tested and recorded the worst case.
- (4) IEEE 802.11ax mode and IEEE 802.11be mode only supports full RU, so only the full RU is evaluated and measured inside report
- (5) For radiated emission below 1 GHz test, the TX Mode_ IEEE 802.11a Mode Channel 149 is found to be the worst case and recorded.
- (6) The electric field intensity signal emitted at 9 kHz kHz - 30 MHz is too weak (20 dB below the limit), so the measured value is not recorded in this report.
- (7) The Output Power of the Beamforming mode will be lower than that of the non-Beamforming mode. Only non-Beamforming mode will be evaluated and recorded in the report.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

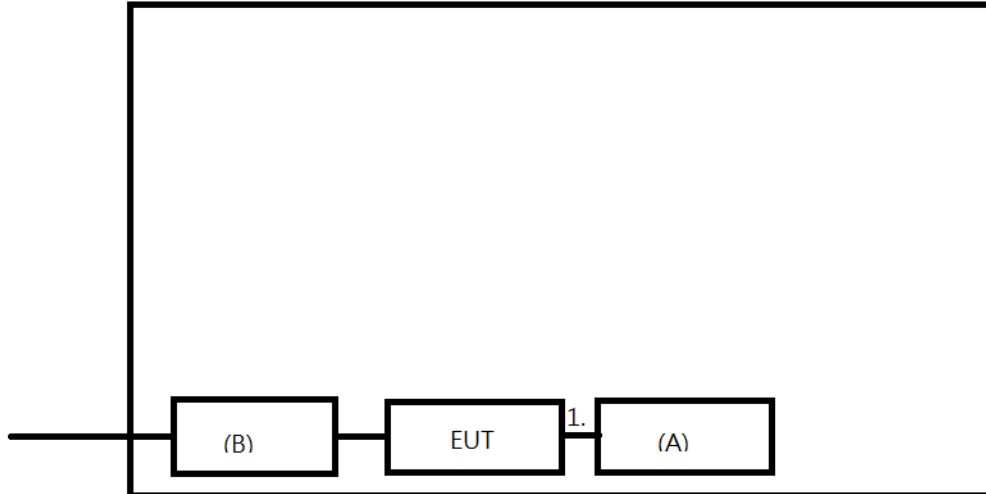

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Notebook	Lenovo	ThinkBook 14 G4 IAP	MP28KHAH	Furnished by test lab.
B	Adapter	Xiaomi	ADS-18MC-1212018 EPCU	N/A	Supplied by test requester.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	RJ45 Cable	N	1m	N	Supplied by test requester.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level (dBμV)		Correct Factor (dB)		Measurement Value (dBμV)
38.22	+	3.45	=	41.67

Measurement Value (dBμV)		Limit Value (dBμV)		Margin Level (dB)
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

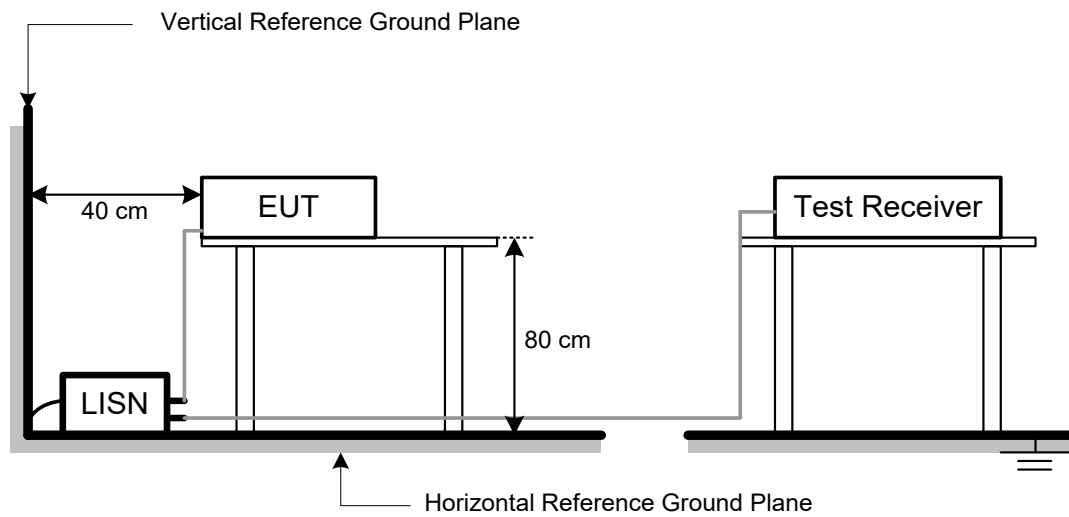

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (NOTE 2)	68.3
	10 (NOTE 2)	105.3
	15.6 (NOTE 2)	110.9
	27 (NOTE 2)	122.3

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBμV)		Correct Factor (dB/m)		Measurement Value (dBμV/m)
36.23	+	-11.97	=	24.26

Measurement Value (dBμV/m)		Limit Value (dBμV/m)		Margin Level (dB)
24.26	-	40	=	-15.74

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

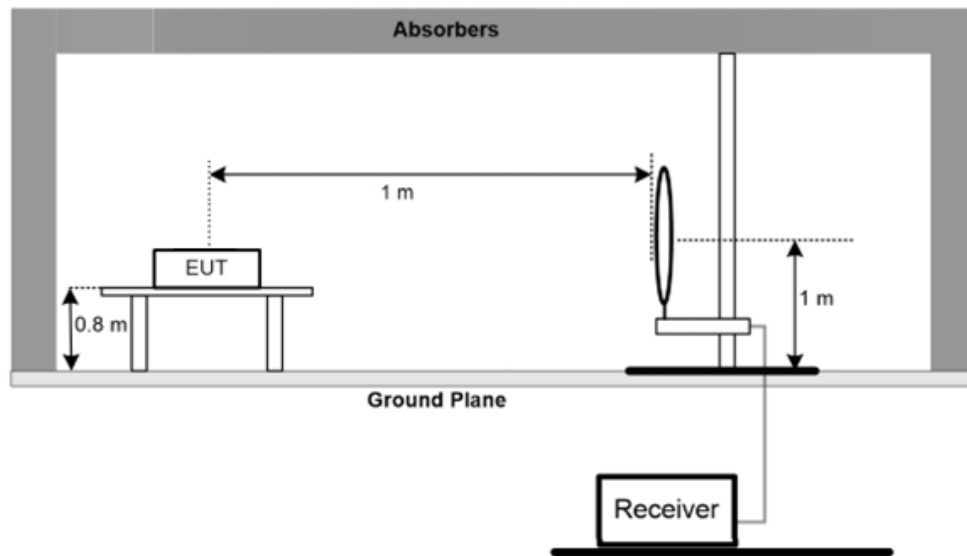

30 MHz to 1 GHz

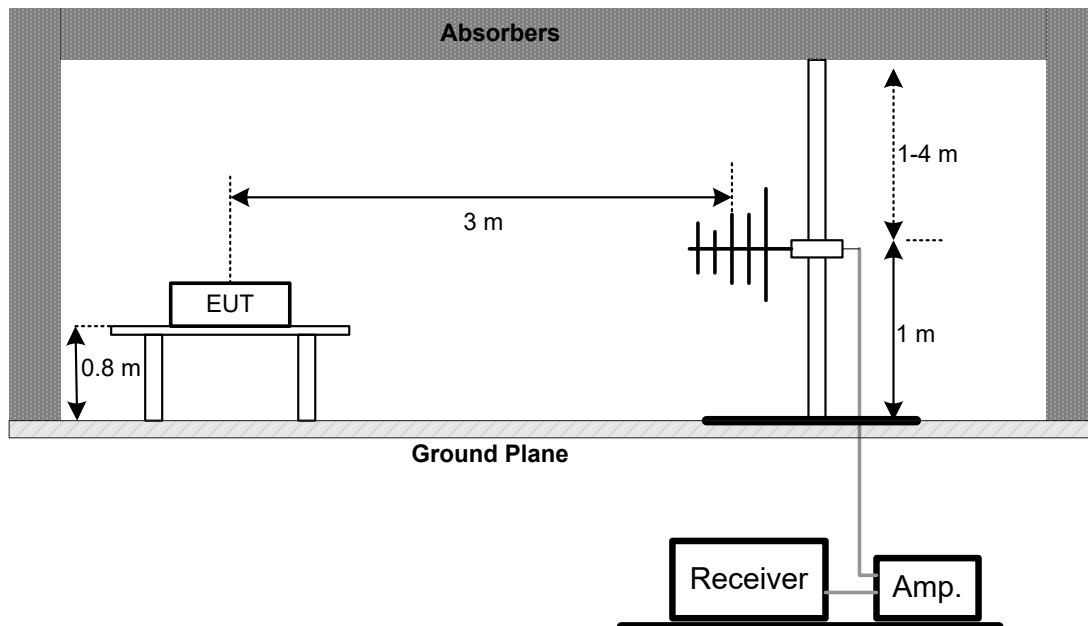

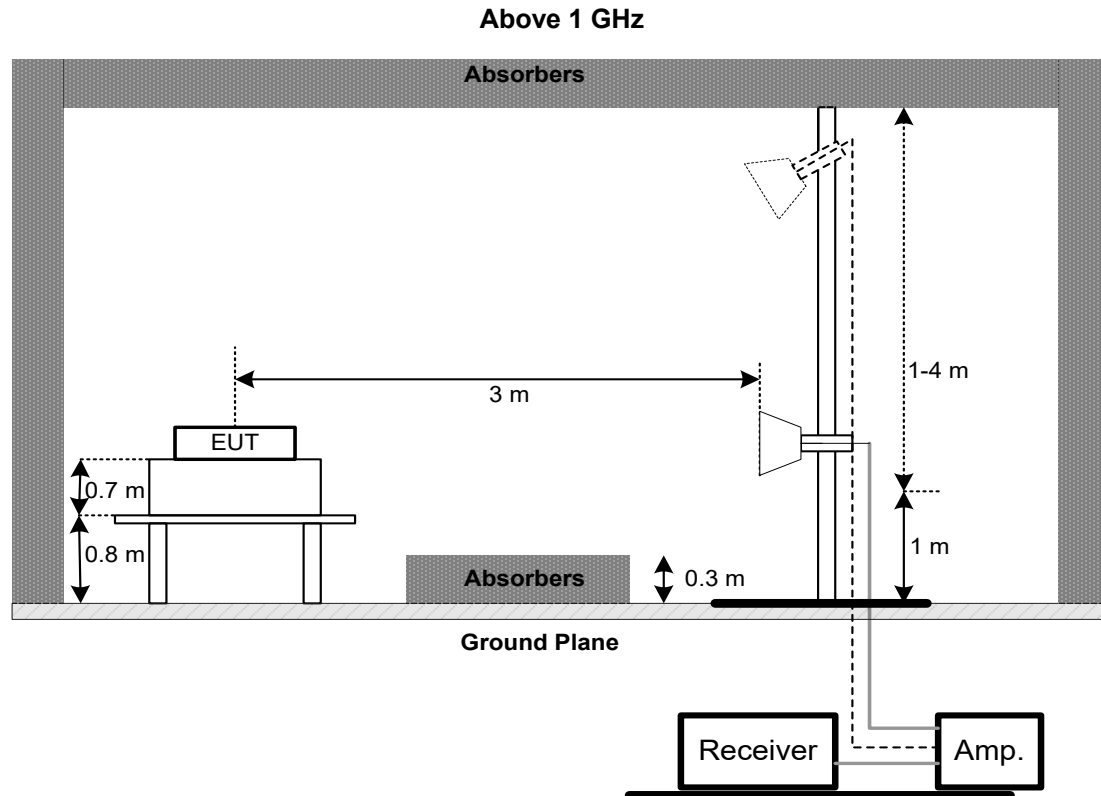

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST

5.1 LIMIT

Section	Test Item	Frequency Range (MHz)
15.407(a)	26 dB Bandwidth	5150-5250
		5250-5350
		5470-5725
	Minimum 500 kHz 6 dB Bandwidth	5725-5850

5.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	> RBW

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP

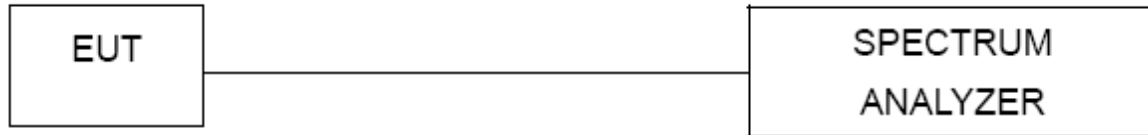

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX D.

6 OUTPUT POWER TEST

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).


6.2 TEST PROCEDURE

- a. The EUT was directly connected to the Peak Power Analyzer and antenna output port as show in the block diagram below.
- b. The maximum peak conducted output power was performed in accordance with method of clause E. 3. a) FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
 - a)Method PM (Measurement using an RF average power meter):
 - (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied
The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
 - (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

6.3 DEVIATION FROM TEST STANDARD

No deviation.

6.4 TEST SETUP

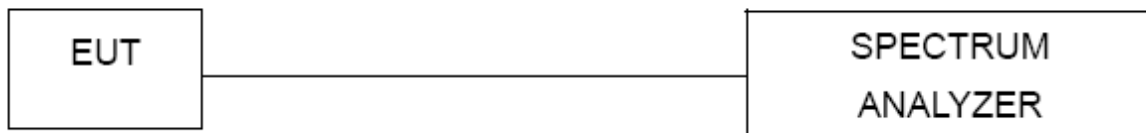

6.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULT

Please refer to the APPENDIX E.

7 POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz
VBW	≥ 3 MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM TEST STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULT

Please refer to the APPENDIX G.

8 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Two-Line V-Network	R&S	ENV216	101051	2024/6/26	2025/6/25
2	Test Cable	EMCI	EMCRG58-BM-B M-9000	210501	2024/12/10	2025/12/9
3	EMC Receiver	Keysight	N9038A	MY54130009	2024/6/27	2025/6/26
4	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions – For test date: 2024/12/14-2024/12/30						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Pre-Amplifier	EMCI	EMC184045SE	980512	2024/12/10	2025/12/9
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	340	2024/6/27	2025/6/26
3	Test Cable	EMCI	EMC102-KM-KM-1000	220328	2024/12/10	2025/12/9
4	Test Cable	EMCI	EMC101G-KM-KM-3000	220330	2024/12/10	2025/12/9
5	Broad-Band Horn Antenna	RFSPIN	DRH18-E	210109A18E	2024/1/10	2025/1/9
6	Pre-Amplifier	EMCI	EMC051845SE	980779	2024/12/10	2025/12/9
7	Test Cable	EMCI	EMC105-SM-SM-1000	210119	2024/12/10	2025/12/9
8	Test Cable	EMCI	EMC105-SM-SM-3000	210118	2024/12/10	2025/12/9
9	Test Cable	EMCI	EMC105-SM-SM-7000	210117	2024/12/10	2025/12/9
10	EXA Spectrum Analyzer	keysight	N9020B	MY59050137	2024/11/24	2025/11/25
11	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01207	2024/12/4	2025/12/3
12	EMC Receiver	Keysight	N9038A	MY54130009	2024/6/27	2025/6/26
13	Pre-Amplifier	EMCI	EMC001330-2020 1222	980807	2024/12/9	2025/12/8
14	Test Cable	EMCI	EMC-8D-NM-NM-5000	150106	2024/12/9	2025/12/8
15	Test Cable	EMCI	EMC-CFD-400-N M-NM-8000	200348	2024/12/9	2025/12/8
16	Test Cable	EMCI	EMC-CFD-400-N M-NM-3300	200343	2024/12/9	2025/12/8
17	Loop Ant.	Electro-Metrics	EMCI-LPA600	274	2024/7/5	2025/7/4
18	EMC Receiver	Keysight	N9038A	MY54130009	2024/6/27	2025/6/26
19	Pre-Amplifier	EMCI	EMC001340	980555	2024/12/1	2025/11/30

Radiated Emissions – For test date: 2025/1/10-2025/1/13						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Pre-Amplifier	EMCI	EMC184045SE	980512	2024/12/10	2025/12/9
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	340	2024/6/27	2025/6/26
3	Test Cable	EMCI	EMC102-KM-KM-1000	220328	2024/12/10	2025/12/9
4	Test Cable	EMCI	EMC101G-KM-KM-3000	220330	2024/12/10	2025/12/9
5	Broad-Band Horn Antenna	RFSPIN	DRH18-E	210109A18E	2025/1/9	2026/1/8
6	Pre-Amplifier	EMCI	EMC051845SE	980779	2024/12/10	2025/12/9
7	Test Cable	EMCI	EMC105-SM-SM-1000	210119	2024/12/10	2025/12/9
8	Test Cable	EMCI	EMC105-SM-SM-3000	210118	2024/12/10	2025/12/9
9	Test Cable	EMCI	EMC105-SM-SM-7000	210117	2024/12/10	2025/12/9
10	EXA Spectrum Analyzer	keysight	N9020B	MY59050137	2024/11/24	2025/11/25
11	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01207	2024/12/4	2025/12/3
12	EMC Receiver	Keysight	N9038A	MY54130009	2024/6/27	2025/6/26
13	Pre-Amplifier	EMCI	EMC001330-20201222	980807	2024/12/9	2025/12/8
14	Test Cable	EMCI	EMC-8D-NM-NM-5000	150106	2024/12/9	2025/12/8
15	Test Cable	EMCI	EMC-CFD-400-NM-NM-8000	200348	2024/12/9	2025/12/8
16	Test Cable	EMCI	EMC-CFD-400-NM-NM-3300	200343	2024/12/9	2025/12/8
17	Loop Ant.	Electro-Metrics	EMCI-LPA600	274	2024/7/5	2025/7/4
18	EMC Receiver	Keysight	N9038A	MY54130009	2024/6/27	2025/6/26
19	Pre-Amplifier	EMCI	EMC001340	980555	2024/12/1	2025/11/30

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2024/6/27	2025/6/26
2	10dbAttenuator	INMET	AHC-10dB	1	2024/11/26	2025/11/25
3	BTL-Conducted Test	BTL	1247788684	N/A	N/A	N/A

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	USB Peak Power Sensor	Anritsu	MA24408A	12589	2024/10/25	2025/10/24
2	10dbAttenuator	INMET	AHC-10dB	1	2024/11/26	2025/11/25
3	Measurement Software	Anritsu	MA2440A Peak Power analyzer(Ver1.1.0.0)	N/A	N/A	N/A

Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	USB Peak Power Sensor	Anritsu	MA24408A	12589	2024/10/25	2025/10/24
2	10dbAttenuator	INMET	AHC-10dB	1	2024/11/26	2025/11/25
3	Measurement Software	Anritsu	MA2440A Peak Power analyzer(Ver1.1.0.0)	N/A	N/A	N/A

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

9 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2410C004-1 (APPENDIX-TEST PHOTOS).

10 EUT PHOTOS

Please refer to document Appendix No.: EP-2410C004-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2024/12/24
Test Frequency	-	Phase	Line

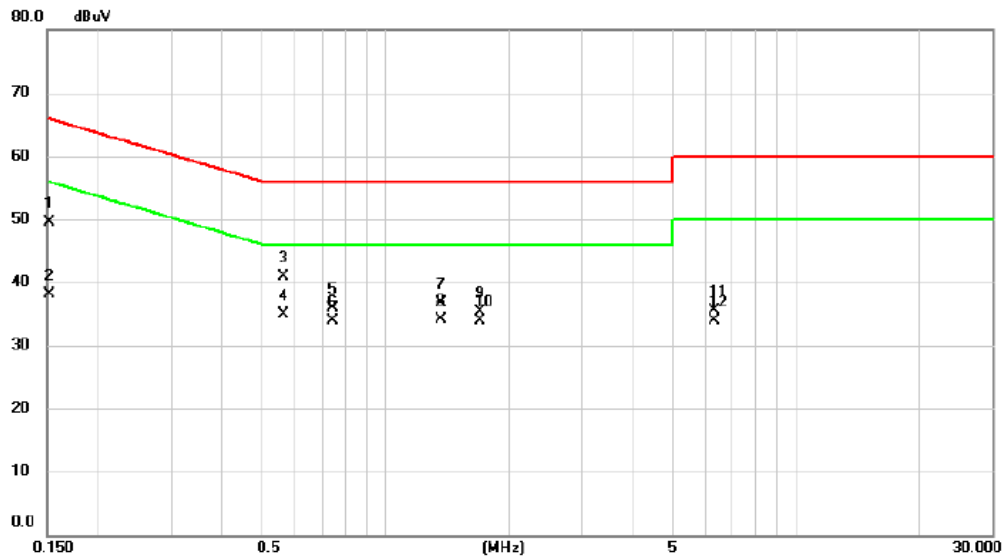


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1521	39.90	9.65	49.55	65.88	-16.33	QP	
2		0.1521	28.38	9.65	38.03	55.88	-17.85	AVG	
3		0.5630	31.37	9.62	40.99	56.00	-15.01	QP	
4	*	0.5630	25.38	9.62	35.00	46.00	-11.00	AVG	
5		0.7430	26.22	9.62	35.84	56.00	-20.16	QP	
6		0.7430	24.37	9.62	33.99	46.00	-12.01	AVG	
7		1.3595	27.00	9.66	36.66	56.00	-19.34	QP	
8		1.3595	24.44	9.66	34.10	46.00	-11.90	AVG	
9		1.6925	25.57	9.69	35.26	56.00	-20.74	QP	
10		1.6925	24.24	9.69	33.93	46.00	-12.07	AVG	
11		6.3250	25.70	9.87	35.57	60.00	-24.43	QP	
12		6.3250	24.01	9.87	33.88	50.00	-16.12	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2024/12/24
Test Frequency	-	Phase	Neutral

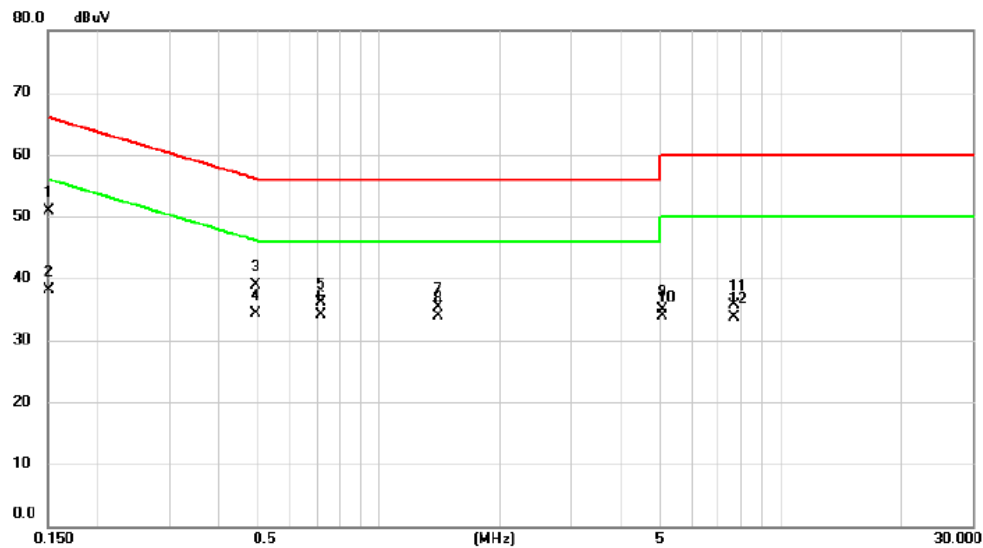


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1510	41.30	9.62	50.92	65.94	-15.02	QP	
2		0.1510	28.40	9.62	38.02	55.94	-17.92	AVG	
3		0.4934	29.33	9.60	38.93	56.11	-17.18	QP	
4	*	0.4934	24.74	9.60	34.34	46.11	-11.77	AVG	
5		0.7160	26.57	9.62	36.19	56.00	-19.81	QP	
6		0.7160	24.43	9.62	34.05	46.00	-11.95	AVG	
7		1.4000	25.64	9.66	35.30	56.00	-20.70	QP	
8		1.4000	24.28	9.66	33.94	46.00	-12.06	AVG	
9		5.0750	24.99	9.83	34.82	60.00	-25.18	QP	
10		5.0750	24.12	9.83	33.95	50.00	-16.05	AVG	
11		7.6250	25.75	9.91	35.66	60.00	-24.34	QP	
12		7.6250	23.83	9.91	33.74	50.00	-16.26	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2024/12/24
Test Frequency	-	Phase	Line

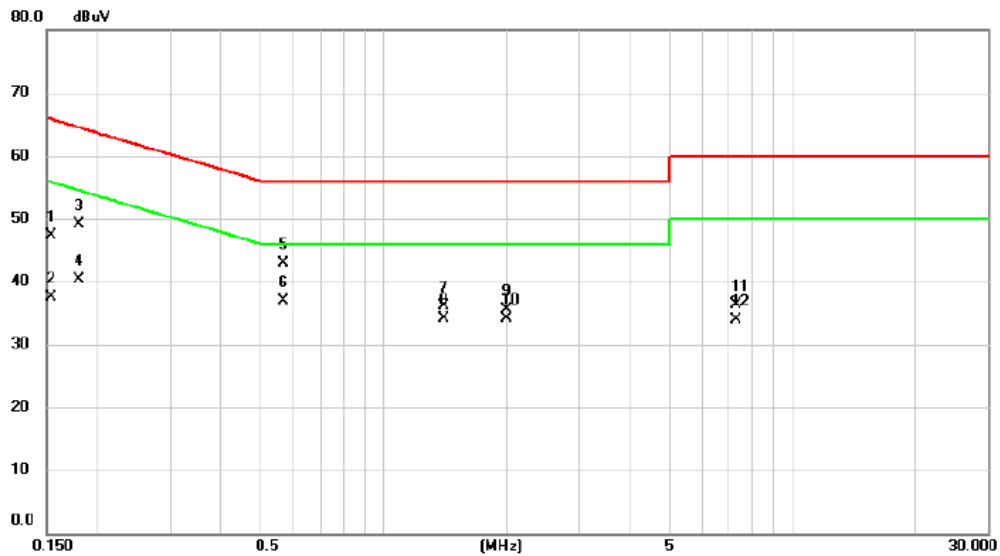


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1535	37.74	9.65	47.39	65.81	-18.42	QP	
2		0.1535	27.87	9.65	37.52	55.81	-18.29	AVG	
3		0.1794	39.56	9.63	49.19	64.51	-15.32	QP	
4		0.1794	30.65	9.63	40.28	54.51	-14.23	AVG	
5		0.5675	33.26	9.62	42.88	56.00	-13.12	QP	
6	*	0.5675	27.23	9.62	36.85	46.00	-9.15	AVG	
7		1.4000	26.53	9.66	36.19	56.00	-19.81	QP	
8		1.4000	24.37	9.66	34.03	46.00	-11.97	AVG	
9		1.9985	25.69	9.72	35.41	56.00	-20.59	QP	
10		1.9985	24.34	9.72	34.06	46.00	-11.94	AVG	
11		7.3000	26.42	9.90	36.32	60.00	-23.68	QP	
12		7.3000	24.04	9.90	33.94	50.00	-16.06	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2024/12/24
Test Frequency	-	Phase	Neutral

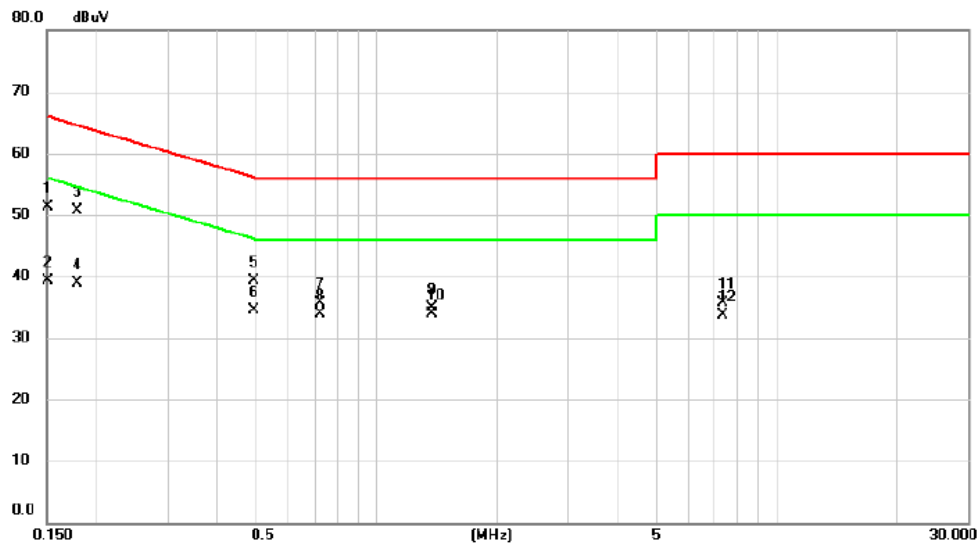

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1507	41.69	9.62	51.31	65.96	-14.65	QP	
2	0.1507	29.62	9.62	39.24	55.96	-16.72	AVG	
3	0.1780	41.13	9.62	50.75	64.58	-13.83	QP	
4	0.1780	29.21	9.62	38.83	54.58	-15.75	AVG	
5	0.4941	29.61	9.60	39.21	56.10	-16.89	QP	
6 *	0.4941	24.83	9.60	34.43	46.10	-11.67	AVG	
7	0.7205	26.16	9.62	35.78	56.00	-20.22	QP	
8	0.7205	24.34	9.62	33.96	46.00	-12.04	AVG	
9	1.3775	25.21	9.66	34.87	56.00	-21.13	QP	
10	1.3775	24.18	9.66	33.84	46.00	-12.16	AVG	
11	7.3500	25.71	9.90	35.61	60.00	-24.39	QP	
12	7.3500	23.84	9.90	33.74	50.00	-16.26	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11a	Test Date	2024/12/14
Test Frequency	5745MHz	Polarization	Vertical

80 dBuV/m

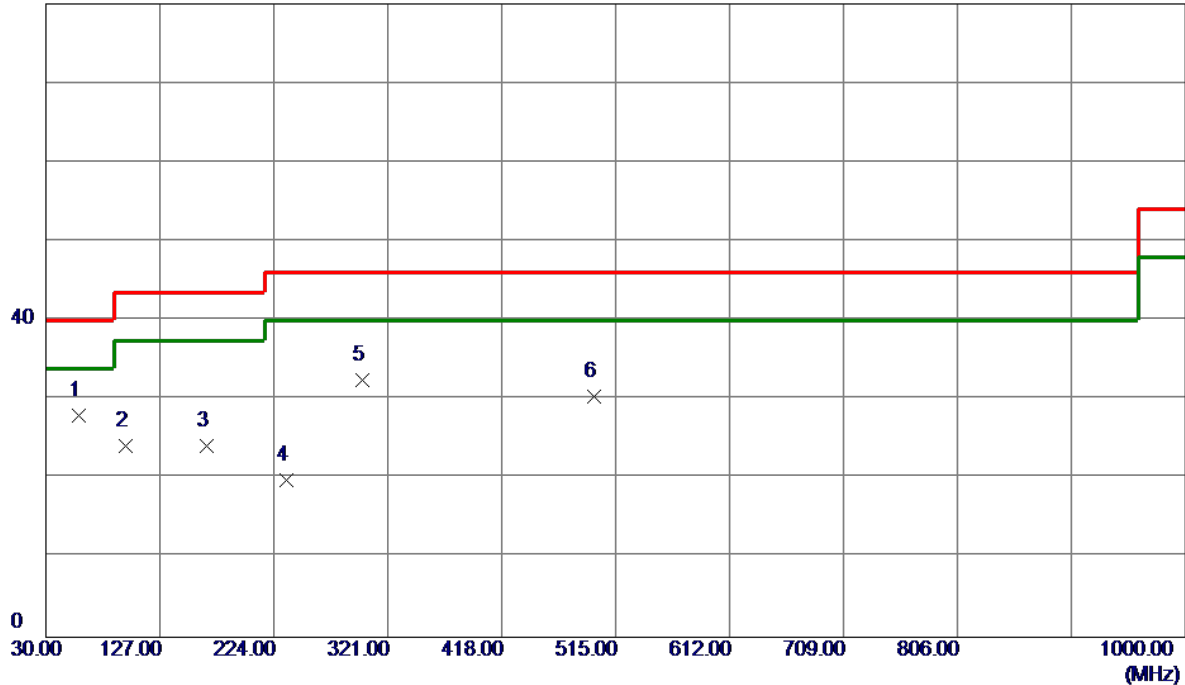


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	58.1300	39.74	-11.74	28.00	40.00	-12.00	Peak	
2	97.9000	40.47	-16.33	24.14	43.50	-19.36	Peak	
3	166.7700	35.69	-11.49	24.20	43.50	-19.30	Peak	
4	234.6700	32.79	-12.94	19.85	46.00	-26.15	Peak	
5	299.6600	42.55	-10.00	32.55	46.00	-13.45	Peak	
6	496.5700	35.38	-5.01	30.37	46.00	-15.63	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/14
Test Frequency	5745MHz	Polarization	Horizontal

80 dBuV/m

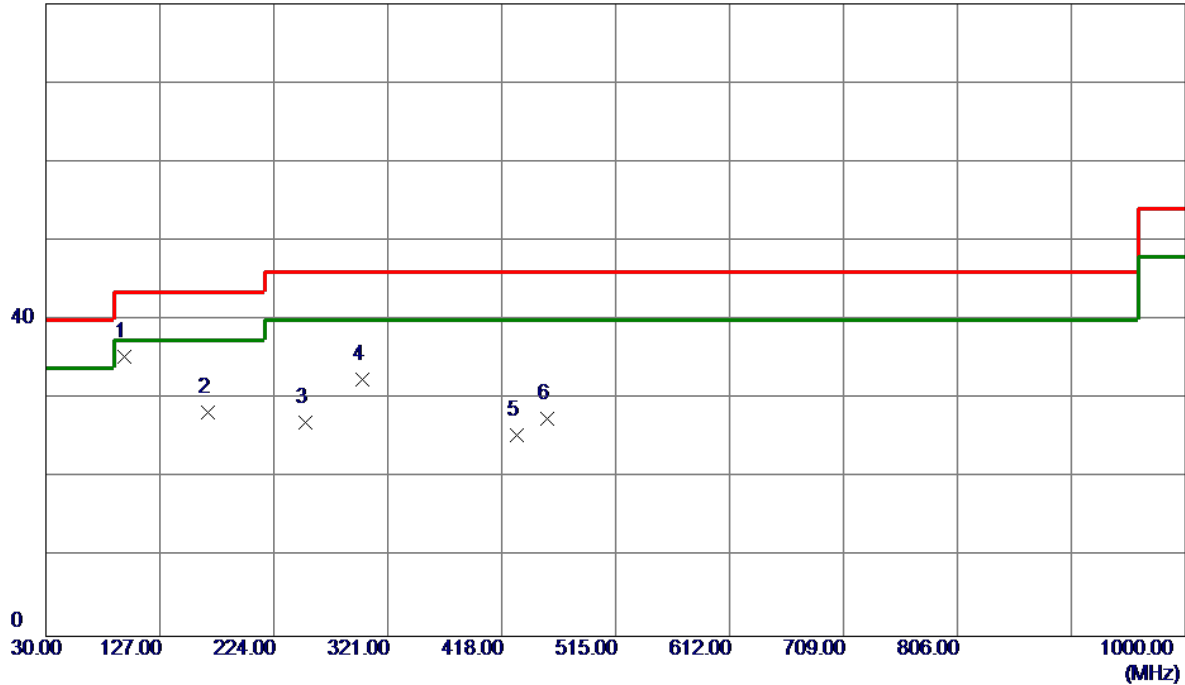

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	96.9300	51.84	-16.44	35.40	43.50	-8.10	Peak	
2	167.7400	39.85	-11.56	28.29	43.50	-15.21	Peak	
3	251.1600	38.89	-11.82	27.07	46.00	-18.93	Peak	
4	299.6600	42.47	-10.00	32.47	46.00	-13.53	Peak	
5	430.6100	31.74	-6.26	25.48	46.00	-20.52	Peak	
6	456.8000	33.16	-5.71	27.45	46.00	-18.55	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11a	Test Date	2025/1/10
Test Frequency	5180MHz	Polarization	Horizontal

130 dBuV/m

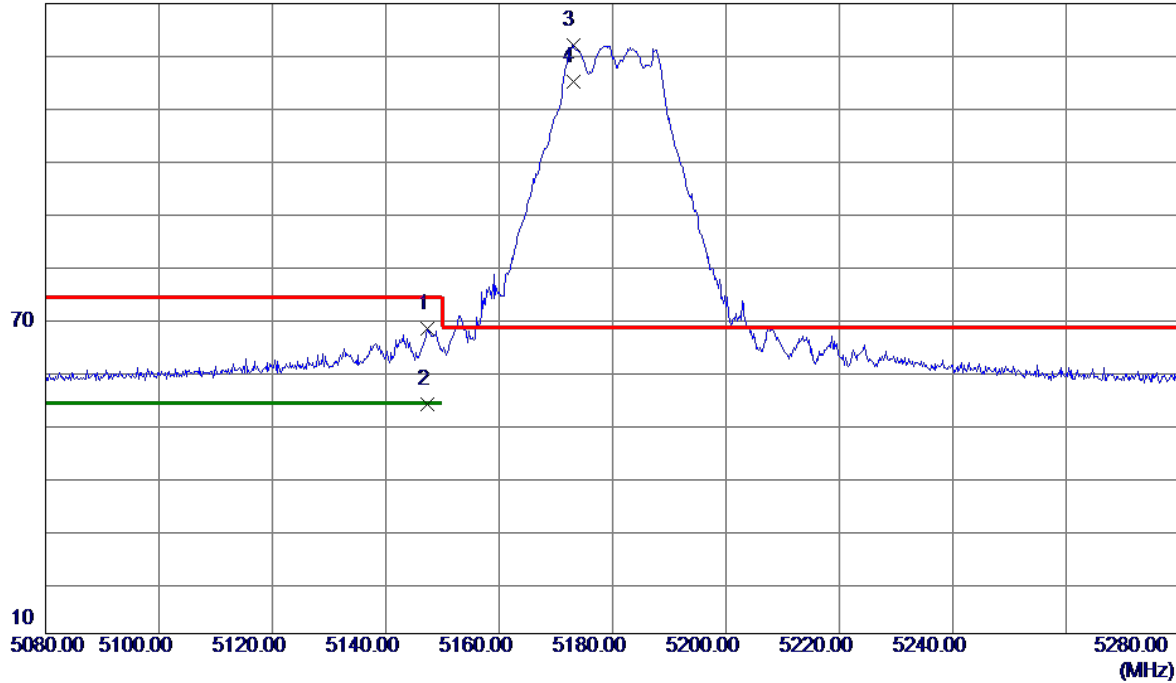


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.4000	55.80	12.31	68.11	74.00	-5.89	Peak	
2	5147.4000	41.48	12.31	53.79	54.00	-0.21	AVG	
3 *	5173.0000	109.67	12.34	122.01	68.20	53.81	Peak	No Limit
4	5173.0000	102.77	12.34	115.11	999.00	-883.89	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/1/10
Test Frequency	5240MHz	Polarization	Vertical

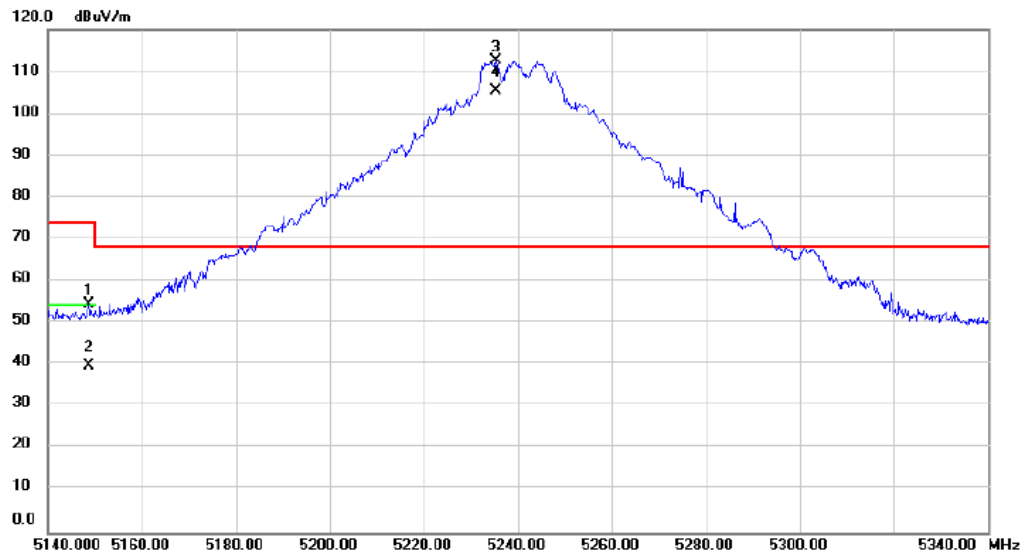


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5148.600	52.62	1.81	54.43	74.00	-19.57	peak		
2		5148.600	37.88	1.81	39.69	54.00	-14.31	AVG		
3	*	5235.400	110.79	1.88	112.67	68.20	44.47	peak		No Limit
4	X	5235.400	103.66	1.88	105.54	68.20	37.34	AVG		No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/1/10
Test Frequency	5260MHz	Polarization	Vertical

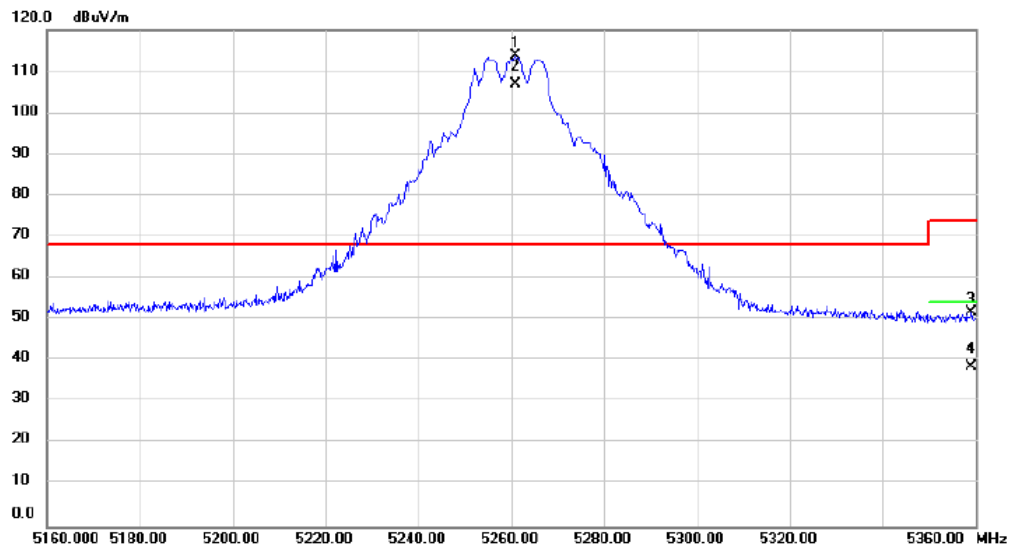


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	*	5260.800	112.08	1.89	113.97	68.20	45.77	peak		No Limit
2	X	5260.800	104.98	1.89	106.87	68.20	38.67	AVG		No Limit
3		5359.200	49.83	1.96	51.79	74.00	-22.21	peak		
4		5359.200	36.50	1.96	38.46	54.00	-15.54	AVG		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/1/10
Test Frequency	5320MHz	Polarization	Vertical

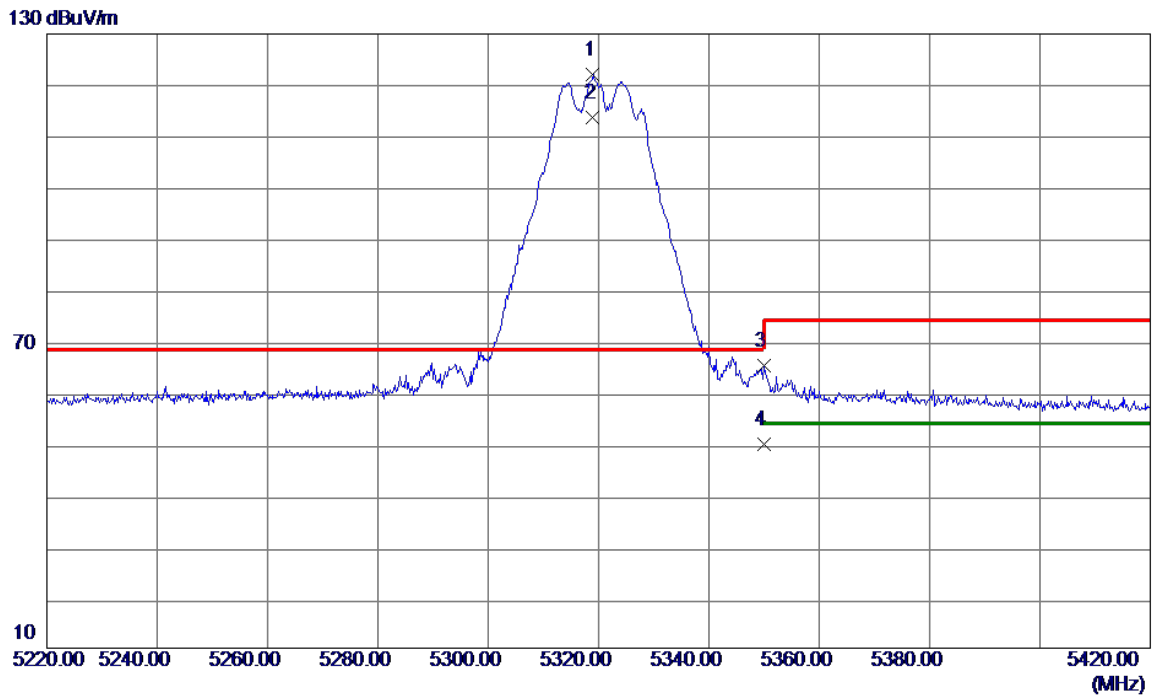


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5319.0000	109.53	12.47	122.00	68.20	53.80	Peak	No Limit
2	5319.0000	101.20	12.47	113.67	999.00	-885.33	AVG	No Limit
3	5350.0000	52.81	12.50	65.31	74.00	-8.69	Peak	
4	5350.0000	37.30	12.50	49.80	999.00	-949.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/1/10
Test Frequency	5500MHz	Polarization	Vertical

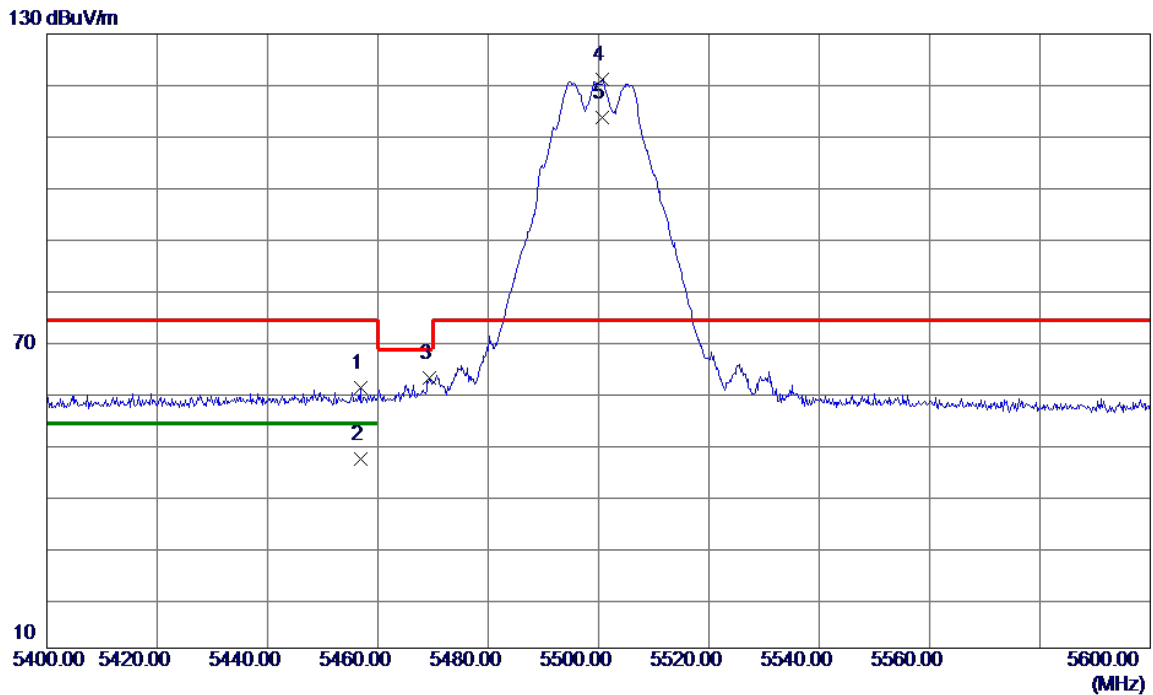


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5456.8000	48.20	12.59	60.79	74.00	-13.21	Peak	
2	5456.8000	34.35	12.59	46.94	54.00	-7.06	AVG	
3	5469.4000	50.29	12.60	62.89	68.20	-5.31	Peak	
4 *	5500.6000	108.39	12.63	121.02	74.00	47.02	Peak	No Limit
5	5500.6000	101.09	12.63	113.72	999.00	-885.28	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/1/10
Test Frequency	5700MHz	Polarization	Vertical

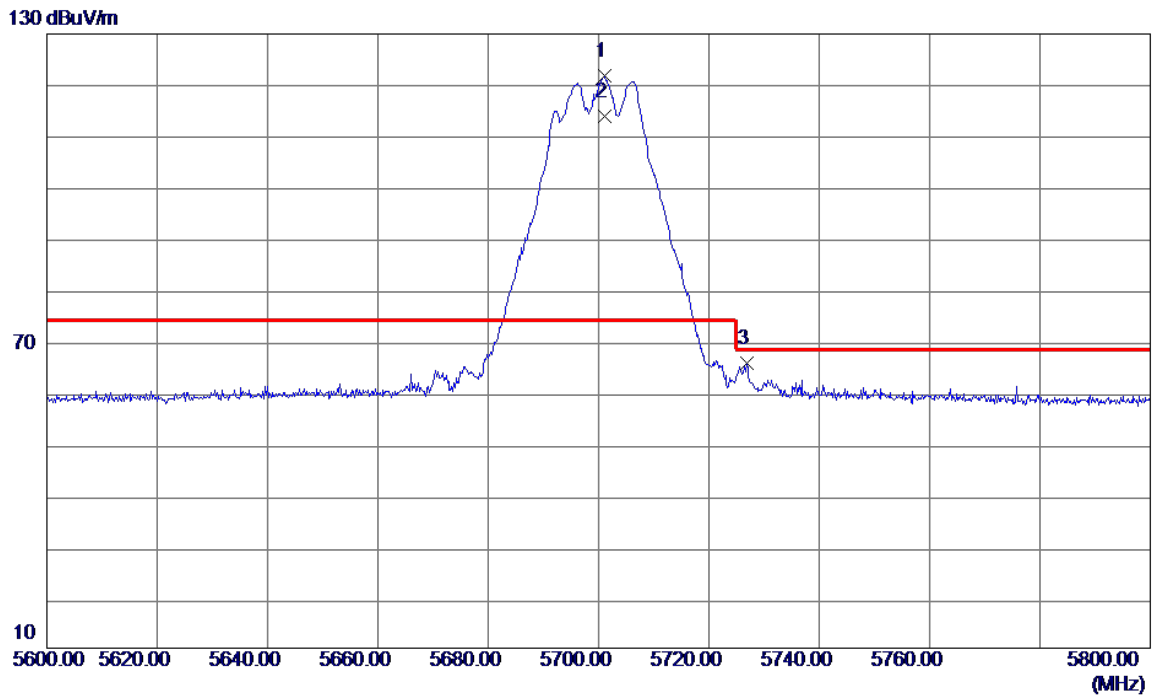


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5701.2000	108.82	13.01	121.83	74.00	47.83	Peak	No Limit
2	5701.2000	100.80	13.01	113.81	999.00	-885.19	AVG	No Limit
3	5726.8000	52.66	13.06	65.72	68.20	-2.48	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/1/10
Test Frequency	5745MHz	Polarization	Vertical

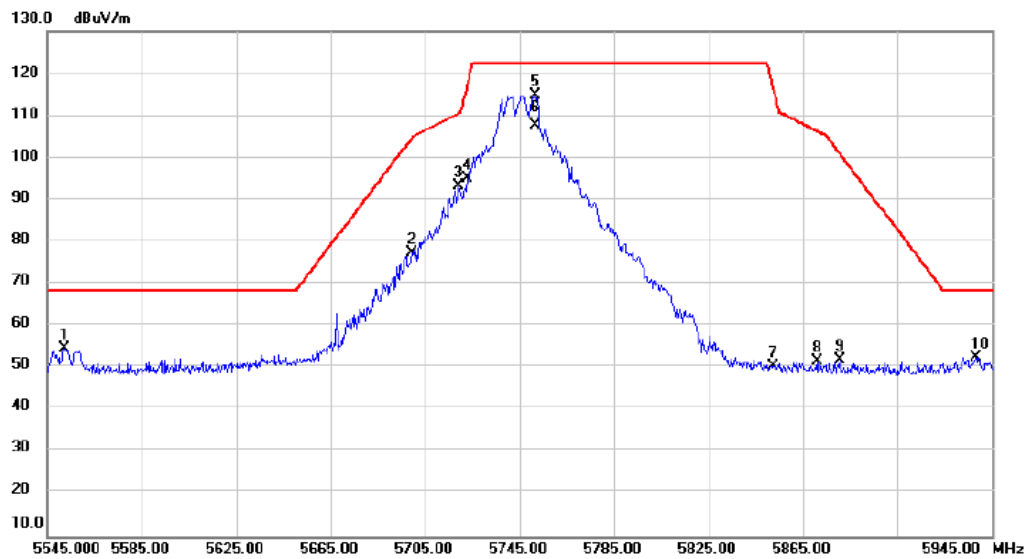


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5552.200	52.55	2.13	54.68	68.20	-13.52	peak		
2		5699.400	75.01	2.34	77.35	104.76	-27.41	peak		
3		5719.400	90.78	2.36	93.14	110.63	-17.49	peak		
4		5722.600	92.60	2.38	94.98	116.73	-21.75	peak		
5	*	5751.800	112.48	2.42	114.90	122.20	-7.30	peak		No Limit
6		5751.800	105.21	2.42	107.63	122.20	-14.57	AVG		No Limit
7		5852.600	47.78	2.55	50.33	116.27	-65.94	peak		
8		5871.000	48.96	2.59	51.55	106.32	-54.77	peak		
9		5880.600	49.28	2.60	51.88	101.04	-49.16	peak		
10		5938.200	49.87	2.69	52.56	68.20	-15.64	peak		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/1/10
Test Frequency	5825MHz	Polarization	Vertical

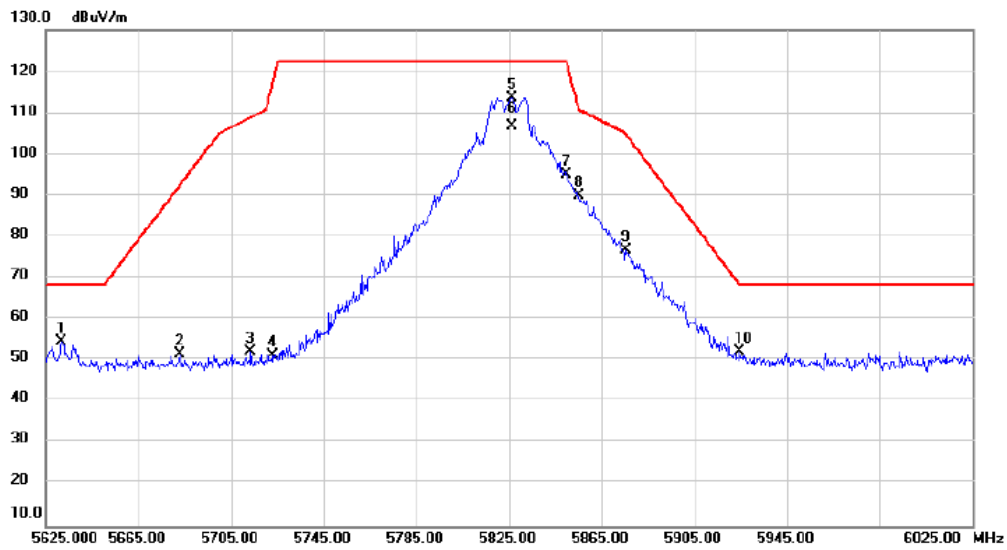

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5631.800	52.28	2.25	54.53	68.20	-13.67	peak			
2	5682.600	49.36	2.32	51.68	92.36	-40.68	peak			
3	5713.400	49.64	2.37	52.01	108.95	-56.94	peak			
4	5723.000	48.83	2.38	51.21	117.64	-66.43	peak			
5 *	5826.200	111.25	2.53	113.78	122.20	-8.42	peak			No Limit
6	5826.200	104.36	2.53	106.89	122.20	-15.31	AVG			No Limit
7	5849.800	92.40	2.56	94.96	122.20	-27.24	peak			
8	5855.400	87.29	2.56	89.85	110.69	-20.84	peak			
9	5875.400	74.27	2.59	76.86	104.90	-28.04	peak			
10	5924.600	49.39	2.66	52.05	68.49	-16.44	peak			


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/1/10
Test Frequency	5180MHz	Polarization	Vertical

130 dBuV/m

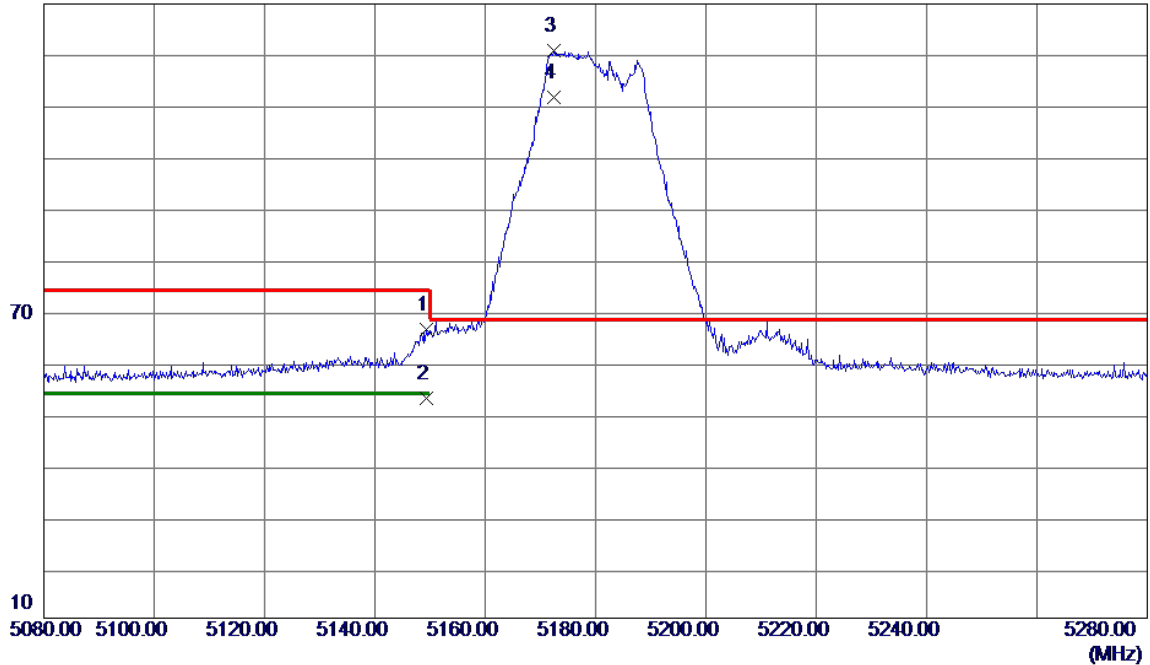


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.4000	54.10	12.31	66.41	74.00	-7.59	Peak	
2	5149.4000	40.63	12.31	52.94	54.00	-1.06	AVG	
3 *	5172.4000	108.51	12.34	120.85	68.20	52.65	Peak	No Limit
4	5172.4000	99.48	12.34	111.82	999.00	-887.18	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/1/10
Test Frequency	5240MHz	Polarization	Vertical

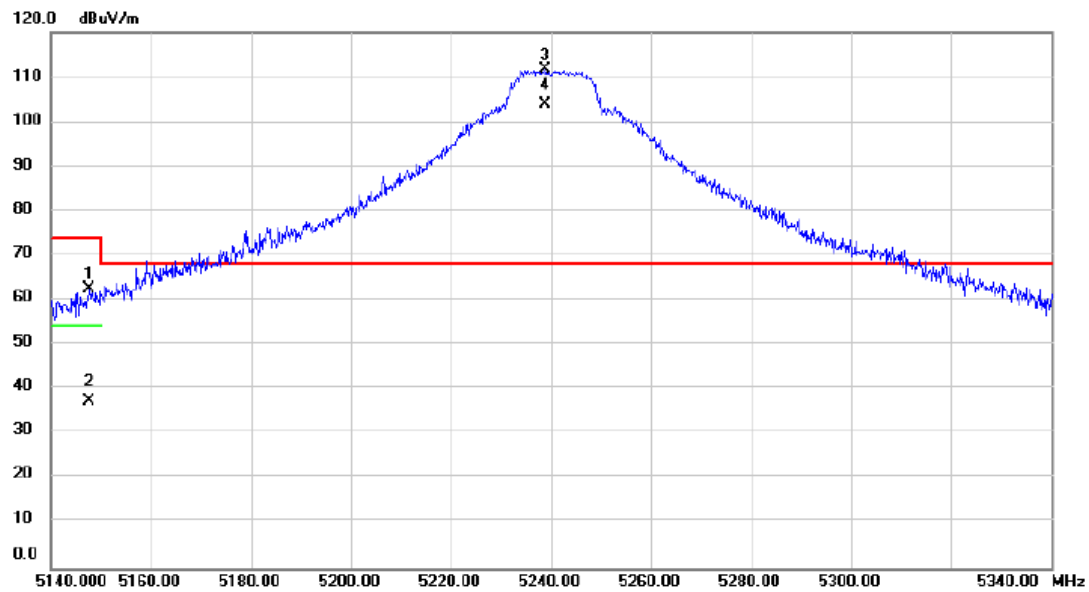


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5147.600	60.80	1.81	62.61	74.00	-11.39			peak
2		5147.600	35.59	1.81	37.40	54.00	-16.60			AVG
3	*	5238.800	109.96	1.88	111.84	68.20	43.64			No Limit
4	X	5238.800	102.02	1.88	103.90	68.20	35.70			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/1/10
Test Frequency	5260MHz	Polarization	Vertical

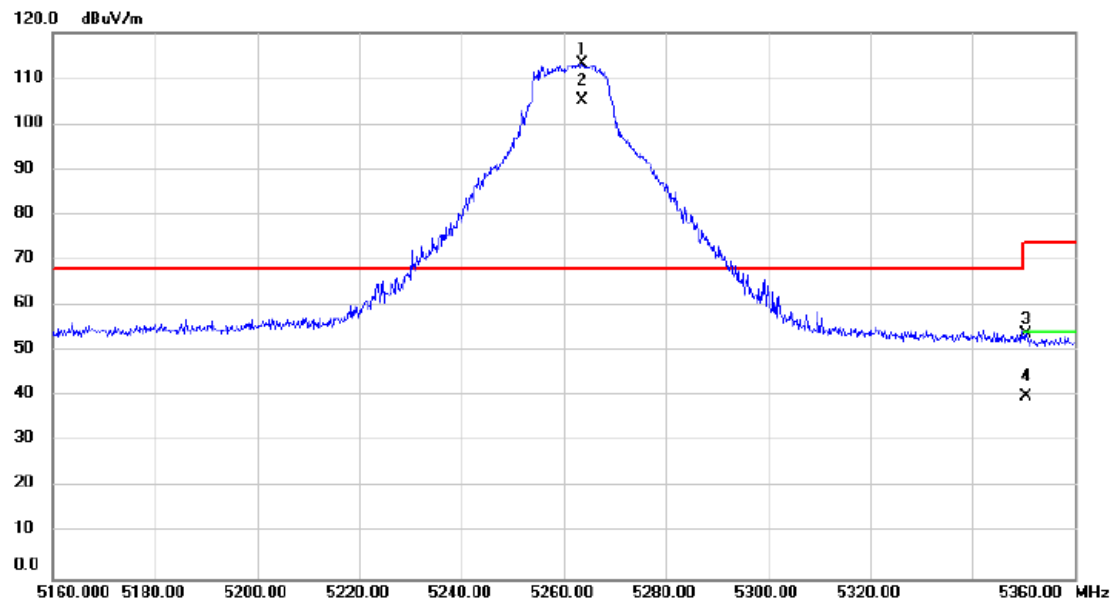


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5263.600	111.25	1.89	113.14	68.20	44.94	peak		No Limit
2	X	5263.600	103.20	1.89	105.09	68.20	36.89	AVG		No Limit
3		5350.600	51.80	1.96	53.76	74.00	-20.24	peak		
4		5350.600	38.09	1.96	40.05	54.00	-13.95	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/1/10
Test Frequency	5320MHz	Polarization	Vertical

130 dBuV/m

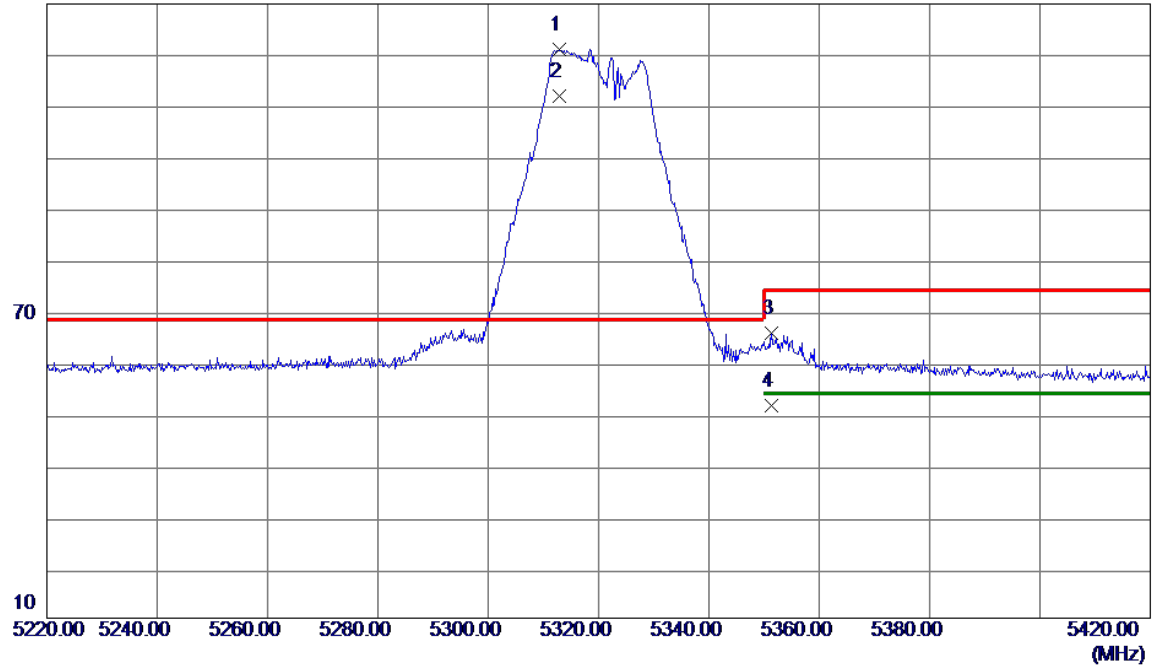


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5312.8000	108.75	12.46	121.21	68.20	53.01	Peak	No Limit
2	5312.8000	99.51	12.46	111.97	999.00	-887.03	AVG	No Limit
3	5351.4000	53.20	12.50	65.70	74.00	-8.30	Peak	
4	5351.4000	39.13	12.50	51.63	54.00	-2.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/1/10
Test Frequency	5500MHz	Polarization	Vertical

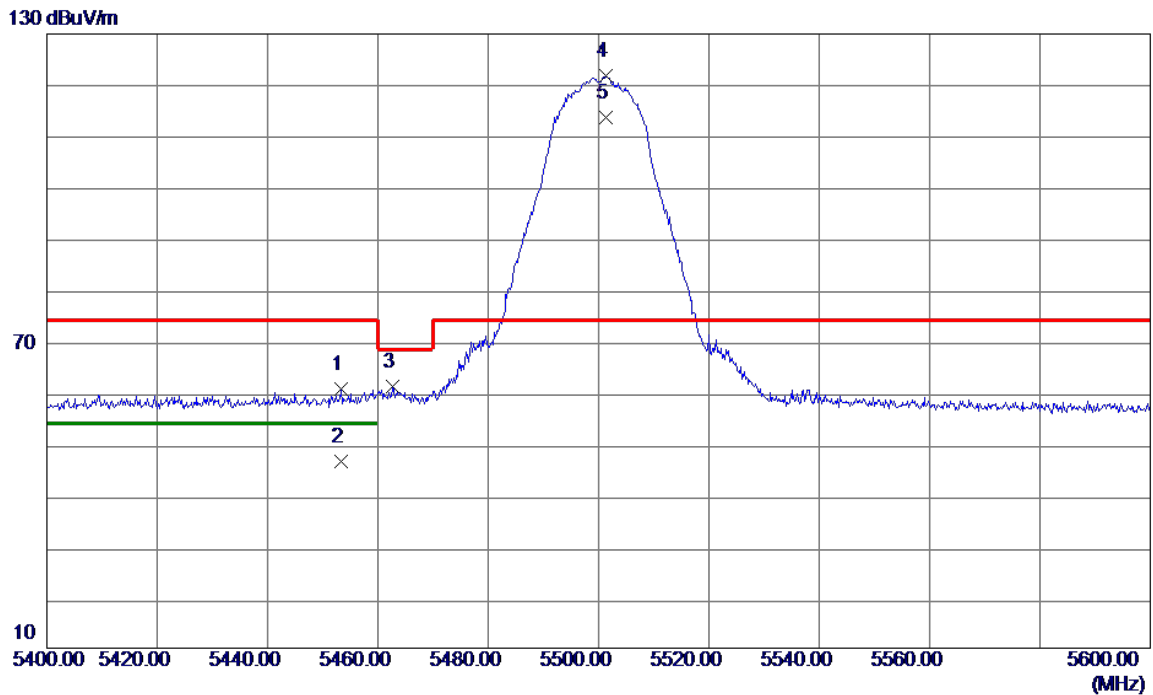


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5453.4000	47.98	12.59	60.57	74.00	-13.43	Peak	
2	5453.4000	33.92	12.59	46.51	54.00	-7.49	AVG	
3	5462.6000	48.56	12.60	61.16	68.20	-7.04	Peak	
4 *	5501.4000	109.09	12.63	121.72	74.00	47.72	Peak	No Limit
5	5501.4000	101.14	12.63	113.77	999.00	-885.23	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/1/10
Test Frequency	5700MHz	Polarization	Vertical

130 dBuV/m

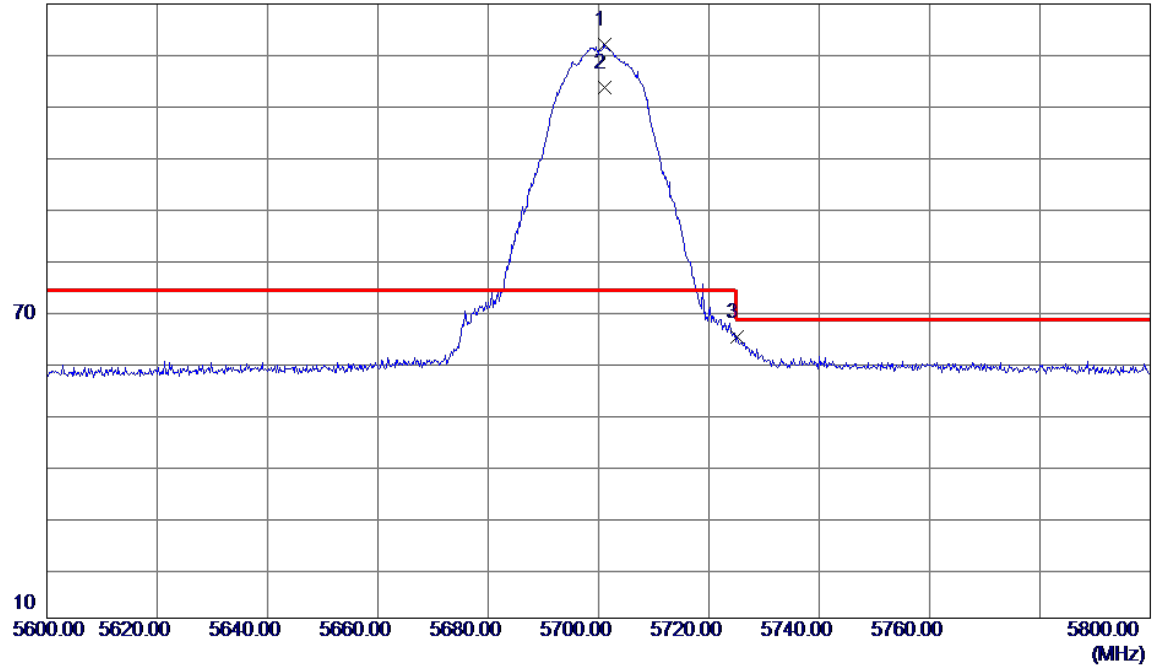


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5701.0000	109.11	13.01	122.12	74.00	48.12	Peak	No Limit
2	5701.0000	100.60	13.01	113.61	999.00	-885.39	AVG	No Limit
3	5725.0000	51.95	13.05	65.00	74.00	-9.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/1/10
Test Frequency	5745MHz	Polarization	Vertical

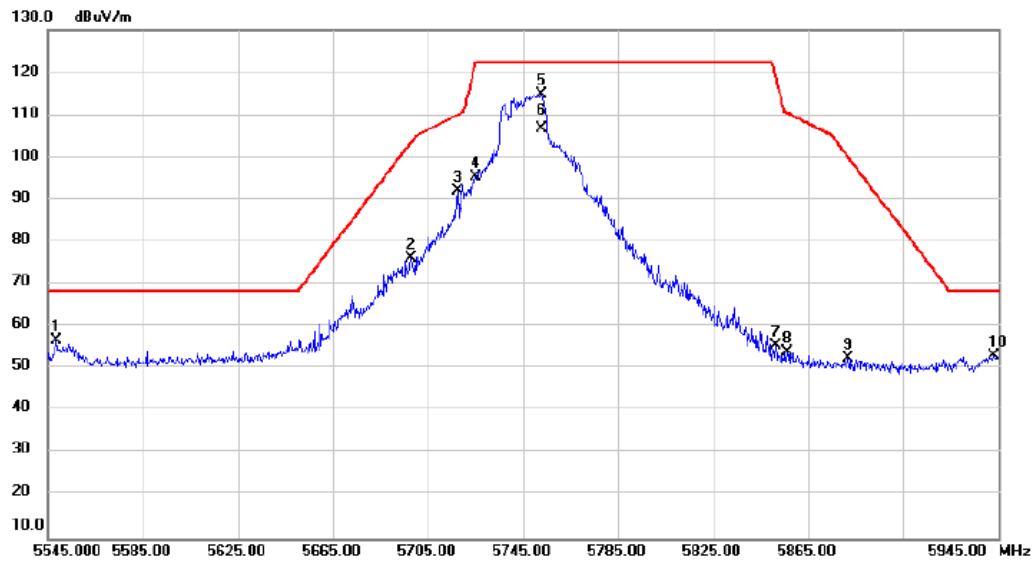


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5548.600	54.56	2.13	56.69	68.20	-11.51	peak		
2		5697.800	73.68	2.34	76.02	103.58	-27.56	peak		
3		5717.400	89.74	2.36	92.10	110.07	-17.97	peak		
4		5725.000	93.06	2.38	95.44	122.20	-26.76	peak		
5	*	5752.600	112.53	2.42	114.95	122.20	-7.25	peak		No Limit
6		5752.600	104.37	2.42	106.79	122.20	-15.41	AVG		No Limit
7		5851.400	52.85	2.56	55.41	119.01	-63.60	peak		
8		5856.200	51.28	2.57	53.85	110.46	-56.61	peak		
9		5881.800	49.83	2.60	52.43	100.15	-47.72	peak		
10		5943.400	50.50	2.68	53.18	68.20	-15.02	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/1/10
Test Frequency	5825MHz	Polarization	Vertical

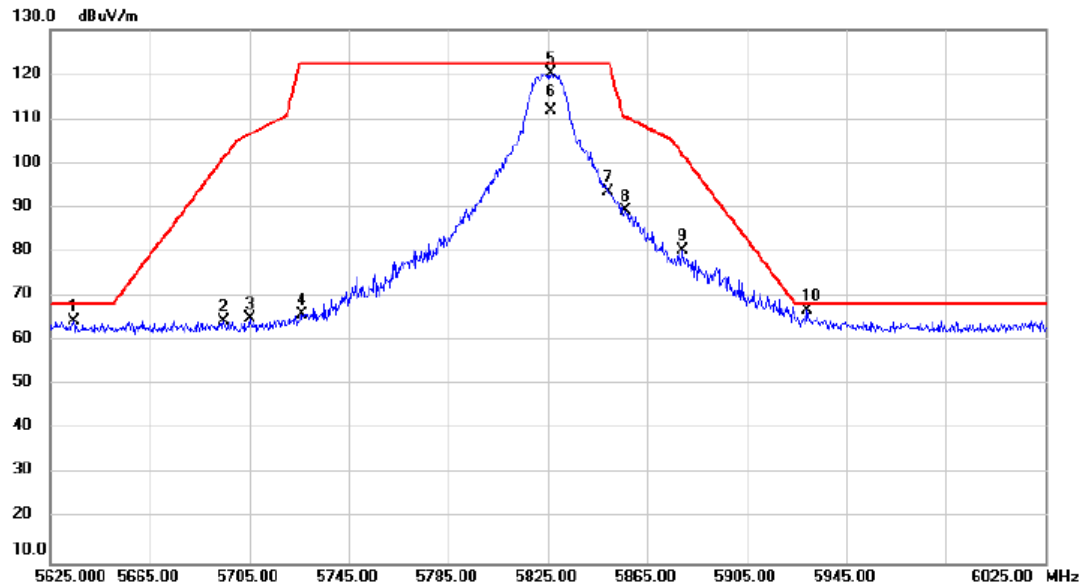


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		5634.200	62.23	2.25	64.48	68.20	-3.72	peak			
2		5694.600	62.25	2.33	64.58	101.22	-36.64	peak			
3		5705.000	62.77	2.36	65.13	106.60	-41.47	peak			
4		5725.800	63.64	2.38	66.02	122.20	-56.18	peak			
5		5826.200	117.76	2.53	120.29	122.20	-1.91	peak			No Limit
6		5826.200	109.40	2.53	111.93	122.20	-10.27	AVG			No Limit
7		5849.400	90.85	2.56	93.41	122.20	-28.79	peak			
8		5856.200	86.64	2.57	89.21	110.46	-21.25	peak			
9		5879.000	77.75	2.59	80.34	102.23	-21.89	peak			
10	*	5929.400	64.20	2.67	66.87	68.20	-1.33	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/1/10
Test Frequency	5190MHz	Polarization	Vertical

130 dBuV/m

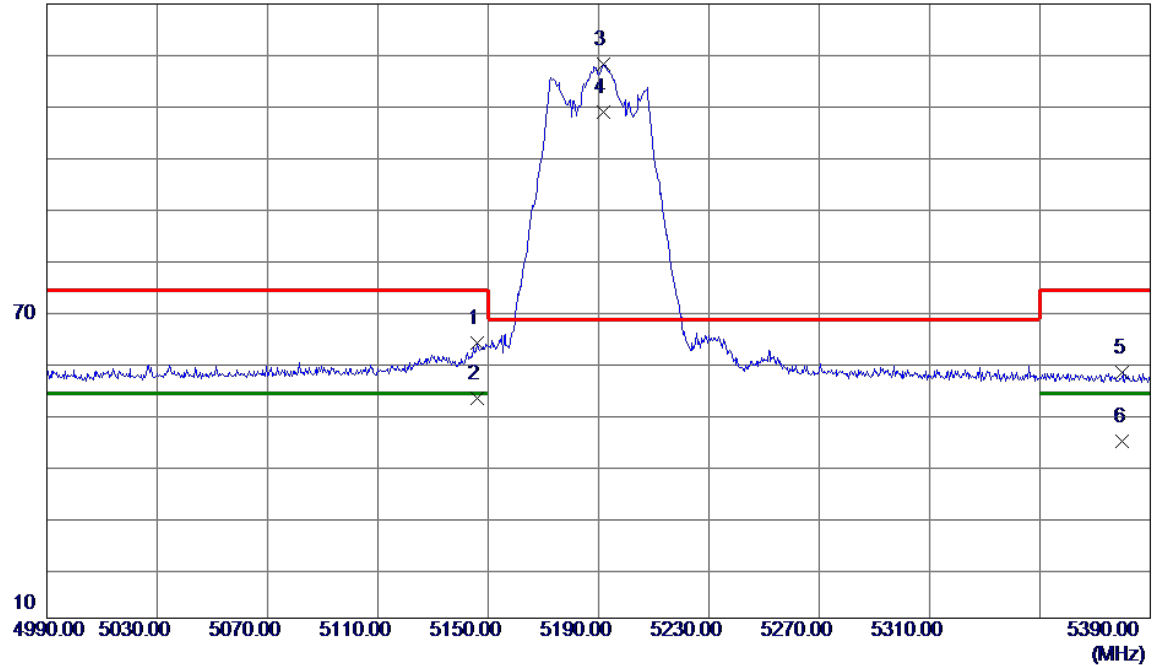


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5146.0000	51.48	12.31	63.79	74.00	-10.21	Peak	
2	5146.0000	40.58	12.31	52.89	54.00	-1.11	AVG	
3 *	5191.6000	105.82	12.35	118.17	68.20	49.97	Peak	No Limit
4	5191.6000	96.42	12.35	108.77	999.00	-890.23	AVG	No Limit
5	5380.0000	45.47	12.52	57.99	74.00	-16.01	Peak	
6	5380.0000	31.98	12.52	44.50	54.00	-9.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/1/13
Test Frequency	5230MHz	Polarization	Vertical

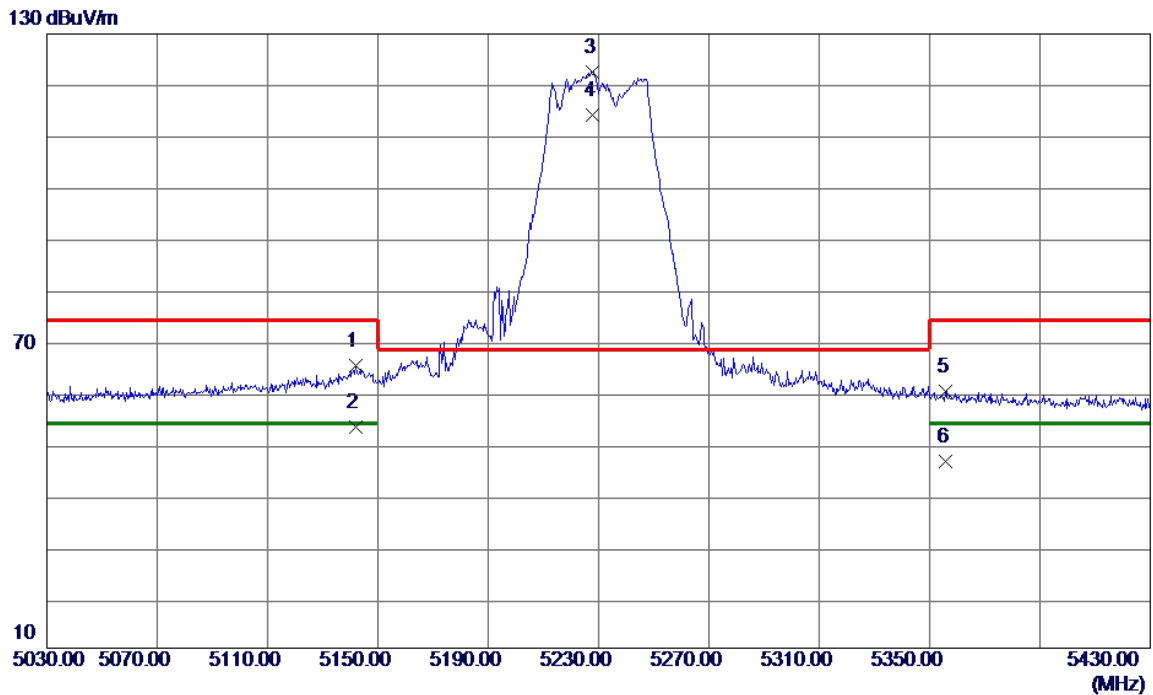


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5142.0000	52.88	12.31	65.19	74.00	-8.81	Peak	
2	5142.0000	41.00	12.31	53.31	54.00	-0.69	AVG	
3 *	5228.0000	110.24	12.39	122.63	68.20	54.43	Peak	No Limit
4	5228.0000	101.67	12.39	114.06	999.00	-884.94	AVG	No Limit
5	5356.0000	47.68	12.50	60.18	74.00	-13.82	Peak	
6	5356.0000	34.05	12.50	46.55	54.00	-7.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/1/13
Test Frequency	5270MHz	Polarization	Vertical

130 dBuV/m

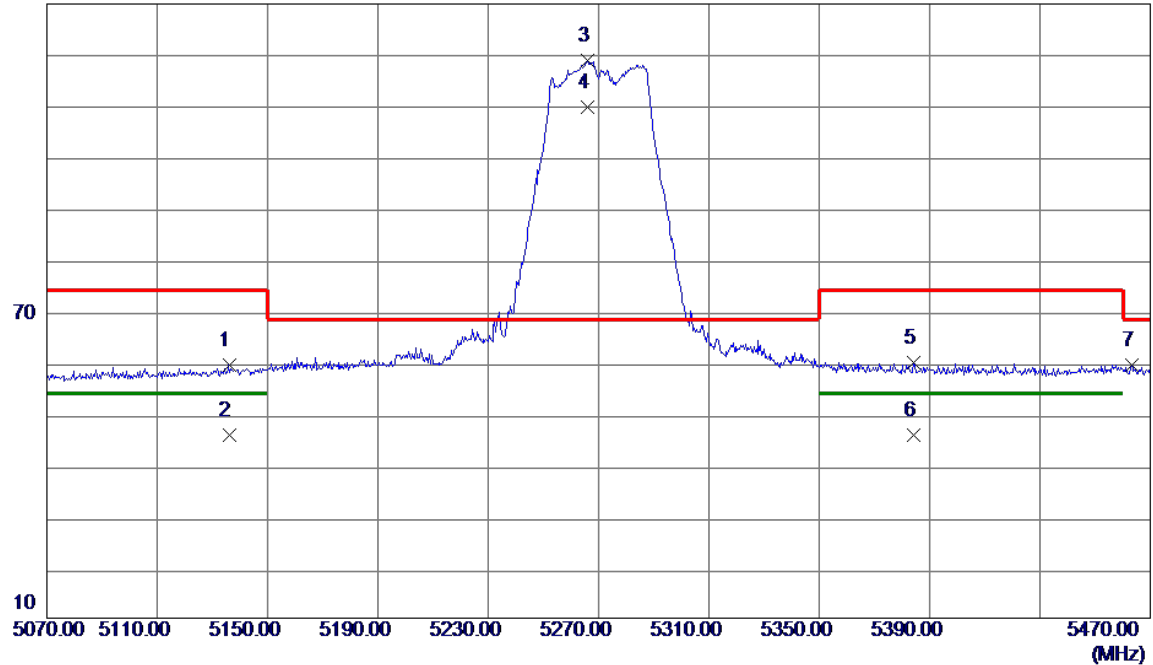


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5136.0000	47.15	12.30	59.45	74.00	-14.55	Peak	
2	5136.0000	33.38	12.30	45.68	54.00	-8.32	AVG	
3 *	5266.0000	106.64	12.42	119.06	68.20	50.86	Peak	No Limit
4	5266.0000	97.44	12.42	109.86	999.00	-889.14	AVG	No Limit
5	5384.4000	47.38	12.53	59.91	74.00	-14.09	Peak	
6	5384.4000	33.34	12.53	45.87	54.00	-8.13	AVG	
7	5463.2000	46.78	12.60	59.38	68.20	-8.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/1/13
Test Frequency	5310MHz	Polarization	Vertical

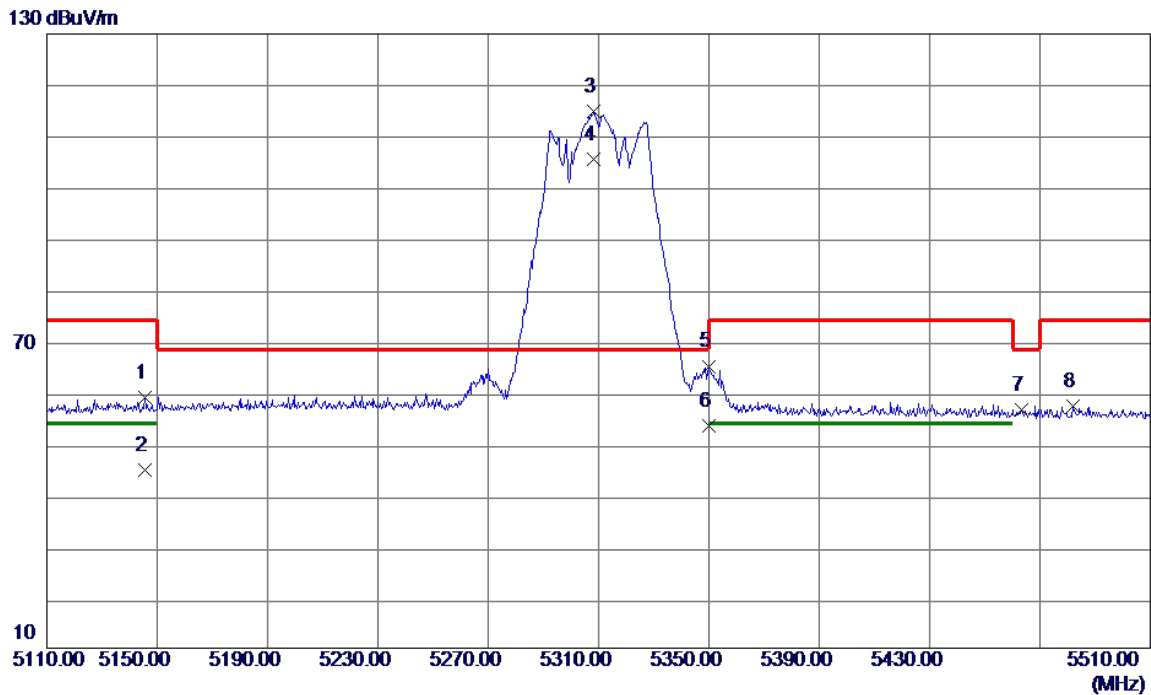


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5145.6000	46.63	12.31	58.94	74.00	-15.06	Peak	
2	5145.6000	32.41	12.31	44.72	54.00	-9.28	AVG	
3 *	5308.4000	102.40	12.46	114.86	68.20	46.66	Peak	No Limit
4	5308.4000	92.96	12.46	105.42	999.00	-893.58	AVG	No Limit
5	5350.0000	52.58	12.50	65.08	74.00	-8.92	Peak	
6	5350.0000	41.01	12.50	53.51	999.00	-945.49	AVG	
7	5463.2000	43.91	12.60	56.51	68.20	-11.69	Peak	
8	5482.0000	44.60	12.61	57.21	74.00	-16.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/1/13
Test Frequency	5510MHz	Polarization	Vertical

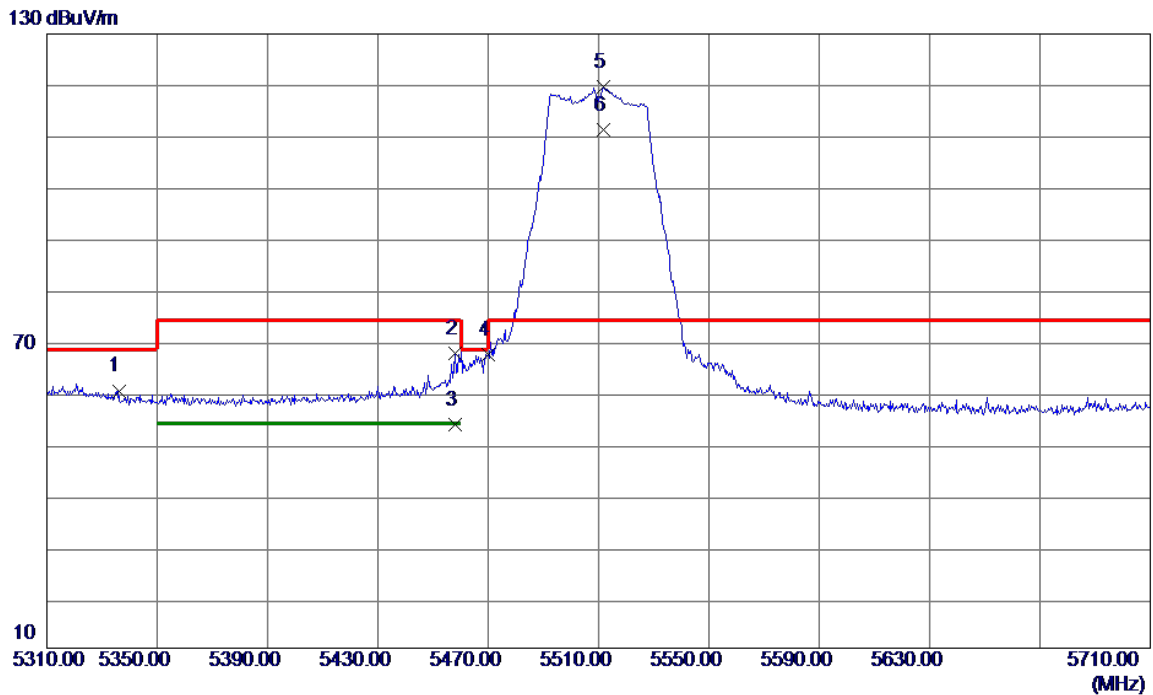


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5336.0000	47.80	12.48	60.28	68.20	-7.92	Peak	
2	5458.0000	54.94	12.59	67.53	74.00	-6.47	Peak	
3	5458.0000	41.16	12.59	53.75	54.00	-0.25	AVG	
4	5470.0000	54.84	12.60	67.44	68.20	-0.76	Peak	
5 *	5511.6000	106.99	12.65	119.64	74.00	45.64	Peak	No Limit
6	5511.6000	98.71	12.65	111.36	999.00	-887.64	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/1/13
Test Frequency	5670MHz	Polarization	Vertical

130 dBuV/m

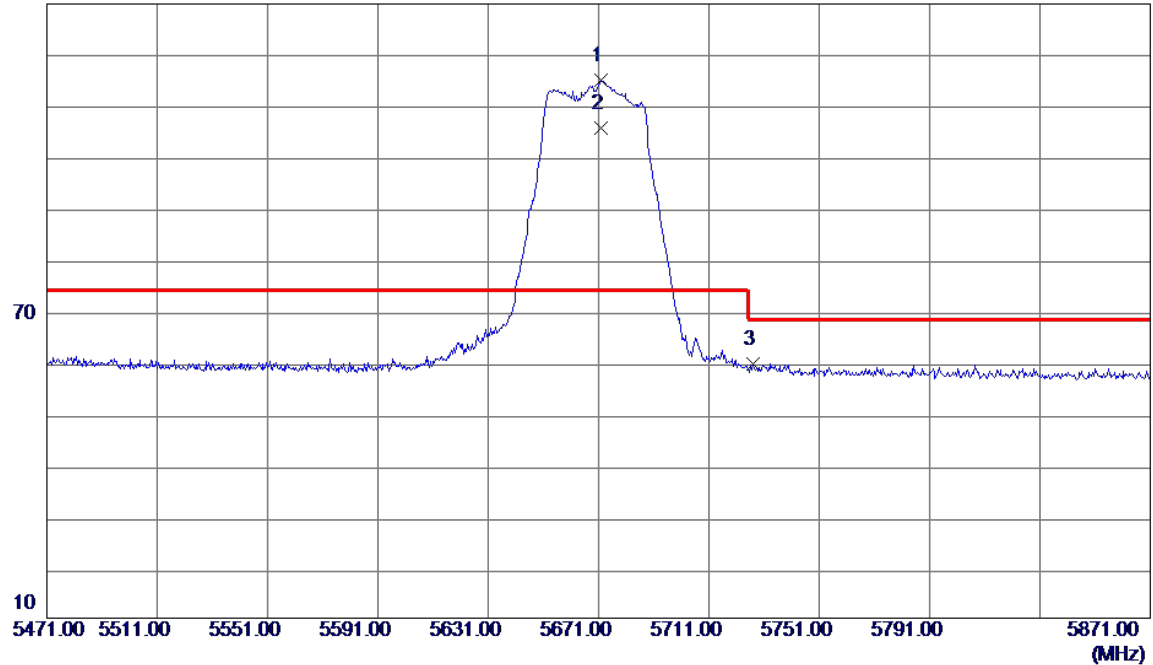


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5671.8000	102.09	12.95	115.04	74.00	41.04	Peak	No Limit
2	5671.8000	92.79	12.95	105.74	999.00	-893.26	AVG	No Limit
3	5727.0000	46.66	13.06	59.72	68.20	-8.48	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/1/13
Test Frequency	5755MHz	Polarization	Vertical

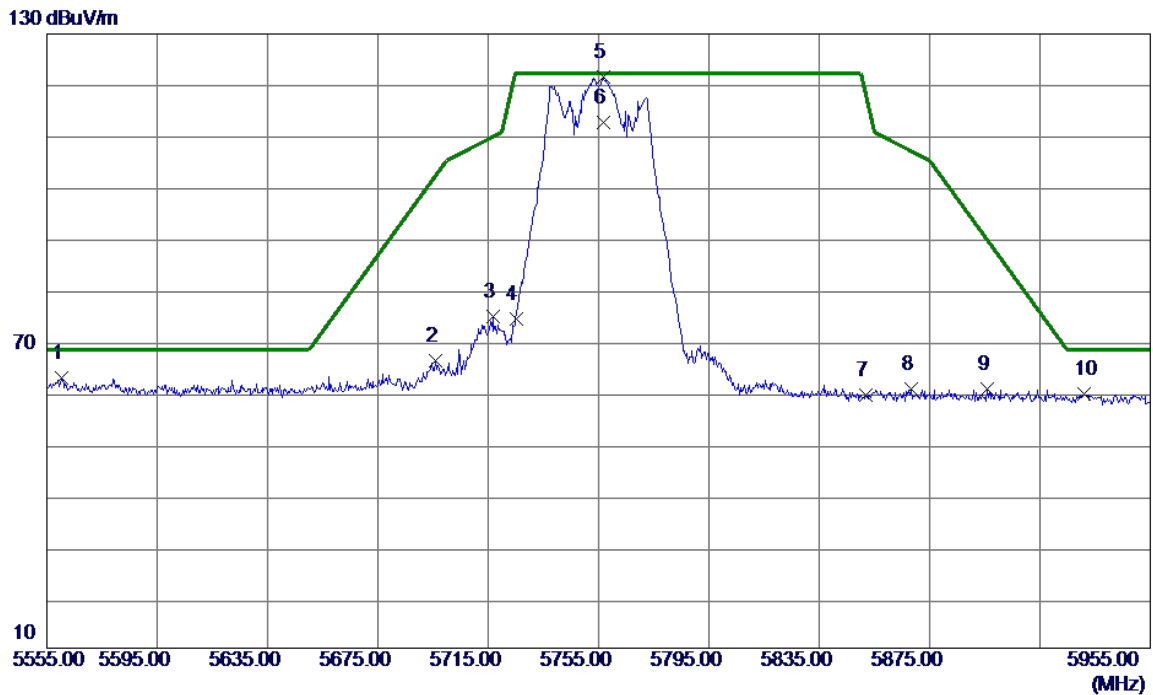


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5560.2000	50.07	12.74	62.81	68.20	-5.39	Peak	
2	5695.8000	53.13	13.00	66.13	102.10	-35.97	Peak	
3	5716.6000	61.82	13.04	74.86	109.85	-34.99	Peak	
4	5725.0000	61.36	13.05	74.41	122.20	-47.79	Peak	
5 *	5756.6000	108.46	13.11	121.57	122.20	-0.63	Peak	No Limit
6	5756.6000	99.53	13.11	112.64	122.20	-9.56	AVG	No Limit
7	5851.8000	46.23	13.29	59.52	118.09	-58.57	Peak	
8	5868.2000	47.42	13.32	60.74	107.10	-46.36	Peak	
9	5895.8000	47.35	13.37	60.72	89.77	-29.05	Peak	
10	5931.0000	46.26	13.44	59.70	68.20	-8.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/1/13
Test Frequency	5795MHz	Polarization	Vertical

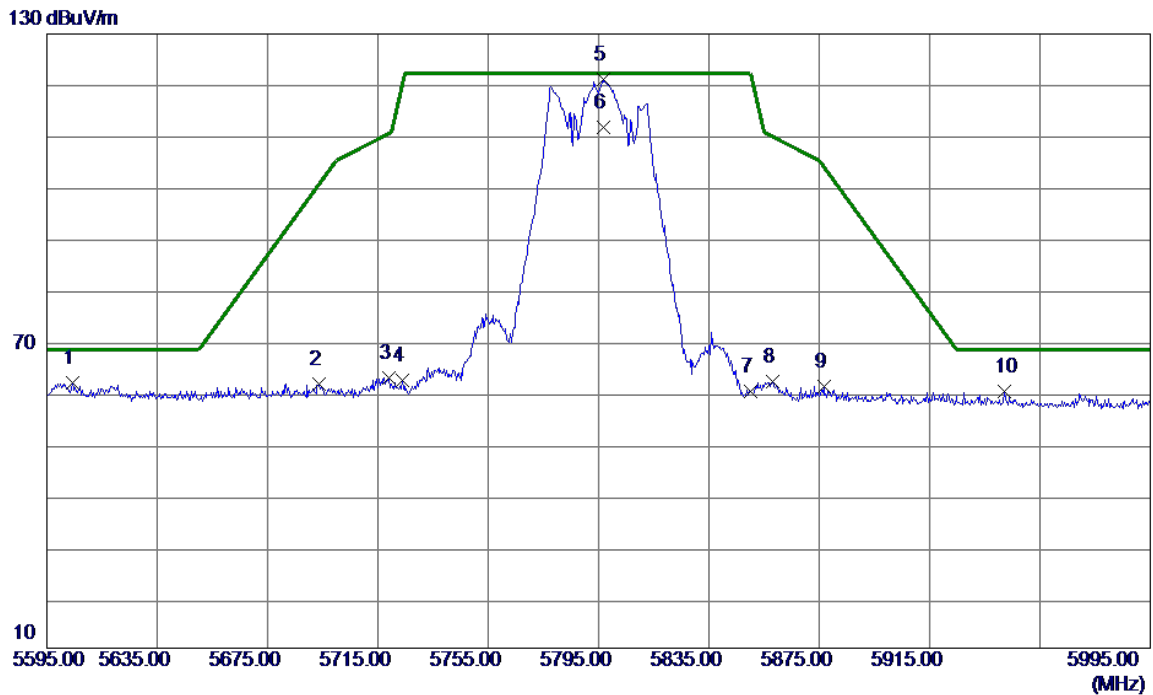

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5604.2000	48.91	12.83	61.74	68.20	-6.46	Peak	
2	5693.8000	48.53	12.99	61.52	100.63	-39.11	Peak	
3	5719.0000	49.83	13.04	62.87	110.52	-47.65	Peak	
4	5723.8000	49.18	13.05	62.23	119.46	-57.23	Peak	
5 *	5796.6000	107.89	13.19	121.08	122.20	-1.12	Peak	No Limit
6	5796.6000	98.67	13.19	111.86	122.20	-10.34	AVG	No Limit
7	5850.2000	46.86	13.29	60.15	121.74	-61.59	Peak	
8	5858.2000	48.73	13.30	62.03	109.90	-47.87	Peak	
9	5876.6000	47.82	13.34	61.16	104.01	-42.85	Peak	
10	5942.2000	46.78	13.46	60.24	68.20	-7.96	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/1/13
Test Frequency	5210MHz	Polarization	Vertical

130 dBuV/m

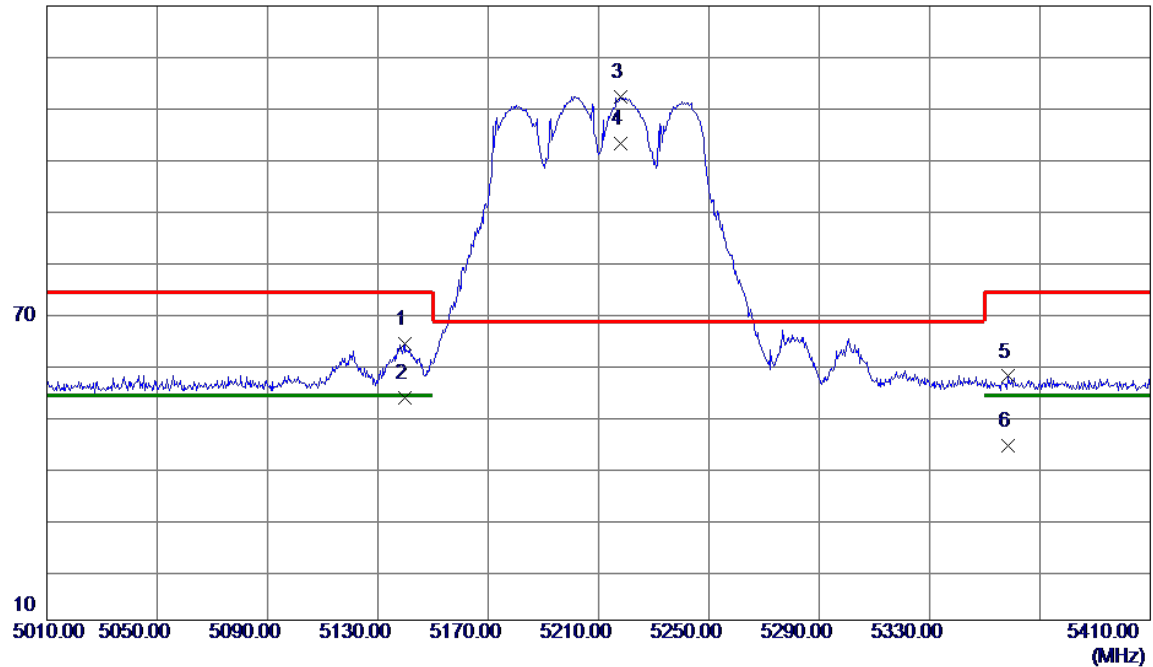


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5139.6000	51.63	12.31	63.94	74.00	-10.06	Peak	
2	5139.6000	41.04	12.31	53.35	54.00	-0.65	AVG	
3 *	5218.0000	99.92	12.38	112.30	68.20	44.10	Peak	No Limit
4	5218.0000	90.84	12.38	103.22	999.00	-895.78	AVG	No Limit
5	5358.4000	45.14	12.50	57.64	74.00	-16.36	Peak	
6	5358.4000	31.49	12.50	43.99	54.00	-10.01	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/1/13
Test Frequency	5290MHz	Polarization	Vertical

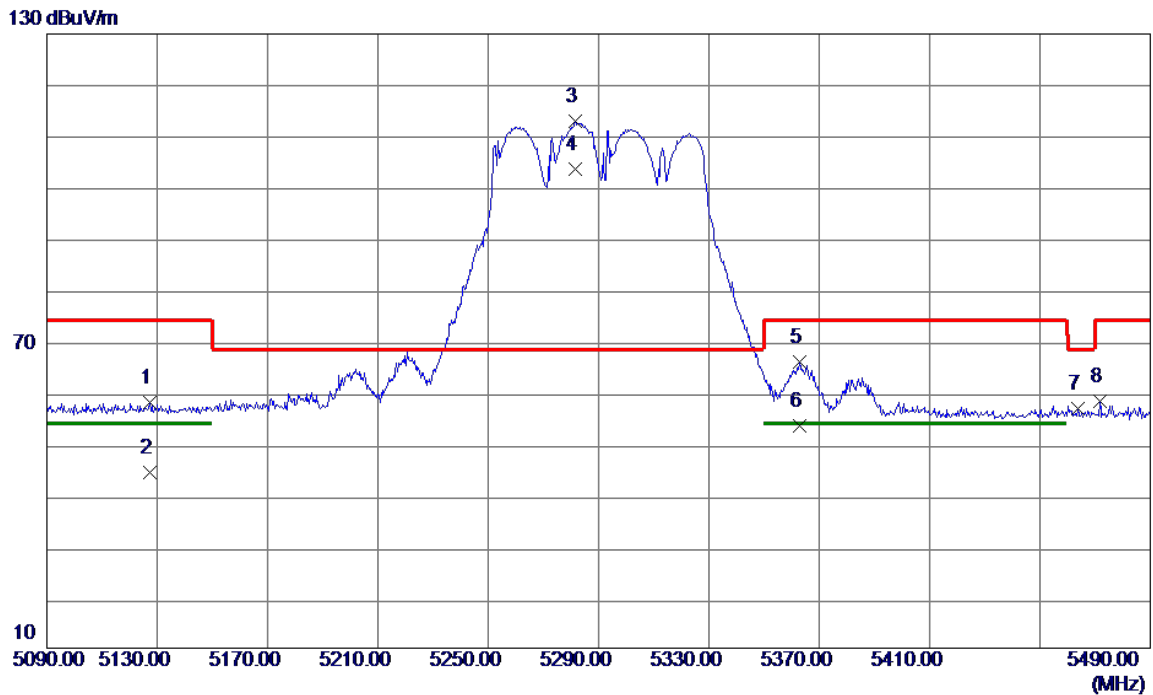


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5127.2000	45.77	12.29	58.06	74.00	-15.94	Peak	
2	5127.2000	32.08	12.29	44.37	54.00	-9.63	AVG	
3 *	5281.6000	100.58	12.43	113.01	68.20	44.81	Peak	No Limit
4	5281.6000	91.10	12.43	103.53	999.00	-895.47	AVG	No Limit
5	5362.8000	53.31	12.51	65.82	74.00	-8.18	Peak	
6	5362.8000	40.92	12.51	53.43	54.00	-0.57	AVG	
7	5463.6000	44.19	12.60	56.79	68.20	-11.41	Peak	
8	5471.6000	45.70	12.60	58.30	74.00	-15.70	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/1/13
Test Frequency	5530MHz	Polarization	Vertical

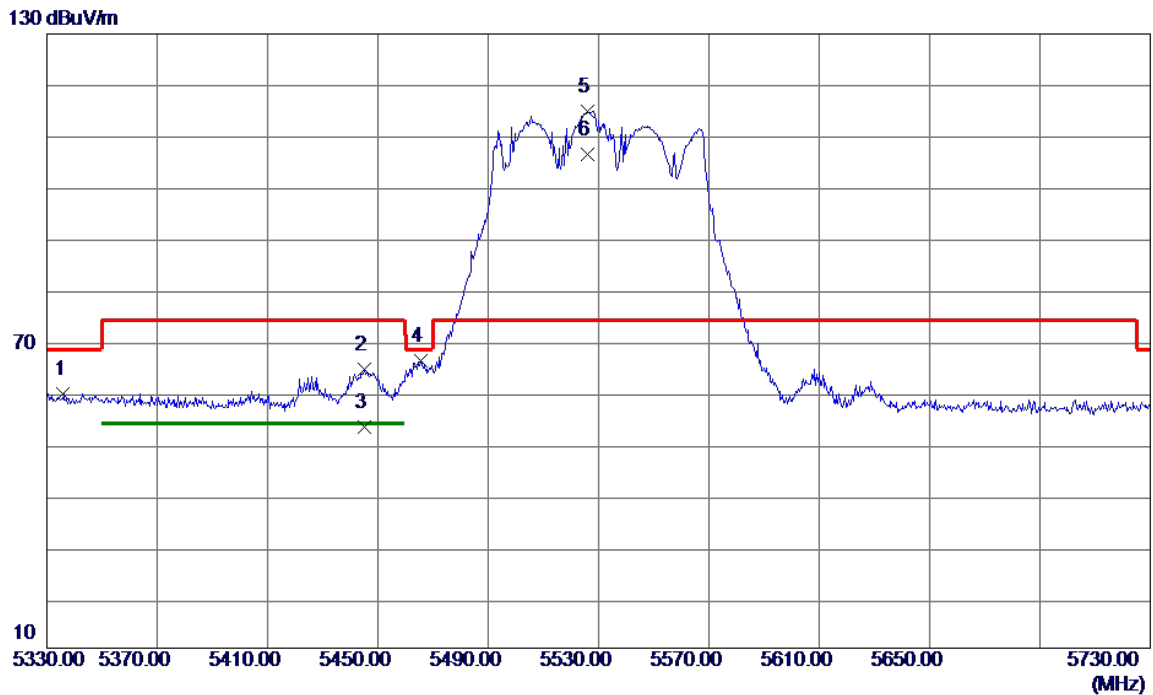


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5336.0000	47.16	12.48	59.64	68.20	-8.56	Peak	
2	5445.2000	51.98	12.58	64.56	74.00	-9.44	Peak	
3	5445.2000	40.70	12.58	53.28	54.00	-0.72	AVG	
4	5465.6000	53.59	12.60	66.19	68.20	-2.01	Peak	
5 *	5526.0000	102.20	12.68	114.88	74.00	40.88	Peak	No Limit
6	5526.0000	93.76	12.68	106.44	999.00	-892.56	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/1/13
Test Frequency	5610MHz	Polarization	Vertical

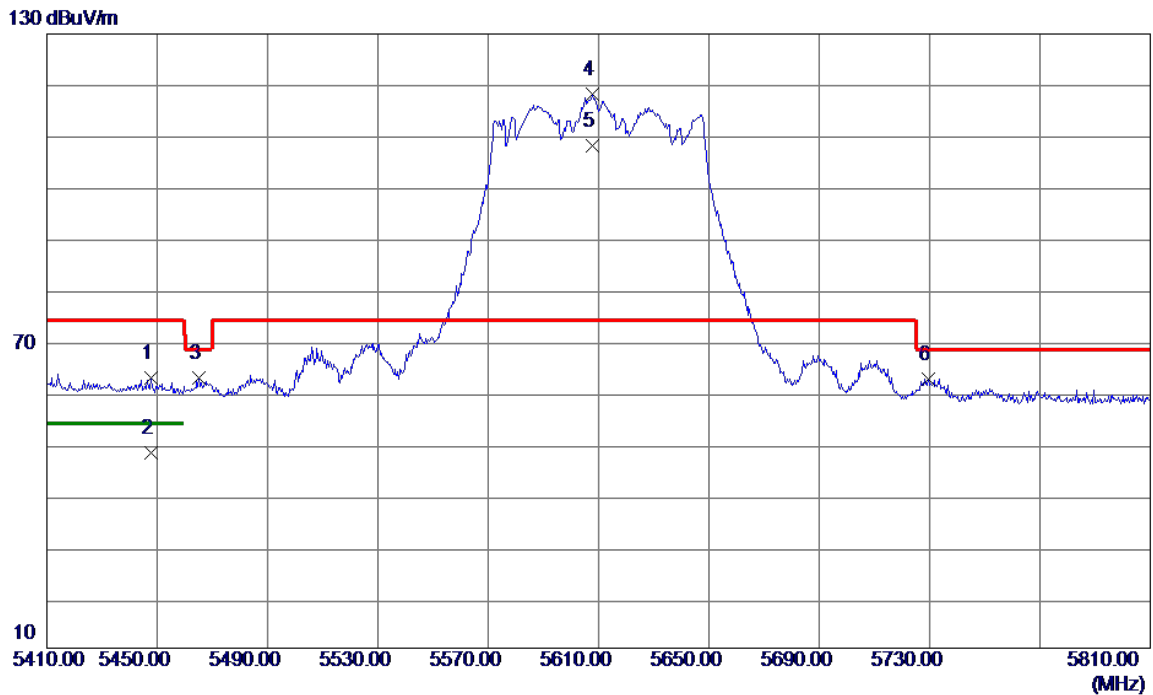


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5447.6000	50.33	12.58	62.91	74.00	-11.09	Peak	
2	5447.6000	35.64	12.58	48.22	54.00	-5.78	AVG	
3	5465.2000	50.21	12.60	62.81	68.20	-5.39	Peak	
4 *	5607.6000	105.31	12.83	118.14	74.00	44.14	Peak	No Limit
5	5607.6000	95.35	12.83	108.18	999.00	-890.82	AVG	No Limit
6	5729.6000	49.53	13.06	62.59	68.20	-5.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/1/13
Test Frequency	5775MHz	Polarization	Vertical

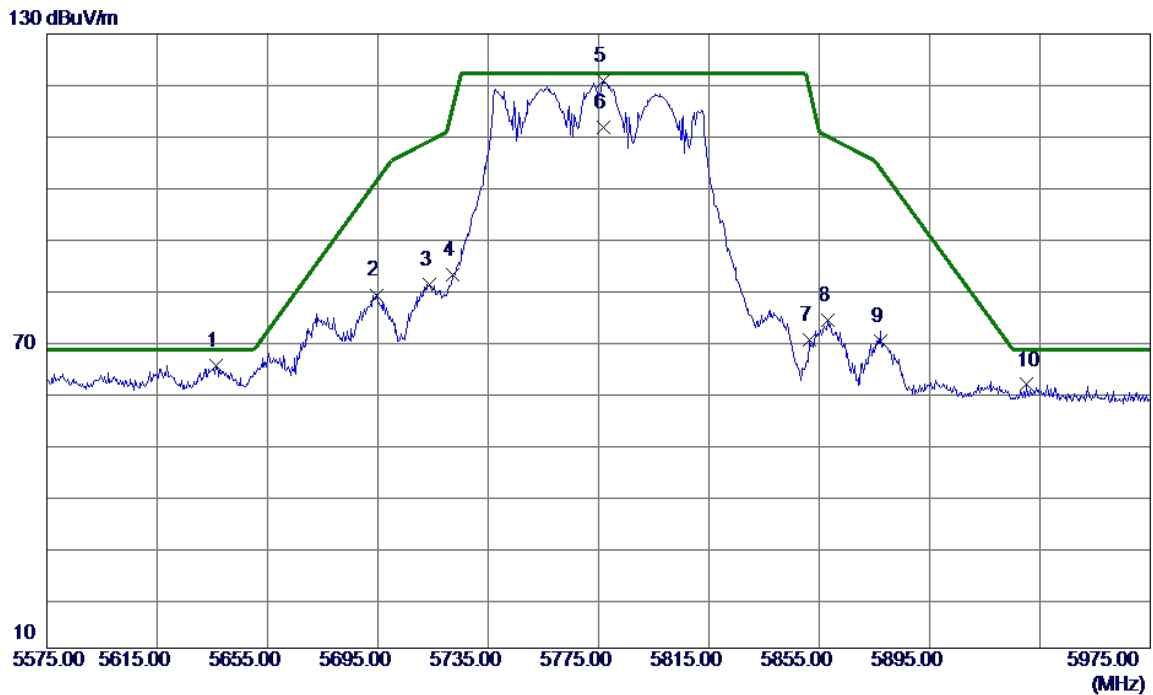

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5636.2000	52.26	12.89	65.15	68.20	-3.05	Peak	
2	5694.6000	66.00	13.00	79.00	101.22	-22.22	Peak	
3	5713.8000	68.06	13.03	81.09	109.07	-27.98	Peak	
4	5722.2000	70.00	13.05	83.05	115.82	-32.77	Peak	
5 *	5776.6000	107.82	13.15	120.97	122.20	-1.23	Peak	No Limit
6	5776.6000	98.57	13.15	111.72	122.20	-10.48	AVG	No Limit
7	5851.4000	56.86	13.29	70.15	119.01	-48.86	Peak	
8	5858.2000	60.75	13.30	74.05	109.90	-35.85	Peak	
9	5877.4000	56.58	13.34	69.92	103.42	-33.50	Peak	
10	5930.2000	48.04	13.44	61.48	68.20	-6.72	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2025/1/13
Test Frequency	5250MHz	Polarization	Vertical

130 dBuV/m

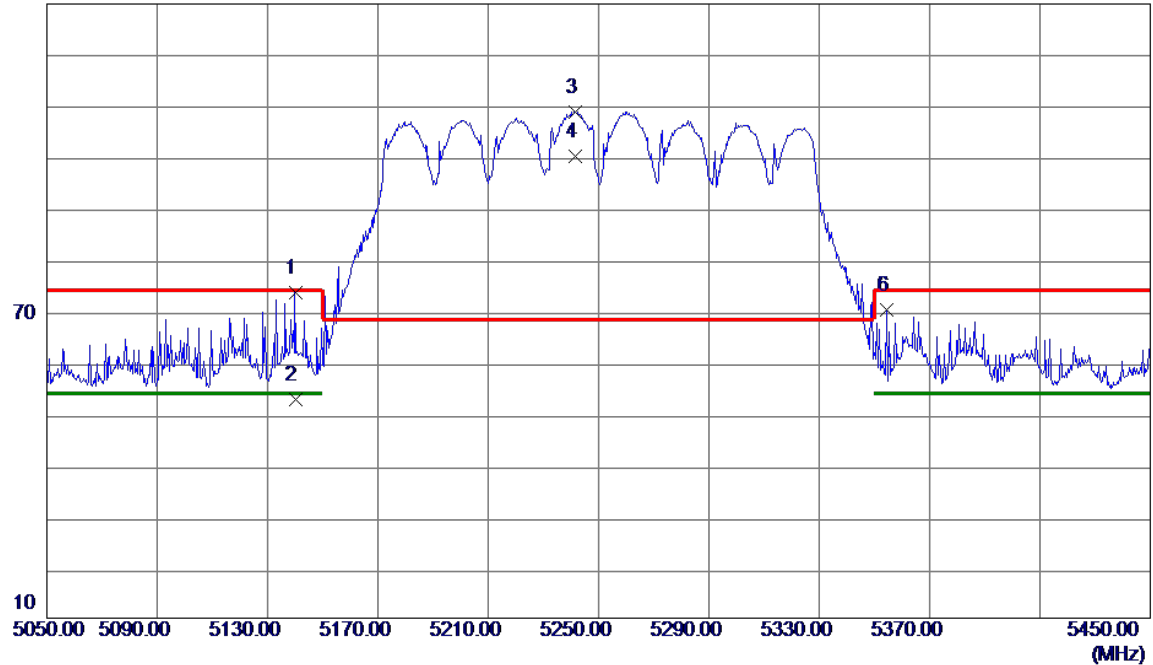


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5140.0000	61.31	12.31	73.62	74.00	-0.38	Peak	
2	5140.0000	40.38	12.31	52.69	74.00	-21.31	Peak	
3 *	5241.6000	96.59	12.40	108.99	68.20	40.79	Peak	No Limit
4	5241.6000	87.82	12.40	100.22	999.00	-898.78	AVG	No Limit
5	5354.4000	57.64	12.50	70.14	74.00	-3.86	Peak	
6	5354.4000	57.64	12.50	70.14	74.00	-3.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2025/1/13
Test Frequency	5570MHz	Polarization	Vertical

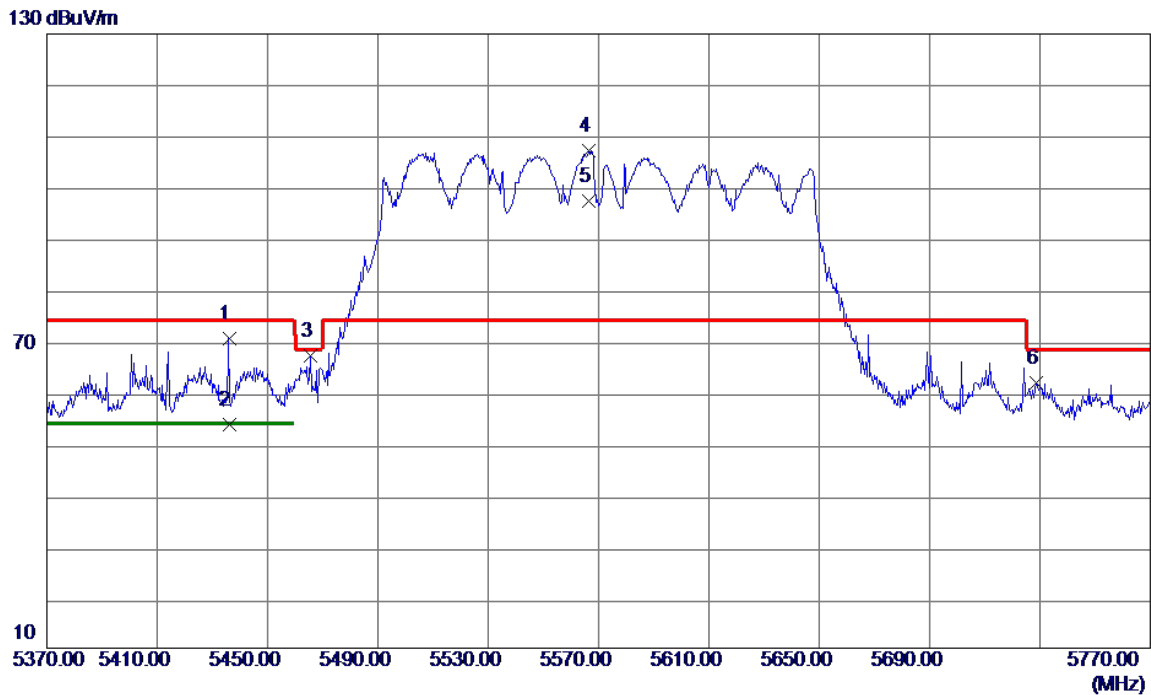


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5436.0000	57.88	12.57	70.45	74.00	-3.55	Peak	
2	5436.0000	41.00	12.57	53.57	54.00	-0.43	AVG	
3	5465.6000	54.53	12.60	67.13	68.20	-1.07	Peak	
4 *	5566.4000	94.53	12.75	107.28	74.00	33.28	Peak	No Limit
5	5566.4000	84.58	12.75	97.33	999.00	-901.67	AVG	No Limit
6	5728.8000	48.70	13.06	61.76	68.20	-6.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/1/13
Test Frequency	5180MHz	Polarization	Vertical

130 dBuV/m

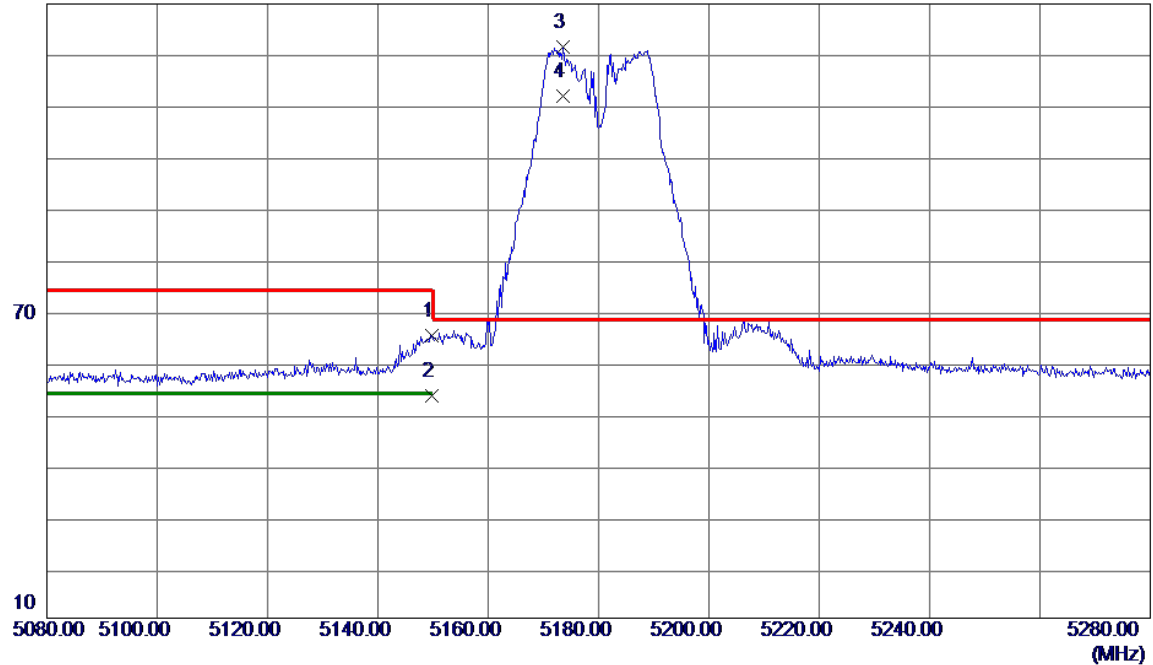


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.8000	52.80	12.31	65.11	74.00	-8.89	Peak	
2	5149.8000	41.06	12.31	53.37	54.00	-0.63	AVG	
3 *	5173.6000	109.19	12.34	121.53	68.20	53.33	Peak	No Limit
4	5173.6000	99.73	12.34	112.07	999.00	-886.93	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/1/13
Test Frequency	5240MHz	Polarization	Vertical

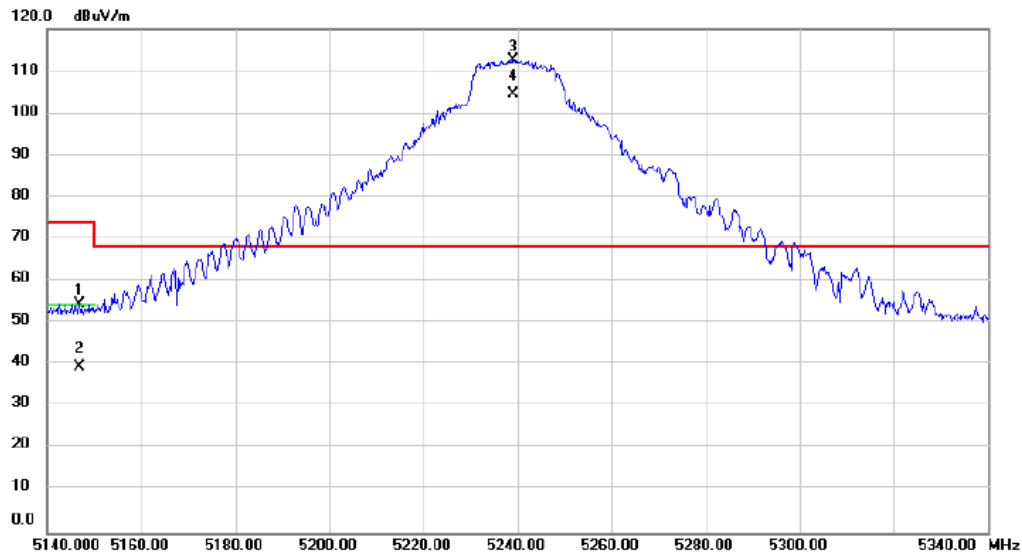


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5146.800	52.58	1.81	54.39	74.00	-19.61	peak		
2		5146.800	37.50	1.81	39.31	54.00	-14.69	AVG		
3	*	5239.000	110.63	1.88	112.51	68.20	44.31	peak		No Limit
4	X	5239.000	102.70	1.88	104.58	68.20	36.38	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/1/13
Test Frequency	5260MHz	Polarization	Vertical

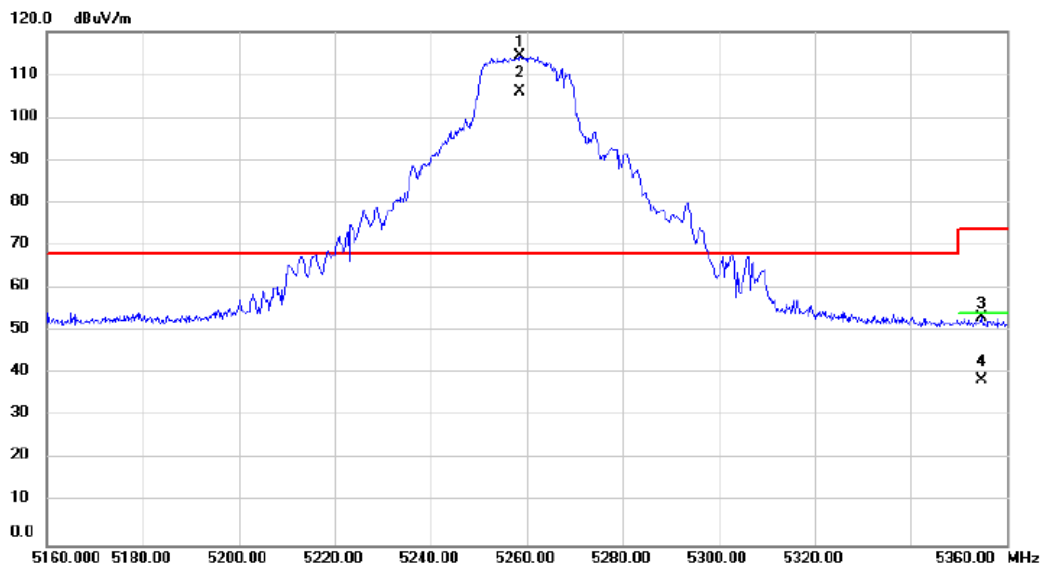


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5258.600	112.43	1.90	114.33	68.20	46.13	peak		No Limit
2	X	5258.600	104.29	1.90	106.19	68.20	37.99	AVG		No Limit
3		5354.800	51.30	1.96	53.26	74.00	-20.74	peak		
4		5354.800	36.60	1.96	38.56	54.00	-15.44	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/1/13
Test Frequency	5320MHz	Polarization	Vertical

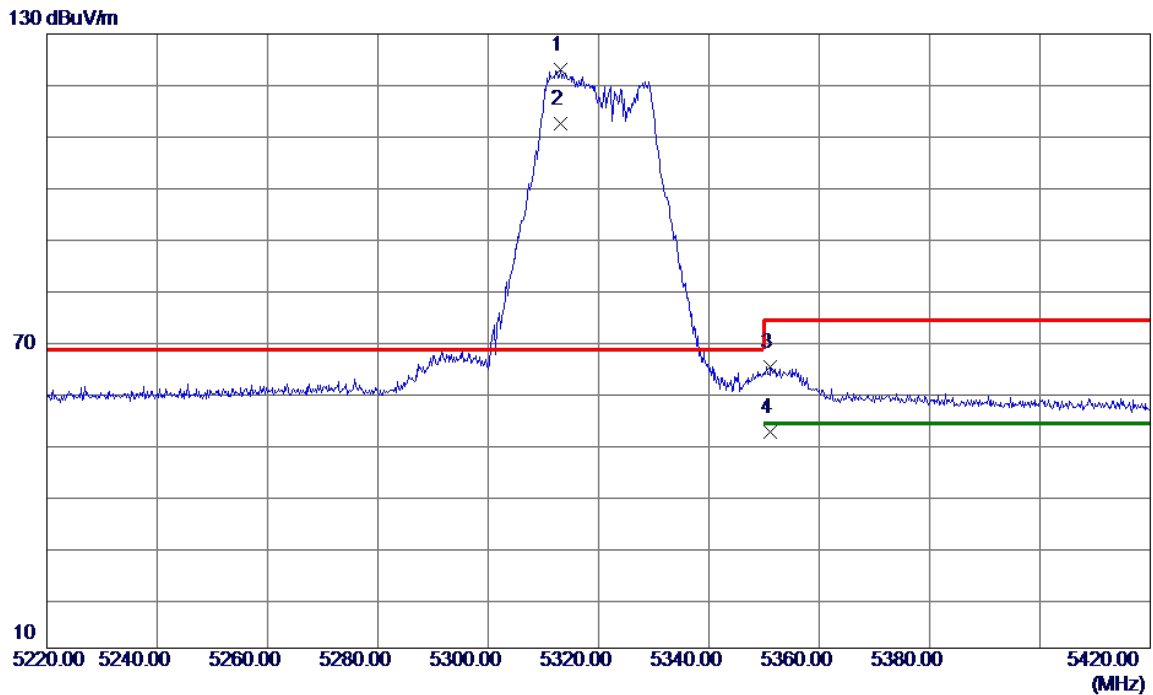


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5313.2000	110.59	12.46	123.05	68.20	54.85	Peak	No Limit
2	5313.2000	100.00	12.46	112.46	999.00	-886.54	AVG	No Limit
3	5351.2000	52.47	12.50	64.97	74.00	-9.03	Peak	
4	5351.2000	39.76	12.50	52.26	54.00	-1.74	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/1/13
Test Frequency	5500MHz	Polarization	Vertical

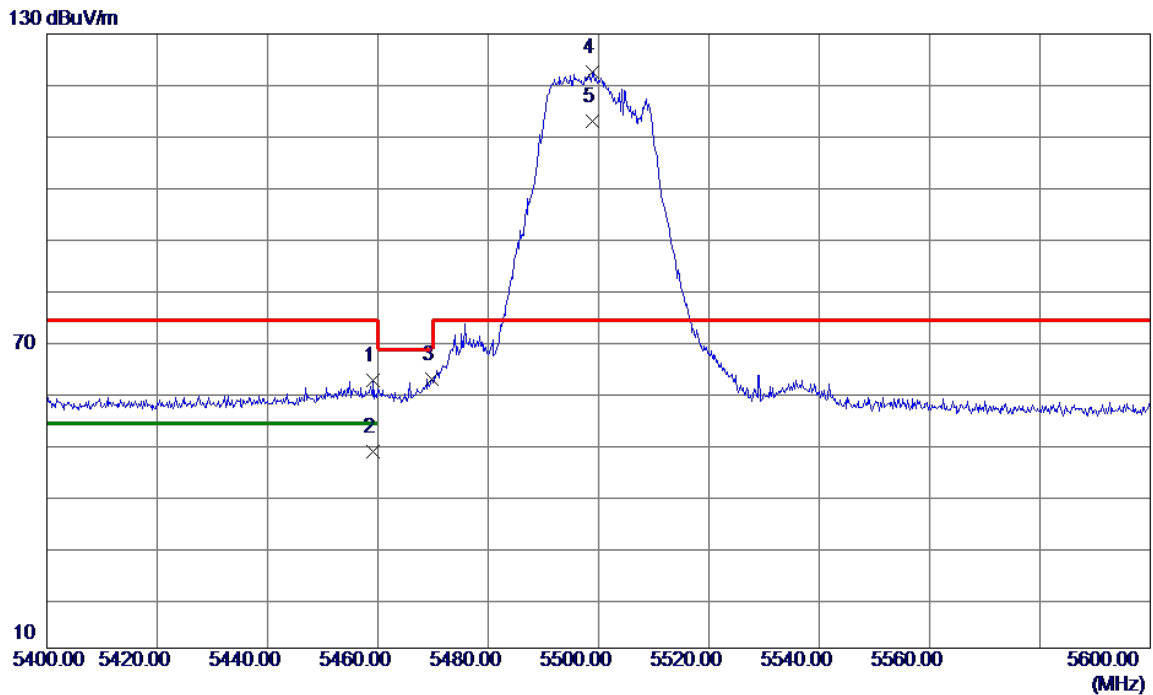


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5459.2000	49.67	12.59	62.26	74.00	-11.74	Peak	
2	5459.2000	35.91	12.59	48.50	54.00	-5.50	AVG	
3	5469.8000	50.06	12.60	62.66	68.20	-5.54	Peak	
4 *	5498.8000	110.03	12.63	122.66	74.00	48.66	Peak	No Limit
5	5498.8000	100.44	12.63	113.07	999.00	-885.93	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/1/13
Test Frequency	5700MHz	Polarization	Vertical

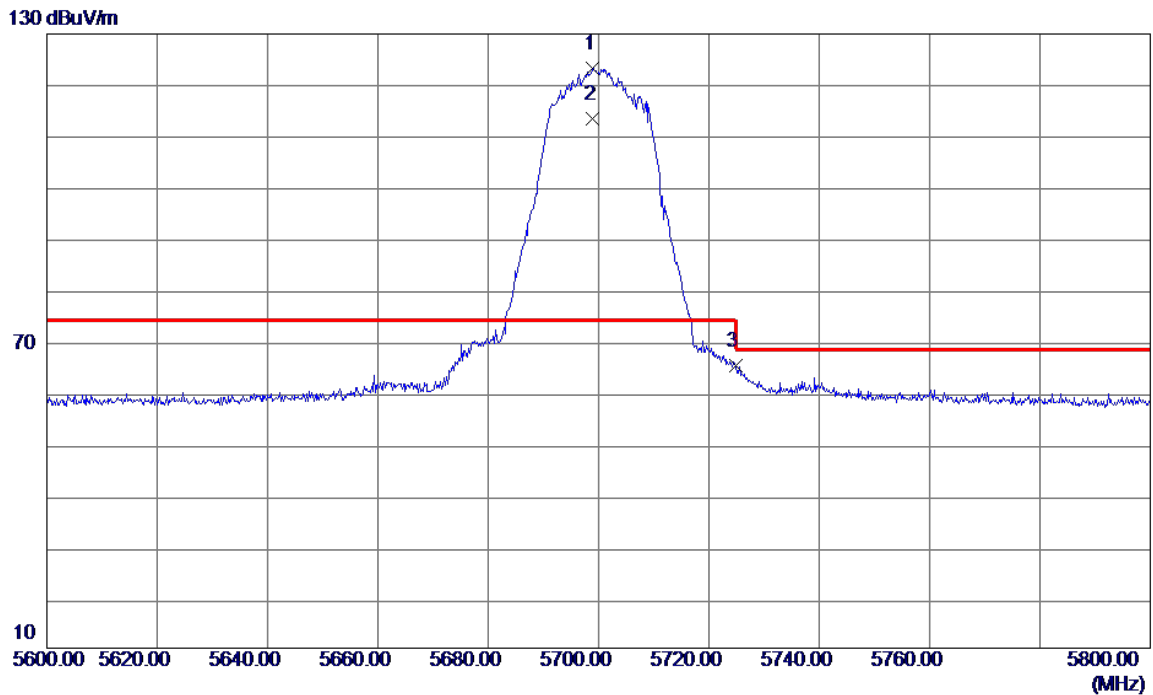


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5699.0000	110.36	13.00	123.36	74.00	49.36	Peak	No Limit
2	5699.0000	100.50	13.00	113.50	999.00	-885.50	AVG	No Limit
3	5724.8000	52.14	13.05	65.19	74.00	-8.81	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/1/13
Test Frequency	5745MHz	Polarization	Vertical

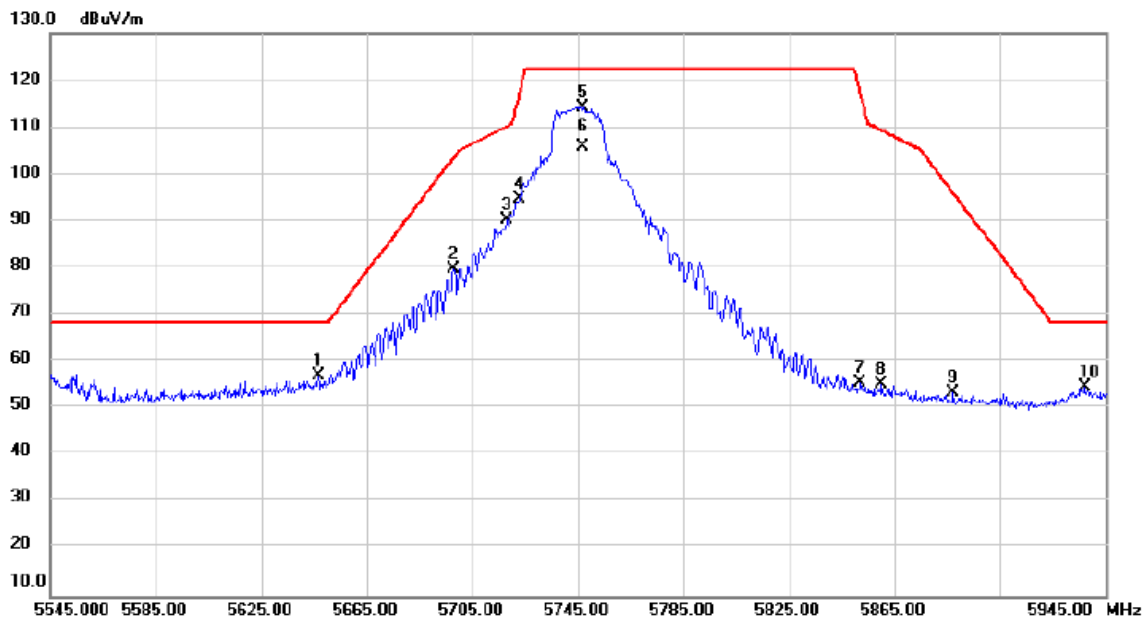


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5646.600	54.71	2.28	56.99	68.20	-11.21	peak		
2		5697.800	77.53	2.34	79.87	103.58	-23.71	peak		
3		5718.200	87.91	2.36	90.27	110.30	-20.03	peak		
4		5723.000	92.50	2.38	94.88	117.64	-22.76	peak		
5	*	5746.600	111.91	2.41	114.32	122.20	-7.88	peak		No Limit
6		5746.600	103.50	2.41	105.91	122.20	-16.29	AVG		No Limit
7		5852.200	52.97	2.56	55.53	117.18	-61.65	peak		
8		5860.200	52.46	2.57	55.03	109.34	-54.31	peak		
9		5887.400	50.78	2.61	53.39	95.99	-42.60	peak		
10		5937.000	51.77	2.68	54.45	68.20	-13.75	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/1/13
Test Frequency	5825MHz	Polarization	Vertical

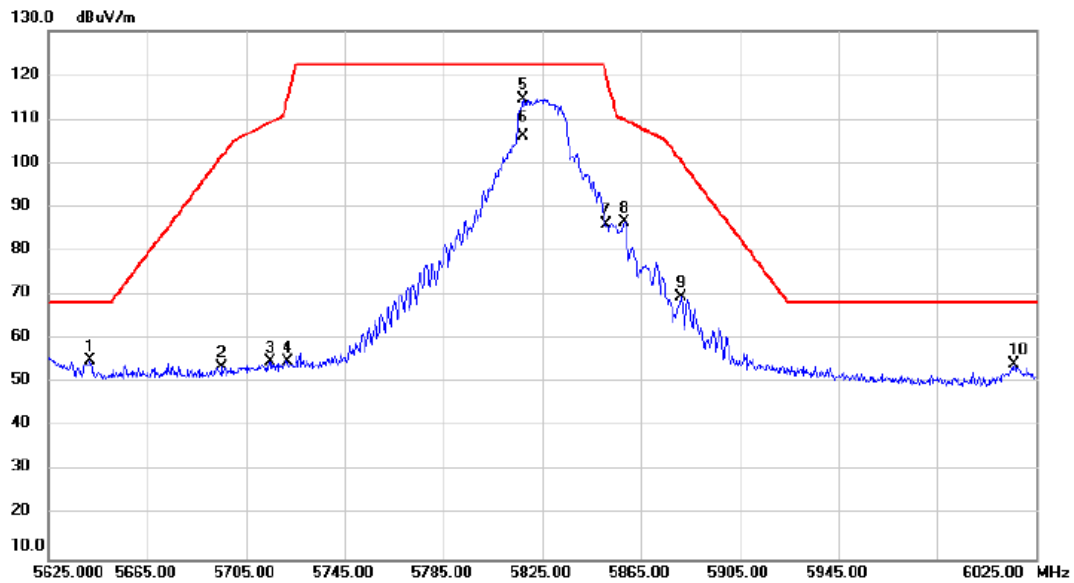


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5641.800	52.75	2.26	55.01	68.20	-13.19	peak		
2		5695.400	51.23	2.33	53.56	101.81	-48.25	peak		
3		5714.600	52.47	2.37	54.84	109.29	-54.45	peak		
4		5721.800	52.42	2.38	54.80	114.91	-60.11	peak		
5	*	5817.000	112.07	2.51	114.58	122.20	-7.62	peak		No Limit
6		5817.000	103.53	2.51	106.04	122.20	-16.16	AVG		No Limit
7		5850.600	83.41	2.56	85.97	120.83	-34.86	peak		
8		5858.200	84.12	2.57	86.69	109.90	-23.21	peak		
9		5881.000	66.82	2.60	69.42	100.74	-31.32	peak		
10		6016.200	51.36	2.86	54.22	68.20	-13.98	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/1/13
Test Frequency	5190MHz	Polarization	Vertical

130 dBuV/m

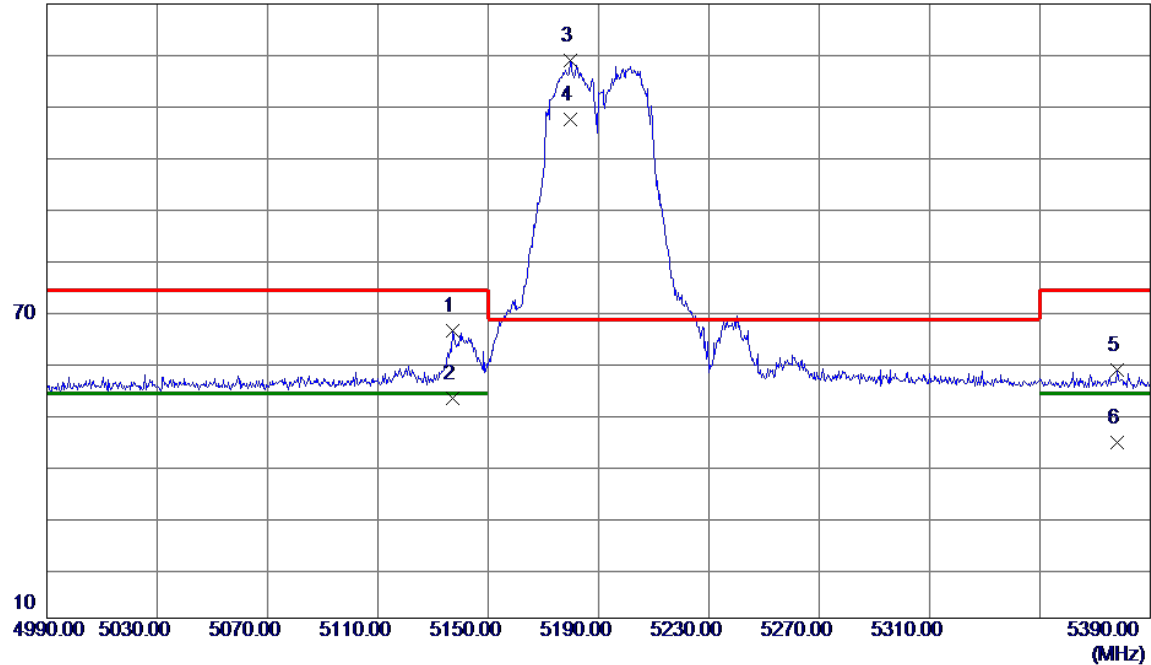


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5137.2000	53.92	12.30	66.22	74.00	-7.78	Peak	
2	5137.2000	40.75	12.30	53.05	54.00	-0.95	AVG	
3 *	5179.6000	106.55	12.34	118.89	68.20	50.69	Peak	No Limit
4	5179.6000	95.15	12.34	107.49	999.00	-891.51	AVG	No Limit
5	5378.0000	45.93	12.52	58.45	74.00	-15.55	Peak	
6	5378.0000	31.85	12.52	44.37	54.00	-9.63	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/1/13
Test Frequency	5230MHz	Polarization	Vertical

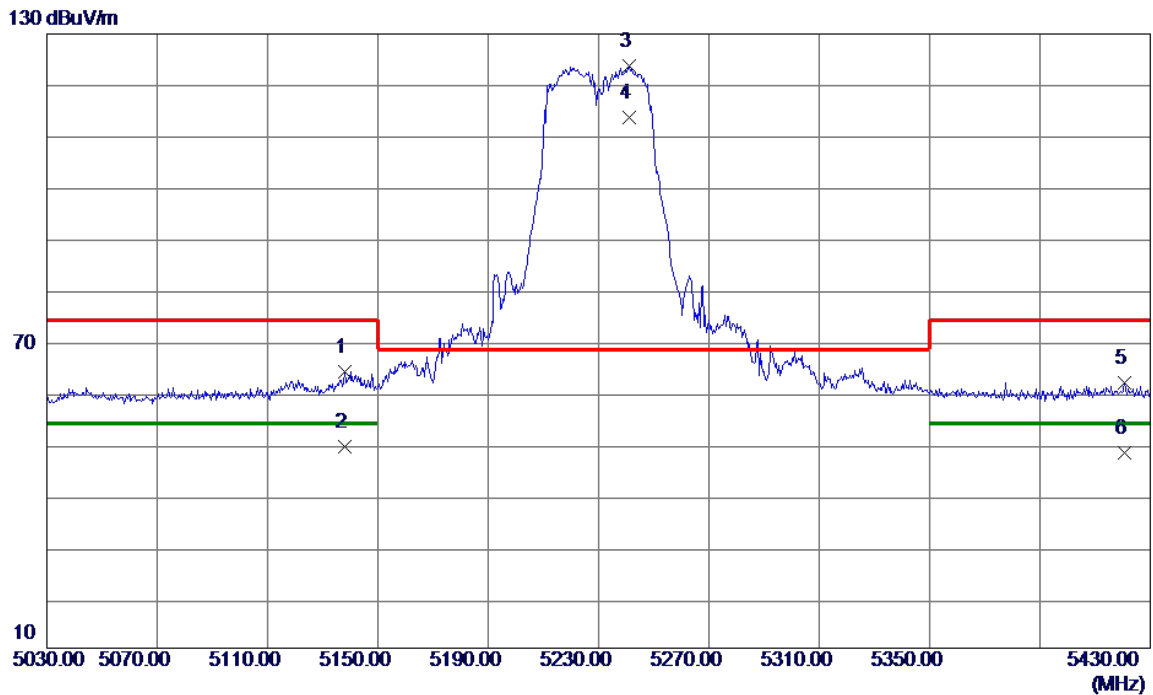


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5138.0000	51.67	12.30	63.97	74.00	-10.03	Peak	
2	5138.0000	37.03	12.30	49.33	54.00	-4.67	AVG	
3 *	5241.2000	111.32	12.40	123.72	68.20	55.52	Peak	No Limit
4	5241.2000	101.22	12.40	113.62	999.00	-885.38	AVG	No Limit
5	5420.8000	49.20	12.56	61.76	74.00	-12.24	Peak	
6	5420.8000	35.52	12.56	48.08	54.00	-5.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/1/13
Test Frequency	5270MHz	Polarization	Vertical

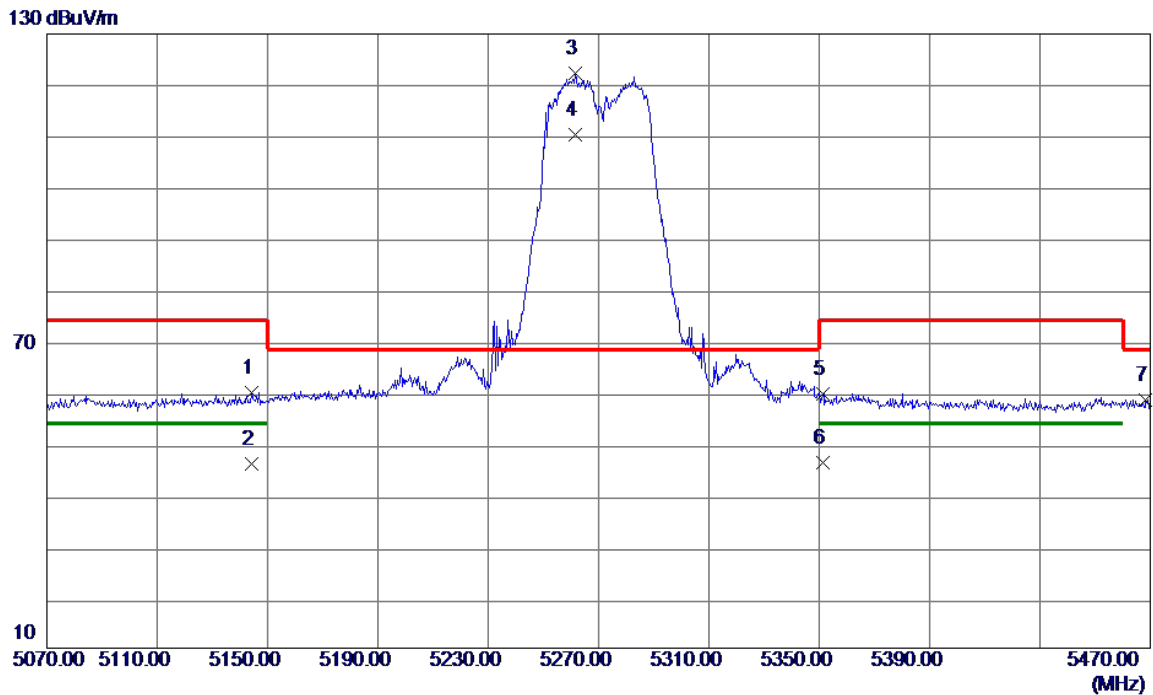


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5144.4000	47.70	12.31	60.01	74.00	-13.99	Peak	
2	5144.4000	33.77	12.31	46.08	54.00	-7.92	AVG	
3 *	5261.6000	109.82	12.42	122.24	68.20	54.04	Peak	No Limit
4	5261.6000	97.84	12.42	110.26	999.00	-888.74	AVG	No Limit
5	5351.2000	47.27	12.50	59.77	74.00	-14.23	Peak	
6	5351.2000	33.80	12.50	46.30	54.00	-7.70	AVG	
7	5468.4000	45.94	12.60	58.54	68.20	-9.66	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/1/13
Test Frequency	5310MHz	Polarization	Vertical

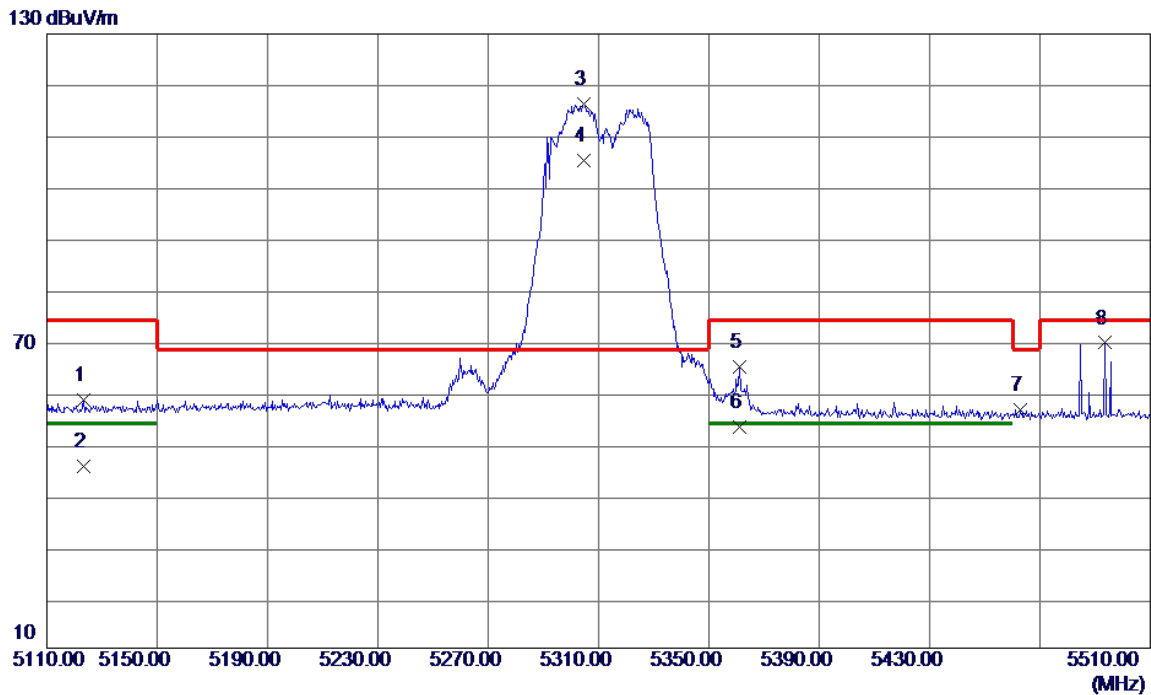


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5123.2000	46.24	12.29	58.53	74.00	-15.47	Peak	
2	5123.2000	33.21	12.29	45.50	54.00	-8.50	AVG	
3 *	5304.8000	103.77	12.45	116.22	68.20	48.02	Peak	No Limit
4	5304.8000	92.80	12.45	105.25	999.00	-893.75	AVG	No Limit
5	5361.2000	52.42	12.51	64.93	74.00	-9.07	Peak	
6	5361.2000	40.71	12.51	53.22	54.00	-0.78	AVG	
7	5462.8000	44.01	12.60	56.61	68.20	-11.59	Peak	
8	5493.6000	57.02	12.62	69.64	74.00	-4.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/1/13
Test Frequency	5510MHz	Polarization	Vertical

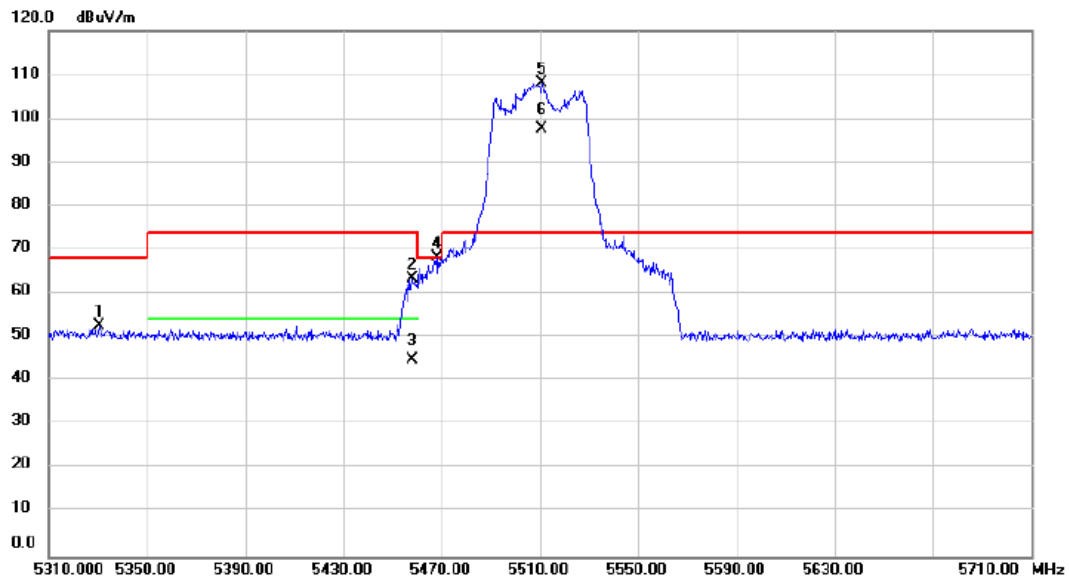


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		5330.400	50.62	1.94	52.56	68.20	-15.64	peak		
2		5458.000	61.44	2.02	63.46	74.00	-10.54	peak		
3		5458.000	42.78	2.02	44.80	54.00	-9.20	AVG		
4		5468.000	66.10	2.04	68.14	68.20	-0.06	peak		
5	*	5510.800	106.06	2.08	108.14	74.00	34.14	peak		No Limit
6	X	5510.800	95.58	2.08	97.66	74.00	23.66	AVG		No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/1/13
Test Frequency	5670MHz	Polarization	Vertical

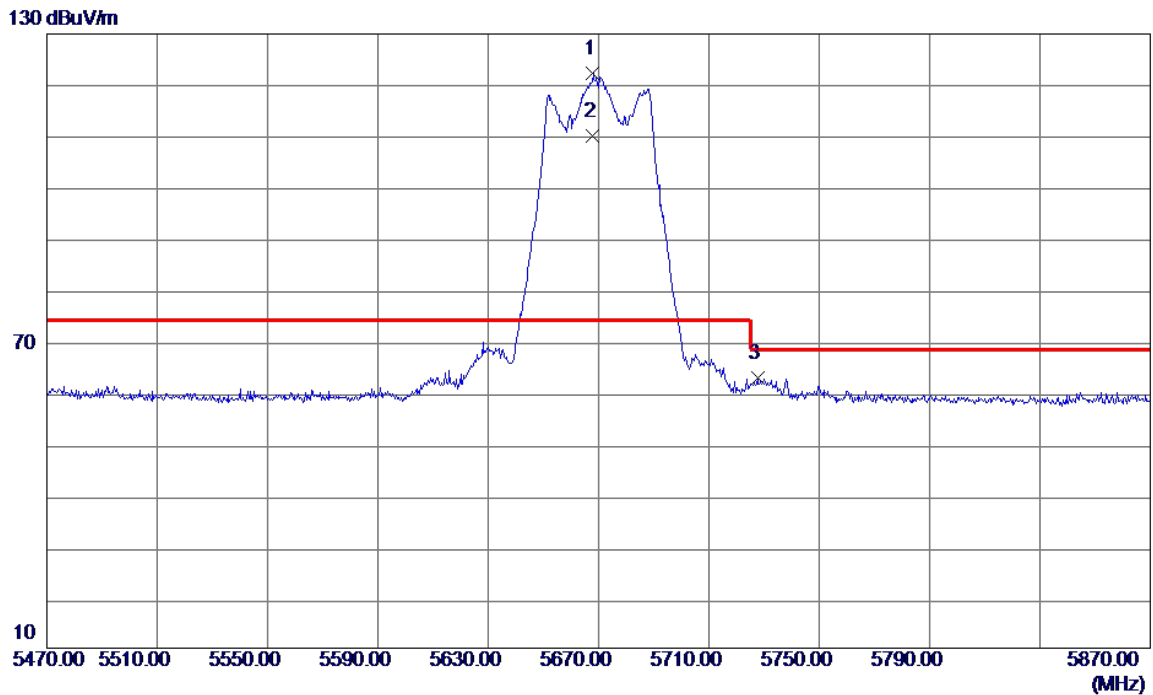


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5668.0000	109.28	12.95	122.23	74.00	48.23	Peak	No Limit
2	5668.0000	97.21	12.95	110.16	999.00	-888.84	AVG	No Limit
3	5727.6000	49.72	13.06	62.78	68.20	-5.42	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/1/13
Test Frequency	5755MHz	Polarization	Vertical

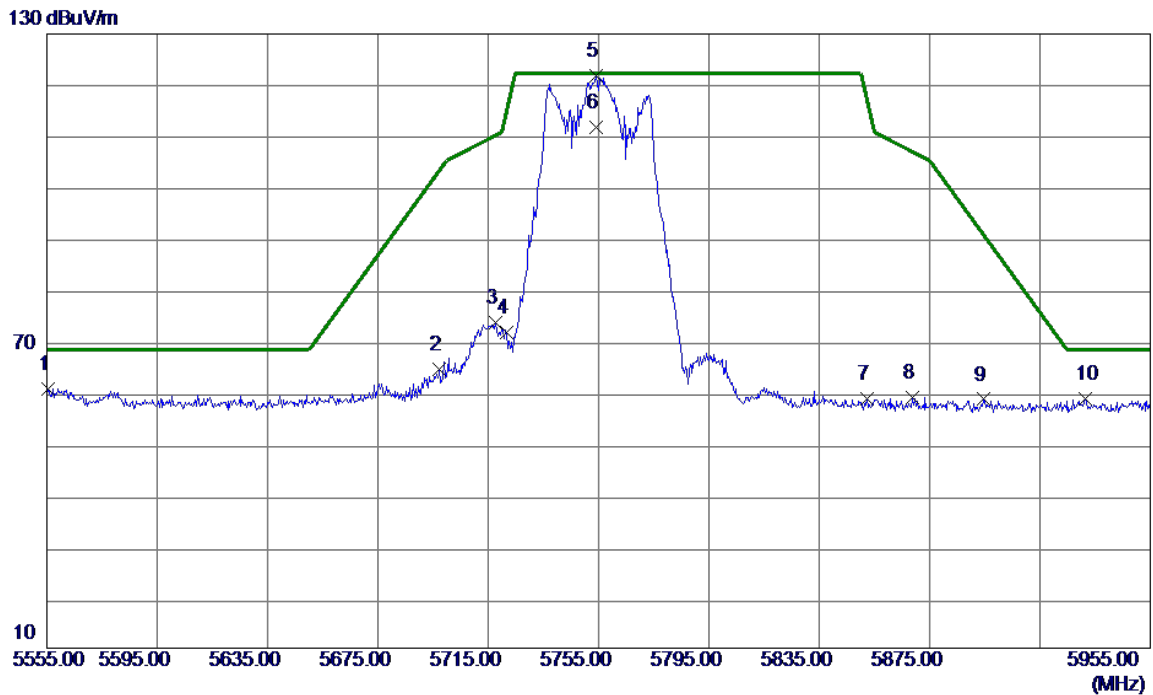


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5555.4000	47.99	12.73	60.72	68.20	-7.48	Peak	
2	5697.4000	51.39	13.00	64.39	103.28	-38.89	Peak	
3	5717.8000	60.51	13.04	73.55	110.18	-36.63	Peak	
4	5721.8000	58.68	13.05	71.73	114.91	-43.18	Peak	
5 *	5754.2000	108.62	13.11	121.73	122.20	-0.47	Peak	No Limit
6	5754.2000	98.67	13.11	111.78	122.20	-10.42	AVG	No Limit
7	5852.2000	45.50	13.29	58.79	117.18	-58.39	Peak	
8	5868.6000	45.67	13.32	58.99	106.99	-48.00	Peak	
9	5894.6000	45.23	13.37	58.60	90.66	-32.06	Peak	
10	5931.4000	45.23	13.44	58.67	68.20	-9.53	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/1/13
Test Frequency	5795MHz	Polarization	Vertical

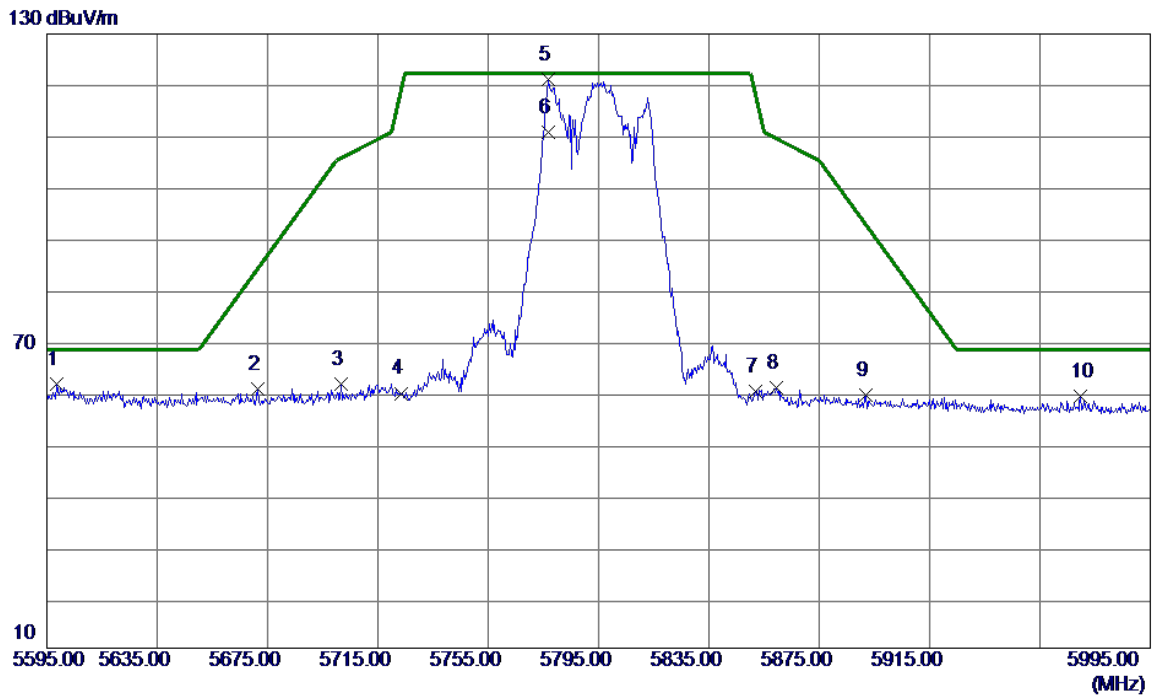


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5598.6000	48.69	12.82	61.51	68.20	-6.69	Peak	
2	5671.4000	47.69	12.95	60.64	84.08	-23.44	Peak	
3	5701.8000	48.62	13.01	61.63	105.70	-44.07	Peak	
4	5723.4000	46.75	13.05	59.80	118.55	-58.75	Peak	
5 *	5776.6000	107.86	13.15	121.01	122.20	-1.19	Peak	No Limit
6	5776.6000	97.55	13.15	110.70	122.20	-11.50	AVG	No Limit
7	5851.8000	46.98	13.29	60.27	118.09	-57.82	Peak	
8	5859.4000	47.53	13.31	60.84	109.57	-48.73	Peak	
9	5891.8000	46.15	13.37	59.52	92.73	-33.21	Peak	
10	5969.8000	45.58	13.51	59.09	68.20	-9.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/1/13
Test Frequency	5210MHz	Polarization	Vertical

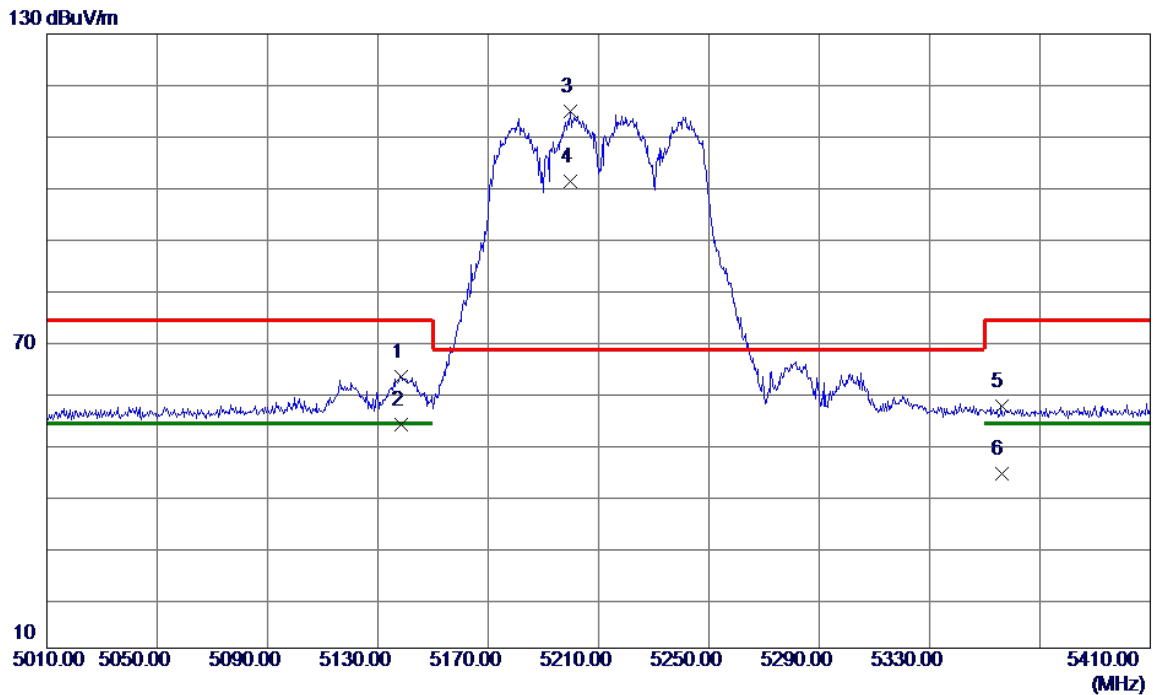


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5138.4000	50.83	12.30	63.13	74.00	-10.87	Peak	
2	5138.4000	41.38	12.30	53.68	54.00	-0.32	AVG	
3 *	5199.6000	102.42	12.36	114.78	68.20	46.58	Peak	No Limit
4	5199.6000	88.74	12.36	101.10	999.00	-897.90	AVG	No Limit
5	5356.0000	44.88	12.50	57.38	74.00	-16.62	Peak	
6	5356.0000	31.47	12.50	43.97	54.00	-10.03	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/1/13
Test Frequency	5290MHz	Polarization	Vertical

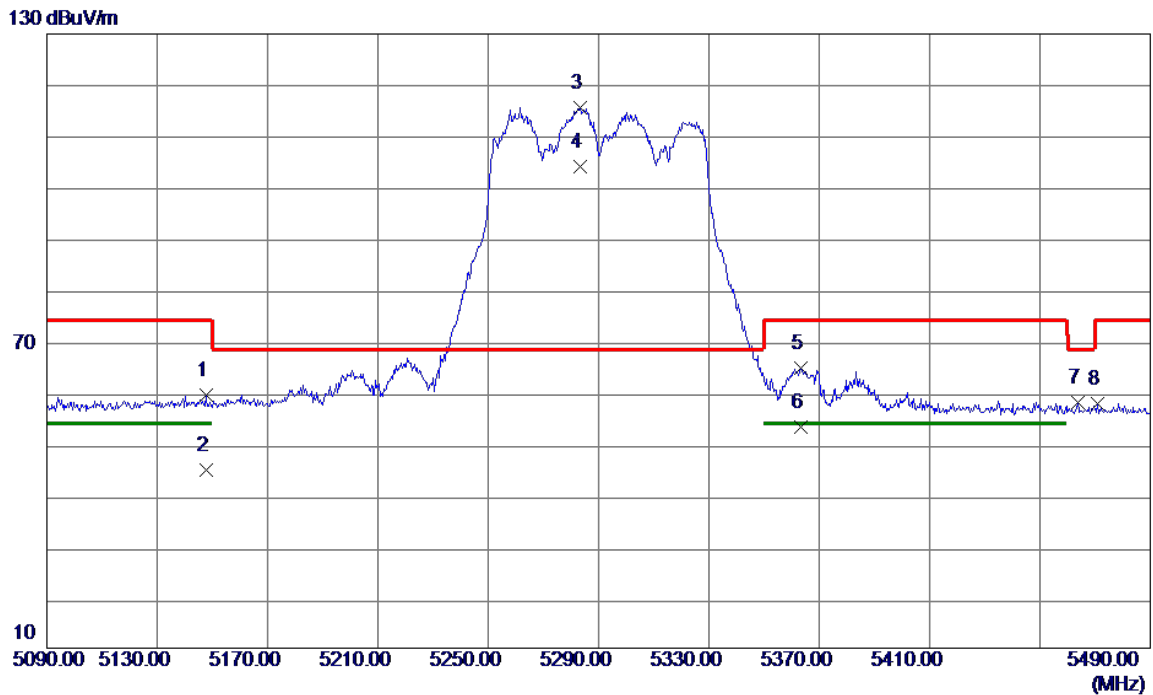


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5147.6000	47.10	12.31	59.41	74.00	-14.59	Peak	
2	5147.6000	32.39	12.31	44.70	54.00	-9.30	AVG	
3 *	5283.2000	103.26	12.43	115.69	68.20	47.49	Peak	No Limit
4	5283.2000	91.64	12.43	104.07	999.00	-894.93	AVG	No Limit
5	5363.2000	52.11	12.51	64.62	74.00	-9.38	Peak	
6	5363.2000	40.77	12.51	53.28	54.00	-0.72	AVG	
7	5463.6000	45.31	12.60	57.91	68.20	-10.29	Peak	
8	5470.8000	45.17	12.60	57.77	74.00	-16.23	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/1/13
Test Frequency	5530MHz	Polarization	Vertical

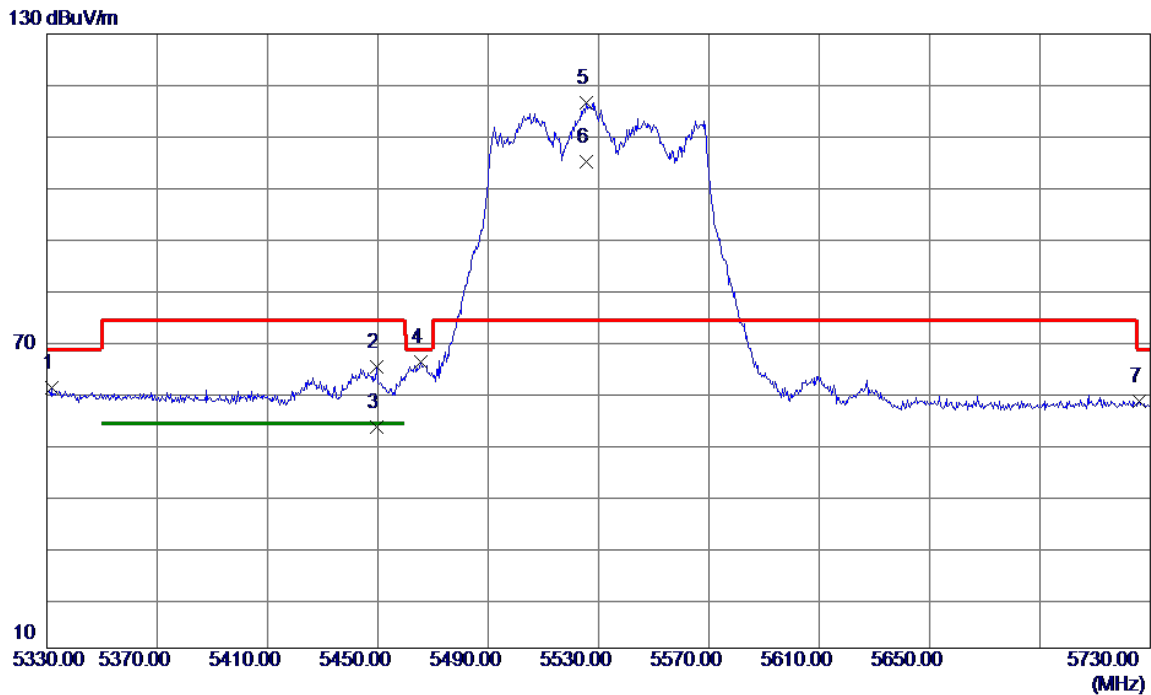


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5331.6000	48.36	12.48	60.84	68.20	-7.36	Peak	
2	5449.6000	52.34	12.58	64.92	74.00	-9.08	Peak	
3	5449.6000	40.56	12.58	53.14	54.00	-0.86	AVG	
4	5465.6000	53.29	12.60	65.89	68.20	-2.31	Peak	
5 *	5525.6000	103.90	12.68	116.58	74.00	42.58	Peak	No Limit
6	5525.6000	92.44	12.68	105.12	999.00	-893.88	AVG	No Limit
7	5726.0000	45.08	13.05	58.13	68.20	-10.07	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/1/13
Test Frequency	5610MHz	Polarization	Vertical

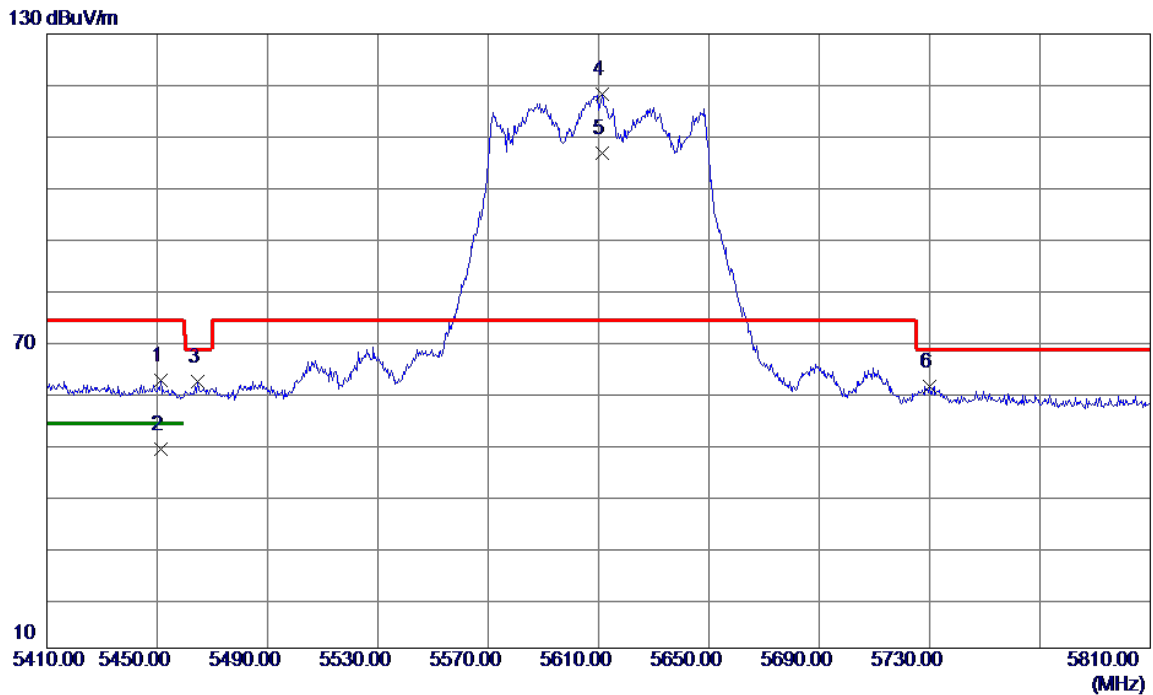


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5451.2000	49.75	12.59	62.34	74.00	-11.66	Peak	
2	5451.2000	36.20	12.59	48.79	54.00	-5.21	AVG	
3	5464.8000	49.55	12.60	62.15	68.20	-6.05	Peak	
4 *	5611.2000	105.30	12.84	118.14	74.00	44.14	Peak	No Limit
5	5611.2000	93.89	12.84	106.73	999.00	-892.27	AVG	No Limit
6	5730.0000	48.12	13.06	61.18	68.20	-7.02	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/1/13
Test Frequency	5775Hz	Polarization	Vertical

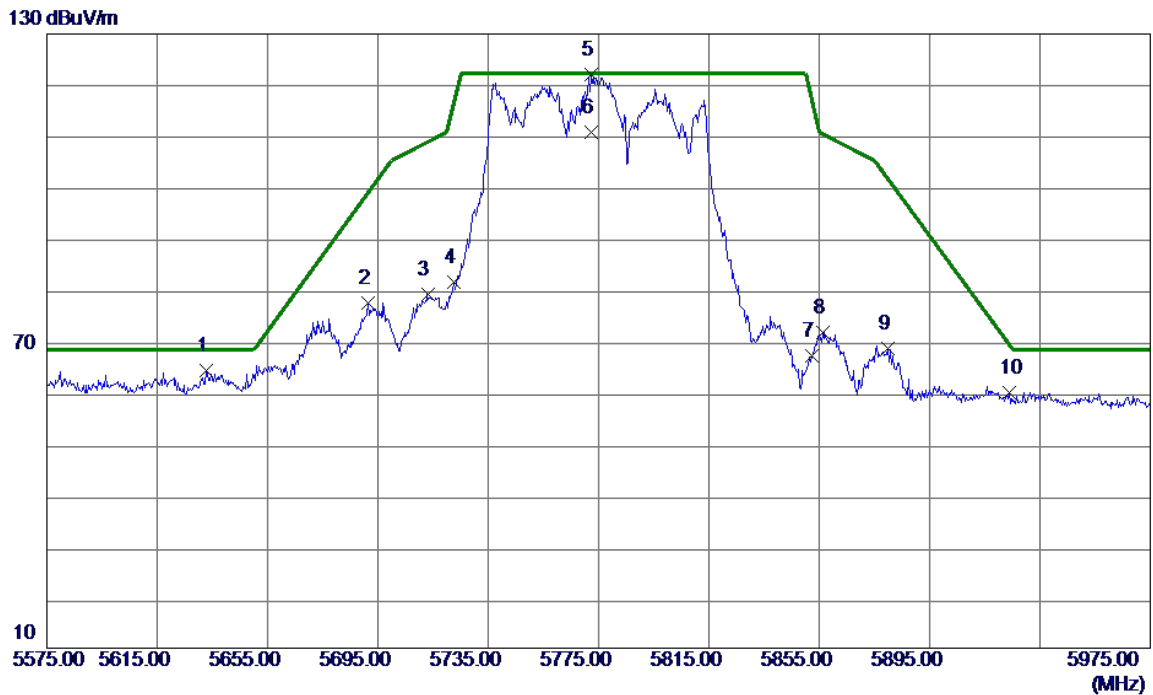

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5632.6000	51.46	12.88	64.34	68.20	-3.86	Peak	
2	5691.4000	64.50	12.99	77.49	98.86	-21.37	Peak	
3	5713.0000	66.00	13.03	79.03	108.84	-29.81	Peak	
4	5722.6000	68.42	13.05	81.47	116.73	-35.26	Peak	
5 *	5772.2000	109.04	13.14	122.18	122.20	-0.02	Peak	No Limit
6	5772.2000	97.67	13.14	110.81	122.20	-11.39	AVG	No Limit
7	5852.2000	53.72	13.29	67.01	117.18	-50.17	Peak	
8	5856.2000	58.49	13.30	71.79	110.46	-38.67	Peak	
9	5879.8000	55.21	13.34	68.55	101.63	-33.08	Peak	
10	5923.8000	46.56	13.43	59.99	69.08	-9.09	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/1/13
Test Frequency	5250Hz	Polarization	Vertical

130 dBuV/m

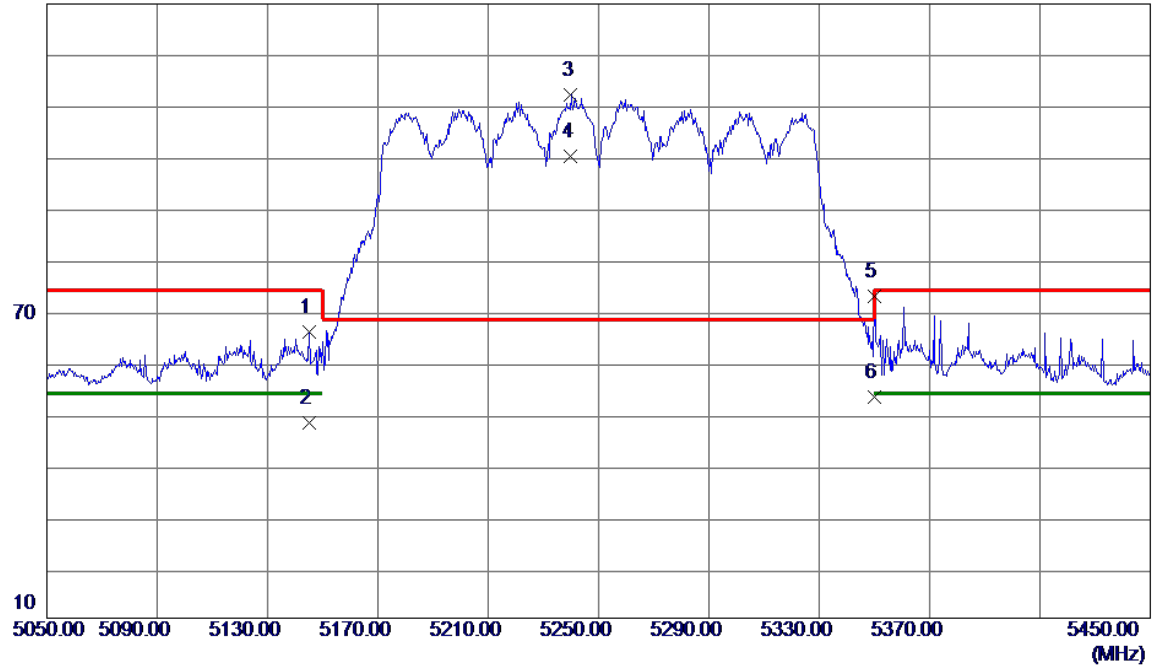

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5145.2000	53.72	12.31	66.03	74.00	-7.97	Peak	
2	5145.2000	35.75	12.31	48.06	54.00	-5.94	AVG	
3 *	5240.0000	99.78	12.40	112.18	68.20	43.98	Peak	No Limit
4	5240.0000	87.91	12.40	100.31	999.00	-898.69	AVG	No Limit
5	5350.0000	60.41	12.50	72.91	74.00	-1.09	Peak	
6	5350.0000	40.59	12.50	53.09	999.00	-945.91	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/1/13
Test Frequency	5570Hz	Polarization	Vertical

130 dBuV/m

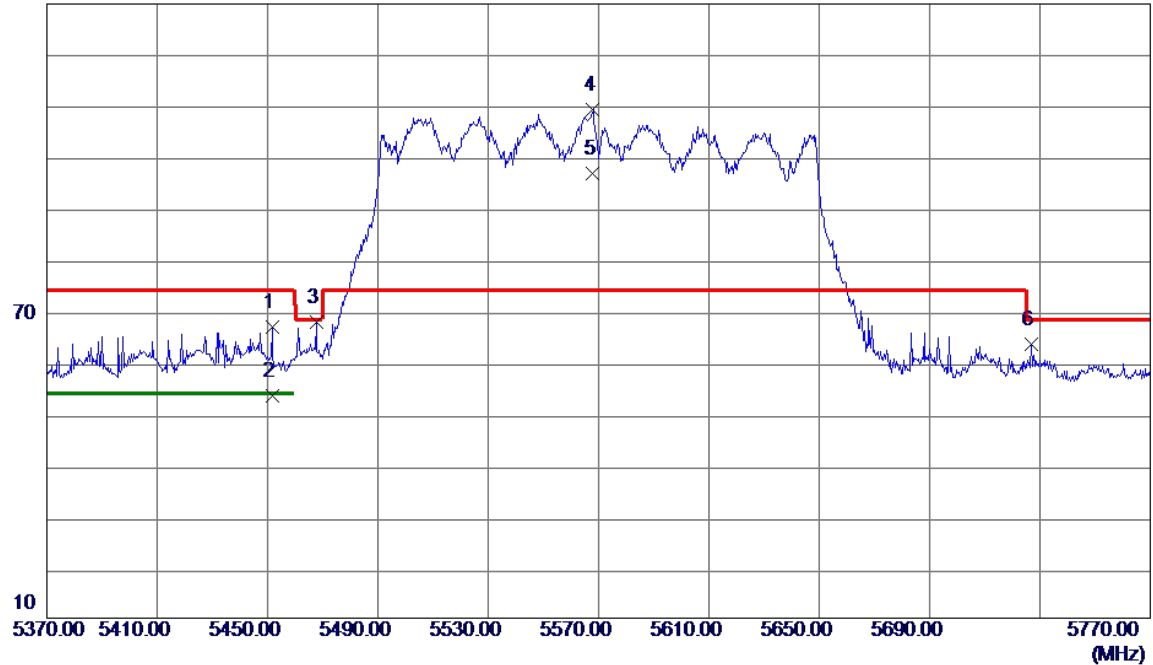


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5451.6000	54.30	12.59	66.89	74.00	-7.11	Peak	
2	5451.6000	40.84	12.59	53.43	54.00	-0.57	AVG	
3	5467.6000	55.20	12.60	67.80	68.20	-0.40	Peak	
4 *	5568.0000	96.55	12.76	109.31	74.00	35.31	Peak	No Limit
5	5568.0000	84.10	12.76	96.86	999.00	-902.14	AVG	No Limit
6	5726.8000	50.37	13.06	63.43	68.20	-4.77	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/1/13
Test Frequency	5180MHz	Polarization	Vertical

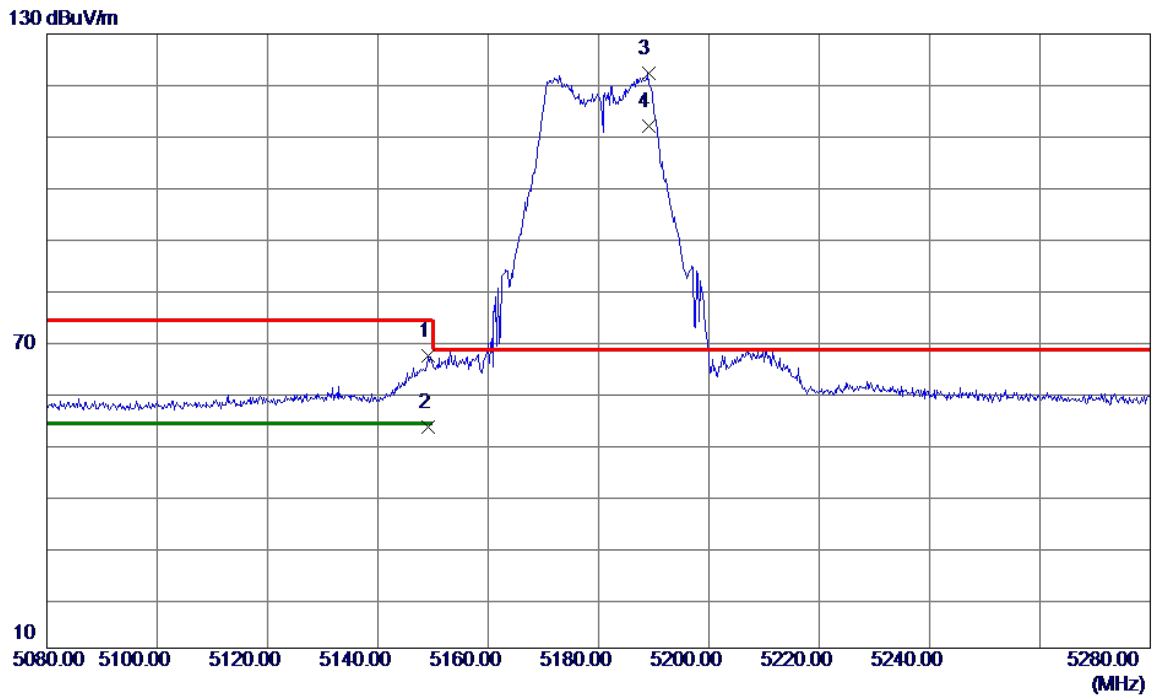


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.2000	54.75	12.31	67.06	74.00	-6.94	Peak	
2	5149.2000	40.99	12.31	53.30	54.00	-0.70	AVG	
3 *	5189.0000	110.02	12.35	122.37	68.20	54.17	Peak	No Limit
4	5189.0000	99.71	12.35	112.06	999.00	-886.94	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/1/13
Test Frequency	5240MHz	Polarization	Vertical

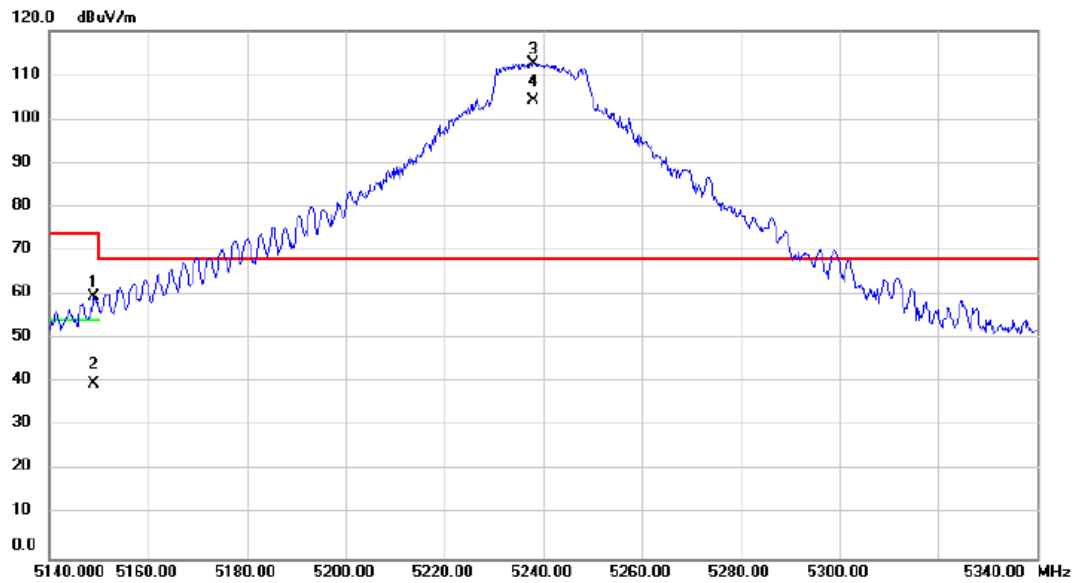


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.000	57.64	1.81	59.45	74.00	-14.55	peak		
2		5149.000	37.92	1.81	39.73	54.00	-14.27	AVG		
3	*	5238.000	110.75	1.88	112.63	68.20	44.43	peak		No Limit
4	X	5238.000	102.48	1.88	104.36	68.20	36.16	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/1/13
Test Frequency	5260MHz	Polarization	Vertical

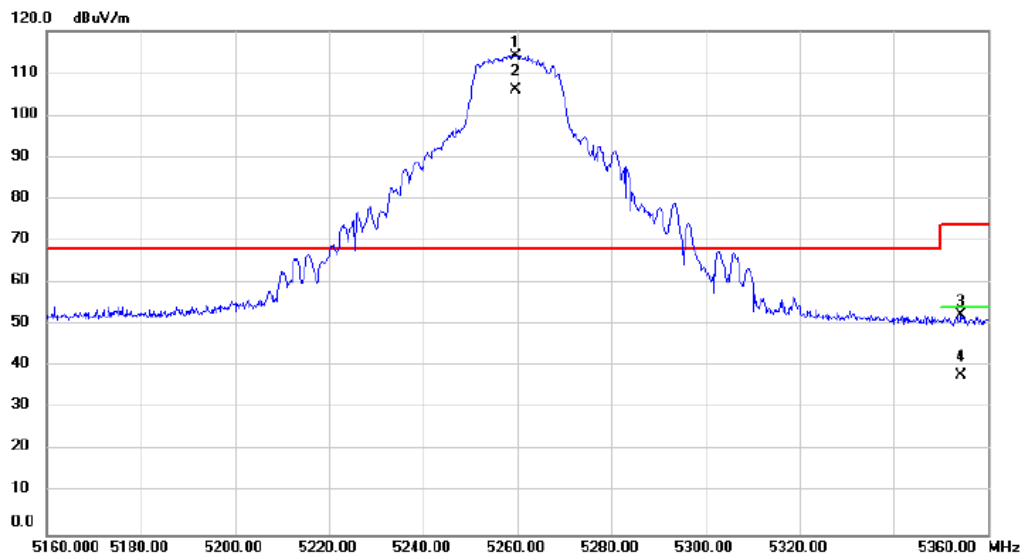


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5259.600	112.27	1.90	114.17	68.20	45.97	peak		No Limit
2	X	5259.600	104.01	1.90	105.91	68.20	37.71	AVG		No Limit
3		5354.400	50.38	1.96	52.34	74.00	-21.66	peak		
4		5354.400	35.88	1.96	37.84	54.00	-16.16	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/1/13
Test Frequency	5320MHz	Polarization	Vertical

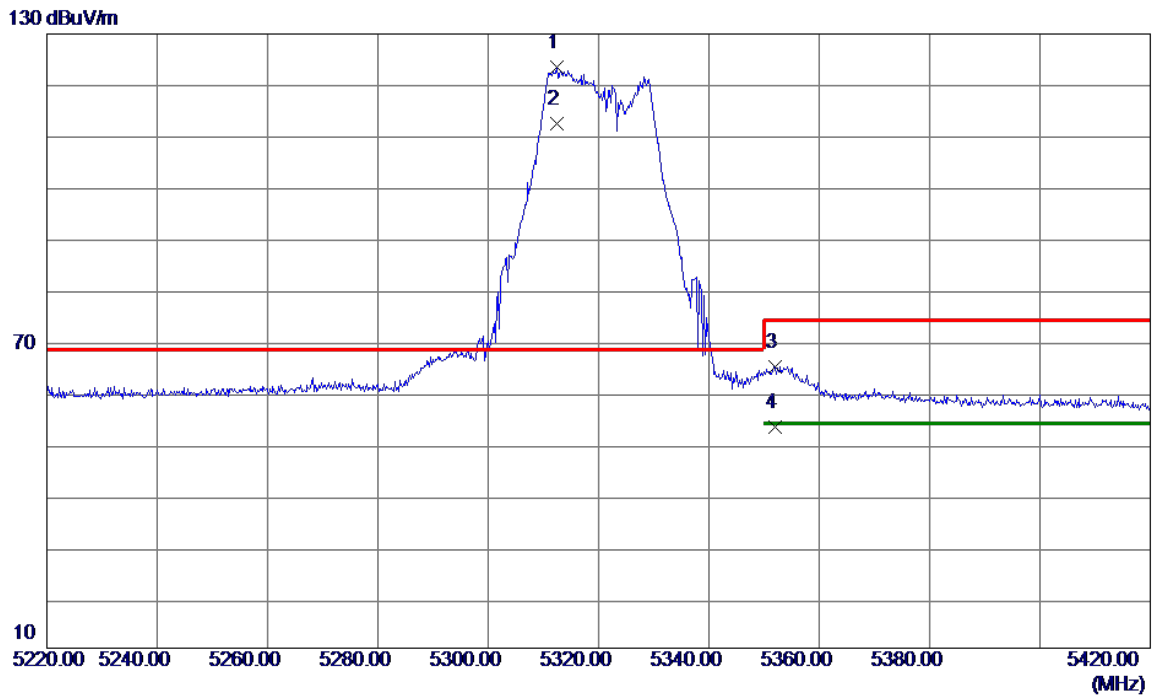


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5312.4000	110.95	12.46	123.41	68.20	55.21	Peak	No Limit
2	5312.4000	100.08	12.46	112.54	999.00	-886.46	AVG	No Limit
3	5352.0000	52.55	12.50	65.05	74.00	-8.95	Peak	
4	5352.0000	40.80	12.50	53.30	54.00	-0.70	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/1/13
Test Frequency	5500MHz	Polarization	Vertical

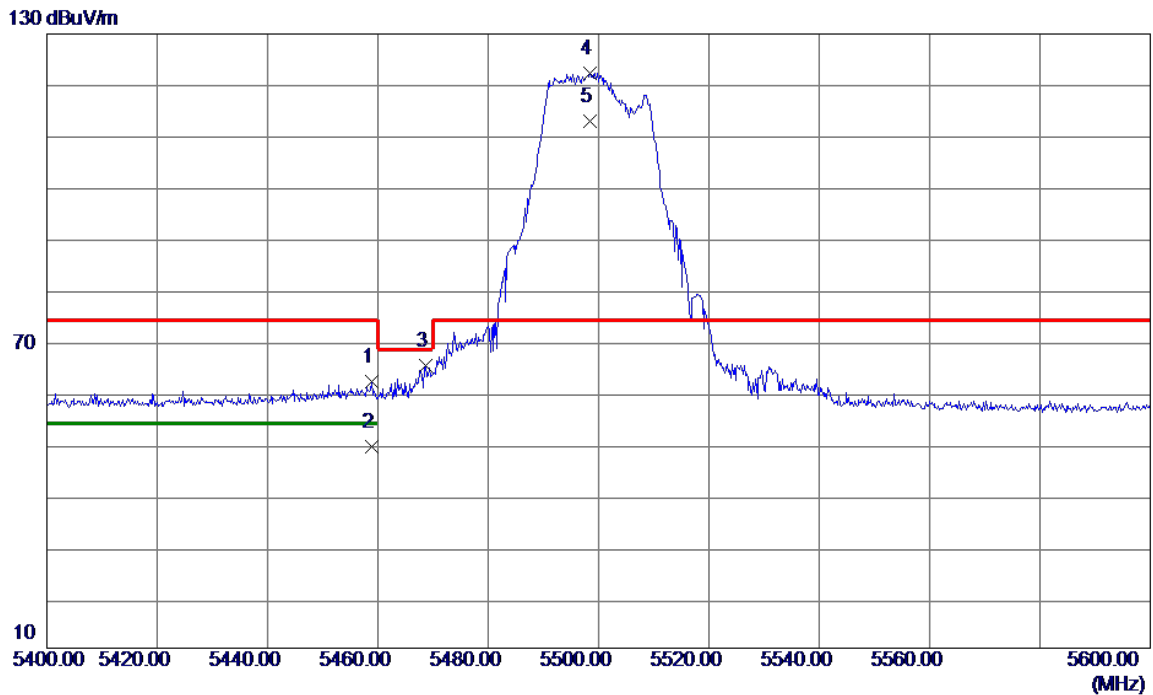


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5458.8000	49.50	12.59	62.09	74.00	-11.91	Peak	
2	5458.8000	36.81	12.59	49.40	54.00	-4.60	AVG	
3	5468.6000	52.68	12.60	65.28	68.20	-2.92	Peak	
4 *	5498.4000	109.66	12.63	122.29	74.00	48.29	Peak	No Limit
5	5498.4000	100.23	12.63	112.86	999.00	-886.14	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/1/13
Test Frequency	5700MHz	Polarization	Vertical

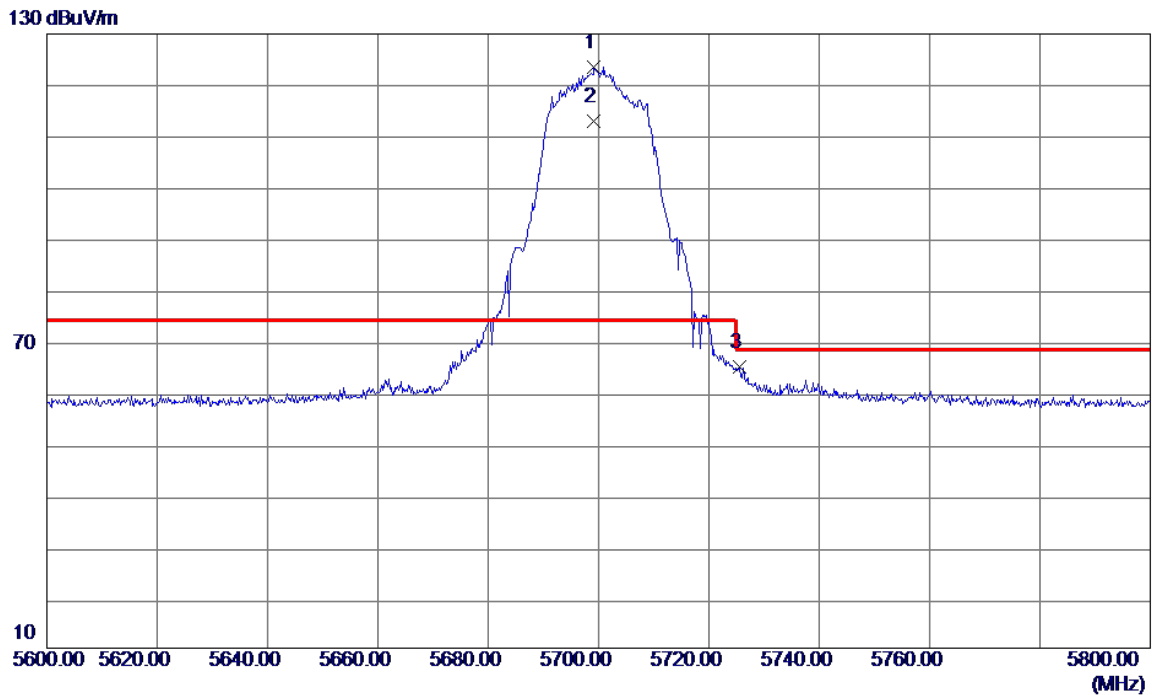


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5699.2000	110.48	13.00	123.48	74.00	49.48	Peak	No Limit
2	5699.2000	100.05	13.00	113.05	999.00	-885.95	AVG	No Limit
3	5725.6000	51.96	13.05	65.01	68.20	-3.19	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/1/13
Test Frequency	5745MHz	Polarization	Vertical

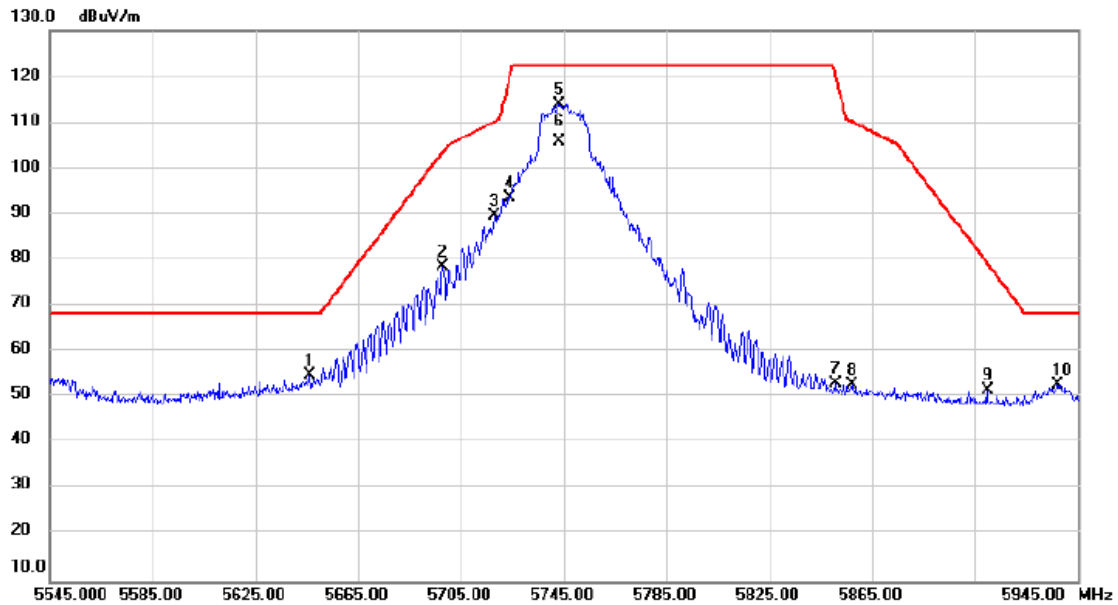


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5645.800	52.62	2.27	54.89	68.20	-13.31	peak		
2		5697.800	76.26	2.34	78.60	103.58	-24.98	peak		
3		5718.200	87.43	2.36	89.79	110.30	-20.51	peak		
4		5723.800	91.12	2.38	93.50	119.46	-25.96	peak		
5	*	5743.000	111.62	2.40	114.02	122.20	-8.18	peak		No Limit
6		5743.000	103.40	2.40	105.80	122.20	-16.40	AVG		No Limit
7		5850.600	50.59	2.56	53.15	120.83	-67.68	peak		
8		5857.000	50.32	2.57	52.89	110.24	-57.35	peak		
9		5909.800	48.87	2.64	51.51	79.41	-27.90	peak		
10		5937.400	50.19	2.68	52.87	68.20	-15.33	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2025/1/13
Test Frequency	5825MHz	Polarization	Vertical

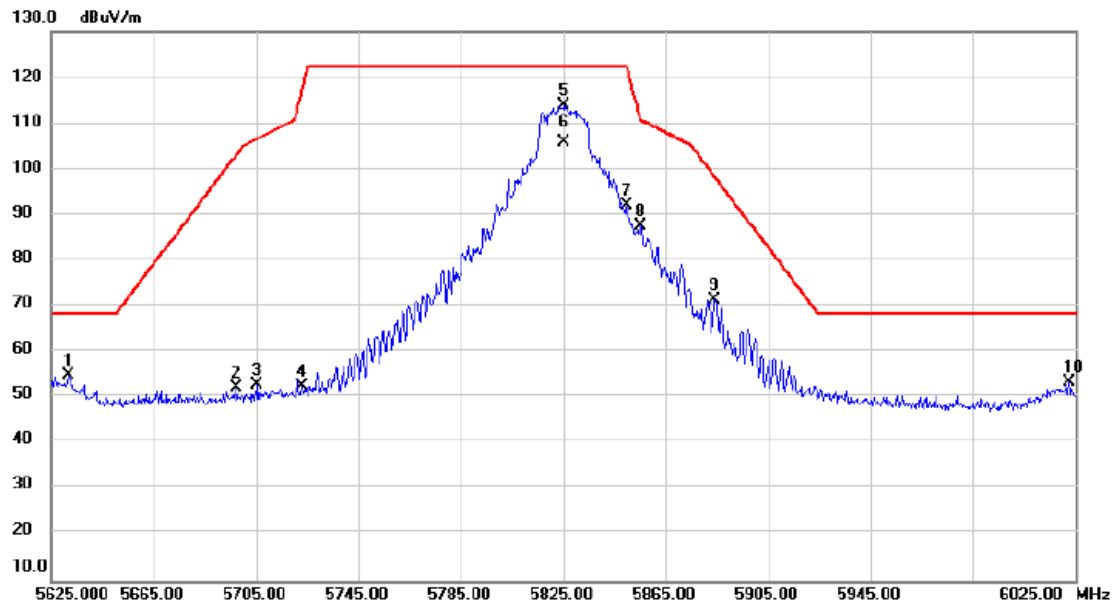


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5631.800	52.63	2.25	54.88	68.20	-13.32	peak		
2		5697.400	49.83	2.34	52.17	103.28	-51.11	peak		
3		5705.400	50.46	2.36	52.82	106.71	-53.89	peak		
4		5722.600	50.14	2.38	52.52	116.73	-64.21	peak		
5	*	5825.400	111.54	2.52	114.06	122.20	-8.14	peak		No Limit
6		5825.400	103.31	2.52	105.83	122.20	-16.37	AVG		No Limit
7		5849.800	89.40	2.56	91.96	122.20	-30.24	peak		
8		5855.400	84.96	2.56	87.52	110.69	-23.17	peak		
9		5884.200	68.84	2.60	71.44	98.37	-26.93	peak		
10		6022.600	50.31	2.89	53.20	68.20	-15.00	peak		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/1/13
Test Frequency	5190MHz	Polarization	Vertical

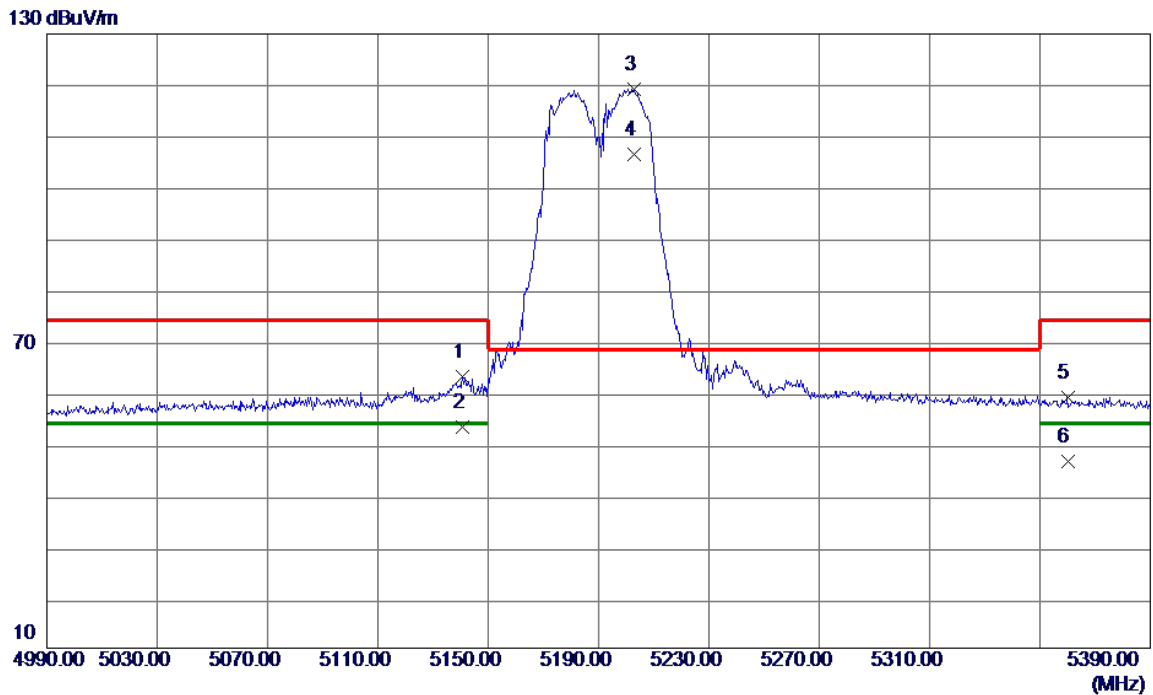


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5140.8000	50.78	12.31	63.09	74.00	-10.91	Peak	
2	5140.8000	40.92	12.31	53.23	54.00	-0.77	AVG	
3 *	5202.8000	106.84	12.36	119.20	68.20	51.00	Peak	No Limit
4	5202.8000	94.00	12.36	106.36	999.00	-892.64	AVG	No Limit
5	5360.0000	46.42	12.50	58.92	74.00	-15.08	Peak	
6	5360.0000	33.91	12.50	46.41	54.00	-7.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/1/13
Test Frequency	5230MHz	Polarization	Vertical

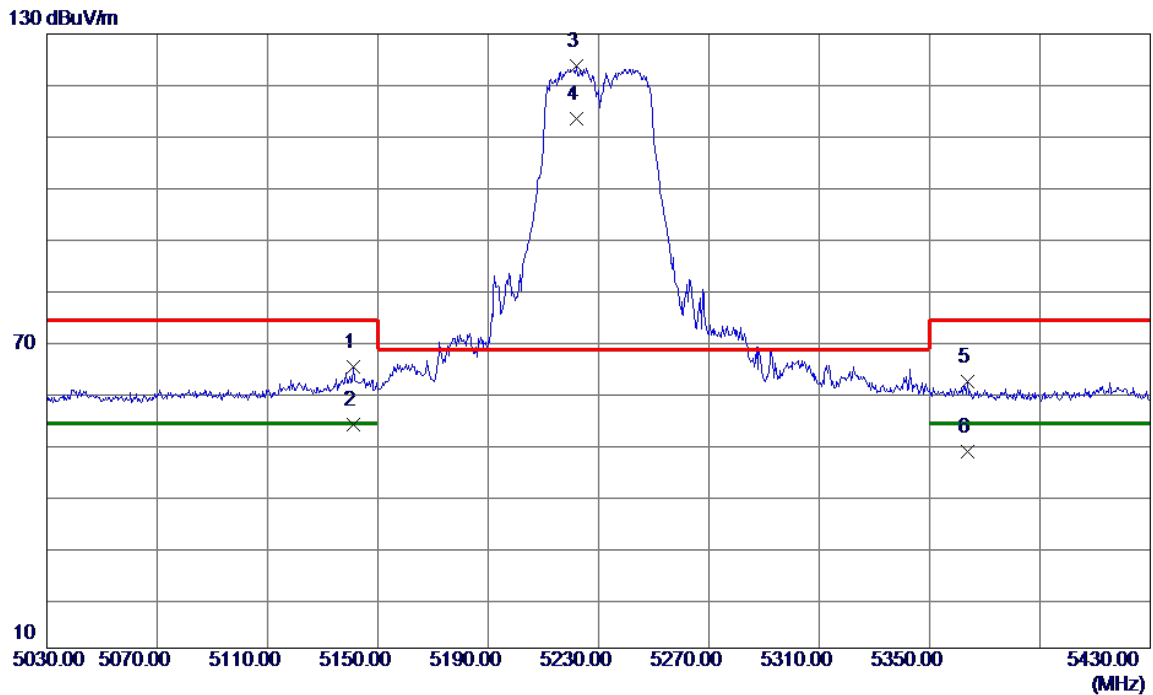


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5141.2000	52.71	12.31	65.02	74.00	-8.98	Peak	
2	5141.2000	41.46	12.31	53.77	54.00	-0.23	AVG	
3 *	5222.0000	111.27	12.38	123.65	68.20	55.45	Peak	No Limit
4	5222.0000	101.03	12.38	113.41	999.00	-885.59	AVG	No Limit
5	5363.6000	49.68	12.51	62.19	74.00	-11.81	Peak	
6	5363.6000	35.88	12.51	48.39	54.00	-5.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/1/13
Test Frequency	5270MHz	Polarization	Vertical

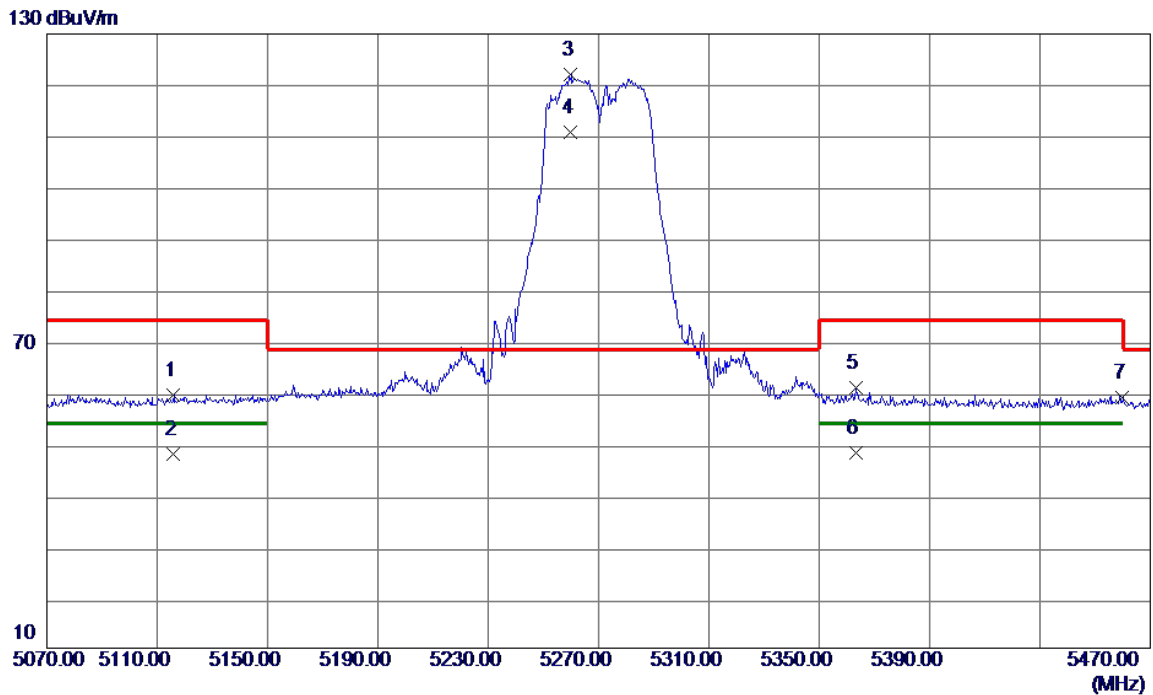


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5116.0000	47.25	12.28	59.53	74.00	-14.47	Peak	
2	5116.0000	35.57	12.28	47.85	54.00	-6.15	AVG	
3 *	5260.0000	109.69	12.41	122.10	68.20	53.90	Peak	No Limit
4	5260.0000	98.49	12.41	110.90	999.00	-888.10	AVG	No Limit
5	5363.2000	48.28	12.51	60.79	74.00	-13.21	Peak	
6	5363.2000	35.63	12.51	48.14	54.00	-5.86	AVG	
7	5460.0000	46.42	12.59	59.01	74.00	-14.99	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/1/13
Test Frequency	5310MHz	Polarization	Vertical

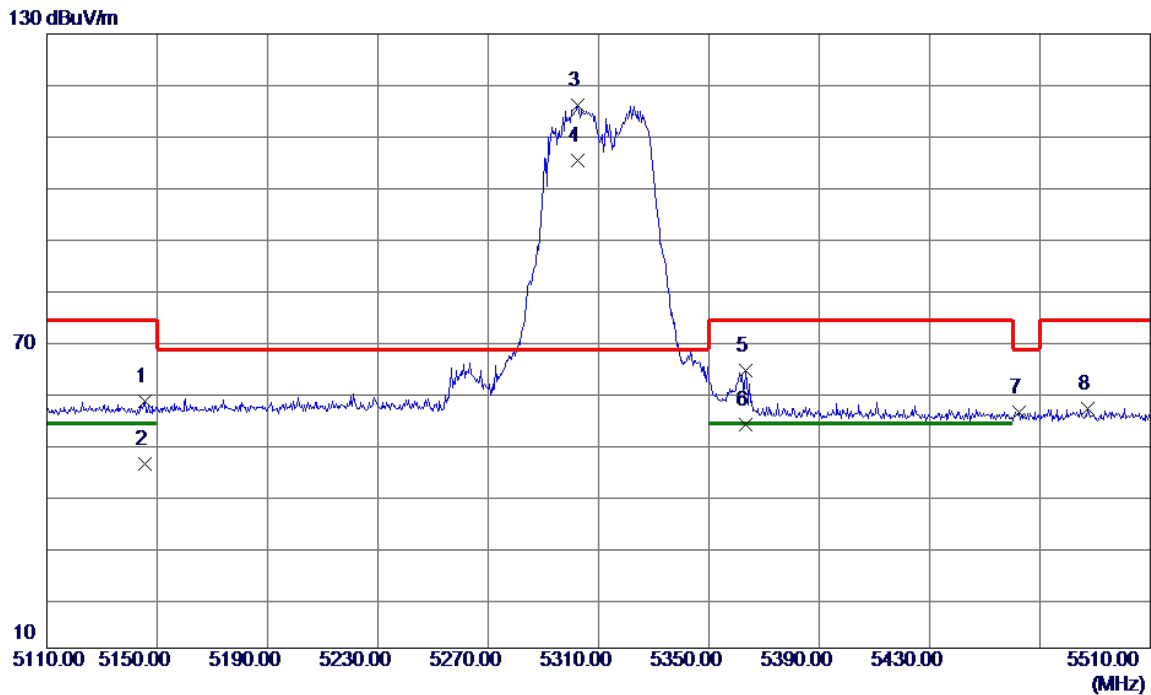


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5145.6000	45.85	12.31	58.16	74.00	-15.84	Peak	
2	5145.6000	33.80	12.31	46.11	54.00	-7.89	AVG	
3 *	5302.4000	103.59	12.45	116.04	68.20	47.84	Peak	No Limit
4	5302.4000	92.80	12.45	105.25	999.00	-893.75	AVG	No Limit
5	5363.2000	51.67	12.51	64.18	74.00	-9.82	Peak	
6	5363.2000	41.11	12.51	53.62	54.00	-0.38	AVG	
7	5462.4000	43.53	12.60	56.13	68.20	-12.07	Peak	
8	5487.2000	44.13	12.62	56.75	74.00	-17.25	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/1/13
Test Frequency	5510MHz	Polarization	Vertical

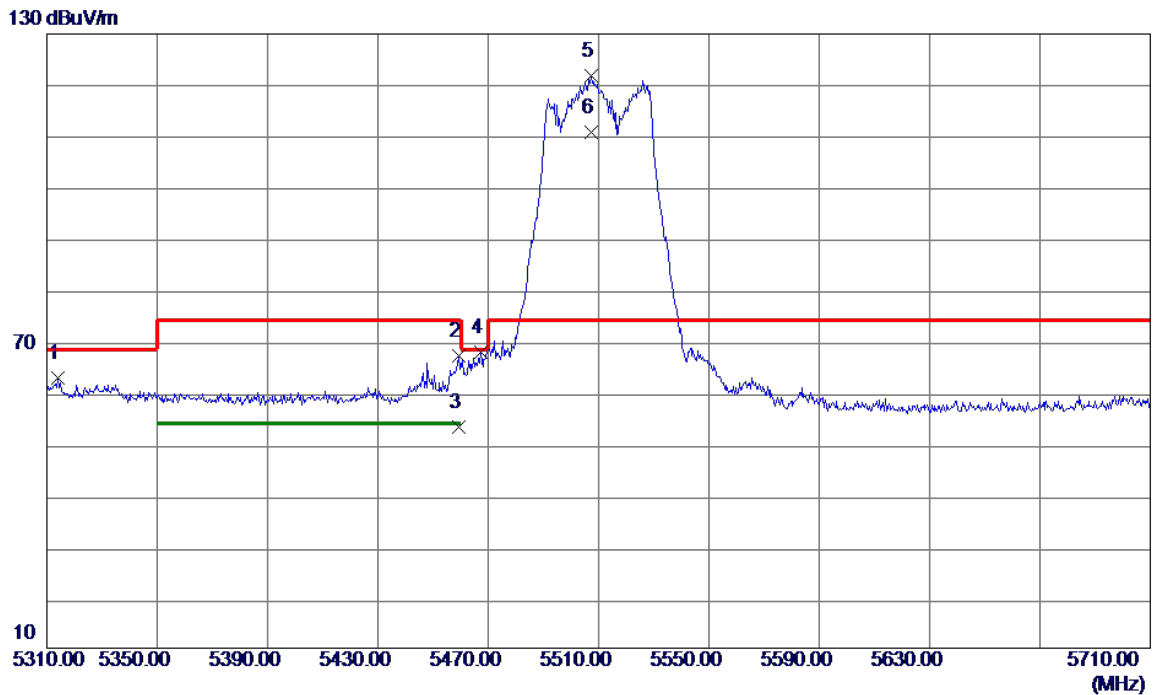


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5314.0000	50.42	12.46	62.88	68.20	-5.32	Peak	
2	5459.2000	54.58	12.59	67.17	74.00	-6.83	Peak	
3	5459.2000	40.52	12.59	53.11	54.00	-0.89	AVG	
4	5467.2000	55.19	12.60	67.79	68.20	-0.41	Peak	
5 *	5507.2000	109.13	12.64	121.77	74.00	47.77	Peak	No Limit
6	5507.2000	98.24	12.64	110.88	999.00	-888.12	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/1/13
Test Frequency	5670MHz	Polarization	Vertical

130 dBuV/m

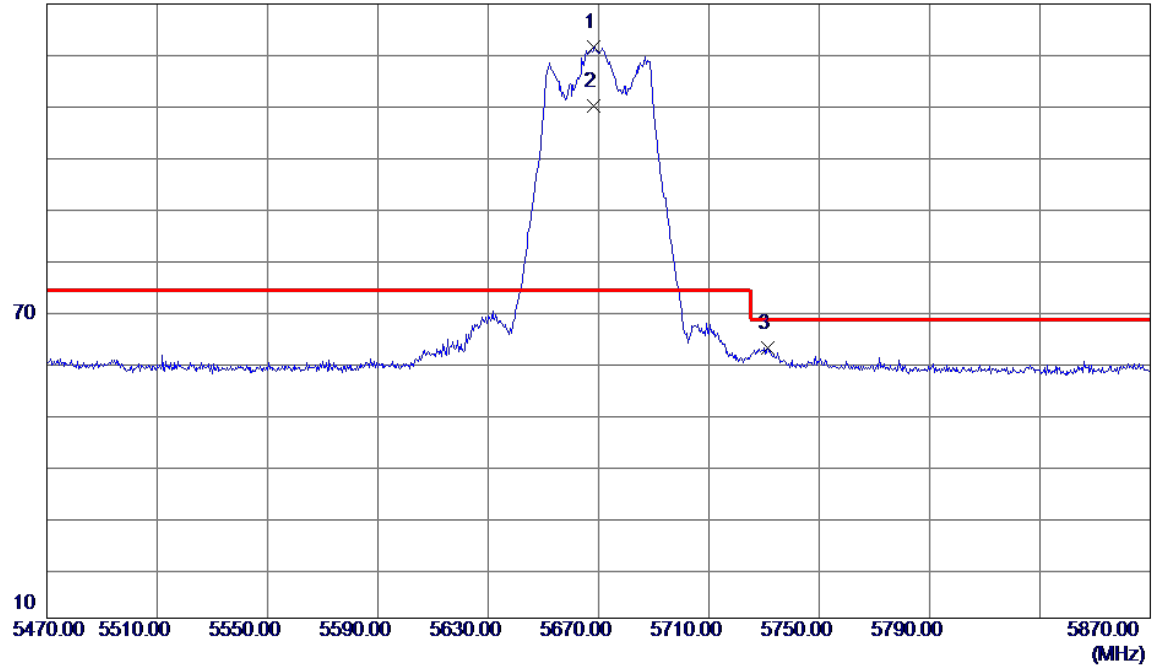


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5668.4000	108.66	12.95	121.61	74.00	47.61	Peak	No Limit
2	5668.4000	97.15	12.95	110.10	999.00	-888.90	AVG	No Limit
3	5731.2000	49.85	13.06	62.91	68.20	-5.29	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/1/13
Test Frequency	5755MHz	Polarization	Vertical

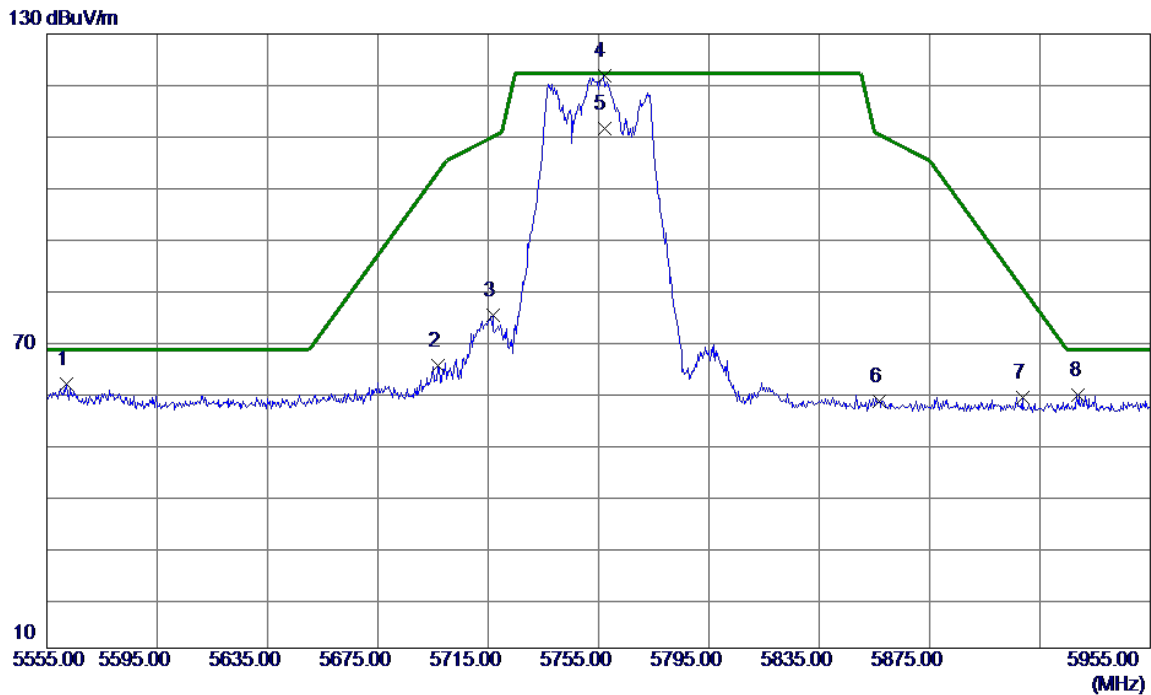


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5562.2000	48.80	12.75	61.55	68.20	-6.65	Peak	
2	5696.6000	52.10	13.00	65.10	102.69	-37.59	Peak	
3	5716.6000	61.97	13.04	75.01	109.85	-34.84	Peak	
4 *	5757.0000	108.79	13.11	121.90	122.20	-0.30	Peak	No Limit
5	5757.0000	98.37	13.11	111.48	122.20	-10.72	AVG	No Limit
6	5856.6000	45.00	13.30	58.30	110.35	-52.05	Peak	
7	5908.6000	45.50	13.40	58.90	80.30	-21.40	Peak	
8	5929.0000	46.02	13.44	59.46	68.20	-8.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2025/1/13
Test Frequency	5795MHz	Polarization	Vertical

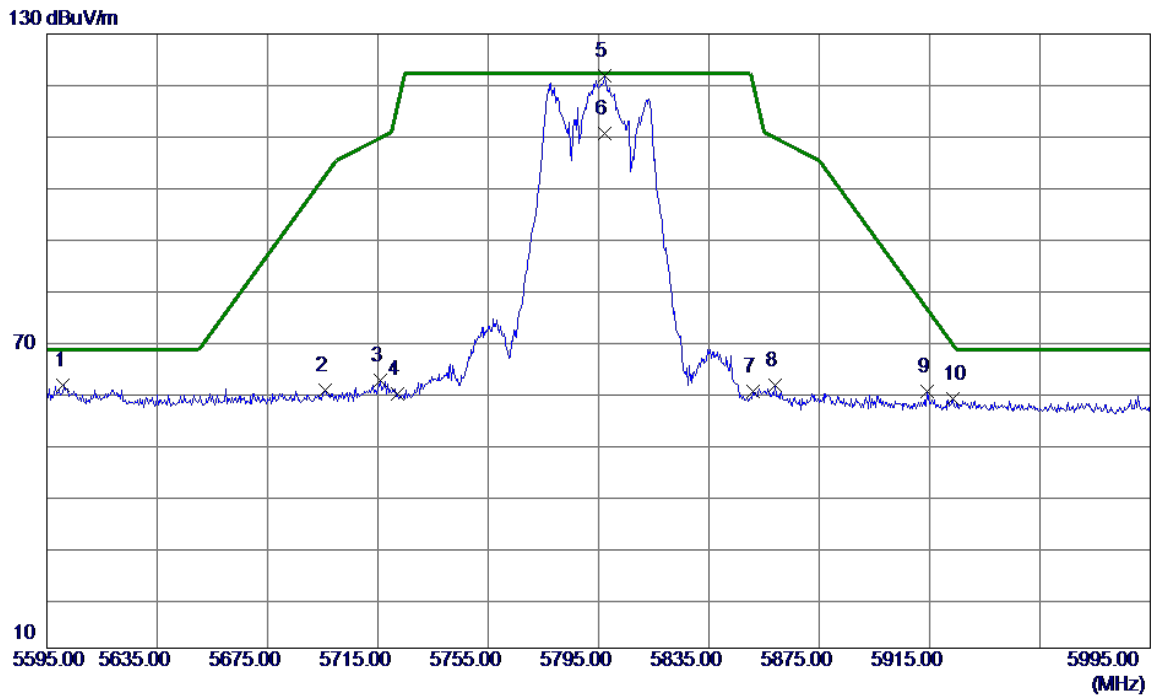


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5601.0000	48.57	12.82	61.39	68.20	-6.81	Peak	
2	5695.8000	47.41	13.00	60.41	102.10	-41.69	Peak	
3	5715.8000	49.38	13.04	62.42	109.63	-47.21	Peak	
4	5722.2000	46.74	13.05	59.79	115.82	-56.03	Peak	
5 *	5797.4000	108.70	13.19	121.89	122.20	-0.31	Peak	No Limit
6	5797.4000	97.47	13.19	110.66	122.20	-11.54	AVG	No Limit
7	5851.0000	46.82	13.29	60.11	119.92	-59.81	Peak	
8	5859.0000	48.15	13.30	61.45	109.68	-48.23	Peak	
9	5914.2000	46.71	13.41	60.12	76.17	-16.05	Peak	
10	5923.4000	45.28	13.43	58.71	69.38	-10.67	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/1/13
Test Frequency	5210MHz	Polarization	Vertical

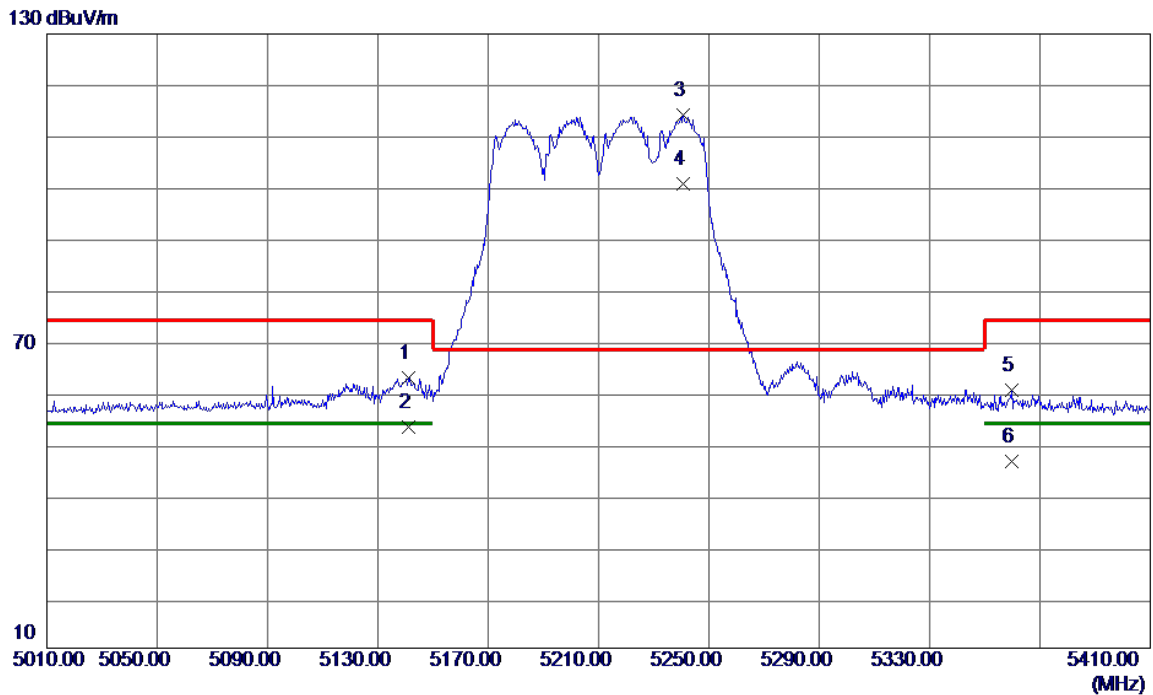


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5141.2000	50.56	12.31	62.87	74.00	-11.13	Peak	
2	5141.2000	40.85	12.31	53.16	54.00	-0.84	AVG	
3 *	5240.8000	101.76	12.40	114.16	68.20	45.96	Peak	No Limit
4	5240.8000	88.36	12.40	100.76	999.00	-898.24	AVG	No Limit
5	5359.6000	47.91	12.50	60.41	74.00	-13.59	Peak	
6	5359.6000	33.92	12.50	46.42	54.00	-7.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/1/13
Test Frequency	5290MHz	Polarization	Vertical

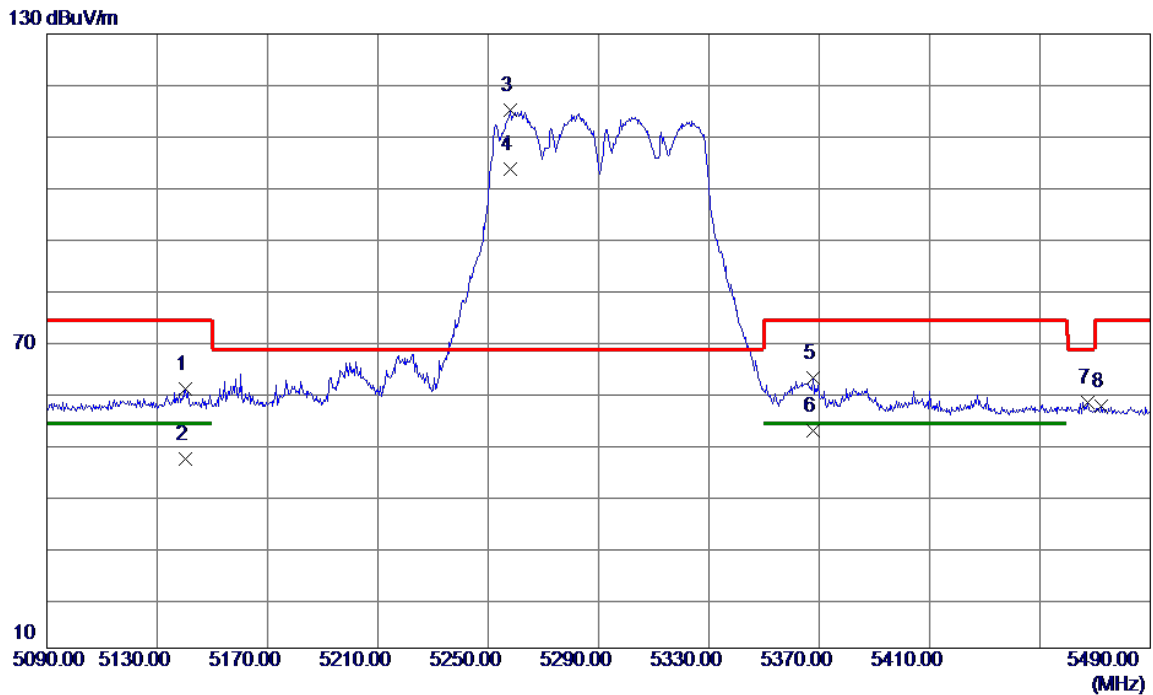


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5140.4000	48.28	12.31	60.59	74.00	-13.41	Peak	
2	5140.4000	34.63	12.31	46.94	54.00	-7.06	AVG	
3 *	5258.0000	102.69	12.41	115.10	68.20	46.90	Peak	No Limit
4	5258.0000	91.24	12.41	103.65	999.00	-895.35	AVG	No Limit
5	5367.6000	50.31	12.51	62.82	74.00	-11.18	Peak	
6	5367.6000	39.92	12.51	52.43	54.00	-1.57	AVG	
7	5467.2000	45.38	12.60	57.98	68.20	-10.22	Peak	
8	5472.4000	44.78	12.61	57.39	74.00	-16.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/1/13
Test Frequency	5530MHz	Polarization	Vertical

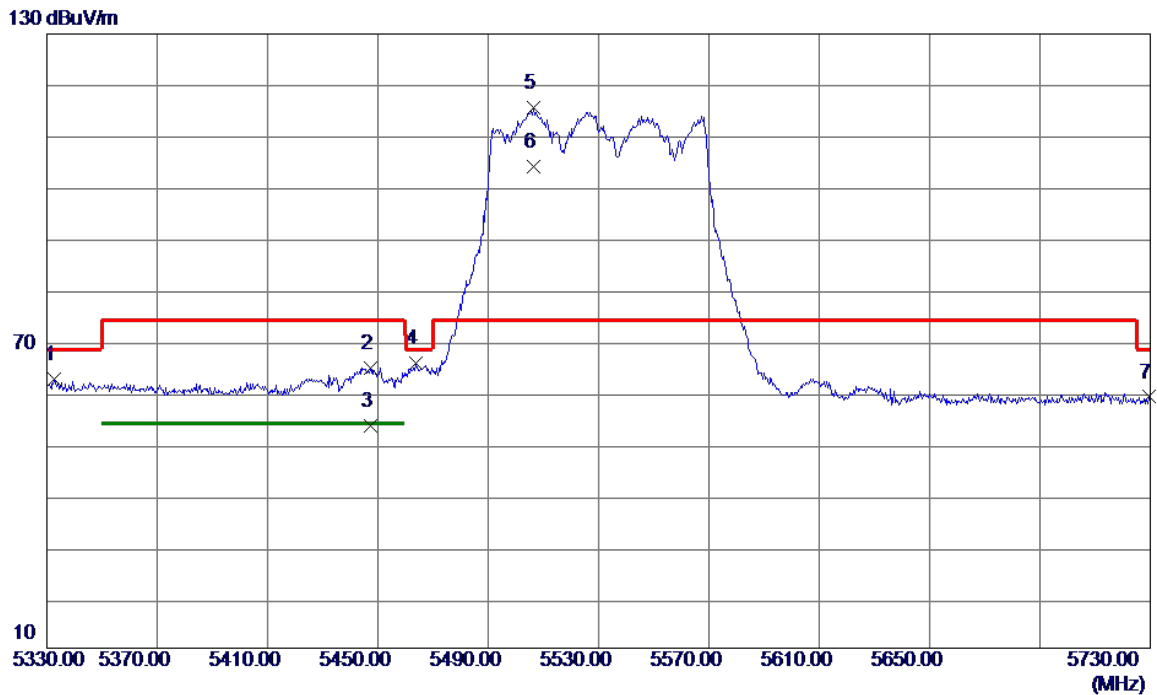


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5332.8000	50.04	12.48	62.52	68.20	-5.68	Peak	
2	5447.2000	52.25	12.58	64.83	74.00	-9.17	Peak	
3	5447.2000	40.97	12.58	53.55	54.00	-0.45	AVG	
4	5463.6000	53.16	12.60	65.76	68.20	-2.44	Peak	
5 *	5506.4000	102.91	12.64	115.55	74.00	41.55	Peak	No Limit
6	5506.4000	91.37	12.64	104.01	999.00	-894.99	AVG	No Limit
7	5729.6000	46.02	13.06	59.08	68.20	-9.12	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/1/13
Test Frequency	5610MHz	Polarization	Vertical

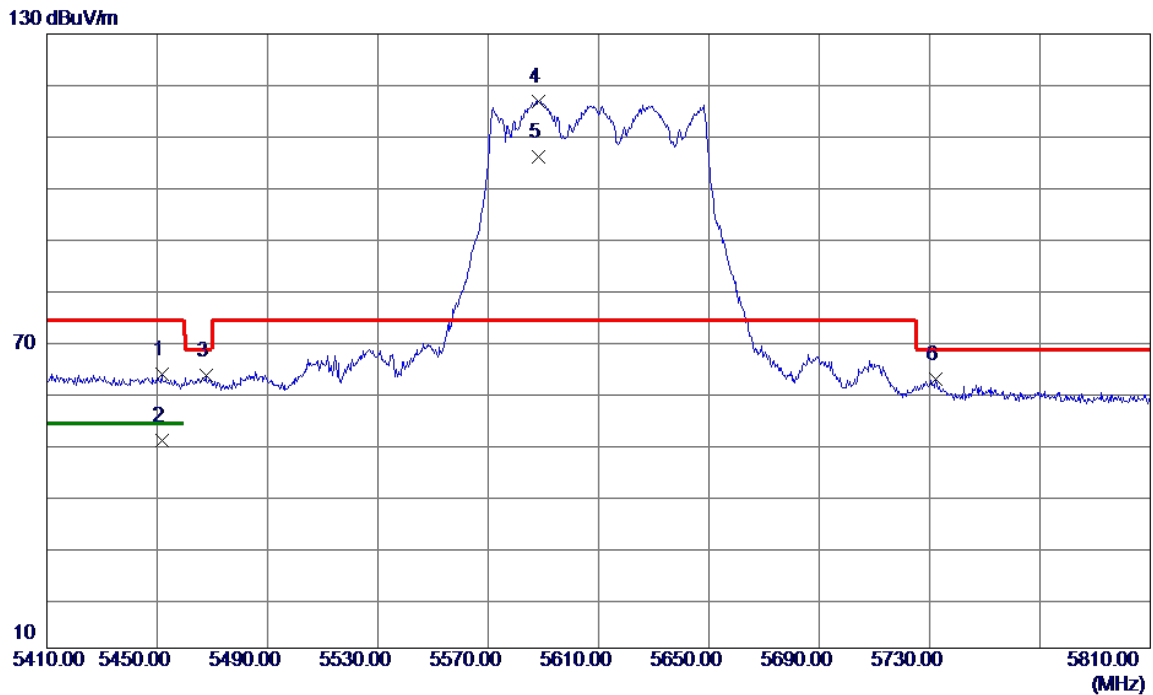


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5451.6000	51.02	12.59	63.61	74.00	-10.39	Peak	
2	5451.6000	37.92	12.59	50.51	54.00	-3.49	AVG	
3	5467.6000	50.65	12.60	63.25	68.20	-4.95	Peak	
4 *	5588.4000	104.11	12.80	116.91	74.00	42.91	Peak	No Limit
5	5588.4000	93.16	12.80	105.96	999.00	-893.04	AVG	No Limit
6	5732.4000	49.60	13.07	62.67	68.20	-5.53	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2025/1/13
Test Frequency	5775Hz	Polarization	Vertical

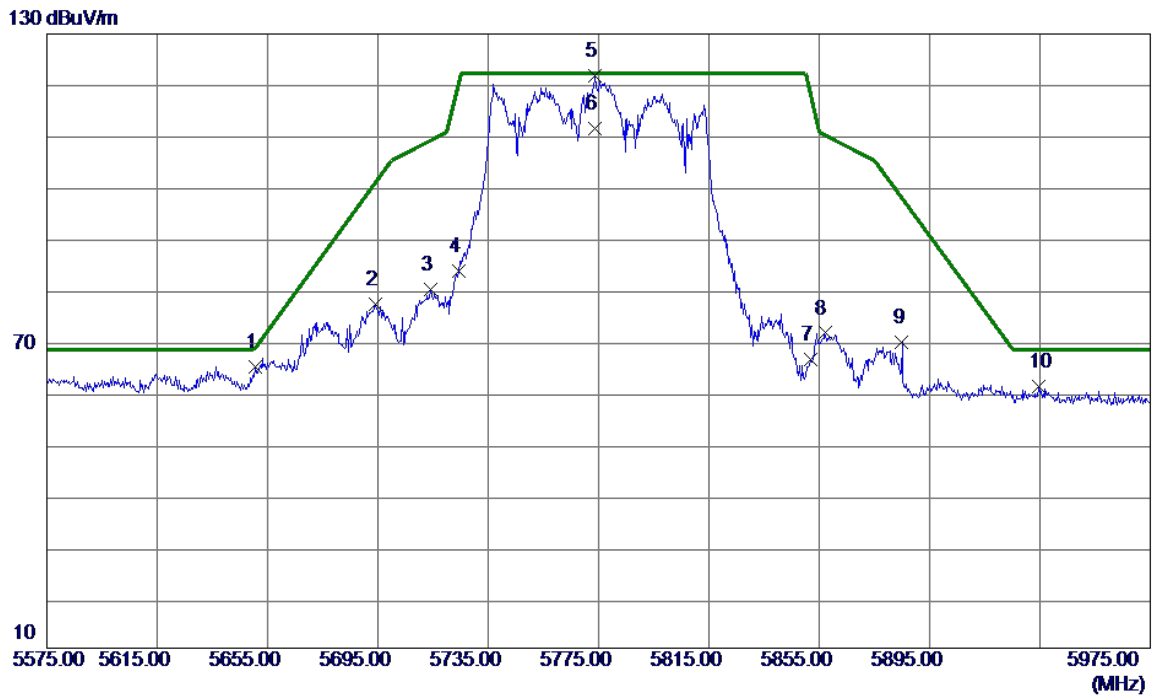


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5650.6000	52.07	12.91	64.98	68.65	-3.67	Peak	
2	5694.2000	64.09	13.00	77.09	100.92	-23.83	Peak	
3	5714.2000	67.11	13.03	80.14	109.18	-29.04	Peak	
4	5724.2000	70.57	13.05	83.62	120.38	-36.76	Peak	
5 *	5773.8000	108.66	13.14	121.80	122.20	-0.40	Peak	No Limit
6	5773.8000	98.37	13.14	111.51	122.20	-10.69	AVG	No Limit
7	5851.8000	53.18	13.29	66.47	118.09	-51.62	Peak	
8	5857.0000	58.26	13.30	71.56	110.24	-38.68	Peak	
9	5885.0000	56.45	13.35	69.80	97.77	-27.97	Peak	
10	5934.6000	47.69	13.45	61.14	68.20	-7.06	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/1/13
Test Frequency	5250Hz	Polarization	Vertical

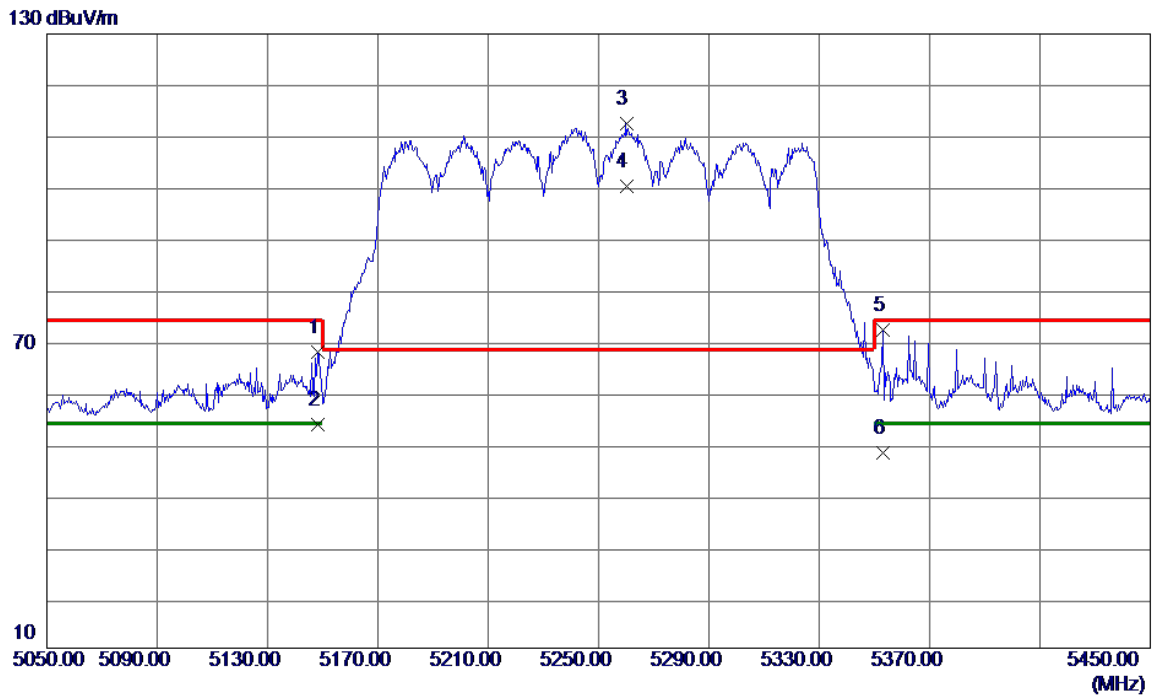


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5148.4000	55.48	12.31	67.79	74.00	-6.21	Peak	
2	5148.4000	41.33	12.31	53.64	54.00	-0.36	AVG	
3 *	5260.0000	100.15	12.41	112.56	68.20	44.36	Peak	No Limit
4	5260.0000	87.82	12.41	100.23	999.00	-898.77	AVG	No Limit
5	5353.2000	59.63	12.50	72.13	74.00	-1.87	Peak	
6	5353.2000	35.55	12.50	48.05	54.00	-5.95	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT160)	Test Date	2025/1/13
Test Frequency	5570Hz	Polarization	Vertical

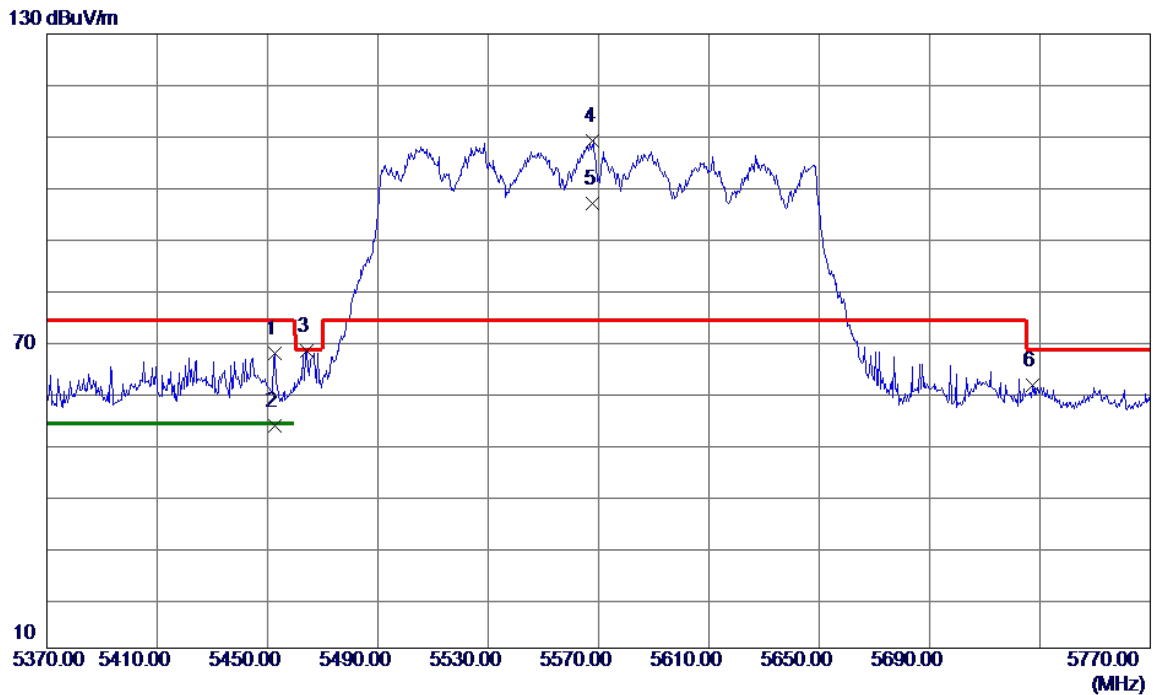


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5452.8000	55.03	12.59	67.62	74.00	-6.38	Peak	
2	5452.8000	40.85	12.59	53.44	54.00	-0.56	AVG	
3	5464.4000	55.45	12.60	68.05	68.20	-0.15	Peak	
4 *	5568.0000	96.24	12.76	109.00	74.00	35.00	Peak	No Limit
5	5568.0000	84.12	12.76	96.88	999.00	-902.12	AVG	No Limit
6	5727.2000	48.28	13.06	61.34	68.20	-6.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Straddle Channel:

Test Mode	IEEE 802.11a	Test Date	2024/12/30
Test Frequency	5720Hz	Polarization	Vertical

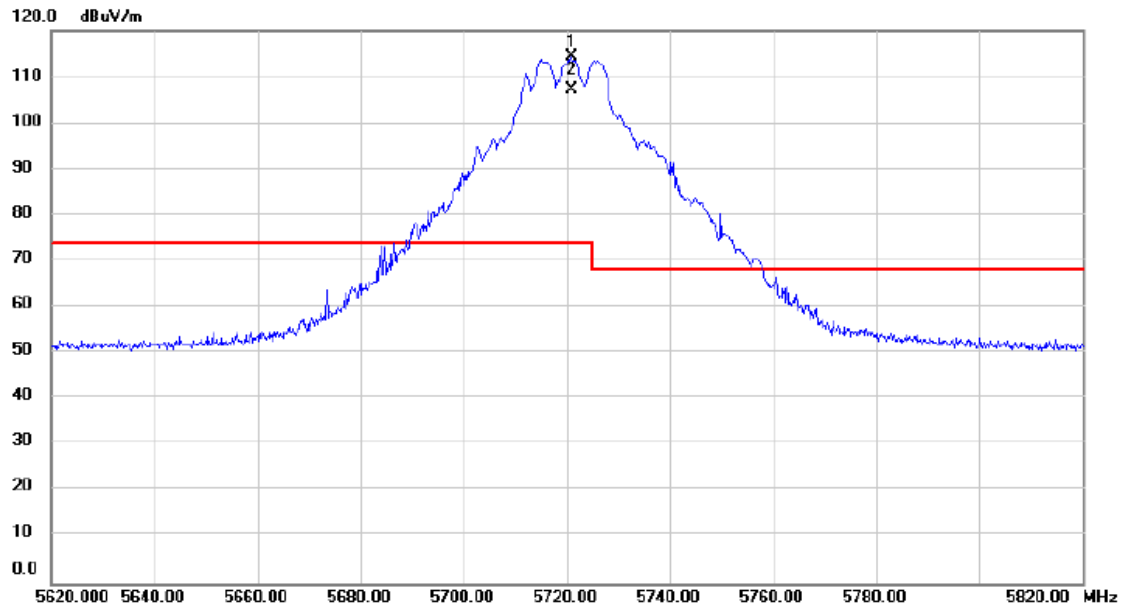


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5720.800	111.9	2.37	114.31	74.00	40.31	peak	No Limit
2	X	5720.800	104.8	2.37	107.21	74.00	33.21	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/30
Test Frequency	5720Hz	Polarization	Vertical

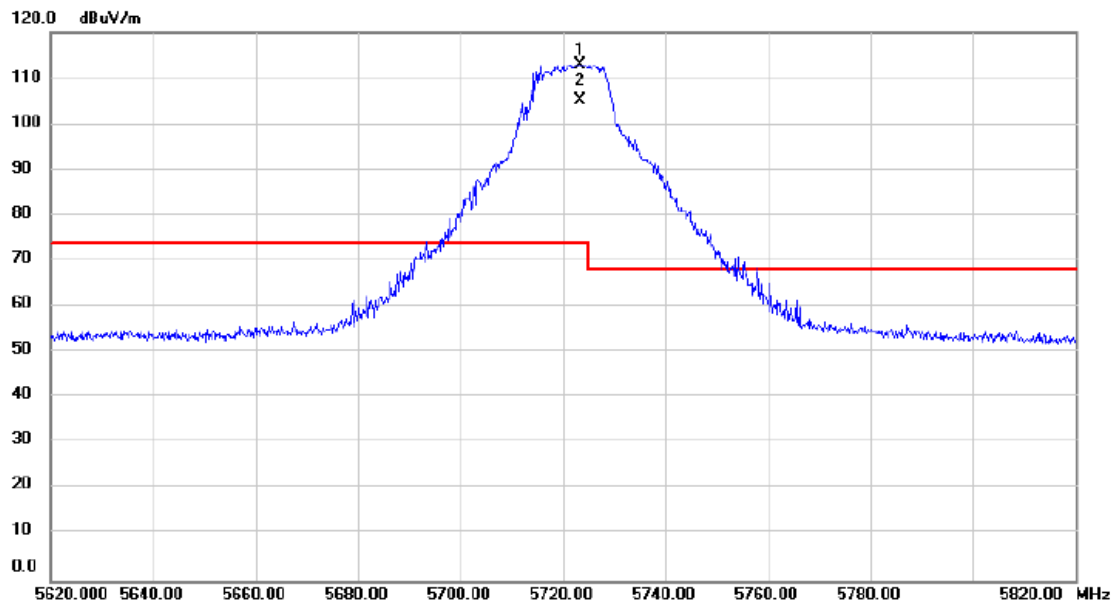


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5723.400	110.5	2.38	112.88	74.00	38.88	peak	No Limit
2	X	5723.400	102.8	2.38	105.26	74.00	31.26	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/30
Test Frequency	5710Hz	Polarization	Vertical

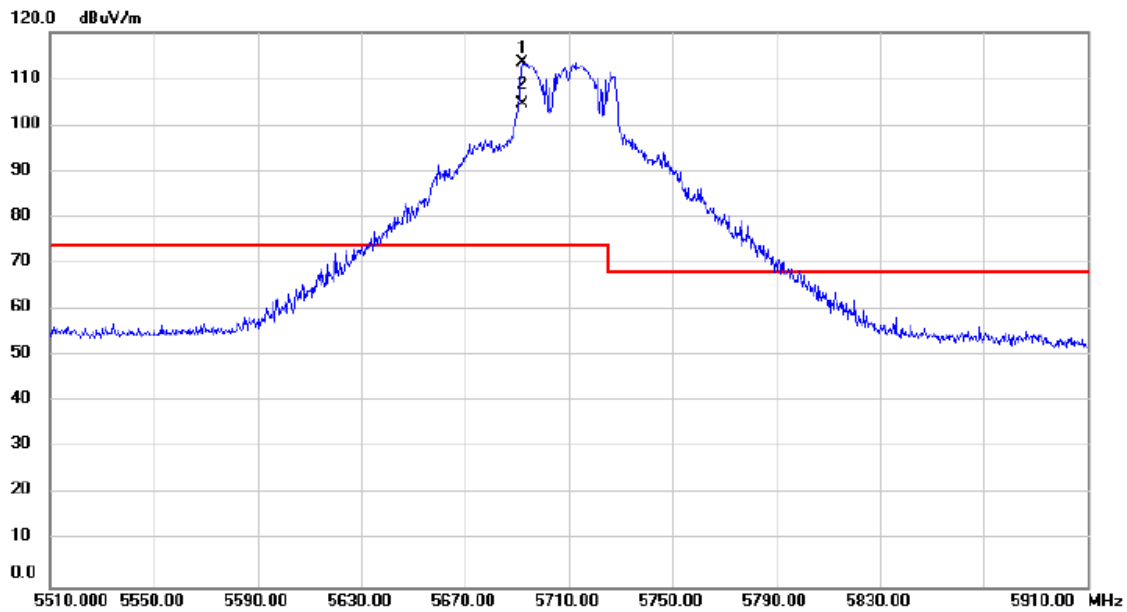


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5692.000	111.2	2.34	113.55	74.00	39.55	peak	No Limit
2	X	5692.000	102.3	2.34	104.65	74.00	30.65	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/12/30
Test Frequency	5690Hz	Polarization	Vertical

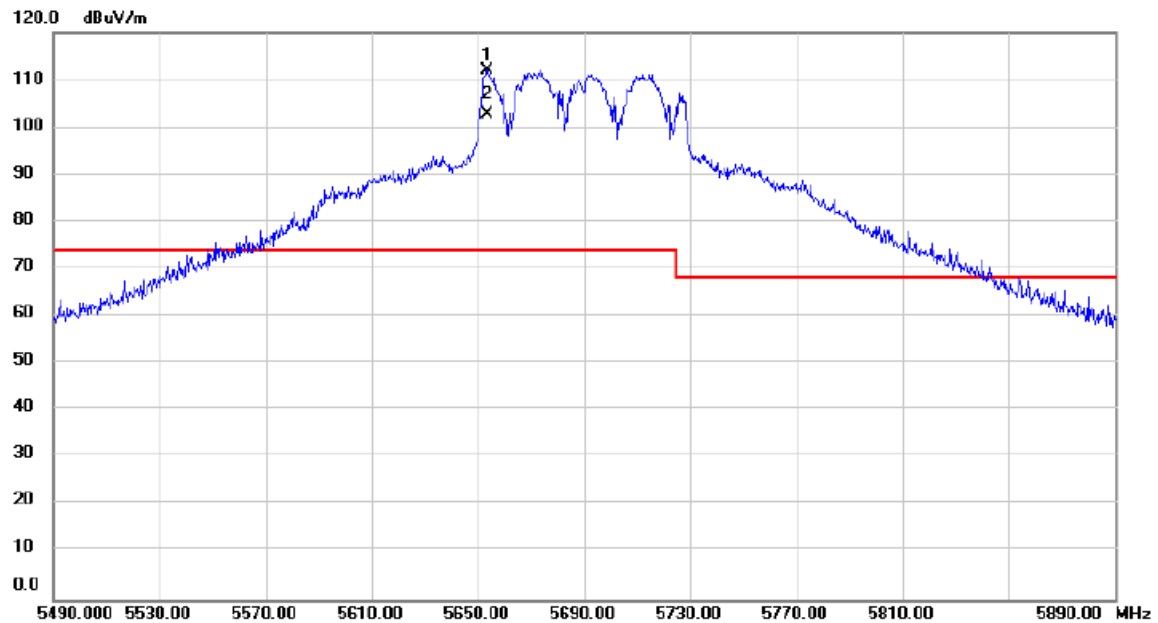


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5653.600	109.8	2.27	112.08	74.00	38.08	peak	No Limit
2	X	5653.600	100.4	2.27	102.70	74.00	28.70	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/12/30
Test Frequency	5720Hz	Polarization	Vertical

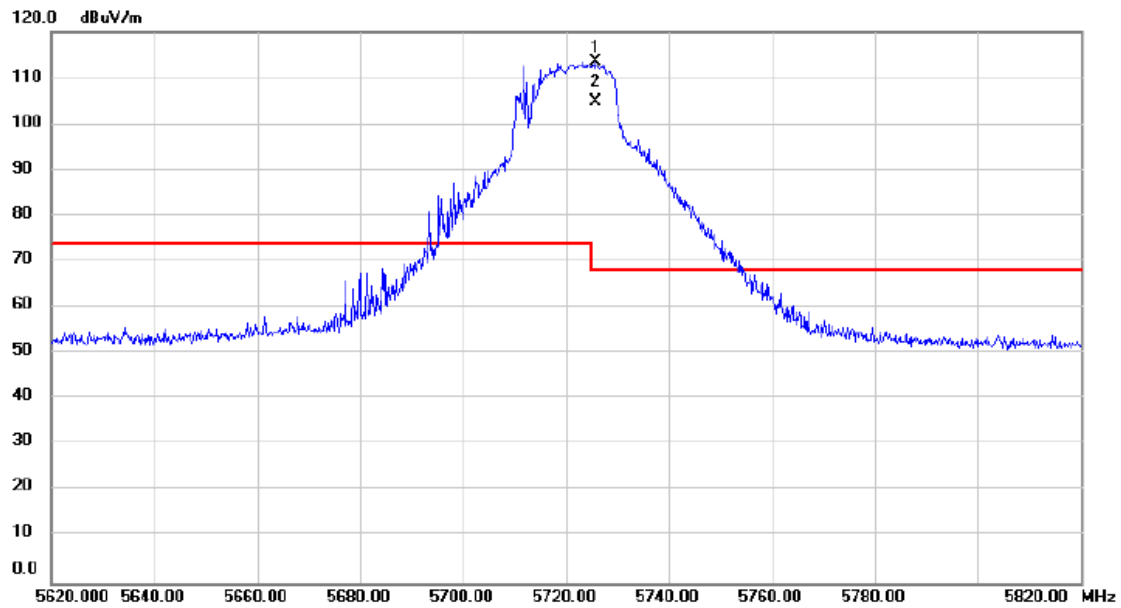


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5725.600	111.2	2.38	113.63	68.20	45.43	peak	No Limit
2	X	5725.600	102.5	2.38	104.88	68.20	36.68	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/12/30
Test Frequency	5710Hz	Polarization	Vertical

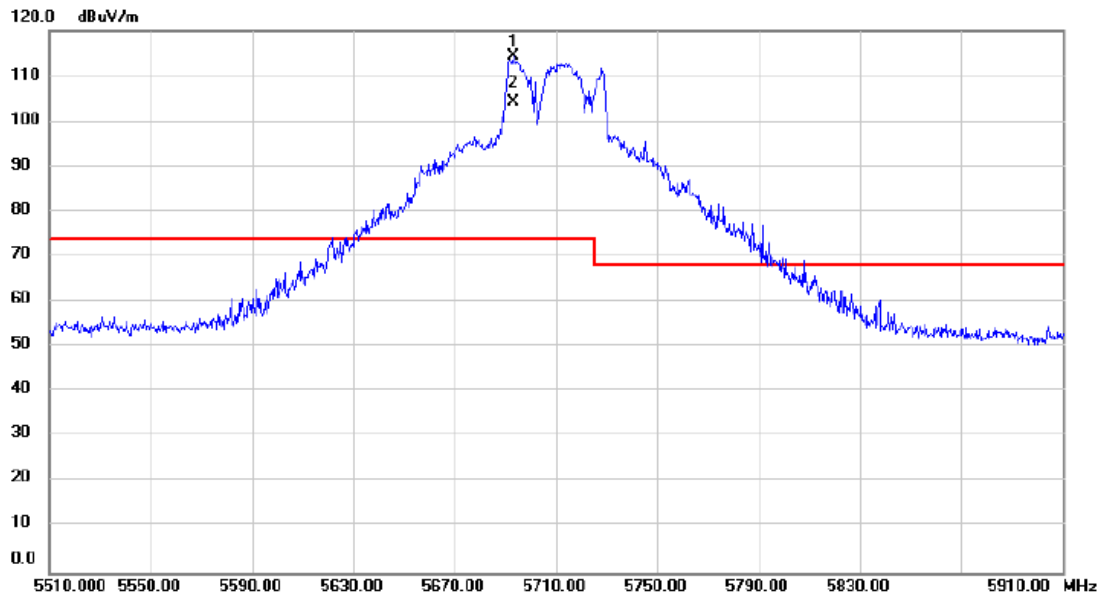


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5693.200	112.1	2.33	114.46	74.00	40.46	peak	No Limit
2	X	5693.200	101.8	2.33	104.21	74.00	30.21	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/12/30
Test Frequency	5690Hz	Polarization	Vertical

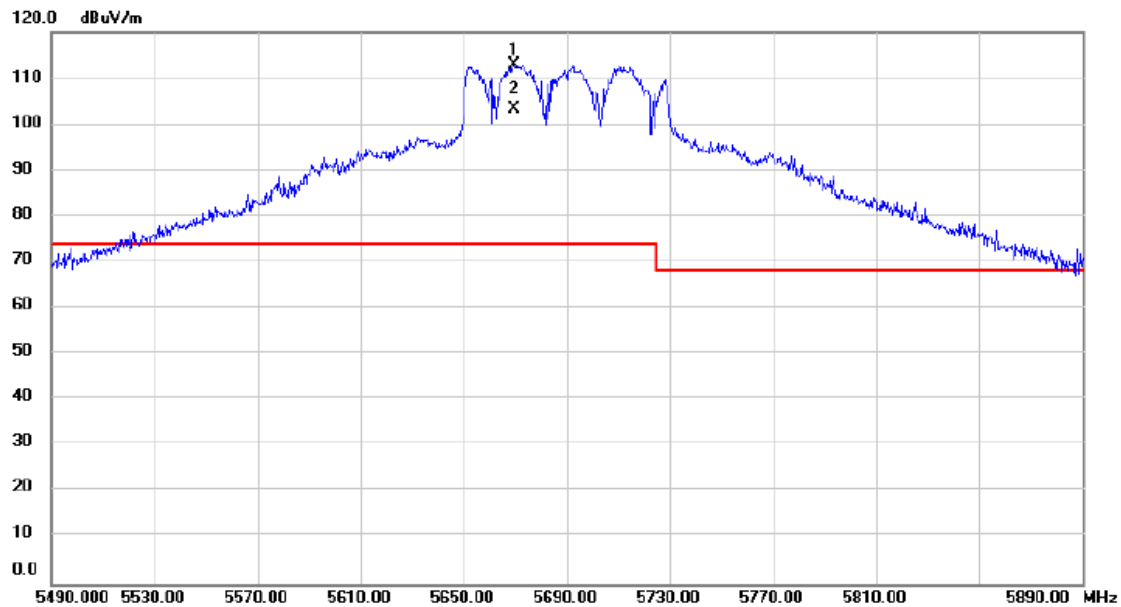


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5669.600	110.5	2.30	112.86	74.00	38.86	peak	No Limit
2	X	5669.600	101.1	2.30	103.40	74.00	29.40	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT20)	Test Date	2024/12/30
Test Frequency	5720Hz	Polarization	Vertical

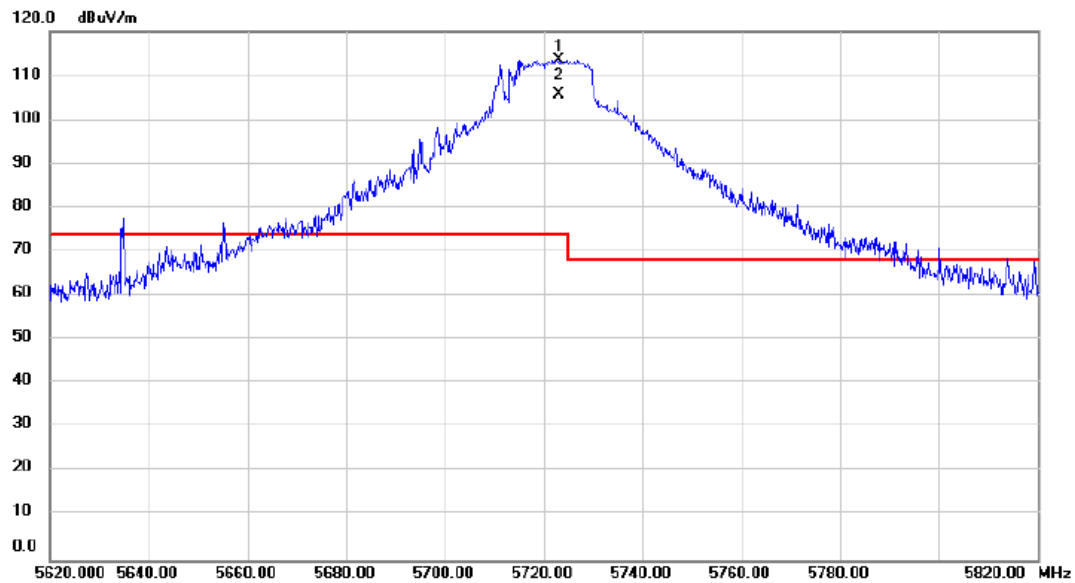


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5723.000	111.1	2.38	113.56	74.00	39.56	peak	No Limit
2	X	5723.000	103.2	2.38	105.61	74.00	31.61	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT40)	Test Date	2024/12/30
Test Frequency	5710Hz	Polarization	Vertical

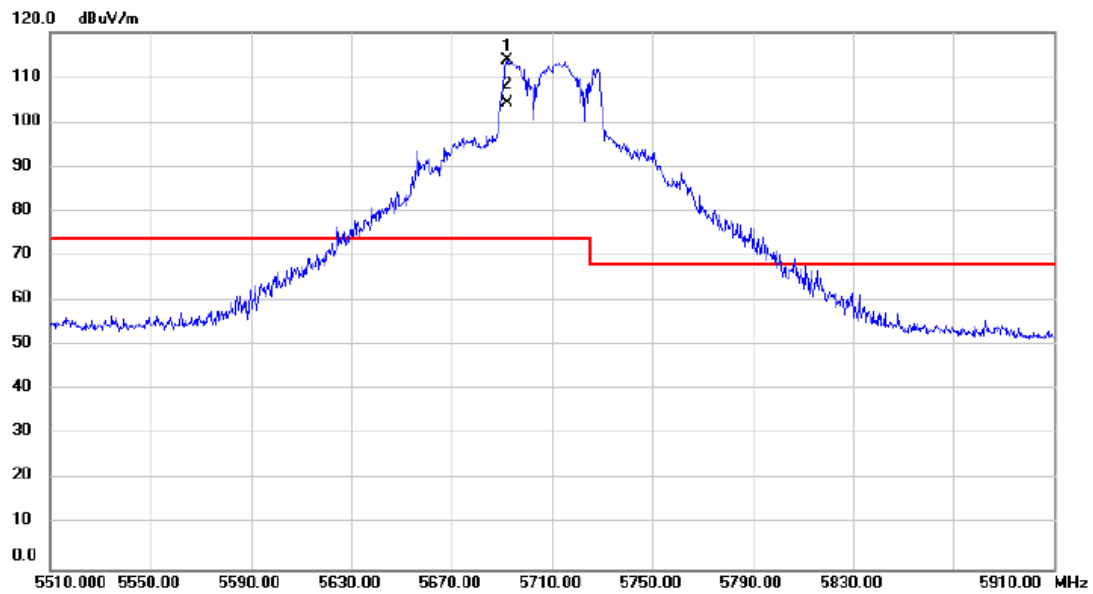


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5692.000	111.4	2.34	113.83	74.00	39.83	peak	No Limit
2	X	5692.000	101.8	2.34	104.21	74.00	30.21	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11be (EHT80)	Test Date	2024/12/30
Test Frequency	5690Hz	Polarization	Vertical

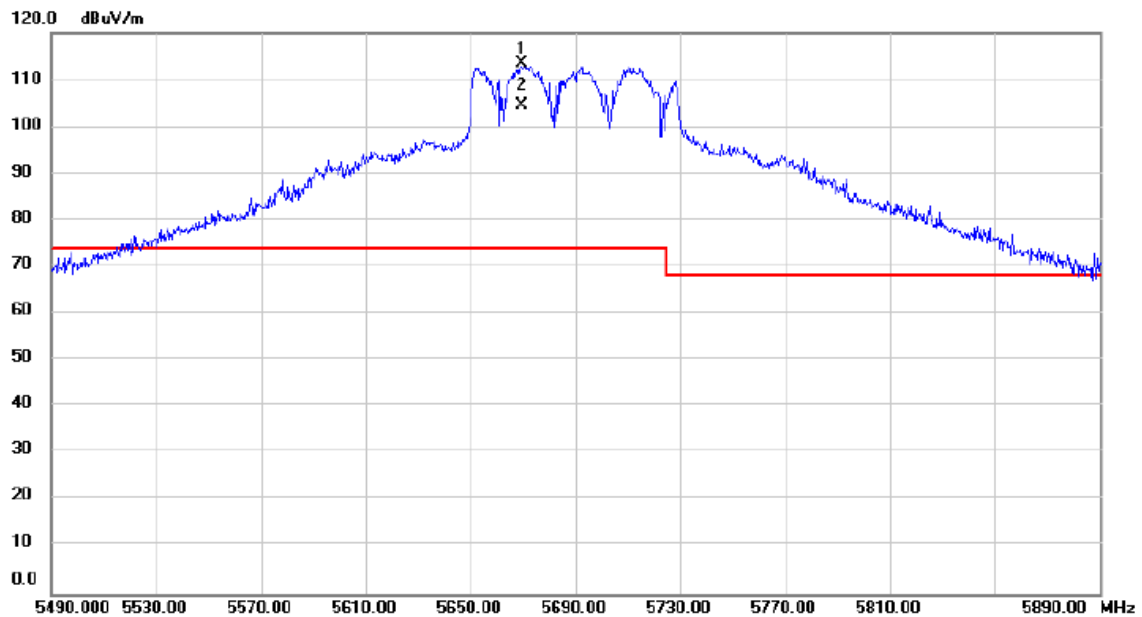


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5669.600	111.3	2.30	113.68	74.00	39.68	peak	No Limit
2	X	5669.600	102.3	2.30	104.67	74.00	30.67	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5180MHz	Polarization	Vertical

120 dBuV/m

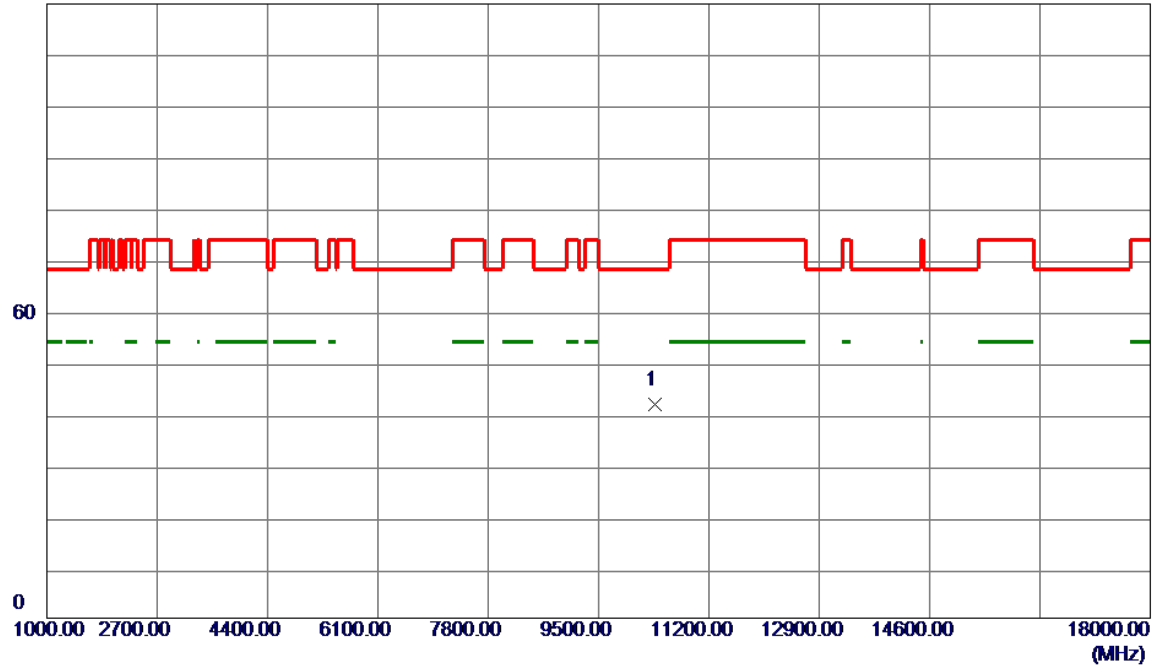


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	42.28	-0.53	41.75	68.20	-26.45	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5180MHz	Polarization	Horizontal

120 dBuV/m

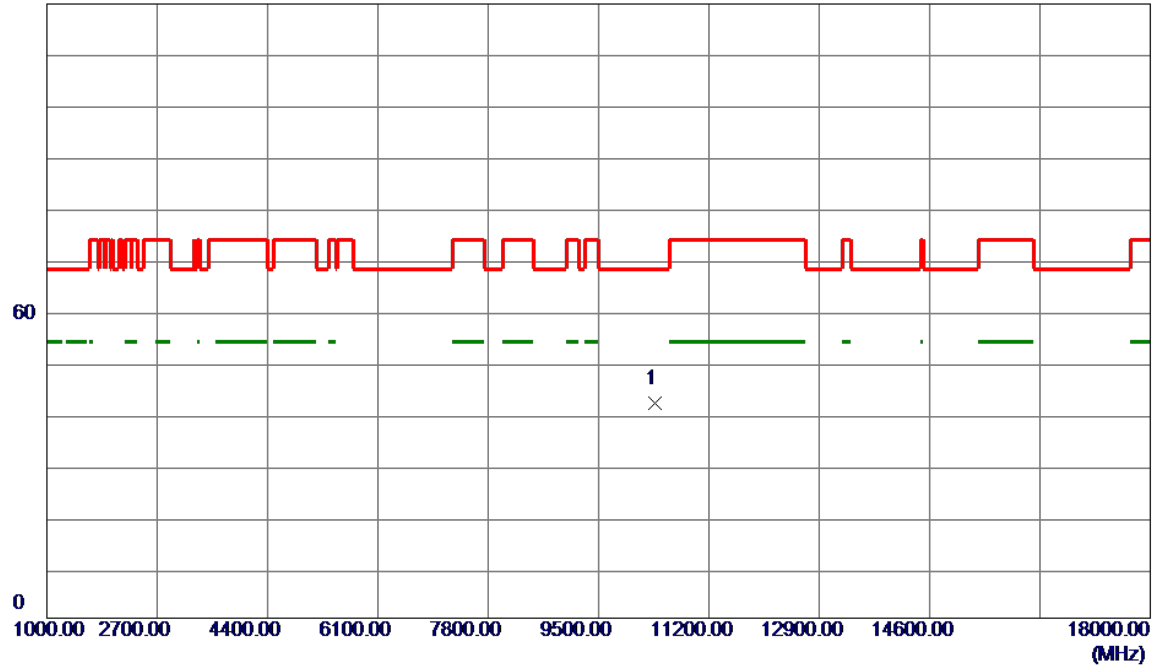


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	42.47	-0.53	41.94	68.20	-26.26	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5200MHz	Polarization	Vertical

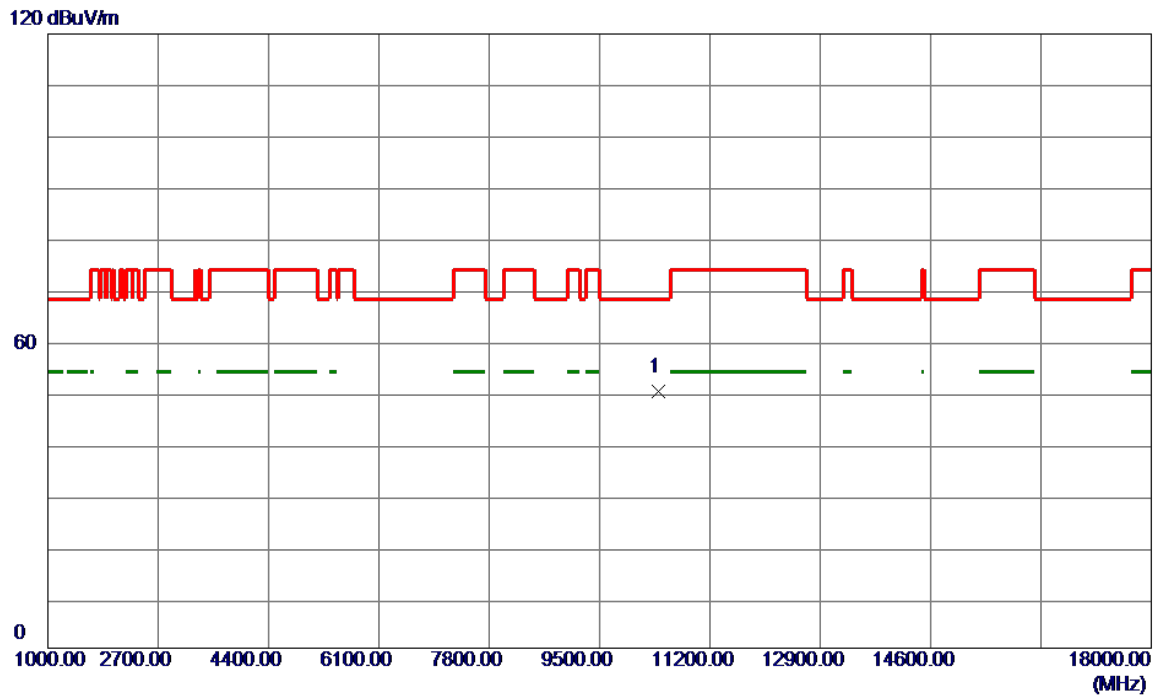

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	10400.0000	50.57	-0.46	50.11	68.20	-18.09	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) $\text{Margin Level} = \text{Measurement Value} - \text{Limit Value}.$

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5200MHz	Polarization	Horizontal

120 dBuV/m

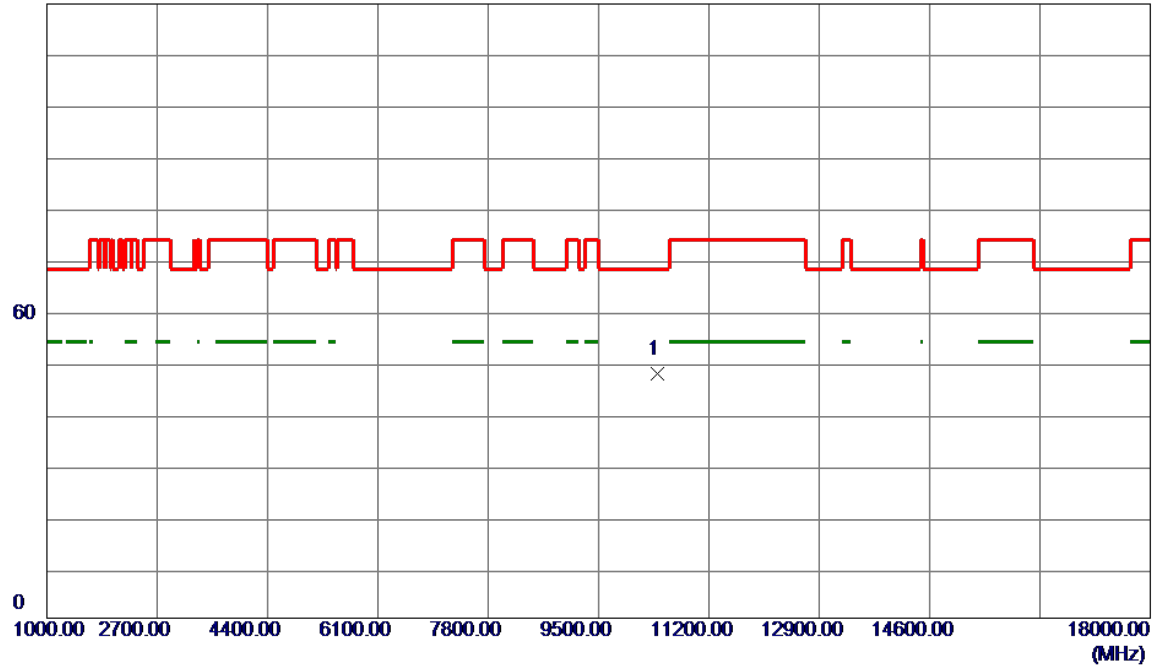


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10400.0000	48.32	-0.46	47.86	68.20	-20.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5240MHz	Polarization	Vertical

120 dBuV/m

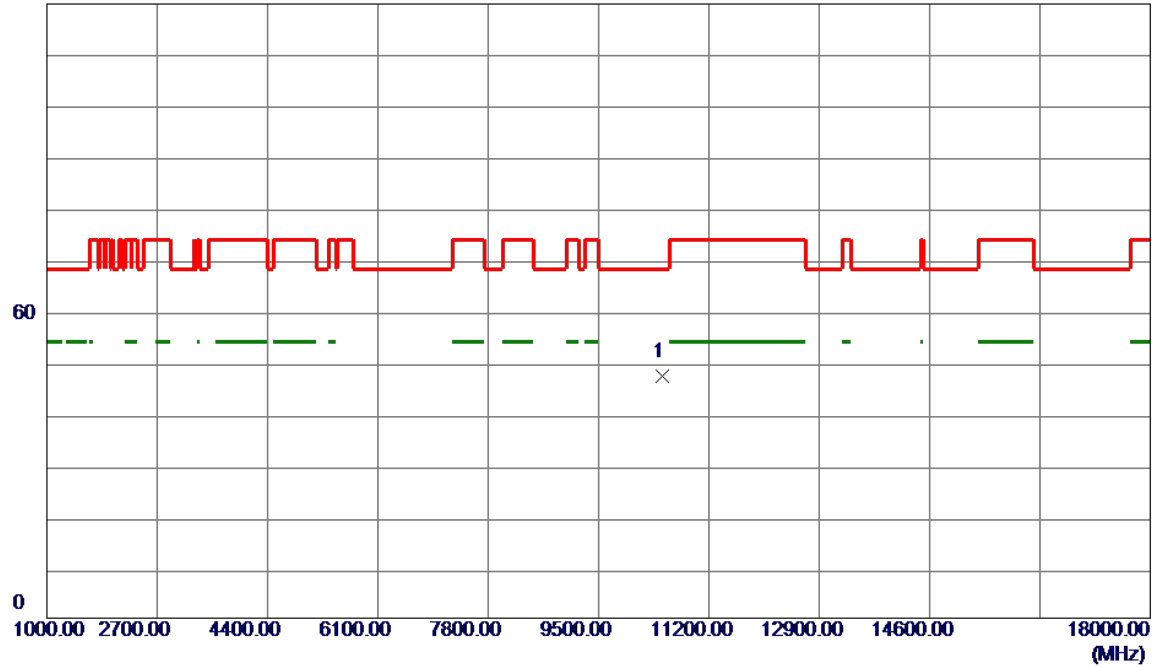


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	47.68	-0.34	47.34	68.20	-20.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5240MHz	Polarization	Horizontal

120 dBuV/m

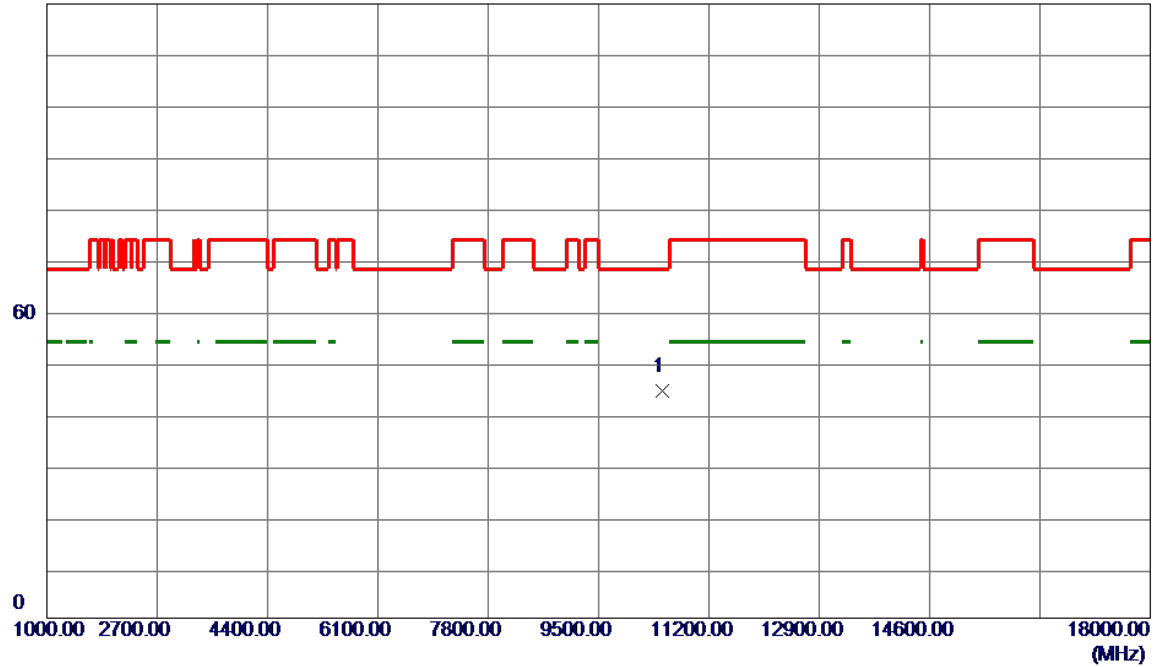


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10480.0000	44.71	-0.34	44.37	68.20	-23.83	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5260MHz	Polarization	Vertical

120 dBuV/m

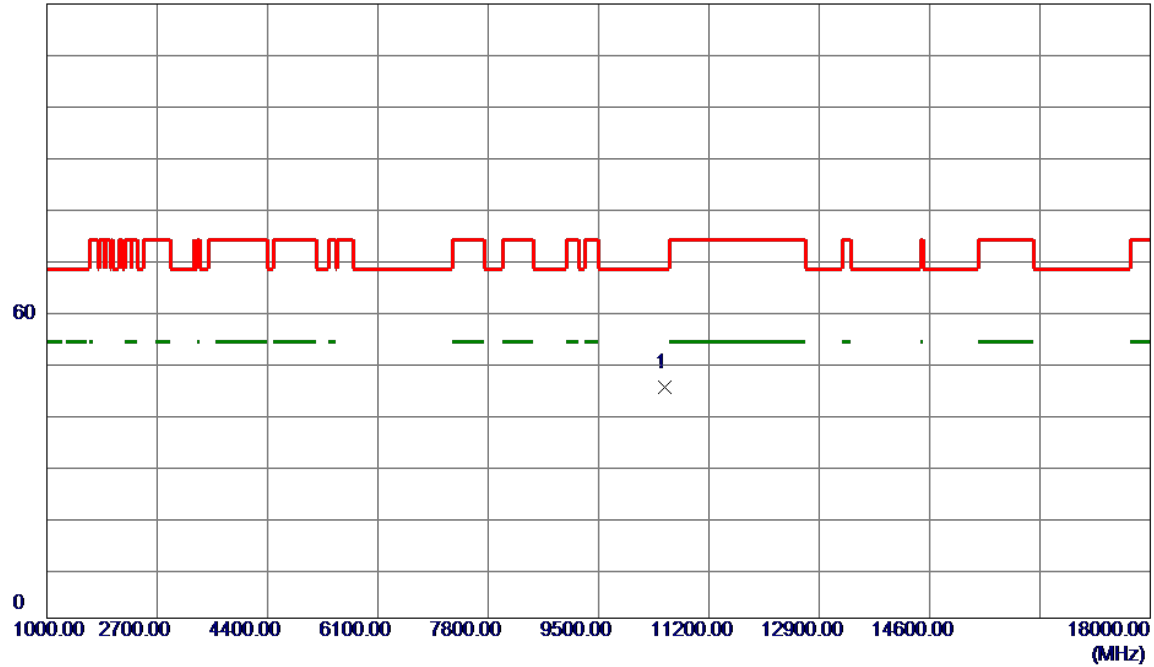


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10520.0000	45.52	-0.30	45.22	68.20	-22.98	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5260MHz	Polarization	Horizontal

120 dBuV/m

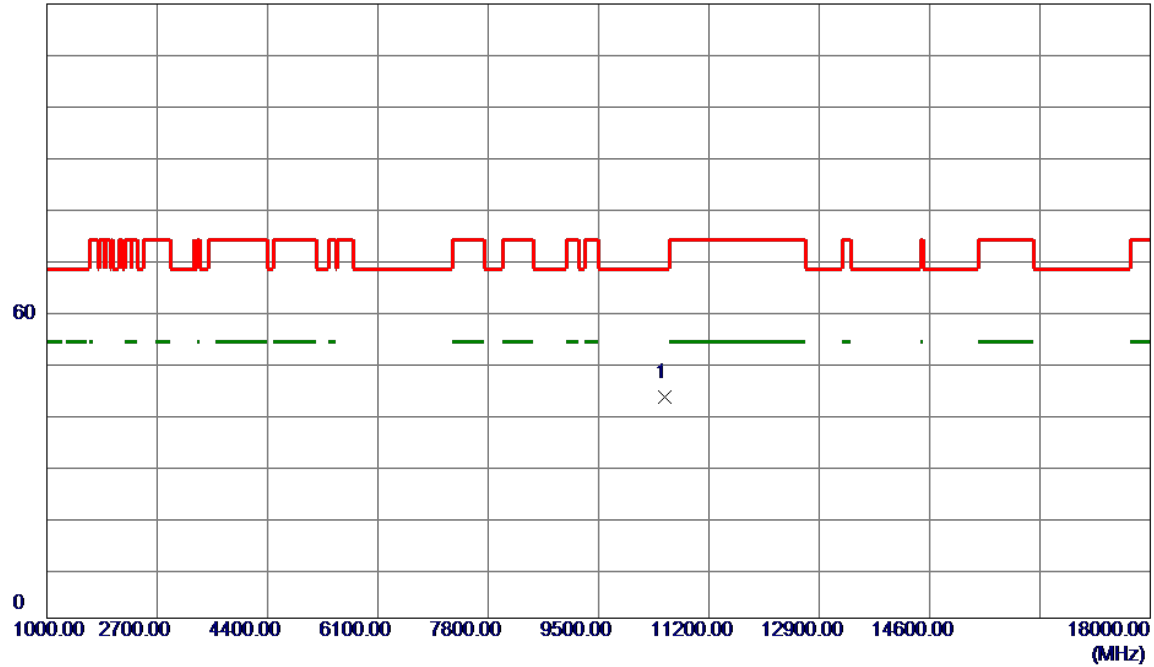


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	43.56	-0.30	43.26	68.20	-24.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5300MHz	Polarization	Vertical

120 dBuV/m

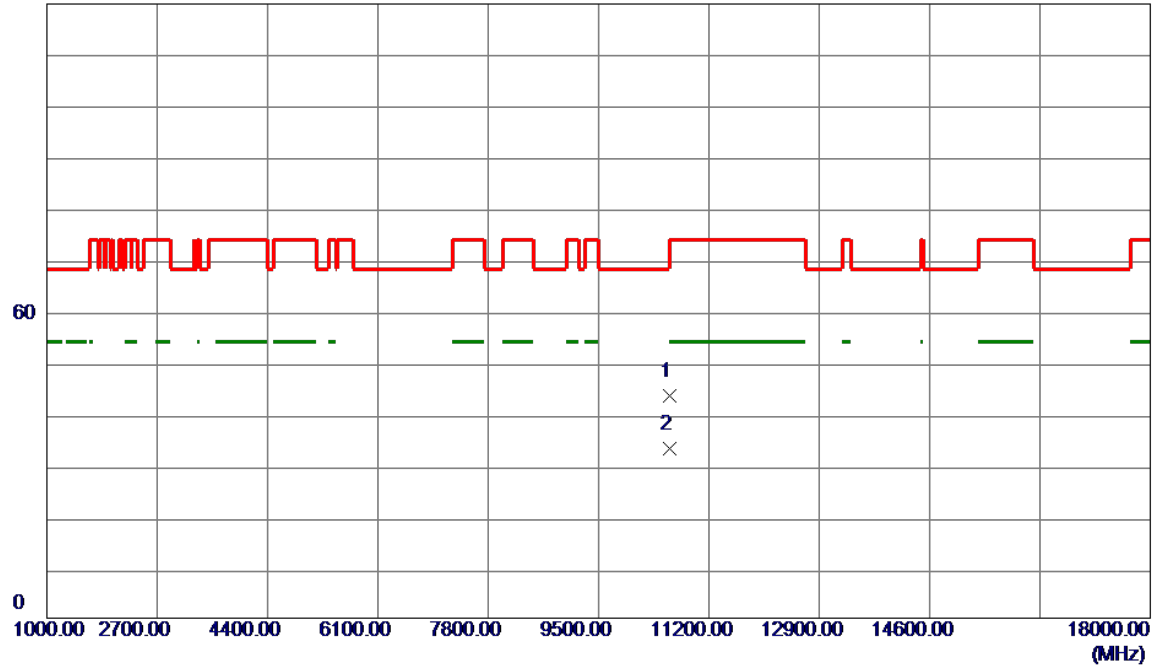


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	43.83	-0.28	43.55	68.20	-24.65	Peak	
2	10600.0000	33.44	-0.28	33.16	999.00	-965.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5300MHz	Polarization	Horizontal

120 dBuV/m

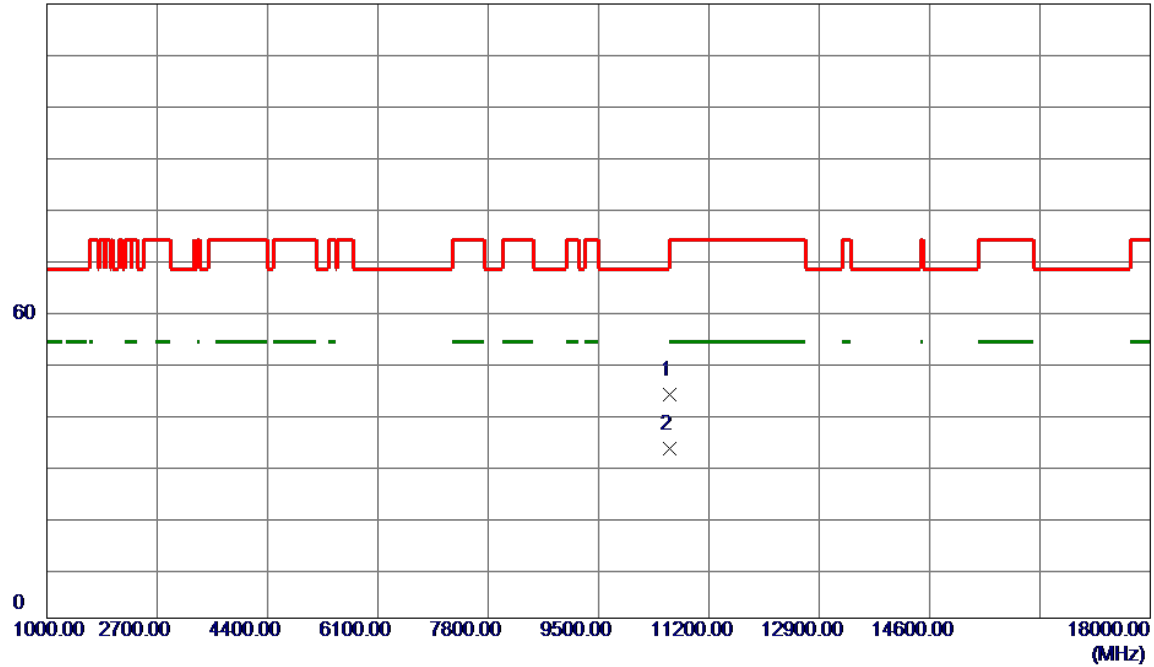


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	43.85	-0.28	43.57	68.20	-24.63	Peak	
2	10600.0000	33.38	-0.28	33.10	999.00	-965.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5320MHz	Polarization	Vertical

120 dBuV/m

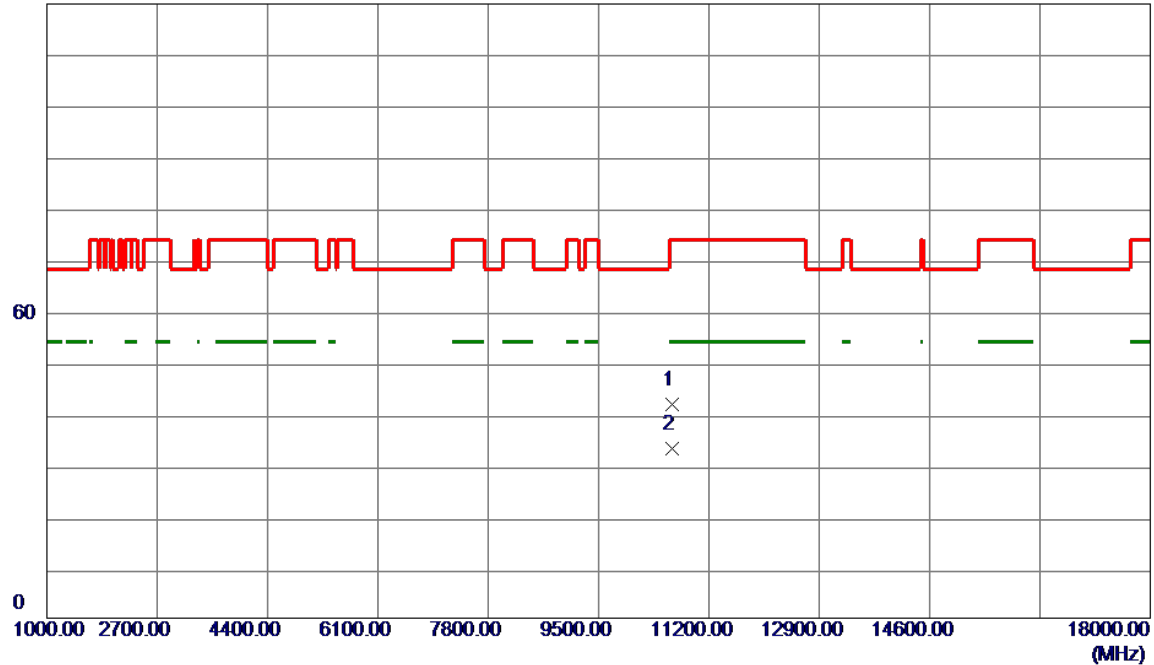

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	41.93	-0.26	41.67	74.00	-32.33	Peak	
2 *	10640.0000	33.43	-0.26	33.17	54.00	-20.83	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5320MHz	Polarization	Horizontal

120 dBuV/m

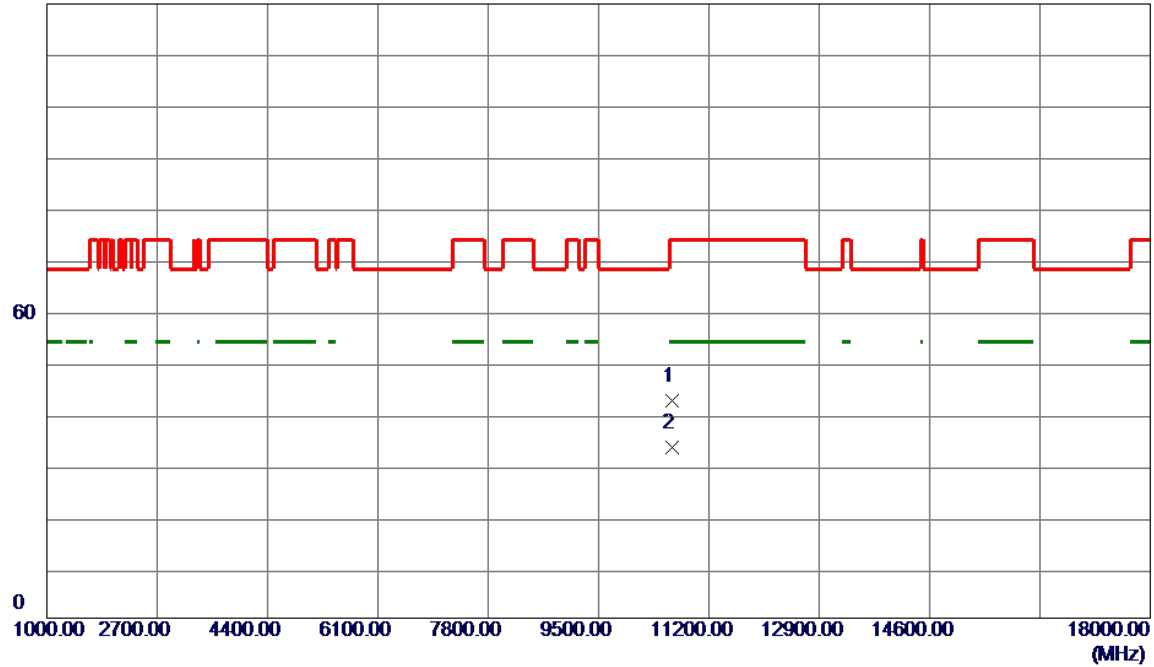


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	42.78	-0.26	42.52	74.00	-31.48	Peak	
2 *	10640.0000	33.56	-0.26	33.30	54.00	-20.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5500MHz	Polarization	Vertical

120 dBuV/m

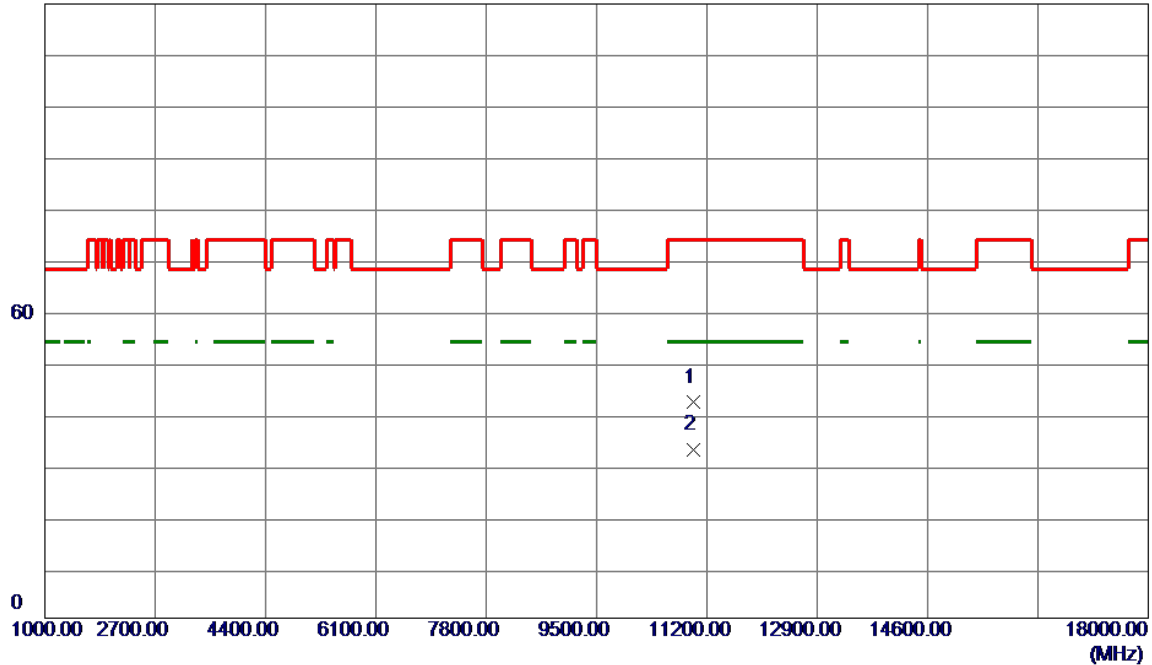


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	42.48	-0.14	42.34	74.00	-31.66	Peak	
2 *	11000.0000	33.14	-0.14	33.00	54.00	-21.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5500MHz	Polarization	Horizontal

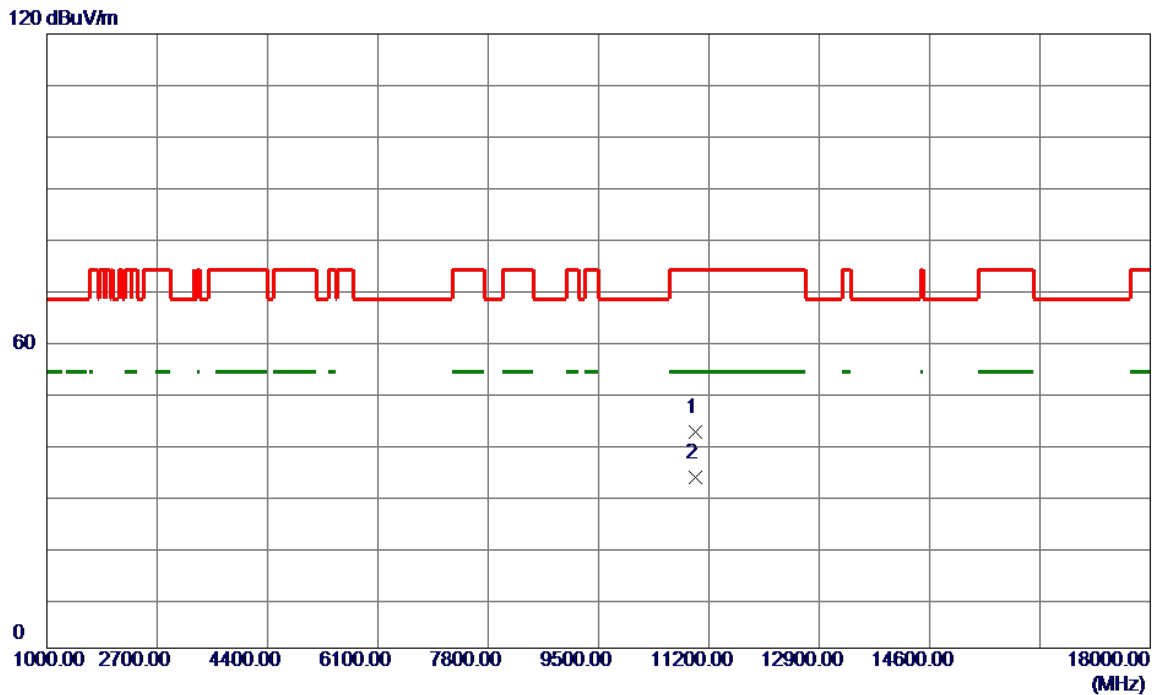


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	42.46	-0.14	42.32	74.00	-31.68	Peak	
2 *	11000.0000	33.57	-0.14	33.43	54.00	-20.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5580MHz	Polarization	Vertical

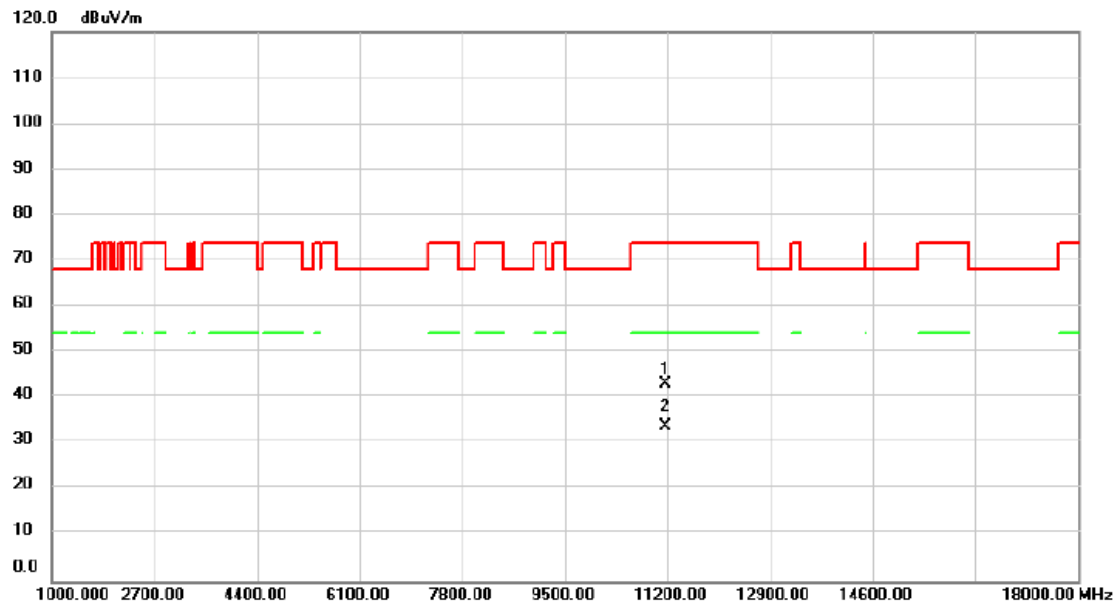


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11160.00	42.88	0.17	43.05	74.00	-30.95	peak		
2	*	11160.00	33.64	0.17	33.81	54.00	-20.19	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5580MHz	Polarization	Horizontal

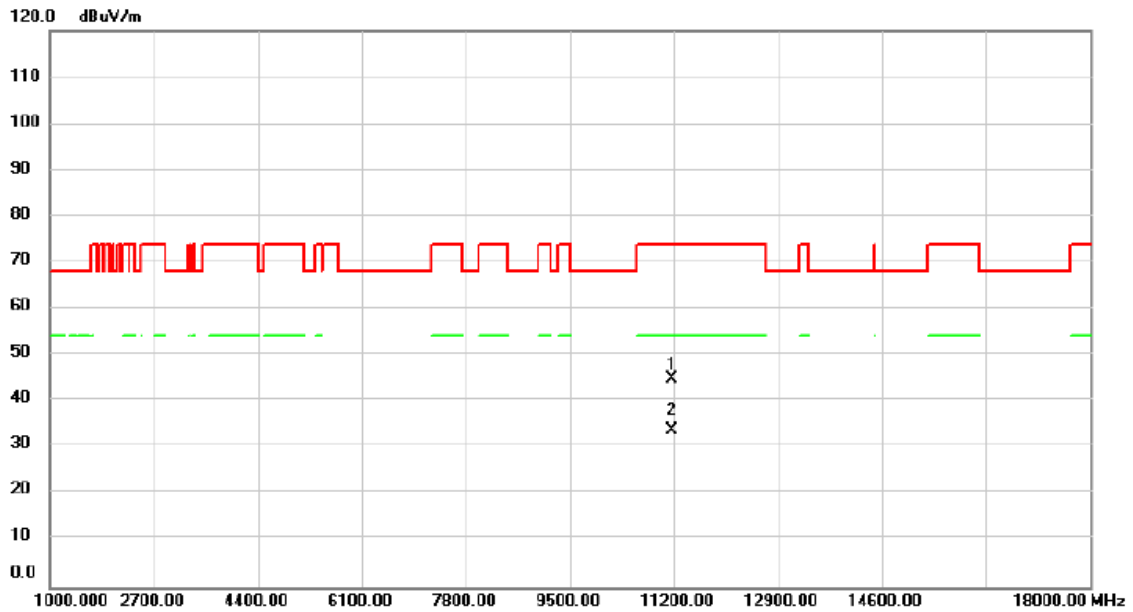


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11160.00	44.53	0.17	44.70	74.00	-29.30	peak		
2	*	11160.00	33.61	0.17	33.78	54.00	-20.22	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5700MHz	Polarization	Vertical

120 dBuV/m

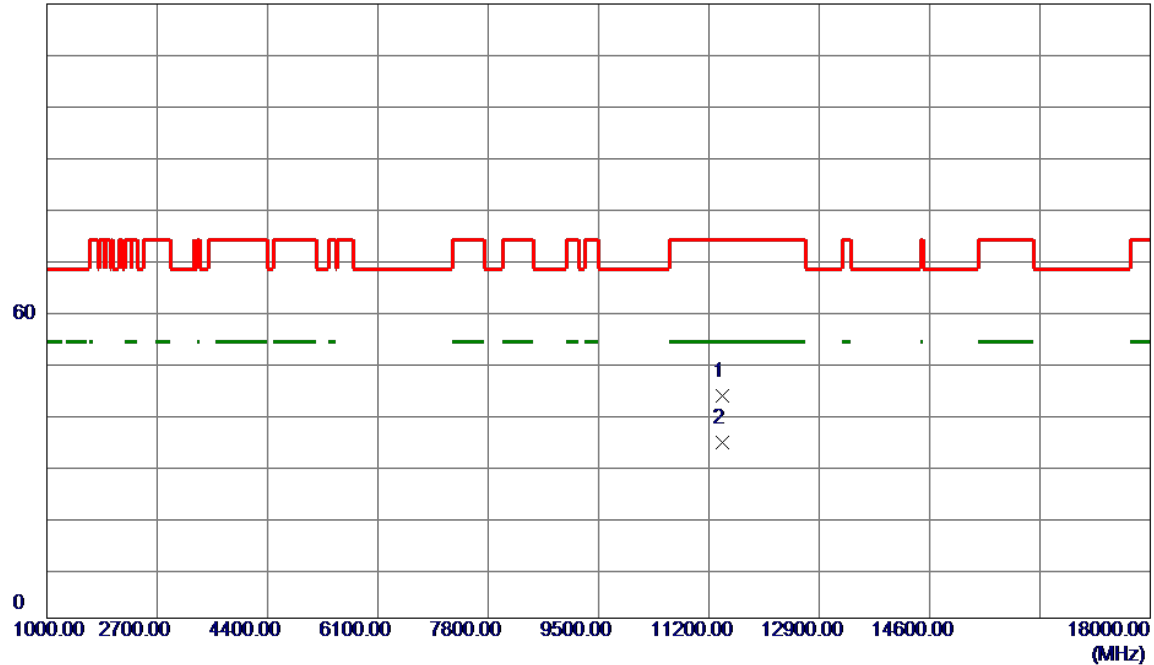

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	42.90	0.64	43.54	74.00	-30.46	Peak	
2 *	11400.0000	33.58	0.64	34.22	54.00	-19.78	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5700MHz	Polarization	Horizontal

120 dBuV/m

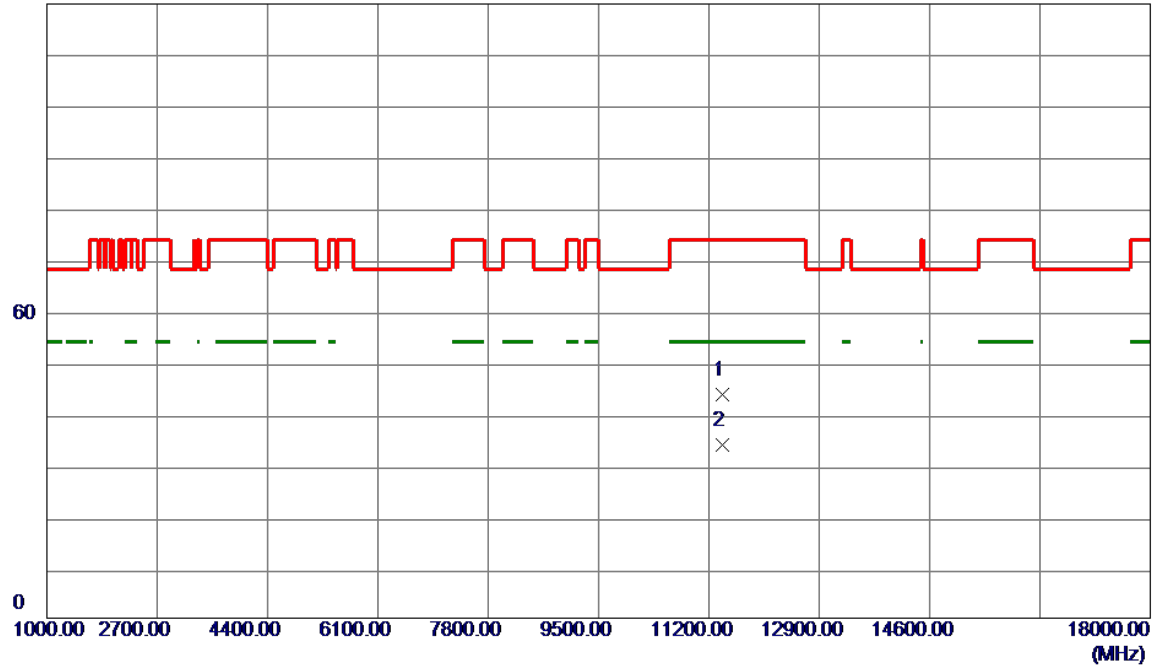


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	42.97	0.64	43.61	74.00	-30.39	Peak	
2 *	11400.0000	33.14	0.64	33.78	54.00	-20.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5745MHz	Polarization	Vertical

120 dBuV/m

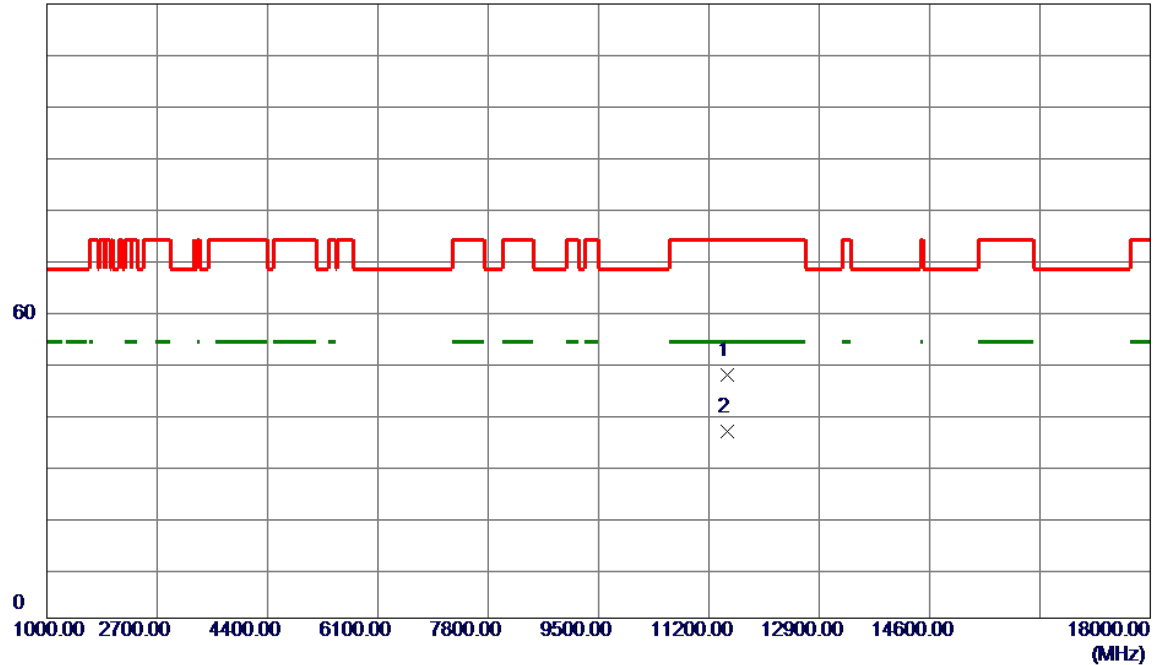


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	46.62	0.81	47.43	74.00	-26.57	Peak	
2 *	11490.0000	35.66	0.81	36.47	54.00	-17.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5745MHz	Polarization	Horizontal

120 dBuV/m

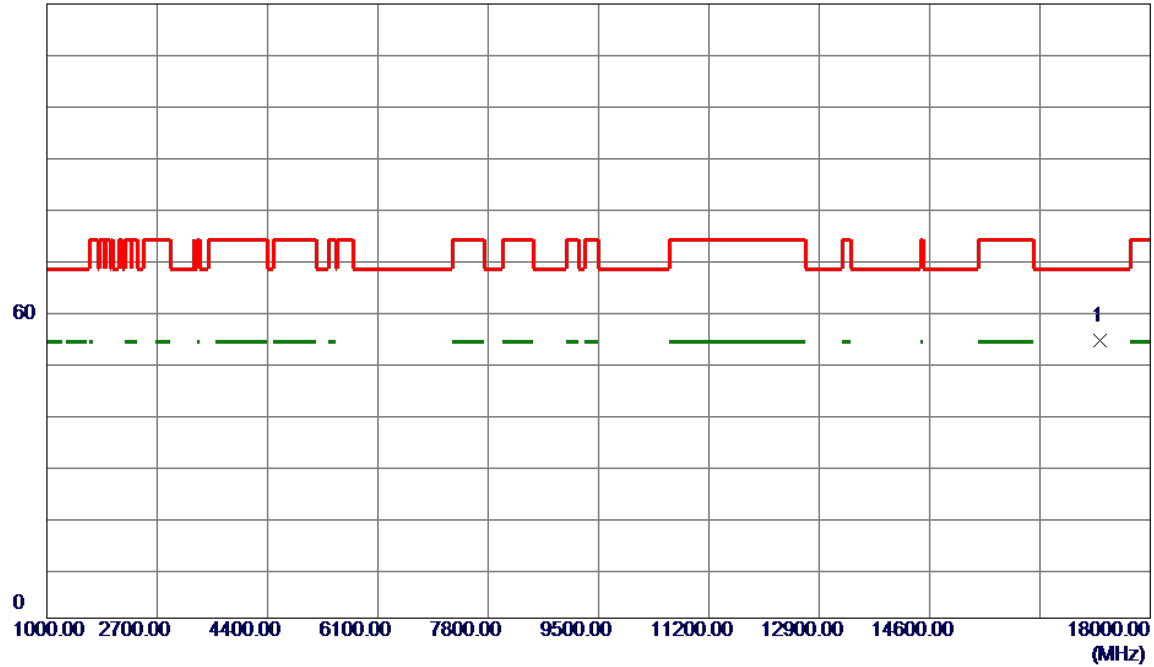


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	17235.0000	49.86	4.34	54.20	68.20	-14.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5785MHz	Polarization	Vertical

120 dBuV/m

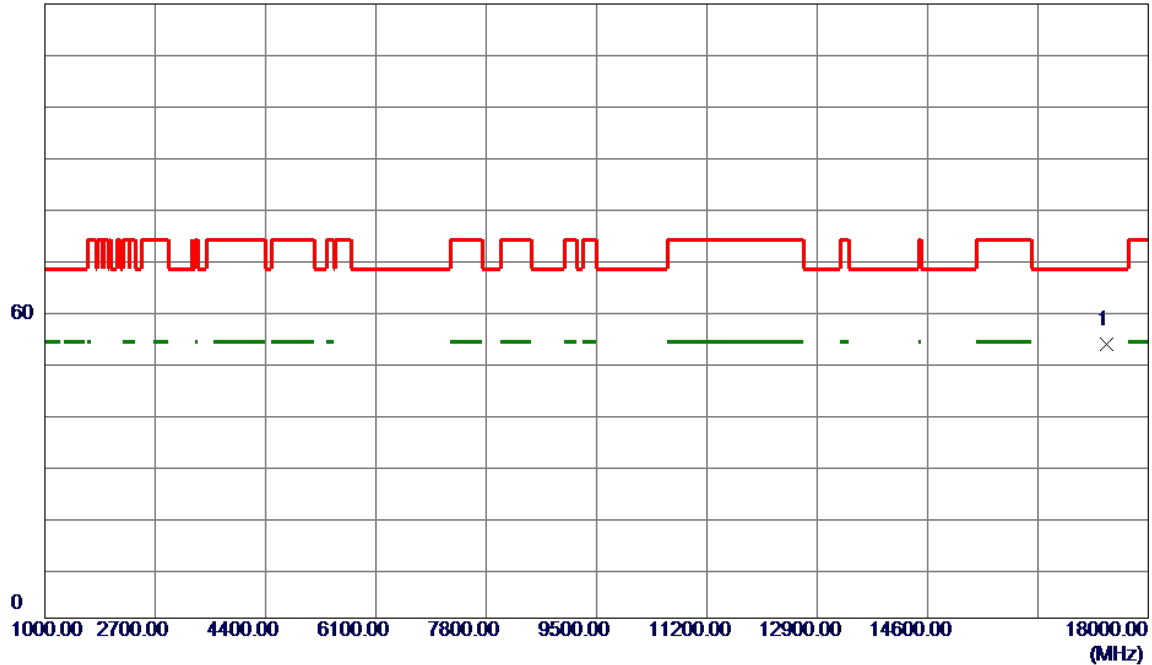


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	17354.0000	48.97	4.58	53.55	68.20	-14.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5785MHz	Polarization	Horizontal

120 dBuV/m

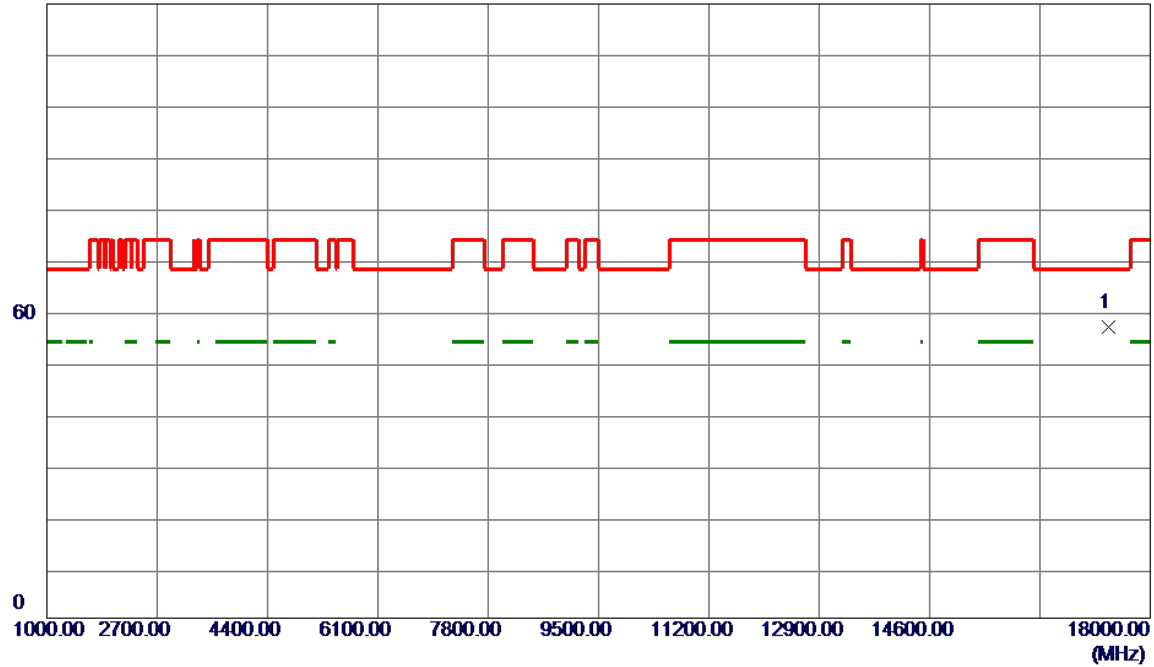


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17354.0000	52.33	4.58	56.91	68.20	-11.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5825MHz	Polarization	Vertical

120 dBuV/m

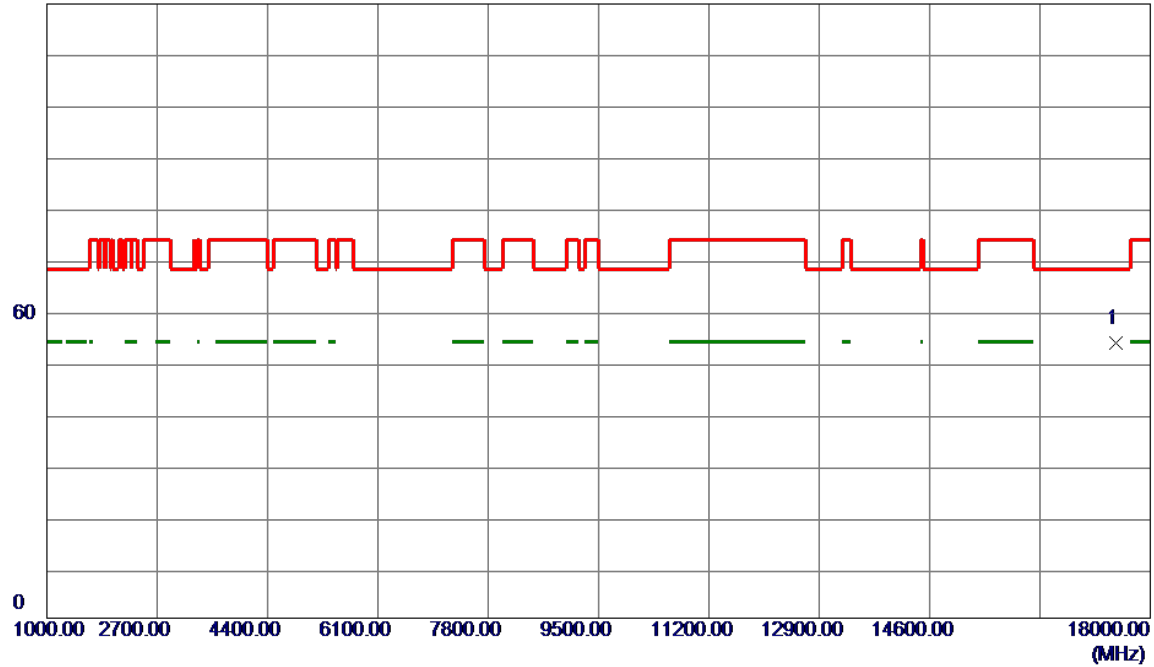


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17473.0000	48.83	4.82	53.65	68.20	-14.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2024/12/26
Test Frequency	5825MHz	Polarization	Horizontal

120 dBuV/m

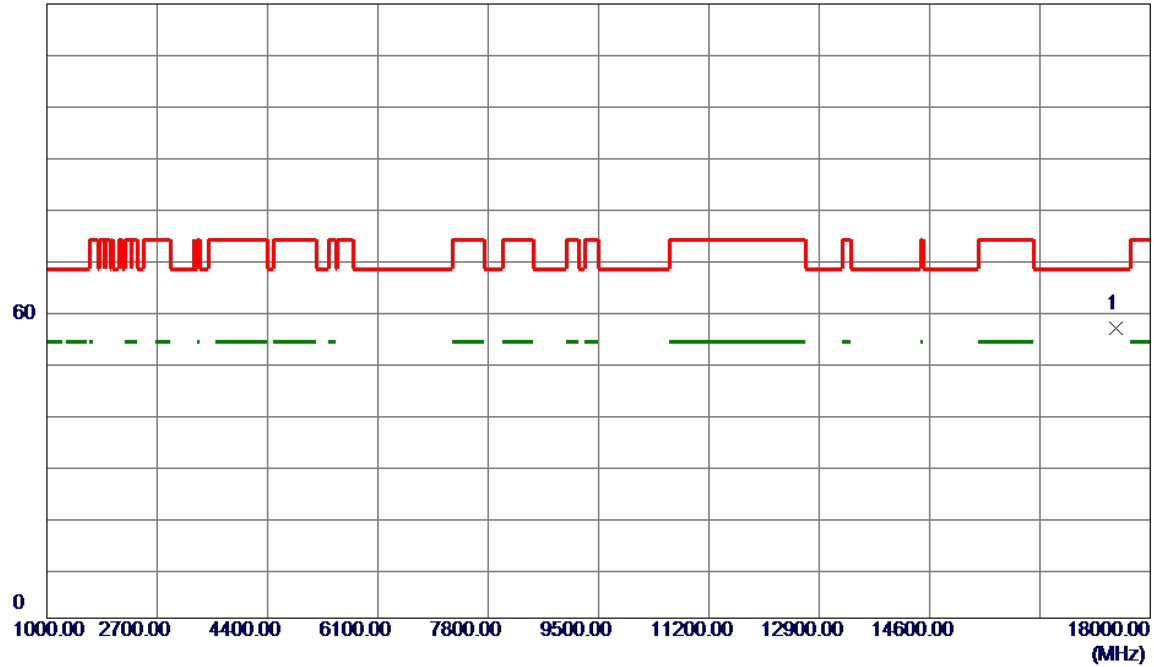


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17473.0000	51.71	4.82	56.53	68.20	-11.67	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5180MHz	Polarization	Vertical

120 dBuV/m

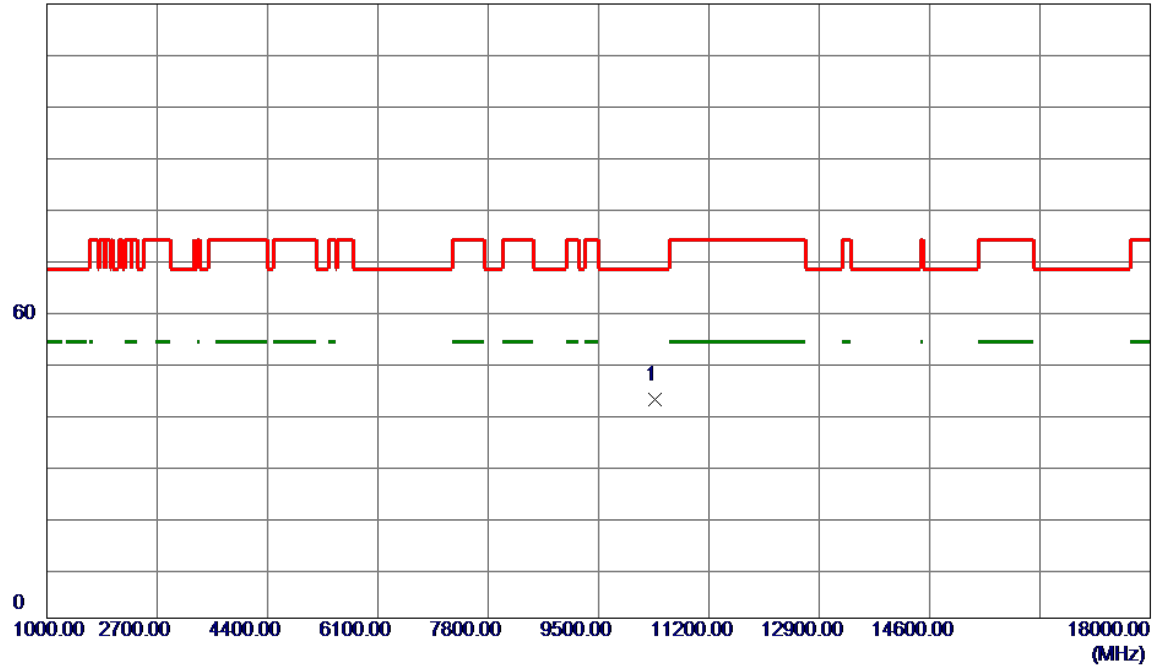


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	43.28	-0.53	42.75	68.20	-25.45	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5180MHz	Polarization	Horizontal

120 dBuV/m

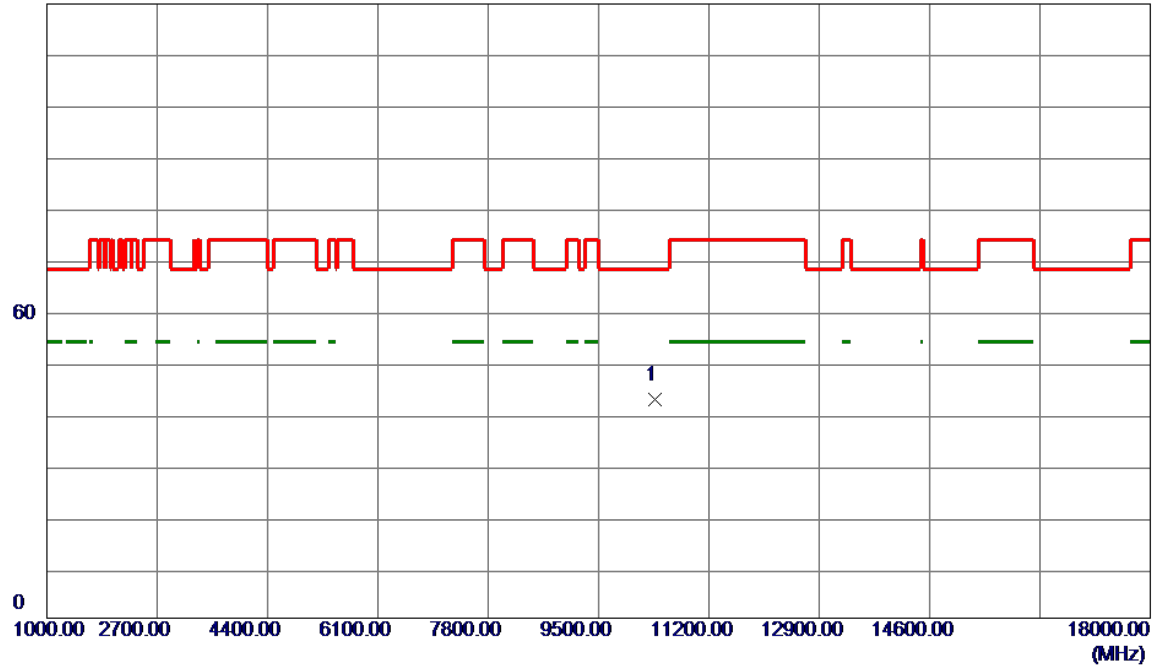


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10360.0000	43.20	-0.53	42.67	68.20	-25.53	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5200MHz	Polarization	Vertical

120 dBuV/m

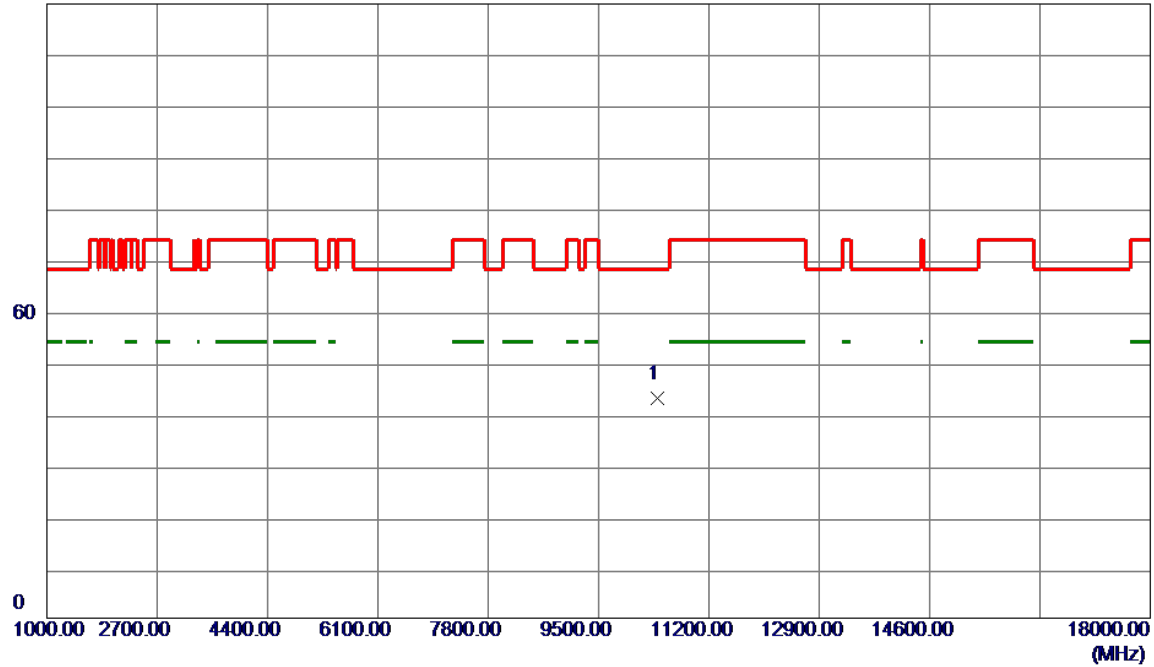


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10400.0000	43.46	-0.46	43.00	68.20	-25.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5200MHz	Polarization	Horizontal

120 dBuV/m

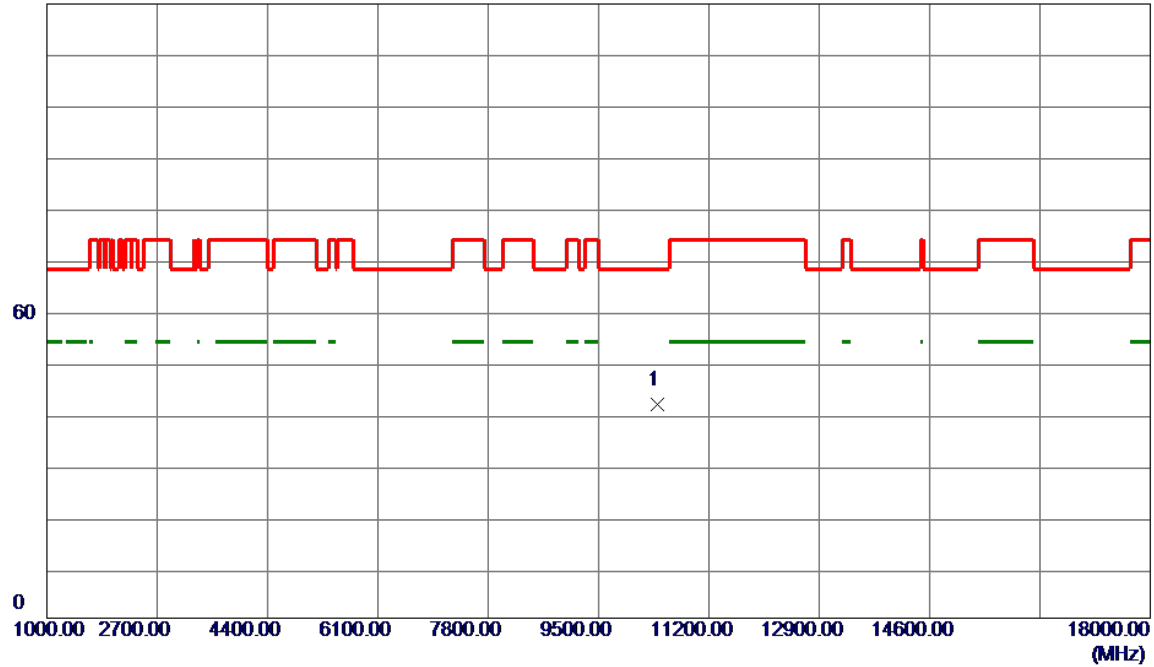


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10400.0000	42.32	-0.46	41.86	68.20	-26.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5240MHz	Polarization	Vertical

120 dBuV/m

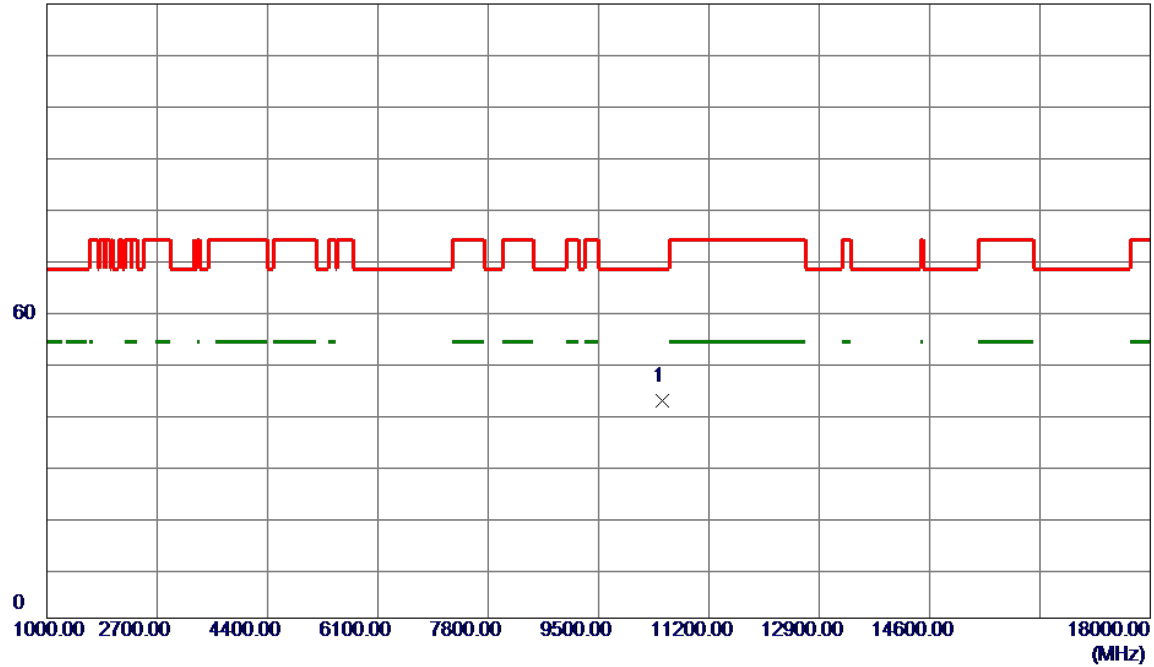


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10480.0000	42.87	-0.34	42.53	68.20	-25.67	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5240MHz	Polarization	Horizontal

120 dBuV/m

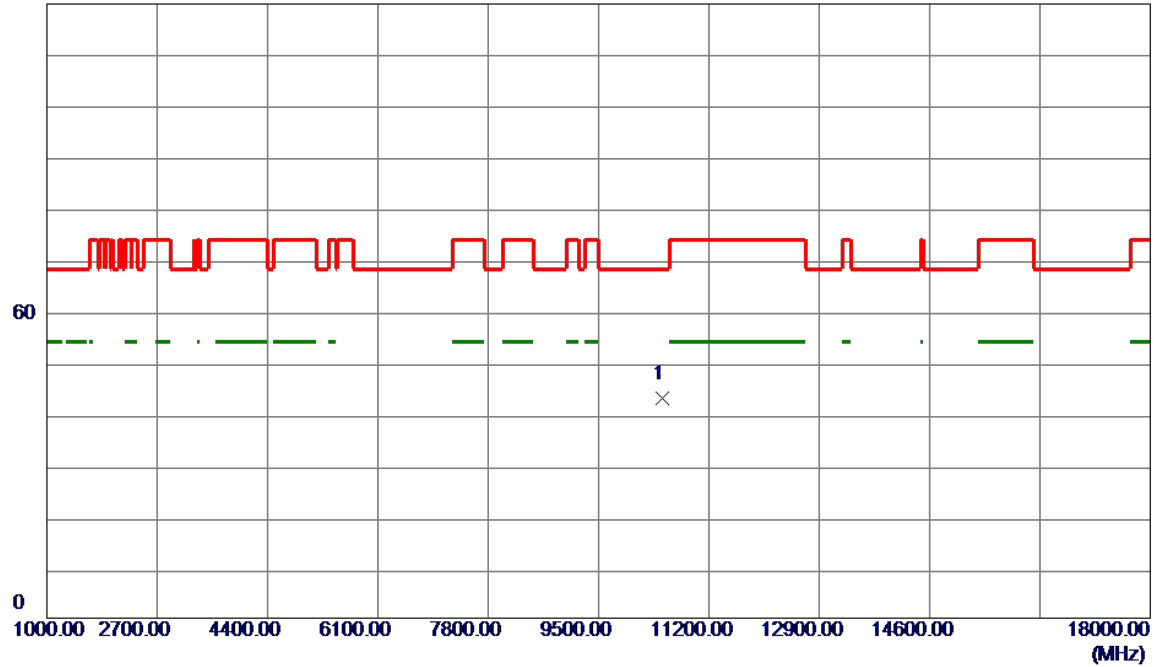


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	43.41	-0.34	43.07	68.20	-25.13	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5260MHz	Polarization	Vertical

120 dBuV/m

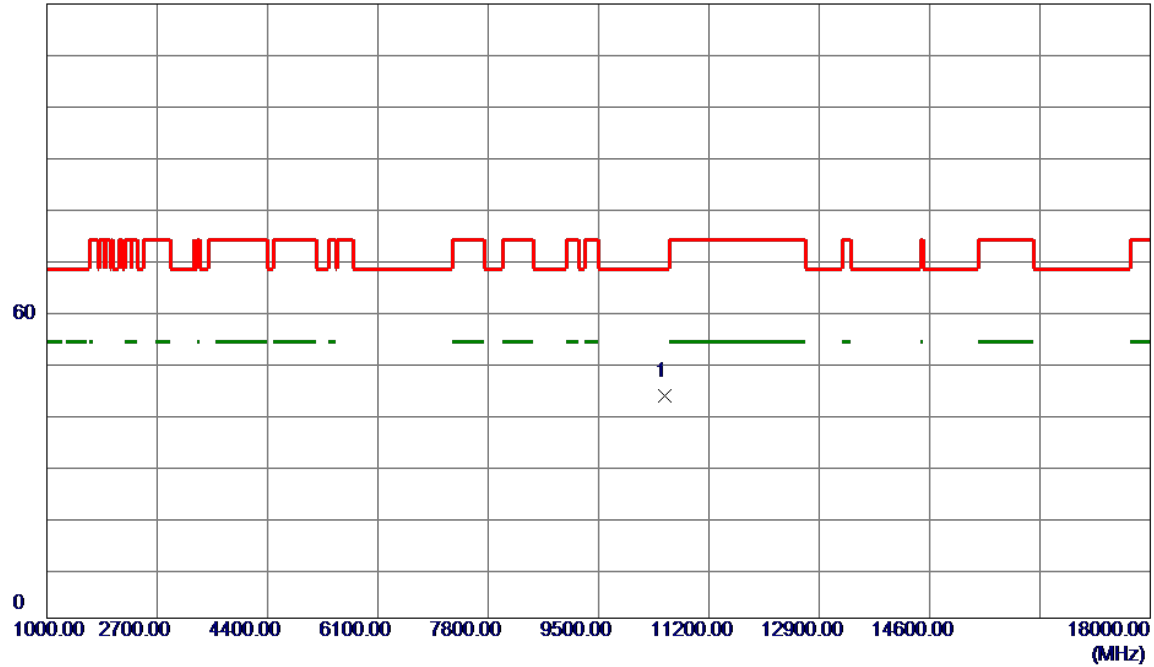


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	43.85	-0.30	43.55	68.20	-24.65	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5260MHz	Polarization	Horizontal

120 dBuV/m

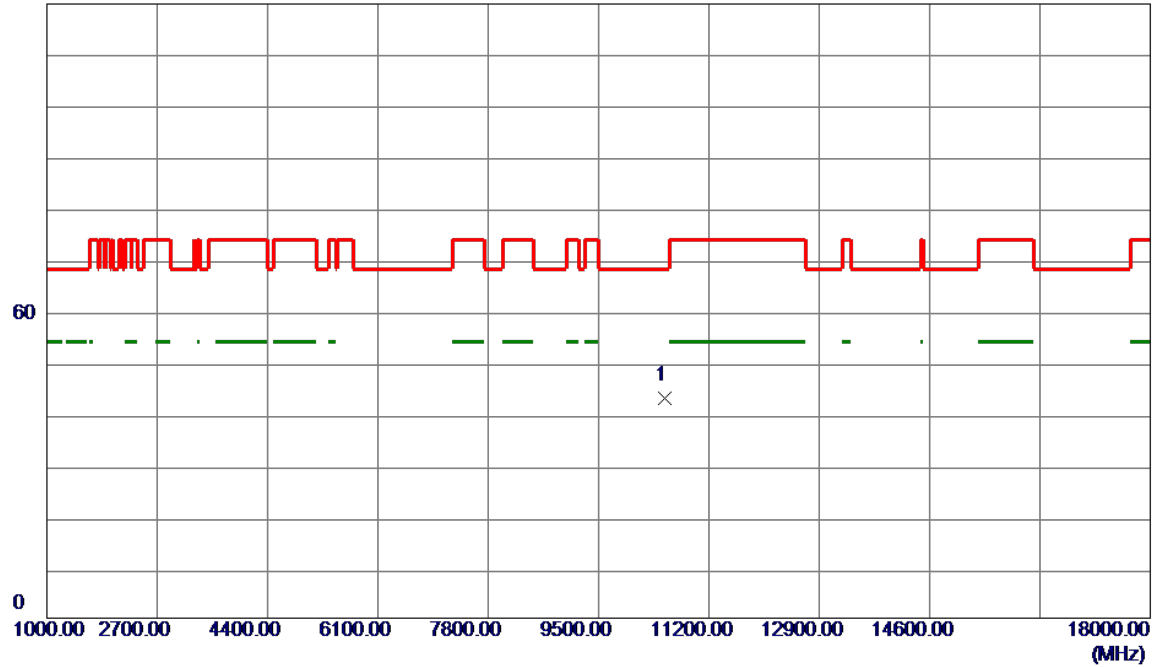


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	43.14	-0.30	42.84	68.20	-25.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5300MHz	Polarization	Vertical

120 dBuV/m

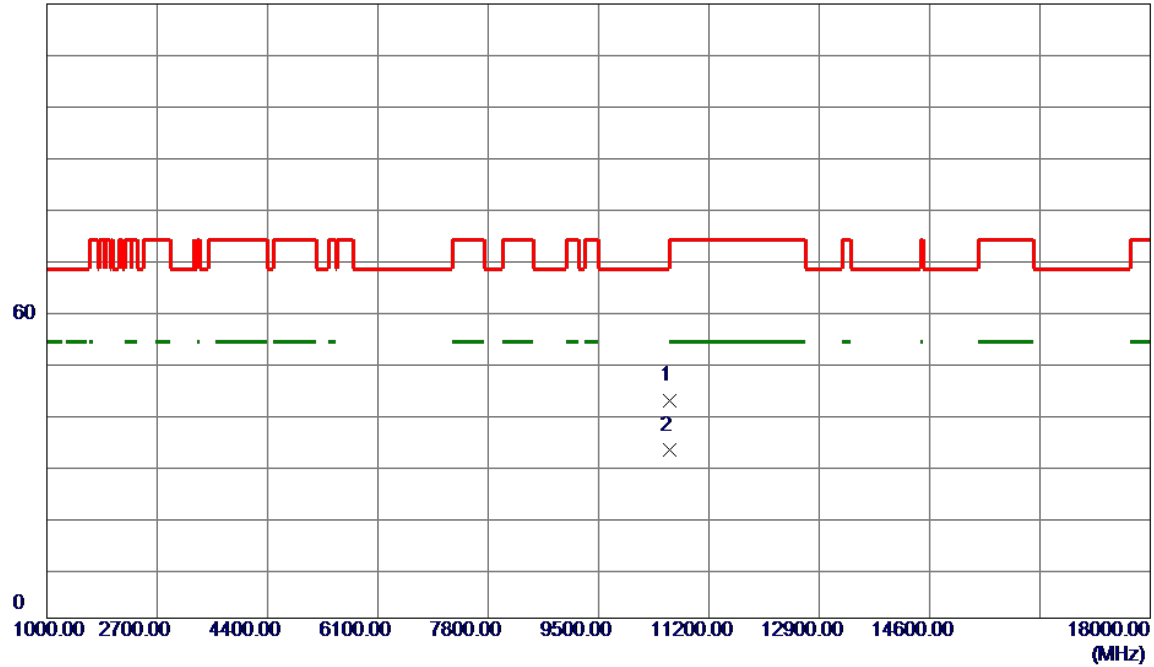


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	42.88	-0.28	42.60	68.20	-25.60	Peak	
2	10600.0000	33.21	-0.28	32.93	999.00	-966.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5300MHz	Polarization	Horizontal

120 dBuV/m

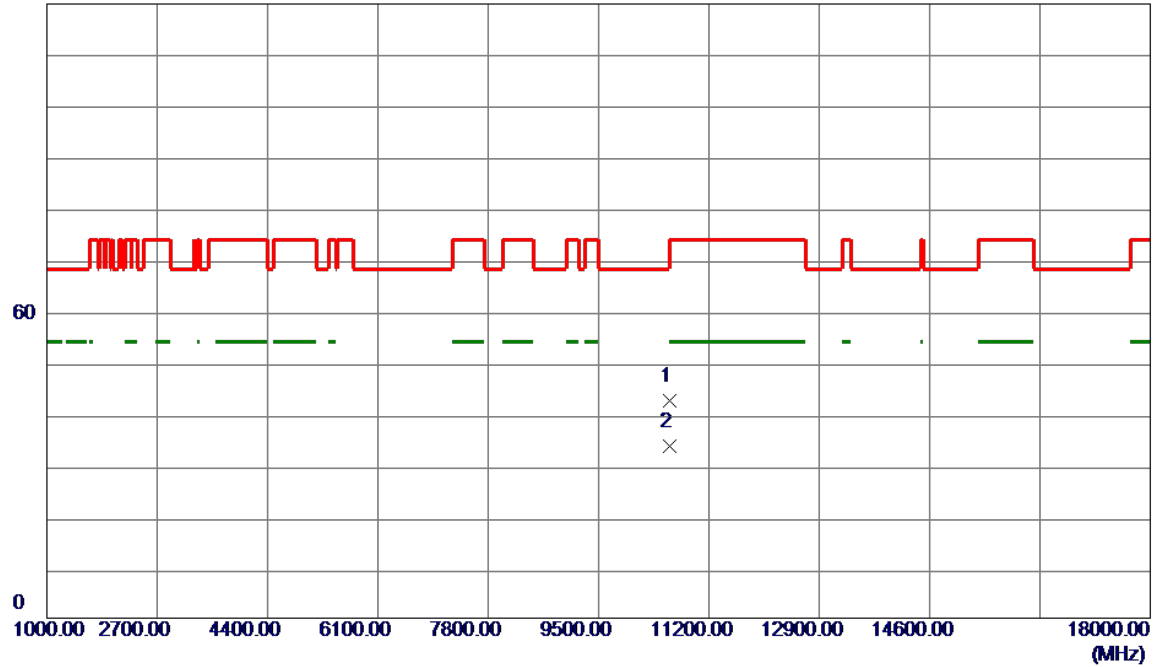


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	42.82	-0.28	42.54	68.20	-25.66	Peak	
2	10600.0000	33.87	-0.28	33.59	999.00	-965.41	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5320MHz	Polarization	Vertical

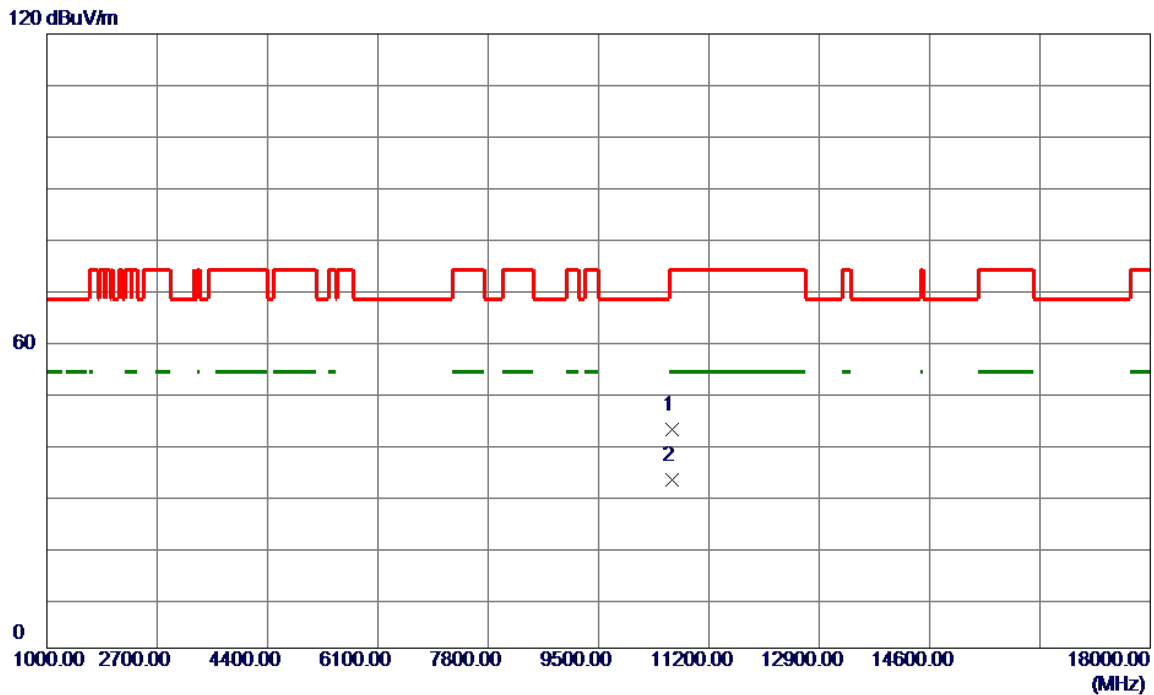


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	43.09	-0.26	42.83	74.00	-31.17	Peak	
2 *	10640.0000	33.16	-0.26	32.90	54.00	-21.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5320MHz	Polarization	Horizontal

120 dBuV/m

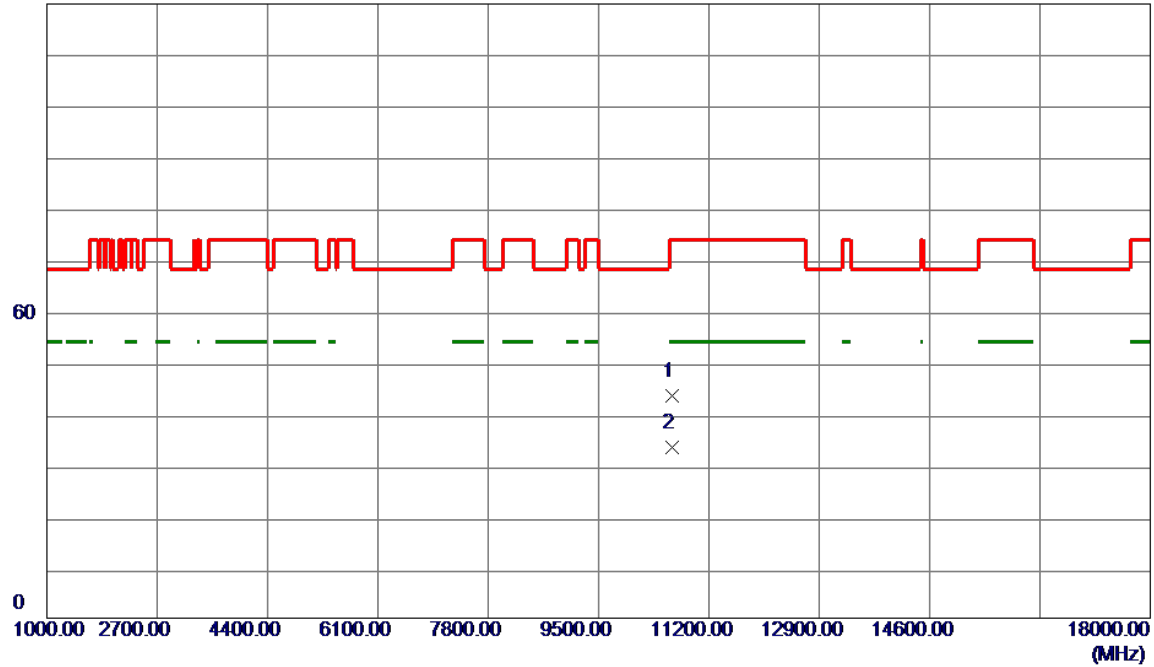


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0000	43.67	-0.26	43.41	74.00	-30.59	Peak	
2 *	10640.0000	33.51	-0.26	33.25	54.00	-20.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5500MHz	Polarization	Vertical

120 dBuV/m

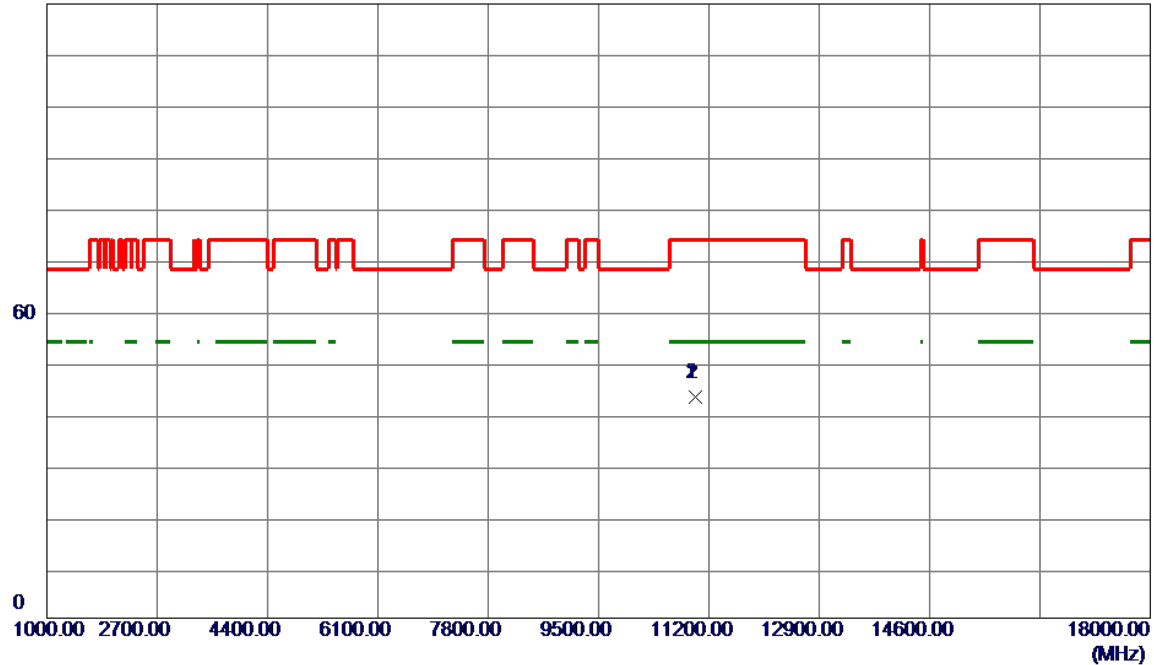


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.0000	43.28	-0.14	43.14	74.00	-30.86	Peak	
2	11000.0000	43.28	-0.14	43.14	74.00	-30.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5500MHz	Polarization	Horizontal

120 dBuV/m

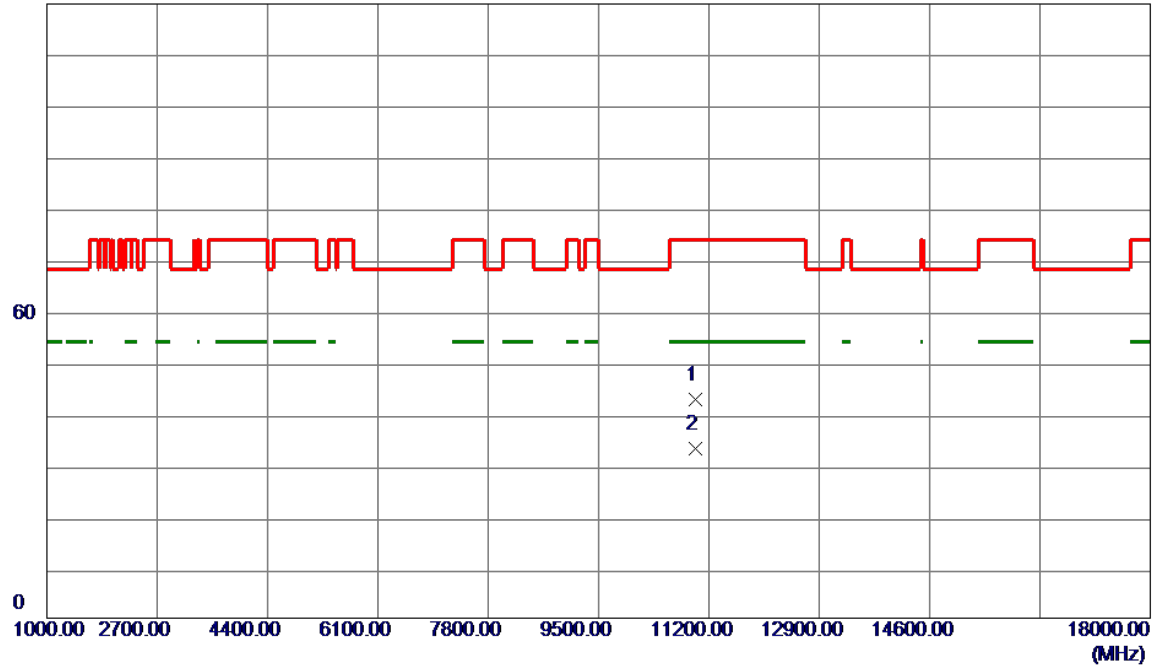


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11000.0000	42.93	-0.14	42.79	74.00	-31.21	Peak	
2 *	11000.0000	33.34	-0.14	33.20	54.00	-20.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5580MHz	Polarization	Vertical

120 dBuV/m

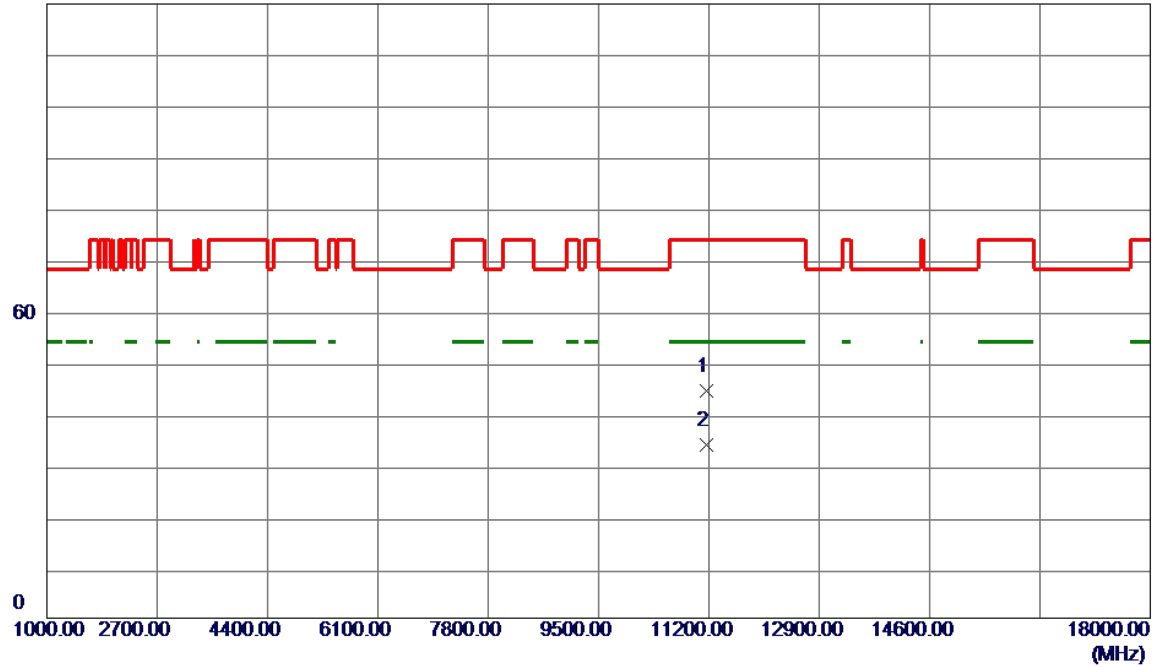


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	44.22	0.17	44.39	74.00	-29.61	Peak	
2 *	11160.0000	33.64	0.17	33.81	54.00	-20.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5580MHz	Polarization	Horizontal

120 dBuV/m

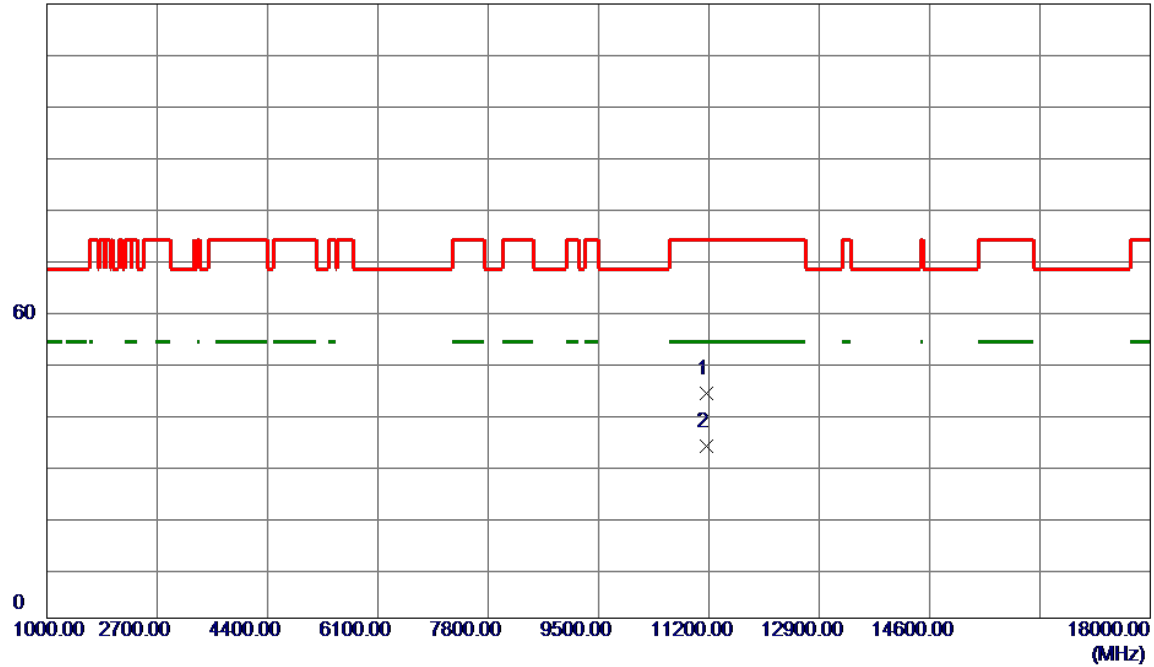


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11160.0000	43.71	0.17	43.88	74.00	-30.12	Peak	
2 *	11160.0000	33.54	0.17	33.71	54.00	-20.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5700MHz	Polarization	Vertical

120 dBuV/m

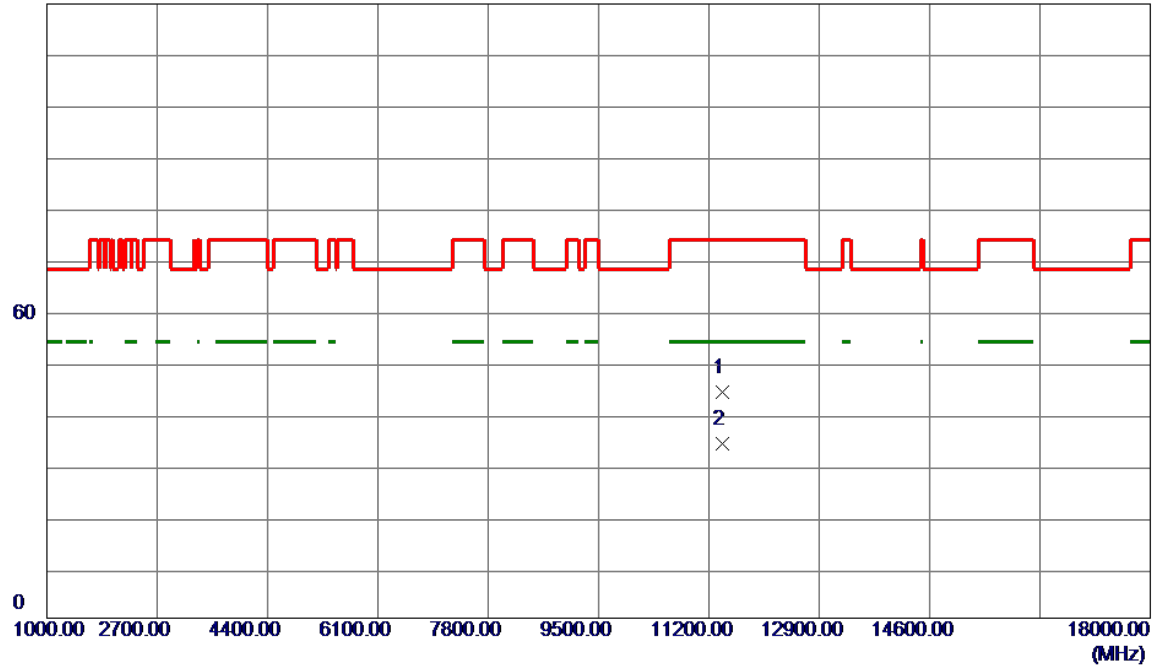


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	43.51	0.64	44.15	74.00	-29.85	Peak	
2 *	11400.0000	33.41	0.64	34.05	54.00	-19.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5700MHz	Polarization	Horizontal

120 dBuV/m

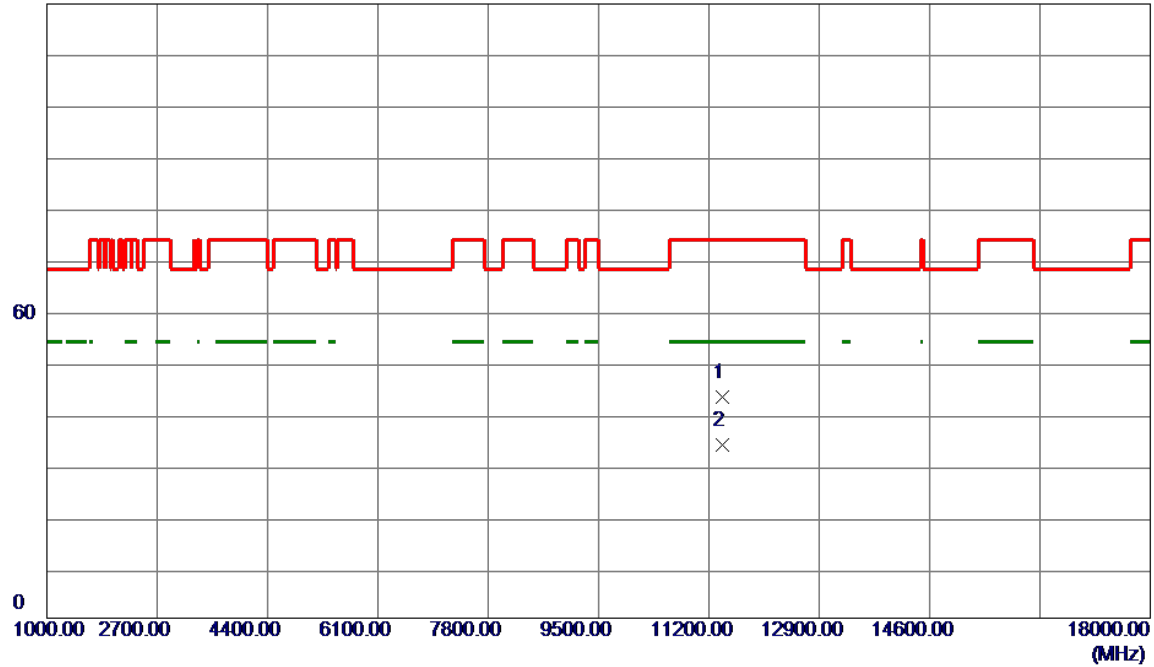


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.0000	42.59	0.64	43.23	74.00	-30.77	Peak	
2 *	11400.0000	33.14	0.64	33.78	54.00	-20.22	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5745MHz	Polarization	Vertical

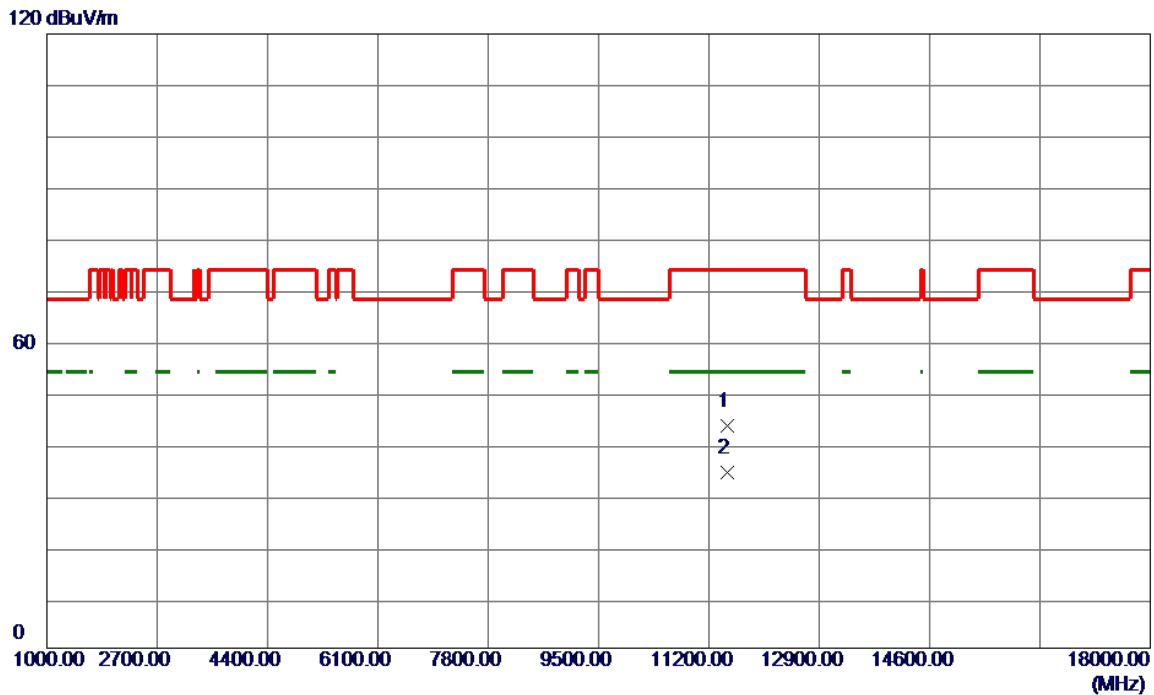


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	42.62	0.81	43.43	74.00	-30.57	Peak	
2 *	11490.0000	33.58	0.81	34.39	54.00	-19.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5745MHz	Polarization	Horizontal

120 dBuV/m

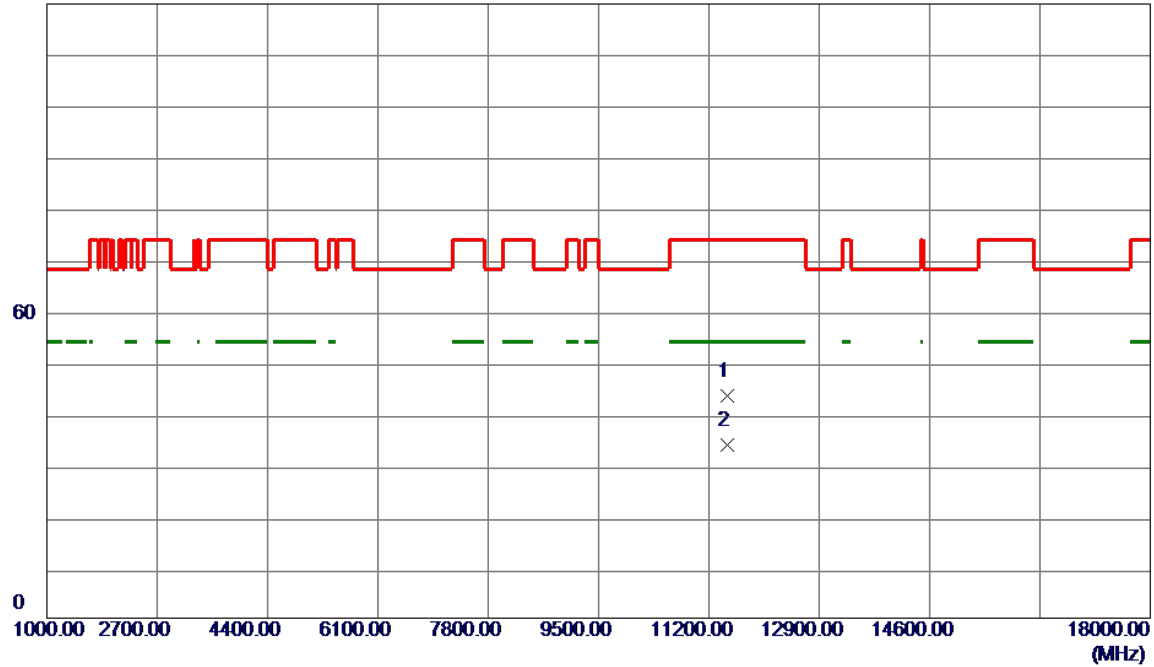

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	42.70	0.81	43.51	74.00	-30.49	Peak	
2 *	11490.0000	33.14	0.81	33.95	54.00	-20.05	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5785MHz	Polarization	Vertical

120 dBuV/m

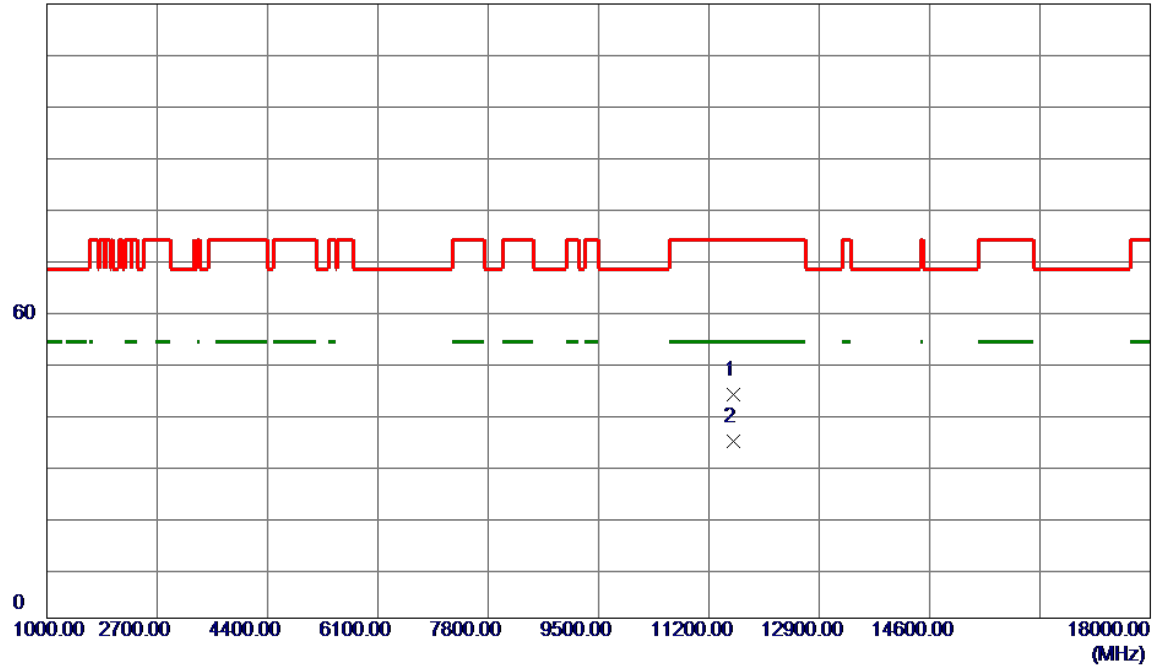


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	42.89	0.85	43.74	74.00	-30.26	Peak	
2 *	11570.0000	33.63	0.85	34.48	54.00	-19.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5785MHz	Polarization	Horizontal

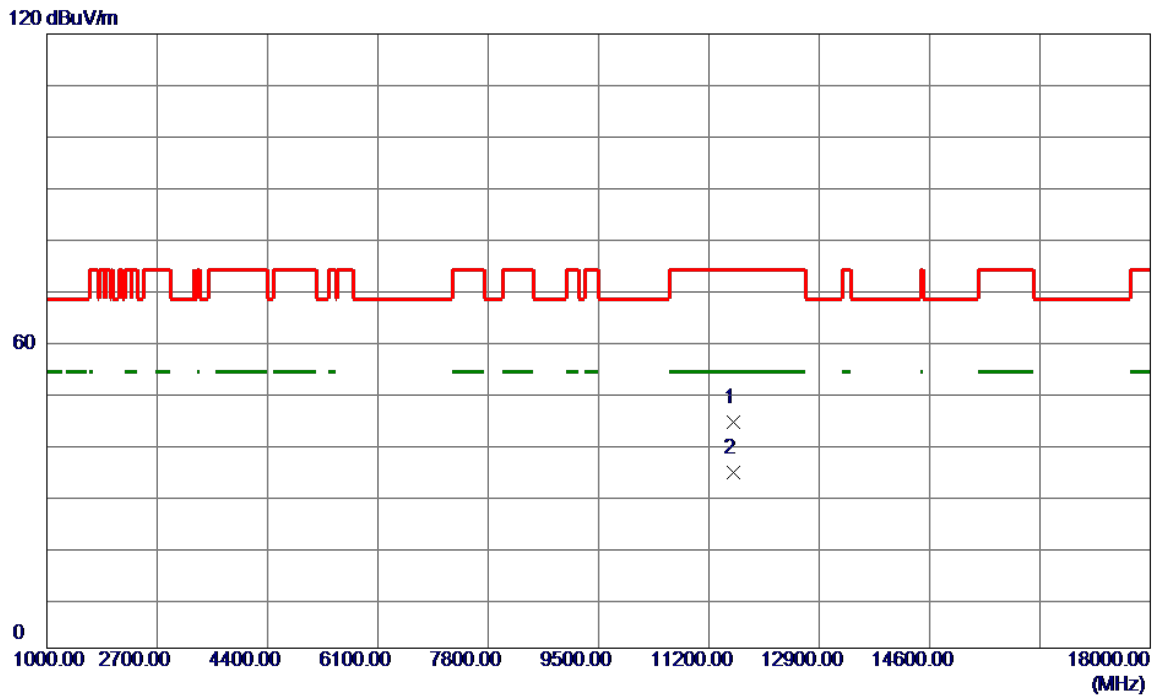


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	43.25	0.85	44.10	74.00	-29.90	Peak	
2 *	11570.0000	33.54	0.85	34.39	54.00	-19.61	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5825MHz	Polarization	Vertical

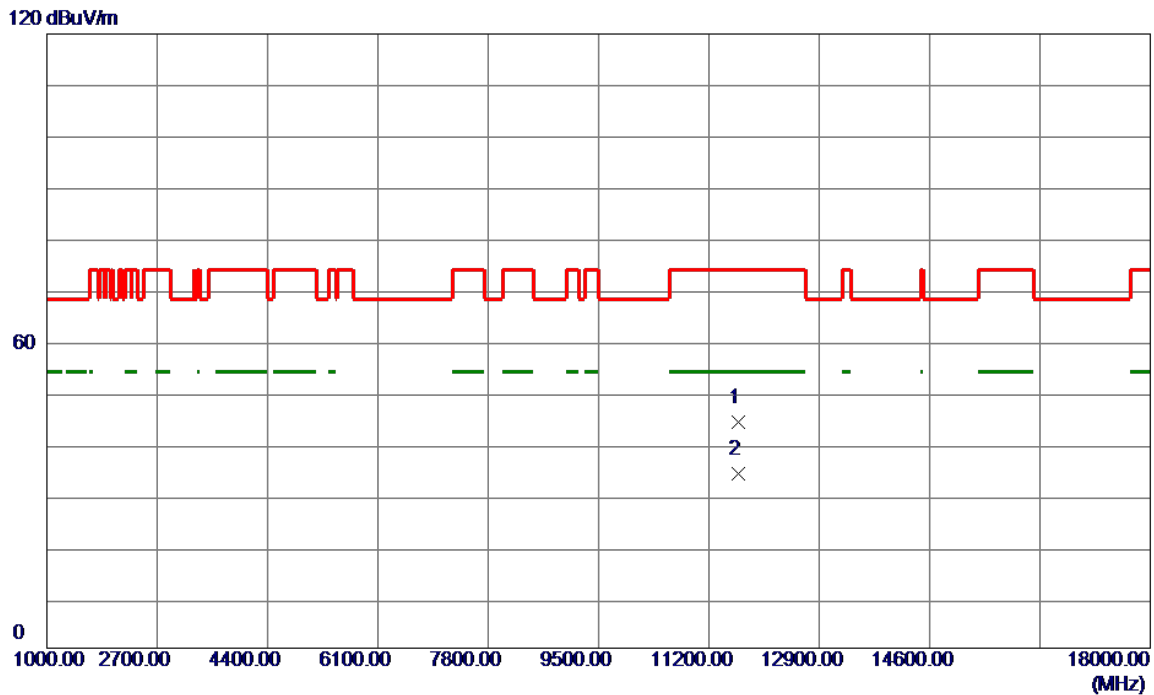


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	43.21	0.86	44.07	74.00	-29.93	Peak	
2 *	11650.0000	33.27	0.86	34.13	54.00	-19.87	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2024/12/26
Test Frequency	5825MHz	Polarization	Horizontal

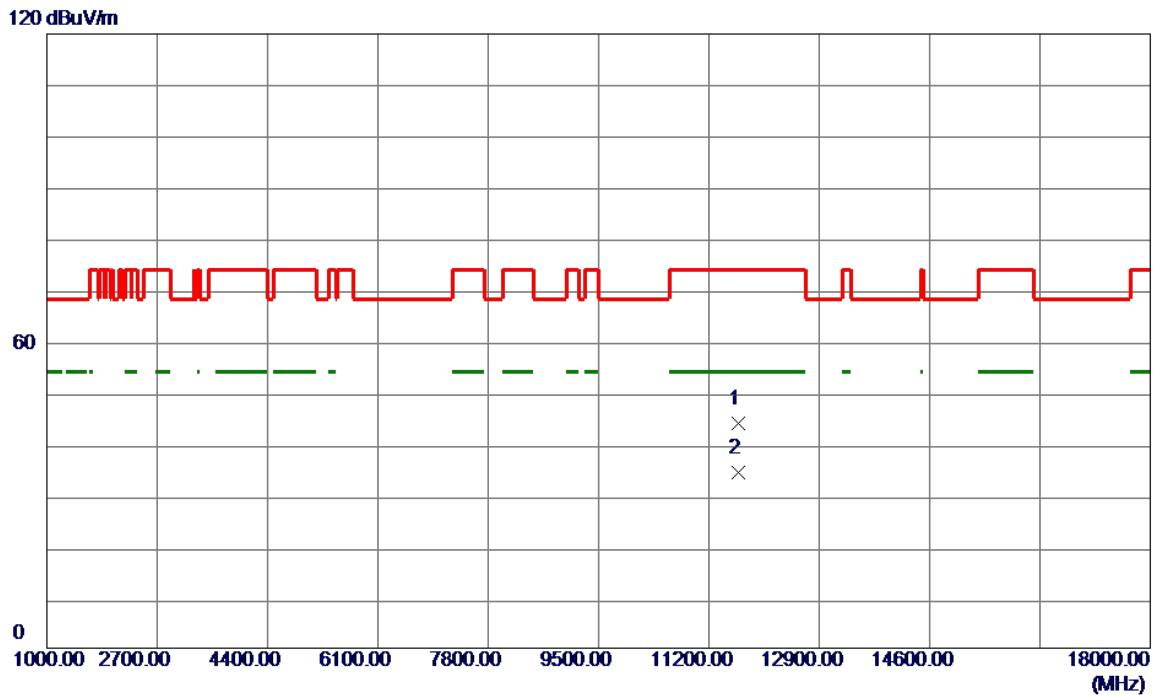


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	43.04	0.86	43.90	74.00	-30.10	Peak	
2 *	11650.0000	33.54	0.86	34.40	54.00	-19.60	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5190MHz	Polarization	Vertical

120 dBuV/m

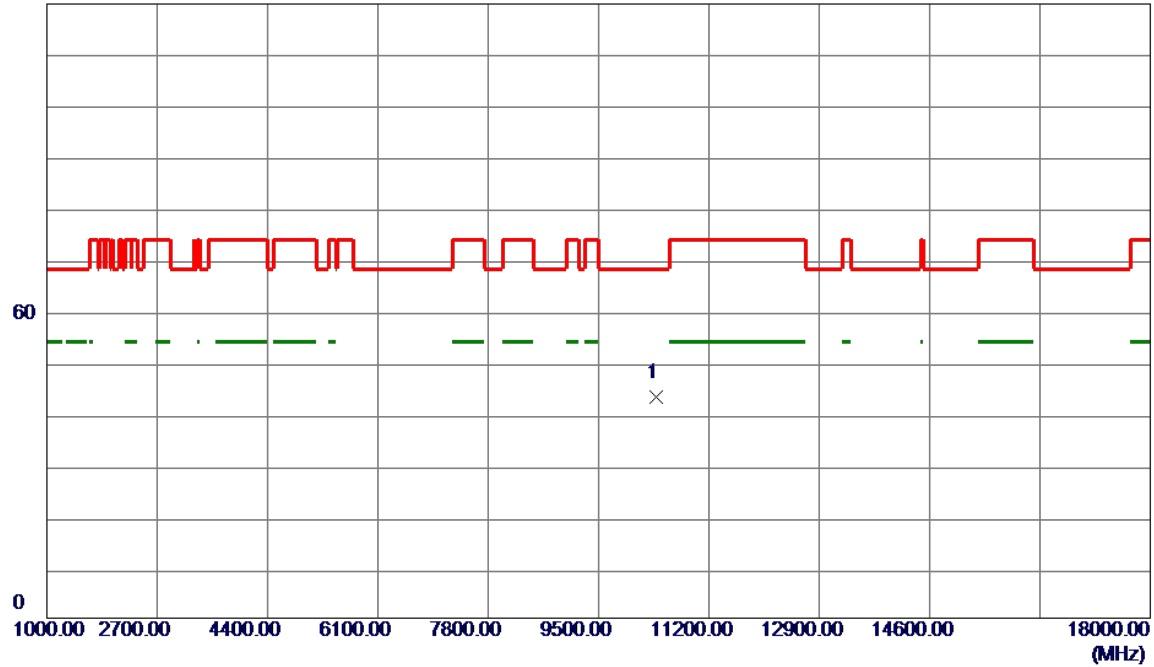


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10380.0000	43.72	-0.49	43.23	68.20	-24.97	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5190MHz	Polarization	Horizontal

120 dBuV/m

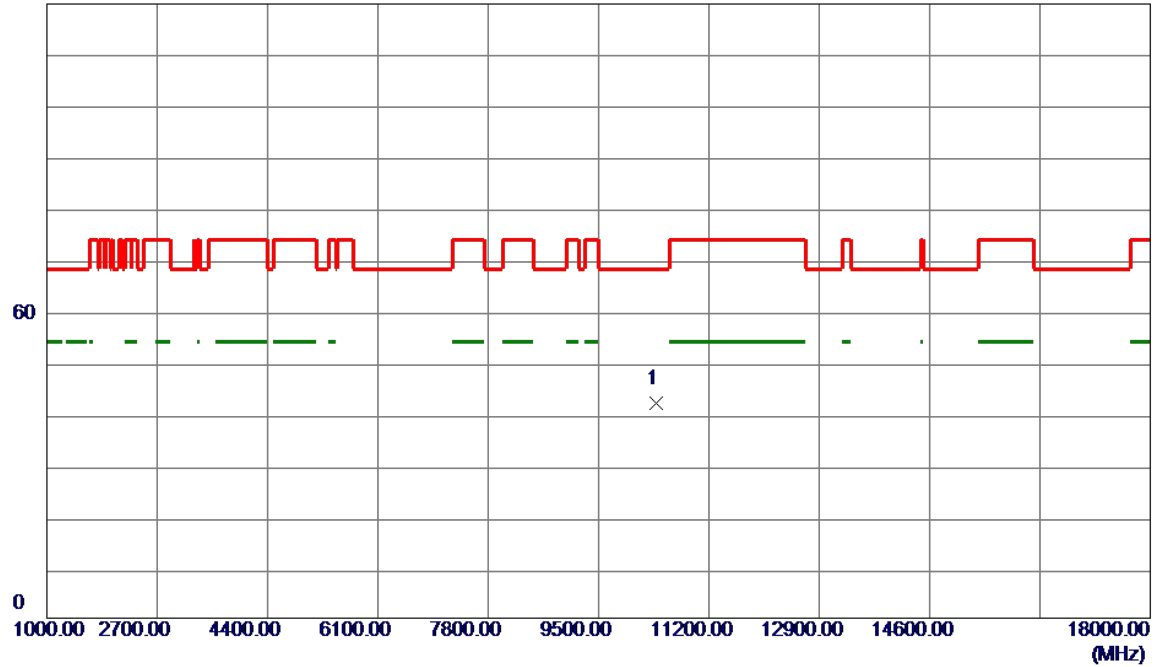


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.0000	42.46	-0.49	41.97	68.20	-26.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5230MHz	Polarization	Vertical

120 dBuV/m

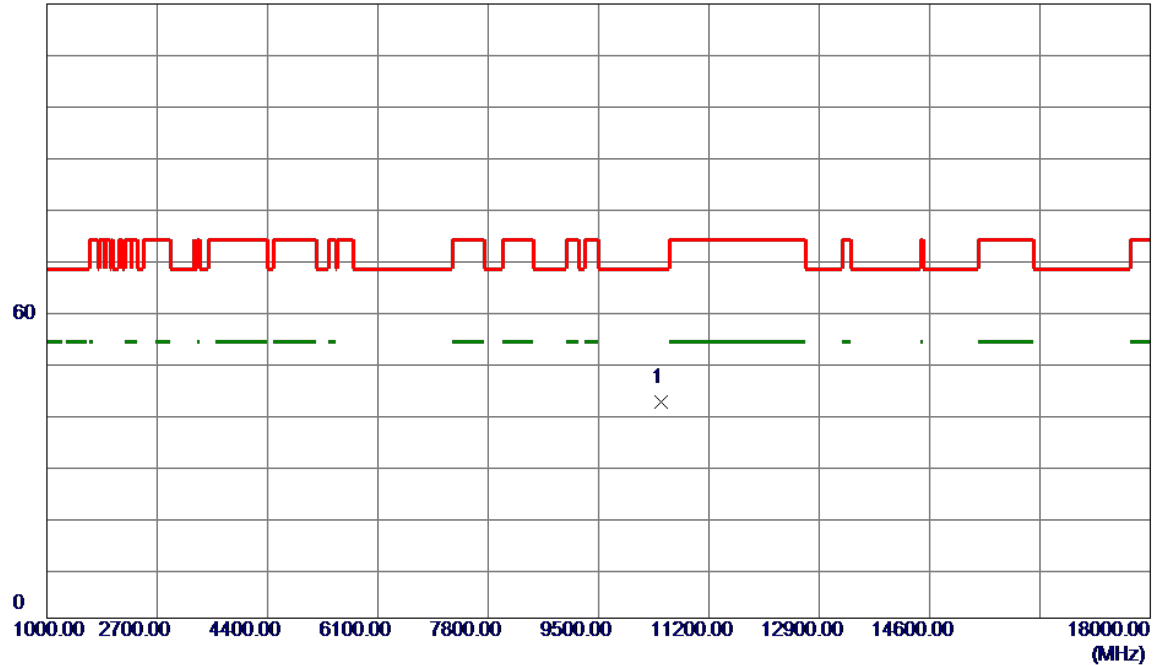


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10460.0000	42.66	-0.37	42.29	68.20	-25.91	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5230MHz	Polarization	Horizontal

120 dBuV/m

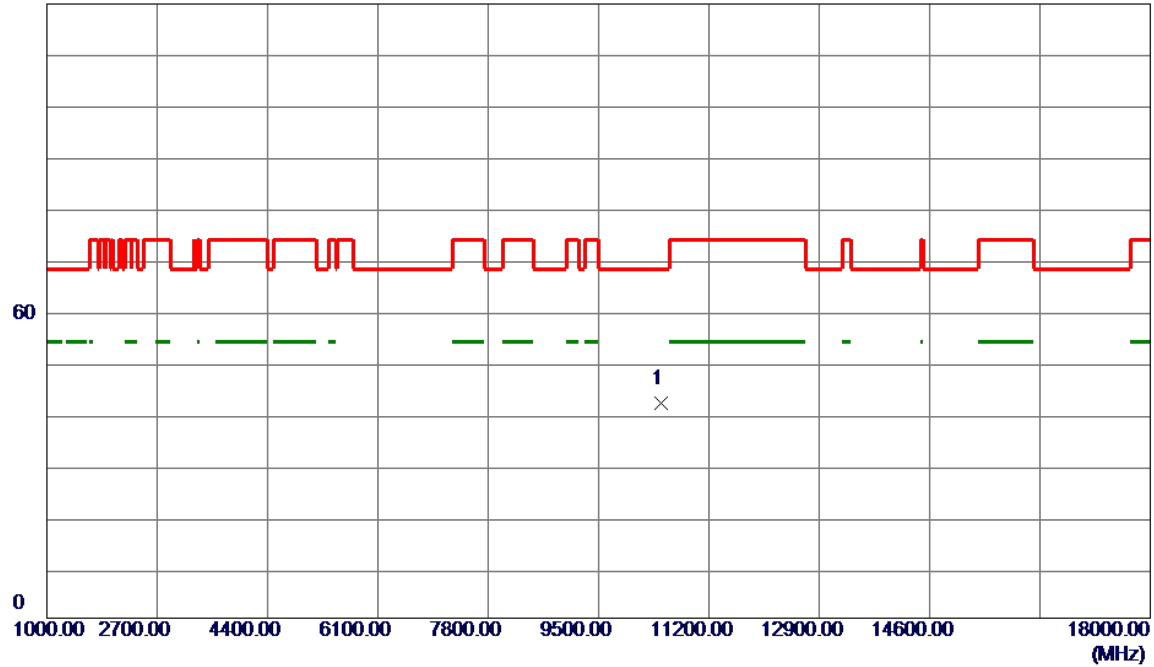


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10460.0000	42.29	-0.37	41.92	68.20	-26.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5270MHz	Polarization	Vertical

120 dBuV/m

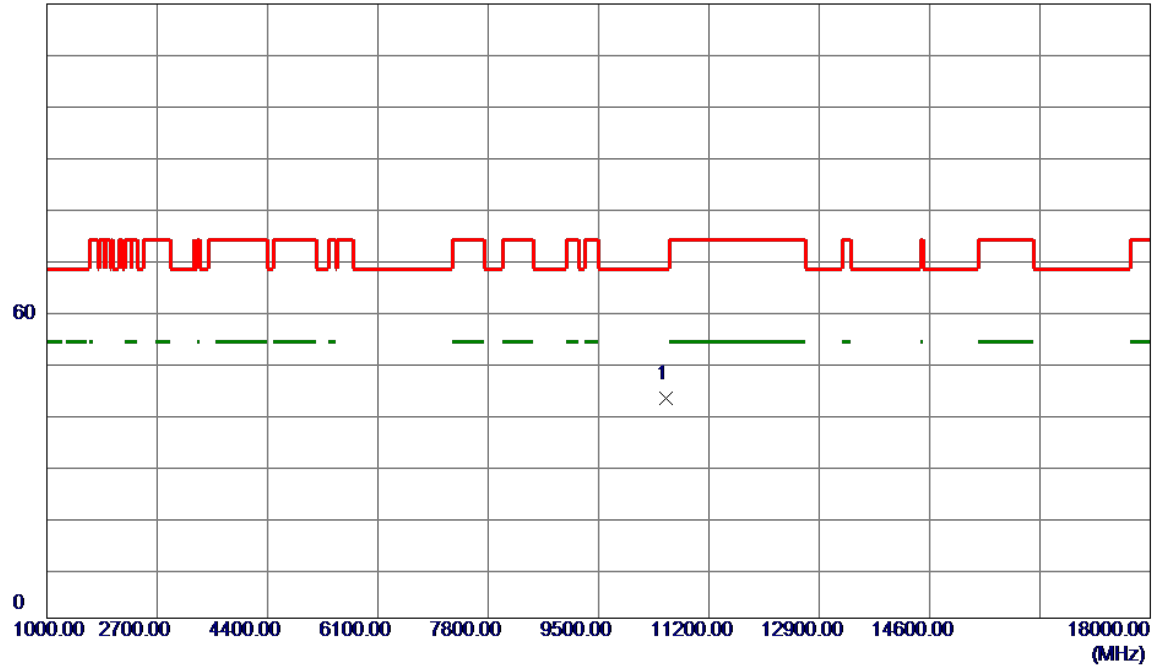


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10540.0000	43.35	-0.30	43.05	68.20	-25.15	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5270MHz	Polarization	Horizontal

120 dBuV/m

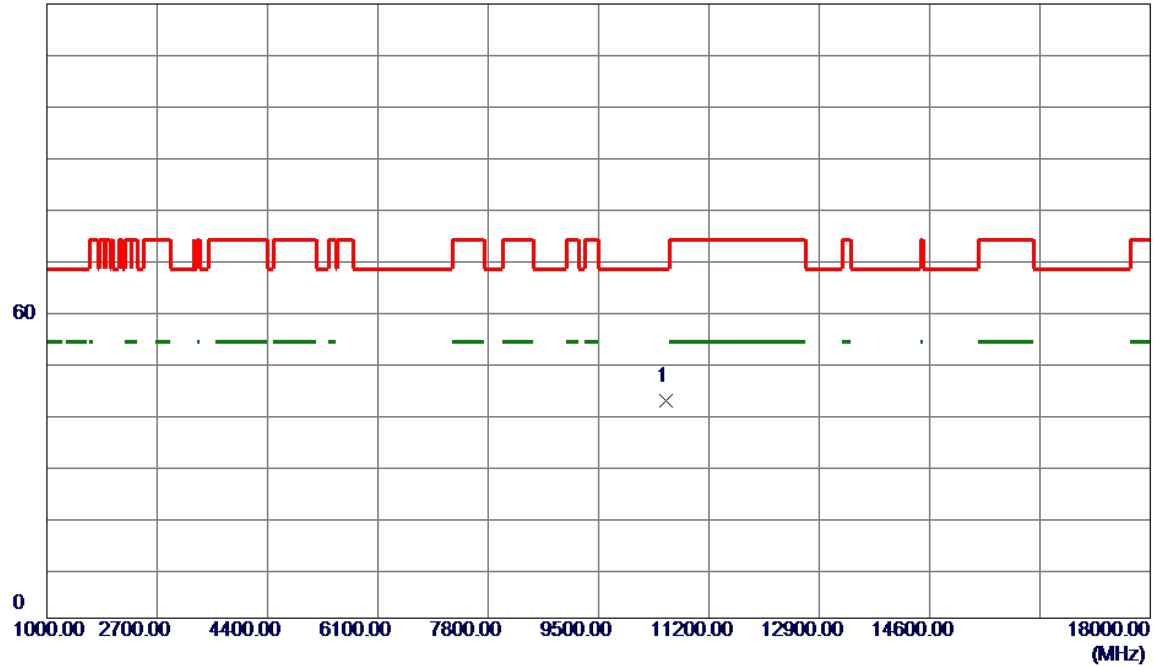


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10540.0000	42.79	-0.30	42.49	68.20	-25.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5310MHz	Polarization	Vertical

120 dBuV/m

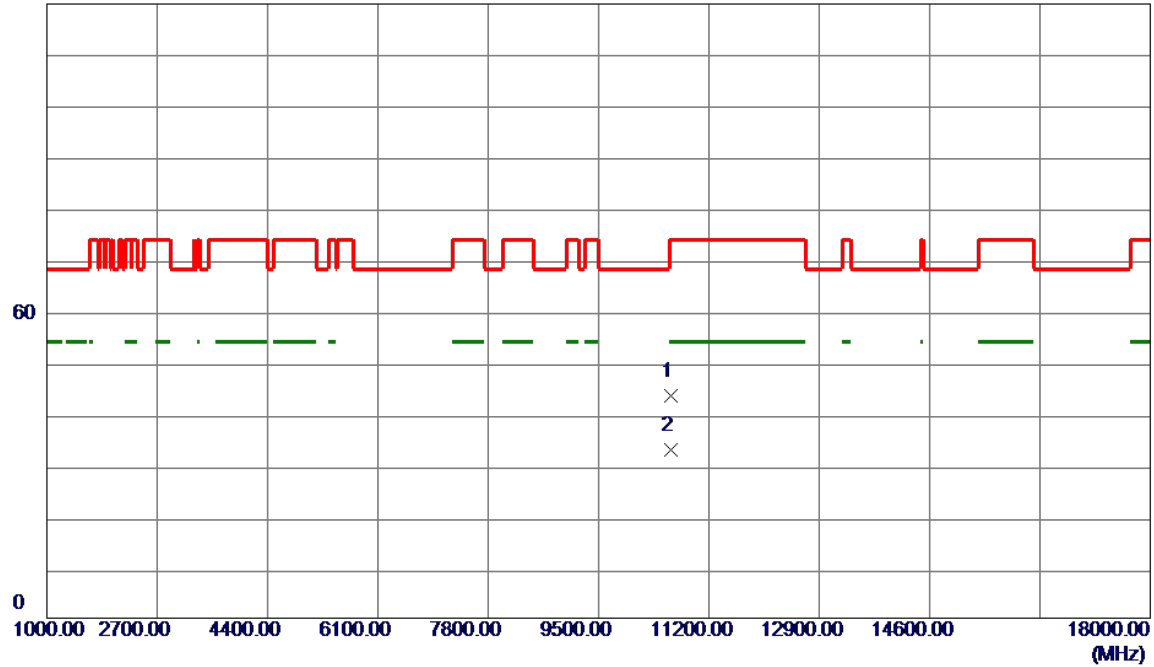


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	43.71	-0.27	43.44	74.00	-30.56	Peak	
2 *	10620.0000	33.17	-0.27	32.90	54.00	-21.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5310MHz	Polarization	Horizontal

120 dBuV/m

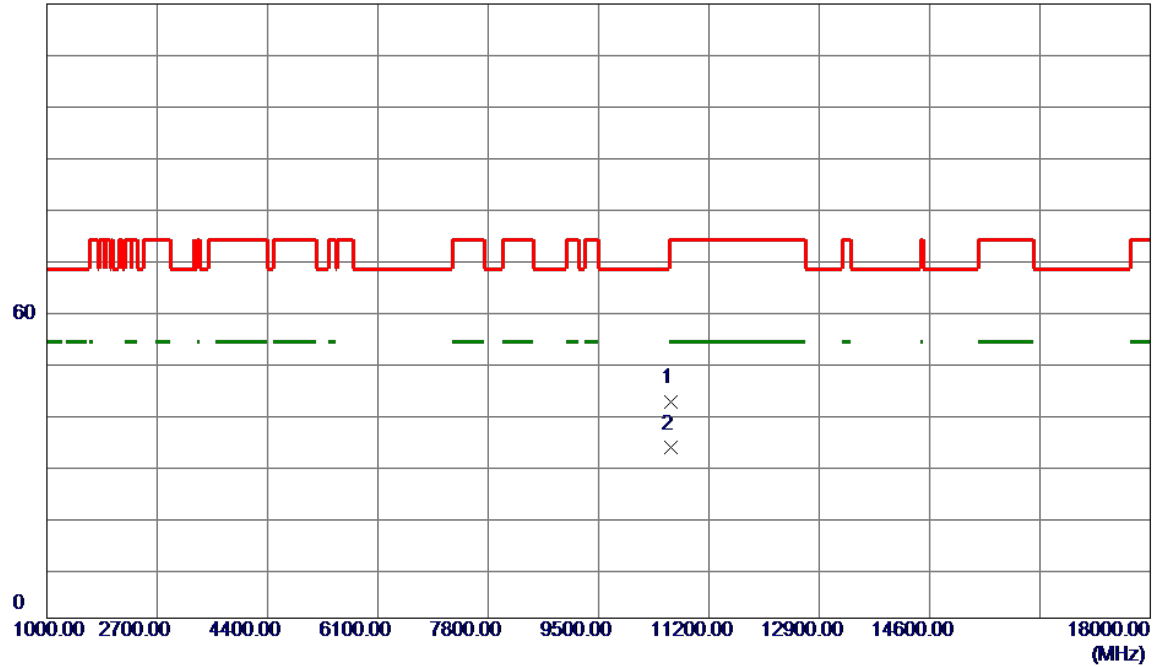

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.0000	42.59	-0.27	42.32	74.00	-31.68	Peak	
2 *	10620.0000	33.51	-0.27	33.24	54.00	-20.76	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5510MHz	Polarization	Vertical

120 dBuV/m

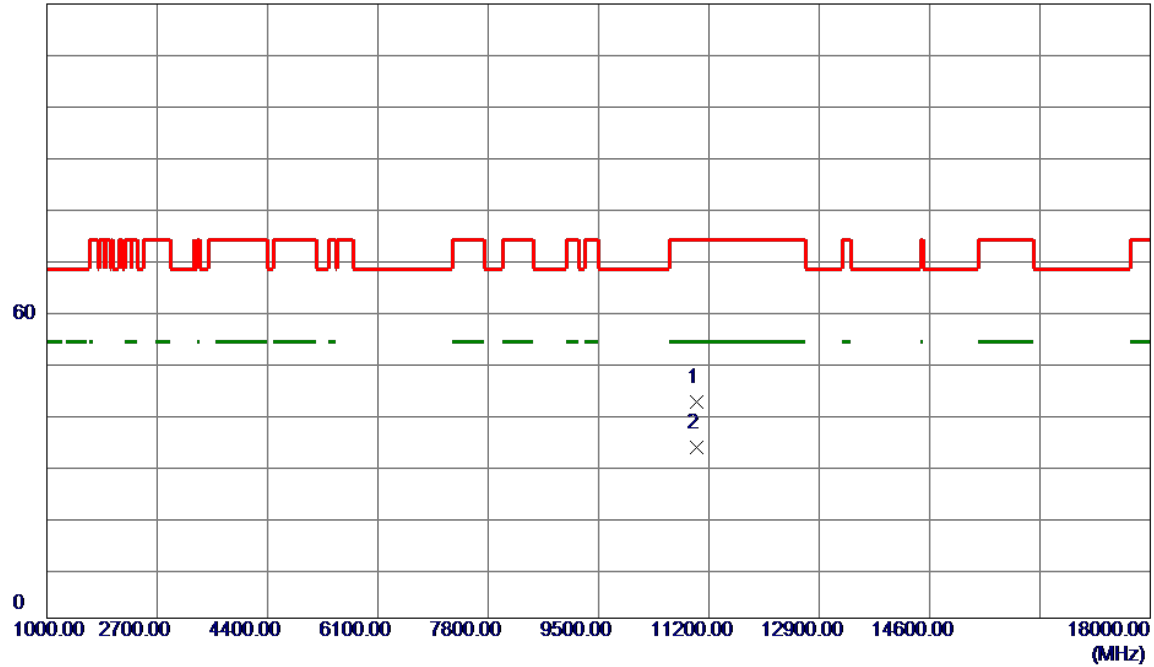


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	42.43	-0.10	42.33	74.00	-31.67	Peak	
2 *	11020.0000	33.55	-0.10	33.45	54.00	-20.55	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5510MHz	Polarization	Horizontal

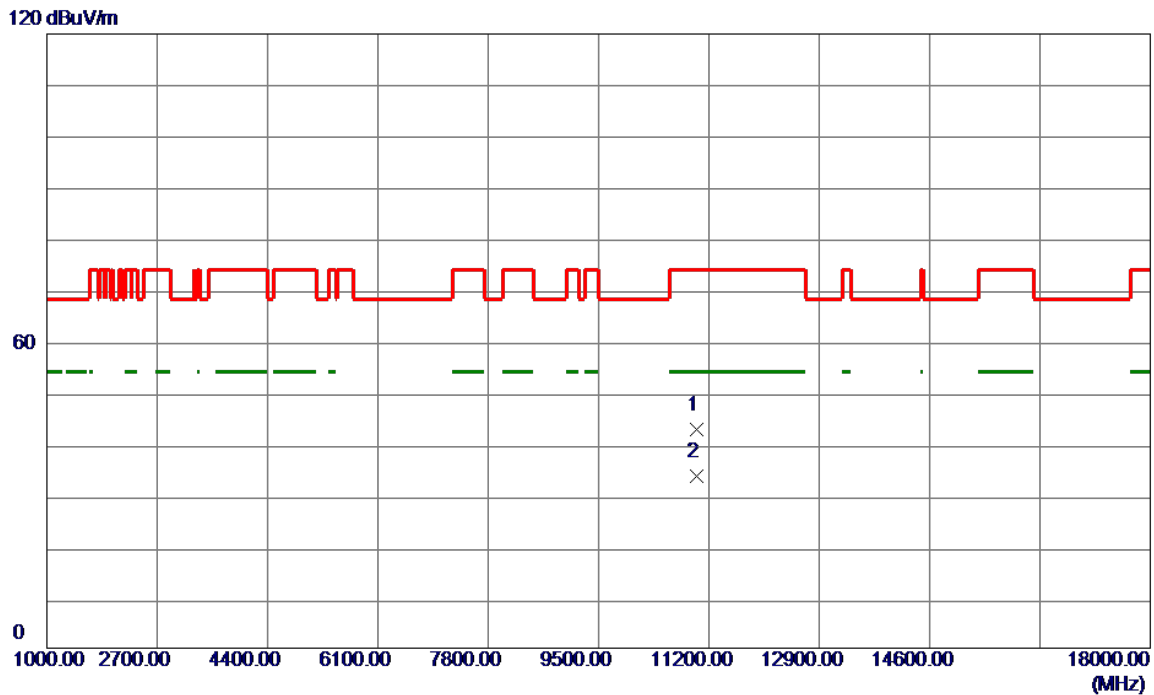


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.0000	42.78	-0.10	42.68	74.00	-31.32	Peak	
2 *	11020.0000	33.65	-0.10	33.55	54.00	-20.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5550MHz	Polarization	Vertical

120 dBuV/m

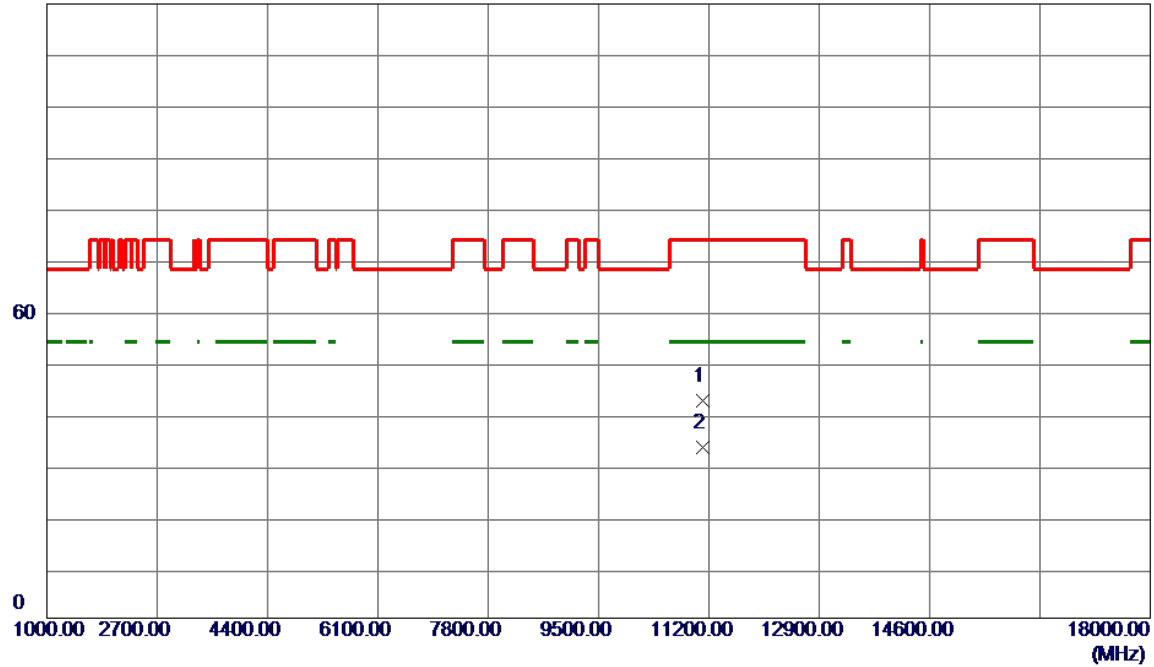


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.0000	42.51	0.05	42.56	74.00	-31.44	Peak	
2 *	11100.0000	33.21	0.05	33.26	54.00	-20.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5550MHz	Polarization	Horizontal

120 dBuV/m

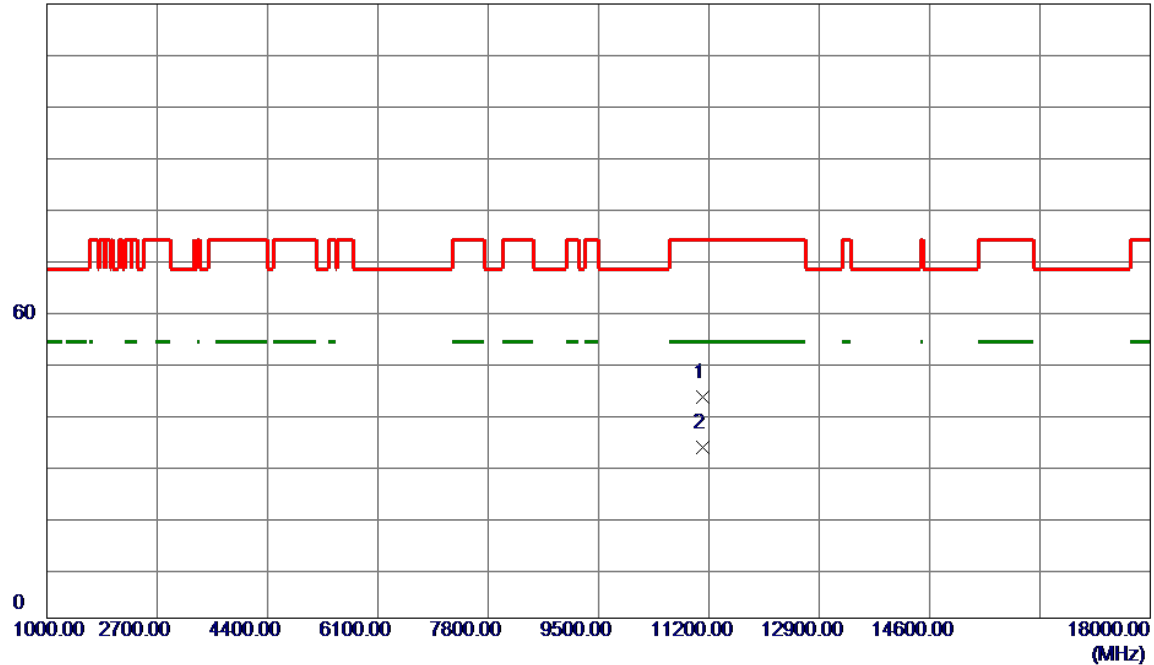


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.0000	43.04	0.05	43.09	74.00	-30.91	Peak	
2 *	11100.0000	33.20	0.05	33.25	54.00	-20.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5670MHz	Polarization	Vertical

120 dBuV/m

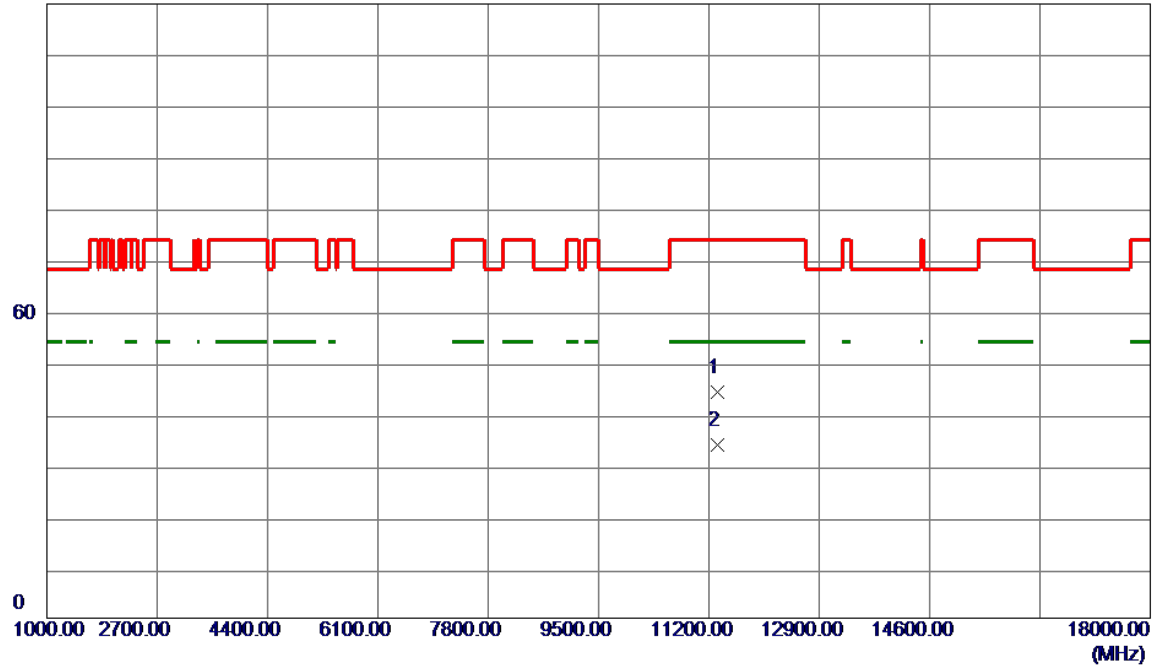

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	43.57	0.52	44.09	74.00	-29.91	Peak	
2 *	11340.0000	33.38	0.52	33.90	54.00	-20.10	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5670MHz	Polarization	Horizontal

120 dBuV/m

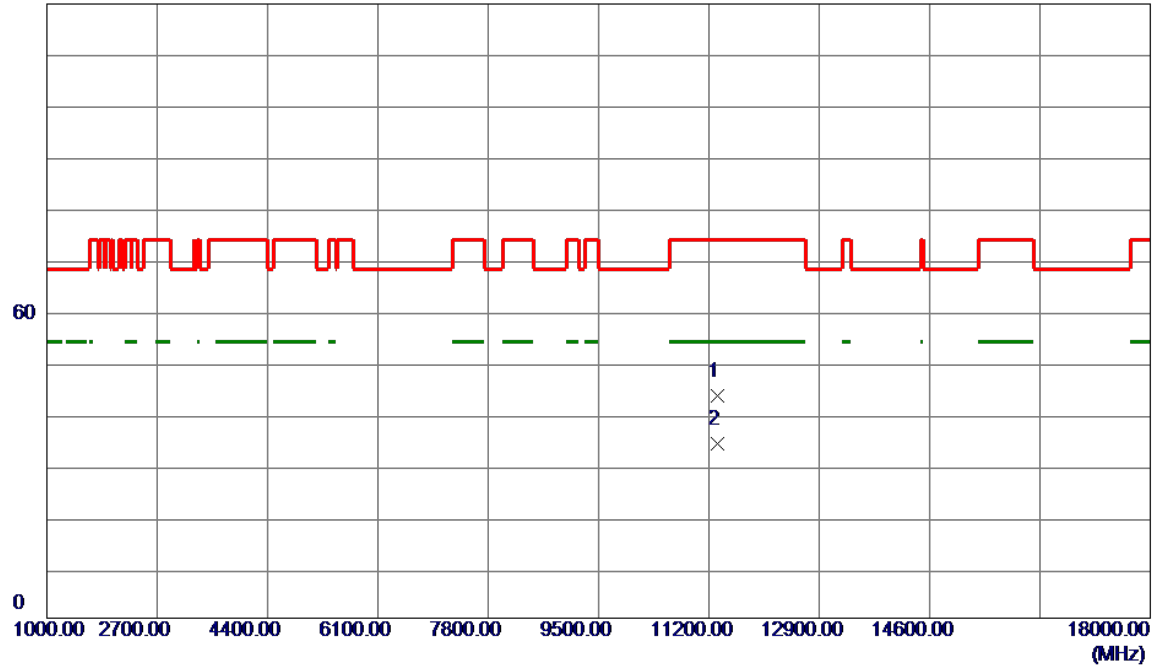


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	42.84	0.52	43.36	74.00	-30.64	Peak	
2 *	11340.0000	33.58	0.52	34.10	54.00	-19.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2024/12/26
Test Frequency	5755MHz	Polarization	Vertical

120 dBuV/m

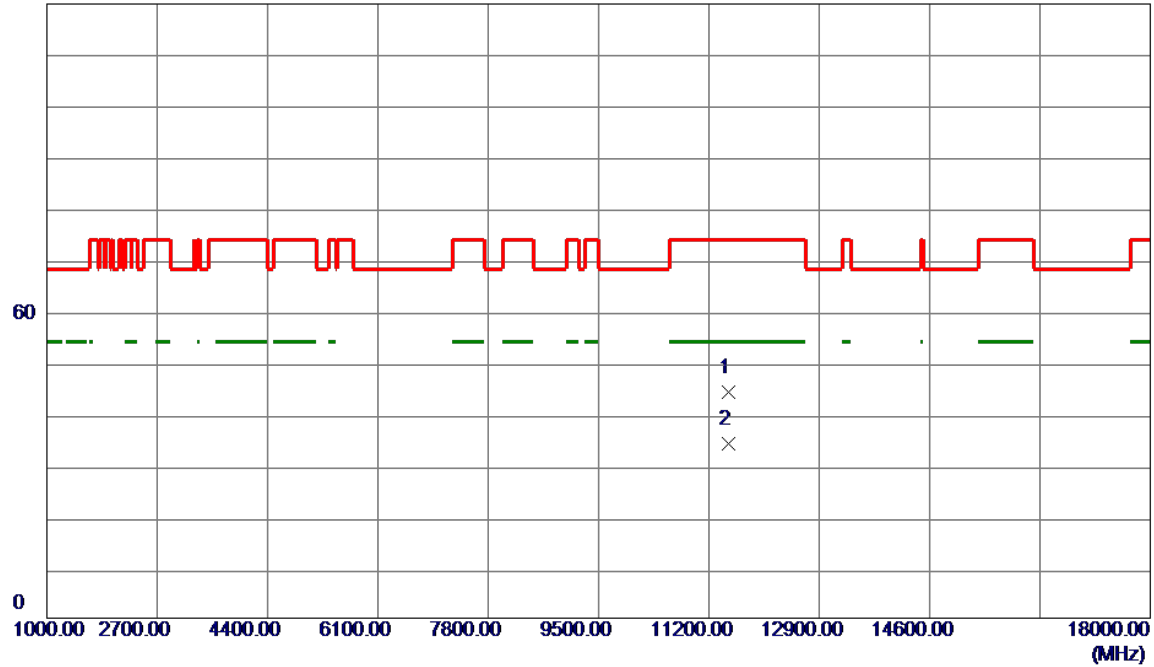

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11510.0000	43.37	0.83	44.20	74.00	-29.80	Peak	
2 *	11510.0000	33.25	0.83	34.08	54.00	-19.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.