






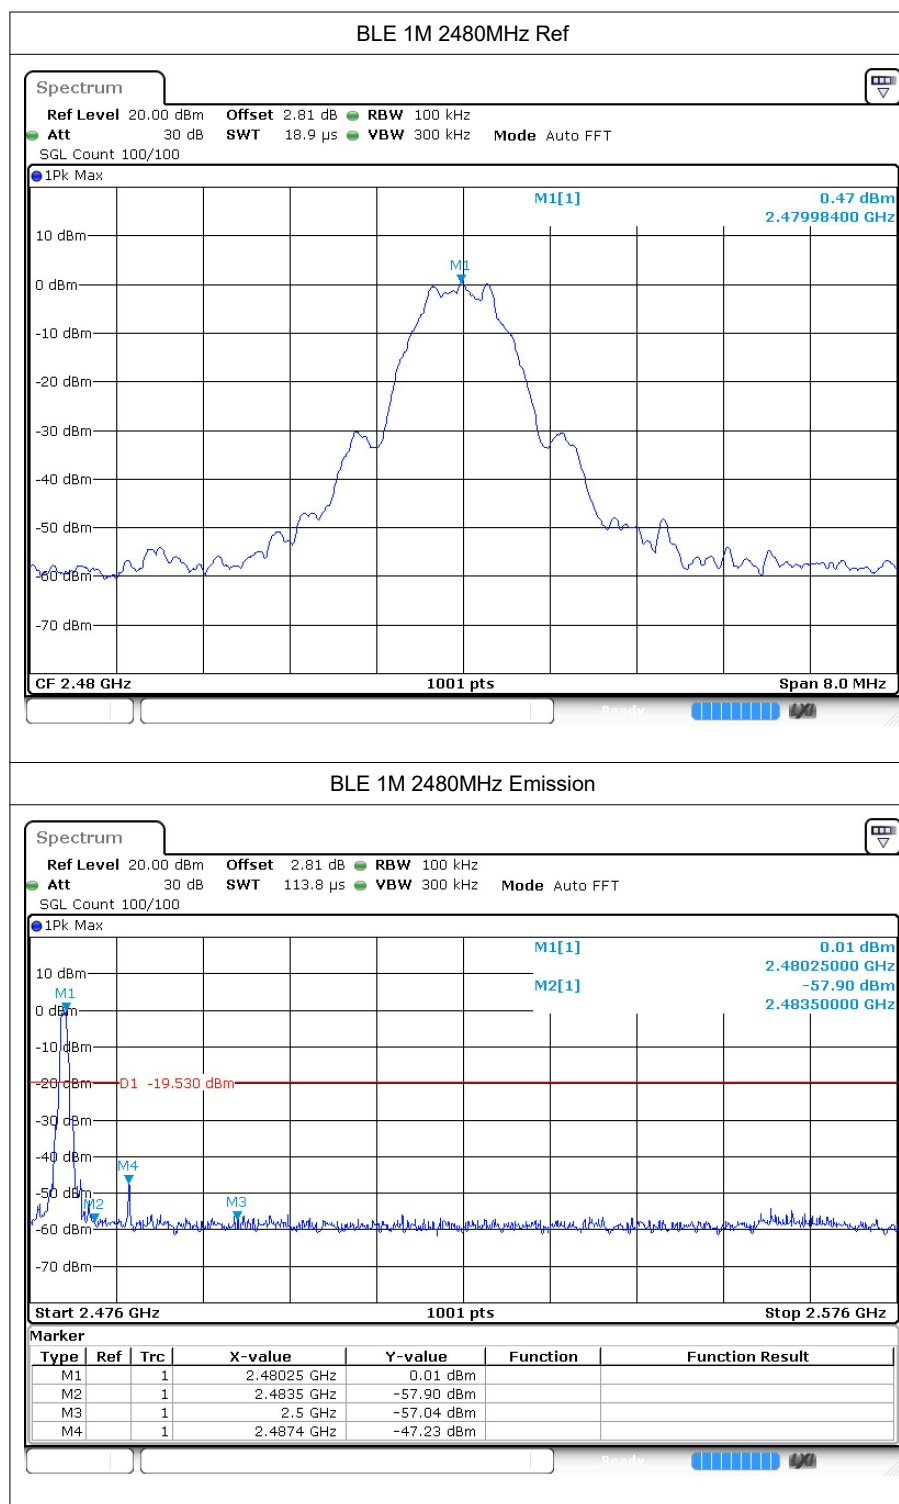

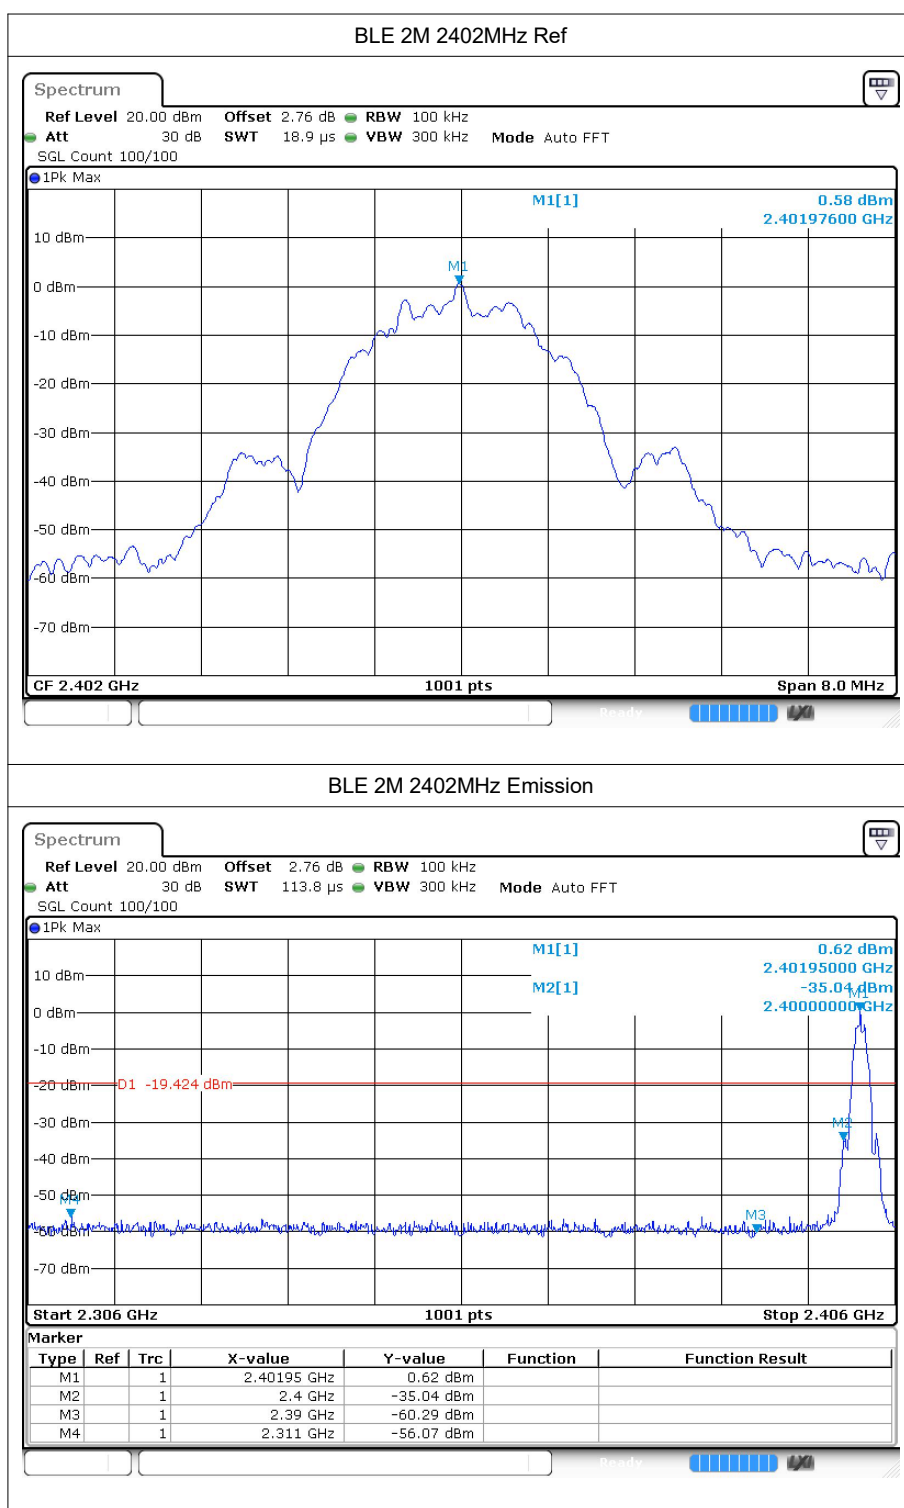

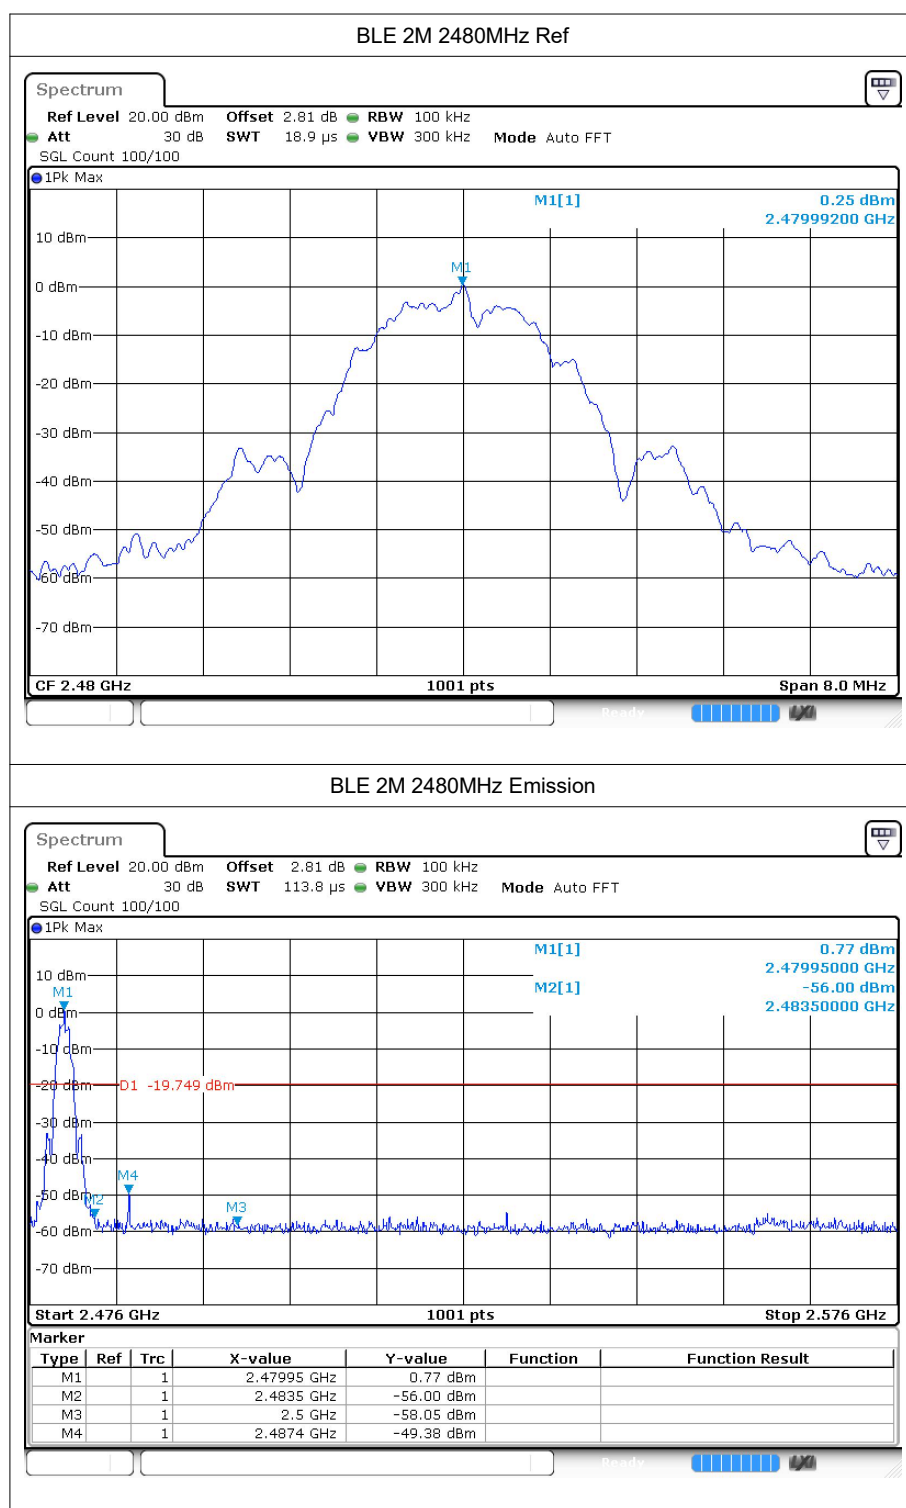



6 Conducted RF Spurious Emission


6.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-44.42	-20	Pass
BLE 1M	2440	-43.9	-20	Pass
BLE 1M	2480	-43.64	-20	Pass
BLE 2M	2402	-42.64	-20	Pass
BLE 2M	2440	-44.15	-20	Pass
BLE 2M	2480	-43.97	-20	Pass


6.2 Test Graphs

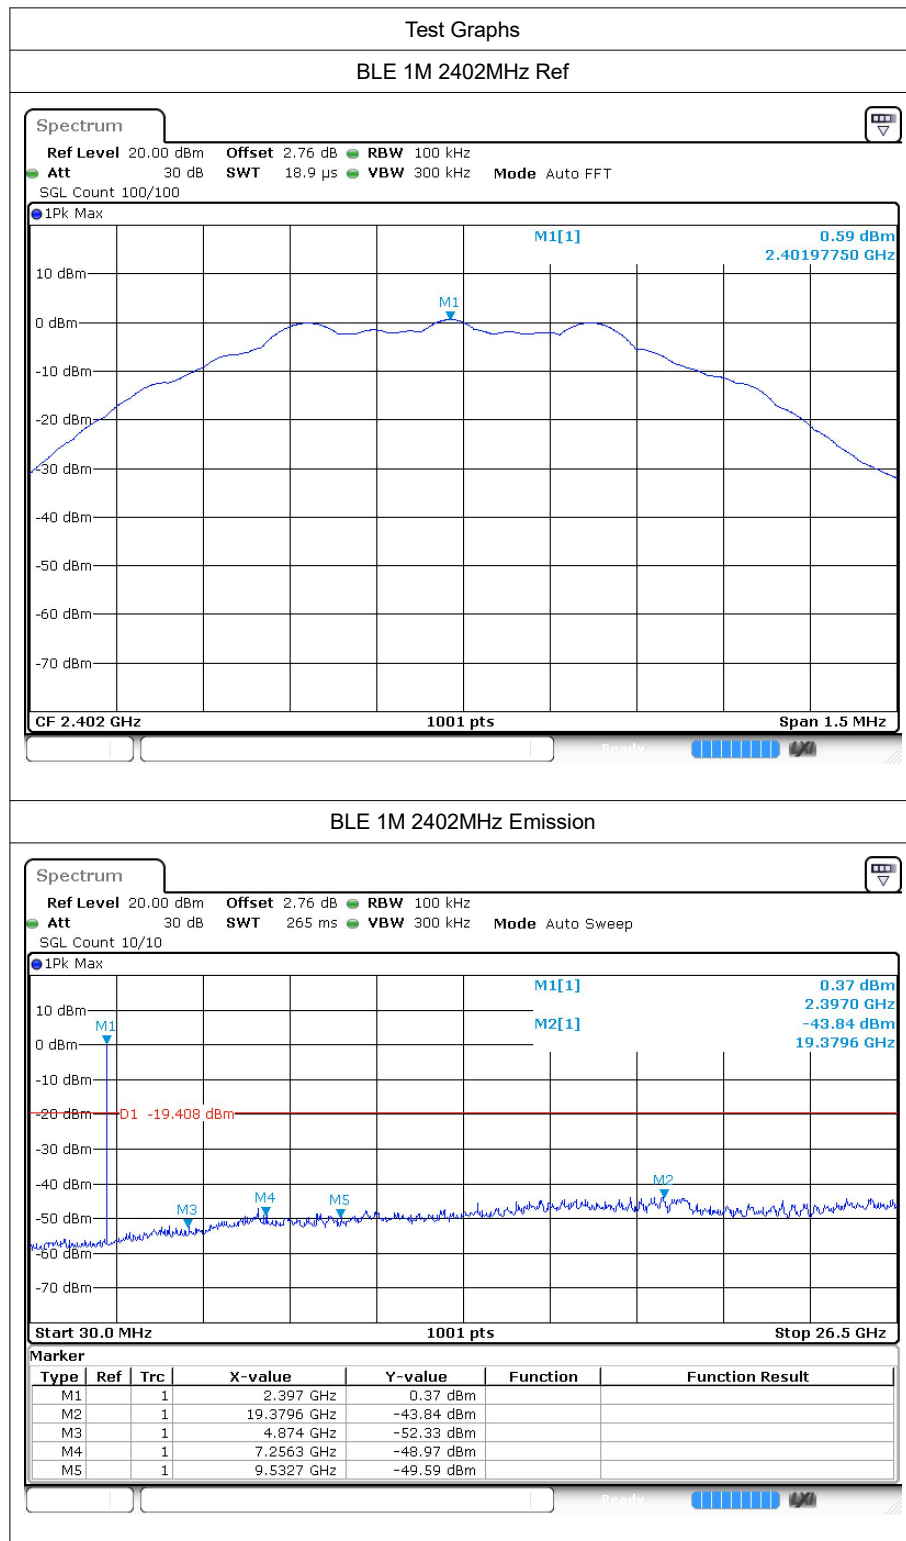


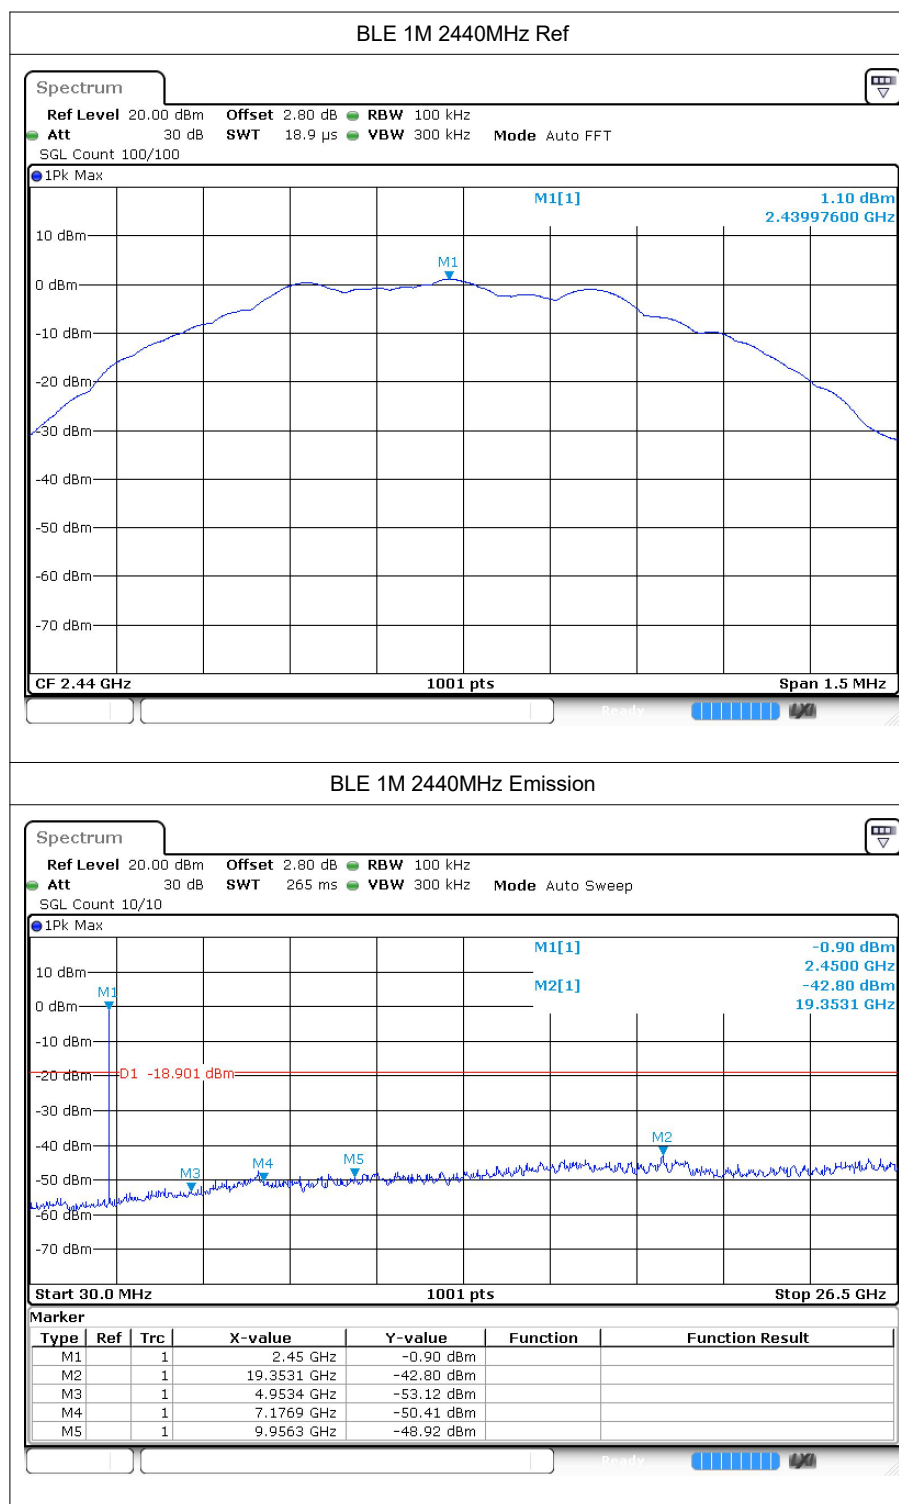

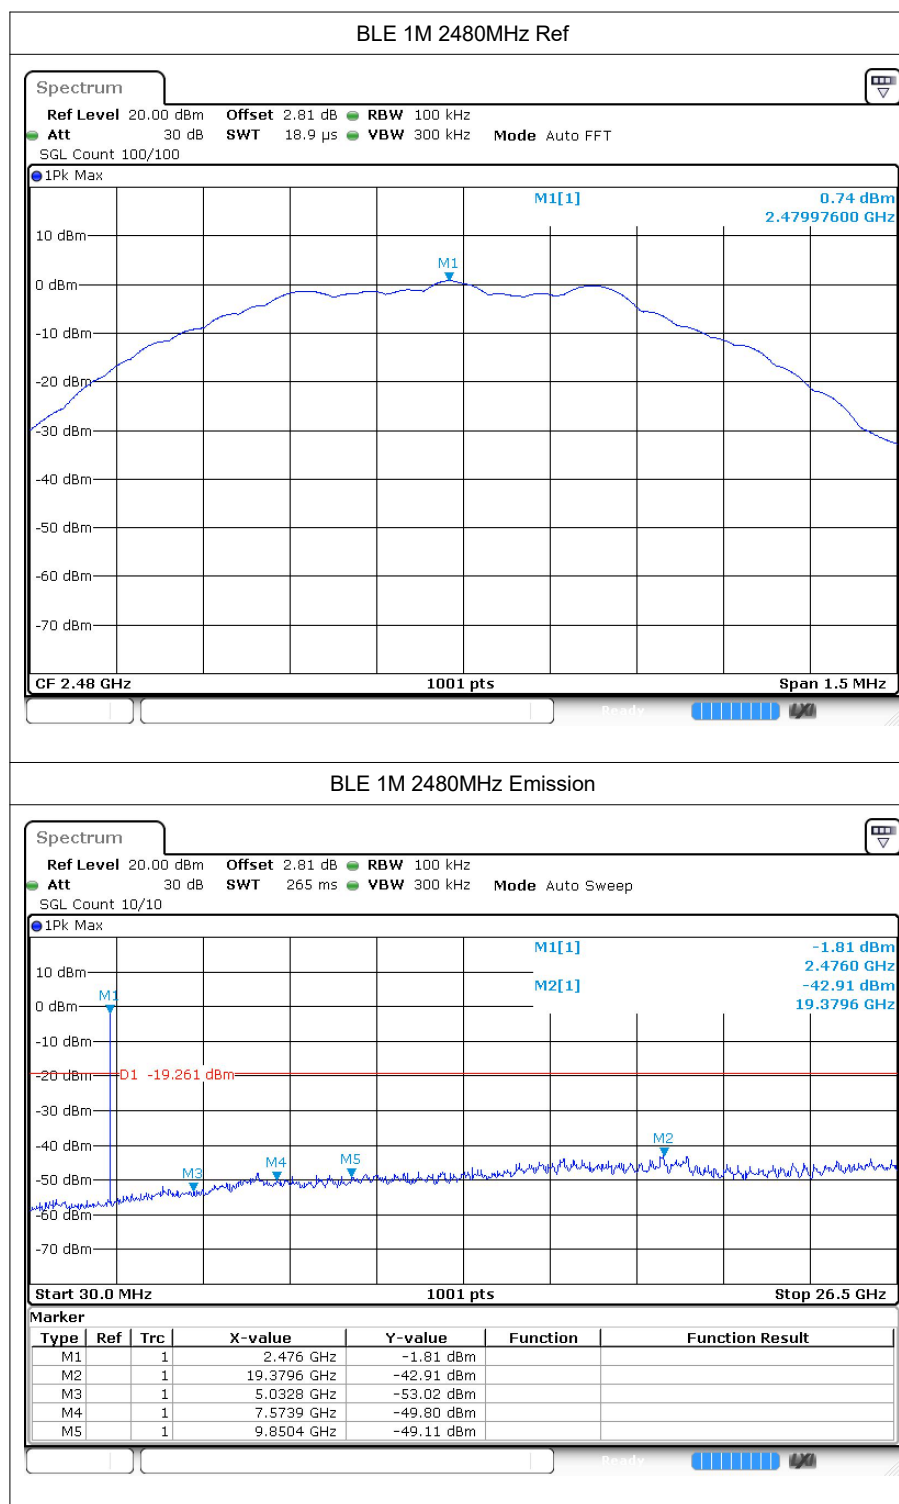

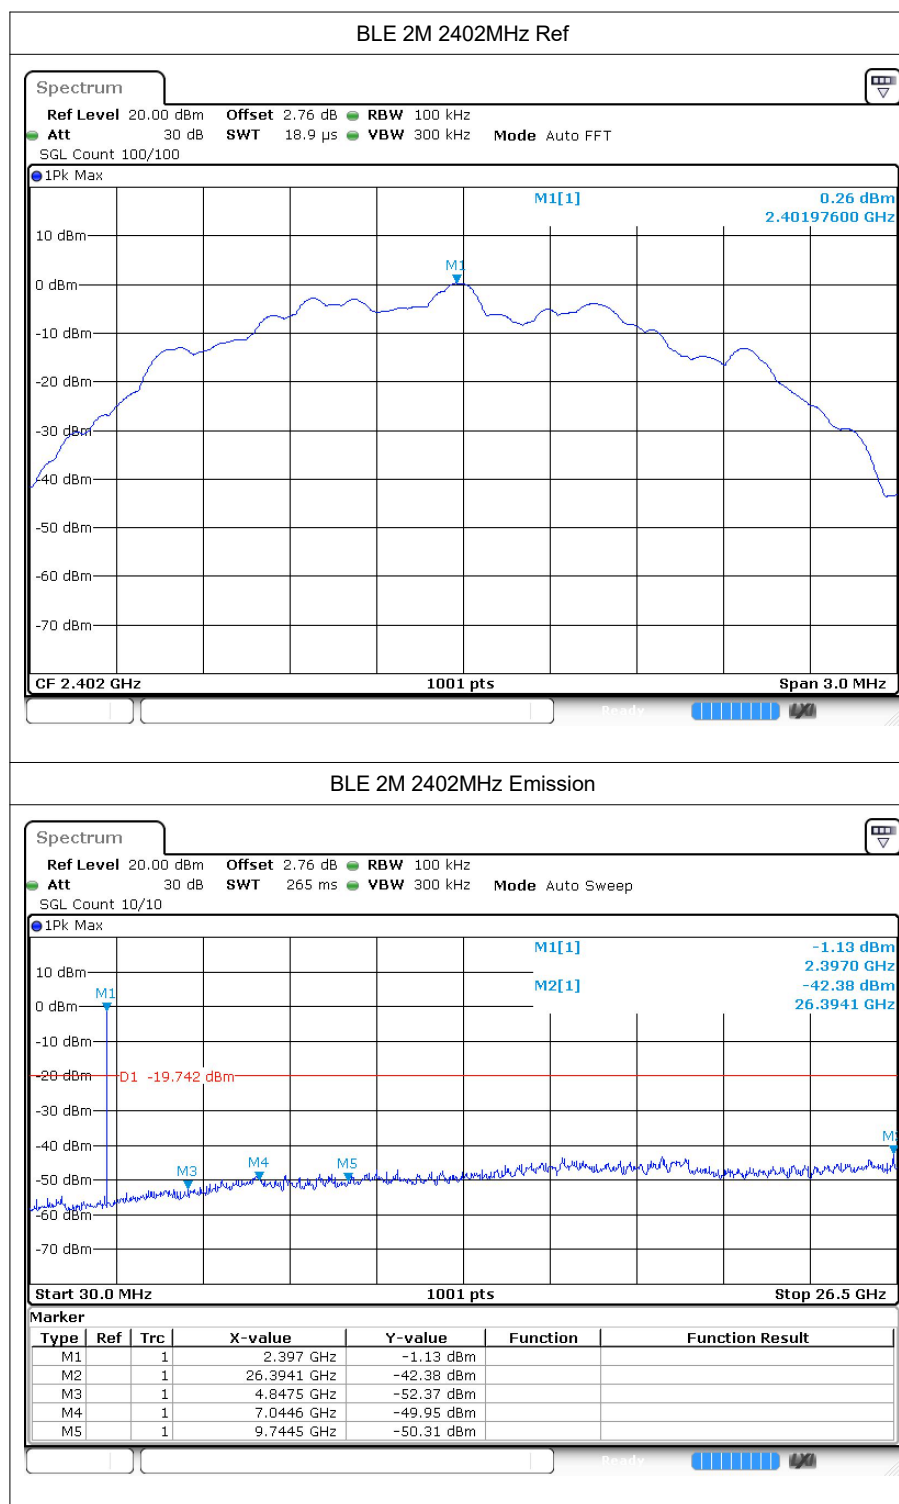

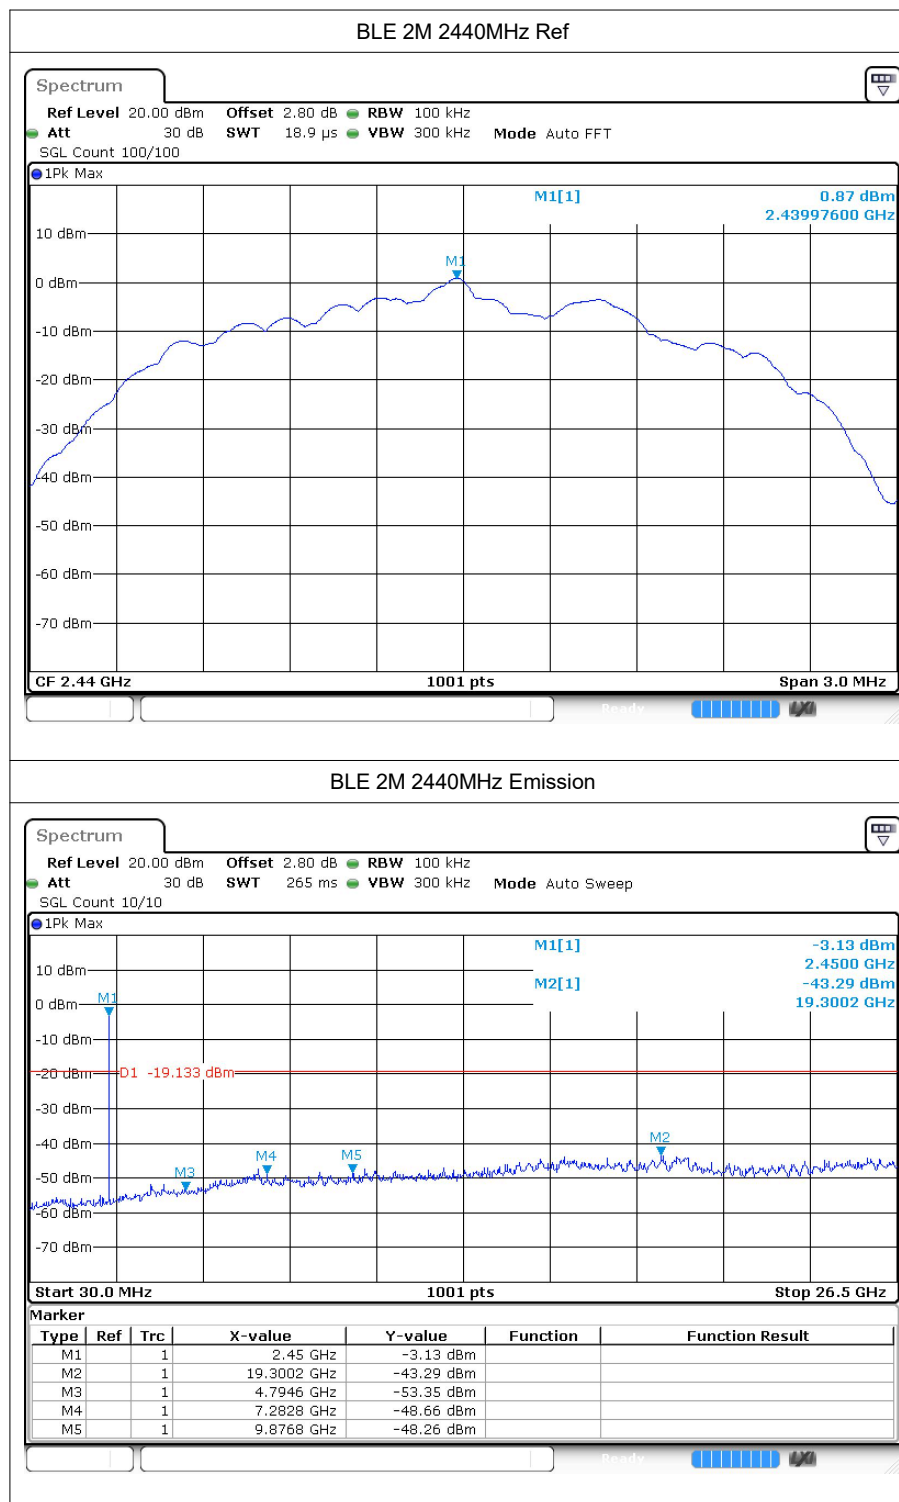

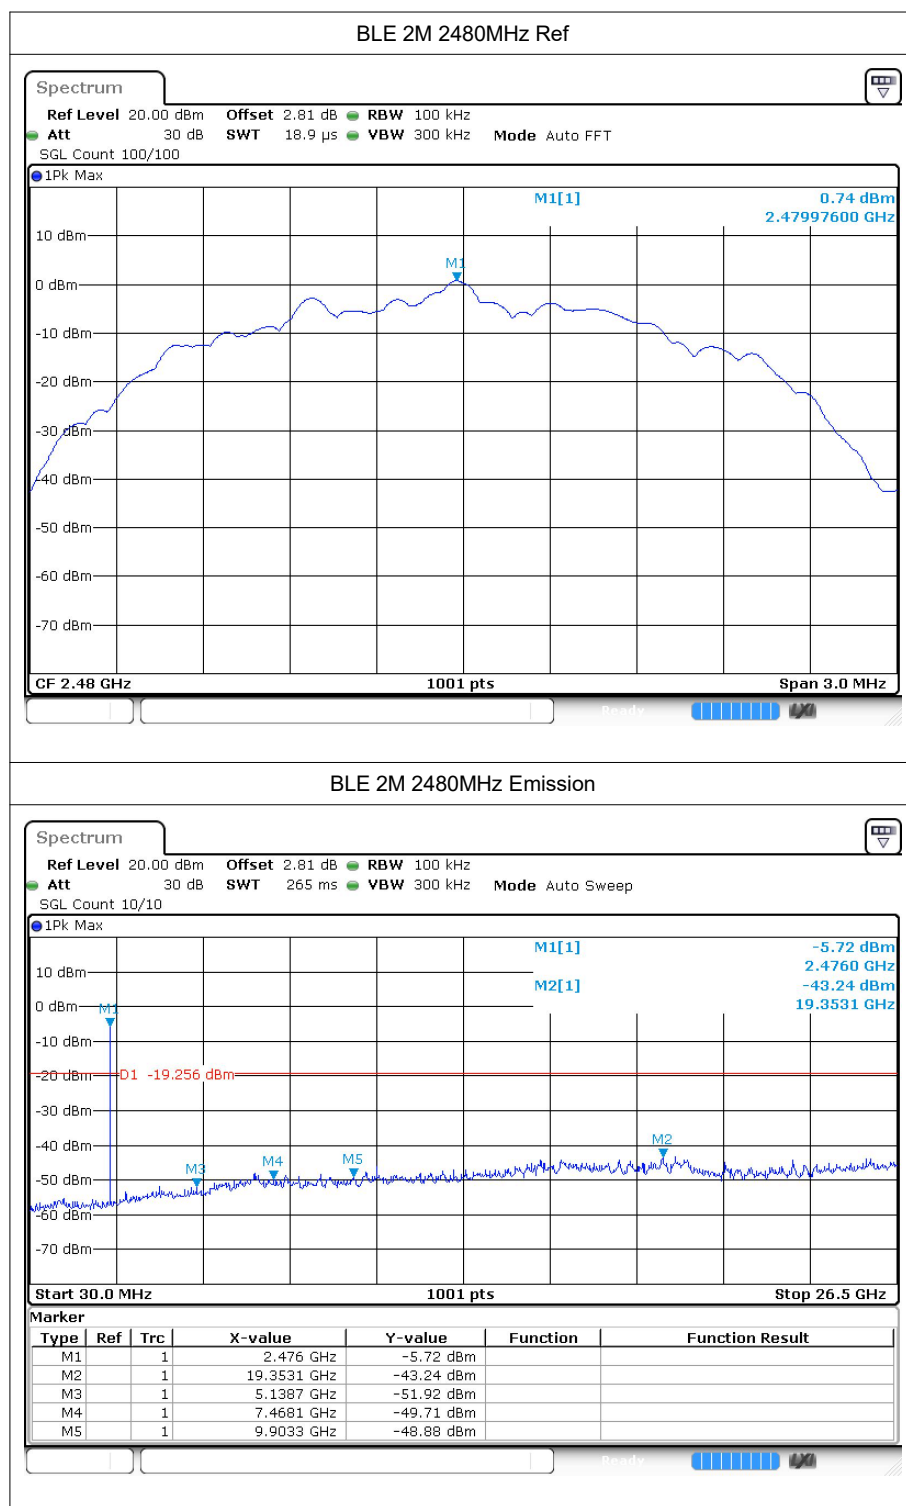





7 Restrict Band


7.1 Test Result


Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-48.62	2	-	48.64	Peak	74	Pass
BLE 1M	2402	2310	-56.31	2	1.88	42.83	Average	54	Pass
BLE 1M	2402	2340.24	-46.14	2	-	51.12	Peak	74	Pass
BLE 1M	2402	2342.064	-54.54	2	1.88	44.6	Average	54	Pass
BLE 1M	2402	2390	-50.94	2	-	46.32	Peak	74	Pass
BLE 1M	2402	2390	-56.49	2	1.88	42.65	Average	54	Pass
BLE 1M	2480	2483.5	-49.34	2	-	47.92	Peak	74	Pass
BLE 1M	2480	2483.5	-55.26	2	1.93	43.93	Average	54	Pass
BLE 1M	2480	2499.664	-46.87	2	-	50.39	Peak	74	Pass
BLE 1M	2480	2487.376	-54.44	2	1.93	44.75	Average	54	Pass
BLE 1M	2480	2500	-47.09	2	-	50.17	Peak	74	Pass
BLE 1M	2480	2500	-56.21	2	1.93	42.98	Average	54	Pass
BLE 2M	2402	2310	-48.52	2	-	48.74	Peak	74	Pass
BLE 2M	2402	2310	-57.01	2	4.55	44.8	Average	54	Pass
BLE 2M	2402	2343.696	-45.25	2	-	52.01	Peak	74	Pass
BLE 2M	2402	2340.144	-54.4	2	4.55	47.41	Average	54	Pass
BLE 2M	2402	2390	-49.58	2	-	47.68	Peak	74	Pass
BLE 2M	2402	2390	-56.98	2	4.55	44.83	Average	54	Pass
BLE 2M	2480	2483.5	-46.44	2	-	50.82	Peak	74	Pass
BLE 2M	2480	2483.5	-55.17	2	4.6	46.69	Average	54	Pass
BLE 2M	2480	2483.512	-46.54	2	-	50.72	Peak	74	Pass
BLE 2M	2480	2483.512	-55.26	2	4.6	46.6	Average	54	Pass
BLE 2M	2480	2500	-47.94	2	-	49.32	Peak	74	Pass
BLE 2M	2480	2500	-56.1	2	4.6	45.76	Average	54	Pass

7.2 Test Graphs

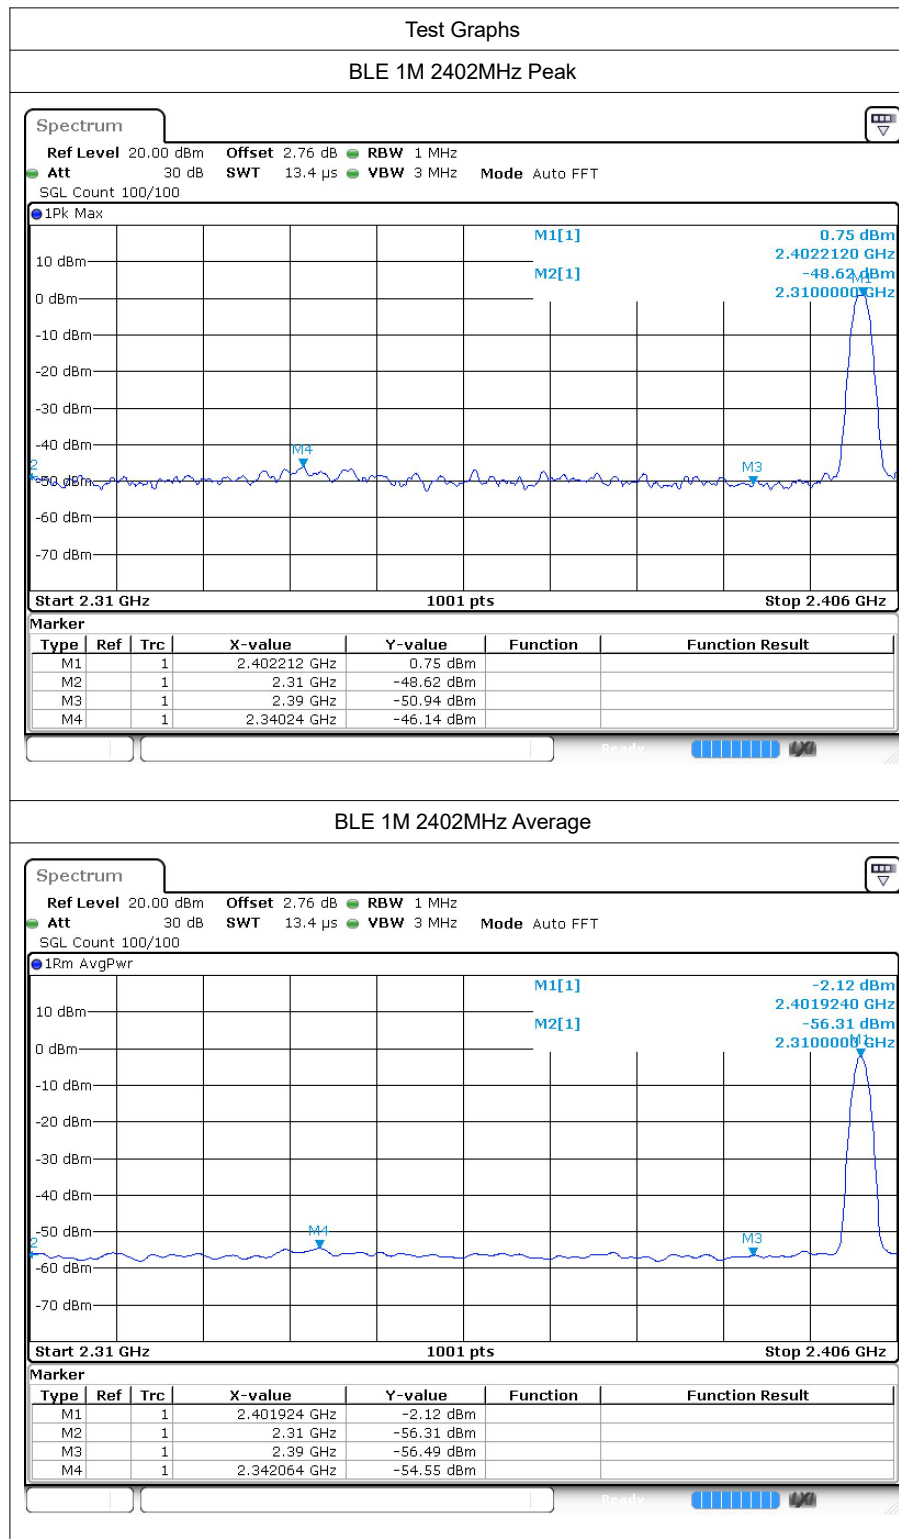

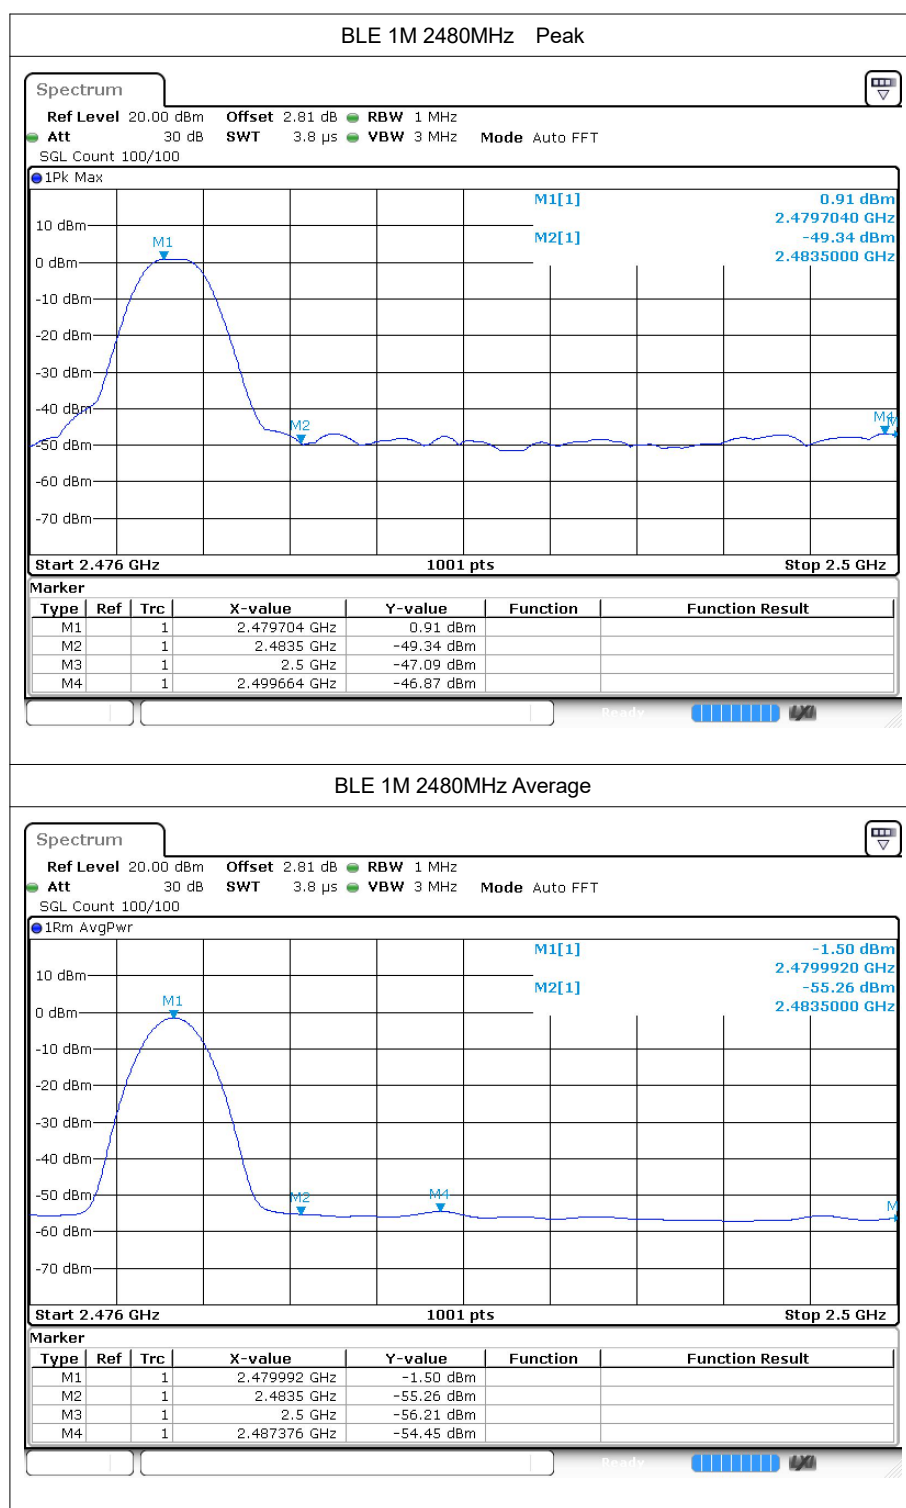

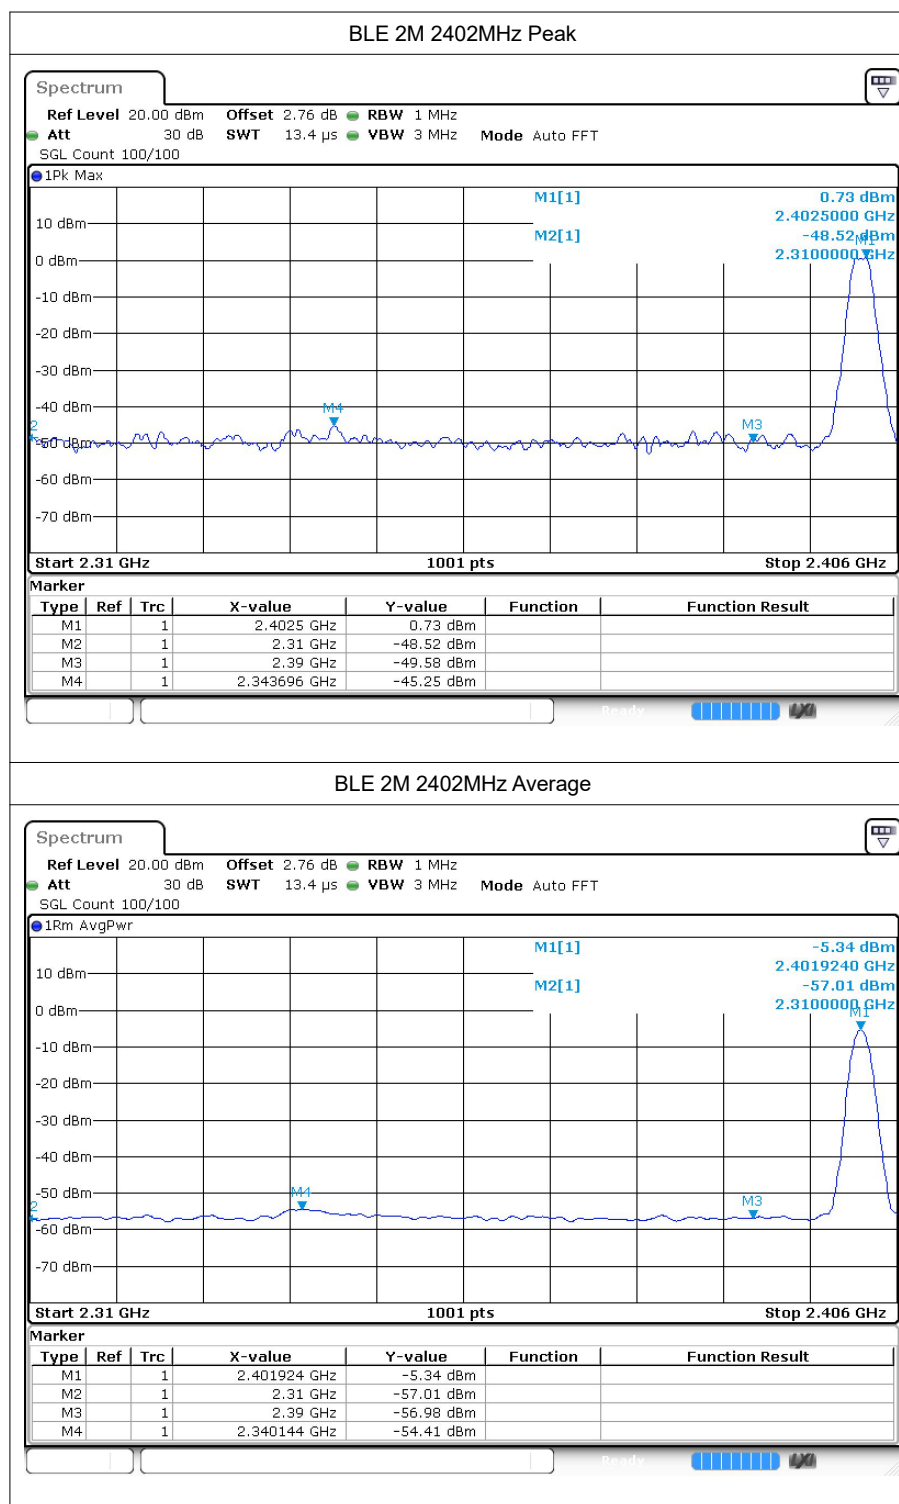

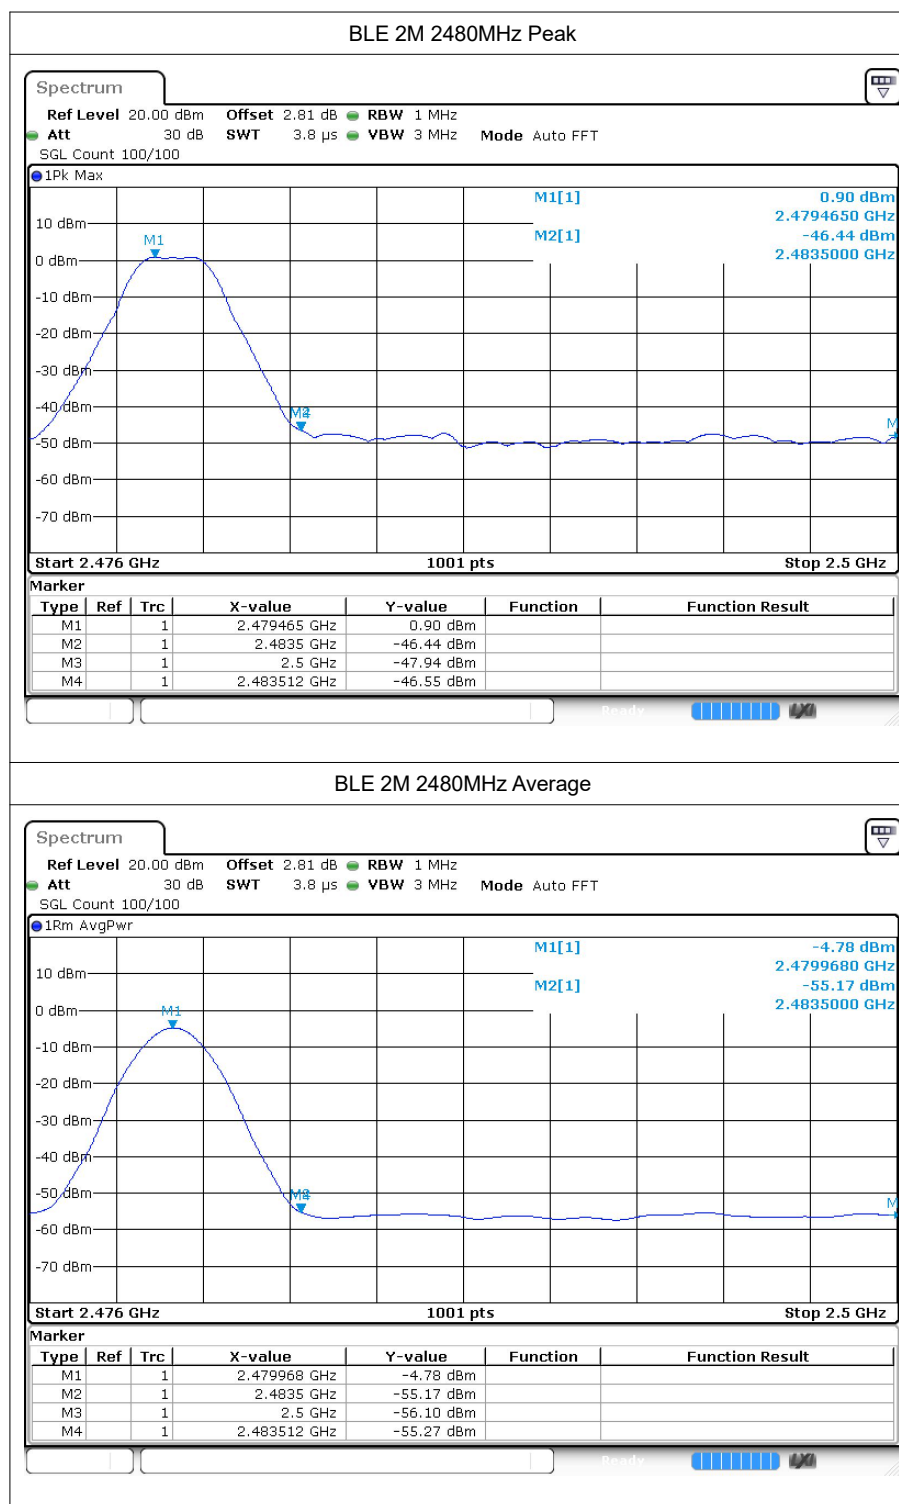

---The End---