

3	Model 795 Digital Staff Workstation	Report: F0700001	3
EMC Laboratory	Product Safety	12 September, 2000	Page 16 of 38

### 5.2.3 Test Results


The EUT met the FCC Part 15, Subpart C Emission Bandwidth requirements. The intentional radiator frequency was within the allowed band and all maximized quasi-peak measurements for the EUT were below the quasi-peak limits. The test scan is shown in Appendix B.

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Passing Margin (dB)	Turntable (degrees)	Antenna Orientation/Angle (Polarity/degrees)
13.561 <sup>1</sup>	61.6	99.08	37.48	90	V / Y - 5
13.553 <sup>2</sup>	35.2	48.62	13.42	90	V / Y - 5
13.567 <sup>2</sup>	39.4	48.62	9.22	90	V / Y - 5

1 - Intentional Radiator Frequency

2 - Band edges measured with a receiver bandwidth setting of 1 KHz. Per ANSI C63.4 Paragraph 13.1.7.

[dB $\mu$ V/m]

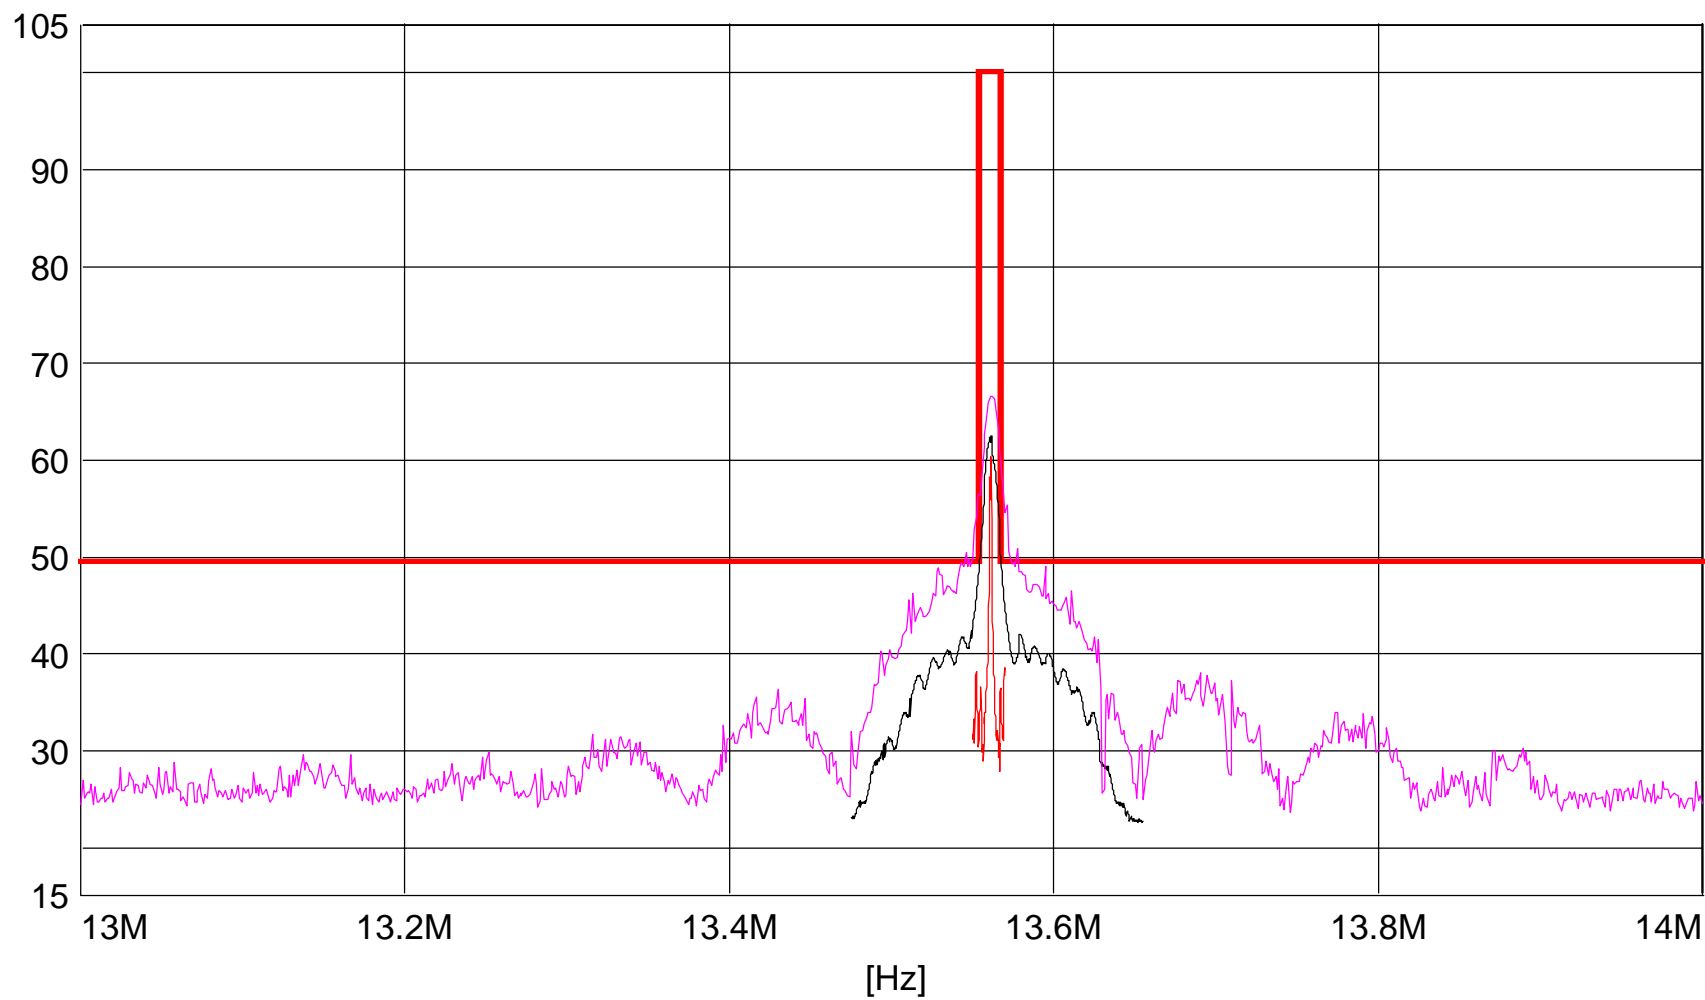

MES	795 9/1 sc2 y	Bandwidth Sweep - Hold MaxPeak
MES	795 9/1 sc3 y 9 KHz	Bandwidth Scan - Q-P 9 KHZ RBW
MES	795 9/1 sc4 y 1 KHz	Bandwidth Scan - Q-P 1 KHz RBW
LIM	FCC 12.5-30 MHz	

3  
EMC Lab

DESCRIPTION	Digital Staff Workstation
-------------	---------------------------

[illegible]


Test Engineer:\_\_\_\_\_

Date: \_\_\_\_\_

Reviewed by:\_\_\_\_\_

Date: \_\_\_\_\_

Level [dBμV/m]

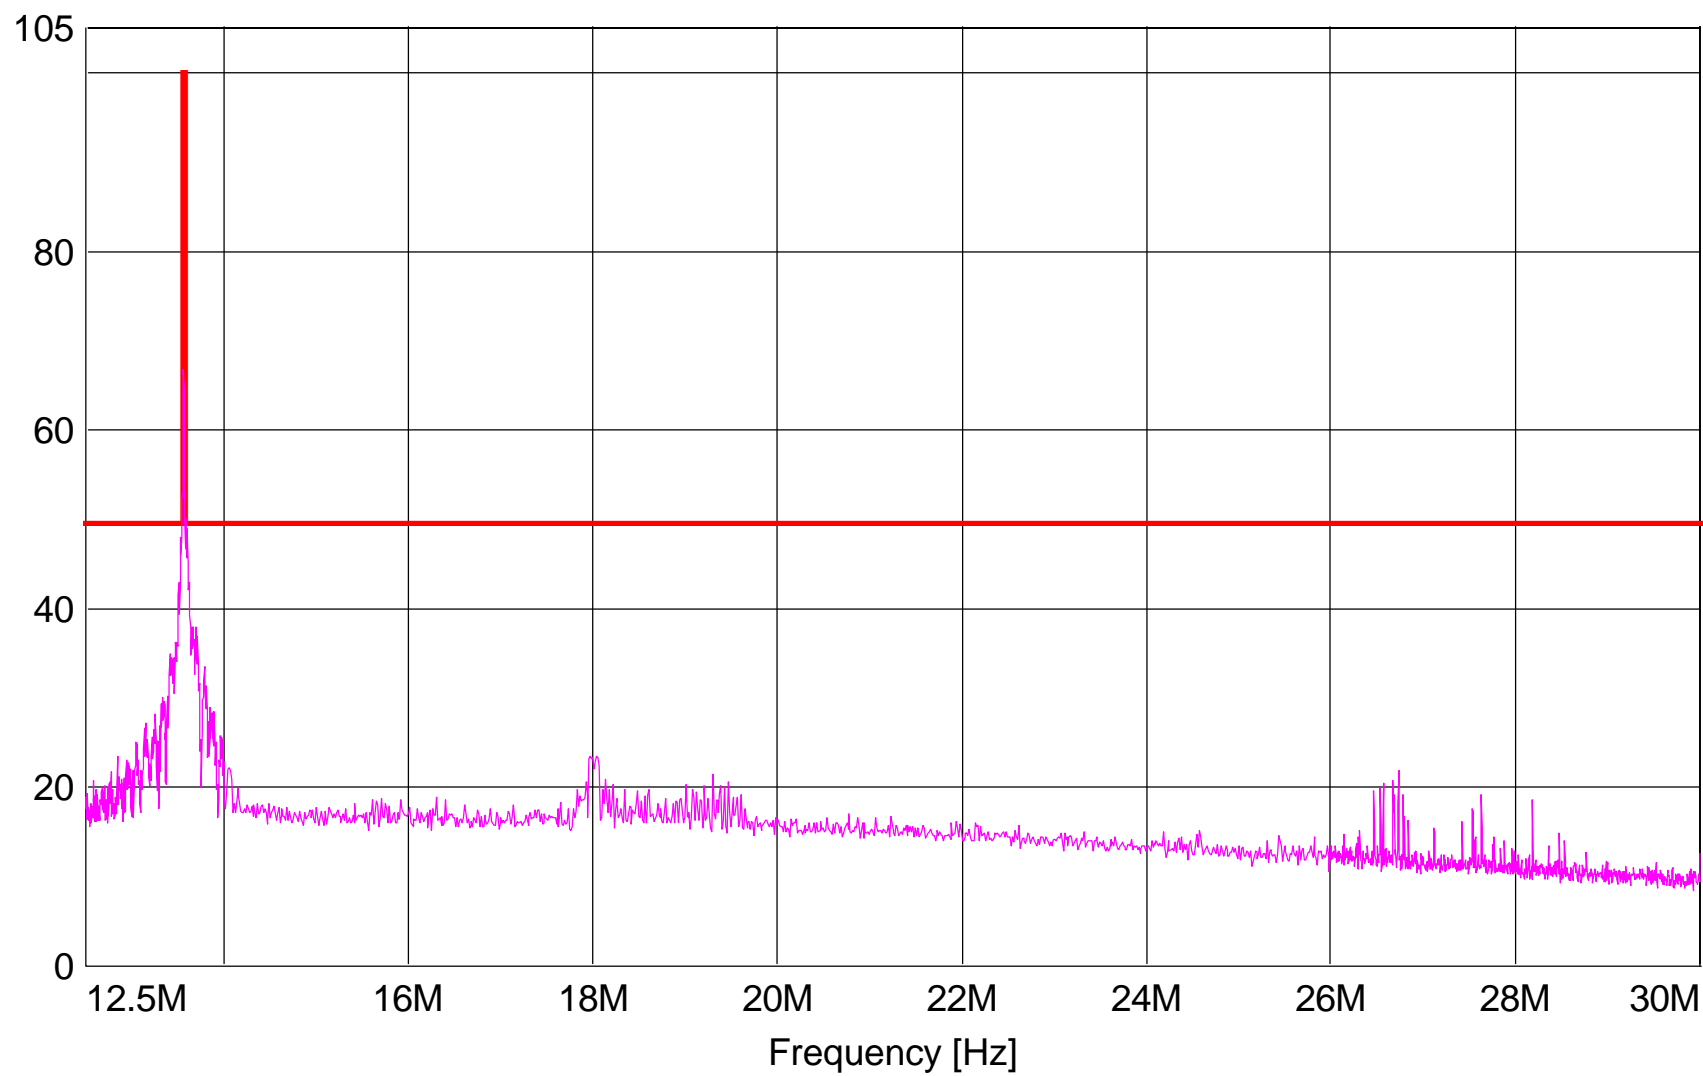

MES 795 9/5 scl y      Spur. Emissions - Hold MaxPeak  
LIM FCC 12.5-30 MHz