



Zacta

# TEST REPORT

Report number : JPD-TR-17130-0

Issue date : June 5, 2017

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

## FCC Part15 Subpart C

The test results are traceable to the international or national standards.

|                            |                       |
|----------------------------|-----------------------|
| Applicant                  | : KYOCERA Corporation |
| Equipment under test (EUT) | : Mobile Phone        |
| Model number               | : EA34                |
| FCC ID                     | : JOYEA34             |

Date of test : April 28, 2017  
May 15, 16, 18, 19, 30, 2017  
Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center  
5-4149-7, Hachimanpara, Yonezawa-shi,  
Yamagata, 992-1128 Japan  
Phone: +81-238-28-2881 Fax: +81-238-28-2888  
Test results : Complied

The results in this report are applicable only to the equipment tested.  
This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.  
This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, ILAC-MRA, or any agency of the federal government.

Tested by : Tadahiro Seino  
Tadahiro Seino

Approved by : Hiroaki Suzuki  
Hiroaki Suzuki  
Lab Manager of RF Lab



## Table of contents

---

|                                                                | Page      |
|----------------------------------------------------------------|-----------|
| <b>1. Summary of Test .....</b>                                | <b>4</b>  |
| 1.1 Purpose of test .....                                      | 4         |
| 1.2 Standards .....                                            | 4         |
| 1.3 List of applied test to the EUT .....                      | 4         |
| 1.4 Modification to the EUT by laboratory .....                | 4         |
| <b>2. Equipment Under Test .....</b>                           | <b>5</b>  |
| 2.1 General Description of equipment .....                     | 5         |
| 2.2 EUT information .....                                      | 5         |
| 2.3 Variation of the family model(s) .....                     | 6         |
| 2.4 Operating channels and frequencies .....                   | 6         |
| 2.5 Operating mode .....                                       | 6         |
| 2.6 Operating flow .....                                       | 7         |
| <b>3. Configuration of equipment .....</b>                     | <b>8</b>  |
| 3.1 Equipment(s) used .....                                    | 8         |
| 3.2 Cable(s) used .....                                        | 8         |
| 3.3 System configuration .....                                 | 8         |
| <b>4. DTS Bandwidth / Occupied Bandwidth (99%) .....</b>       | <b>9</b>  |
| 4.1 Measurement procedure .....                                | 9         |
| 4.2 Limit .....                                                | 9         |
| 4.3 Measurement result .....                                   | 9         |
| 4.4 Trace data .....                                           | 10        |
| <b>5. Maximum Conducted Output Power .....</b>                 | <b>13</b> |
| 5.1 Measurement procedure .....                                | 13        |
| 5.2 Limit .....                                                | 13        |
| 5.3 Measurement result .....                                   | 13        |
| <b>6. Band Edge Compliance of RF Conducted Emissions .....</b> | <b>15</b> |
| 6.1 Measurement procedure .....                                | 15        |
| 6.2 Limit .....                                                | 15        |
| 6.3 Measurement result .....                                   | 16        |
| 6.4 Trace data .....                                           | 17        |
| <b>7. Spurious emissions - Conducted - .....</b>               | <b>20</b> |
| 7.1 Measurement procedure .....                                | 20        |
| 7.2 Limit .....                                                | 20        |
| 7.3 Measurement result .....                                   | 20        |
| <b>8. Spurious Emissions - Radiated - .....</b>                | <b>30</b> |
| 8.1 Measurement procedure .....                                | 30        |
| 8.2 Calculation method .....                                   | 31        |
| 8.3 Limit .....                                                | 31        |
| 8.4 Test data .....                                            | 32        |
| <b>9. Restricted Band of Operation .....</b>                   | <b>54</b> |
| 9.1 Measurement procedure .....                                | 54        |
| 9.2 Limit .....                                                | 54        |
| 9.3 Measurement Result .....                                   | 55        |



Zacta

|                                                    |           |
|----------------------------------------------------|-----------|
| 9.4 Test data.....                                 | 55        |
| <b>10. Transmitter Power Spectral Density.....</b> | <b>62</b> |
| 10.1 Measurement procedure.....                    | 62        |
| 10.2 Limit.....                                    | 62        |
| 10.3 Measurement result.....                       | 62        |
| <b>11. AC Power Line Conducted Emissions.....</b>  | <b>67</b> |
| 11.1 Measurement procedure.....                    | 67        |
| 11.2 Calculation method.....                       | 67        |
| 11.3 Limit.....                                    | 68        |
| 11.4 Test data.....                                | 68        |
| <b>12. Antenna requirement.....</b>                | <b>69</b> |
| <b>13. Uncertainty of measurement.....</b>         | <b>70</b> |
| <b>14. Laboratory Information.....</b>             | <b>71</b> |
| <b>Appendix A. Test equipment.....</b>             | <b>72</b> |
| <b>Appendix B. Duty Cycle.....</b>                 | <b>73</b> |

## 1. Summary of Test

### 1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 15 Subpart C.

### 1.2 Standards

CFR47 FCC Part 15 Subpart C

#### 1.2.1 Test Methods

ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v04

#### 1.2.2 Deviation from standards

None

### 1.3 List of applied test to the EUT

| Test items<br>Section         | Test items                                     | Condition             | Result |
|-------------------------------|------------------------------------------------|-----------------------|--------|
| 15.247(a)(2)                  | DTS Bandwidth / Occupied Bandwidth (99%)       | Conducted             | PASS   |
| 15.247(b)(3)                  | Maximum conducted (average) output power       | Conducted             | PASS   |
| 15.247(d)                     | Band Edge Compliance of RF Conducted Emissions | Conducted             | PASS   |
| 15.247(d)<br>15.205<br>15.209 | Spurious Emissions                             | Conducted<br>Radiated | PASS   |
| 15.247(d)<br>15.205<br>15.209 | Restricted Bands of Operation                  | Radiated              | PASS   |
| 15.247(e)                     | Transmitter Power Spectral Density             | Conducted             | PASS   |
| 15.207                        | AC Power Line Conducted Emissions              | Conducted             | PASS   |

#### 1.3.1 Test set up

Table-Top

### 1.4 Modification to the EUT by laboratory

None



## 2. Equipment Under Test

---

### 2.1 General Description of equipment

EUT is the Mobile Phone.

### 2.2 EUT information

|                              |                                                                                                                                                                                                                                 |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicant                    | : KYOCERA Corporation<br>Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa,<br>Japan<br>Phone: +81-45-943-6253 Fax: +81-45-943-6314                                                                             |
| Equipment under test         | : Mobile Phone                                                                                                                                                                                                                  |
| Trade name                   | : Kyocera                                                                                                                                                                                                                       |
| Model number                 | : EA34                                                                                                                                                                                                                          |
| Serial number                | : N/A                                                                                                                                                                                                                           |
| EUT condition                | : Pre-Production                                                                                                                                                                                                                |
| Power ratings                | : Battery: DC 3.8V                                                                                                                                                                                                              |
| Size                         | : (W) 73.0 × (D) 8.9 × (H) 146.0 mm                                                                                                                                                                                             |
| Environment                  | : Indoor and Outdoor use                                                                                                                                                                                                        |
| Terminal limitation          | : -20°C to 60°C                                                                                                                                                                                                                 |
| RF Specification<br>Protocol | : IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)                                                                                                                                                                                  |
| Frequency range              | : IEEE802.11b /11g/11n (HT20): 2412MHz-2462MHz                                                                                                                                                                                  |
| Number of RF<br>Channels     | : 11 Channels                                                                                                                                                                                                                   |
| Modulation type              | : IEEE802.11b: DSSS (DBPSK, DQPSK, CCK)<br>IEEE802.11g / n (HT20) : OFDM (BPSK, QPSK, 16QAM, 64QAM)                                                                                                                             |
| Data rate                    | : IEEE802.11b: 1, 2, 5.5, 11Mbps<br>IEEE802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps<br>IEEE802.11n (HT20 LGI): 6.5, 13, 19.5, 26, 39, 52, 58.5, 65Mbps<br>IEEE802.11n (HT20 SGI): 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2Mbps |
| Channel separation           | : 5MHz                                                                                                                                                                                                                          |
| Output power                 | : 50.443mW (IEEE802.11b)<br>98.560mW (IEEE802.11g)<br>87.902mW (IEEE802.11n: HT20)                                                                                                                                              |
| Antenna type                 | : Internal antenna                                                                                                                                                                                                              |
| Antenna gain                 | : -0.2dBi                                                                                                                                                                                                                       |

### 2.3 Variation of the family model(s)

Not applicable

### 2.4 Operating channels and frequencies

| Channel | Frequency [MHz] |
|---------|-----------------|
| 1       | 2412            |
| 2       | 2417            |
| 3       | 2422            |
| 4       | 2427            |
| 5       | 2432            |
| 6       | 2437            |
| 7       | 2442            |
| 8       | 2447            |
| 9       | 2452            |
| 10      | 2457            |
| 11      | 2462            |

### 2.5 Operating mode

The EUT had been tested under operating condition.  
There are three channels have been tested as following:

| Tested Channel | Frequency [MHz] |
|----------------|-----------------|
| Low            | 2412            |
| Middle         | 2437            |
| High           | 2462            |

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

| Tested Channel    | Modulation Type              | Data Rate      |
|-------------------|------------------------------|----------------|
| Low, Middle, High | IEEE802.11b: DSSS            | 1Mbps          |
| Low, Middle, High | IEEE802.11g: OFDM            | 6Mbps          |
| Low, Middle, High | IEEE802.11n (HT20 LGI): OFDM | MCS0 (6.5Mbps) |

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X axis and the worst case recorded.

## 2.6 Operating flow

### [Tx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode  
[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]  
Operating frequency: Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz
- iii) Start test mode

### [Rx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode  
[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]  
Operating frequency: Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz
- iii) Start test mode

### 3. Configuration of equipment

#### 3.1 Equipment(s) used

| No. | Equipment    | Company | Model No. | Serial No. | FCC ID / DoC | Comment |
|-----|--------------|---------|-----------|------------|--------------|---------|
| 1   | Mobile Phone | KYOCERA | EA34      | N/A        | JOYEA34      | EUT     |
| 2   | AC Adapter   | au      | N/A       | N/A        | N/A          | *       |


\*: AC power line Conducted Emission Test.

#### 3.2 Cable(s) used

| No. | Cable                            | Length[m] | Shield | Connector | Comment |
|-----|----------------------------------|-----------|--------|-----------|---------|
| a   | Micro USB cable (for AC Adapter) | 1.0       | Yes    | Metal     | *       |

\*: AC power line Conducted Emission Test.

#### 3.3 System configuration

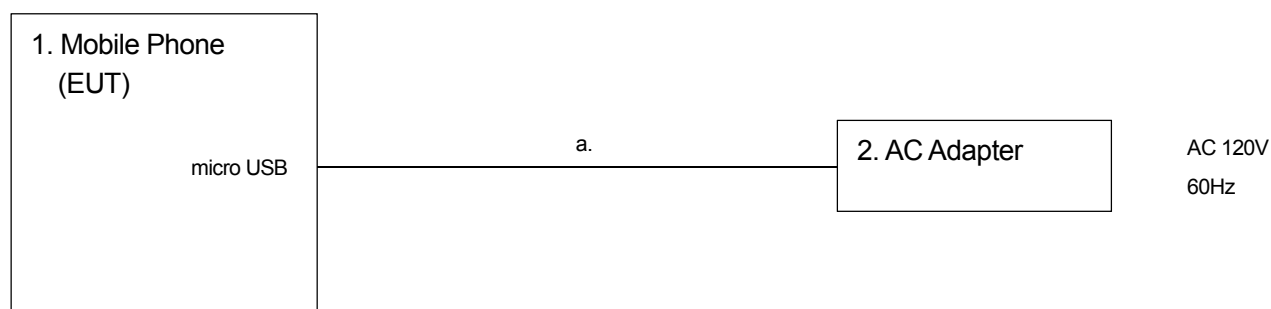

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used" and "3.2 Cable(s) used".

## 4. DTS Bandwidth / Occupied Bandwidth (99%)

### 4.1 Measurement procedure


[FCC 15.247(a)(2), KDB 558074 D01 v04, Section 8.2]

The bandwidth at 6dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) RBW = 100kHz.
- b) VBW  $\geq 3 \times$  RBW.
- c) Sweep time = auto-couple.
- d) Detector = peak.
- e) Trace mode = max hold.

- Test configuration



### 4.2 Limit

The minimum permissible 6dB bandwidth is 500kHz.

### 4.3 Measurement result

Date : May 30, 2017  
 Temperature : 24.0 [°C]  
 Humidity : 48.0 [%]  
 Test place : Shielded room No.4

Test engineer : Tadahiro Seino


[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]

| Channel | Frequency [MHz] | DTS Bandwidth [MHz] |             |                    |
|---------|-----------------|---------------------|-------------|--------------------|
|         |                 | IEEE802.11b         | IEEE802.11g | IEEE802.11n (HT20) |
| Low     | 2412            | 8.576               | 16.414      | 17.614             |
| Middle  | 2437            | 9.047               | 16.429      | 17.634             |
| High    | 2462            | 8.585               | 16.405      | 17.627             |


| Channel | Frequency [MHz] | Occupied Bandwidth (99%) [MHz] |             |                    |
|---------|-----------------|--------------------------------|-------------|--------------------|
|         |                 | IEEE802.11b                    | IEEE802.11g | IEEE802.11n (HT20) |
| Low     | 2412            | 13.293                         | 16.545      | 17.708             |
| Middle  | 2437            | 13.215                         | 16.542      | 17.695             |
| High    | 2462            | 13.309                         | 16.550      | 17.702             |

4.4 Trace data  
[IEEE802.11b]


Channel Low

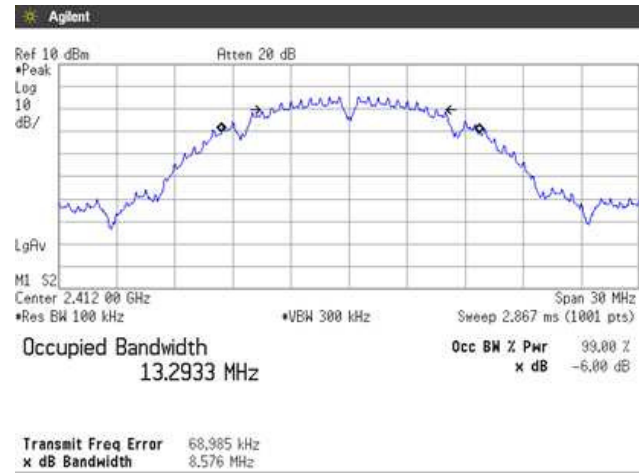

Channel Middle

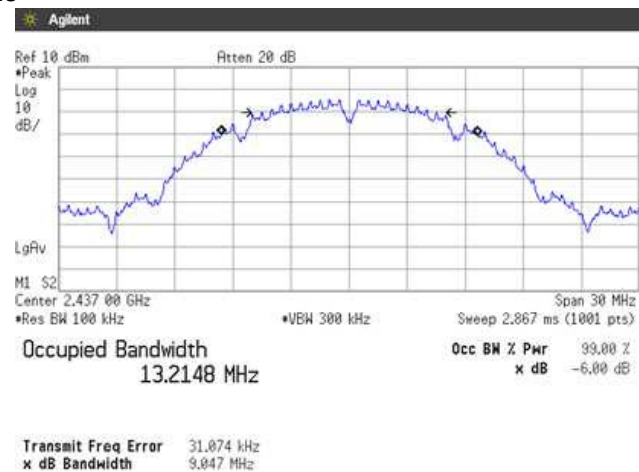

Channel High

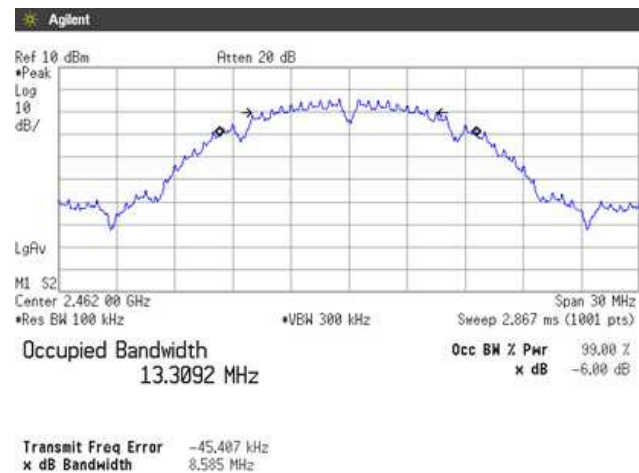





Zacta

[IEEE802.11g]


Channel Low

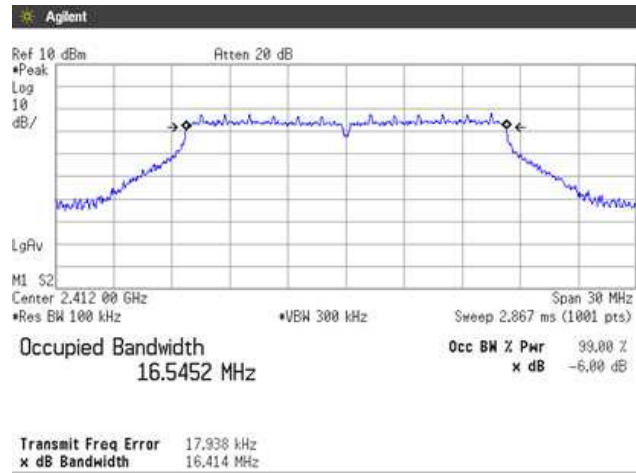

Channel Middle

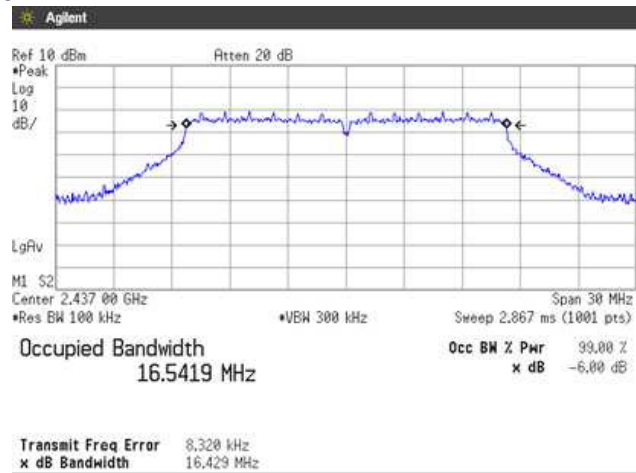

Channel High

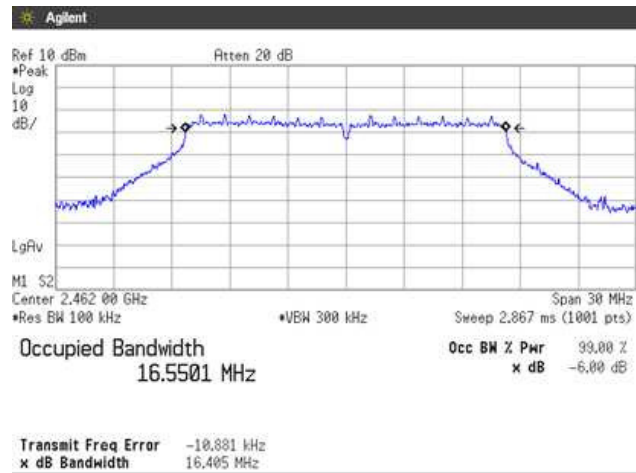





Zacta

[IEEE802.11n (HT20)]


Channel Low

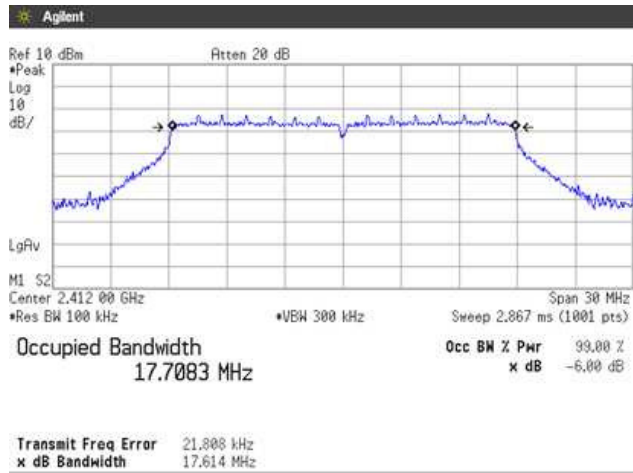

Channel Middle

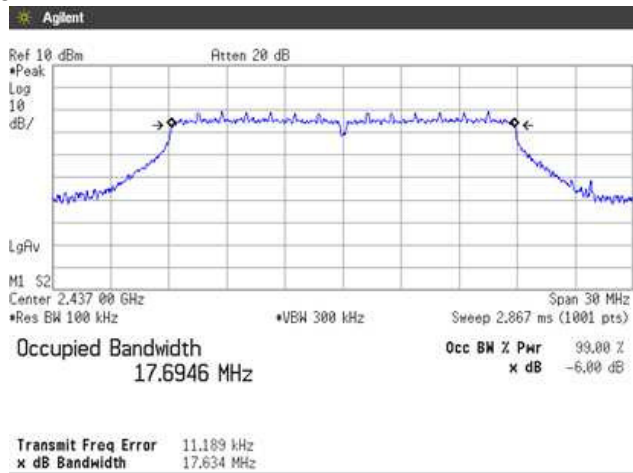

Channel High

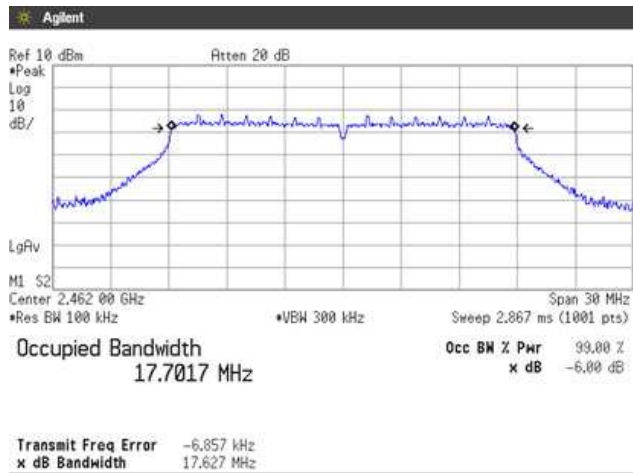



## 5. Maximum Conducted Output Power


---

### 5.1 Measurement procedure

[FCC 15.247(b)(3), KDB 558074 D01 v04, Section 9.1.3]

The peak power is measured with a power sensor connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

- Test configuration

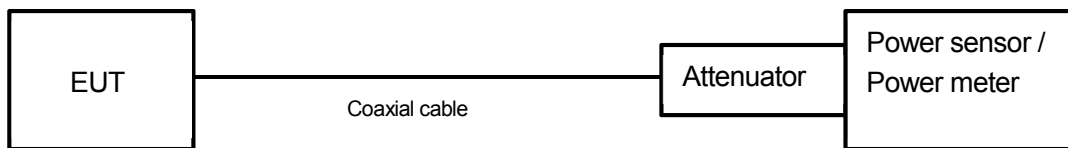

### 5.2 Limit

1W (1000mW) or less

### 5.3 Measurement result

Date : May 30, 2017  
Temperature : 24.0 [°C]  
Humidity : 48.0 [%]  
Test place : Shielded room No.4

Test engineer : Tadahiro Seino

**[IEEE802.11b]**  
**Battery Full**

| Channel | Center Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Output Power (mW) | Limit (mW)  | Result |
|---------|------------------------|---------------|-------------|-------------|-------------------|-------------|--------|
| Low     | 2412                   | 6.38          | 10.53       | 16.91       | 49.091            | $\leq 1000$ | PASS   |
| Middle  | 2437                   | 6.21          | 10.53       | 16.74       | 47.152            | $\leq 1000$ | PASS   |
| High    | 2462                   | 6.50          | 10.53       | 17.03       | 50.443            | $\leq 1000$ | PASS   |

**[IEEE802.11g]**  
**Battery Full**

| Channel | Center Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Output Power (mW) | Limit (mW)  | Result |
|---------|------------------------|---------------|-------------|-------------|-------------------|-------------|--------|
| Low     | 2412                   | 7.47          | 10.53       | 18.00       | 63.139            | $\leq 1000$ | PASS   |
| Middle  | 2437                   | 9.41          | 10.53       | 19.94       | 98.560            | $\leq 1000$ | PASS   |
| High    | 2462                   | 7.40          | 10.53       | 17.93       | 62.130            | $\leq 1000$ | PASS   |

**[IEEE802.11n (HT20)]**  
**Battery Full**

| Channel | Center Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Output Power (mW) | Limit (mW)  | Result |
|---------|------------------------|---------------|-------------|-------------|-------------------|-------------|--------|
| Low     | 2412                   | 8.91          | 10.53       | 19.44       | 87.902            | $\leq 1000$ | PASS   |
| Middle  | 2437                   | 7.29          | 10.53       | 17.82       | 60.492            | $\leq 1000$ | PASS   |
| High    | 2462                   | 7.44          | 10.53       | 17.97       | 62.647            | $\leq 1000$ | PASS   |

Calculation;

$$\text{Reading (dBm)} + \text{Factor (dB)} = \text{Level (dBm)}$$

$$10\log P = \text{Level (dBm)}$$

$$P = 10^{(\text{Maximum Peak Output Power} / 10)} \text{ (mW)}$$

## 6. Band Edge Compliance of RF Conducted Emissions

### 6.1 Measurement procedure


[FCC 15.247(d), KDB 558074 D01 v04, Section 11.0]

The Band Edge is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = Arbitrary setting. (Setting suitable for measurement.)
- b) RBW = 100kHz.
- c) VBW  $\geq 3 \times$  RBW
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

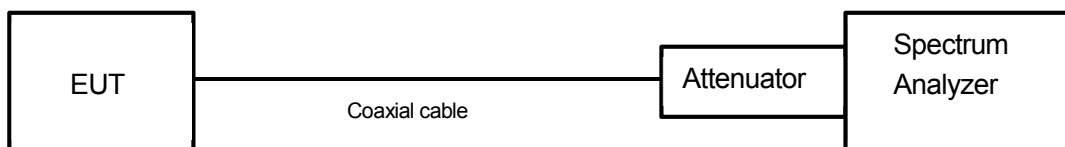

### 6.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### 6.3 Measurement result

Date : May 30, 2017  
 Temperature : 24.0 [°C]  
 Humidity : 48.0 [%]  
 Test place : Shielded room No.4

Test engineer : Tadahiro Seino

#### [IEEE802.11b]

| Channel | Frequency (MHz) | RF Power Level (dBm) | Band-edge Frequency (MHz) | Band-edge Level (dBm) | Difference Level (dBm) | Limit (dBm)                         | Result |
|---------|-----------------|----------------------|---------------------------|-----------------------|------------------------|-------------------------------------|--------|
| Low     | 2412            | -4.35                | 2398.96                   | -50.53                | 46.18                  | At least 20dB below from peak of RF | PASS   |
| High    | 2462            | -4.31                | 2487.18                   | -65.19                | 60.88                  | At least 20dB below from peak of RF | PASS   |

#### [IEEE802.11g]


| Channel | Frequency (MHz) | RF Power Level (dBm) | Band-edge Frequency (MHz) | Band-edge Level (dBm) | Difference Level (dBm) | Limit (dBm)                         | Result |
|---------|-----------------|----------------------|---------------------------|-----------------------|------------------------|-------------------------------------|--------|
| Low     | 2412            | -12.30               | 2399.52                   | -47.68                | 35.38                  | At least 20dB below from peak of RF | PASS   |
| High    | 2462            | -11.99               | 2483.50                   | -62.13                | 50.14                  | At least 20dB below from peak of RF | PASS   |

#### [IEEE802.11n (HT20)]


| Channel | Frequency (MHz) | RF Power Level (dBm) | Band-edge Frequency (MHz) | Band-edge Level (dBm) | Difference Level (dBm) | Limit (dBm)                         | Result |
|---------|-----------------|----------------------|---------------------------|-----------------------|------------------------|-------------------------------------|--------|
| Low     | 2412            | -12.24               | 2399.84                   | -45.84                | 33.60                  | At least 20dB below from peak of RF | PASS   |
| High    | 2462            | -11.97               | 2483.66                   | -59.02                | 47.05                  | At least 20dB below from peak of RF | PASS   |

6.4 Trace data  
[IEEE802.11b]

Channel Low

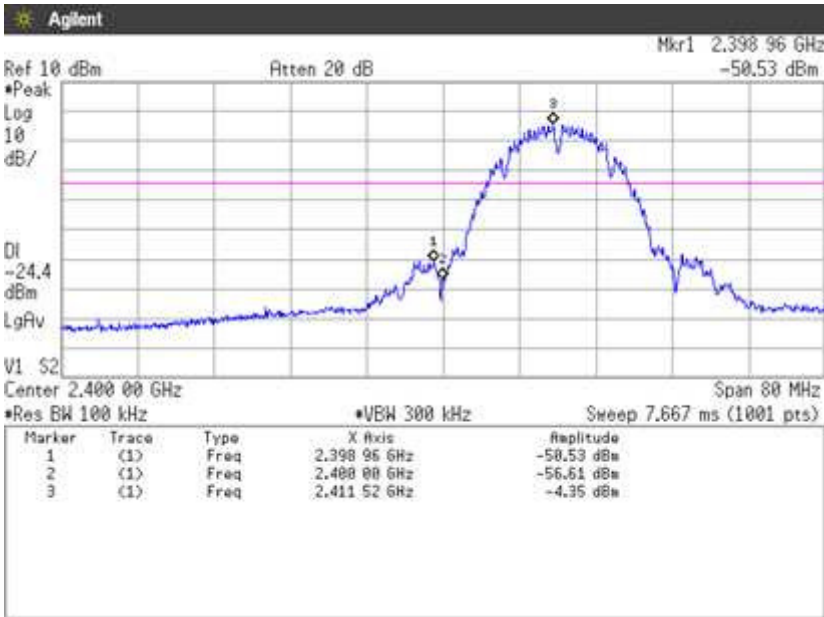


Channel High

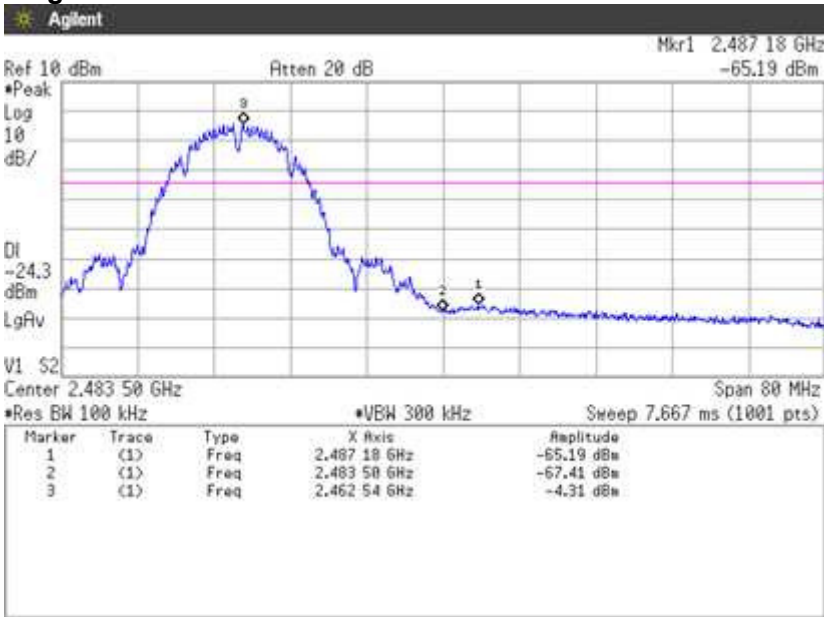


[IEEE802.11g]

Channel Low

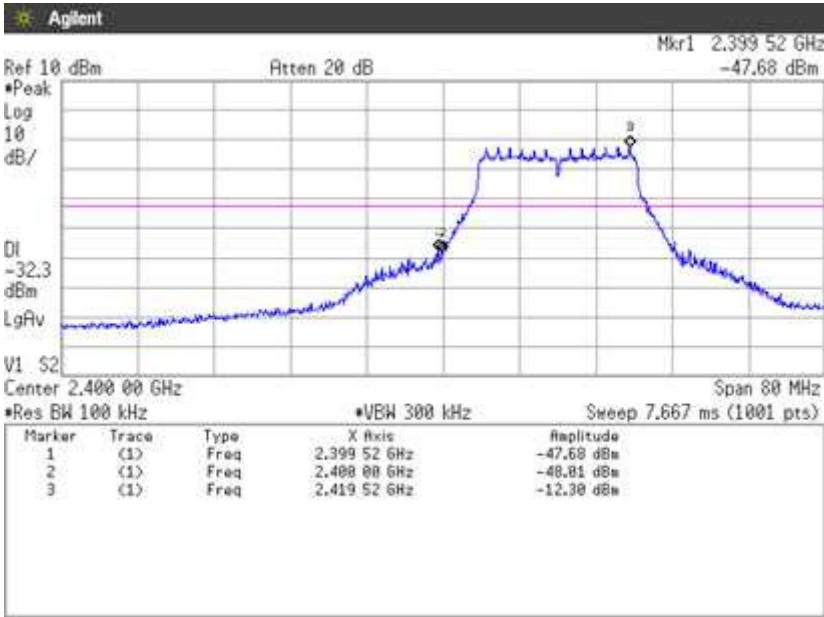


Channel High

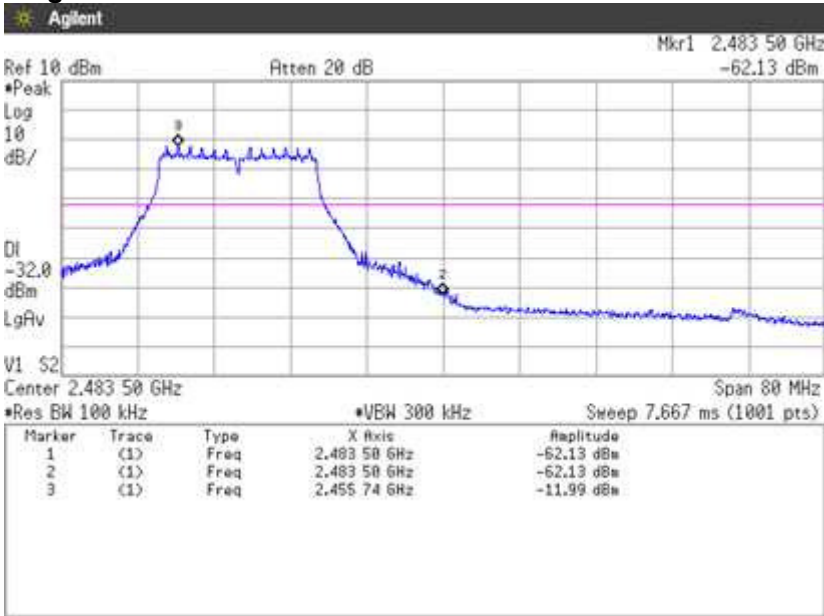


[IEEE802.11n (HT20)]

Channel Low

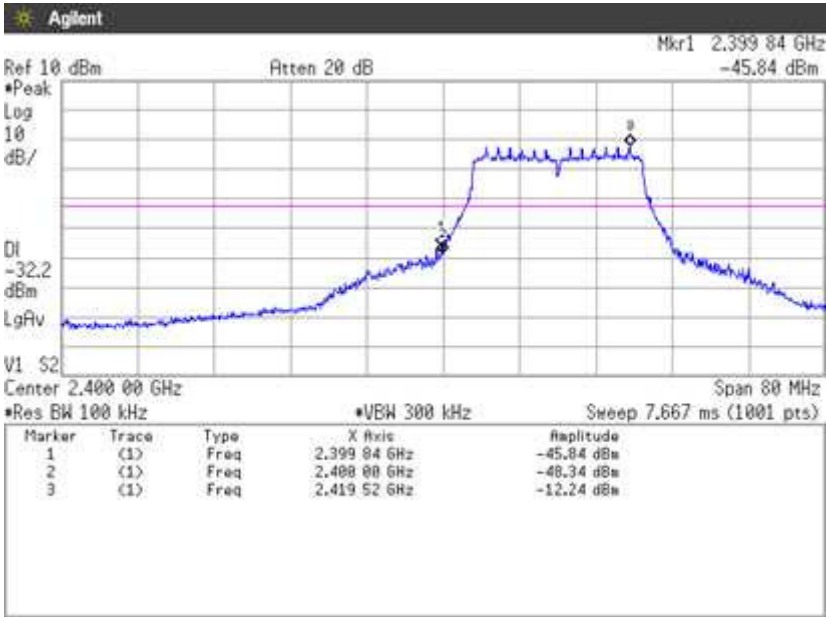

Channel High

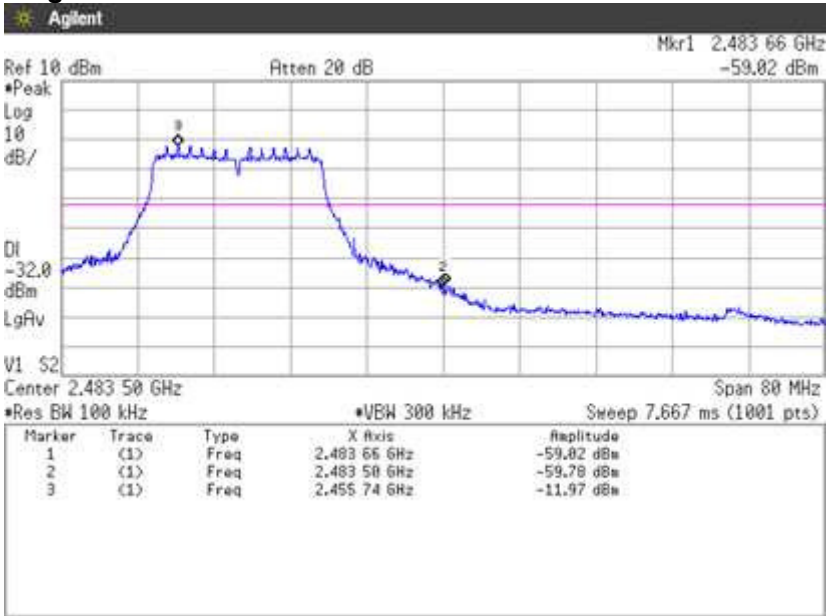

## 7. Spurious emissions - Conducted -

### 7.1 Measurement procedure


[FCC 15.247(d), KDB 558074 D01 v04, Section 11.0]

The spurious emissions (Conducted) are measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = wide enough to fully capture the emission being measured.
- b) RBW = 100 kHz.
- c) VBW  $\geq$  RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

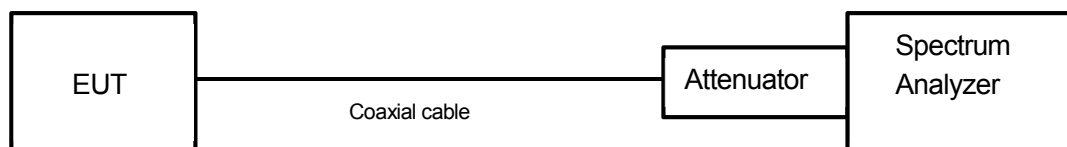

### 7.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### 7.3 Measurement result

Date : May 30, 2017  
 Temperature : 24.0 [°C]  
 Humidity : 48.0 [%]  
 Test place : Shielded room No.4

Test engineer :  
 Tadahiro Seino

[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]

| Channel | Frequency [MHz] | Limit [dB]                          | Results Chart      | Result |
|---------|-----------------|-------------------------------------|--------------------|--------|
| Low     | 2412            | At least 20dB below from peak of RF | See the trace Data | PASS   |
| Middle  | 2437            | At least 20dB below from peak of RF | See the trace Data | PASS   |
| High    | 2462            | At least 20dB below from peak of RF | See the trace Data | PASS   |




## 7.4 Trace data


### [IEEE802.11b]

### Channel Low


### 30MHz-1GHz

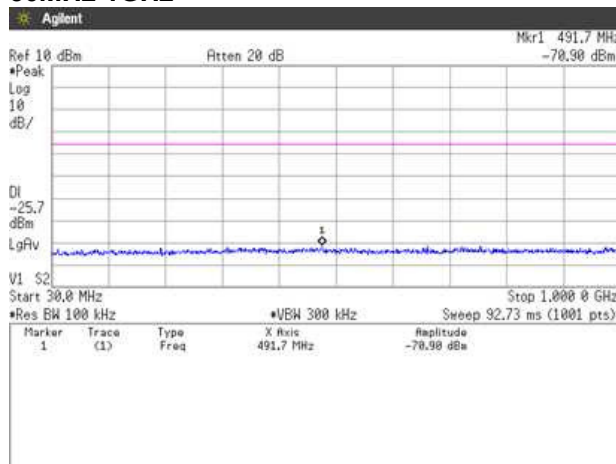


### 1GHz-5GHz

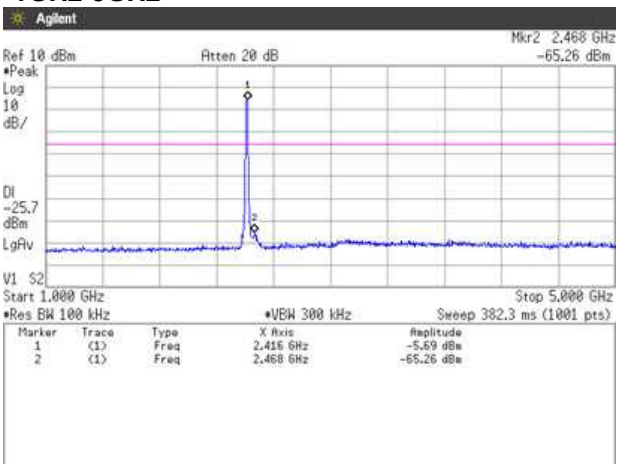


### 5GHz-10GHz

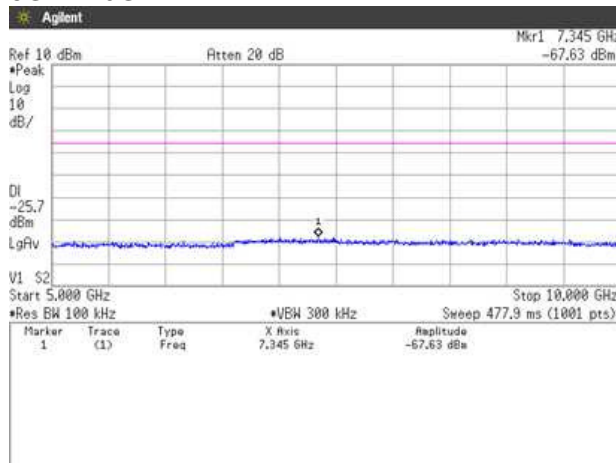


### 10GHz-15GHz

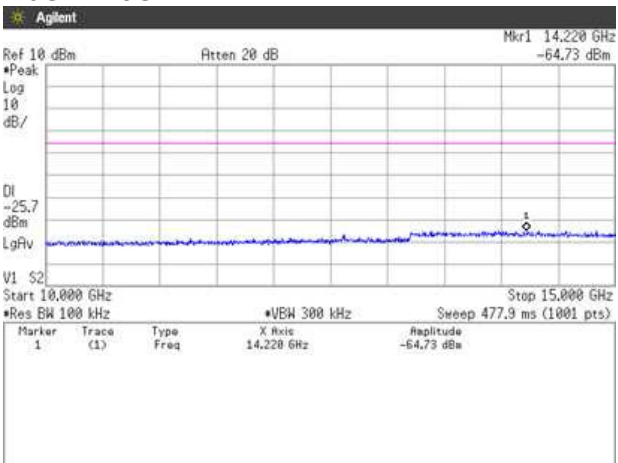


### 15GHz-20GHz

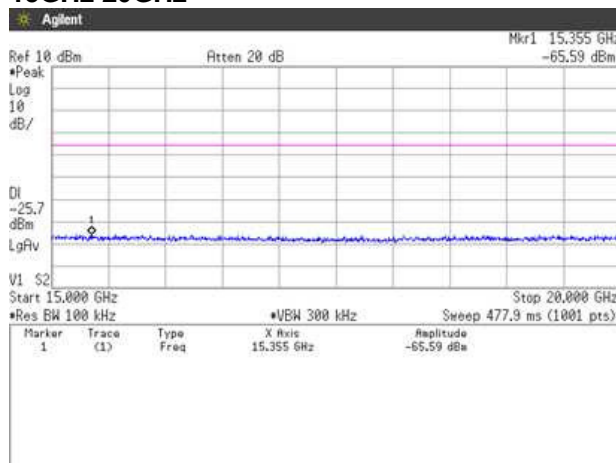


### 20GHz-25GHz

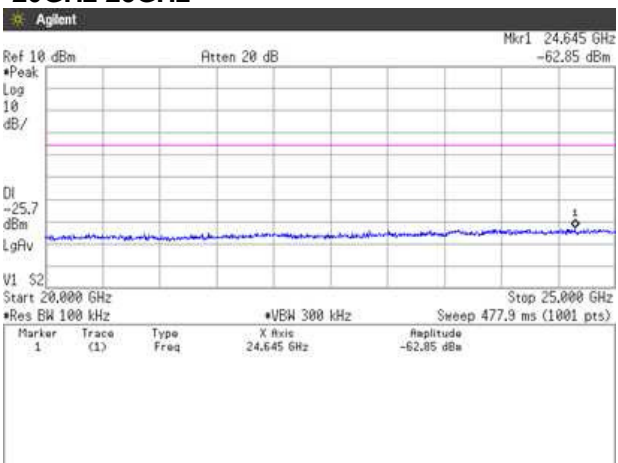


## Channel Middle 30MHz-1GHz

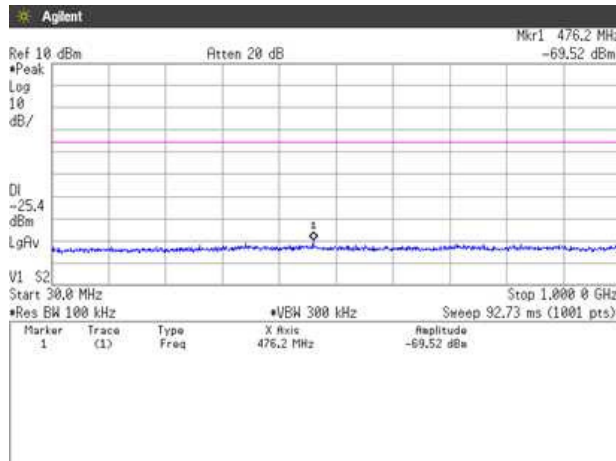


## 1GHz-5GHz

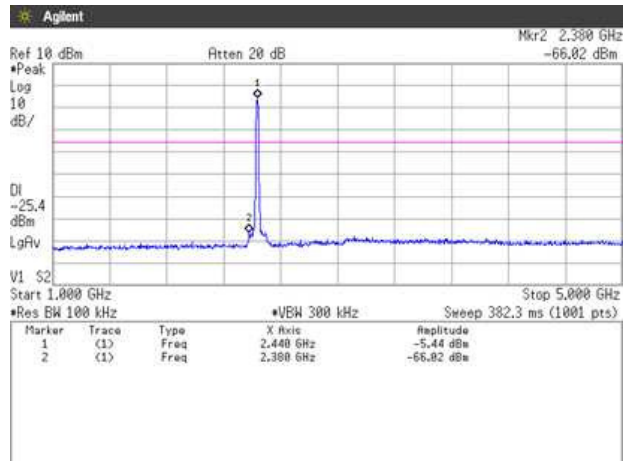


## 5GHz-10GHz

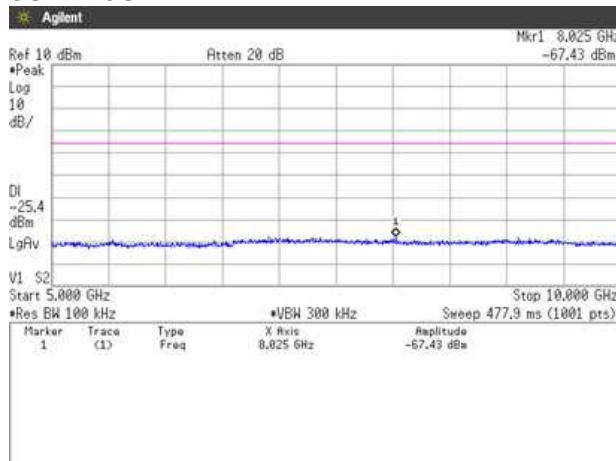


## 10GHz-15GHz

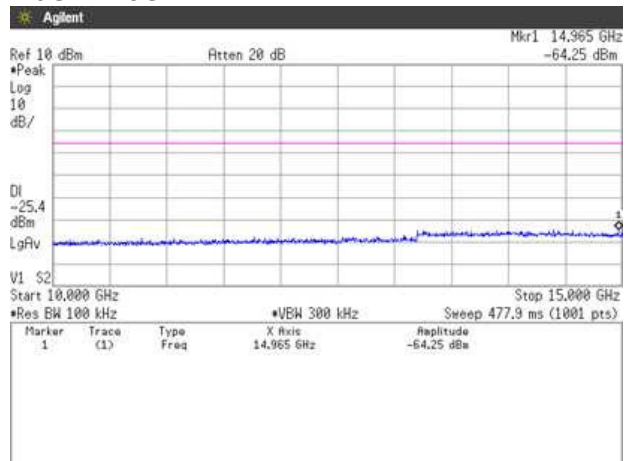


## 15GHz-20GHz

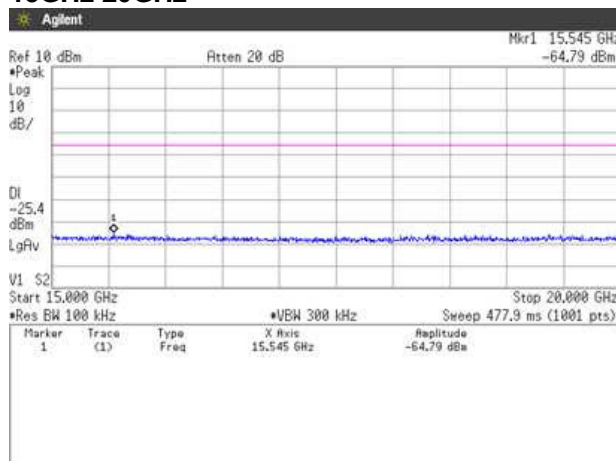


## 20GHz-25GHz

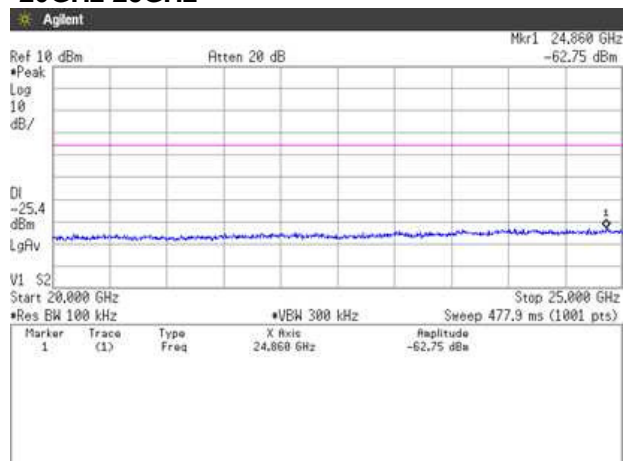


### Channel High 30MHz-1GHz

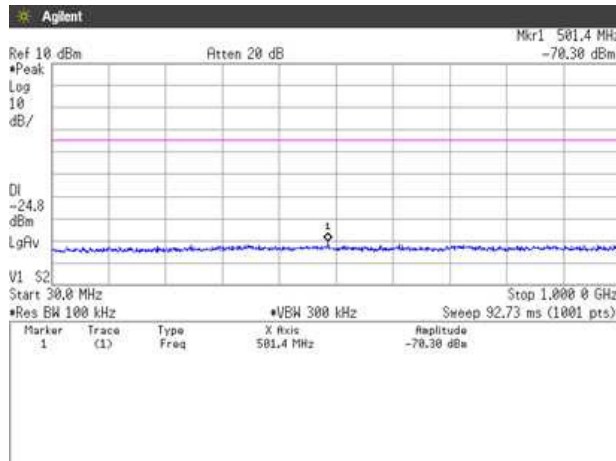


### 1GHz-5GHz

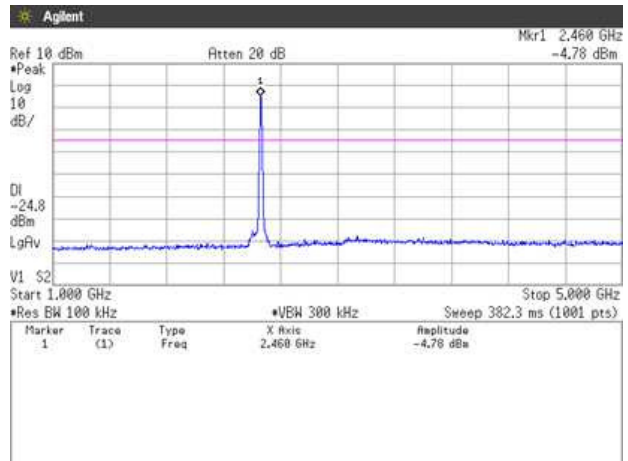


### 5GHz-10GHz

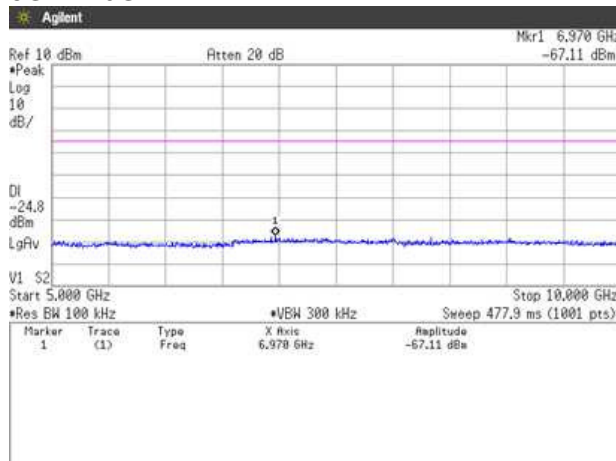


### 10GHz-15GHz

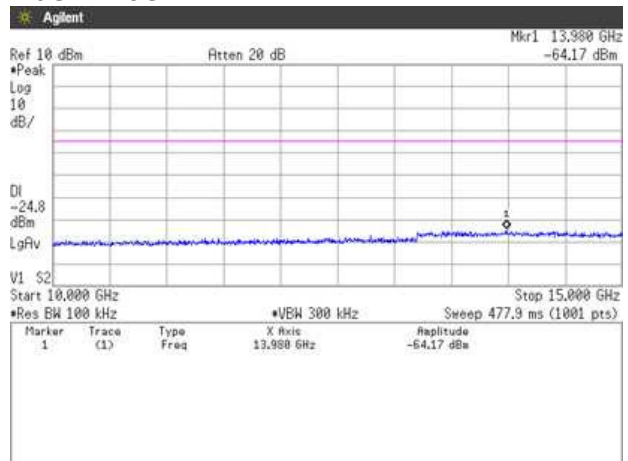


### 15GHz-20GHz

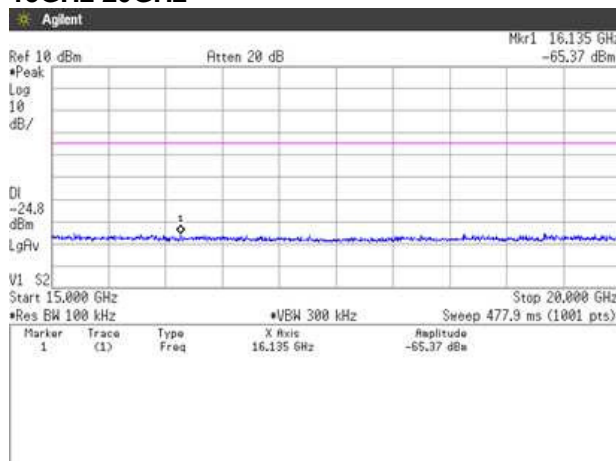


### 20GHz-25GHz

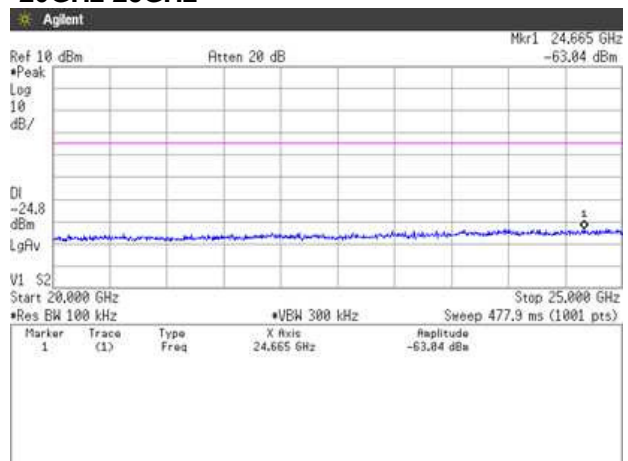


# [IEEE802.11g] Channel Low 30MHz-1GHz

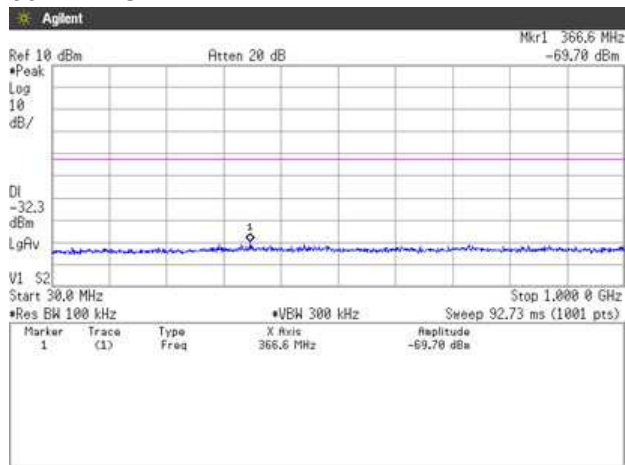


## 1GHz-5GHz

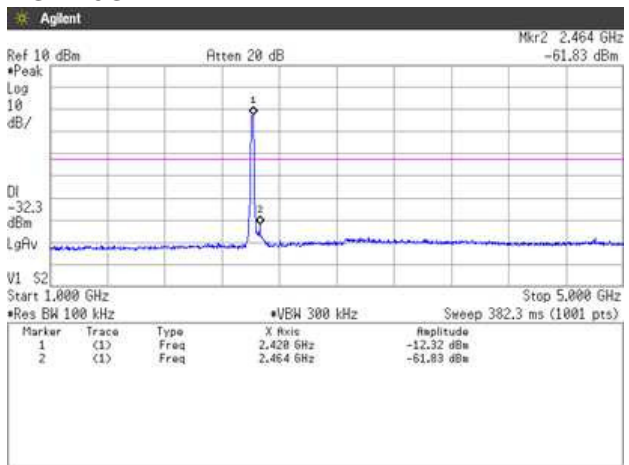


## 5GHz-10GHz

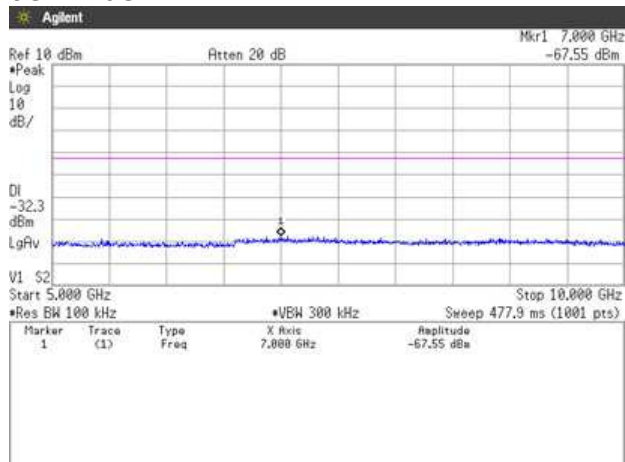


## 10GHz-15GHz

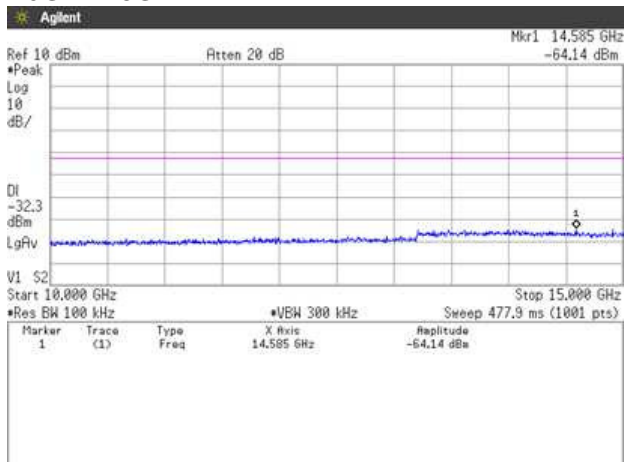


## 15GHz-20GHz

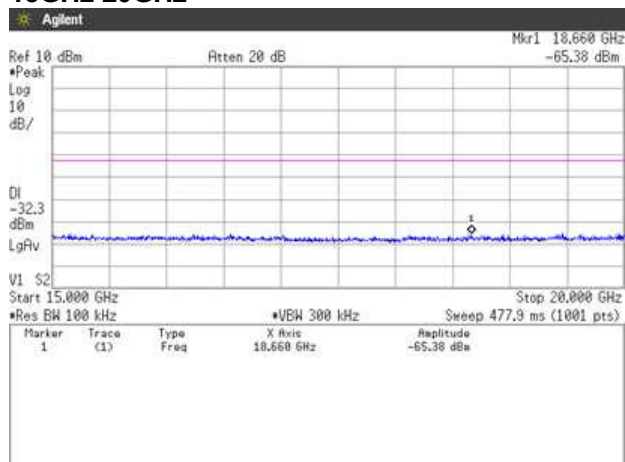


## 20GHz-25GHz

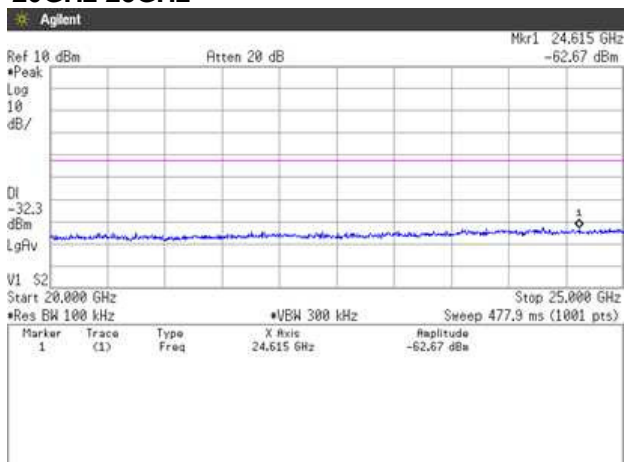


## Channel Middle 30MHz-1GHz

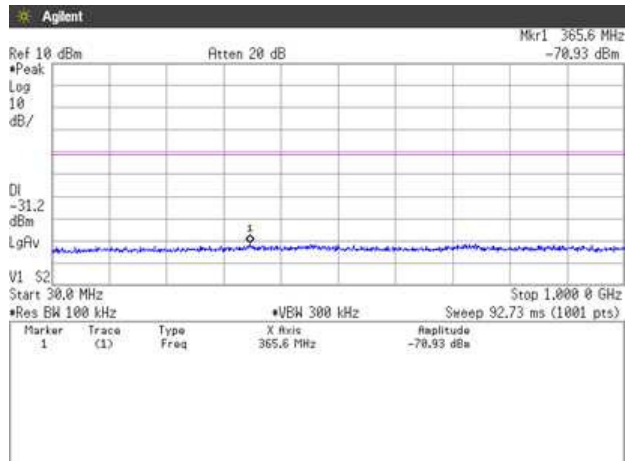


## 1GHz-5GHz

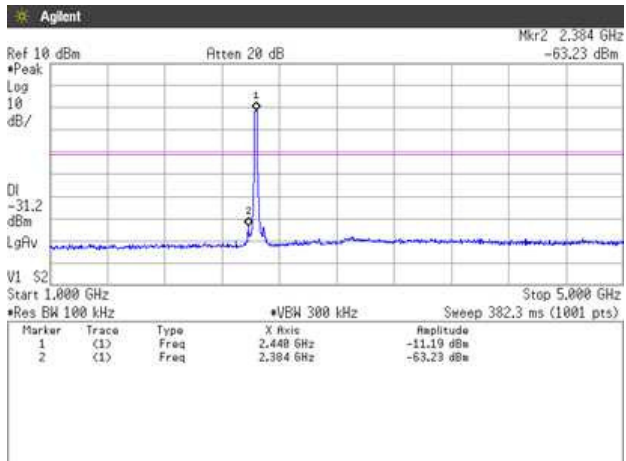


## 5GHz-10GHz

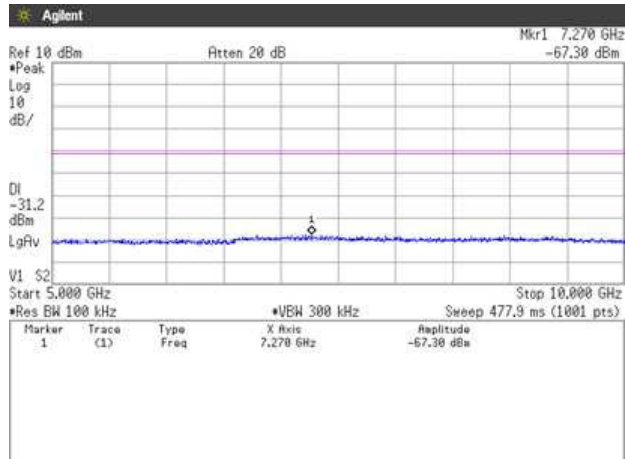


## 10GHz-15GHz

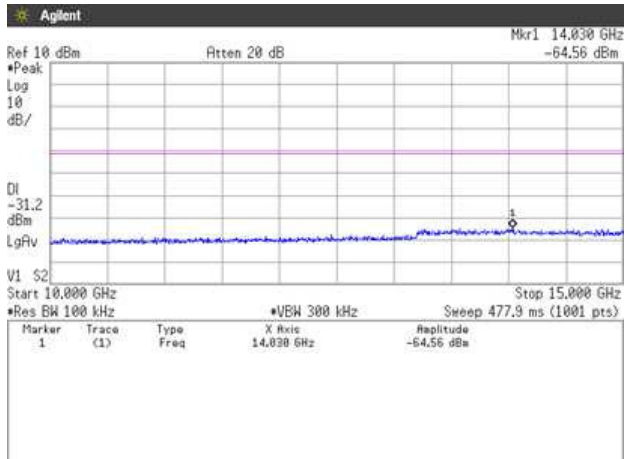

## 15GHz-20GHz

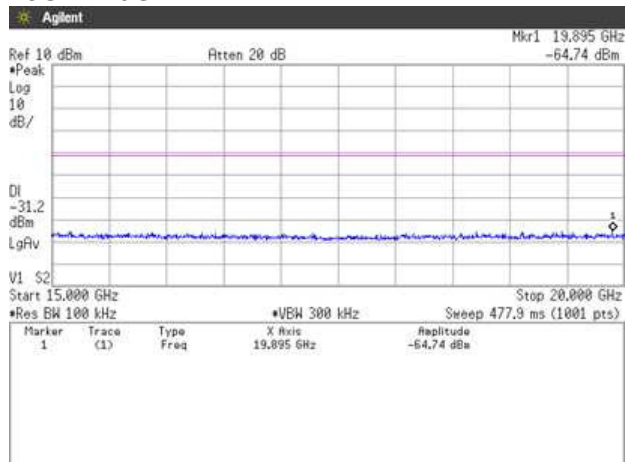


## 20GHz-25GHz

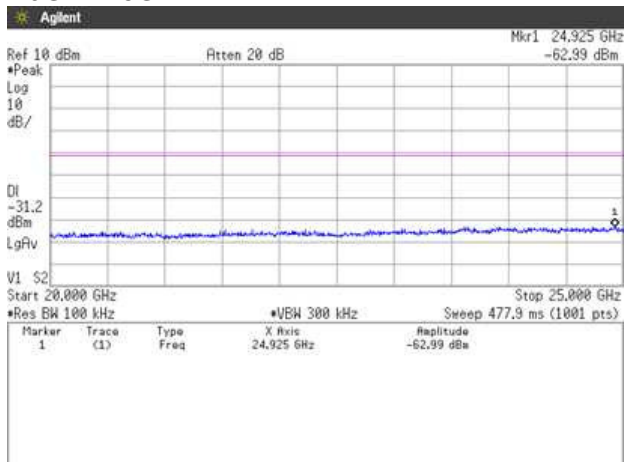





### Channel High 30MHz-1GHz

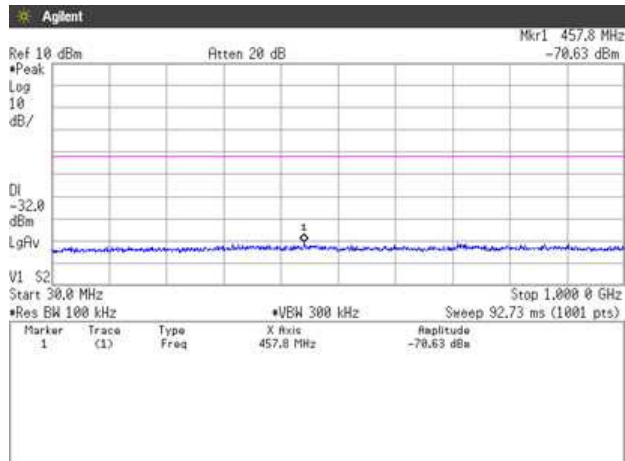


### 1GHz-5GHz

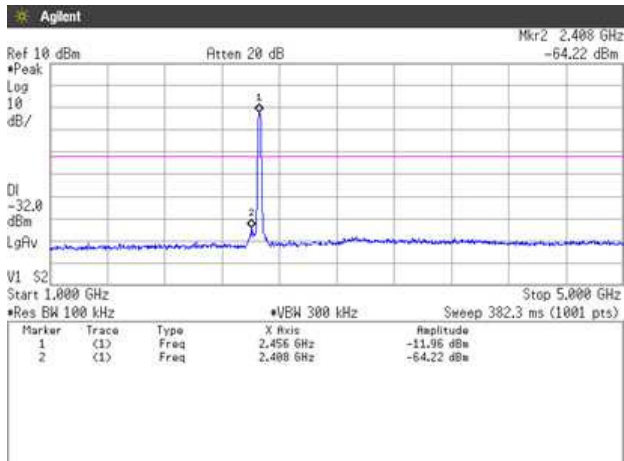


### 5GHz-10GHz

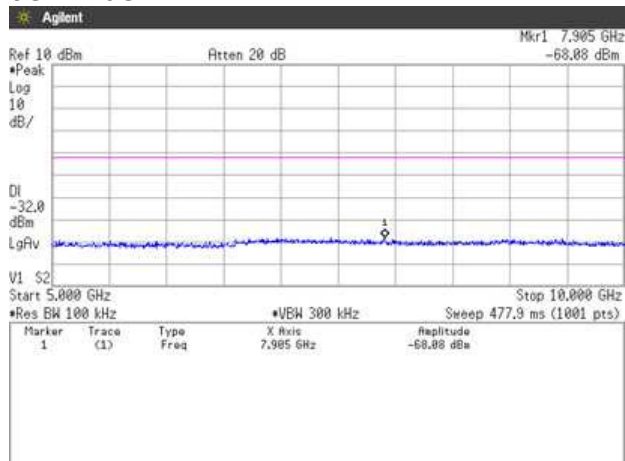


### 10GHz-15GHz

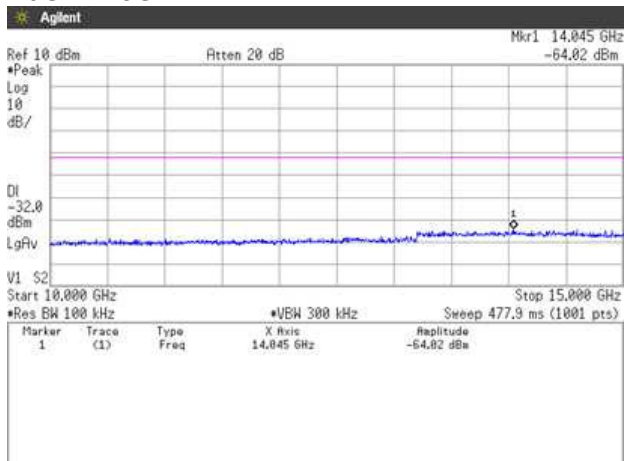


### 15GHz-20GHz

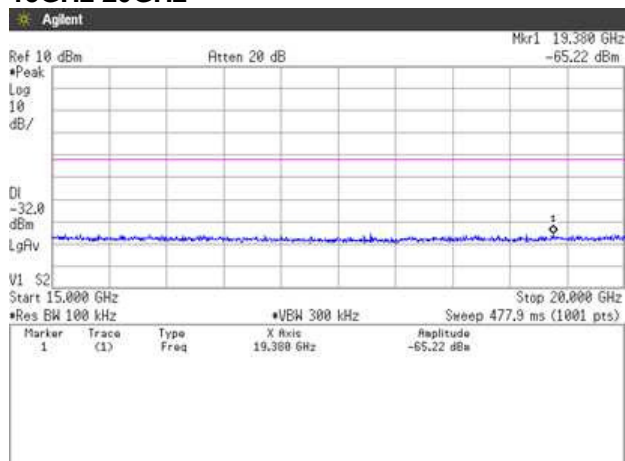


### 20GHz-25GHz

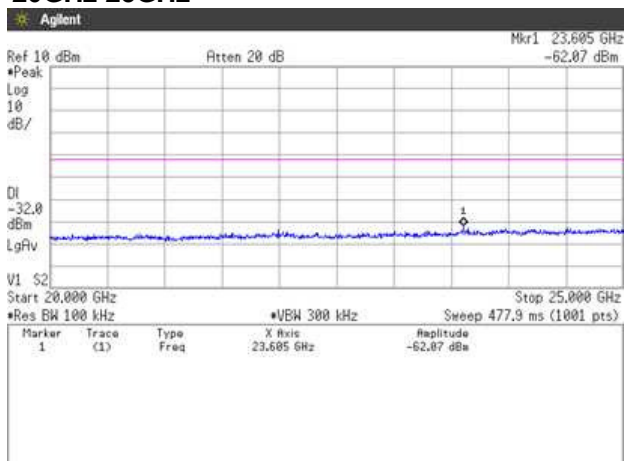


**[IEEE802.11n (HT20)]**  
**Channel Low**  
**30MHz-1GHz**

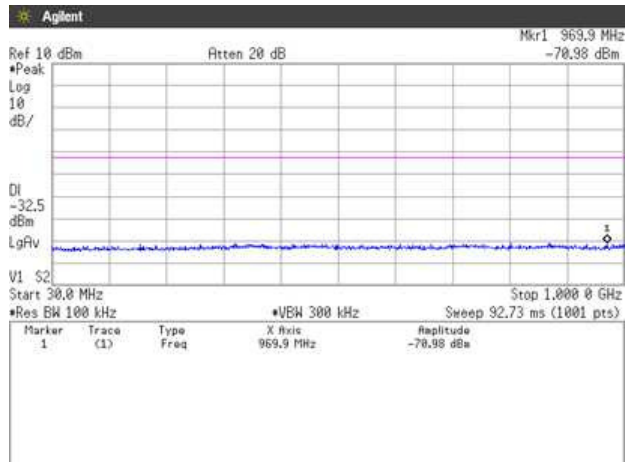


**1GHz-5GHz**

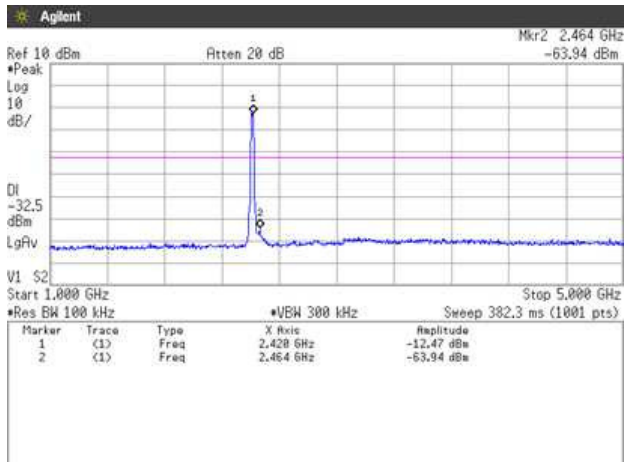


**5GHz-10GHz**

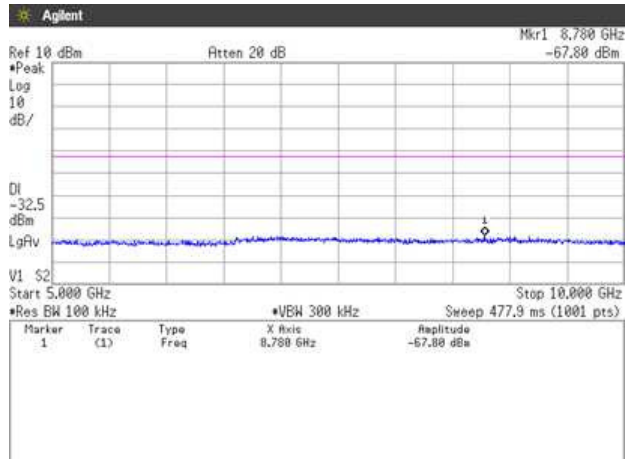


**10GHz-15GHz**

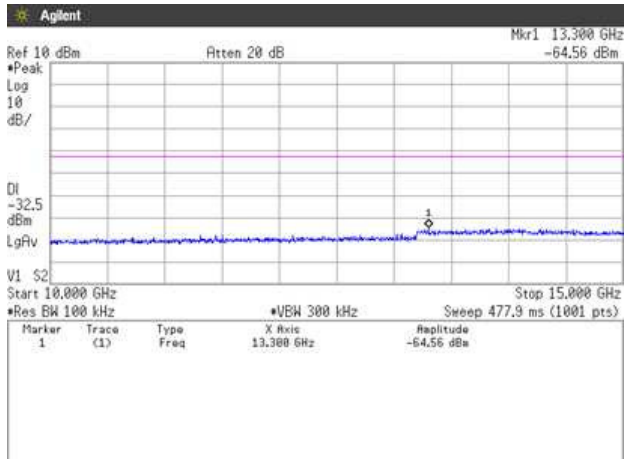


**15GHz-20GHz**

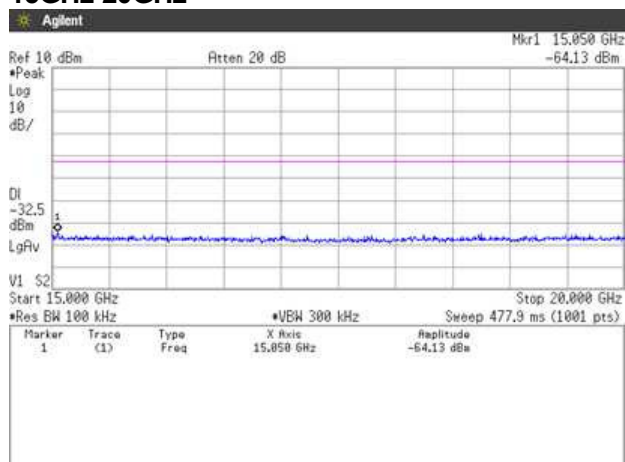


**20GHz-25GHz**

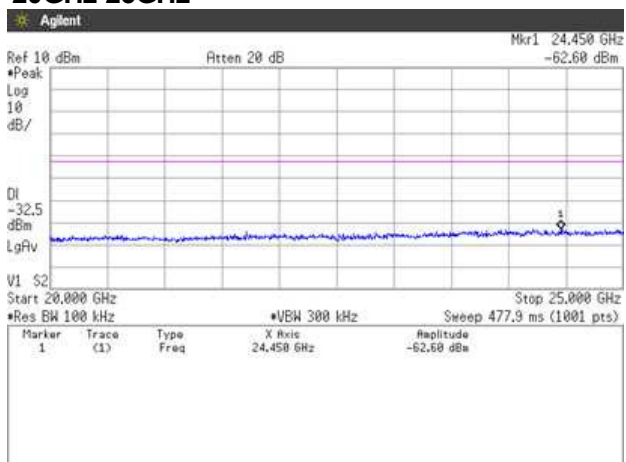


## Channel Middle 30MHz-1GHz

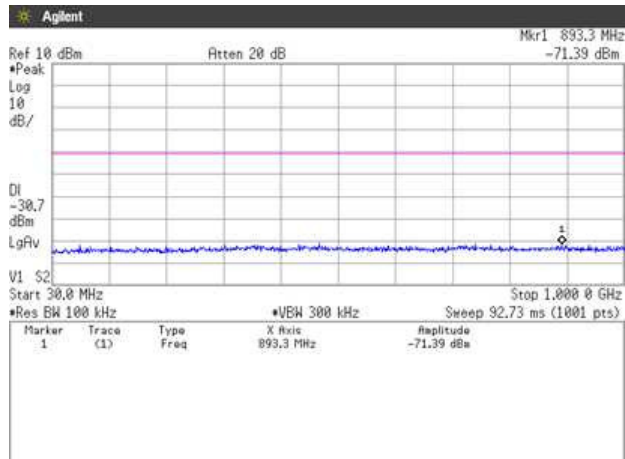


## 1GHz-5GHz

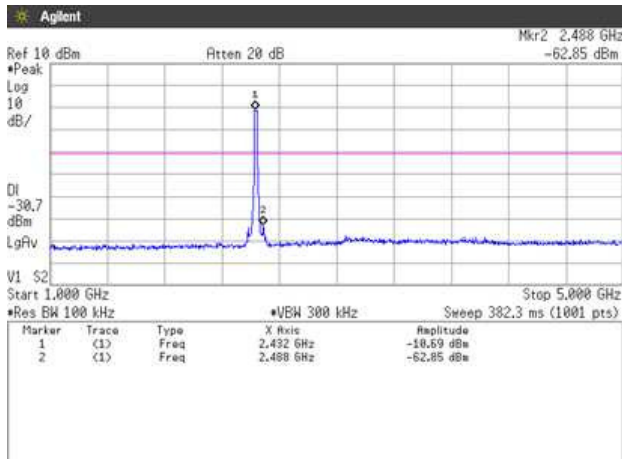


## 5GHz-10GHz

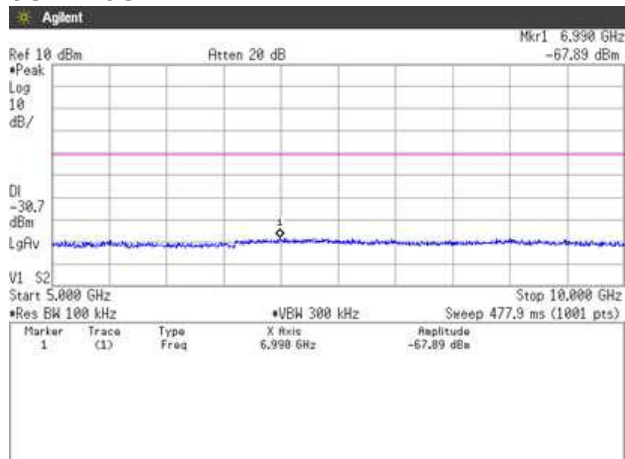


## 10GHz-15GHz

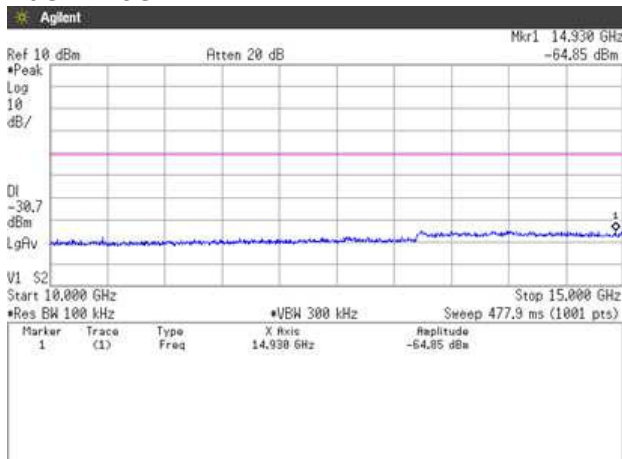

## 15GHz-20GHz

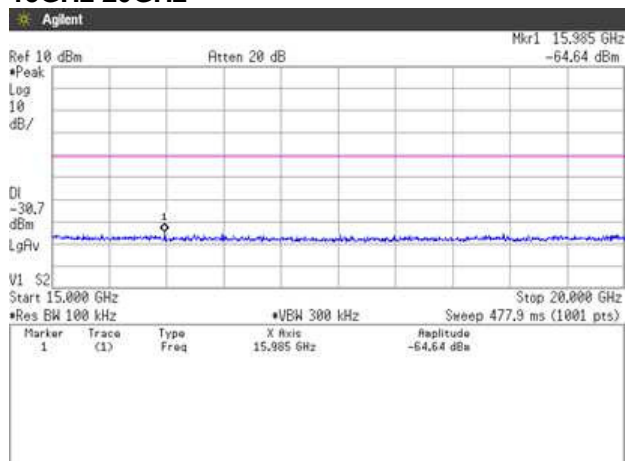


## 20GHz-25GHz

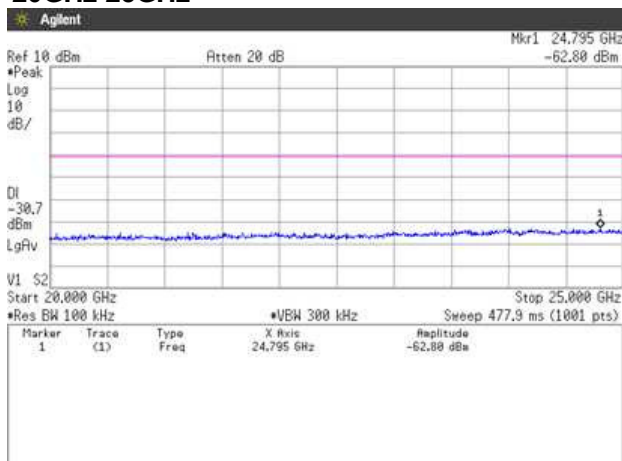





## Channel High 30MHz-1GHz

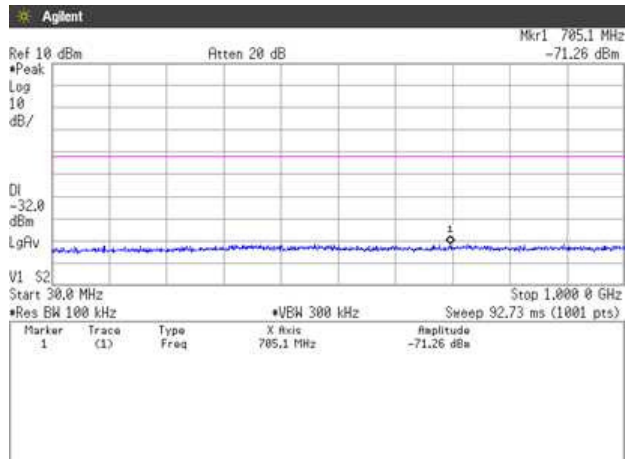


## 1GHz-5GHz

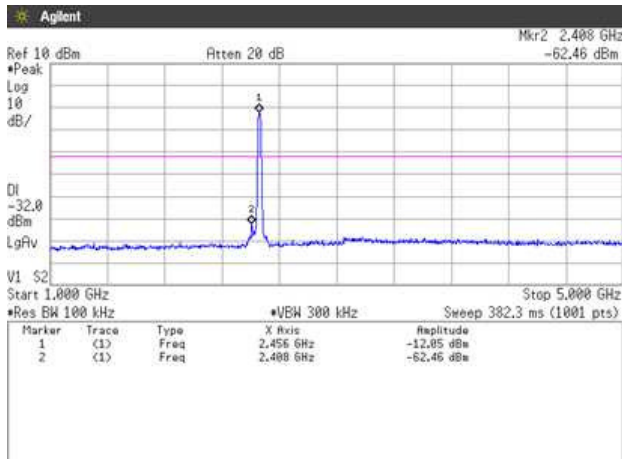


## 5GHz-10GHz

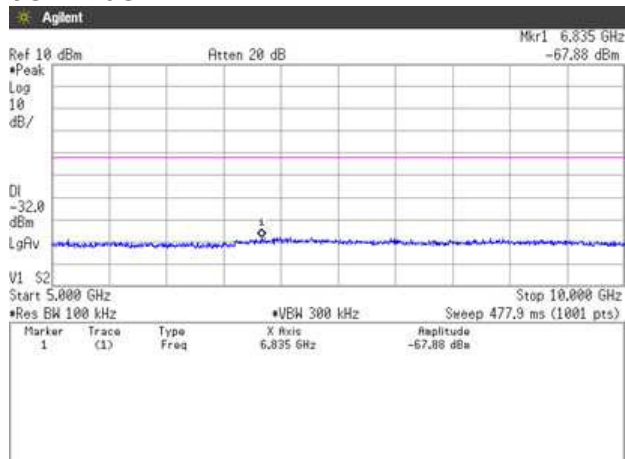


## 10GHz-15GHz

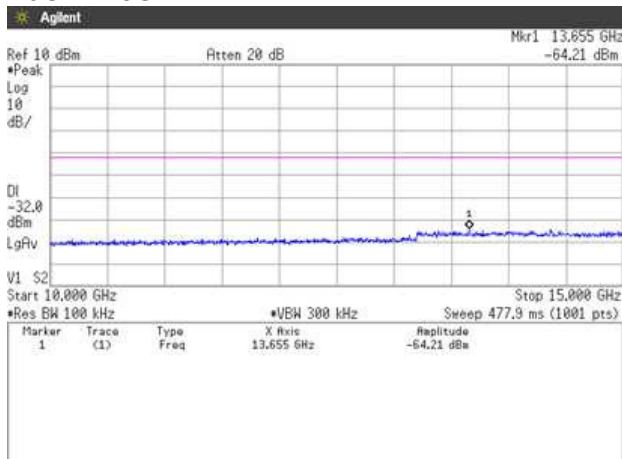

## 15GHz-20GHz

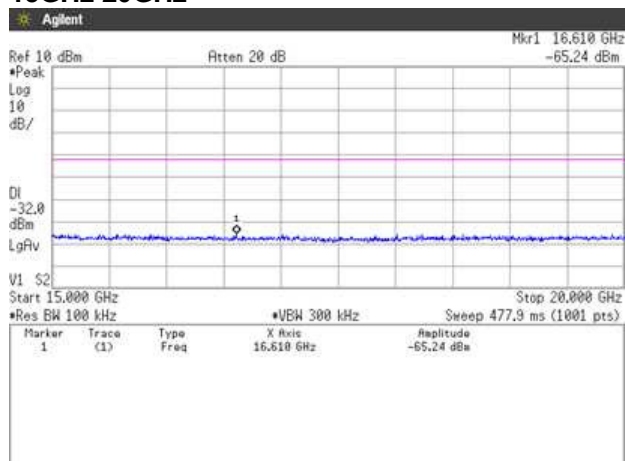

## 20GHz-25GHz

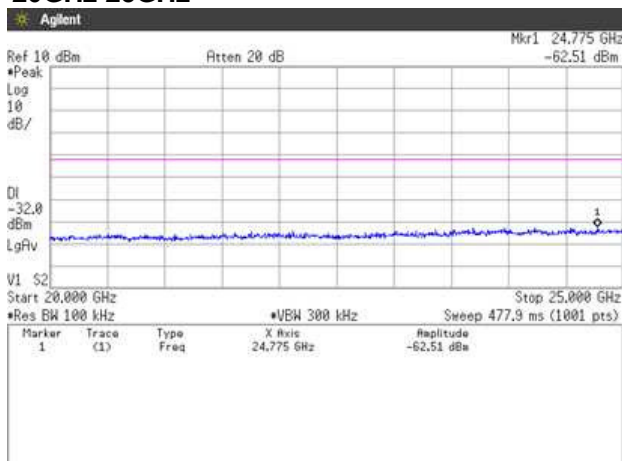

## 8. Spurious Emissions - Radiated -

### 8.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209, KDB 558074 D01 v04, Section 12.1]

Test was applied by following conditions.

|                           |                                                                                                                            |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Test method               | : ANSI C63.10                                                                                                              |
| Frequency range           | : 9kHz to 25GHz                                                                                                            |
| Test place                | : 3m Semi-anechoic chamber                                                                                                 |
| EUT was placed on         | : Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz)<br>Styrofoam table / (W)0.6m × (D)0.6m × (H)1.5m (above 1GHz) |
| Antenna distance          | : 3m                                                                                                                       |
| Test receiver setting     | Below 1GHz                                                                                                                 |
| - Detector                | : Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak                                                                          |
| - Bandwidth               | : 200Hz, 120kHz                                                                                                            |
| Spectrum analyzer setting | Above 1GHz                                                                                                                 |
| - Peak                    | : RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep=auto                                                                                 |
| - Average                 | : RBW=1MHz, VBW=10Hz, Span=0Hz, Sweep=auto<br>Display mode=Linear                                                          |

#### Average Measurement Setting [VBW]

| Mode              | Duty Cycle (%) | T <sub>on</sub> (us) | T <sub>off</sub> (us) | Determined VBW Setting  |
|-------------------|----------------|----------------------|-----------------------|-------------------------|
| IEEE802.11b       | 99.22          | 1024                 | 8                     | 10Hz (Duty Cycle ≥ 98%) |
| IEEE802.11g       | 99.42          | 1364                 | 8                     | 10Hz (Duty Cycle ≥ 98%) |
| IEEE802.11n(HT20) | 99.22          | 1276                 | 10                    | 10Hz (Duty Cycle ≥ 98%) |


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna and Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane.

The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

#### - Test configuration

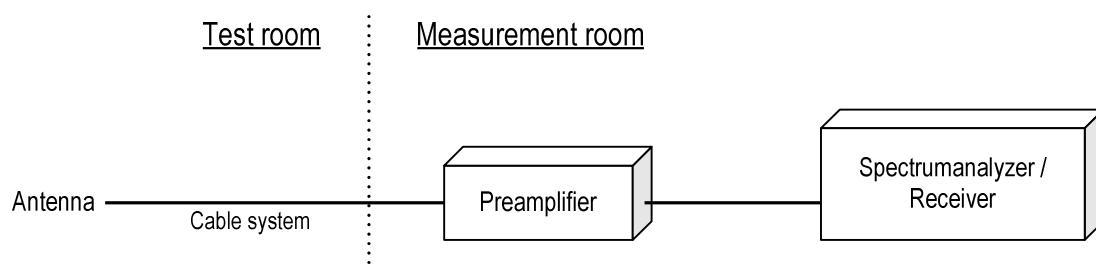

## 8.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant. factor + Cable system loss )

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant. factor + Cable system loss – Amp. Gain)

Margin = Limit – Emission level

Example:

Limit @ 4824.0MHz : 74.0dBuV/m (Peak Limit)

S.A Reading = 49.5dBuV Cable system loss = 8.4dB

Result = 49.5 + 8.4 = 45.1dBuV/m

Margin = 74.0 - 45.1 = 16.1dB

## 8.3 Limit

| Frequency<br>[MHz] | Field strength  |               | Distance<br>[m] |
|--------------------|-----------------|---------------|-----------------|
|                    | [uV/m]          | [dBuV/m]      |                 |
| 0.009-0.490        | 2400 / F [kHz]  | 20logE [uV/m] | 300             |
| 0.490-1.705        | 24000 / F [kHz] | 20logE [uV/m] | 30              |
| 1.705-30           | 30              | 29.5          | 30              |
| 30-88              | 100             | 40.0          | 3               |
| 88-216             | 150             | 43.5          | 3               |
| 216-960            | 200             | 46.0          | 3               |
| Above 960          | 500             | 54.0          | 3               |

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.


#### 8.4 Test data

|             |   |                          |               |                       |
|-------------|---|--------------------------|---------------|-----------------------|
| Date        | : | May 15, 2017             |               |                       |
| Temperature | : | 23.4 [°C]                |               |                       |
| Humidity    | : | 45.8 [%]                 | Test engineer | :                     |
| Test place  | : | 3m Semi-anechoic chamber |               | <u>Tadahiro Seino</u> |
|             |   |                          |               |                       |
| Date        | : | May 16, 2017             |               |                       |
| Temperature | : | 23.4 [°C]                |               |                       |
| Humidity    | : | 45.8 [%]                 | Test engineer | :                     |
| Test place  | : | 3m Semi-anechoic chamber |               | <u>Tadahiro Seino</u> |
|             |   |                          |               |                       |
| Date        | : | May 18, 2017             |               |                       |
| Temperature | : | 23.8 [°C]                |               |                       |
| Humidity    | : | 35.3 [%]                 | Test engineer | :                     |
| Test place  | : | 3m Semi-anechoic chamber |               | <u>Tadahiro Seino</u> |

### 8.4.1 Transmission mode

[11b]  
Channel Low  
BELOW 1GHz

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

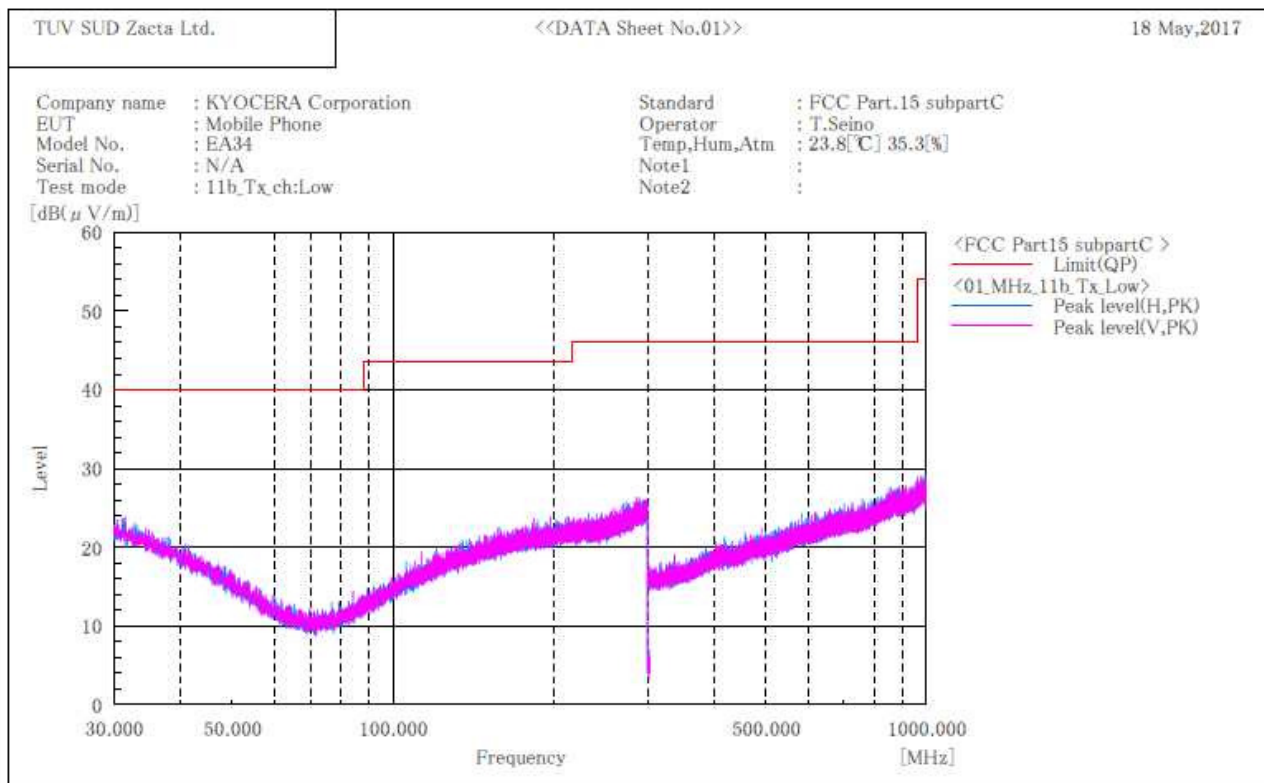

#### Final Result


| No. | Frequency (P) | c.f       | Height | Angle | Remark |
|-----|---------------|-----------|--------|-------|--------|
|     | [MHz]         | [dB(1/m)] | [cm]   | [°]   |        |

#### Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11b]  
Channel Low  
ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

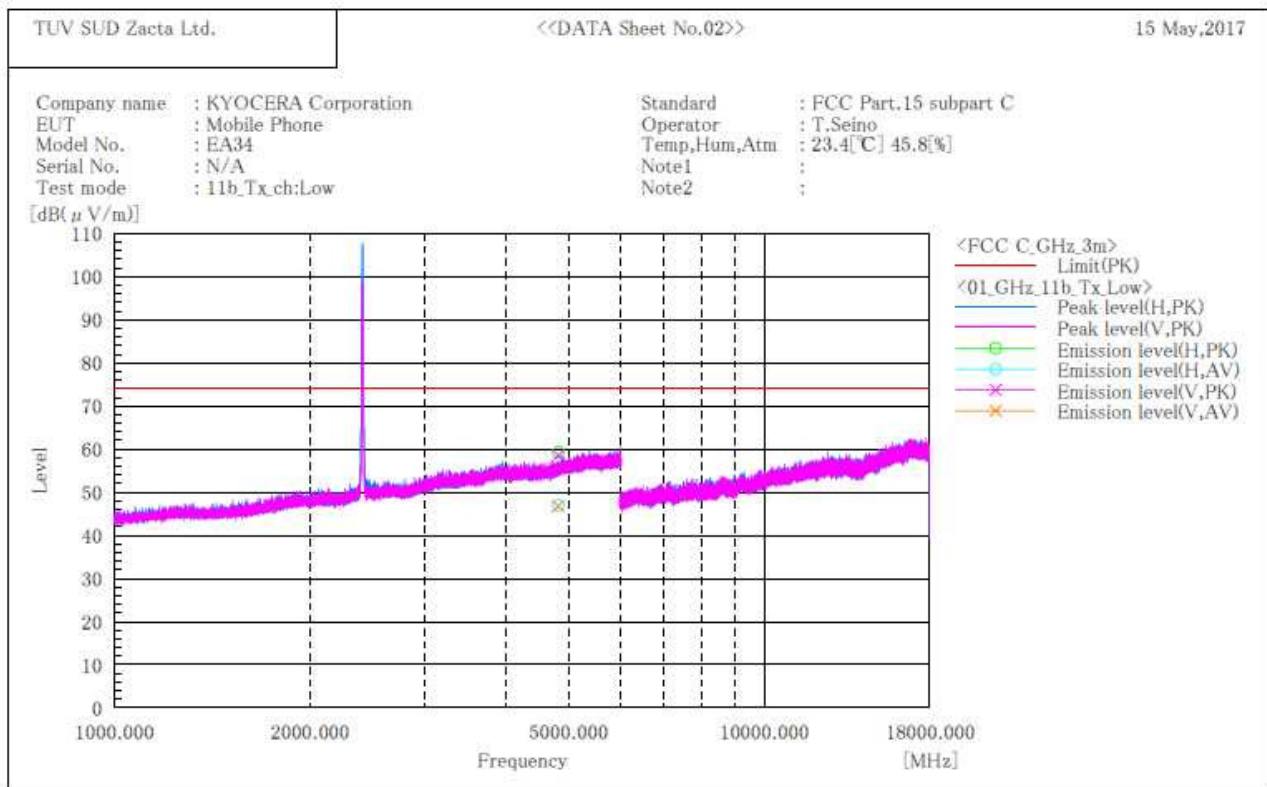

## Final Result


| No. | Frequency (F) | Reading<br>PK | Reading<br>AV | c.f       | Result<br>PK | Result<br>AV | Limit<br>PK | Limit<br>AV | Margin<br>PK | Margin<br>AV | Height | Angle | Remark |  |
|-----|---------------|---------------|---------------|-----------|--------------|--------------|-------------|-------------|--------------|--------------|--------|-------|--------|--|
|     | [MHz]         | [dB(μV)]      | [dB(μV)]      | [dB(1/m)] | [dB(μV/m)]   | [dB(μV/m)]   | [dB(μV/m)]  | [dB(μV/m)]  | [dB]         | [dB]         | [cm]   | [°]   |        |  |
| 1   | 4824.000      | H             | 50.9          | 38.6      | 8.4          | 59.3         | 47.0        | 74.0        | 54.0         | 14.7         | 7.0    | 149.0 | 11.0   |  |
| 2   | 4824.000      | V             | 50.2          | 38.4      | 8.4          | 58.6         | 46.8        | 74.0        | 54.0         | 15.4         | 7.2    | 218.0 | 289.0  |  |

## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[11b]**  
**Channel Middle**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

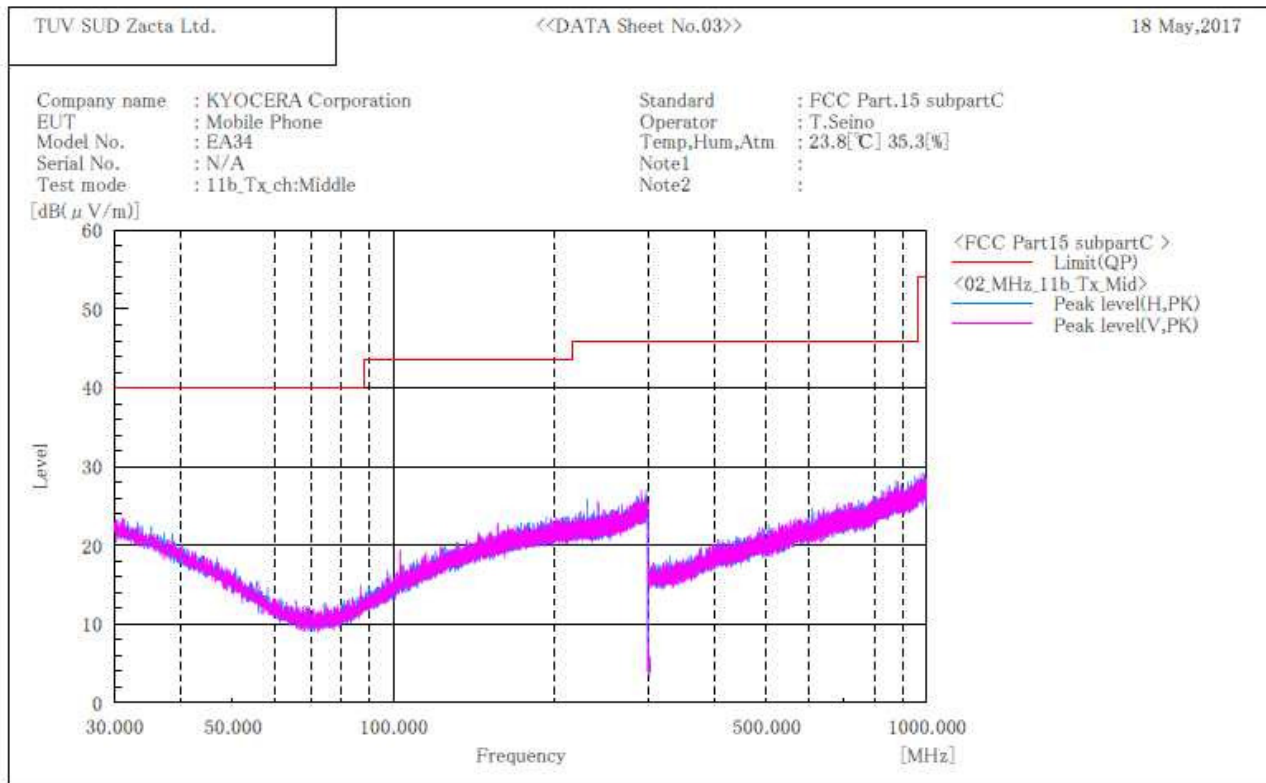

**Final Result**

| No. | Frequency (P) | c.f        | Height | Angle | Remark |
|-----|---------------|------------|--------|-------|--------|
|     | [MHz]         | [dB (1/m)] | [cm]   | [°]   |        |


**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



**[11b]  
Channel Middle  
ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

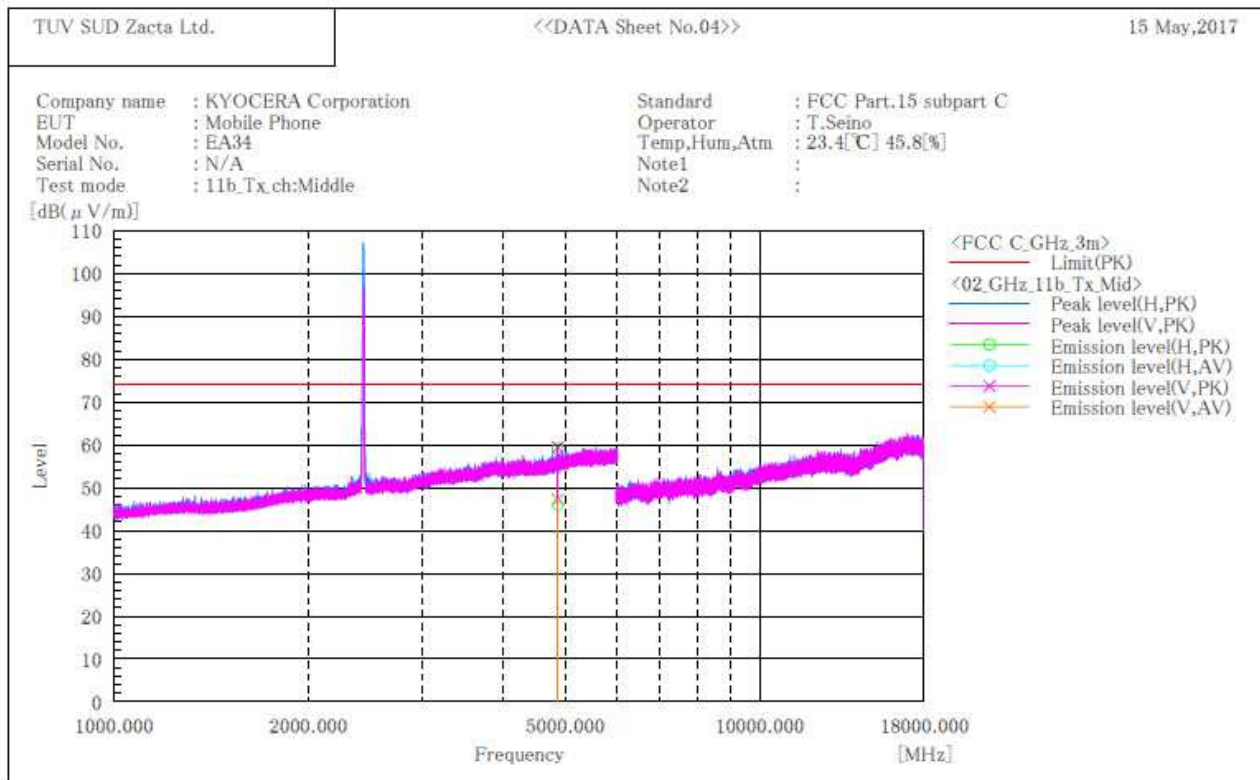

## Final Result

| No. | Frequency [MHz] | (P) | Reading PK [dB(μV)] | Reading AV [dB(μV)] | c.f [dB(1/m)] | Result PK [dB(μV/m)] | Result AV [dB(μV/m)] | Limit PK [dB(μV/m)] | Limit AV [dB(μV/m)] | Margin PK [dB] | Margin AV [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------------|---------------|----------------------|----------------------|---------------------|---------------------|----------------|----------------|-------------|-----------|--------|
| 1   | 4874.000        | H   | 50.5                | 37.4                | 8.6           | 59.1                 | 46.0                 | 74.0                | 54.0                | 14.9           | 8.0            | 145.0       | 14.0      |        |
| 2   | 4874.000        | V   | 50.8                | 38.6                | 8.6           | 59.4                 | 47.2                 | 74.0                | 54.0                | 14.6           | 6.8            | 221.0       | 332.0     |        |


## Note:

- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



[11b]  
Channel High  
BELOW 1GHz

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

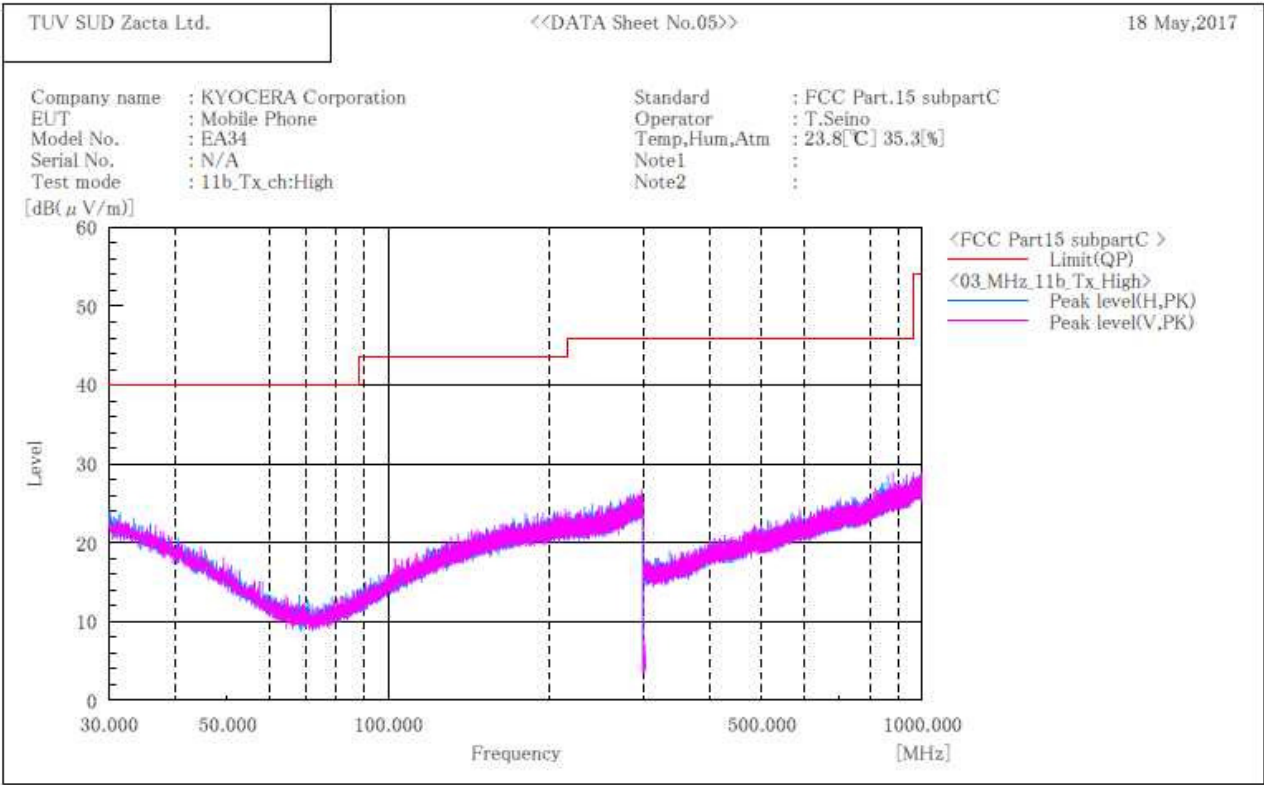

Final Result


| No. | Frequency (P) | c.f       | Height | Angle | Remark |
|-----|---------------|-----------|--------|-------|--------|
|     | [MHz]         | [dB(1/m)] | [cm]   | [°]   |        |

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11b]  
Channel High  
ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

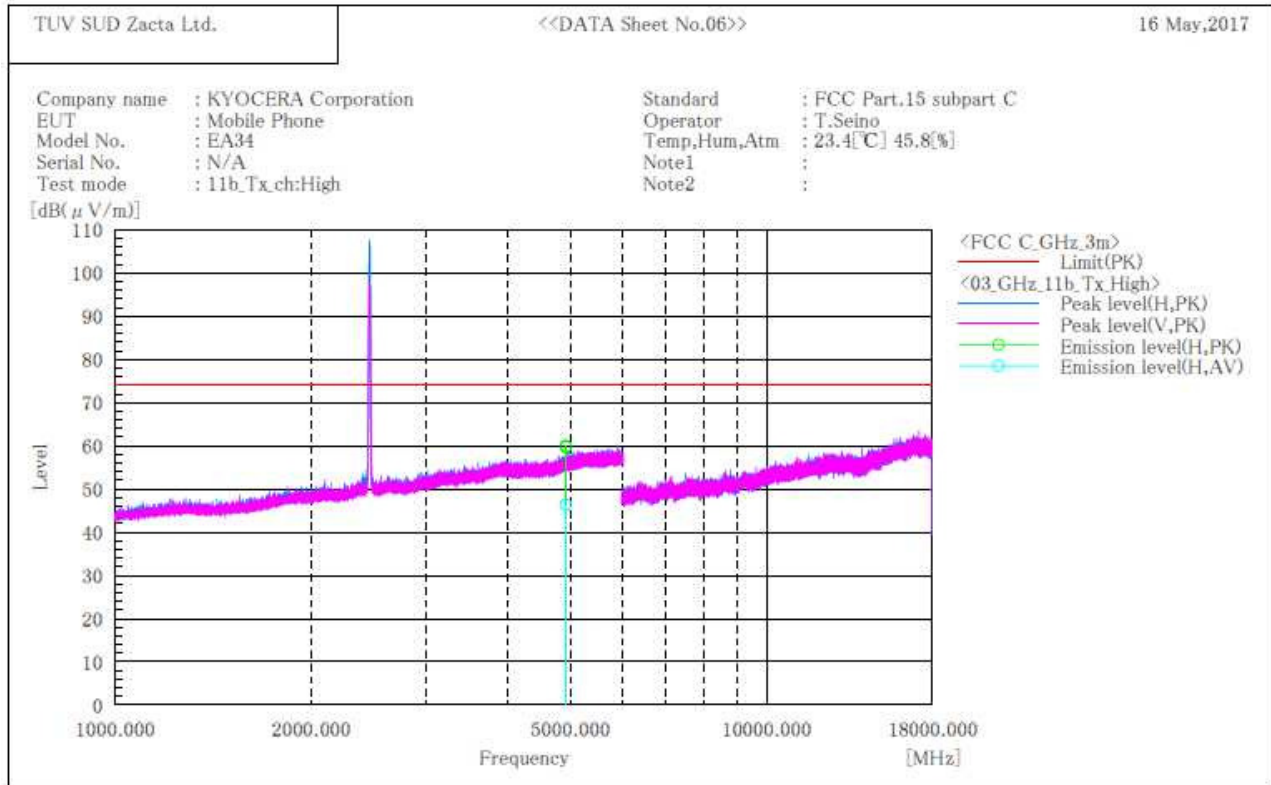

## Final Result


| No. | Frequency [MHz] | (P) | Reading PK [dB(μV)] | Reading AV [dB(μV)] | c.f [dB(1/m)] | Result PK [dB(μV/m)] | Result AV [dB(μV/m)] | Limit PK [dB(μV/m)] | Limit AV [dB(μV/m)] | Margin PK [dB] | Margin AV [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------------|---------------|----------------------|----------------------|---------------------|---------------------|----------------|----------------|-------------|-----------|--------|
| 1   | 4924.000        | H   | 81.1                | 37.5                | 8.9           | 60.0                 | 46.4                 | 74.0                | 54.0                | 14.0           | 7.6            | 148.0       | 11.0      |        |
| 2   | 4924.000        | H   | 50.8                | 37.4                | 8.9           | 59.7                 | 46.3                 | 74.0                | 54.0                | 14.3           | 7.7            | 216.0       | 333.0     |        |

## Note:

- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[11g]  
Channel Low  
BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

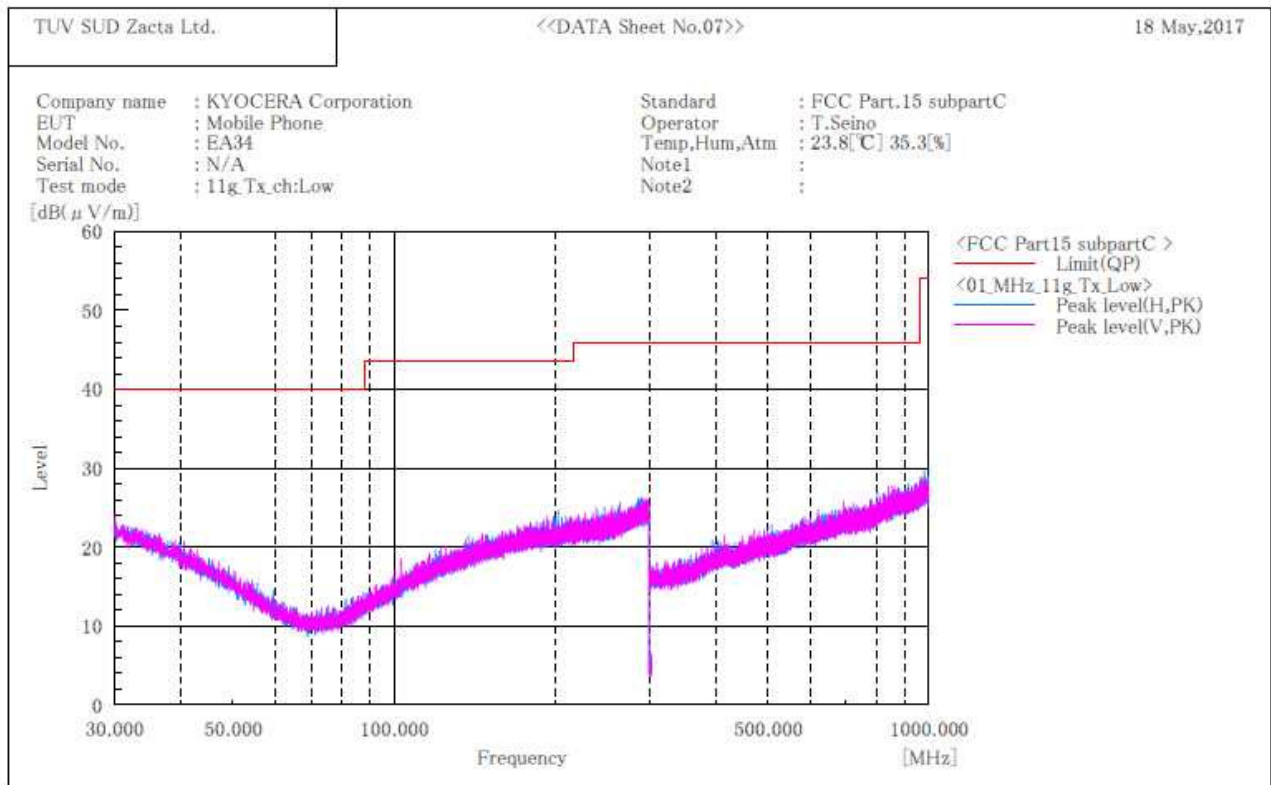

**Final Result**


| No. | Frequency (P) | c.f       | Height | Angle | Remark |
|-----|---------------|-----------|--------|-------|--------|
|     | [MHz]         | [dB(1/m)] | [cm]   | [°]   |        |

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11g]  
Channel Low  
ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

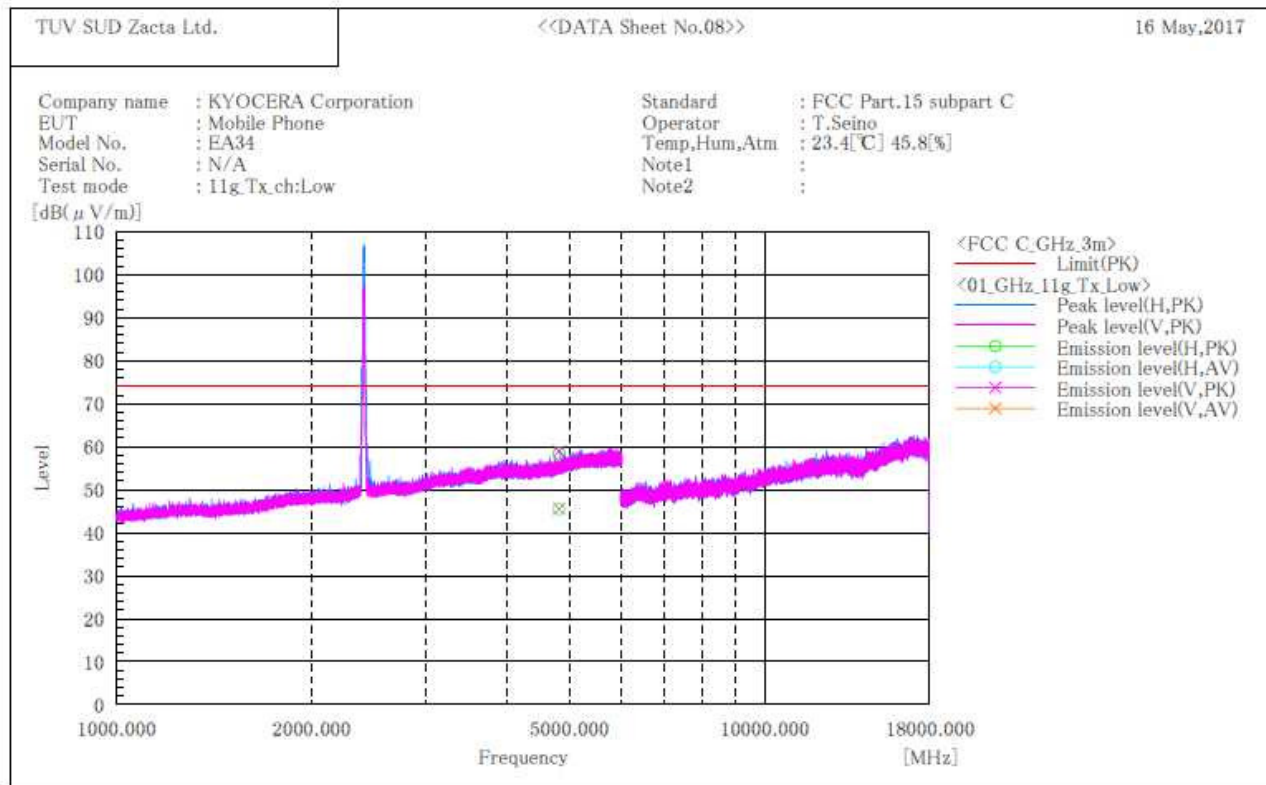

## Final Result


| No. | Frequency [MHz] | (P) | Reading PK [dB(μV)] | Reading AV [dB(μV)] | c.f [dB(1/m)] | Result PK [dB(μV/m)] | Result AV [dB(μV/m)] | Limit PK [dB(μV/m)] | Limit AV [dB(μV/m)] | Margin PK [dB] | Margin AV [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------------|---------------|----------------------|----------------------|---------------------|---------------------|----------------|----------------|-------------|-----------|--------|
| 1   | 4824.000        | H   | 50.1                | 37.1                | 8.4           | 58.5                 | 45.5                 | 74.0                | 54.0                | 15.5           | 8.5            | 156.0       | 13.0      |        |
| 2   | 4824.000        | V   | 50.5                | 37.2                | 8.4           | 58.9                 | 45.6                 | 74.0                | 54.0                | 15.1           | 8.4            | 234.0       | 322.0     |        |

## Note:

- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[11g]  
Channel Middle  
BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

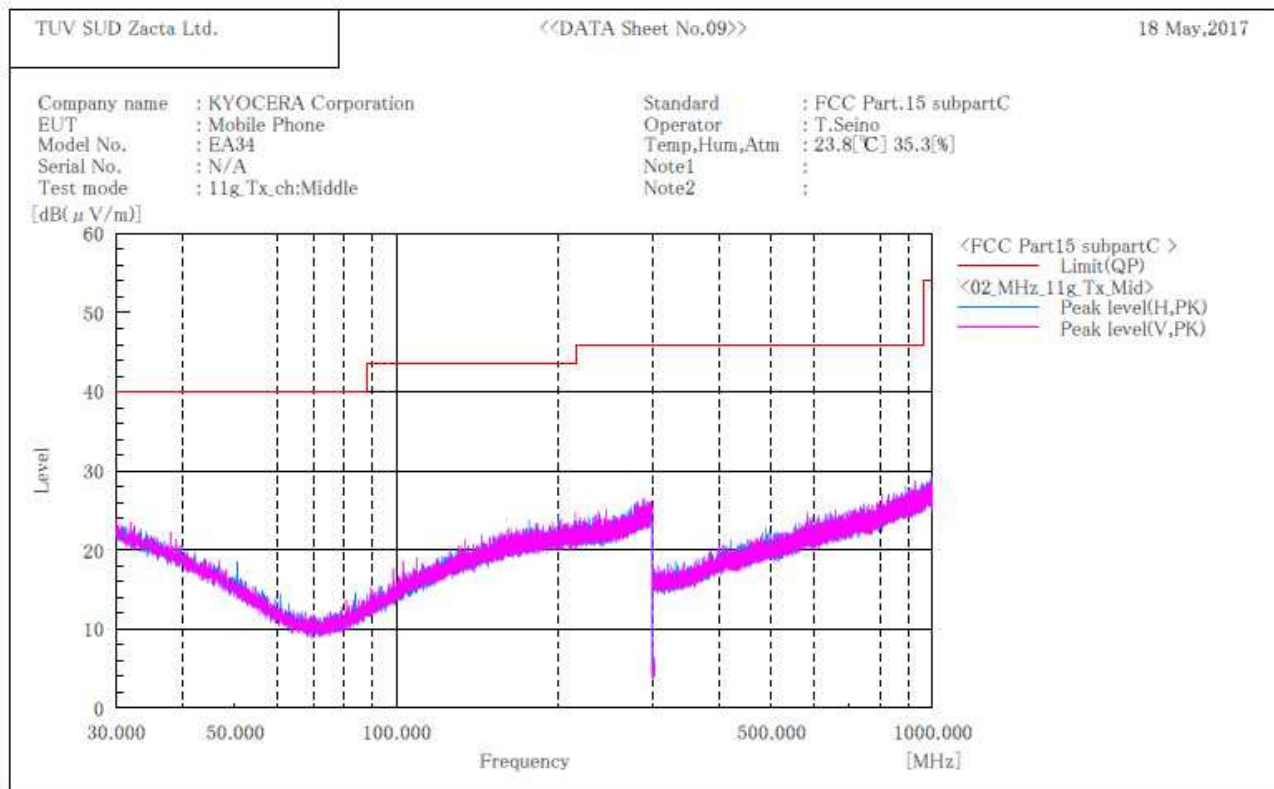

**Final Result**


| No. | Frequency (P) | c.f       | Height | Angle | Remark |
|-----|---------------|-----------|--------|-------|--------|
|     | [MHz]         | [dB(1/m)] | [cm]   | [°]   |        |

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11g]  
Channel Middle  
ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

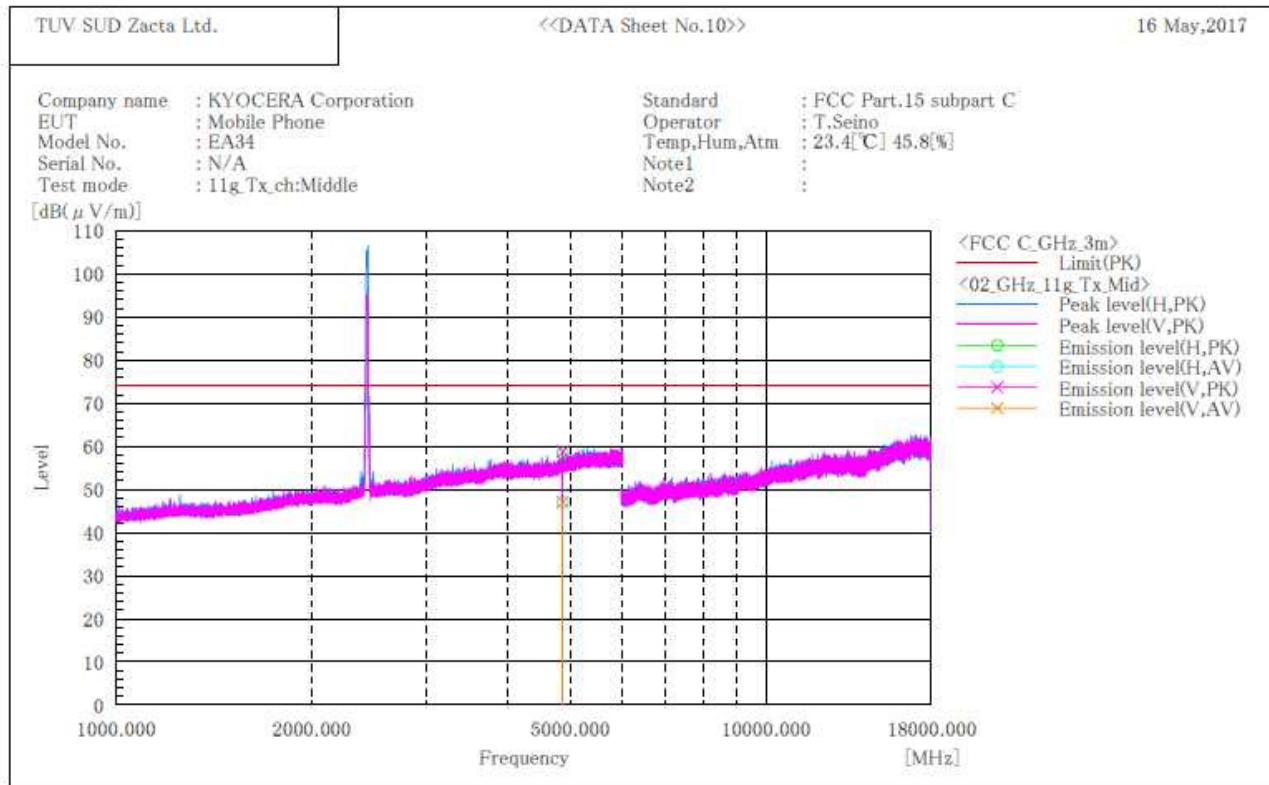

## Final Result

| No. | Frequency (P) | Reading PK | Reading AV | c.f       | Result PK  | Result AV  | Limit PK   | Limit AV   | Margin PK | Margin AV | Height | Angle | Remark |  |
|-----|---------------|------------|------------|-----------|------------|------------|------------|------------|-----------|-----------|--------|-------|--------|--|
|     | [MHz]         | [dB(μV)]   | [dB(μV)]   | [dB(1/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB]      | [dB]      | [cm]   | [°]   |        |  |
| 1   | 4874.000      | H          | 49.8       | 38.4      | 8.6        | 58.4       | 47.0       | 74.0       | 54.0      | 15.6      | 7.0    | 167.0 | 17.0   |  |
| 2   | 4874.000      | V          | 50.2       | 38.5      | 8.6        | 58.8       | 47.1       | 74.0       | 54.0      | 15.2      | 6.9    | 217.0 | 324.0  |  |


## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



**[11g]  
Channel High  
BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

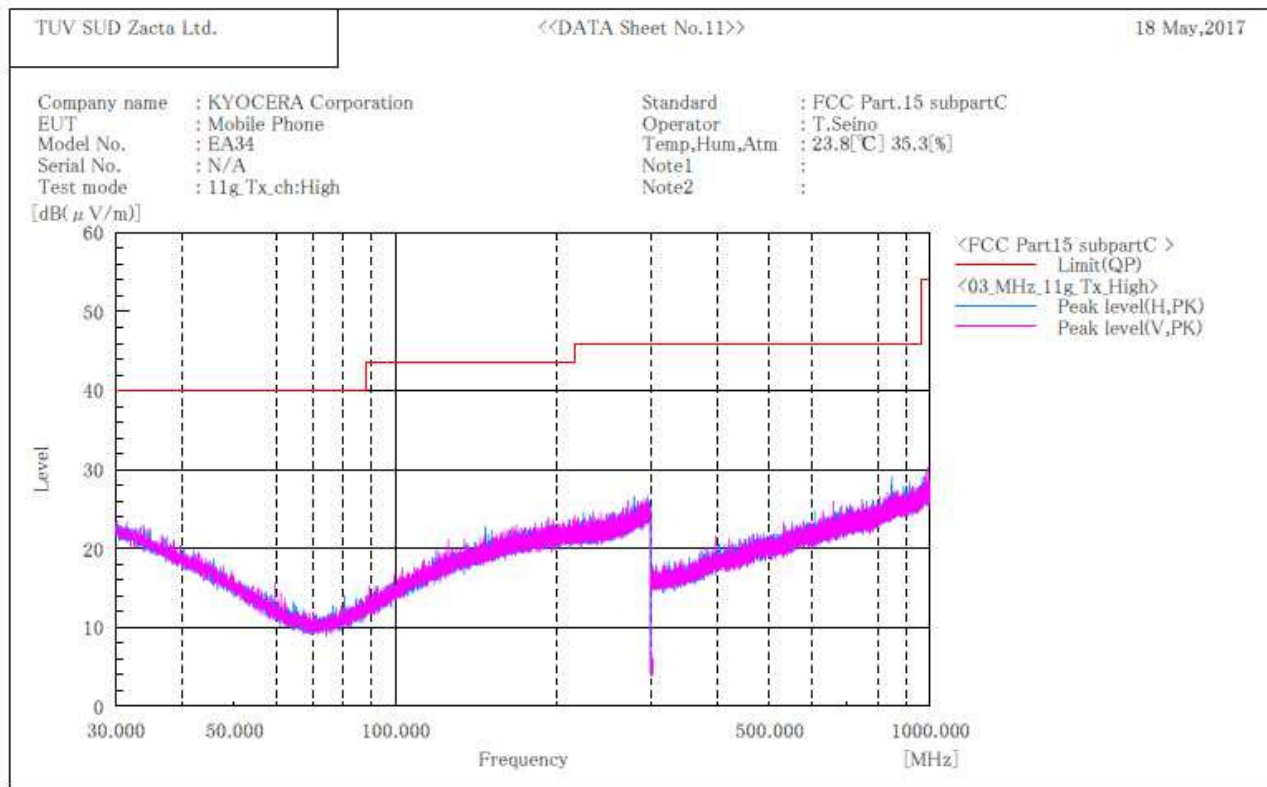

**Final Result**


| No. | Frequency (P) | c.f       | Height | Angle | Remark |
|-----|---------------|-----------|--------|-------|--------|
|     | [MHz]         | [dB(1/m)] | [cm]   | [°]   |        |

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11g]  
Channel High  
ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

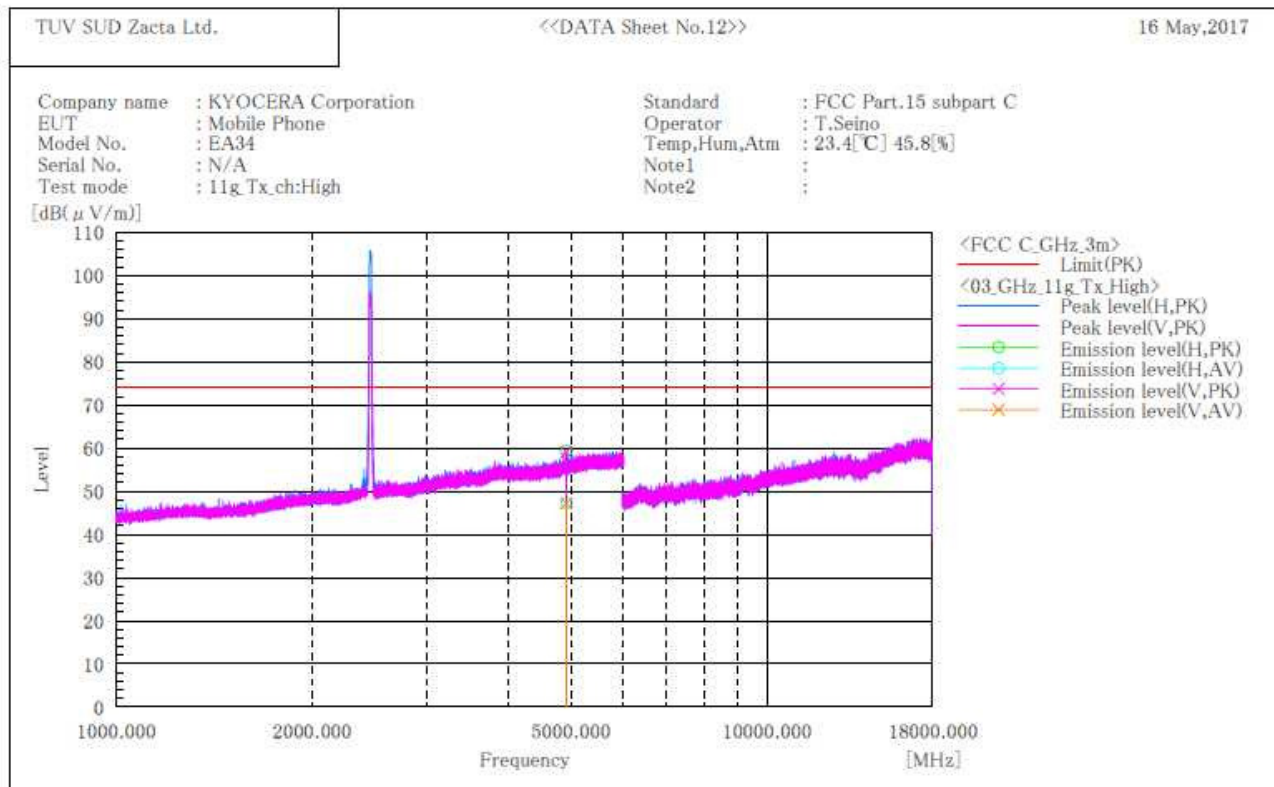

Final Result

| No.   | Frequency (P) | Reading PK | Reading AV | c.f       | Result PK  | Result AV  | Limit PK   | Limit AV   | Margin PK | Margin AV | Height | Angle | Remark |
|-------|---------------|------------|------------|-----------|------------|------------|------------|------------|-----------|-----------|--------|-------|--------|
| [MHz] |               | [dB(μV)]   | [dB(μV)]   | [dB(1/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB]      | [dB]      | [cm]   | [°]   |        |
| 1     | 4924.000      | H          | 50.4       | 38.4      | 8.9        | 59.3       | 47.3       | 74.0       | 54.0      | 14.7      | 6.7    | 159.0 | 18.0   |
| 2     | 4924.000      | V          | 50.2       | 38.3      | 8.9        | 59.1       | 47.2       | 74.0       | 54.0      | 14.9      | 6.8    | 215.0 | 336.0  |


Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



**[11n(HT20)]**  
**Channel Low**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

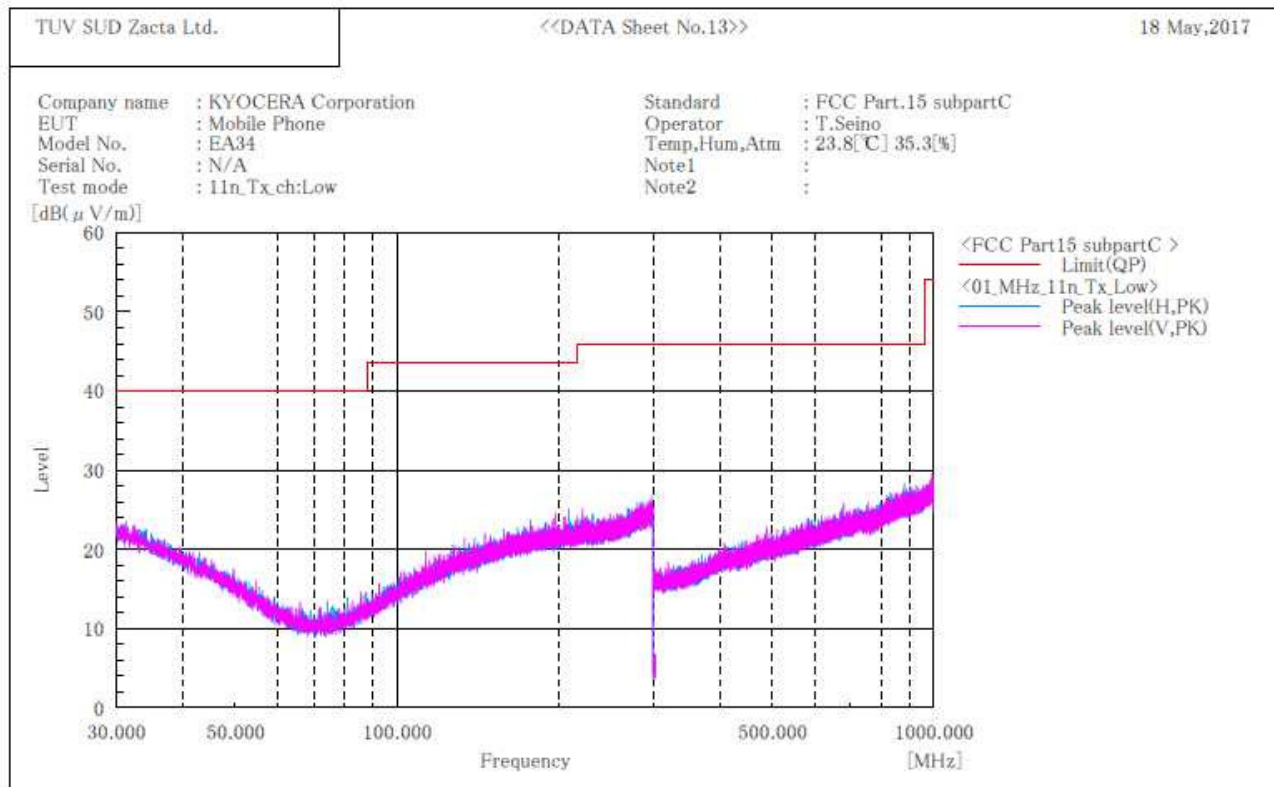

**Final Result**


| No. | Frequency (P) | c.f       | Height | Angle | Remark |
|-----|---------------|-----------|--------|-------|--------|
|     | [MHz]         | [dB(1/m)] | [cm]   | [°]   |        |

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11n(HT20)]**  
**Channel Low**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

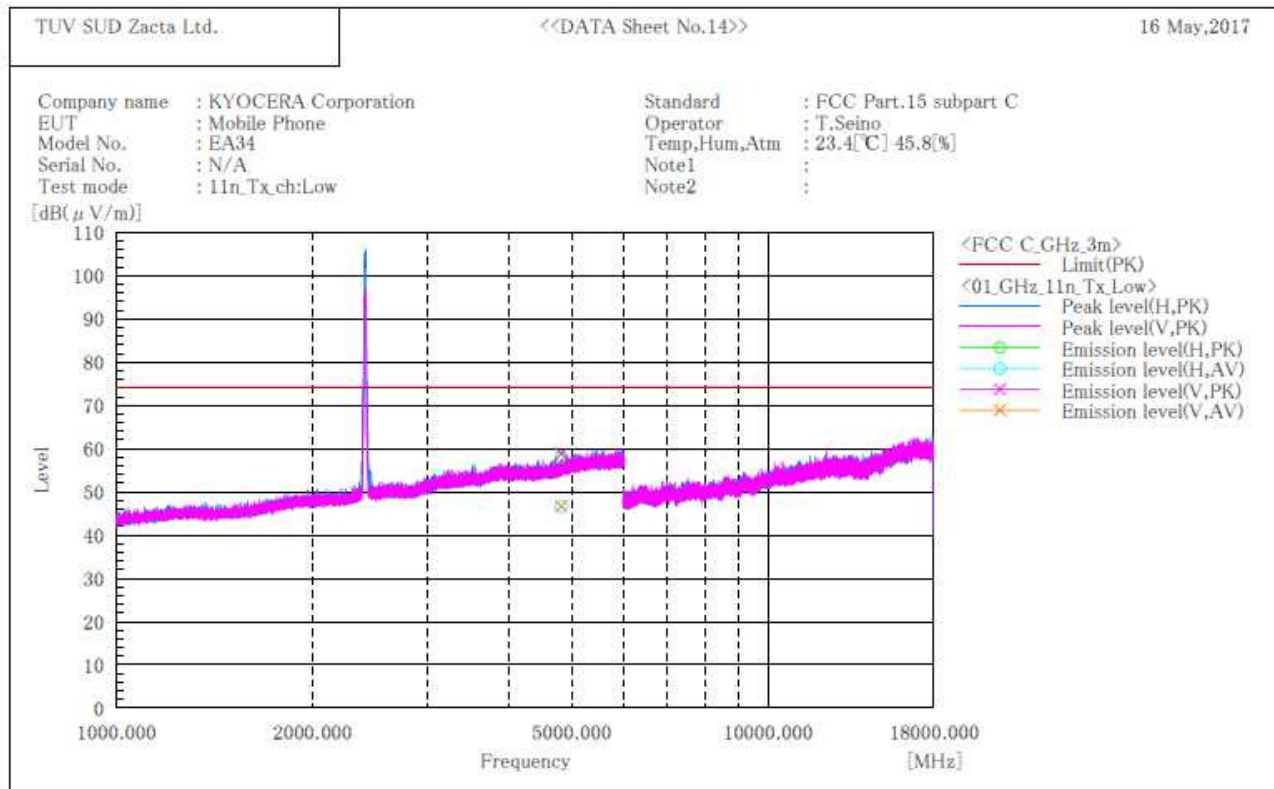

## Final Result


| No. | Frequency (P) | Reading PK | Reading AV | c.f       | Result PK  | Result AV  | Limit PK   | Limit AV   | Margin PK | Margin AV | Height | Angle | Remark |
|-----|---------------|------------|------------|-----------|------------|------------|------------|------------|-----------|-----------|--------|-------|--------|
|     | [MHz]         | [dB(μV)]   | [dB(μV)]   | [dB(1/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB]      | [dB]      | [cm]   | [°]   |        |
| 1   | 4824.000 H    | 49.7       | 38.2       | 8.4       | 58.1       | 46.6       | 74.0       | 54.0       | 15.9      | 7.4       | 143.0  | 20.0  |        |
| 2   | 4824.000 V    | 50.4       | 38.3       | 8.4       | 58.8       | 46.7       | 74.0       | 54.0       | 15.2      | 7.3       | 223.0  | 340.0 |        |

## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11n(HT20)]  
Channel Middle  
BELOW 1GHz

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

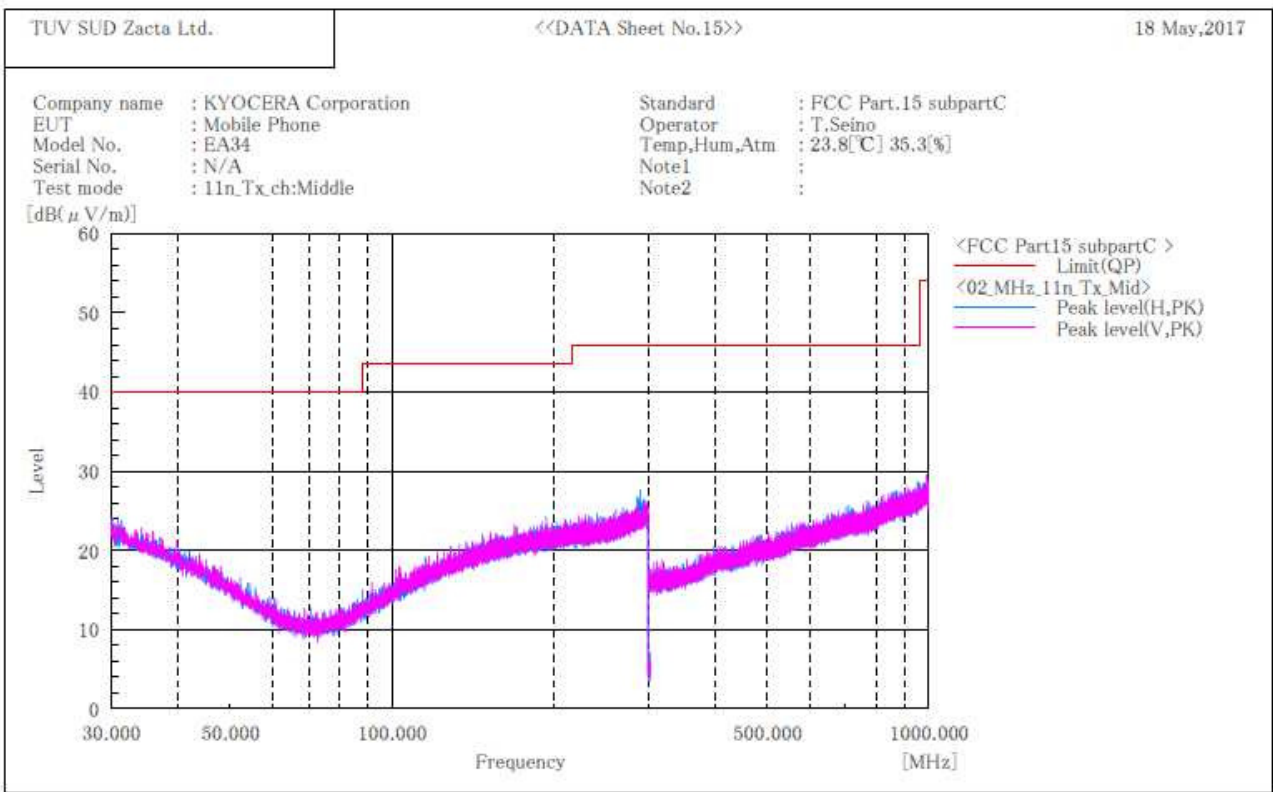

Final Result


| No. | Frequency (P) | c.f        | Height | Angle | Remark |
|-----|---------------|------------|--------|-------|--------|
|     | [MHz]         | [dB (1/m)] | [cm]   | [° ]  |        |

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11n(HT20)]**  
**Channel Middle**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

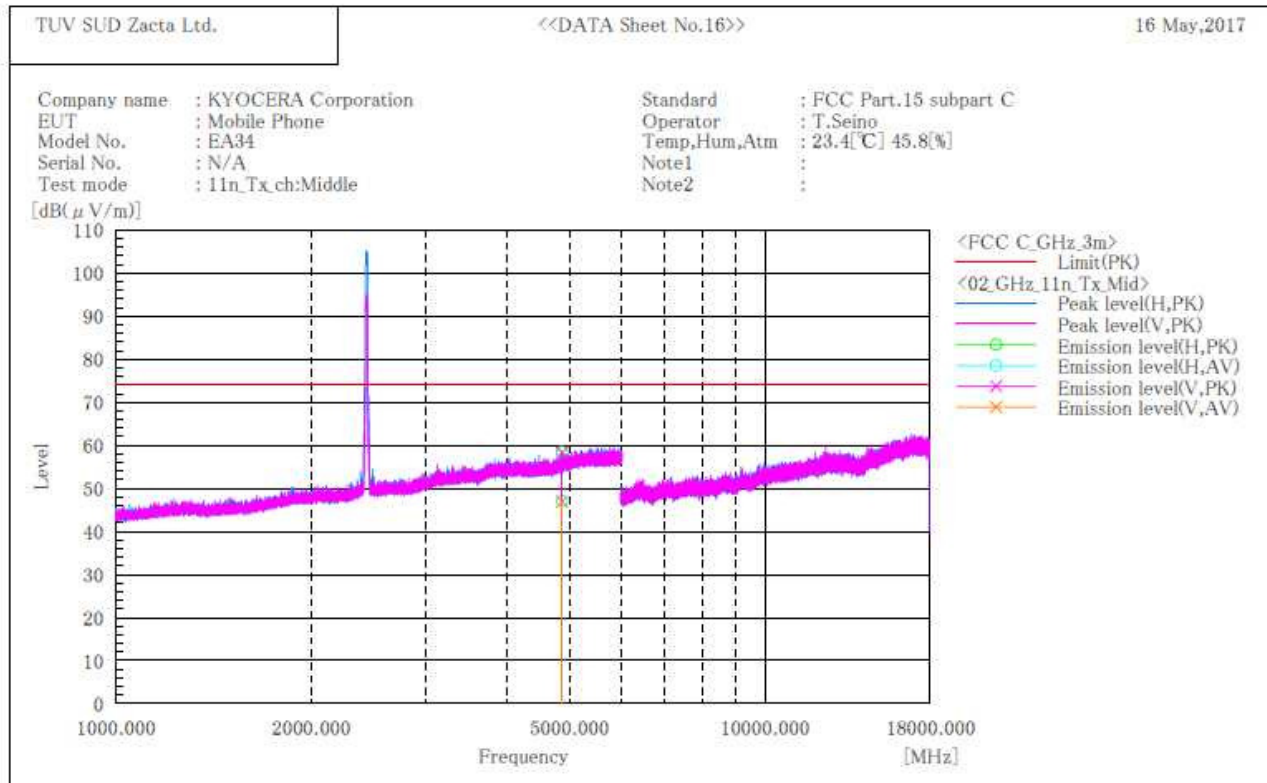

## Final Result


| No. | Frequency [MHz] | (P) | Reading PK [dB(μV)] | Reading AV [dB(μV)] | c.f [dB(1/m)] | Result PK [dB(μV/m)] | Result AV [dB(μV/m)] | Limit PK [dB(μV/m)] | Limit AV [dB(μV/m)] | Margin PK [dB] | Margin AV [dB] | Height [cm] | Angle [°] | Remark |
|-----|-----------------|-----|---------------------|---------------------|---------------|----------------------|----------------------|---------------------|---------------------|----------------|----------------|-------------|-----------|--------|
| 1   | 4874.000        | H   | 49.9                | 38.5                | 8.6           | 58.5                 | 47.1                 | 74.0                | 54.0                | 15.5           | 6.9            | 144.0       | 16.0      |        |
| 2   | 4874.000        | V   | 49.7                | 38.3                | 8.6           | 58.3                 | 46.9                 | 74.0                | 54.0                | 15.7           | 7.1            | 229.0       | 334.0     |        |

## Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[11n(HT20)]**  
**Channel High**  
**BELOW 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

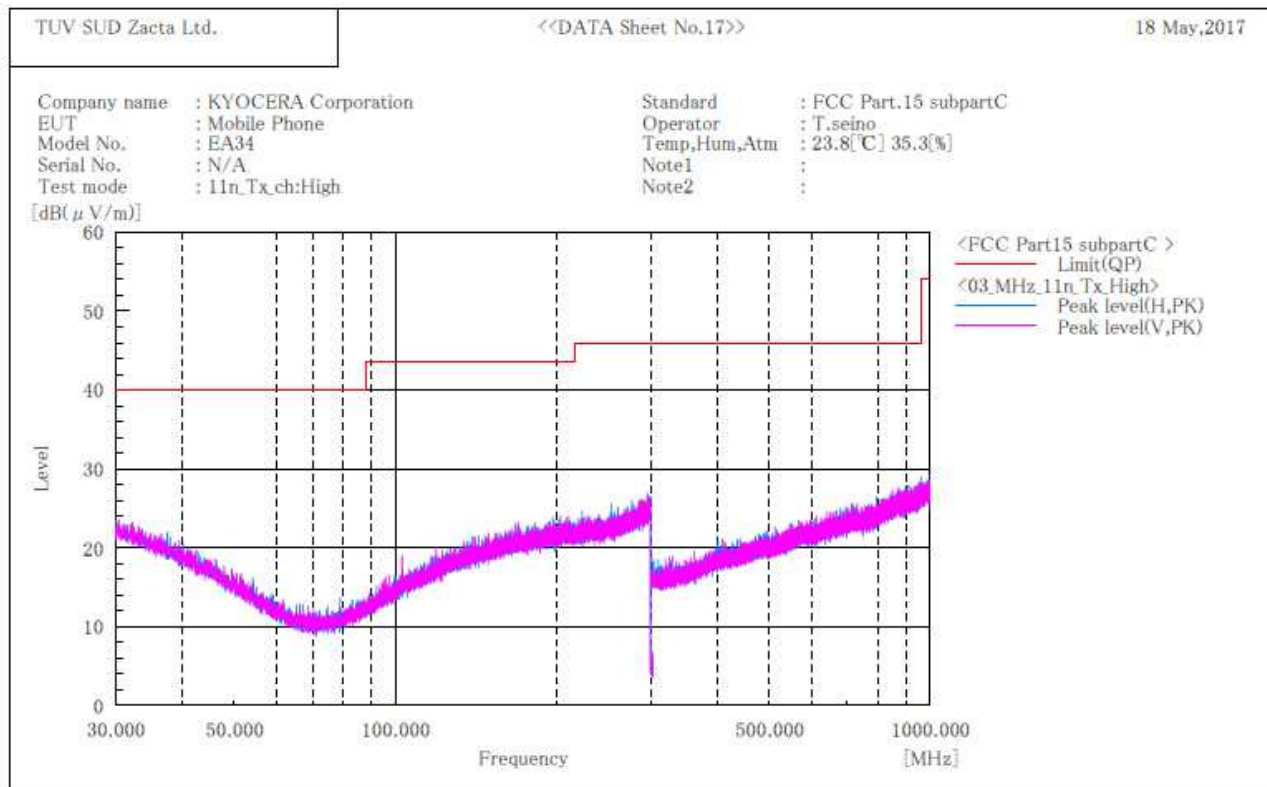

**Final Result**


| No. | Frequency (P) | c.f        | Height | Angle | Remark |
|-----|---------------|------------|--------|-------|--------|
|     | [MHz]         | [dB (1/m)] | [cm]   | [°]   |        |

**Note:**

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11n(HT20)]**  
**Channel High**  
**ABOVE 1GHz**

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
 [ 3m Semi-anechoic chamber ]

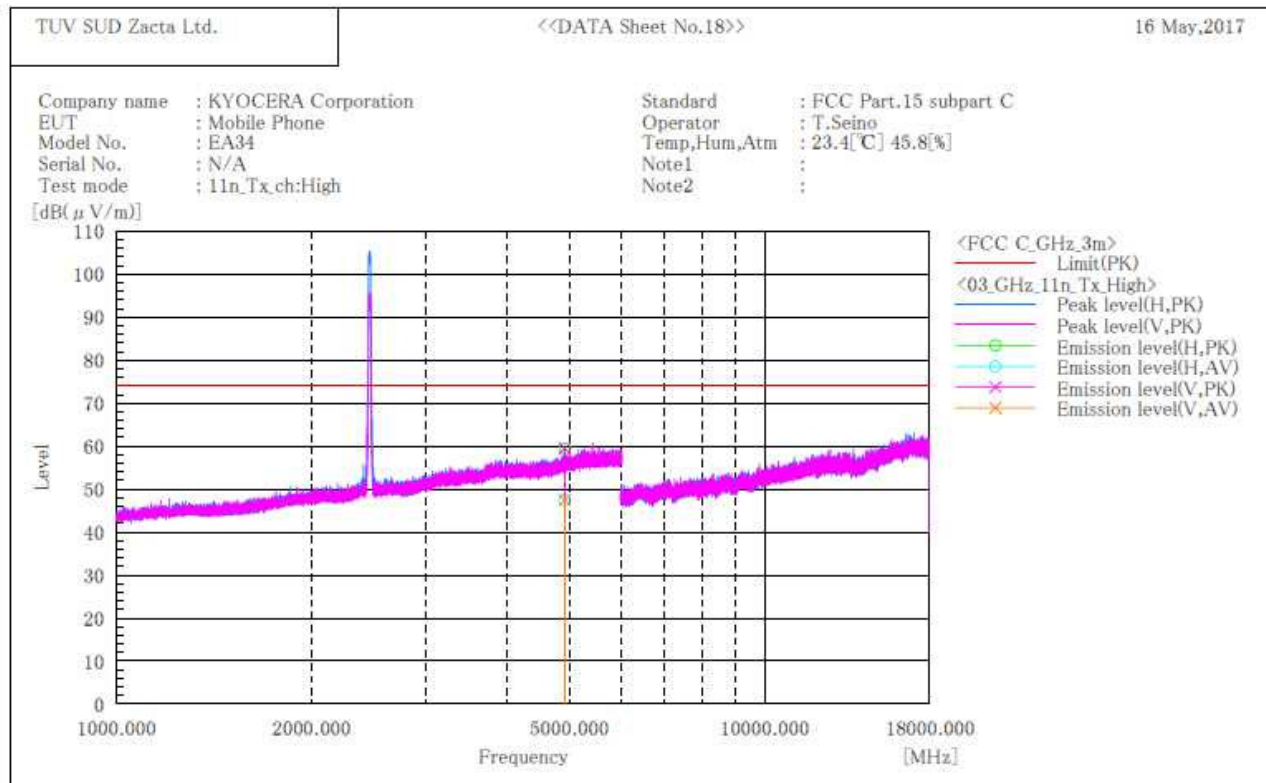

## Final Result

| No. | Frequency (P) | Reading PK | Reading AV | c.f  | Result PK  | Result AV  | Limit PK   | Limit AV   | Margin PK | Margin AV | Height | Angle | Remark |
|-----|---------------|------------|------------|------|------------|------------|------------|------------|-----------|-----------|--------|-------|--------|
|     | [MHz]         | [dB(μV)]   | [dB(μV)]   |      | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB(μV/m)] | [dB]      | [dB]      | [cm]   | [°]   |        |
| 1   | 4924.000      | H          | 50.5       | 38.5 | 8.9        | 59.4       | 74.0       | 54.0       | 14.6      | 6.6       | 149.0  | 12.0  |        |
| 2   | 4924.000      | V          | 50.6       | 38.6 | 8.9        | 59.5       | 74.0       | 54.0       | 14.5      | 6.5       | 227.0  | 346.0 |        |

## Note:


- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



## 8.4.2 Receive mode

### Channel Low BELOW 1GHz

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

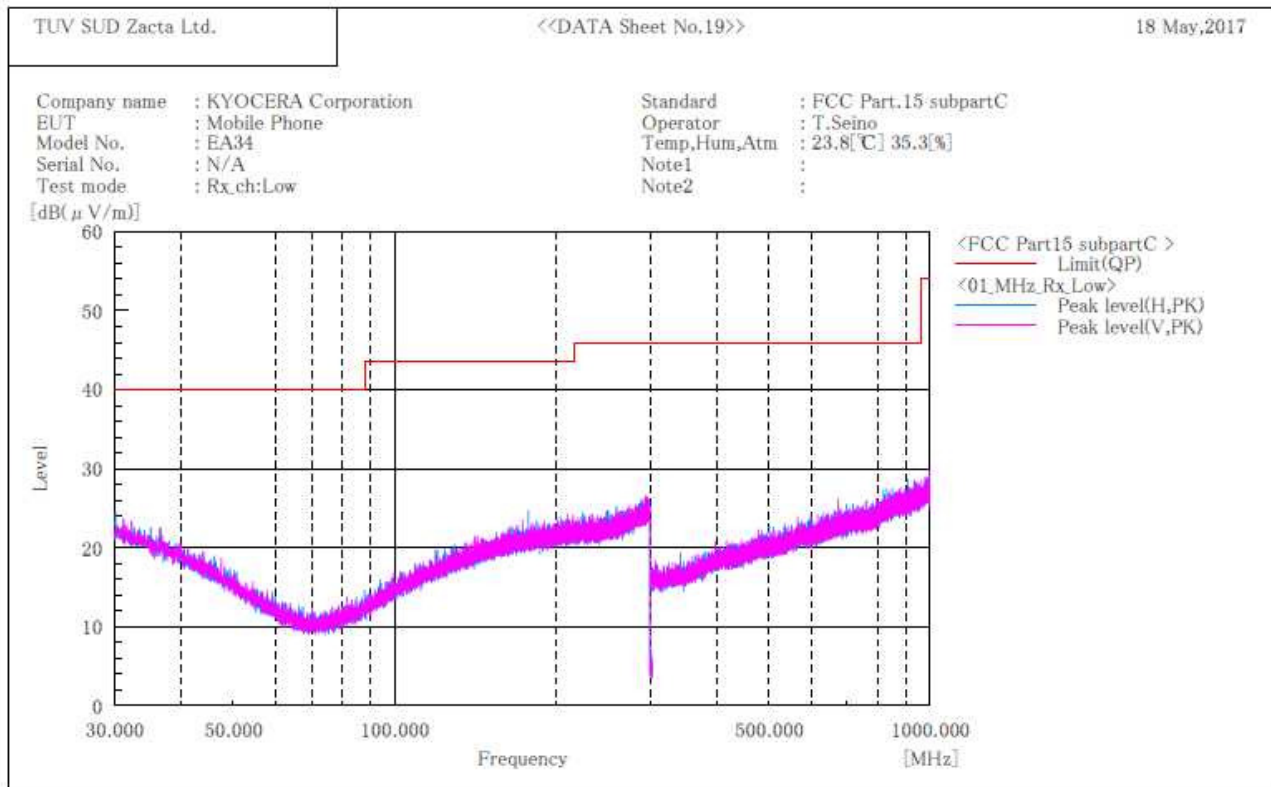

#### Final Result

| No. | Frequency (P) | c. f      | Height | Angle | Remark |
|-----|---------------|-----------|--------|-------|--------|
|     | [MHz]         | [dB(1/m)] | [cm]   | [°]   |        |


#### Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.



## Channel Middle BELOW 1GHz

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

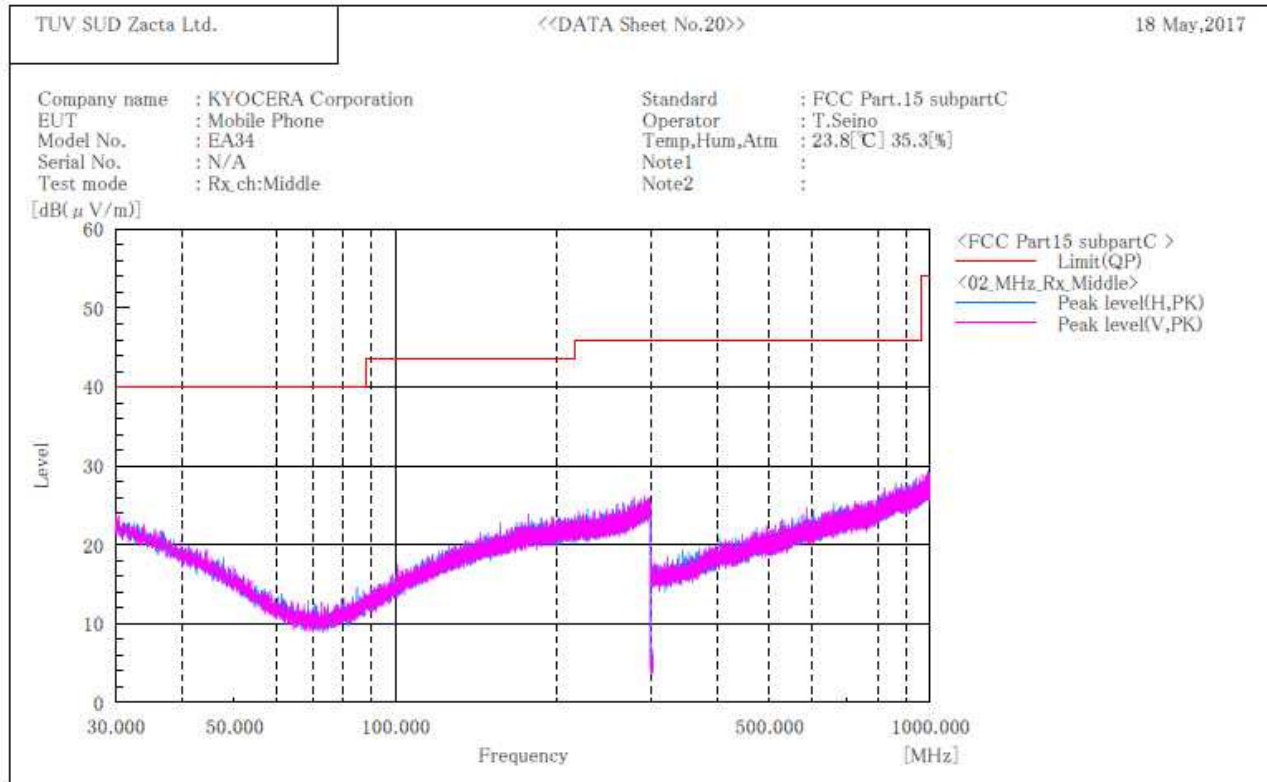

### Final Result


| No. | Frequency (P) | c.f       | Height | Angle | Remark |
|-----|---------------|-----------|--------|-------|--------|
|     | [MHz]         | [dB(1/m)] | [cm]   | [°]   |        |

### Note:

1. Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

## Channel High BELOW 1GHz

\*\*\*\*\* RADIATED EMISSION \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

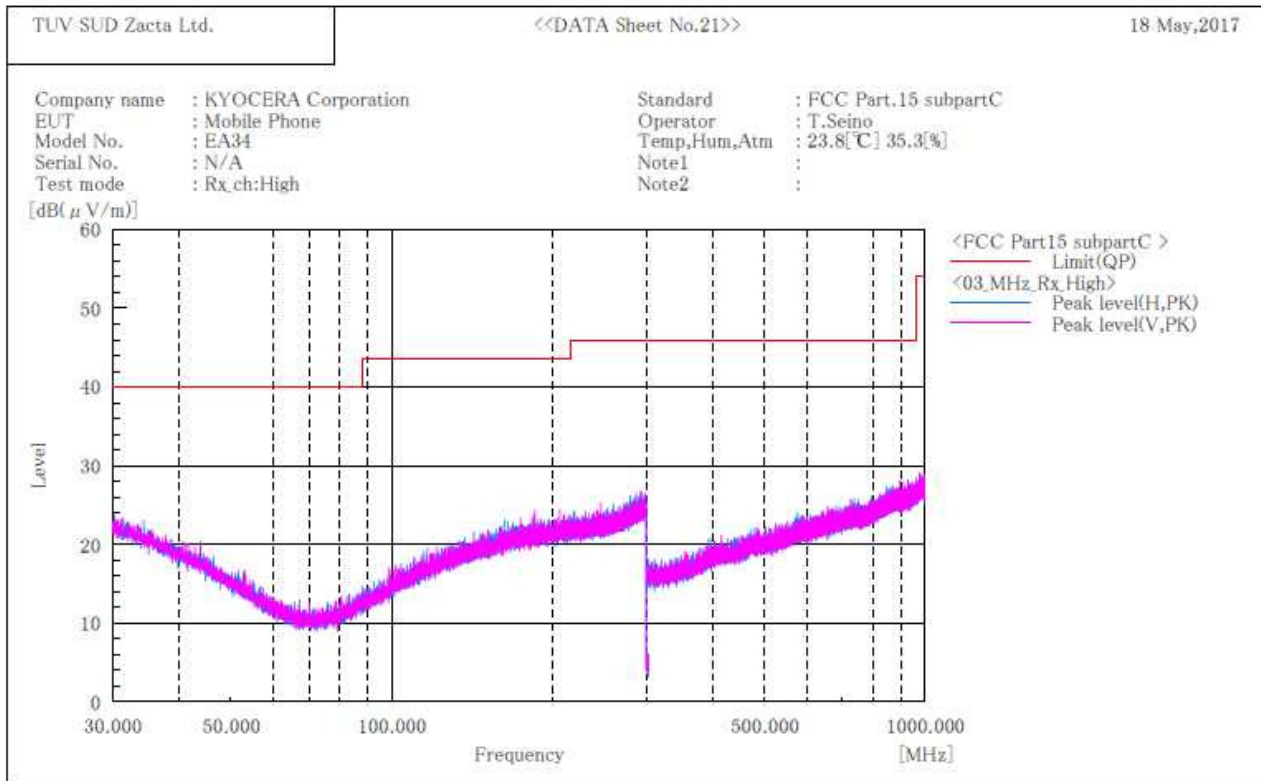

### Final Result

| No. | Frequency (P) | c.f       | Height | Angle | Remark |
|-----|---------------|-----------|--------|-------|--------|
|     | [MHz]         | [dB(1/m)] | [cm]   | [°]   |        |

### Note:

- Emission Level (Margin) = Limit - [Reading + Factor ( Antenna + Cable – Amp)]
- No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

## 9. Restricted Band of Operation

### 9.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209, KDB 558074 D01 v04, Section 12.0]

Test was applied by following conditions.

|                           |                                                                                                                            |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Test method               | : ANSI C63.10                                                                                                              |
| Test place                | : 3m Semi-anechoic chamber                                                                                                 |
| EUT was placed on         | : Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz)<br>Styrofoam table / (W)0.6m × (D)0.6m × (H)1.5m (above 1GHz) |
| Antenna distance          | : 3m                                                                                                                       |
| Spectrum analyzer setting |                                                                                                                            |
| - Peak                    | : RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto                                                                   |
| - Average                 | : RBW=1MHz, VBW=10Hz, Span=Arbitrary setting, Sweep=auto<br>Display mode=Linear                                            |

#### Average Measurement Setting [VBW]

| Mode              | Duty Cycle (%) | T <sub>on</sub> (us) | T <sub>off</sub> (us) | Determined VBW Setting  |
|-------------------|----------------|----------------------|-----------------------|-------------------------|
| IEEE802.11b       | 99.03          | 1022                 | 10                    | 10Hz (Duty Cycle ≥ 98%) |
| IEEE802.11g       | 99.27          | 1362                 | 10                    | 10Hz (Duty Cycle ≥ 98%) |
| IEEE802.11n(HT20) | 99.38          | 1276                 | 8                     | 10Hz (Duty Cycle ≥ 98%) |


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission.

The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

#### - Test configuration

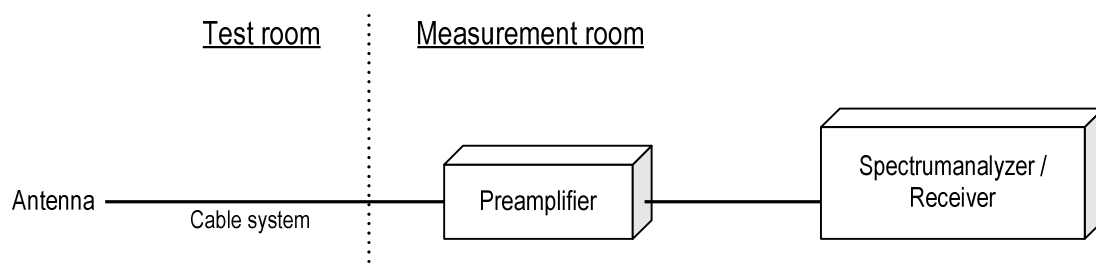

### 9.2 Limit

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

### 9.3 Measurement Result

[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]


| Channel | Frequency [MHz] | Results Chart      | Result |
|---------|-----------------|--------------------|--------|
| Low     | 2412            | See the Trace Data | Pass   |
| High    | 2462            | See the Trace Data | Pass   |

### 9.4 Test data

|             |                            |               |                       |
|-------------|----------------------------|---------------|-----------------------|
| Date        | : May 18, 2017             |               |                       |
| Temperature | : 24.4 [°C]                |               |                       |
| Humidity    | : 45.8 [%]                 | Test engineer | :                     |
| Test place  | : 3m Semi-anechoic chamber |               | <u>Tadahiro Seino</u> |
|             |                            |               |                       |
| Date        | : May 19, 2017             |               |                       |
| Temperature | : 24.2 [°C]                |               |                       |
| Humidity    | : 45.1 [%]                 | Test engineer | :                     |
| Test place  | : 3m Semi-anechoic chamber |               | <u>Tadahiro Seino</u> |


[IEEE802.11b]

Channel Low  
Horizontal  
Peak

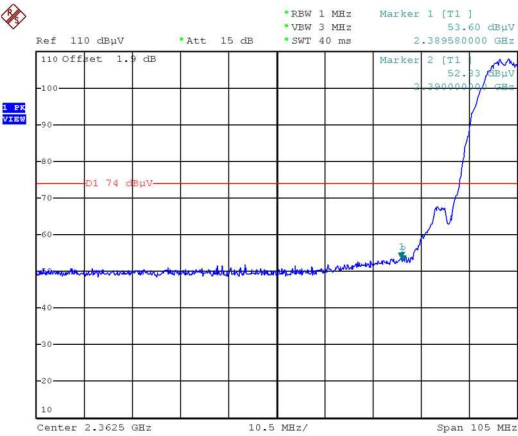


Date: 18.MAY.2017 23:01:20

Average

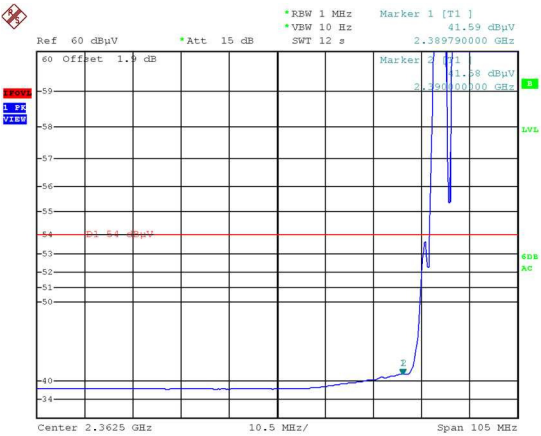


Date: 18.MAY.2017 23:02:23

Vertical  
Peak

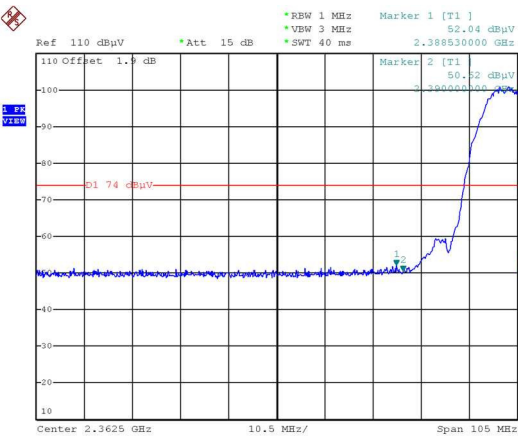


Date: 18.MAY.2017 23:05:23

Average

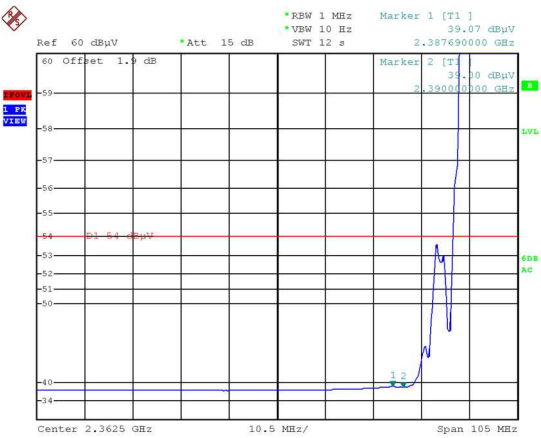


Date: 18.MAY.2017 23:06:10

**Channel High  
Horizontal  
Peak**

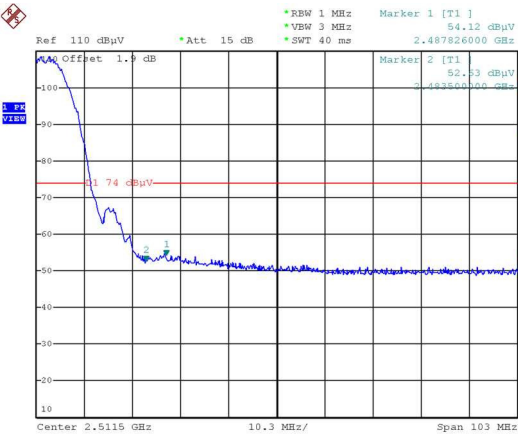


Date: 18.MAY.2017 23:09:44

**Average**

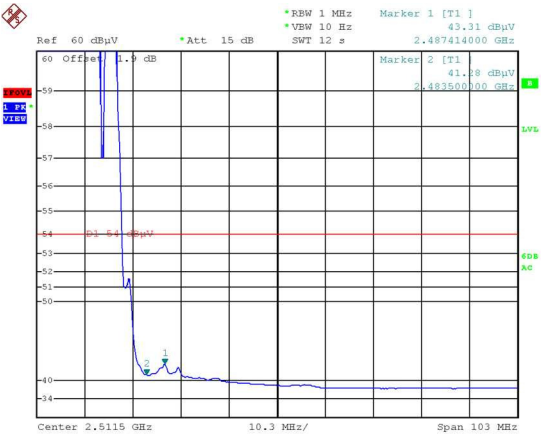


Date: 18.MAY.2017 23:10:23

**Vertical  
Peak**

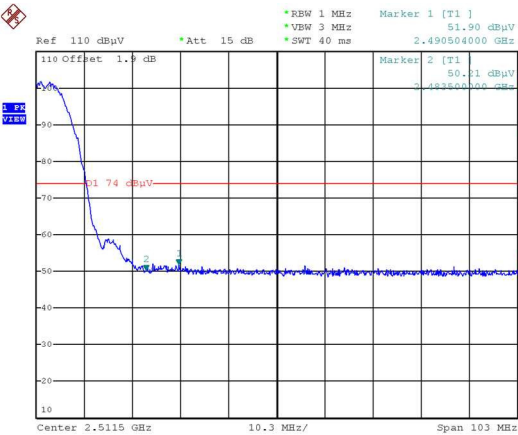

Date: 18.MAY.2017 23:12:39


**Average**

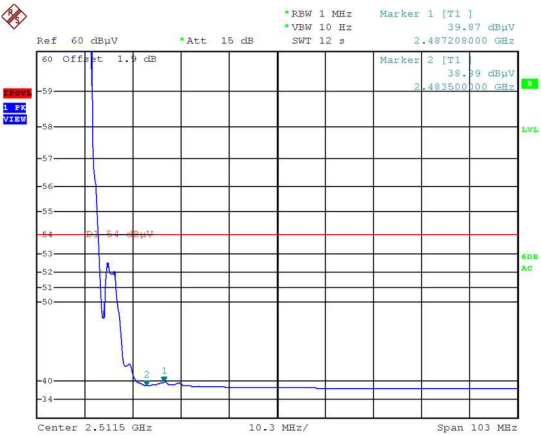

Date: 18.MAY.2017 23:13:18


[IEEE802.11g]

Channel Low  
Horizontal  
Peak

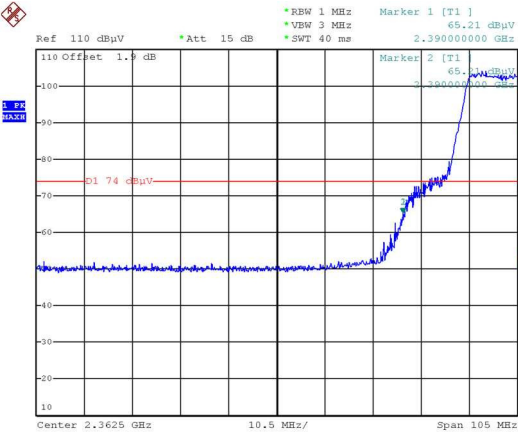


Date: 19.MAY.2017 22:39:18

Average

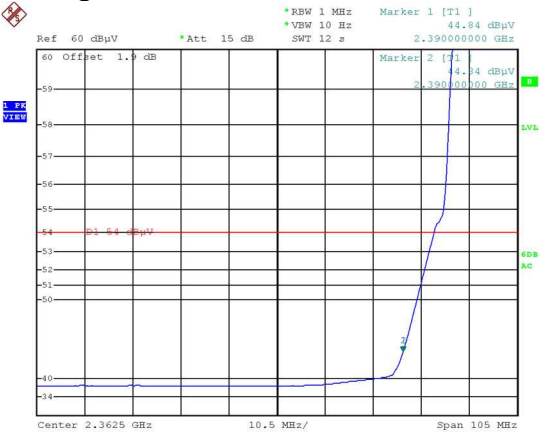


Date: 19.MAY.2017 22:39:57

Vertical  
Peak

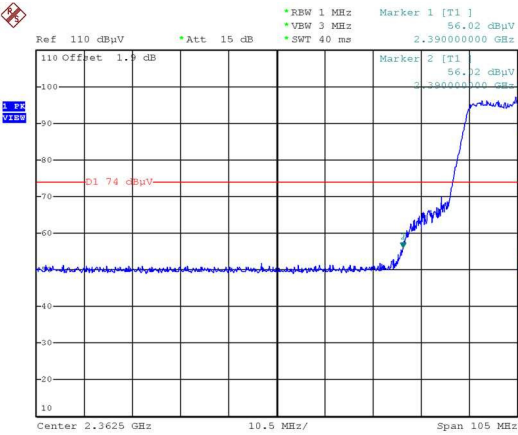

Date: 19.MAY.2017 22:42:59


Average

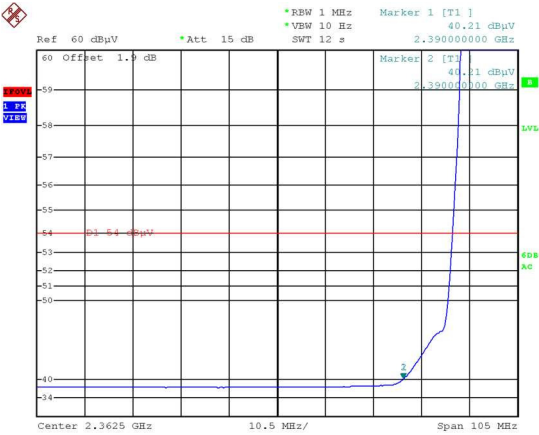

Date: 19.MAY.2017 22:43:39




**Channel High  
Horizontal  
Peak**

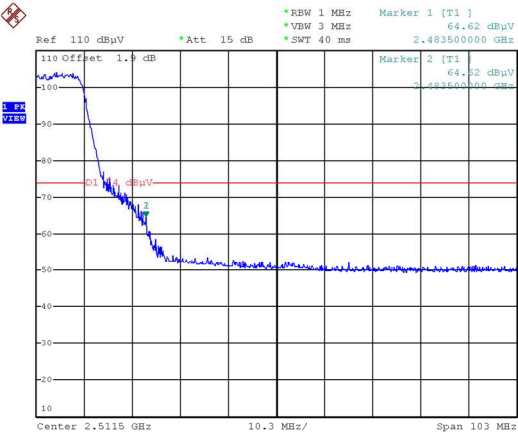


Date: 19.MAY.2017 22:48:52

**Average**

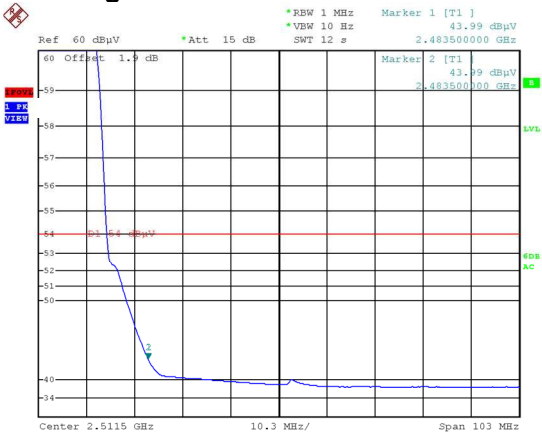


Date: 19.MAY.2017 22:49:30

**Vertical  
Peak**

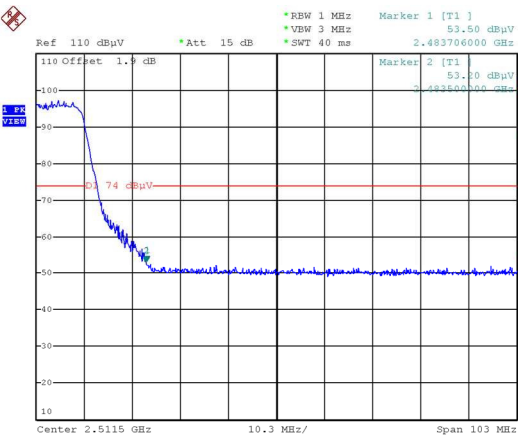

Date: 19.MAY.2017 22:53:24


**Average**

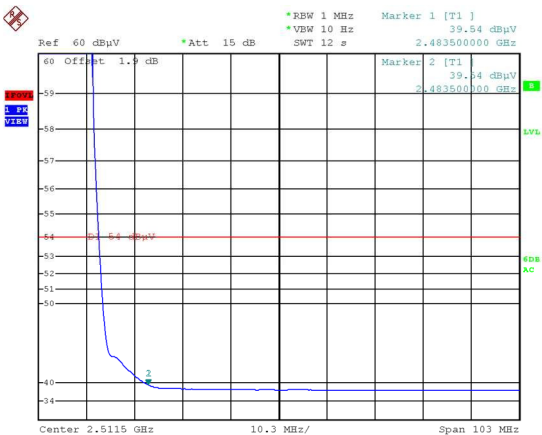

Date: 19.MAY.2017 22:53:59


[IEEE802.11n (HT20)]

Channel Low  
Horizontal  
Peak

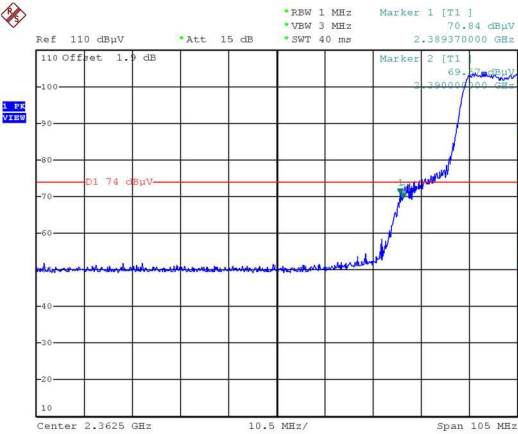


Date: 19.MAY.2017 23:13:48

Average

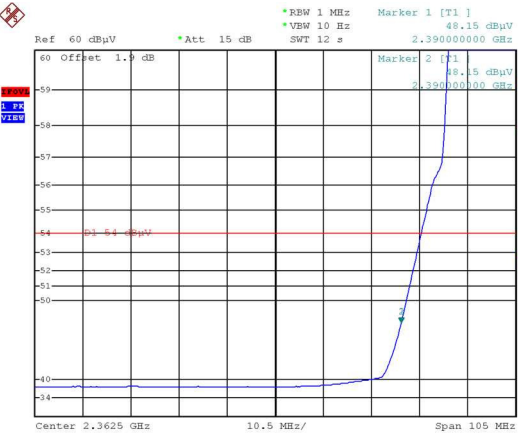


Date: 19.MAY.2017 23:15:01

Vertical  
Peak

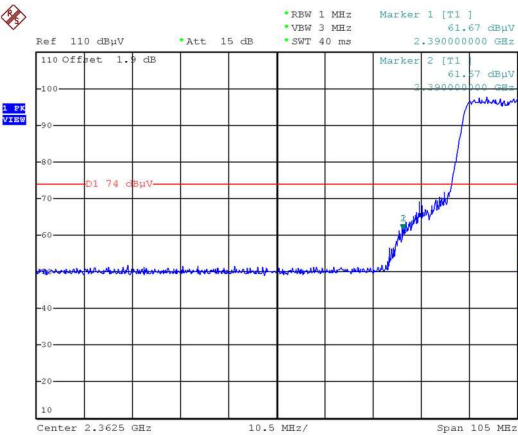


Date: 19.MAY.2017 23:21:58

Average

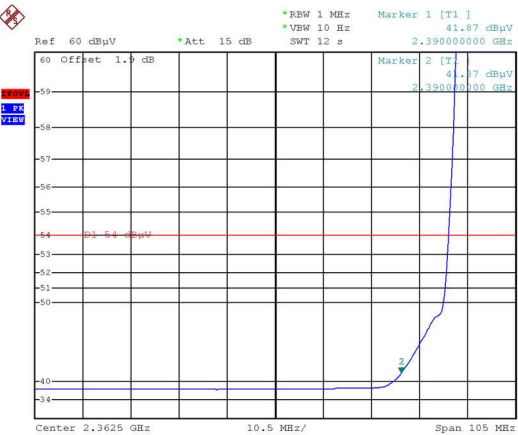


Date: 19.MAY.2017 23:22:34

Channel High  
Horizontal  
Peak

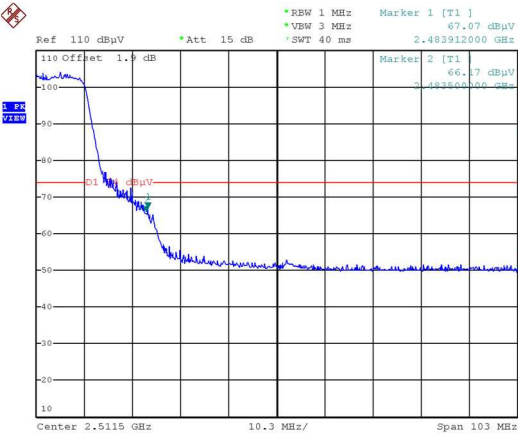


Date: 19.MAY.2017 23:29:21

Average

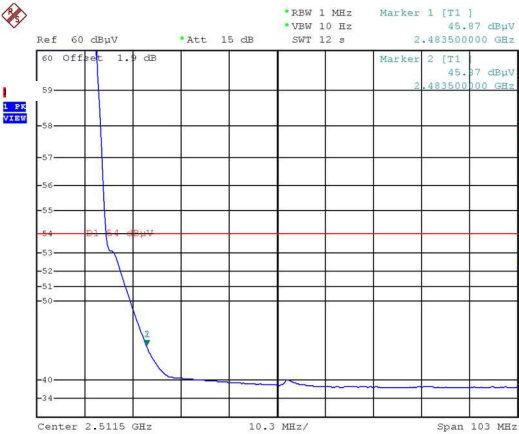


Date: 19.MAY.2017 23:29:06

Vertical  
Peak

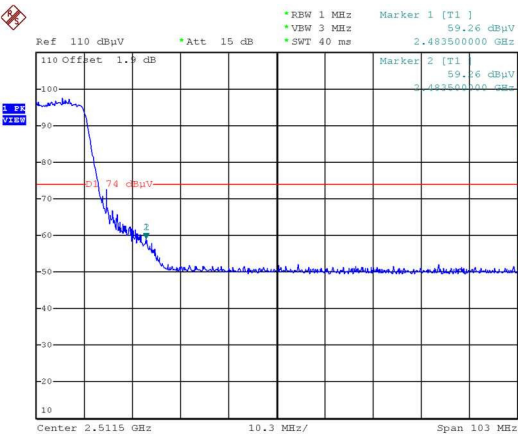

Date: 19.MAY.2017 23:33:22

Average

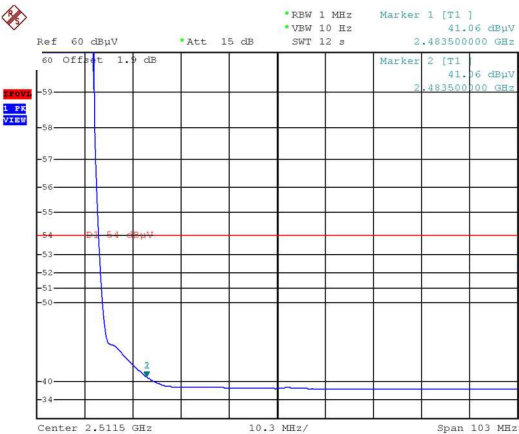

Date: 19.MAY.2017 23:33:55

## 10. Transmitter Power Spectral Density

### 10.1 Measurement procedure


[FCC 15.247(e), KDB 558074 D01 v04, Section 10.2]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = 1.5 times the 6 dB bandwidth.
- b) RBW = 3kHz - 100kHz.
- c) VBW  $\geq 3 \times$  RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

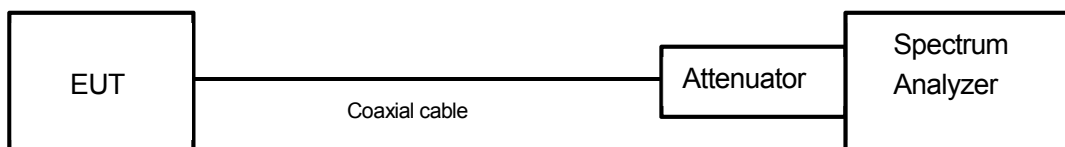

### 10.2 Limit

The peak power spectral density shall not be greater than 8dBm in any 3kHz band.

### 10.3 Measurement result

Date : May 30, 2017  
 Temperature : 24.0 [°C]  
 Humidity : 48.0 [%]  
 Test place : Shielded room No.4

Test engineer :  
 Tadahiro Seino

**[IEEE802.11b]**

| Channel | Center Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dBm) | Result |
|---------|------------------------|---------------|-------------|-------------|-------------|--------------|--------|
| Low     | 2412                   | -17.48        | 10.53       | -6.95       | 8.00        | 14.95        | PASS   |
| Middle  | 2437                   | -18.58        | 10.53       | -8.05       | 8.00        | 16.05        | PASS   |
| High    | 2462                   | -17.24        | 10.53       | -6.71       | 8.00        | 14.71        | PASS   |

Calculation;

Transmitter Power Spectral Density Level (Margin) = Limit – (Reading + Factor)

**[IEEE802.11g]**

| Channel | Center Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dBm) | Result |
|---------|------------------------|---------------|-------------|-------------|-------------|--------------|--------|
| Low     | 2412                   | -25.73        | 10.53       | -15.20      | 8.00        | 23.20        | PASS   |
| Middle  | 2437                   | -24.34        | 10.53       | -13.81      | 8.00        | 21.81        | PASS   |
| High    | 2462                   | -24.21        | 10.53       | -13.68      | 8.00        | 21.68        | PASS   |

Calculation;

Transmitter Power Spectral Density Level (Margin) = Limit – (Reading + Factor)

**[IEEE802.11n (HT20)]**


| Channel | Center Frequency (MHz) | Reading (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dBm) | Result |
|---------|------------------------|---------------|-------------|-------------|-------------|--------------|--------|
| Low     | 2412                   | -26.06        | 10.53       | -15.53      | 8.00        | 23.53        | PASS   |
| Middle  | 2437                   | -23.49        | 10.53       | -12.96      | 8.00        | 20.96        | PASS   |
| High    | 2462                   | -25.48        | 10.53       | -14.95      | 8.00        | 22.95        | PASS   |

Calculation;


Transmitter Power Spectral Density Level (Margin) = Limit – (Reading + Factor)

## 10.4 Trace data [IEEE802.11b]


### Channel Low

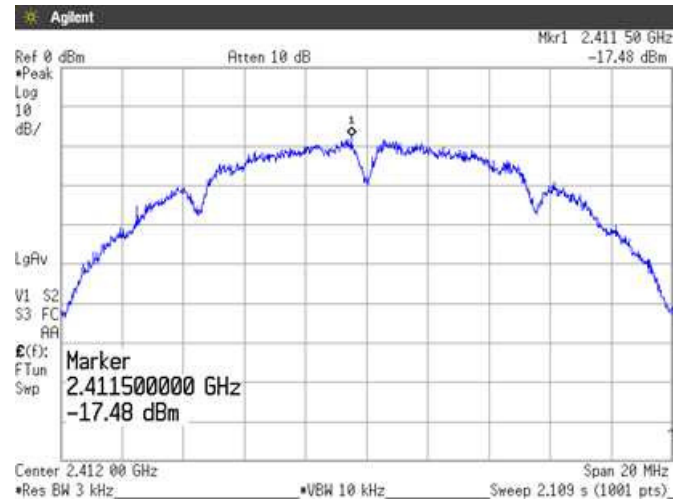

### Channel Middle

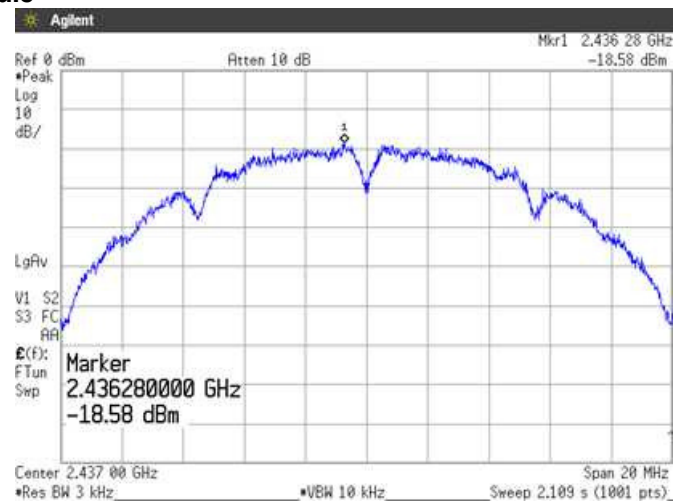


### Channel High

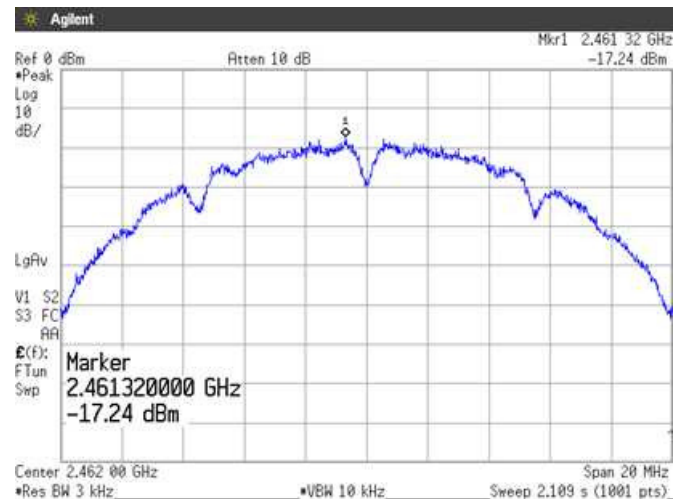


[IEEE802.11g]


Channel Low

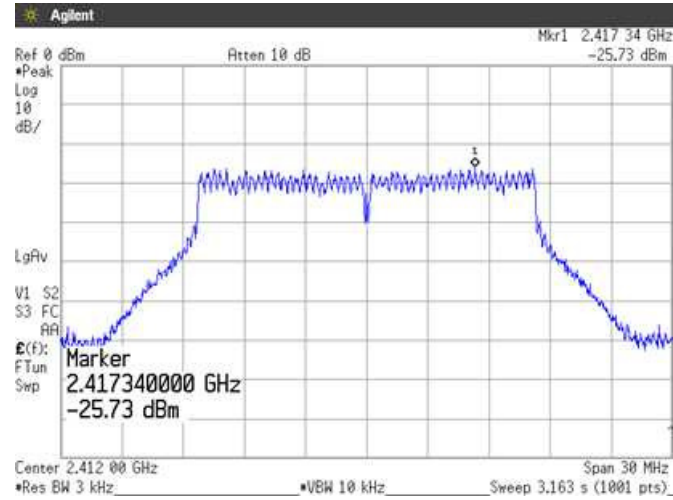

Channel Middle

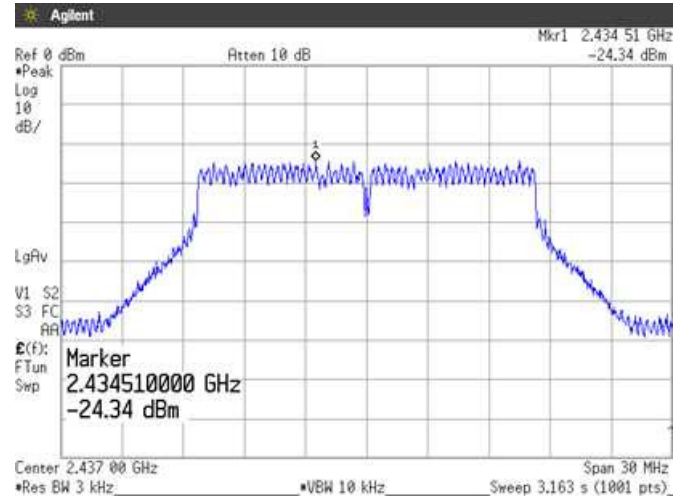


Channel High

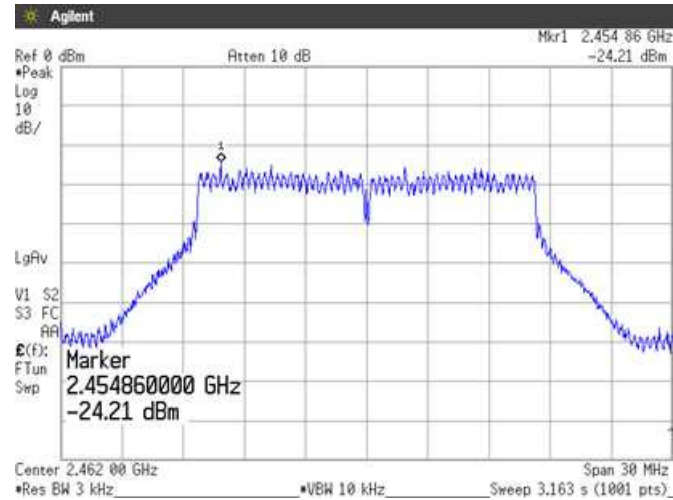




[IEEE802.11n (HT20)]


Channel Low

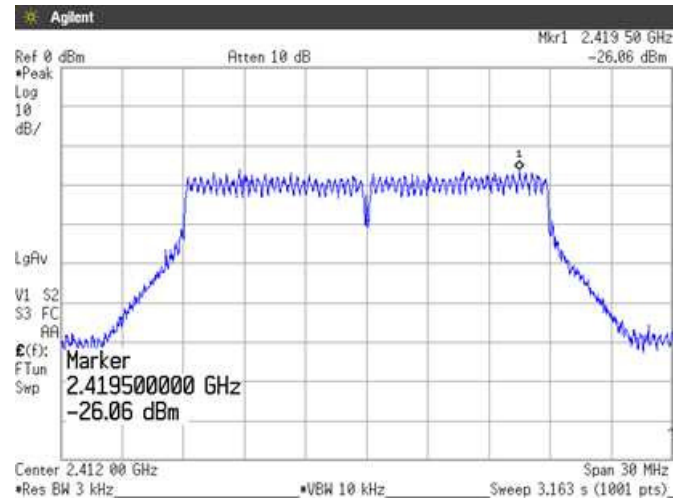

Channel Middle

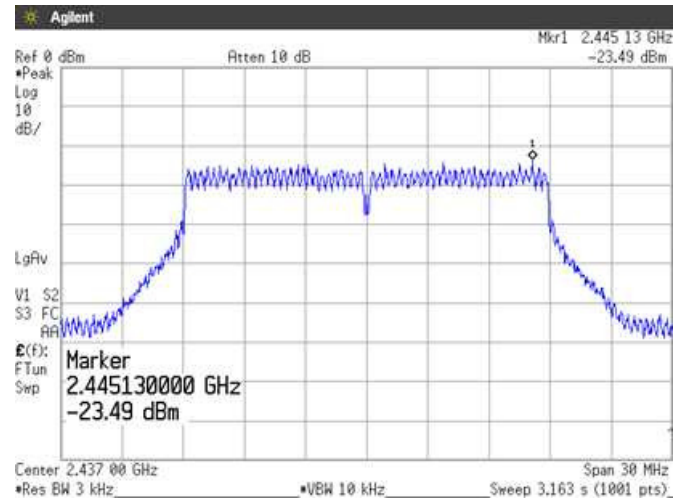

Channel High

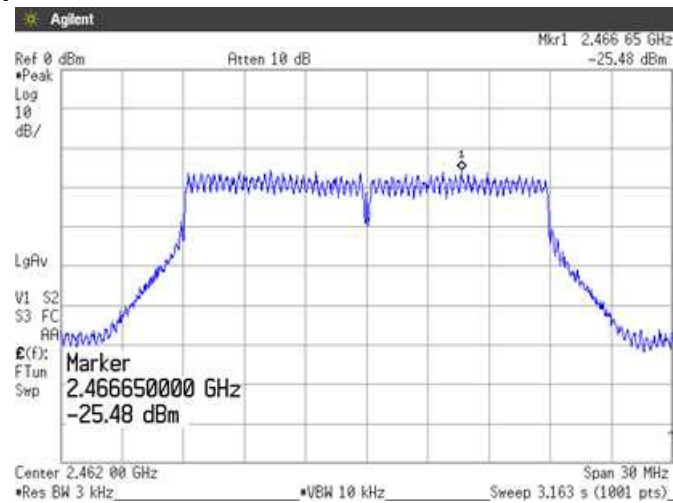

## 11. AC Power Line Conducted Emissions

### 11.1 Measurement procedure [FCC 15.207]

Test was applied by following conditions.


|                                |                                           |
|--------------------------------|-------------------------------------------|
| Test method                    | : ANSI C63.10                             |
| Frequency range                | : 0.15MHz to 30MHz                        |
| Test place                     | : 3m Semi-anechoic chamber                |
| EUT was placed on              | : FRP table / (W)2.0m × (D)1.0m × (H)0.8m |
| Vertical Metal Reference Plane | : (W)2.0m × (H)2.0m 0.4m away from EUT    |
| Test receiver setting          |                                           |
| - Detector                     | : Quasi-peak, Average                     |
| - Bandwidth                    | : 9kHz                                    |

EUT and peripherals are connected to 50Ω/50μH Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in 50Ω.

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

- Test configuration

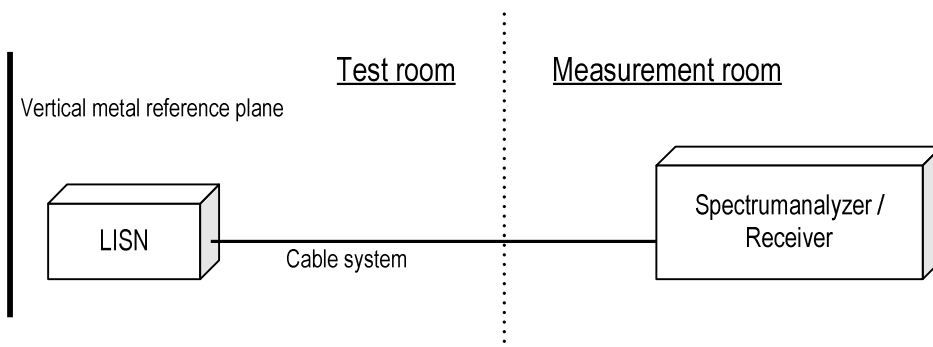

### 11.2 Calculation method

Emission level = Reading + (LISN. factor + Cable system loss)

Margin = Limit – Emission level

Example:

Limit @ 0.403MHz : 57.8dBμV(Quasi-peak)  
: 47.8dBμV(Average)

(Quasi peak) Reading = 22.7dBμV c.f = 10.4dB  
Emission level = 22.7 + 10.4 = 33.1dBμV  
Margin = 57.8 – 33.1 = 24.7dB

(Average) Reading = 6.5dBμV c.f = 10.4dB  
Emission level = 6.5 + 10.4 = 16.9dBμV  
Margin = 47.8 – 16.9 = 30.9dB


### 11.3 Limit

| Frequency<br>[MHz] | Limit     |           |
|--------------------|-----------|-----------|
|                    | QP [dBuV] | AV [dBuV] |
| 0.15-0.5           | 66-56*    | 56-46*    |
| 0.5-5              | 56        | 46        |
| 5-30               | 60        | 50        |

\*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 11.4 Test data

\*\*\*\*\* CONDUCTED EMISSION at MAINS PORT \*\*\*\*\*  
[ 3m Semi-anechoic chamber ]

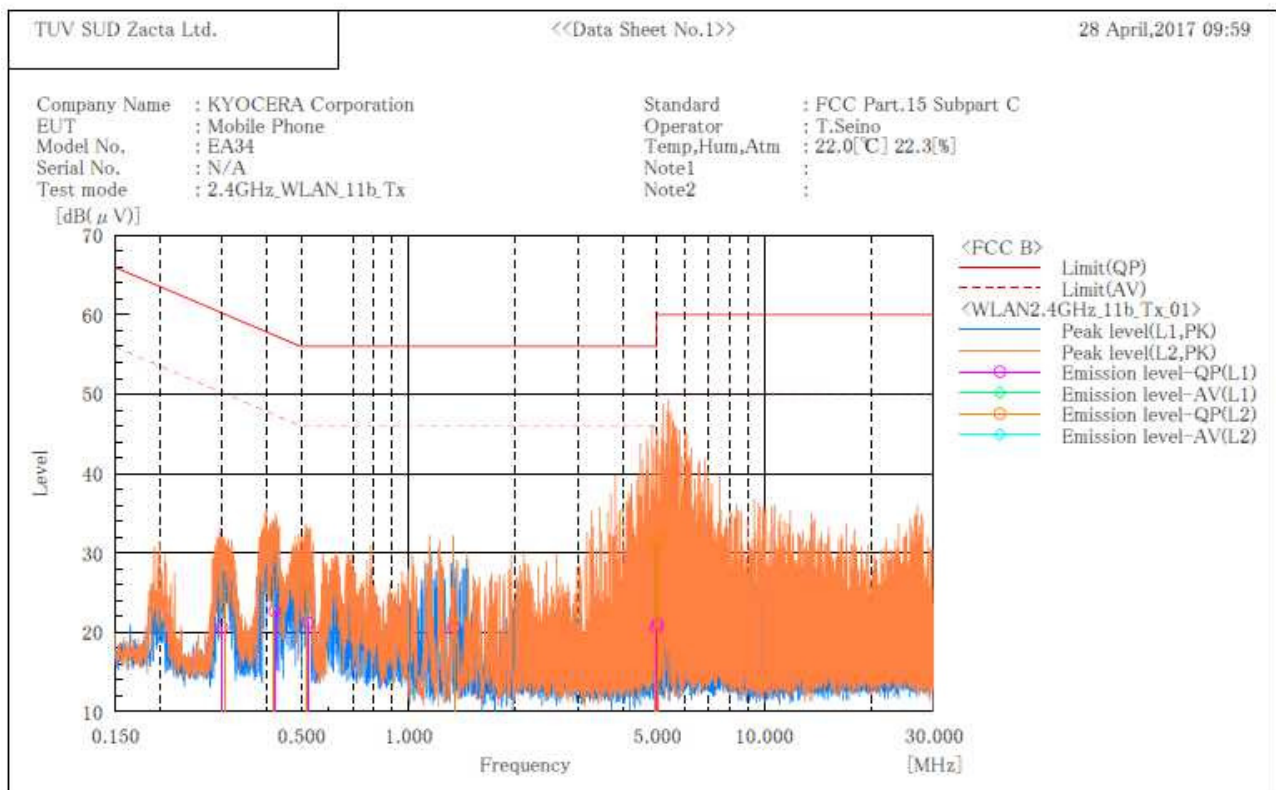

#### Final Result

| — L1 Phase — |           |          |          |      |          |          |          |          |        |        |
|--------------|-----------|----------|----------|------|----------|----------|----------|----------|--------|--------|
| No.          | Frequency | Reading  | Reading  | c. f | Result   | Result   | Limit    | Limit    | Margin | Margin |
|              | [MHz]     | QP       | AV       |      | QP       | AV       | QP       | AV       | QP     | AV     |
|              |           | [dB(μV)] | [dB(μV)] | [dB] | [dB(μV)] | [dB(μV)] | [dB(μV)] | [dB(μV)] | [dB]   | [dB]   |
| 1            | 0.300     | 10.2     | -3.2     | 10.4 | 20.6     | 7.2      | 60.2     | 50.2     | 39.6   | 43.0   |
| 2            | 0.422     | 12.3     | -3.1     | 10.4 | 22.7     | 7.3      | 57.4     | 47.4     | 34.7   | 40.1   |
| 3            | 0.524     | 10.8     | -3.5     | 10.4 | 21.2     | 6.9      | 56.0     | 46.0     | 34.8   | 39.1   |
| 4            | 1.347     | 10.2     | -3.7     | 10.4 | 20.6     | 6.7      | 56.0     | 46.0     | 35.4   | 39.3   |
| 5            | 4.989     | 9.9      | -4.3     | 10.7 | 20.6     | 6.4      | 56.0     | 46.0     | 35.4   | 39.6   |
| 6            | 5.039     | 10.4     | -4.3     | 10.7 | 21.1     | 6.4      | 60.0     | 50.0     | 38.9   | 43.6   |

| — L2 Phase — |           |          |          |      |          |          |          |          |        |        |
|--------------|-----------|----------|----------|------|----------|----------|----------|----------|--------|--------|
| No.          | Frequency | Reading  | Reading  | c. f | Result   | Result   | Limit    | Limit    | Margin | Margin |
|              | [MHz]     | QP       | AV       |      | QP       | AV       | QP       | AV       | QP     | AV     |
|              |           | [dB(μV)] | [dB(μV)] | [dB] | [dB(μV)] | [dB(μV)] | [dB(μV)] | [dB(μV)] | [dB]   | [dB]   |
| 1            | 0.307     | 14.1     | -2.3     | 10.4 | 24.5     | 8.1      | 60.1     | 50.1     | 35.6   | 42.0   |
| 2            | 0.419     | 16.1     | -2.3     | 10.4 | 26.5     | 8.1      | 57.5     | 47.5     | 31.0   | 39.4   |
| 3            | 0.519     | 15.4     | -2.7     | 10.4 | 25.8     | 7.7      | 56.0     | 46.0     | 30.2   | 38.3   |
| 4            | 1.350     | 11.3     | -3.3     | 10.4 | 21.7     | 7.1      | 56.0     | 46.0     | 34.3   | 38.9   |
| 5            | 4.946     | 20.1     | -2.6     | 10.7 | 30.8     | 8.1      | 56.0     | 46.0     | 25.2   | 37.9   |
| 6            | 5.061     | 20.9     | -2.3     | 10.7 | 31.6     | 8.4      | 60.0     | 50.0     | 28.4   | 41.6   |

## ***12. Antenna requirement***

---

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

### **13. Uncertainty of measurement**

---

Expanded uncertainties stated are calculated with a coverage Factor  $k=2$ .

Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028-0011 determining compliance or non-compliance with test result.

| Test item                           | Measurement uncertainty |
|-------------------------------------|-------------------------|
| Conducted emission at mains port    | $\pm 3.0\text{dB}$      |
| Radiated emission (9kHz – 30MHz)    | $\pm 4.4\text{dB}$      |
| Radiated emission (30MHz – 1000MHz) | $\pm 4.5\text{dB}$      |
| Radiated emission (1000MHz – 26GHz) | $\pm 3.9\text{dB}$      |

## 14. Laboratory Information

---

### 1. Location

Name: Yonezawa Testing Center  
 Address: 5-4149-7, Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan  
 Phone: +81-238-28-2881  
 Fax: +81-238-28-2888

### 2. Accreditation and Registration

- 1) NVLAP  
LAB CODE: 200306-0
- 2) VLAC  
Accreditation No.: VLAC-013
- 3) BSMI  
Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

#### 4) Industry Canada

| Site number | Facility                       | Expiration date |
|-------------|--------------------------------|-----------------|
| 4224A-4     | 3m Semi-anechoic chamber       | 2017-12-03      |
| 4224A-5     | 10m Semi-anechoic chamber No.1 | 2017-12-03      |
| 4224A-6     | 10m Semi-anechoic chamber No.2 | 2019-12-14      |

#### 5) VCCI Council

| Registration number | Expiration date |
|---------------------|-----------------|
| A-0166              | 2017-07-03      |

## Appendix A. Test equipment

### Antenna port conducted test

| Equipment         | Company              | Model No.        | Serial No. | Cal. Due      | Cal. Date     |
|-------------------|----------------------|------------------|------------|---------------|---------------|
| Spectrum analyzer | Agilent Technologies | E4440A           | US40420937 | Jul. 31, 2017 | Jul. 15, 2016 |
| Microwave cable   | RS                   | YH-13S5          | N/A(S403)  | May 31, 2017  | May 24, 2016  |
| Attenuator        | Weinschel            | 56-10            | J4993      | Nov. 30, 2017 | Nov. 1, 2016  |
| Microwave cable   | SUHNER               | SUCOFLEX104/1.5m | 322087/4   | Jul. 31, 2017 | Jul. 20, 2016 |

### Radiated emission

| Equipment                   | Company              | Model No.         | Serial No.      | Cal. Due      | Cal. Date     |
|-----------------------------|----------------------|-------------------|-----------------|---------------|---------------|
| EMI Receiver                | ROHDE&SCHWARZ        | ESCI              | 100764          | Aug. 31, 2017 | Aug. 19, 2016 |
| Spectrum analyzer           | Agilent Technologies | E4440A            | US40420937      | Jul. 31, 2017 | Jul. 15, 2016 |
| Preamplifier                | ANRITSU              | MH648A            | M96057          | Feb. 28, 2018 | Feb. 1, 2017  |
| Loop antenna                | ROHDE&SCHWARZ        | HFH2-Z2           | 892246/010      | Feb. 28, 2018 | Feb. 17, 2017 |
| Attenuator                  | TDC                  | TAT-43B-06        | N/A(S209)       | May 31, 2017  | May 10, 2016  |
| Biconical antenna           | Schwarzbeck          | VHA9103/BBA9106   | 2155            | Jun. 30, 2017 | Jun. 2, 2016  |
| Log periodic antenna        | Schwarzbeck          | UHALP9108A        | 0560            | Jun. 30, 2017 | Jun. 2, 2016  |
| Attenuator                  | TME                  | CFA-01NPJ-6       | N/A(S275)       | Feb. 28, 2018 | Feb. 3, 2017  |
| Attenuator                  | TME                  | CFA-01NPJ-3       | N/A(S272)       | Feb. 28, 2018 | Feb. 2, 2017  |
| Preamplifier                | TSJ                  | MLA-100M18-B02-40 | 1929118         | Feb. 28, 2018 | Feb. 3, 2017  |
| Attenuator                  | AEROFLEX             | 26A-10            | 081217-08       | May 31, 2017  | May 24, 2016  |
| Double ridged guide antenna | EMCO                 | 3115              | 5205            | Mar. 31, 2018 | Mar. 15, 2017 |
| Double ridged guide antenna | ETS LINDGREN         | 3117              | 00052315        | Feb. 28, 2018 | Feb. 23, 2017 |
| Attenuator                  | Agilent Technologies | 8491B             | MY39268633      | Feb. 28, 2018 | Feb. 2, 2017  |
| Broad-Band Horn Antenna     | Schwarzbeck          | BBHA9170          | BBHA9170189     | Jun. 30, 2017 | Jun. 16, 2016 |
| Preamplifier                | TSJ                  | MLA-1840-B03-35   | 1240332         | Jun. 30, 2017 | Jun. 16, 2016 |
| Notch filter                | Micro-Tronics        | BRM50702          | 045             | Apr. 30, 2017 | Apr. 8, 2016  |
| Microwave cable             | SUHNER               | SUCOFLEX104/9m    | MY30037/4       | Feb. 28, 2018 | Feb. 3, 2017  |
|                             |                      | SUCOFLEX104/1m    | my24610/4       | Feb. 28, 2018 | Feb. 3, 2017  |
|                             |                      | SUCOFLEX104/8m    | SN MY30031/4    | Feb. 28, 2018 | Feb. 2, 2017  |
|                             |                      | SUCOFLEX104/1.5m  | 322086/4        | May 31, 2017  | May 10, 2016  |
|                             |                      | SUCOFLEX104/1.5m  | 317226/4        | May 31, 2017  | May 10, 2016  |
|                             |                      | SUCOFLEX104/7m    | 41625/6         | Feb. 28, 2018 | Feb. 3, 2017  |
| PC                          | DELL                 | DIMENSION E521    | 75465BX         | N/A           | N/A           |
| Software                    | TOYO Corporation     | EP5/RE-AJ         | 0611193/V5.6.0  | N/A           | N/A           |
| Absorber                    | RIKEN                | PFP30             | N/A             | N/A           | N/A           |
| 3m Semi an-echoic Chamber   | TOKIN                | N/A               | N/A(9002-NSA)   | May 31, 2017  | May 11, 2016  |
| 3m Semi an-echoic Chamber   | TOKIN                | N/A               | N/A(9002-SVSWR) | May 31, 2017  | May 12, 2016  |

### Conducted emission at mains port


| Equipment                                    | Company                         | Model No.   | Serial No.      | Cal. Due      | Cal. Date     |
|----------------------------------------------|---------------------------------|-------------|-----------------|---------------|---------------|
| EMI Receiver                                 | ROHDE&SCHWARZ                   | ESCI        | 100764          | Aug. 31, 2017 | Aug. 19, 2016 |
| Attenuator                                   | HUBER+SUHNER                    | 6810.01.A   | N/A (S411)      | Feb. 28, 2018 | Feb. 2, 2017  |
| Line impedance stabilization network for EUT | Kyoritsu Electrical Works, Ltd. | KNW-407F    | 8-2003-1        | Mar. 31, 2018 | Mar. 13, 2017 |
| Coaxial cable                                | FUJIKURA                        | 5D-2W/4m    | N/A (S350)      | Feb. 28, 2018 | Feb. 2, 2017  |
| Coaxial cable                                | FUJIKURA                        | 5D-2W/1m    | N/A (S193)      | Feb. 28, 2018 | Feb. 3, 2017  |
| Coaxial cable                                | SUHNER                          | RG214/U/10m | N/A (S194)      | Feb. 28, 2018 | Feb. 3, 2017  |
| PC                                           | DELL                            | DIMENSION   | 75465BX         | N/A           | N/A           |
| Software                                     | TOYO Corporation                | EP5/CE-AJ   | 0611193/V5.4.11 | N/A           | N/A           |

\*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.




**Appendix B. Duty Cycle**

[Plot & Calculation]

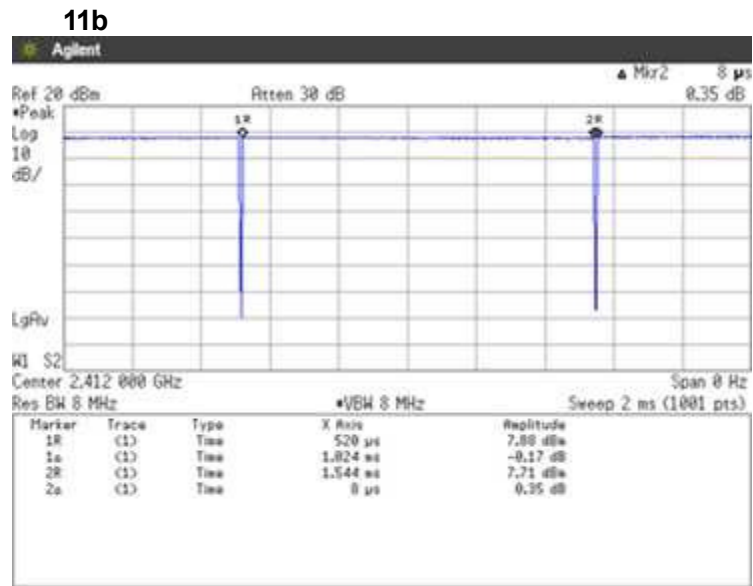

Duty Cycle = Ton / (Ton + Toff) = 1024[μs] / (1024[μs] + 8[μs]) = 99.22[%]

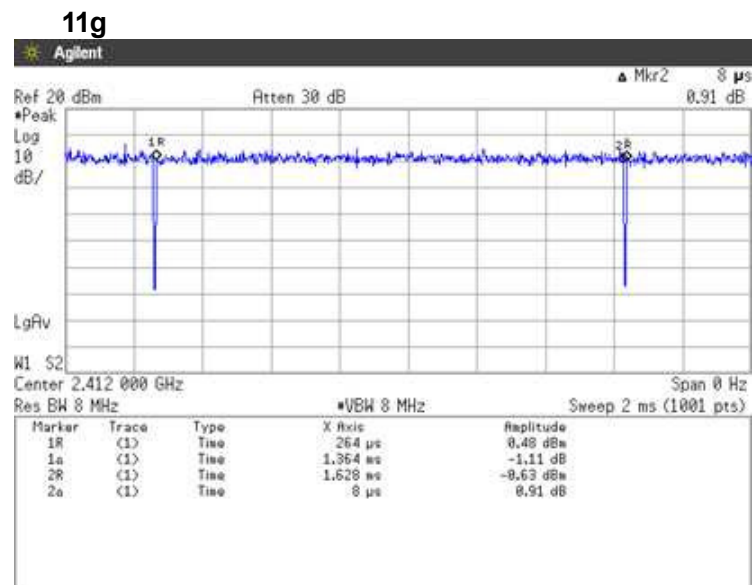


Duty Cycle = Ton / (Ton + Toff) = 1364[μs] / (1364[μs] + 8[μs]) = 99.42[%]



Zacta

11n (HT20)

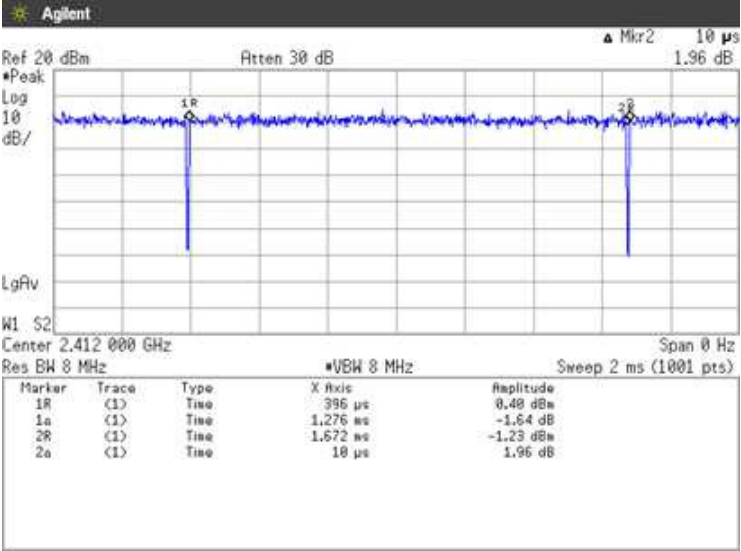

Duty Cycle = Ton / (Ton + Toff) = 1276[ $\mu$ s] / (1276[ $\mu$ s] + 10[ $\mu$ s]) = 99.22[%]