

FCC Test Report

Applicant : Huizhou Intelligent Energy Co., Ltd.

Address : 8-9/F, Bldg.E2, Qunyi Industrial Park, Sanhe
Avenue, Tonghu Town, Zhongkai High-tech
Zone, HuiZhou, China

Product Name : PORTABLE POWER STATION

Report Date : Jul. 11, 2024



Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information	5
1.1. Client Information	5
1.2. Description of Device (EUT)	5
1.3. Auxiliary Equipment Used During Test	7
1.4. Description of Test Modes	7
1.5. Description Of Test Setup	8
1.6. Test Equipment List	9
1.7. Measurement Uncertainty	10
1.8. Description of Test Facility	10
1.9. Disclaimer	10
2. Summary of Test Results	11
3. Conducted Emission Test	12
3.1. Test Standard and Limit	12
3.2. Test Setup	12
3.3. Test Procedure	12
3.4. Test Data	12
4. Radiation Spurious Emission	15
4.1. Test Standard and Limit	15
4.2. Test Setup	15
4.3. Test Procedure	16
4.4. Test Data	16
5. Antenna Requirement	21
5.1. Test Standard and Requirement	21
5.2. Antenna Connected Construction	21
APPENDIX I -- TEST SETUP PHOTOGRAPH	22
APPENDIX II -- EXTERNAL PHOTOGRAPH	22
APPENDIX III -- INTERNAL PHOTOGRAPH	22



TEST REPORT

Applicant : Huizhou Intelligent Energy Co., Ltd.

Manufacturer : Huizhou Intelligent Energy Co., Ltd.

Product Name : PORTABLE POWER STATION

Model No. : H300

Trade Mark : N/A

Rating(s) : Please refer to page 6

Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.209

Test Method(s) : ANSI C63.10: 2020

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Jun. 07, 2024

Date of Test

Jun. 07 to Jun. 24, 2024

Prepared By

Tu Tu Hong

(TuTu Hong)

Approved & Authorized Signer

Edward Pan

(Edward Pan)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Jul. 11, 2024



1. General Information

1.1. Client Information

Applicant	:	Huizhou Intelligent Energy Co., Ltd.
Address	:	8-9/F, Bldg.E2, Qunyi Industrial Park, Sanhe Avenue, Tonghu Town, Zhongkai High-tech Zone, HuiZhou, China
Manufacturer	:	Huizhou Intelligent Energy Co., Ltd.
Address	:	8-9/F, Bldg.E2, Qunyi Industrial Park, Sanhe Avenue, Tonghu Town, Zhongkai High-tech Zone, HuiZhou, China
Factory	:	Huizhou Intelligent Energy Co., Ltd.
Address	:	8-9/F, Bldg.E2, Qunyi Industrial Park, Sanhe Avenue, Tonghu Town, Zhongkai High-tech Zone, HuiZhou, China

1.2. Description of Device (EUT)

Product Name	:	PORTABLE POWER STATION
Model No.	:	H300
Trade Mark	:	N/A
Test Power Supply	:	AC 120V, 60Hz/ DC 12.8V Battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Frequency	:	110.1-205kHz
Modulation Type	:	ASK
Antenna Type	:	Inductive loop coil Antenna
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		



Rating(s):

PORTABLE POWER STATION

- Type: H300
- Battery Capacity: 12.8V, 18Ah/230.4Wh
- AC Input: 100V-130V~1.7A, 60Hz, 200W Max
- PV Input: DC 12V-26V~8A, 100W Max
- USB-C Input: 5V/9V/12V/15V/20V~3A, 20V~5A, 100W Max
- AC Output X1: Pure Sine Wave 120V~60Hz, 300W
- DC Output X2 + Cigarette Lighter Socket Output: Total 12V~10A
- USB-A Output X1: 5V~3A, 9V~2A, 12V~1.5A, 18W Max
- USB-C Output X1: 5V/9V~3A, 12V~2.5A, 30W Max
- USB-C Output X1: 5V/9V/12V/15V/20V~3A, 20V~5A, 100W Max
- Wireless Charge: 10W
- Operating Temp: 14 to 104°F (-10 to 40°C)
- Charging Temp: 32 to 104°F (0 to 40°C)
- Manufacturer: Huizhou Intellient Energy Co., Ltd.
- Date Code:

H300IM V2.0.00
3.06.04.0710

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
FCC ID: 2BASNH300MV1000

**UN38.3**

MADE IN CHINA



Li-Ion

**⚠ WARNING!**

- Do not short-circuit the unit. To avoid short-circuiting, keep the unit away from all metal objects (e.g. coins, hair-pins, keys, etc.).
- Do not heat the unit, or dispose of it in fire, water or other liquids. Keep away from high temperatures.
- Do not expose the unit to direct sunlight. Keep away from high humidity, dusty places.
- Do not disassemble or reassemble this unit.
- Do not drop and place heavy objects on, or allow strong impact to this unit.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- The unit may become hot when charging. This is normal. Be careful when handling.
- Use the unit properly to avoid electronic shock.
- The product is only used for emergency power station, it can not replace the standard DC or AC power of household appliances or digital products.
- Do not overcharge the internal battery. See Instruction Manual.

⚠ AVERTISSEMENT!

- Ne court-circuitiez pas l'appareil. Pour éviter tout court-circuit, éloignez l'appareil de tout objet métallique (par exemple, pièces de monnaie, épingles à cheveux, clés, etc.).
- Ne chauffez pas l'appareil et ne le jetez pas dans le feu, l'eau ou d'autres liquides. Tenir à l'écart des températures élevées. N'exposez pas l'appareil à la lumière directe du soleil.
- Tenir à l'écart des endroits humides et poussiéreux.
- Ne démontez pas et ne réassemblez pas cet appareil.
- Ne laissez pas tomber, ne placez pas d'objets lourds dessus et ne laissez pas de chocs violents sur cet appareil.
- Cet appareil n'est pas destiné à être utilisé par des personnes (y compris des enfants) ayant des capacités physiques, sensorielles ou mentales réduites, ou un manque d'expérience et de connaissances, à moins qu'elles n'aient reçu une supervision ou des instructions concernant.
- L'utilisation de l'appareil par une personne responsable de leur sécurité.
- Les enfants doivent être surveillés pour s'assurer qu'ils ne jouent pas avec l'appareil.
- L'appareil peut devenir chaud pendant la charge. C'est normal. Soyez prudent lors de la manipulation.
- Utilisez l'appareil correctement pour éviter les chocs électroniques. Le produit n'est utilisé que pour la centrale électrique de secours, il ne peut pas remplacer l'alimentation CC ou CA standard des appareils ménagers ou des produits numériques.
- Ne pas surcharger la batterie interne. Consulter le manuel d'utilisation.



1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
Wireless charging load	Manufacturer: Shenzhen Ouju Technology Co., Ltd. M/N: CD2577 Power: 5W/7.5W/10W/15W


1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Modes	Descriptions
Mode 1	WTP Mode (10W 1% Load)
Mode 2	WTP Mode (10W 50% Load)
Mode 3	WTP Mode (10W 99% Load)
Mode 4	Standby Mode



1.5. Description Of Test Setup

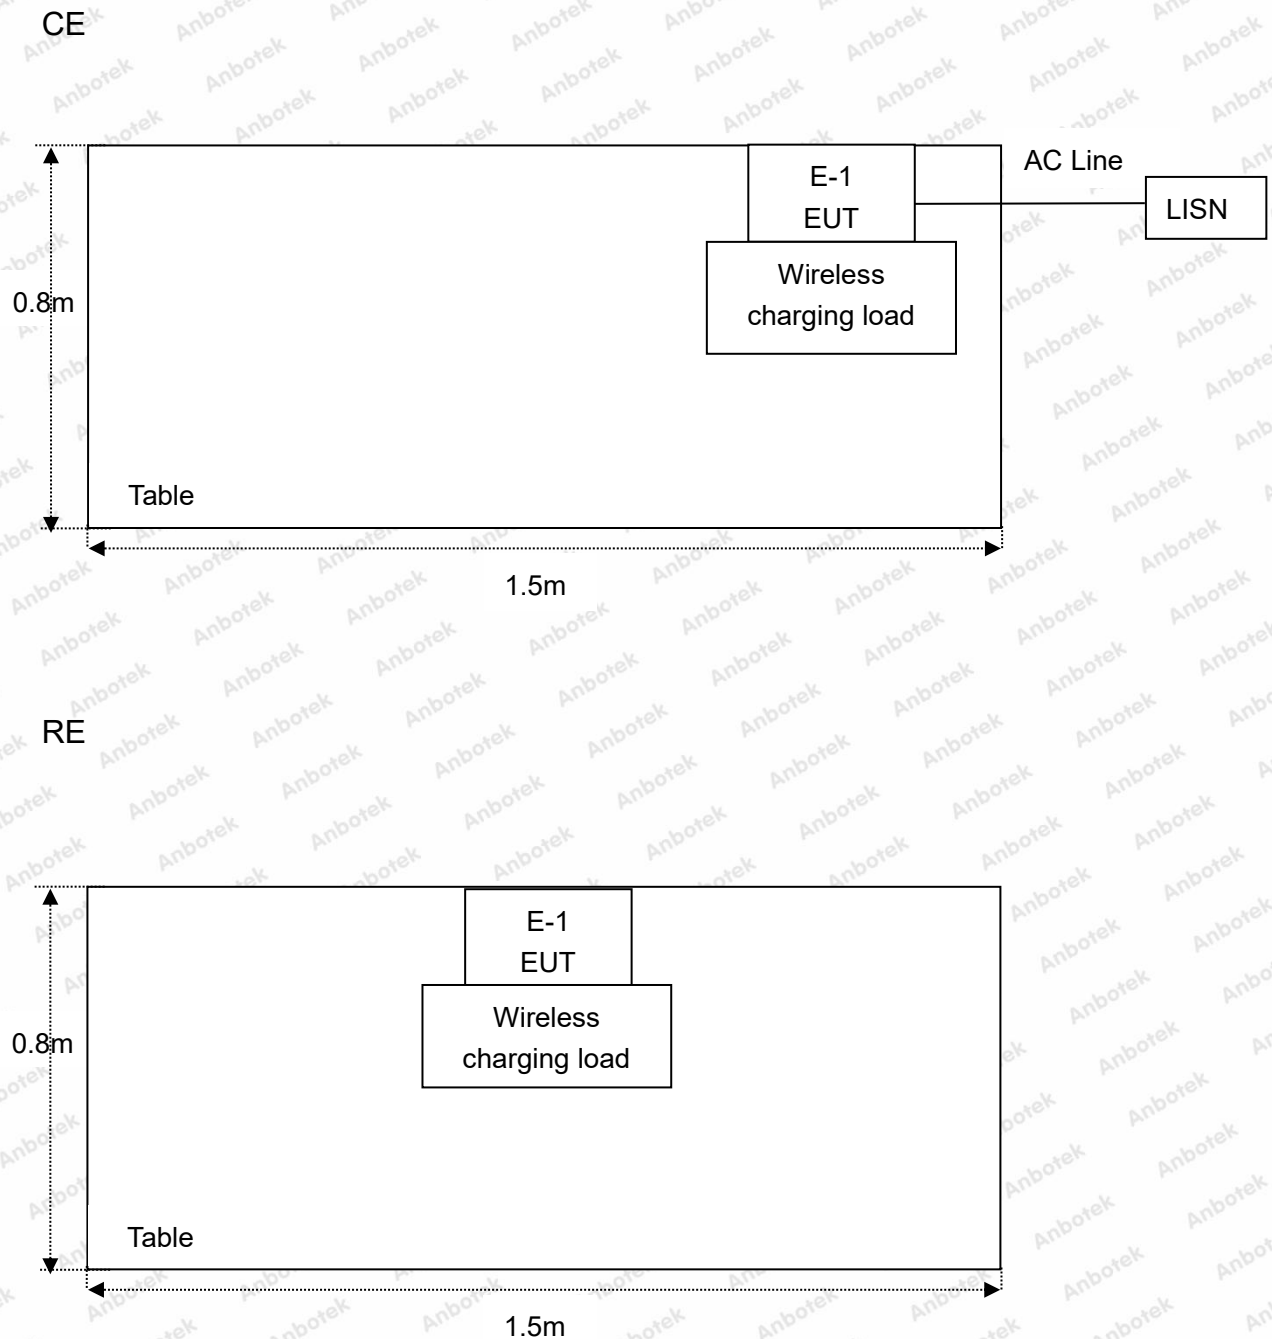

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Jan. 18, 2024	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT00 1	Jan. 17, 2024	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Jan. 17, 2024	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Jan. 23, 2024	1 Year
5.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 12, 2023	1 Year
6.	EMI Preamplifier	SKET Electronic	LNPA-0118G- 45	SKET-PA-002	Jan. 17, 2024	1 Year
7.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	Oct. 23, 2022	3 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 12, 2023	1 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Oct. 12, 2023	1 Year
11.	Pre-amplifier	SONOMA	310N	186860	Jan. 17, 2024	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 12, 2023	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 12, 2023	1 Year
15.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 12, 2023	1 Year
16.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 20, 2023	1 Year
17.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 16, 2023	1 Year
18.	Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102150	May. 06, 2024	1 Year



1.7. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.8dB
Radiated spurious emissions (Below 30MHz)	3.53dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.92dB; Vertical: 4.52dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 434132

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

1.9. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotek and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission Test	PASS
15.205/15.209	Spurious Emission	PASS




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

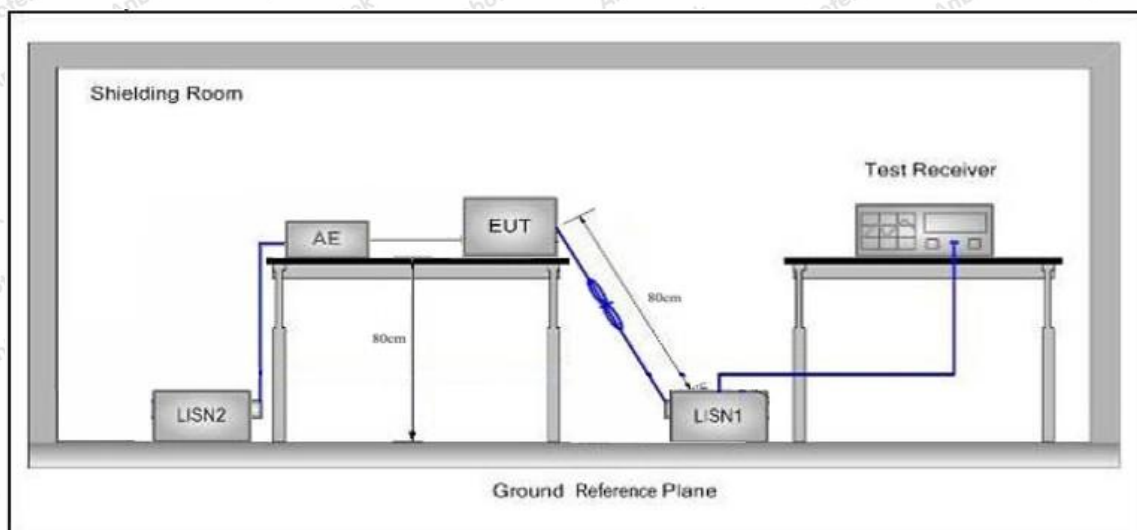

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

PASS

During the test, pre-scan all modes, only the worst case is recorded in the report.

Please to see the following pages.




Report No.: 182511C400003101

FCC ID: 2BASNH300MV1000

Page 13 of 22

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 3
Test Specification: AC 120V, 60Hz
Comment: Live Line
Temp.(°C)/Hum.(%RH): 23.4°C/51%RH

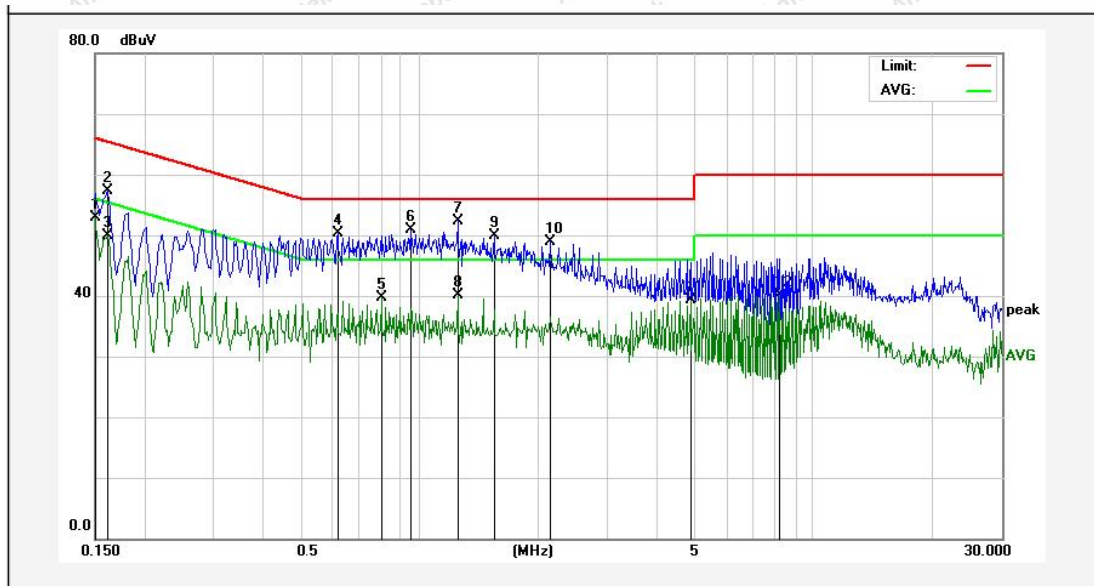


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1499	35.06	17.82	52.88	56.00	-3.12	AVG	
2	0.1620	39.52	17.83	57.35	65.36	-8.01	QP	
3	0.1620	31.98	17.83	49.81	55.36	-5.55	AVG	
4	0.6219	32.39	17.86	50.25	56.00	-5.75	QP	
5	0.8020	21.86	17.86	39.72	46.00	-6.28	AVG	
6	0.9499	33.08	17.85	50.93	56.00	-5.07	QP	
7	1.2500	34.44	17.84	52.28	56.00	-3.72	QP	
8	1.2500	22.17	17.84	40.01	46.00	-5.99	AVG	
9	1.5500	32.04	17.84	49.88	56.00	-6.12	QP	
10	2.1499	30.98	17.83	48.81	56.00	-7.19	QP	
11	4.8498	21.51	17.85	39.36	46.00	-6.64	AVG	
12	8.1499	22.17	17.91	40.08	50.00	-9.92	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 3
Test Specification: AC 120V, 60Hz
Comment: Neutral Line
Temp.(°C)/Hum.(%RH): 23.4°C/51%RH

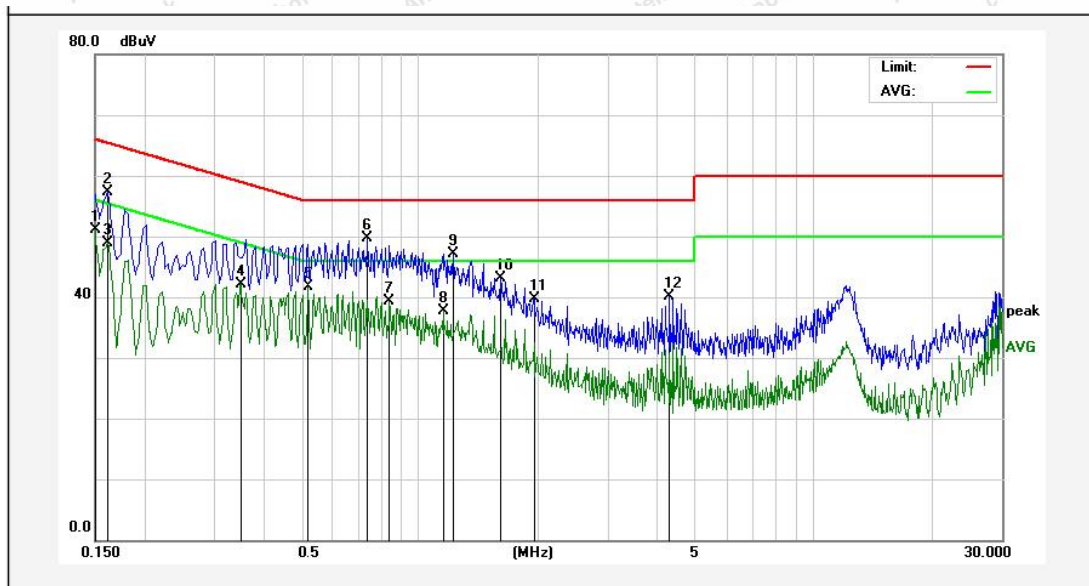

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1499	33.19	17.82	51.01	56.00	-4.99	AVG	
2	0.1620	39.54	17.83	57.37	65.36	-7.99	QP	
3	0.1620	31.10	17.83	48.93	55.36	-6.43	AVG	
4	0.3498	24.37	17.82	42.19	48.97	-6.78	AVG	
5	0.5220	23.87	17.85	41.72	46.00	-4.28	AVG	
6	0.7420	31.81	17.87	49.68	56.00	-6.32	QP	
7	0.8418	21.46	17.86	39.32	46.00	-6.68	AVG	
8	1.1498	19.81	17.85	37.66	46.00	-8.34	AVG	
9	1.2220	29.33	17.84	47.17	56.00	-8.83	QP	
10	1.6019	25.24	17.84	43.08	56.00	-12.92	QP	
11	1.9500	21.91	17.83	39.74	56.00	-16.26	QP	
12	4.3020	22.26	17.84	40.10	56.00	-15.90	QP	



4. Radiation Spurious Emission

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

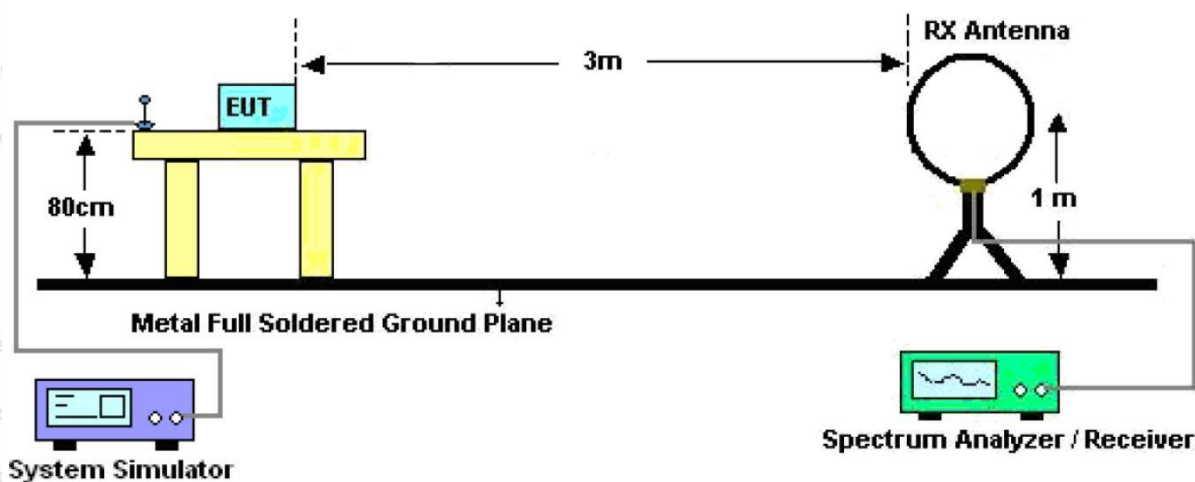


Figure 1. Below 30MHz



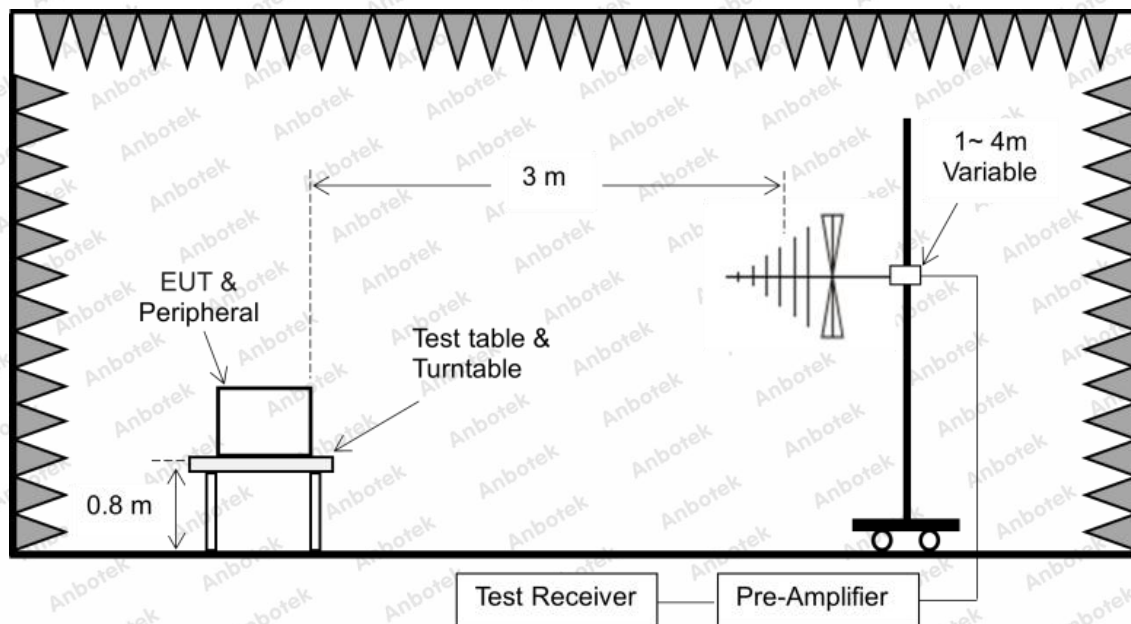


Figure 2. 30MHz to 1GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, pre-scan all modes, only the worst case is recorded in the report.

Please to see the following pages.




Report No.: 182511C400003101

FCC ID: 2BASNH300MV1000

Page 17 of 22

Test Results (Between 9KHz – 150KHz)

Test Mode: Mode 3
Distance: 3m
Power Source: DC 12.8V Battery inside
Temp.(°C)/Hum.(%RH): 23.5°C/49%RH

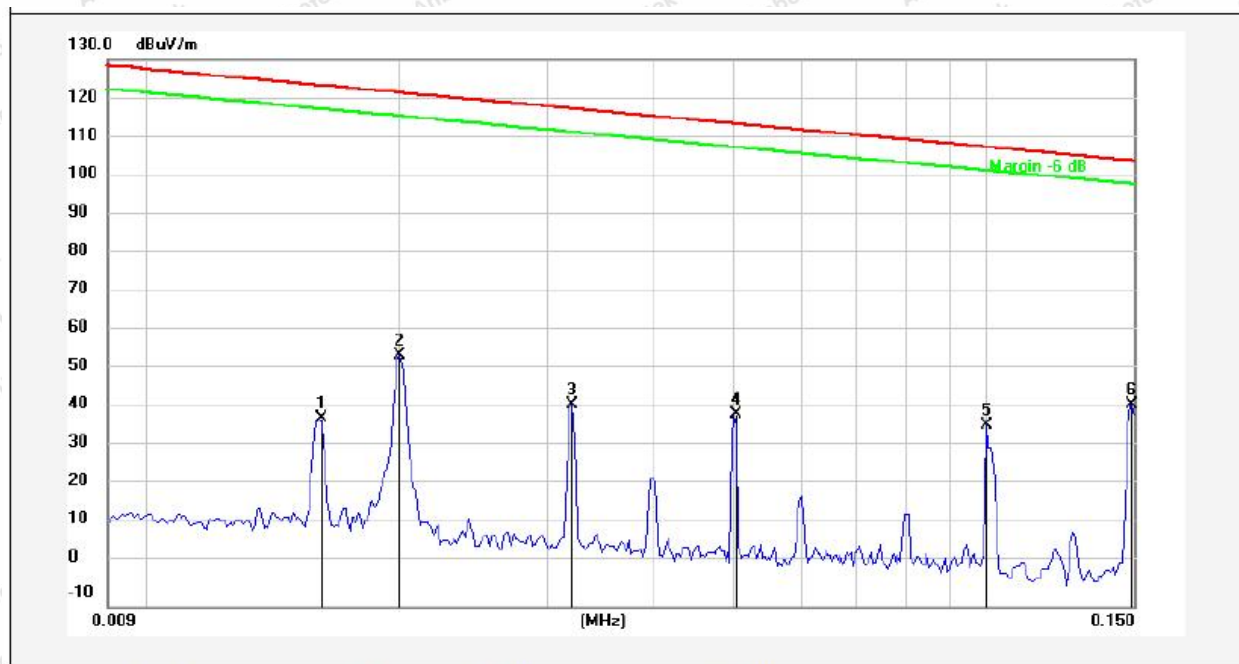

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector			
1	0.0161	17.81	20.28	38.09	123.29	-85.20	QP			
2	0.0200	34.01	20.29	54.30	121.41	-67.11	QP			
3	0.0321	21.14	20.56	41.70	117.33	-75.63	QP			
4	0.0501	18.82	20.42	39.24	113.49	-74.25	QP			
5	0.1000	16.26	20.29	36.55	107.52	-70.97	QP			
6	0.1491	21.45	20.33	41.78	104.07	-62.29	QP			




Report No.: 182511C400003101

FCC ID: 2BASNH300MV1000

Page 18 of 22

Test Results (Between 0.15MHz – 30MHz)

Test Mode: Mode 3
Distance: 3m
Power Source: DC 12.8V Battery inside
Temp.(°C)/Hum.(%RH): 23.5°C/49%RH
Fundamental

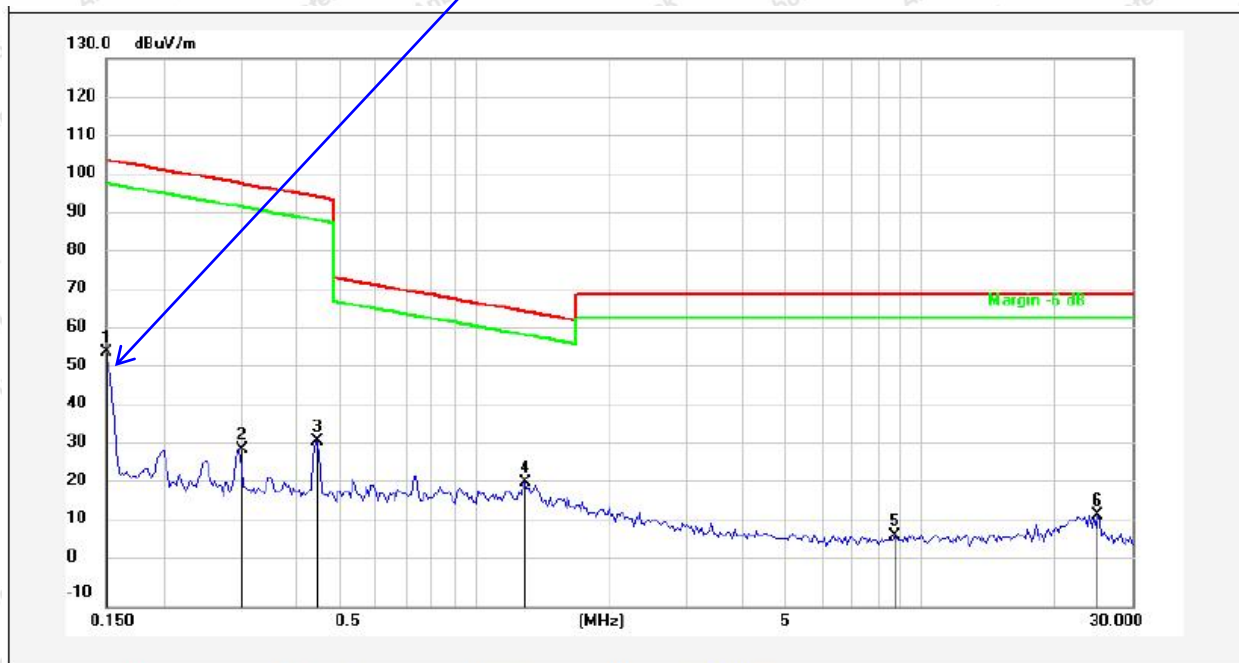

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector			
1	0.1500	34.61	20.33	54.94	104.02	-49.08	QP			
2	0.2987	9.64	20.30	29.94	98.07	-68.13	QP			
3	0.4421	11.95	20.27	32.22	94.69	-62.47	QP			
4	1.2892	1.57	20.26	21.83	65.42	-43.59	QP			
5	8.7757	-12.52	20.50	7.98	69.50	-61.52	QP			
6	25.0545	-7.24	20.67	13.43	69.50	-56.07	QP			

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.




Report No.: 182511C400003101

FCC ID: 2BASNH300MV1000

Page 19 of 22

Test Results (Between 30MHz –1000 MHz)

Test Mode: Mode 3
Distance: 3m
Power Source: DC 12.8V Battery inside
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 20.3°C/46%RH

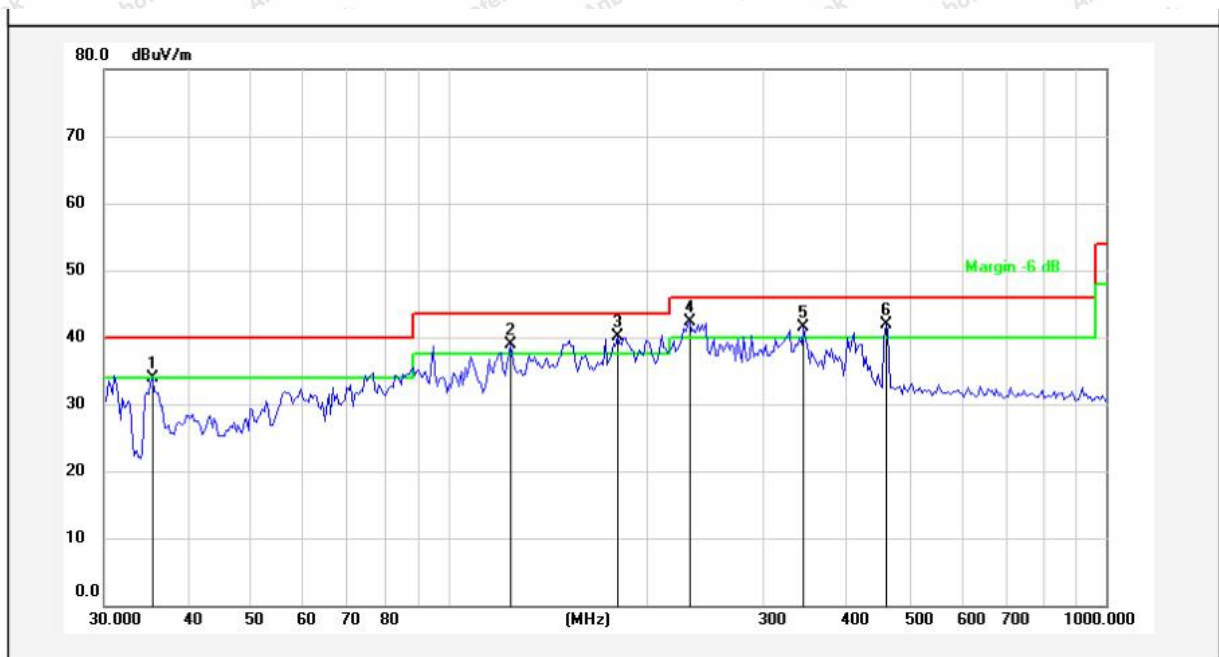

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector			
1	35.4992	53.11	-19.23	33.88	40.00	-6.12	QP			
2	124.5690	57.45	-18.62	38.83	43.50	-4.67	QP			
3	180.6487	57.04	-16.87	40.17	43.50	-3.33	QP			
4	232.5318	57.18	-14.89	42.29	46.00	-3.71	QP			
5	346.8091	54.46	-12.98	41.48	46.00	-4.52	QP			
6	462.3455	54.20	-12.22	41.98	46.00	-4.02	QP			




Report No.: 182511C400003101

FCC ID: 2BASNH300MV1000

Page 20 of 22

Test Mode: Mode 3
Distance: 3m
Power Source: DC 12.8V Battery inside
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 20.3°C/46%RH

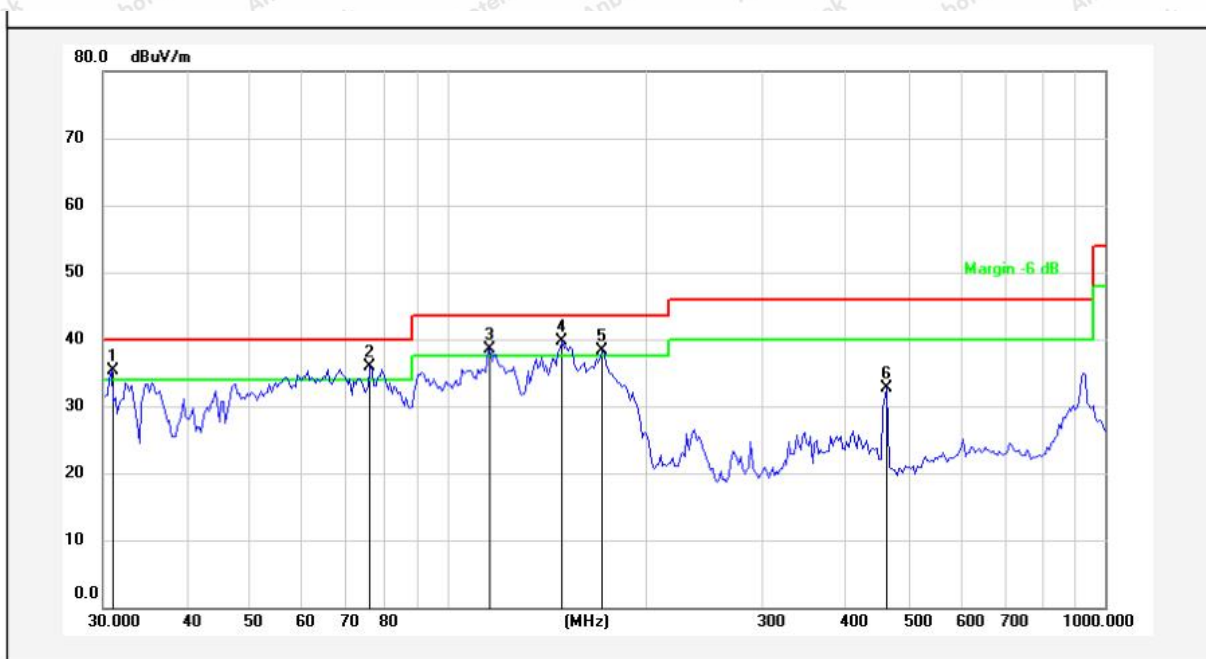

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector			
1	30.8535	55.53	-20.14	35.39	40.00	-4.61	QP			
2	76.2442	56.35	-20.54	35.81	40.00	-4.19	QP			
3	116.1320	56.14	-17.69	38.45	43.50	-5.05	QP			
4	149.4857	58.90	-19.21	39.69	43.50	-3.81	QP			
5	171.9945	55.75	-17.52	38.23	43.50	-5.27	QP			
6	465.5994	44.95	-12.28	32.67	46.00	-13.33	QP			



5. Antenna Requirement

5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached. It complies with the standard requirement.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_RF

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

