





11AX80MIMO_Ant1_6465_484Tone_RU65

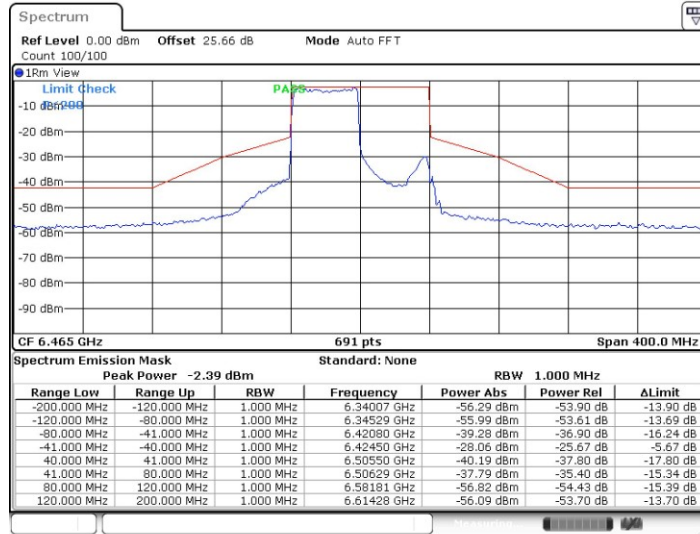

Date: 6.MAY.2022 01:00:52


11AX80MIMO_Ant2_6465_484Tone_RU65

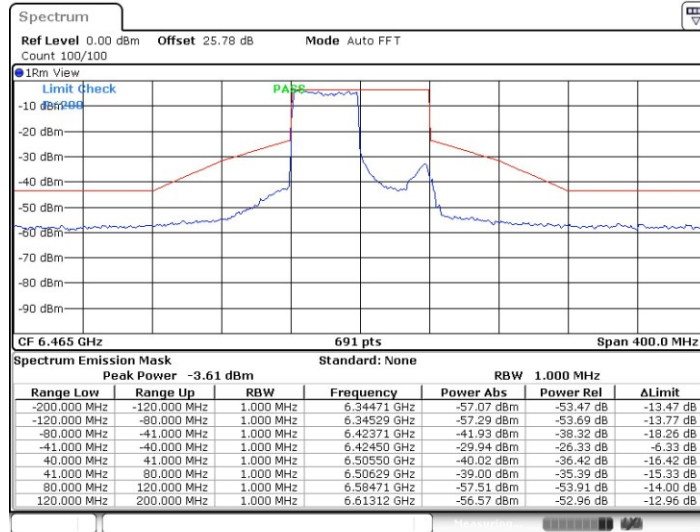

Date: 6.MAY.2022 01:02:45




11AX80MIMO_Ant1_6625_484Tone_RU65

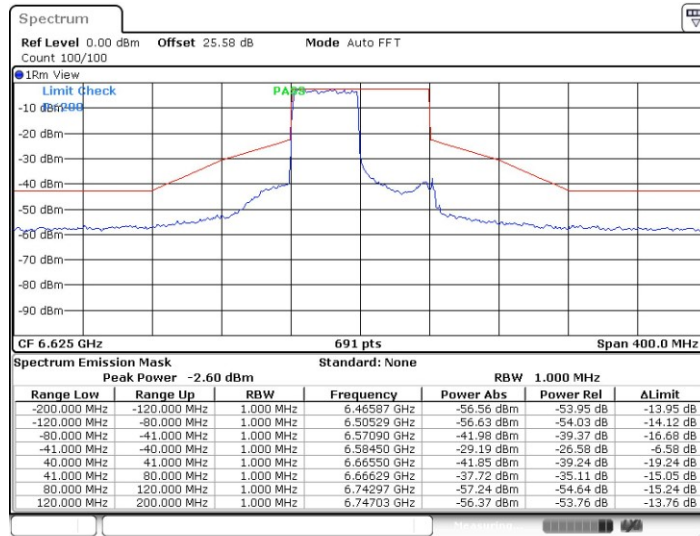

Date: 6.MAY.2022 01:05:42


11AX80MIMO_Ant2_6625_484Tone_RU65

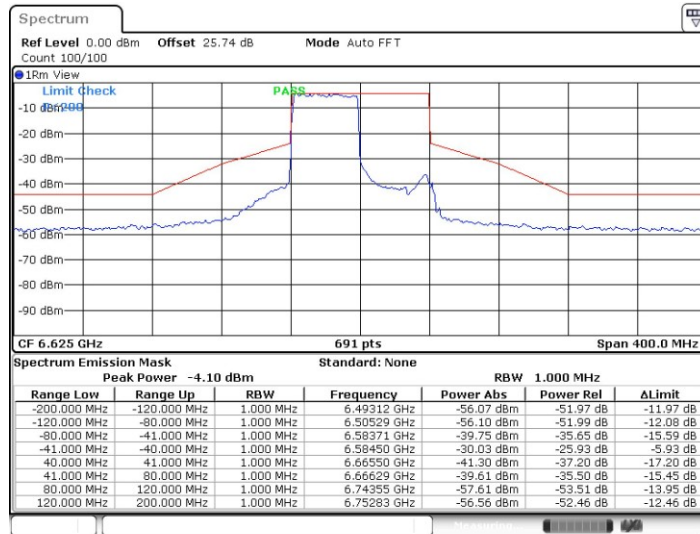

Date: 6.MAY.2022 01:06:36




11AX80MIMO_Ant1_6705_484Tone_RU65

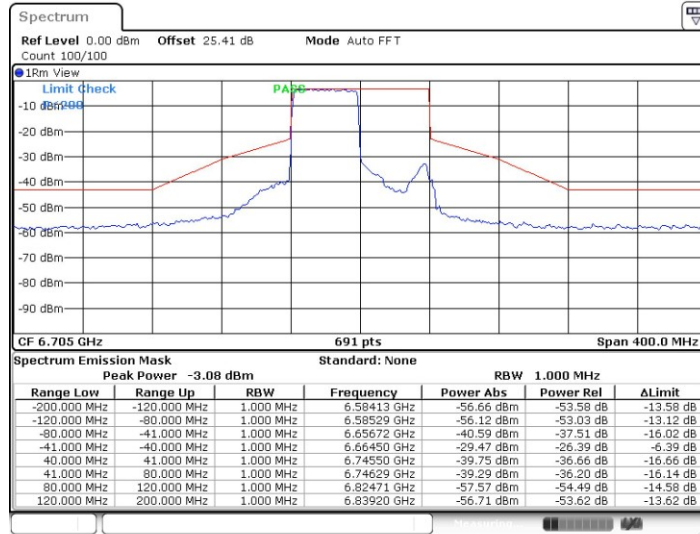

Date: 6.MAY.2022 01:07:51


11AX80MIMO_Ant2_6705_484Tone_RU65

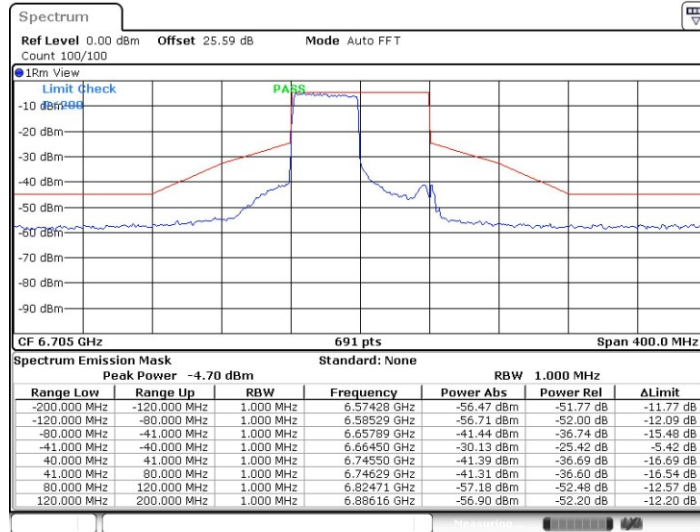

Date: 6.MAY.2022 01:09:02




11AX80MIMO_Ant1_6785_484Tone_RU66

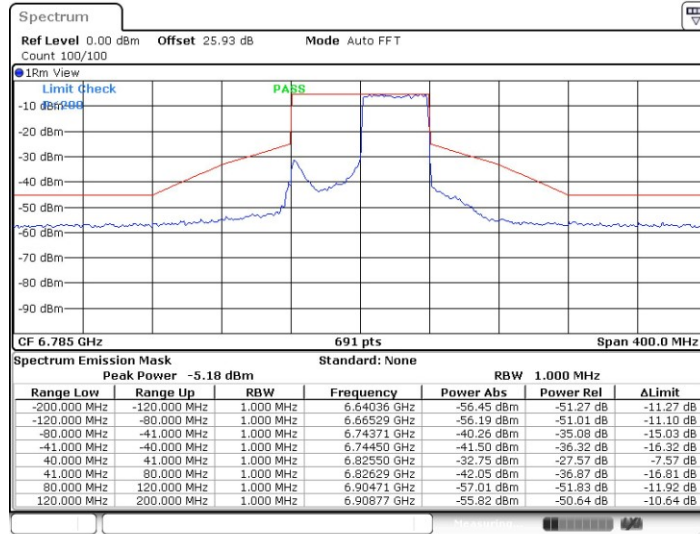

Date: 6.MAY.2022 01:20:27


11AX80MIMO_Ant2_6785_484Tone_RU66

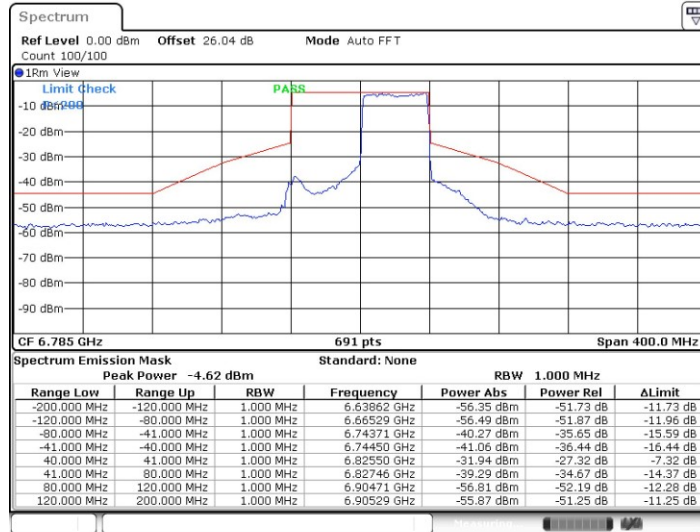

Date: 6.MAY.2022 01:21:54




11AX80MIMO_Ant1_6945_484Tone_RU65

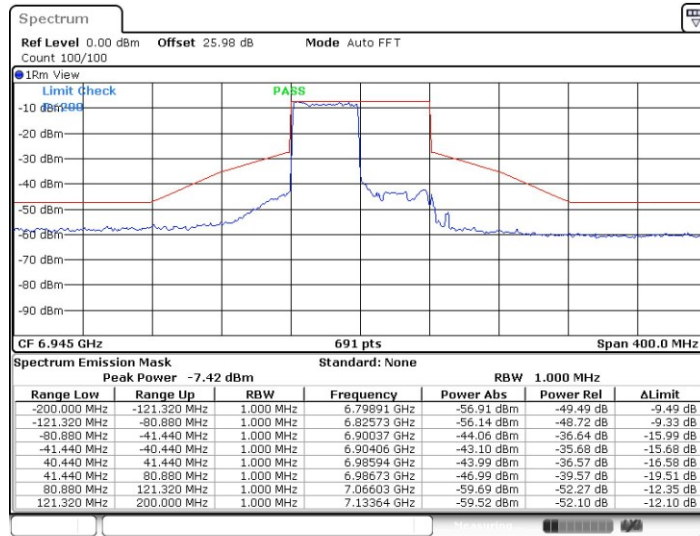

Date: 12.MAY.2022 11:58:27


11AX80MIMO_Ant2_6945_484Tone_RU65

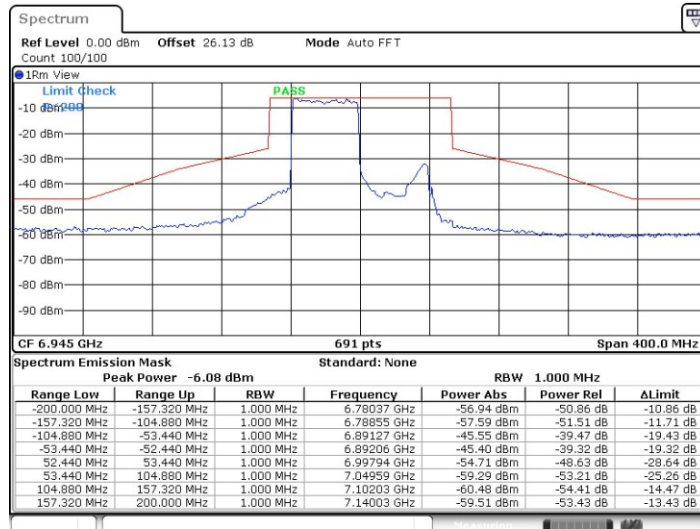

Date: 12.MAY.2022 11:58:48




11AX80MIMO_Ant1_7025_484Tone_RU66

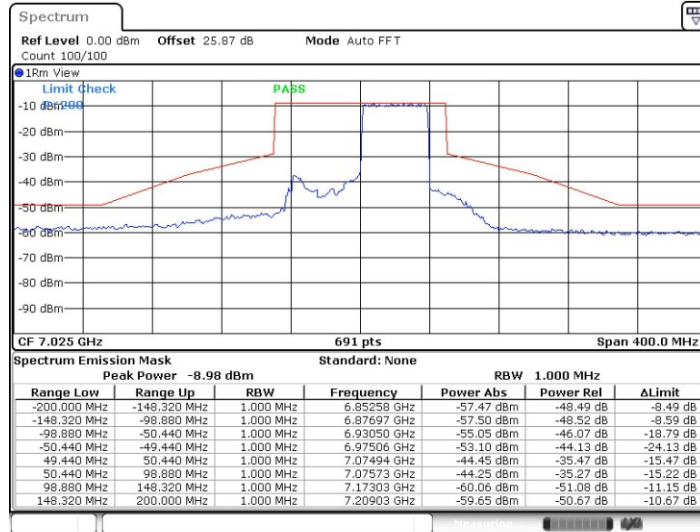

Date: 12.MAY.2022 11:59:27

11AX80MIMO_Ant2_7025_484Tone_RU66

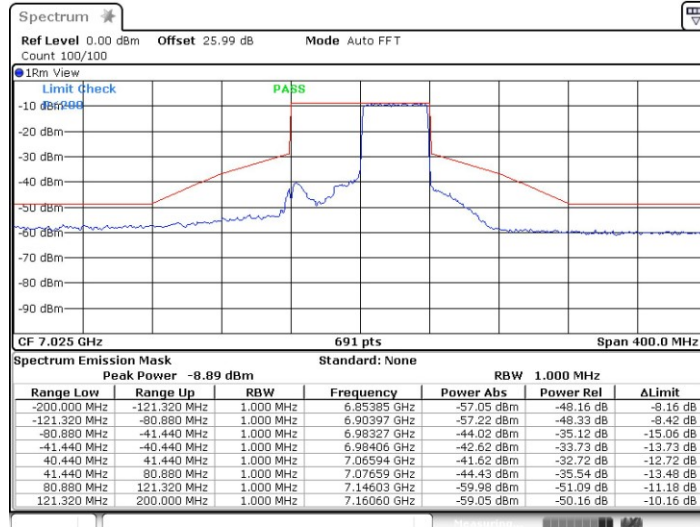


Date: 12.MAY.2022 12:00:15



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

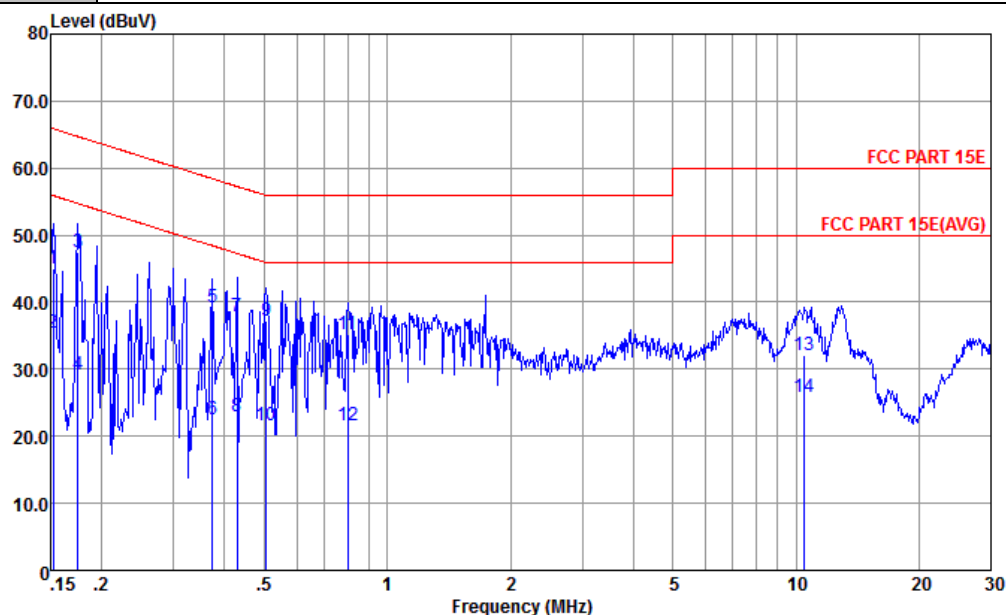


Site : CO01-KS
Condition : FCC PART 15E LISN-060105-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.152	44.99	-20.88	65.87	34.50	0.02	10.47	QP
2	0.152	35.39	-20.48	55.87	24.90	0.02	10.47	Average
3 *	0.175	47.55	-17.17	64.72	37.10	0.03	10.42	QP
4	0.175	29.25	-25.47	54.72	18.80	0.03	10.42	Average
5	0.373	39.16	-19.27	58.43	28.80	0.08	10.28	QP
6	0.373	22.56	-25.87	48.43	12.20	0.08	10.28	Average
7	0.428	37.85	-19.44	57.29	27.50	0.09	10.26	QP
8	0.428	22.95	-24.34	47.29	12.60	0.09	10.26	Average
9	0.505	37.14	-18.86	56.00	26.80	0.10	10.24	QP
10	0.505	21.64	-24.36	46.00	11.30	0.10	10.24	Average
11	0.800	35.16	-20.84	56.00	24.80	0.12	10.24	QP
12	0.800	21.56	-24.44	46.00	11.20	0.12	10.24	Average
13	10.508	32.18	-27.82	60.00	21.60	0.23	10.35	QP
14	10.508	25.78	-24.22	50.00	15.20	0.23	10.35	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

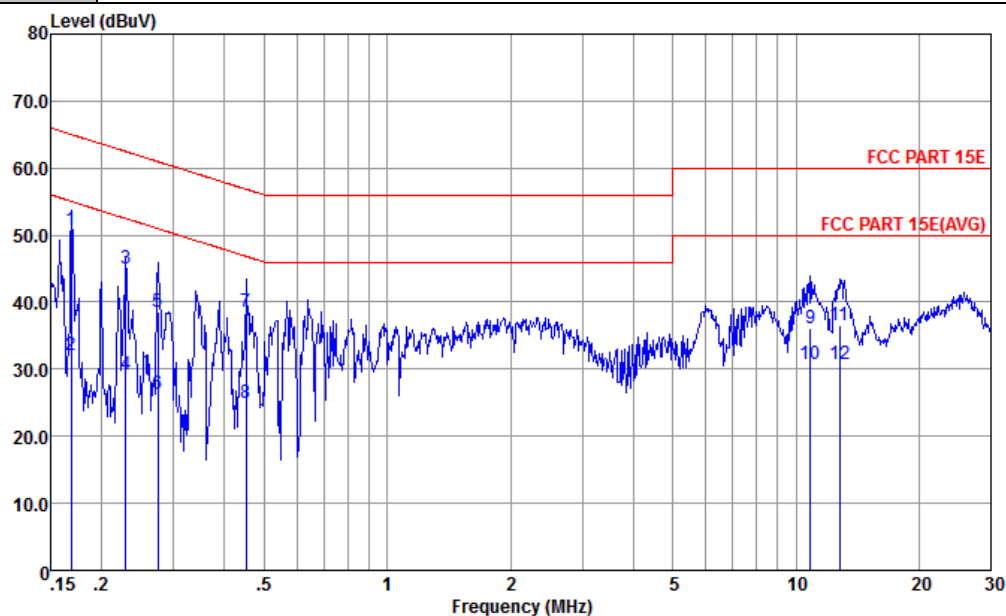

Site : CO01-KS
Condition : FCC PART 15E LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.169	50.74	-14.29	65.03	40.20	0.11	10.43	QP
2	0.169	32.14	-22.89	55.03	21.60	0.11	10.43	Average
3	0.229	44.95	-17.53	62.48	34.50	0.10	10.35	QP
4	0.229	29.25	-23.23	52.48	18.80	0.10	10.35	Average
5	0.274	38.62	-22.36	60.98	28.20	0.10	10.32	QP
6	0.274	26.32	-24.66	50.98	15.90	0.10	10.32	Average
7	0.452	38.56	-18.29	56.85	28.20	0.11	10.25	QP
8	0.452	24.96	-21.89	46.85	14.60	0.11	10.25	Average
9	10.847	36.10	-23.90	60.00	25.50	0.25	10.35	QP
10	10.847	30.80	-19.20	50.00	20.20	0.25	10.35	Average
11	12.784	36.55	-23.45	60.00	25.90	0.28	10.37	QP
12	12.784	30.75	-19.25	50.00	20.10	0.28	10.37	Average



Appendix C. Radiated Spurious Emission

U-NII 5 - 5925-6425MHzMHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 Full CH 01 5955MHz		5921.32	60.06	-28.24	88.3	46.21	35.33	10.51	31.99	100	229	P	H
		5923.98	50.92	-17.38	68.3	37.02	35.37	10.52	31.99	100	229	A	H
	*	5950	109.35	--	--	95.43	35.4	10.53	32.01	100	229	P	H
		5950	101.8	--	--	87.88	35.4	10.53	32.01	100	229	A	H
		5918.24	57.5	-30.8	88.3	43.65	35.33	10.51	31.99	292	90	P	V
		5923.56	47.38	-20.92	68.3	33.48	35.37	10.52	31.99	292	90	A	V
	*	5950	103.17	--	--	89.25	35.4	10.53	32.01	292	90	P	V
		5950	95.44	--	--	81.52	35.4	10.53	32.01	292	90	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full		11912	43.47	-30.53	74	50.33	38.78	16.49	62.13	300	0	P	H
CH 01 5955MHz		11912	44.19	-29.81	74	51.05	38.78	16.49	62.13	100	0	P	V
802.11ax HE20 Full		12352	43.75	-30.25	74	50.39	39.12	16.76	62.52	300	0	P	H
CH 45 6175MHz		12352	43.84	-30.16	74	50.48	39.12	16.76	62.52	100	0	P	V
802.11ax HE20 Full		12832	43.4	-44.9	88.3	49.81	39.27	17.05	62.73	300	0	P	H
CH 93 6415MHz		12832	43.75	-44.55	88.3	50.16	39.27	17.05	62.73	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 26/0 CH 01 5955MHz		5924.82	56.11	-32.19	88.3	42.21	35.37	10.52	31.99	100	289	P	H
		5924.96	46.24	-22.06	68.3	32.34	35.37	10.52	31.99	100	289	A	H
		5950	113.96	--	--	100.04	35.4	10.53	32.01	100	289	P	H
		5950	107.23	--	--	93.31	35.4	10.53	32.01	100	289	A	H
		5914.04	58.41	-29.89	88.3	44.56	35.33	10.51	31.99	301	255	P	V
		5924.96	46.01	-22.29	68.3	32.11	35.37	10.52	31.99	301	255	A	V
		5950	110.04	--	--	96.12	35.4	10.53	32.01	301	255	P	V
		5950	104.26	--	--	90.34	35.4	10.53	32.01	301	255	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 52/37 CH 01 5955MHz		5924.96	58.52	-29.78	88.3	44.62	35.37	10.52	31.99	100	289	P	H
		5924.96	47.18	-21.12	68.3	33.28	35.37	10.52	31.99	100	289	A	H
		5950	112.7	--	--	98.78	35.4	10.53	32.01	100	289	P	H
		5950	105.07	--	--	91.15	35.4	10.53	32.01	100	289	A	H
		5914.46	58	-30.3	88.3	44.15	35.33	10.51	31.99	301	255	P	V
		5924.96	46.32	-21.98	68.3	32.42	35.37	10.52	31.99	301	255	A	V
		5950	109.82	--	--	95.9	35.4	10.53	32.01	301	255	P	V
		5950	101.65	--	--	87.73	35.4	10.53	32.01	301	255	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 106/53 CH 01 5955MHz		5924.96	59.07	-29.23	88.3	45.17	35.37	10.52	31.99	100	289	P	H
		5924.82	49.37	-18.93	68.3	35.47	35.37	10.52	31.99	100	289	A	H
		5950	109.52	--	--	95.6	35.4	10.53	32.01	100	289	P	H
		5950	101.96	--	--	88.04	35.4	10.53	32.01	100	289	A	H
		5924.96	58.1	-30.2	88.3	44.2	35.37	10.52	31.99	301	255	P	V
		5924.82	47.63	-20.67	68.3	33.73	35.37	10.52	31.99	301	255	A	V
		5950	106.4	--	--	92.48	35.4	10.53	32.01	301	255	P	V
		5950	98.39	--	--	84.47	35.4	10.53	32.01	301	255	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE40 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 03 5965MHz		5924.82	64.8	-23.5	88.3	50.9	35.37	10.52	31.99	107	228	P	H
		5924.96	55.2	-13.1	68.3	41.3	35.37	10.52	31.99	107	228	A	H
	*	5959	105.98	--	--	92.04	35.4	10.55	32.01	107	228	P	H
		5959	98.51	--	--	84.57	35.4	10.55	32.01	107	228	A	H
		5924.54	60.85	-27.45	88.3	46.95	35.37	10.52	31.99	303	89	P	V
		5924.68	50.03	-18.27	68.3	36.13	35.37	10.52	31.99	303	89	A	V
	*	5968	99.05	--	--	85.13	35.4	10.55	32.03	303	89	P	V
		5968	91.85	--	--	77.93	35.4	10.55	32.03	303	89	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full		11928	43.83	-30.17	74	50.65	38.8	16.5	62.12	300	0	P	H
CH 03 5965MHz		11928	44.53	-29.47	74	51.35	38.8	16.5	62.12	100	0	P	V
802.11ax HE40 Full		12328	43.42	-30.58	74	50.06	39.1	16.74	62.48	300	0	P	H
CH 43 6165MHz		12328	44.79	-29.21	74	51.43	39.1	16.74	62.48	100	0	P	V
802.11ax HE40 Full		12808	43.21	-45.09	88.3	49.64	39.26	17.04	62.73	300	0	P	H
CH 91 6405MHz		12808	43.5	-44.8	88.3	49.93	39.26	17.04	62.73	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 242/61 CH 03 5965MHz		5923.84	58.46	-29.84	88.3	44.56	35.37	10.52	31.99	100	287	P	H
		5923.84	49.27	-19.03	68.3	35.37	35.37	10.52	31.99	100	287	A	H
		5959	106.81	--	--	92.87	35.4	10.55	32.01	100	287	P	H
		5959	97.38	--	--	83.44	35.4	10.55	32.01	100	287	A	H
		5860.98	57.11	-31.19	88.3	43.37	35.23	10.46	31.95	305	256	P	V
		5923.28	47.81	-20.49	68.3	33.91	35.37	10.52	31.99	305	256	A	V
		5950	103.13	--	--	89.21	35.4	10.53	32.01	305	256	P	V
		5950	94.19	--	--	80.27	35.4	10.53	32.01	305	256	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE80 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 07 5985MHz		5918.44	70.03	-18.27	88.3	56.18	35.33	10.51	31.99	100	223	P	H
		5924.2	60.95	-7.35	68.3	47.05	35.37	10.52	31.99	100	223	A	H
	*	5950	102.87	--	--	88.95	35.4	10.53	32.01	100	223	P	H
		5950	94.27	--	--	80.35	35.4	10.53	32.01	100	223	A	H
		5922.12	63.91	-24.39	88.3	50.01	35.37	10.52	31.99	302	88	P	V
		5924.52	55.58	-12.72	68.3	41.68	35.37	10.52	31.99	302	88	A	V
	*	5977	97.25	--	--	83.32	35.4	10.56	32.03	302	88	P	V
		5977	89	--	--	75.07	35.4	10.56	32.03	302	88	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full		11968	43.29	-30.71	74	50.02	38.85	16.53	62.11	300	0	P	H
CH 07 5985MHz		11968	43.84	-30.16	74	50.57	38.85	16.53	62.11	100	0	P	V
802.11ax HE80 Full		12288	43.33	-30.67	74	49.97	39.08	16.72	62.44	300	0	P	H
CH 39 6145MHz		12288	44.05	-29.95	74	50.69	39.08	16.72	62.44	100	0	P	V
802.11ax HE80 Full		12768	42.56	-45.74	88.3	49.02	39.25	17.01	62.72	300	0	P	H
CH 87 6385MHz		12768	45.17	-43.13	88.3	51.63	39.25	17.01	62.72	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 5 5925~6425MHz

WIFI 802.11ax HE80 Partial 484 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Partial 484/65 CH 07 5985MHz		5924.36	71.71	-16.59	88.3	57.81	35.37	10.52	31.99	100	223	P	H
		5924.04	59.97	-8.33	68.3	46.07	35.37	10.52	31.99	100	223	A	H
		5950	106.26	--	--	92.34	35.4	10.53	32.01	100	223	P	H
		5950	97.78	--	--	83.86	35.4	10.53	32.01	100	223	A	H
		5921	67.9	-20.4	88.3	54.05	35.33	10.51	31.99	292	89	P	V
		5923.56	54.7	-13.6	68.3	40.8	35.37	10.52	31.99	292	89	A	V
		5950	98.96	--	--	85.04	35.4	10.53	32.01	292	89	P	V
		5950	91.78	--	--	77.86	35.4	10.53	32.01	292	89	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 6 - 6425-6525MHzMHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 Full		12872	43.51	-44.79	88.3	49.9	39.27	17.07	62.73	300	0	P	H
CH 97 6435MHz		12872	44.28	-44.02	88.3	50.67	39.27	17.07	62.73	100	0	P	V
802.11ax HE20 Full		12952	42.81	-45.49	88.3	49.14	39.29	17.12	62.74	300	0	P	H
CH 105 6475MHz		12952	43.06	-45.24	88.3	49.39	39.29	17.12	62.74	100	0	P	V
802.11ax HE20 Full		13032	43.77	-44.53	88.3	50.1	39.27	17.18	62.78	300	0	P	H
CH 113 6515MHz		13032	43.4	-44.9	88.3	49.73	39.27	17.18	62.78	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 6 5925~6425MHz

WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full		12888	43.91	-44.39	88.3	50.29	39.28	17.08	62.74	300	0	P	H
CH 99 6445MHz		12888	42.87	-45.43	88.3	49.25	39.28	17.08	62.74	100	0	P	V
802.11ax HE40 Full		12968	42.65	-45.65	88.3	48.98	39.29	17.13	62.75	300	0	P	H
CH 107 6485MHz		12968	42.54	-45.76	88.3	48.87	39.29	17.13	62.75	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**U-NII 6 6425~6525MHz****WIFI 802.11ax HE80 Full (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full		12928	43.01	-45.29	88.3	49.35	39.29	17.11	62.74	300	0	P	H
CH 103 6465MHz		12928	42.09	-46.21	88.3	48.43	39.29	17.11	62.74	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 7 - 6525-6875MHzMHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 Full		13072	43.45	-44.85	88.3	49.82	39.24	17.21	62.82	300	0	P	H
CH 117 6535MHz		13072	43.76	-44.54	88.3	50.13	39.24	17.21	62.82	100	0	P	V
802.11ax HE20 Full		13392	42.66	-31.34	74	49.34	38.98	17.49	63.15	300	0	P	H
CH 149 6695MHz		13392	44.85	-29.15	74	51.53	38.98	17.49	63.15	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 7 6525~6875MHz

WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full		13128	43.76	-44.54	88.3	50.18	39.2	17.25	62.87	300	0	P	H
CH 123 6565MHz		13128	41.94	-46.36	88.3	48.36	39.2	17.25	62.87	100	0	P	V
802.11ax HE40 Full		13368	43.53	-30.47	74	50.19	39	17.47	63.13	300	0	P	H
CH 147 6685MHz		13368	44.42	-29.58	74	51.08	39	17.47	63.13	100	0	P	V
802.11ax HE40 Full		13688	44.75	-43.55	88.3	51.66	38.86	17.73	63.5	300	0	P	H
CH 179 6845MHz		13688	44.67	-43.63	88.3	51.58	38.86	17.73	63.5	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 7 6525~6875MHz

WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 135 6625MHz		13248	44.85	-43.45	88.3	51.38	39.11	17.35	62.99	300	0	P	H
		13248	42.99	-45.31	88.3	49.52	39.11	17.35	62.99	100	0	P	V
802.11ax HE80 Full CH 151 6705MHz		13408	42.36	-45.94	88.3	49.05	38.97	17.5	63.16	300	0	P	H
		13408	42.71	-45.59	88.3	49.4	38.97	17.5	63.16	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 - 6875-7125MHzMHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 Full CH 229 7095MHz		7125.16	56.64	-31.66	88.3	45.64	35.04	12.57	36.61	334	80	P	H
		7125.32	45.39	-22.91	68.3	34.39	35.04	12.57	36.61	334	80	A	H
	*	7102	97.01	--	--	86.05	35.02	12.55	36.61	334	80	P	H
		7102	89.99	--	--	79.03	35.02	12.55	36.61	334	80	A	H
		7128.68	58.45	-29.85	88.3	47.39	35.07	12.59	36.6	100	111	P	V
		7125.48	47.51	-20.79	68.3	36.51	35.04	12.57	36.61	100	111	A	V
	*	7093	99.81	--	--	88.9	35	12.53	36.62	100	111	P	V
		7093	91.94	--	--	81.03	35	12.53	36.62	100	111	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 189 6895MHz		13792	44.64	-43.66	88.3	51.61	38.84	17.82	63.63	300	0	P	H
		13792	46.89	-41.41	88.3	53.86	38.84	17.82	63.63	100	0	P	V
802.11ax HE20 Full CH 209 6995MHz		13992	46.55	-41.75	88.3	53.65	38.8	18	63.9	300	0	P	H
		13992	47.38	-40.92	88.3	54.48	38.8	18	63.9	100	0	P	V
802.11ax HE20 Full CH 229 7095MHz		14192	44.52	-43.78	88.3	51.53	39.1	18.09	64.2	300	0	P	H
		14192	45.41	-42.89	88.3	52.42	39.1	18.09	64.2	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz

WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 26/8 CH 229 7095MHz		7140.04	80.25	-8.05	88.3	68.29	35.97	12.59	36.6	100	0	P	H
		7135.56	62.62	-5.68	68.3	50.66	35.97	12.59	36.6	100	0	A	H
		7102	107.77	--	--	96.44	35.39	12.55	36.61	100	0	P	H
		7102	100.69	--	--	89.36	35.39	12.55	36.61	100	0	A	H
		7136.84	74.62	-13.68	88.3	62.66	35.97	12.59	36.6	301	270	P	V
		7136.68	58.53	-9.77	68.3	46.57	35.97	12.59	36.6	301	270	A	V
		7102	104.46	--	--	93.13	35.39	12.55	36.61	301	270	P	V
		7102	96.54	--	--	85.21	35.39	12.55	36.61	301	270	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz

WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 52/40 CH 229 7095MHz		7134.44	77.28	-11.02	88.3	65.32	35.97	12.59	36.6	100	19	P	H
		7129.16	59.74	-8.56	68.3	48.36	35.39	12.59	36.6	100	19	A	H
		7102	104.9	--	--	93.57	35.39	12.55	36.61	100	19	P	H
		7102	97	--	--	85.67	35.39	12.55	36.61	100	19	A	H
		7126.92	74.46	-13.84	88.3	62.52	35.98	12.57	36.61	290	262	P	V
		7130.12	56.69	-11.61	68.3	44.73	35.97	12.59	36.6	290	262	A	V
		7102	101.23	--	--	89.9	35.39	12.55	36.61	290	262	P	V
		7102	92.36	--	--	81.03	35.39	12.55	36.61	290	262	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz

WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 106/54 CH 229 7095MHz		7128.04	54.04	-34.26	88.3	43.04	35.04	12.57	36.61	289	87	P	H
		7126.44	44.31	-23.99	68.3	33.31	35.04	12.57	36.61	289	87	A	H
		7102	99.07	--	--	88.11	35.02	12.55	36.61	289	87	P	H
		7102	91.97	--	--	81.01	35.02	12.55	36.61	289	87	A	H
		7128.04	56.45	-31.85	88.3	45.45	35.04	12.57	36.61	108	112	P	V
		7126.76	45.16	-23.14	68.3	34.16	35.04	12.57	36.61	108	112	A	V
		7102	99.39	--	--	88.43	35.02	12.55	36.61	108	112	P	V
		7102	92.01	--	--	81.05	35.02	12.55	36.61	108	112	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz

WIFI 802.11ax HE40 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 227 7085MHz		7125.84	69.94	-18.36	88.3	51.35	35.9	15.48	32.79	100	200	P	H
		7126.2	61.88	-6.42	68.3	47.49	35.6	11.58	32.79	100	200	A	H
	*	7084	101.21	--	--	86.82	35.6	11.56	32.77	100	200	P	H
		7084	94.96	--	--	76.34	35.9	15.49	32.77	100	200	A	H
		7125.84	65	-23.3	88.3	50.61	35.6	11.58	32.79	300	89	P	V
		7126.2	57.66	-10.64	68.3	43.27	35.6	11.58	32.79	300	89	A	V
	*	7084	97.14	--	--	82.75	35.6	11.56	32.77	300	89	P	V
		7084	89.73	--	--	75.34	35.6	11.56	32.77	300	89	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz

WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full		13928	44.82	-43.48	88.3	51.87	38.82	17.94	63.81	300	0	P	H
CH 203 6965MHz		13928	44.88	-43.42	88.3	51.93	38.82	17.94	63.81	100	0	P	V
802.11ax HE40 Full		14168	44.12	-44.18	88.3	51.13	39.08	18.09	64.18	300	0	P	H
CH 227 7085MHz		14168	47.57	-40.73	88.3	54.58	39.08	18.09	64.18	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz

WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 242/62 CH 227 7085MHz		7137	74.66	-13.64	88.3	60.26	35.6	11.6	32.8	109	283	P	H
		7131.6	63.78	-4.52	68.3	49.37	35.6	11.6	32.79	109	283	A	H
		7102	103.57	--	--	89.17	35.6	11.57	32.77	109	283	P	H
		7102	95.46	--	--	81.06	35.6	11.57	32.77	109	283	A	H
		7141.68	72.4	-15.9	88.3	58	35.6	11.6	32.8	290	261	P	V
		7134.3	60.6	-7.7	68.3	46.2	35.6	11.6	32.8	290	261	A	V
		7102	100.78	--	--	86.38	35.6	11.57	32.77	290	261	P	V
		7102	92.19	--	--	77.79	35.6	11.57	32.77	290	261	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz

WIFI 802.11ax HE80 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 215 7025MHz		7125.16	53.55	-34.75	88.3	42.55	35.04	12.57	36.61	300	273	P	H
		7125	46.04	-22.26	68.3	35.04	35.04	12.57	36.61	300	273	A	H
	*	7012	89.96	--	--	79.22	34.92	12.46	36.64	300	273	P	H
		7012	81.77	--	--	71.03	34.92	12.46	36.64	300	273	A	H
		7125.16	56.31	-31.99	88.3	45.31	35.04	12.57	36.61	102	288	P	V
		7125.32	48.63	-19.67	68.3	37.63	35.04	12.57	36.61	102	288	A	V
	*	7066	91.81	--	--	80.94	34.98	12.51	36.62	102	288	P	V
		7066	83.9	--	--	73.03	34.98	12.51	36.62	102	288	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz

WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full		13888	45.41	-42.89	88.3	52.44	38.82	17.91	63.76	300	0	P	H
CH 199 6945MHz		13888	44.19	-44.11	88.3	51.22	38.82	17.91	63.76	100	0	P	V
802.11ax HE80 Full		14048	45.49	-42.81	88.3	52.58	38.88	18.03	64	300	0	P	H
CH 215 7025MHz		14048	45.26	-43.04	88.3	52.35	38.88	18.03	64	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII 8 6875~7125MHz

WIFI 802.11ax HE80 Partial 484 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Partial 484/66 CH 215 7025MHz		7136.2	53.24	-35.06	88.3	42.18	35.07	12.59	36.6	302	106	P	H
		7125.96	44.33	-23.97	68.3	33.33	35.04	12.57	36.61	302	106	A	H
		7057	89.34	--	--	78.51	34.96	12.5	36.63	302	106	P	H
		7057	81.86	--	--	71.03	34.96	12.5	36.63	302	106	A	H
		7131.72	53.65	-34.65	88.3	42.59	35.07	12.59	36.6	305	100	P	V
		7132.84	44.34	-23.96	68.3	33.28	35.07	12.59	36.6	305	100	A	V
		7048	85.42	--	--	74.59	34.96	12.5	36.63	305	100	P	V
		7048	79.19	--	--	68.36	34.96	12.5	36.63	305	100	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



RSE Co-location

WIFI 802.11ax HE40 Partial 242 + LTE_B30_BW_10M (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE40 Partial 242/62 CH 227 7085MHz		7149.06	74.59	-13.71	88.3	60.18	35.6	11.61	32.8	109	283	P	H
		7134.12	63.73	-4.57	68.3	49.33	35.6	11.6	32.8	109	283	A	H
		7102	103.57	---	---	89.17	35.6	11.57	32.77	109	283	P	H
		7102	95.46	---	---	81.06	35.6	11.57	32.77	109	283	A	H
		7144.74	70.77	-17.53	88.3	56.37	35.6	11.6	32.8	290	261	P	V
		7131.78	61.19	-7.11	68.3	46.78	35.6	11.6	32.79	290	261	A	V
		7093	101.9	---	---	87.51	35.6	11.56	32.77	290	261	P	V
		7102	92.19	---	---	77.79	35.6	11.57	32.77	290	261	A	V
Remark		1. No other spurious found.											
		2. All results are PASS against Peak and Average limit line.											

WIFI 802.11ax HE40 Partial 242 + LTE_B30_BW_10M (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE40 Partial 242/62 CH 227 7085MHz		14168	46.18	-42.12	88.3	52.14	39	16.64	61.6	300	0	P	H
		14168	46.23	-42.07	88.3	52.19	39	16.64	61.6	100	360	P	V
Remark		1. No other spurious found.											
		2. All results are PASS against Peak and Average limit line.											



Emission below 1GHz

WIFI 802.11ax HE40 Partial 242 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE40 Partial 242 LF		30	21.16	-18.84	40	28.28	24.8	0.88	32.8	--	--	P	H
		150.28	14.96	-28.54	43.5	28.91	17	1.95	32.9	--	--	P	H
		263.77	16.89	-29.11	46	28.6	18.69	2.61	33.01	--	--	P	H
		508.21	23.65	-22.35	46	29.42	24	3.6	33.37	--	--	P	H
		750.71	27.73	-18.27	46	28.5	28	4.38	33.15	--	--	P	H
		787.57	28.19	-17.81	46	28.55	28.15	4.48	32.99	--	--	P	H
		30	21.16	-18.84	40	28.28	24.8	0.88	32.8	--	--	P	V
		150.28	14.96	-28.54	43.5	28.91	17	1.95	32.9	--	--	P	V
		260.86	17.31	-28.69	46	29.07	18.65	2.6	33.01	--	--	P	V
		508.21	23.65	-22.35	46	29.42	24	3.6	33.37	--	--	P	V
		564.47	24.34	-21.66	46	28.6	25.27	3.79	33.32	--	--	P	V
		756.53	28.59	-17.41	46	29.3	28.03	4.39	33.13	--	--	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
 = 55.45 (dBμV/m)
2. Over Limit(dB)
 = Level(dBμV/m) – Limit Line(dBμV/m)
 = 55.45(dBμV/m) – 74(dBμV/m)
 = -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
 = 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
 = 43.54(dBμV/m) – 54(dBμV/m)
 = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission

Note symbol

-L	Low channel location
-R	High channel location








U-NII 5 - 5925-6425MHzMHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)



WIFI		U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																								
ANT		802.11ax HE20 Full CH01 5955MHz																																																																								
1+2		Horizontal	Fundamental																																																																							
Peak	No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 0320H6-KS Condition : WIFI 6E PEAK 3m 3117.580240138 HORIZONTAL Project : RRM 1000.000KHz VBM 3000.000KHz SMT Auto Rde : (FR)240834 Rde : 823 Plane : 2 Single-directivity : 1.6 powersetting : 1.6 <table><thead><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pow</th><th>T/Pow</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>on</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5921.32</td><td>60.06</td><td>-28.24</td><td>88.30</td><td>46.21</td><td>35.33</td><td>10.51</td><td>31.99</td><td>100</td><td>229</td><td>Peak</td><td>HORIZONTAL</td></tr></tbody></table> No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 0320H6-KS Condition : WIFI 6E PEAK 3m 3117.580240138 HORIZONTAL Project : RRM 1000.000KHz VBM 3000.000KHz SMT Auto Rde : (FR)240834 Rde : 823 Plane : 2 Single-directivity : 1.6 powersetting : 1.6 <table><thead><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pow</th><th>T/Pow</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>on</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5950.00</td><td>109.35</td><td>21.05</td><td>88.30</td><td>95.43</td><td>35.40</td><td>10.53</td><td>32.01</td><td>100</td><td>229</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>5950.00</td><td>101.80</td><td>33.50</td><td>68.30</td><td>87.88</td><td>35.40</td><td>10.53</td><td>32.01</td><td>100</td><td>229</td><td>Average</td><td>HORIZONTAL</td></tr></tbody></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pow	T/Pow	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	on	deg		1	5921.32	60.06	-28.24	88.30	46.21	35.33	10.51	31.99	100	229	Peak	HORIZONTAL	Over	Limit	ReadAntenna	Cable Preamp	A/Pow	T/Pow	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	on	deg		1	5950.00	109.35	21.05	88.30	95.43	35.40	10.53	32.01	100	229	Peak	HORIZONTAL	2	5950.00	101.80	33.50	68.30	87.88	35.40	10.53	32.01	100	229	Average	HORIZONTAL	
	Over	Limit	ReadAntenna	Cable Preamp	A/Pow	T/Pow	Remark	Pol/Phas																																																																		
Freq	Level	Line	Level Factor	Loss Factor	on	deg																																																																				
1	5921.32	60.06	-28.24	88.30	46.21	35.33	10.51	31.99	100	229	Peak	HORIZONTAL																																																														
Over	Limit	ReadAntenna	Cable Preamp	A/Pow	T/Pow	Remark	Pol/Phas																																																																			
Freq	Level	Line	Level Factor	Loss Factor	on	deg																																																																				
1	5950.00	109.35	21.05	88.30	95.43	35.40	10.53	32.01	100	229	Peak	HORIZONTAL																																																														
2	5950.00	101.80	33.50	68.30	87.88	35.40	10.53	32.01	100	229	Average	HORIZONTAL																																																														
Avg.	No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 0320H6-KS Condition : WIFI 6E (AVG) 3m 3117.580240138 HORIZONTAL Project : RRM 1000.000KHz VBM 0.01000KHz SMT Auto Rde : (FR)240834 Rde : 1 Plane : 2 Single-directivity : 1.6 powersetting : 1.6 <table><thead><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pow</th><th>T/Pow</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>on</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5923.98</td><td>50.92</td><td>-17.38</td><td>68.30</td><td>37.02</td><td>35.37</td><td>10.52</td><td>31.99</td><td>100</td><td>229</td><td>Average</td><td>HORIZONTAL</td></tr></tbody></table> Left blank		Over	Limit	ReadAntenna	Cable Preamp	A/Pow	T/Pow	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	on	deg		1	5923.98	50.92	-17.38	68.30	37.02	35.37	10.52	31.99	100	229	Average	HORIZONTAL																																											
	Over	Limit	ReadAntenna	Cable Preamp	A/Pow	T/Pow	Remark	Pol/Phas																																																																		
Freq	Level	Line	Level Factor	Loss Factor	on	deg																																																																				
1	5923.98	50.92	-17.38	68.30	37.02	35.37	10.52	31.99	100	229	Average	HORIZONTAL																																																														



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m		
ANT	802.11ax HE20 Full CH01 5955MHz		
1+2	Vertical	Fundamental	
Peak	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900158 http://www.sporton.com.cn SPORTON LAB. Data: 4 117 Level (dBuV/m) 93.5 81.5 70.2 58.5 46.8 35.1 23.4 11.7 5825 5850 5870 5890 5910 5930 5950 5965 Frequency (MHz) Site Condition Project Model Mode Plane Power setting Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas 03DH05-KS RIFI 6E PEAK 3m 3117 5800240138 VERTICAL RSM-1000 000KHz VBR-3000 000KHz SMT-Auto (FR)240834 #23 X Single-directivity 14 dB dBuV/m dB cm deg 292 90 Peak VERTICAL 1 5918.24 57.50 -30.80 88.30 43.65 35.33 10.51 31.99 292 90 Peak VERTICAL  No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900158 http://www.sporton.com.cn SPORTON LAB. Data: 6 117 Level (dBuV/m) 93.5 81.5 70.2 58.5 46.8 35.1 23.4 11.7 5825 5850 5870 5890 5910 5930 5950 5965 Frequency (MHz) Site Condition Project Model Mode Plane Power setting Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas 03DH05-KS RIFI 6E PEAK 3m 3117 5800240138 VERTICAL RSM-1000 000KHz VBR-3000 000KHz SMT-Auto (FR)240834 #23 X Single-directivity 14 dB dBuV/m dB cm deg 292 90 Peak VERTICAL 1 5950.00 103.17 14.87 88.30 89.25 35.40 10.53 32.01 292 90 Peak VERTICAL 2 5950.00 95.44 27.14 68.30 81.52 35.40 10.53 32.01 292 90 Average VERTICAL <tr><td>Avg.</td><td>  No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900158 http://www.sporton.com.cn SPORTON LAB. Data: 5 117 Level (dBuV/m) 93.5 81.5 70.2 58.5 46.8 35.1 23.4 11.7 5825 5850 5870 5890 5910 5930 5950 5965 Frequency (MHz) Site Condition Project Model Mode Plane Power setting Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas 03DH05-KS RIFI 6E (AVG) 3m 3117 5800240138 VERTICAL RSM-1000 000KHz VBR-3000 000KHz SMT-Auto (FR)240834 #23 X Single-directivity 14 dB dBuV/m dB cm deg 292 90 Average VERTICAL 1 5923.56 47.38 -20.92 68.30 33.48 35.37 10.52 31.99 292 90 Average VERTICAL Left blank </td></tr>	Avg.	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900158 http://www.sporton.com.cn SPORTON LAB. Data: 5 117 Level (dBuV/m) 93.5 81.5 70.2 58.5 46.8 35.1 23.4 11.7 5825 5850 5870 5890 5910 5930 5950 5965 Frequency (MHz) Site Condition Project Model Mode Plane Power setting Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas 03DH05-KS RIFI 6E (AVG) 3m 3117 5800240138 VERTICAL RSM-1000 000KHz VBR-3000 000KHz SMT-Auto (FR)240834 #23 X Single-directivity 14 dB dBuV/m dB cm deg 292 90 Average VERTICAL 1 5923.56 47.38 -20.92 68.30 33.48 35.37 10.52 31.99 292 90 Average VERTICAL Left blank
Avg.	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900158 http://www.sporton.com.cn SPORTON LAB. Data: 5 117 Level (dBuV/m) 93.5 81.5 70.2 58.5 46.8 35.1 23.4 11.7 5825 5850 5870 5890 5910 5930 5950 5965 Frequency (MHz) Site Condition Project Model Mode Plane Power setting Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas 03DH05-KS RIFI 6E (AVG) 3m 3117 5800240138 VERTICAL RSM-1000 000KHz VBR-3000 000KHz SMT-Auto (FR)240834 #23 X Single-directivity 14 dB dBuV/m dB cm deg 292 90 Average VERTICAL 1 5923.56 47.38 -20.92 68.30 33.48 35.37 10.52 31.99 292 90 Average VERTICAL Left blank		

U-NII 5 - 5925-6425MHzMHz






WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

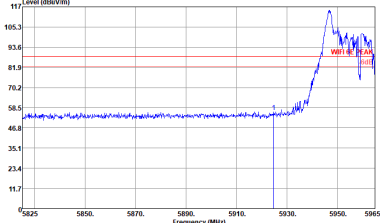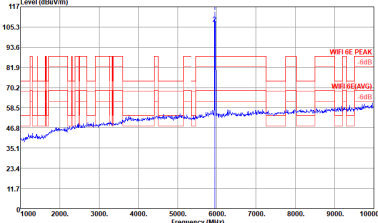WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																				
ANT	802.11ax HE20 Partial 26/0 CH01 5955MHz																																																																				
1+2	Horizontal	Fundamental																																																																			
Peak	 No. 109B, Pengxi North Road Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn Date: 1 Level (dBμV/m) Site Condition : 03CH06-KS RIFI GE PEAK 3e 3117 5N00240138 HORIZONTAL Project RRM 1000.000KHz VSW 3000.000MHz SWT Auto Map FRI 240834 Name Z WEI #23 Plane S Single-directivity Powersetting 14 <table> <tr> <th>Freq Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Poa</th><th>T/Poa</th><th>Remark</th><th>Poi/Phas</th></tr> <tr> <th>MHz</th><th>dBμV/m</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>cn</th><th>deg</th></tr> <tr> <td>1 5924.82</td><td>56.11</td><td>-32.19</td><td>88.30</td><td>42.21</td><td>35.37</td><td>10.52</td><td>31.99</td><td>100</td><td>289 Peak</td><td>HORIZONTAL</td></tr> </table>	Freq Level	Over Limit	ReadAntenna	Cable Preamp	A/Poa	T/Poa	Remark	Poi/Phas	MHz	dBμV/m	Limit	Line	Level Factor	Loss Factor	dB	cn	deg	1 5924.82	56.11	-32.19	88.30	42.21	35.37	10.52	31.99	100	289 Peak	HORIZONTAL	 No. 109B, Pengxi North Road Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn Date: 3 Level (dBμV/m) Site Condition : 03CH06-KS RIFI GE PEAK 3e 3117 5N00240138 HORIZONTAL Project RRM 1000.000KHz VSW 3000.000MHz SWT Auto Map FRI 240834 Name Z WEI #23 Plane S Single-directivity Powersetting 14 <table> <tr> <th>Freq Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Poa</th><th>T/Poa</th><th>Remark</th><th>Poi/Phas</th></tr> <tr> <th>MHz</th><th>dBμV/m</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>cn</th><th>deg</th></tr> <tr> <td>1 * 5950.00</td><td>113.96</td><td>26.66</td><td>88.30</td><td>100.04</td><td>35.40</td><td>10.53</td><td>32.01</td><td>100</td><td>289 Peak</td><td>HORIZONTAL</td></tr> <tr> <td>2 * 5950.00</td><td>107.23</td><td>38.93</td><td>88.30</td><td>93.31</td><td>35.40</td><td>10.53</td><td>32.01</td><td>100</td><td>289 Average</td><td>HORIZONTAL</td></tr> </table>	Freq Level	Over Limit	ReadAntenna	Cable Preamp	A/Poa	T/Poa	Remark	Poi/Phas	MHz	dBμV/m	Limit	Line	Level Factor	Loss Factor	dB	cn	deg	1 * 5950.00	113.96	26.66	88.30	100.04	35.40	10.53	32.01	100	289 Peak	HORIZONTAL	2 * 5950.00	107.23	38.93	88.30	93.31	35.40	10.53	32.01	100	289 Average	HORIZONTAL
Freq Level	Over Limit	ReadAntenna	Cable Preamp	A/Poa	T/Poa	Remark	Poi/Phas																																																														
MHz	dBμV/m	Limit	Line	Level Factor	Loss Factor	dB	cn	deg																																																													
1 5924.82	56.11	-32.19	88.30	42.21	35.37	10.52	31.99	100	289 Peak	HORIZONTAL																																																											
Freq Level	Over Limit	ReadAntenna	Cable Preamp	A/Poa	T/Poa	Remark	Poi/Phas																																																														
MHz	dBμV/m	Limit	Line	Level Factor	Loss Factor	dB	cn	deg																																																													
1 * 5950.00	113.96	26.66	88.30	100.04	35.40	10.53	32.01	100	289 Peak	HORIZONTAL																																																											
2 * 5950.00	107.23	38.93	88.30	93.31	35.40	10.53	32.01	100	289 Average	HORIZONTAL																																																											
Avg.	Left blank																																																																				






U-NII 5 - 5925-6425MHzMHz




WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

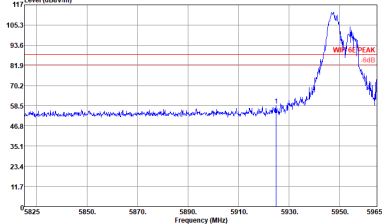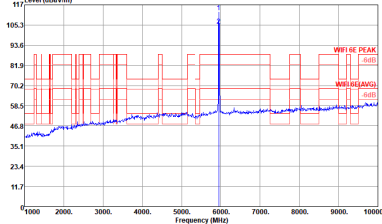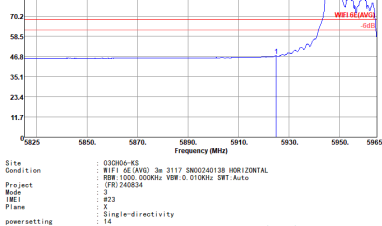WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																																															
ANT	802.11ax HE20 Partial 52/37 CH01 5955MHz																																																																																																															
1+2	Horizontal	Fundamental																																																																																																														
Peak	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn SPORTON LAB. Logo Date: 1  Site Condition Project Mode ME1 Plane powersetting : 032004-KS : WIFI 6E PEAK 3m 3117 590240138 HORIZONTA : RRM 1000.000KHz VSW:3.000 500KHz SWT:Auto : (FR)240834 : #23 : 2 : Single-directivity : 14 <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Poss</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5924.96</td><td>58.52</td><td>-29.78</td><td>88.30</td><td>44.62</td><td>35.37</td><td>10.52</td><td>31.99</td><td>100</td><td>289 Peak</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>HORIZONT</td></tr></table> Date: 3  Site Condition Project Mode ME1 Plane powersetting : 032004-KS : WIFI 6E PEAK 3m 3117 590240138 HORIZONTA : RRM 1000.000KHz VSW:3.000 500KHz SWT:Auto : (FR)240834 : #23 : 2 : Single-directivity : 14 <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Poss</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5950.00</td><td>112.70</td><td>24.40</td><td>88.30</td><td>98.78</td><td>35.40</td><td>10.53</td><td>32.01</td><td>100</td><td>289 Peak</td></tr><tr><td>2 5950.00</td><td>105.07</td><td>36.77</td><td>68.30</td><td>91.15</td><td>35.40</td><td>10.53</td><td>32.01</td><td>100</td><td>289 Average</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>HORIZONT</td></tr></table>		Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5924.96	58.52	-29.78	88.30	44.62	35.37	10.52	31.99	100	289 Peak										HORIZONT		Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5950.00	112.70	24.40	88.30	98.78	35.40	10.53	32.01	100	289 Peak	2 5950.00	105.07	36.77	68.30	91.15	35.40	10.53	32.01	100	289 Average										HORIZONT	Left blank
		Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Pos	Remark	Pol/Phas																																																																																																						
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5924.96	58.52	-29.78	88.30	44.62	35.37	10.52	31.99	100	289 Peak																																																																																																							
									HORIZONT																																																																																																							
	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Pos	Remark	Pol/Phas																																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5950.00	112.70	24.40	88.30	98.78	35.40	10.53	32.01	100	289 Peak																																																																																																							
2 5950.00	105.07	36.77	68.30	91.15	35.40	10.53	32.01	100	289 Average																																																																																																							
									HORIZONT																																																																																																							
 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn SPORTON LAB. Logo Date: 2  Site Condition Project Mode ME1 Plane powersetting : 032004-KS : WIFI 6E (AVG) 3m 3117 590240138 HORIZONTA : RRM 1000.000KHz VSW:3.000 500KHz SWT:Auto : (FR)240834 : #23 : 2 : Single-directivity : 14 <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Poss</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5924.96</td><td>47.18</td><td>-21.12</td><td>68.30</td><td>33.28</td><td>35.37</td><td>10.52</td><td>31.99</td><td>100</td><td>289 Average</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>HORIZONT</td></tr></table>		Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5924.96	47.18	-21.12	68.30	33.28	35.37	10.52	31.99	100	289 Average										HORIZONT																																																														
	Over	Limit	ReadAntenna	Cable	Preamp	A/Poss	T/Pos	Remark	Pol/Phas																																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5924.96	47.18	-21.12	68.30	33.28	35.37	10.52	31.99	100	289 Average																																																																																																							
									HORIZONT																																																																																																							







WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																												
ANT	802.11ax HE20 Partial 52/37 CH01 5955MHz																																																																												
1+2	Vertical	Fundamental																																																																											
Peak	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-0512-57900158 fax: +86-0512-57900958 http://www.sporton.com.cn Site Condition Project Mode MEI Plane Single-directivity powersetting : 03DH05-KS : WIFI 6E PEAK 3m 3117 5800240138 VERTICAL : RSM-1000 000KHz VBR-3000 000KHz SRT-Auto : (FR)240834 : #23 : X : Single-directivity : 14 <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5914.46</td><td>58.00</td><td>-30.30</td><td>88.30</td><td>44.15</td><td>35.33</td><td>10.51</td><td>31.99</td><td>301</td><td>255</td><td>Peak</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level Factor	Loss Factor	dB	dB	cm	deg	1	5914.46	58.00	-30.30	88.30	44.15	35.33	10.51	31.99	301	255	Peak	VERTICAL	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-0512-57900158 fax: +86-0512-57900958 http://www.sporton.com.cn Site Condition Project Mode MEI Plane Single-directivity powersetting : 03DH05-KS : WIFI 6E PEAK 3m 3117 5800240138 VERTICAL : RSM-1000 000KHz VBR-3000 000KHz SRT-Auto : (FR)240834 : #23 : X : Single-directivity : 14 <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5950.00</td><td>109.82</td><td>71.52</td><td>88.30</td><td>95.90</td><td>35.40</td><td>10.53</td><td>32.01</td><td>301</td><td>255</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>5950.00</td><td>101.65</td><td>33.35</td><td>68.30</td><td>87.73</td><td>35.40</td><td>10.53</td><td>32.01</td><td>301</td><td>255</td><td>Average</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level Factor	Loss Factor	dB	dB	cm	deg	1	5950.00	109.82	71.52	88.30	95.90	35.40	10.53	32.01	301	255	Peak	VERTICAL	2	5950.00	101.65	33.35	68.30	87.73	35.40	10.53	32.01	301	255	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Limit	Line	Level Factor	Loss Factor	dB	dB	cm	deg																																																																				
1	5914.46	58.00	-30.30	88.30	44.15	35.33	10.51	31.99	301	255	Peak	VERTICAL																																																																	
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level Factor	Loss Factor	dB	dB	cm	deg																																																																				
1	5950.00	109.82	71.52	88.30	95.90	35.40	10.53	32.01	301	255	Peak	VERTICAL																																																																	
2	5950.00	101.65	33.35	68.30	87.73	35.40	10.53	32.01	301	255	Average	VERTICAL																																																																	
Avg.	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-0512-57900158 fax: +86-0512-57900958 http://www.sporton.com.cn Site Condition Project Mode MEI Plane Single-directivity powersetting : 03DH05-KS : WIFI 6E (AVG) 3m 3117 5800240138 VERTICAL : RSM-1000 000KHz VBR-3000 000KHz SRT-Auto : (FR)240834 : #23 : X : Single-directivity : 14 <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.96</td><td>46.32</td><td>-21.98</td><td>68.30</td><td>32.42</td><td>35.37</td><td>10.52</td><td>31.99</td><td>301</td><td>255</td><td>Average</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level Factor	Loss Factor	dB	dB	cm	deg	1	5924.96	46.32	-21.98	68.30	32.42	35.37	10.52	31.99	301	255	Average	VERTICAL	Left blank																																												
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level Factor	Loss Factor	dB	dB	cm	deg																																																																				
1	5924.96	46.32	-21.98	68.30	32.42	35.37	10.52	31.99	301	255	Average	VERTICAL																																																																	




U-NII 5 - 5925-6425MHz
WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																														
ANT	802.11ax HE20 Partial 106/53 CH01 5955MHz																																																																														
1+2	Horizontal	Fundamental																																																																													
Peak	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 032004-KS Condition : WIFI 6E PEAK 3m 3117 590240138 HORIZONT Project : RRM 1000.000KHz VSW:3.000 500KHz SRT:Auto Mode : 4 Ref : #23 Plane : 2 Power : Single-directivity Power : 14 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1 5924.96</td><td>59.07</td><td>-29.23</td><td>88.30</td><td>45.17</td><td>35.37</td><td>10.52</td><td>31.99</td><td>100</td><td>289 Peak</td><td>HORIZONT</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1 5924.96	59.07	-29.23	88.30	45.17	35.37	10.52	31.99	100	289 Peak	HORIZONT	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 032004-KS Condition : WIFI 6E PEAK 3m 3117 590240138 HORIZONT Project : RRM 1000.000KHz VSW:3.000 500KHz SRT:Auto Mode : 4 Ref : #23 Plane : 2 Power : Single-directivity Power : 14 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1 5950.00</td><td>109.52</td><td>21.22</td><td>88.30</td><td>95.60</td><td>35.40</td><td>10.53</td><td>32.01</td><td>100</td><td>289 Peak</td><td>HORIZONT</td></tr><tr><td>2 5950.00</td><td>101.76</td><td>33.66</td><td>68.30</td><td>88.04</td><td>35.40</td><td>10.53</td><td>32.01</td><td>100</td><td>289 Average</td><td>HORIZONT</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1 5950.00	109.52	21.22	88.30	95.60	35.40	10.53	32.01	100	289 Peak	HORIZONT	2 5950.00	101.76	33.66	68.30	88.04	35.40	10.53	32.01	100	289 Average	HORIZONT
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																							
1 5924.96	59.07	-29.23	88.30	45.17	35.37	10.52	31.99	100	289 Peak	HORIZONT																																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																							
1 5950.00	109.52	21.22	88.30	95.60	35.40	10.53	32.01	100	289 Peak	HORIZONT																																																																					
2 5950.00	101.76	33.66	68.30	88.04	35.40	10.53	32.01	100	289 Average	HORIZONT																																																																					
Avg.	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 032004-KS Condition : WIFI 6E (Ave) 3m 3117 590240138 HORIZONT Project : RRM 1000.000KHz VSW:0.010KHz SRT:Auto Mode : 4 Ref : #23 Plane : 2 Power : Single-directivity Power : 14 <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1 5924.82</td><td>49.37</td><td>-18.93</td><td>68.30</td><td>35.47</td><td>35.37</td><td>10.52</td><td>31.99</td><td>100</td><td>289 Average</td><td>HORIZONT</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg			1 5924.82	49.37	-18.93	68.30	35.47	35.37	10.52	31.99	100	289 Average	HORIZONT	Left blank																																												
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																							
1 5924.82	49.37	-18.93	68.30	35.47	35.37	10.52	31.99	100	289 Average	HORIZONT																																																																					






WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																												
ANT	802.11ax HE20 Partial 106/53 CH01 5955MHz																																																																																												
1+2	Vertical	Fundamental																																																																																											
Peak	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900158 http://www.sporton.com.cn SPORTON LAB. Data: 4 117 Level (dBuV/m) 105.3 93.6 81.9 70.2 58.5 46.8 35.1 23.4 11.7 5925 5850 5870 5890 5910 5930 5950 5965 Frequency (MHz) Site Condition Project Mode MEI Plane Single-directivity powersetting Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th><th>Pol/Phas</th></tr><tr><td>1</td><td>5924.96</td><td>58.10</td><td>-30.20</td><td>88.30</td><td>44.20</td><td>35.37</td><td>10.52</td><td>31.99</td><td>301</td><td>255</td><td>Peak</td><td>VERTICAL</td></tr></table> <td>  No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900158 http://www.sporton.com.cn SPORTON LAB. Data: 6 117 Level (dBuV/m) 105.3 93.6 81.9 70.2 58.5 46.8 35.1 23.4 11.7 1000 2000 3000 4000 5000 6000 7000 8000 9000 10000 Frequency (MHz) Site Condition Project Mode MEI Plane Single-directivity powersetting Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th><th>Pol/Phas</th></tr><tr><td>1</td><td>5950.00</td><td>106.40</td><td>18.10</td><td>88.30</td><td>92.48</td><td>35.40</td><td>10.53</td><td>32.01</td><td>301</td><td>255</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>5950.00</td><td>98.39</td><td>30.09</td><td>68.30</td><td>84.47</td><td>35.40</td><td>10.53</td><td>32.01</td><td>301</td><td>255</td><td>Average</td><td>VERTICAL</td></tr></table> </td>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB	cm	deg	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	Pol/Phas	1	5924.96	58.10	-30.20	88.30	44.20	35.37	10.52	31.99	301	255	Peak	VERTICAL	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900158 http://www.sporton.com.cn SPORTON LAB. Data: 6 117 Level (dBuV/m) 105.3 93.6 81.9 70.2 58.5 46.8 35.1 23.4 11.7 1000 2000 3000 4000 5000 6000 7000 8000 9000 10000 Frequency (MHz) Site Condition Project Mode MEI Plane Single-directivity powersetting Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th><th>Pol/Phas</th></tr><tr><td>1</td><td>5950.00</td><td>106.40</td><td>18.10</td><td>88.30</td><td>92.48</td><td>35.40</td><td>10.53</td><td>32.01</td><td>301</td><td>255</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>5950.00</td><td>98.39</td><td>30.09</td><td>68.30</td><td>84.47</td><td>35.40</td><td>10.53</td><td>32.01</td><td>301</td><td>255</td><td>Average</td><td>VERTICAL</td></tr></table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB	cm	deg	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	Pol/Phas	1	5950.00	106.40	18.10	88.30	92.48	35.40	10.53	32.01	301	255	Peak	VERTICAL	2	5950.00	98.39	30.09	68.30	84.47	35.40	10.53	32.01	301	255	Average	VERTICAL
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB	cm	deg	Remark	Pol/Phas																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	Pol/Phas																																																																																	
1	5924.96	58.10	-30.20	88.30	44.20	35.37	10.52	31.99	301	255	Peak	VERTICAL																																																																																	
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB	cm	deg	Remark	Pol/Phas																																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	Pol/Phas																																																																																	
1	5950.00	106.40	18.10	88.30	92.48	35.40	10.53	32.01	301	255	Peak	VERTICAL																																																																																	
2	5950.00	98.39	30.09	68.30	84.47	35.40	10.53	32.01	301	255	Average	VERTICAL																																																																																	
Avg.	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900158 http://www.sporton.com.cn SPORTON LAB. Data: 5 117 Level (dBuV/m) 105.3 93.6 81.9 70.2 58.5 46.8 35.1 23.4 11.7 5925 5850 5870 5890 5910 5930 5950 5965 Frequency (MHz) Site Condition Project Mode MEI Plane Single-directivity powersetting Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th><th>Pol/Phas</th></tr><tr><td>1</td><td>5924.82</td><td>47.63</td><td>-20.67</td><td>68.30</td><td>33.73</td><td>35.37</td><td>10.52</td><td>31.99</td><td>301</td><td>255</td><td>Average</td><td>VERTICAL</td></tr></table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB	cm	deg	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	Pol/Phas	1	5924.82	47.63	-20.67	68.30	33.73	35.37	10.52	31.99	301	255	Average	VERTICAL	Left blank																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB	cm	deg	Remark	Pol/Phas																																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	Pol/Phas																																																																																	
1	5924.82	47.63	-20.67	68.30	33.73	35.37	10.52	31.99	301	255	Average	VERTICAL																																																																																	



WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																																												
ANT	802.11ax HE40 Full CH03 5965MHz																																																																																												
1+2	Vertical	Fundamental																																																																																											
Peak	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900058 http://www.sporton.com.cn Site Condition : 03DH05-KS Project : WIFI 6E PEAK 3m 3117 5800240138 VERTICAL Mode : RSM-1000 000KHz VBR-3000 000KHz SMT-Auto Plane : (FR)240834 Polarization : #23 Power setting : Single-directivity 14 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5924.54</td><td>60.85</td><td>-27.45</td><td>88.30</td><td>46.95</td><td>35.37</td><td>10.52</td><td>31.99</td><td>303 89 Peak VERTICAL</td></tr></table>  No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900058 http://www.sporton.com.cn Site Condition : 03DH05-KS Project : WIFI 6E PEAK 3m 3117 5800240138 VERTICAL Mode : RSM-1000 000KHz VBR-3000 000KHz SMT-Auto Plane : (FR)240834 Polarization : #23 Power setting : Single-directivity 14 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 * 5968.00</td><td>99.05</td><td>10.75</td><td>88.30</td><td>85.13</td><td>35.40</td><td>10.55</td><td>32.03</td><td>303 89 Peak VERTICAL</td></tr><tr><td>2 * 5968.00</td><td>91.85</td><td>23.55</td><td>68.30</td><td>77.93</td><td>35.40</td><td>10.55</td><td>32.03</td><td>303 89 Average VERTICAL</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1 5924.54	60.85	-27.45	88.30	46.95	35.37	10.52	31.99	303 89 Peak VERTICAL	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1 * 5968.00	99.05	10.75	88.30	85.13	35.40	10.55	32.03	303 89 Peak VERTICAL	2 * 5968.00	91.85	23.55	68.30	77.93	35.40	10.55	32.03	303 89 Average VERTICAL	Avg.	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900058 http://www.sporton.com.cn Site Condition : 03DH05-KS Project : WIFI 6E (AVG) 3m 3117 5800240138 VERTICAL Mode : RSM-1000 000KHz VBR-3000 000KHz SMT-Auto Plane : (FR)240834 Polarization : #23 Power setting : Single-directivity 14 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5924.68</td><td>50.03</td><td>-18.27</td><td>68.30</td><td>36.13</td><td>35.37</td><td>10.52</td><td>31.99</td><td>303 89 Average VERTICAL</td></tr></table> Left blank	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1 5924.68	50.03	-18.27	68.30	36.13	35.37	10.52	31.99	303 89 Average VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																																					
1 5924.54	60.85	-27.45	88.30	46.95	35.37	10.52	31.99	303 89 Peak VERTICAL																																																																																					
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																																					
1 * 5968.00	99.05	10.75	88.30	85.13	35.40	10.55	32.03	303 89 Peak VERTICAL																																																																																					
2 * 5968.00	91.85	23.55	68.30	77.93	35.40	10.55	32.03	303 89 Average VERTICAL																																																																																					
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																																					
1 5924.68	50.03	-18.27	68.30	36.13	35.37	10.52	31.99	303 89 Average VERTICAL																																																																																					

U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)




WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																												
ANT	802.11ax HE40 Partial 242/61 CH03 5965MHz																																																																												
1+2	Horizontal	Fundamental																																																																											
Peak	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-57600158 Fax: +86-512-57600958 http://www.sporton.com.cn Site : 032004-KS Condition : WIFI 6E PEAK 3m 3117 590240138 HORIZONTAL Project : RRM 1000.000KHz VBR 3000.000KHz SRT Auto Mode : 8 MEI : #23 Plane : 2 Single-directivity Power setting : 14 <table><thead><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5923.84</td><td>58.46</td><td>-29.84</td><td>88.30</td><td>44.56</td><td>35.37</td><td>10.52</td><td>31.99</td><td>100</td><td>287</td><td>Peak</td><td>HORIZONTAL</td></tr></tbody></table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	1	5923.84	58.46	-29.84	88.30	44.56	35.37	10.52	31.99	100	287	Peak	HORIZONTAL	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-57600158 Fax: +86-512-57600958 http://www.sporton.com.cn Site : 032004-KS Condition : WIFI 6E PEAK 3m 3117 590240138 HORIZONTAL Project : RRM 1000.000KHz VBR 3000.000KHz SRT Auto Mode : 8 MEI : #23 Plane : 2 Single-directivity Power setting : 14 <table><thead><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5959.00</td><td>105.81</td><td>18.51</td><td>88.30</td><td>92.87</td><td>35.40</td><td>10.55</td><td>32.01</td><td>100</td><td>287</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>5959.00</td><td>97.38</td><td>29.08</td><td>88.30</td><td>83.44</td><td>35.40</td><td>10.55</td><td>32.01</td><td>100</td><td>287</td><td>Average</td><td>HORIZONTAL</td></tr></tbody></table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	1	5959.00	105.81	18.51	88.30	92.87	35.40	10.55	32.01	100	287	Peak	HORIZONTAL	2	5959.00	97.38	29.08	88.30	83.44	35.40	10.55	32.01	100	287	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																					
1	5923.84	58.46	-29.84	88.30	44.56	35.37	10.52	31.99	100	287	Peak	HORIZONTAL																																																																	
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																					
1	5959.00	105.81	18.51	88.30	92.87	35.40	10.55	32.01	100	287	Peak	HORIZONTAL																																																																	
2	5959.00	97.38	29.08	88.30	83.44	35.40	10.55	32.01	100	287	Average	HORIZONTAL																																																																	
Avg.	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-57600158 Fax: +86-512-57600958 http://www.sporton.com.cn Site : 032004-KS Condition : WIFI 6E (Ave) 3m 3117 590240138 HORIZONTAL Project : RRM 1000.000KHz VBR 1.000KHz SRT Auto Mode : 8 MEI : #23 Plane : 2 Single-directivity Power setting : 14 <table><thead><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5923.84</td><td>49.27</td><td>-19.03</td><td>68.30</td><td>35.37</td><td>35.37</td><td>10.52</td><td>31.99</td><td>100</td><td>287</td><td>Average</td><td>HORIZONTAL</td></tr></tbody></table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	1	5923.84	49.27	-19.03	68.30	35.37	35.37	10.52	31.99	100	287	Average	HORIZONTAL	Left blank																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																					
1	5923.84	49.27	-19.03	68.30	35.37	35.37	10.52	31.99	100	287	Average	HORIZONTAL																																																																	



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)




WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																											
ANT	802.11ax HE80 Full CH07 5985MHz																																																																											
1+2	Horizontal	Fundamental																																																																										
Peak	Site: 032004-KS Condition: WIFI SE PEAK 3m 3117, SMO240138 HORIZONT Power: 100W, 0.000Hz, VSW: 3.000, SWR: Auto Project: (FR) 240834 Mode: 11 MEI: #23 Plane: 2 Power setting: Single-directivity, 10 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Loss</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5918.44</td><td>70.03</td><td>18.77</td><td>88.30</td><td>56.18</td><td>35.33</td><td>10.51</td><td>31.99</td><td>100</td><td>223 Peak</td><td>HORIZONT</td></tr></table> Site: 032004-KS Condition: WIFI SE PEAK 3m 3117, SMO240138 HORIZONT Power: 100W, 0.000Hz, VSW: 3.000, SWR: Auto Project: (FR) 240834 Mode: 11 MEI: #23 Plane: 2 Power setting: Single-directivity, 10 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Loss</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5950.00</td><td>14.57</td><td>88.30</td><td>88.95</td><td>35.40</td><td>10.53</td><td>32.01</td><td>100</td><td>223 Peak</td><td>HORIZONT</td></tr><tr><td>2</td><td>5950.00</td><td>14.57</td><td>88.30</td><td>88.95</td><td>35.40</td><td>10.53</td><td>32.01</td><td>100</td><td>223 Average</td><td>HORIZONT</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Loss	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	1	5918.44	70.03	18.77	88.30	56.18	35.33	10.51	31.99	100	223 Peak	HORIZONT	Freq	Level	Limit	ReadAntenna	Cable	Loss	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	1	5950.00	14.57	88.30	88.95	35.40	10.53	32.01	100	223 Peak	HORIZONT	2	5950.00	14.57	88.30	88.95	35.40	10.53	32.01	100	223 Average	HORIZONT	
Freq	Level	Limit	ReadAntenna	Cable	Loss	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																																			
1	5918.44	70.03	18.77	88.30	56.18	35.33	10.51	31.99	100	223 Peak	HORIZONT																																																																	
Freq	Level	Limit	ReadAntenna	Cable	Loss	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																																			
1	5950.00	14.57	88.30	88.95	35.40	10.53	32.01	100	223 Peak	HORIZONT																																																																		
2	5950.00	14.57	88.30	88.95	35.40	10.53	32.01	100	223 Average	HORIZONT																																																																		
Avg.	Site: 032004-KS Condition: WIFI SE PEAK 3m 3117, SMO240138 HORIZONT Power: 100W, 0.000Hz, VSW: 3.000, SWR: Auto Project: (FR) 240834 Mode: 11 MEI: #23 Plane: 2 Power setting: Single-directivity, 10 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Loss</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.20</td><td>60.95</td><td>17.35</td><td>68.30</td><td>47.05</td><td>35.37</td><td>10.52</td><td>31.99</td><td>100</td><td>223 Average</td><td>HORIZONT</td></tr></table> Left blank	Freq	Level	Limit	ReadAntenna	Cable	Loss	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	1	5924.20	60.95	17.35	68.30	47.05	35.37	10.52	31.99	100	223 Average	HORIZONT																																											
Freq	Level	Limit	ReadAntenna	Cable	Loss	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																																			
1	5924.20	60.95	17.35	68.30	47.05	35.37	10.52	31.99	100	223 Average	HORIZONT																																																																	






WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																								
ANT	802.11ax HE80 Full CH07 5985MHz																																																																								
1+2	Vertical	Fundamental																																																																							
Peak	 No. 1098, Pengxi North Road Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 03DH05-KS Condition : WIFI 6E PEAK 3m 3117 SMO0240138 VERTICAL Project : RSM-1000.000KHz VBR-3000.000KHz SMT-Auto Model : (FR)240834 Mode : 11 MEI : #23 Plane : X Polarization : Single-directivity Power setting : 15 <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>Loss</th><th>cn</th><th>deg</th></tr><tr><td>1</td><td>5922.12</td><td>63.91</td><td>-24.39</td><td>88.30</td><td>50.01</td><td>35.37</td><td>10.52</td><td>31.99</td><td>302</td><td>88</td><td>Peak</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	Loss	cn	deg	1	5922.12	63.91	-24.39	88.30	50.01	35.37	10.52	31.99	302	88	Peak	VERTICAL	 No. 1098, Pengxi North Road Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 03DH05-KS Condition : WIFI 6E PEAK 3m 3117 SMO0240138 VERTICAL Project : RSM-1000.000KHz VBR-3000.000KHz SMT-Auto Model : (FR)240834 Mode : 11 MEI : #23 Plane : X Polarization : Single-directivity Power setting : 15 <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>Loss</th><th>cn</th><th>deg</th></tr><tr><td>1</td><td>5977.00</td><td>97.25</td><td>8.95</td><td>88.30</td><td>83.32</td><td>35.40</td><td>10.56</td><td>32.03</td><td>302</td><td>88</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>5977.00</td><td>89.00</td><td>20.70</td><td>68.30</td><td>75.07</td><td>35.40</td><td>10.56</td><td>32.03</td><td>302</td><td>88</td><td>Average</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	Loss	cn	deg	1	5977.00	97.25	8.95	88.30	83.32	35.40	10.56	32.03	302	88	Peak	VERTICAL	2	5977.00	89.00	20.70	68.30	75.07	35.40	10.56	32.03	302	88	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Freq	Level	Line	Level Factor	Loss Factor	Loss	cn	deg																																																																		
1	5922.12	63.91	-24.39	88.30	50.01	35.37	10.52	31.99	302	88	Peak	VERTICAL																																																													
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Freq	Level	Line	Level Factor	Loss Factor	Loss	cn	deg																																																																		
1	5977.00	97.25	8.95	88.30	83.32	35.40	10.56	32.03	302	88	Peak	VERTICAL																																																													
2	5977.00	89.00	20.70	68.30	75.07	35.40	10.56	32.03	302	88	Average	VERTICAL																																																													
Avg.	 No. 1098, Pengxi North Road Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 03DH05-KS Condition : WIFI 6E (AVG) 3m 3117 SMO0240138 VERTICAL Project : RSM-1000.000KHz VBR-3.000KHz SMT-Auto Model : (FR)240834 Mode : 11 MEI : #23 Plane : X Polarization : Single-directivity Power setting : 15 <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>Loss</th><th>cn</th><th>deg</th></tr><tr><td>1</td><td>5924.52</td><td>55.58</td><td>-12.72</td><td>68.30</td><td>41.68</td><td>35.37</td><td>10.52</td><td>31.99</td><td>302</td><td>88</td><td>Average</td><td>VERTICAL</td></tr></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	Loss	cn	deg	1	5924.52	55.58	-12.72	68.30	41.68	35.37	10.52	31.99	302	88	Average	VERTICAL	Left blank																																										
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Freq	Level	Line	Level Factor	Loss Factor	Loss	cn	deg																																																																		
1	5924.52	55.58	-12.72	68.30	41.68	35.37	10.52	31.99	302	88	Average	VERTICAL																																																													



U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE80 Partial 484 (Band Edge @ 3m)

WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																												
ANT	802.11ax HE80 Partial 484/65 CH07 5985MHz																																																																												
1+2	Horizontal	Fundamental																																																																											
Peak	 No. 1098, Pengji North Road Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site Condition : 032004-KS Condition : WIFI 6E PEAK 3m 3117 590240138 HORIZONT Project : RRM 1000.000KHz VSW:3.000 500KHz SRT:Auto Mode : 12 Ref : #23 Plane : A Single-directivity : 15 powersetting : 15 <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.36</td><td>71.71</td><td>-16.99</td><td>88.30</td><td>57.81</td><td>35.37</td><td>10.52</td><td>31.99</td><td>100</td><td>223</td><td>Peak</td><td>HORIZONT</td></tr></table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	1	5924.36	71.71	-16.99	88.30	57.81	35.37	10.52	31.99	100	223	Peak	HORIZONT	 No. 1098, Pengji North Road Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site Condition : 032004-KS Condition : WIFI 6E PEAK 3m 3117 590240138 HORIZONT Project : RRM 1000.000KHz VSW:3.000 500KHz SRT:Auto Mode : 12 Ref : #23 Plane : A Single-directivity : 15 powersetting : 15 <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5950.00</td><td>105.26</td><td>17.96</td><td>88.30</td><td>92.34</td><td>35.40</td><td>10.53</td><td>32.01</td><td>100</td><td>223</td><td>Peak</td><td>HORIZONT</td></tr><tr><td>2</td><td>5950.00</td><td>97.78</td><td>29.48</td><td>68.30</td><td>83.60</td><td>35.40</td><td>10.53</td><td>32.01</td><td>100</td><td>223</td><td>Average</td><td>HORIZONT</td></tr></table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	1	5950.00	105.26	17.96	88.30	92.34	35.40	10.53	32.01	100	223	Peak	HORIZONT	2	5950.00	97.78	29.48	68.30	83.60	35.40	10.53	32.01	100	223	Average	HORIZONT
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																					
1	5924.36	71.71	-16.99	88.30	57.81	35.37	10.52	31.99	100	223	Peak	HORIZONT																																																																	
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																					
1	5950.00	105.26	17.96	88.30	92.34	35.40	10.53	32.01	100	223	Peak	HORIZONT																																																																	
2	5950.00	97.78	29.48	68.30	83.60	35.40	10.53	32.01	100	223	Average	HORIZONT																																																																	
Avg.	 No. 1098, Pengji North Road Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site Condition : 032004-KS Condition : WIFI 6E (AVG) 3m 3117 590240138 HORIZONT Project : RRM 1000.000KHz VSW:1.000KHz SRT:Auto Mode : 12 Ref : #23 Plane : A Single-directivity : 15 powersetting : 15 <table><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.04</td><td>59.97</td><td>-8.33</td><td>68.30</td><td>46.07</td><td>35.37</td><td>10.52</td><td>31.99</td><td>100</td><td>223</td><td>Average</td><td>HORIZONT</td></tr></table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	1	5924.04	59.97	-8.33	68.30	46.07	35.37	10.52	31.99	100	223	Average	HORIZONT	Left blank																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																					
1	5924.04	59.97	-8.33	68.30	46.07	35.37	10.52	31.99	100	223	Average	HORIZONT																																																																	

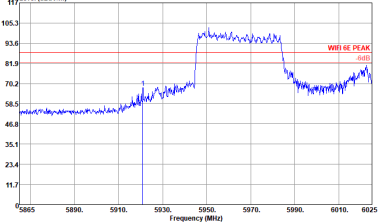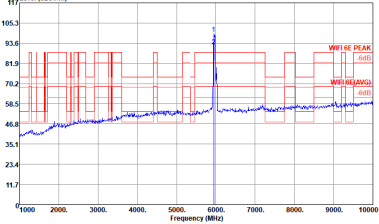
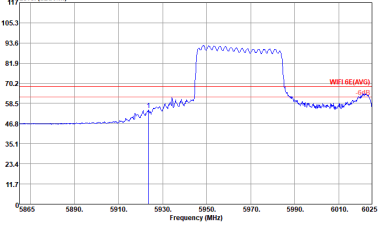


WIFI	U-NII 5 - 5925-6425MHz Band Edge @ 3m																																																																					
ANT	802.11ax HE80 Partial 484/65 CH07 5985MHz																																																																					
1+2	Vertical	Fundamental																																																																				
Peak	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn 117 Level (dBuV/m)  Site : 03DH05-KS Condition : WIFI DE PEAK 3m 3117 SMO0240138 VERTICAL Project : RSM-1000 000KHz VBR-3000 000KHz SMT-Auto Model : (FR) 240834 Mode : 12 MEI : #23 Plane : X PowerSetting : 15 Single-directivity <table><thead><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5921.00</td><td>67.90</td><td>-20.40</td><td>88.30</td><td>54.05</td><td>35.33</td><td>10.51</td><td>31.99</td><td>292</td><td>89 Peak</td><td>VERTICAL</td></tr></tbody></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	cm	deg		1	5921.00	67.90	-20.40	88.30	54.05	35.33	10.51	31.99	292	89 Peak	VERTICAL	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn 117 Level (dBuV/m)  Site : 03DH05-KS Condition : WIFI DE PEAK 3m 3117 SMO0240138 VERTICAL Project : RSM-1000 000KHz VBR-3000 000KHz SMT-Auto Model : (FR) 240834 Mode : 12 MEI : #23 Plane : X PowerSetting : 15 Single-directivity <table><thead><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5950.00</td><td>98.96</td><td>10.66</td><td>88.30</td><td>85.04</td><td>35.40</td><td>10.53</td><td>32.01</td><td>292</td><td>89 Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>5950.00</td><td>91.78</td><td>23.48</td><td>68.30</td><td>77.86</td><td>35.40</td><td>10.53</td><td>32.01</td><td>292</td><td>89 Average</td><td>VERTICAL</td></tr></tbody></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	cm	deg		1	5950.00	98.96	10.66	88.30	85.04	35.40	10.53	32.01	292	89 Peak	VERTICAL	2	5950.00	91.78	23.48	68.30	77.86	35.40	10.53	32.01	292	89 Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																														
Freq	Level	Line	Level Factor	Loss Factor	cm	deg																																																																
1	5921.00	67.90	-20.40	88.30	54.05	35.33	10.51	31.99	292	89 Peak	VERTICAL																																																											
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
Freq	Level	Line	Level Factor	Loss Factor	cm	deg																																																																
1	5950.00	98.96	10.66	88.30	85.04	35.40	10.53	32.01	292	89 Peak	VERTICAL																																																											
2	5950.00	91.78	23.48	68.30	77.86	35.40	10.53	32.01	292	89 Average	VERTICAL																																																											
Avg.	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn 117 Level (dBuV/m)  Site : 03DH05-KS Condition : WIFI DE (AVG) 3m 3117 SMO0240138 VERTICAL Project : RSM-1000 000KHz VBR-1 000KHz SMT-Auto Model : (FR) 240834 Mode : 12 MEI : #23 Plane : X PowerSetting : 15 Single-directivity <table><thead><tr><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5923.56</td><td>54.70</td><td>-13.60</td><td>68.30</td><td>40.80</td><td>35.37</td><td>10.52</td><td>31.99</td><td>292</td><td>89 Average</td><td>VERTICAL</td></tr></tbody></table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	cm	deg		1	5923.56	54.70	-13.60	68.30	40.80	35.37	10.52	31.99	292	89 Average	VERTICAL	Left blank																																								
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
Freq	Level	Line	Level Factor	Loss Factor	cm	deg																																																																
1	5923.56	54.70	-13.60	68.30	40.80	35.37	10.52	31.99	292	89 Average	VERTICAL																																																											





U-NII 5 - 5925-6425MHzMHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

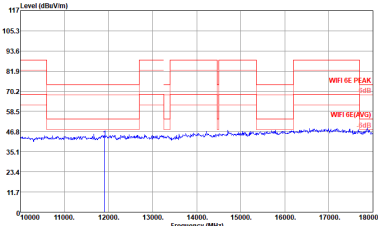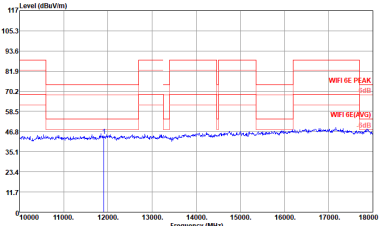WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																																			
ANT	802.11ax HE20 Full CH01 5955MHz																																																																			
1+2	Horizontal	Vertical																																																																		
Peak	 Site : 030904-KS Condition : WIFI HE PEAK 3m 3117 0237860 HORIZONTAL Project : RSM 1000 0000KHz VSW:3000.0000KHz SRT:Auto Mode : 1 MEI : #23 Plane : X Single-directivity <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBm/100kHz</th><th>dB</th><th>dBm/100kHz</th><th>dBm/100kHz</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 11912.00</td><td>43.47</td><td>-30.53</td><td>74.00</td><td>50.33</td><td>38.78</td><td>16.49</td><td>62.13</td><td>300</td><td>0 Peak</td><td>HORIZONTAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	dB	cm	deg			1 11912.00	43.47	-30.53	74.00	50.33	38.78	16.49	62.13	300	0 Peak	HORIZONTAL	 Site : 030904-KS Condition : WIFI HE PEAK 3m 3117 0237860 VERTICAL Project : RSM 1000 0000KHz VSW:3000.0000KHz SRT:Auto Mode : 1 MEI : #23 Plane : X Single-directivity <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBm/100kHz</th><th>dB</th><th>dBm/100kHz</th><th>dBm/100kHz</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 11912.00</td><td>44.19</td><td>-29.81</td><td>74.00</td><td>51.05</td><td>38.78</td><td>16.49</td><td>62.13</td><td>100</td><td>0 Peak</td><td>VERTICAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	dB	cm	deg			1 11912.00	44.19	-29.81	74.00	51.05	38.78	16.49	62.13	100	0 Peak	VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																																										
MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	dB	cm	deg																																																												
1 11912.00	43.47	-30.53	74.00	50.33	38.78	16.49	62.13	300	0 Peak	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																																										
MHz	dBm/100kHz	dB	dBm/100kHz	dBm/100kHz	dB	dB	cm	deg																																																												
1 11912.00	44.19	-29.81	74.00	51.05	38.78	16.49	62.13	100	0 Peak	VERTICAL																																																										





WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH45 6175MHz	
1+2	Horizontal	Vertical
Peak	 Site : 035004-KS Condition : WIFI 1E PEAK @ 3117 0277660 HORIZONTAL Project : 03500004 Mode : S BEC : #23 Plane : X single-directivity Over Limit ReadAntenna Cable Preamp Loss Factor A/Pos T/Pos Remark Pol/Phas 1 12352.00 43.75 -30.25 74.00 50.39 39.12 16.76 62.52 300 0 Peak HORIZONTAL	 Site : 035004-KS Condition : WIFI 1E PEAK @ 3117 0277660 VERTICAL Project : 03500004 Mode : S BEC : #23 Plane : X single-directivity Over Limit ReadAntenna Cable Preamp Loss Factor A/Pos T/Pos Remark Pol/Phas 1 12352.00 43.84 -30.16 74.00 50.48 39.12 16.76 62.52 100 0 Peak VERTICAL





WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH93 6415MHz	
1+2	Horizontal	Vertical
Peak	Site : 035004-KS Condition : WIFI 6E PEAK 3m 3117 0277660 HORIZONTAL Project : RF150004 Mode : S BEC : #23 Plane : X single-directivity Freq Level Limit Line ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dB dB dB cm deg 1 12832.00 43.40 -44.90 88.30 49.81 39.27 17.05 62.73 300 0 Peak HORIZONTAL	Site : 035004-KS Condition : WIFI 6E PEAK 3m 3117 0277660 VERTICAL Project : RF150004 Mode : S BEC : #23 Plane : X single-directivity Freq Level Limit Line ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dB dB dB cm deg 1 12832.00 43.75 -44.55 88.30 50.16 39.27 17.05 62.73 100 0 Peak VERTICAL





U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m	
ANT	802.11ax HE40 Full CH03 5965MHz	
1+2	Horizontal	Vertical
Peak	 Site : 032004-KS Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTAL Project : RRM-1000, 5000Hz, VSWR:3000, 5000Hz, SBT-Auto Project : (F) 240834 Mode : #23 Plane : #1 single-directivity ReadAntenna Cable Preamp A/Pos T/Pos Level Factor Loss Factor 1 11928.00 43.83 -30.17 74.00 50.65 38.80 16.50 62.12 300 0 Peak HORIZONTAL	 Site : 032004-KS Condition : WIFI AE PEAK 3m 3117 0227860 VERTICAL Project : RRM-1000, 5000Hz, VSWR:3000, 5000Hz, SBT-Auto Project : (F) 240834 Mode : #23 Plane : #1 single-directivity ReadAntenna Cable Preamp A/Pos T/Pos Level Factor Loss Factor 1 11928.00 44.53 -29.47 74.00 51.35 38.80 16.50 62.12 100 0 Peak VERTICAL





WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																																									
ANT	802.11ax HE40 Full CH43 6165MHz																																																																									
1+2	Horizontal	Vertical																																																																								
Peak	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-57900958 Fax: +86-512-57900958 http://www.sporton.com.cn Site : 030804-KS Condition : WIFI 6E PEAK 3m 3117 0277660 HORIZONTAL Project : RBW:1000, 000kHz VBW:3000, 000kHz SFT:Auto Ref : 03040834 Mode : 9 MEI : #23 Plane : X single-directivity : Over Limit ReadAntenna : dBm Cable Preamp : dB Loss Factor : dB A/Pos : cm T/Pos : deg Remark : 0 Peak Pol/Phas : HORIZONTAL <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/Hz</th><th>dB</th><th>dBm/Hz</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1 12328.00</td><td>43.42</td><td>-30.58</td><td>74.00</td><td>50.66</td><td>39.10</td><td>16.74</td><td>62.48</td><td>300</td><td>0</td><td>Peak</td><td>HORIZONTAL</td></tr></tbody></table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	cm	deg			1 12328.00	43.42	-30.58	74.00	50.66	39.10	16.74	62.48	300	0	Peak	HORIZONTAL	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-57900958 Fax: +86-512-57900958 http://www.sporton.com.cn Site : 030804-KS Condition : WIFI 6E PEAK 3m 3117 0277660 VERTICAL Project : RBW:1000, 000kHz VBW:3000, 000kHz SFT:Auto Ref : 03040834 Mode : 9 MEI : #23 Plane : X single-directivity : Over Limit ReadAntenna : dBm Cable Preamp : dB Loss Factor : dB A/Pos : cm T/Pos : deg Remark : 0 Peak Pol/Phas : VERTICAL <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/Hz</th><th>dB</th><th>dBm/Hz</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1 12328.00</td><td>44.79</td><td>-29.21</td><td>74.00</td><td>51.43</td><td>39.10</td><td>16.74</td><td>62.48</td><td>100</td><td>0</td><td>Peak</td><td>VERTICAL</td></tr></tbody></table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	cm	deg			1 12328.00	44.79	-29.21	74.00	51.43	39.10	16.74	62.48	100	0	Peak	VERTICAL
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																														
MHz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	cm	deg																																																																	
1 12328.00	43.42	-30.58	74.00	50.66	39.10	16.74	62.48	300	0	Peak	HORIZONTAL																																																															
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	cm	deg																																																																	
1 12328.00	44.79	-29.21	74.00	51.43	39.10	16.74	62.48	100	0	Peak	VERTICAL																																																															

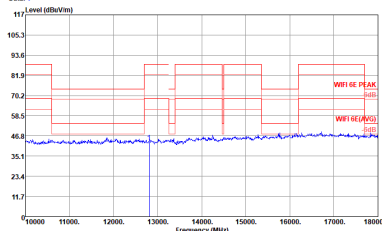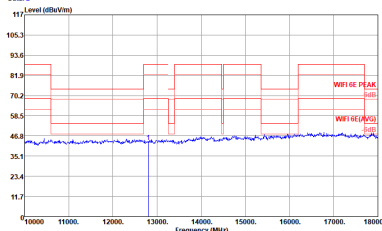



WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																													
ANT	802.11ax HE40 Full CH91 6405MHz																																																													
1+2	Horizontal	Vertical																																																												
Peak	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Data: 1  Site : 030804-KS Condition : WIFI DE PEAK @ 13117 0277860 HORIZONTAL Project : RBW:1000, 000KHz VSW:3000, 000KHz SMT:Auto Mode : FREQ:500000 Ref : 10 Plane : X Single-directivity <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100MHz</th><th>dBm/100MHz</th><th>dBm/100MHz</th><th>dBm/100MHz</th><th>dBm/100MHz</th><th>dBm/100MHz</th><th>dBm/100MHz</th><th>cm</th><th>deg</th></tr><tr><td>1 12808.00</td><td>43.21</td><td>-45.09</td><td>88.30</td><td>49.64</td><td>39.26</td><td>17.04</td><td>62.73</td><td>300</td><td>0 Peak HORIZONTAL</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	cm	deg	1 12808.00	43.21	-45.09	88.30	49.64	39.26	17.04	62.73	300	0 Peak HORIZONTAL	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Data: 2  Site : 030804-KS Condition : WIFI DE PEAK @ 13117 0277860 VERTICAL Project : RBW:1000, 000KHz VSW:3000, 000KHz SMT:Auto Mode : FREQ:500000 Ref : 10 Plane : X Single-directivity <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100MHz</th><th>dBm/100MHz</th><th>dBm/100MHz</th><th>dBm/100MHz</th><th>dBm/100MHz</th><th>dBm/100MHz</th><th>dBm/100MHz</th><th>cm</th><th>deg</th></tr><tr><td>1 12808.00</td><td>43.50</td><td>-44.80</td><td>88.30</td><td>49.93</td><td>39.26</td><td>17.04</td><td>62.73</td><td>100</td><td>0 Peak VERTICAL</td></tr></table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	cm	deg	1 12808.00	43.50	-44.80	88.30	49.93	39.26	17.04	62.73	100	0 Peak VERTICAL
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	cm	deg																																																					
1 12808.00	43.21	-45.09	88.30	49.64	39.26	17.04	62.73	300	0 Peak HORIZONTAL																																																					
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	dBm/100MHz	cm	deg																																																					
1 12808.00	43.50	-44.80	88.30	49.93	39.26	17.04	62.73	100	0 Peak VERTICAL																																																					





U-NII 5 - 5925-6425MHzMHz
WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																		
ANT	802.11ax HE80 Full CH07 5985MHz																																																		
1+2	Horizontal	Vertical																																																	
Peak	 Site : 032004-KS Condition : WIFI AE PEAK 3m 0117 0227860 HORIZONTAL Project : RRM-1000 5000Hz VSW-3000 5000Hz SBT-Auto Pilot : 11 Mod : 823 Plane : 4 <table><tr><th>single-directivity</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Unit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th></tr><tr><td>1 11968.00</td><td>43.29</td><td>-30.71</td><td>74.00</td><td>50.02</td><td>38.85</td><td>16.53</td><td>62.11</td><td>300</td><td>0 Peak</td><td>HORIZONTAL</td></tr></table>  Site : 032004-KS Condition : WIFI AE PEAK 3m 0117 0227860 VERTICAL Project : RRM-1000 5000Hz VSW-3000 5000Hz SBT-Auto Pilot : 11 Mod : 823 Plane : 4 <table><tr><th>single-directivity</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Unit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th></tr><tr><td>1 11968.00</td><td>43.84</td><td>-30.16</td><td>74.00</td><td>50.57</td><td>38.85</td><td>16.53</td><td>62.11</td><td>100</td><td>0 Peak</td><td>VERTICAL</td></tr></table>	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Unit	Line	Level Factor	Loss Factor		1 11968.00	43.29	-30.71	74.00	50.02	38.85	16.53	62.11	300	0 Peak	HORIZONTAL	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Unit	Line	Level Factor	Loss Factor		1 11968.00	43.84	-30.16	74.00	50.57	38.85	16.53	62.11	100	0 Peak	VERTICAL
single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																													
Freq	Level	Unit	Line	Level Factor	Loss Factor																																														
1 11968.00	43.29	-30.71	74.00	50.02	38.85	16.53	62.11	300	0 Peak	HORIZONTAL																																									
single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																													
Freq	Level	Unit	Line	Level Factor	Loss Factor																																														
1 11968.00	43.84	-30.16	74.00	50.57	38.85	16.53	62.11	100	0 Peak	VERTICAL																																									

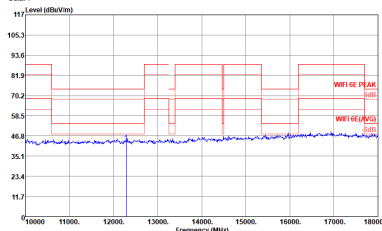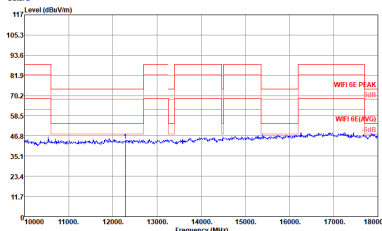

WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																																			
ANT	802.11ax HE80 Full CH39 6145MHz																																																																			
1+2	Horizontal	Vertical																																																																		
Peak	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Data: 1  Site : 030404-KS Condition : WIFI DE PEAK @ 3117 0277860 HORIZONTAL Project : RBW:1000, 000KHz VBR:3000, 000KHz SMT:Auto Mode : FREQ:500KHz Ref : 63 Plane : X Single-directivity <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100MHz</th><th>dB</th><th>dBm/100MHz</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 12288.00</td><td>43.33</td><td>-30.67</td><td>74.00</td><td>49.97</td><td>39.08</td><td>16.72</td><td>62.44</td><td>300</td><td>0 Peak</td><td>HORIZONTAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100MHz	dB	dBm/100MHz	dBm	dB	dB	cm	deg			1 12288.00	43.33	-30.67	74.00	49.97	39.08	16.72	62.44	300	0 Peak	HORIZONTAL	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Data: 2  Site : 030404-KS Condition : WIFI DE PEAK @ 3117 0277860 VERTICAL Project : RBW:1000, 000KHz VBR:3000, 000KHz SMT:Auto Mode : FREQ:500KHz Ref : 63 Plane : X Single-directivity <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100MHz</th><th>dB</th><th>dBm/100MHz</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 12288.00</td><td>44.00</td><td>-29.95</td><td>74.00</td><td>50.69</td><td>39.08</td><td>16.72</td><td>62.44</td><td>100</td><td>0 Peak</td><td>VERTICAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100MHz	dB	dBm/100MHz	dBm	dB	dB	cm	deg			1 12288.00	44.00	-29.95	74.00	50.69	39.08	16.72	62.44	100	0 Peak	VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm/100MHz	dB	dBm/100MHz	dBm	dB	dB	cm	deg																																																												
1 12288.00	43.33	-30.67	74.00	49.97	39.08	16.72	62.44	300	0 Peak	HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm/100MHz	dB	dBm/100MHz	dBm	dB	dB	cm	deg																																																												
1 12288.00	44.00	-29.95	74.00	50.69	39.08	16.72	62.44	100	0 Peak	VERTICAL																																																										

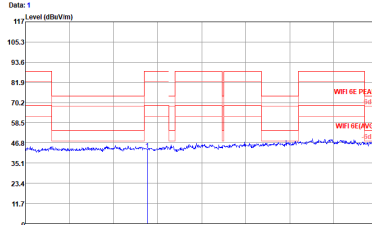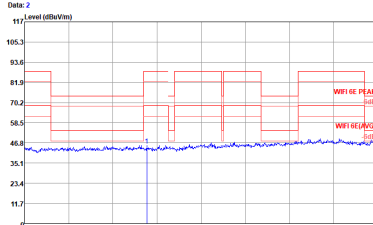

WIFI	U-NII 5 - 5925-6425MHzMHz Harmonic @ 3m																																																																			
ANT	802.11ax HE80 Full CH87 6385MHz																																																																			
1+2	Horizontal	Vertical																																																																		
Peak	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Data: 1  Site : 030804-KS Condition : WIFI DE PEAK @ 3117 0277860 HORIZONTAL Project : RSM 1000, 000KHz VSW: 3000, 000KHz SMT: Auto Mode : FREQ 500KHz Ref : 64 Plane : #23 Plane : X single-directivity <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>12768.00</td><td>42.56</td><td>-45.74</td><td>88.30</td><td>49.02</td><td>39.25</td><td>17.01</td><td>62.72</td><td>300</td><td>0 Peak HORIZONTAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg		1	12768.00	42.56	-45.74	88.30	49.02	39.25	17.01	62.72	300	0 Peak HORIZONTAL	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Data: 2  Site : 030804-KS Condition : WIFI DE PEAK @ 3117 0277860 VERTICAL Project : RSM 1000, 000KHz VSW: 3000, 000KHz SMT: Auto Mode : FREQ 500KHz Ref : 64 Plane : #23 Plane : X single-directivity <table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>12768.00</td><td>45.17</td><td>-43.13</td><td>88.30</td><td>51.63</td><td>39.25</td><td>17.01</td><td>62.72</td><td>100</td><td>0 Peak VERTICAL</td></tr></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg		1	12768.00	45.17	-43.13	88.30	51.63	39.25	17.01	62.72	100	0 Peak VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																											
1	12768.00	42.56	-45.74	88.30	49.02	39.25	17.01	62.72	300	0 Peak HORIZONTAL																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg																																																											
1	12768.00	45.17	-43.13	88.30	51.63	39.25	17.01	62.72	100	0 Peak VERTICAL																																																										

U-NII 6 - 6425-6525MHzMHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI

U-NII 6 - 6425-6525MHz Harmonic @ 3m

ANT

802.11ax HE20 Full CH97 6435MHz

1+2

Horizontal

Vertical

Peak

SPORTRON LAB

No. 109B, Pengzi North Road Kunshan
 Economic & Technical Development
 Zone, Jiangsu, China
 tel: +86-512-57900158
 Fax: +86-512-57900058
<http://www.sportron.com.cn>

Data: 1

Level (dBV/m)

Frequency (MHz)

Site Condition : 03QHD-KS

Project : WIFI 6E PEAK 3n 3117 0277860 HORIZONTAL

Made : RSR 1000, COOINX VSW 3000, COOINX SPT Auto

Plane : IS

FREQ Limit : #23

Angle/directivity : X

Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Poi/Phas
MHz	dBV/m	dB	dBV/m	dB	dB	dB	dB	dB	dB
1 12872.00	43.51	-44.79	88.30	49.90	39.27	17.07	62.73	300	0 Peak HORIZONTAL

SPORTRON LAB

No. 109B, Pengzi North Road Kunshan
 Economic & Technical Development
 Zone, Jiangsu, China
 tel: +86-512-57900158
 Fax: +86-512-57900058
<http://www.sportron.com.cn>

Data: 2

Level (dBV/m)

Frequency (MHz)

Site Condition : 03QHD-KS

Project : WIFI 6E PEAK 3n 3117 0277860 VERTICAL

Made : RSR 1000, COOINX VSW 3000, COOINX SPT Auto



Plane : IS

FREQ Limit : #23



Angle/directivity : X

Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Poi/Phas
MHz	dBV/m	dB	dBV/m	dB	dB	dB	dB	dB	dB
1 12872.00	44.28	-44.02	88.30	50.67	39.27	17.07	62.73	100	0 Peak VERTICAL

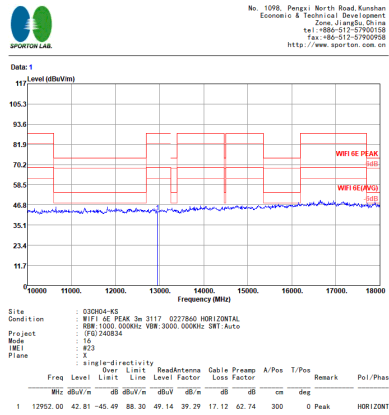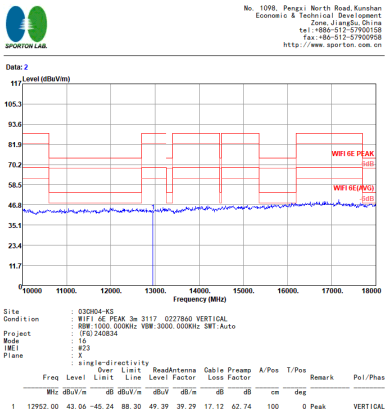



WIFI	U-NII 6 - 6425-6525MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH105 6475MHz	
1+2	Horizontal	Vertical
Peak	 Site : 035004-HS Condition : WIFI 6E PEAK @ 3117 0277660 HORIZONTAL Project : 03500004 Mode : 10 BEC : #23 Plane : X single-directivity Freq Level Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dB dB cm deg 1 12952.00 42.81 -45.49 88.30 49.14 39.29 17.12 62.74 300 0 Peak HORIZONTAL	 Site : 035004-HS Condition : WIFI 6E PEAK @ 3117 0277660 VERTICAL Project : 03500004 Mode : 10 BEC : #23 Plane : X single-directivity Freq Level Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dB dB cm deg 1 12952.00 43.06 -45.24 88.30 49.39 39.29 17.12 62.74 100 0 Peak VERTICAL

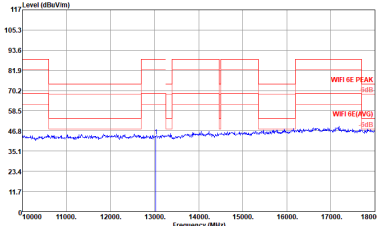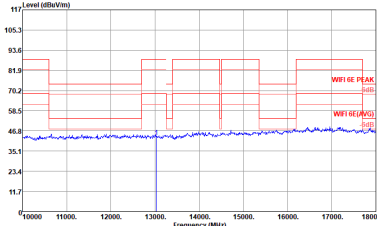

WIFI	U-NII 6 - 6425-6525MHz Harmonic @ 3m	
ANT	802.11ax HE20 Full CH113 6515MHz	
1+2	Horizontal	Vertical
Peak	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn Data: 1  Site : 035004-KS Condition : WIFI 6E PEAK @ 3117 6277660 HORIZONTAL Project : RSM 1000 000KHz VSW: 3000 000KHz SMT: Auto Rota : 030150004 Mode : 823 Plane : X single-directivity Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dB dB cm deg 1 13032.00 43.77 -44.53 88.30 50.10 39.27 17.18 62.78 300 0 Peak HORIZONTAL	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn Data: 2  Site : 035004-KS Condition : WIFI 6E PEAK @ 3117 6277660 VERTICAL Project : RSM 1000 000KHz VSW: 3000 000KHz SMT: Auto Rota : 030150004 Mode : 823 Plane : X single-directivity Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dB dB cm deg 1 13032.00 43.40 -44.90 88.30 49.73 39.27 17.18 62.78 100 0 Peak VERTICAL



U-NII 6 - 6425-6525MHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)



WIFI	U-NII 6 - 6425-6525MHz Harmonic @ 3m	
ANT	802.11ax HE40 Full CH99 6445 MHz	
1+2	Horizontal	Vertical
Peak	 Site : 032004-KS Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTAL Project : HBM 1000 5000Hz VBR 3000 5000Hz SBT Auto Project : (F0) 240834 Mode : 18 MEI : #23 Plane : 1 single-directivity ReadAntenna Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor Remark Pol/Phas 1 12888.00 43.91 -44.39 88.30 50.29 39.28 17.08 62.74 300 0 Peak HORIZONTAL	 Site : 032004-KS Condition : WIFI AE PEAK 3m 3117 0227860 VERTICAL Project : HBM 1000 5000Hz VBR 3000 5000Hz SBT Auto Project : (F0) 240834 Mode : 18 MEI : #23 Plane : 1 single-directivity ReadAntenna Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor Remark Pol/Phas 1 12888.00 42.87 -45.43 88.30 49.25 39.28 17.08 62.74 100 0 Peak VERTICAL



WIFI	U-NII 6 - 6425-6525MHz Harmonic @ 3m	
ANT	802.11ax HE40 Full CH107 6485 MHz	
1+2	Horizontal	Vertical
Peak	No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn SPORTON LAB Date: 1 Site : 035004-KS Condition : WIFI 6E PEAK @ 3117 0277660 HORIZONTAL Project : RSM 1000 000KHz VSW: 3000 000KHz SMT Auto RSM 1000 000KHz RFE : 03500004 Mode : 03 Polar : 033 Plane : X single-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dB dB cm deg 1 12968.00 42.65 -45.65 88.30 48.98 39.29 17.13 62.75 300 0 Peak HORIZONTAL	No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn SPORTON LAB Date: 2 Site : 035004-KS Condition : WIFI 6E PEAK @ 3117 0277660 VERTICAL Project : RSM 1000 000KHz VSW: 3000 000KHz SMT Auto RSM 1000 000KHz RFE : 03500004 Mode : 03 Polar : 033 Plane : X single-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dB dB cm deg 1 12968.00 42.54 -45.76 88.30 48.87 39.29 17.13 62.75 100 0 Peak VERTICAL





U-NII 6 - 6425-6525MHz
WIFI 802.11ax HE80 Full (Harmonic @ 3m)



WIFI	U-NII 6 - 6425-6525MHz Harmonic @ 3m																																																									
ANT	802.11ax HE80 Full CH103 6465MHz																																																									
1+2	Horizontal	Vertical																																																								
Peak	 Site : 032004-KS Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTAL Project : HBM 1500 5000Hz VBR 3000 5000Hz SBT Auto Project : (F0) 240834 Mode : 25 MEI : #23 Plane : 1 <table><tr><th>single-directivity</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><td>12928.00</td><td>43.01</td><td>-45.29</td><td>88.30</td><td>39.29</td><td>17.11</td><td>62.74</td></tr><tr><td></td><td>dBm</td><td>dBm</td><td>dB</td><td>dB</td><td>dB</td><td>deg</td></tr></table> 0 Peak HORIZONTAL	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor			12928.00	43.01	-45.29	88.30	39.29	17.11	62.74		dBm	dBm	dB	dB	dB	deg	 Site : 032004-KS Condition : WIFI AE PEAK 3m 3117 0227860 VERTICAL Project : HBM 1500 5000Hz VBR 3000 5000Hz SBT Auto Project : (F0) 240834 Mode : 25 MEI : #23 Plane : 1 <table><tr><th>single-directivity</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><td>12928.00</td><td>42.09</td><td>-46.21</td><td>88.30</td><td>39.29</td><td>17.11</td><td>62.74</td></tr><tr><td></td><td>dBm</td><td>dBm</td><td>dB</td><td>dB</td><td>dB</td><td>deg</td></tr></table> 0 Peak VERTICAL	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor			12928.00	42.09	-46.21	88.30	39.29	17.11	62.74		dBm	dBm	dB	dB	dB	deg
	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																			
Freq	Level	Limit	Level Factor	Loss Factor																																																						
12928.00	43.01	-45.29	88.30	39.29	17.11	62.74																																																				
	dBm	dBm	dB	dB	dB	deg																																																				
single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
Freq	Level	Limit	Level Factor	Loss Factor																																																						
12928.00	42.09	-46.21	88.30	39.29	17.11	62.74																																																				
	dBm	dBm	dB	dB	dB	deg																																																				



U-NII 7 6525~6875MHz
WIFI 802.11ax HE40 Full (Harmonic @ 3m)



WIFI	U-NII 7 6525~6875MHz Harmonic @ 3m																																											
ANT	802.11ax HE40 Full CH123 6565MHz																																											
1+2	Horizontal	Vertical																																										
Peak	 Site : 032004-KS Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTAL Project : HSB-1000 5000Hz VSW-3000 5000Hz SBT-Auto Project : (F0) 240834 Mode : 25 MEI : #23 Plane : X <table><tr><th>single-directivity</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><td>1 13128.00</td><td>43.76</td><td>-44.54</td><td>88.30</td><td>50.18</td><td>17.25 62.87</td><td>300 0 Peak HORIZONTAL</td></tr></table>	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor			1 13128.00	43.76	-44.54	88.30	50.18	17.25 62.87	300 0 Peak HORIZONTAL	 Site : 032004-KS Condition : WIFI AE PEAK 3m 3117 0227860 VERTICAL Project : HSB-1000 5000Hz VSW-3000 5000Hz SBT-Auto Project : (F0) 240834 Mode : 25 MEI : #23 Plane : Y <table><tr><th>single-directivity</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><td>1 13128.00</td><td>41.94</td><td>-46.36</td><td>88.30</td><td>48.36</td><td>17.25 62.87</td><td>100 0 Peak VERTICAL</td></tr></table>	single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor			1 13128.00	41.94	-46.36	88.30	48.36	17.25 62.87	100 0 Peak VERTICAL
single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																						
Freq	Level	Limit	Level Factor	Loss Factor																																								
1 13128.00	43.76	-44.54	88.30	50.18	17.25 62.87	300 0 Peak HORIZONTAL																																						
single-directivity	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																						
Freq	Level	Limit	Level Factor	Loss Factor																																								
1 13128.00	41.94	-46.36	88.30	48.36	17.25 62.87	100 0 Peak VERTICAL																																						





WIFI	U-NII 7 6525~6875MHz Harmonic @ 3m	
ANT	802.11ax HE40 Full CH179 6845MHz	
1+2	Horizontal	Vertical
Peak	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 035004-KS Condition : WIFI 6E PEAK @ 3117 0277660 HORIZONTAL Project : 035150054 Rde : 27 MFI : 873 Plane : X single-directivity Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dB dB cm deg 1 13688.00 44.75 -43.55 88.30 51.66 38.86 17.73 63.50 300 0 Peak HORIZONTAL	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 035004-KS Condition : WIFI 6E PEAK @ 3117 0277660 VERTICAL Project : 035150054 Rde : 27 MFI : 873 Plane : X single-directivity Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dB dB cm deg 1 13688.00 44.67 -43.63 88.30 51.58 38.86 17.73 63.50 100 0 Peak VERTICAL



U-NII 7 6525~6875MHz
WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI	U-NII 7 6525~6875MHz Harmonic @ 3m	
ANT	802.11ax HE80 Full CH135 6625MHz	
1+2	Horizontal	Vertical
Peak	 Site : 032004-KS Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTAL Project : HSB-1000 5000Hz VSW-3000 5000Hz SBT-Auto Project : (F0) 240834 Mode : 25 MEI : #23 Plane : 1 single-directivity ReadAntenna Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor Remark Pol/Phas 1 13248.00 44.85 -43.45 88.30 39.11 17.35 62.99 300 0 Peak HORIZONTAL	 Site : 032004-KS Condition : WIFI AE PEAK 3m 3117 0227860 VERTICAL Project : HSB-1000 5000Hz VSW-3000 5000Hz SBT-Auto Project : (F0) 240834 Mode : 25 MEI : #23 Plane : 1 single-directivity ReadAntenna Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor Remark Pol/Phas 1 13248.00 42.99 -45.31 88.30 49.52 39.11 17.35 62.99 100 0 Peak VERTICAL






WIFI	U-NII 7 6525~6875MHz Harmonic @ 3m	
ANT	802.11ax HE80 Full CH151 6705MHz	
1+2	Horizontal	Vertical
Peak	 Site : 035004-KS Condition : WIFI 6E PEAK 3m 3117 0277660 HORIZONTAL Project : 03500004 Mode : 20 BEC : #23 Plane : X single-directivity Freq Level Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dB dB dB cm deg 1 13408.00 42.36 -45.94 88.30 49.05 38.97 17.50 63.16 300 0 Peak HORIZONTAL	 Site : 035004-KS Condition : WIFI 6E PEAK 3m 3117 0277660 VERTICAL Project : 03500004 Mode : 20 BEC : #23 Plane : X single-directivity Freq Level Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dB dB dB cm deg 1 13408.00 42.71 -45.59 88.30 49.40 38.97 17.50 63.16 100 0 Peak VERTICAL






U-NII 8 - 6875-7125MHzMHz

WIFI 802.11ax HE20 Full (Band Edge @ 3m)

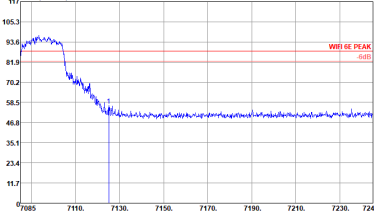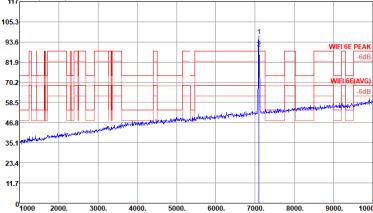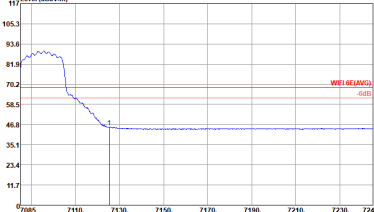WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																														
ANT	802.11ax HE20 Full CH229 7095MHz																																																																														
1+2	Horizontal	Fundamental																																																																													
Peak	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 030904-K3 Condition : WIFI HE PEAK 3m 91200 16dB HORIZONTAL Project : RSM 1000 000KHz VSR 3000 000KHz SRT Auto RFE : F70240834 Mode : 3A MEI : #23 Plane : X single-directivity <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100m</th><th>dB</th><th>dBm/100m</th><th>dBm/100m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 7125.16</td><td>93.64</td><td>-31.66</td><td>88.30</td><td>45.64</td><td>35.04</td><td>12.57</td><td>36.61</td><td>334</td><td>80 Peak</td><td>HORIZONTAL</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100m	dB	dBm/100m	dBm/100m	dB	dB	dB	dB	dB	dB	1 7125.16	93.64	-31.66	88.30	45.64	35.04	12.57	36.61	334	80 Peak	HORIZONTAL	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 030904-K3 Condition : WIFI HE PEAK 3m 91200 16dB HORIZONTAL Project : RSM 1000 000KHz VSR 3000 000KHz SRT Auto RFE : F70240834 Mode : 3A MEI : #23 Plane : X single-directivity <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100m</th><th>dB</th><th>dBm/100m</th><th>dBm/100m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 7122.00</td><td>97.01</td><td>8.71</td><td>88.30</td><td>86.05</td><td>35.02</td><td>12.55</td><td>36.61</td><td>334</td><td>80 Peak</td><td>HORIZONTAL</td></tr><tr><td>2 7122.00</td><td>89.99</td><td>21.69</td><td>68.30</td><td>79.03</td><td>35.02</td><td>12.05</td><td>36.61</td><td>334</td><td>80 Average</td><td>HORIZONTAL</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100m	dB	dBm/100m	dBm/100m	dB	dB	dB	dB	dB	dB	1 7122.00	97.01	8.71	88.30	86.05	35.02	12.55	36.61	334	80 Peak	HORIZONTAL	2 7122.00	89.99	21.69	68.30	79.03	35.02	12.05	36.61	334	80 Average	HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBm/100m	dB	dBm/100m	dBm/100m	dB	dB	dB	dB	dB	dB																																																																					
1 7125.16	93.64	-31.66	88.30	45.64	35.04	12.57	36.61	334	80 Peak	HORIZONTAL																																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBm/100m	dB	dBm/100m	dBm/100m	dB	dB	dB	dB	dB	dB																																																																					
1 7122.00	97.01	8.71	88.30	86.05	35.02	12.55	36.61	334	80 Peak	HORIZONTAL																																																																					
2 7122.00	89.99	21.69	68.30	79.03	35.02	12.05	36.61	334	80 Average	HORIZONTAL																																																																					
Avg.	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 030904-K3 Condition : WIFI HE (AVG) 3m 91200 16dB HORIZONTAL Project : RSM 1000 000KHz VSR 1.000KHz SRT Auto RFE : F70240834 Mode : 3A MEI : #23 Plane : X single-directivity <table><thead><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBm/100m</th><th>dB</th><th>dBm/100m</th><th>dBm/100m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 7125.32</td><td>45.39</td><td>-22.91</td><td>68.30</td><td>34.39</td><td>35.04</td><td>12.57</td><td>36.61</td><td>334</td><td>80 Average</td><td>HORIZONTAL</td></tr></tbody></table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100m	dB	dBm/100m	dBm/100m	dB	dB	dB	dB	dB	dB	1 7125.32	45.39	-22.91	68.30	34.39	35.04	12.57	36.61	334	80 Average	HORIZONTAL	Left blank																																												
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBm/100m	dB	dBm/100m	dBm/100m	dB	dB	dB	dB	dB	dB																																																																					
1 7125.32	45.39	-22.91	68.30	34.39	35.04	12.57	36.61	334	80 Average	HORIZONTAL																																																																					






WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH229 7095MHz	
1+2	Vertical	Fundamental
Peak	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900058 http://www.sporton.com.cn SPORTON LAB. DATA: 6 117 Level (dBV/m) 105.3 93.6 81.6 70.2 58.5 46.8 35.1 23.4 11.7 7085 7115 7130 7150 7170 7190 7210 7230 7245 Frequency (MHz) WFI HE PEAK red Site Condition Project Mode MEI Plane single-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBV/m dB dBV/m dBV/m dB dB cm deg 1 7125.68 58.45 -29.85 88.30 47.39 35.07 12.59 36.60 100 111 Peak VERTICAL	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900058 http://www.sporton.com.cn SPORTON LAB. DATA: 8 117 Level (dBV/m) 105.3 93.6 81.6 70.2 58.5 46.8 35.1 23.4 11.7 1000 2000 3000 4000 5000 6000 7000 8000 9000 10000 Frequency (MHz) WFI HE PEAK red Site Condition Project Mode MEI Plane single-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBV/m dB dBV/m dBV/m dB dB cm deg 1 7093.00 99.81 11.51 88.30 88.90 35.00 12.53 36.62 100 111 Peak VERTICAL 2 7093.00 91.94 23.64 68.30 81.53 35.00 12.53 36.62 100 111 Average VERTICAL
Avg.	 No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900058 http://www.sporton.com.cn SPORTON LAB. DATA: 7 117 Level (dBV/m) 105.3 93.6 81.6 70.2 58.5 46.8 35.1 23.4 11.7 7085 7115 7130 7150 7170 7190 7210 7230 7245 Frequency (MHz) WFI HE (AVG) red Site Condition Project Mode MEI Plane single-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas MHz dBV/m dB dBV/m dBV/m dB dB cm deg 1 7125.48 47.51 -20.79 68.30 36.51 35.04 12.57 36.61 100 111 Average VERTICAL	Left blank



U-NII 8 - 6875-7125MHzMHz
WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m																																																																
ANT	802.11ax HE20 Partial 26/8 CH229 7095MHz																																																																
1+2	Horizontal	Fundamental																																																															
Peak	No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-37900158 Fax: +86-512-37900058 http://www.sporton.com.cn Date: 3 Site : 032004-KS Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTAL RSM 1000 0000Hz VSW: 3000 0000Hz SRT Auto Project : (FU)240834 Mode : 35 MEI : 823 Plane : X single-directivity <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 7140.04</td><td>80.25</td><td>-8.05</td><td>88.30</td><td>68.29</td><td>35.97</td><td>12.59</td><td>36.60</td><td>100 0 Peak HORIZONTAL</td></tr></tbody></table> No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-37900158 Fax: +86-512-37900058 http://www.sporton.com.cn Date: 5 Site : 032004-KS Condition : WIFI AE PEAK 3m 3117 0227860 HORIZONTAL RSM 1000 0000Hz VSW: 3000 0000Hz SRT Auto Project : (FU)240834 Mode : 35 MEI : 823 Plane : X single-directivity <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 * 7102.00</td><td>107.77</td><td>19.47</td><td>88.30</td><td>96.44</td><td>35.39</td><td>12.55</td><td>36.61</td><td>100 0 Peak HORIZONTAL</td></tr><tr><td>2 * 7102.00</td><td>100.69</td><td>32.29</td><td>68.30</td><td>89.36</td><td>35.39</td><td>12.55</td><td>36.61</td><td>100 0 Average HORIZONTAL</td></tr></tbody></table>	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1 7140.04	80.25	-8.05	88.30	68.29	35.97	12.59	36.60	100 0 Peak HORIZONTAL	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1 * 7102.00	107.77	19.47	88.30	96.44	35.39	12.55	36.61	100 0 Peak HORIZONTAL	2 * 7102.00	100.69	32.29	68.30	89.36	35.39	12.55	36.61	100 0 Average HORIZONTAL	
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																										
1 7140.04	80.25	-8.05	88.30	68.29	35.97	12.59	36.60	100 0 Peak HORIZONTAL																																																									
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																										
1 * 7102.00	107.77	19.47	88.30	96.44	35.39	12.55	36.61	100 0 Peak HORIZONTAL																																																									
2 * 7102.00	100.69	32.29	68.30	89.36	35.39	12.55	36.61	100 0 Average HORIZONTAL																																																									
Avg.	No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Tel: +86-512-37900158 Fax: +86-512-37900058 http://www.sporton.com.cn Date: 4 Site : 032004-KS Condition : WIFI AE(AVG) 3m 3117 0227860 HORIZONTAL RSM 1000 0000Hz VSW: 0.0100Hz SRT Auto Project : (FU)240834 Mode : 35 MEI : 823 Plane : X single-directivity <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 7135.56</td><td>62.62</td><td>-5.68</td><td>68.30</td><td>50.66</td><td>35.97</td><td>12.59</td><td>36.60</td><td>100 0 Average HORIZONTAL</td></tr></tbody></table> Left blank	Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1 7135.56	62.62	-5.68	68.30	50.66	35.97	12.59	36.60	100 0 Average HORIZONTAL																																					
Freq	Level	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																										
1 7135.56	62.62	-5.68	68.30	50.66	35.97	12.59	36.60	100 0 Average HORIZONTAL																																																									

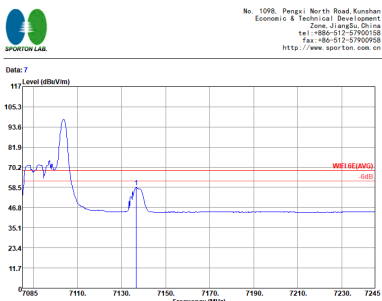

WIFI	U-NII 8 - 6875-7125MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 26/8 CH229 7095MHZ	
1+2	Vertical	Fundamental
Peak	 No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 032404-KS Condition : WIFI 6E PEAK 3m 3117 0227860 VERTICAL Project : RF0240834 Mode : 20 MEI : #23 Plane : X Single-directivity Freq Level Limit Line Level Factor Loss Factor A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dBuV dBuV dBuV cm deg 1 7136.84 74.62 -13.68 88.30 62.66 35.97 12.59 36.60 301 270 Peak VERTICAL	 No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 032404-KS Condition : WIFI 6E PEAK 3m 3117 0227860 VERTICAL Project : RF0240834 Mode : 20 MEI : #23 Plane : X Single-directivity Freq Level Limit Line Level Factor Loss Factor A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dBuV dBuV dBuV cm deg 1 7102.00 104.46 14.16 88.30 93.13 35.39 12.55 36.61 301 270 Peak VERTICAL 2 7102.00 16.54 26.24 68.30 65.21 35.39 12.55 36.61 301 270 Average VERTICAL
Avg.	 No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Site : 032404-KS Condition : WIFI 6E (AVG) 3m 3117 0227860 VERTICAL Project : RF0240834 Mode : 20 MEI : #23 Plane : X Single-directivity Freq Level Limit Line Level Factor Loss Factor A/Pos T/Pos Remark Pol/Phas MHz dBuV/m dB dBuV/m dBuV dBuV dBuV dBuV cm deg 1 7136.68 58.53 -9.77 68.30 46.57 35.97 12.59 36.60 301 270 Average VERTICAL	Left blank