

## FCC/ISED Test Report

**Prepared for:** Garmin International, Inc.

**Address:** 1200 E. 151<sup>st</sup> Street  
Olathe, Kansas, 66062, USA

**Product:** A04868

**Test Report No:** R230919-20-E1

**Approved by:**



Fox Lane  
EMC Test Engineer

**DATE:** January 15, 2024

**Total Pages:** 88


*The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above-named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.*



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |


## REVISION PAGE

| Rev. No. | Date             | Description  |
|----------|------------------|--|
| 0        | 15 December 2023 | Issued by FLane<br>Reviewed by KVepuri<br>Prepared by FLane/ESchmidt |

|  |                |                            |     |   |
|--|----------------|----------------------------|-----|---|
|  | Report Number: | R230919-20-E1              | Rev | 0 |
|  | Prepared for:  | Garmin International, Inc. |     |   |

## CONTENTS

|   |           |
|---|-----------|
| Revision Page .....   | 2         |
| <b>1.0 Summary of test results.....</b>                         | <b>4</b>  |
| <b>2.0 EUT Description .....</b>                                | <b>5</b>  |
| 2.1 Equipment under test .....                                  | 5         |
| 2.2 Description of test modes .....                             | 5         |
| 2.3 Description of support units.....                           | 5         |
| <b>3.0 Laboratory and General Test Description .....</b>        | <b>6</b>  |
| 3.1 Laboratory description.....                                 | 6         |
| 3.2 Test personnel.....   | 6         |
| 3.3 Test equipment.....   | 7         |
| 3.4 General Test Procedure and Setup for Radio Measuremnts..... | 8         |
| <b>4.0 Results .....</b>  | <b>9</b>  |
| 4.1 Output Power .....  | 13        |
| 4.2 Bandwidth.....  | 14        |
| 4.3 Duty Cycle .....  | 15        |
| 4.4 Radiated emissions.....                                     | 19        |
| 4.5 Conducted Spurious Emissions .....                          | 28        |
| 4.6 Band edges .....  | 34        |
| 4.7 Power Spectral Density.....                                 | 36        |
| <b>Appendix A: Sample Calculation .....</b>                     | <b>37</b> |
| <b>Appendix B – Measurement Uncertainty .....</b>               | <b>39</b> |
| <b>Appendix C – Graphs and Tables .....</b>                     | <b>40</b> |
| <b>REPORT END.....</b>  | <b>88</b> |

|  |                |                            |     |   |
|--|----------------|----------------------------|-----|---|
|  | Report Number: | R230919-20-E1              | Rev | 0 |
|  | Prepared for:  | Garmin International, Inc. |     |   |

## 1.0 SUMMARY OF TEST RESULTS

The worst-case measurements were reported in this report. Summary of test results presented in this report correspond to the following section:

### FCC Part 15.247

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISSED RSS-Gen, Issue 5
- (3) ISSED RSS-247, Issue 3

| APPLIED STANDARDS AND REGULATIONS  |                                |        |
|--|--------------------------------|--------|
| Standard Section   | Test Type                      | Result |
| FCC Part 15.35<br>RSS Gen, Issue 5, Section 6.10   | Duty Cycle                     | Pass   |
| FCC Part 15.247(b)(3)<br>RSS-247 Issue 3 Section 5.4(d)  | Peak output power              | Pass   |
| FCC Part 15.247(a)(2)<br>RSS-247 Issue 3 Section 5.2 (a)   | Bandwidth                      | Pass   |
| FCC Part 15.209<br>RSS-Gen Issue 5, Section 7.3  | Receiver Radiated Emissions    | Pass   |
| FCC Part 15.209 (restricted bands), 15.247 (unrestricted)<br>RSS-247 Issue 3 Section 5.5, RSS-Gen Issue 5, Section 8.9 | Transmitter Radiated Emissions | Pass   |
| FCC Part 15.247(e)<br>RSS-247 Issue 3 Section 5.2 (b)  | Power Spectral Density         | Pass   |
| FCC Part 15.209, 15.247(d)<br>RSS-247 Issue 3 Section 5.5  | Band Edge Measurement          | Pass   |



Report Number: R230919-20-E1

Rev

0

Prepared for: Garmin International, Inc.

## 2.0 EUT DESCRIPTION

### 2.1 EQUIPMENT UNDER TEST

#### Summary and Operating Condition:

|                               |   |
|-------------------------------|---|
| <b>EUT</b>                    | A04868  |
| <b>FCC ID</b>                 | IPH-04868   |
| <b>IC</b>                     | 1792A-04868   |
| <b>EUT Received</b>           | 24 October 2023   |
| <b>EUT Tested</b>             | 24 October 2023 - 11 December 2023  |
| <b>Serial No.</b>             | 3456804386 (Radiated Measurements)<br>3456804397 (Conducted Measurements)   |
| <b>Operating Band</b>         | 2400 – 2483.5 MHz   |
| <b>Device Type</b>            | <input type="checkbox"/> GMSK <input type="checkbox"/> GFSK <input type="checkbox"/> BT BR <input type="checkbox"/> BT EDR 2MB <input type="checkbox"/> BT EDR 3MB<br><input checked="" type="checkbox"/> 802.11x |
| <b>Power Supply / Voltage</b> | 12VDC External Battery  |

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 2.2 DESCRIPTION OF TEST MODES

The operating range of the EUT is dependent on the device type found in section 2.1:

#### Data Rates:

| Modulation | Low/High Data rate |
|------------|--------------------|
| 802.11b    | 1MB/11MB           |
| 802.11g    | 6MB/54MB           |
| 802.11n    | MCS0/MCS7          |


#### For 802.11x Transmissions:

| Channel | Frequency |
|---------|-----------|
| Low     | 2412 MHz  |
| Mid     | 2437 MHz  |
| High    | 2462 MHz  |

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequencies and designations.

### 2.3 DESCRIPTION OF SUPPORT UNITS

None

|  |                |                            |     |   |
|--|----------------|----------------------------|-----|---|
|  | Report Number: | R230919-20-E1              | Rev | 0 |
|  | Prepared for:  | Garmin International, Inc. |     |   |

### 3.0 LABORATORY AND GENERAL TEST DESCRIPTION

#### 3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)  
4740 Discovery Drive  
Lincoln, NE 68521

A2LA Certificate Number: 1953.01  
FCC Accredited Test Site Designation No: US1060  
Industry Canada Test Site Registration No: 4294A-1  
NCC CAB Identification No: US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of  $35 \pm 4\%$   
Temperature of  $22 \pm 3^\circ$  Celsius



#### 3.2 TEST PERSONNEL

| No. | PERSONNEL      | TITLE           | ROLE                        |
|-----|----------------|-----------------|-----------------------------|
| 1   | Fox Lane       | Test Engineer   | Testing, Review, and Report |
| 2   | Blake Winter   | Test Engineer   | Testing                     |
| 3   | Ethan Schmidt  | Test Technician | Testing and Report          |
| 4   | Karthik Vepuri | Test Engineer   | Review/Testing              |

**Notes:**

All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.



Report Number: R230919-20-E1

Rev

0

Prepared for: Garmin International, Inc.

**3.3 TEST EQUIPMENT**

| DESCRIPTION AND MANUFACTURER                             | MODEL NO.                      | SERIAL NO.           | LAST CALIBRATION DATE | CALIBRATION DUE DATE |
|--|--------------------------------|----------------------|-----------------------|----------------------|
| Keysight MXE Signal Analyzer (44GHz)                     | N9038A                         | MY59050109           | July 17, 2023         | July 17, 2025        |
| Keysight MXE Signal Analyzer (26.5GHz)                   | N9038A                         | MY56400083           | July 17, 2023         | July 17, 2025        |
| Keysight EXA Signal Analyzer                             | N9010A                         | MY56070862           | July 18, 2023         | July 17, 2025        |
| SunAR RF Motion  | JB1                            | A091418              | July 27, 2023         | July 26, 2024        |
| ETS-Lindgren Red Horn Antenna                            | 3115                           | 218576               | July 31, 2023         | July 30, 2024        |
| EMCO Horn Antenna  | 3116                           | 2576                 | July 31, 2023         | July 30, 2024        |
| Com-Power LISN, Single Phase                             | LI-220C                        | 20070017             | July 17, 2023         | July 17, 2025        |
| Agilent Preamp*  | 87405A                         | 3950M00669           | June 5, 2023          | June 5, 2025         |
| Rohde & Schwarz Preamplifier*                            | TS-PR18                        | 3545700803           | June 5, 2023          | June 5, 2025         |
| Trilithic High Pass Filter*                              | 6HC330                         | 23042                | June 5, 2023          | June 5, 2025         |
| RF Cable (antenna to 10m chamber bulkhead)               | FSCM 64639                     | 01E3872              | June 5, 2023          | June 5, 2025         |
| RF Cable (10m chamber bulkhead to control room bulkhead) | FSCM 64639                     | 01E3874              | June 5, 2023          | June 5, 2025         |
| RF Cable (control room bulkhead to test receiver)        | FSCM 64639                     | 01F1206              | June 5, 2023          | June 5, 2025         |
| N connector bulkhead (10m chamber)                       | PE9128                         | NCEEBH1              | June 5, 2023          | June 5, 2025         |
| N connector bulkhead (control room)                      | PE9128                         | NCEEBH2              | June 5, 2023          | June 5, 2025         |
| TDK Emissions Lab Software                               | V11.25                         | 700307               | NA                    | NA                   |
| ETS – Lindgren- VSWR on 10m Chamber                      | 10m Semi-anechoic chamber-VSWR | 4740 Discovery Drive | July 30, 2020         | July 30, 2024        |
| NCEE Labs-NSA on 10m Chamber                             | 10m Semi-anechoic chamber-NSA  | NCEE-001             | May 25, 2022          | May 25, 2025         |

\*Internal Characterization

\*\*2 Year Cal Cycle

\*\*\*3 Year Cal Cycle

**Notes:**

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

### 3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMNTS

Measurement type presented in this report (Please see the checked box below):

#### Conducted ☒

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. Information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.



Figure 1 - Bandwidth Measurements Test Setup

#### Radiated ☒

All the radiated measurements were taken at a distance of 3m from the EUT. Information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

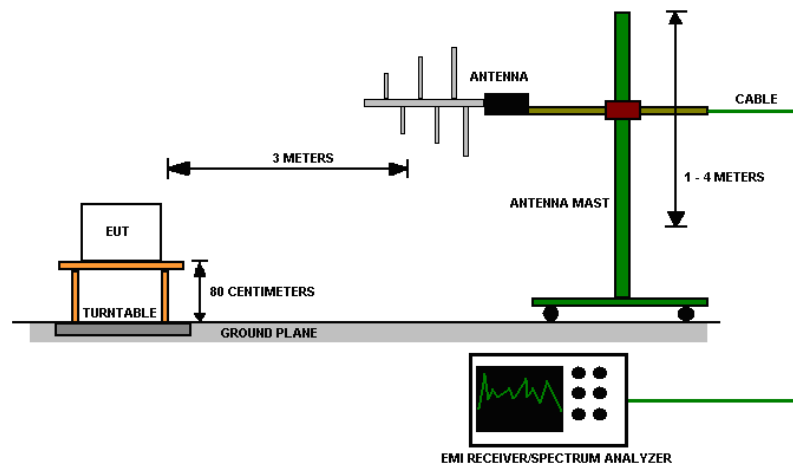


Figure 2 - Radiated Emissions Test Setup





Report Number: R230919-20-E1

Rev

0

Prepared for: Garmin International, Inc.

#### 4.0 RESULTS

##### DTS Radio Measurements, Low Data Rate

| CHANNEL | Transmitter | Occupied Bandwidth (MHz) | 6 dB Bandwidth (MHz) | PSD (dBm) | RESULT |
|---------|-------------|--------------------------|----------------------|-----------|--------|
| Low     | 802.11 b    | 13.37                    | 9.06                 | -13.724   | PASS   |
| Mid     | 802.11 b    | 14.88                    | 9.56                 | -4.637    | PASS   |
| High    | 802.11 b    | 13.48                    | 8.61                 | -2.275    | PASS   |
| Low     | 802.11 g    | 16.73                    | 15.73                | -19.979   | PASS   |
| Mid     | 802.11 g    | 16.85                    | 15.45                | -6.577    | PASS   |
| High    | 802.11 g    | 16.75                    | 15.69                | -18.041   | PASS   |
| Low     | 802.11 n    | 17.72                    | 15.50                | -20.41    | PASS   |
| Mid     | 802.11 n    | 17.89                    | 15.18                | -7.003    | PASS   |
| High    | 802.11 n    | 17.78                    | 16.18                | -18.757   | PASS   |

Occupied Bandwidth = N/A;  
6 dB Bandwidth Limit = 500 kHzOutput Power Limit = 30 dBm;  
PSD Limit = 8 dBm

##### Unrestricted Band-Edge, Low Data Rate

| CHANNEL | Mode     | Band edge /Measurement Frequency (MHz) | Relative Highest out of band level (dBm) | Relative Fundamental (dBm) | Delta (dB) | Min Delta (dB) | Result |
|---------|----------|--|--|----------------------------|------------|----------------|--------|
| Low     | 802.11 b | 2400.00                                | 58.69                                    | 107.69                     | 49.00      | 20.00          | PASS   |
| Low     | 802.11 g | 2400.00                                | 60.61                                    | 101.10                     | 40.49      | 20.00          | PASS   |
| Low     | 802.11 n | 2400.00                                | 60.78                                    | 101.45                     | 40.67      | 20.00          | PASS   |
| High    | 802.11 b | 2483.50                                | 46.60                                    | 108.15                     | 61.55      | 20.00          | PASS   |
| High    | 802.11 g | 2483.50                                | 52.70                                    | 101.19                     | 48.49      | 20.00          | PASS   |
| High    | 802.11 n | 2483.50                                | 53.94                                    | 101.27                     | 47.34      | 20.00          | PASS   |

\*Measurements shown above are relative

##### Peak Restricted Band-Edge, Low Data Rate

| CHANNEL | Mode     | Band edge /Measurement Frequency (MHz) | Highest out of band level (dBuV/m @ 3m) | Measurement Type | Limit (dBuV/m @ 3m) | Margin | Result |
|---------|----------|--|---|------------------|---------------------|--------|--------|
| Low     | 802.11 b | 2390.00                                | 51.89                                   | Peak             | 73.98               | 22.09  | PASS   |
| Low     | 802.11 g | 2390.00                                | 61.64                                   | Peak             | 73.98               | 12.34  | PASS   |
| Low     | 802.11 n | 2390.00                                | 62.14                                   | Peak             | 73.98               | 11.84  | PASS   |
| High    | 802.11 b | 2483.50                                | 52.11                                   | Peak             | 73.98               | 21.87  | PASS   |
| High    | 802.11 g | 2483.50                                | 63.64                                   | Peak             | 73.98               | 10.34  | PASS   |
| High    | 802.11 n | 2483.50                                | 64.86                                   | Peak             | 73.98               | 9.12   | PASS   |

\*Limit shown is the peak limit taken from FCC Part 15.209



Report Number: R230919-20-E1

Rev

0

Prepared for: Garmin International, Inc.

**DTS Radio Measurements, High Data Rate**

| CHANNEL | Transmitter | Occupied Bandwidth (MHz) | 6 dB Bandwidth (MHz) | PSD (dBm) | RESULT |
|---------|-------------|--------------------------|----------------------|-----------|--------|
| Low     | 802.11 b    | 13.21                    | 8.18                 | -14.292   | PASS   |
| Mid     | 802.11 b    | 13.86                    | 8.78                 | -4.57     | PASS   |
| High    | 802.11 b    | 13.28                    | 9.17                 | -13.803   | PASS   |
| Low     | 802.11 g    | 16.50                    | 16.02                | -21.328   | PASS   |
| Mid     | 802.11 g    | 17.93                    | 15.44                | -9.153    | PASS   |
| High    | 802.11 g    | 16.49                    | 16.05                | -21.803   | PASS   |
| Low     | 802.11 n    | 17.69                    | 16.82                | -20.864   | PASS   |
| Mid     | 802.11 n    | 18.48                    | 16.91                | -7.946    | PASS   |
| High    | 802.11 n    | 17.64                    | 16.08                | -22.154   | PASS   |

Occupied Bandwidth = N/A;  
6 dB Bandwidth Limit = 500 kHzOutput Power Limit = 30 dBm;  
PSD Limit = 8 dBm**Unrestricted Band-Edge, High Data Rate**

| CHANNEL | Mode     | Band edge /Measurement Frequency (MHz) | Relative Highest out of band level (dBuV)* | Relative Fundamental (dBuV)* | Delta (dB) | Min Delta (dB) | Result |
|---------|----------|--|--|------------------------------|------------|----------------|--------|
| Low     | 802.11 b | 2400.00                                | 58.61                                      | 107.35                       | 48.74      | 20.00          | PASS   |
| Low     | 802.11 g | 2400.00                                | 60.14                                      | 101.52                       | 41.38      | 20.00          | PASS   |
| Low     | 802.11 n | 2400.00                                | 59.00                                      | 101.66                       | 42.66      | 20.00          | PASS   |
| High    | 802.11 b | 2483.50                                | 47.27                                      | 108.15                       | 60.88      | 20.00          | PASS   |
| High    | 802.11 g | 2483.50                                | 51.25                                      | 101.70                       | 50.46      | 20.00          | PASS   |
| High    | 802.11 n | 2483.50                                | 51.68                                      | 101.66                       | 49.98      | 20.00          | PASS   |

\*Measurements shown above are relative

**Peak Restricted Band-Edge, High Data Rate**

| CHANNEL | Mode     | Band edge /Measurement Frequency (MHz) | Highest out of band level (dBuV/m @ 3m) | Measurement Type | Limit (dBuV/m @ 3m) | Margin | Result |
|---------|----------|--|---|------------------|---------------------|--------|--------|
| Low     | 802.11 b | 2390.00                                | 51.59                                   | Peak             | 73.98               | 22.39  | PASS   |
| Low     | 802.11 g | 2390.00                                | 61.12                                   | Peak             | 73.98               | 12.86  | PASS   |
| Low     | 802.11 n | 2390.00                                | 59.60                                   | Peak             | 73.98               | 14.39  | PASS   |
| High    | 802.11 b | 2483.50                                | 51.50                                   | Peak             | 73.98               | 22.48  | PASS   |
| High    | 802.11 g | 2483.50                                | 62.53                                   | Peak             | 73.98               | 11.45  | PASS   |
| High    | 802.11 n | 2483.50                                | 63.28                                   | Peak             | 73.98               | 10.70  | PASS   |

\*Limit shown is the peak limit taken from FCC Part 15.209



Report Number: R230919-20-E1

Rev

0

Prepared for: Garmin International, Inc.

**Radiated Average Restricted Band-Edge, Low Data Rate**

| CHANNEL | Mode     | Band edge /Measurement Frequency (MHz) | Raw Avg out of band level (dBuV/m @ 3m) | DCCF (For Emissions) | Corrected Highest out of band level (dBuV/m @ 3m) | Detector | Limit (dBuV/m @ 3m) | Margin (dB) | Result |
|---------|----------|--|---|----------------------|---|----------|---------------------|-------------|--------|
| Low     | 802.11 b | 2390.00                                | 40.060                                  | 0.337                | 40.397  | Average  | 53.98               | 13.583      | PASS   |
| Low     | 802.11 g | 2390.00                                | 45.241                                  | 1.113                | 46.354  | Average  | 53.98               | 7.626       | PASS   |
| Low     | 802.11 n | 2390.00                                | 45.901                                  | 1.144                | 47.045  | Average  | 53.98               | 6.935       | PASS   |
| High    | 802.11 b | 2483.50                                | 39.950                                  | 0.337                | 40.287  | Average  | 53.98               | 13.693      | PASS   |
| High    | 802.11 g | 2483.50                                | 48.164                                  | 1.113                | 49.277  | Average  | 53.98               | 4.703       | PASS   |
| High    | 802.11 n | 2483.50                                | 49.341                                  | 1.144                | 50.485  | Average  | 53.98               | 3.495       | PASS   |

Limit shown is the average limit taken from FCC Part 15.209

Highest out of band level = Raw Average out of band level + DCCF (as per C63.10 Sec. 11.12.2.5.2)

\*See section 4.3 for more information on DCCF

**Radiated Average Restricted Band-Edge, High Data Rate**

| CHANNEL | Mode     | Band edge /Measurement Frequency (MHz) | Raw Avg out of band level (dBuV/m @ 3m) | DCCF (For Emissions) | Corrected Highest out of band level (dBuV/m @ 3m) | Detector | Limit (dBuV/m @ 3m) | Margin (dB) | Result |
|---------|----------|--|---|----------------------|---|----------|---------------------|-------------|--------|
| Low     | 802.11 b | 2390.00                                | 39.878                                  | 2.391                | 42.269  | Average  | 53.98               | 11.711      | PASS   |
| Low     | 802.11 g | 2390.00                                | 42.915                                  | 6.150                | 49.065  | Average  | 53.98               | 4.915       | PASS   |
| Low     | 802.11 n | 2390.00                                | 43.031                                  | 6.136                | 49.167  | Average  | 53.98               | 4.813       | PASS   |
| High    | 802.11 b | 2483.50                                | 39.885                                  | 2.391                | 42.276  | Average  | 53.98               | 11.704      | PASS   |
| High    | 802.11 g | 2483.50                                | 45.667                                  | 6.150                | 51.817  | Average  | 53.98               | 2.163       | PASS   |
| High    | 802.11 n | 2483.50                                | 46.796                                  | 6.136                | 52.932  | Average  | 53.98               | 1.048       | PASS   |

Limit shown is the average limit taken from FCC Part 15.209

Highest out of band level = Raw Average out of band level + DCCF (as per C63.10 Sec. 11.12.2.5.2)

\*See section 4.3 for more information on DCCF



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |

| FCC Power Measurements, Low Data Rate                   |             |                          |        |                             |                           |        |
|---|-------------|--------------------------|--------|-----------------------------|---------------------------|--------|
| CHANNEL   | Transmitter | Raw Average Output power | DCCF** | Average* OUTPUT POWER (dBm) | Average OUTPUT POWER (mW) | RESULT |
| Low   | 802.11 b    | 8.74                     | 0.168  | 8.908                       | 7.777                     | PASS   |
| Mid   | 802.11 b    | 14.15                    | 0.168  | 14.318                      | 27.027                    | PASS   |
| High  | 802.11 b    | 8.94                     | 0.168  | 9.108                       | 8.143                     | PASS   |
| Low   | 802.11 g    | 3.89                     | 0.557  | 4.447                       | 2.784                     | PASS   |
| Mid   | 802.11 g    | 14.07                    | 0.557  | 14.627                      | 29.018                    | PASS   |
| High  | 802.11 g    | 4.11                     | 0.557  | 4.667                       | 2.929                     | PASS   |
| Low   | 802.11 n    | 3.74                     | 0.572  | 4.312                       | 2.699                     | PASS   |
| Mid   | 802.11 n    | 13.92                    | 0.572  | 14.492                      | 28.131                    | PASS   |
| High  | 802.11 n    | 3.96                     | 0.572  | 4.532                       | 2.839                     | PASS   |
| *Average OUTPUT POWER = Raw Average Output power + DCCF |             |                          |        |                             |                           |        |
| **For more information regarding DCCF see section 4.3   |             |                          |        |                             |                           |        |

| FCC Power Measurements, High Data Rate                  |             |                          |        |                             |                           |        |
|---|-------------|--------------------------|--------|-----------------------------|---------------------------|--------|
| CHANNEL   | Transmitter | Raw Average Output power | DCCF** | Average* OUTPUT POWER (dBm) | Average OUTPUT POWER (mW) | RESULT |
| Low   | 802.11 b    | 7.75                     | 1.196  | 8.946                       | 7.845                     | PASS   |
| Mid   | 802.11 b    | 12.52                    | 1.196  | 13.716                      | 23.529                    | PASS   |
| High  | 802.11 b    | 7.91                     | 1.196  | 9.106                       | 8.140                     | PASS   |
| Low   | 802.11 g    | 1.63                     | 3.075  | 4.705                       | 2.955                     | PASS   |
| Mid   | 802.11 g    | 11.08                    | 3.075  | 14.155                      | 26.032                    | PASS   |
| High  | 802.11 g    | 1.88                     | 3.075  | 4.955                       | 3.130                     | PASS   |
| Low   | 802.11 n    | 1.53                     | 3.068  | 4.598                       | 2.883                     | PASS   |
| Mid   | 802.11 n    | 11.45                    | 3.068  | 14.518                      | 28.301                    | PASS   |
| High  | 802.11 n    | 1.74                     | 3.068  | 4.808                       | 3.026                     | PASS   |
| *Average OUTPUT POWER = Raw Average Output power + DCCF |             |                          |        |                             |                           |        |
| **For more information regarding DCCF see section 4.3   |             |                          |        |                             |                           |        |



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |

#### 4.1 OUTPUT POWER

**Test Method:**

Power measurements were performed using ANSI C63.10, Section 11.9.2.2.2.

**Limits of power measurements:****For FCC Part 15.247 Device:**

The maximum allowed output power is 30 dBm.

**Test procedures:**

Details can be found in section 3.4 of this report.

**Deviations from test standard:**

No deviation.

**Test setup:**

Details can be found in section 3.4 of this report.

**EUT operating conditions:**

Details can be found in section 2.1 of this report.

**Test results:****Pass****Comments:**

1. All the output power plots can be found in Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.



Report Number: R230919-20-E1

Rev

0

Prepared for: Garmin International, Inc.

## 4.2 BANDWIDTH

### Test Method:

All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

### Limits of bandwidth measurements:

#### For FCC Part 15.247 Device:

The 99% occupied bandwidth is for informational purposes only. The 6dB bandwidth of the signal must be greater than 500 kHz.

### Test procedures:

Details can be found in section 3.4 of this report.

### Deviations from test standard:

No deviation.

### Test setup:

Test setup details can be found in section 3.4 of this report.

### EUT operating conditions:


Details can be found in section 2.1 of this report.

### Test results:

## Pass

#### Comments:

1. All the bandwidth plots can be found in Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.

|  |                |                            |     |   |
|--|----------------|----------------------------|-----|---|
|  | Report Number: | R230919-20-E1              | Rev | 0 |
|  | Prepared for:  | Garmin International, Inc. |     |   |

### 4.3 DUTY CYCLE

#### Results:

The following duty cycle and duty cycle correction factors (DCCF) were used where applicable.

Duty Cycle = ON Time / Period

Duty Cycle correction factor (for emissions) =  $20 * \log(1 / \text{Duty cycle})$

Duty Cycle correction factor (for power) =  $10 * \log(1 / \text{Duty Cycle})$

Duty cycle for 802.11b 1MB: **0.962**

Duty cycle correction factor (for emissions) for 802.11b 1MB: **0.337dB**

Duty Cycle correction factor (for power) for 802.11b 1MB: **0.168dB**

Duty cycle for 802.11b 11MB: **0.759**

Duty cycle correction factor (for emissions) for 802.11b 11MB: **2.391dB**

Duty Cycle correction factor (for power) for 802.11b 11MB: **1.196dB**

Duty cycle for 802.11g 6MB: **0.880**

Duty cycle correction factor (for emissions) for 802.11g 6MB: **1.113dB**

Duty Cycle correction factor (for power) for 802.11g 6MB: **0.557dB**

Duty cycle for 802.11g 54MB: **0.493**

Duty cycle correction factor (for emissions) for 802.11g 54MB: **6.150dB**

Duty Cycle correction factor (for power) for 802.11g 54MB: **3.075dB**

Duty cycle for 802.11n MCS0: **0.877**

Duty cycle correction factor (for emissions) for 802.11n MCS0: **1.144dB**

Duty Cycle correction factor (for power) for 802.11n MCS0: **0.572dB**

Duty cycle for 802.11n MCS7: **0.493**

Duty cycle correction factor (for emissions) for 802.11n MCS7: **6.136dB**

Duty Cycle correction factor (for power) for 802.11n MCS7: **3.068dB**



Figure 3 - Radiated Emissions Plot, 802.11b 1MB

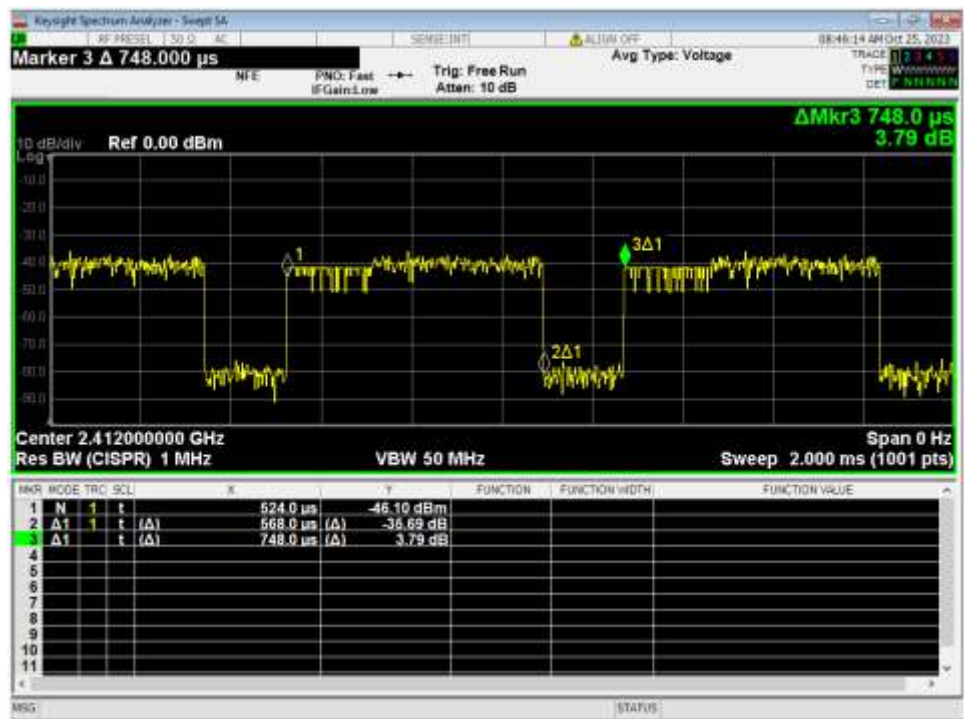


Figure 4 - Radiated Emissions Plot, 802.11b 11MB



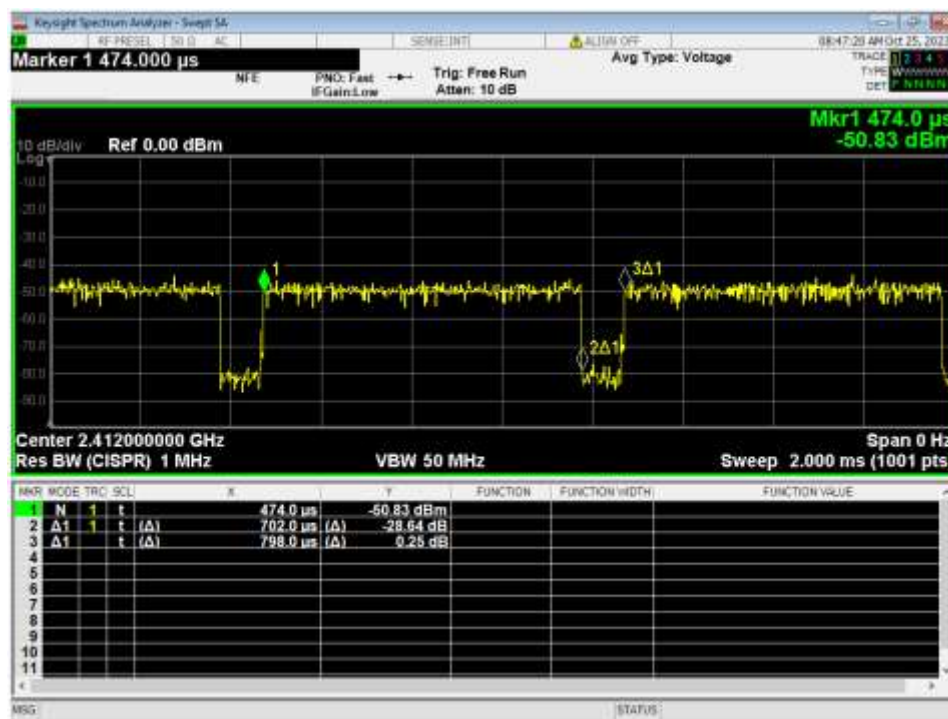


Figure 5 - Radiated Emissions Plot, 802.11g 6MB

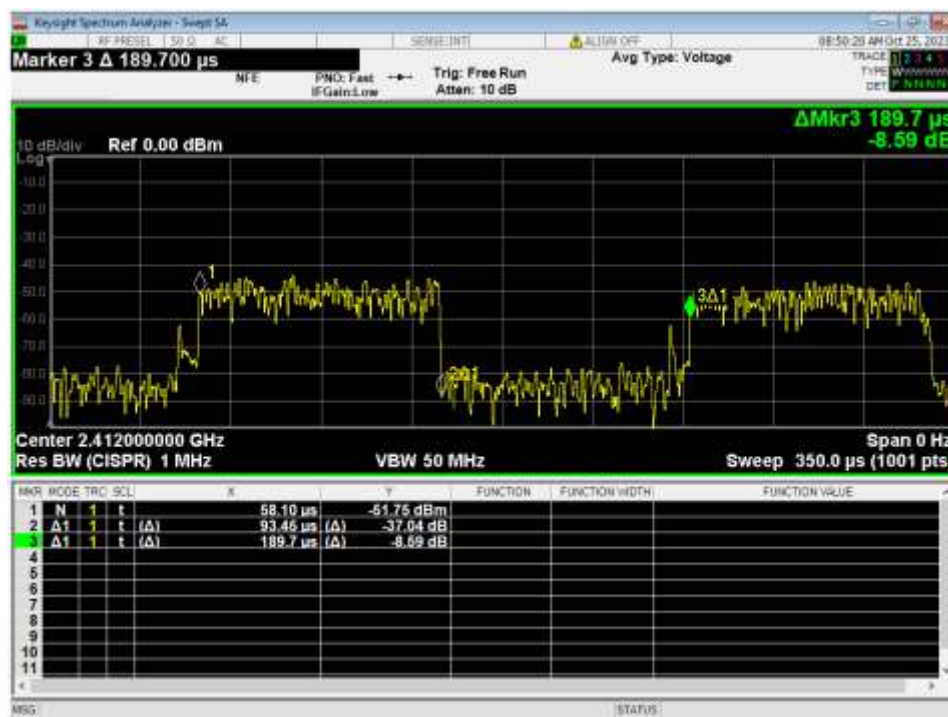


Figure 6 - Radiated Emissions Plot, 802.11G 54MB

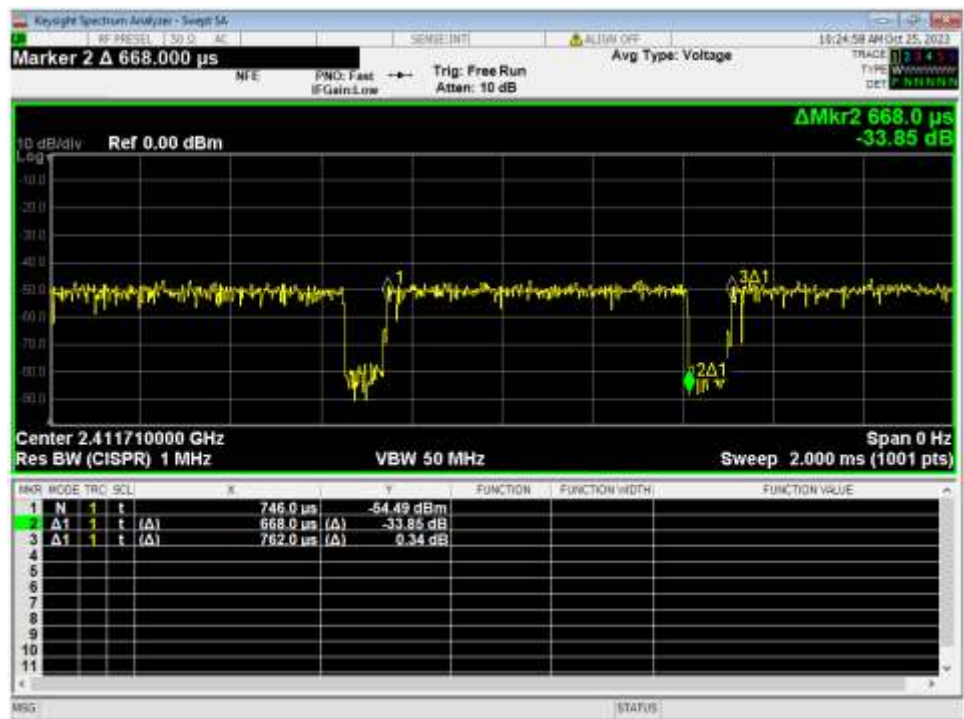


Figure 7 - Radiated Emissions Plot, 802.11n MCS0

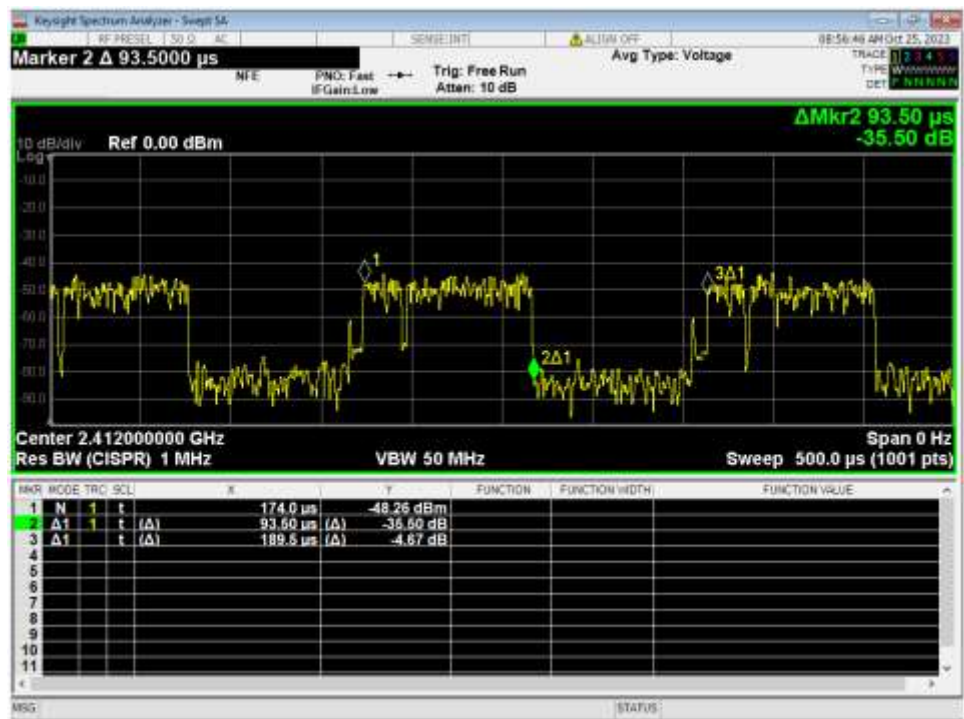


Figure 8 - Radiated Emissions Plot, 802.11n MCS7

#### 4.4 RADIATED EMISSIONS

**Test Method:**

ANSI C63.10-2013, Section 6.5, 6.6


**Limits for radiated emissions measurements:**

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

| FREQUENCIES<br>(MHz) | FIELD<br>STRENGTH<br>( $\mu\text{V/m}$ ) | MEASUREMENT<br>DISTANCE (m) |
|----------------------|--|-----------------------------|
| 0.009-0.490          | 2400/F(kHz)                              | 300                         |
| 0.490-1.705          | 24000/F(kHz)                             | 30                          |
| 1.705-30.0           | 30                                       | 3                           |
| 30-88                | 100                                      | 3                           |
| 88-216               | 150                                      | 3                           |
| 216-960              | 200                                      | 3                           |
| Above 960            | 500                                      | 3                           |

**NOTE:**


1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) =  $20 * \log * \text{Emission level } (\mu\text{V/m})$ .
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.

|  |                |                            |     |   |
|--|----------------|----------------------------|-----|---|
|  | Report Number: | R230919-20-E1              | Rev | 0 |
|  | Prepared for:  | Garmin International, Inc. |     |   |

### Test procedures:

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise, the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

### Test setup:

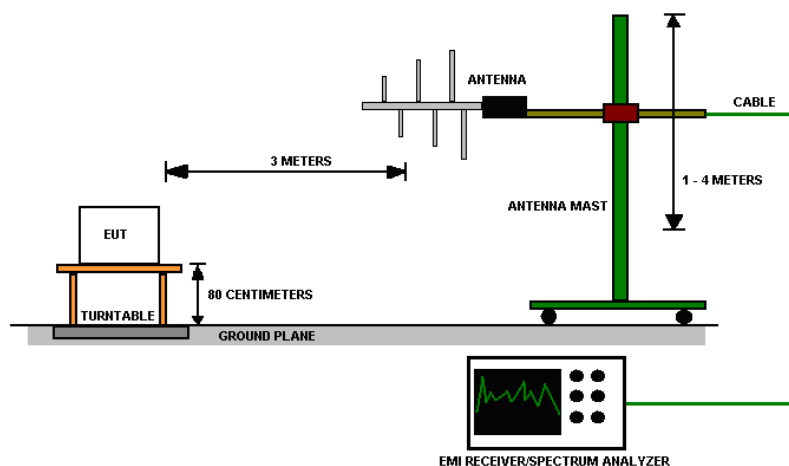

**Figure 9 - Radiated Emissions Test Setup**

### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

### Deviations from test standard:

No deviation.

### EUT operating conditions

Details can be found in section 2.1 of this report.

### Test results:

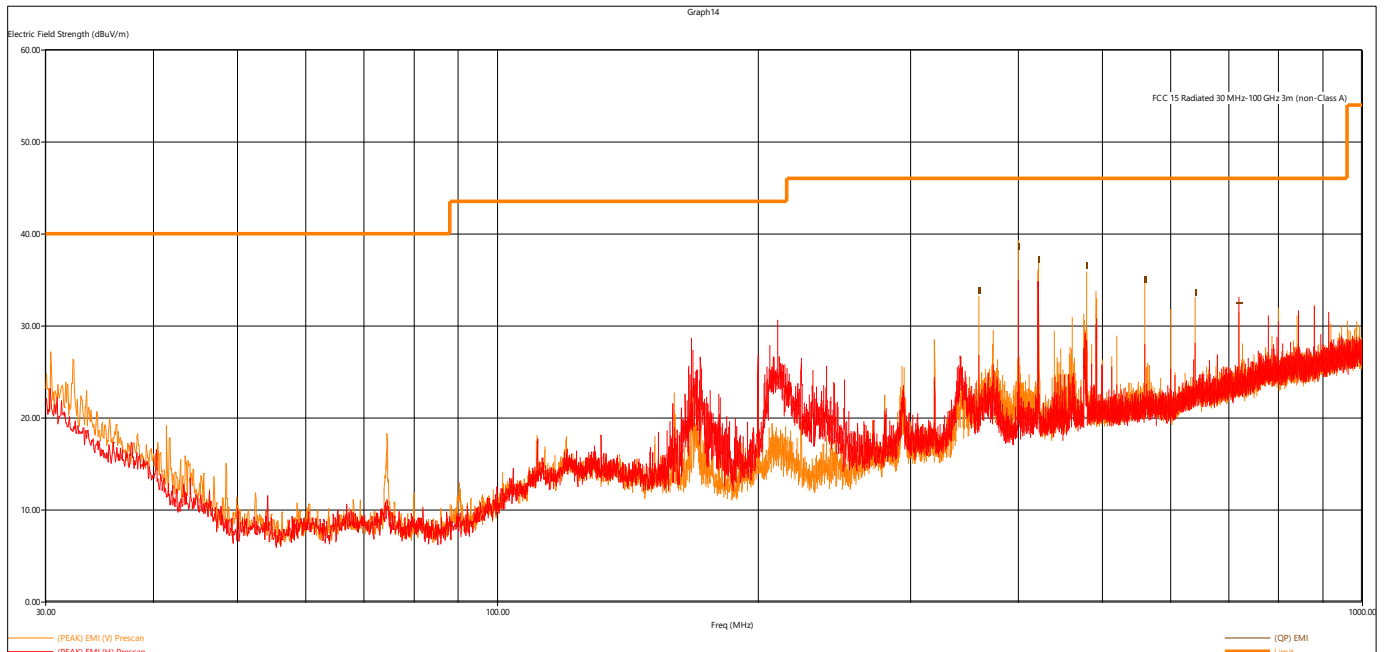


Figure 10 - Radiated Emissions Plot, Receive

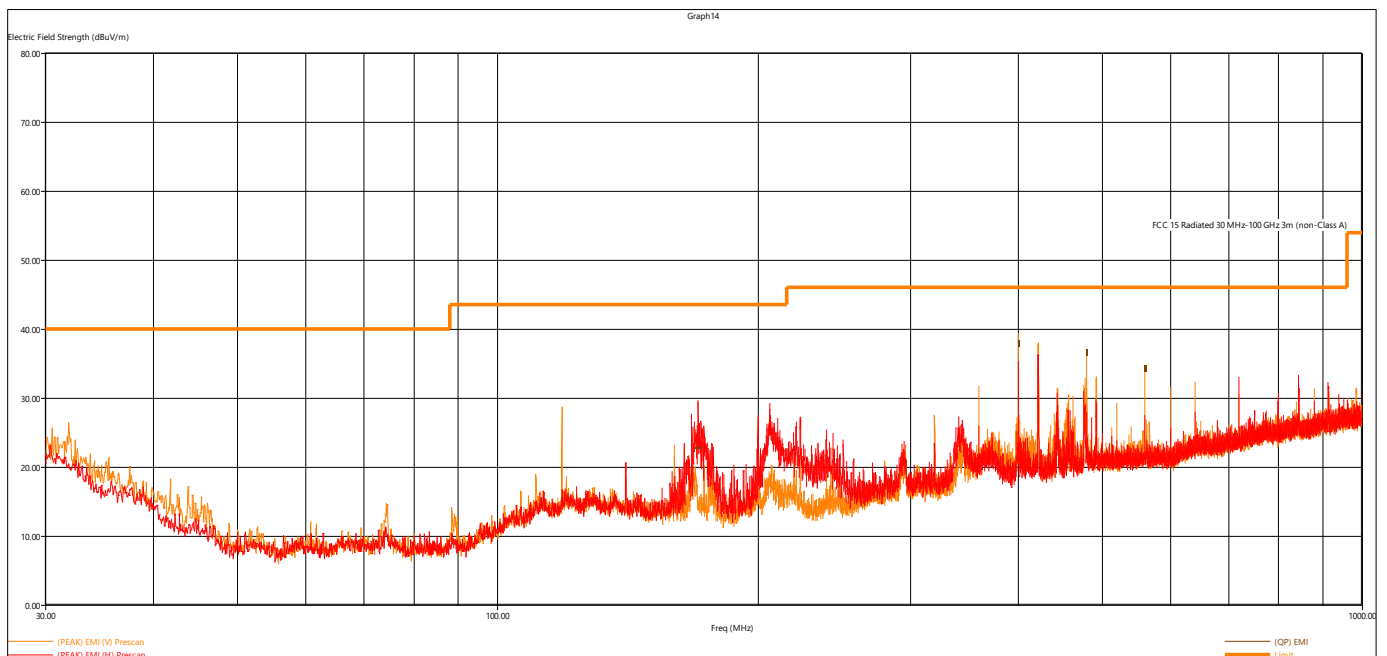


Figure 11 - Radiated Emissions Plot, 802.11b 1MB

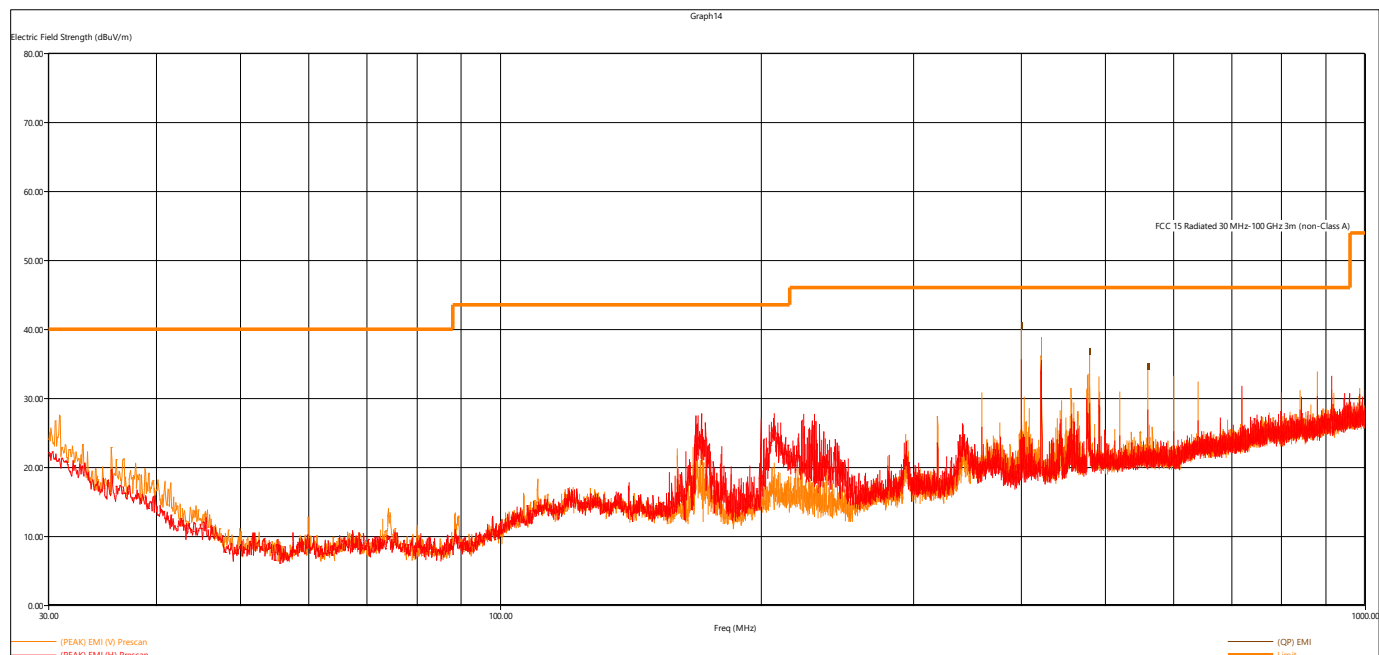


Figure 12 - Radiated Emissions Plot, 802.11b 11MB

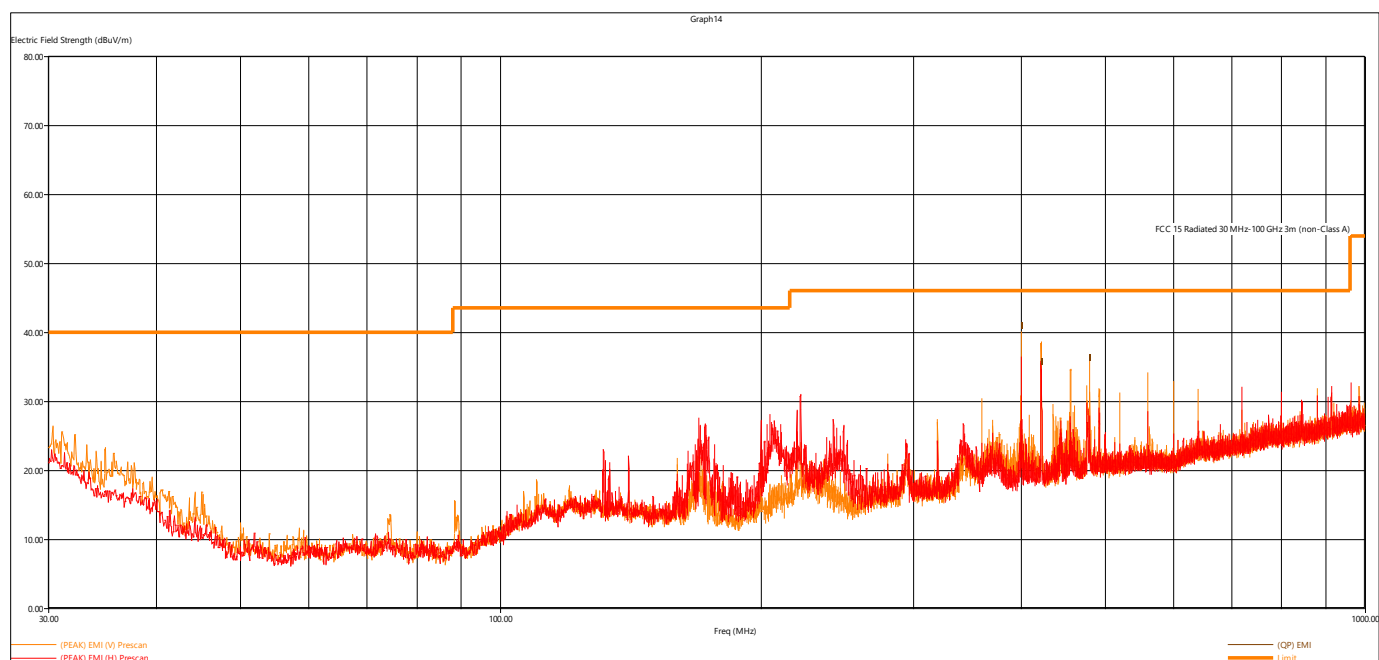


Figure 13 - Radiated Emissions Plot, 802.11g 6MB

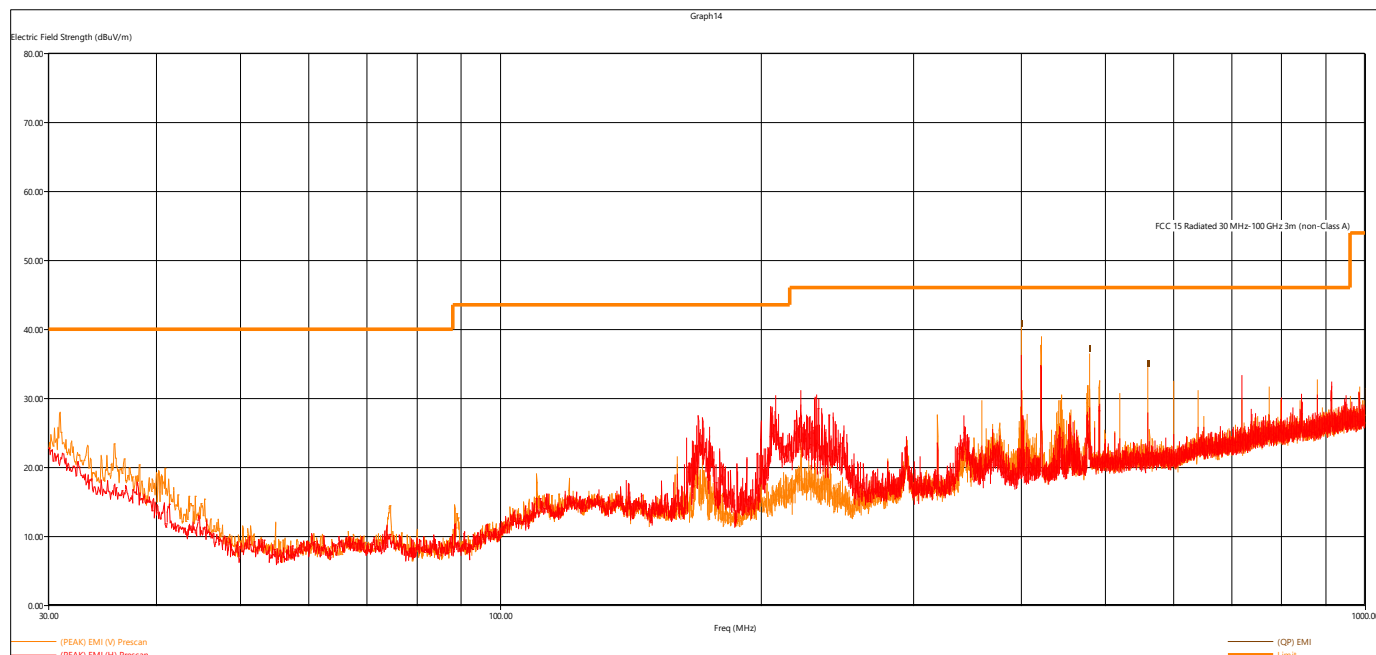


Figure 14 - Radiated Emissions Plot, 802.11g 54MB

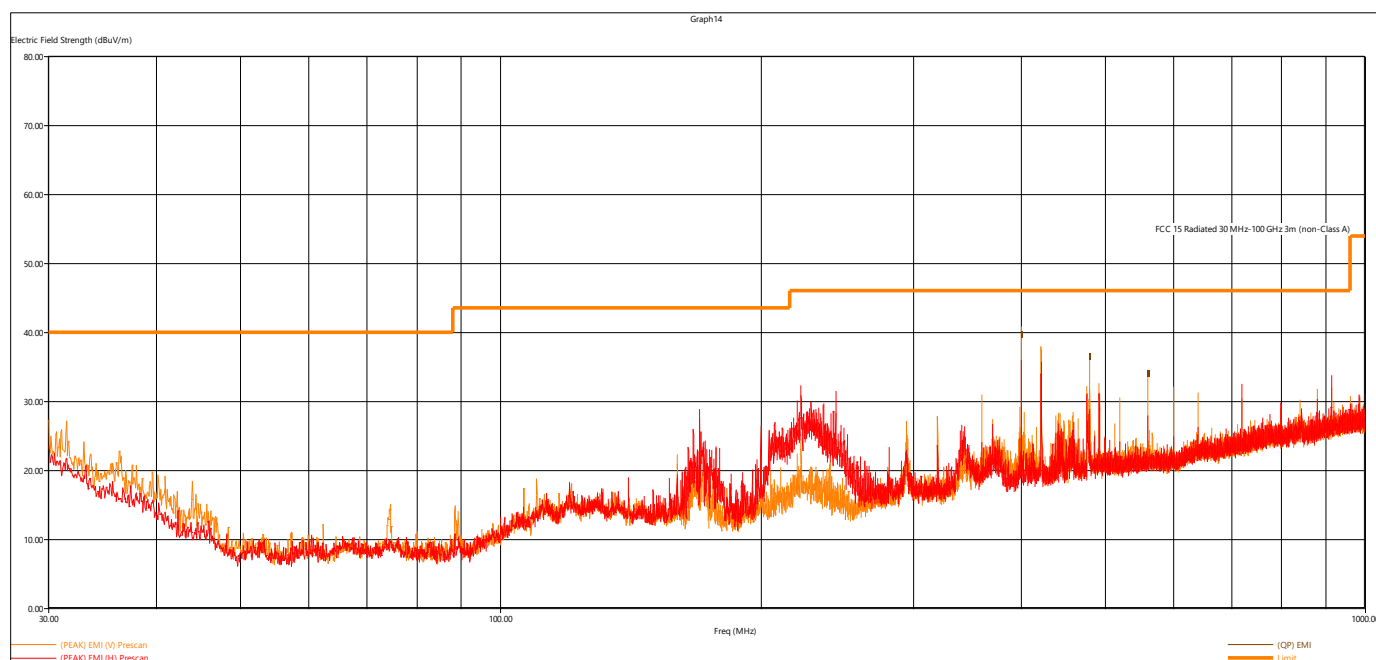


Figure 15 - Radiated Emissions Plot, 802.11n MCS0



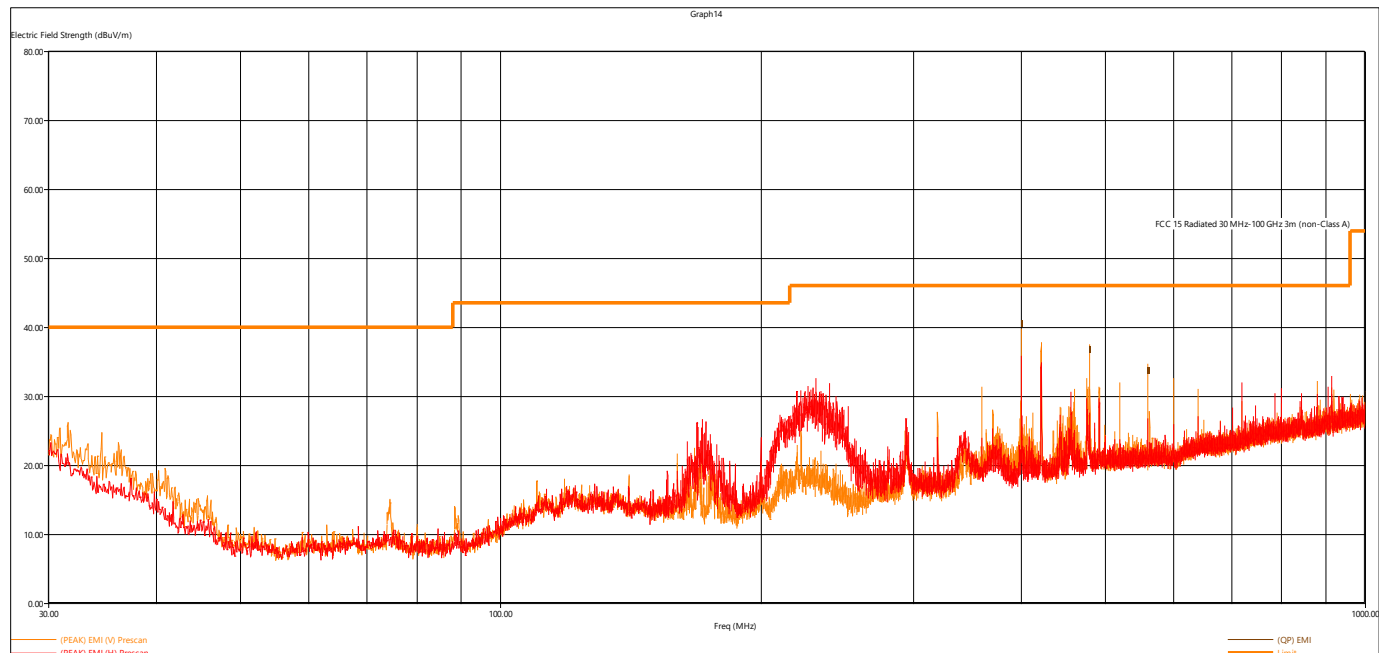


Figure 16 - Radiated Emissions Plot, 802.11n MCS7

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value



Report Number: R230919-20-E1

Rev

0

Prepared for: Garmin International, Inc.

**Quasi-Peak Measurements, 802.11x**

| Frequency  | Level  | Limit  | Margin | Height | Angle  | Pol | Channel | Modulation  |
|------------|--------|--------|--------|--------|--------|-----|---------|-------------|
| MHz        | dBμV/m | dBμV/m | dB     | cm.    | deg.   |     |         |             |
| 170.364000 | 22.65  | 43.52  | 20.87  | 282.35 | 344.50 | H   | Low     | WIFI B 1MB  |
| 400.029120 | 37.71  | 46.02  | 8.31   | 126.89 | 192.00 | V   | Low     | WIFI B 1MB  |
| 480.003360 | 36.35  | 46.02  | 9.67   | 106.53 | 196.50 | V   | Low     | WIFI B 1MB  |
| 560.016960 | 34.11  | 46.02  | 11.91  | 103.79 | 166.00 | V   | Low     | WIFI B 1MB  |
| 400.021440 | 40.31  | 46.02  | 5.71   | 119.79 | 176.75 | V   | Low     | WIFI B 11MB |
| 479.993520 | 36.54  | 46.02  | 9.48   | 108.68 | 196.50 | V   | Low     | WIFI B 11MB |
| 559.980960 | 34.37  | 46.02  | 11.65  | 103.49 | 165.00 | V   | Low     | WIFI B 11MB |
| 399.988320 | 40.68  | 46.02  | 5.34   | 111.43 | 182.50 | V   | Low     | WIFI G 6MB  |
| 422.101200 | 35.47  | 46.02  | 10.55  | 168.02 | 9.00   | V   | Low     | WIFI G 6MB  |
| 479.994240 | 36.19  | 46.02  | 9.83   | 103.67 | 192.25 | V   | Low     | WIFI G 6MB  |
| 400.011360 | 40.66  | 46.02  | 5.36   | 111.67 | 181.25 | V   | Low     | WIFI G 54MB |
| 480.010080 | 36.99  | 46.02  | 9.03   | 103.37 | 178.50 | V   | Low     | WIFI G 54MB |
| 560.007840 | 34.76  | 46.02  | 11.26  | 103.43 | 161.50 | V   | Low     | WIFI G 54MB |
| 399.976080 | 39.47  | 46.02  | 6.55   | 123.61 | 190.50 | V   | Low     | WIFI N MCS0 |
| 479.994720 | 36.26  | 46.02  | 9.76   | 107.43 | 192.00 | V   | Low     | WIFI N MCS0 |
| 560.009040 | 33.85  | 46.02  | 12.17  | 109.10 | 163.75 | V   | Low     | WIFI N MCS0 |
| 400.002000 | 40.44  | 46.02  | 5.58   | 116.38 | 166.00 | V   | Low     | WIFI N MCS7 |
| 479.989440 | 36.55  | 46.02  | 9.47   | 105.46 | 186.75 | V   | Low     | WIFI N MCS7 |
| 559.995600 | 33.59  | 46.02  | 12.43  | 104.98 | 175.25 | V   | Low     | WIFI N MCS7 |
| 719.986080 | 32.33  | 46.02  | 13.69  | 103.91 | 135.25 | H   |         | RX          |
| 360.000480 | 33.68  | 46.02  | 12.34  | 124.02 | 173.25 | V   |         | RX          |
| 399.989040 | 38.45  | 46.02  | 7.57   | 124.44 | 180.25 | V   |         | RX          |
| 421.745040 | 37.01  | 46.02  | 9.01   | 119.01 | 0.00   | V   |         | RX          |
| 479.984160 | 36.39  | 46.02  | 9.63   | 108.14 | 187.00 | V   |         | RX          |
| 560.016000 | 34.91  | 46.02  | 11.11  | 104.32 | 156.75 | V   |         | RX          |
| 639.988800 | 33.54  | 46.02  | 12.48  | 156.62 | 192.25 | V   |         | RX          |

All other measurements were found to be at least 6 dB below the limit. Worst case emissions are reported.



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |

| Peak Measurements, 802.11x |        |        |        |        |        |     |         |              |
|----------------------------|--------|--------|--------|--------|--------|-----|---------|--------------|
| Frequency                  | Level  | Limit  | Margin | Height | Angle  | Pol | Channel | Modulation   |
| MHz                        | dBμV/m | dBμV/m | dB     | cm.    | deg.   |     |         |              |
| 3656.378000                | 53.83  | 73.98  | 20.15  | 457.64 | 282.75 | V   | 6       | 802.11b 11MB |
| 3658.680000                | 53.43  | 73.98  | 20.55  | 424.74 | 277.25 | V   | 6       | 802.11g 6MB  |
| 3656.324000                | 53.21  | 73.98  | 20.77  | 435.79 | 279.75 | V   | 6       | 802.11g 54MB |
| 3656.288000                | 53.77  | 73.98  | 20.21  | 483.07 | 281.00 | V   | 6       | 802.11n MCS0 |
| 3656.200000                | 52.58  | 73.98  | 21.40  | 537.76 | 278.75 | V   | 6       | 802.11n MCS7 |

The EUT was maximized on all 3 orthogonal axes. The worst-case is shown in the plot and table above.  
All other measurements were found to be at least 6 dB Below the limit.

| Average Measurements, 802.11x |           |       |                     |        |        |        |        |     |     |              |
|-------------------------------|-----------|-------|---------------------|--------|--------|--------|--------|-----|-----|--------------|
| Freq                          | Avg Level | DCCF  | Corrected Avg Level | Limit  | Margin | Height | Angle  | Pol | Ch. | Modulation   |
| MHz                           | dBμV/m    | dB    | dB                  | dBμV/m | dB     | cm.    | deg.   |     |     |              |
| 3656.378000                   | 43.63     | 2.391 | 46.021              | 53.98  | 7.959  | 457.64 | 282.75 | V   | 6   | 802.11b 11MB |
| 3658.680000                   | 41.59     | 1.113 | 42.703              | 53.98  | 11.277 | 424.74 | 277.25 | V   | 6   | 802.11g 6MB  |
| 3656.324000                   | 37.48     | 6.150 | 43.630              | 53.98  | 10.350 | 435.79 | 279.75 | V   | 6   | 802.11g 54MB |
| 3656.288000                   | 41.61     | 1.144 | 42.754              | 53.98  | 11.226 | 483.07 | 281.00 | V   | 6   | 802.11n MCS0 |
| 3656.200000                   | 36.91     | 6.136 | 43.046              | 53.98  | 10.934 | 537.76 | 278.75 | V   | 6   | 802.11n MCS7 |

The EUT was maximized on all 3 orthogonal axes. The worst-case is shown in the plot and table above.  
All other measurements were found to be at least 6 dB Below the limit.

Corrected Avg Level = Avg Level + DCCF, for more information regarding DCCF, see Sec 4.3.



Report Number: R230919-20-E1

Rev

0

Prepared for: Garmin International, Inc.

#### 4.5 CONDUCTED SPURIOUS EMISSIONS

**Test Method:**

ANSI C63.10-2013, Section 6.7

**Limits of spurious emissions:**

**From FCC Part 15.247:**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Test procedures:**

The highest emissions level was measured and recorded. All spurious measurements were evaluated to 30dB below the fundamental. More details can be found in section 3.4 of this report. The line shown in the plots is a reference line placed at -20dBm, this is just for reference only.

**Deviations from test standard:**

None.

**Test setup:**

Test setup details can be found in section 3.4 of this report.

**EUT operating conditions:**

Details can be found in section 2.1 of this report.

**Test results:**

Data rates and channels were investigated and worst case was reported. no emissions exceeded the limits.

There was no distinguishable difference between low and high data rate.

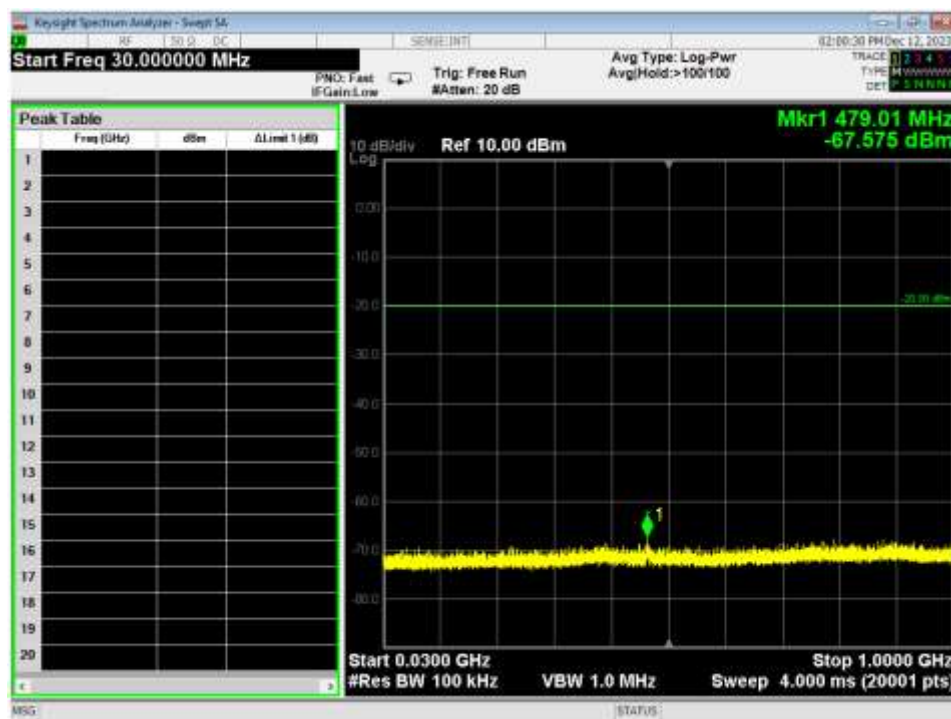


Figure 17 - Radiated Emissions Plot, WIFI 802.11b, 30M – 1G, Mid Channel

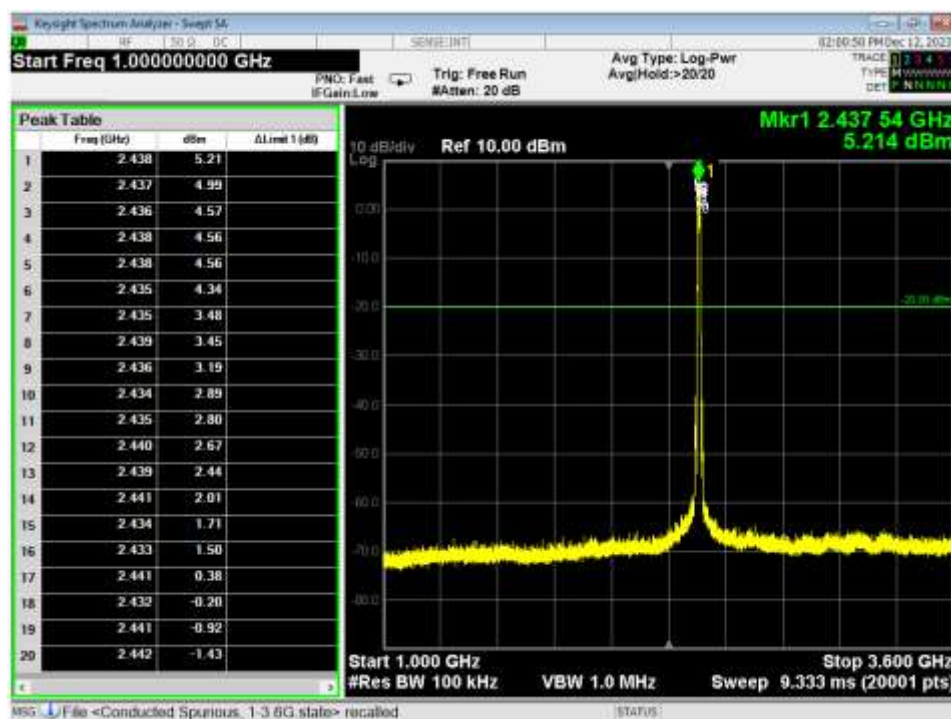


Figure 18 - Radiated Emissions Plot, WIFI 802.11b, 1G – 3.6G, Mid Channel

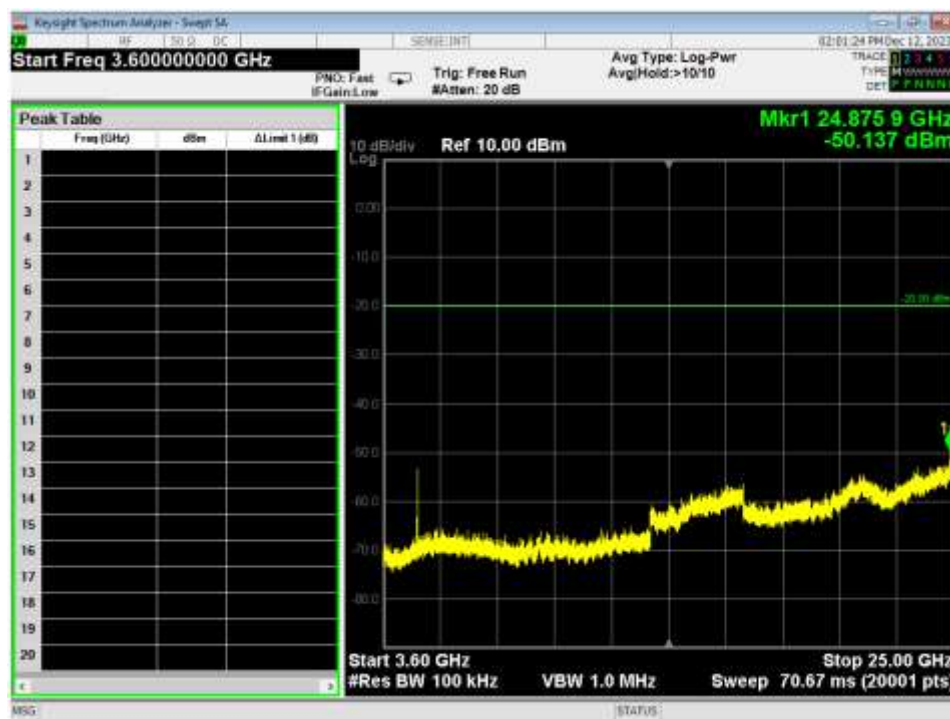


Figure 19 - Radiated Emissions Plot, WIFI 802.11b, 3.6G – 25G, Mid Channel

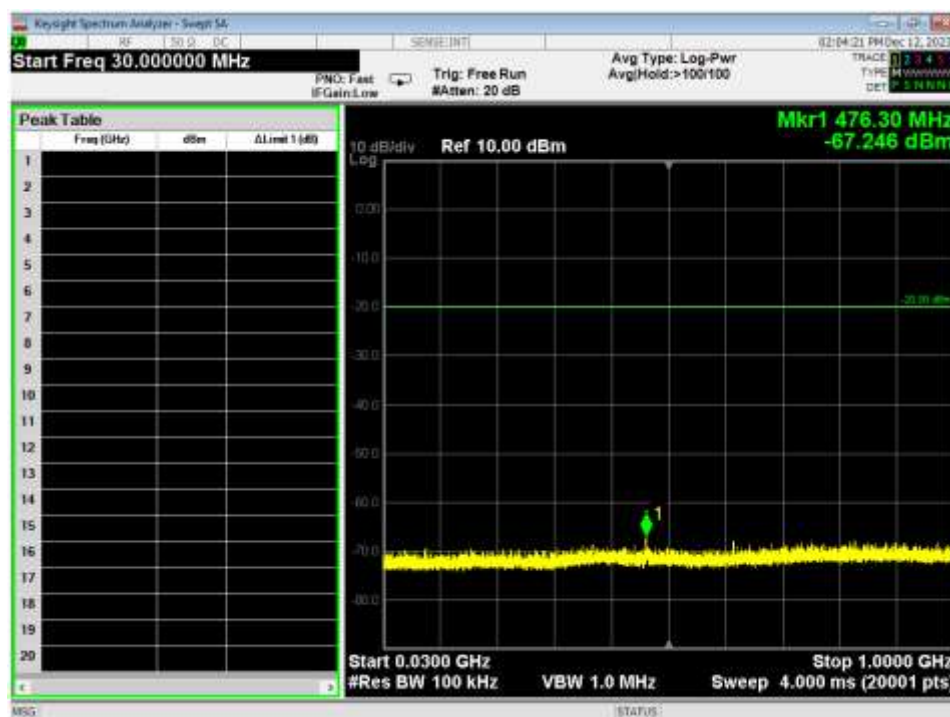


Figure 20 - Radiated Emissions Plot, WIFI 802.11g, 30M – 1G, Mid Channel

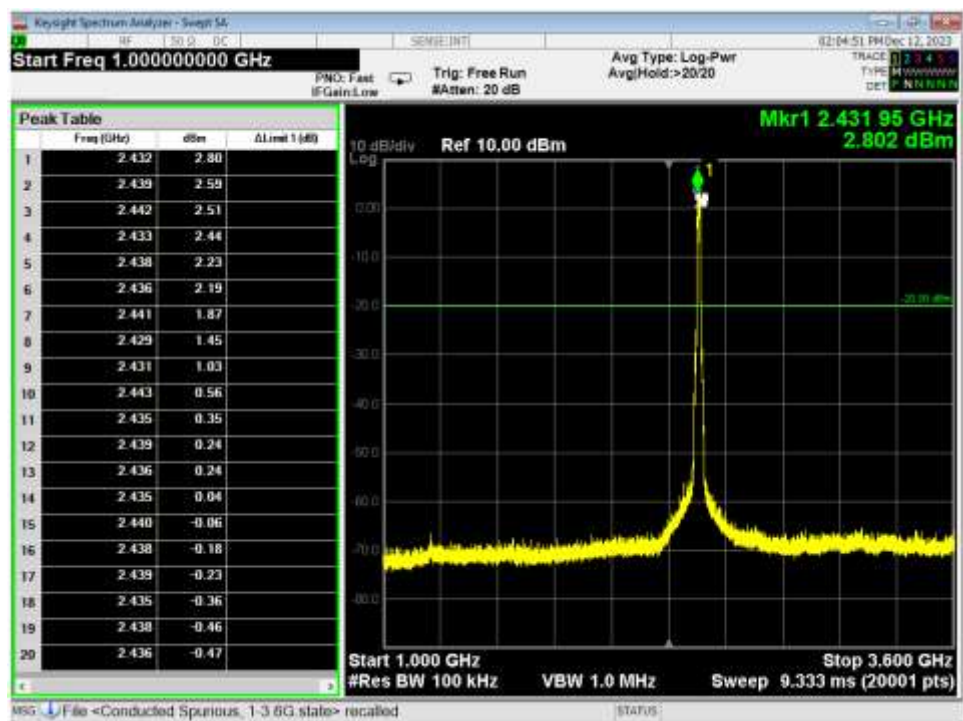


Figure 21 - Radiated Emissions Plot, WIFI 802.11g, 1G – 3.6G, Mid Channel

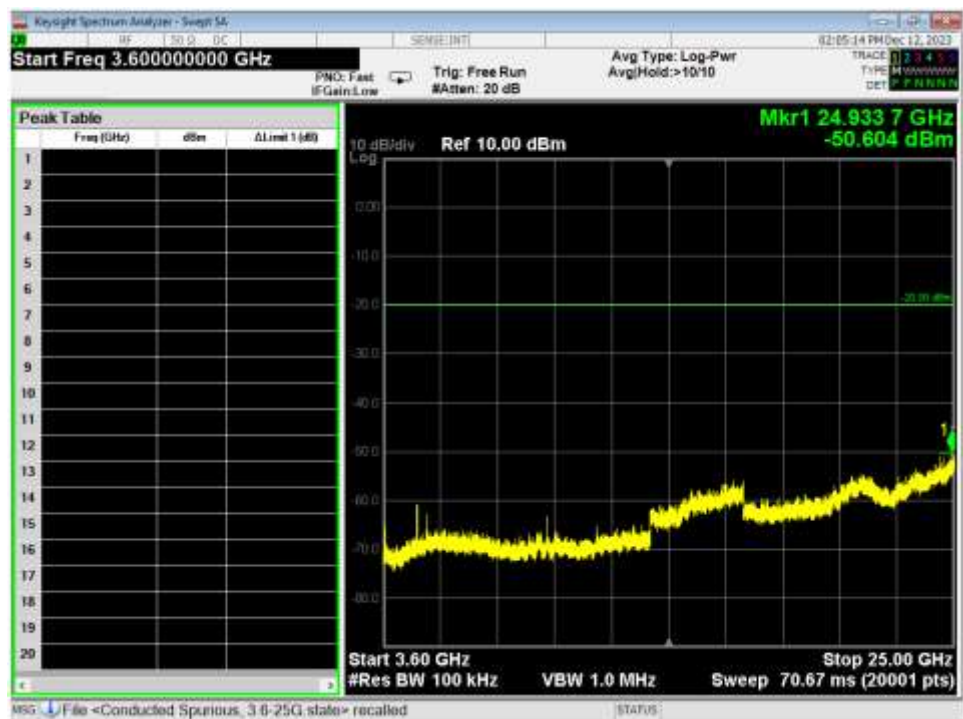


Figure 22 - Radiated Emissions Plot, WIFI 802.11g, 3.6G – 25G, Mid Channel



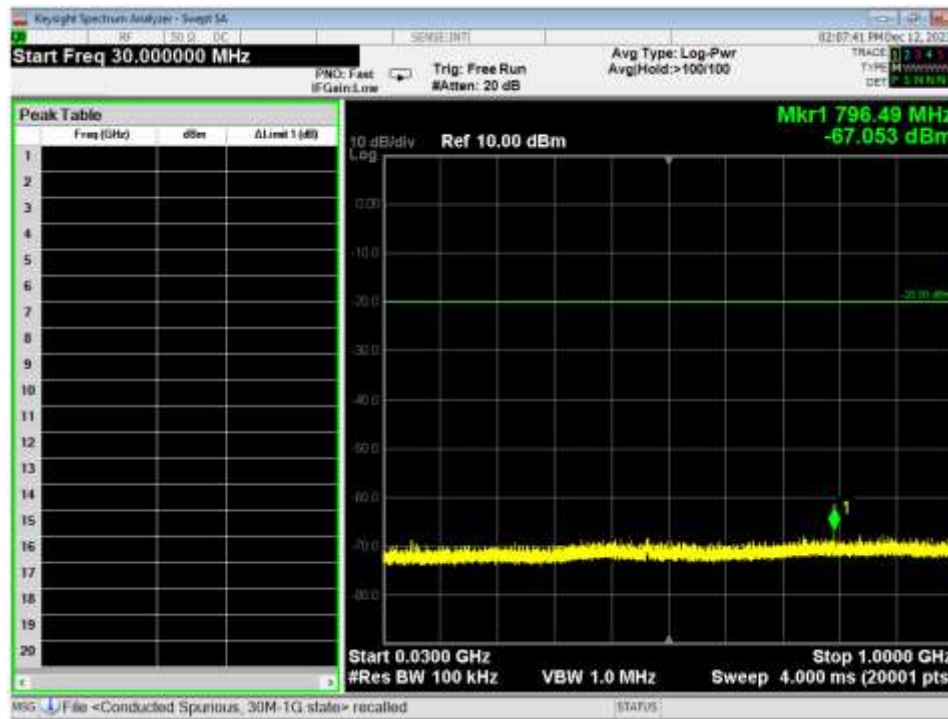


Figure 23 - Radiated Emissions Plot, WIFI 802.11n, 30M – 1G, Mid Channel

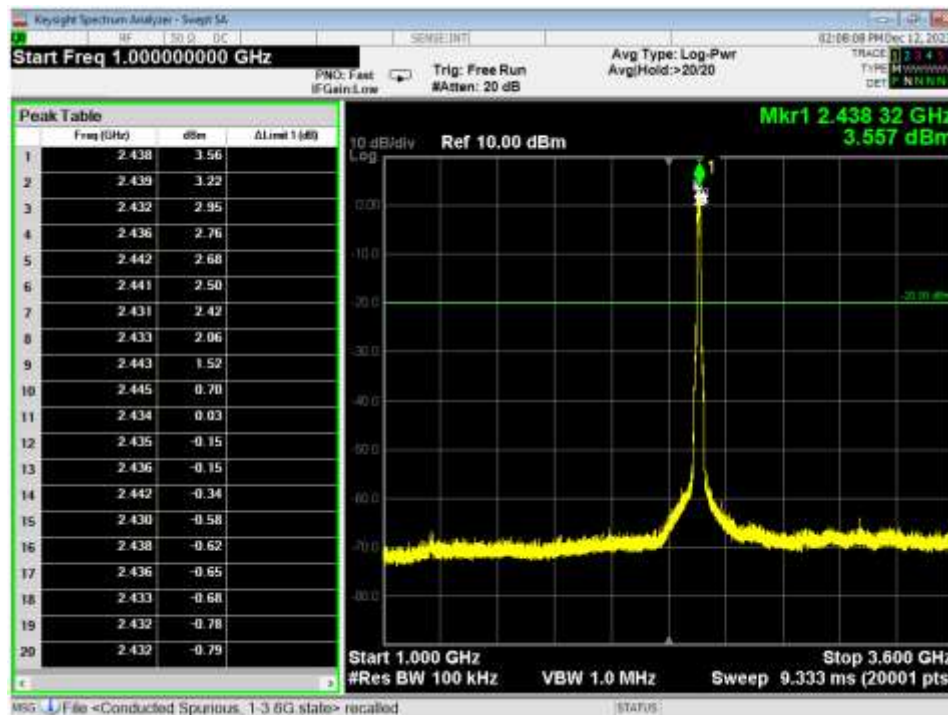


Figure 24 - Radiated Emissions Plot, WIFI 802.11n, 1G – 3.6G, Mid Channel



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |

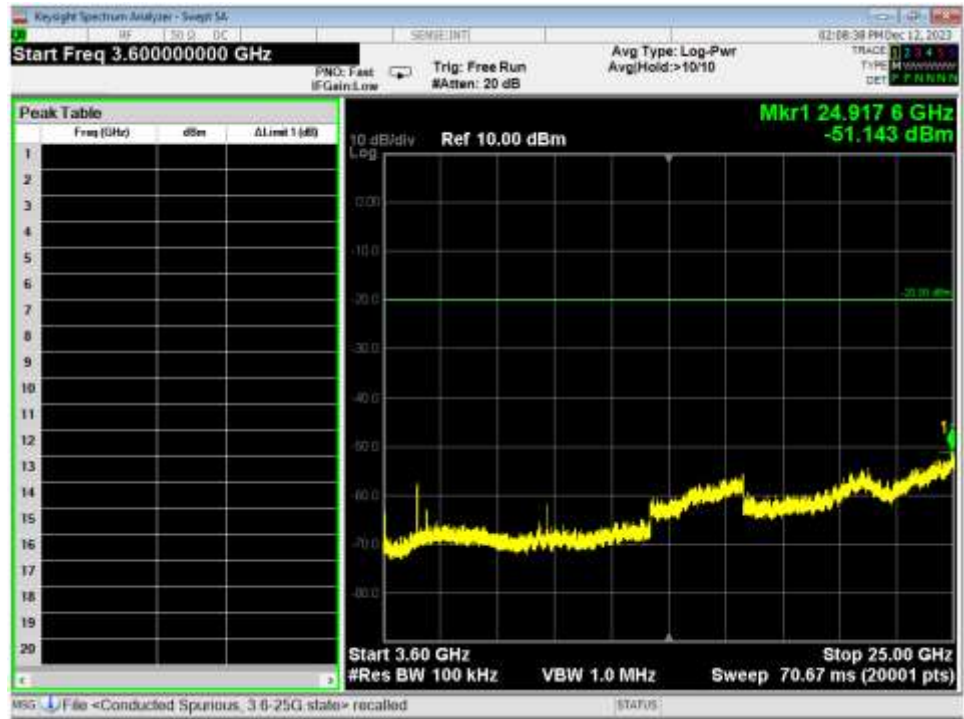


Figure 25 - Radiated Emissions Plot, WIFI 802.11n, 3.6G – 25G, Mid Channel



Report Number: R230919-20-E1

Rev

0

Prepared for: Garmin International, Inc.

#### 4.6 BAND EDGES

**Test Method:**

All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

**Limits of band-edge measurements:****For FCC Part 15.247 Device:**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**Test procedures:**

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

**Deviations from test standard:**

No deviation.

**Test setup:**

Test setup details can be found in section 3.4 of this report.

**EUT operating conditions:**

Details can be found in section 2.1 of this report.



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |

**Test results:**

**Pass**

Comments:

1. All the band edge plots can be found in Appendix C.
2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
3. The restricted band edge compliance is shown by comparing it to the general limit defined in Part 15.209. The limit shown in the graph accounts for the antenna gain of the device.



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |

## 4.7 POWER SPECTRAL DENSITY

### Test Method:

All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

### Limits of power measurements:

#### For FCC Part 15.247 Device:

The maximum PSD allowed is 8 dBm.

### Test procedures:

Details can be found in section 3.4 of this report.

### Deviations from test standard:

No deviation.

### Test setup:

Details can be found in section 3.4 of this report.

### EUT operating conditions:

Details can be found in section 2.1 of this report.

### Test results:

## Pass

#### Comments:

1. All the Power Spectral Density (PSD) plots can be found in Appendix C.
2. All the measurements were found to be compliant.
3. The measurements are listed in the tables in section 4.0.



Report Number: R230919-20-E1

Rev

0

Prepared for: Garmin International, Inc.

## APPENDIX A: SAMPLE CALCULATION

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB $\mu$ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB $\mu$ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB $\mu$ V/m value can be mathematically converted to its corresponding level in  $\mu$ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by taking the  $20 \cdot \log(T_{\text{on}}/100)$  where  $T_{\text{on}}$  is the maximum transmission time in any 100ms window.



Report Number: R230919-20-E1

Rev

0

Prepared for: Garmin International, Inc.

### EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP (Watts) = [Field Strength (V/m) \times antenna distance (m)]^2 / 30$$

$$Power (watts) = 10^{[Power (dBm)/10]} / 1000$$

$$Voltage (dB\mu V) = Power (dBm) + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$Field Strength (V/m) = 10^{[Field Strength (dB\mu V/m) / 20]} / 10^6$$

$$Gain = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [FS(V/m) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(dBm) = FS(dB\mu V/m) - 10(\log 10^9) + 10\log[0.3] = FS(dB\mu V/m) - 95.23$$

$10\log(10^9)$  is the conversion from micro to milli



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |


## APPENDIX B – MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:


| Test                        | Frequency Range | Uncertainty Value (dB) |
|-----------------------------|-----------------|------------------------|
| Radiated Emissions, 3m      | 30MHz - 1GHz    | ±4.31                  |
| Radiated Emissions, 3m      | 1GHz - 18GHz    | ±5.08                  |
| Emissions limits, conducted | 30MHz – 18GHz   | ±3.03                  |

Expanded uncertainty values are calculated to a confidence level of 95%.

## APPENDIX C – GRAPHS AND TABLES

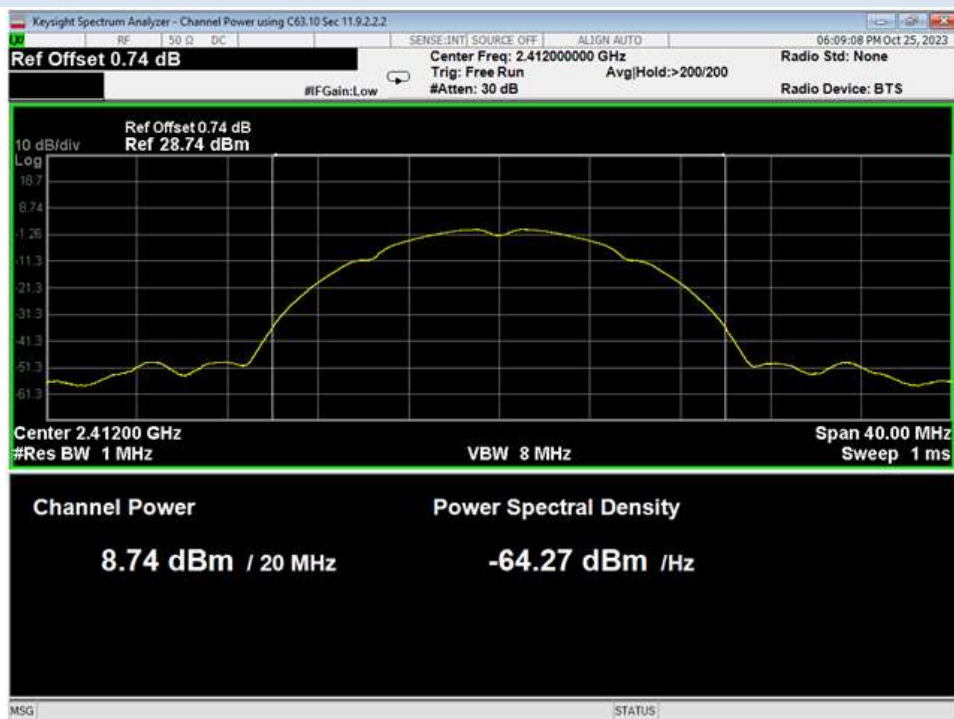


01 Average Power, Low, Wifi B, Low Data Rate

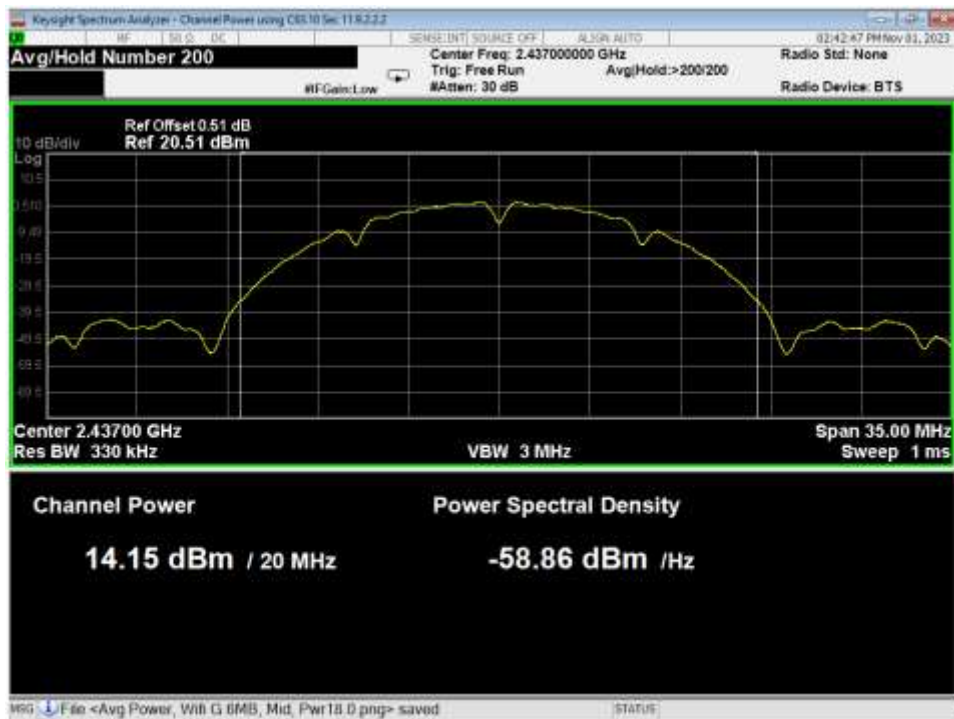

02 Average Power, Mid, Wifi B, Low Data Rate



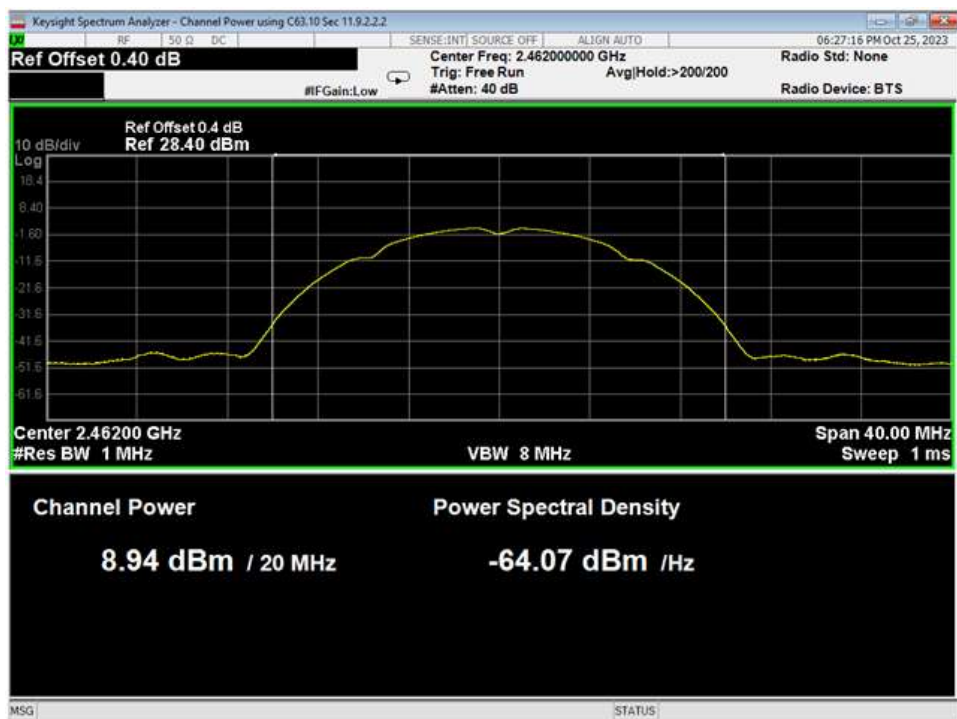

03 Average Power, High, Wifi B, Low Data Rate



04 6dB Bandwidth, Low, Wifi B, Low Data Rate




05 6dB Bandwidth, Mid, Wifi B, Low Data Rate



06 6dB Bandwidth, High, Wifi B, Low Data Rate


|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |

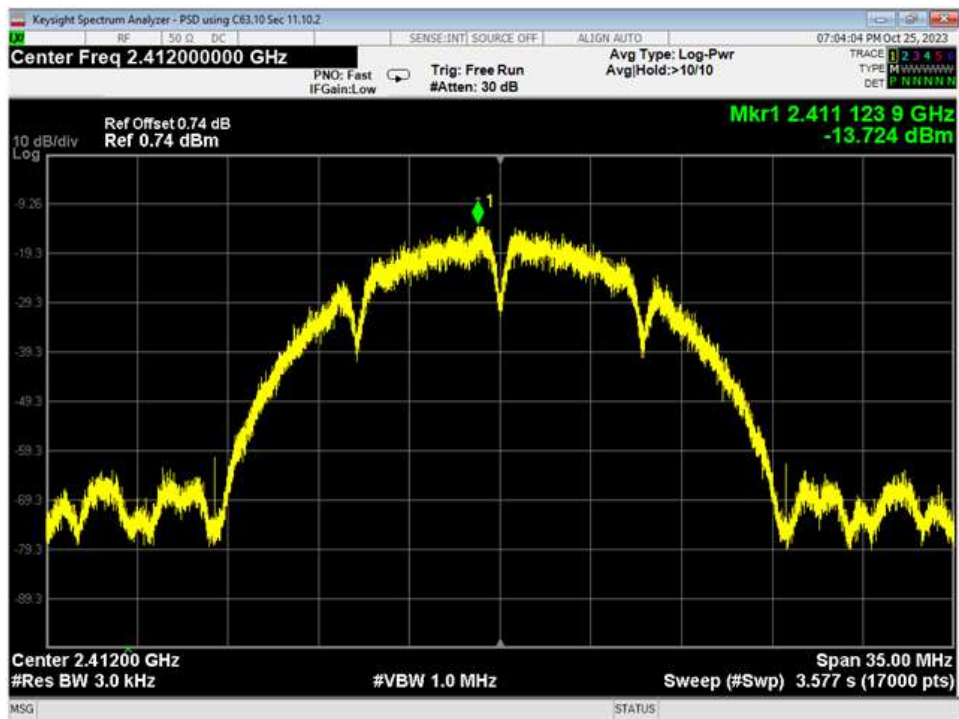

07 PSD, Low, Wifi B, Low Data Rate



08 PSD, Mid, Wifi B, Low Data Rate

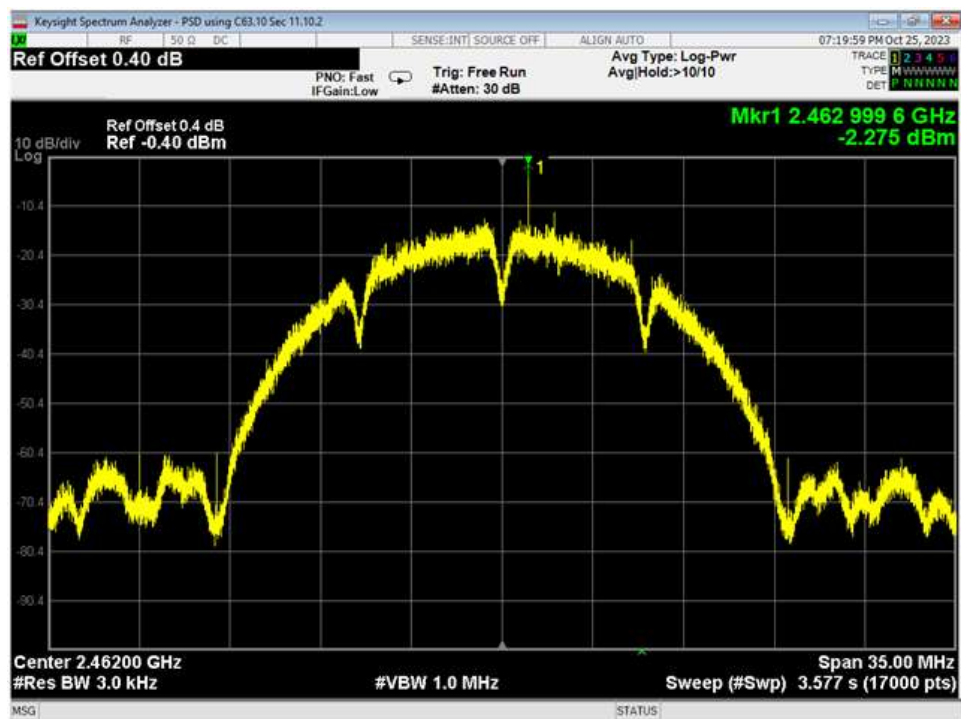


09 PSD, High, Wifi B, Low Data Rate



10 LBE Unrestricted, Wifi B, Low Data Rate




11 HBE Unrestricted, Wifi B, Low Data Rate

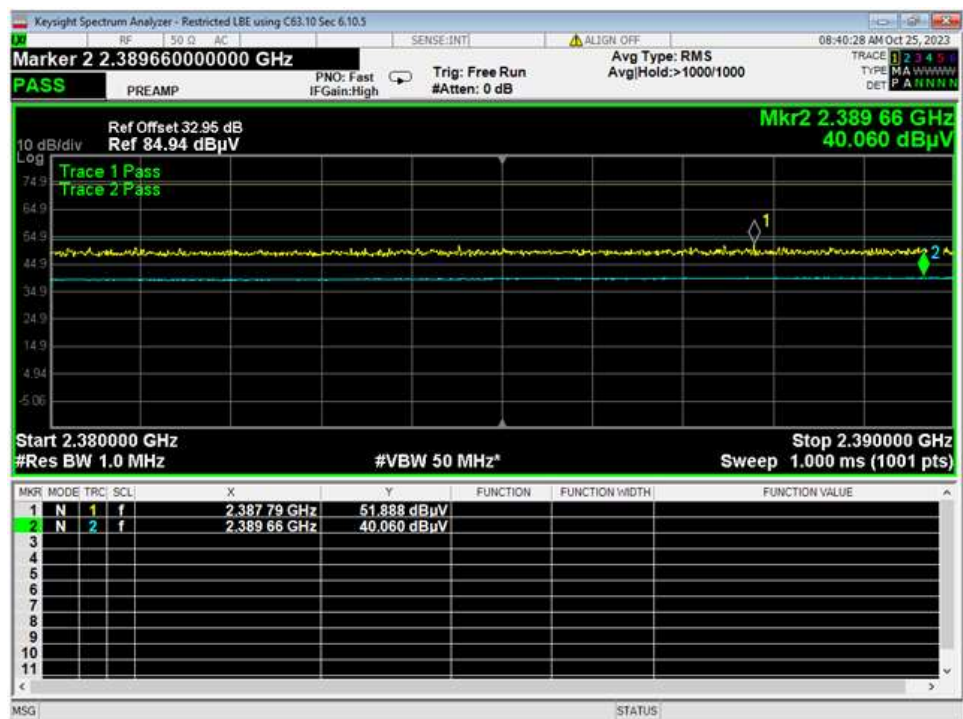


12 LBE Restricted, Wifi B, Low Data Rate



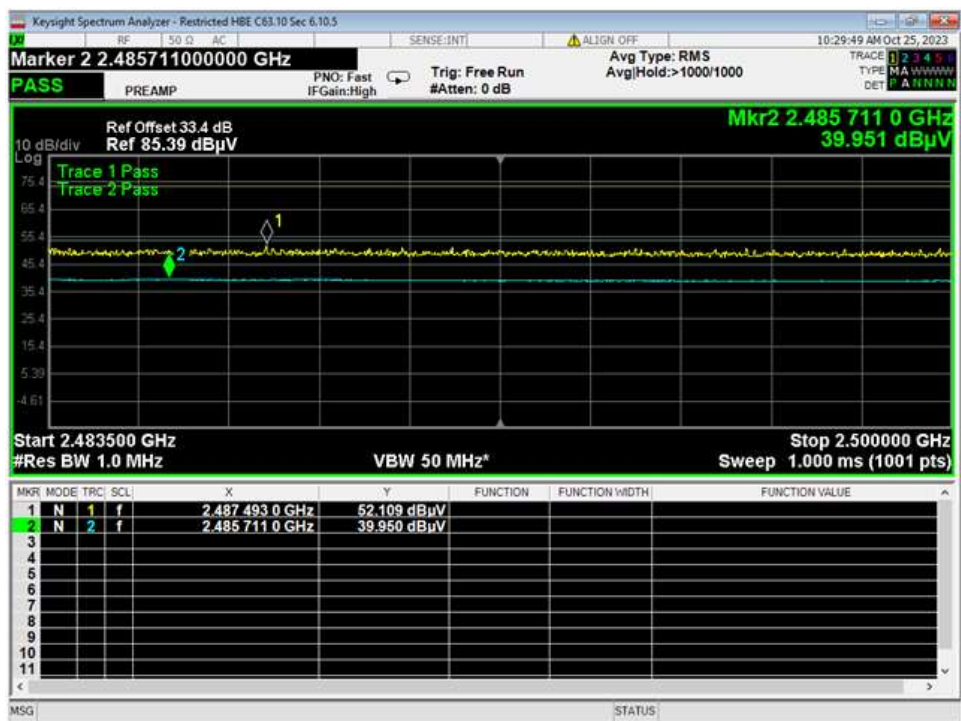


13 HBE Restricted, Wifi B, Low Data Rate

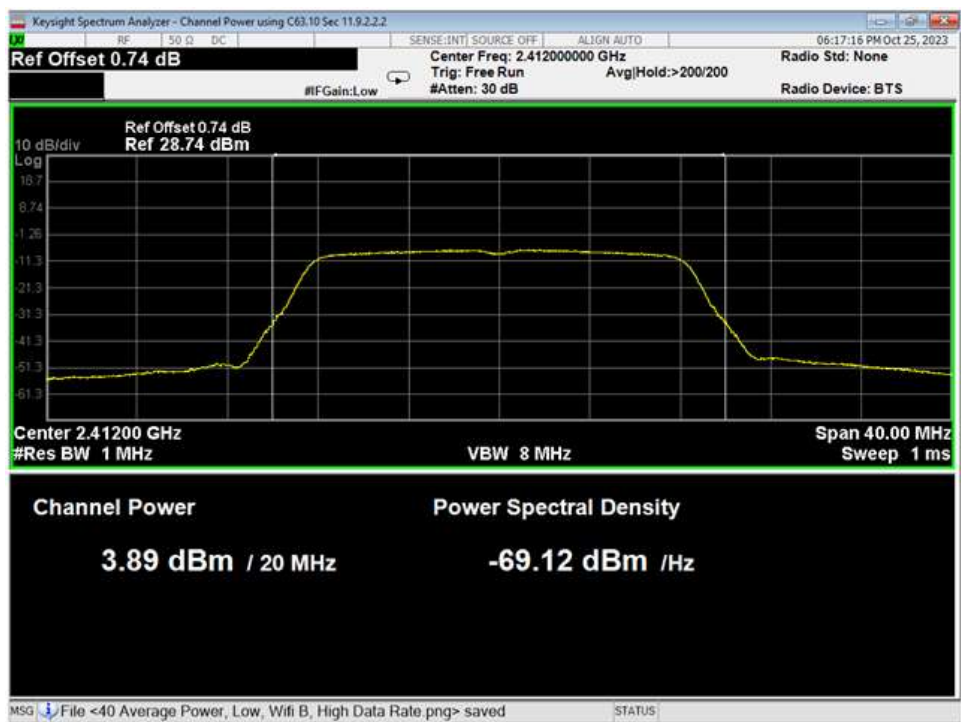


14 Average Power, Low, Wifi G, Low Data Rate


|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |

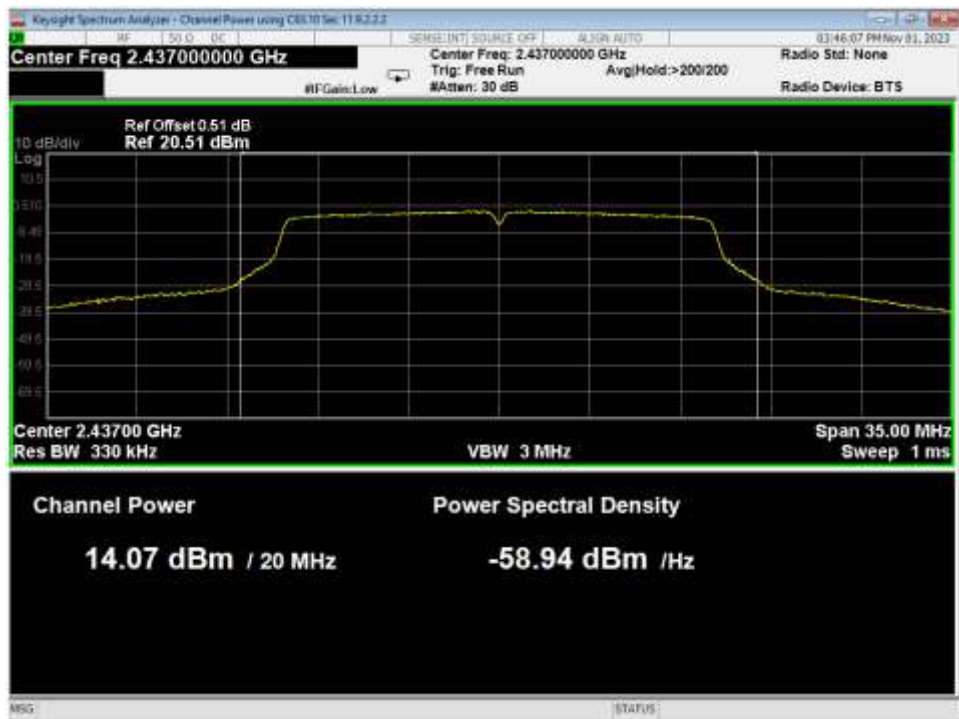


15 Average Power, Mid, Wifi G, Low Data Rate

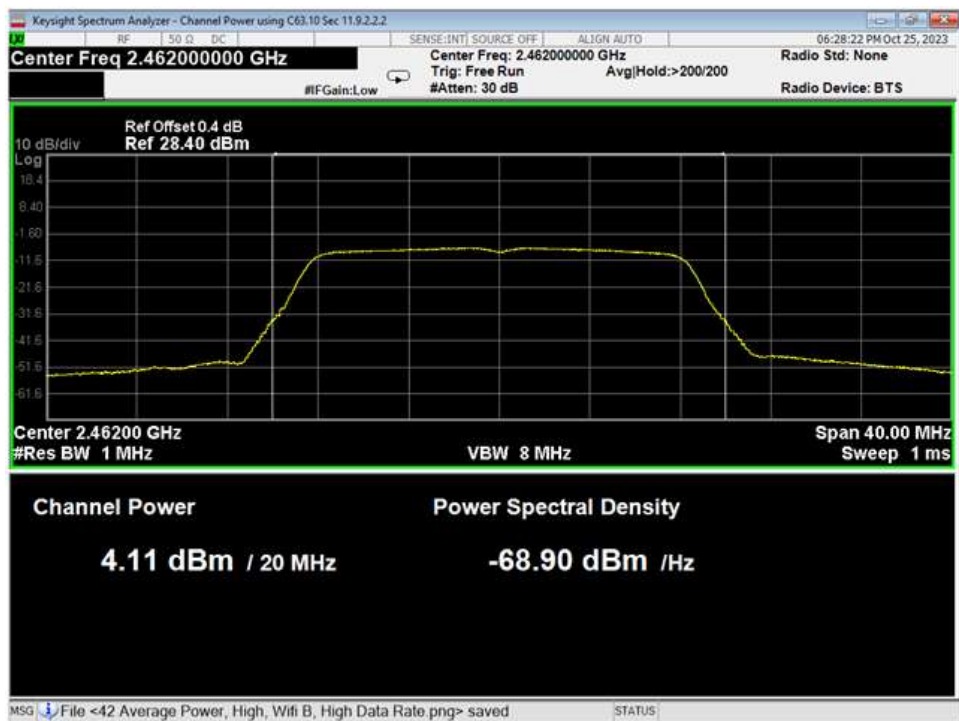

16 Average Power, High, Wifi G, Low Data Rate

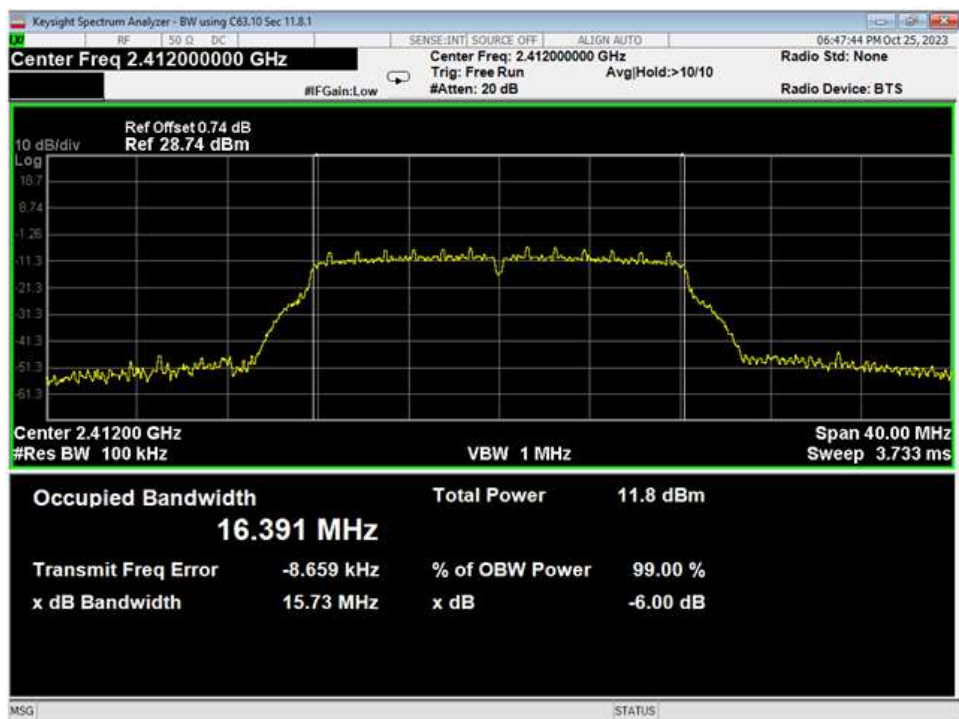


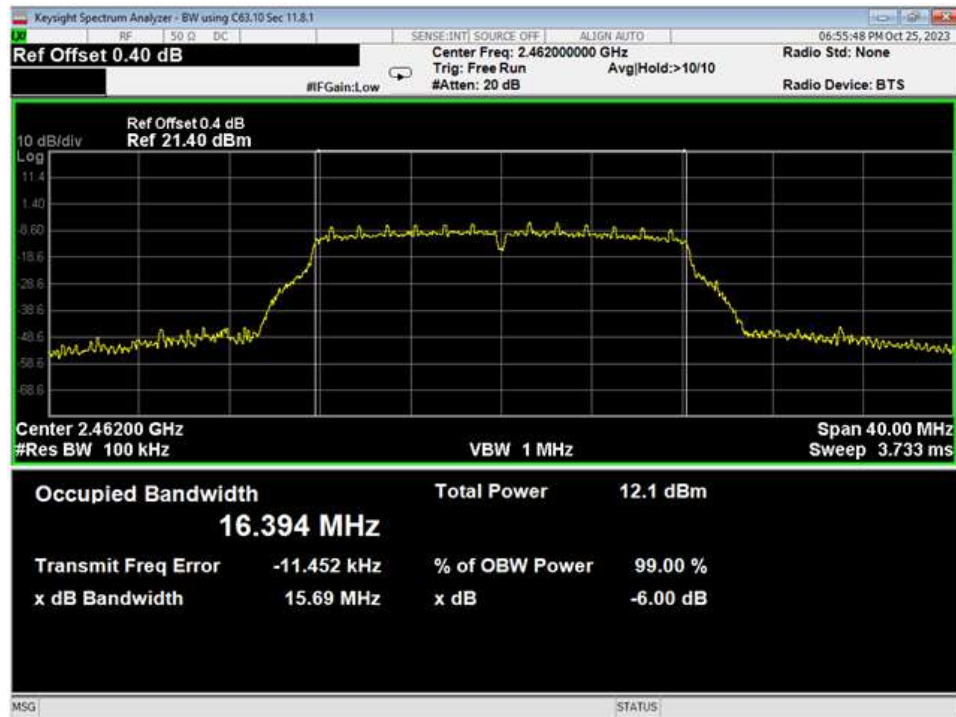
17 6dB Bandwidth, Low, Wifi G, Low Data Rate

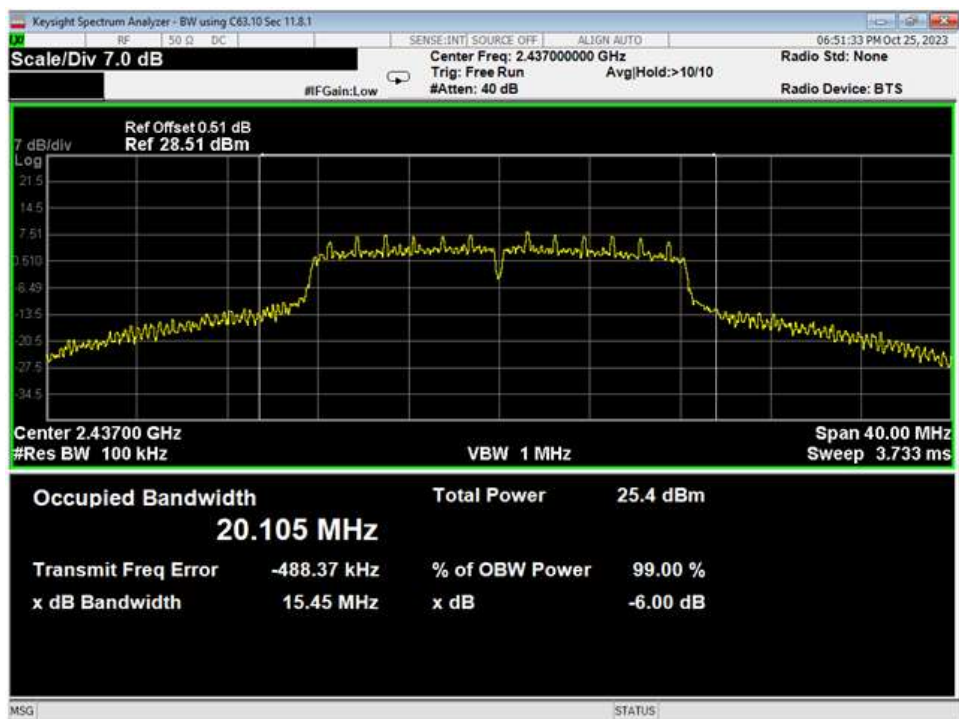


18 6dB Bandwidth, Mid, Wifi G, Low Data Rate




|  |                |                            |     |   |
|--|----------------|----------------------------|-----|---|
|  | Report Number: | R230919-20-E1              | Rev | 0 |
|  | Prepared for:  | Garmin International, Inc. |     |   |




19 6dB Bandwidth, High, Wifi G, Low Data Rate

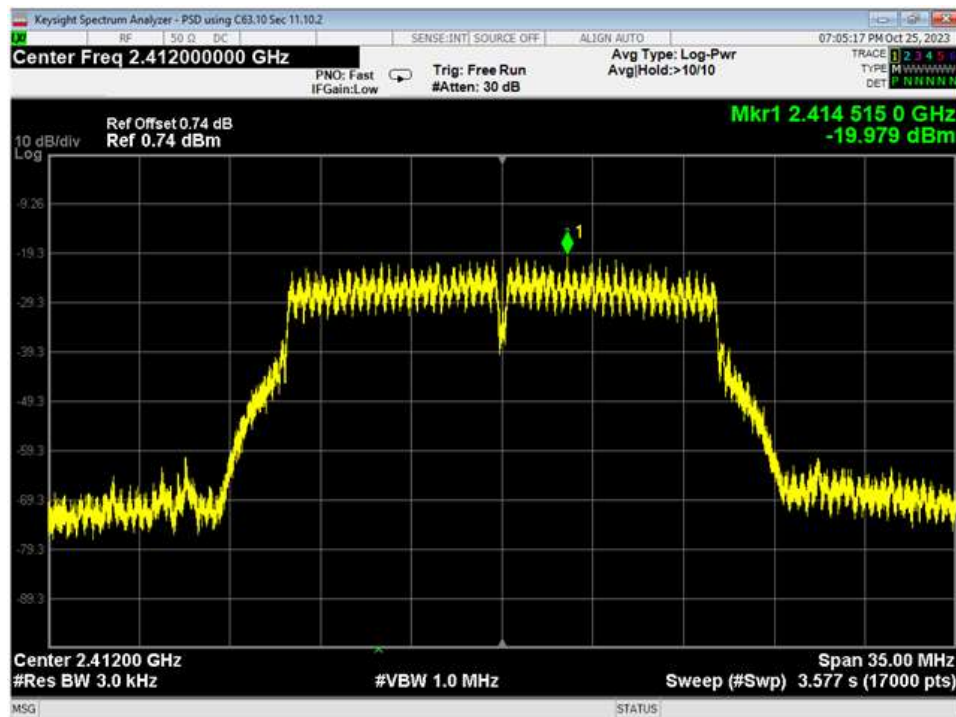


20 PSD, Low, Wifi G, Low Data Rate

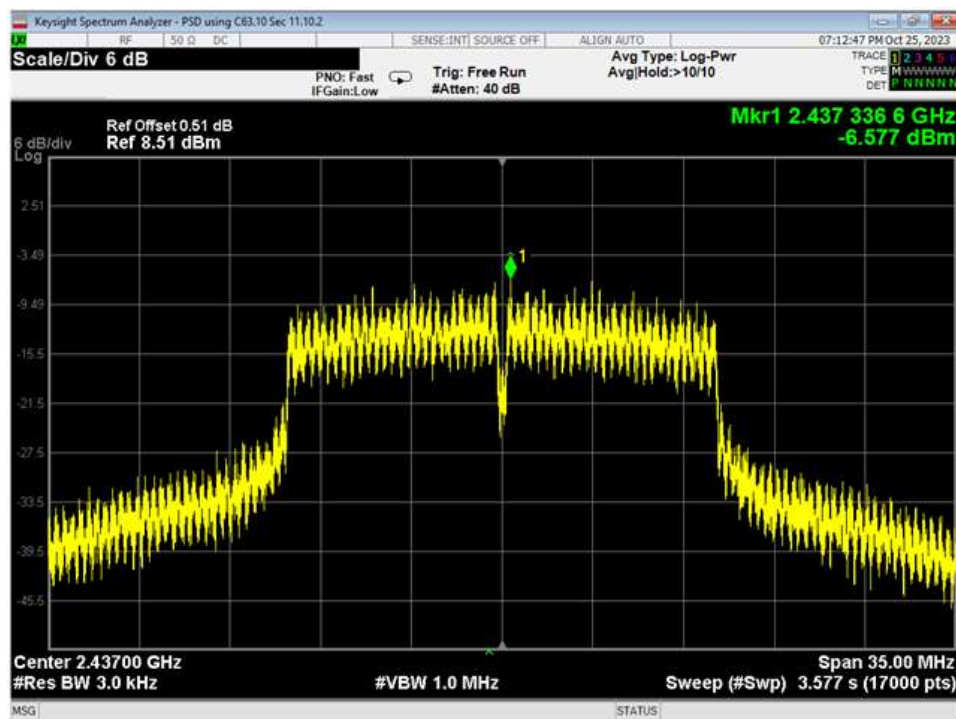


21 PSD, Mid, Wifi G, Low Data Rate

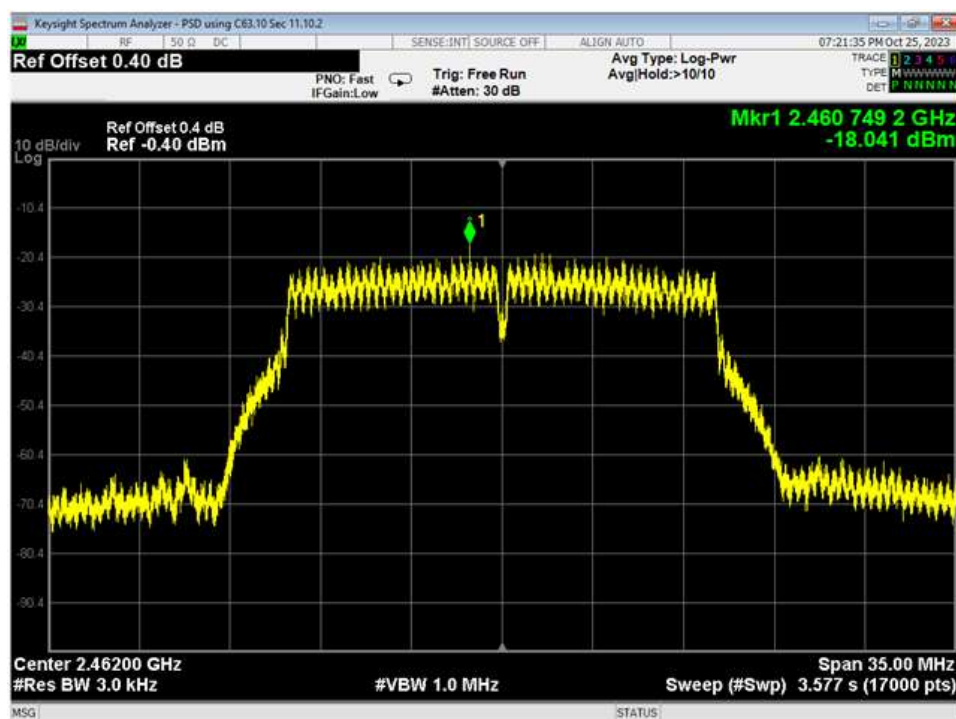


22 PSD, High, Wifi G, Low Data Rate

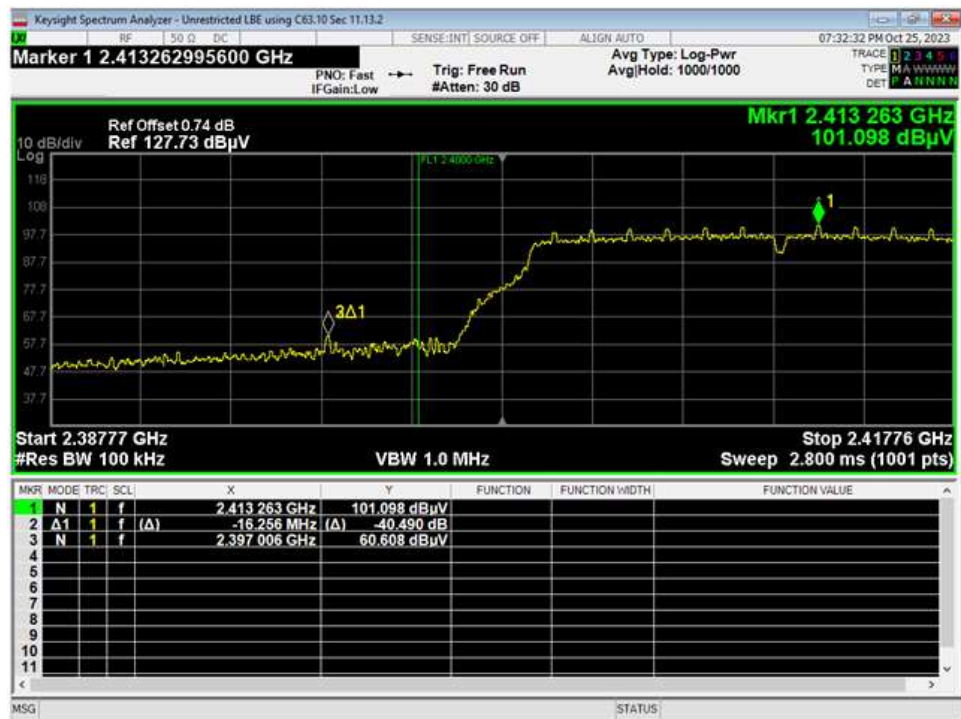


23 LBE Unrestricted, Wifi G, Low Data Rate

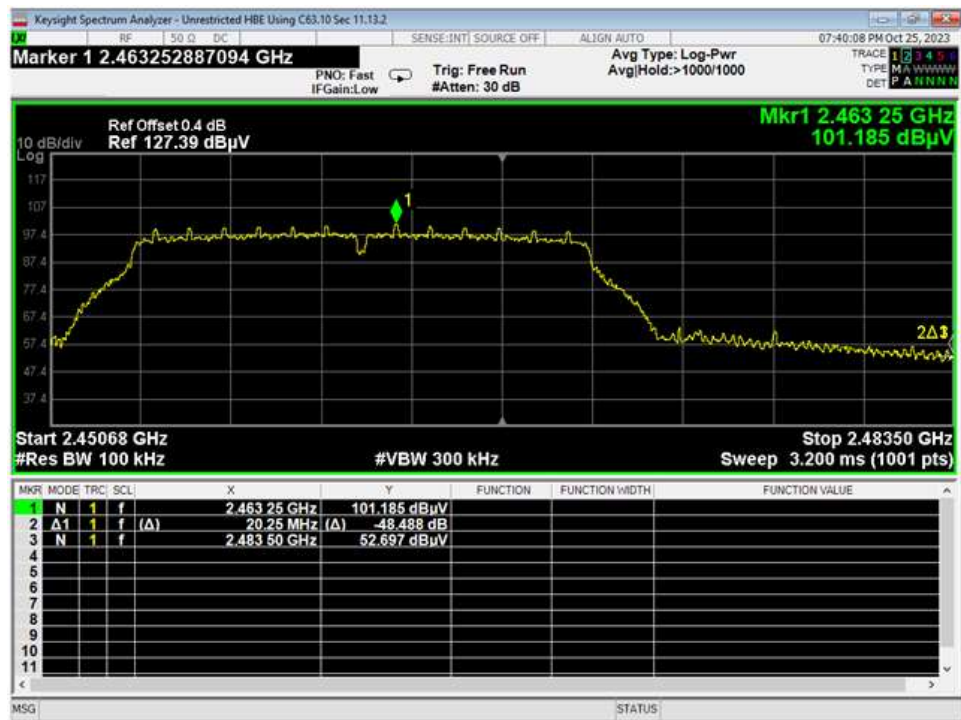

24 HBE Unrestricted, Wifi G, Low Data Rate

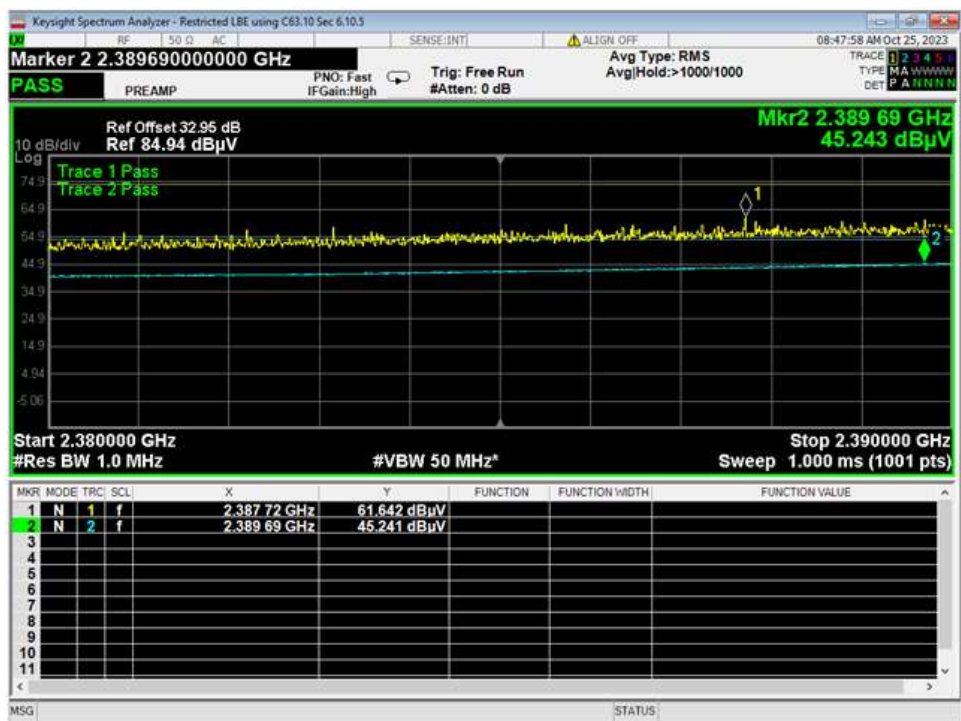


25 LBE Restricted, Wifi G, Low Data Rate

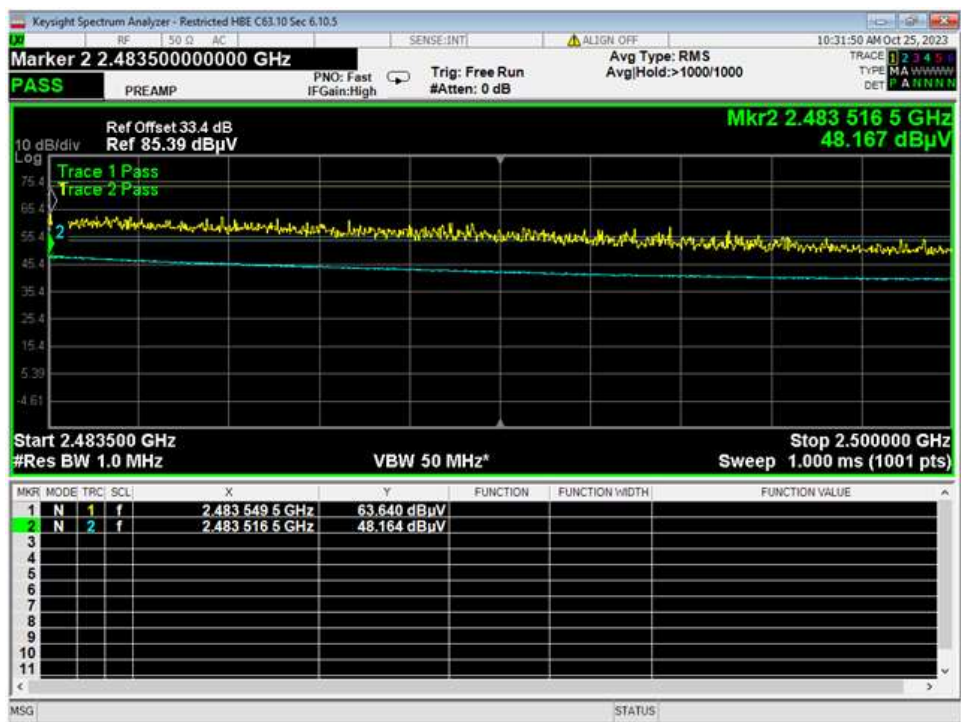


26 HBE Restricted, Wifi G, Low Data Rate

|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |

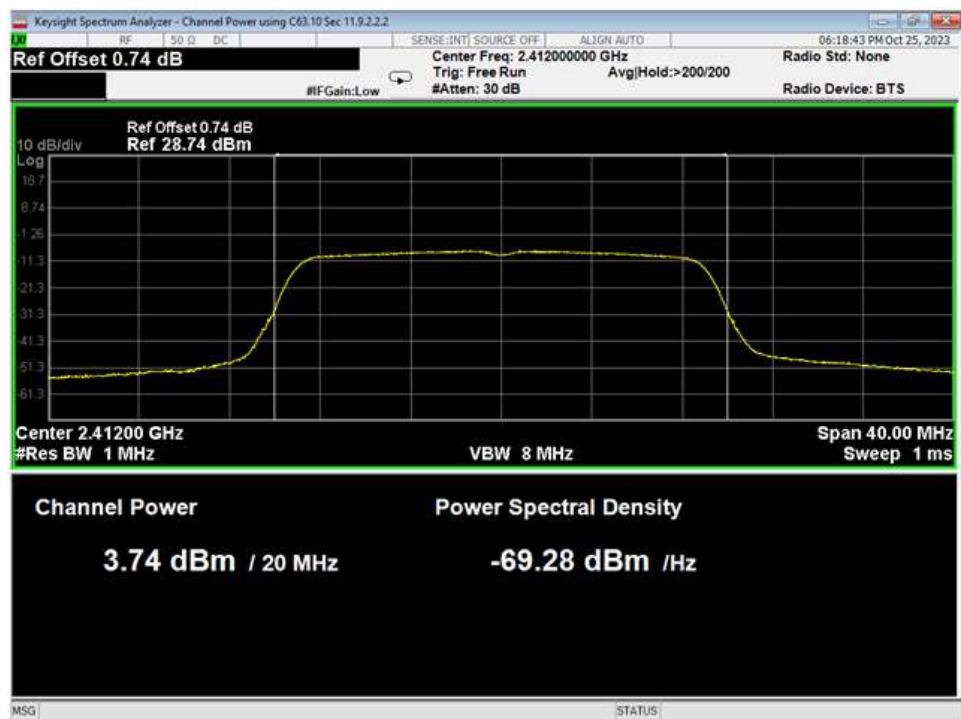


27 Average Power, Low, Wifi N, Low Data Rate

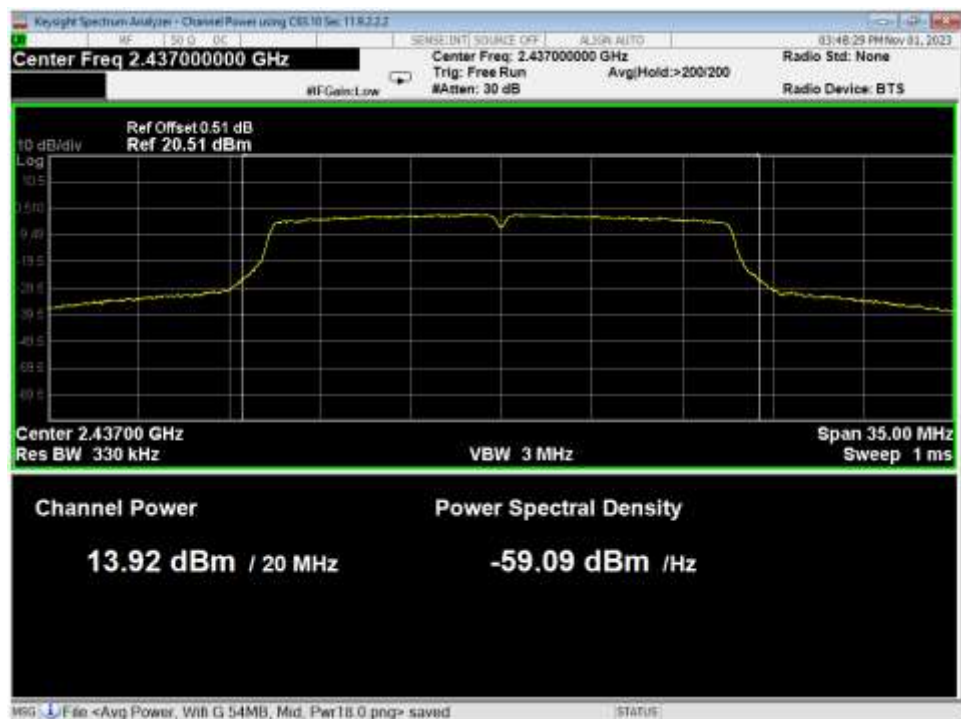


28 Average Power, Mid, Wifi N, Low Data Rate



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |

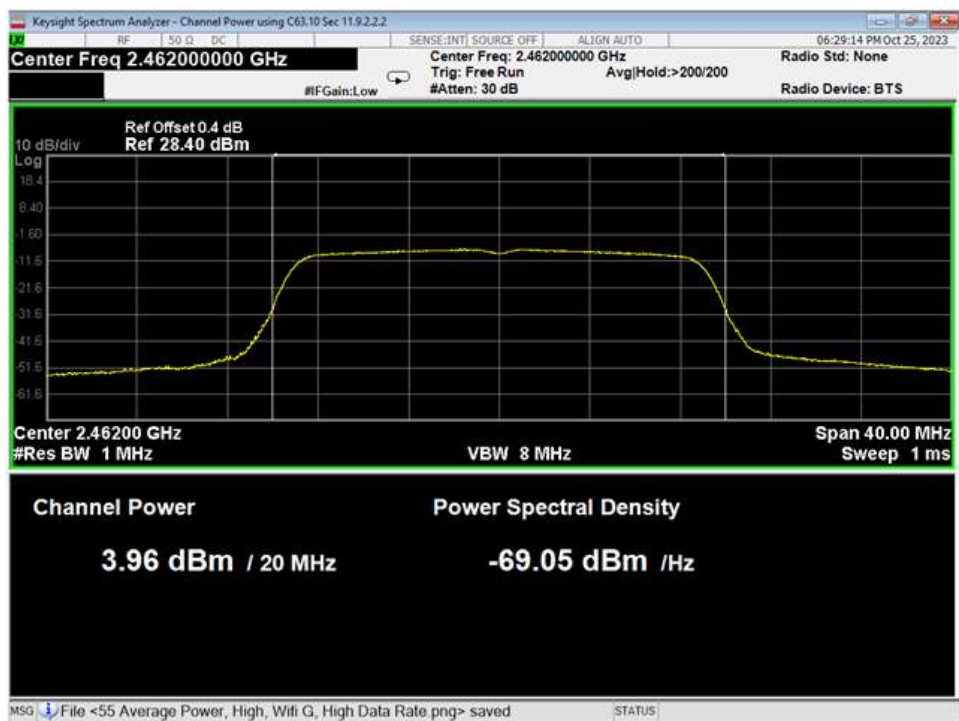


29 Average Power, High, Wifi N, Low Data Rate

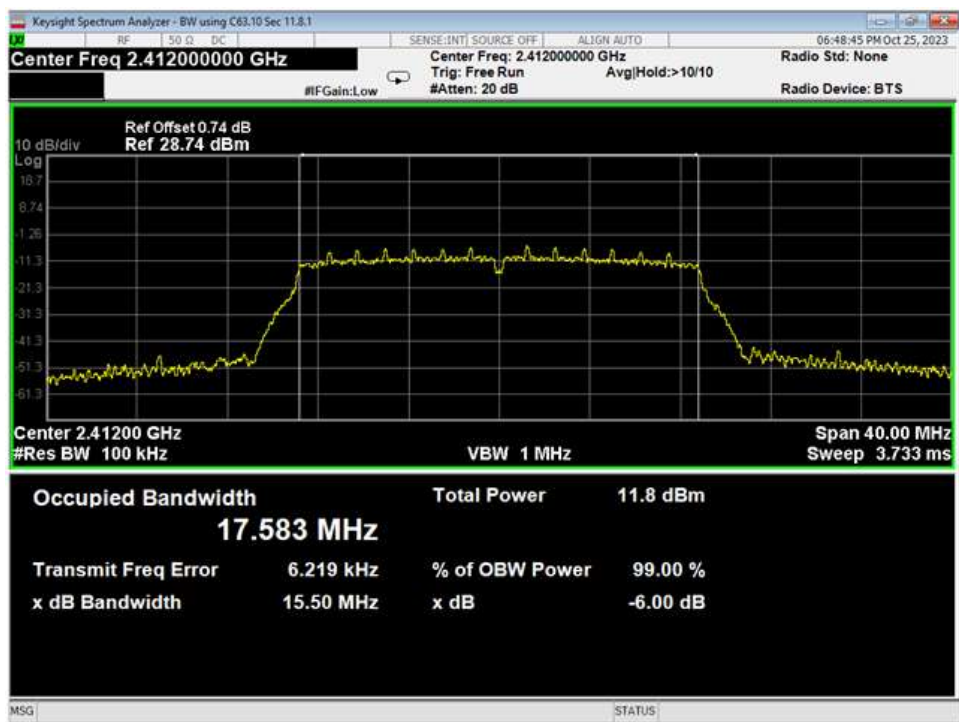


30 6dB Bandwidth, Low, Wifi N, Low Data Rate




31 6dB Bandwidth, Mid, Wifi N, Low Data Rate

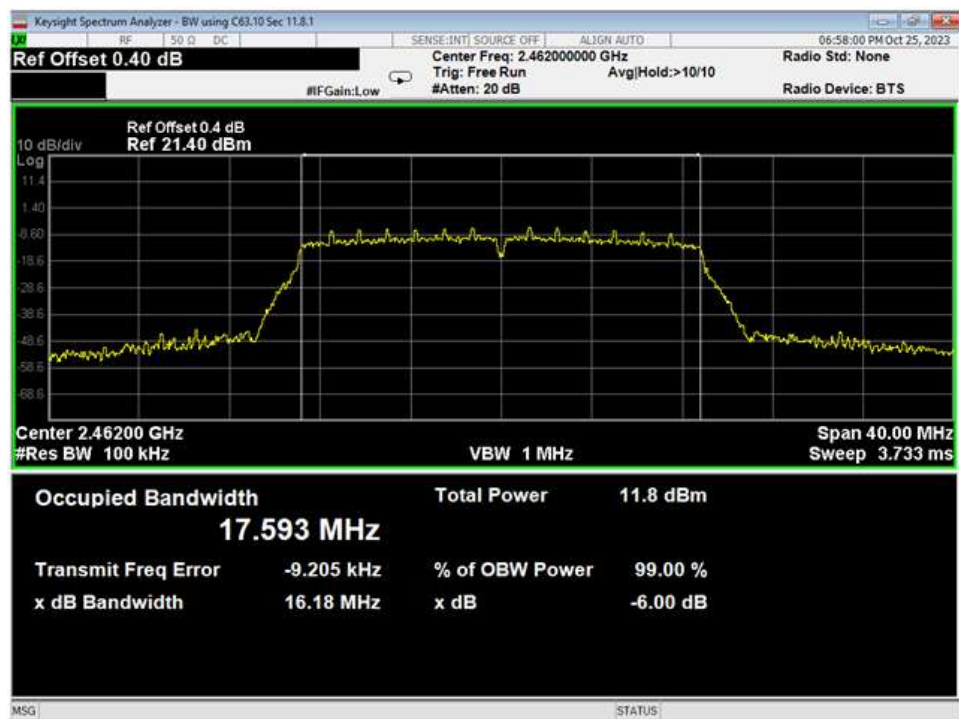

32 6dB Bandwidth, High, Wifi N, Low Data Rate

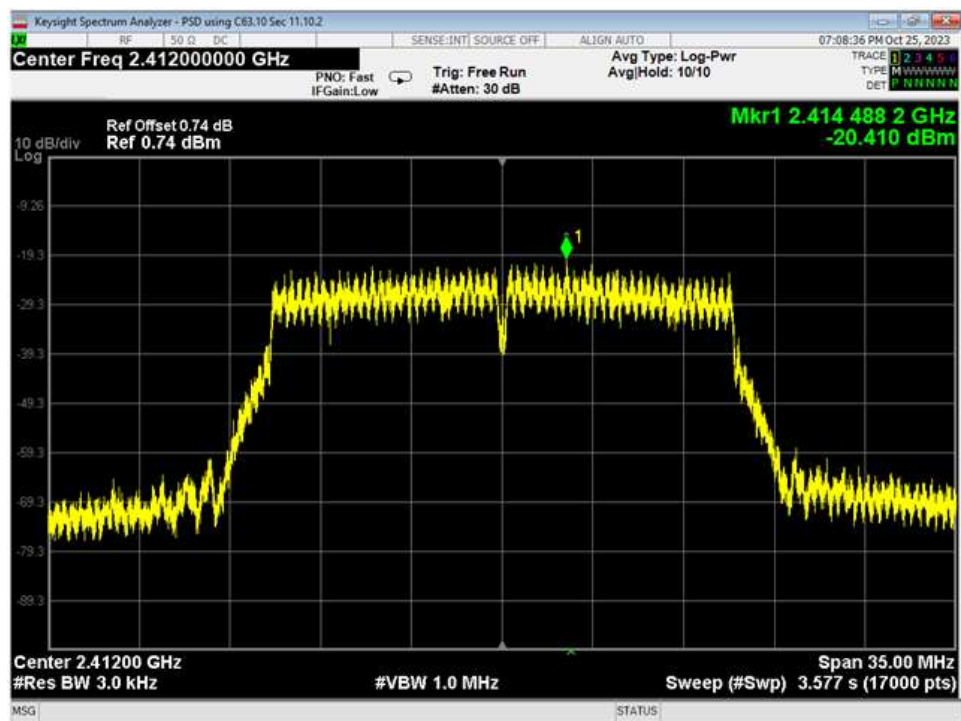


33 PSD, Low, Wifi N, Low Data Rate

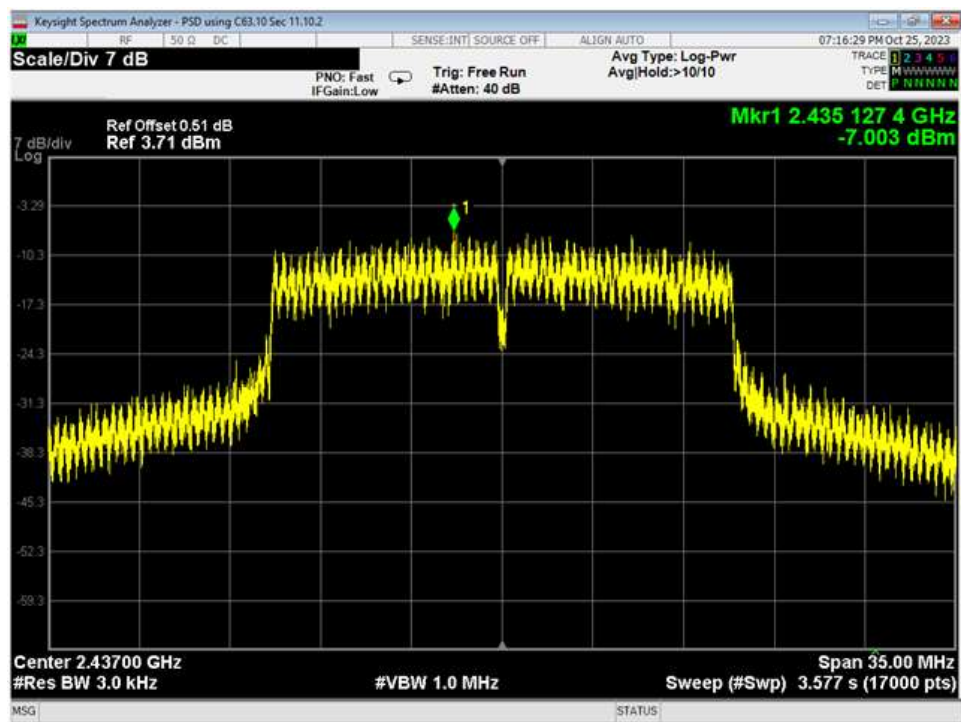


34 PSD, Mid, Wifi N, Low Data Rate



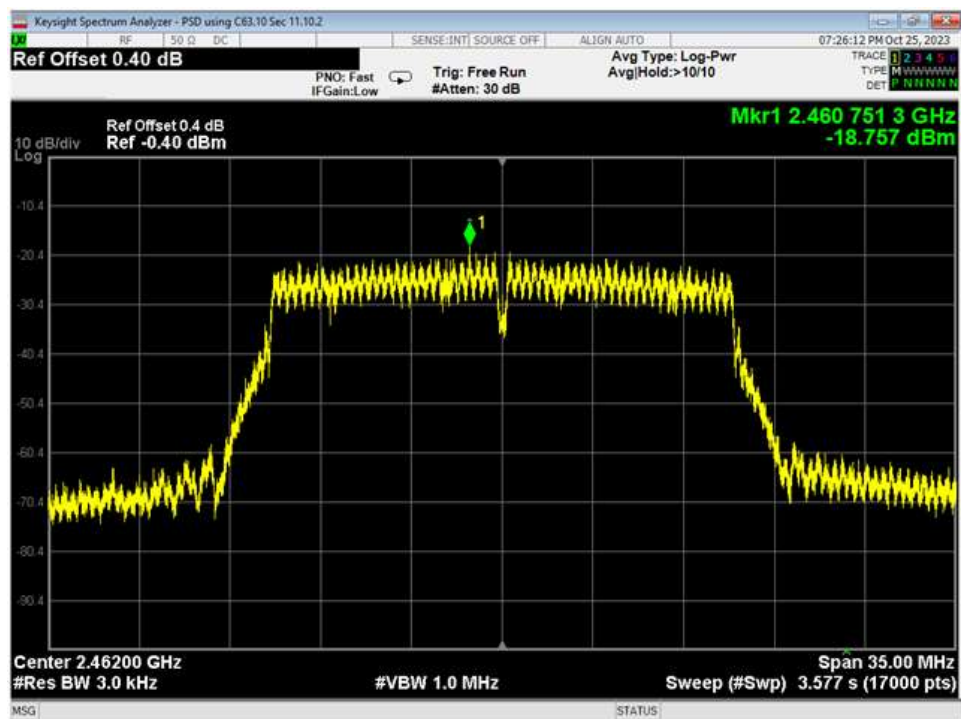


35 PSD, High, Wifi N, Low Data Rate

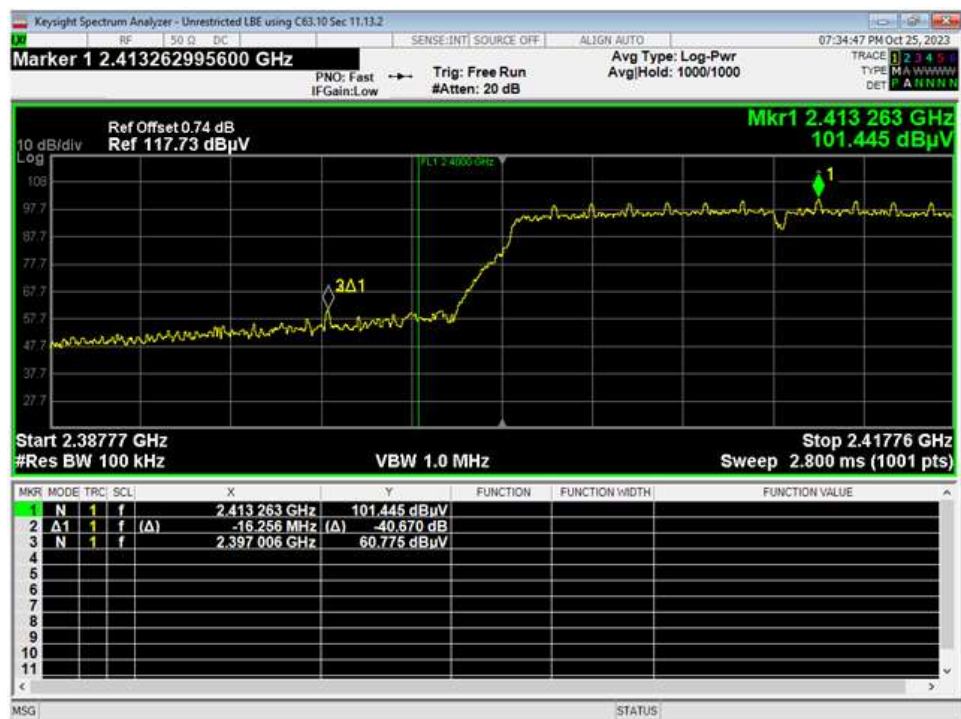


36 LBE Unrestricted, Wifi N, Low Data Rate




37 HBE Unrestricted, Wifi N, Low Data Rate

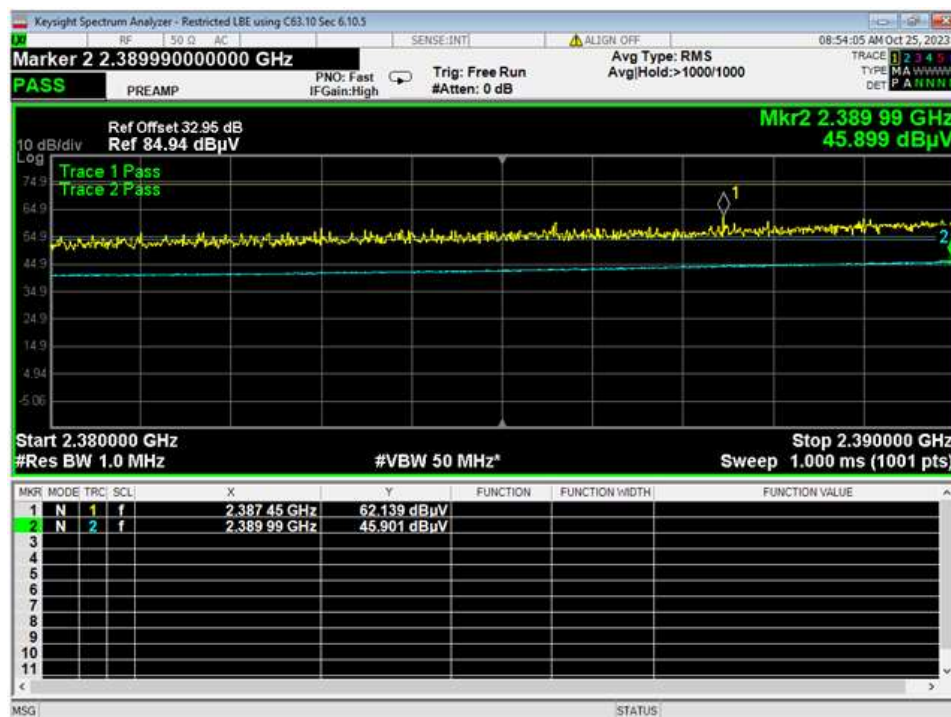


38 LBE Restricted, Wifi N, Low Data Rate

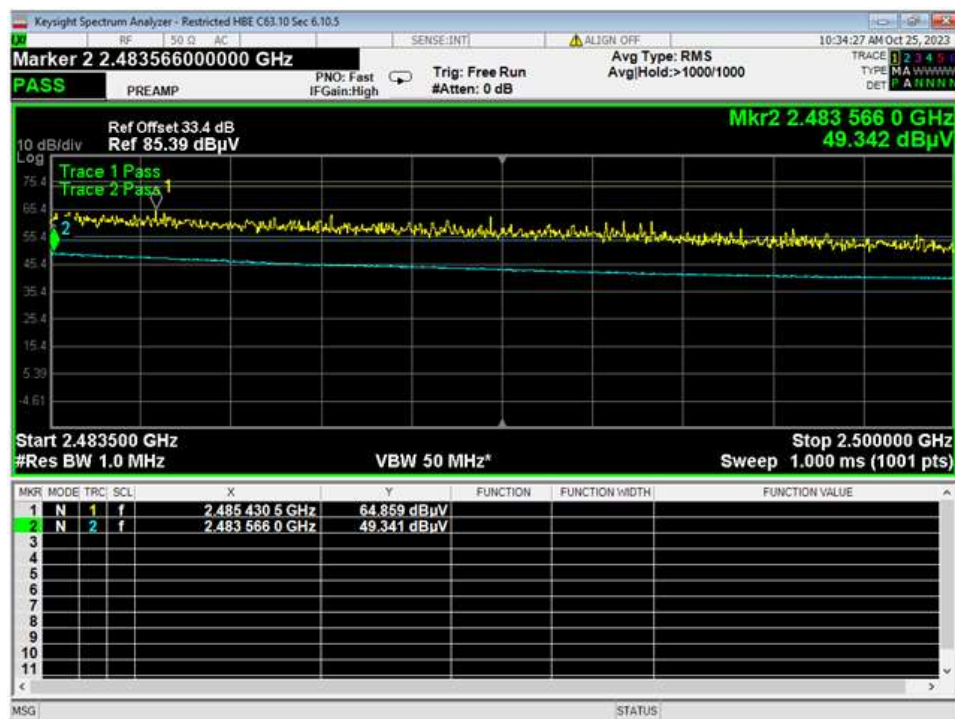


39 HBE Restricted, Wifi N, Low Data Rate

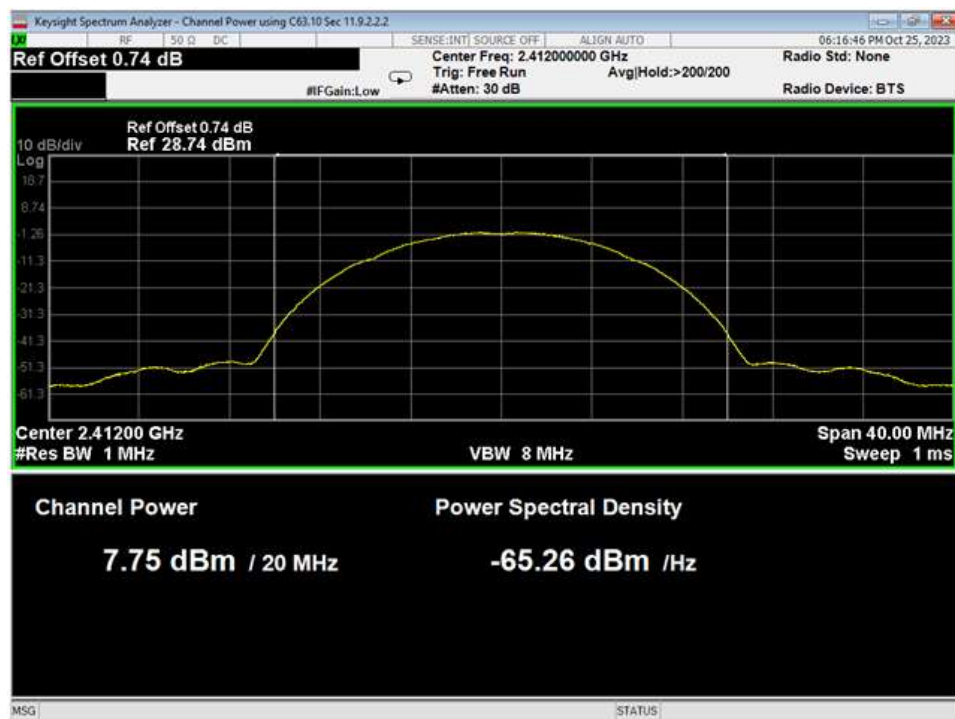


40 Average Power, Low, Wifi B, High Data Rate

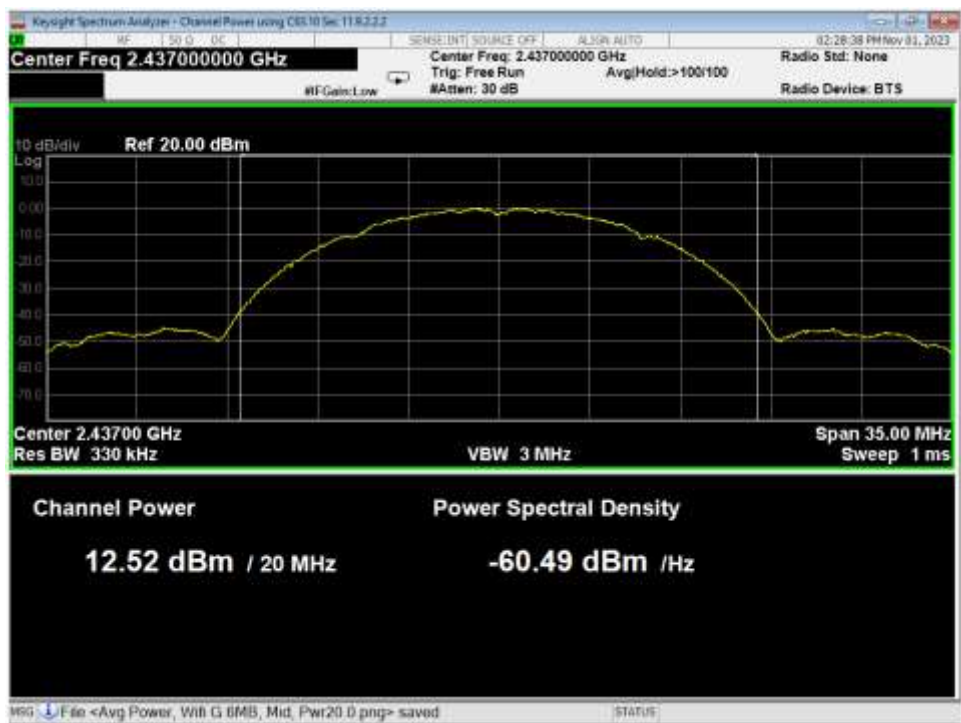

41 Average Power, Mid, Wifi B, High Data Rate

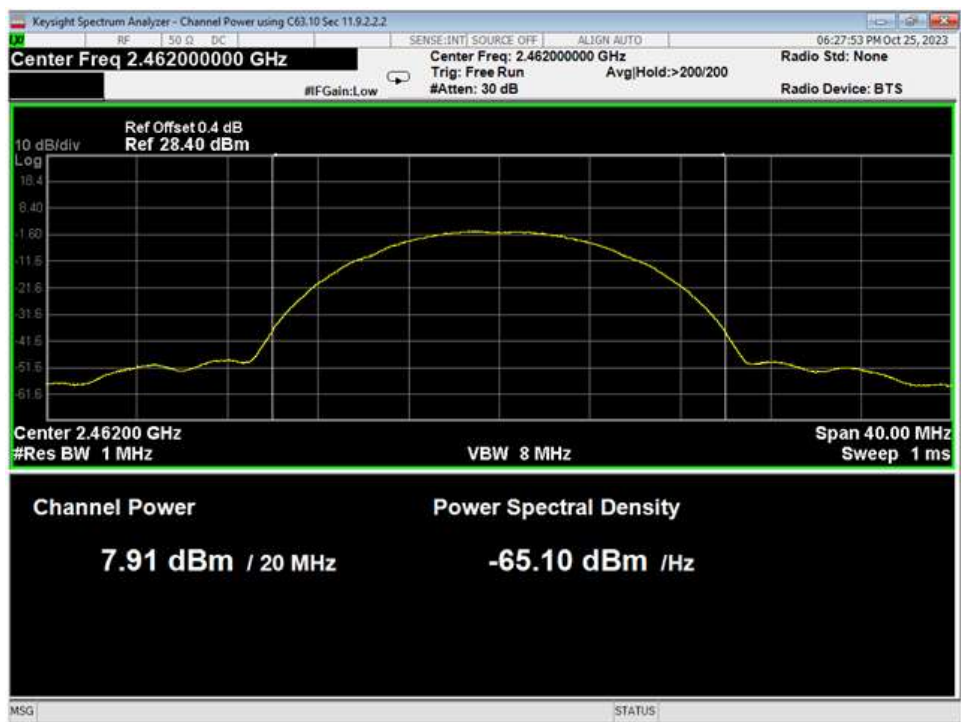

42 Average Power, High, Wifi B, High Data Rate

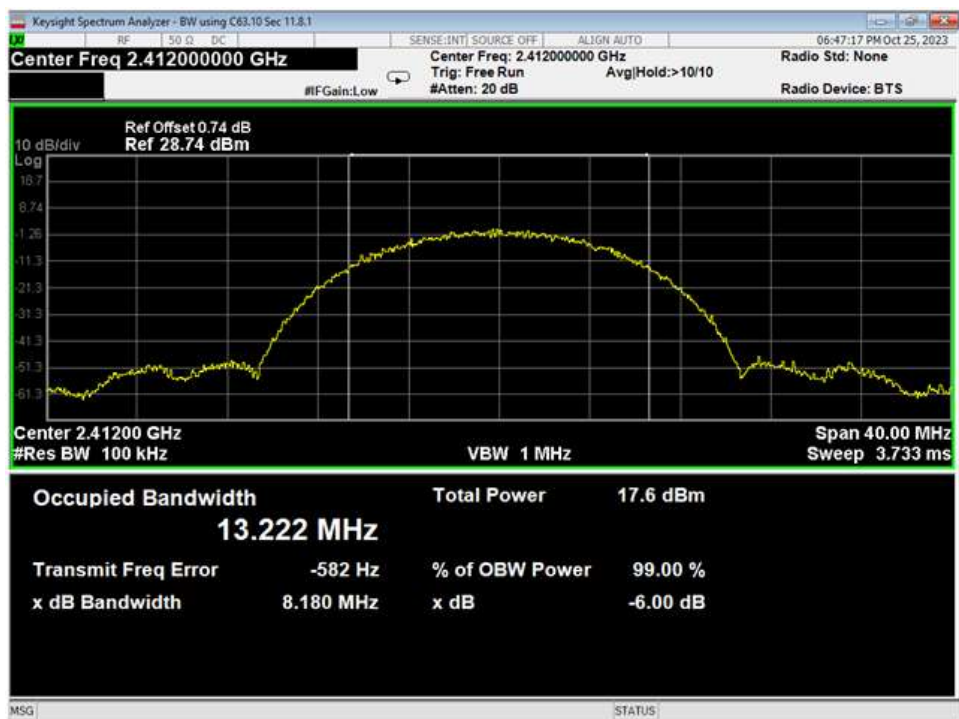


43 6dB Bandwidth, Low, Wifi B, High Data Rate




44 6dB Bandwidth, Mid, Wifi B, High Data Rate




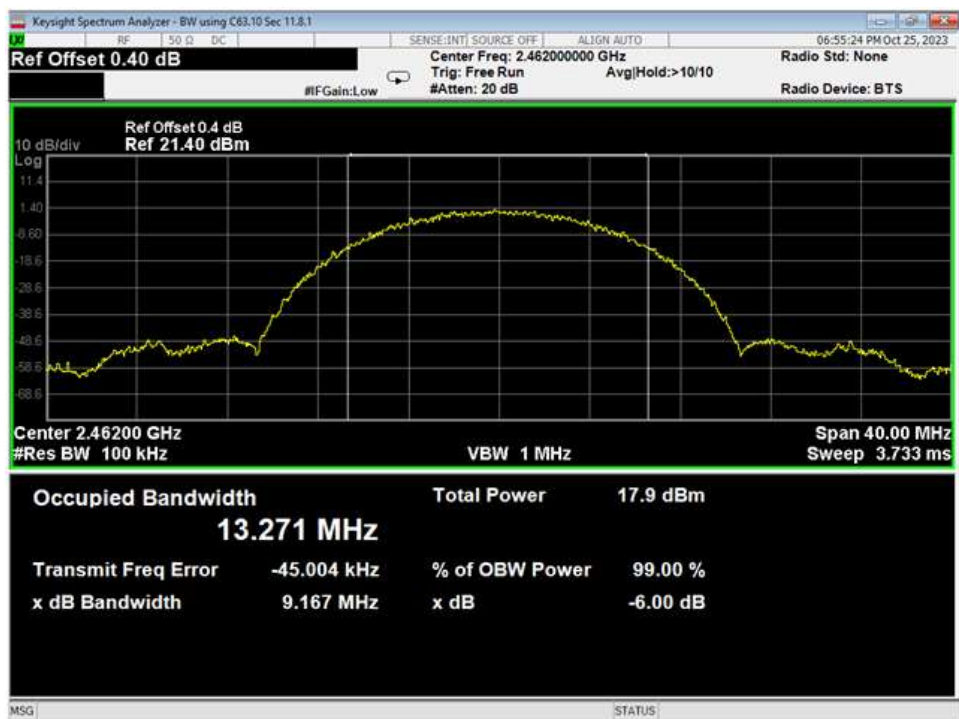


45 6dB Bandwidth, High, Wifi B, High Data Rate

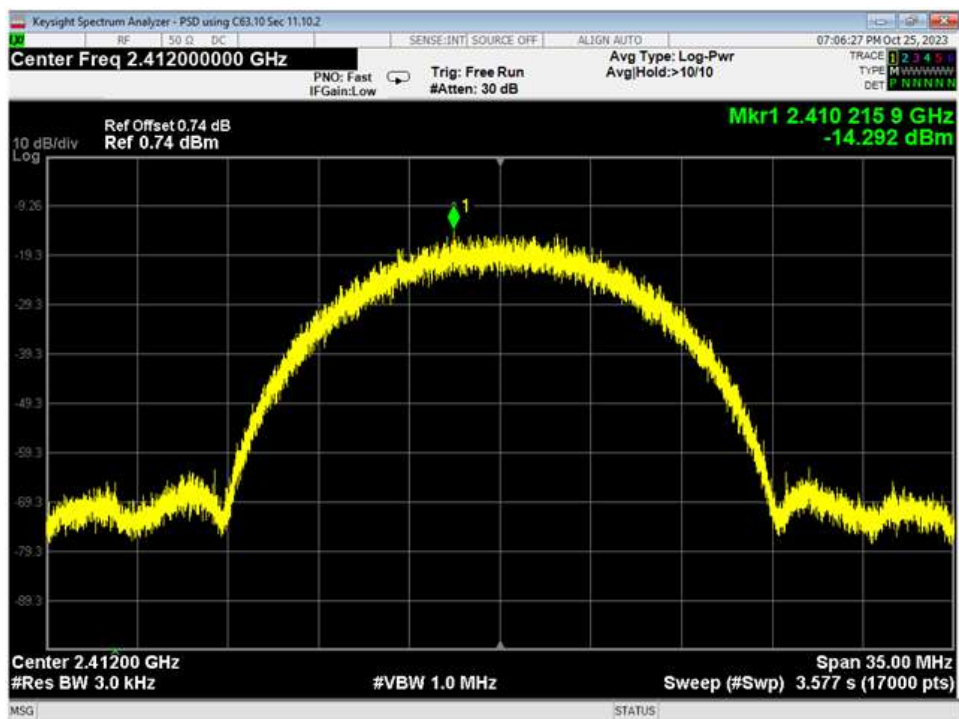

46 PSD, Low, Wifi B, High Data Rate

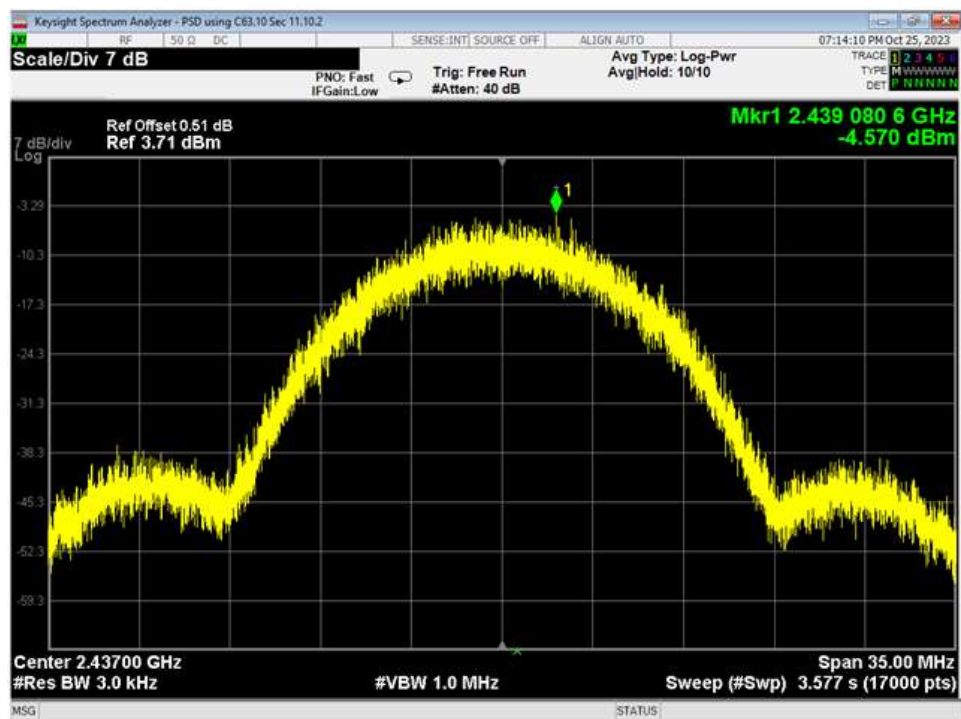

47 PSD, Mid, Wifi B, High Data Rate

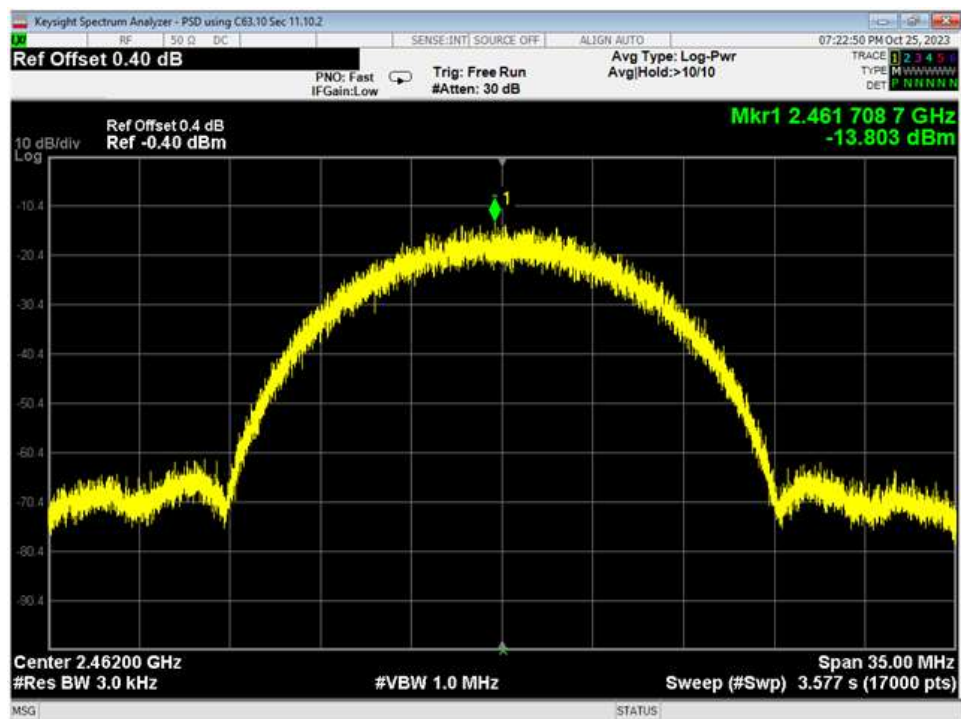

48 PSD, High, Wifi B, High Data Rate




49 LBE Unrestricted, Wifi B, High Data Rate




50 HBE Unrestricted, Wifi B, High Data Rate




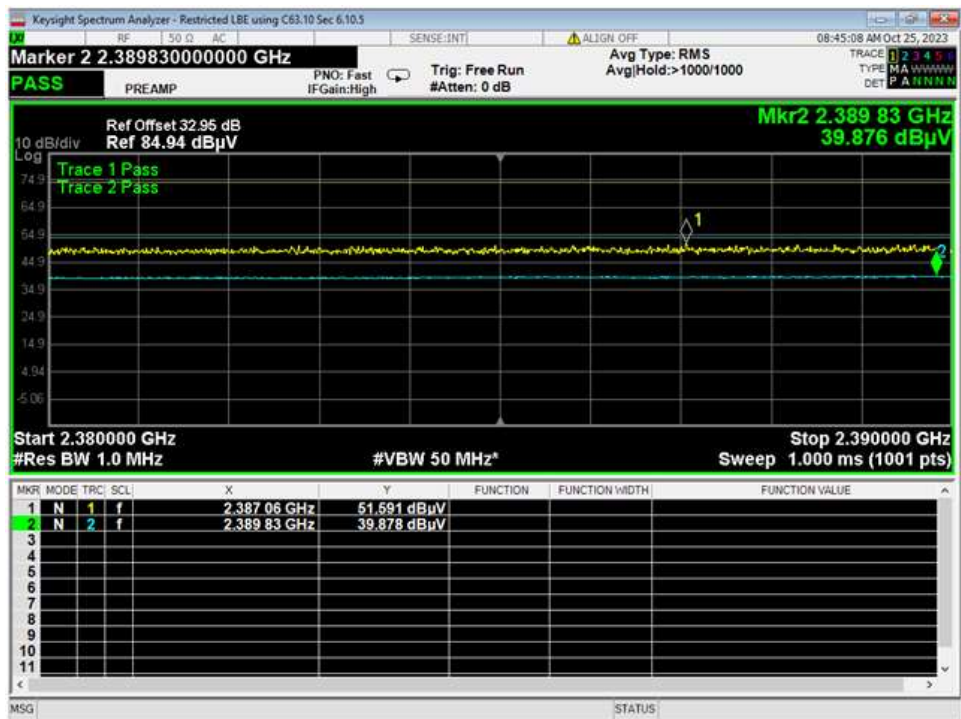


51 LBE Restricted, Wifi B 11MB

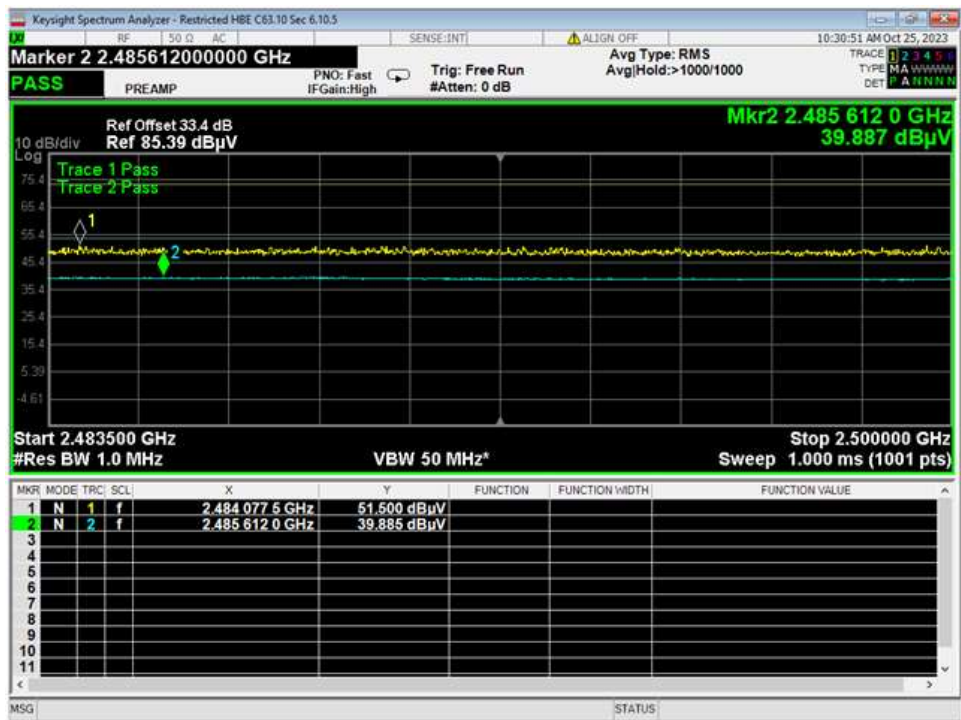

52 HBE Restricted, Wifi B 11MB

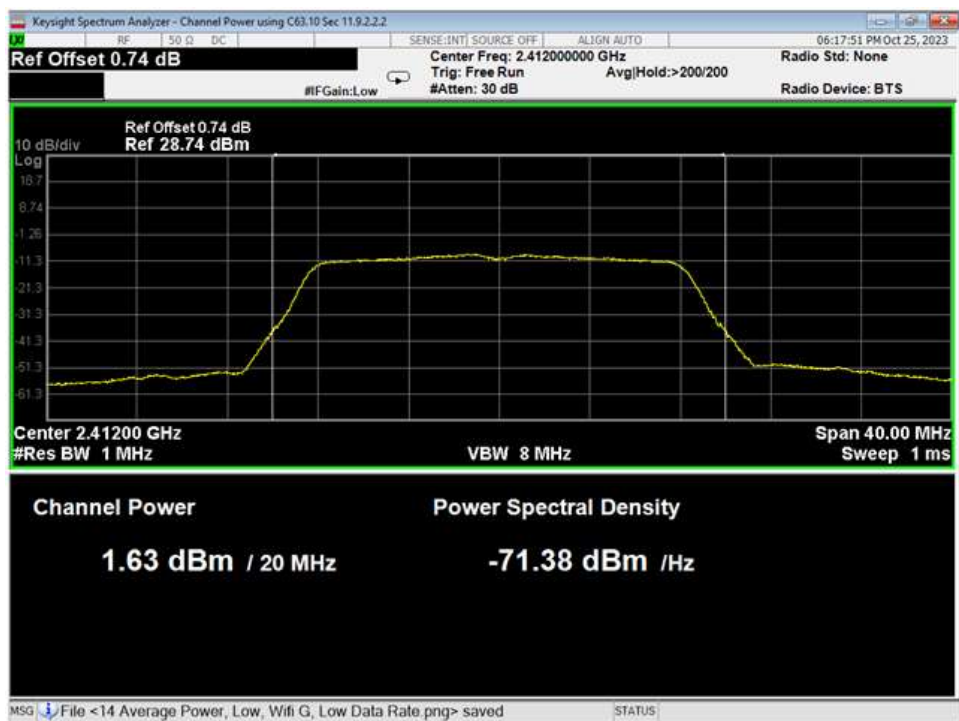


53 Average Power, Low, Wifi G, High Data Rate

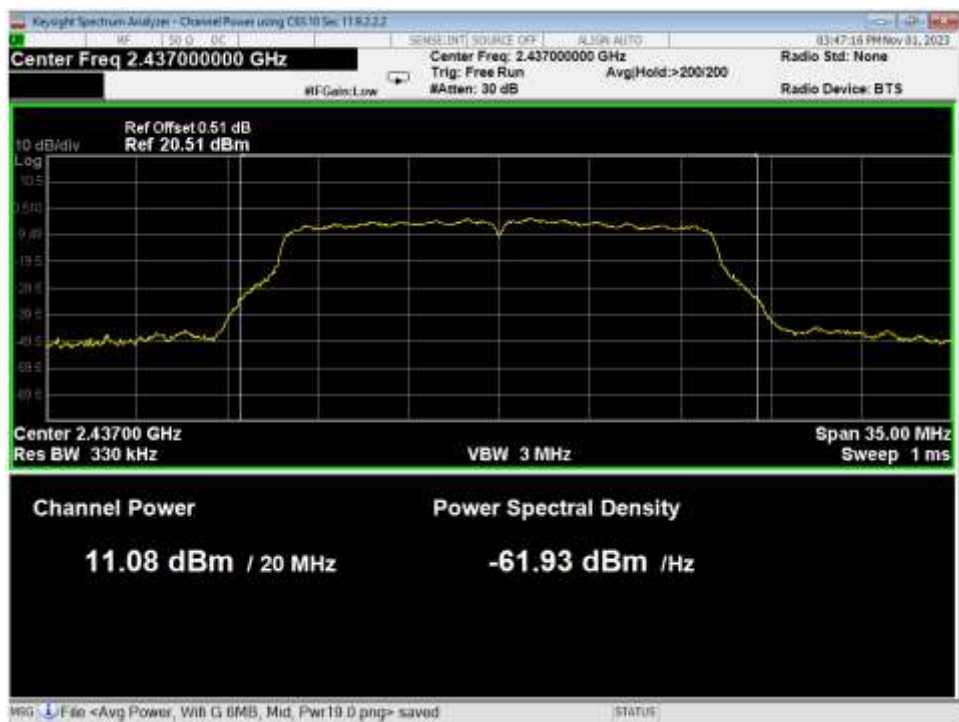


54 Average Power, Mid, Wifi G, High Data Rate

|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |

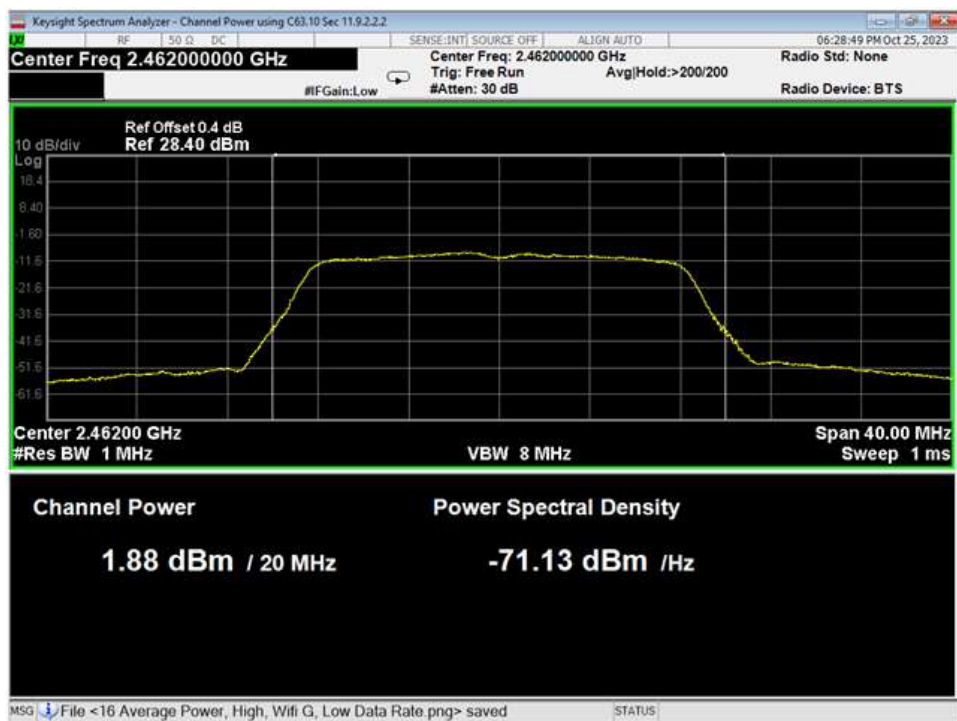


55 Average Power, High, Wifi G, High Data Rate

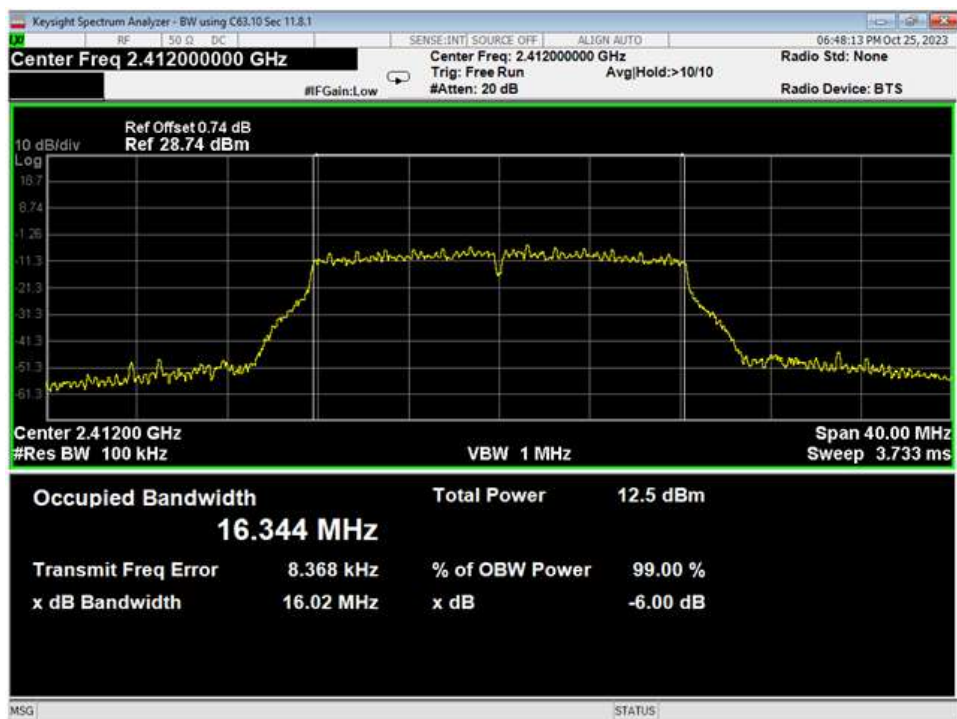

56 6dB Bandwidth, Low, Wifi G, High Data Rate




57 6dB Bandwidth, Mid, Wifi G, High Data Rate

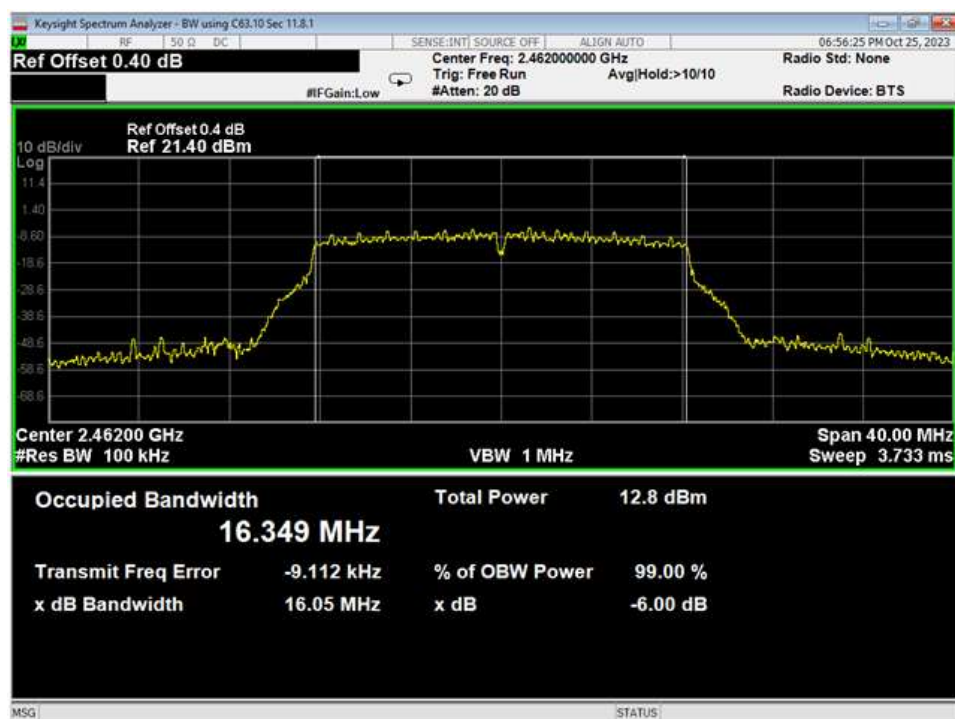


58 6dB Bandwidth, High, Wifi G, High Data Rate

|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |

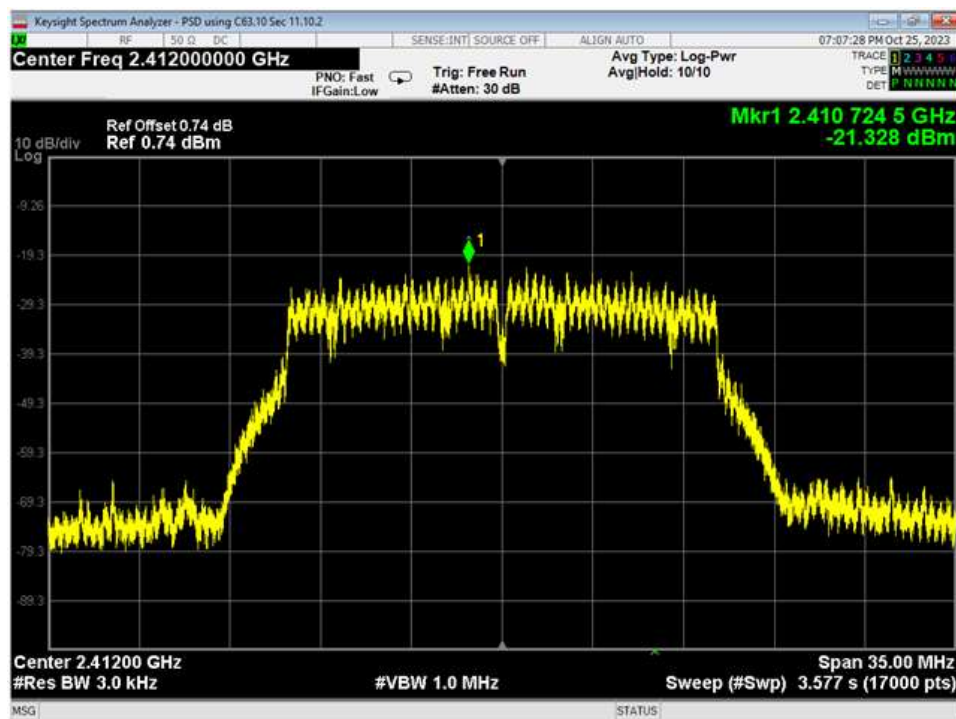


59 PSD, Low, Wifi G, High Data Rate

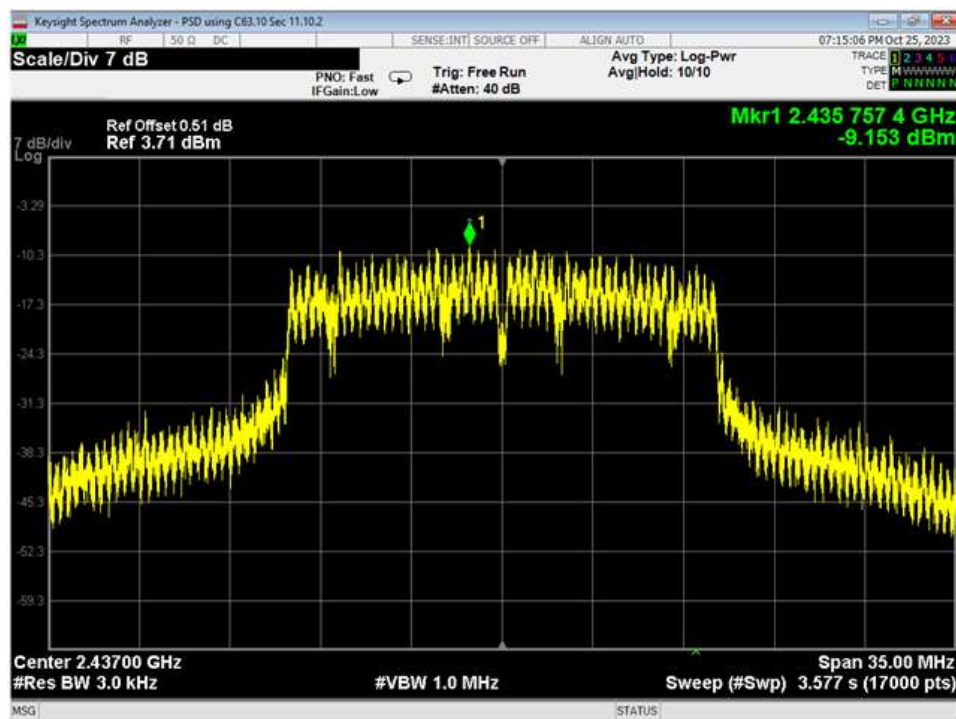


60 PSD, Mid, Wifi G, High Data Rate



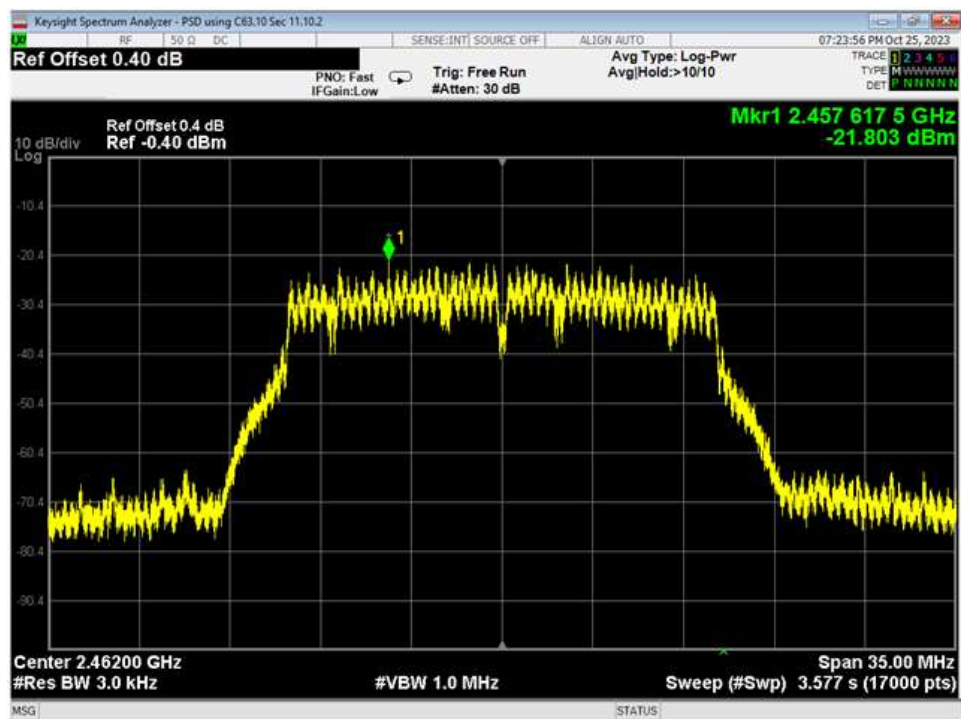


61 PSD, High, Wifi G, High Data Rate

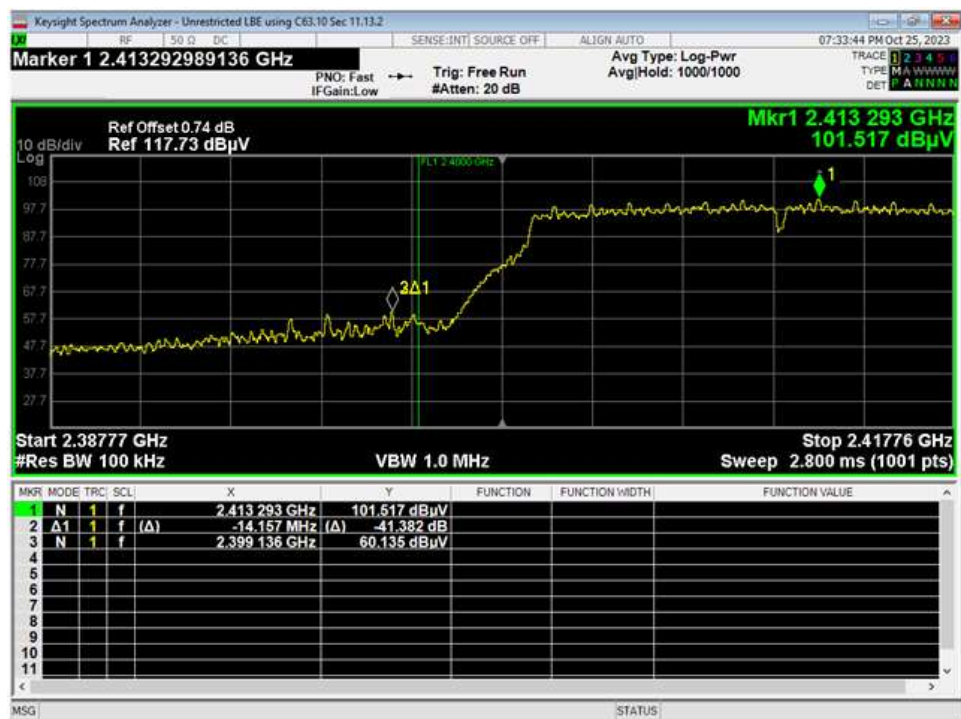


62 LBE Unrestricted Wifi G, High Data Rate




63 HBE Unrestricted, Wifi G, High Data Rate

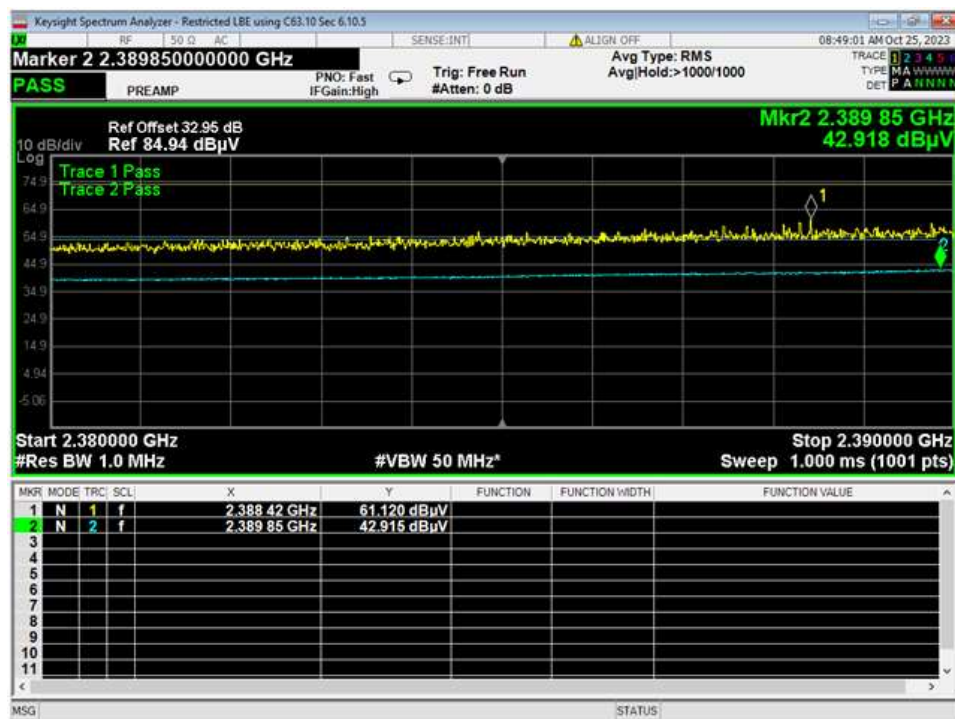

64 LBE Restricted, Wifi G 54MB

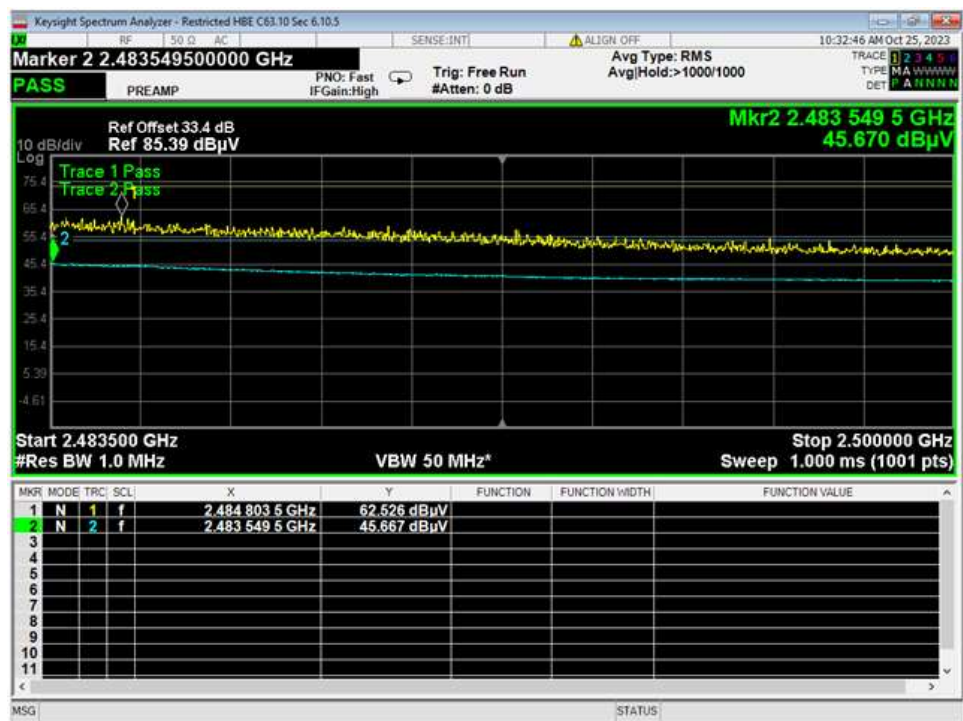


65 HBE Restricted, Wifi G 54MB

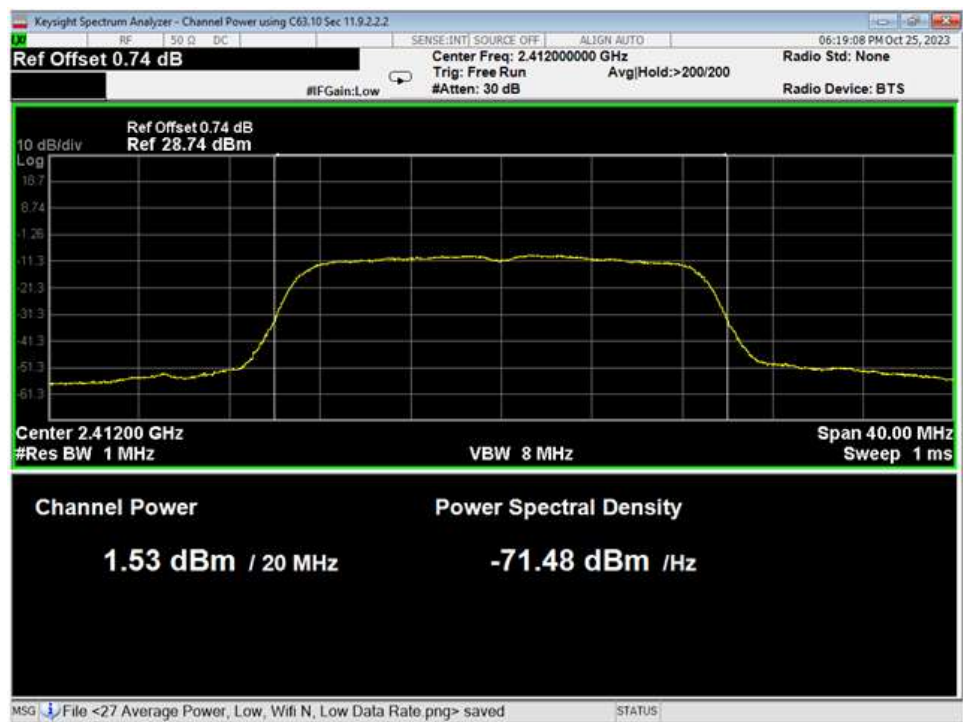


66 Average Power, Low, Wifi N, High Data Rate



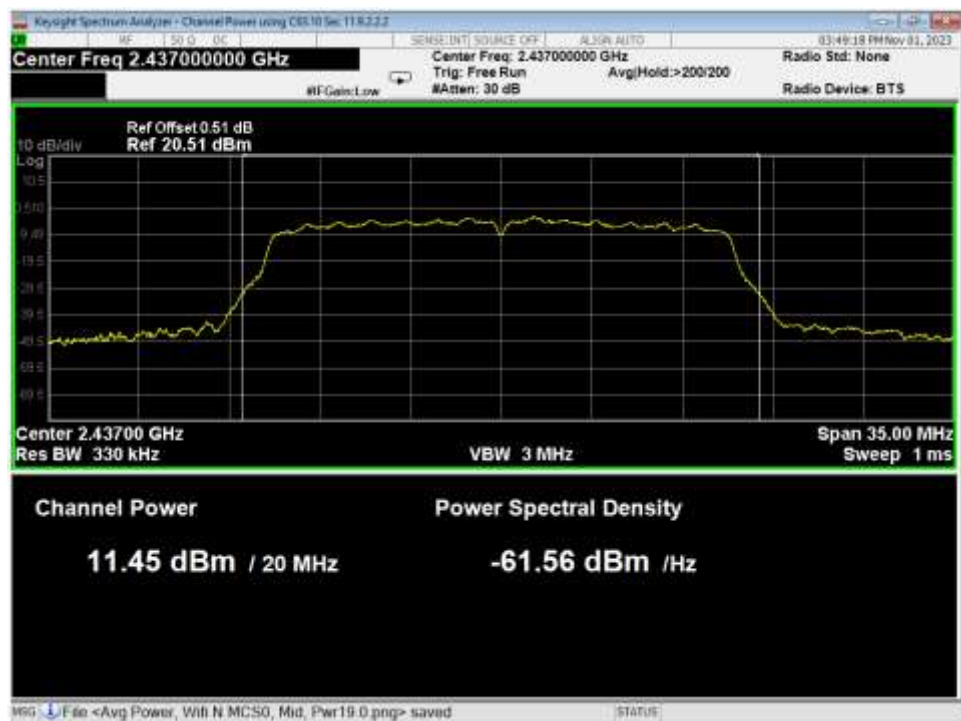


67 Average Power, Mid, Wifi N, High Data Rate

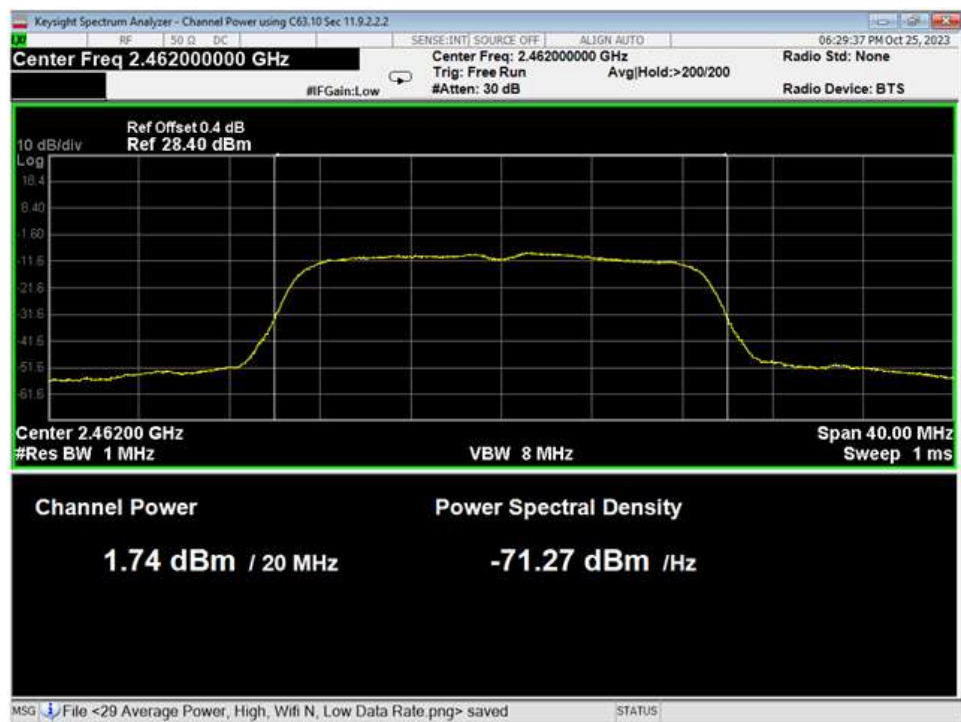


68 Average Power, High, Wifi N, High Data Rate


|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |

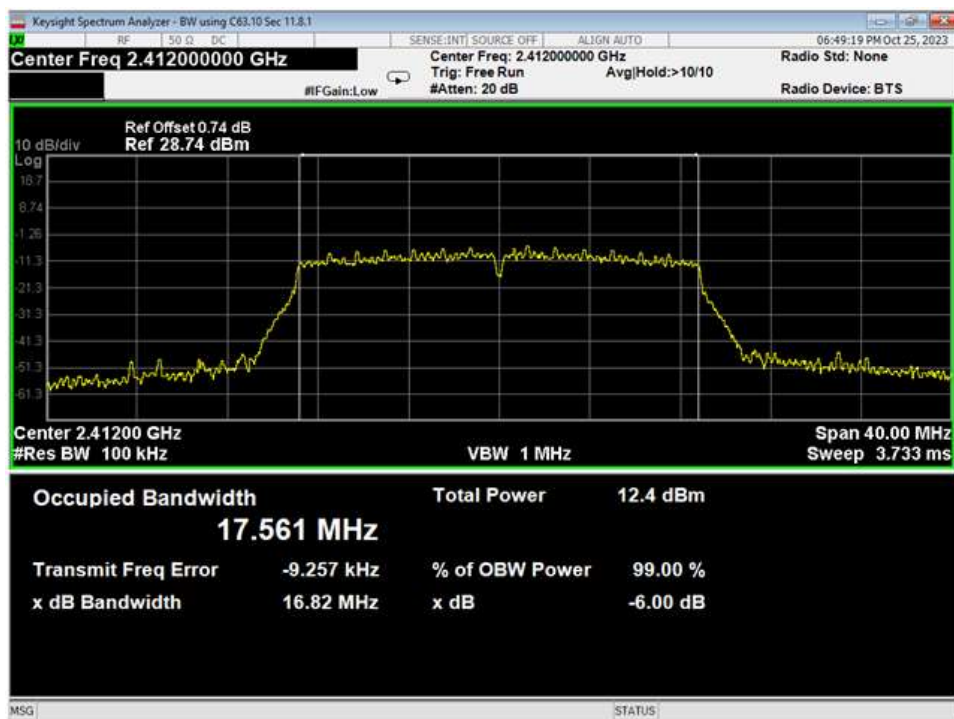


69 6dB Bandwidth, Low, Wifi N, High Data Rate

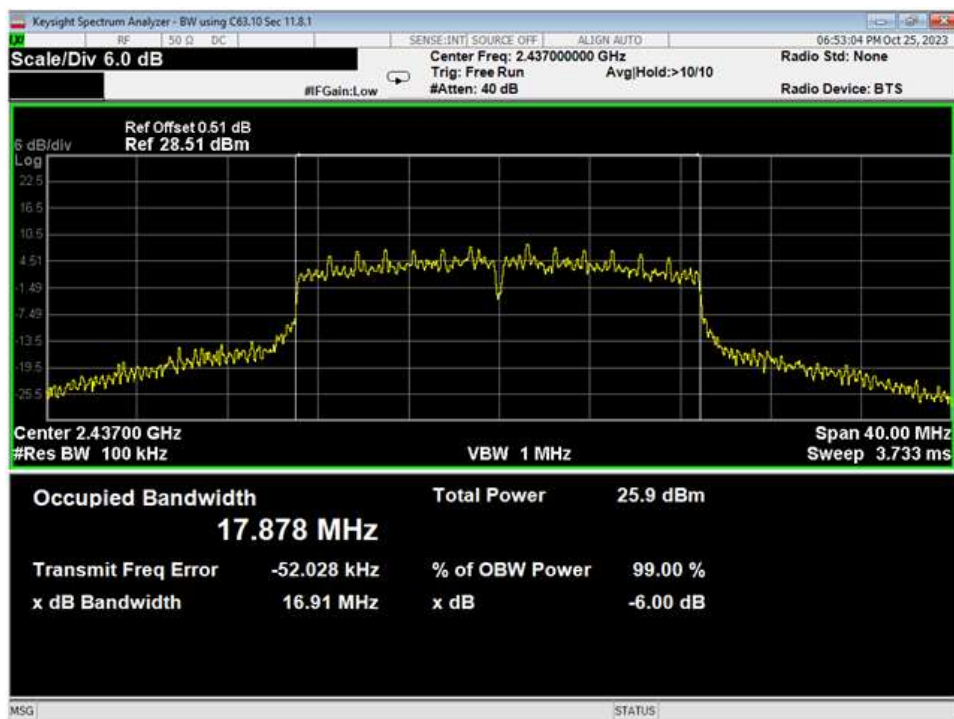


70 6dB Bandwidth, Mid, Wifi N, High Data Rate

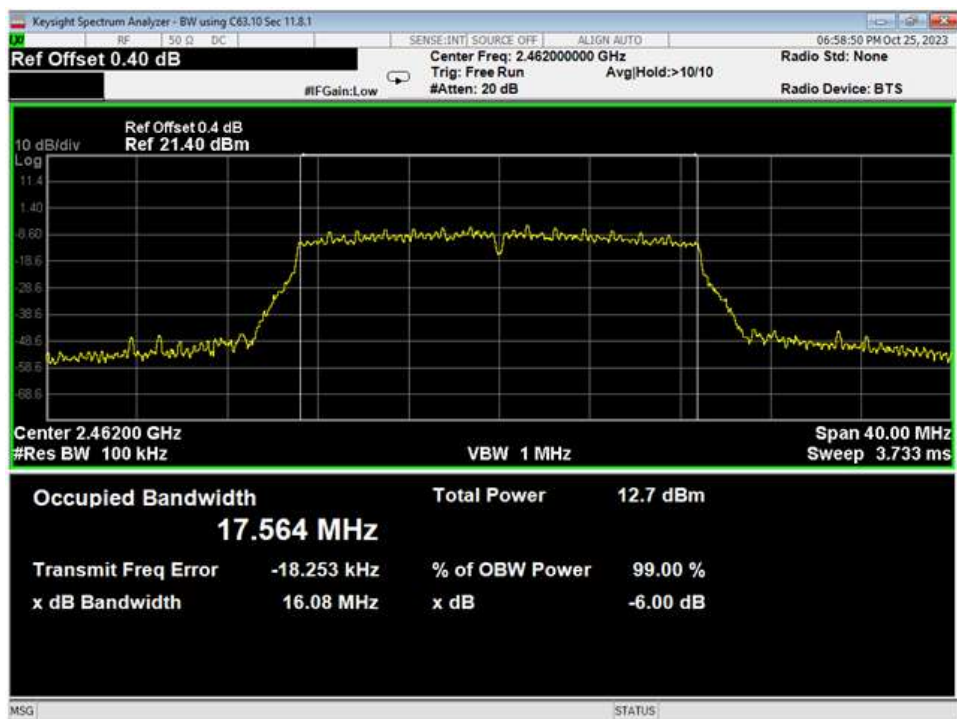


71 6dB Bandwidth, High, Wifi N, High Data Rate

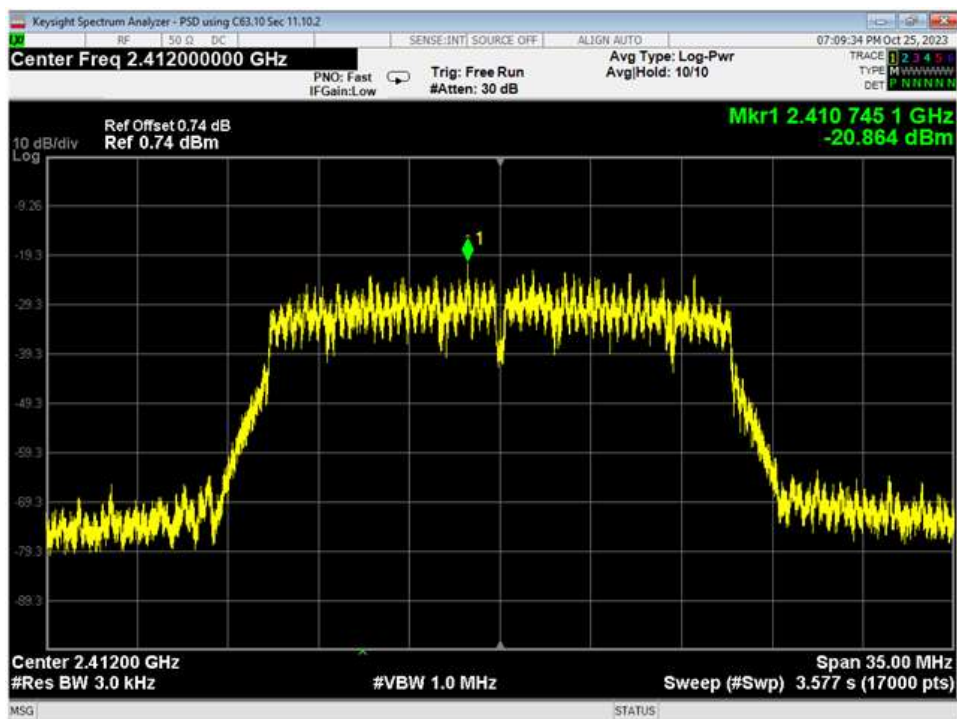


72 PSD, Low, Wifi N, High Data Rate

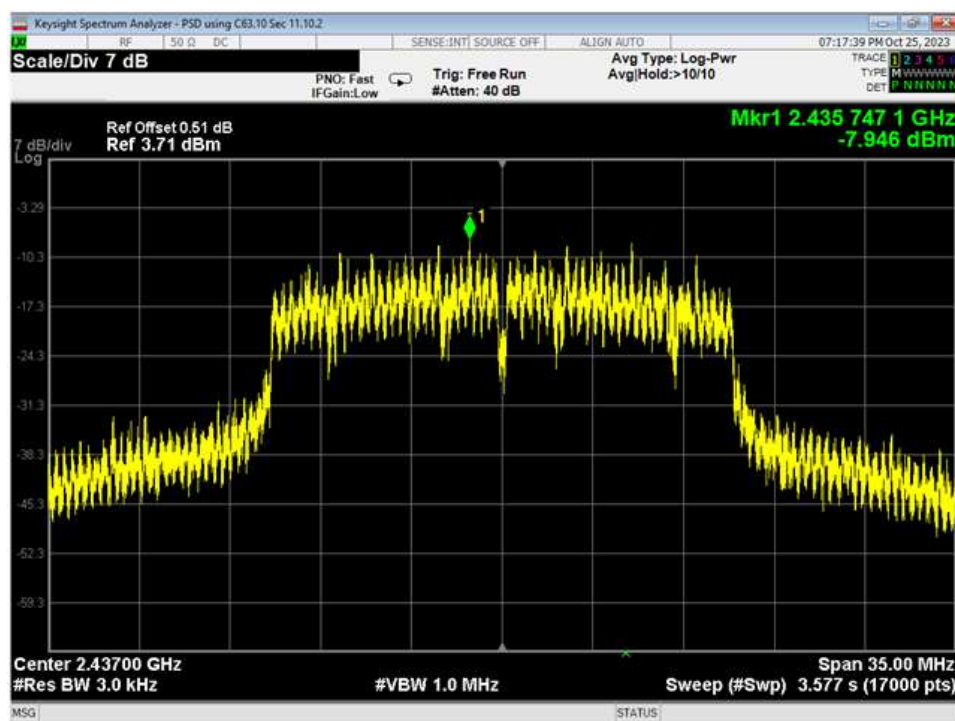


73 PSD, Mid, Wifi N, High Data Rate

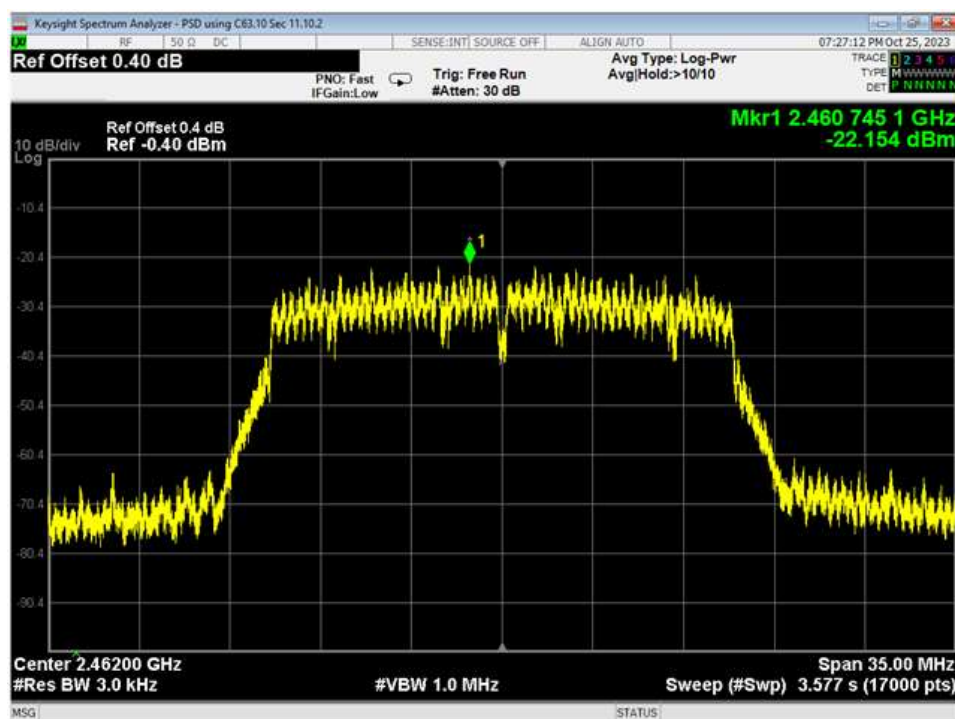

74 PSD, High, Wifi N, High Data Rate

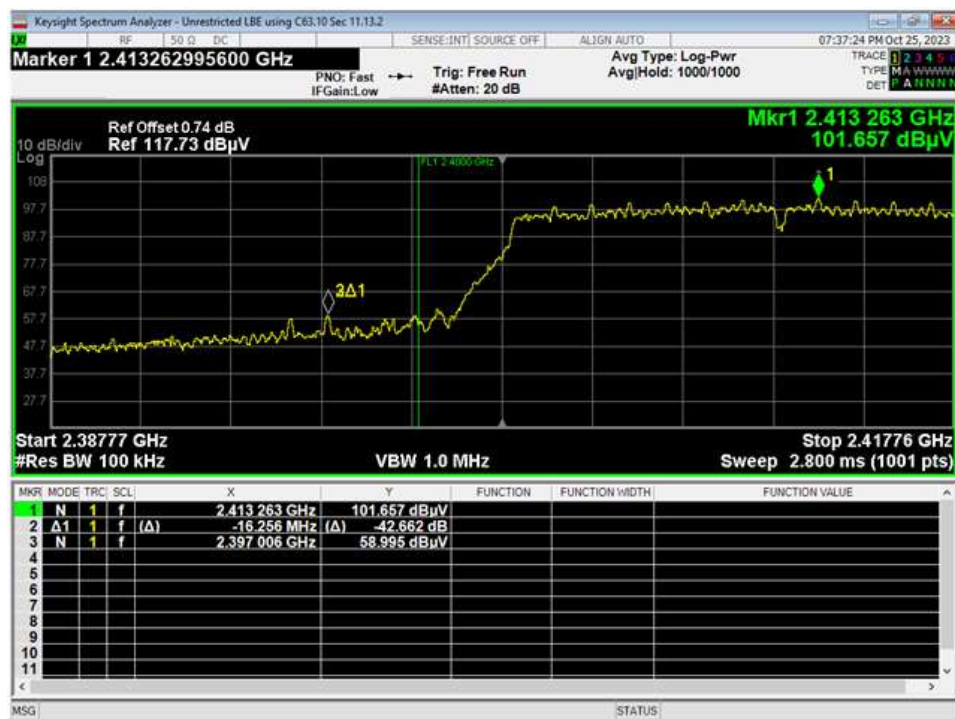


75 LBE Unrestricted, Wifi N, High Data Rate

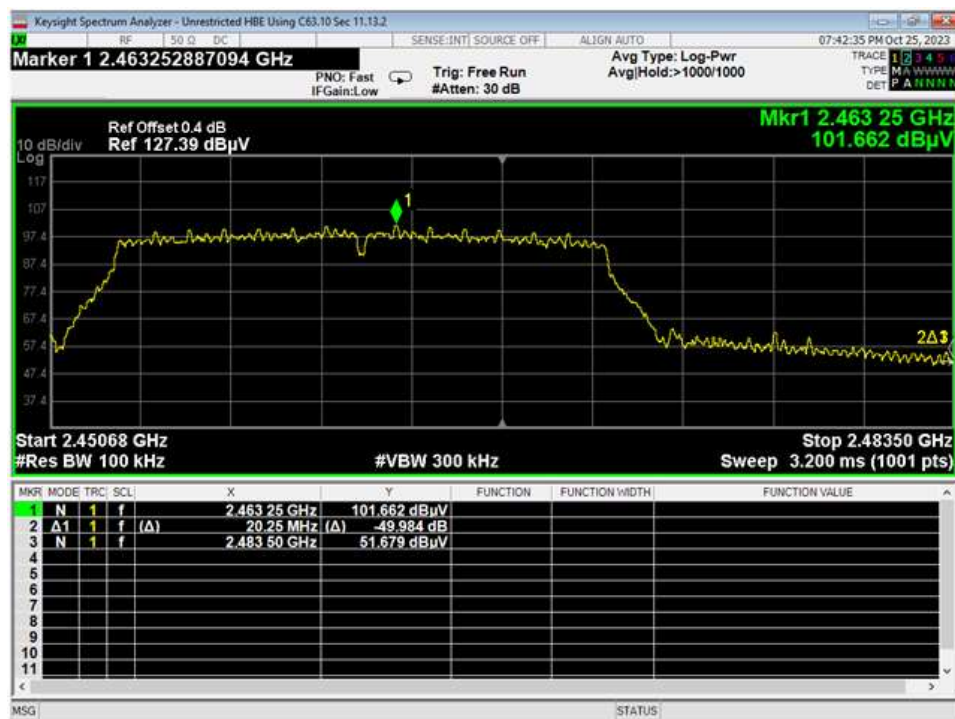


76 HBE Unrestricted, Wifi N, High Data Rate



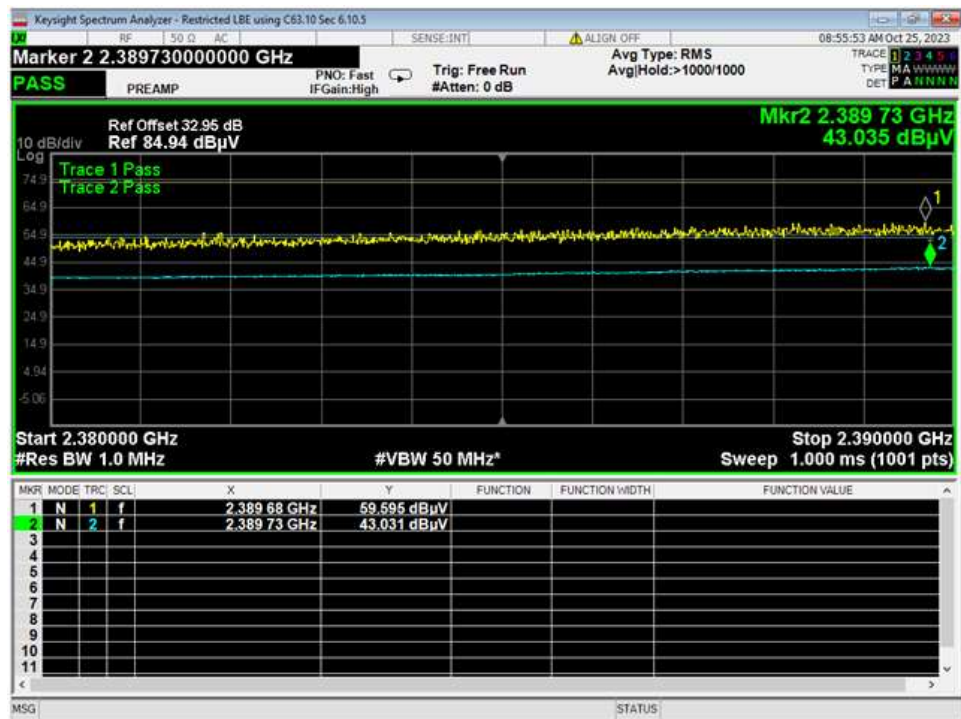

77 LBE Restricted, Wifi N MCS7, LG

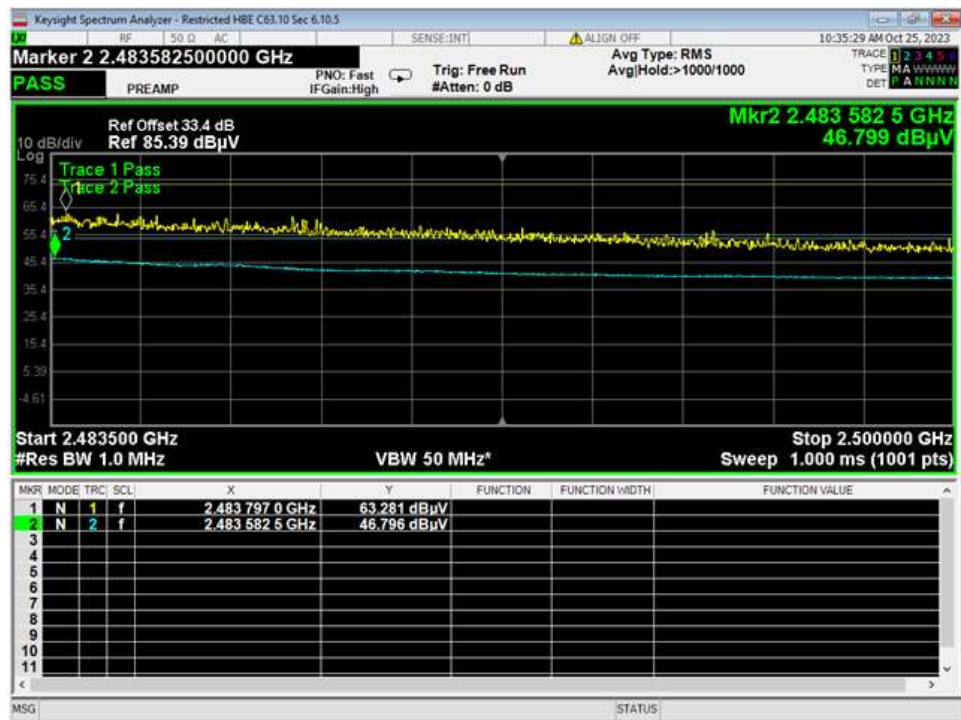

78 HBE Restricted, Wifi N MCS7, LG






79 Occupied Bandwidth, Low, Wifi B, Low Data Rate



80 Occupied Bandwidth, Mid, Wifi B, Low Data Rate



81 Occupied Bandwidth, High, Wifi B, Low Data Rate

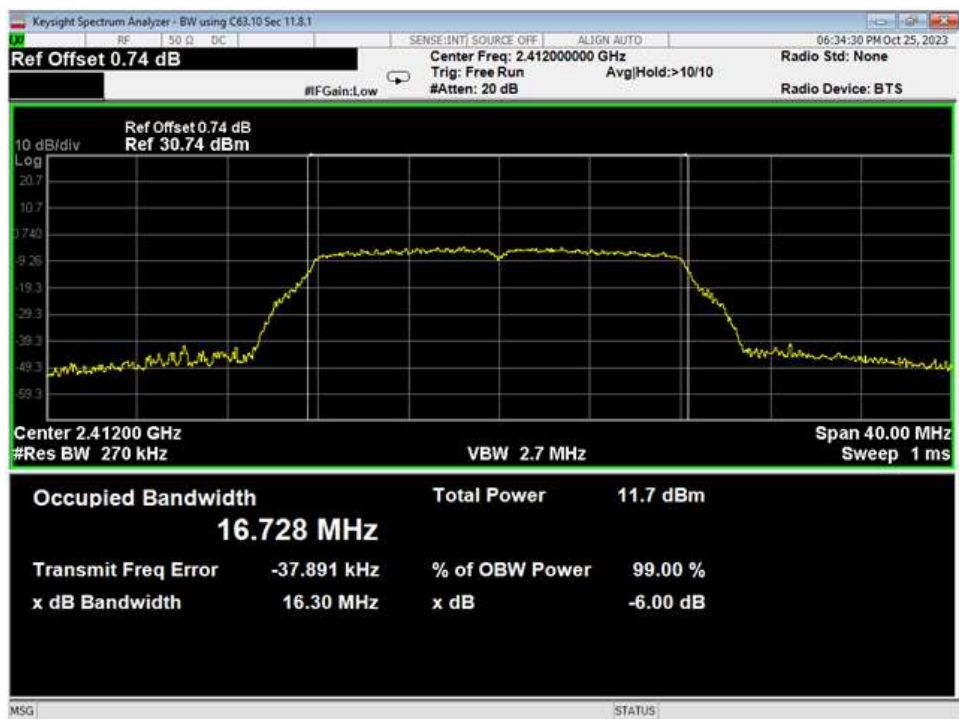


82 Occupied Bandwidth, Low, Wifi G, Low Data Rate




83 Occupied Bandwidth, Mid, Wifi G, Low Data Rate



84 Occupied Bandwidth, High, Wifi G, Low Data Rate

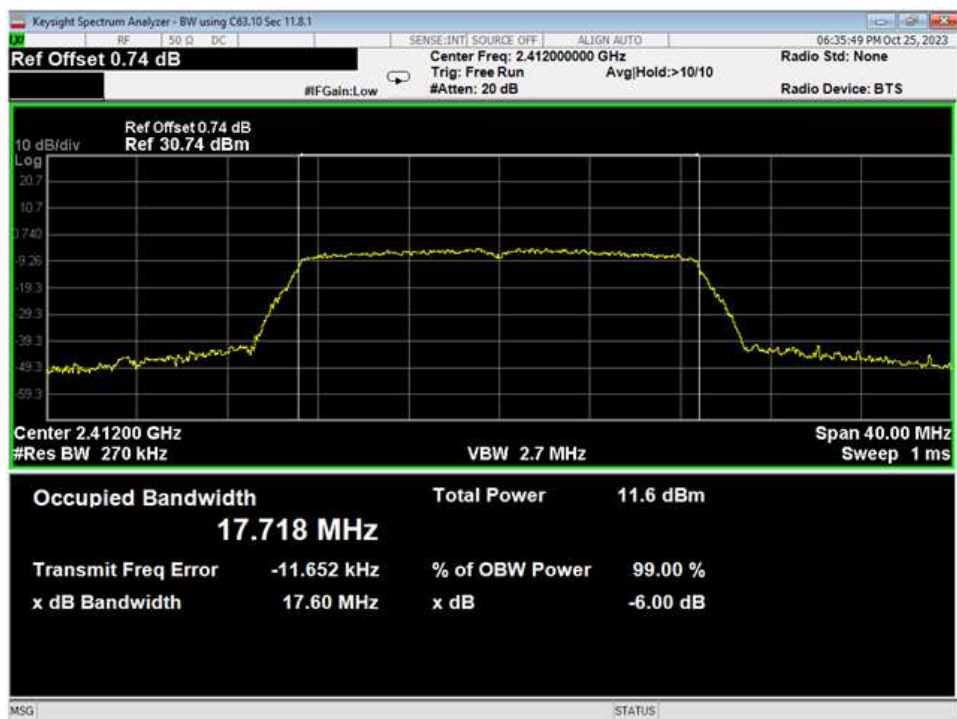


85 Occupied Bandwidth, Low, Wifi N, Low Data Rate

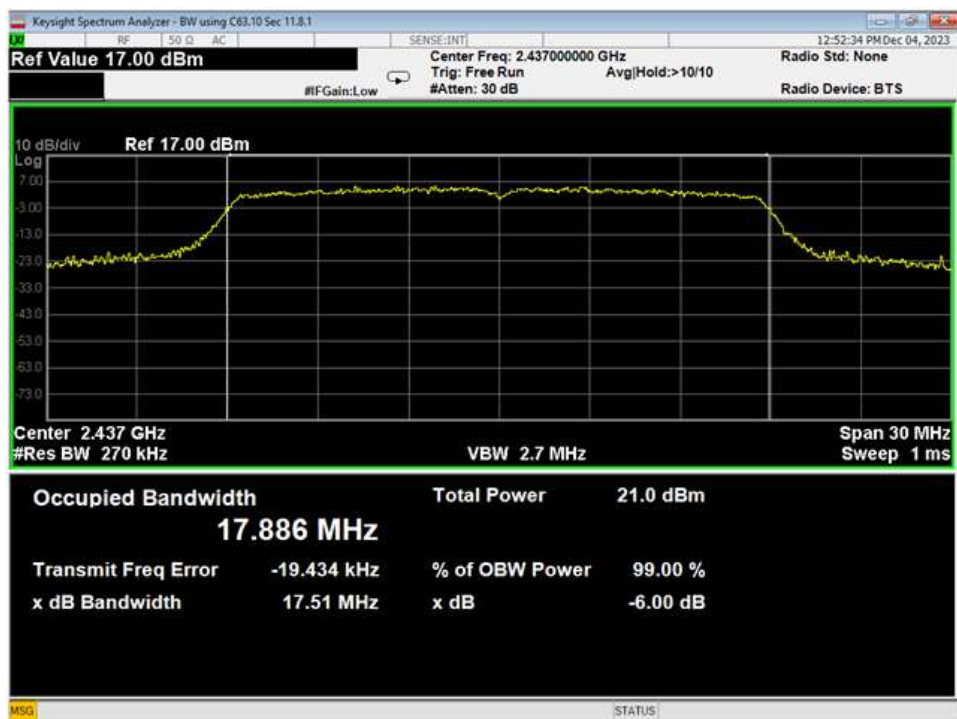

86 Occupied Bandwidth, Mid, Wifi N, Low Data Rate



87 Occupied Bandwidth, High, Wifi N, Low Data Rate

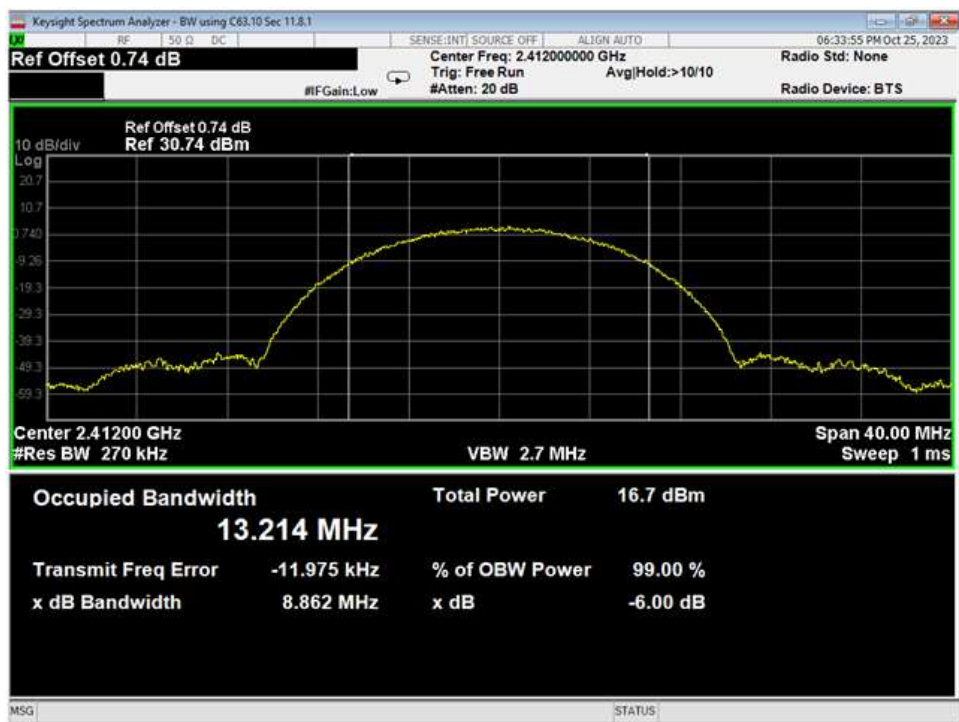

88 Occupied Bandwidth, Low, Wifi B, High Data Rate





89 Occupied Bandwidth, Mid, Wifi B, High Data Rate




90 Occupied Bandwidth, High, Wifi B, High Data Rate






91 Occupied Bandwidth, Low, Wifi G, High Data Rate

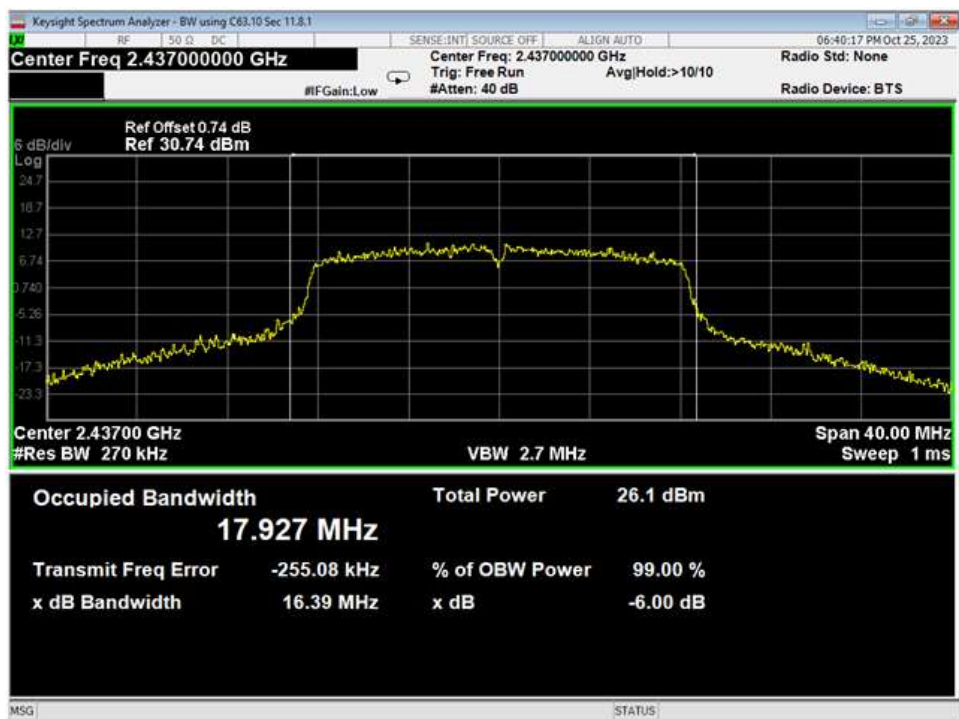

92 Occupied Bandwidth, Mid, Wifi G, High Data Rate

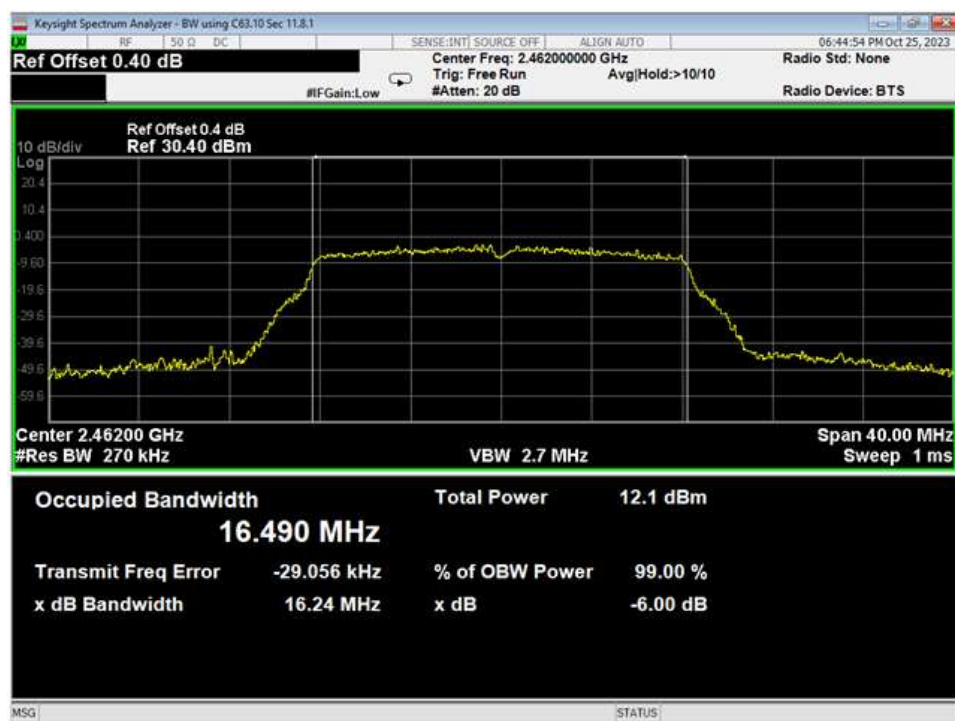


93 Occupied Bandwidth, High, Wifi G, High Data Rate



94 Occupied Bandwidth, Low, Wifi N, High Data Rate



95 Occupied Bandwidth, Mid, Wifi N, High Data Rate

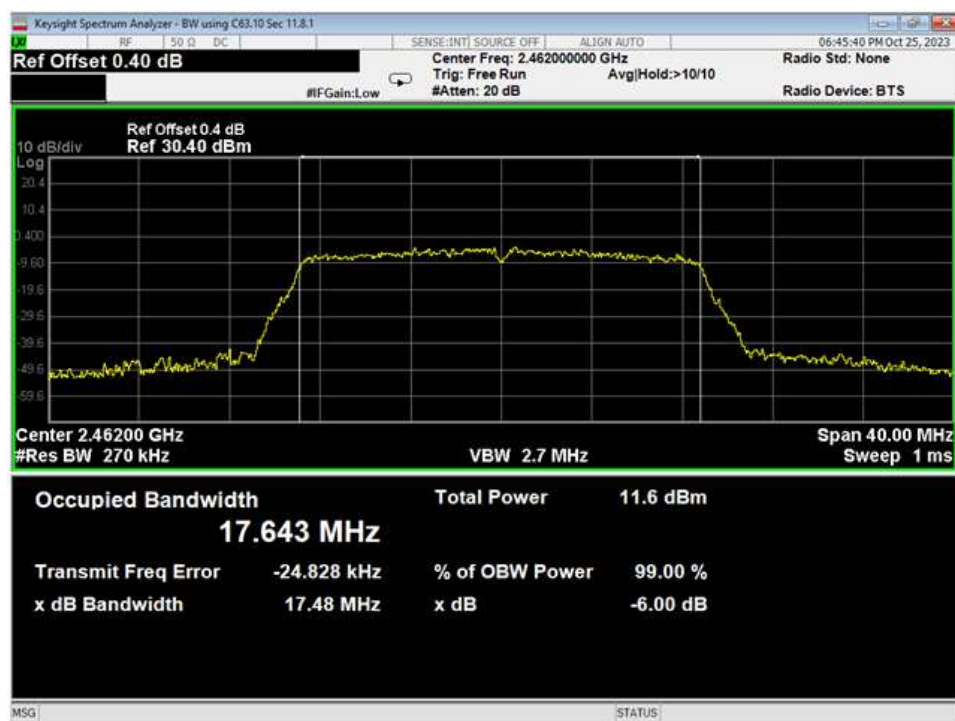

96 Occupied Bandwidth, High, Wifi N, High Data Rate



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R230919-20-E1              | Rev | 0 |
| Prepared for:  | Garmin International, Inc. |     |   |

REPORT END