

Radio Test Report
For
CP-8821 IP Phone with

2.4 GHz/5.0 GHz Wi-Fi Radio 802.11a/ac/b/g/n + Bluetooth v3.0

FCC ID: LDK88211296

UNII-3 (5725-5850 MHz)

Against the following Specifications:

CFR47 Part 15.407



Cisco Systems
170 West Tasman Drive
San Jose, CA 95134

Author: Ronak Patel

Approved By:

Title: See EDCS

Revision: See EDCS

This report replaces any previously entered test report under EDCS – **875621**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system. Test Report Template EDCS# 1526149.

SECTION 1: OVERVIEW.....	5
1.1 Test Summary	5
SECTION 2: ASSESSMENT INFORMATION	6
2.1 General	6
2.2 Units of Measurement	6
2.3 Date of testing (initial sample receipt date to last date of testing)	8
2.4 Report Issue Date	8
2.5 Testing facilities.....	8
2.6 Equipment Assessed (EUT).....	8
2.7 EUT Description	9
SECTION 3: RESULT SUMMARY.....	10
3.1 Results Summary Table	10
SECTION 4: SAMPLE DETAILS	12
4.1 Sample Details	12
4.2 Antenna Information.....	12
4.3 Mode of Operation Details	12
APPENDIX A: CONDUCTED TEST RESULTS.....	13
A.1 DUTY CYCLE	14
A.1.1 Duty Cycle Test Method	14
A.1.2 Duty Cycle Data Table.....	15
A.1.3 Duty Cycle Graphical Test results.....	16
A.2 FREQUENCY STABILITY	17
A.2.1 Limits.....	17

A.2.2	Frequency Stability Test Data	17
A.3	6DB BANDWIDTH	19
A.3.1	Limits.....	19
A.3.2	6dB Bandwidth Test Procedure.....	19
A.3.3	99% Occupied & 6dB Bandwidth data table.....	19
A.3.4	99% Occupied & 6dB Bandwidth Graphical Test Results	20
A.4	MAXIMUM CONDUCTED OUTPUT POWER.....	24
A.4.1	Limits.....	24
A.4.2	Test Procedure.....	24
A.4.3	Maximum Conducted Output Power Data Table.....	25
A.4.4	Maximum Conducted Output Power Graphical Test Results	26
A.5	POWER SPECTRAL DENSITY.....	29
A.5.1	Limits.....	29
A.5.2	Test Procedure.....	29
A.5.3	Power Spectral Density Data Table	30
A.5.4	Power Spectral Density Graphical Test Results	31
A.6	CONDUCTED BAND EDGE & UNDESIRABLE EMISSIONS IN NON-RESTRICTED BANDS	34
A.6.1	Limits.....	34
A.6.2	Test Procedure.....	34
A.6.3	Conducted Band Edge and Out-of-Band Test Data Table	35
A.6.4	Conducted Band Edge and Out-of-Band Graphical Test Results	36
APPENDIX B:	RADIATED TEST RESULTS.....	37
B.1	RADIATED SPURIOUS EMISSIONS & RESTRICTED BANDS	37



B.1.1	Limits.....	39
B.1.2	Test Procedure.....	41
B.1.3	Transmitter Radiated Spurious Emissions Graphical Data Results.....	42
B.2	AC CONDUCTED EMISSIONS	49
B.2.1	Limits.....	49
B.2.2	Test Procedure.....	50
B.2.3	Recorded Test Data and Graphical Test results	52
APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST.....		53
APPENDIX D: ABBREVIATION KEY AND DEFINITIONS.....		54
APPENDIX E: SOFTWARE USED TO PERFORM TESTING.....		54
APPENDIX F: TEST PROCEDURES.....		56
APPENDIX G: SCOPE OF ACCREDITATION		57
APPENDIX H: TEST ASSESSMENT PLAN.....		58
APPENDIX I: WORST CASE JUSTIFICATION		58

Section 1: Overview

1.1 Test Summary

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Specifications
CFR47 15.407

Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Radio Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc.:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%
- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)

2.2 Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

Emission level [dBuV] = Indicated voltage level [dBuV] + Cable Loss [dB] + Other correction factors [dB]

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

Level in uV/m = Common Antilogarithm [(X dBuV/m)/20] = Y uV/m

Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	± 2.4 10 ⁻⁷
temperature measurements	$\pm 0.54^{\circ}$.
humidity measurements	$\pm 2.3\%$
DC and low frequency measurements	$\pm 2.5\%$.

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

This report must not be reproduced except in full, without written approval of Cisco Systems.

2.3 Date of testing (initial sample receipt date to last date of testing)

September 08 2015 to June 01 2016

2.4 Report Issue Date

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

2.5 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.
125 West Tasman Drive (Building P)
San Jose, CA 95134
USA

Headquarters

Cisco Systems, Inc.,
170 West Tasman Drive
San Jose, CA 95134,
USA

Registration Numbers for Industry Canada

Cisco System Site	Address	Site Identifier
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1
Building N, 5m Chamber	125 Rio Robles, San Jose, California 95134	Company #: 6111A

Test Engineer

Danh Le

2.6 Equipment Assessed (EUT)

CP-8821



2.7 EUT Description

The CP-8821 is the next generation IP Phone with Wi-Fi (802.11a/ac/b/g/n) and Bluetooth module support. The specification is applied to IEEE802.11a/ac/b/g/n + Bluetooth Basic rate/ EDR

Here is a brief summary of the Heracles hardware:

- IEEE 802.11 a/b/g/n/ac compliant wireless LAN
- USB 2.0/OTG interface (Shared with docking connector)
- 2.4-inch TFT LCD display, with 240 x 320 pixels, 16M colors
- Capacitive standard 12-key backlit keypad, 2 soft keys, volume and ringer control hard keys, mute hard Key, speakerphone hard key, push-to-talk hard key, dedicated end call button (shared with power-on and off function) and send/dial button, 5-way joystick/navigation keys
- 512MB LPDDR2 RAM, 4GB eMMC flash storage, version4.41
- 2020 mAh removable standard battery
- Ring, Wireless low signal, battery condition and MWI LED
- Shared antenna for 802.11a/b/g/n/ac and Bluetooth Basic rate /EDR.
- Separate ringer and voice speaker
- 3.5 mm headset interface
- Vibrate alert support
- Two Digital Microphone & Two loud speaker Interface
- Audio codec support, MP3, WAV, AAC etc.
- IP67 certified water and dust proof.

Section 3: Result Summary

3.1 Results Summary Table

Conducted emissions

Basic Standard	Technical Requirements / Details	Result
15.407(e)	99% & 6 dB Bandwidth: The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.	Pass
15.407(a)(3)	Maximum Conducted Output Power: For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If the transmitting antennas of directional gain greater than 6dBi are used, The maximum conducted output power shall be reduced by amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
15.407(a)(3)	Power Spectral Density The maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
15.407(b)(4)(i)	Band Edge / Out-of-Band Emissions: For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	Pass
15.407 15.205 15.209	Restricted band: Unwanted emissions must comply with the general field strength limits set forth in §15.209.	Pass
15.207	AC conducted Emissions: U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.	Pass

Radiated Emissions (General requirements)

Basic Standard	Technical Requirements / Details	Result
15.407 15.205 15.209	TX Spurious Emissions: Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the filed strength limits table in this section.	Pass

Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the “Justification for worst Case test Configuration” section of this report for further details on the selection of EUT samples.

4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01 (Radiated)	CP-8821	Cisco Systems, Inc.	01	Sip8821.10-3-2-HER-157 dev	Rootfs8821.10-3-2HER-157-dev	FCH192180BK
S02 (Conducted)	CP-8821	Cisco Systems, Inc.	01	Sip8821.10-2-1-HE1-3.1-diagnos- tics	Sip8821.10-2-1-HE1-3.1-diag- nostics	FCH18528TEU

4.2 Antenna Information

The following antennas are supported by this product series.

Frequency (MHz)	Part Number	Antenna Type	Antenna Gain (dBi)
5725-5850	Internal	Monopole	2

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Diagnostic	Diagnostic version allows to do conducted testing at antenna port of EUT. Image version : Sip8821.10-2-1-HE1-3.1-diagnostics

Measurements were made in accordance with

- ANSI C63.10:2013 Procedure for Compliance Testing of Unlicensed Wireless Devices
- KDB Publication No. 789033 - D02 General UNII Test Procedures New Rules v01
- KDB 644545 D03 Guidance for IEEE 802.11ac v01

Appendix A: Conducted Test Results

Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)		
	Frequency (MHz)		
	5745	5785	5825
802.11a	15	17	15
802.11n HT20	10	17	10
802.11ac VHT20	10	17	15

Operating Mode	Maximum Channel Power (dBm)	
	Frequency (MHz)	
	5755	5795
802.11n HT40	9	12
802.11ac VHT40	9	12

Operating Mode	Maximum Channel Power (dBm)
	Frequency (MHz)
	5775
802.11ac VHT80	10

A.1 Duty Cycle

Duty Cycle Test Requirement

From KDB 789033 D02 General UNII Test Procedures New Rules v01

B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

1. All measurements are to be performed with the EUT transmitting at 100 percent duty cycle at its maximum power control level; however, if 100 percent duty cycle cannot be achieved, measurements of duty cycle, x , and maximum-power transmission duration, T , are required for each tested mode of operation.

A.1.1 Duty Cycle Test Method

From KDB 789033 D02 General UNII Test Procedures New Rules v01:


B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

A.1.2 Duty Cycle Data Table

Mode	Data Rate (Mbps)	On-time (ms)	Total on+off Time (ms)	Duty Cycle (%)	Correction Factor (dB)
802.11a	6	1.423	1.53	93.007	0.315
802.11n20	MCS0	1.333	1.433	93.022	0.315
802.11n40	MCS0	0.3533	0.4567	77.360	1.113
802.11ac20	MCS0	1.34	1.443	92.863	0.332
802.11ac40	MCS0	0.670	0.770	87.013	0.605
802.11ac80	MCS0	0.330	0.4333	76.160	1.183

A.1.3 Duty Cycle Graphical Test results

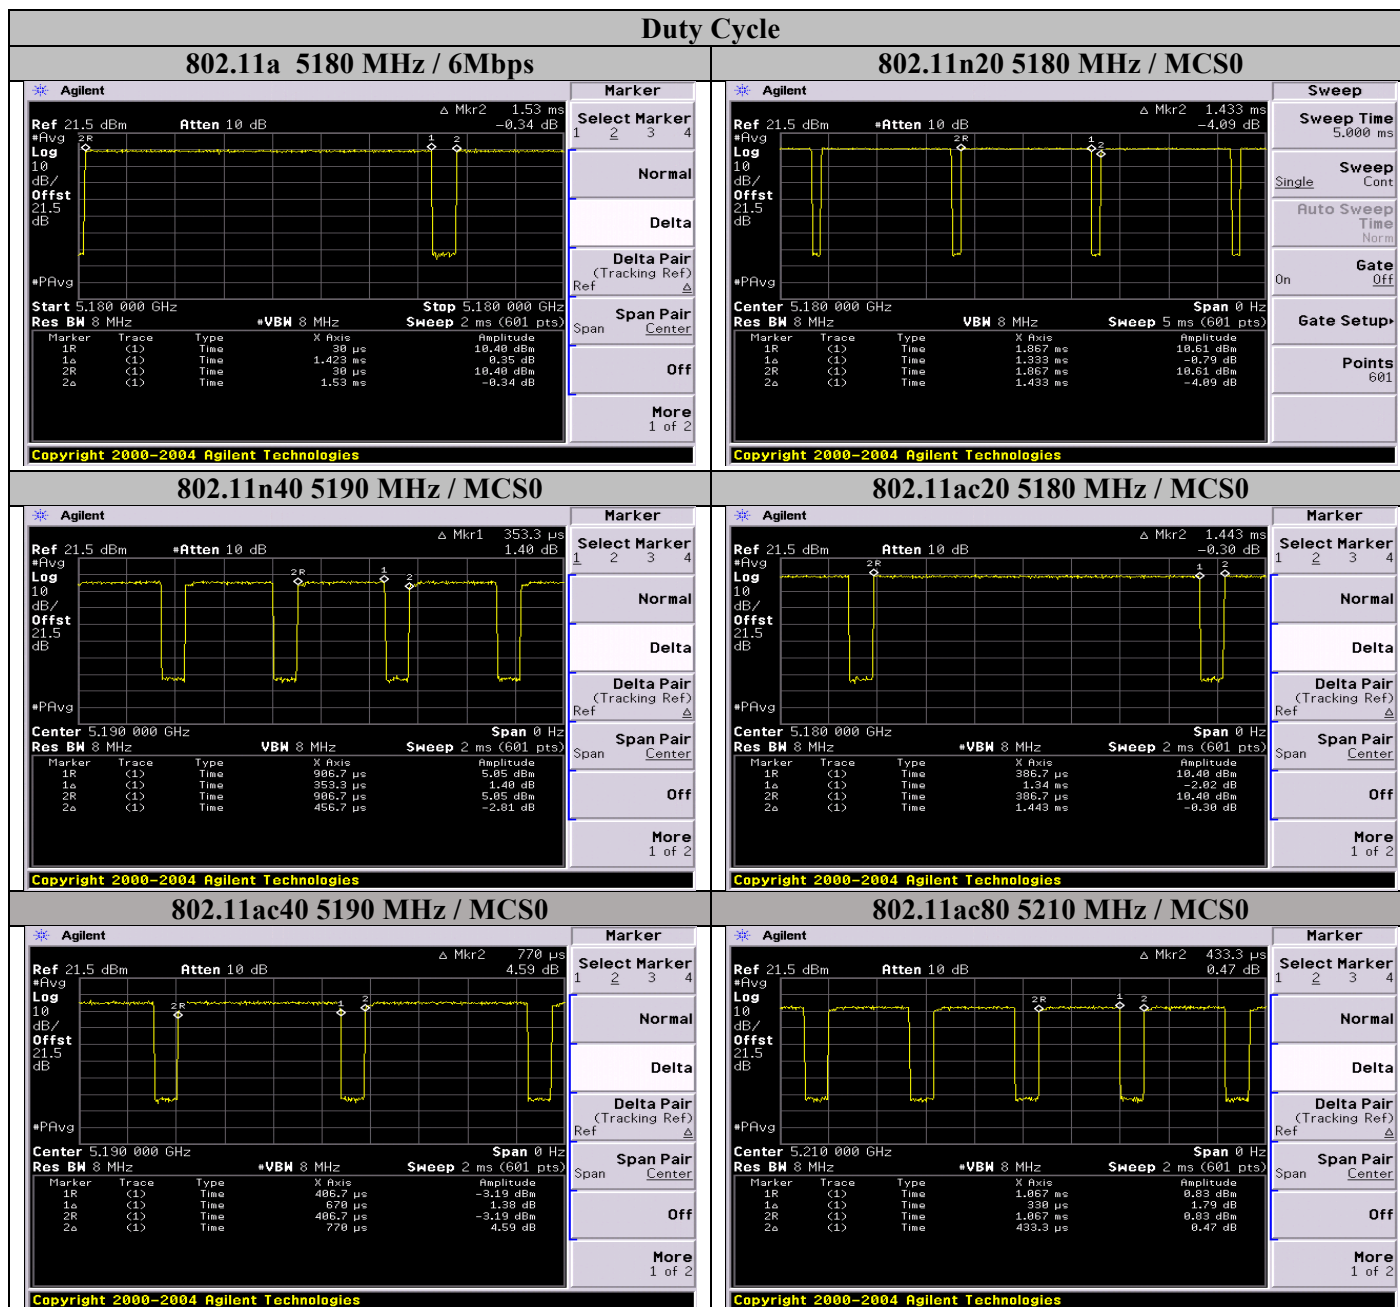

A.2 Frequency Stability

A.2.1 Limits.

FCC 15.407(g): Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

A.2.2 Frequency Stability Test Data

Temperature	Voltage	Frequency (MHz)	S.A Reading (MHz)	Deviation (ppm)	Limit (ppm)	Result
802.11a 5745MHz						
0 degree	Low	5745 MHz	5745.0252	4.386422977	≤ 20	Pass
	Nominal		5745.0546	9.503916449	≤ 20	Pass
	High		5745.0546	9.503916449	≤ 20	Pass
Normal Temperature	Low	5745 MHz	5744.9975	-0.43516101	≤ 20	Pass
	Nominal		5744.9631	-6.42297650	≤ 20	Pass
	High		5744.9975	-0.43516101	≤ 20	Pass
50 degree	Low	5745 MHz	5744.9807	-3.35944299	≤ 20	Pass
	Nominal		5744.9807	-3.35944299	≤ 20	Pass
	High		5744.9815	-3.22019147	≤ 20	Pass
802.11a 5785MHz						
0 degree	Low	5785 MHz	5785.0268	4.6326707	≤ 20	Pass
	Nominal		5785.0546	9.503916449	≤ 20	Pass
	High		5785.0553	9.55920484	≤ 20	Pass
Normal Temperature	Low	5785 MHz	5784.9975	-0.432152117	≤ 20	Pass
	Nominal		5784.9630	-6.39585134	≤ 20	Pass
	High		5784.9975	-0.432152117	≤ 20	Pass
50 degree	Low	5785 MHz	5784.9807	-3.336214347	≤ 20	Pass
	Nominal		5784.9807	-3.336214347	≤ 20	Pass
	High		5784.9824	-3.042350908	≤ 20	Pass
802.11a 5825MHz						
0 degree	Low	5825 MHz	5825.0268	4.600858369	≤ 20	Pass
	Nominal		5825.0546	9.503916449	≤ 20	Pass
	High		5825.0553	9.493562232	≤ 20	Pass
Normal Temperature	Low	5825 MHz	5824.9975	-0.429184549	≤ 20	Pass
	Nominal		5824.9639	-6.197424893	≤ 20	Pass
	High		5824.9975	-0.429184549	≤ 20	Pass
50 degree	Low	5825 MHz	5824.9807	-3.313304721	≤ 20	Pass
	Nominal		5824.9807	-3.313304721	≤ 20	Pass
	High		5824.9807	-3.313304721	≤ 20	Pass

Frequency Stability Test Data

Temperature	Voltage	Frequency (MHz)	S.A Reading (MHz)	Deviation (ppm)	Limit (ppm)	Result
802.11n40 5755MHz						
0 degree	Low	5755 MHz	5755.0260	4.517810599	≤ 20	Pass
	Nominal		5755.0546	9.503916449	≤ 20	Pass
	High		5755.0544	9.45264987	≤ 20	Pass
Normal Temperature	Low	5755 MHz	5754.9975	-0.43440486	≤ 20	Pass
	Nominal		5754.9639	-6.27280625	≤ 20	Pass
	High		5754.9975	-0.43440486	≤ 20	Pass
50 degree	Low	5755 MHz	5754.9807	-3.35360556	≤ 20	Pass
	Nominal		5754.9807	-3.35360556	≤ 20	Pass
	High		5754.9807	-3.35360556	≤ 20	Pass
802.11n40 5795MHz						
0 degree	Low	5795 MHz	5795.0260	4.486626402	≤ 20	Pass
	Nominal		5795.0546	9.503916449	≤ 20	Pass
	High		5795.0553	9.542709232	≤ 20	Pass
Normal Temperature	Low	5795 MHz	5794.9975	-0.43140638	≤ 20	Pass
	Nominal		5794.9631	-6.36755824	≤ 20	Pass
	High		5794.9983	-0.29335634	≤ 20	Pass
50 degree	Low	5795 MHz	5794.9807	-3.33045729	≤ 20	Pass
	Nominal		5794.9807	-3.33045729	≤ 20	Pass
	High		5794.9807	-3.33045729	≤ 20	Pass
802.11ac80 5775MHz						
0 degree	Low	5775 MHz	5775.0260	4.502164502	≤ 20	Pass
	Nominal		5775.0546	9.503916449	≤ 20	Pass
	High		5775.0544	9.41991342	≤ 20	Pass
Normal Temperature	Low	5775 MHz	5774.9975	-0.43290043	≤ 20	Pass
	Nominal		5774.9639	-6.25108225	≤ 20	Pass
	High		5774.9975	-0.43290043	≤ 20	Pass
50 degree	Low	5775 MHz	5774.9807	-3.34199134	≤ 20	Pass
	Nominal		5774.9807	-3.34199134	≤ 20	Pass
	High		5774.9807	-3.34199134	≤ 20	Pass

A.3 6dB Bandwidth

The 6 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

A.3.1 Limits.

FCC 15.407 (e)

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz

A.3.2 6dB Bandwidth Test Procedure

Ref. KDB 789033 Section C. Bandwidth Measurement

6dB BW
Test Procedure
<ol style="list-style-type: none">1. Set the radio in the continuous transmitting mode.2. Allow the trace to stabilize.3. Setting the x-dB bandwidth mode to -6dB within the measurement set up function.4. Select the automatic OBW measurement function of an instrument to perform bandwidth measurement.5. Capture graphs and record pertinent measurement data.
Test parameters
<ol style="list-style-type: none">a) Set RBW = 100 kHz.b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.c) Detector = Peak.d) Trace mode = max hold.e) Sweep = auto couple.f) Allow the trace to stabilize.g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. <p>Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.</p>


A.3.3 99% Occupied & 6dB Bandwidth data table




Frequency (MHz)	Mode	Data Rate (Mbps)	99% BW (MHz)	6dB BW (MHz)	Limits (KHz)	Results
5745	802.11a	6	16.5090	16.406	≥ 500	Pass
5785	802.11a	6	16.5186	16.426	≥ 500	Pass
5825	802.11a	6	16.5199	16.444	≥ 500	Pass
5745	802.11n20	MCS0	17.6861	17.622	≥ 500	Pass
5785	802.11n20	MCS0	17.7193	17.620	≥ 500	Pass
5825	802.11n20	MCS0	17.7132	17.637	≥ 500	Pass
5755	802.11n40	MCS0	36.1095	36.417	≥ 500	Pass
5795	802.11n40	MCS0	36.1098	36.446	≥ 500	Pass
5745	802.11ac	MCS0	17.6382	17.680	≥ 500	Pass
5785	802.11ac	MCS0	17.7672	17.733	≥ 500	Pass
5825	802.11ac	MCS0	17.6378	17.680	≥ 500	Pass
5755	802.11ac40	MCS0	36.1195	36.110	≥ 500	Pass
5795	802.11ac40	MCS0	36.1331	36.124	≥ 500	Pass
5775	802.11ac80	MCS0	75.4494	76.130	≥ 500	Pass

A.3.4 99% Occupied & 6dB Bandwidth Graphical Test Results

99% & 6dB Occupied Bandwidth	
802.11a 5745 MHz / 6Mbps	802.11n20 5745 MHz / MCS0

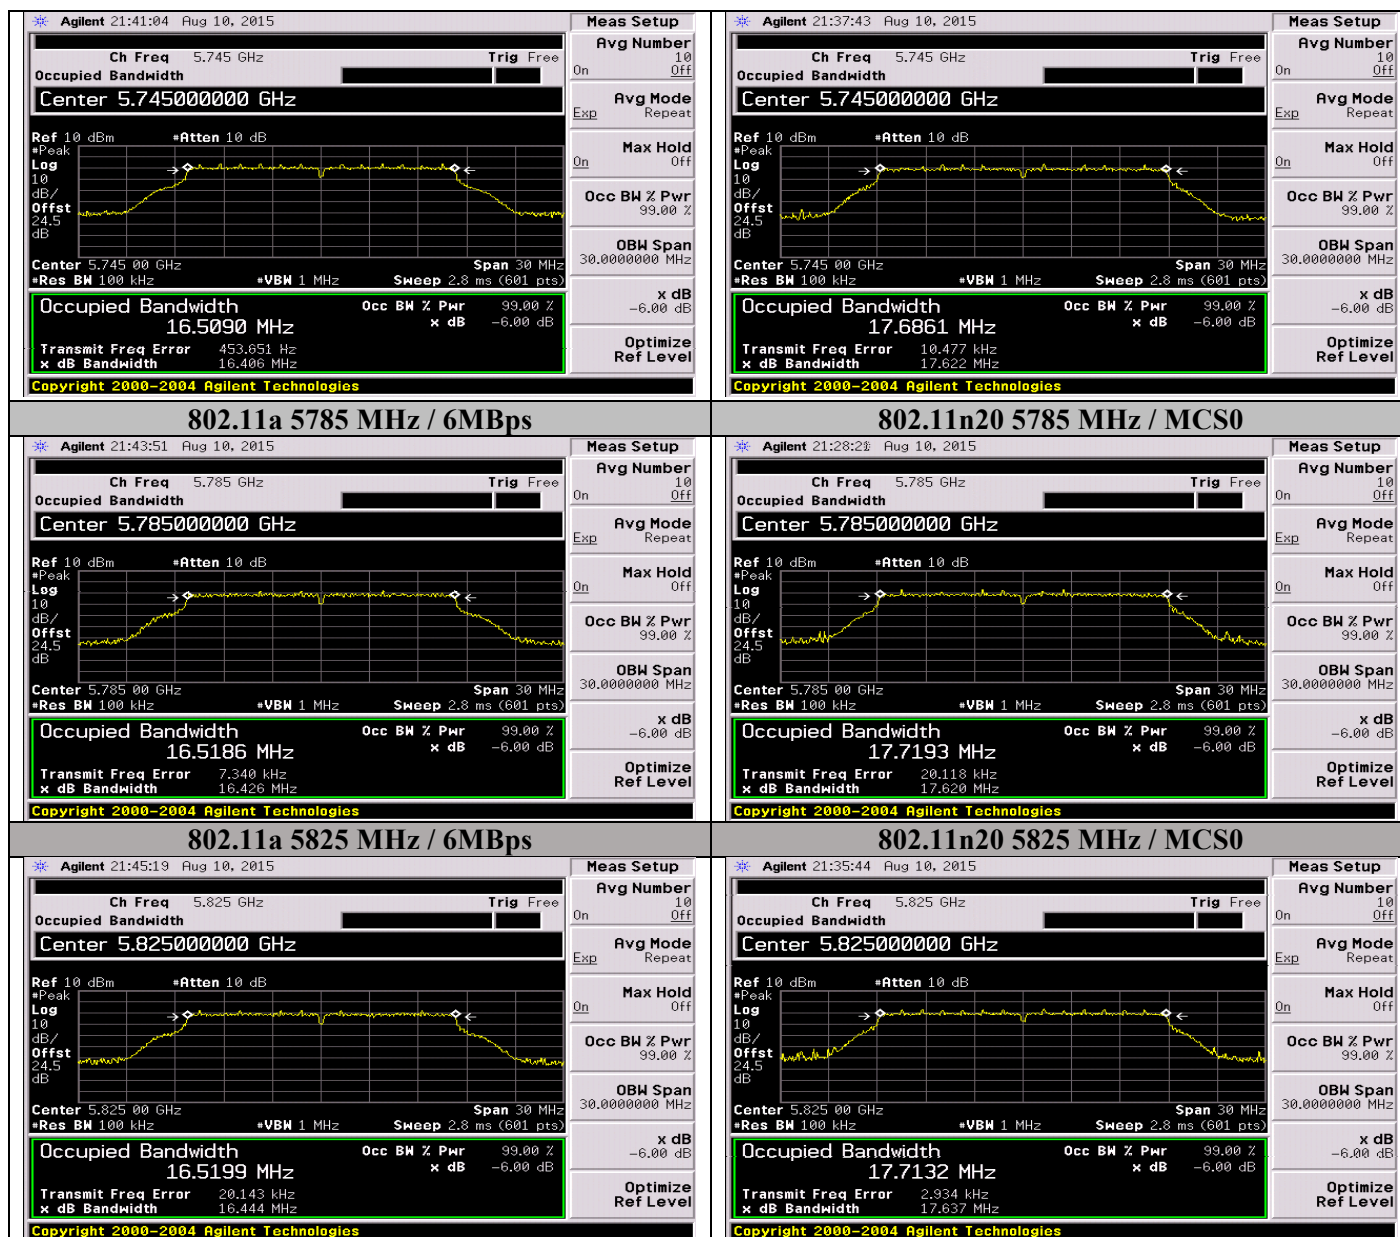



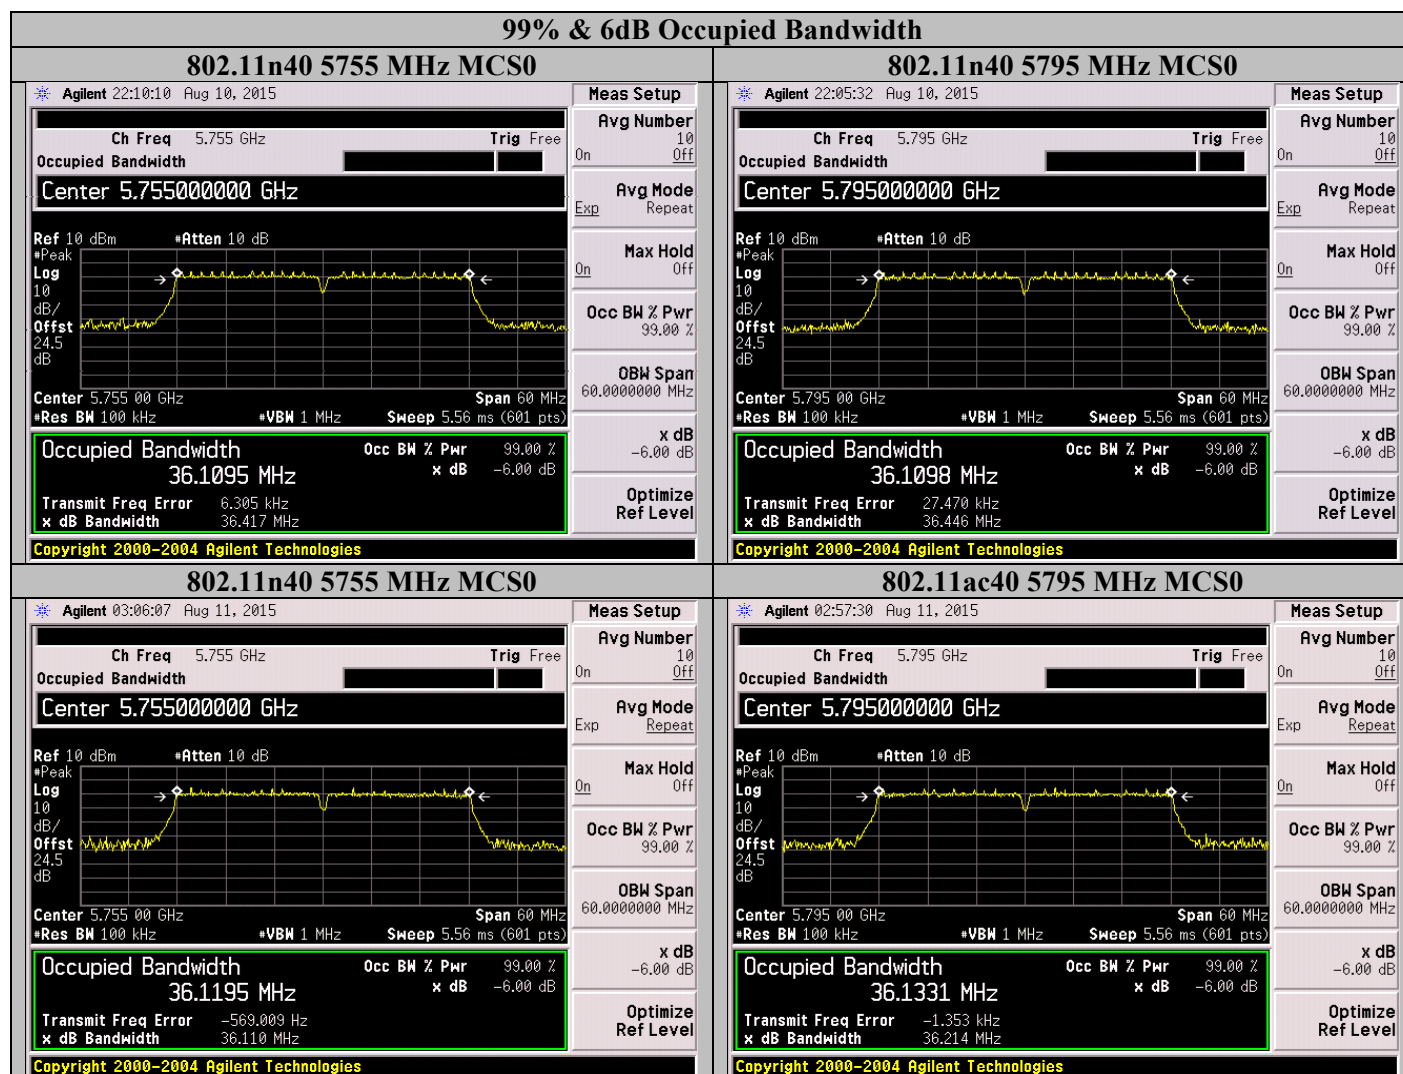

A.4 Maximum Conducted Output Power

Maximum Conducted Output Power is defined as the total transmit power delivered to all antenna when the transmitter is operating at its maximum control level.

A.4.1 Limits.

FCC 15.407(a) (3)

30dBm

A.4.2 Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01

Test Procedure
<ol style="list-style-type: none">1. Set the radio in the transmitting mode2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges.3. Capture graphs and record pertinent measurement data.4. Make the following adjustments to the peak value of the spectrum, by adding duty cycle correction factor to the measured value


Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2

Test parameters
<ol style="list-style-type: none">(i) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.(ii) Set RBW = 1 MHz(iii) Set VBW \geq 3 MHz(iv) Number of points in sweep \geq 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)(v) Sweep time = auto.(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.(vii) Do not use sweep triggering. Allow the sweep to "free run".(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.

A.4.3 Maximum Conducted Output Power Data Table

Channel No	Frequency (MHz)	Antenna Gain (dBi)	DCCF (dB)	Max Output Power (dBm)	Corrected Max Output Power (dBm)	Limits (dBm)	Results
Mode/Data rate (Mbps): 802.11a/(6Mbps)							
149	5745	2	0.315	11.04	11.355	30	Pass
157	5785	2	0.315	14.74	15.055	30	Pass
165	5825	2	0.315	10.43	10.745	30	Pass
Mode/Data rate (Mbps): 802.11n20/(MCS0)							
149	5745	2	0.315	9.32	9.635	30	Pass
157	5785	2	0.315	16.41	16.725	30	Pass
165	5825	2	0.315	9.00	9.315	30	Pass
Mode/Data rate (Mbps): 802.11n40/(MCS0)							
151	5755	2	1.113	7.67	8.783	30	Pass
159	5795	2	1.113	11.59	12.703	30	Pass
Mode/Data rate (Mbps): 802.11ac20/(MCS0)							
149	5745	2	0.332	9.74	10.072	30	Pass
157	5785	2	0.332	16.90	17.232	30	Pass
165	5825	2	0.332	14.76	15.092	30	Pass
Mode/Data rate (Mbps): 802.11ac40/(MCS0)							
151	5755	2	0.605	11.33	11.935	30	Pass
159	5795	2	0.605	12.07	12.675	30	Pass
Mode/Data rate (Mbps): 802.11ac80/(MCS0)							
155	5775	2	1.183	8.43	9.613	30	Pass

A.4.4 Maximum Conducted Output Power Graphical Test Results

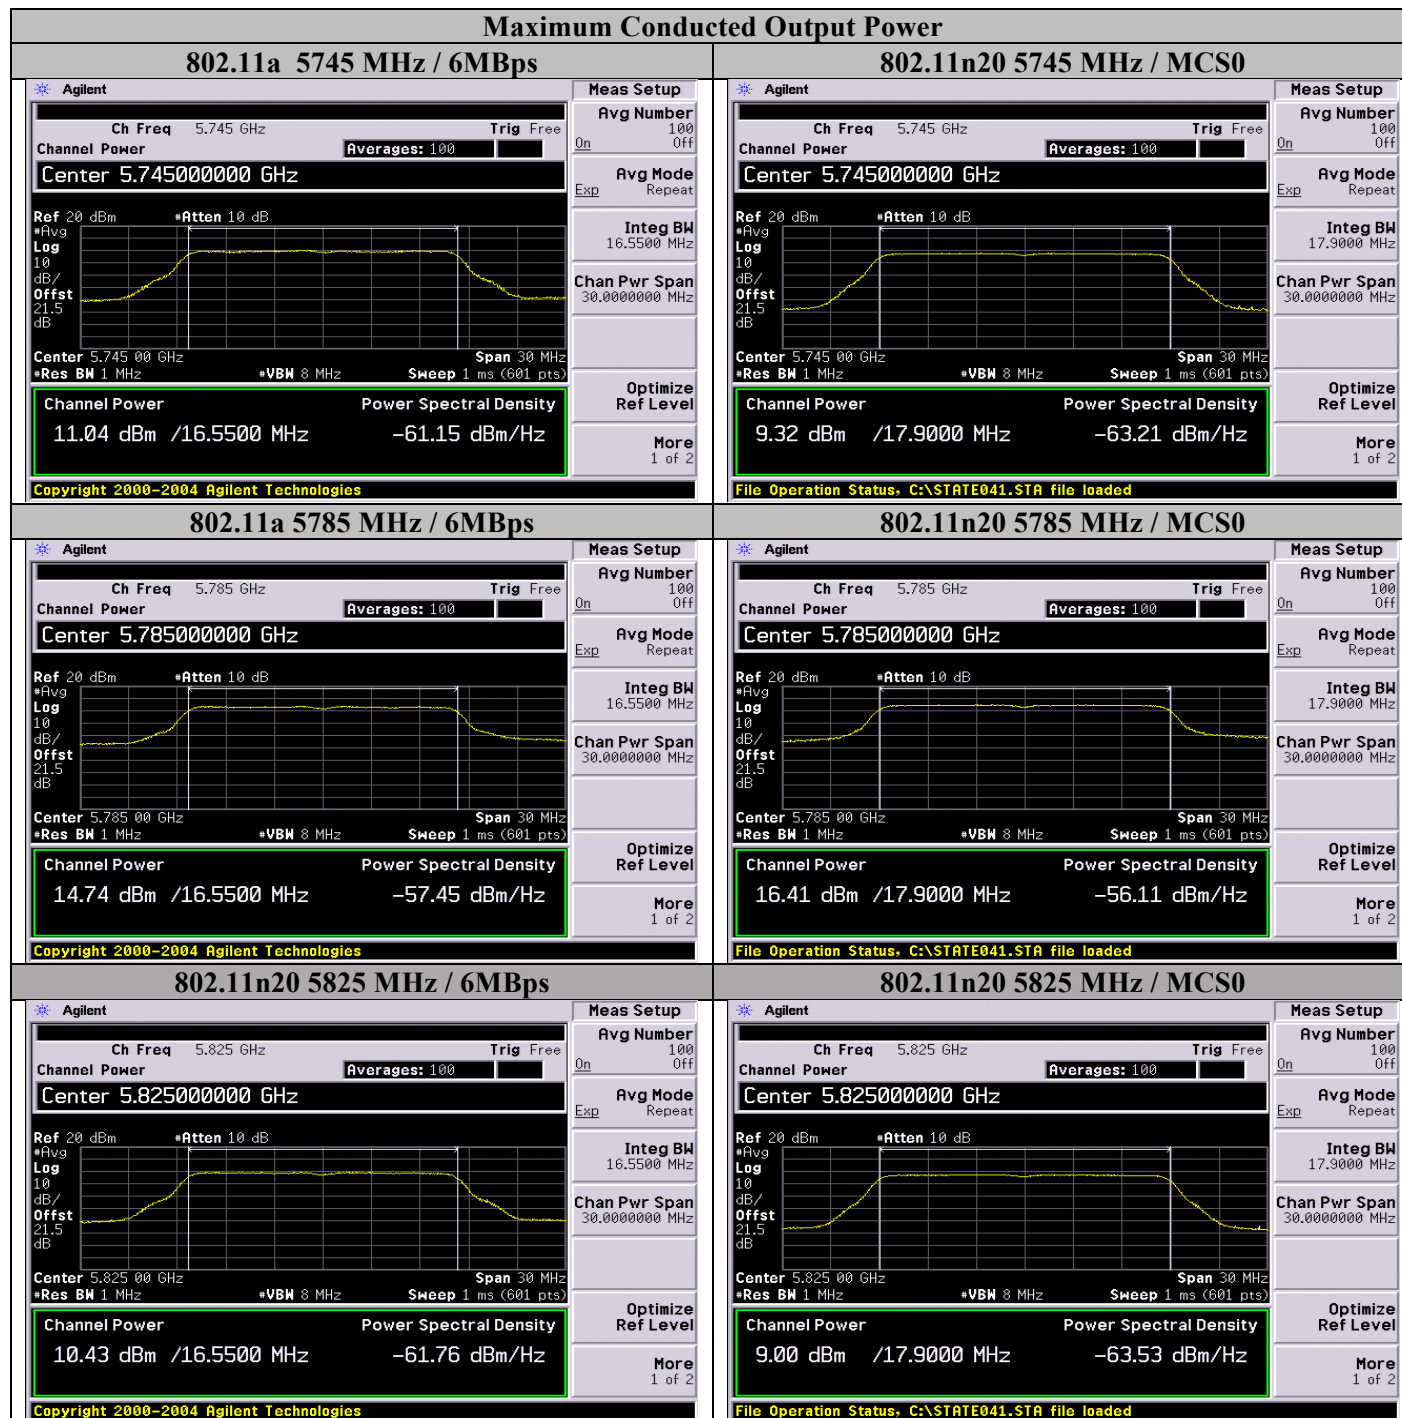





A.5 Power Spectral Density

The Power Spectral Density is the total energy output per unit bandwidth from a pulse or sequence of pulses for which the transmit power is at its maximum level, divided by the total duration of the pulses, This total time does not include the time between pulses during which the transmit power is off or below its maximum level.

A.5.1 Limits.

FCC 15.407 (a) (3)

30dBm/500 KHz

A.5.2 Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v01

Test Procedure
1. Set the radio in the transmitting mode
2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
3. Make the following adjustments to the peak value of the spectrum, by adding duty cycle correction factor to the measured value.
4. Capture graphs and record pertinent measurement data.
5. The result is the Maximum PSD over 500 KHz reference bandwidth.


Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2


Test parameters
(i) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
(ii) Set RBW = 500 KHz
(iii) Set VBW $\geq 3 \times$ RBW
(iv) Number of points in sweep $\geq 2 \times$ Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
(v) Sweep time = auto.
(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
(vii) Do not use sweep triggering. Allow the sweep to “free run”.
(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.

A.5.3 Power Spectral Density Data Table


Channel No	Frequency (MHz)	Antenna Gain (dBi)	DCCF (dB)	PSD (dBm/500 KHz)	Corrected PSD (dBm/500 KHz)	Limits (dBm/500 KHz)	Results
Mode/Data rate (Mbps): 802.11a/(6Mbps)							
149	5745	2	0.315	-0.401	-0.086	30	Pass
157	5785	2	0.315	0.973	1.288	30	Pass
165	5825	2	0.315	-0.856	-0.541	30	Pass
Mode/Data rate (Mbps): 802.11n20/(MCS0)							
149	5745	2	0.315	-5.229	-4.914	30	Pass
157	5785	2	0.315	1.399	1.714	30	Pass
165	5825	2	0.315	-5.742	-5.427	30	Pass
Mode/Data rate (Mbps): 802.11n40/(MCS0)							
151	5755	2	1.113	-9.982	-8.869	30	Pass
159	5795	2	1.113	-5.926	-4.813	30	Pass
Mode/Data rate (Mbps): 802.11ac20/(MCS0)							
149	5745	2	0.332	-1.780	-1.448	30	Pass
157	5785	2	0.332	4.808	5.14	30	Pass
165	5825	2	0.332	2.651	2.983	30	Pass
Mode/Data rate (Mbps): 802.11ac40/(MCS0)							
151	5755	2	1.113	-8.900	-8.295	30	Pass
159	5795	2	1.113	-5.398	-4.793	30	Pass
Mode/Data rate (Mbps): 802.11ac80/(MCS0)							
155	5775	2	1.113	-11.80	-10.617	30	Pass

A.5.4 Power Spectral Density Graphical Test Results

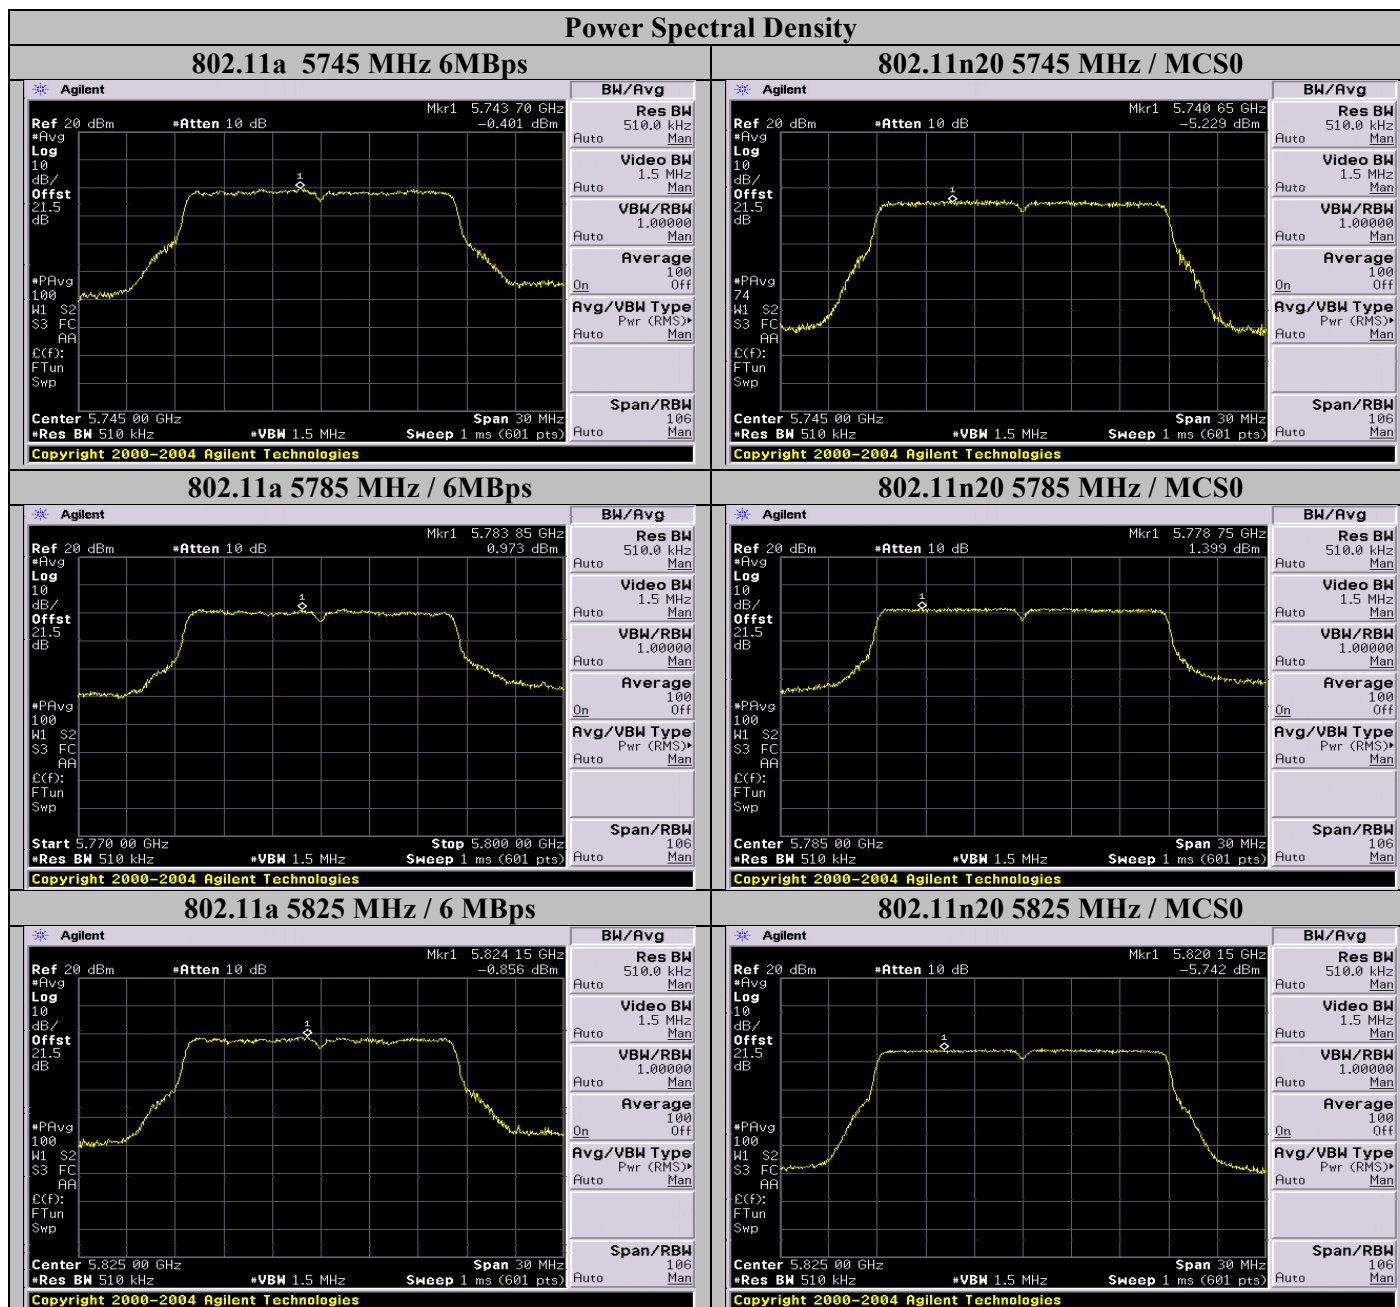

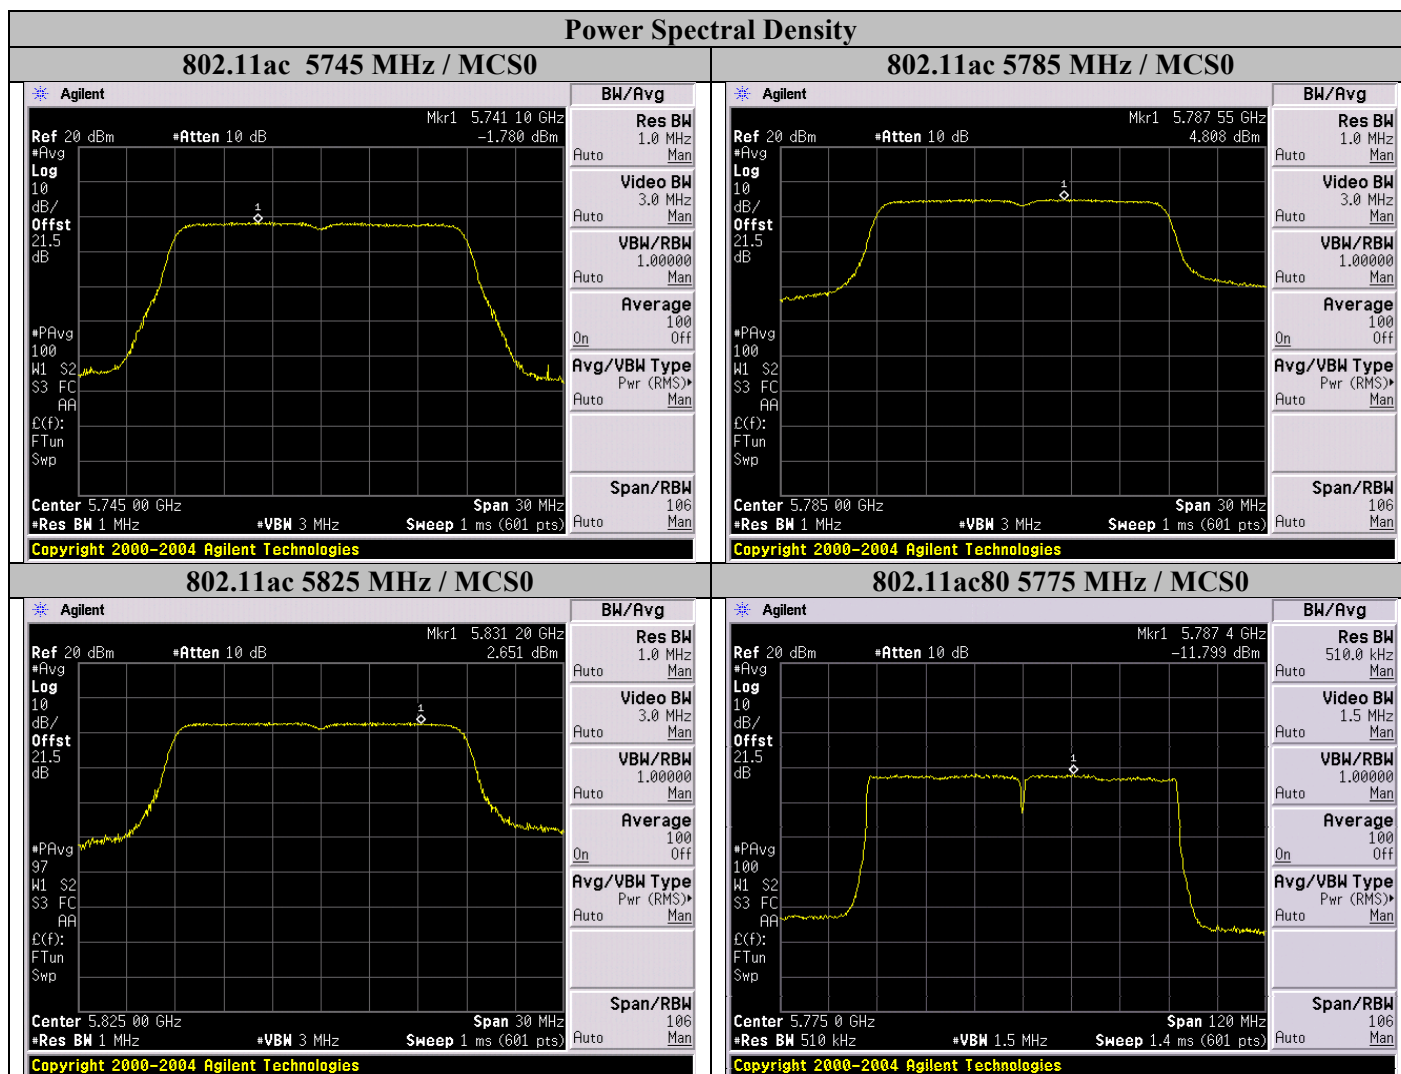

Power Spectral Density

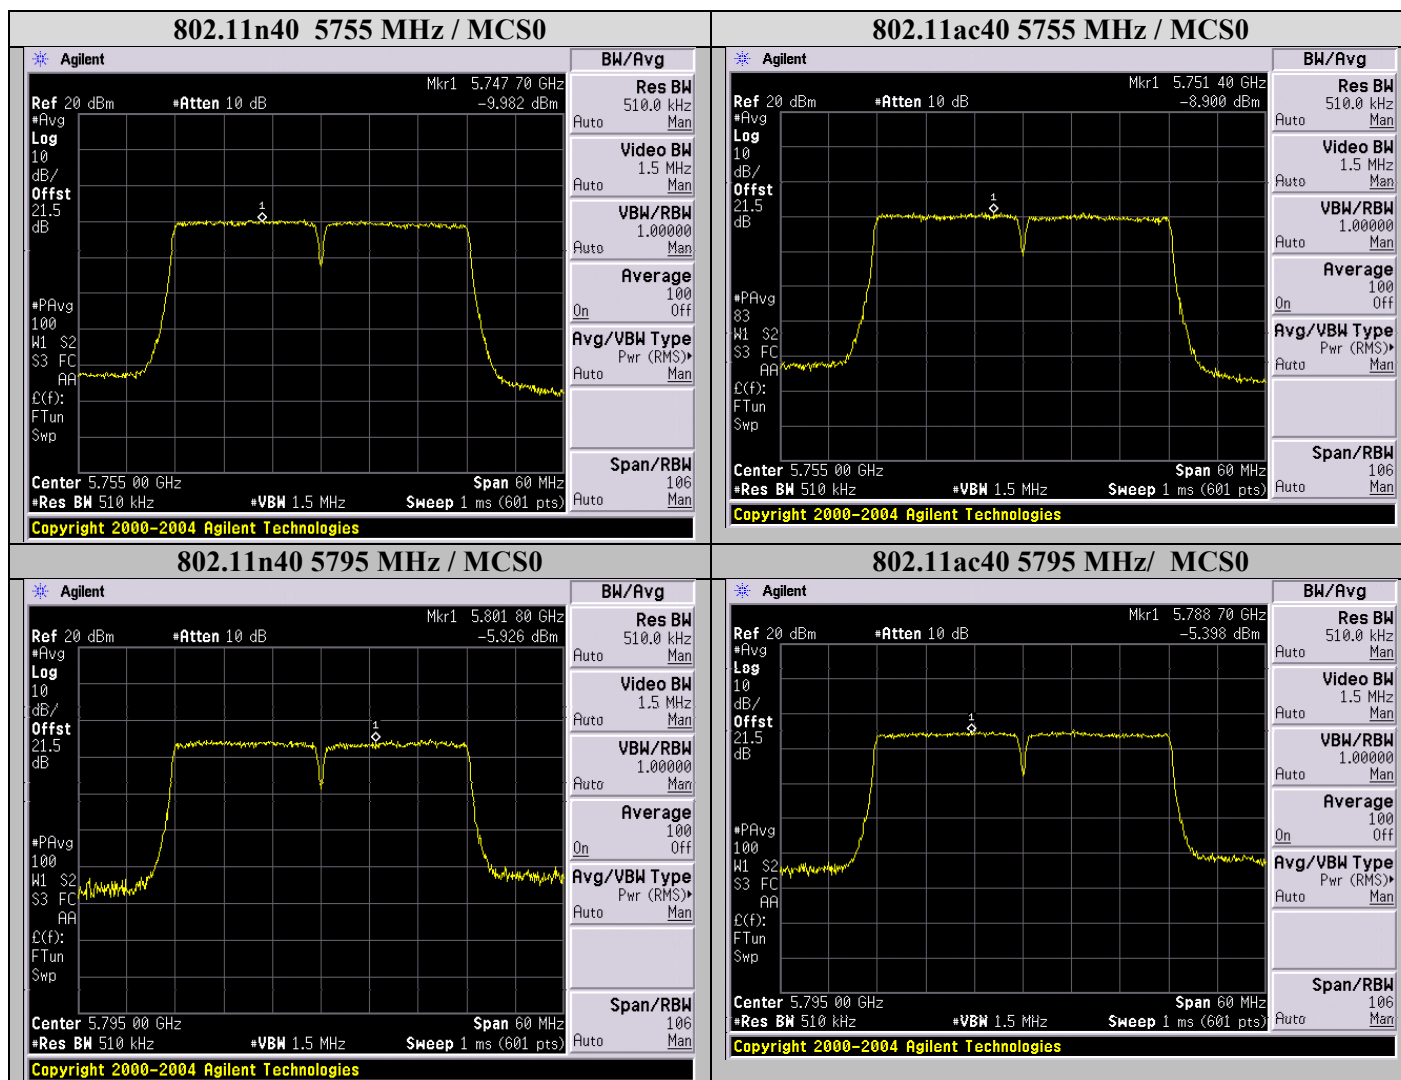

A.6 Conducted Band Edge & Undesirable emissions in non-restricted bands

A.6.1 Limits

15.407(b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

15.407(b) (4) (i) For transmitter operating in the 5.725 MHz – 5.850 Mhz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

A.6.2 Test Procedure

Ref. 789033 D02 General UNII Test Procedures New Rules v01, section II.G.3

Conducted Band Edge and Out-of-band
Test Procedure
<ol style="list-style-type: none">1. Connect the antenna port(s) to the spectrum analyzer input.2. Place the radio in continuous transmit mode. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately 1/x, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).4. Place markers at the peak of all measurable emissions.5. Capture graphs and record pertinent measurement data.6. Correct all readings with correction factors if applicable (cable loss, ext. attenuators, duty cycle correction factors, etc) to show compliance.


Ref. 789033 D02 General UNII Test Procedures New Rules v01, section II.G.5

Conducted Band Edge and Out-of-band
Test parameters
RBW = 1 MHz VBW \geq 3MHz for Peak Sweep = Auto Detector = Peak Trace = Max Hold.

A.6.3 Conducted Band Edge and Out-of-Band Test Data Table

Operating Frequency (MHz)	Data Rate (Mbps)	Measured Frequency (MHz)	Measured Emission Level (dBm/MHz)	Antenna Gain (dBi)	E.I.R.P (dBm)	Limit (dBm)	Result
Mode#1: 802.11a							
5745	6	5747.0	10.42	2	12.42	27.0	Pass
5745	6	5647.0	-42.07	2	-40.07	-10.0	Pass
5745	6	5659.0	-44.64	2	-42.64	-20.9	Pass
5825	6	5824.0	12.65	2	14.65	27.0	Pass
5825	6	5859.5	-27.80	2	-25.61	14.2	Pass
Mode#3: 802.11n40							
5755	MCS0	5750.0	3.40	2	5.40	27.0	Pass
5755	MCS0	5715.5	-32.09	2	-30.09	13.3	Pass
5755	MCS0	5674.5	-43.58	2	-41.58	-11.9	Pass
5795	MCS0	5809.5	7.09	2	9.24	27.0	Pass
5795	MCS0	5900.0	-38.80	2	-36.80	-10.0	Pass
Mode#6: 802.11ac80							
5775	MCS0	5769.5	1.74	2	3.74	27.0	Pass
5775	MCS0	5710.5	-29.71	2	-27.71	12.2	Pass
5775	MCS0	5697.0	-30.95	2	-28.95	8.60	Pass
5775	MCS0	5788.0	1.60	2	3.60	27.0	Pass
5775	MCS0	5871.0	-36.93	2	-34.93	11.10	Pass

A.6.4 Conducted Band Edge and Out-of-Band Graphical Test Results

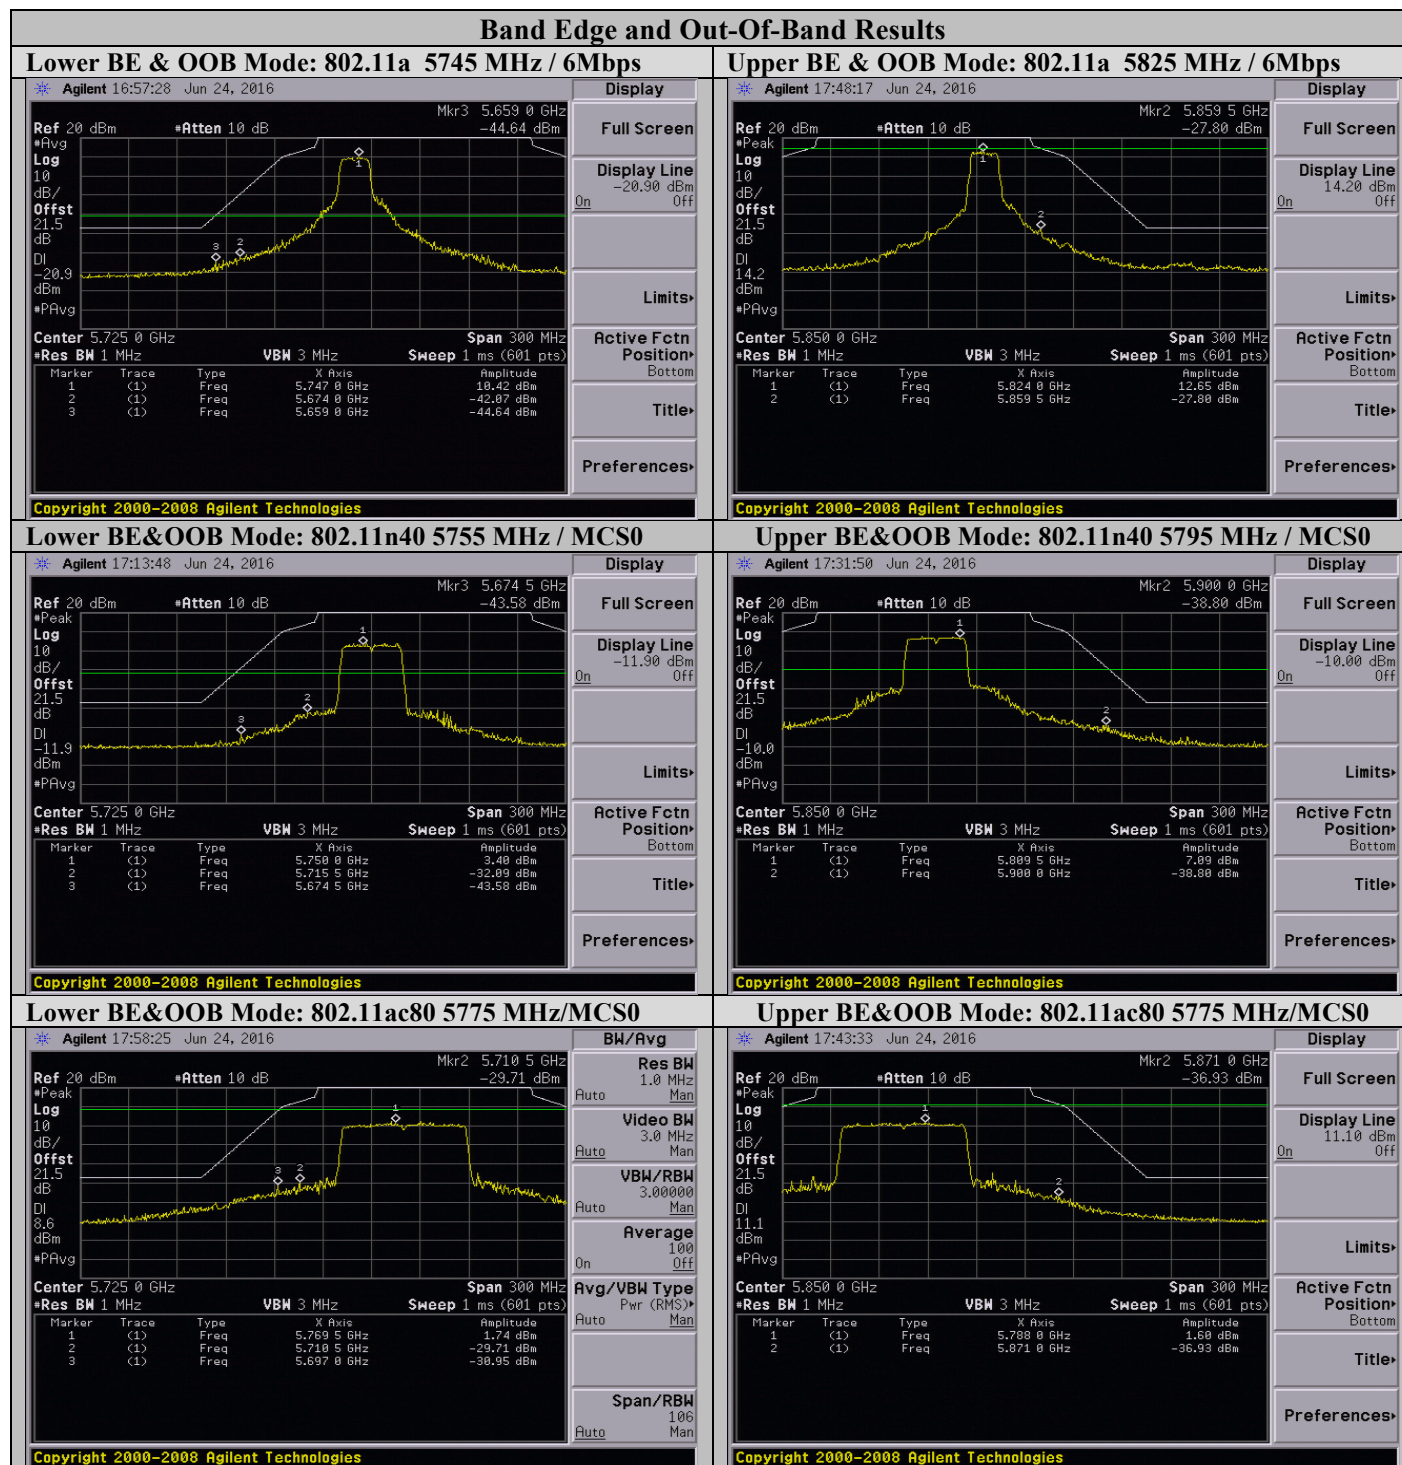



Appendix B: Radiated Test Results

B.1 Radiated Spurious Emissions & Restricted Bands

Unwanted Emissions Outside of the Restricted Bands

Frequency range: Below 1GHz

FCC 15.407 (b) (6): Unwanted emissions below 1GHz must comply with general field strength limits set forth in §15.209. Further any U-NII devices using an AC power line are required to comply also with conducted emissions limits set forth in §15.207. Refer to limit section for detailed limits

Frequency range: Above 1GHz

FCC 15.407 (b): Unwanted emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or - 17 dBm/MHz). Refer to limit section for detailed limits.

Restricted Bands

FCC 15.407 (b) (7): The provision of §15.205 apply to intentional radiators operating under FCC 15.407(b).

FCC 15.205 / FCC 15.209

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Refer to limit section for detailed limits.

Restricted Bands			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz

B.1.1 Limits.

For Restricted bands & below 1GHz

FCC 15.209: The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the table specified in the table in FCC§15.209(a).

FCC15.407 (b) (6): Unwanted emissions below 1GHz must comply with general field strength limits set forth in §15.209.

General Field Strength Limits Table			
Frequency (MHz)	Field strength (uV/meter)	Field strength (dBuV/meter)	Measurement distance (meters)
30-88	100**	40 Qp	3
88-216	150**	43.5 Qp	3
216-960	200**	46 Qp	3
Above 960	500	54 Av / 74 Pk	3

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For Non-Restricted bands above 1GHz

15.407(b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (4) (i)** For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge.



Limit Conversion

When the DUT power is measured using a radiated test configuration, the EIRP can be directly determined using the power (logarithmic) approach as follows:

$$\text{eirp} = \text{pt} \times \text{gt} = (\text{E} \times \text{d})^2 / 30$$

where: **pt** = transmitter output power in watts,
gt = numeric gain of the transmitting antenna (unit less),
E = electric field strength in V/m,
d = measurement distance in meters (m).

Based on the equation above, unit conversion from log => linear

(1) Conversion from dBm to Watt

$$\begin{aligned} W &= 10 \text{ EXP } (-27\text{dBm} - 30 / 10) \\ W &= 10 \text{ EXP } (-5.7) = 2 \text{ E-6} \end{aligned}$$

(2) E Field Strength can be derived by inverse calculation.

$$\begin{aligned} E &= 9 (\text{pt} \times \text{gt} \times 30) / d \\ E &= \text{SQRT} (2\text{E-6} \times 1.0 \times 30) / 3 = 0.0026 \text{ V/m} \end{aligned}$$

(3) Conversion from Linear to Log, using the following formula

$$\begin{aligned} \text{Volts to dBuV} &= 20 \log (\text{Volts}) + 120 \\ E \text{ (in dBuV)} &= 20 \text{ Log } (0.0026) + 120 = \mathbf{68.23/m @ 3 \text{ meter}} \end{aligned}$$

B.1.2 Test Procedure

Ref. ANSI C63.10-2013 section 6.5 & 6.6

Test Procedure below 1 GHz

1. Using Vasona software, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
2. Place the radio in continuous transmit mode. Maximize Turntable (find worst case table angle) and maximize Antenna (find worst case height).
3. Use the peak marker function to determine the maximum amplitude level.
4. Center marker frequency and perform final measurement in Quasi-peak ($\leq 1\text{GHz}$)
5. Record at least 6 highest readings for the worst case operating mode.

ANSI C63.10: 2013 section 4.1.4 (Quasi-Peak) / section 12.7.6 (peak), section 12.7.5, section 12.7.7.3 (VBW average),

Test parameters

- (i) Span = Entire frequency range or segment if necessary.
- (ii) Reference Level = 70 dBuV
- (iii) RBW = 100 kHz (less than or equal to 1 GHz); 1 MHz (above 1 GHz)
- (iv) VBW $\geq 3 \times$ RBW
- (v) Detector = Peak & Quasi-Peak (frequency range 30 MHz to 1 GHz);
Peak & Average (frequency range above 1 GHz); Change VBW to 10 Hz for average measurement
- (vi) Sweep Time = Couple

- . The system was evaluated up to 40 GHz but there were no measurable emissions above 18 GHz.
- . These data represent the worst case mode data for all supported operating modes and antennas.


- For emissions below 1000 MHz, measurements shall be performed using a CISPR quasi-peak detector and the related measurement bandwidth. As an alternative to CISPR quasi-peak measurement, compliance with the emission limit can be demonstrated using measuring equipment employing a peak detector function properly adjusted for factors such as pulse desensitization as required, with an equal or greater measurement bandwidth relative to the applicable CISPR quasi-peak bandwidth.
- Above 1000 MHz, measurements shall be performed using an average detector with a minimum Resolution bandwidth of 1 MHz

Note1: A Notch Filter was used during formal testing from 1 – 18GHz to help prevent the front end of the analyzer from over loading. The Notch filters used are designed to suppress TX fundamental frequency but do not effect harmonics of the fundamental frequency from being measured

Note2: The data displayed on the plots detailed in the graphical test results section were measured using a 'Peak Detector'. Please refer to the results table for the detectors used during formal measurements.

B.1.3 Transmitter Radiated Spurious Emissions Graphical Data Results


Subtest Date:	23-Oct-2015
Engineer	Danh Le
Lab Information	Building N, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	30MHz - 1GHz
Comments on the above Test Results	802.11a ,Tx Channel 157 (5785 MHz)

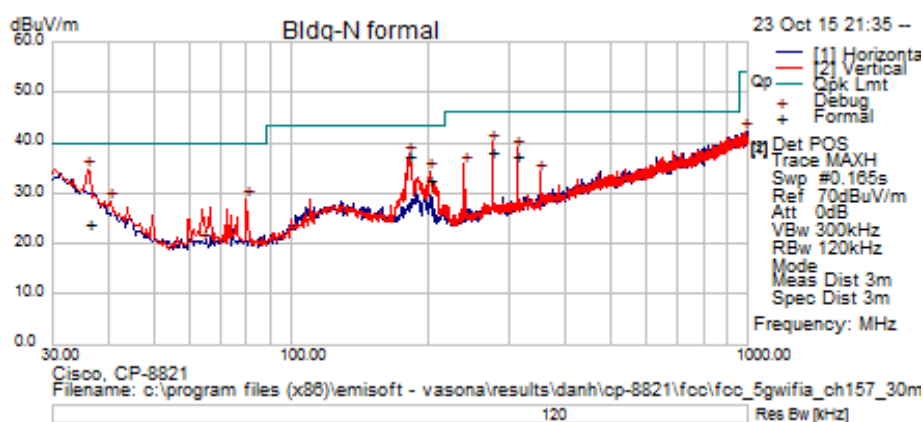

Title: TX Spurious Emissions from 30MHz-1GHz – Ch157 (5785 MHz)

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
180.9395	25.03	1.7	10.9	37.64	Quasi Max	V	110	108	43.5	-5.86	Pass	Tx/Ch157
313.321	21.29	2.25	13.77	37.3	Quasi Max	V	105	108	46	-8.7	Pass	Tx/Ch157
36.06575	6.84	0.77	16.35	23.95	Quasi Max	V	146	224	40	-16.05	Pass	Tx/Ch157
276.5	22.78	2.11	13.3	38.19	Quasi Max	V	117	230	46	-7.81	Pass	Tx/Ch157
201.7248	19.14	1.81	11.81	32.76	Quasi Max	V	101	244	43.5	-10.74	Pass	Tx/Ch157

Subtest Date:	22-Oct-2015
Engineer	Danh Le
Lab Information	Building N, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	1-10GHz
Comments on the above Test Results	802.11a, Tx Channel 149 (5745 MHz)

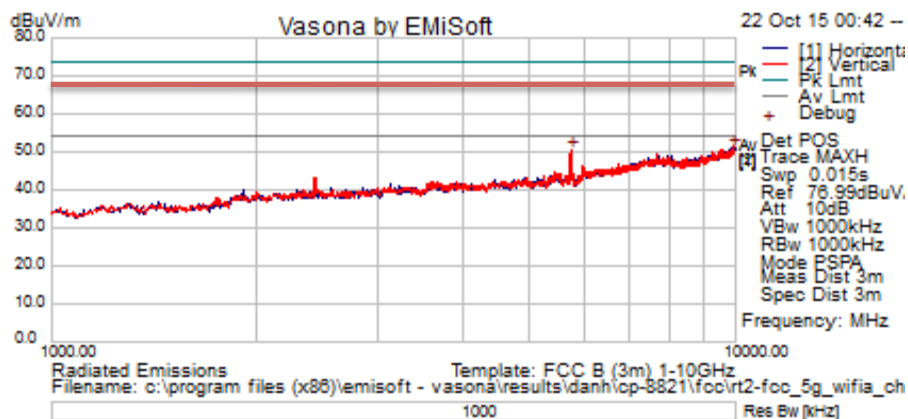


Title: TX Spurious Emissions from 1-10GHz – Ch149 (5745 MHz) – Peak Trace

Legend: — 74dBμV/m (Peak); — 54 dBμV/m (Average); — 68dBμV/m (Peak) ~ -27dbm

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
9949.375	39.73	14.48	-2.73	51.48	Peak	V	275	42	54	-2.52	Pass	Tx/Ch149
5753.125	47.12	10.51	-7.13	50.49	Peak	V	250	279	54	-3.51	Pass	Tx/Ch149

Note: Where limits are specified by regulations for both average and peak detection, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

Subtest Date:	22-Oct-2015
Engineer	Danh Le
Lab Information	Building N, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	10-18GHz
Comments on the above Test Results	802.11a, Tx Channel 149 (5745 MHz)

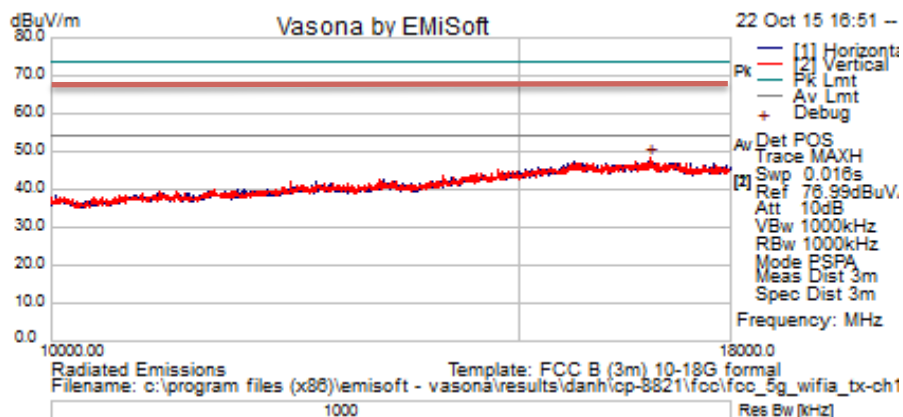


Title: TX Spurious Emissions from 10-18GHz – Ch149 (5745 MHz) – Peak Trace

Legend: — 74dB μ V/m (Peak); — 54 dB μ V/m (Average); — 68dB μ V/m (Peak) ~ -27dbm

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
16800	41.42	19.61	-12.46	48.57	Peak	V	200	321	54	-5.44	Pass	Tx/Ch149

Note: Where limits are specified by regulations for both average and peak detection, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement

Subtest Date:	22-Oct-2015
Engineer	Danh Le
Lab Information	Building N, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	1-10GHz
Comments on the above Test Results	802.11a,Tx Channel 157 (5785 MHz)

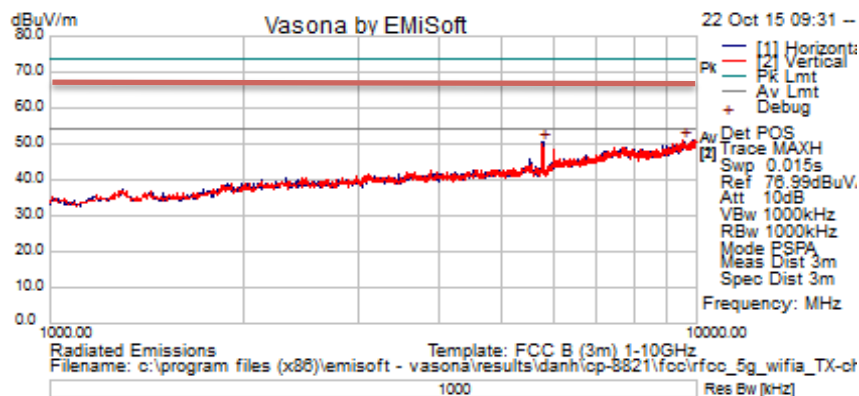


Title: TX Spurious Emissions from 1-10GHz – Ch157 (5785 MHz) – Peak Trace

Legend: — 74dBuV/m (Peak); — 54 dBuV/m (Average); — 68dBuV/m (Peak) ~ -27dbm

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
9555.625	40.07	14.19	-3.24	51.02	Peak	V	150	278	54	-2.98	Pass	Tx/Ch157
5781.25	47.17	10.55	-6.96	50.76	Peak	H	225	266	54	-3.24	Pass	Tx/Ch157

Note: Where limits are specified by regulations for both average and peak detection, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement

Subtest Date:	22-Oct-2015
Engineer	Danh Le
Lab Information	Building N, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	10-18GHz
Comments on the above Test Results	802.11a,Tx Channel 157 (5785 MHz)

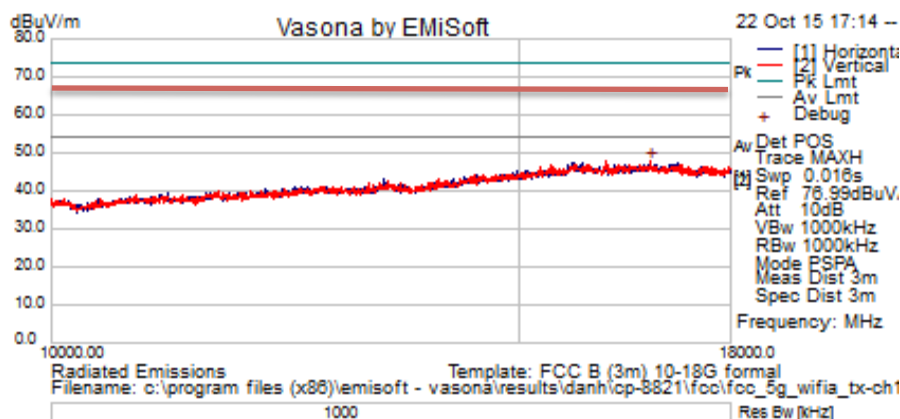


Title: TX Spurious Emissions from 10-18GHz – Ch157 (5785 MHz) – Peak Trace

Legend: — 74dB μ V/m (Peak); — 54 dB μ V/m (Average); — 68dB μ V/m (Peak) ~ -27dbm

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
16800	40.79	19.61	-12.46	47.93	Peak	V	100	98	54	-6.07	Pass	Tx/Ch157

Note: Where limits are specified by regulations for both average and peak detection, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement

Subtest Date:	22-Oct-2015
Engineer	Danh Le
Lab Information	Building N, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	1-10GHz
Comments on the above Test Results	802.11a,Tx Channel 165 (5825 MHz)

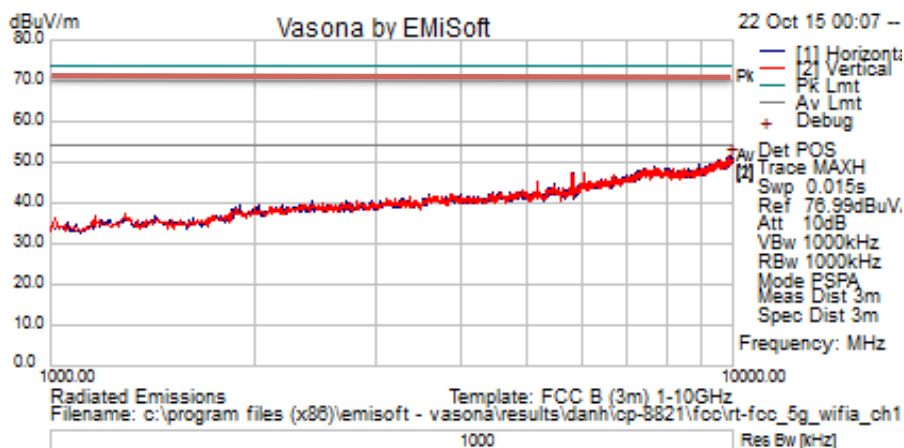


Title: TX Spurious Emissions from 1-10GHz – Ch165 (5825 MHz) – Peak Trace

Legend: — 74dBμV/m (Peak); — 54 dBμV/m (Average); — 68dBμV/m (Peak) ~ -27dbm

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comment
9926.875	39.64	14.49	-2.76	51.38	Peak	H	150	252	54	-2.63	Pass	Tx/Ch165

Note: Where limits are specified by regulations for both average and peak detection, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement

Subtest Date:	22-Oct-2015
Engineer	Danh Le
Lab Information	Building N, 5m Anechoic
Subtest Title	Transmitter Spurious Emissions
Frequency Range	10-18GHz
Comments on the above Test Results	802.11a ,Tx Channel 165 (5825 MHz)

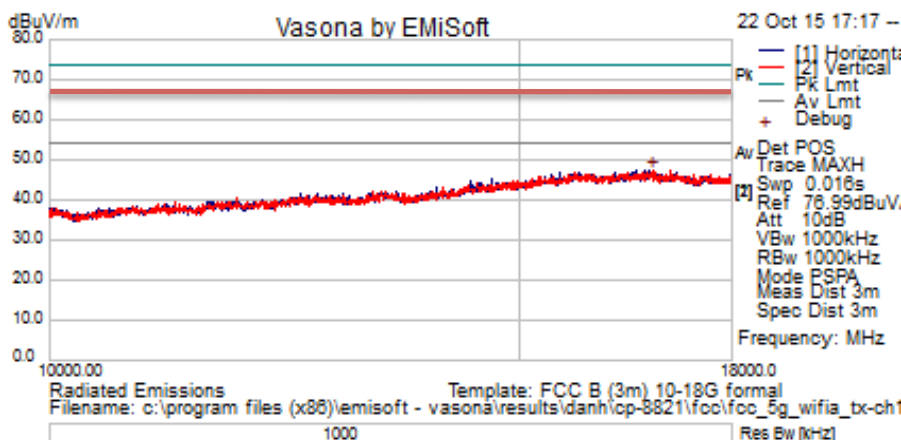

Title: TX Spurious Emissions from 10-18GHz – Ch165 (5825 MHz) – Peak Trace

Legend: — 74dBuV/m (Peak); — 54 dBuV/m (Average); — 68dBuV/m (Peak) ~ -27dbm

Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	AF (dB)	Level (dBuV)	Detector	Polarity	Height (cm)	Azt (Deg)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
16780	39.9	19.61	-12.18	47.33	Peak	H	275	307	54	-6.67	Pass	Tx/Ch165

Note: Where limits are specified by regulations for both average and peak detection, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement

B.2 AC Conducted Emissions

B.2.1 Limits.

FCC 15.207

Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.

B.2.2 Test Procedure

Measurement requirements

Ref: C63.10:2013, section 6.2.2

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument, or where permitted or required, the emission currents on the power line sensed by a current probe. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer, and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements, using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having a 50 Ω input impedance. All other ports are terminated in 50 Ω loads. Figure 5, Figure 6, and Figure 7 show typical test setups for ac power-line conducted emissions testing (see 6.13). For information about the use of a RF-shielded (screen) room, vertical conducting plane and voltage probe, see ANSI C63.4.

Tabletop devices shall be placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above thereference ground plane. The vertical conducting plane or wall of an RF-shielded (screen) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

Final ac power-line conducted emission measurements

Ref: C63.10:2013, section 6.2.5

Based on the exploratory tests of the EUT performed in 6.2.4, the one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Ref. C63.10:2013, section 6.2

Test Procedure

- | |
|---|
| <ol style="list-style-type: none">1. Using Vasona software, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).2. Set the radio in continuous transmit mode.3. Connect cable end to LISN Hot port and other cable end to the spectrum Analyzer/EMC receiver RF input port. Terminate the LISN neutral port with a 50 Ω impedance terminator.4. Sweep the frequency range from 150 kHz to 30 MHz (segment if necessary)5. Use the peak marker function to determine the maximum amplitude level.6. Center marker frequency and perform final measurement using applicable detector (Quasi-Pk/Average).7. Record at least 6 highest reading for the worst case operating modes in Quasi-peak/Average.8. Repeat the test on Neutral lead.9. Repeat step 3 – 7 with the radio sets in the Receiver mode.10. Record at least 6 highest reading in Quasi-peak/Average |
|---|

Ref. C63.10:2013, section 4 / CISPR16-1-1

Test Parameters

Span = Entire frequency range or segment if necessary. Reference Level = 70 dBuV RBW = 9 kHz VBW \geq 3 x RBW Sweep Time = Couple Detector = Quasi-Peak & Average
--

B.2.3 Recorded Test Data and Graphical Test results


AC Conducted Emissions Test Result Tables for 802.11a / TX Ch157 (Peak, Quasi-Peak & Average)

Subtest Date:		01-Jun-2016								
Engineer		Danh Le								
Lab Information		Building N, formal room								
Subtest Title		Conducted Emissions								
Frequency Range		150 kHz - 30 MHz								
Comments on the above Test Results		TX Ch157 (5785 MHz) with BPSK modulation – 6 Mbps								
Frequency (MHz)	Raw (dBuV)	Cab Loss (dB)	Factors (dB)	Level (dBuV)	Detector	Lines (Live/Neutral)	Limit (dBuV)	Margin (dB)	Results Pass / Fail	Comments
0.5679	18.12	20.04	0.04	38.2	Peak [Scan]	Neutral	46	-7.8	Pass	TX / Ch157
2.538	9.24	19.99	0.04	29.27	Peak [Scan]	Neutral	46	-16.73	Pass	TX / Ch157
1.149975	8.87	20	0.04	28.91	Peak [Scan]	Neutral	46	-17.09	Pass	TX / Ch157
1.538025	8.61	19.99	0.05	28.64	Peak [Scan]	Neutral	46	-17.36	Pass	TX / Ch157
3.5529	8.06	20.02	0.04	28.12	Peak [Scan]	Neutral	46	-17.88	Pass	TX / Ch157
0.65745	7.89	20.03	0.04	27.96	Peak [Scan]	Neutral	46	-18.04	Pass	TX / Ch157
4.552875	7.18	20.04	0.05	27.27	Peak [Scan]	Neutral	46	-18.73	Pass	TX / Ch157
2.68725	7.07	19.99	0.05	27.11	Peak [Scan]	Live	46	-18.89	Pass	TX / Ch157
3.955875	6.04	20.02	0.05	26.11	Peak [Scan]	Neutral	46	-19.89	Pass	TX / Ch157

AC Conducted Graphical Test Results for 802.11a Mode:

Note: The data displayed on the plots detailed in this section were measured using a 'Peak Detector'. Please refer to the results table for the detectors used during final measurements.

When Peak readings are lower than Quasi-Peak & Average limits, it is not necessary to measure in Quasi-peak and Average.

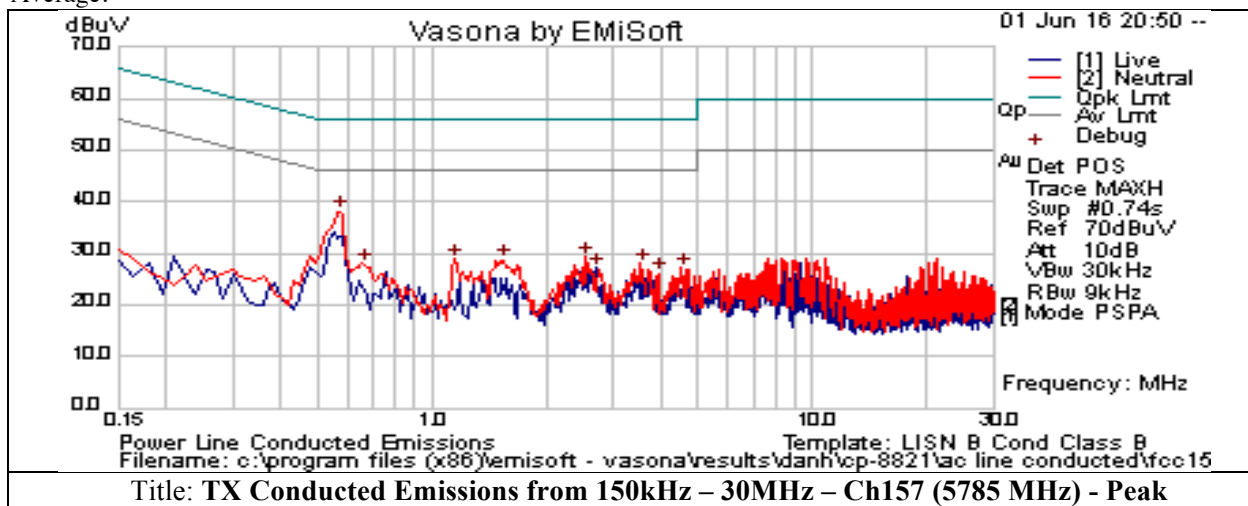

Appendix C: List of Test Equipment Used to perform the test

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due
CIS004882	EMC Test Systems / 3115	Double Ridged Guide Horn Antenna	19-AUG-15	19-Aug-16
CIS041944	Sunol Sciences / JB1	Combination Bi-Log Antenna, 30MHz-2GHz	21-JUL-15	21-JUL-16
CIS18313	HP / 8447D OPT 011	Dual Amplifier (0.1 – 13000 MHz)	28-APR-15	28-APR-16
CIS005691	Miteq / NSP1800-25-S1	Broadband Preamplifier (1-18GHz)	26-Jun-15	25-JUN-16
CIS39123	Cisco / THO118	Broadband Preamplifier (1-18GHz)	31-Mar15	31-Mar-16
CIS008100	Cisco / NSA 5m Chamber	NSA 5m Chamber	26-AUG-15	26-AUG-16
CIS035624	Rohde & Schwarz / ESCI	EMI Test Receiver	04-JUN-15	04-JUN-16
CIS024905	Agilent / E4440A	Precision Spectrum Analyzer	25-SEP-15	25-SEP-16
CIS44907	Rohde & Schwarz / ESCI	EMI Test Receiver	14-AUG-15	14-AUG-16
CIS08191	Fisher Custom Comm / FCC-450B-2.4-N	Pulse Limiter	07-JUL-15	07-JUL-16
CIS019208	TTE / H785-150K-50-21378	High Pass Filter 150KHz	09-DEC-15	09-DEC-16
CIS006565	Fisher Custom Com / 50/250-50-2-02	LISN (9kHz-30MHz)	03-MAR-16	03-MAR-17
CIS023911	Fisher Custom Com / 50-2-RA-NEMA-5-20R	LISN Receptacle Adaptor	03-MAR-16	03-MAR-17
CIS008531	Huber + Suhner / RG-223	25 ft RG-223 Cable	10-NOV-15	10-NOV-16
CIS051784	Huber+Suhner / Sucoflex 106PA	RF Coaxial Cable, to 18GHz	06-JAN-15	06-JAN-16
CIS023697	Micro-Coax / UFB197C-1-3144-504504	RF Coaxial Cable, to 18GHz, 314.4 in	06-JAN-15	06-JAN-16
CIS008023	Huber+Suhner / Sucoflex SF106A	3 meter Sucoflex cable	06-JAN-15	06-JAN-16
CIS006697	Lufft / 5063-33W	Temperature/Humidity Gauge	09-MAR-15	09-MAR-16
CIS054416	Huber + Suhner/ Sucoflex 106PA	Sucoflex N Type Blue 3ft cable	28-APR-15	28-APR-16
CIS040503	Agilent / E4440A	Precision Spectrum Analyzer	10-JUN-15	10-JUN-16
CIS35619	TestEquity / HalfCube	Temperature Chamber	01-APR-15	01-APR-16
CIS51741	Rohde & Schwarz / NRP-Z81	Power Meter	19-JAN-15	19-JAN-16

Appendix D: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	Emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	KHz	Kilohertz (1×10^3)
EN	European Norm	MHz	MegaHertz (1×10^6)
IEC	International Electro technical Commission	GHz	Gigahertz (1×10^9)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	Db	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1×10^3)
L1	Line 1	μ V	Microvolt (1×10^{-6})
L2	Line2	A	Amp
L3	Line 3	μ A	Micro Amp (1×10^{-6})
DC	Direct Current	mS	Milli Second (1×10^{-3})
RAW	Uncorrected measurement value, as indicated by the measuring device	μ S	Micro Second (1×10^{-6})
RF	Radio Frequency	μ S	Micro Second (1×10^{-6})
SLCE	Signal Line Conducted Emissions	M	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

Appendix E: Software Used to Perform Testing

EMIssoft Vasona, version 6.024



Appendix F: Test Procedures

Measurements were made in accordance with

- ANSI C63.10:2013 Procedure for Compliance Testing of Unlicensed Wireless Devices
- KDB Publication No. 789033 - D02 General UNII Test Procedures New Rules v01
- KDB 644545 D03 Guidance for IEEE 802.11ac v01

Test procedures are summarized below:

FCC 5GHz Test Procedures	EDCS # - 1445048
FCC 5GHz RSE Test Procedures	EDCS # - 1511600

Appendix G: Scope of Accreditation

(A2LA certificate number 1178-01)

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>

Appendix H: Test Assessment Plan

Compliance Test Plan (Excel) EDCS- 1534002
Target Power Tables EDCS-882940

Appendix I: Worst Case Justification

Worst case modes were selected by ANSI C63.10 2013 Section **5.6.2.2**

For devices with multiple operating modes, measurements on the middle channel can be used to determine the worst-case mode(s). The worst-case modes are as follows:

- a) Band edge requirements—Measurements on the mode with the widest bandwidth can be used to cover the same channel (center frequency) on modes with narrower bandwidth that have the same or lower output power for each modulation family (e.g., OFDM and direct sequence spread spectrum).
- b) Spurious emissions—Measure the mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum).
- c) In-band PSD—Measurements on the mode with the narrowest bandwidth can be used to cover all modes within the same modulation family of an equal or lower output power provided the result is less than 50% of the limit.