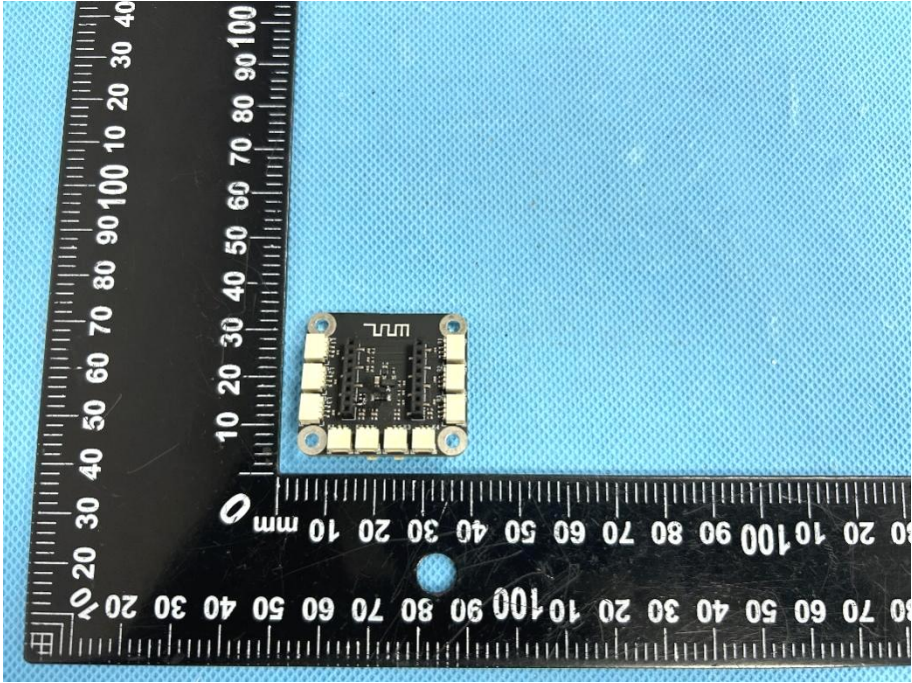
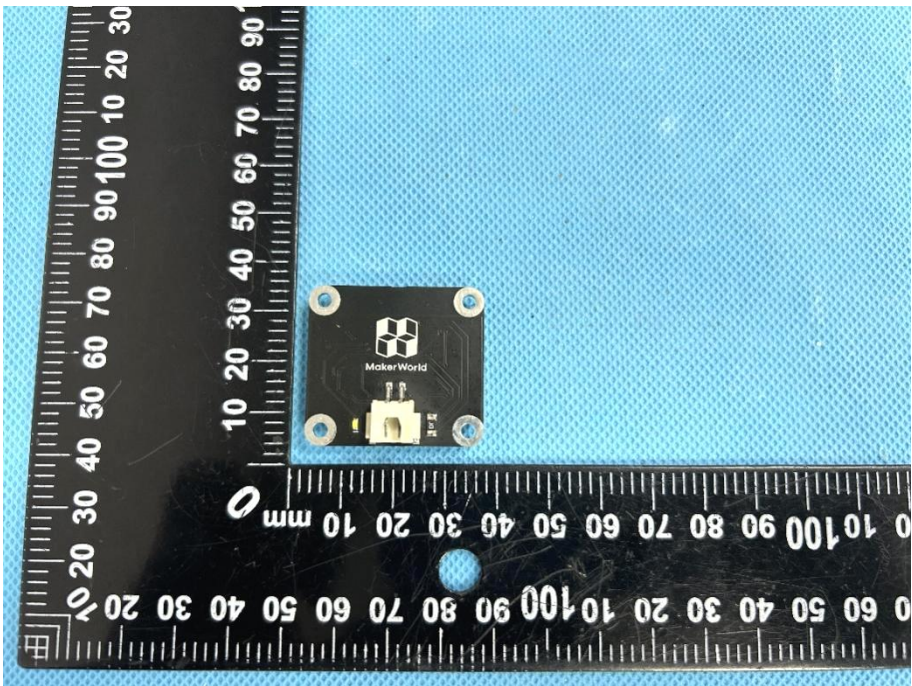
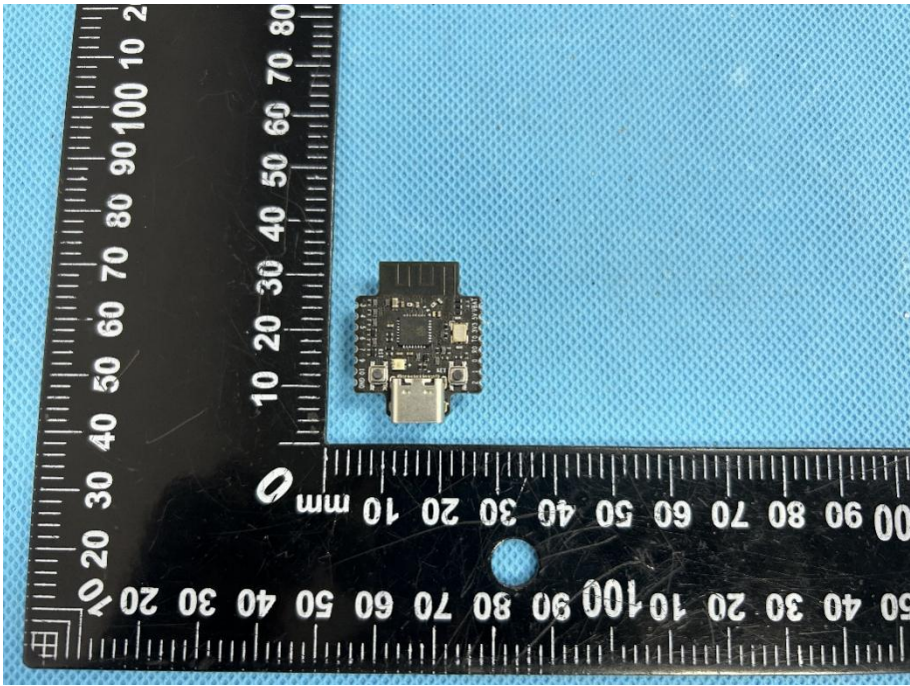
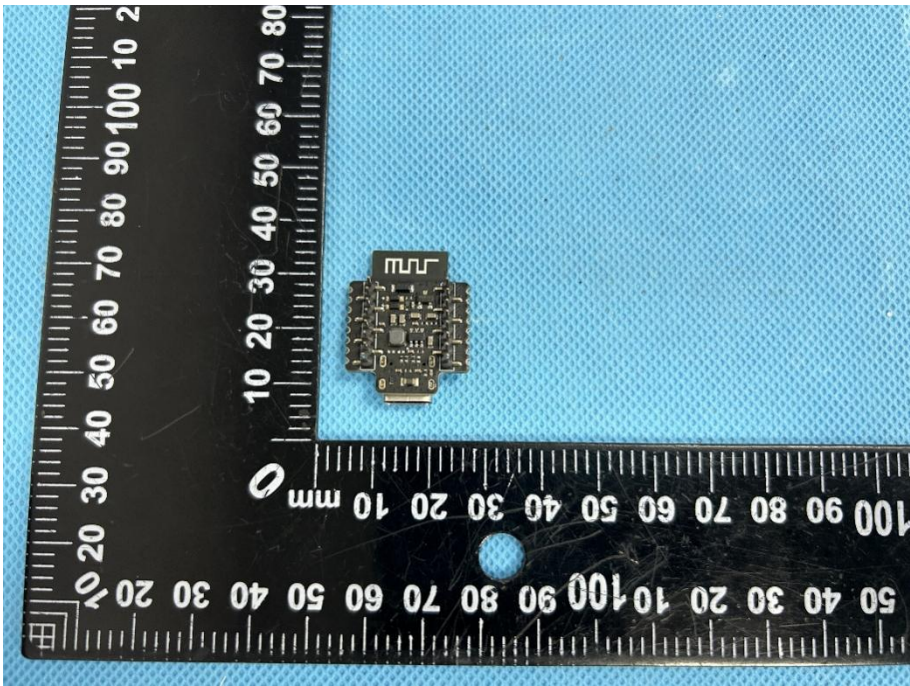
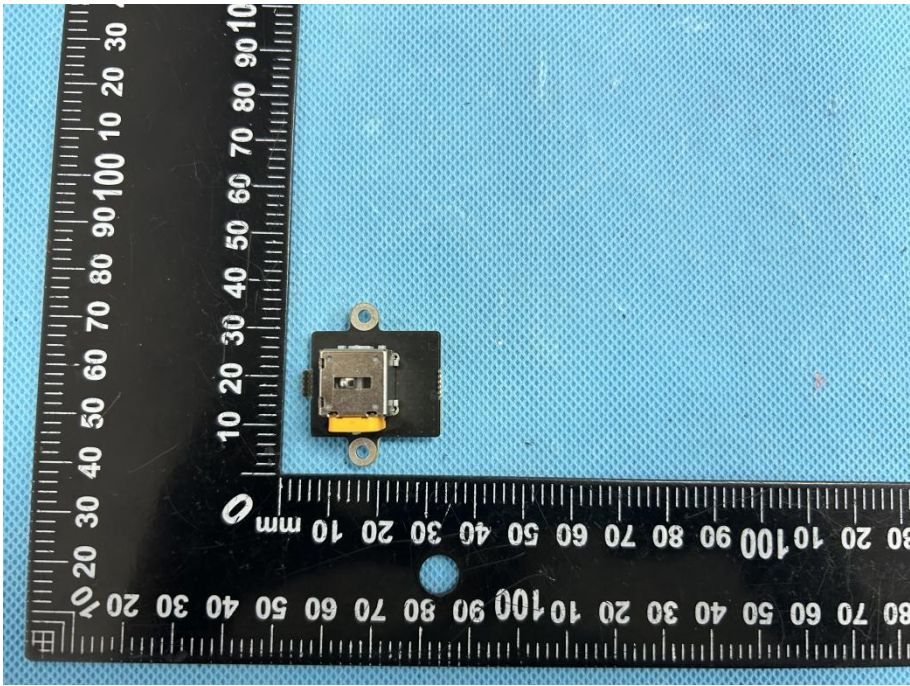
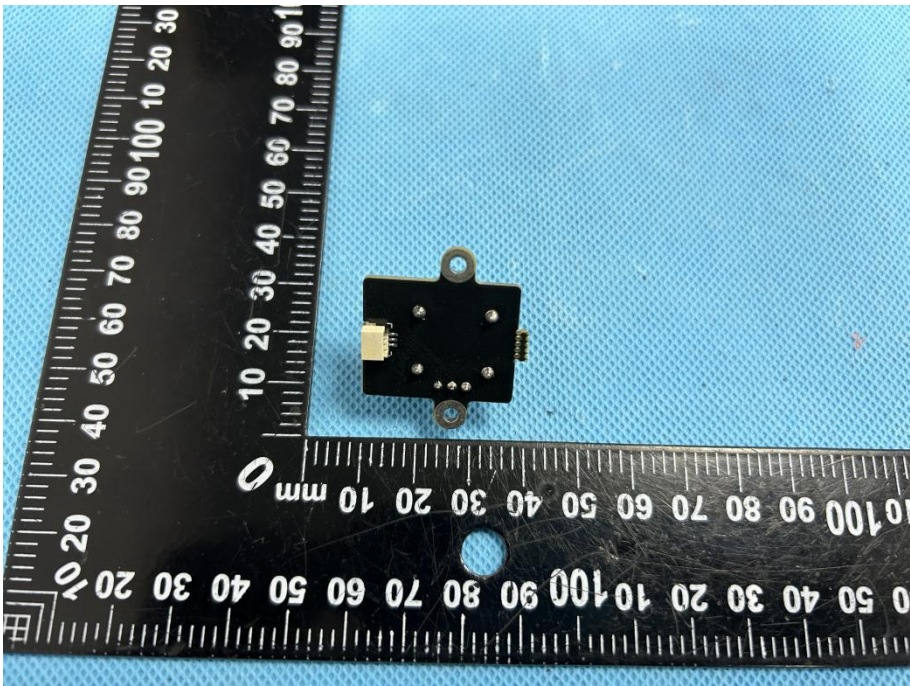
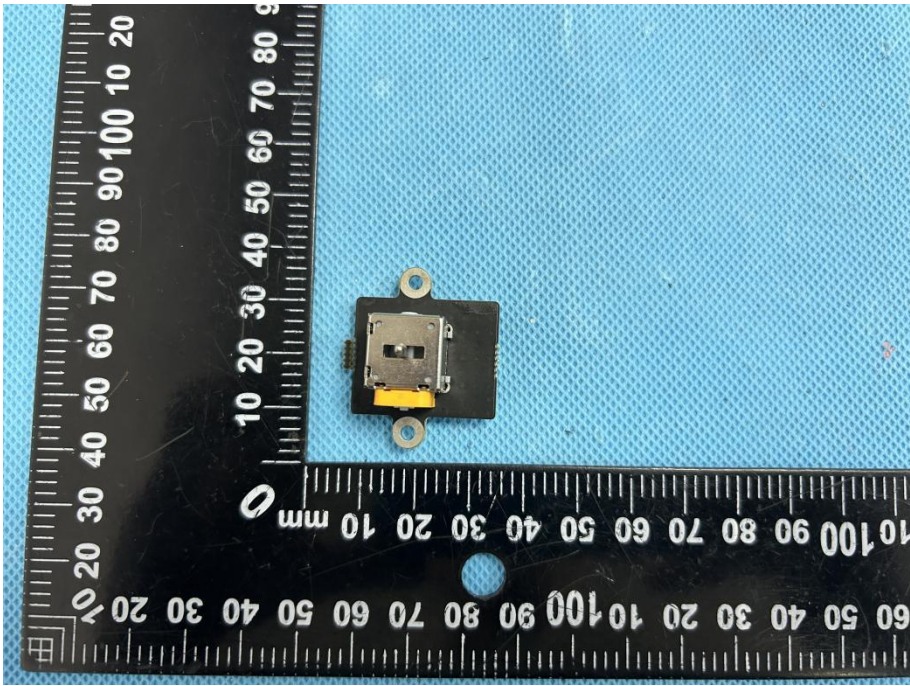
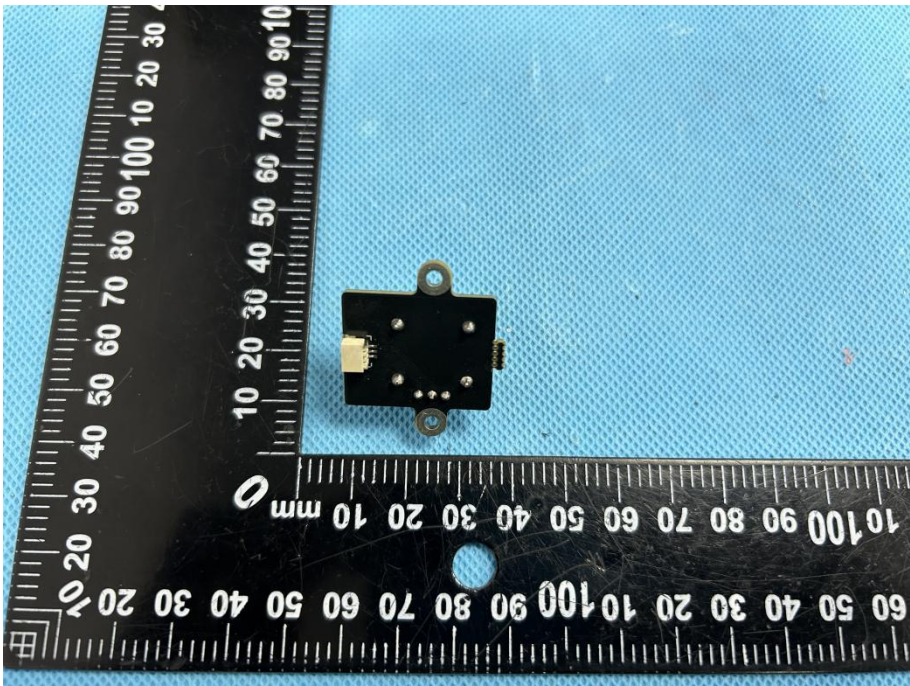


EXHIBIT 3 - EUT INTERNAL PHOTOGRAPHS


Solder Board-Component View 1	
Solder Board-Component View 2	

Solder Board-Component View 3	 A photograph of a small, rectangular electronic component (likely a USB-to-UART bridge) mounted on a blue textured surface. The component is positioned next to a black L-shaped ruler with white markings. The ruler indicates the component's dimensions are approximately 15 mm by 10 mm. The component has a USB Type-A connector on one side and a small integrated circuit in the center.
Solder Board-Component View 4	 A photograph of the same electronic component from a different angle (View 4). The component is shown next to the same black L-shaped ruler, confirming its size. This view highlights the component's profile and the solder connections on its underside.


Solder Board-Component View 5	 A photograph of a small, square, black electronic component with a yellow solder pad on one side and two circular mounting holes. It is placed on a blue textured surface next to a black L-shaped ruler with white markings in millimeters.
Solder Board-Component View 6	 A photograph of the same small, square, black electronic component from a different angle, showing its top surface with several small solder points. It is placed on a blue textured surface next to a black L-shaped ruler with white markings in millimeters.



Solder Board-Component View 7	 A photograph of a small, square, black electronic component with two circular solder pads on its top surface. The component is placed on a blue textured surface next to a black L-shaped ruler. The ruler has white markings in millimeters and centimeters. The component is positioned at approximately 30 mm on the horizontal axis and 30 mm on the vertical axis.
Solder Board-Component View 8	 A photograph of the same small, square, black electronic component from a different angle. This view shows the bottom surface of the component, which has several small, circular solder pads. The component is placed on the same blue textured surface next to the same black L-shaped ruler. The component is positioned at approximately 30 mm on the horizontal axis and 30 mm on the vertical axis.



**Solder
Board-Component
View 9**

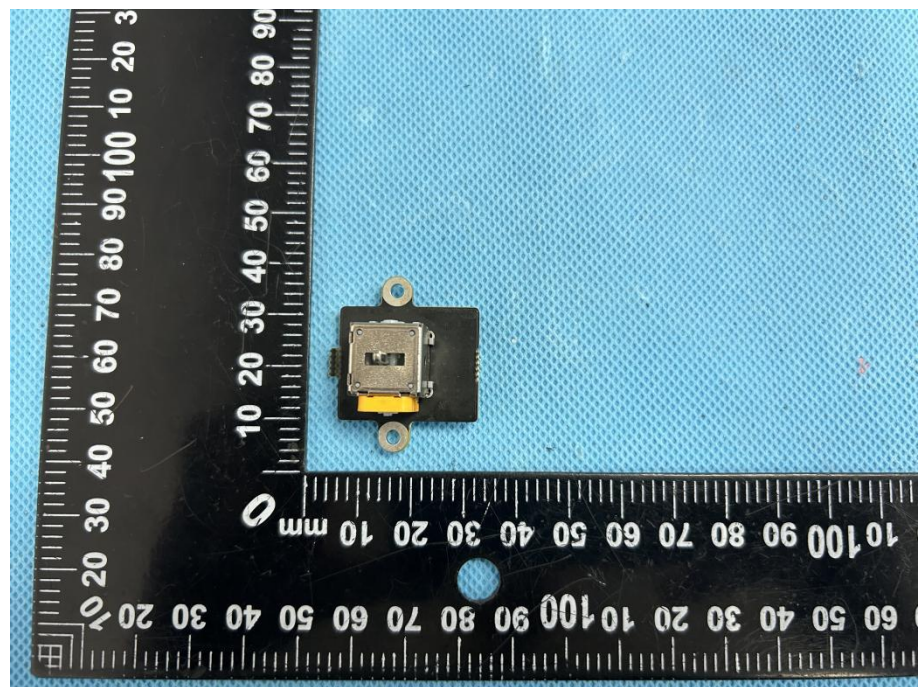


**Solder
Board-Component
View 10**

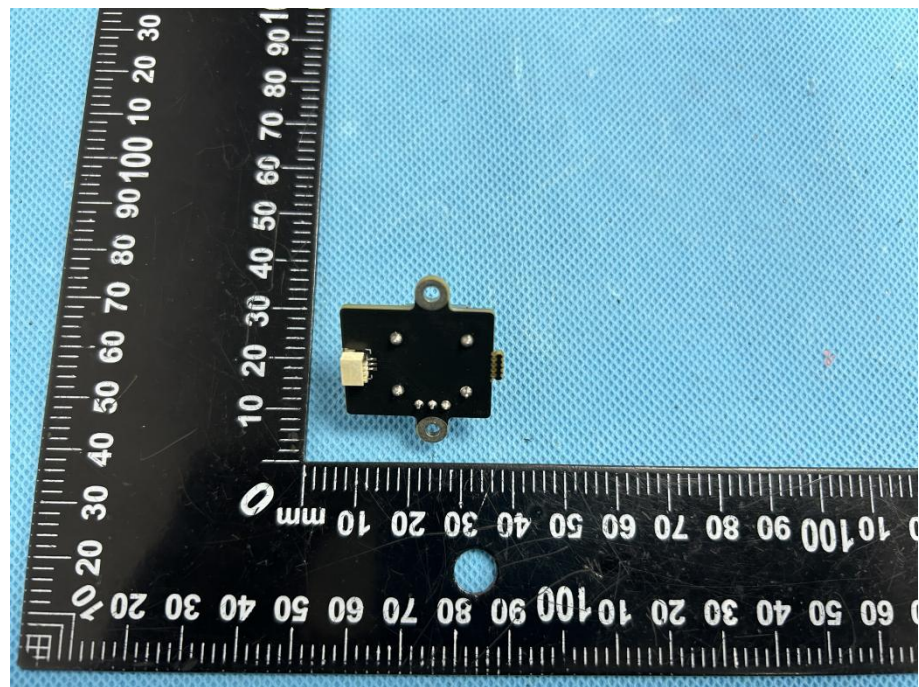

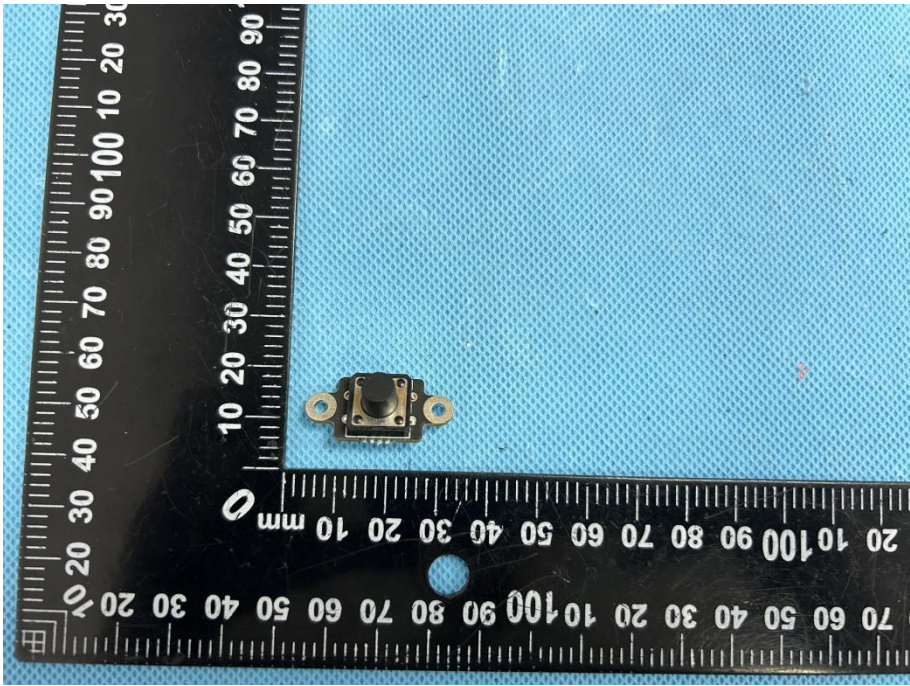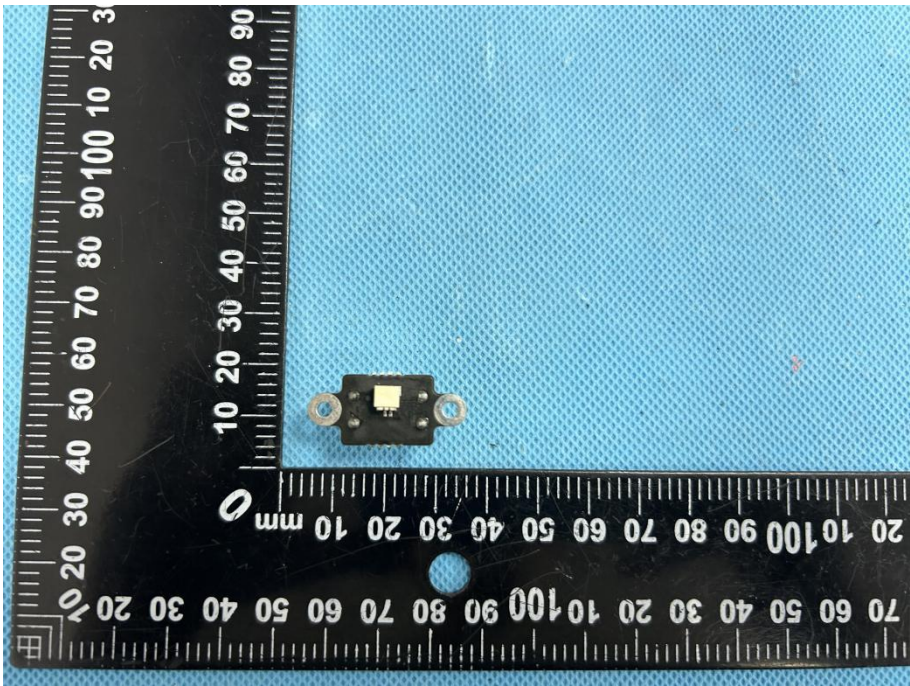
Solder Board-Component View 11	 A photograph of a small electronic component, likely a sensor or actuator, mounted on a blue textured surface. The component is square with a central circular feature and two small circular pads on the sides. It is positioned next to a black L-shaped ruler with white markings. The ruler shows dimensions in millimeters (0 to 100 mm) and centimeters (0 to 10 cm).
Solder Board-Component View 12	 A photograph of the same electronic component as in View 11, but from a different angle. The component is square with a central square feature and two small circular pads on the sides. It is positioned next to a black L-shaped ruler with white markings. The ruler shows dimensions in millimeters (0 to 100 mm) and centimeters (0 to 10 cm).

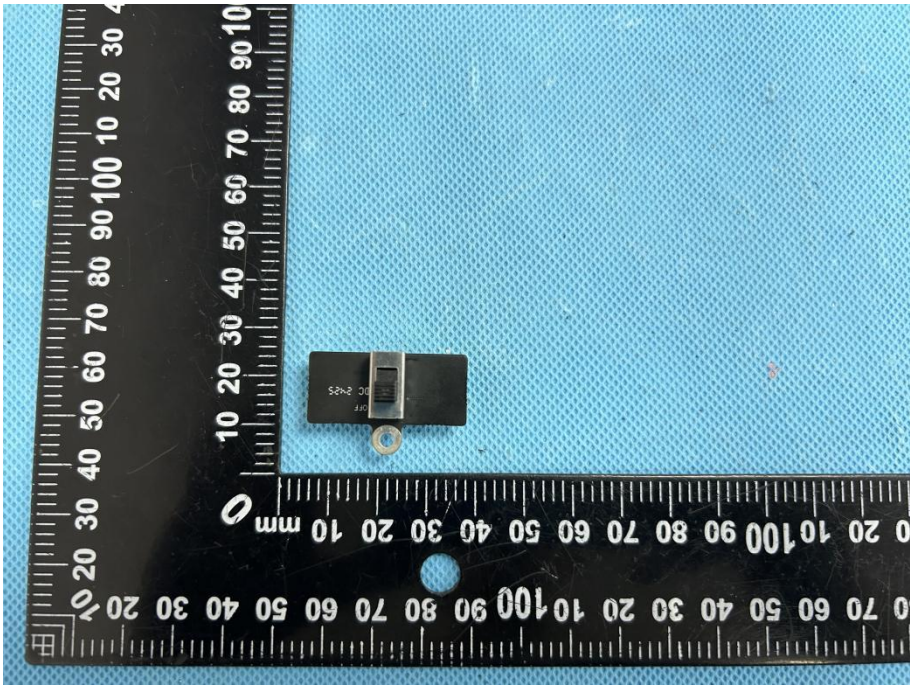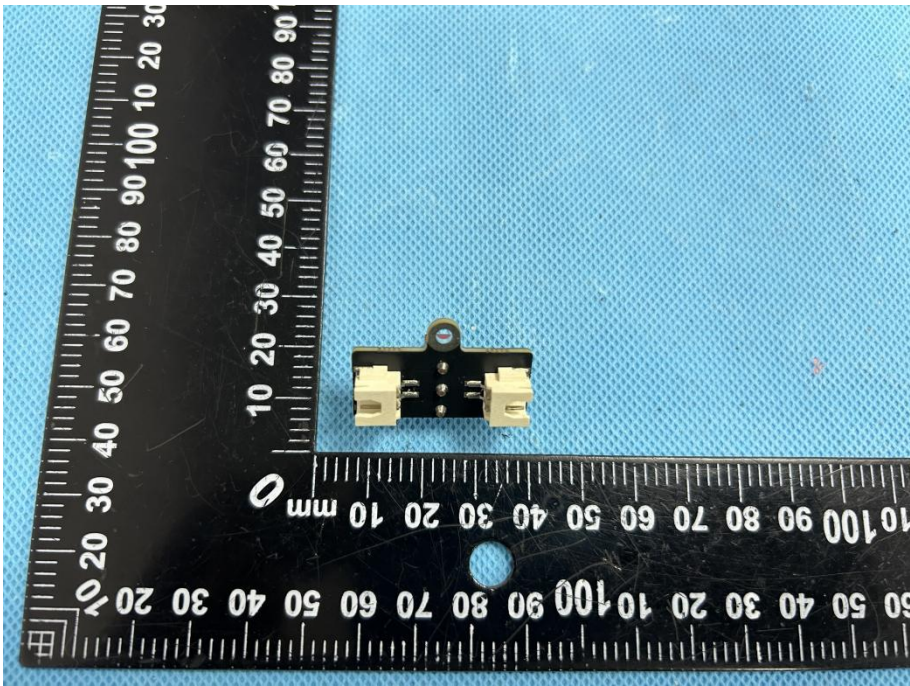Solder Board-Component View 13	 A photograph of a small, dark, rectangular component with a silver-colored metal tab on top, resting on a blue textured surface. A black L-shaped ruler with white markings is placed next to the component for scale. The ruler shows measurements in millimeters (0 to 100) and centimeters (0 to 10).
Solder Board-Component View 14	 A photograph of the same component from a different angle, showing its profile and the solder joints on its sides. The component is positioned on the same blue textured surface, with the same black L-shaped ruler for scale.

**Solder
Board-Component
View 15**

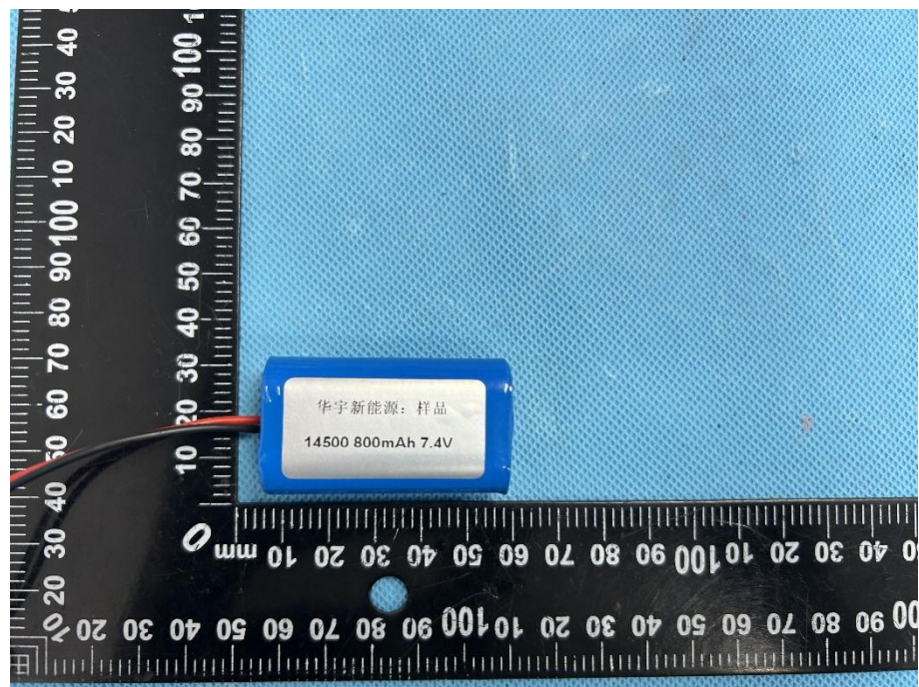

Antenna View

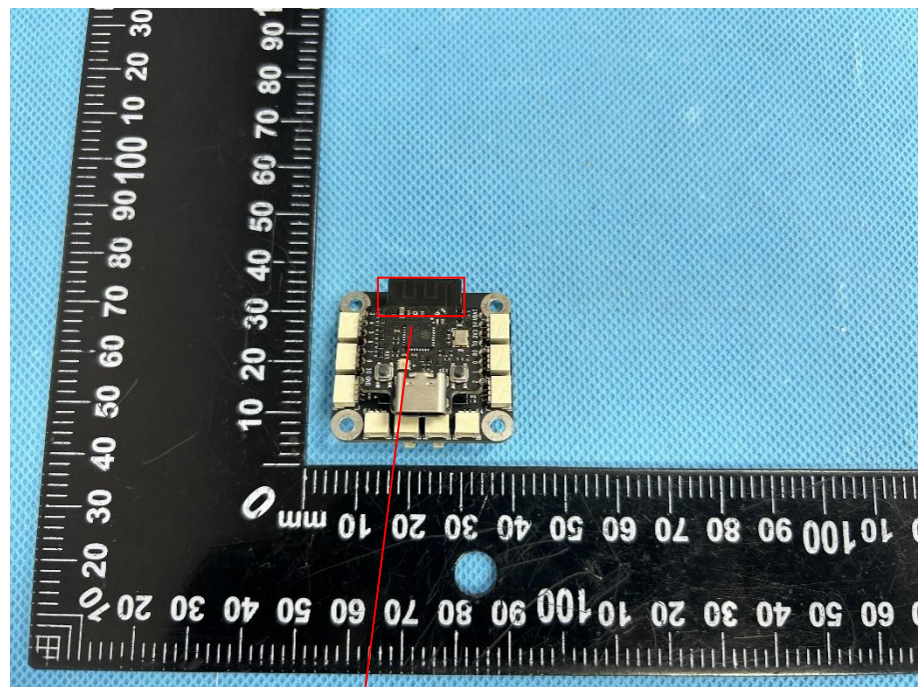

BT/WIFI Ant.