

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Report No.: RFBHAA-WTW-P23080666-1

FCC ID: 2BBFJC58U0

Product: Vehicle-mounted equipment that performs overall control of vehicle information display, video and audio playback, etc.

Brand: AISIN

Model No.: C58U0

Received Date: 2024/3/1

Test Date: 2024/10/18 ~ 2024/12/3

Issued Date: 2025/1/6

Applicant: AISIN CORPORATION

Address: 2-1, Asahi-machi, Kariya, Aichi, 448-8650 JAPAN

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location(1): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan

Test Location(2): No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

FCC Registration / 788550 / TW0003 for Test Location(1)

Designation Number: 281270 / TW0032 for Test Location(2)

Approved by:



Jeremy Lin / Project Engineer

Date:

2025/1/6

This test report consists of 29 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Gina Liu / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	7
3.3 Channel List.....	8
3.4 Power Setting	8
3.5 Test Mode Applicability and Tested Channel Detail.....	8
3.6 Duty Cycle of Test Signal.....	8
3.7 Test Program Used and Operation Descriptions	8
3.8 Connection Diagram of EUT and Peripheral Devices	9
3.9 Configuration of Peripheral Devices and Cable Connections	9
4 Test Instruments	10
4.1 RF Output Power.....	10
4.2 Power Spectral Density	10
4.3 6 dB Bandwidth	10
4.4 Occupied Bandwidth.....	10
4.5 Unwanted Emissions below 1 GHz	11
4.6 Unwanted Emissions above 1 GHz.....	12
5 Limits of Test Items.....	13
5.1 RF Output Power.....	13
5.2 Power Spectral Density	13
5.3 6 dB Bandwidth	13
5.4 Occupied Bandwidth.....	13
5.5 Unwanted Emissions below 1 GHz	13
5.6 Unwanted Emissions above 1 GHz.....	14
6 Test Arrangements.....	15
6.1 RF Output Power.....	15
6.1.1 Test Setup	15
6.1.2 Test Procedure.....	15
6.2 Power Spectral Density	15
6.2.1 Test Setup	15
6.2.2 Test Procedure.....	15
6.3 6 dB Bandwidth	16
6.3.1 Test Setup	16
6.3.2 Test Procedure.....	16
6.4 Occupied Bandwidth.....	16
6.4.1 Test Setup	16
6.4.2 Test Procedure.....	16
6.5 Unwanted Emissions below 1 GHz	17
6.5.1 Test Setup	17
6.5.2 Test Procedure.....	18
6.6 Unwanted Emissions above 1 GHz.....	19
6.6.1 Test Setup	19
6.6.2 Test Procedure.....	19
7 Test Results of Test Item	20
7.1 RF Output Power.....	20
7.2 Power Spectral Density	21
7.3 6 dB Bandwidth	22
7.4 Occupied Bandwidth.....	23

7.5	Unwanted Emissions below 1 GHz	24
7.6	Unwanted Emissions above 1 GHz.....	26
8	Pictures of Test Arrangements	28
9	Information of the Testing Laboratories	29

Release Control Record

Issue No.	Description	Date Issued
RFBHAA-WTW-P23080666-1	Original release.	2025/1/6

1 Certificate

Product: Vehicle-mounted equipment that performs overall control of vehicle information display, video and audio playback, etc.

Brand: AISIN

Test Model: C58U0

Sample Status: Production Prototype

Applicant: AISIN CORPORATION

Test Date: 2024/10/18 ~ 2024/12/3

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Measurement ANSI C63.10-2013

procedure: KDB 789033 D02 General UNII Test Procedure New Rules v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(3)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
---	Occupied Bandwidth	-	Reference only.
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -4.6 dB at 511.12 MHz
15.407(b) (4(i)/10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -5.4 dB at 11490.00 MHz
15.203	Antenna Requirement	Pass	No antenna connector is used.

Notes: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.371 dB
Power Spectral Density	-	1.017 dB
6 dB Bandwidth	-	206.5 Hz
Occupied Bandwidth	-	72 Hz
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3 dB
	30 MHz ~ 1 GHz	2.93 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	1.76 dB
	18 GHz ~ 40 GHz	1.77 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Vehicle-mounted equipment that performs overall control of vehicle information display, video and audio playback, etc.
Brand	AISIN
Test Model	C58U0
EUT RF Test Tool	EUT RF Test Tool
Status of EUT	Production Prototype
Power Supply Rating	12Vdc
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode
Modulation Technology	OFDM
Transfer Rate	Up to 78 Mbps
Operating Frequency	5.745 GHz
Number of Channel	802.11n (HT20), 802.11ac (VHT20): 2
Output Power	24.378 mW (13.87 dBm)

Note:

- The following models are provided to this EUT. Since series 1 and 2 consist identical hardware, series 1 was selected for final test.

Model	Series	Hardware Variations	Bluetooth (Ver. 5.0 w/o BLE)	WLAN 5GHz (W58)	GNSS(GPS/ GLONASS/ Galileo)	AM	FM
C58U0	series 1	V-R01	✓	n/ac HT/VHT20 (149ch)	✓	✓ (9kHz)	✓
	series 2		✓	n/ac HT/VHT20 (149ch)	✓	✓ (10kHz) *2	✓

*2-AM frequency range and step frequency different.

- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Antenna Description of EUT

- The antenna information is listed as below.

Antenna NO.	Brand	Model	Antenna Net Gain(dBi)	Frequency range (GHz)	Antenna Type	Connector Type
WLAN (5G) Ant 0	N/A	N/A	-1.50	5.725 ~ 5.85	PCB	none(like solder)
BT Ant1	N/A	N/A	1.90	2.4 ~ 2.4835	PCB	none(like solder)

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

- The EUT incorporates a SISO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11n (HT20)	1TX	1RX
802.11ac (VHT20)	1TX	1RX

3.3 Channel List

1 channel are provided for 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency
149	5745 MHz

3.4 Power Setting

Power Setting		
Channel	802.11n (HT20)	802.11ac (VHT20)
149	Default	Default

3.5 Test Mode Applicability and Tested Channel Detail


Worst Case:	The EUT was positioned on the X-axis during testing.
-------------	--

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	802.11n (HT20)	149	BPSK	MCS0
	802.11ac (VHT20)	149	BPSK	MCS0
Power Spectral Density	802.11ac (VHT20)	149	BPSK	MCS0
6 dB Bandwidth	802.11ac (VHT20)	149	BPSK	MCS0
Occupied Bandwidth	802.11ac (VHT20)	149	BPSK	MCS0
Unwanted Emissions below 1 GHz	802.11ac (VHT20)	149	BPSK	MCS0
Unwanted Emissions above 1 GHz	802.11ac (VHT20)	149	BPSK	MCS0

3.6 Duty Cycle of Test Signal


802.11ac (VHT20): Duty cycle = $0.635 \text{ ms} / 0.725 \text{ ms} \times 100\% = 87.6\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.58 \text{ dB}$

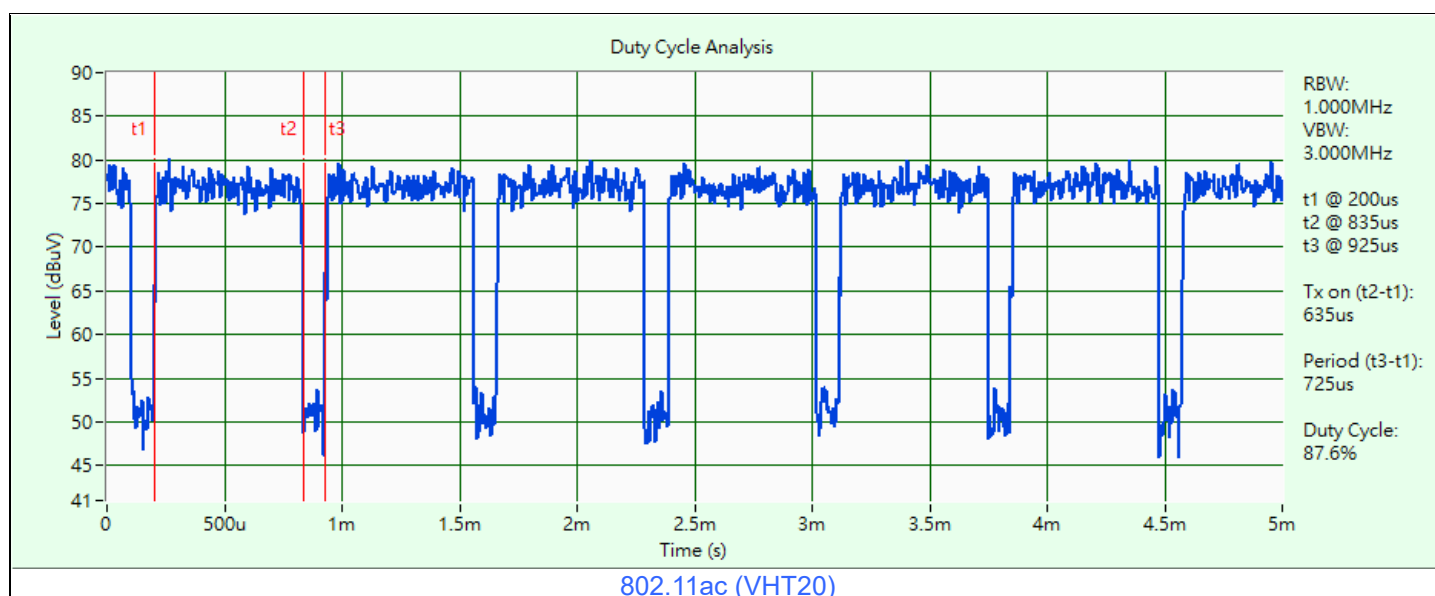

3.7 Test Program Used and Operation Descriptions

Controlling software (provided by manufacturer) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.8 Connection Diagram of EUT and Peripheral Devices

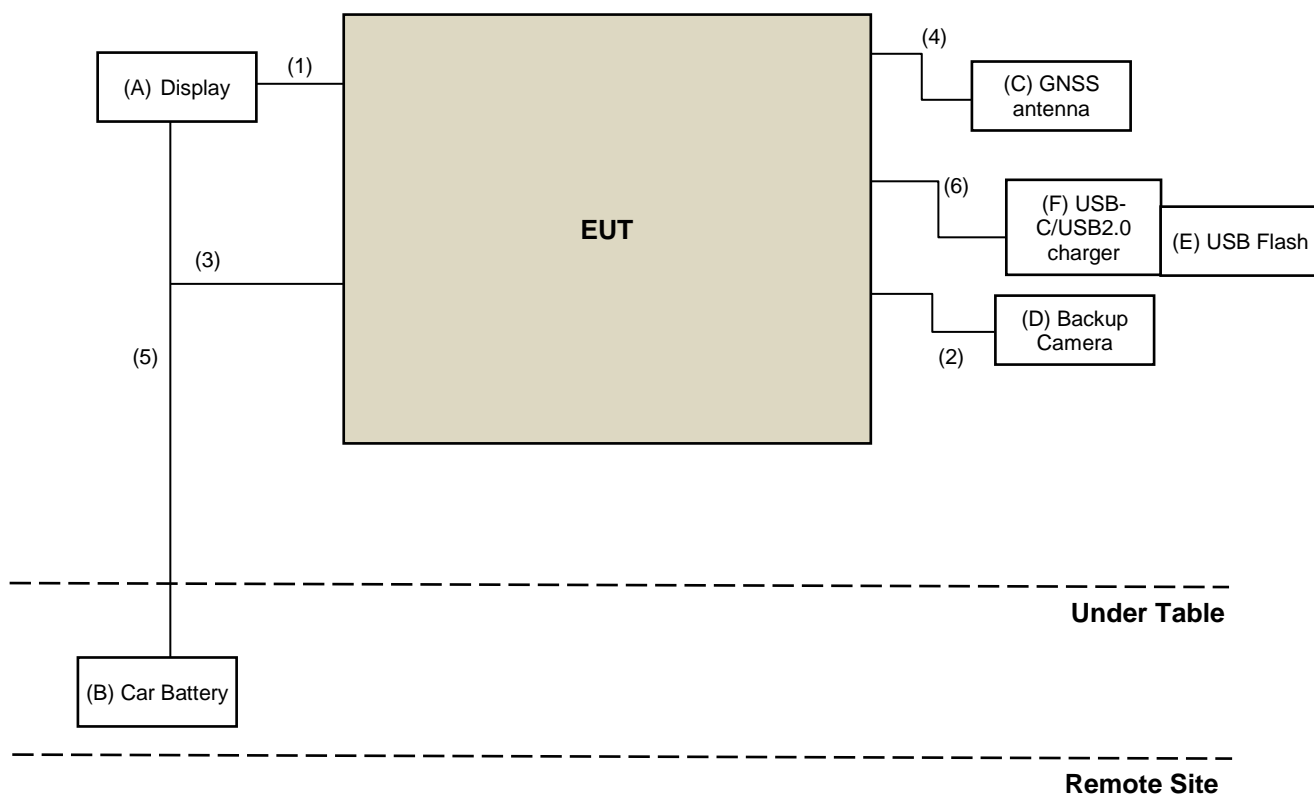

3.9 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Display	DESAY	86111-VR55A1 (for left-hand drive car), 86111-VR55A2 (for right-hand drive car)	N/A	N/A	Supplied by applicant
B	Car Battery	Global	Global_NX120-7L	N/A	N/A	Provided by Lab
C	GNSS antenna	MinebeaMitsumi	3A500-58U10	N/A	N/A	Supplied by applicant
D	Backup Camera	TTE	3A760-58UX0	N/A	N/A	Supplied by applicant
E	USB Flash	SanDisk	SDDDC3	N/A	N/A	Provided by Lab
F	USB-C/USB2.0 charger	n/a	39470-64P00	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	LVDS cable	1	0.8	No	N/A	Supplied by applicant
2	Backup Camera	1	0.6	No	N/A	Supplied by applicant
3	Harness	1	2	No	N/A	Supplied by applicant
4	FAKRA/SMA cable (For GNSS antenna port)	1	0.5	No	NA	Supplied by applicant
5	DC Cable	1	0.5	No	N/A	Provided by Lab
6	FAKRA Cable (For USB-C/USB2.0 charger)	1	0.5	No	NA	Supplied by applicant

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Peak Power Analyzer Keysight	8990B	MY51000485	2024/1/21	2025/1/20
Wideband Power Sensor Keysight	N1923A	MY58020002	2024/1/18	2025/1/17
		MY58140009	2024/1/18	2025/1/17

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/12/3

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Signal & Spectrum Analyzer R&S	FSV3044	101105	2024/2/27	2025/2/26
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/12/3

4.3 6 dB Bandwidth

Refer to section 4.2 to get the tested date and information of the instruments.

4.4 Occupied Bandwidth

Refer to section 4.2 to get the tested date and information of the instruments.

4.5 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFT-151SS-0.5T	N/A	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-1213	2024/10/14	2025/10/13
EMI Test Receiver R&S	ESR3	102782	2023/12/7	2024/12/6
Loop Antenna TESEQ	HLA 6121	45745	2024/8/21	2025/8/20
MXA Signal Analyzer Keysight	N9020B	MY60110513	2023/12/22	2024/12/21
Preamplifier EMCI	EMC330N	980782	2024/1/15	2025/1/14
	EMC001340	980201	2024/9/24	2025/9/23
RF Coaxial Cable EMCI	EMCCFD400-NM-NM-500	201233	2024/1/15	2025/1/14
	EMCCFD400-NM-NM-3000	201235	2024/1/15	2025/1/14
	EMCCFD400-NM-NM-9000	201236(with PAD)	2024/1/15	2025/1/14
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MF-7802BS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208674	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 8.
2. Tested Date: 2024/10/19

4.6 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFT-151SS-0.5T	N/A	N/A	N/A
EMI Test Receiver R&S	ESR3	102782	2023/12/7	2024/12/6
Horn Antenna RFSPIN	DRH18-E	210103A18E	2023/11/12	2024/11/11
Horn Antenna Schwarzbeck	BBHA 9170	9170-1049	2023/11/12	2024/11/11
MXA Signal Analyzer Keysight	N9020B	MY60110513	2023/12/22	2024/12/21
Preamplifier EMCI	EMC118A45SE	980808	2023/12/28	2024/12/27
	EMC184045SE	980788	2024/1/15	2025/1/14
RF Coaxial Cable EMCI	EMC101G-KM-KM-2000	201254	2024/1/15	2025/1/14
	EMC101G-KM-KM-3000	201258	2024/1/15	2025/1/14
	EMC101G-KM-KM-5000	201261	2024/1/15	2025/1/14
	EMC104-SM-SM-1000	210102	2024/1/15	2025/1/14
	EMC104-SM-SM-3000	201231	2024/1/15	2025/1/14
	EMC104-SM-SM-9000	201243	2024/1/15	2025/1/14
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MF-7802BS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208674	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 8.
2. Tested Date: 2024/10/18

5 Limits of Test Items

5.1 RF Output Power

Operation Band	Limit
U-NII-3	1 Watt (30 dBm)

5.2 Power Spectral Density

Operation Band	Limit
U-NII-3	30 dBm/500 kHz

5.3 6 dB Bandwidth

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.4 Occupied Bandwidth

The results are for reference only.

5.5 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.6 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To	Limit	
789033 D02 General UNII Test Procedure New Rules v02r01	Field Strength at 3 m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)

For transmitters operating in the 5.725-5.850 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2 (dBμV/m) ^{*1} PK: 105.2 (dBμV/m) ^{*2} PK: 110.8 (dBμV/m) ^{*3} PK: 122.2 (dBμV/m) ^{*4}
^{*1} beyond 75 MHz or more above of the band edge. ^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. ^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. ^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.		


Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts).}$$

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup

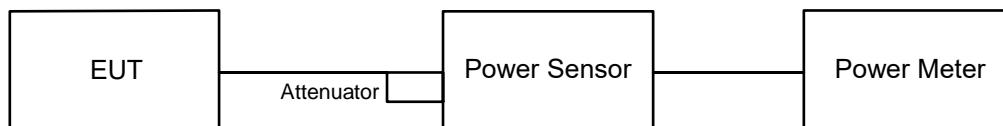


6.1.2 Test Procedure

Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

6.2 Power Spectral Density

6.2.1 Test Setup

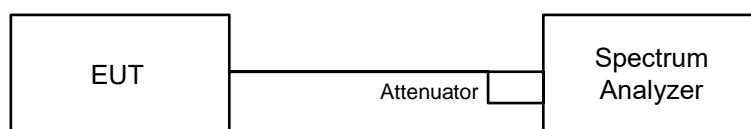

6.2.2 Test Procedure


For specified measurement bandwidth 500 kHz:

Method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300 \text{ kHz})$
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- Record the max value and add $10 \log (1/\text{duty cycle})$.

6.3 6 dB Bandwidth

6.3.1 Test Setup

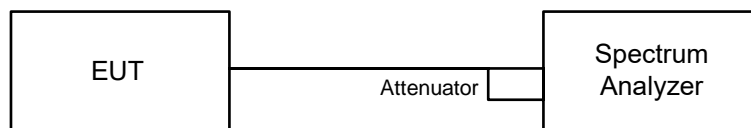


6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Occupied Bandwidth

6.4.1 Test Setup

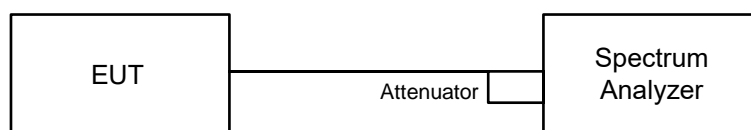


6.4.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to Sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.


6.5 Unwanted Emissions below 1 GHz

6.5.1 Test Setup

For Radiated emission below 30 MHz

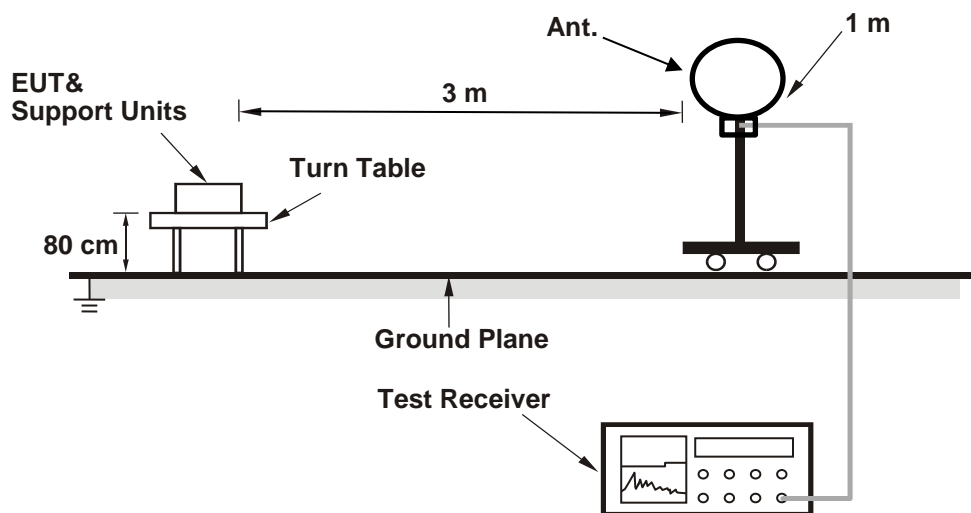

For Radiated emission above 30 MHz

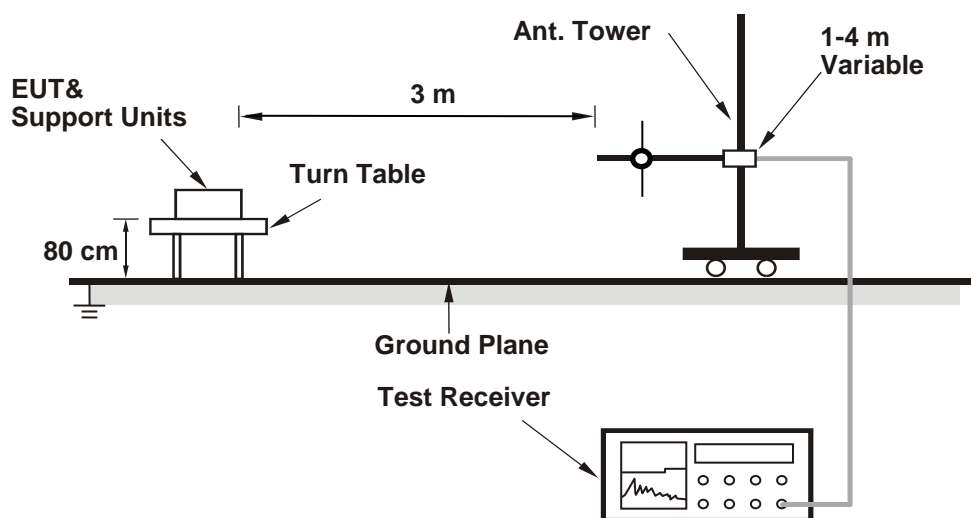

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.6 Unwanted Emissions above 1 GHz

6.6.1 Test Setup

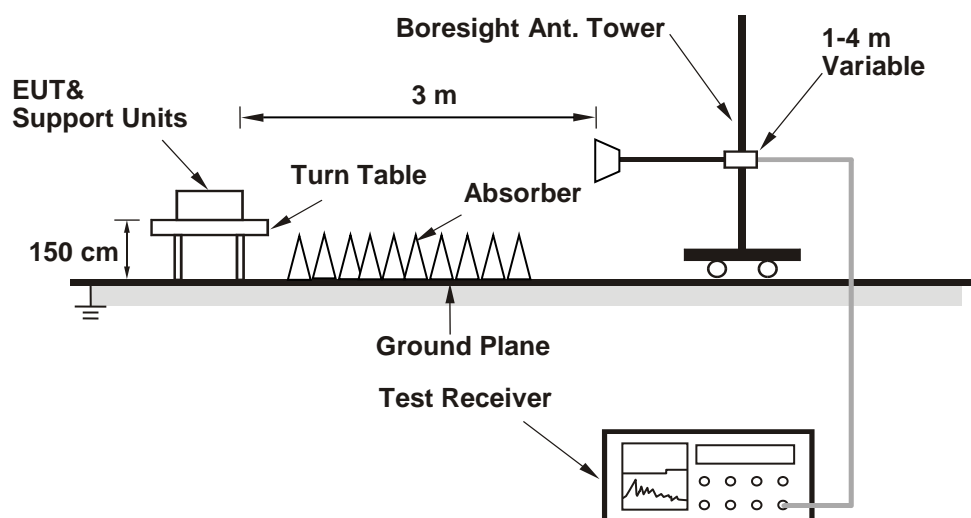

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	12 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Lin&Jisyong Wang
--------------	--------	---------------------------	--------------	------------	-----------------------

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
149	5745	24.21	13.84	30	Pass

Note: For U-NII-3, the antenna gain is -1.5 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
149	5745	24.378	13.87	30	Pass


Note: For U-NII-3, the antenna gain is -1.5 dBi < 6 dBi, so the output power limit shall not be reduced.

7.2 Power Spectral Density

Input Power:	12 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Lin, Jisyong Wang
--------------	--------	---------------------------	--------------	------------	---------------------------

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor (dB)	PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
149	5745	-7.97	-5.75	0.58	-5.17	30	Pass


Note: For U-NII-3, the antenna gain is $-1.5 \text{ dBi} < 6 \text{ dBi}$, so the power density limit shall not be reduced.

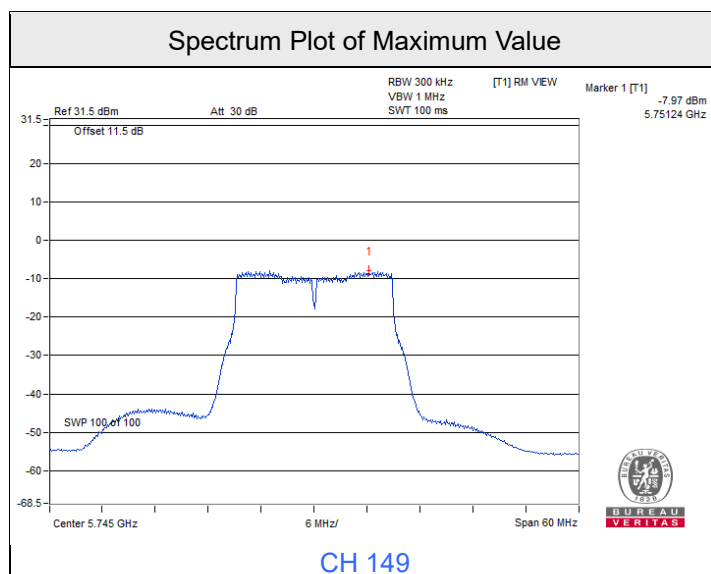

7.3 6 dB Bandwidth

Input Power:	12 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Lin, Jisyong Wang
--------------	--------	---------------------------	--------------	------------	------------------------



Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
149	5745	17.64	0.5	Pass

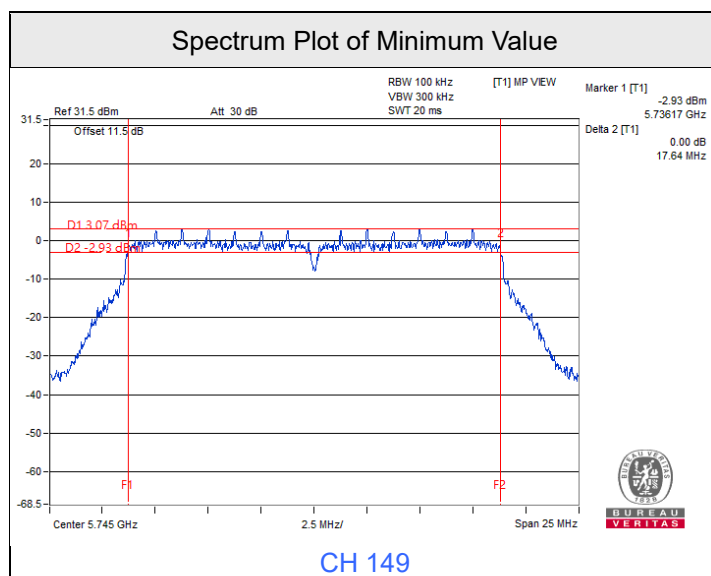

7.4 Occupied Bandwidth

Input Power:	12 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Lin, Jisyong Wang
--------------	--------	---------------------------	--------------	------------	------------------------

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
149	5745	18.36

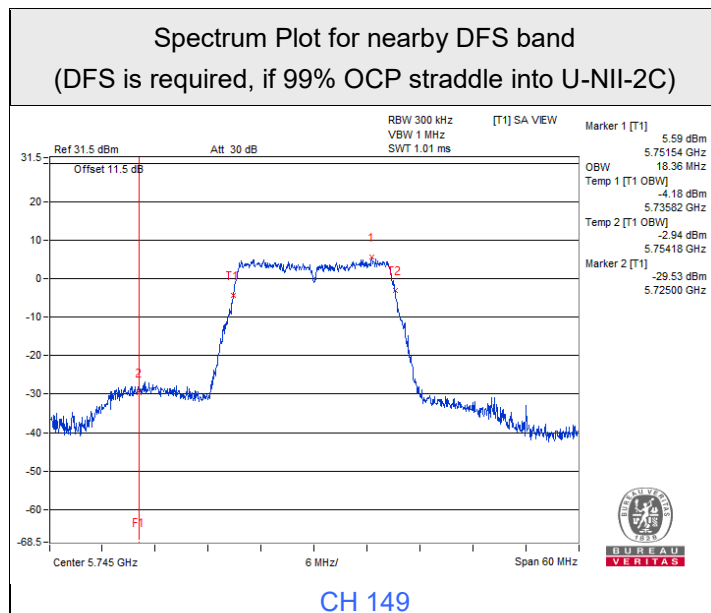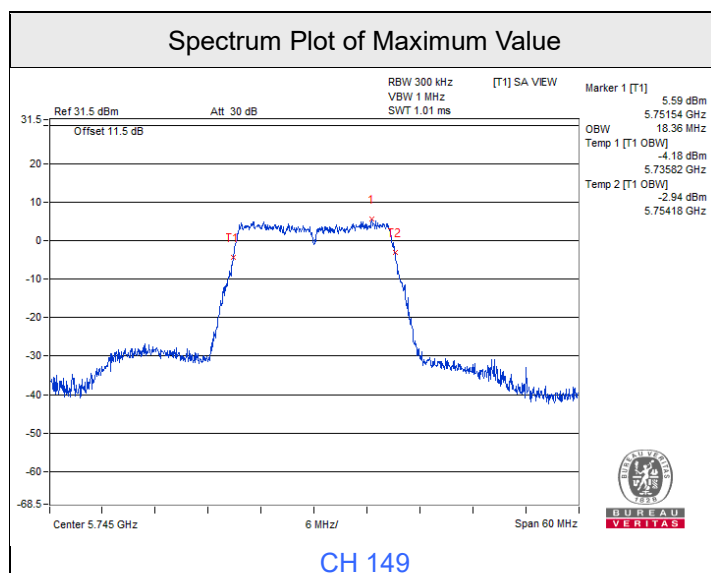


7.5 Unwanted Emissions below 1 GHz

RF Mode	802.11ac (VHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	138.64	36.0 QP	43.5	-7.5	1.04 H	196	49.4	-13.4
2	219.15	26.2 QP	46.0	-19.8	1.33 H	204	42.7	-16.5
3	352.04	26.7 QP	46.0	-19.3	1.93 H	263	38.1	-11.4
4	511.12	41.4 QP	46.0	-4.6	1.06 H	182	49.0	-7.6
5	683.78	36.9 QP	46.0	-9.1	1.02 H	81	41.1	-4.2
6	739.07	38.2 QP	46.0	-7.8	1.34 H	294	41.2	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

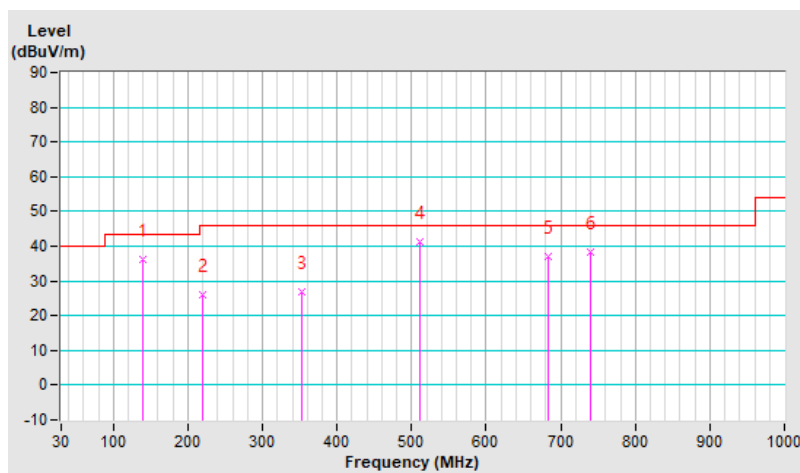


RF Mode	802.11ac (VHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	98.87	32.0 QP	43.5	-11.5	1.84 V	243	49.6	-17.6
2	143.49	30.8 QP	43.5	-12.7	1.77 V	108	43.9	-13.1
3	187.14	33.7 QP	43.5	-9.8	1.93 V	305	49.2	-15.5
4	384.05	26.6 QP	46.0	-19.4	1.24 V	181	36.9	-10.3
5	520.82	36.6 QP	46.0	-9.4	1.72 V	209	43.9	-7.3
6	742.95	36.9 QP	46.0	-9.1	2.06 V	263	39.7	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

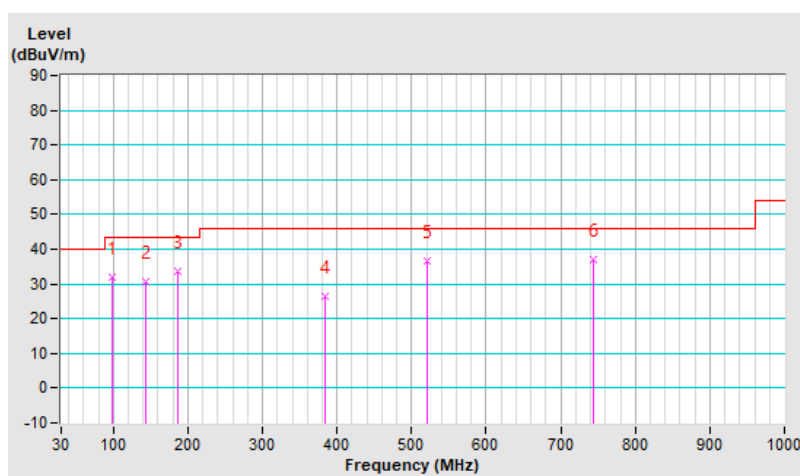

7.6 Unwanted Emissions above 1 GHz

RF Mode	802.11ac (VHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=2 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67 % RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5619.20	59.0 PK	68.2	-9.2	1.00 H	341	55.4	3.6
2	*5745.00	108.6 PK			1.00 H	341	66.7	41.9
3	*5745.00	95.4 AV			1.00 H	341	53.5	41.9
4	#5958.00	59.9 PK	68.2	-8.3	1.00 H	341	55.3	4.6
5	11490.00	61.9 PK	74.0	-12.1	2.04 H	71	52.3	9.6
6	11490.00	48.6 AV	54.0	-5.4	2.04 H	71	39.0	9.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5605.20	59.5 PK	68.2	-8.7	1.61 V	183	55.9	3.6
2	*5745.00	99.3 PK			1.61 V	183	57.4	41.9
3	*5745.00	88.1 AV			1.61 V	183	46.2	41.9
4	#5955.20	59.8 PK	68.2	-8.4	1.61 V	183	55.2	4.6
5	11490.00	61.4 PK	74.0	-12.6	1.55 V	237	51.8	9.6
6	11490.00	48.3 AV	54.0	-5.7	1.55 V	237	38.7	9.6


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge

Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11ac (VHT20) Channel 149

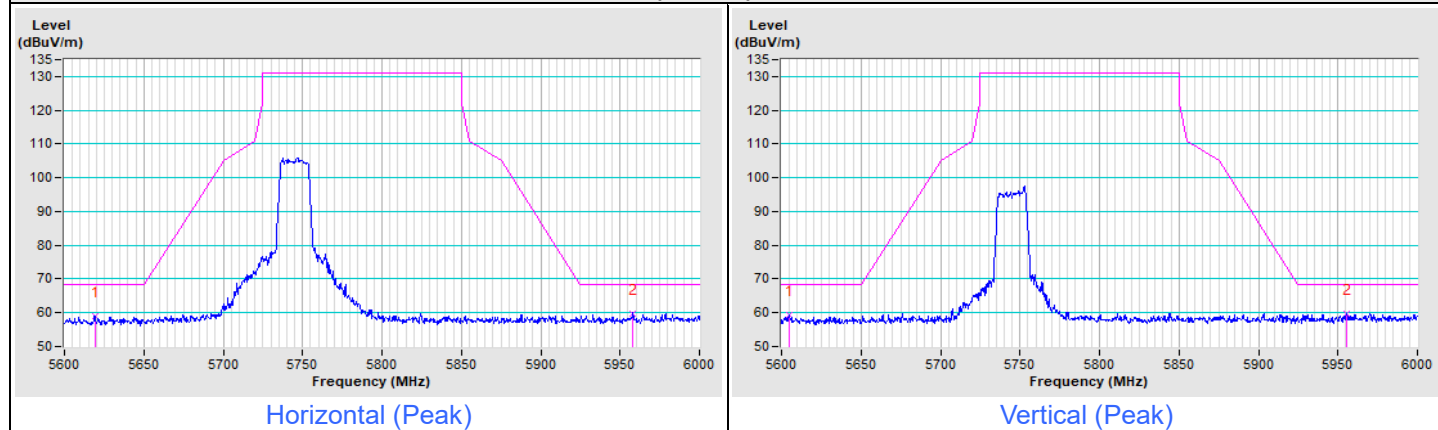

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---